

TEST REPORT

Applicant Name: Shenzhen Four Seas Global Link Network Technology Co., Ltd
Address: FCC: Room 607-610, Block B, TAOJINDI Electronic Business Incubation Base, Tenglong Road, Longhua District, Shenzhen China
IC: Room 607-610, Block B, TAOJINDI Electronic Business Incubation Base, Tenglong Road, Longhua District, Shenzhen, 518000 China (Peoples Republic Of)
Report Number: SZ4240129-06787E-RF
FCC ID: OYR-CF-AC1300
IC: 20902-CFAC1300

Test Standard (s)

FCC PART 15.247; RSS-GEN ISSUE 5, FEBRUARY 2021 AMENDMENT 2;
RSS-247 ISSUE 3, AUGUST 2023

Sample Description

Product Type: Wi-Fi Dongle
Model No.: CF-AC1300
Multiple Model(s) No.: CF-913AC V2
Trade Mark: **COMFAST**
Date Received: 2024/01/29
Issue Date: 2024/04/03

Test Result:	Pass▲
--------------	-------

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Black Chen

Black Chen
RF Engineer

Approved By:

Nancy Wang

Nancy Wang
RF Supervisor

Note: The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.

This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China
Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	5
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY.....	6
TEST FACILITY	6
SYSTEM TEST CONFIGURATION.....	7
DESCRIPTION OF TEST CONFIGURATION	7
EQUIPMENT MODIFICATIONS	7
EUT EXERCISE SOFTWARE	7
DUTY CYCLE	8
SUPPORT EQUIPMENT LIST AND DETAILS	8
EXTERNAL I/O CABLE.....	8
BLOCK DIAGRAM OF TEST SETUP	9
SUMMARY OF TEST RESULTS	10
TEST EQUIPMENT LIST	11
FCC §1.1307 (B) (1) & §2.1093- RF EXPOSURE.....	13
APPLICABLE STANDARD	13
RSS-102 - RF EXPOSURE	14
APPLICABLE STANDARD	14
§15.203 & RSS-GEN §6.8 ANTENNA REQUIREMENT.....	15
APPLICABLE STANDARD	15
ANTENNA CONNECTOR CONSTRUCTION	16
§15.207 (A) & RSS-GEN §8.8 AC LINE CONDUCTED EMISSIONS	17
APPLICABLE STANDARD	17
EUT SETUP.....	18
EMI TEST RECEIVER SETUP.....	18
TEST PROCEDURE	18
FACTOR & OVER LIMIT CALCULATION.....	19
TEST DATA	19
§15.205, §15.209, §15.247(D) & RSS-GEN § 8.10 & RSS-247 § 5.5 SPURIOUS EMISSIONS.....	22
APPLICABLE STANDARD	22
EUT SETUP	22
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	24
TEST PROCEDURE	24
FACTOR & OVER LIMIT/MARGIN CALCULATION	25
TEST DATA	25

§15.247 (A)(2) & RSS-GEN§6.7 RSS-247 § 5.2 (A) 99% OCCUPIED BANDWIDTH & 6 DB EMISSION BANDWIDTH.....63

 APPLICABLE STANDARD63

 TEST PROCEDURE63

 TEST DATA64

§15.247(B)(3) & RSS-247 § 5.4(D) MAXIMUM CONDUCTED OUTPUT POWER65

 APPLICABLE STANDARD65

 TEST PROCEDURE65

 TEST DATA66

§15.247(D) & RSS-247 § 5.5 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE.....67

 APPLICABLE STANDARD67

 TEST PROCEDURE67

 TEST DATA67

§15.247(E) & RSS-247 § 5.2 (B) POWER SPECTRAL DENSITY68

 APPLICABLE STANDARD68

 TEST PROCEDURE68

 TEST DATA68

EUT PHOTOGRAPHS69

TEST SETUP PHOTOGRAPHS70

APPENDIX71

 APPENDIX A: DTS BANDWIDTH71

 APPENDIX B: OCCUPIED CHANNEL BANDWIDTH84

 APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER97

 APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY98

 APPENDIX E: BAND EDGE MEASUREMENTS111

 APPENDIX F: DUTY CYCLE119

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	SZ4240129-06787E-RF	Original Report	2024/04/03

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

HVIN	CF-AC1300, CF-913AC V2
FVIN	N/A
Product	Wi-Fi Dongle
Tested Model	CF-AC1300
Multiple Model(s)	CF-913AC V2
Frequency Range	2412-2462MHz
Maximum Conducted Peak Output Power	20.70dBm
Modulation Technique	DSSS, OFDM
Antenna Specification [#]	2dBi (It is provided by the applicant)
Voltage Range	DC 5V from USB port
Sample serial number	2HBW-2 for Conducted and Radiated Emissions Test 2HBW-1 for RF Conducted Test (Assigned by BAACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	N/A
Note [#] : The Multiple models are electrically identical with the test model except for model name. Please refer to the declaration letter [#] for more detail, which was provided by manufacturer.	

Objective

This report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules and RSS-GEN Issue 5, February 2021 Amendment 2 and RSS-247 Issue 3, August 2023 of the Innovation, Science and Economic Development Canada rules.

The tests were performed in order to determine Compliant with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules, and RSS-GEN, RSS-247.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliant Testing of Unlicensed Wireless Devices and RSS-GEN Issue 5, February 2021 Amendment 2 and RSS-247 Issue 3, August 2023.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
RF Frequency		213.55 Hz(k=2, 95% level of confidence)
RF output power, conducted		0.72 dB(k=2, 95% level of confidence)
Unwanted Emission, conducted		1.75 dB(k=2, 95% level of confidence)
AC Power Lines Conducted Emissions	9 kHz~150 KHz	3.94dB(k=2, 95% level of confidence)
	150 kHz ~30MHz	3.84dB(k=2, 95% level of confidence)
Radiated Emissions	9kHz - 30MHz	3.30dB(k=2, 95% level of confidence)
	30MHz~200MHz (Horizontal)	4.48dB(k=2, 95% level of confidence)
	30MHz~200MHz (Vertical)	4.55dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Horizontal)	4.85dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Vertical)	5.05dB(k=2, 95% level of confidence)
	1GHz - 6GHz	5.35dB(k=2, 95% level of confidence)
	6GHz - 18GHz	5.44dB(k=2, 95% level of confidence)
18GHz - 40GHz	5.16dB(k=2, 95% level of confidence)	
Temperature		±1°C
Humidity		±1%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 715558, the FCC Designation No. : CN5045.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0023.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For 2.4GHz Wi-Fi mode, total 11channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For 802.11b, 802.11g, 802.11n20, EUT was tested with Channel 1, 6 and 11.
 For 802.11n40, EUT was tested with Channel 3, 6 and 9.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

“00008186-Win7_MP_Kit_RTL11ac_8822BU_USB_V0.19”[#] software was used to test. The software and power level was provided by the applicant. The device was tested with the worst case was performed as below:

Test Modes	Test Channels	Test Frequency	Data rate	Power Level Setting [#]	
				ANT1	ANT2
802.11b	Lowest	2412	1Mbps	45	35
	Middle	2437	1Mbps	45	35
	Highest	2462	1Mbps	45	35
802.11g	Lowest	2412	6Mbps	45	35
	Middle	2437	6Mbps	45	35
	Highest	2462	6Mbps	45	35
802.11n-HT20	Lowest	2412	MCS0	38	38
	Middle	2437	MCS0	38	38
	Highest	2462	MCS0	38	38
802.11n-HT40	Lowest	2422	MCS0	38	38
	Middle	2437	MCS0	38	38
	Highest	2452	MCS0	38	38

Note:

1. The above are the worst-case data rates, which are determined for each mode based upon investigations by measuring the average power and PSD across all data rates, bandwidths, and modulations.
2. For 802.11 b/g modes, the device only support SISO mode.
3. For 802.11n mode, the device supports SISO and MIMO in all modes, per pretest, the MIMO mode was the worst mode for all the modes.

Duty cycle

Please refer to the Appendix.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Dell	Notebook	Inspiron	Unknown
Dell	Adapter	DA130PE-00	Unknown

External I/O Cable


Cable Description	Length (m)	From Port	To
Unshielded Detachable AC cable	1.2	LISN	Adapter
Unshielded Un-detachable DC cable	1.5	Adapter	EUT

Block Diagram of Test Setup

For conducted emission

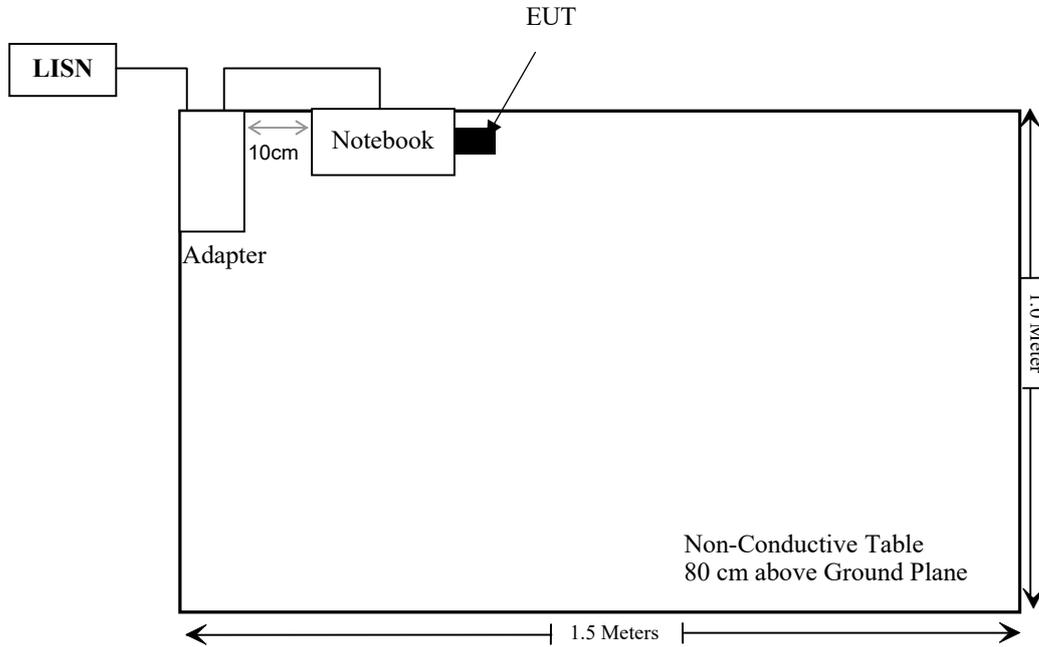

For radiated emission:

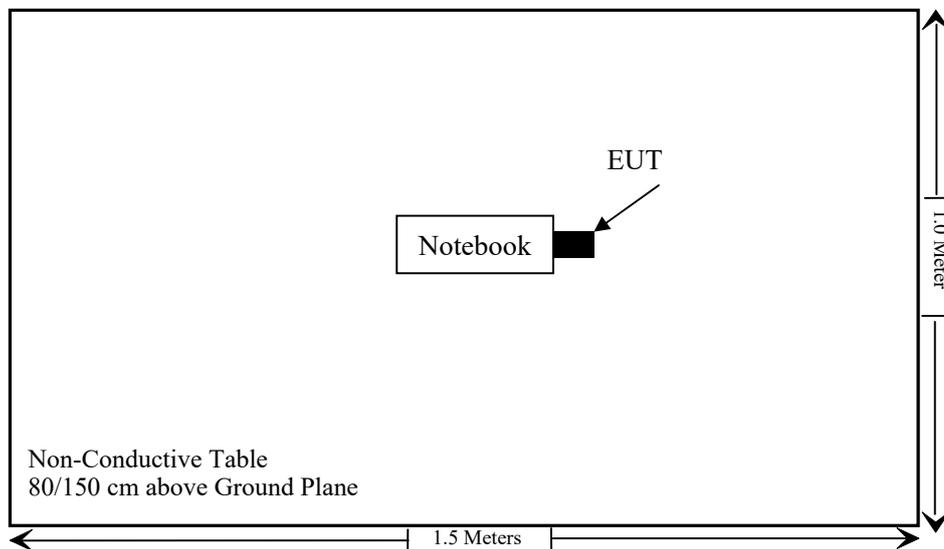

SUMMARY OF TEST RESULTS

FCC Rules	RSS-247 & RSS-Gen Rules	Description of Test	Result
§1.1307 (b) (1) & §2.1093	RSS-102	RF Exposure	Compliant
§15.203	RSS-Gen §6.8	Antenna Requirement	Compliant
§15.207 (a)	RSS-Gen §8.8	AC Line Conducted Emissions	Compliant
§15.205, §15.209, §15.247(d)	RSS-GEN § 8.10 & RSS-247 § 5.5	Spurious Emissions	Compliant
§15.247 (a)(2)	RSS- Gen §6.7 RSS-247 § 5.2 (a)	99% Occupied Bandwidth & 6 dB Emission Bandwidth	Compliant
§15.247(b)(3)	RSS-247 § 5.4(d)	Maximum Conducted Output Power	Compliant
§15.247(d)	RSS-247 § 5.5	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	RSS-247 § 5.2 (b)	Power Spectral Density	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2024/01/16	2025/01/15
Rohde & Schwarz	LISN	ENV216	101613	2024/01/16	2025/01/15
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2023/08/03	2024/08/02
Unknown	CE Cable	CE Cable	UF A210B-1-0720-504504	2023/08/03	2024/08/02
Audix	EMI Test software	E3	191218	NCR	NCR
Radiated Emissions Test					
R&S	EMI Test Receiver	ESR3	102455	2024/01/16	2025/01/15
Sonoma instrument	Pre-amplifier	310 N	186238	2023/06/08	2024/06/07
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2024/07/19
ETS	Passive Loop Antenna	6512	29604	2023/07/07	2024/07/06
Unknown	Cable	Chamber Cable 1	F-03-EM236	2023/08/03	2024/08/02
Unknown	Cable	Chamber Cable 4	EC-007	2023/08/03	2024/08/02
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR
Rohde & Schwarz	Spectrum Analyzer	FSV40	101605	2023/04/18	2024/04/17
COM-POWER	Pre-amplifier	PA-122	181919	2023/06/29	2024/06/28
Schwarzbeck	Horn Antenna	BBHA9120D(1201)	1143	2023/07/26	2024/07/25
Unknown	RF Cable	UFA147	219661	2023/10/08	2024/10/07
Unknown	RF Cable	XH750A-N	J-10M	2023/10/08	2024/10/07
SNSD	2.4G Band Reject filter	BSF2402-2480MN-0898-001	2.4G filter	2023/08/03	2024/08/02
A.H.System	Pre-amplifier	PAM-1840VH	190	2023/08/03	2024/08/02
Electro-Mechanics Co	Horn Antenna	3116	2026	2023/09/18	2026/09/17
UTIFLEX	RF Cable	NO. 13	232308-001	2023/08/03	2024/08/02
Audix	EMI Test software	E3	191218(V9)	NCR	NCR

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF conducted test					
Tonscend	RF control Unit	JS0806-2	19D8060154	2023/09/06	2024/09/05
ANRITSU	Microwave peak power sensor	MA24418A	12622	2023/08/08	2024/08/07
Rohde & Schwarz	Signal and Spectrum Analyzer	FSV40	101473	2024/01/16	2025/01/15
MARCONI	10dB Attenuator	6534/3	2942	2023/07/04	2024/07/03

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1307 (B) (1) & §2.1093- RF EXPOSURE

Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

Result: Compliant.

Please refer to SAR Report Number: SZ4240129-13293E-20A.

RSS-102 - RF EXPOSURE

Applicable Standard

According to RSS-102, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

Result: Compliant.

Please refer to SAR Report Number: SZ4240129-13293E-20B.

§15.203 & RSS-Gen §6.8 ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine Compliant with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the Compliant of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

Antenna Connector Construction

The EUT has two internal antennas arrangement which was permanently attached for Wi-Fi and the antenna gain[#] is 2dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Type	Antenna Gain [#]	Impedance
PCB	2dBi	50Ω

Result: Compliant

§15.207 (a) & RSS-GEN §8.8 AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC § 15.207 (a) & RSS-GEN §8.8

Unless stated otherwise in the applicable RSS, for radio apparatus that are designed to be connected to the public utility AC power network, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the range 150 kHz to 30 MHz shall not exceed the limits in table 4, as measured using a 50 μH / 50 Ω line impedance stabilization network. This requirement applies for the radio frequency voltage measured between each power line and the ground terminal of each AC power-line mains cable of the EUT.

For an EUT that connects to the AC power lines indirectly, through another device, the requirement for Compliant with the limits in table 4 shall apply at the terminals of the AC power-line mains cable of a representative support device, while it provides power to the EUT. The lower limit applies at the boundary between the frequency ranges. The device used to power the EUT shall be representative of typical applications.


Table 4 - AC Power Lines Conducted Emission Limits		
Frequency range (MHz)	Conducted limit (dBμV)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56 ¹	56 to 46 ¹
0.5 – 5	56	46
5 – 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

For an EUT with a permanent or detachable antenna operating between 150 kHz and 30 MHz, the AC power-line conducted emissions must be measured using the following configurations:

- (a) Perform the AC power-line conducted emissions test with the antenna connected to determine Compliant with the limits of table 4 outside the transmitter's fundamental emission band.
- (b) Retest with a dummy load instead of the antenna to determine Compliant with the limits of table 4 within the transmitter's fundamental emission band. For a detachable antenna, remove the antenna and connect a suitable dummy load to the antenna connector. For a permanent antenna, remove the antenna and terminate the RF output with a dummy load or network that simulates the antenna in the fundamental frequency band.

EUT Setup

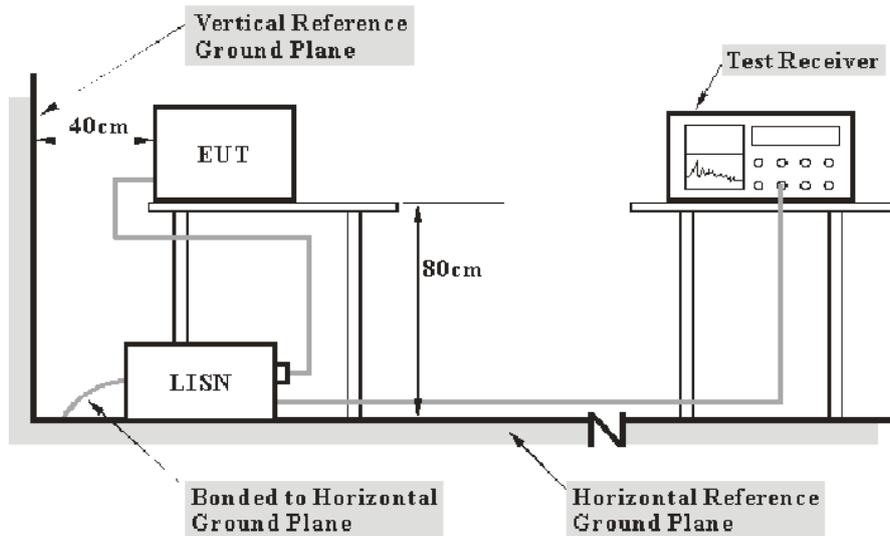

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 & RSS-247/RSS-Gen limits.

The spacing between the peripherals was 10 cm.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Factor & Over Limit Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).

Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	64 %
ATM Pressure:	101 kPa

The testing was performed by Macy Shi on 2024-02-04.

EUT operation mode: Transmitting (worst case is 802.11n-HT40 mode, middle channel)

AC 120V/60 Hz, Line

Date: 2024-02-04

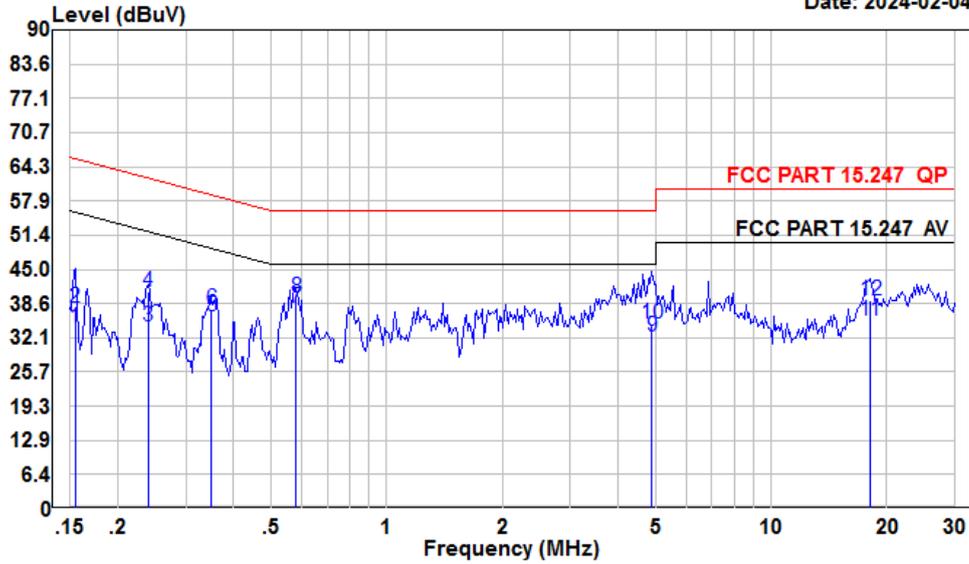


Condition: Line
 Project : SZ4240129-06787E-RF
 Tester : Macy shi
 Note : 2.4G WIFI

	Read Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.15	13.37	33.92	10.40	10.15	55.74	-21.82	Average
2	0.15	17.24	37.79	10.40	10.15	65.74	-27.95	QP
3	0.24	13.78	34.32	10.36	10.18	52.13	-17.81	Average
4	0.24	20.16	40.70	10.36	10.18	62.13	-21.43	QP
5	0.35	15.81	36.25	10.28	10.16	48.96	-12.71	Average
6	0.35	17.09	37.53	10.28	10.16	58.96	-21.43	QP
7	0.58	17.33	37.83	10.29	10.21	46.00	-8.17	Average
8	0.58	19.09	39.59	10.29	10.21	56.00	-16.41	QP
9	4.90	11.77	32.46	10.47	10.22	46.00	-13.54	Average
10	4.90	14.07	34.76	10.47	10.22	56.00	-21.24	QP
11	18.04	14.62	35.29	10.56	10.11	50.00	-14.71	Average
12	18.04	18.58	39.25	10.56	10.11	60.00	-20.75	QP

AC 120V/60 Hz, Neutral

Date: 2024-02-04

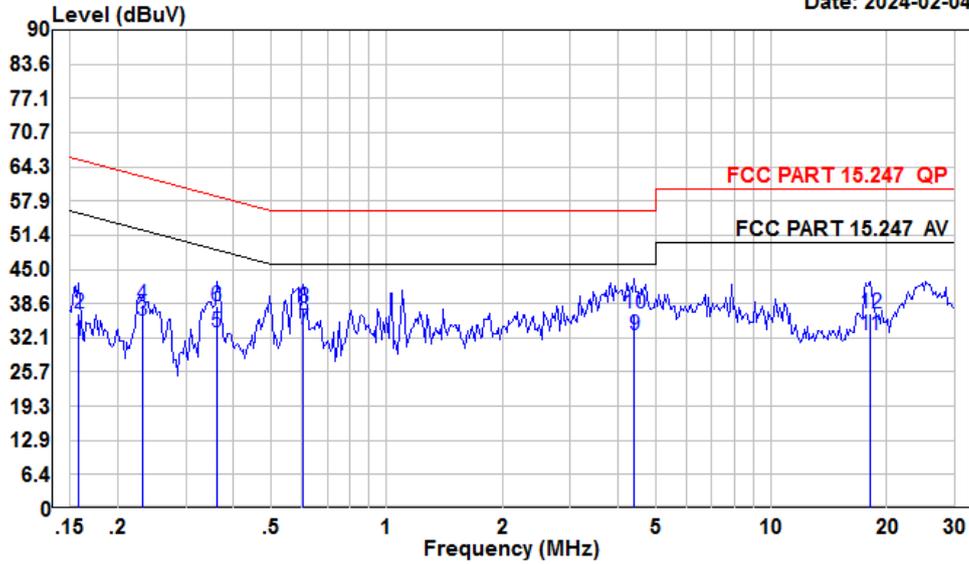

Condition: Neutral
 Project : SZ4240129-06787E-RF
 Tester : Macy shi
 Note : 2.4G WIFI

	Read Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.16	11.17	31.59	10.27	10.15	55.56	-23.97	Average
2	0.16	16.22	36.64	10.27	10.15	65.56	-28.92	QP
3	0.23	14.67	35.47	10.63	10.17	52.39	-16.92	Average
4	0.23	17.47	38.27	10.63	10.17	62.39	-24.12	QP
5	0.36	12.39	33.29	10.73	10.17	48.69	-15.40	Average
6	0.36	17.12	38.02	10.73	10.17	58.69	-20.67	QP
7	0.61	12.75	33.60	10.63	10.22	46.00	-12.40	Average
8	0.61	17.08	37.93	10.63	10.22	56.00	-18.07	QP
9	4.41	11.88	32.52	10.40	10.24	46.00	-13.48	Average
10	4.41	15.95	36.59	10.40	10.24	56.00	-19.41	QP
11	18.04	12.16	32.54	10.27	10.11	50.00	-17.46	Average
12	18.04	16.31	36.69	10.27	10.11	60.00	-23.31	QP

§15.205, §15.209, §15.247(d) & RSS-GEN § 8.10 & RSS-247 § 5.5 SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;


According to RSS-GEN § 8.10 & RSS-247 § 5.5

Restricted frequency bands, identified in table 7, are designated primarily for safety-of-life services (distress calling and certain aeronautical activities), certain satellite downlinks, radio astronomy and some government uses. Except where otherwise indicated, the following conditions related to the restricted frequency bands apply:(a) The transmit frequency, including fundamental components of modulation, of licence-exempt radio apparatus shall not fall within the restricted frequency bands listed in table 7 except for apparatus compliant with RSS-287, Emergency Position Indicating Radio Beacons (EPIRB), Emergency Locator Transmitters (ELT), Personal Locator Beacons (PLB), and Maritime Survivor Locator Devices (MSLD).(b) Unwanted emissions that fall into restricted frequency bands listed in table 7 shall comply with the limits specified in table 5 and table 6.(c) Unwanted emissions that do not fall within the restricted frequency bands listed in table 7 shall comply either with the limits specified in the applicable RSS or with those specified in table 5 and table 6.


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates Compliant with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

EUT Setup


9 kHz-30MHz:

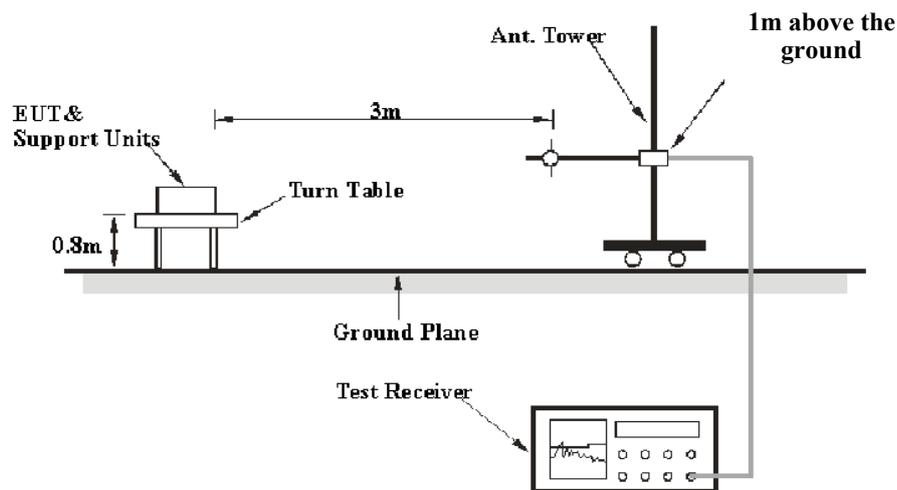

30MHz-1GHz:

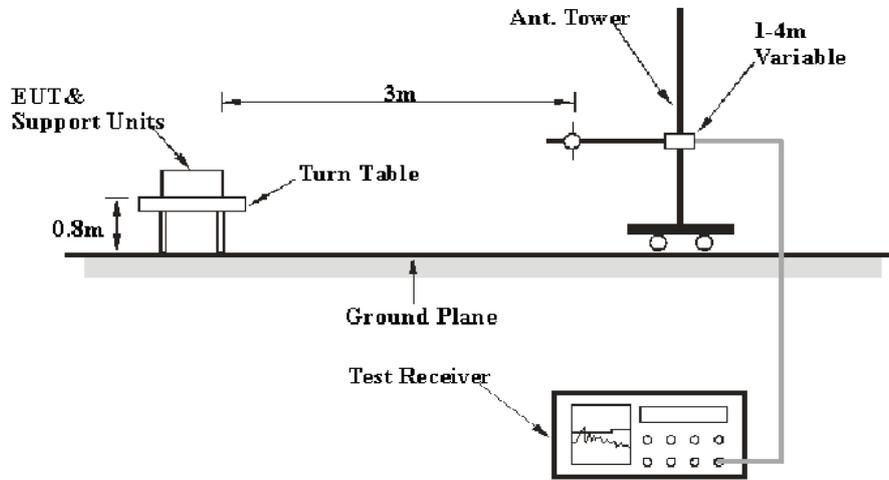

Above 1GHz:

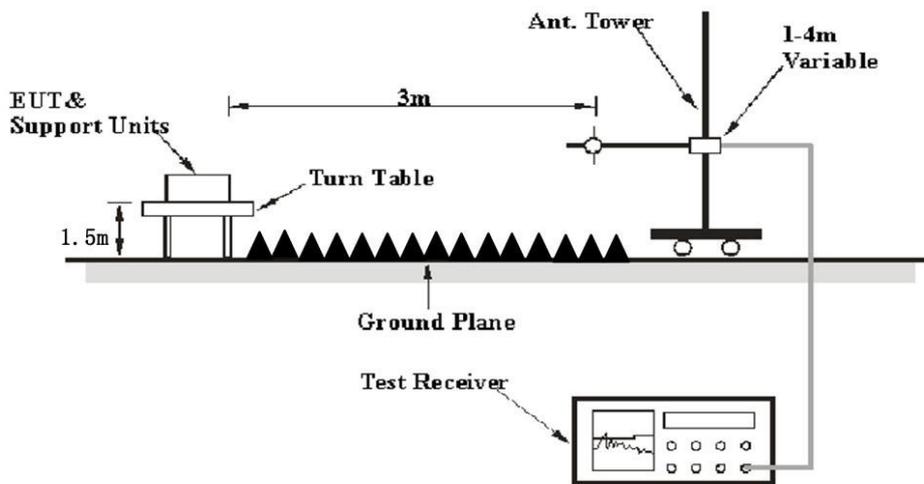

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013 & RSS-Gen. The specification used was the FCC 15.209, and FCC 15.247 & RSS-Gen limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9 kHz-1GHz:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
9 kHz – 150 kHz	/	/	200 Hz	QP
	300 Hz	1 kHz	/	PK
150 kHz – 30 MHz	/	/	9 kHz	QP
	10 kHz	30 kHz	/	PK
30 MHz – 1000 MHz	/	/	120 kHz	QP
	100 kHz	300 kHz	/	PK

1-25GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
AV	>98%	1MHz	10 Hz
	<98%	1MHz	≥1/T

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, average detection modes for frequency bands 9–90 kHz and 110–490 kHz, peak and average detection modes for frequencies above 1 GHz.

For 9 kHz-30MHz, the report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground-parallel) unless the margin is greater than 20 dB.

Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.

Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.

Repeat above procedures until all measured frequencies were complete.

Factor & Over Limit/Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit/Margin} &= \text{Level/Corrected Amplitude} - \text{Limit} \\ \text{Level / Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

Test Data

Environmental Conditions

Temperature:	23~24 °C
Relative Humidity:	55~61 %
ATM Pressure:	101.0~101.2 kPa

The testing was performed by Warren Huang on 2024-02-18 for below 1GHz and Dylan Yang from 2024-02-28 to 2024-03-13 for above 1GHz.


EUT operation mode: Transmitting

Note: Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded.

9 kHz-30MHz: (worst case is 802.11n-HT40 mode, middle channel)


Note: When the test result of Peak was more than 6dB below the limit of QP, just the Peak value was recorded.

Parallel (worst case)

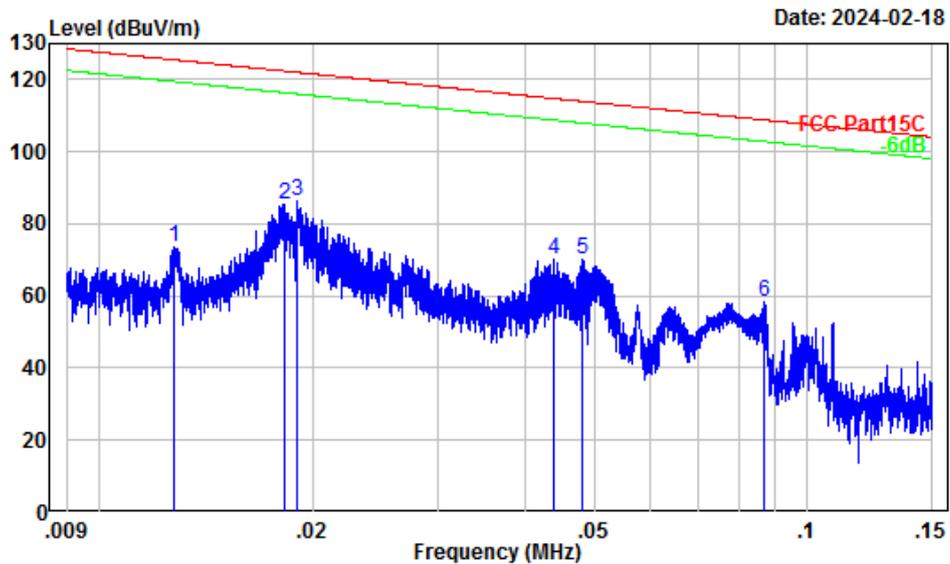

Site : chamber
 Condition : 3m
 Project Number: SZ4240129-06787E-RF
 Note : 2.4G WIFI
 Tester : Warren Huang

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.01	52.46	20.93	73.39	125.49	-52.10	Peak
2	0.02	50.76	34.67	85.43	122.36	-36.93	Peak
3	0.02	50.52	35.85	86.37	122.00	-35.63	Peak
4	0.04	42.92	27.22	70.14	114.78	-44.64	Peak
5	0.05	41.61	28.76	70.37	113.97	-43.60	Peak
6	0.09	35.92	22.45	58.37	108.82	-50.45	Peak

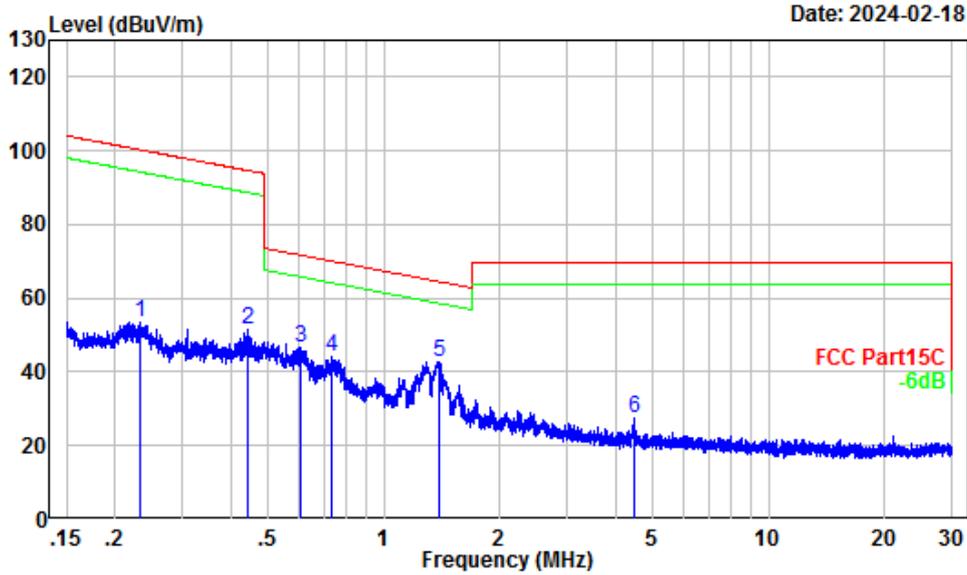


Site : chamber
 Condition : 3m
 Project Number: SZ4240129-06787E-RF
 Note : 2.4G WIFI
 Tester : Warren Huang

	Read	Limit	Over				
Freq	Level	Level	Line	Limit Remark			
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB		
1	0.23	27.84	25.55	53.39	100.29	-46.90	Peak
2	0.44	21.77	29.91	51.68	94.71	-43.03	Peak
3	0.61	19.60	26.89	46.49	71.91	-25.42	Peak
4	0.73	17.83	26.51	44.34	70.25	-25.91	Peak
5	1.39	13.49	29.35	42.84	64.53	-21.69	Peak
6	4.47	5.82	21.60	27.42	69.54	-42.12	Peak

30 MHz~1 GHz: (worst case is 802.11n-HT40 mode, middle channel)


Horizontal

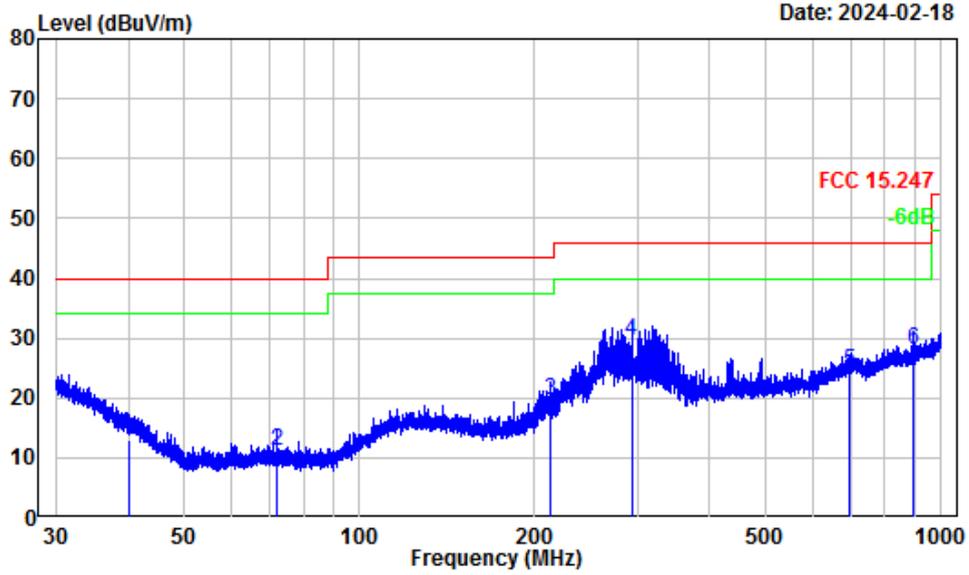

Site : chamber
 Condition : 3m Horizontal
 Project Number: SZ4240129-06787E-RF
 Note : 2.4G WIFI
 Tester : Warren Huang

	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	40.12	-10.46	23.58	13.12	40.00	-26.88	QP
2	72.02	-16.30	27.48	11.18	40.00	-28.82	QP
3	213.11	-11.24	30.89	19.65	43.50	-23.85	QP
4	293.47	-10.21	39.68	29.47	46.00	-16.53	QP
5	696.55	-1.58	25.99	24.41	46.00	-21.59	QP
6	898.57	0.99	26.94	27.93	46.00	-18.07	QP

Vertical

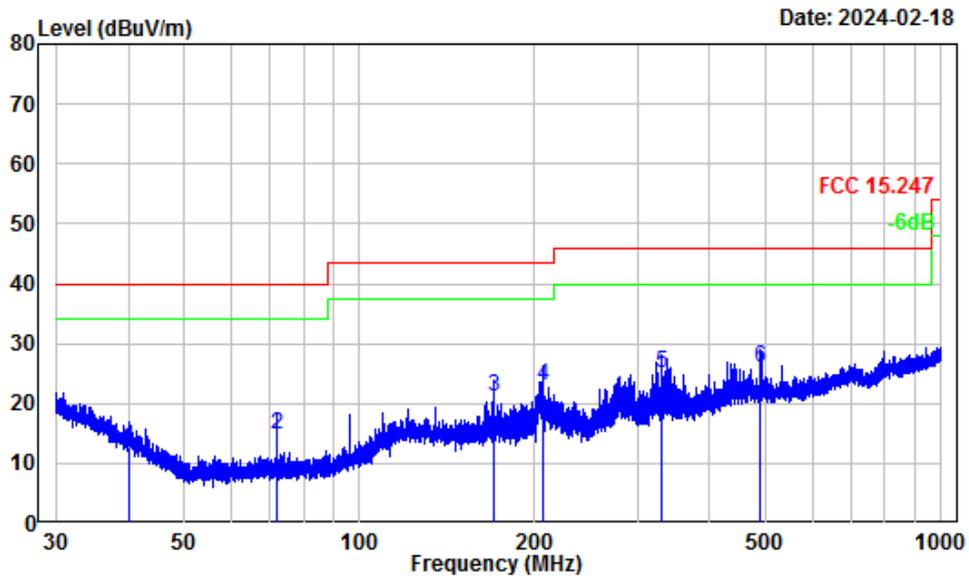

Site : chamber
 Condition : 3m Vertical
 Project Number: SZ4240129-06787E-RF
 Note : 2.4G WIFI
 Tester : Warren Huang

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	40.12	-11.96	24.71	12.75	40.00	-27.25	QP
2	71.99	-17.28	32.07	14.79	40.00	-25.21	QP
3	170.42	-12.39	33.40	21.01	43.50	-22.49	QP
4	206.67	-12.24	35.29	23.05	43.50	-20.45	QP
5	330.48	-10.23	35.18	24.95	46.00	-21.05	QP
6	488.81	-5.45	31.53	26.08	46.00	-19.92	QP

1 GHz-25 GHz:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave					
802.11b (ANT1)							
Low Channel 2412MHz							
4824.00	52.11	PK	H	2.45	54.56	74	-19.44
4824.00	48.29	AV	H	2.45	50.74	54	-3.26
4824.00	50.31	PK	V	2.45	52.76	74	-21.24
4824.00	47.62	AV	V	2.45	50.07	54	-3.93
Middle Channel 2437MHz							
4874.00	52.19	PK	H	2.56	54.75	74	-19.25
4874.00	48.13	AV	H	2.56	50.69	54	-3.31
4874.00	50.11	PK	V	2.56	52.67	74	-21.33
4874.00	47.50	AV	V	2.56	50.06	54	-3.94
High Channel 2462MHz							
4924.00	52.45	PK	H	2.63	55.08	74	-18.92
4924.00	48.02	AV	H	2.63	50.65	54	-3.35
4924.00	50.22	PK	V	2.63	52.85	74	-21.15
4924.00	47.69	AV	V	2.63	50.32	54	-3.68
802.11b (ANT2)							
Low Channel 2412MHz							
4824.00	52.67	PK	H	2.45	55.12	74	-18.88
4824.00	47.62	AV	H	2.45	50.07	54	-3.93
4824.00	50.04	PK	V	2.45	52.49	74	-21.51
4824.00	42.66	AV	V	2.45	45.11	54	-8.89
Middle Channel 2437MHz							
4874.00	52.76	PK	H	2.56	55.32	74	-18.68
4874.00	47.07	AV	H	2.56	49.63	54	-4.37
4874.00	51.23	PK	V	2.56	53.79	74	-20.21
4874.00	45.62	AV	V	2.56	48.18	54	-5.82
High Channel 2462MHz							
4924.00	52.81	PK	H	2.63	55.44	74	-18.56
4924.00	48.31	AV	H	2.63	50.94	54	-3.06
4924.00	51.47	PK	V	2.63	54.10	74	-19.90
4924.00	47.23	AV	V	2.63	49.86	54	-4.14

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave					
802.11g (ANT1)							
Low Channel 2412MHz							
4824.00	51.38	PK	H	2.45	53.83	74	-20.17
4824.00	36.23	AV	H	2.45	38.68	54	-15.32
4824.00	48.91	PK	V	2.45	51.36	74	-22.64
4824.00	35.77	AV	V	2.45	38.22	54	-15.78
Middle Channel 2437MHz							
4874.00	52.65	PK	H	2.56	55.21	74	-18.79
4874.00	39.38	AV	H	2.56	41.94	54	-12.06
4874.00	49.62	PK	V	2.56	52.18	74	-21.82
4874.00	38.49	AV	V	2.56	41.05	54	-12.95
High Channel 2462MHz							
4924.00	52.95	PK	H	2.63	55.58	74	-18.42
4924.00	39.65	AV	H	2.63	42.28	54	-11.72
4924.00	49.89	PK	V	2.63	52.52	74	-21.48
4924.00	38.42	AV	V	2.63	41.05	54	-12.95
802.11g (ANT2)							
Low Channel 2412MHz							
4824.00	51.33	PK	H	2.45	53.78	74	-20.22
4824.00	38.29	AV	H	2.45	40.74	54	-13.26
4824.00	47.88	PK	V	2.45	50.33	74	-23.67
4824.00	37.12	AV	V	2.45	39.57	54	-14.43
Middle Channel 2437MHz							
4874.00	50.83	PK	H	2.56	53.39	74	-20.61
4874.00	38.26	AV	H	2.56	40.82	54	-13.18
4874.00	47.54	PK	V	2.56	50.10	74	-23.90
4874.00	36.77	AV	V	2.56	39.33	54	-14.67
High Channel 2462MHz							
4924.00	51.19	PK	H	2.63	53.82	74	-20.18
4924.00	38.79	AV	H	2.63	41.42	54	-12.58
4924.00	46.88	PK	V	2.63	49.51	74	-24.49
4924.00	36.47	AV	V	2.63	39.10	54	-14.90

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave					
802.11n20							
Low Channel 2412MHz							
4824.00	50.14	PK	H	2.45	52.59	74	-21.41
4824.00	37.88	AV	H	2.45	40.33	54	-13.67
4824.00	47.56	PK	V	2.45	50.01	74	-23.99
4824.00	36.45	AV	V	2.45	38.90	54	-15.10
Middle Channel 2437MHz							
4874.00	51.79	PK	H	2.56	54.35	74	-19.65
4874.00	38.94	AV	H	2.56	41.50	54	-12.50
4874.00	48.46	PK	V	2.56	51.02	74	-22.98
4874.00	36.91	AV	V	2.56	39.47	54	-14.53
High Channel 2462MHz							
4924.00	51.67	PK	H	2.63	54.30	74	-19.70
4924.00	38.79	AV	H	2.63	41.42	54	-12.58
4924.00	48.41	PK	V	2.63	51.04	74	-22.96
4924.00	37.56	AV	V	2.63	40.19	54	-13.81
802.11n40							
Low Channel 2422MHz							
4844.00	49.45	PK	H	2.45	51.90	74	-22.10
4844.00	36.33	AV	H	2.45	38.78	54	-15.22
4844.00	48.62	PK	V	2.45	51.07	74	-22.93
4844.00	35.45	AV	V	2.45	37.90	54	-16.10
Middle Channel 2437MHz							
4874.00	48.78	PK	H	2.56	51.34	74	-22.66
4874.00	36.15	AV	H	2.56	38.71	54	-15.29
4874.00	48.74	PK	V	2.56	51.30	74	-22.70
4874.00	34.88	AV	V	2.56	37.44	54	-16.56
High Channel 2452MHz							
4904.00	48.67	PK	H	2.64	51.31	74	-22.69
4904.00	36.18	AV	H	2.64	38.82	54	-15.18
4904.00	47.98	PK	V	2.64	50.62	74	-23.38
4904.00	35.79	AV	V	2.64	38.43	54	-15.57

Note:


Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Factor + Reading


Margin = Corrected. Amplitude - Limit

The other spurious emission which is in the noise floor level was not recorded.

Test plots for Band Edge Measurements (Radiated):

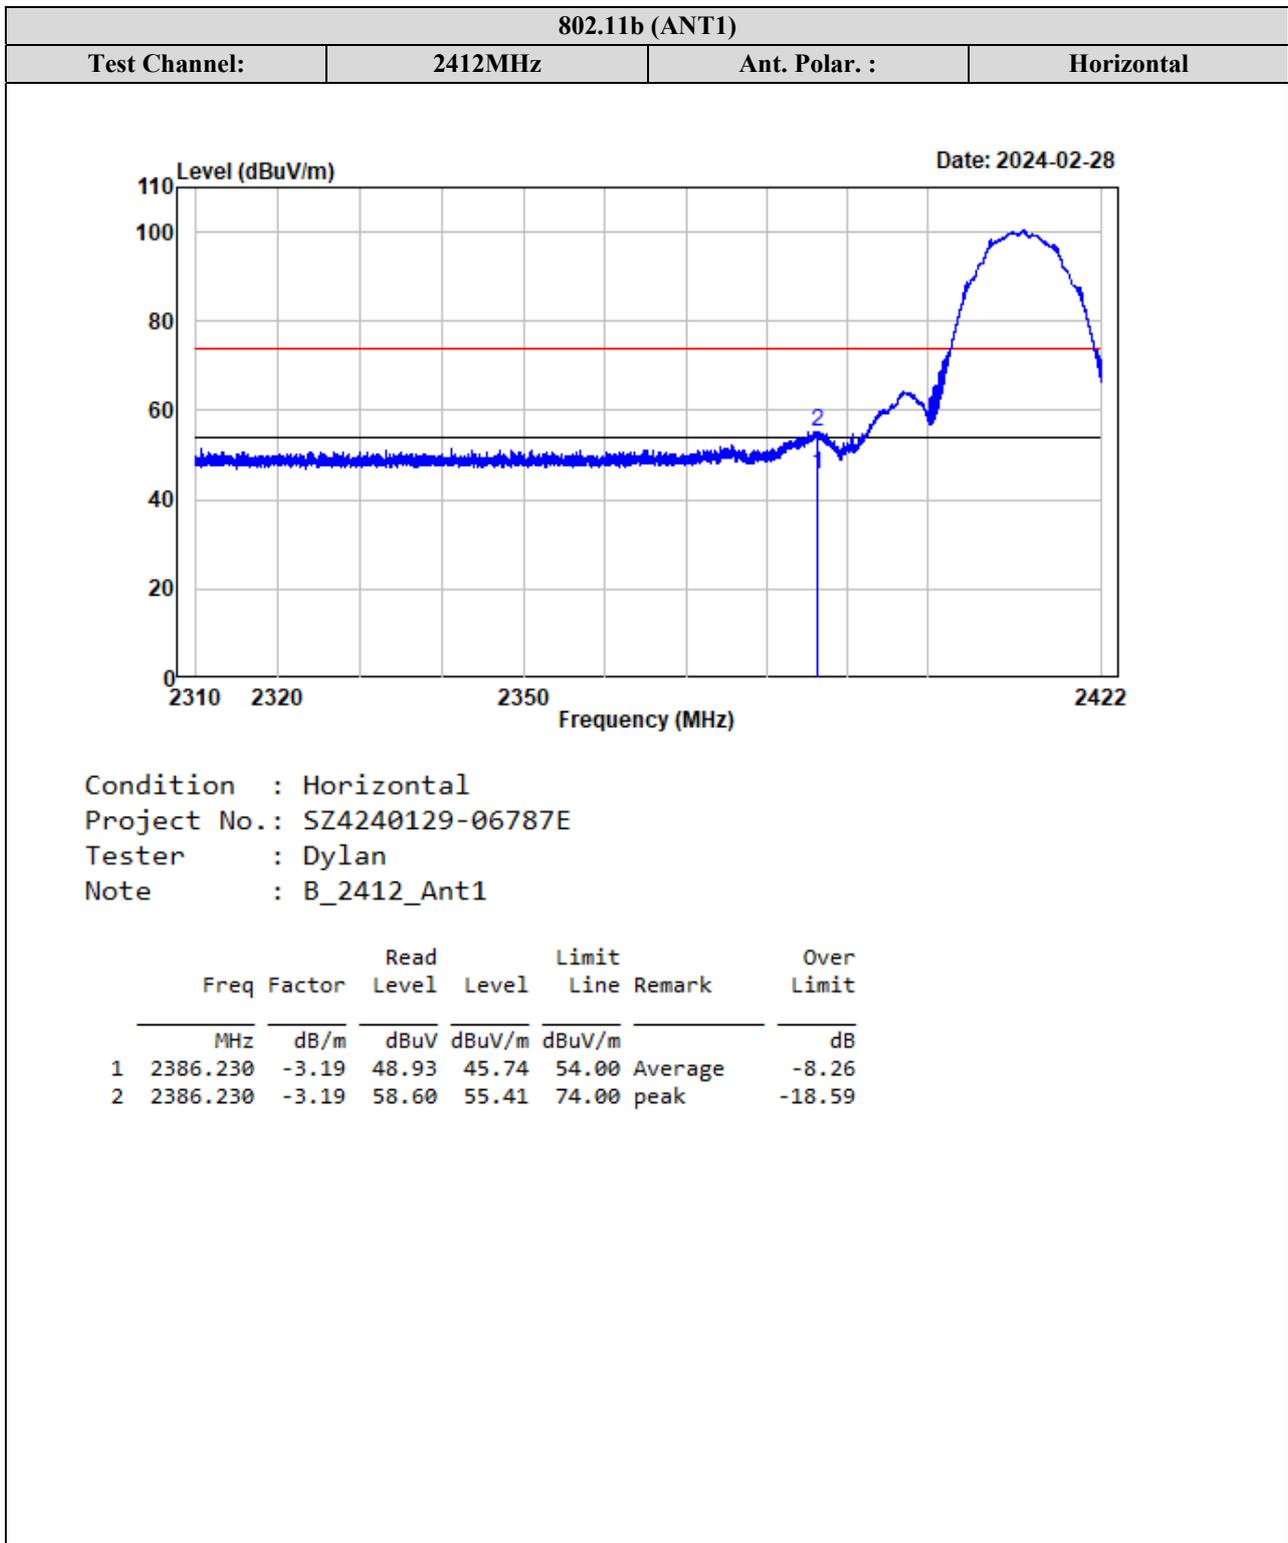


802.11b (ANT1)			
Test Channel:	2412MHz	Ant. Polar. :	Vertical

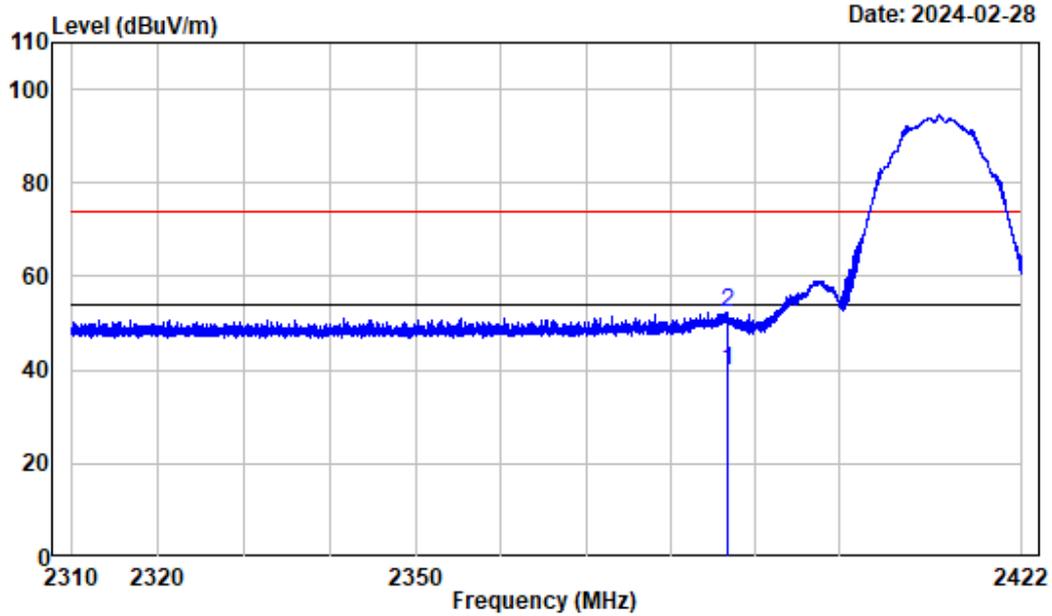

Condition : Vertical
 Project No.: SZ4240129-06787E
 Tester : Dylan
 Note : B_2412_Ant1

	Freq	Factor	Read Level	Level	Limit	Line Remark	Over Limit
	MHz	dB/m	dBuV	dBuV/m	dBuV/m		dB
1	2386.748	-3.19	43.24	40.05	54.00	Average	-13.95
2	2386.748	-3.19	55.41	52.22	74.00	peak	-21.78

802.11b (ANT1)			
Test Channel:	2462MHz	Ant. Polar. :	Horizontal

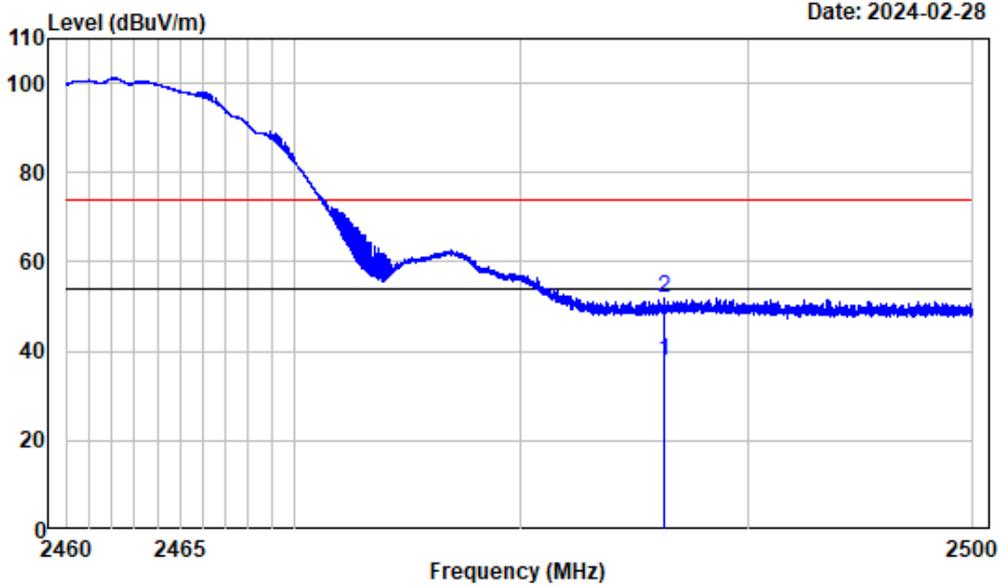


Condition : Horizontal
 Project No.: SZ4240129-06787E
 Tester : Dylan
 Note : B_2462_Ant1

	Freq	Factor	Read		Limit		Over
			Level	Level	Line	Remark	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m		dB
1	2486.295	-3.17	40.93	37.76	54.00	Average	-16.24
2	2486.295	-3.17	55.13	51.96	74.00	peak	-22.04

802.11b (ANT1)


Test Channel: 2462MHz Ant. Polar.: Vertical

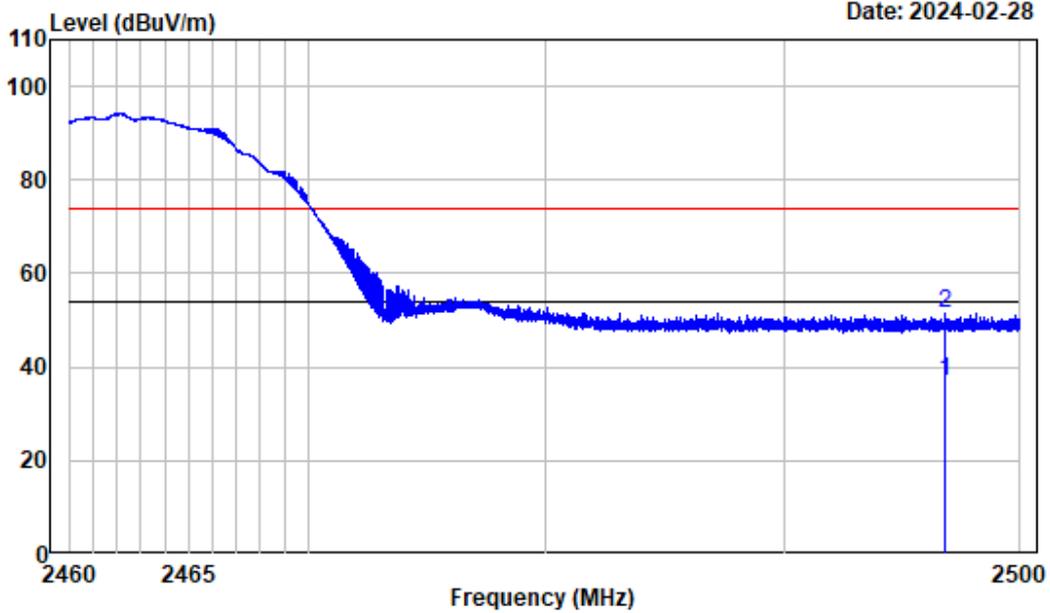

Condition : Vertical
 Project No.: SZ4240129-06787E
 Tester : Dylan
 Note : B_2462_Ant1

	Freq	Factor	Read Level	Level	Limit	Line Remark	Over Limit
	MHz	dB/m	dBuV	dBuV/m	dBuV/m		dB
1	2496.800	-3.19	40.11	36.92	54.00	Average	-17.08
2	2496.800	-3.19	54.75	51.56	74.00	peak	-22.44


802.11b (ANT2)			
Test Channel:	2412MHz	Ant. Polar. :	Horizontal

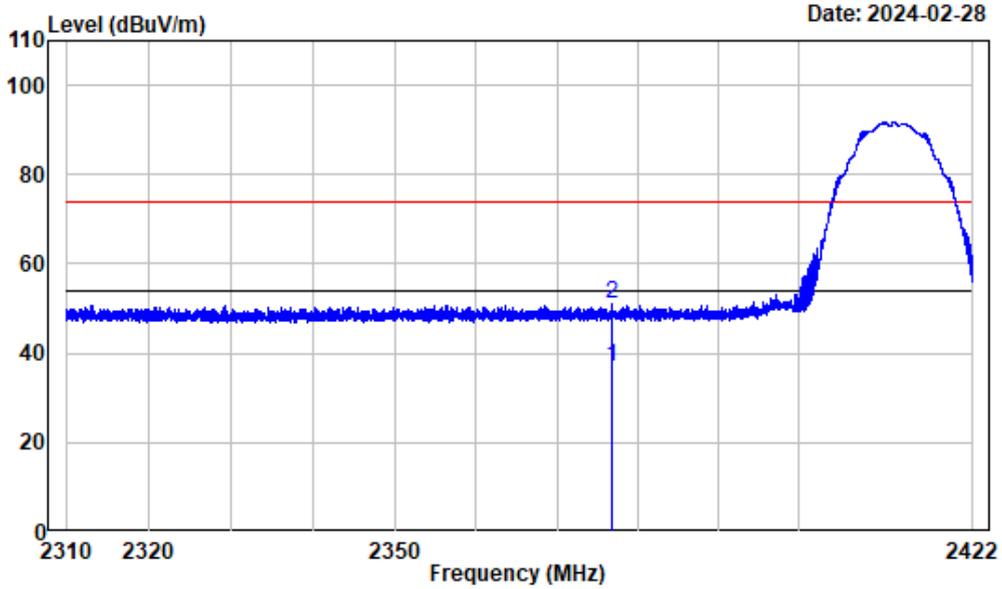

Condition : Horizontal
 Project No.: SZ4240129-06787E
 Tester : Dylan
 Note : B_2412_Ant2

	Freq	Factor	Read Level	Level	Limit	Line	Remark	Over Limit
	MHz	dB/m	dBuV	dBuV/m	dBuV/m			dB
1	2376.892	-3.18	40.23	37.05	54.00	Average		-16.95
2	2376.892	-3.18	54.15	50.97	74.00	peak		-23.03


802.11b (ANT2)			
Test Channel:	2412MHz	Ant. Polar. :	Vertical

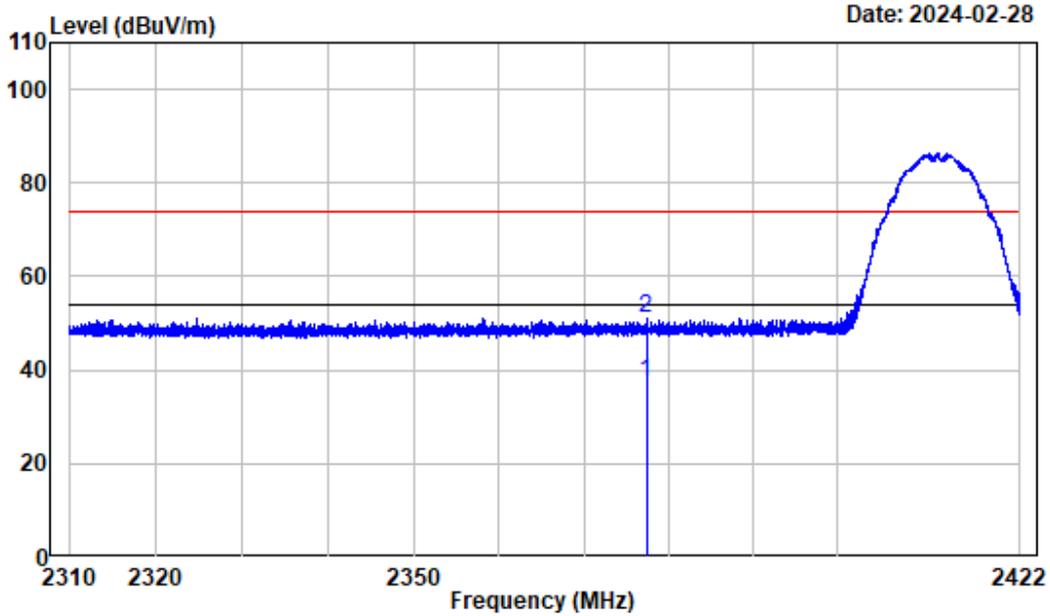

Condition : Vertical
 Project No.: SZ4240129-06787E
 Tester : Dylan
 Note : B_2412_Ant2

	Freq	Factor	Read Level	Level	Limit	Line Remark	Over Limit
	MHz	dB/m	dBuV	dBuV/m	dBuV/m		dB
1	2377.368	-3.18	40.56	37.38	54.00	Average	-16.62
2	2377.368	-3.18	54.40	51.22	74.00	peak	-22.78


802.11b (ANT2)			
Test Channel:	2462MHz	Ant. Polar. :	Horizontal

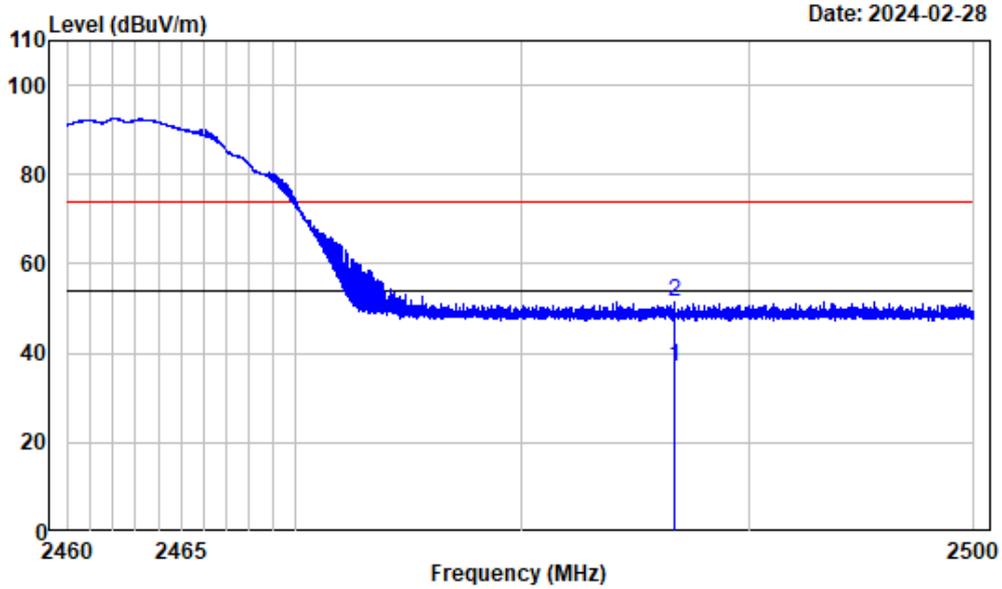

Condition : Horizontal
 Project No.: SZ4240129-06787E
 Tester : Dylan
 Note : B_2462_Ant2

	Freq	Factor	Read		Limit	Remark	Over
			Level	Level			
	MHz	dB/m	dBuV	dBuV/m	dBuV/m		dB
1	2486.740	-3.17	40.11	36.94	54.00	Average	-17.06
2	2486.740	-3.17	54.74	51.57	74.00	peak	-22.43


802.11b (ANT2)			
Test Channel:	2462MHz	Ant. Polar. :	Vertical

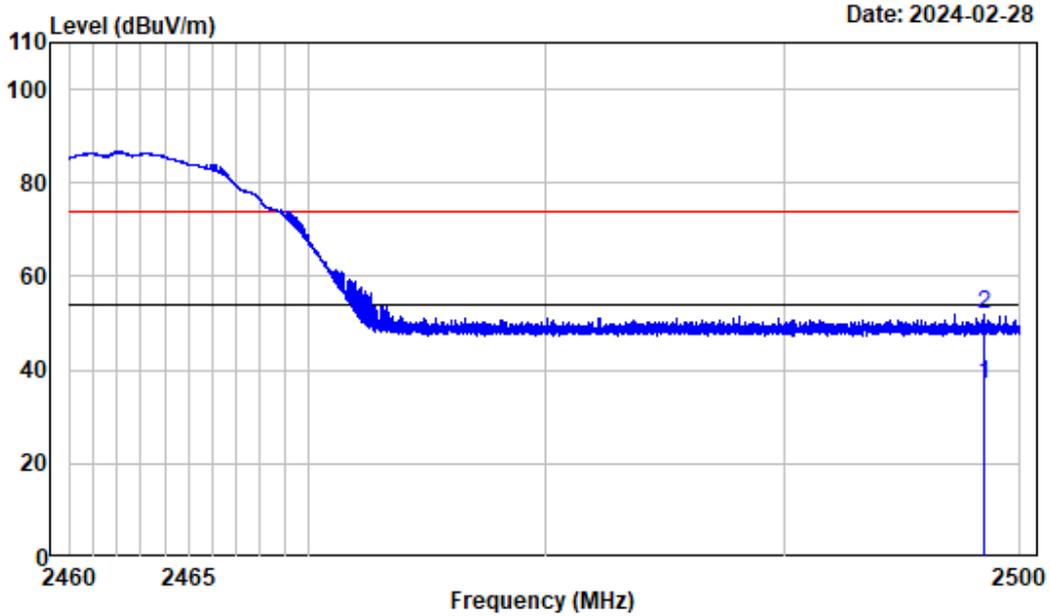

Condition : Vertical
 Project No.: SZ4240129-06787E
 Tester : Dylan
 Note : B_2462_Ant2


	Freq	Factor	Read Level	Level	Limit	Line Remark	Over Limit
	MHz	dB/m	dBuV	dBuV/m	dBuV/m		dB
1	2498.450	-3.20	40.05	36.85	54.00	Average	-17.15
2	2498.450	-3.20	55.16	51.96	74.00	peak	-22.04

802.11g (ANT1)			
Test Channel:	2412MHz	Ant. Polar. :	Horizontal

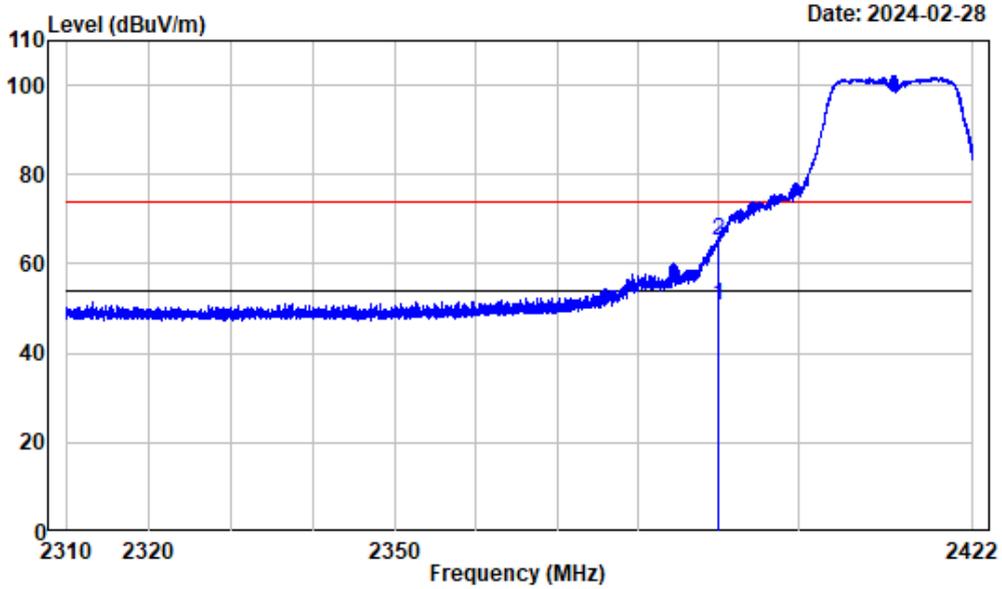


Condition : Horizontal
 Project No.: SZ4240129-06787E
 Tester : Dylan
 Note : G_2412_Ant1

	Freq	Factor	Read Level	Limit Level	Limit Line	Remark	Over Limit
	MHz	dB/m	dBuV	dBuV/m	dBuV/m		dB
1	2389.926	-3.20	53.65	50.45	54.00	Average	-3.55
2	2389.926	-3.20	68.46	65.26	74.00	peak	-8.74

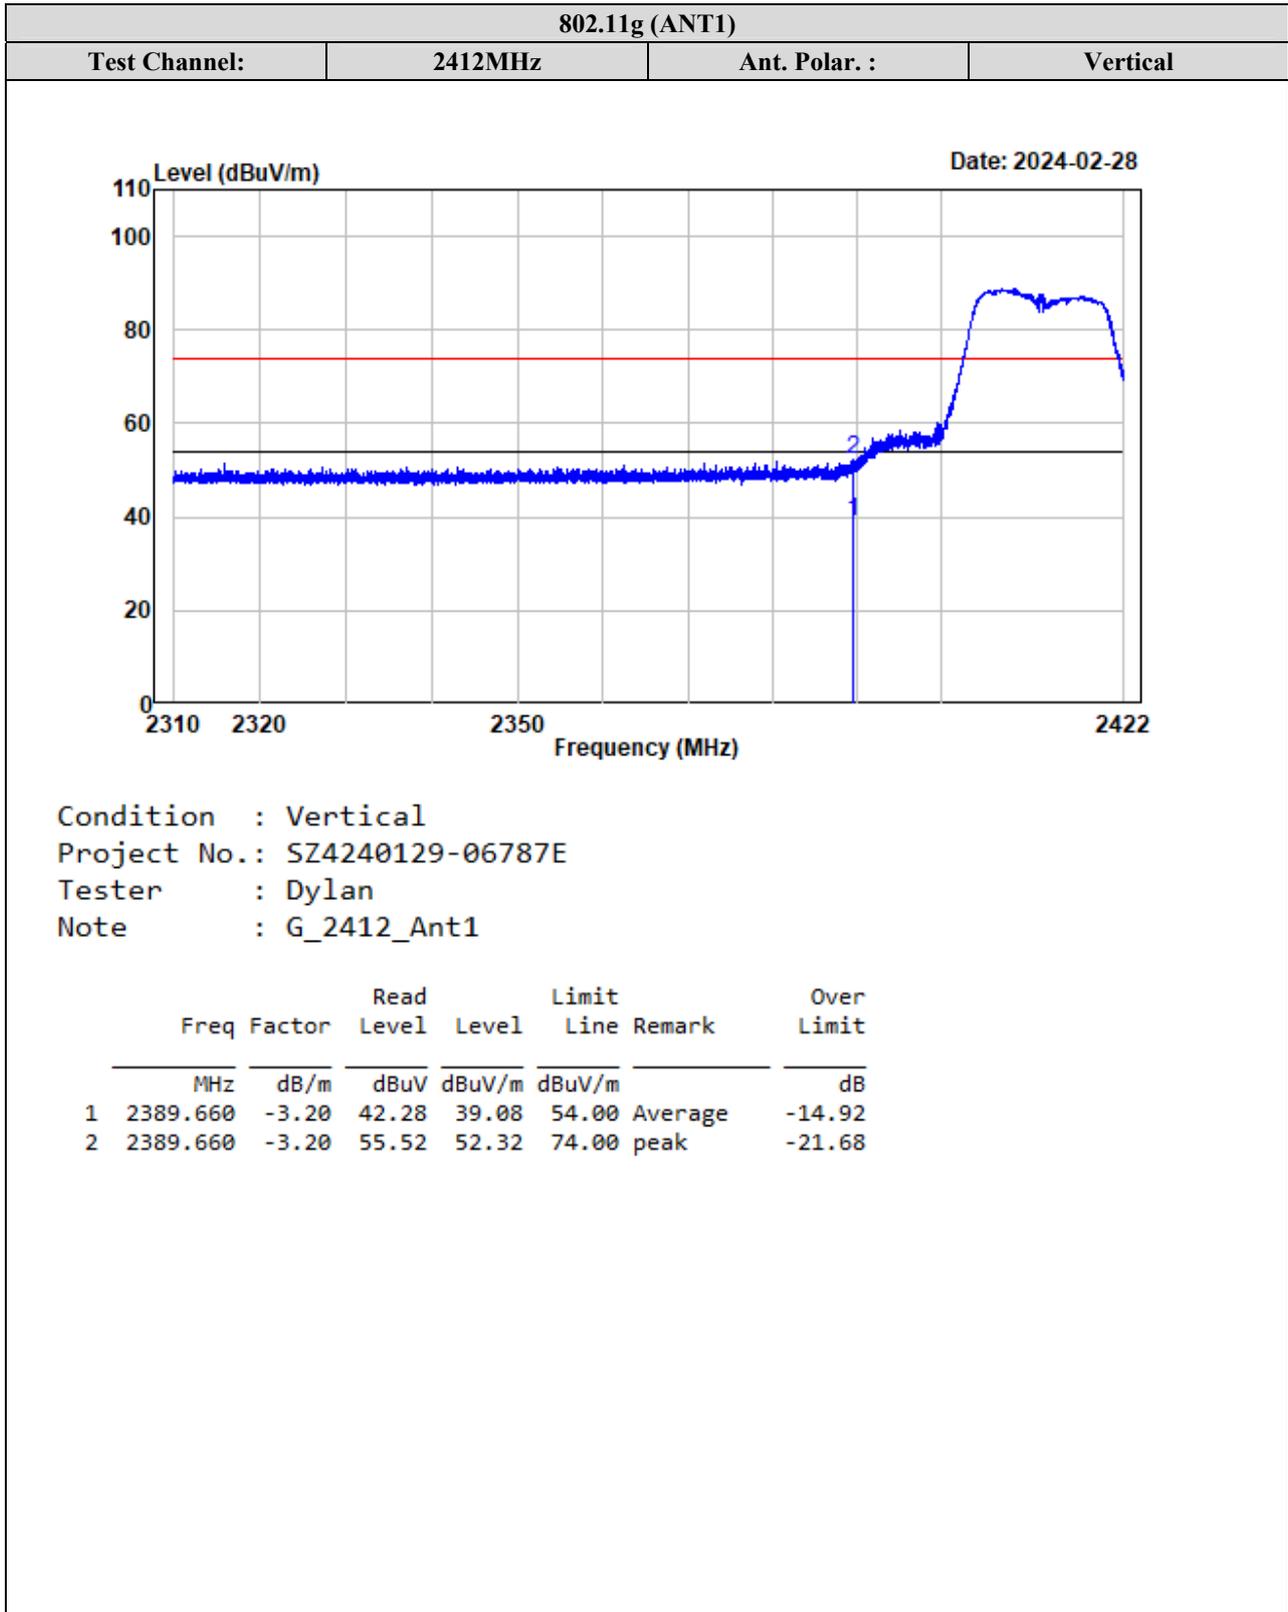


802.11g (ANT1)			
Test Channel:	2462MHz	Ant. Polar. :	Horizontal

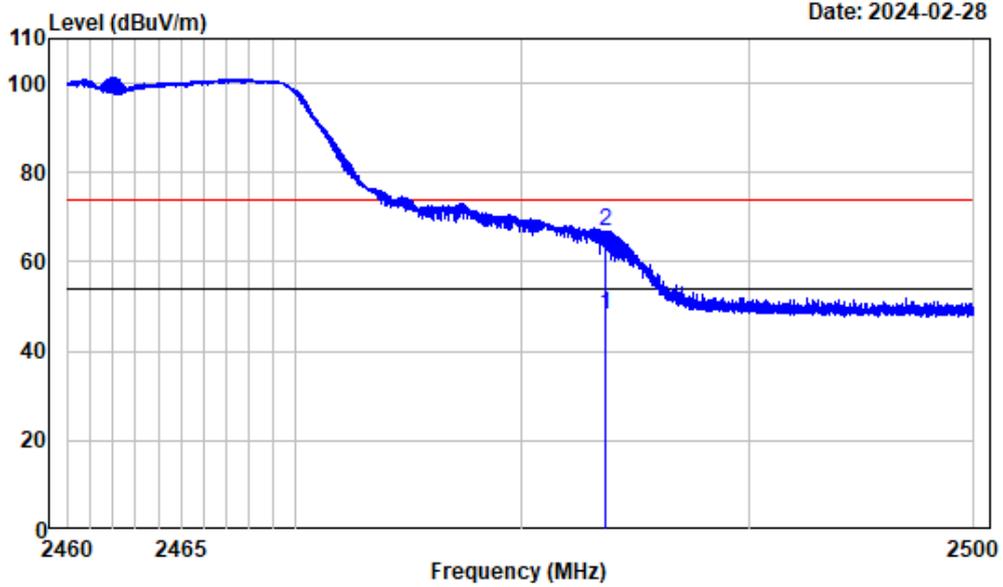

Condition : Horizontal
 Project No.: SZ4240129-06787E
 Tester : Dylan
 Note : G_2462_Ant1

	Freq	Factor	Read Level	Level	Limit	Line	Remark	Over Limit
	MHz	dB/m	dBuV	dBuV/m	dBuV/m			dB
1	2483.645	-3.17	51.21	48.04	54.00		Average	-5.96
2	2483.645	-3.17	70.17	67.00	74.00		peak	-7.00


802.11g (ANT1)			
Test Channel:	2462MHz	Ant. Polar. :	Vertical

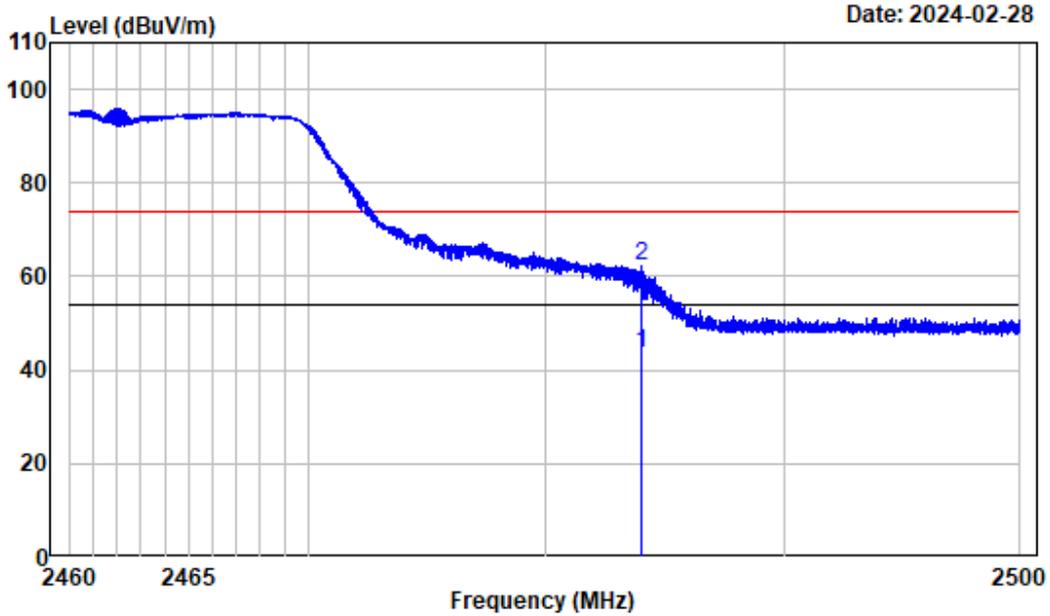

Condition : Vertical
 Project No.: SZ4240129-06787E
 Tester : Dylan
 Note : G_2462_Ant1

	Freq	Factor	Read Level	Level	Limit	Line Remark	Over Limit
	MHz	dB/m	dBuV	dBuV/m	dBuV/m		dB
1	2484.005	-3.17	46.77	43.60	54.00	Average	-10.40
2	2484.005	-3.17	65.26	62.09	74.00	peak	-11.91


802.11g (ANT2)			
Test Channel:	2412MHz	Ant. Polar. :	Horizontal

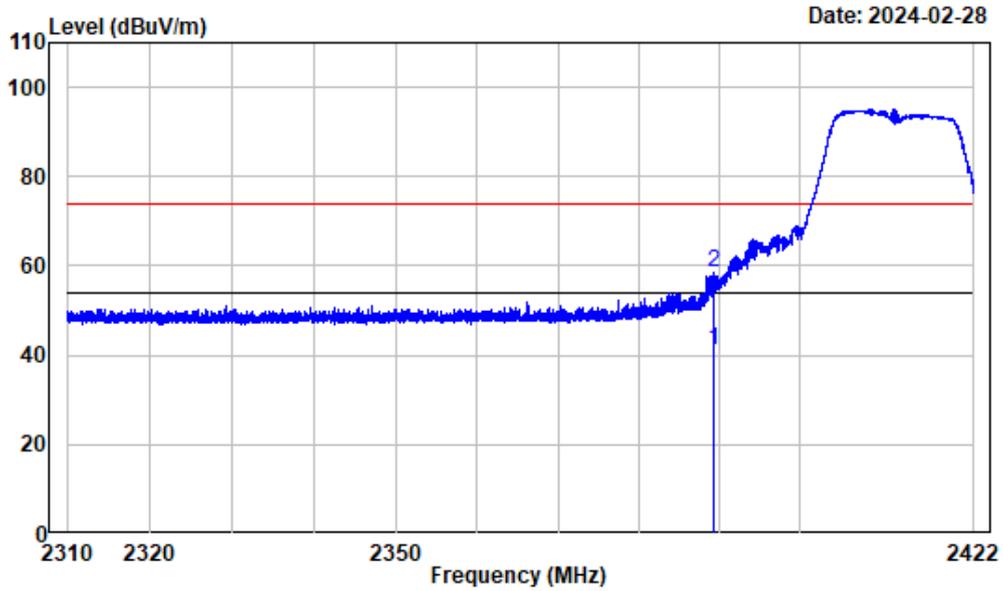

Condition : Horizontal
 Project No.: SZ4240129-06787E
 Tester : Dylan
 Note : G_2412_Ant2

	Freq	Factor	Read		Limit	Remark	Over
			Level	Level	Line		Limit
	MHz	dB/m	dBuV	dBuV/m	dBuV/m		dB
1	2389.352	-3.20	44.25	41.05	54.00	Average	-12.95
2	2389.352	-3.20	61.63	58.43	74.00	peak	-15.57


802.11g (ANT2)			
Test Channel:	2412MHz	Ant. Polar. :	Vertical

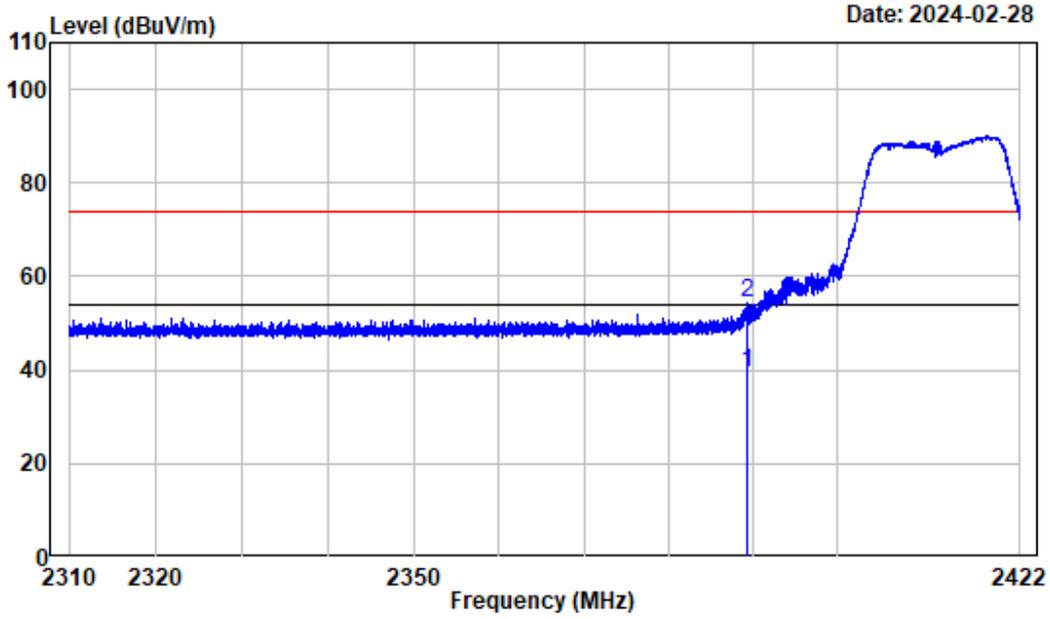

Condition : Vertical
 Project No.: SZ4240129-06787E
 Tester : Dylan
 Note : G_2412_Ant2

	Freq	Factor	Read Level	Level	Limit	Line Remark	Over Limit
	MHz	dB/m	dBuV	dBuV/m	dBuV/m		dB
1	2389.380	-3.20	42.65	39.45	54.00	Average	-14.55
2	2389.380	-3.20	57.53	54.33	74.00	peak	-19.67


802.11g (ANT2)			
Test Channel:	2462MHz	Ant. Polar. :	Horizontal

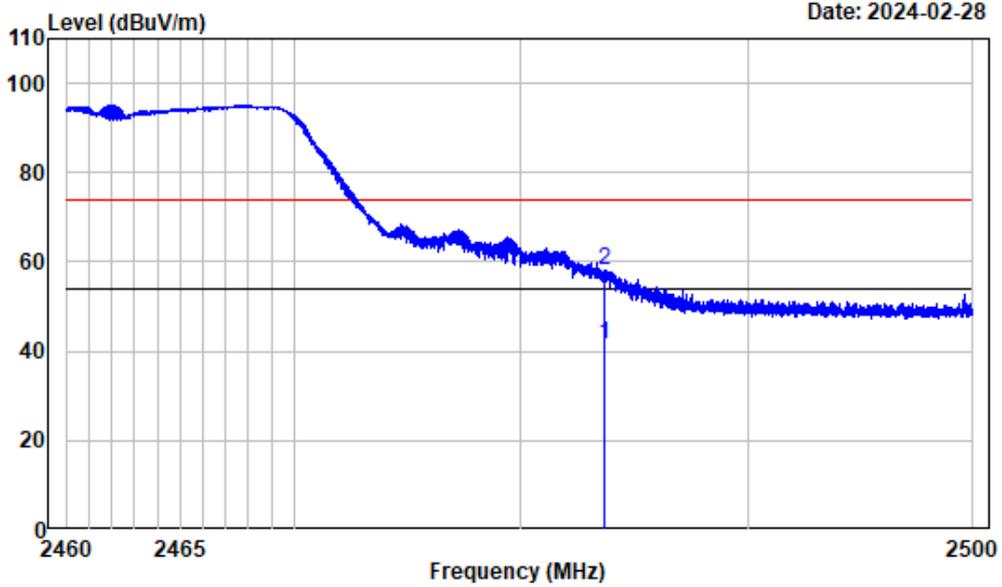

Condition : Horizontal
 Project No.: SZ4240129-06787E
 Tester : Dylan
 Note : G_2462_Ant2

	Freq	Factor	Read		Limit	Remark	Over
			Level	Level			
	MHz	dB/m	dBuV	dBuV/m	dBuV/m		dB
1	2483.705	-3.17	44.48	41.31	54.00	Average	-12.69
2	2483.705	-3.17	61.42	58.25	74.00	peak	-15.75


802.11g (ANT2)			
Test Channel:	2462MHz	Ant. Polar. :	Vertical

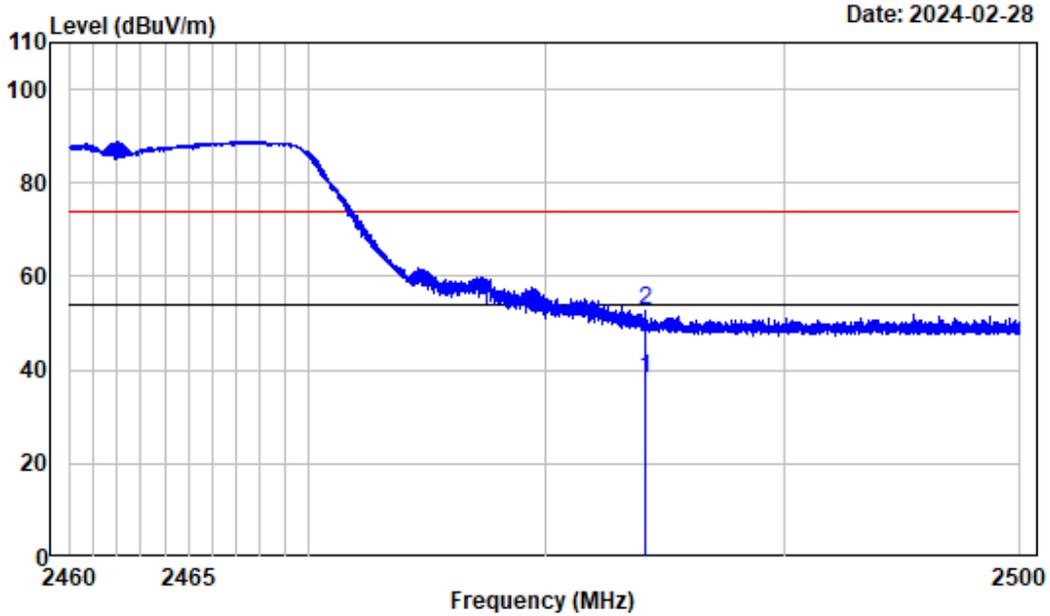

Condition : Vertical
 Project No.: SZ4240129-06787E
 Tester : Dylan
 Note : G_2462_Ant2

	Freq	Factor	Read Level	Level	Limit	Line Remark	Over Limit
	MHz	dB/m	dBuV	dBuV/m	dBuV/m		dB
1	2484.175	-3.17	41.38	38.21	54.00	Average	-15.79
2	2484.175	-3.17	55.80	52.63	74.00	peak	-21.37


802.11n20			
Test Channel:	2412MHz	Ant. Polar. :	Horizontal

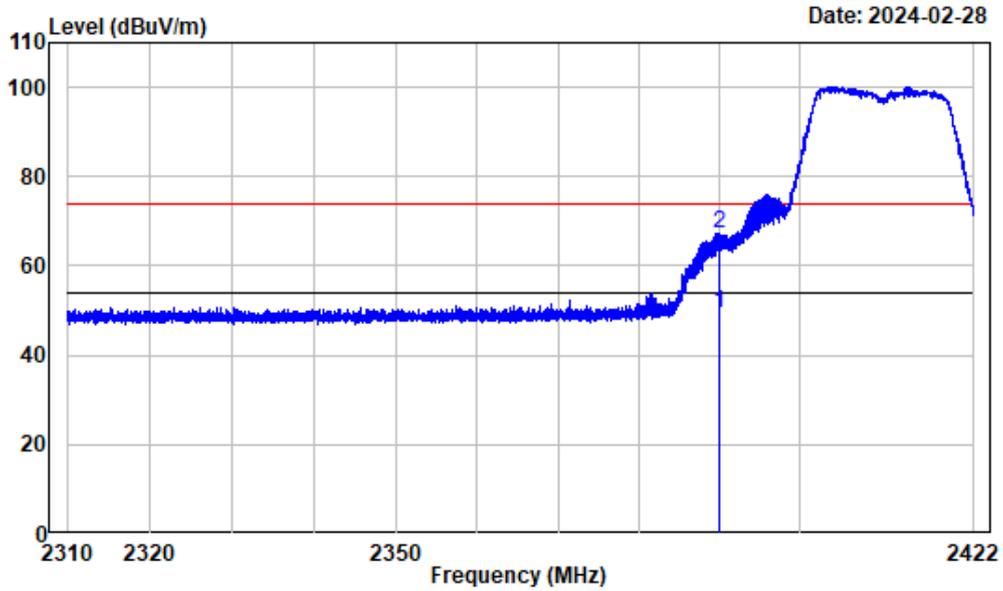

Condition : Horizontal
 Project No.: SZ4240129-06787E
 Tester : Dylan
 Note : N20_2412

	Freq	Factor	Read Level	Level	Limit	Line	Remark	Over Limit
	MHz	dB/m	dBuV	dBuV/m	dBuV/m			dB
1	2389.940	-3.20	52.53	49.33	54.00		Average	-4.67
2	2389.940	-3.20	70.46	67.26	74.00		peak	-6.74


802.11n20			
Test Channel:	2412MHz	Ant. Polar. :	Vertical

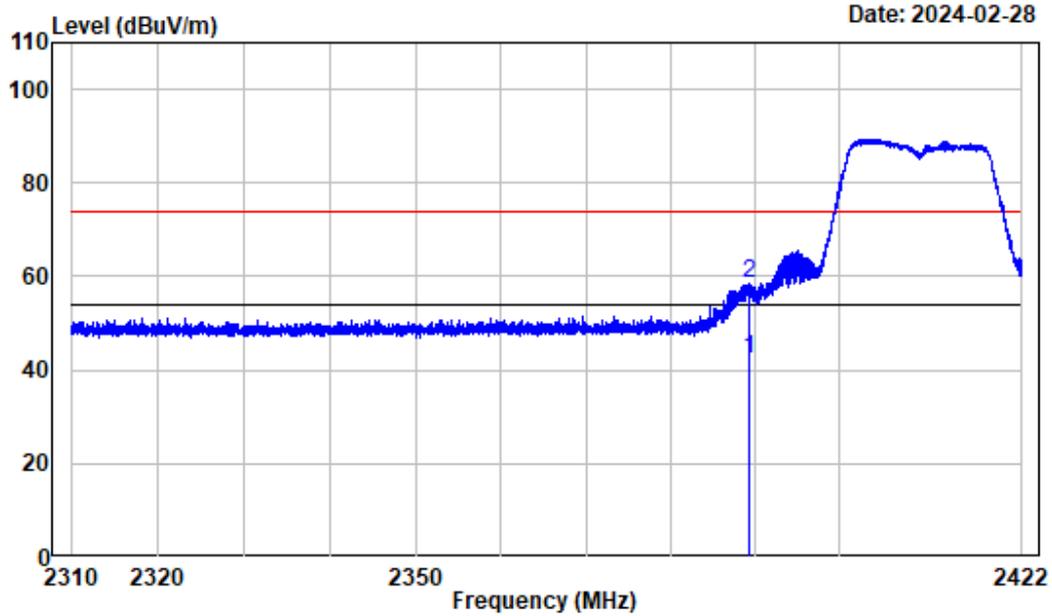

Condition : Vertical
 Project No.: SZ4240129-06787E
 Tester : Dylan
 Note : N20_2412

	Freq	Factor	Read Level	Level	Limit	Line Remark	Over Limit
	MHz	dB/m	dBuV	dBuV/m	dBuV/m		dB
1	2389.380	-3.20	45.68	42.48	54.00	Average	-11.52
2	2389.380	-3.20	61.75	58.55	74.00	peak	-15.45


802.11n20			
Test Channel:	2462MHz	Ant. Polar. :	Horizontal

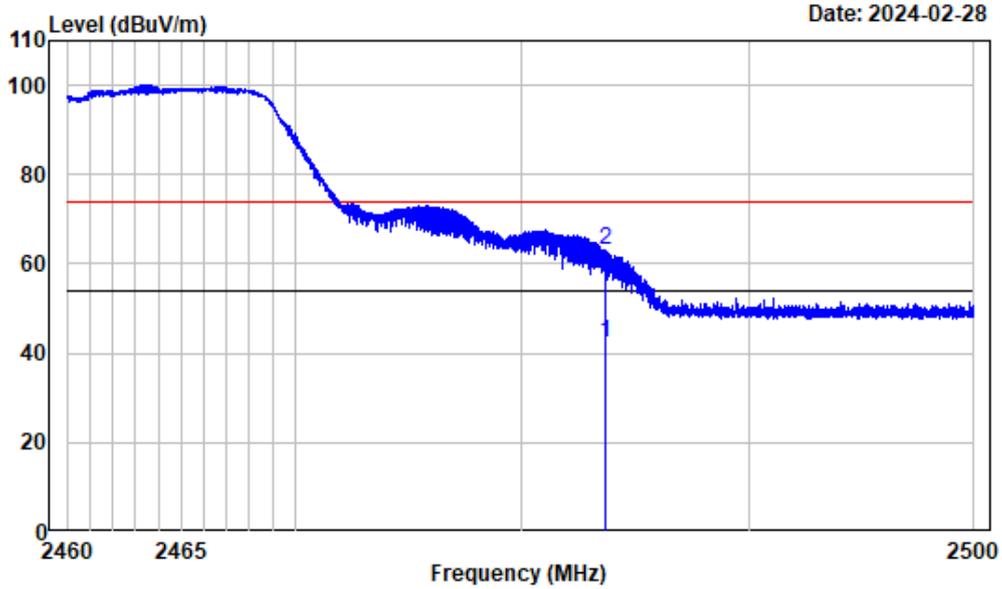

Condition : Horizontal
 Project No.: SZ4240129-06787E
 Tester : Dylan
 Note : N20_2462

	Freq	Factor	Read Level	Level	Limit	Line	Remark	Over Limit
	MHz	dB/m	dBuV	dBuV/m	dBuV/m			dB
1	2483.660	-3.17	45.45	42.28	54.00		Average	-11.72
2	2483.660	-3.17	66.29	63.12	74.00		peak	-10.88


802.11n20			
Test Channel:	2462MHz	Ant. Polar. :	Vertical

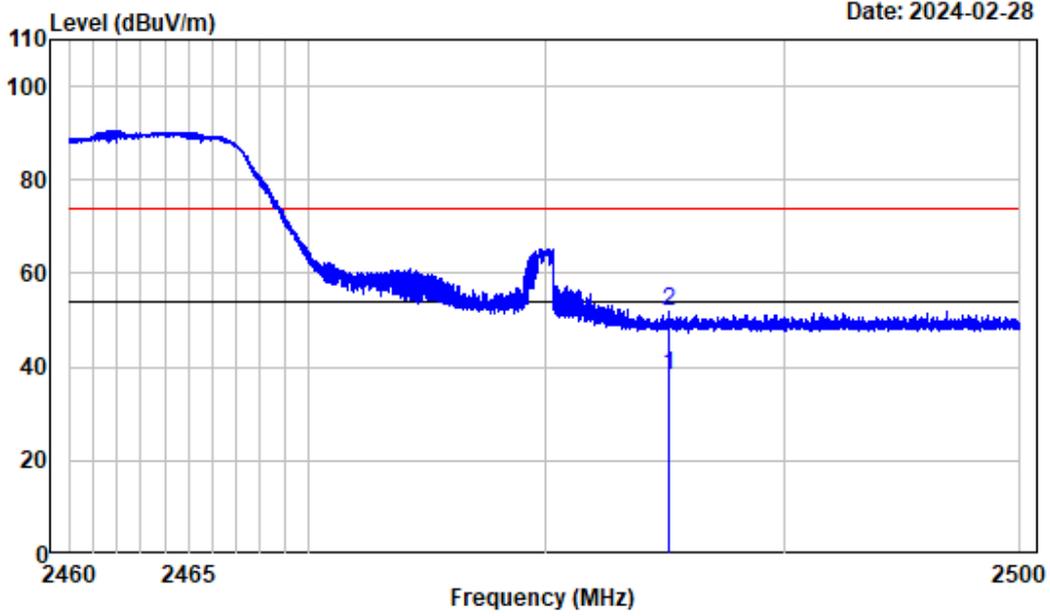

Condition : Vertical
 Project No.: SZ4240129-06787E
 Tester : Dylan
 Note : N20_2462

	Freq	Factor	Read Level	Level	Limit	Remark	Over Limit
	MHz	dB/m	dBuV	dBuV/m	dBuV/m		dB
1	2485.140	-3.17	41.28	38.11	54.00	Average	-15.89
2	2485.140	-3.17	55.11	51.94	74.00	peak	-22.06


802.11n40			
Test Channel:	2422MHz	Ant. Polar. :	Horizontal

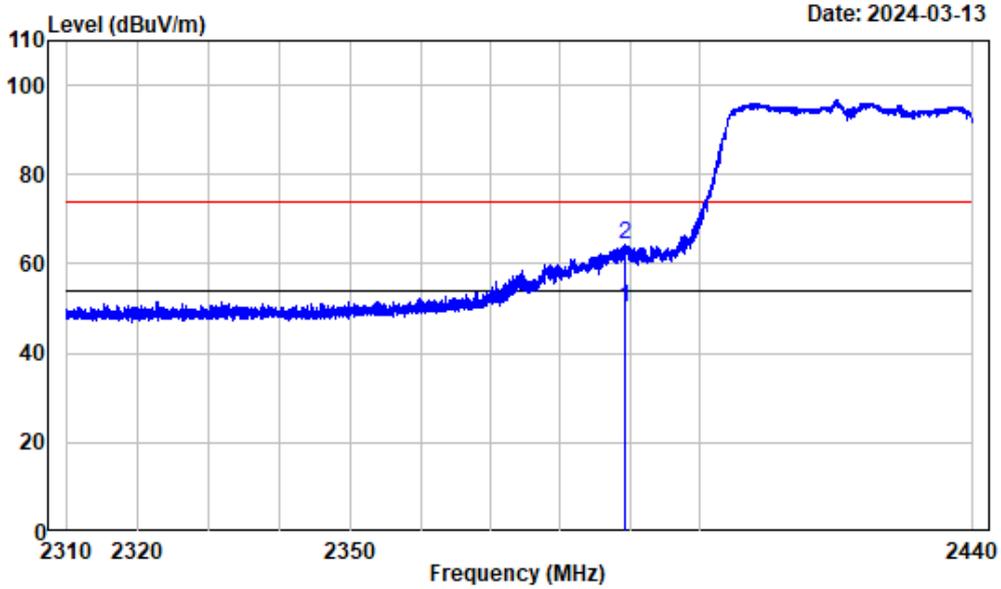

Condition : Horizontal
 Project No.: SZ4240129-06787E
 Tester : Dylan
 Note : 802.11N40_2422

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2389.235	-3.20	53.48	50.28	54.00	-3.72	Average
2	2389.235	-3.20	67.39	64.19	74.00	-9.81	peak


802.11n40			
Test Channel:	2422MHz	Ant. Polar. :	Vertical

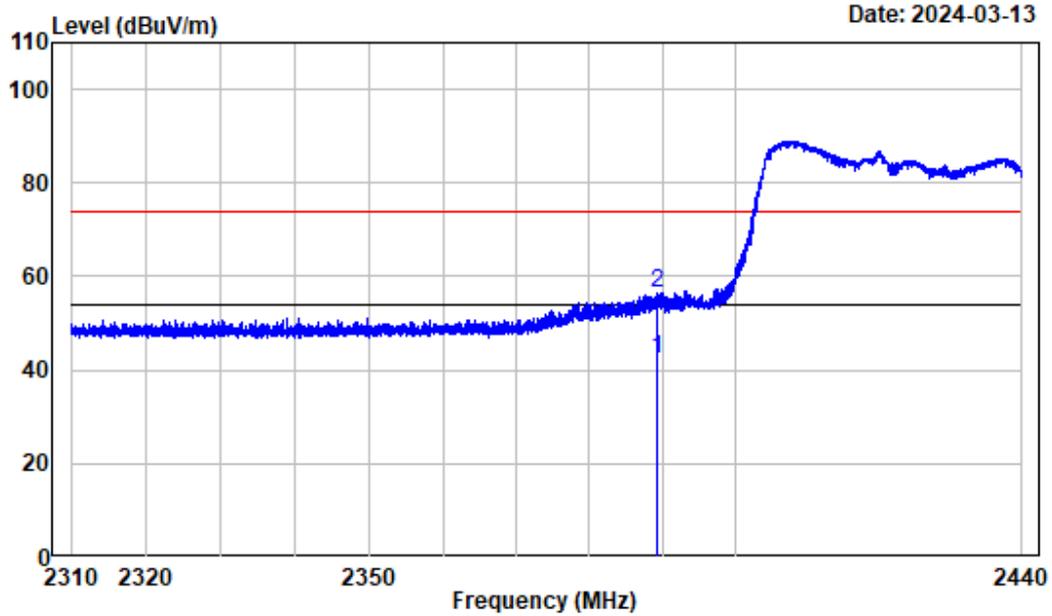

Condition : Vertical
 Project No.: SZ4240129-06787E
 Tester : Dylan
 Note : 802.11N40_2422

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2389.349	-3.20	45.62	42.42	54.00	-11.58	Average
2	2389.349	-3.20	59.63	56.43	74.00	-17.57	peak


802.11n40			
Test Channel:	2452MHz	Ant. Polar. :	Horizontal

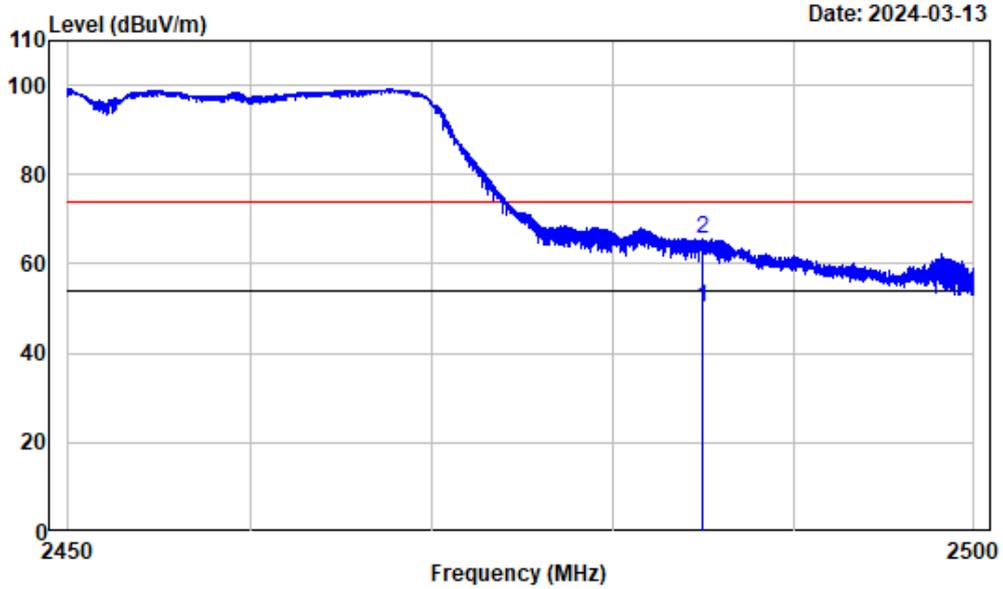

Condition : Horizontal
 Project No.: SZ4240129-06787E
 Tester : Dylan
 Note : 802.11N40_2452

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2484.900	-3.17	53.47	50.30	54.00	-3.70	Average
2	2484.900	-3.17	68.69	65.52	74.00	-8.48	peak


802.11n40			
Test Channel:	2452MHz	Ant. Polar. :	Vertical

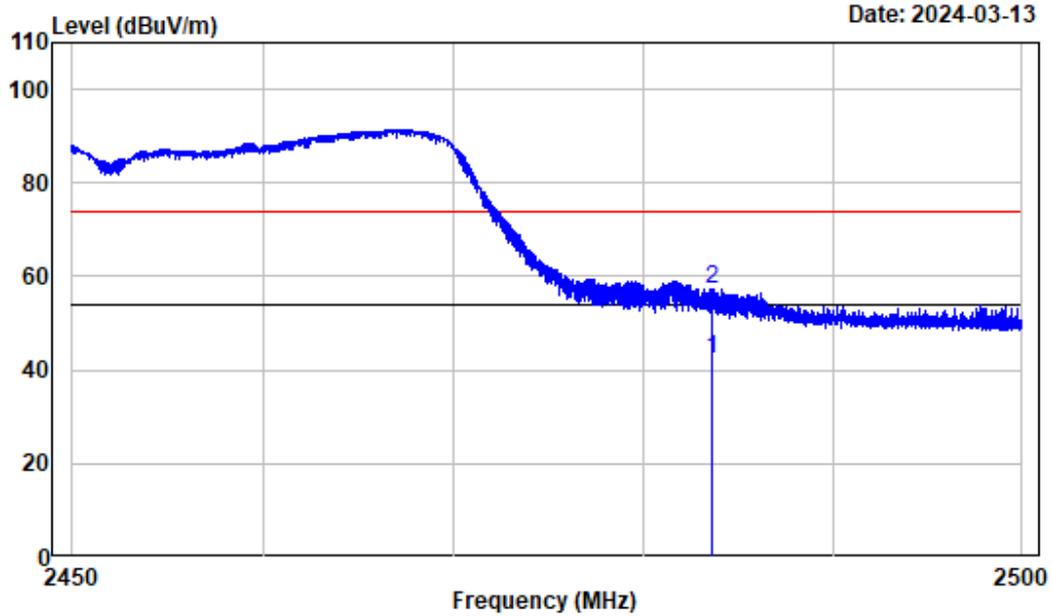

Condition : Vertical
 Project No.: SZ4240129-06787E
 Tester : Dylan
 Note : 802.11N40_2452


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.637	-3.17	45.62	42.45	54.00	-11.55	Average
2	2483.637	-3.17	60.49	57.32	74.00	-16.68	peak

Listed with the worst harmonic margin test plot: 802.11b ANT2 2462MHz

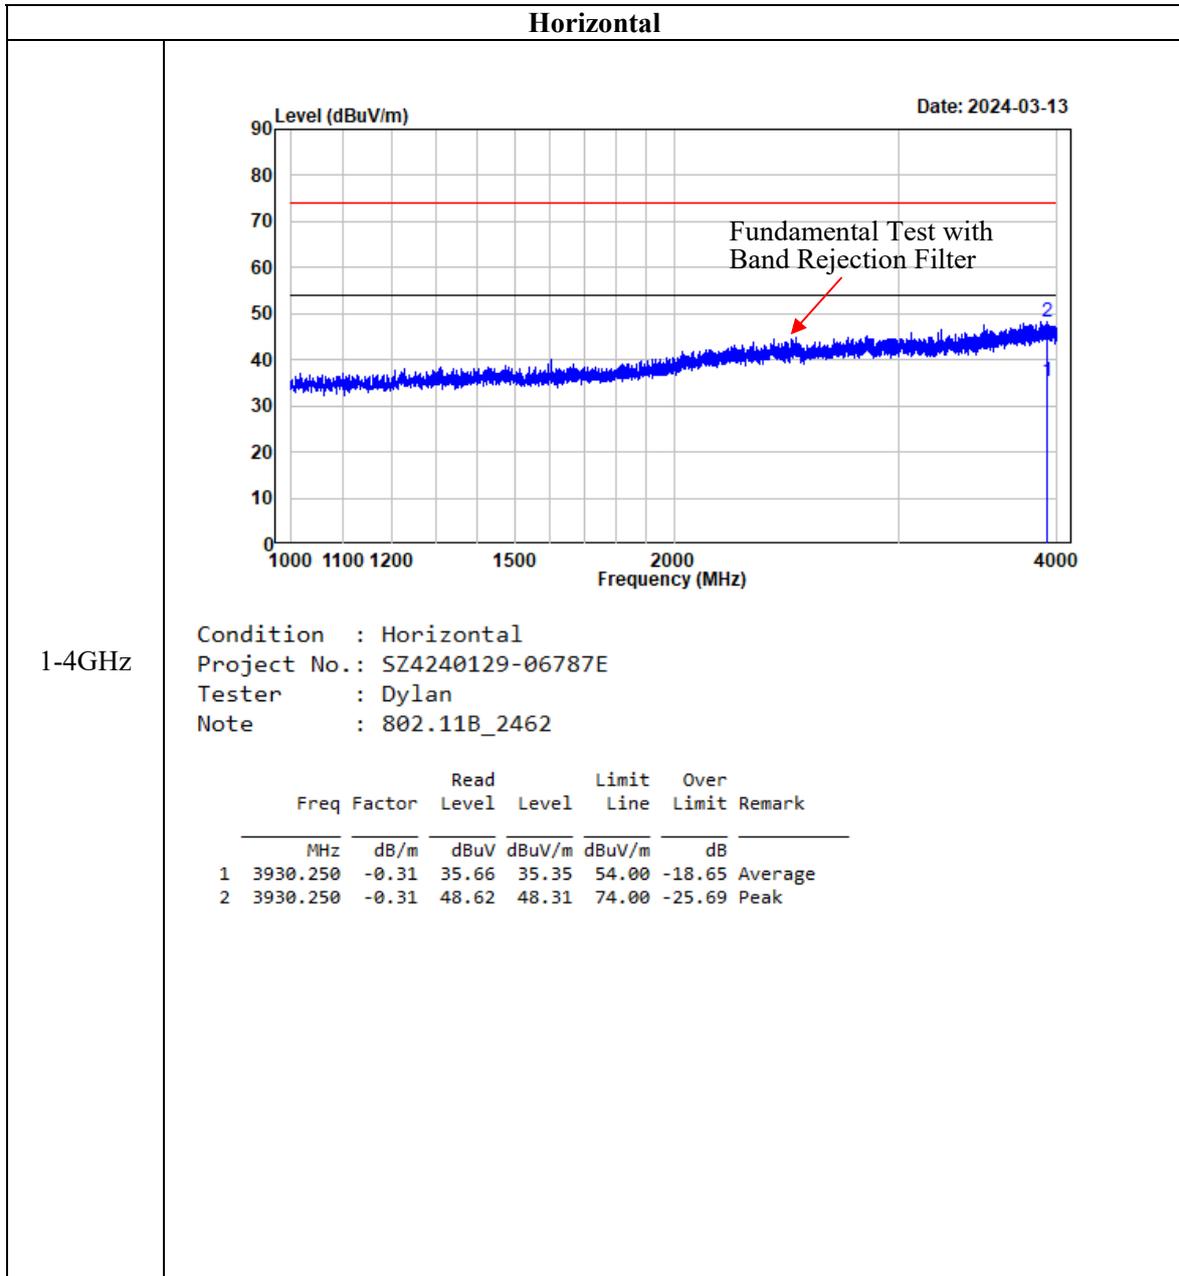

Vertical


1-4GHz

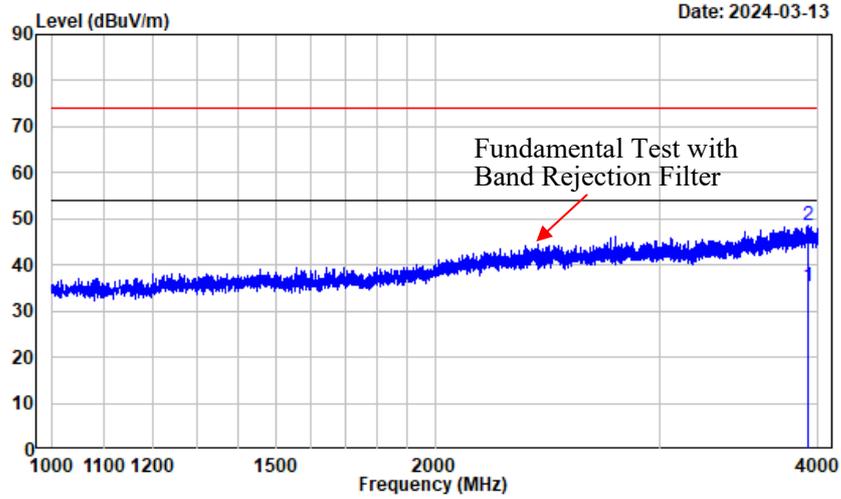

Condition : Vertical
 Project No.: SZ4240129-06787E
 Tester : Dylan
 Note : 802.11B_2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3930.250	-0.31	35.78	35.47	54.00	-18.53	Average
2	3930.250	-0.31	48.93	48.62	74.00	-25.38	Peak

Horizontal

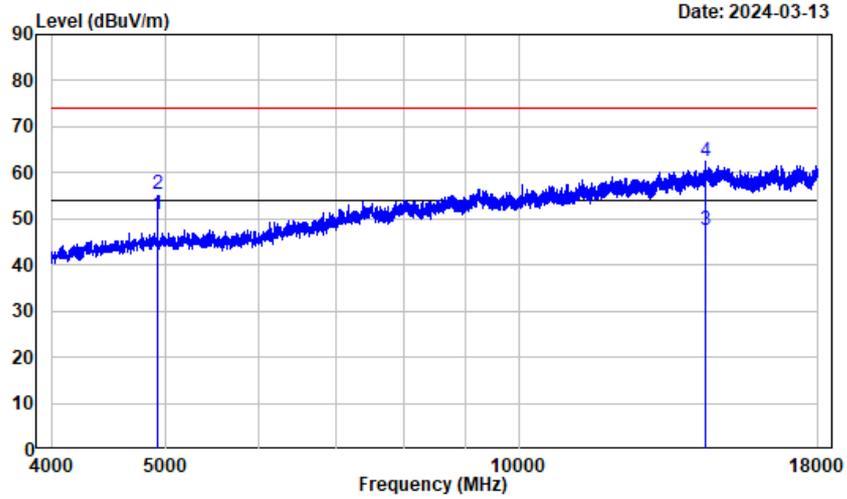


4-18GHz

Condition : Horizontal
 Project No.: SZ4240129-06787E
 Tester : Dylan
 Note : 802.11B_2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4924.000	2.63	48.31	50.94	54.00	-3.06	Average
2	4924.000	2.63	52.81	55.44	74.00	-18.56	Peak
3	14447.500	17.35	30.22	47.57	54.00	-6.43	Average
4	14447.500	17.35	45.18	62.53	74.00	-11.47	Peak

Vertical

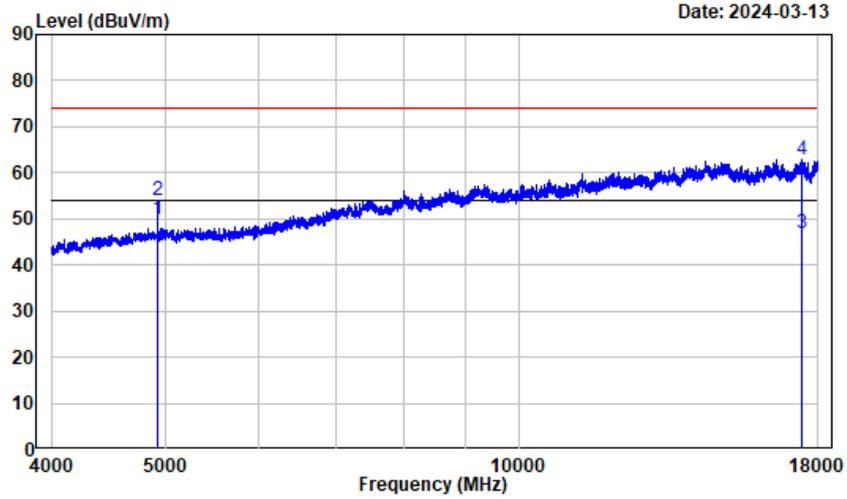


4-18GHz

Condition : Vertical
 Project No.: SZ4240129-06787E
 Tester : Dylan
 Note : 802.11B_2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4924.000	2.63	47.23	49.86	54.00	-4.14	Average
2	4924.000	2.63	51.47	54.10	74.00	-19.90	Peak
3	17429.500	20.01	26.77	46.78	54.00	-7.22	Average
4	17429.500	20.01	42.72	62.73	74.00	-11.27	Peak

Horizontal

18-25GHz

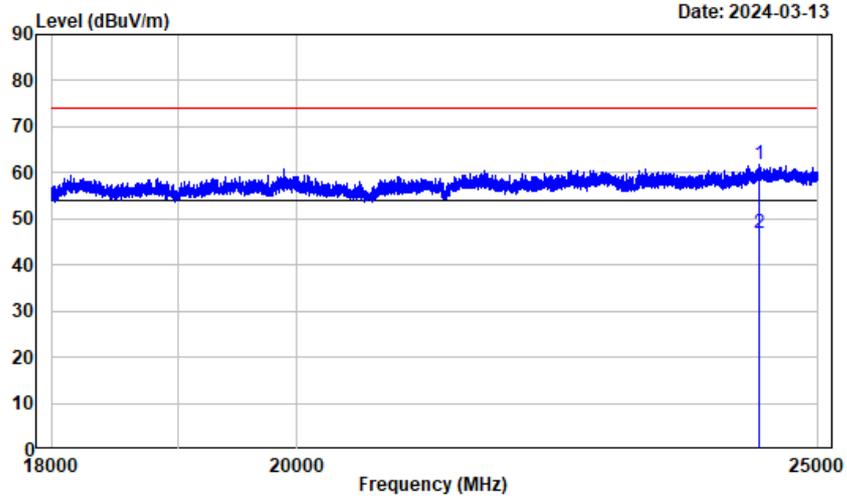


Condition : Horizontal
 Project No.: SZ4240129-06787E
 Tester : Dylan
 Note : 802.11B_2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	24376.130	18.71	43.19	61.90	74.00	-12.10	Peak
2	24376.130	18.71	28.15	46.86	54.00	-7.14	Average

Vertical

18-25GHz

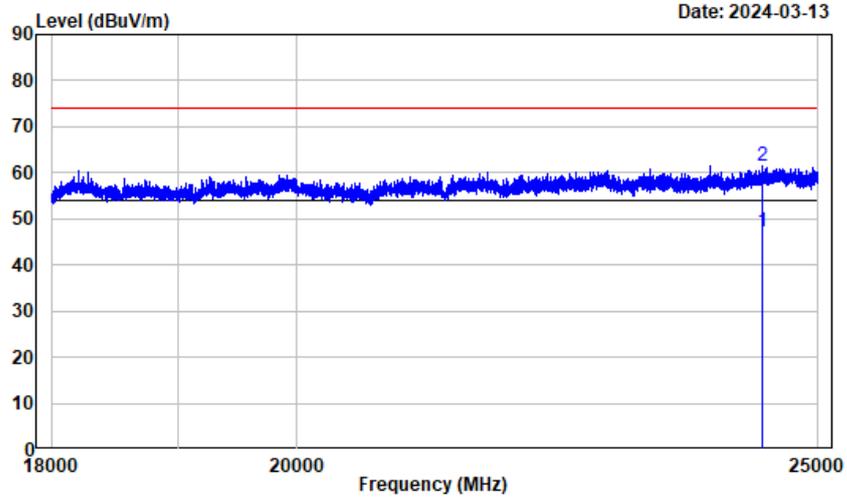

Condition : Vertical
 Project No.: SZ4240129-06787E
 Tester : Dylan
 Note : 802.11B_2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	24417.250	18.80	28.32	47.12	54.00	-6.88	Average
2	24417.250	18.80	42.59	61.39	74.00	-12.61	peak

§15.247 (a)(2) & RSS-Gen§6.7 RSS-247 § 5.2 (a) 99% OCCUPIED BANDWIDTH & 6 dB EMISSION BANDWIDTH

Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

In some cases, the “6 dB bandwidth” is required, which is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated 6 dB below the maximum in-band power level of the modulated signal, where the two points are on the outskirts of the in-band emission.

Test Procedure

Test Method: ANSI C63.10-2013 section 11.8&6.9.3


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

The following conditions shall be observed for measuring the occupied bandwidth and 6 dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / 6 dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / 6 dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in Compliant with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).

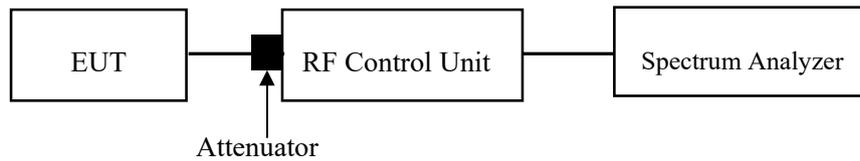

Test Data

Environmental Conditions

Temperature:	24~25 °C
Relative Humidity:	49 %
ATM Pressure:	101 kPa

The testing was performed by Tom Tan from 2024-03-28 to 2024-03-29.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

§15.247(b)(3) & RSS-247 § 5.4(d) MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, Compliant with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.


For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

As an alternative to a peak power measurement, Compliant can be based on a measurement of the maximum conducted output power. The maximum conducted output power is the total transmit power delivered to all antennas and antenna elements, averaged across all symbols in the signalling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or transmitting at a reduced power level. If multiple modes of operation are implemented, the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

Test Method: ANSI C63.10-2013 section 11.9.1.3 & 11.9.2.3.2

- Place the EUT on a bench and set it in transmitting mode.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
- Add a correction factor to the display.

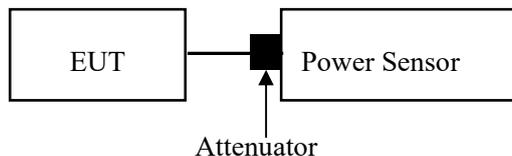

Test Data**Environmental Conditions**

Temperature:	24~25 °C
Relative Humidity:	49 %
ATM Pressure:	101 kPa

The testing was performed by Tom Tan from 2024-03-28 to 2024-03-29.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

§15.247(d) & RSS-247 § 5.5 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE


Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates Compliant with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

Test Method: ANSI C63.10-2013 section 11.11

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.

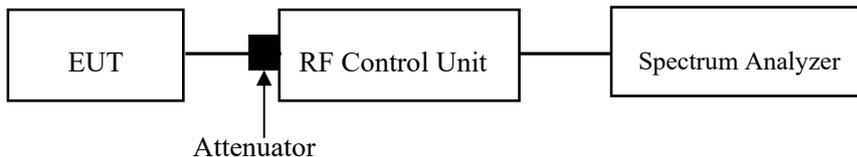

Test Data

Environmental Conditions

Temperature:	24~25 °C
Relative Humidity:	49 %
ATM Pressure:	101 kPa

The testing was performed by Tom Tan from 2024-03-28 to 2024-03-29.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

§15.247(e) & RSS-247 § 5.2 (b) POWER SPECTRAL DENSITY

Applicable Standard


For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of section 5.4(d), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

Test Procedure

Test Method: ANSI C63.10-2013 section 11.10.2

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq [3 \times \text{RBW}]$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

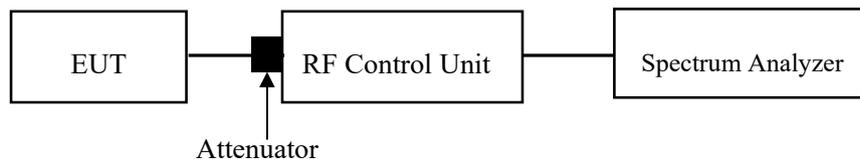

Test Data

Environmental Conditions

Temperature:	24~25 °C
Relative Humidity:	49 %
ATM Pressure:	101 kPa

The testing was performed by Tom Tan from 2024-03-28 to 2024-03-29.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

EUT PHOTOGRAPHS

Please refer to the attachment SZ4240129-06787E-RF External photo and SZ4240129-06787E-RF Internal photo.

TEST SETUP PHOTOGRAPHS


Please refer to the attachment SZ4240129-06787E-RFA Test Setup photo.



APPENDIX


**Appendix A: DTS Bandwidth
Test Result**



Test Mode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	9.08	2407.44	2416.52	0.5	PASS
	Ant2	2412	9.12	2407.44	2416.56	0.5	PASS
	Ant1	2437	9.12	2432.44	2441.56	0.5	PASS
	Ant2	2437	9.12	2432.44	2441.56	0.5	PASS
	Ant1	2462	9.12	2457.44	2466.56	0.5	PASS
	Ant2	2462	9.12	2457.44	2466.56	0.5	PASS
11G	Ant1	2412	16.56	2403.72	2420.28	0.5	PASS
	Ant2	2412	16.56	2403.72	2420.28	0.5	PASS
	Ant1	2437	16.56	2428.72	2445.28	0.5	PASS
	Ant2	2437	16.56	2428.72	2445.28	0.5	PASS
	Ant1	2462	16.56	2453.72	2470.28	0.5	PASS
	Ant2	2462	16.56	2453.72	2470.28	0.5	PASS
11N20MIMO	Ant1	2412	17.60	2403.20	2420.80	0.5	PASS
	Ant2	2412	17.60	2403.20	2420.80	0.5	PASS
	Ant1	2437	17.60	2428.20	2445.80	0.5	PASS
	Ant2	2437	17.68	2428.20	2445.88	0.5	PASS
	Ant1	2462	17.64	2453.16	2470.80	0.5	PASS
	Ant2	2462	17.60	2453.20	2470.80	0.5	PASS
11N40MIMO	Ant1	2422	36.48	2403.76	2440.24	0.5	PASS
	Ant2	2422	36.40	2403.84	2440.24	0.5	PASS
	Ant1	2437	36.48	2418.76	2455.24	0.5	PASS
	Ant2	2437	36.40	2418.84	2455.24	0.5	PASS
	Ant1	2452	36.56	2433.76	2470.32	0.5	PASS
	Ant2	2452	36.56	2433.76	2470.32	0.5	PASS



Test Graphs


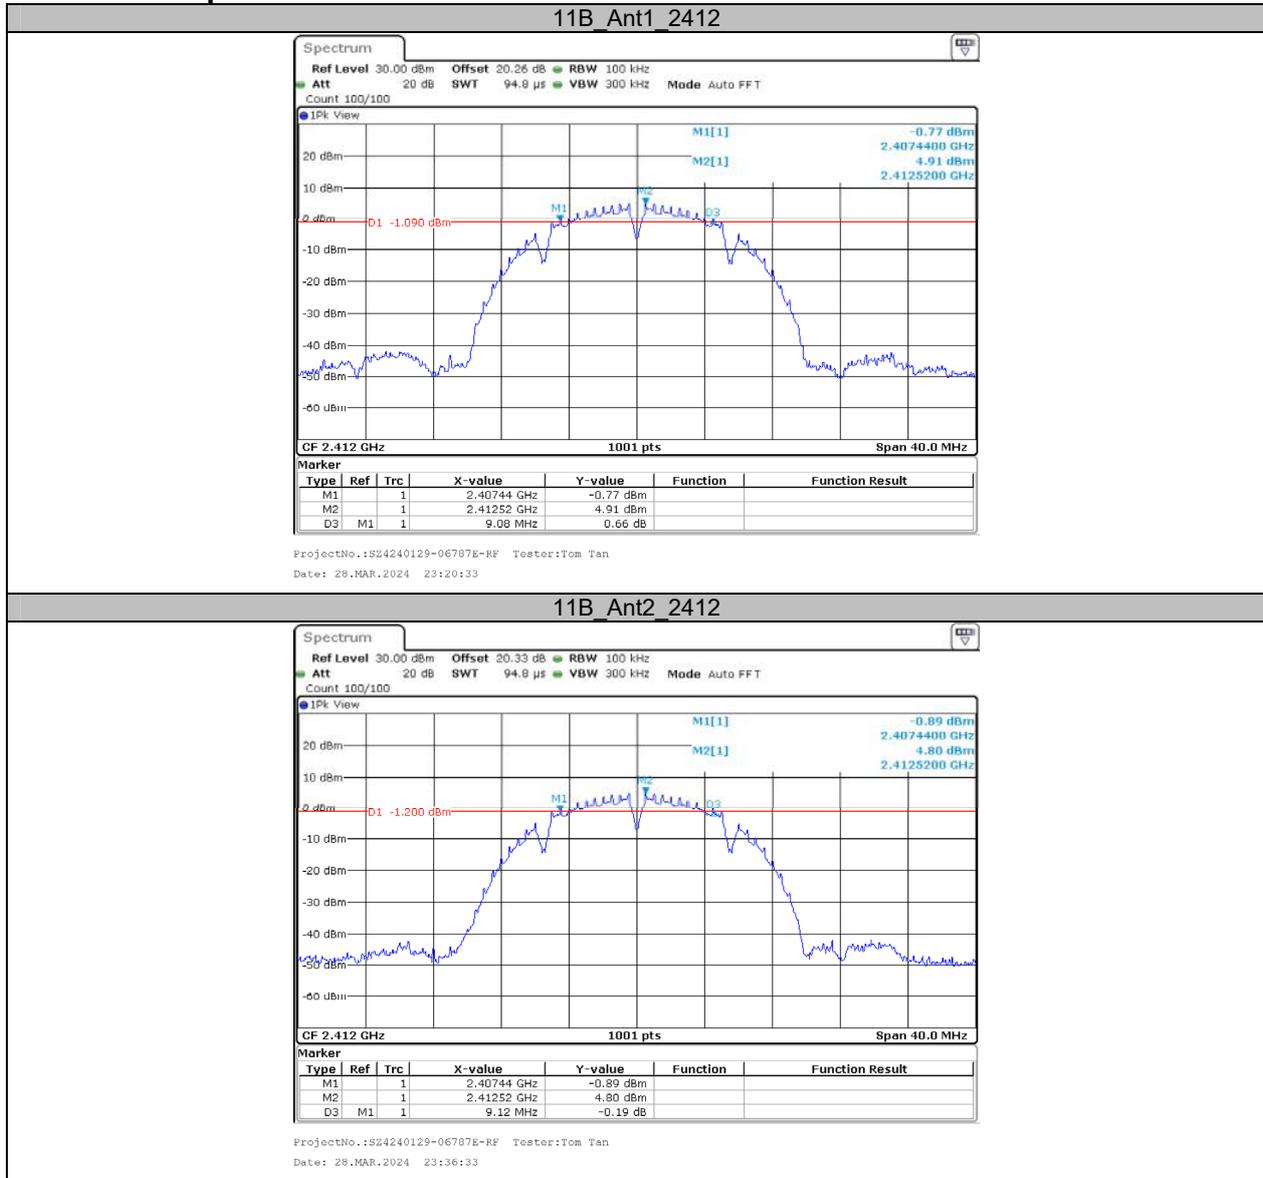


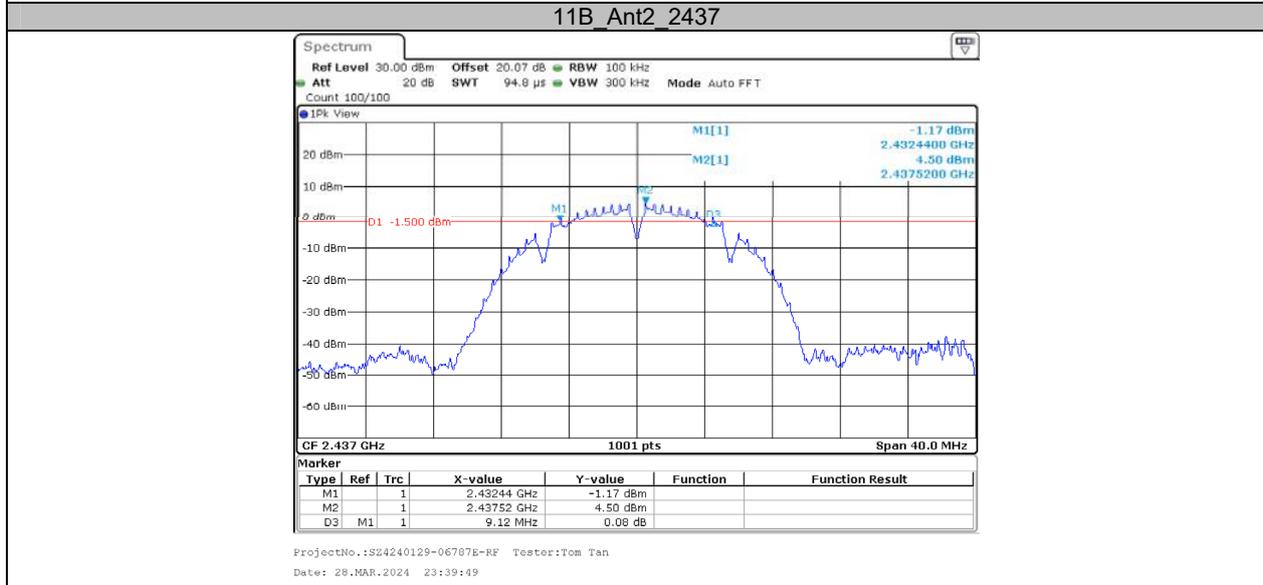
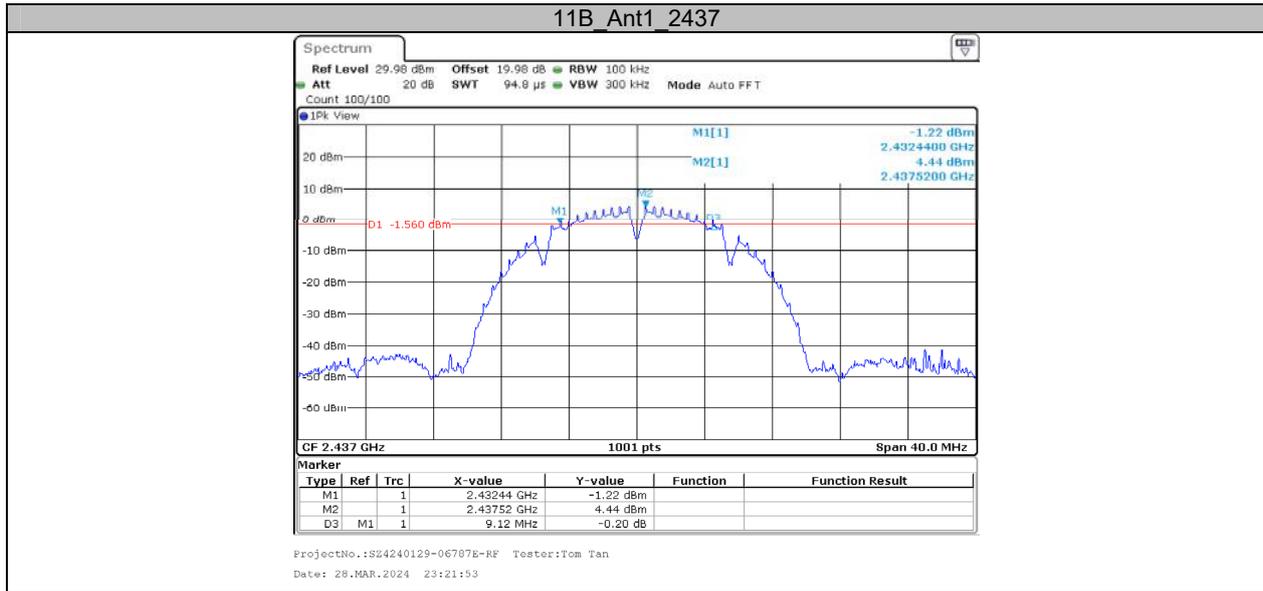



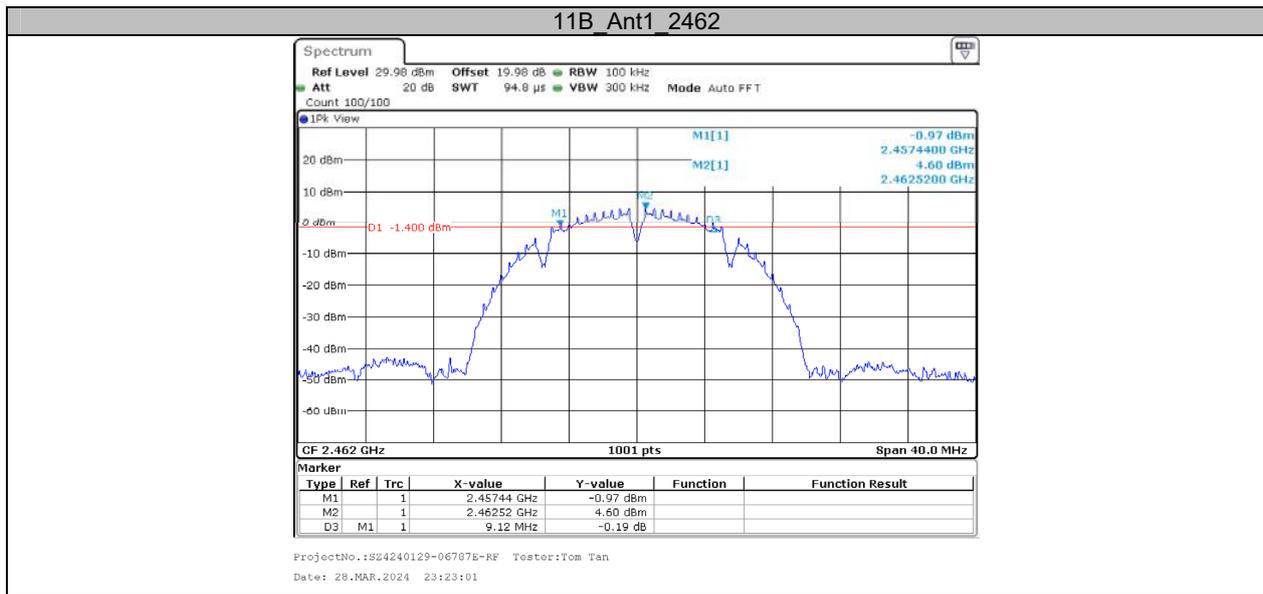


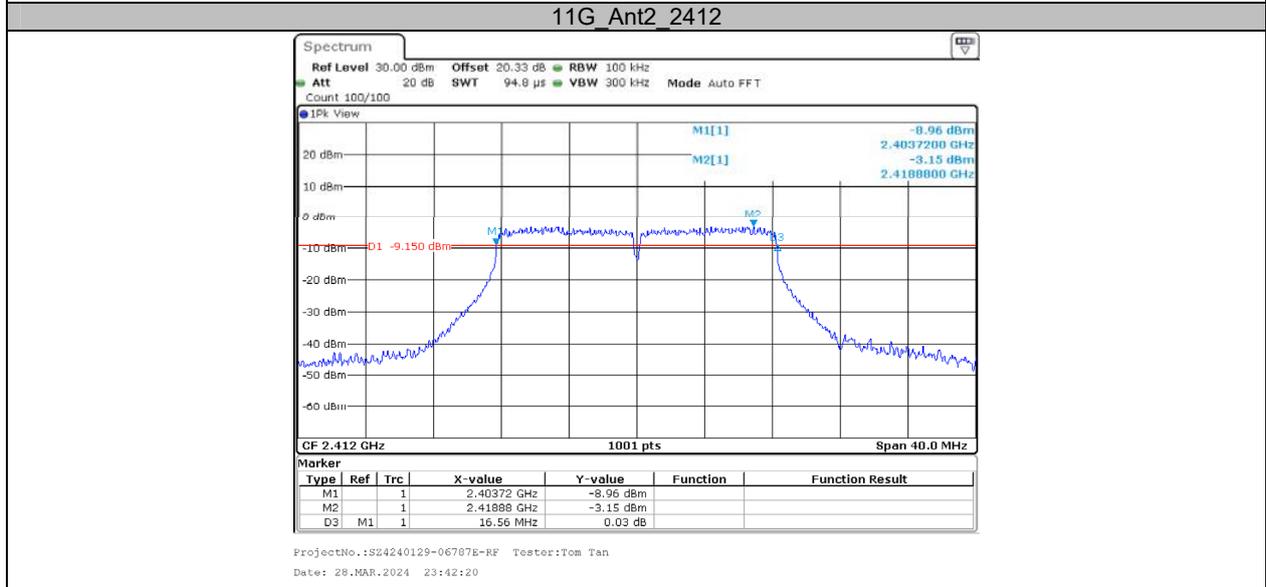
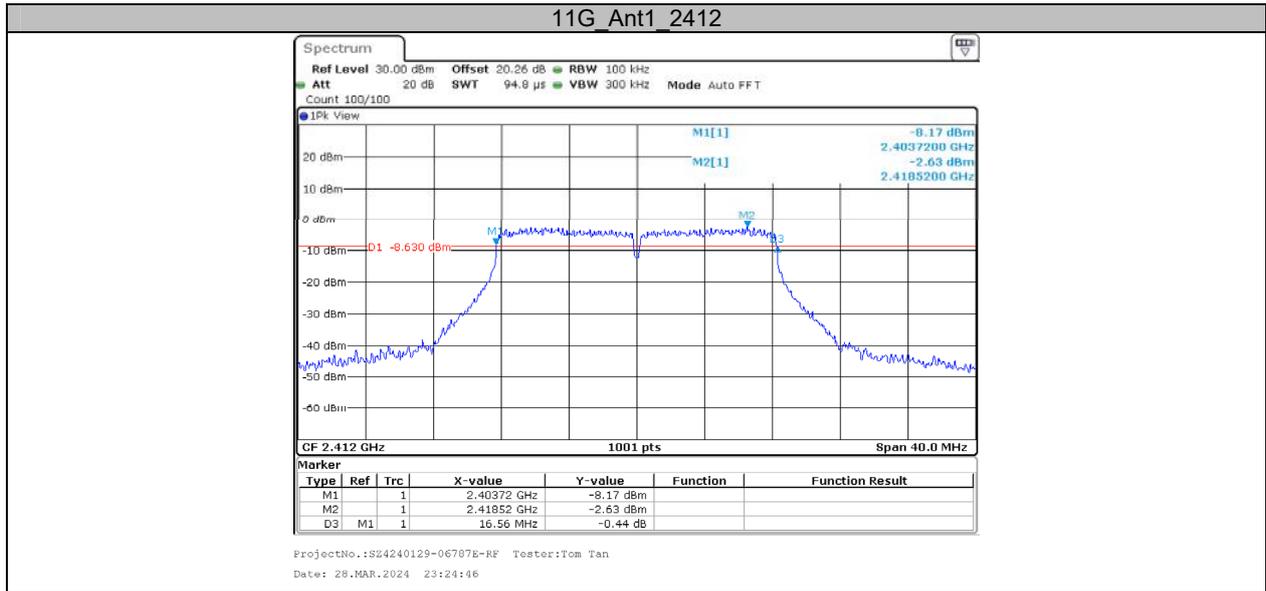


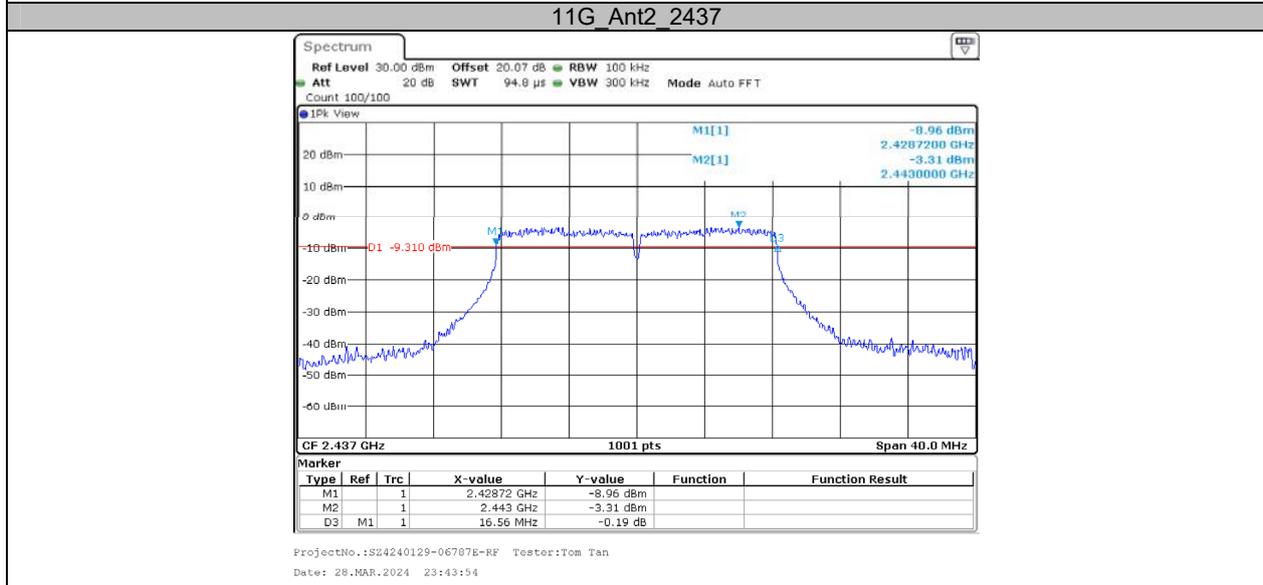
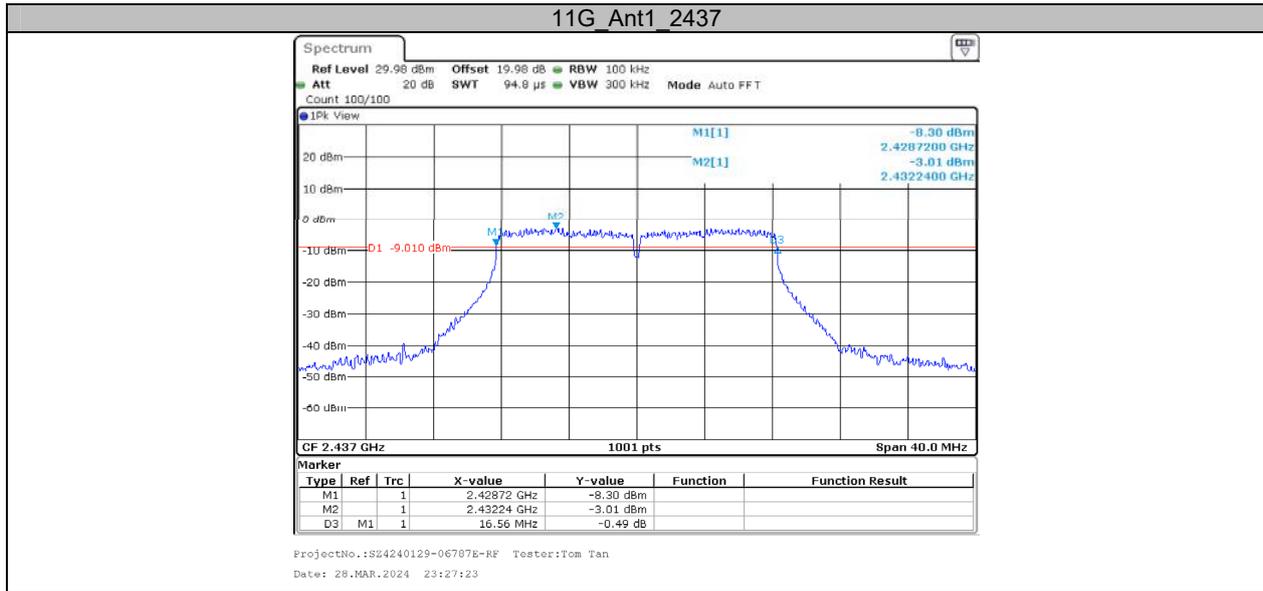


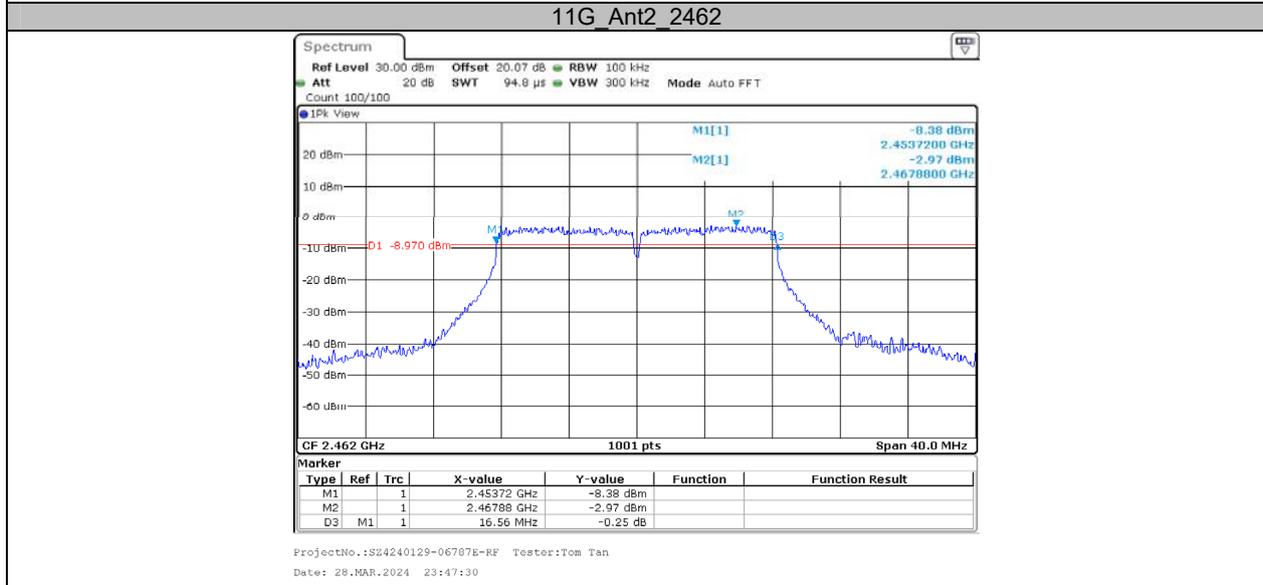
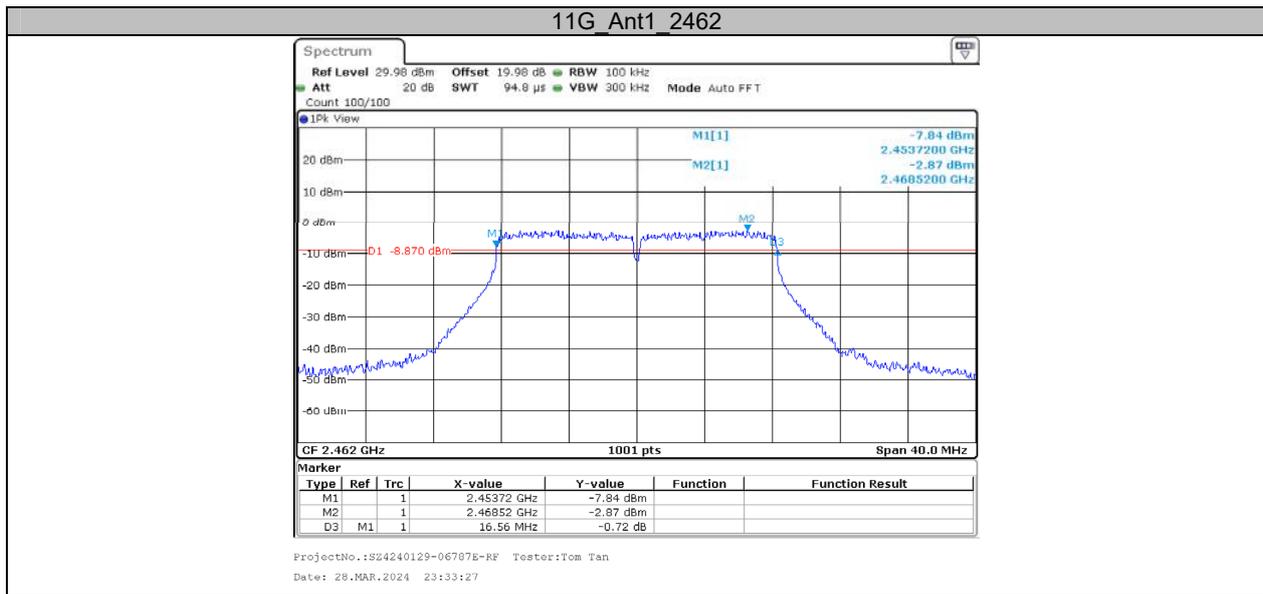


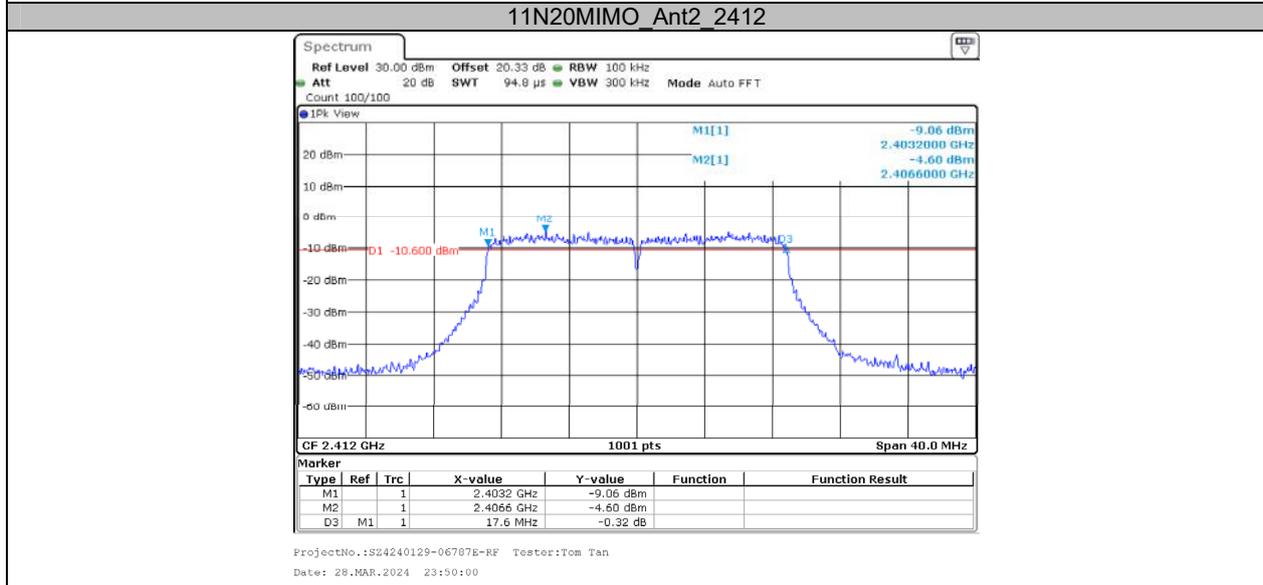
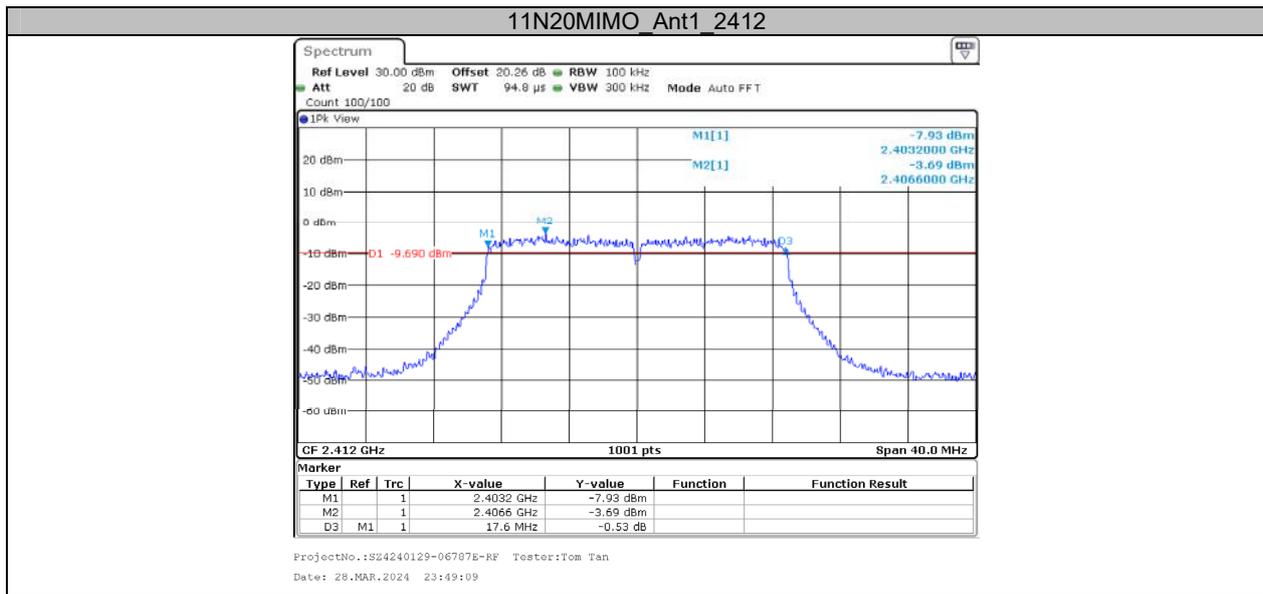


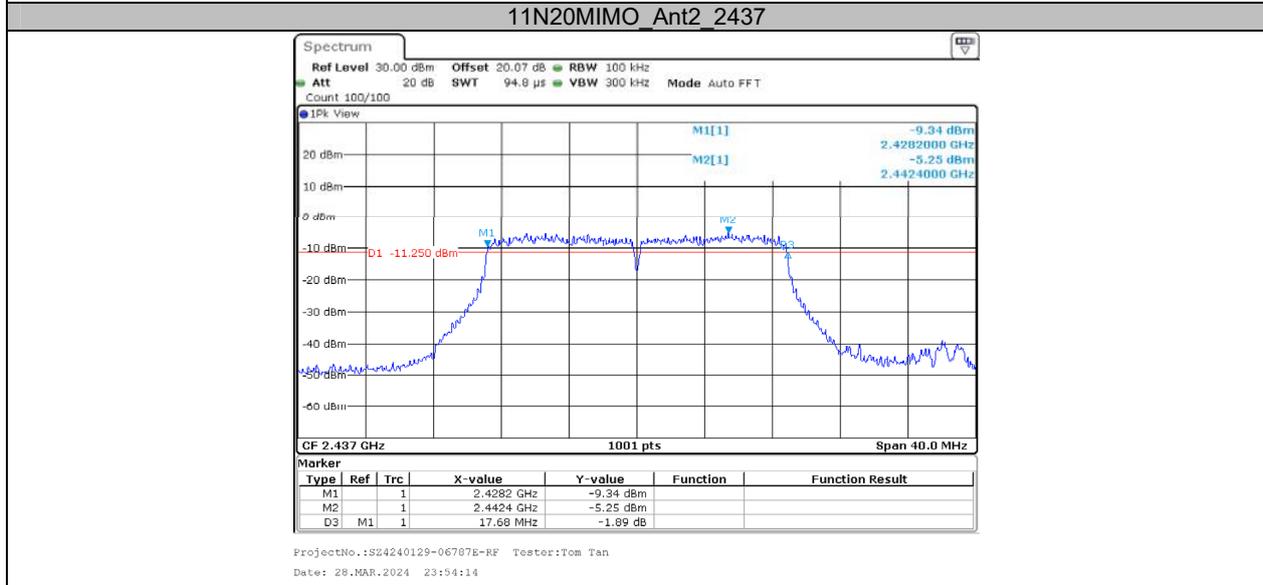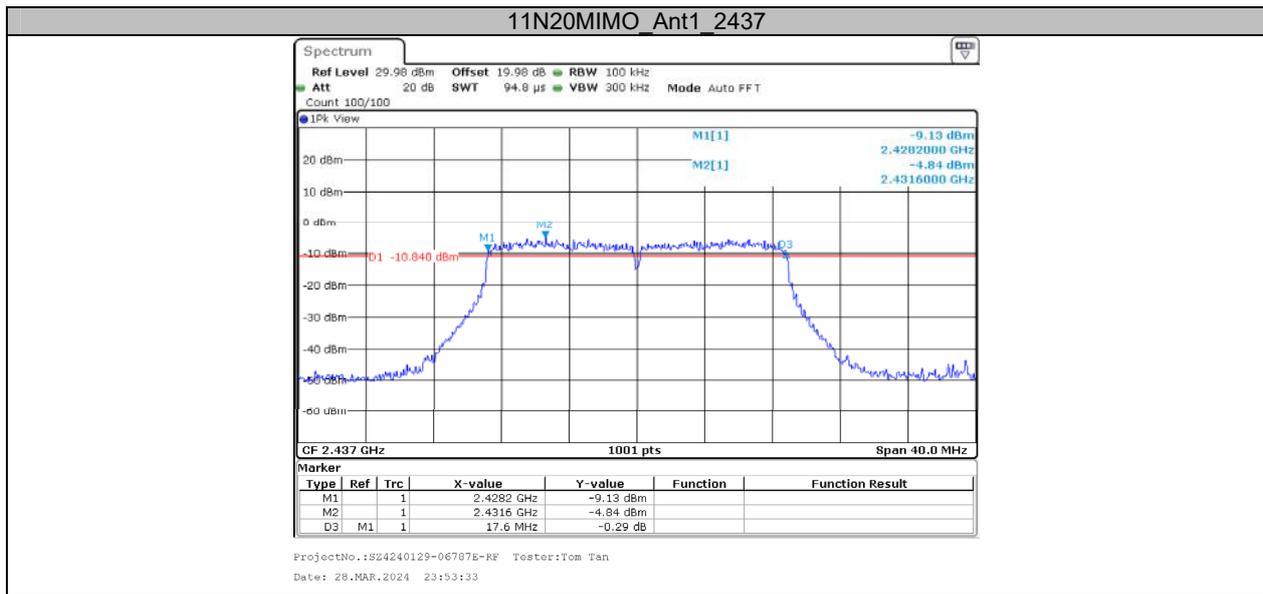

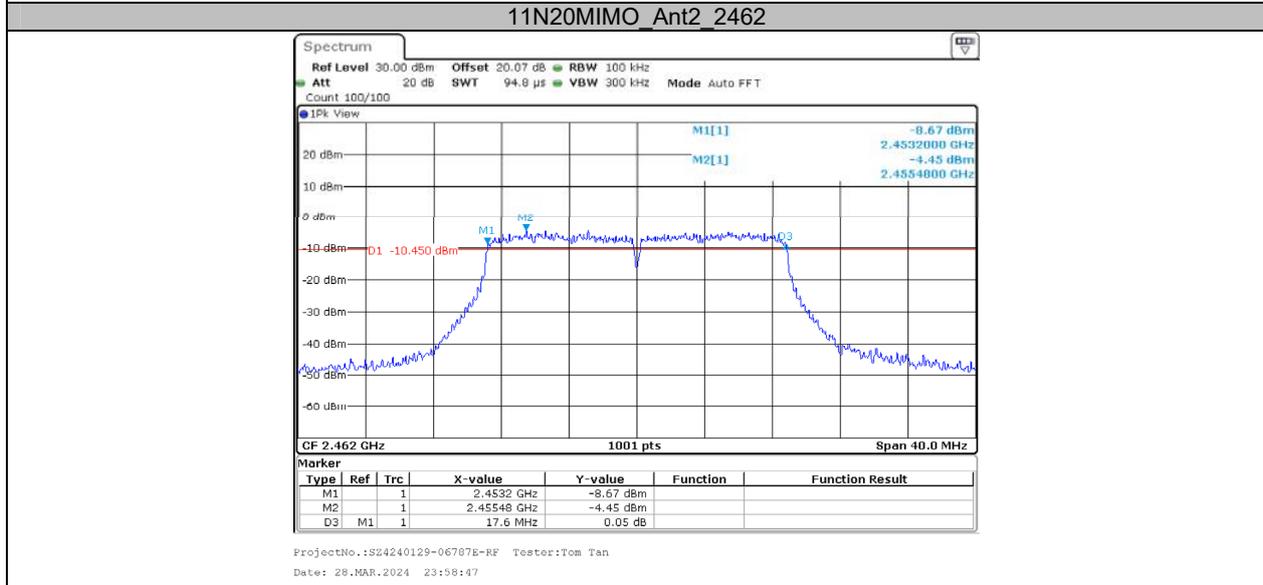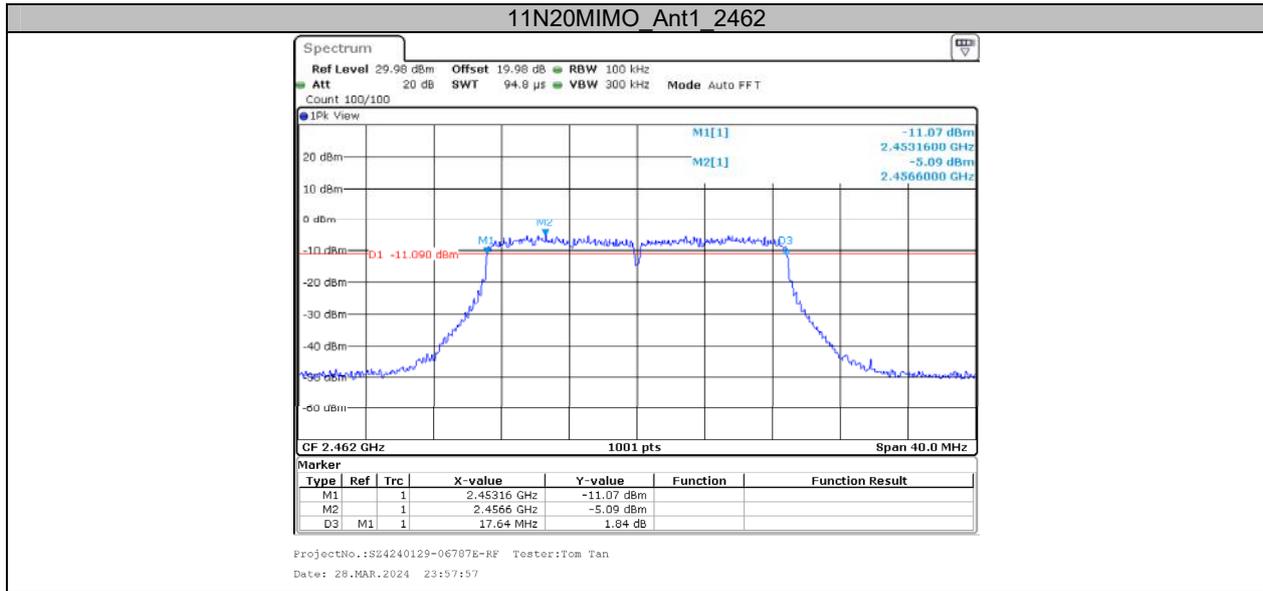

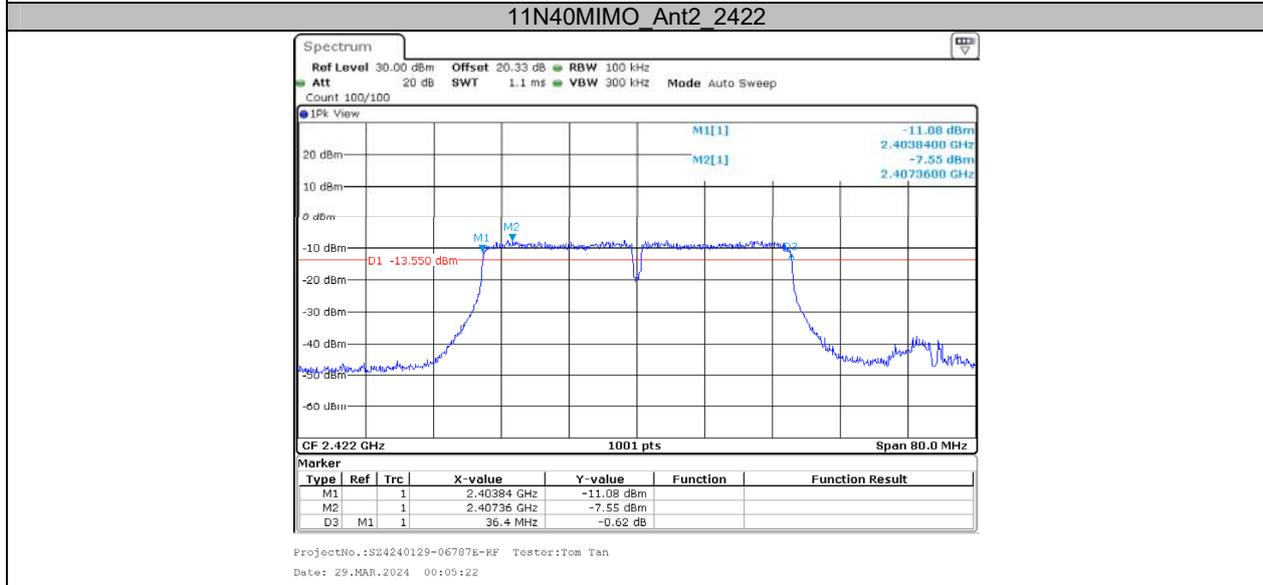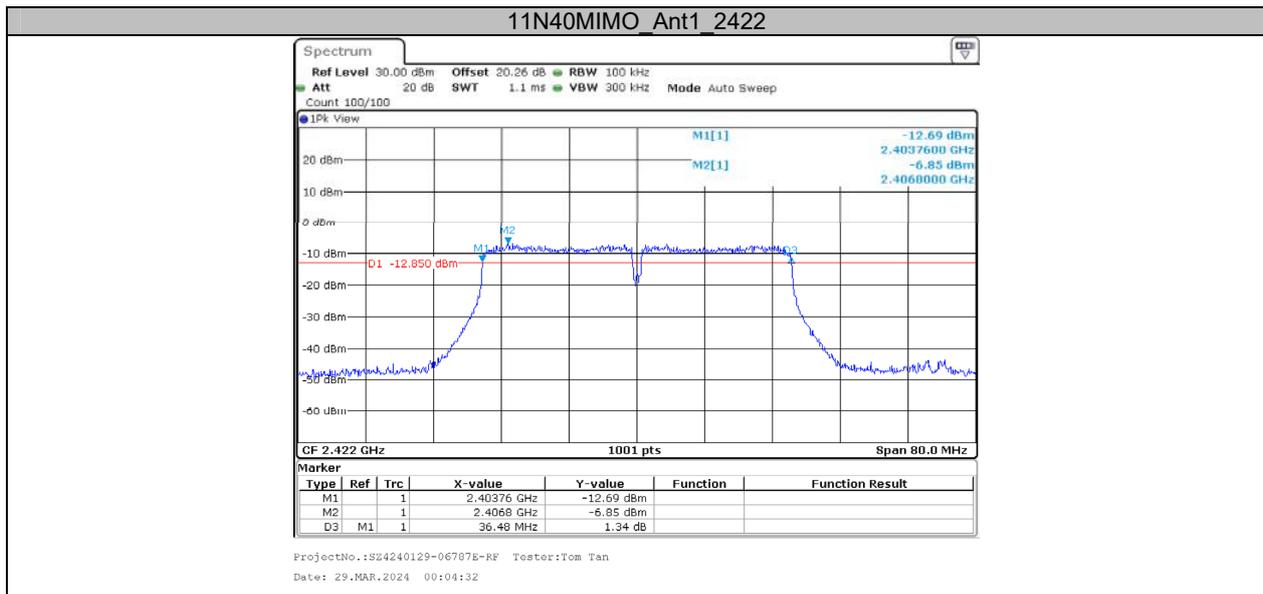

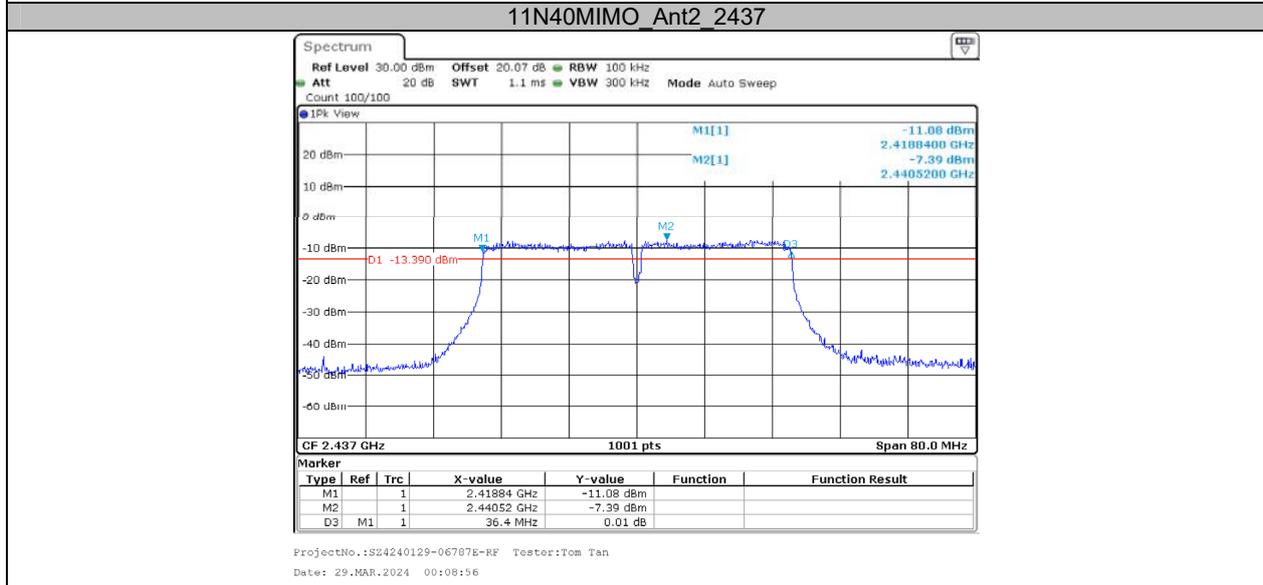
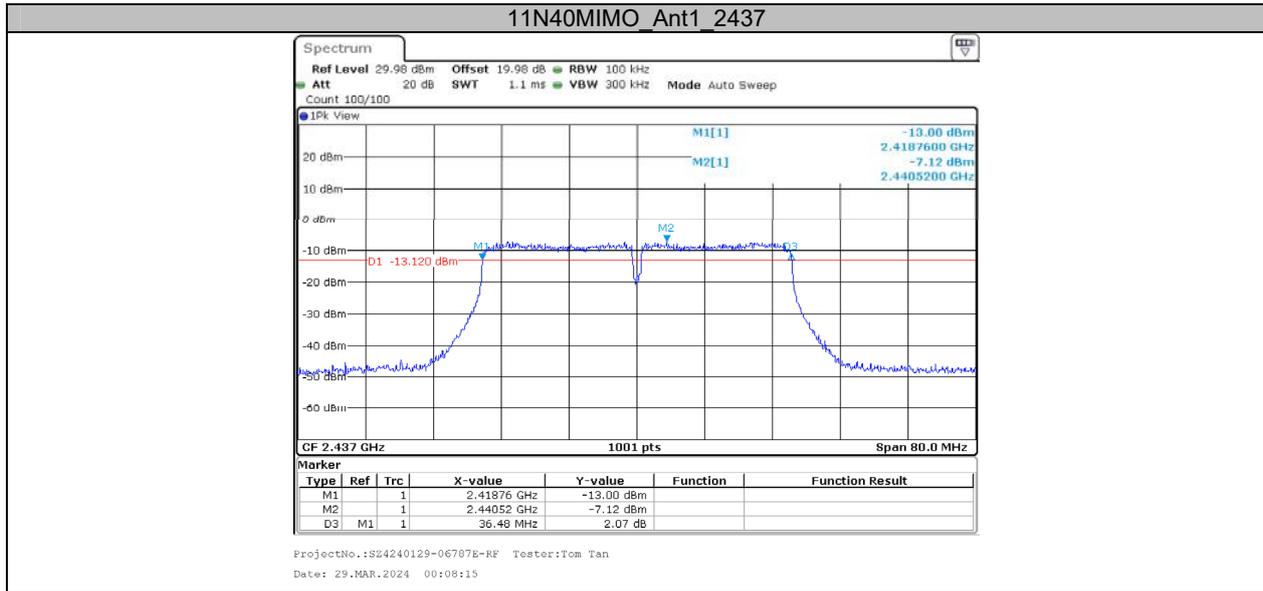


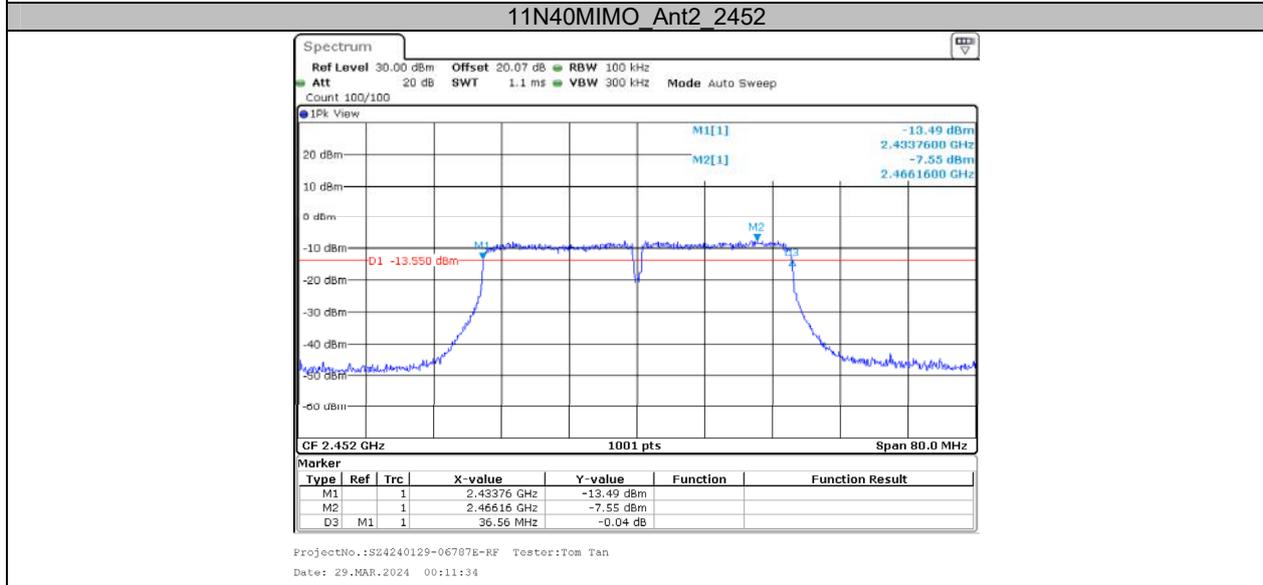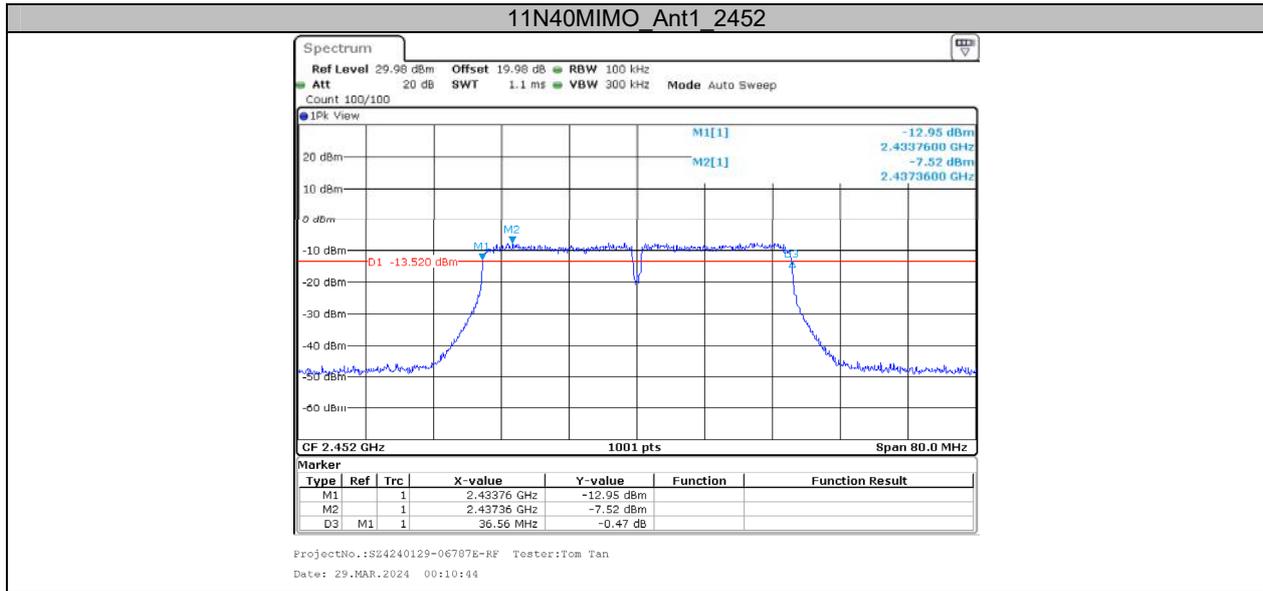


**Appendix B: Occupied Channel Bandwidth
Test Result**

Test Mode	Antenna	Channel Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	13.387	2405.3267	2418.7133	---	---
	Ant2	2412	13.427	2405.2867	2418.7133	---	---
	Ant1	2437	13.467	2430.2867	2443.7532	---	---
	Ant2	2437	13.467	2430.2867	2443.7532	---	---
	Ant1	2462	13.467	2455.2867	2468.7532	---	---
	Ant2	2462	13.506	2455.2468	2468.7532	---	---
11G	Ant1	2412	17.143	2403.3287	2420.4715	---	---
	Ant2	2412	17.143	2403.3287	2420.4715	---	---
	Ant1	2437	17.143	2428.3686	2445.5115	---	---
	Ant2	2437	17.103	2428.4086	2445.5115	---	---
	Ant1	2462	17.223	2453.2488	2470.4715	---	---
	Ant2	2462	17.223	2453.2887	2470.5115	---	---
11N20MIMO	Ant1	2412	18.062	2402.9291	2420.9910	---	---
	Ant2	2412	18.022	2402.9690	2420.9910	---	---
	Ant1	2437	18.102	2427.9291	2446.0310	---	---
	Ant2	2437	18.102	2427.9291	2446.0310	---	---
	Ant1	2462	18.062	2452.9291	2470.9910	---	---
	Ant2	2462	18.102	2452.9291	2471.0310	---	---
11N40MIMO	Ant1	2422	37.003	2403.4585	2440.4615	---	---
	Ant2	2422	37.003	2403.5385	2440.5415	---	---
	Ant1	2437	37.003	2418.5385	2455.5415	---	---
	Ant2	2437	37.003	2418.5385	2455.5415	---	---
	Ant1	2452	36.923	2433.5385	2470.4615	---	---
	Ant2	2452	36.923	2433.6184	2470.5415	---	---

Test Graphs

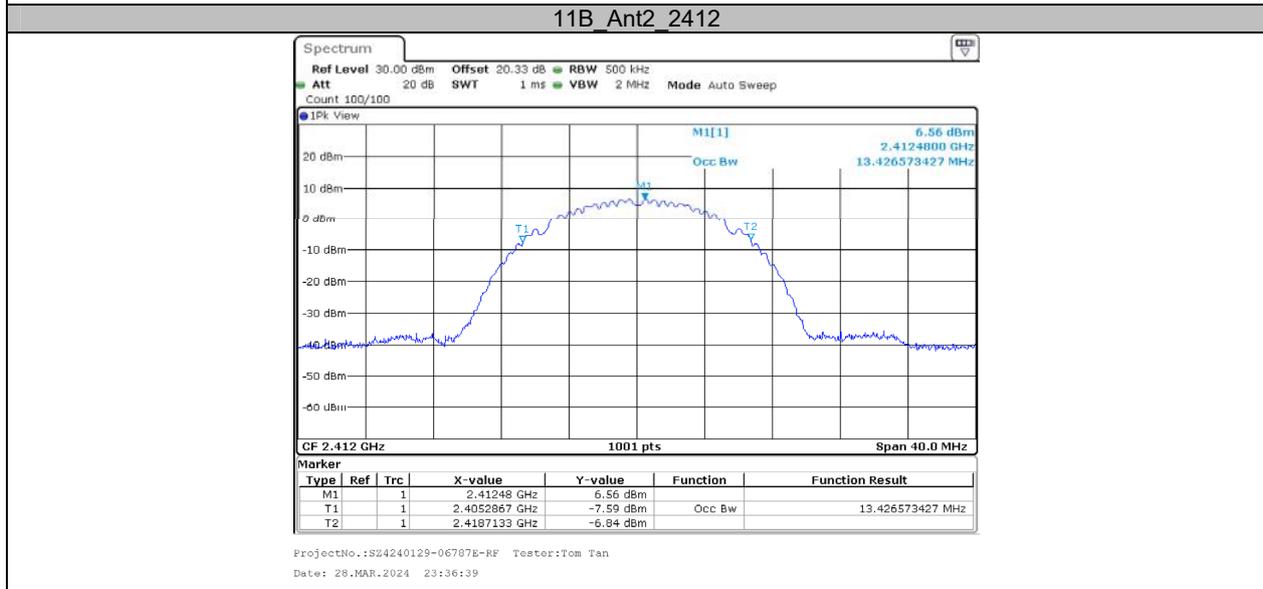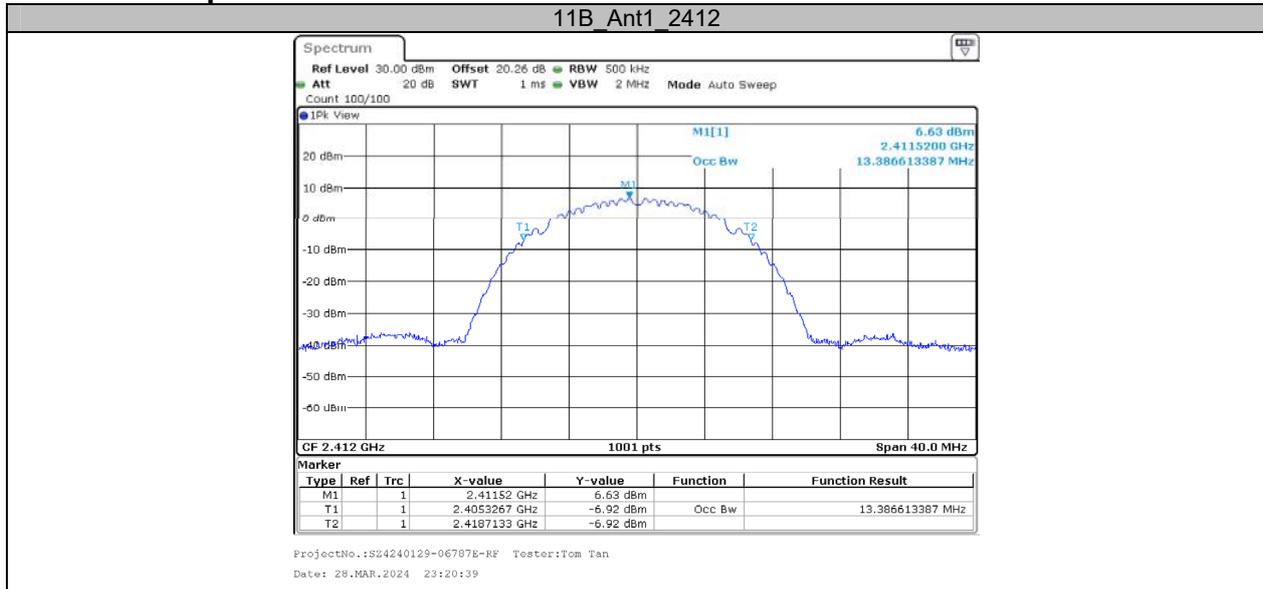


11B_Ant1_2437

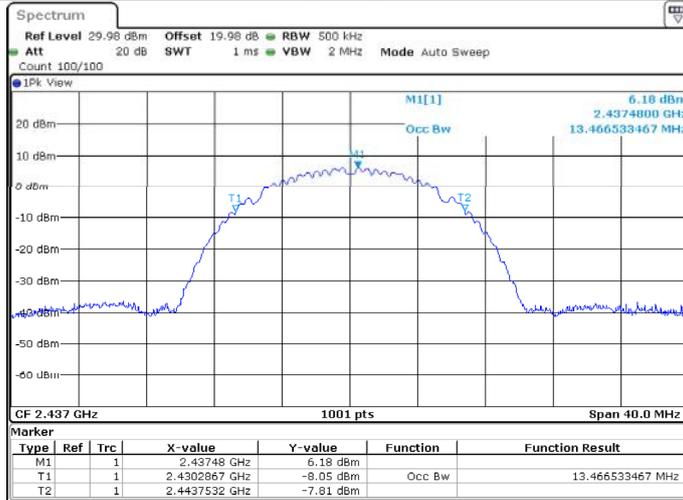


ProjectNo.:SZ4240129-06787E-RF Tester:Tom Tan
 Date: 28.MAR.2024 23:21:59

11B_Ant2_2437

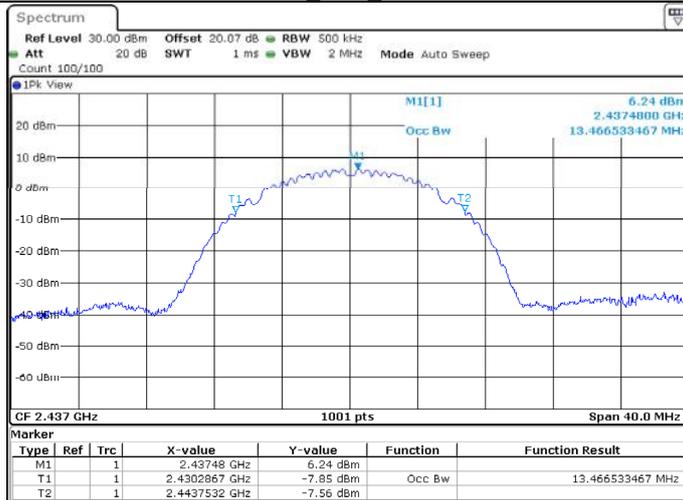


ProjectNo.:SZ4240129-06787E-RF Tester:Tom Tan
 Date: 28.MAR.2024 23:39:55

11B_Ant1_2462


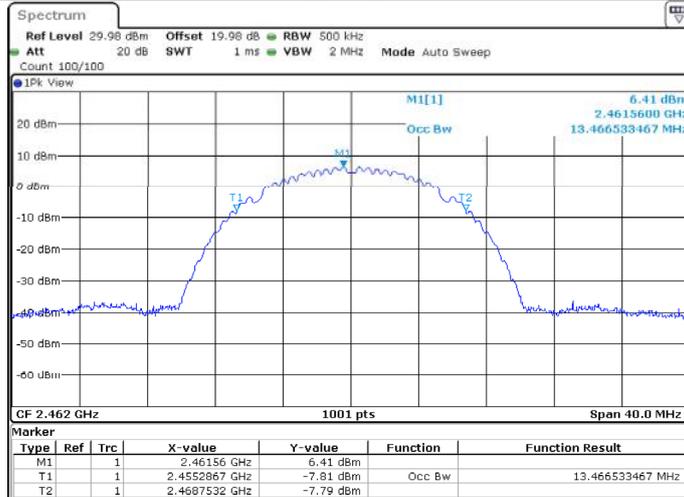




ProjectNo.:SZ4240129-06787E-RF Tester:Tom Tan
 Date: 28.MAR.2024 23:23:07

11B_Ant2_2462

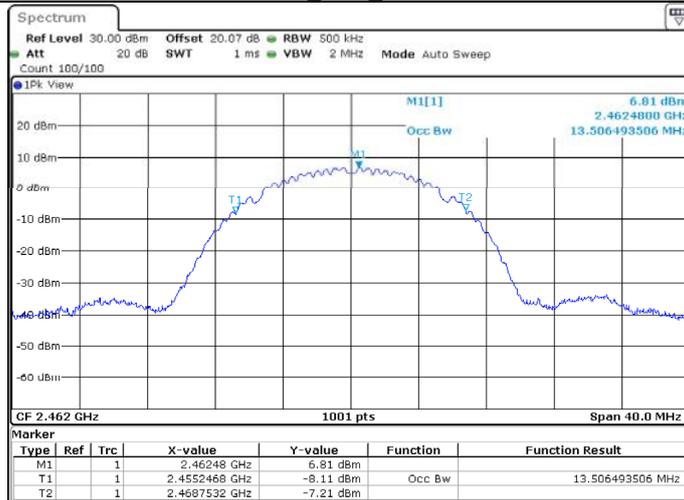


ProjectNo.:SZ4240129-06787E-RF Tester:Tom Tan
 Date: 28.MAR.2024 23:41:05

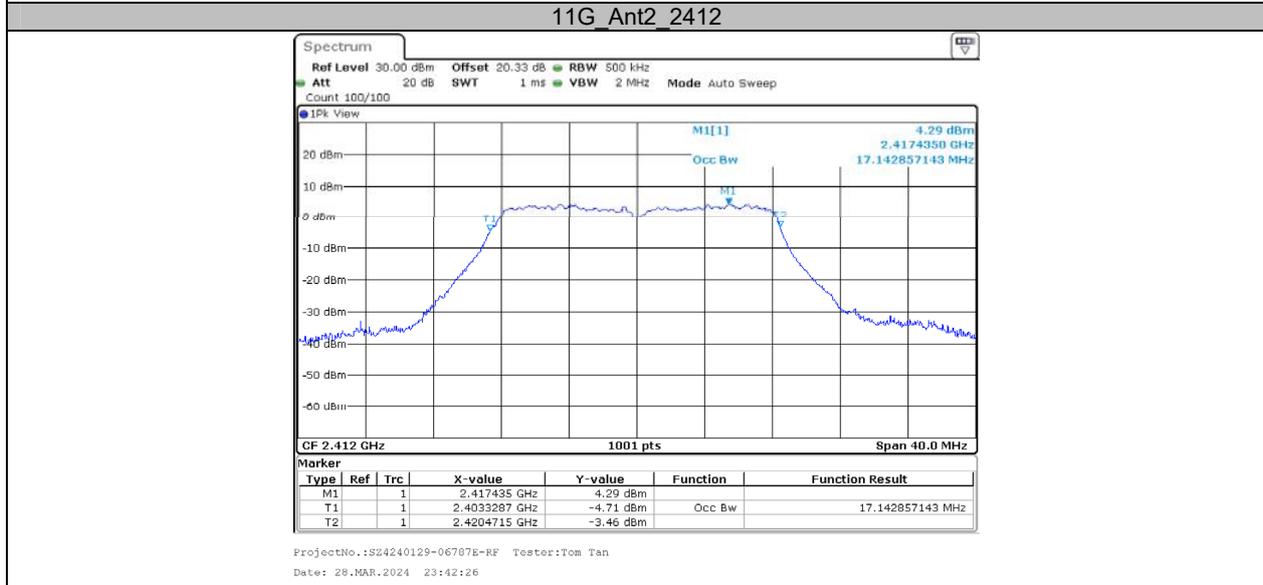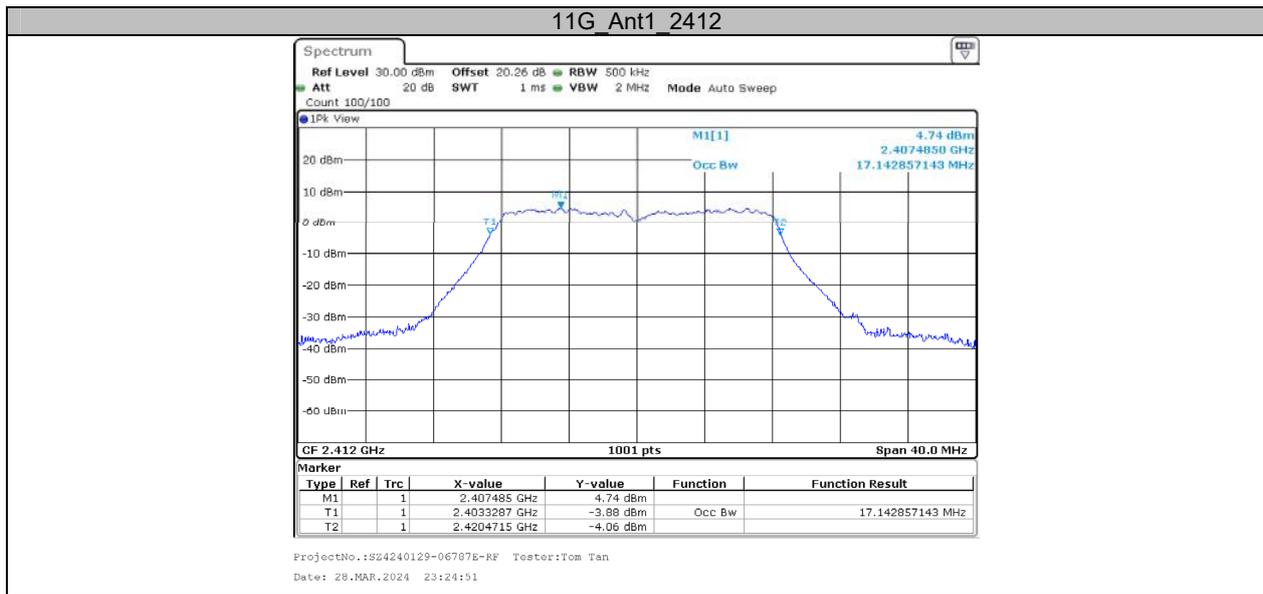

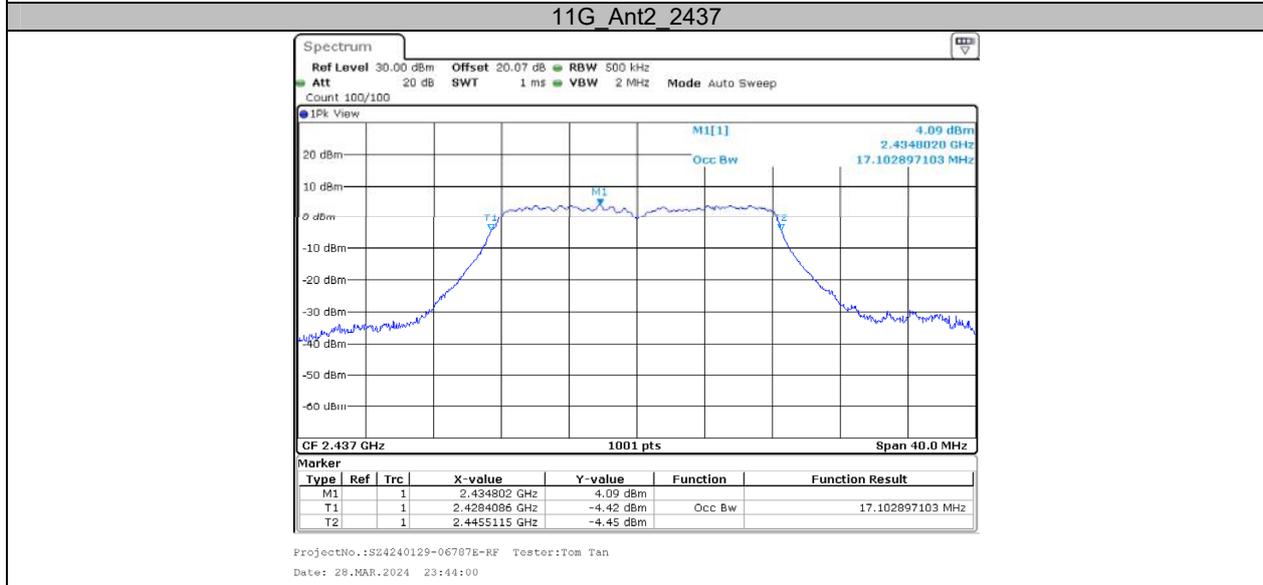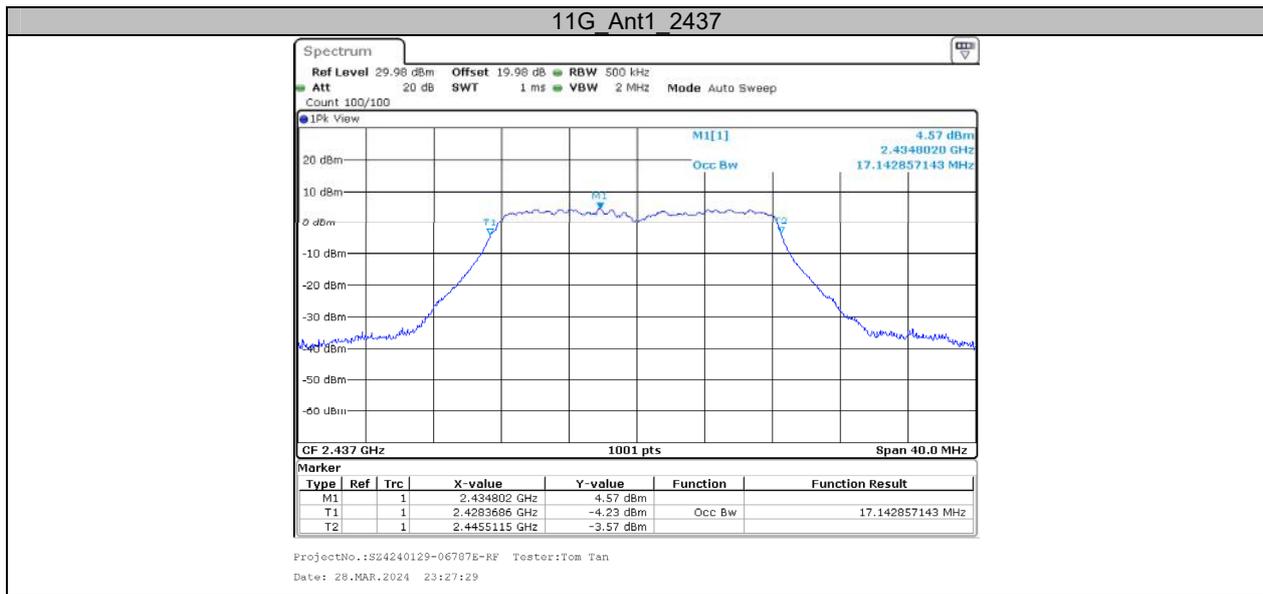


11G_Ant1_2462


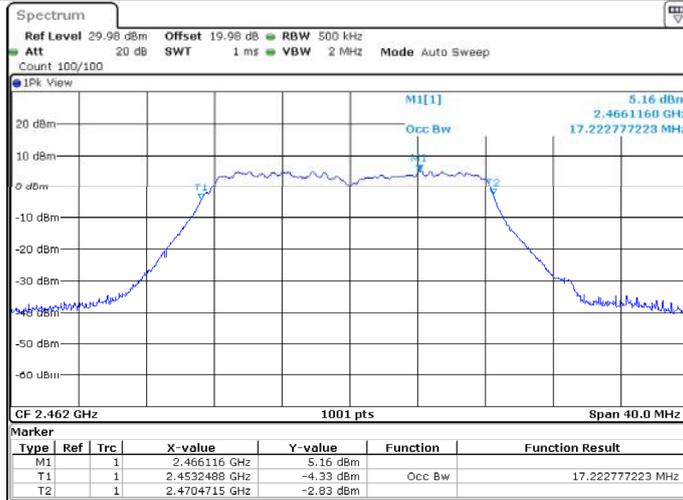




ProjectNo.:SZ4240129-06787E-RF Tester:Tom Tan
 Date: 28.MAR.2024 23:33:32


11G_Ant2_2462


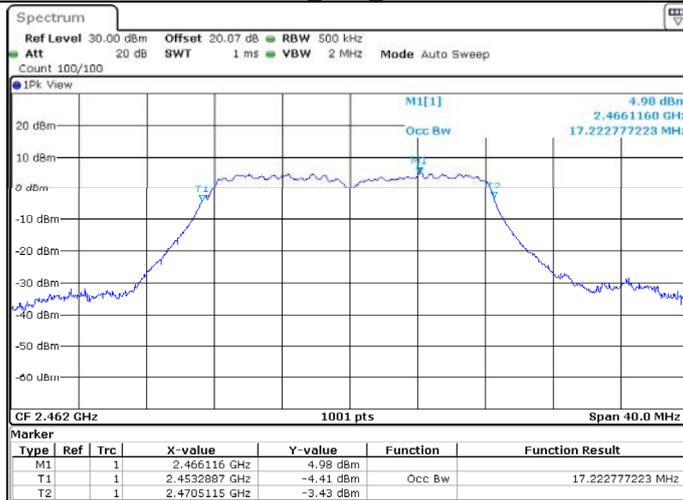



ProjectNo.:SZ4240129-06787E-RF Tester:Tom Tan
 Date: 28.MAR.2024 23:47:35

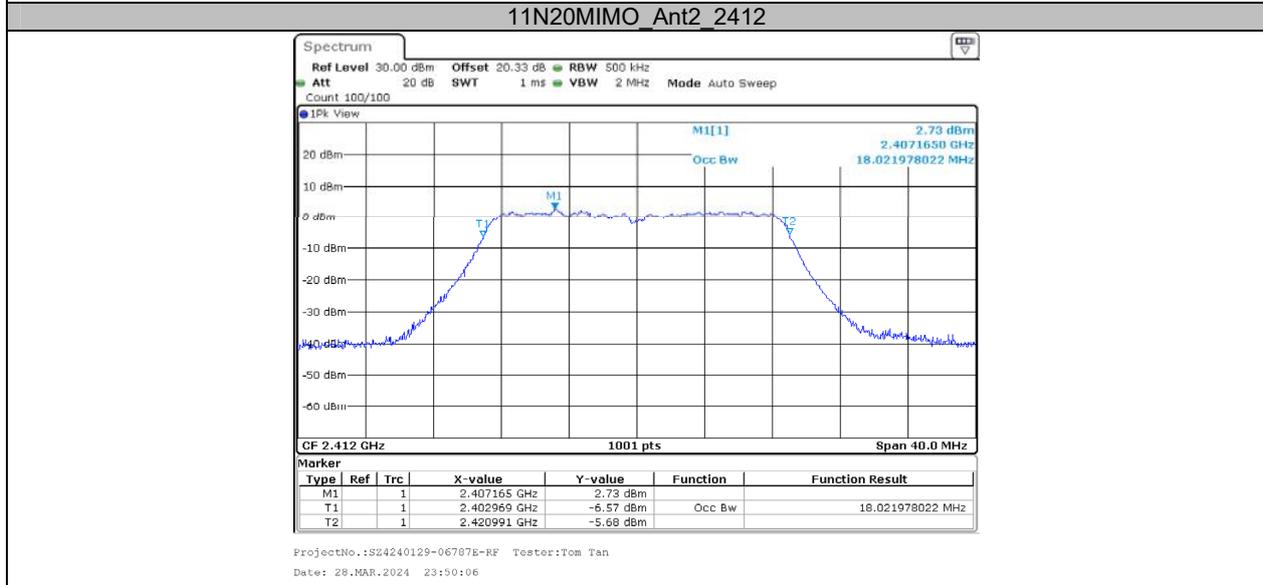
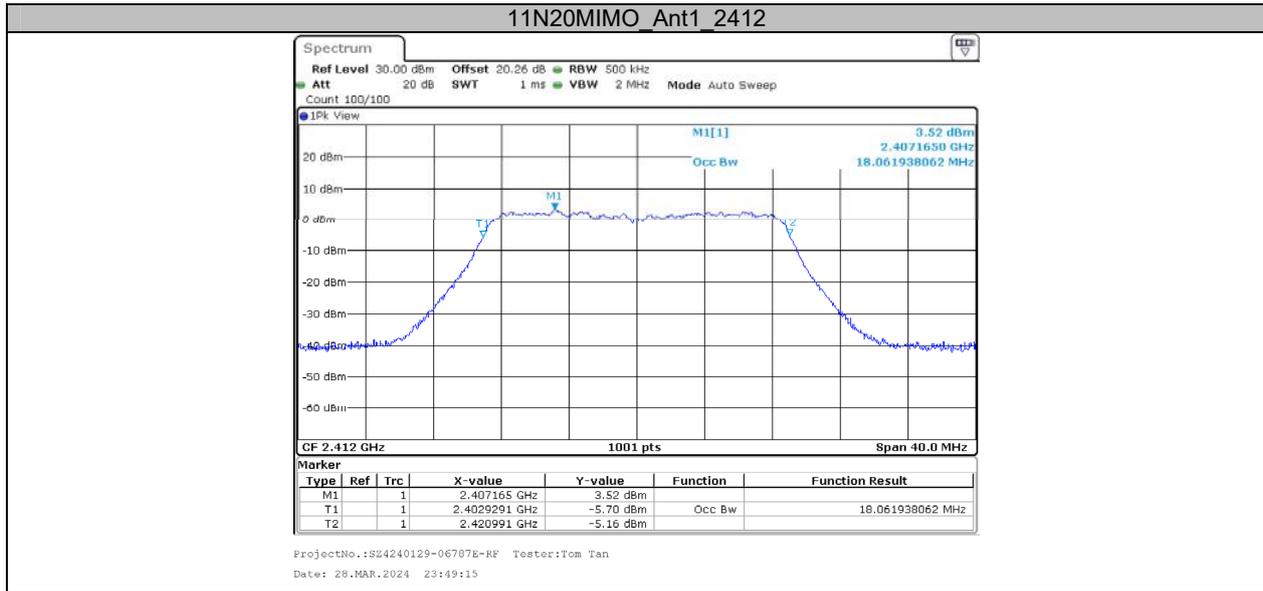


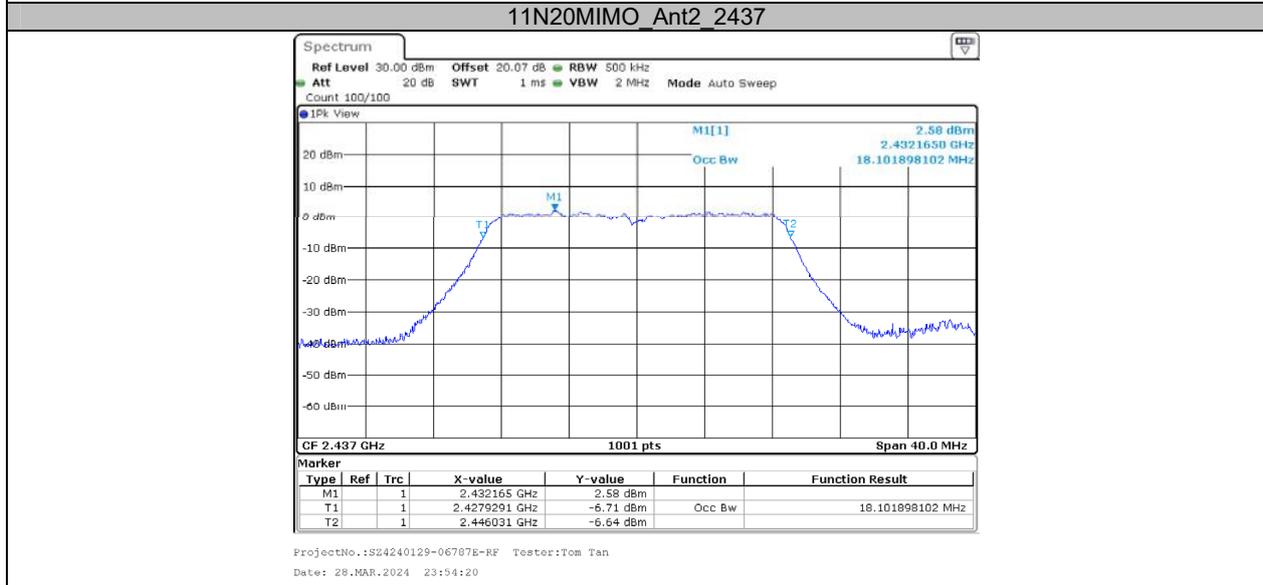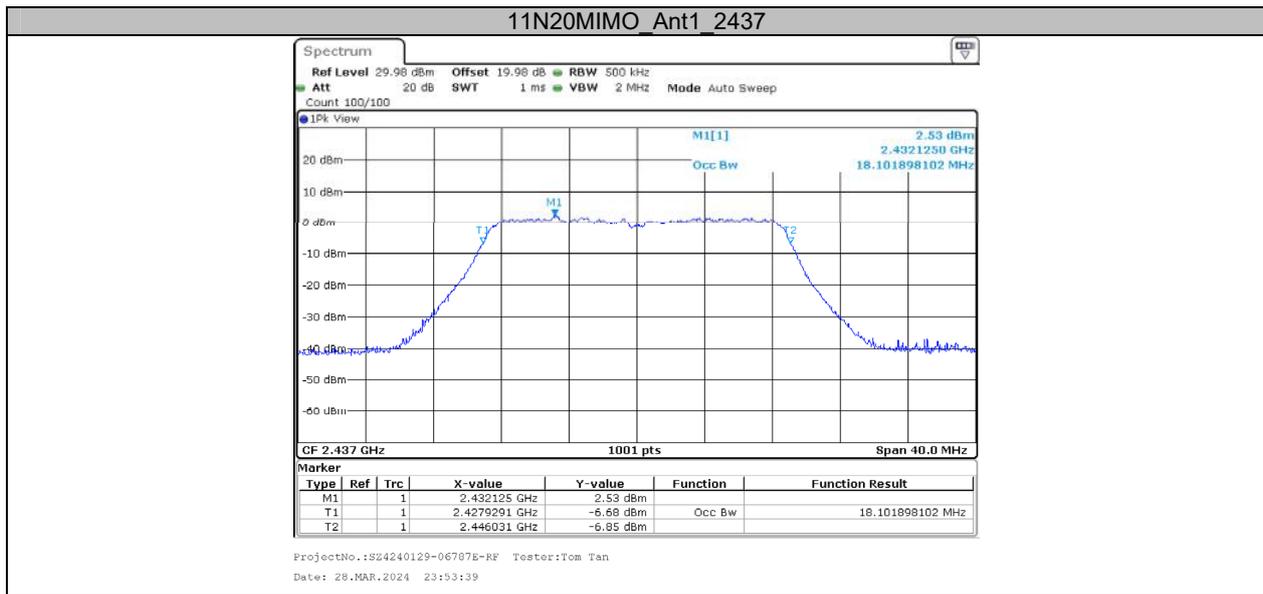

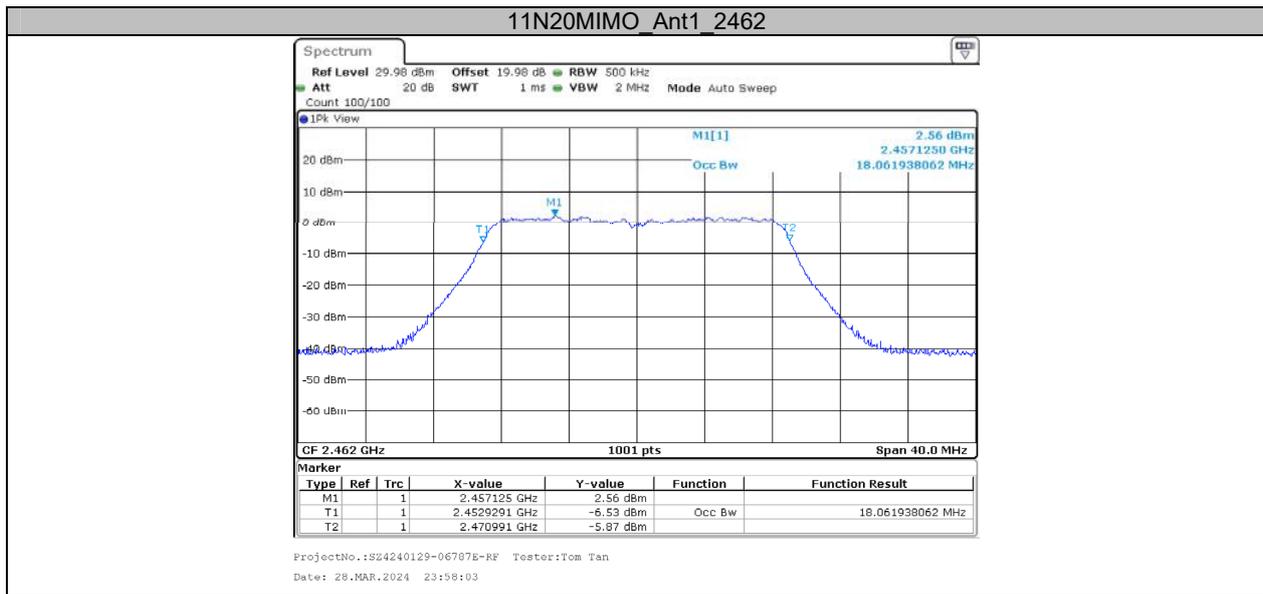

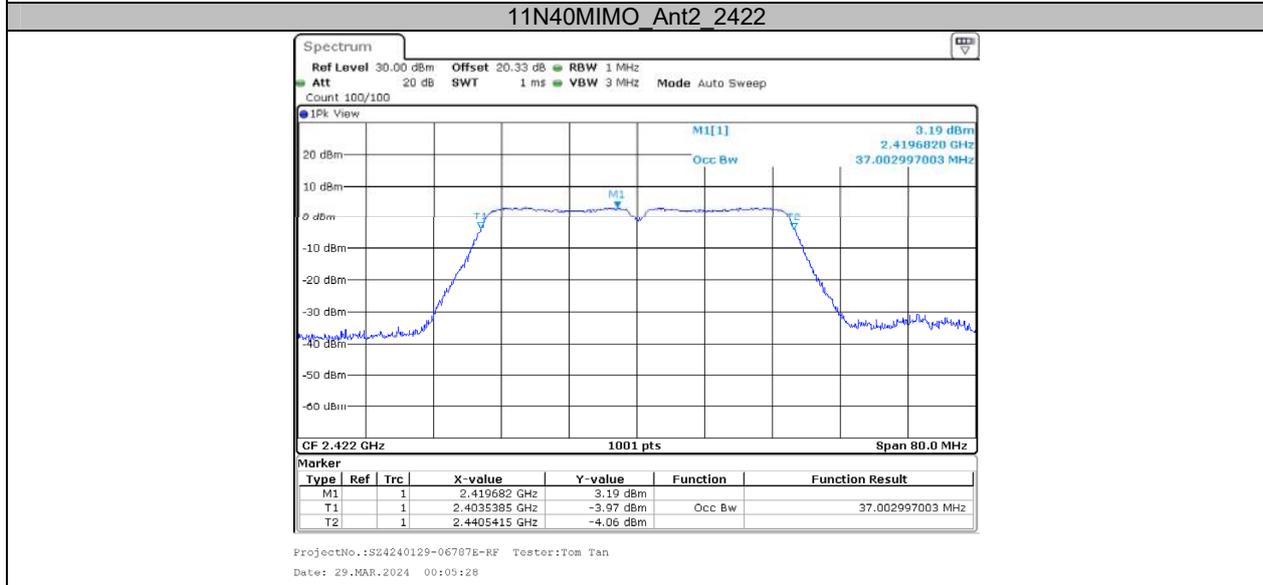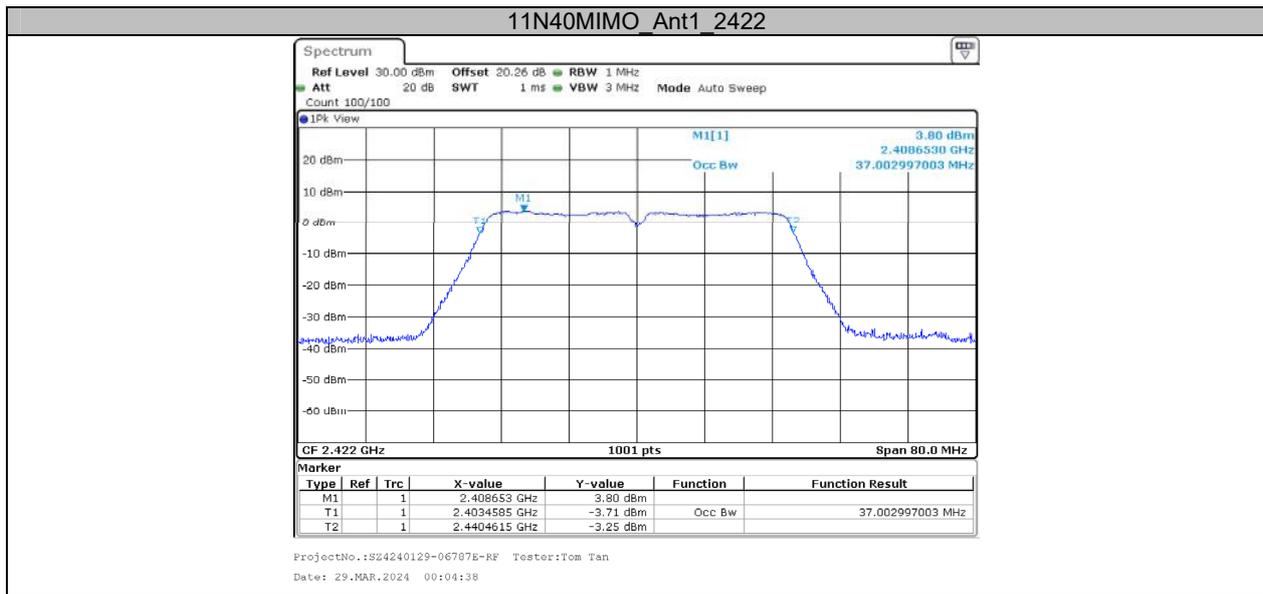

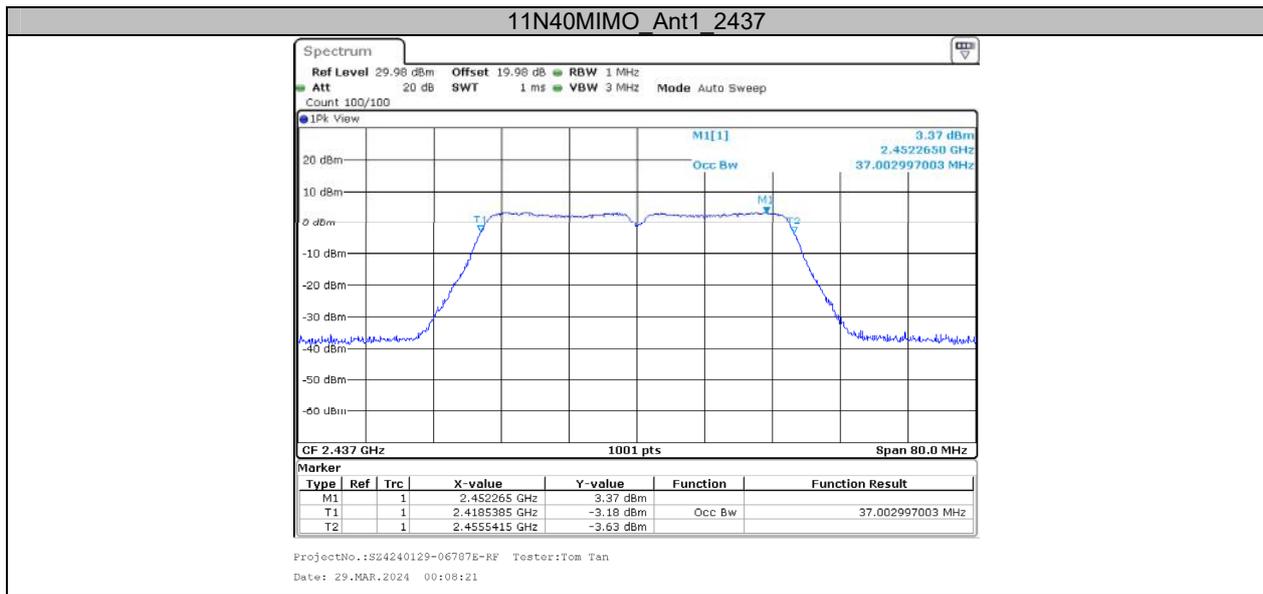

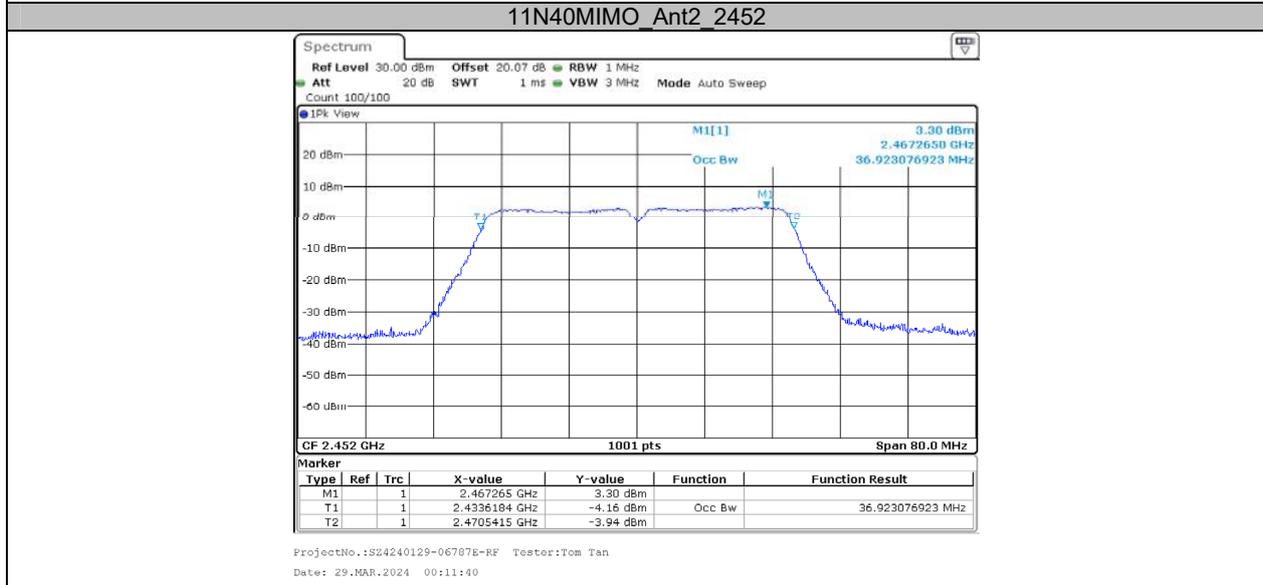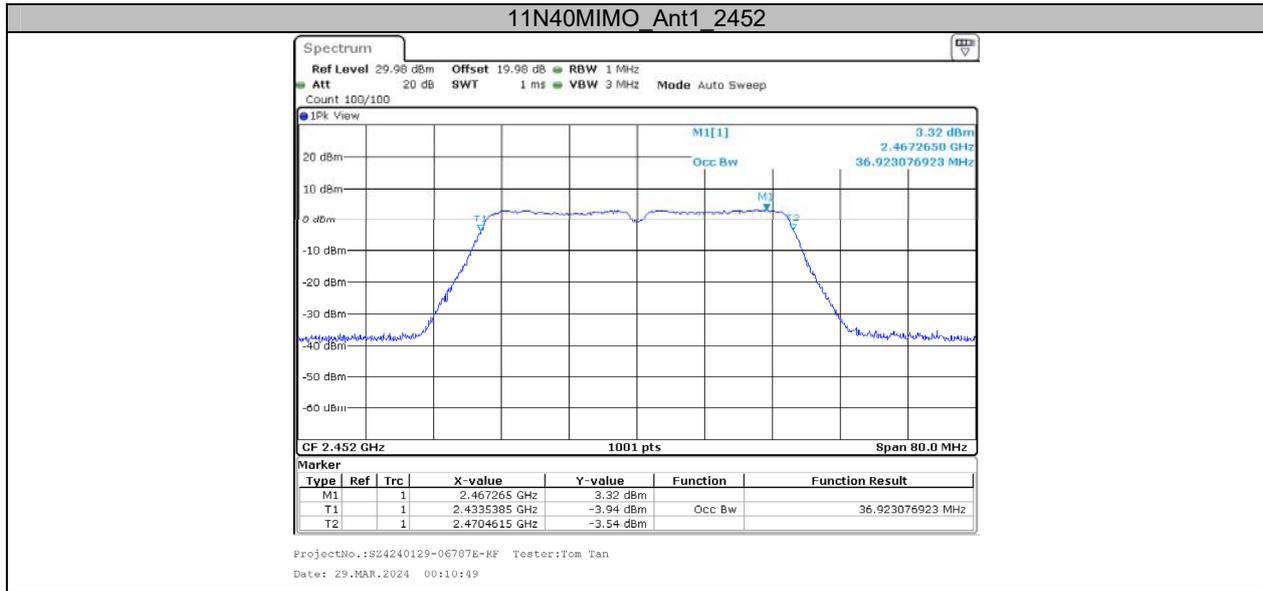



**Appendix C: Maximum conducted output power
Test Result**



Test Mode	Antenna	Frequency [MHz]	AVG Power [dBm]	Peak Power [dBm]	Conducted Limit [dBm]	Verdict
11B	Ant1	2412	15.51	17.36	≤30.00	PASS
	Ant2	2412	15.12	17.33	≤30.00	PASS
	Ant1	2437	15.96	16.87	≤30.00	PASS
	Ant2	2437	15.92	17.01	≤30.00	PASS
	Ant1	2462	15.41	17.12	≤30.00	PASS
	Ant2	2462	15.62	17.55	≤30.00	PASS
11G	Ant1	2412	12.83	19.13	≤30.00	PASS
	Ant2	2412	12.31	18.70	≤30.00	PASS
	Ant1	2437	13.17	18.91	≤30.00	PASS
	Ant2	2437	12.84	18.51	≤30.00	PASS
	Ant1	2462	12.63	19.17	≤30.00	PASS
	Ant2	2462	12.35	18.94	≤30.00	PASS
11N20MIMO	Ant1	2412	10.36	17.79	≤30.00	PASS
	Ant2	2412	10.02	17.42	≤30.00	PASS
	total	2412	13.20	20.62	≤30.00	PASS
	Ant1	2437	10.40	16.68	≤30.00	PASS
	Ant2	2437	10.18	16.64	≤30.00	PASS
	total	2437	13.30	19.67	≤30.00	PASS
	Ant1	2462	10.34	17.63	≤30.00	PASS
	Ant2	2462	9.99	17.45	≤30.00	PASS
total	2462	13.18	20.55	≤30.00	PASS	
11N40MIMO	Ant1	2422	10.94	17.93	≤30.00	PASS
	Ant2	2422	10.64	17.43	≤30.00	PASS
	total	2422	13.80	20.70	≤30.00	PASS
	Ant1	2437	11.34	17.44	≤30.00	PASS
	Ant2	2437	10.90	17.28	≤30.00	PASS
	total	2437	14.14	20.37	≤30.00	PASS
	Ant1	2452	10.37	17.44	≤30.00	PASS
	Ant2	2452	10.18	17.22	≤30.00	PASS
total	2452	13.29	20.34	≤30.00	PASS	
Note: The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices: Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$						
Antenna Gain:	2.0	dBi	Directional gain:		2.0	dBi
Maximum EIRP is 22.7dBm<36dBm which comply with the ISEDC EIRP limit.						



**Appendix D: Maximum power spectral density
Test Result**



Test Mode	Antenna	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-15.73	≤8.00	PASS
	Ant2	2412	-15.82	≤8.00	PASS
	Ant1	2437	-16.26	≤8.00	PASS
	Ant2	2437	-16.10	≤8.00	PASS
	Ant1	2462	-16.00	≤8.00	PASS
11G	Ant2	2462	-15.56	≤8.00	PASS
	Ant1	2412	-17.13	≤8.00	PASS
	Ant2	2412	-17.66	≤8.00	PASS
	Ant1	2437	-17.49	≤8.00	PASS
	Ant2	2437	-17.80	≤8.00	PASS
11N20MIMO	Ant1	2462	-17.21	≤8.00	PASS
	Ant2	2462	-17.38	≤8.00	PASS
	Ant1	2412	-18.13	≤8.00	PASS
	Ant2	2412	-18.54	≤8.00	PASS
	total	2412	-15.32	≤8.00	PASS
	Ant1	2437	-18.40	≤8.00	PASS
	Ant2	2437	-18.30	≤8.00	PASS
	total	2437	-15.34	≤8.00	PASS
11N40MIMO	Ant1	2462	-17.95	≤8.00	PASS
	Ant2	2462	-18.16	≤8.00	PASS
	total	2462	-15.04	≤8.00	PASS
	Ant1	2422	-19.77	≤8.00	PASS
	Ant2	2422	-20.33	≤8.00	PASS
	total	2422	-17.03	≤8.00	PASS
	Ant1	2437	-19.99	≤8.00	PASS
	Ant2	2437	-20.17	≤8.00	PASS
	total	2437	-17.07	≤8.00	PASS
	Ant1	2452	-19.85	≤8.00	PASS
	Ant2	2452	-19.82	≤8.00	PASS
	total	2452	-16.82	≤8.00	PASS
	Note: The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power spectral density (PSD) measurements on the devices: Array Gain = 10 log(N _{ANT} /N _{SS}) dB				
Antenna Gain:	2.0	dBi	Directional gain:	5.0	dBi



Test Graphs

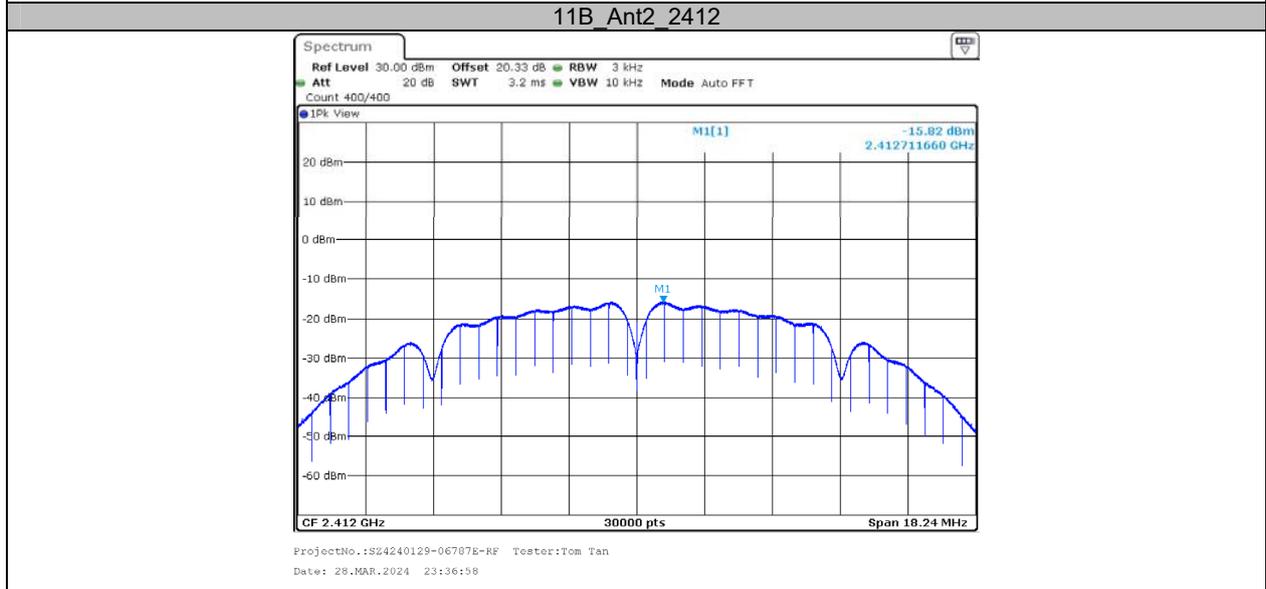
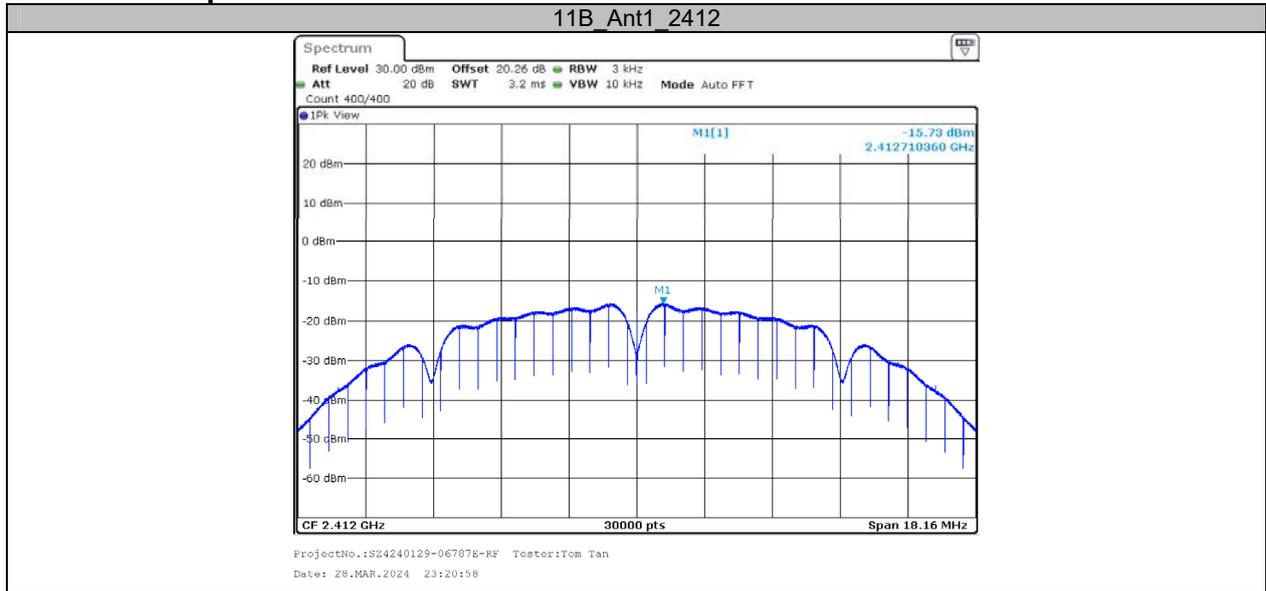


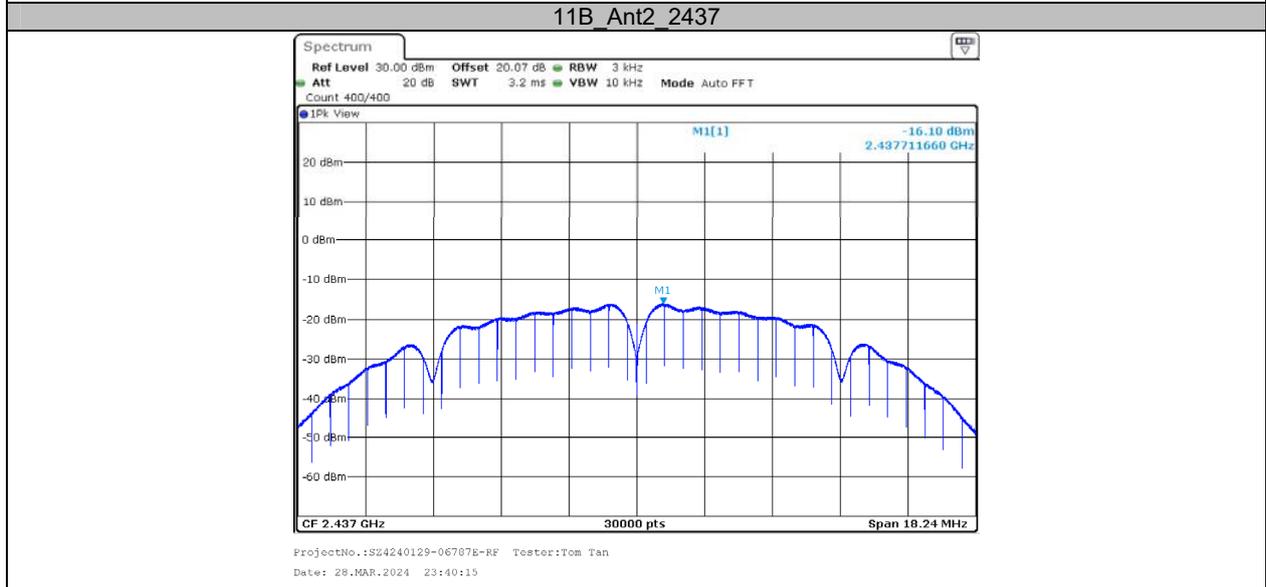
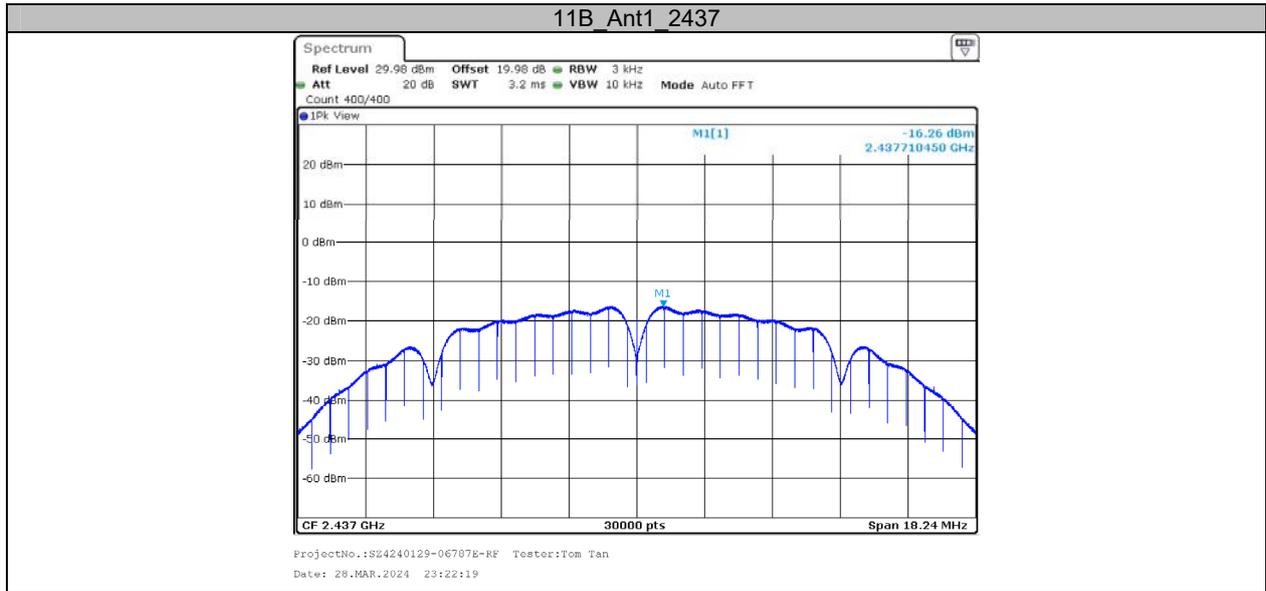


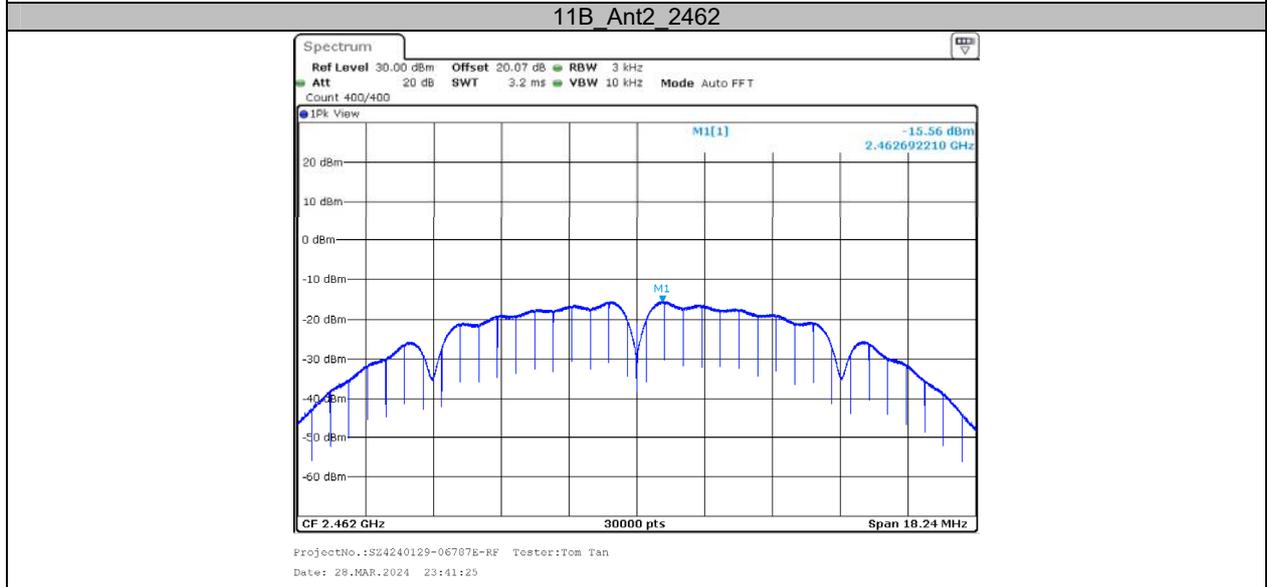
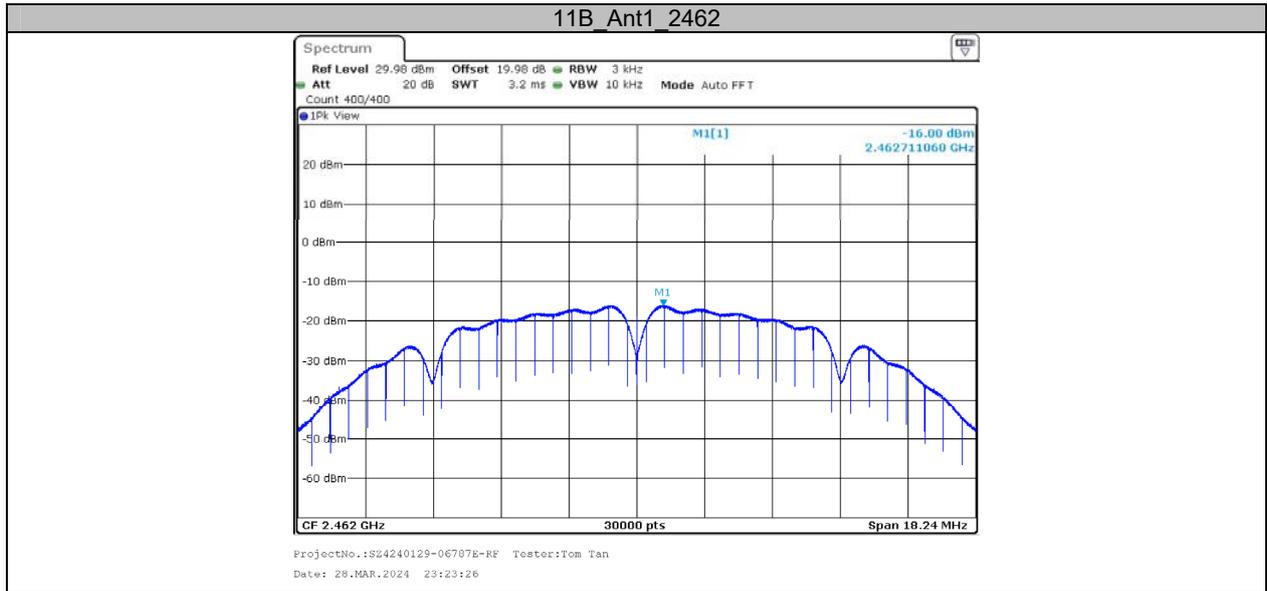


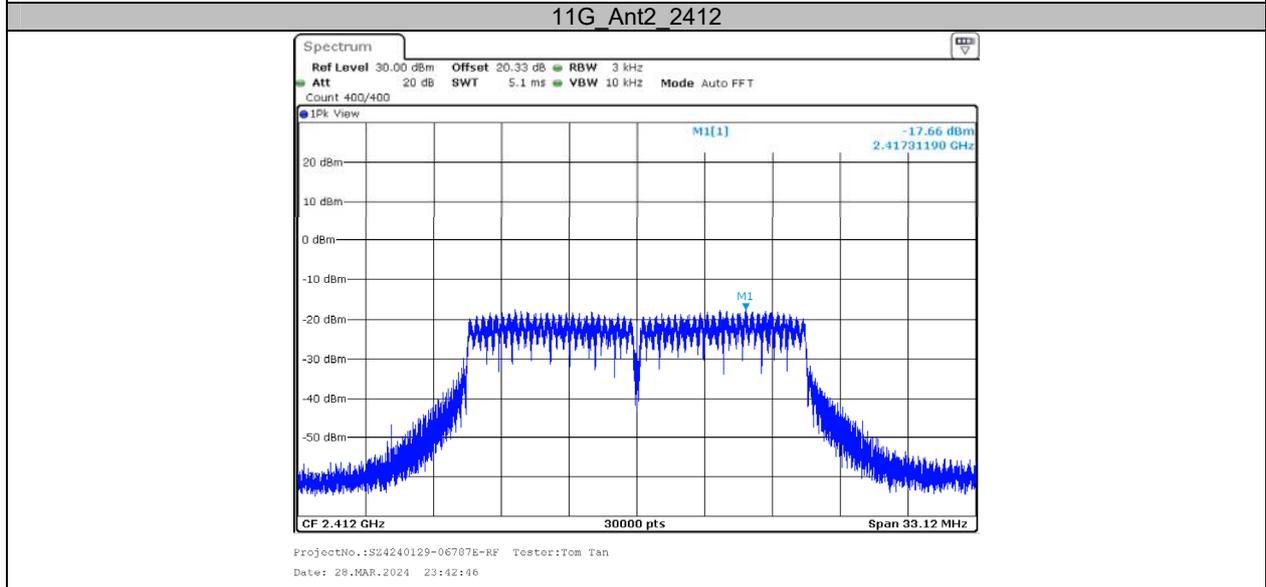
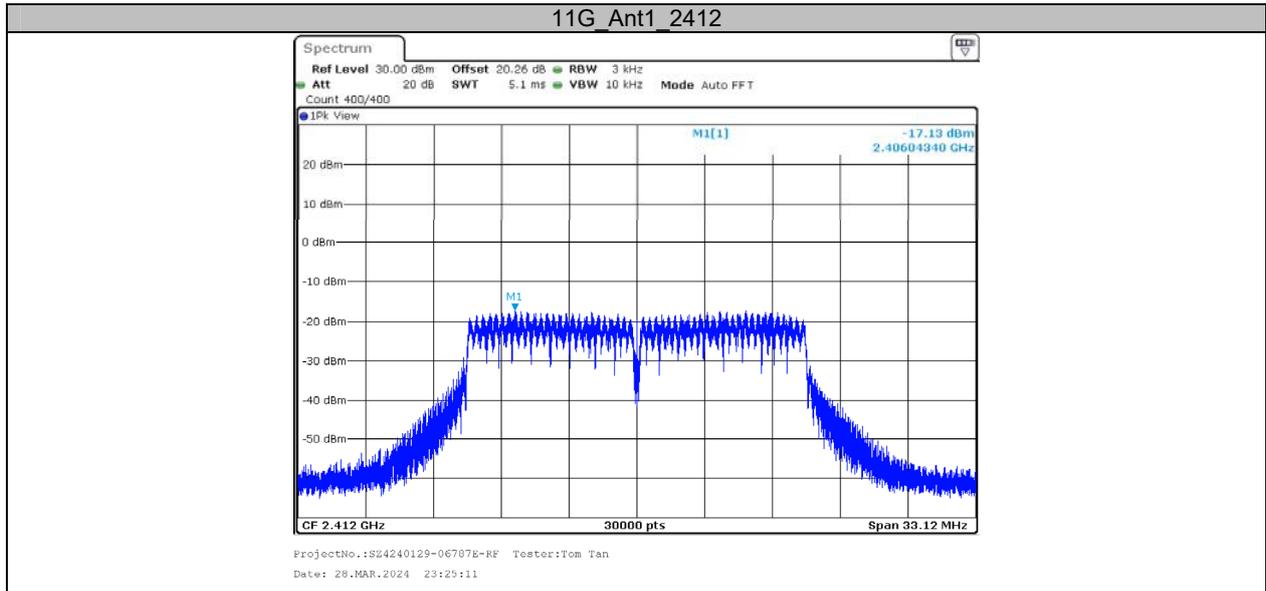


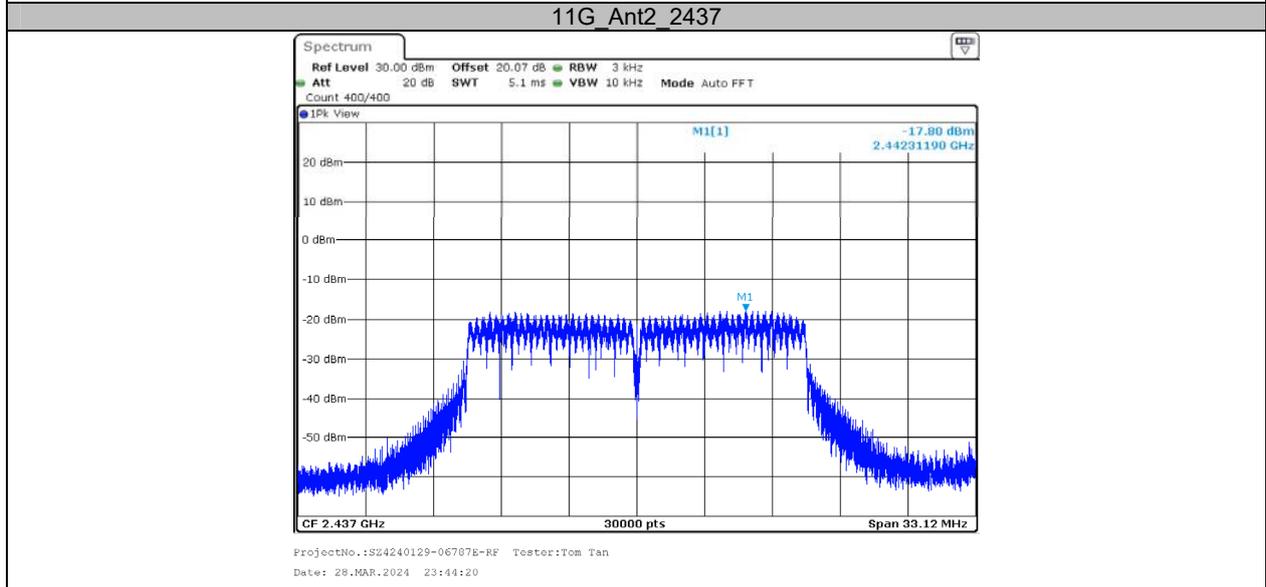
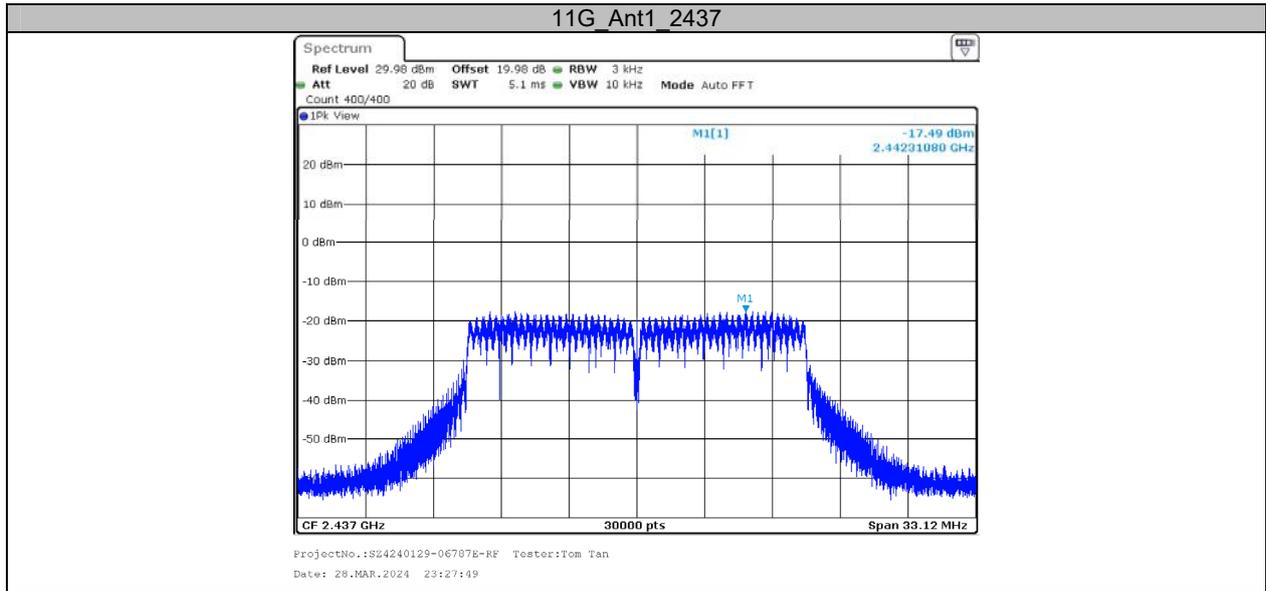


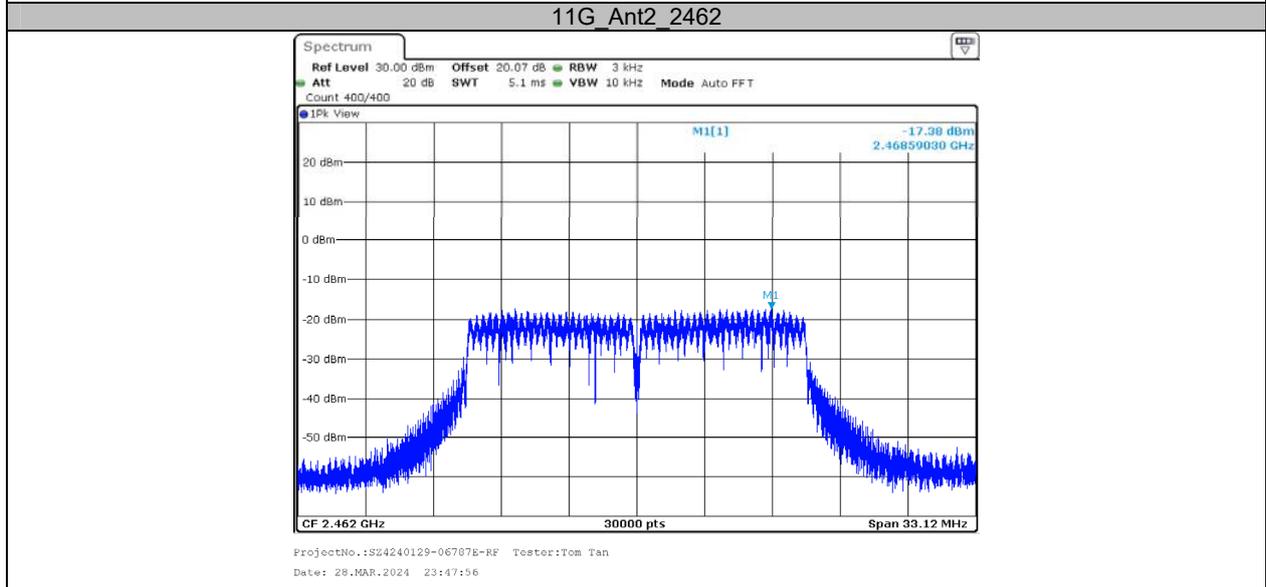
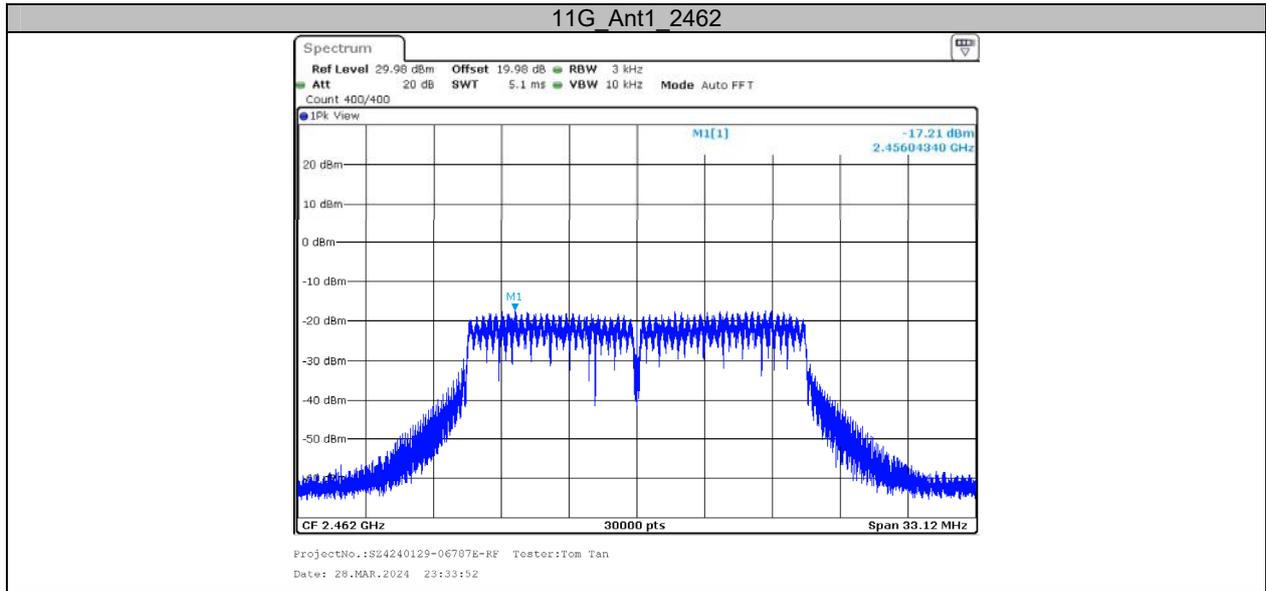


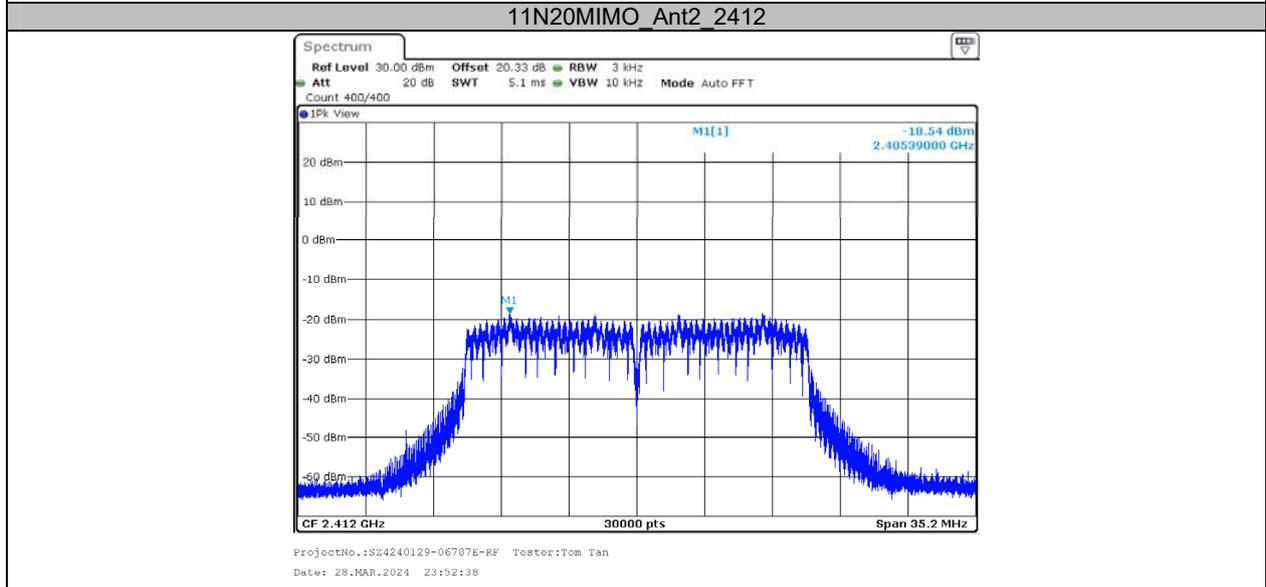
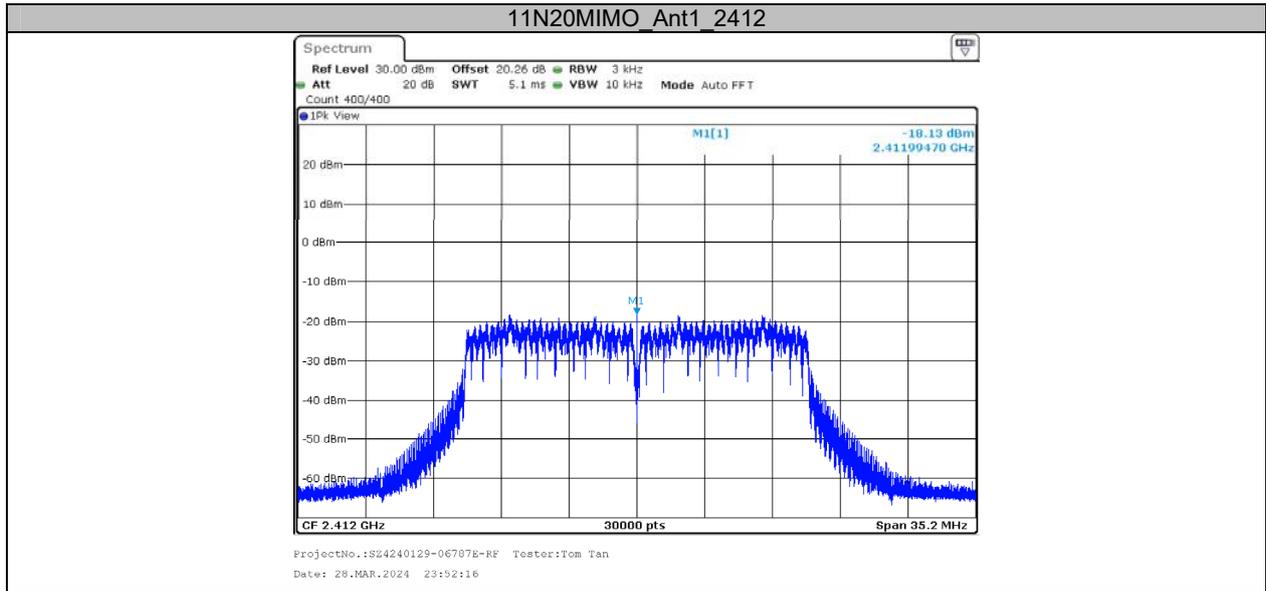


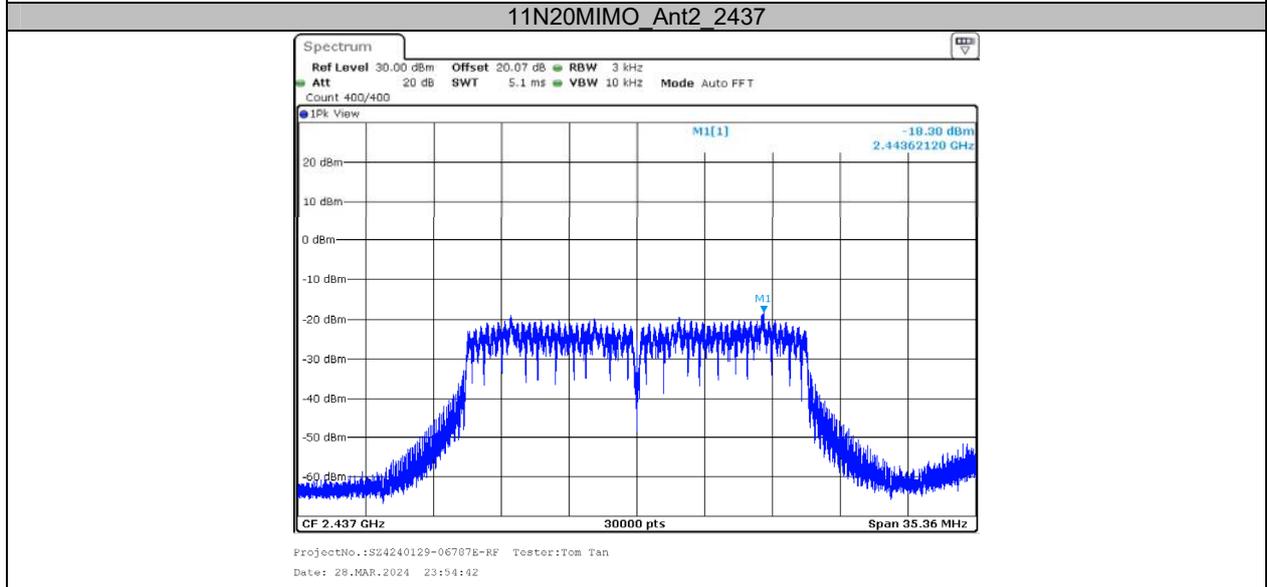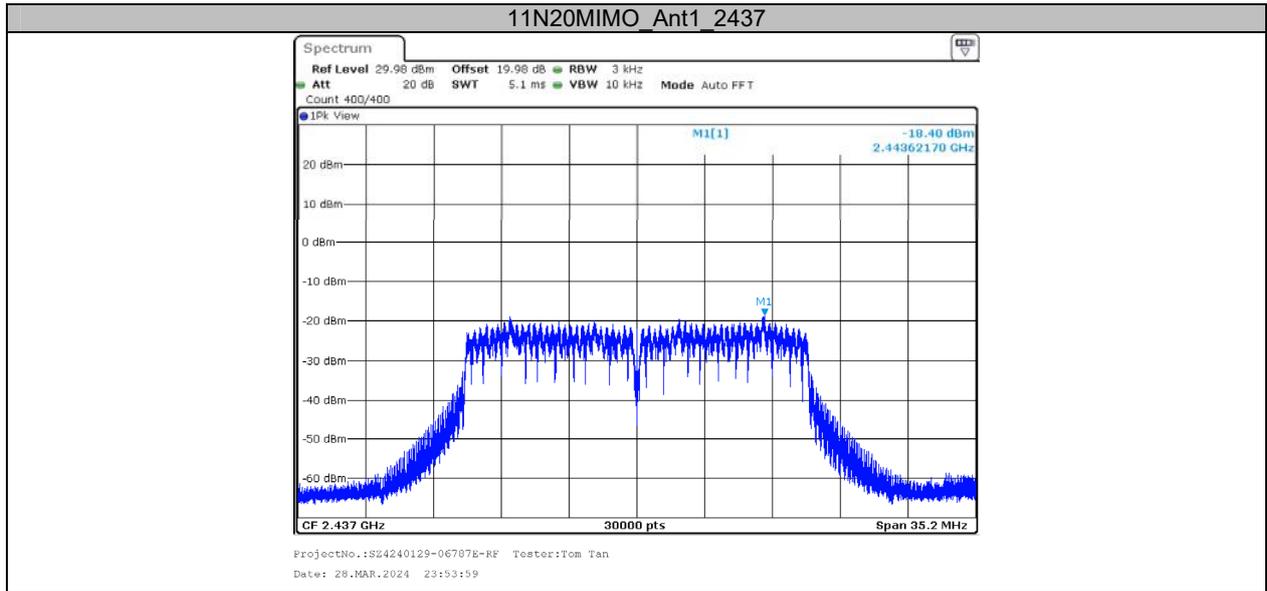

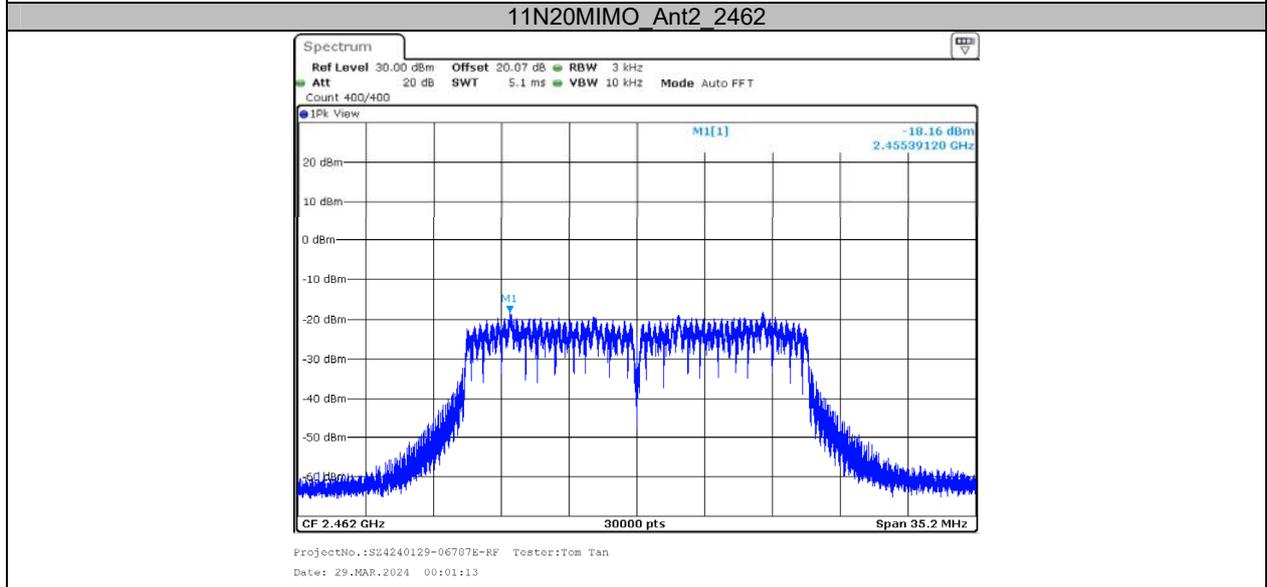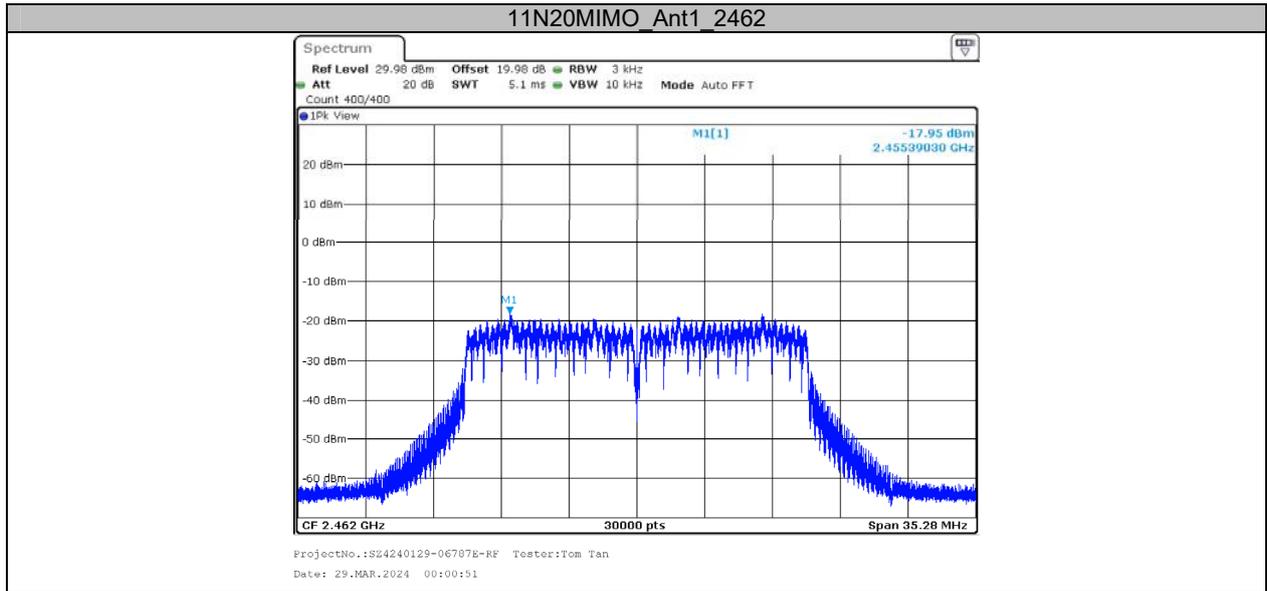


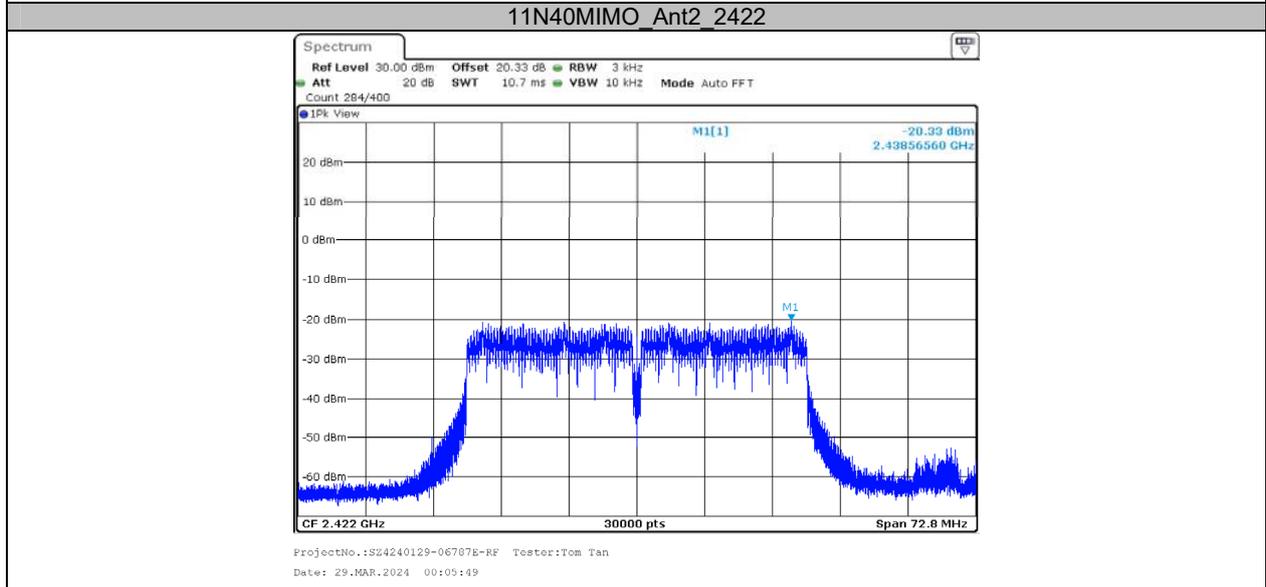
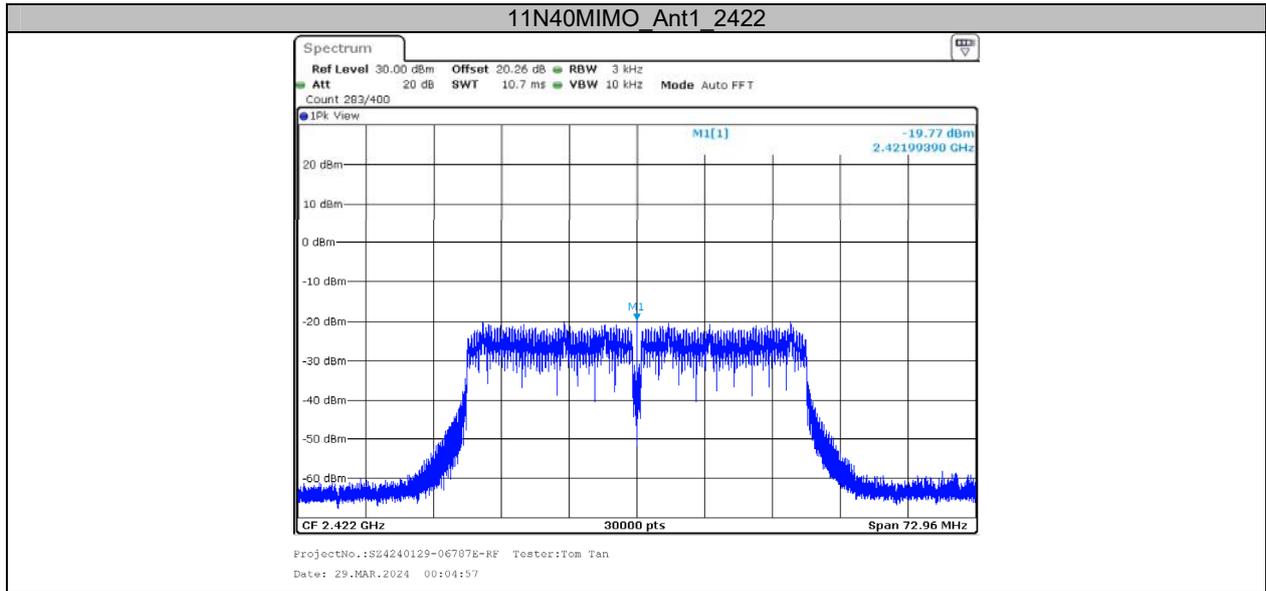


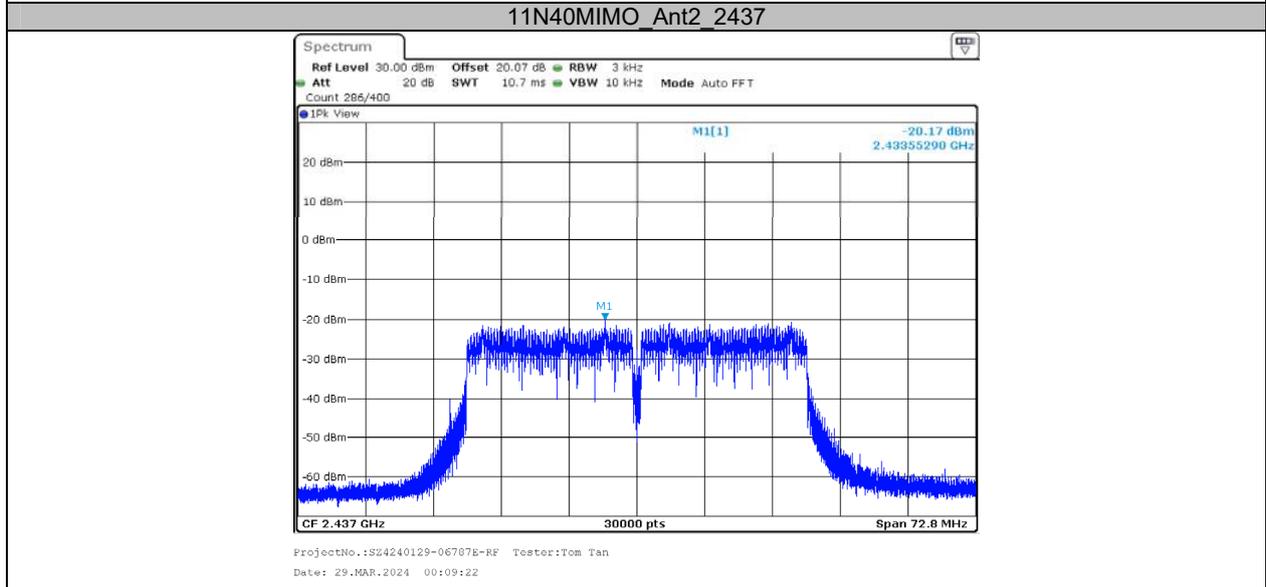
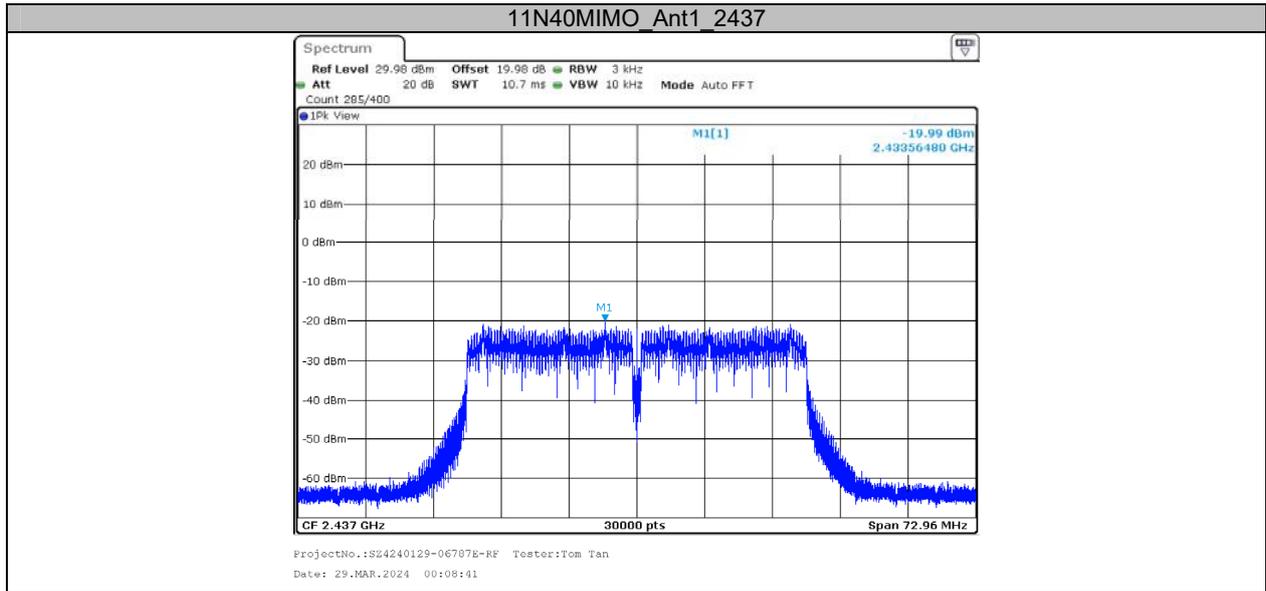


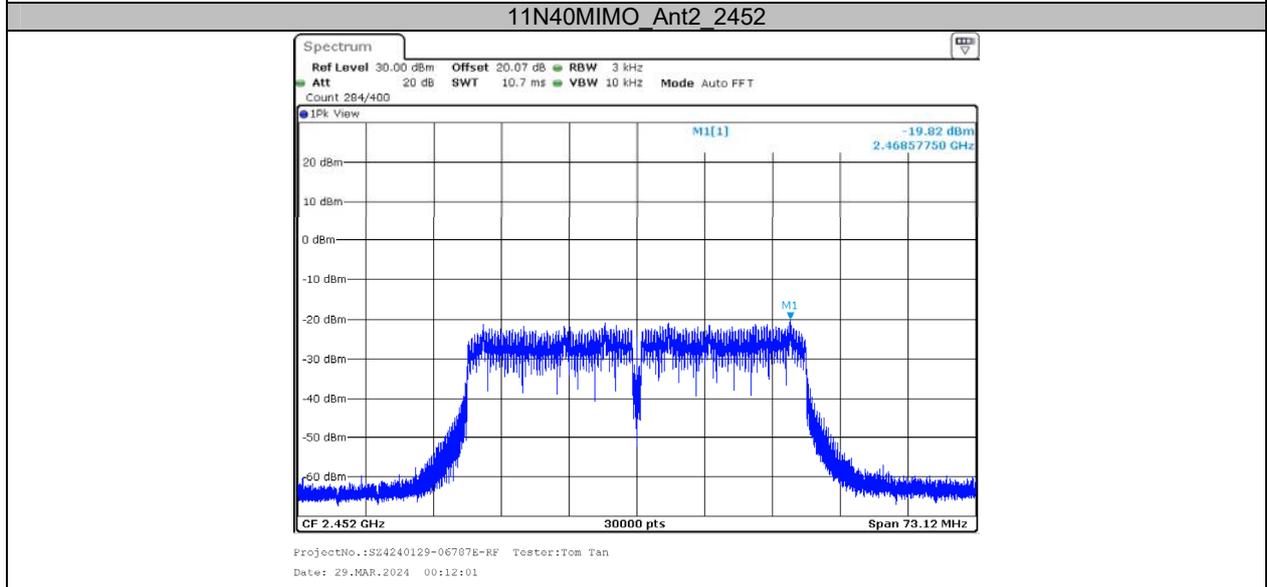
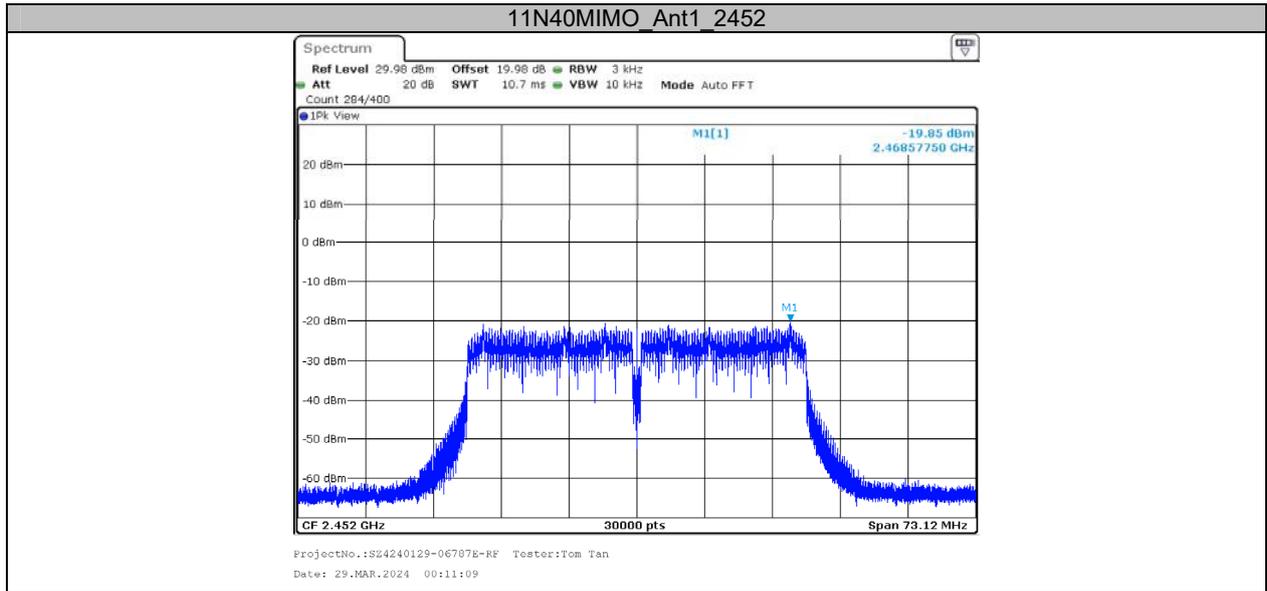




Appendix E: Band edge measurements Test Graphs


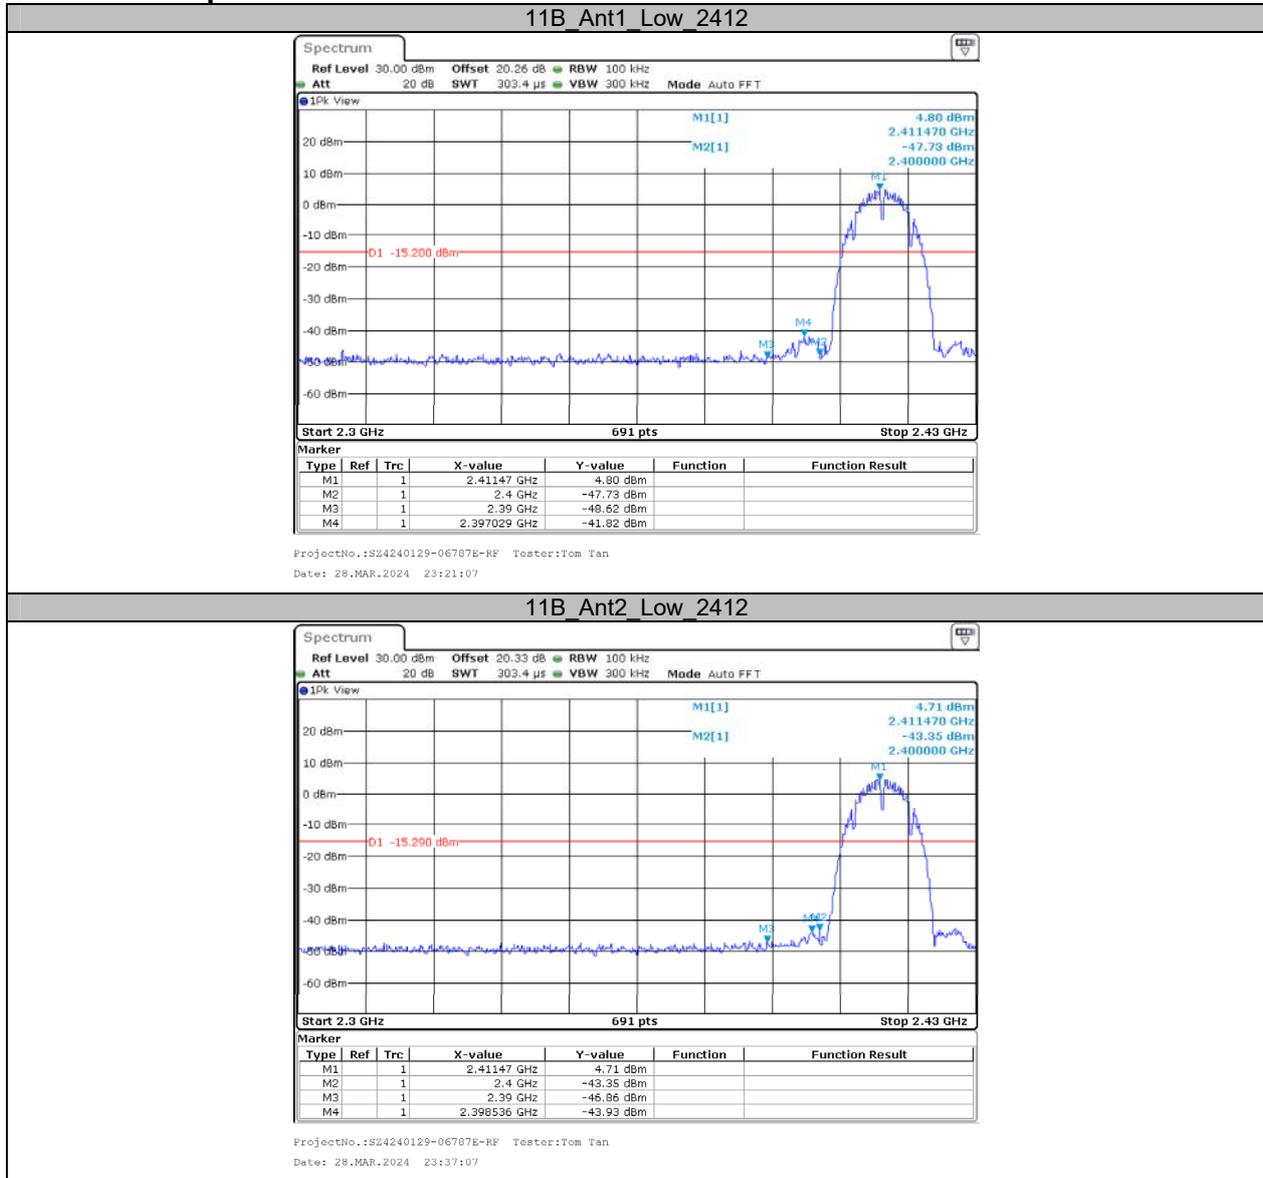


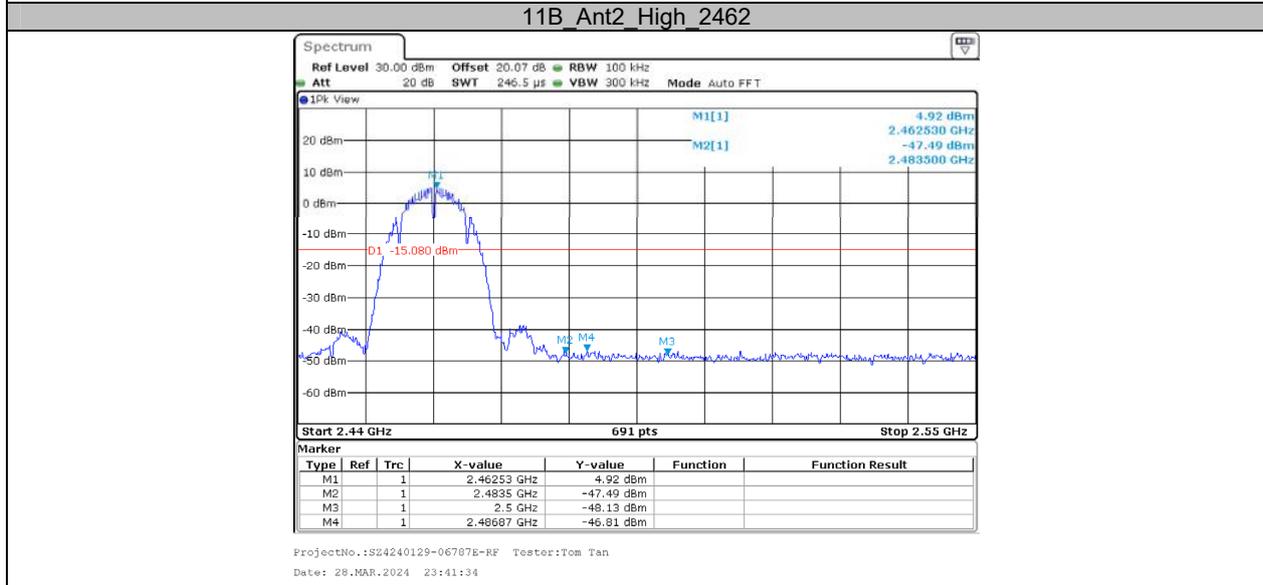
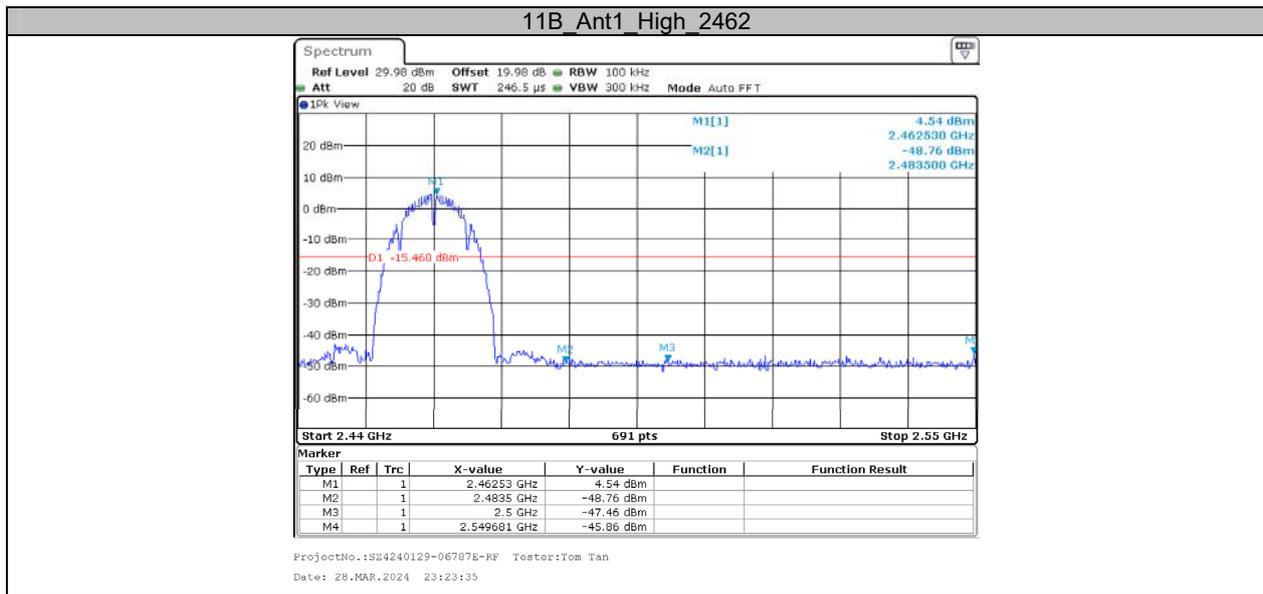


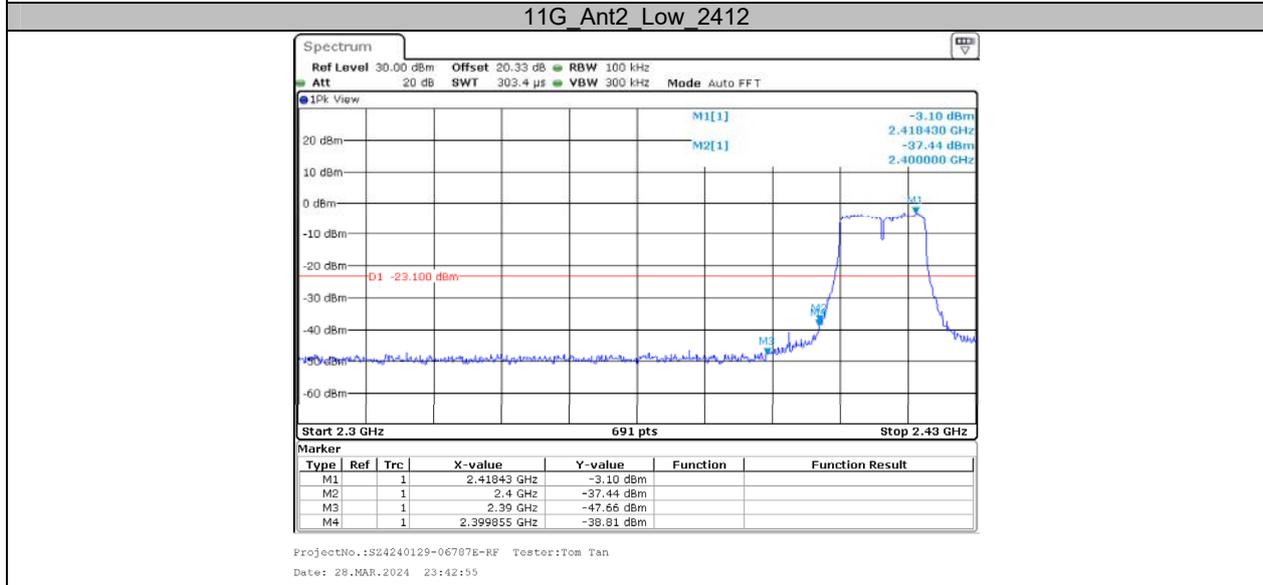
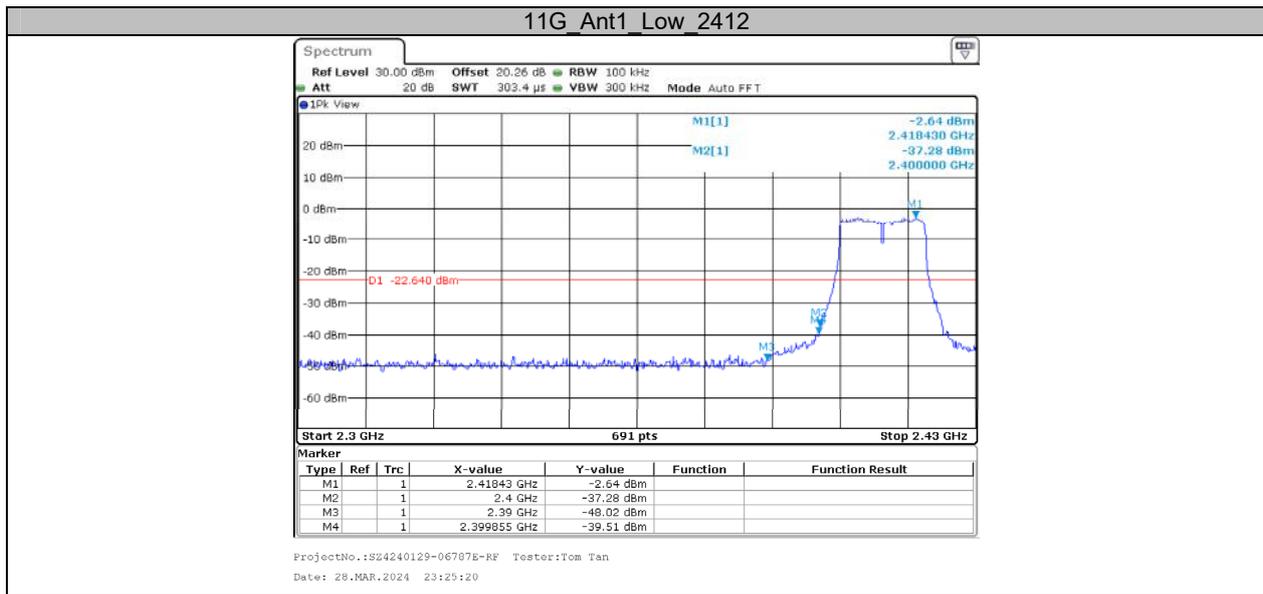


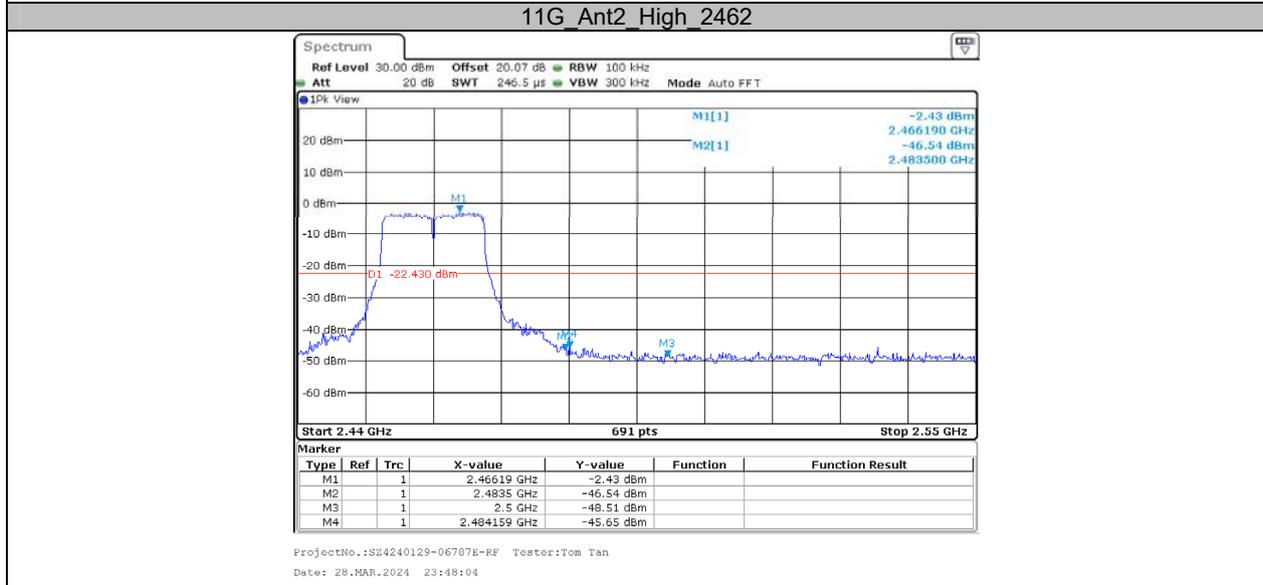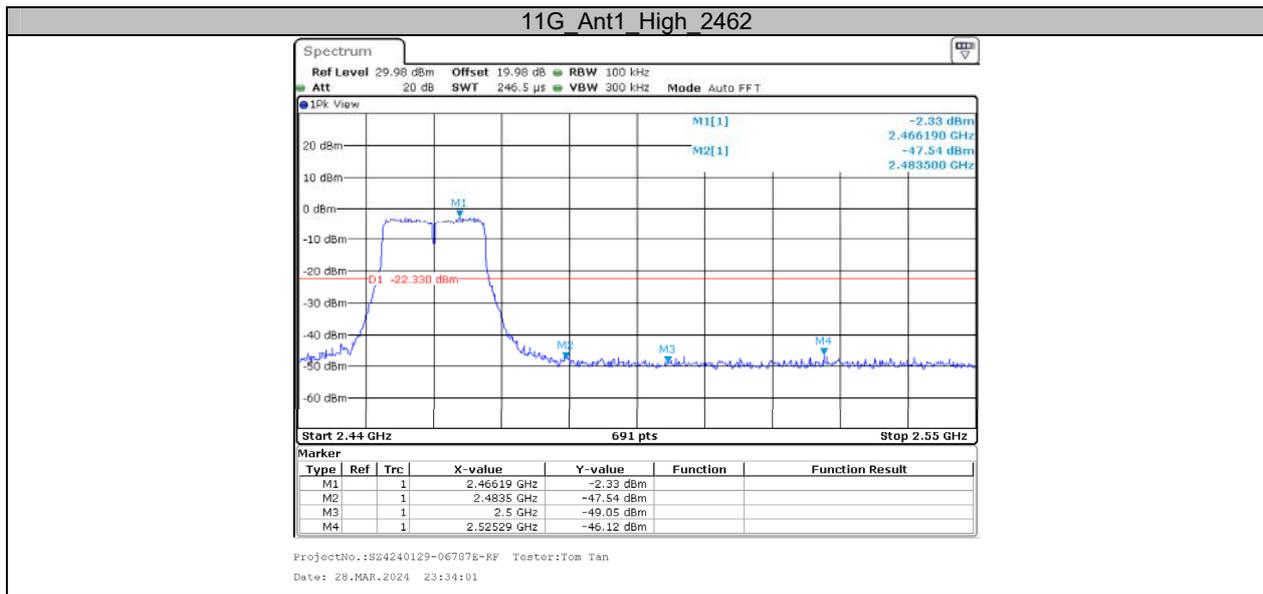

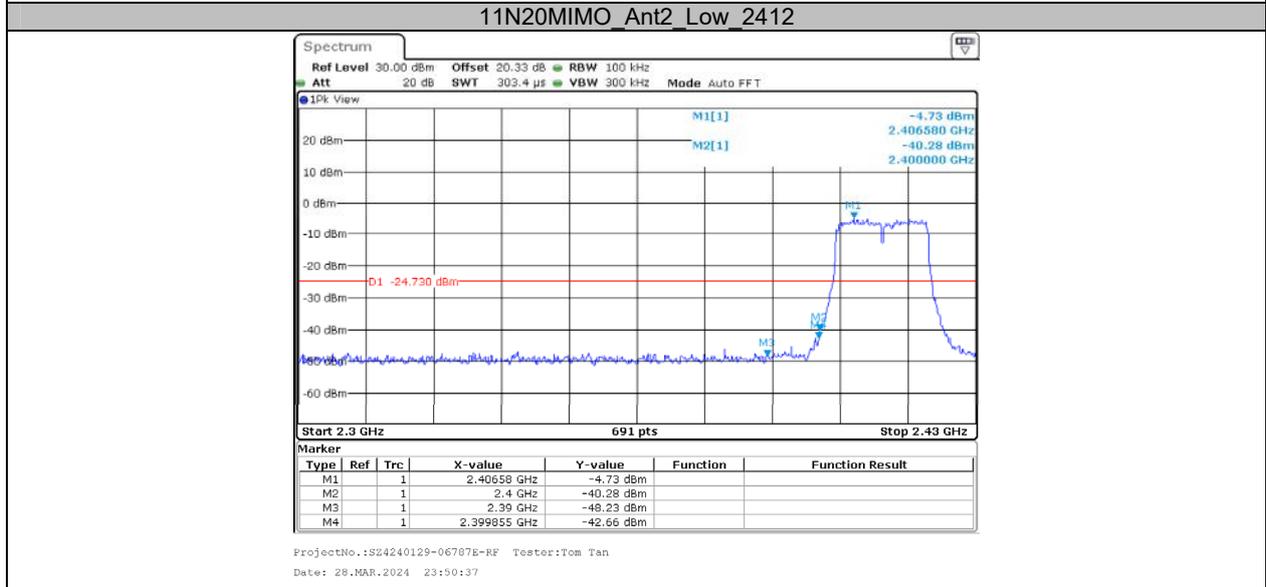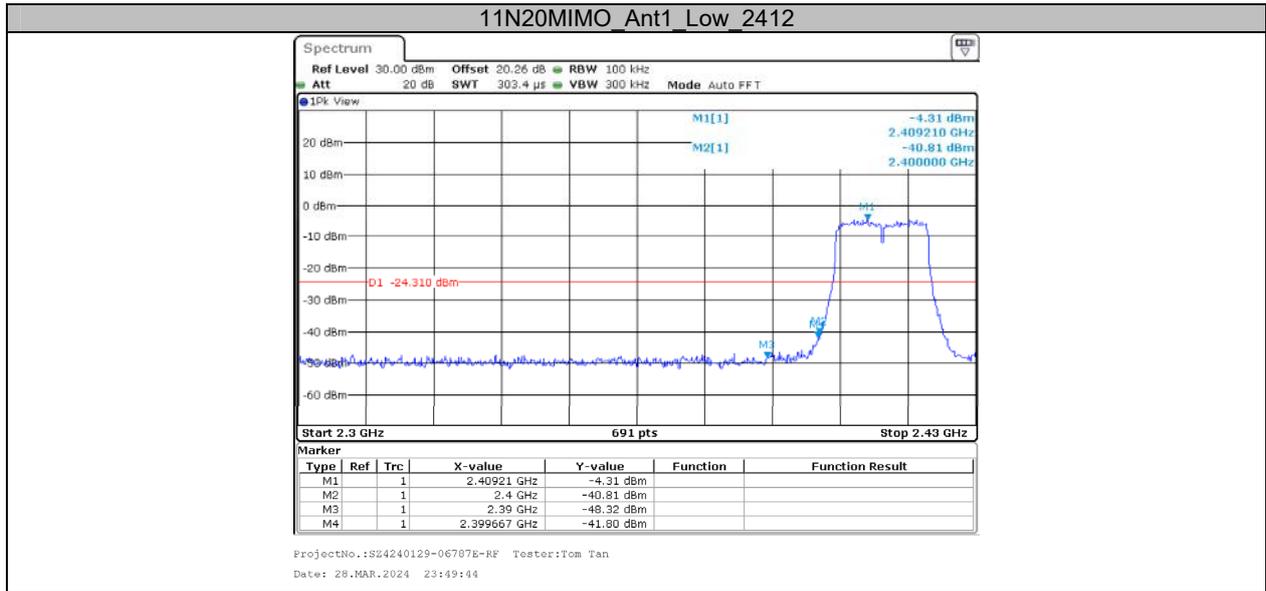

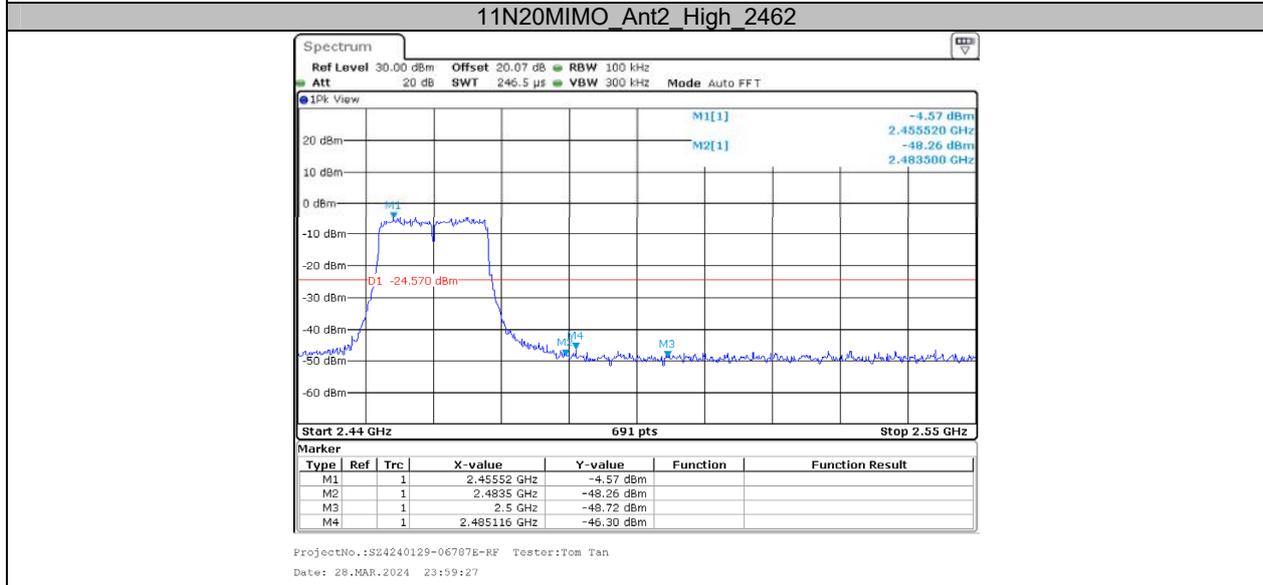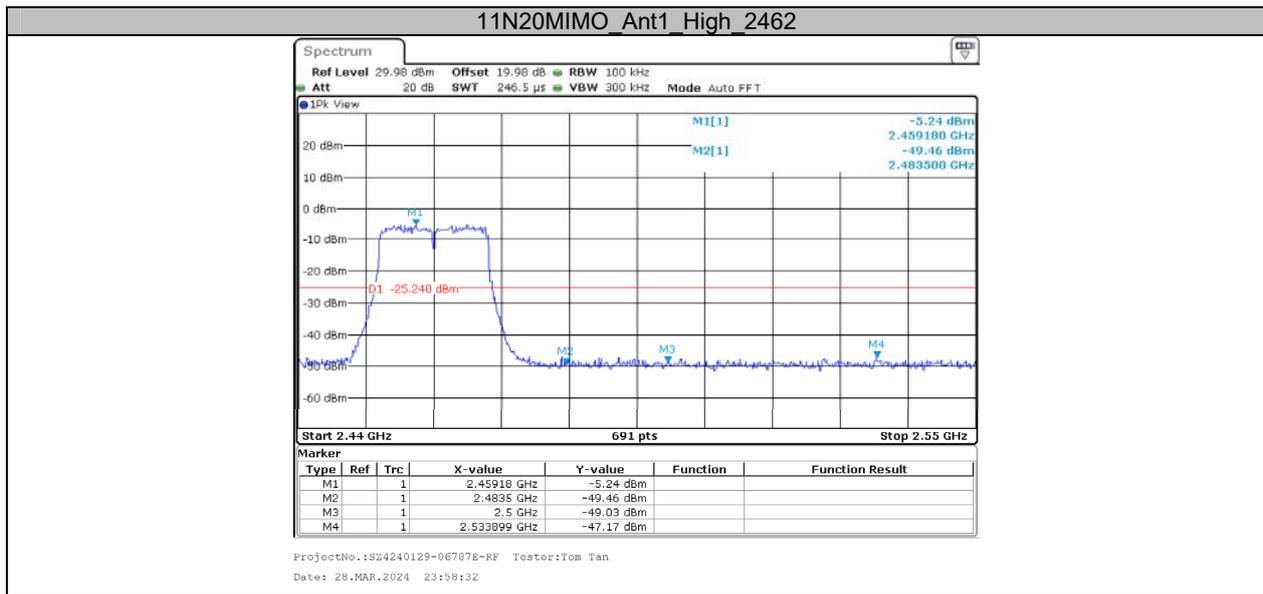

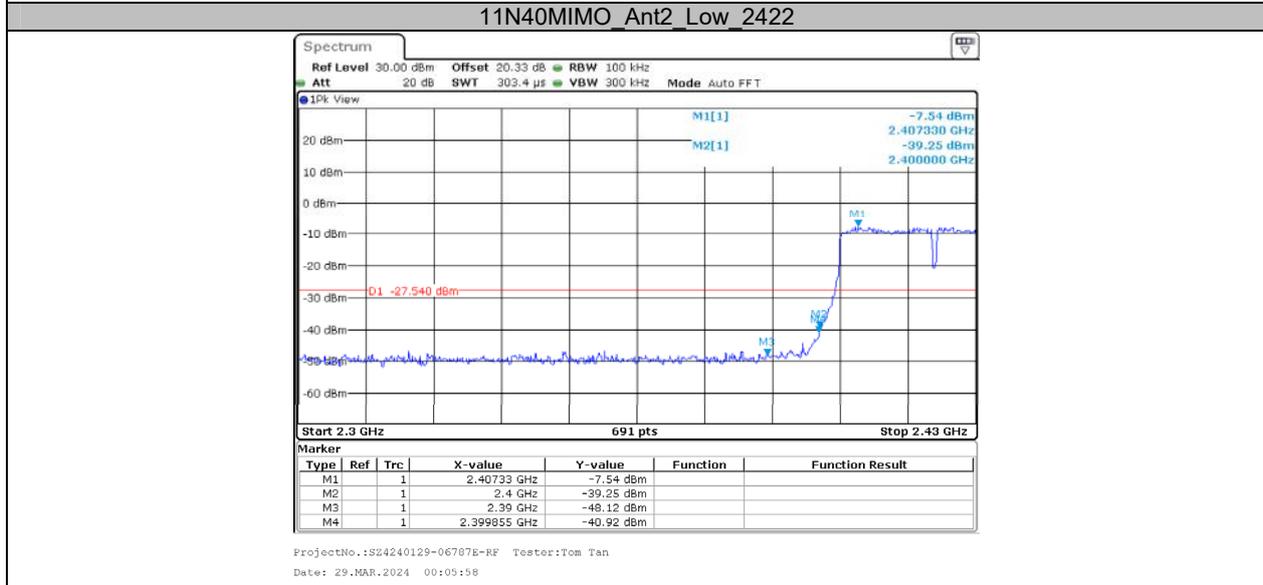
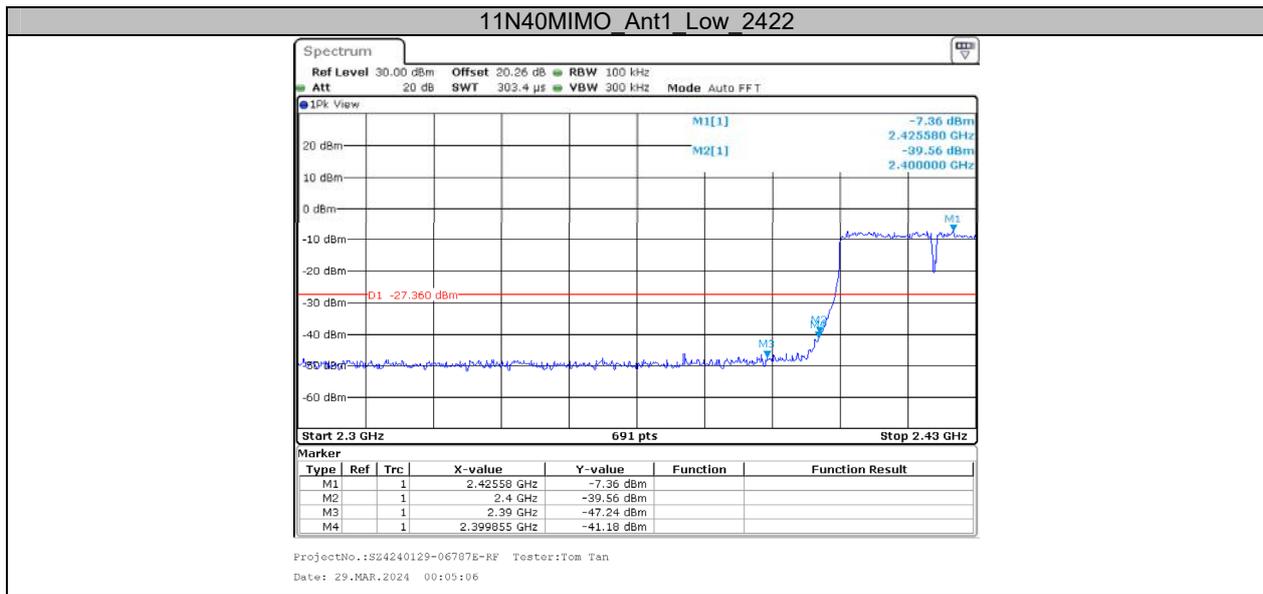


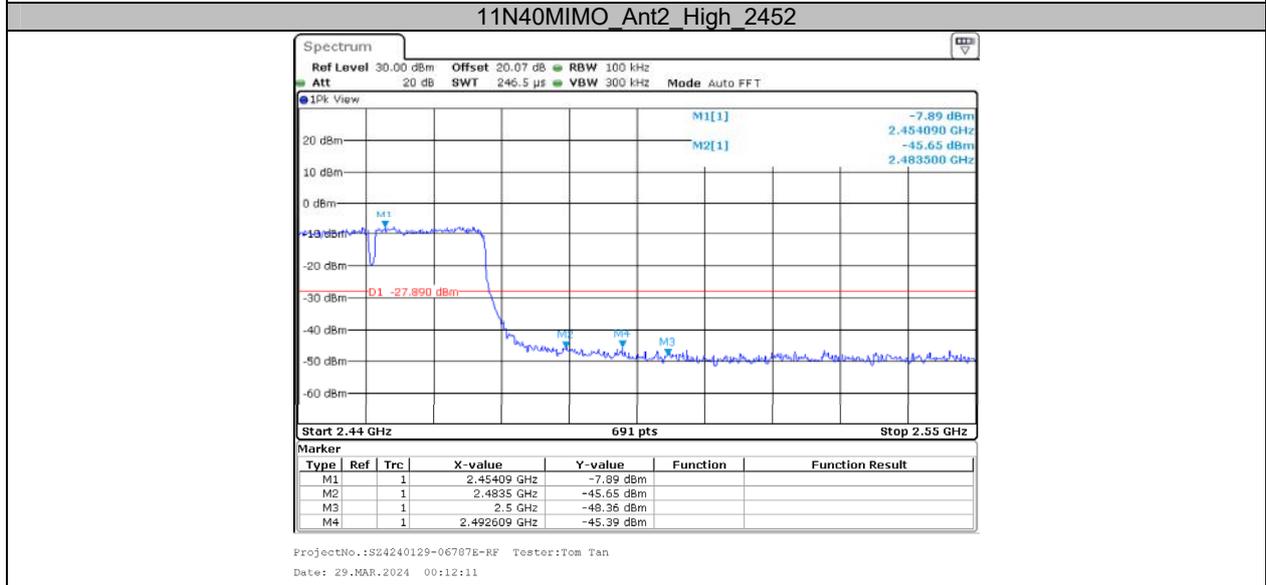
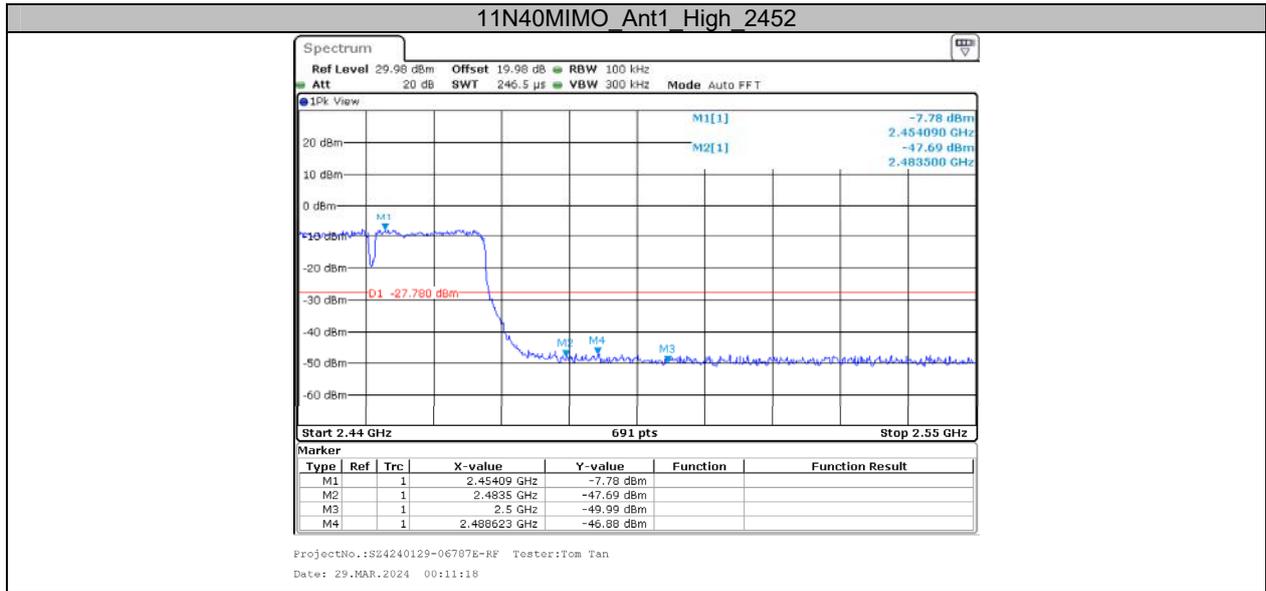


**Appendix F: Duty Cycle
Test Result**

Test Mode	Antenna	Frequency[MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	Duty Cycle Factor [dB]	1/T[Hz]	VBW Setting [Hz]
11B	Ant1	2437	100.00	100.00	100.00	/	/	10
11G	Ant1	2437	100.00	100.00	100.00	/	/	10
11N20	Ant1	2437	100.00	100.00	100.00	/	/	10
11N40	Ant1	2437	100.00	100.00	100.00	/	/	10

Test Graphs

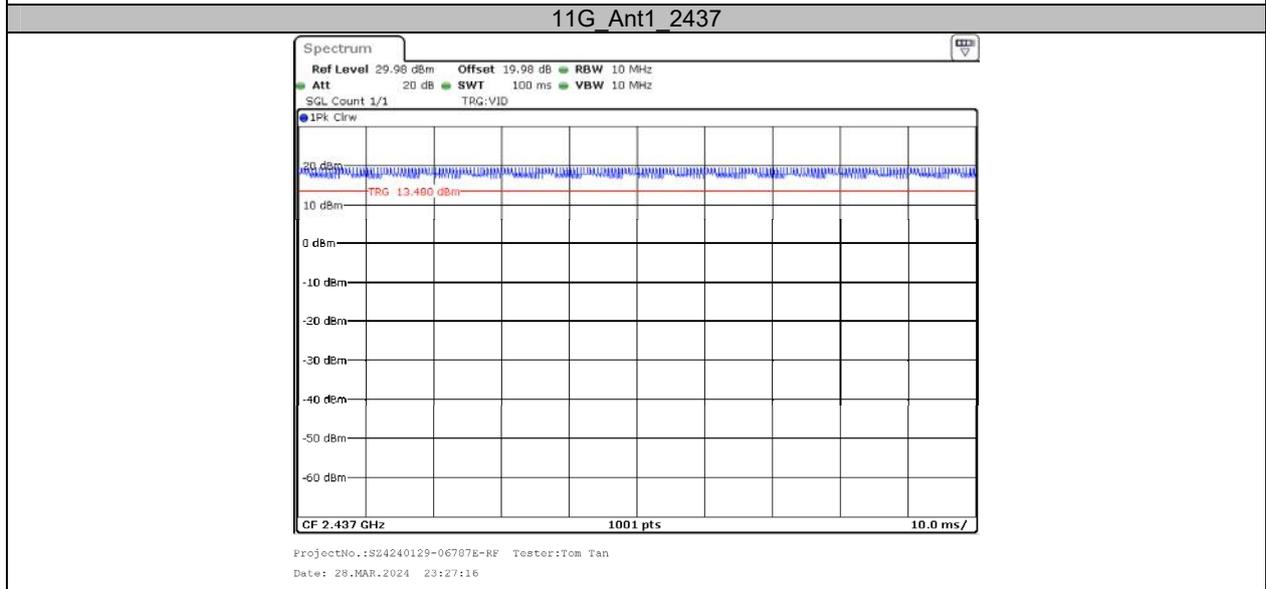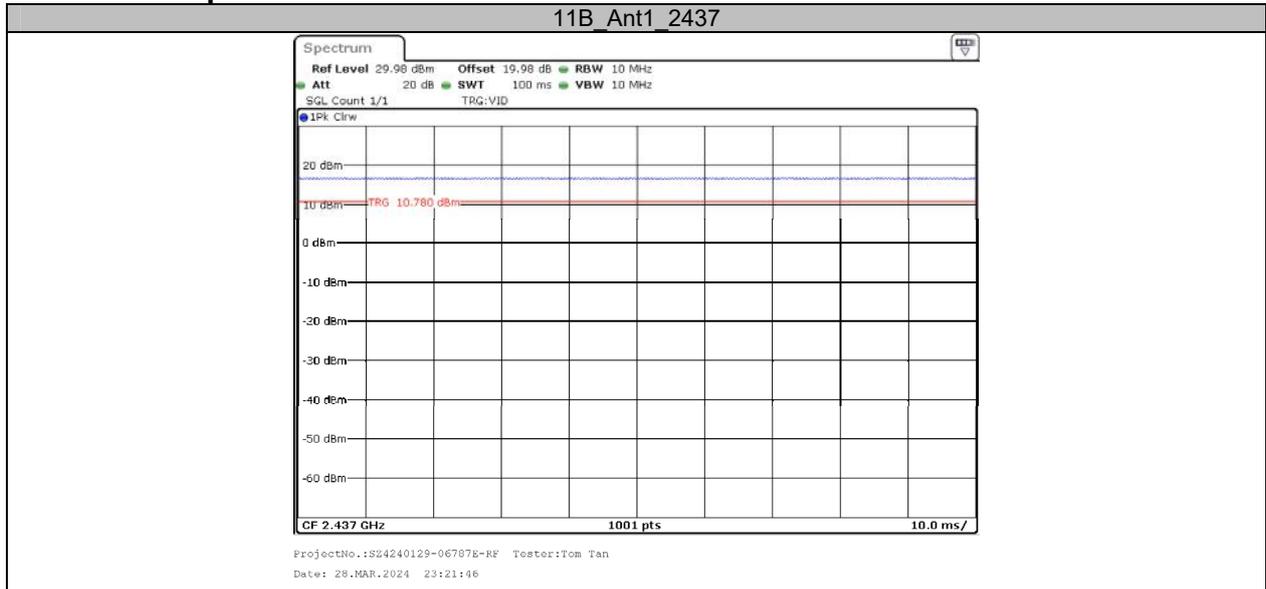

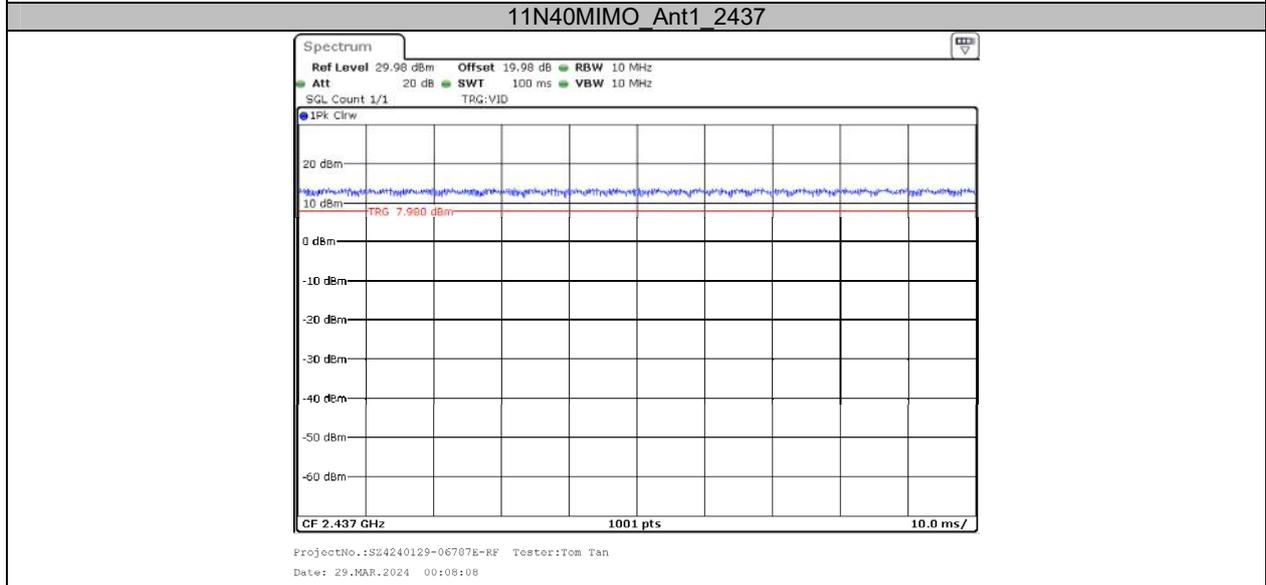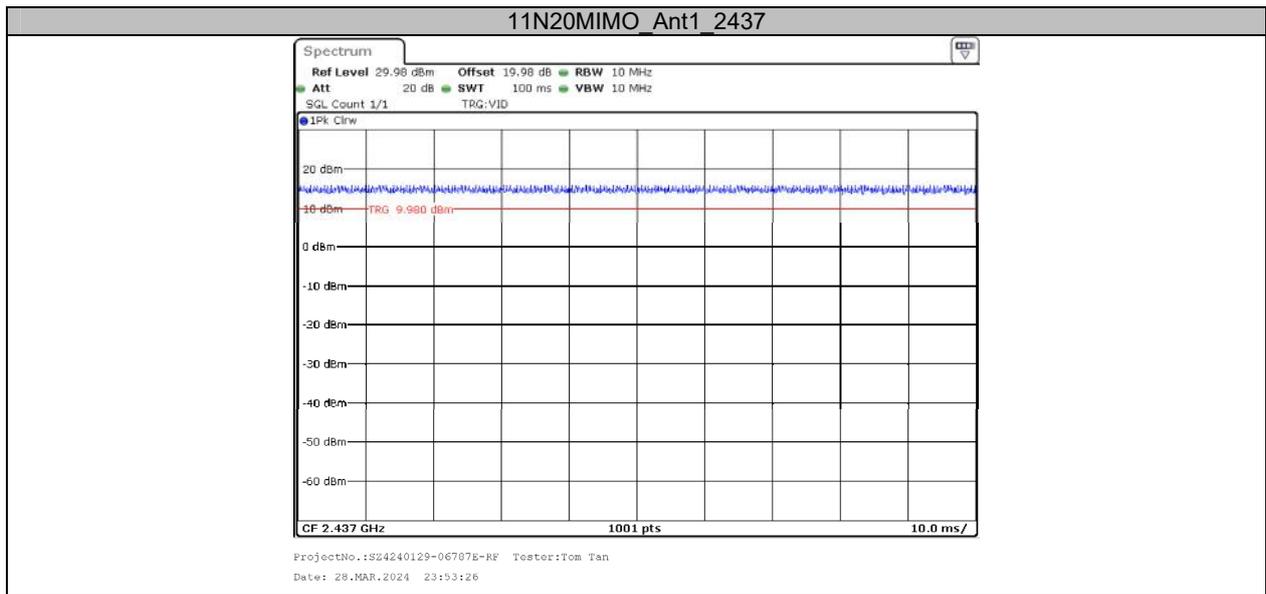

******* END OF REPORT *******