

FCC EVALUATION REPORT FOR CERTIFICATION

Manufacturer : OH SUNG Electronics Co., Ltd.
#181 Gongdan-dong, Gumi-si, Gyeongbuk
Republic of Korea.
Attn : Mr. Kwang-Jae Ok / Team Leader of Q.C

Date of Issue : November 18, 2009
Order Number: GETEC-C1-09-180
Test Report Number: GETEC-E3-09-097
Test Site: Gumi College EMC Center
FCC Registration Number: (100749, 443957)

FCC ID.: OZ5URCMX-880I

Applicant: OH SUNG Electronics Co., Ltd.

Rule Part(s) : FCC Part 15 subpart C-Intentional Radiator § 15.231
Equipment Class : Remote Control Transmitter (DSC)
EUT Type : RF remote controller
Type of Authority : Certification
Model Name : MX-880i
Trade Name : UNIVERSAL remote control

This equipment has been shown to be in compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003


I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the vest of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Tested by,

Reviewed by,



Soon-Hoon Jeong, Engineer
GUMI College EMC center



Tae-Sig Park, Technical Manager
GUMI College EMC center



CONTENTS

1. GENERAL INFORMATION	4
2. INTRODUCTION	5
3. PRODUCT INFORMATION	6
3.1 DESCRIPTION OF EUT.....	6
3.2 SUPPORT EQUIPMENT / CABLES USED	7
3.3 MODIFICATION ITEM(S).....	7
4. ANTENNA REQUIREMENT - §15.203	7
4.1 DESCRIPTION OF ANTENNA.....	7
5. DESCRIPTION OF TESTS.....	8
5.1 TEST CONDITION.....	8
5.2 CONDUCTED EMISSION	9
5.3 RADIATED EMISSION.....	10
5.4 DUTY CYCLE CORRECTION	11
5.5 OCCUPIED BANDWIDTH.....	11
6. CONDUCTED EMISSION.....	12
6.1 OPERATING ENVIRONMENT	12
6.2 TEST SET-UP.....	12
6.3 MEASUREMENT UNCERTAINTY	12
6.4 LIMIT	13
6.5 TEST EQUIPMENT USED	13
6.6 TEST DATA FOR POWER LINE CONDUCTED EMISSION.....	13
7. DUTY CYCLE CORRECTION.....	16
7.1 OPERATING ENVIRONMENT	16
7.2 TEST SET-UP	16
7.3 TEST EQUIPMENT USED.....	16
7.4 TEST RESULT OF DUTY CYCLE.....	16
8. RADIATED EMISSION	17
8.1 OPERATING ENVIRONMENT	17
8.2 TEST SET-UP.....	17
8.3 MEASUREMENT UNCERTAINTY	17
8.4 LIMIT	18
8.5 TEST EQUIPMENT USED	18
8.6 RADIATED EMISSION TEST DATA	19
9. OCCUPIED BANDWIDTH MEASUREMENT.....	21
9.1 OPERATING ENVIRONMENT	21
9.2 TEST SET-UP	21
9.3 LIMIT	21
9.4 TEST EQUIPMENT USED.....	21
9.5 TEST RESULT OF OCCUPIED BANDWIDTH.....	21
10. SAMPLE CALCULATIONS.....	22
10.1 EXAMPLE 1 :	22
10.2 EXAMPLE 2 :	22
11. RECOMMENDATION & CONCLUSION.....	23



APPENDIX A – ATTESTATION STATEMENT
APPENDIX B – TEST PLOTS
APPENDIX C – ID SAMPLE LABEL & LOCATION
APPENDIX D – BLOCK DIAGRAM
APPENDIX E – SCHEMATIC DIAGRAM
APPENDIX F – TEST SET-UP PHOTOGRAPHS
APPENDIX G – EXTERNAL PHOTOGRAPHS
APPENDIX H –INTERNAL PHOTOGRAPHS
APPENDIX I – USER’S MANUAL
APPENDIX J – OPERATIONAL DESCRIPTION



Scope: Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and / or unintentional radiators for compliance with technical rules and regulations of the Federal Communications Commission.

1. General Information

Applicant: OH SUNG Electronics Co., Ltd.

Applicant Address: #181 Gongdan-dong, Gumi-si, Gyeongbuk, Republic of Korea.

Manufacturer: OH SUNG Electronics Co., Ltd.

Manufacturer Address: #181 Gongdan-dong, Gumi-si, Gyeongbuk, Republic of Korea.

Contact Person: Mr. Kwang-Jae Ok / Team Leader Q.C

Tel Number: +82-54-468-0831 Fax Number: +82-54-461-8368

- **FCC ID.** OZ5URCMX-880I
- **Equipment Class** Remote Control Transmitter (DSC)
- **EUT Type** RF remote controller
- **Power Source** AC 120 V / 60 Hz
Li-on Rechargeable Battery 3.7 V , 1 330 mAh
- **Model Name** MX-880i
- **Trade Name** UNIVERSAL remote control
- **Rule Part(s)** FCC Part 15, Subpart C-Intentional Radiator § 15.231
- **Type of Authority** Certification
- **Test Procedure(s)** ANSI C63.4 (2003)
- **Dates of Test** September 09, 2009
- **Place of Test** **Gumi College EMC Center** (FCC Registration No.: 100749, 443957)
407, Bugok-Dong, Gumi-si, Gyeongsangbuk-Do, Korea.
- **Test Report Number** GETEC-E3-09-097
- **Dates of Issue** November 18, 2009

EUT Type: RF remote controller

FCC ID.: OZ5URCMX-880I



2. Introduction

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Nose Emissions From Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ASNI C63.4-2003) was used in determining radiated and conducted emissions emanating from **OH SUNG Electronics Co., Ltd. RF remote controller (Model Name: MX-880i)**

These measurement tests were conducted at **Gumi College EMC Center**.

The site address is 407, Bugok-dong, Gumi-si, Gyeongsangbuk-do, Korea.

This test site is one of the highest point of Gumi 1 college at about 200 kilometers away from Seoul city and 40 kilometers away from Daegu city. It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures. The detailed description of the measurement facility was found to be in compliance with the requirements of FCC §2.948 according to ANSI C63.4 (2003).



Fig 1. The map above shows the Gumi College in vicinity area.



3. Product Information

3.1 Description of EUT

The equipment under test (EUT) is the **OH SUNG Electronics Co., Ltd. RF remote controller (Model Name: MX-880i) FCC ID.: OZ5URCMX-880I**

Used AC/DC Adapter & Battery	:Adapter- TESA5G1-050010d2-1(UNIVERSAL remote control) Input: AC (100 ~ 240) V, (50/60) Hz, 0.2 A Output: DC 5 V, 1.0 A Battery- Li-ion Rechargeable BATTERY_3.7 V, 1 330 mAh
RF Frequency	: 433.92 MHz
Crystal, Clock Frequency	: 32.768 kHz, CPUX-TAL(8 MHz), MICOM X-TLA(8 MHz) on Main B'D 13.0625 MHz on RF module B'D
Number of Layer	: Main B'D 4 Layer RF Module B'D 2 Layer
External Connector	: USB, DC in
Antenna	: Built-in internal looped antenna on-board

Memory - 32 Megabits of Flash Memory Total (28 Megabits for User Configuration)

Customization Capability - Up to 48 devices and up to 8 pages each for a total of 384 pages.

Learning Capability - Standard frequencies (15kHz to 460kHz)

Macro Capability - Up to 255 steps each

IR Range (Line of Sight via Infrared): 30-50 feet, depending on the environment

RF Range (radio frequency): 50 to 100 feet, depending upon the environment

RF Frequency: 433MHz

Weight: 6.9 ounces (with battery loaded)

Size: 8" H x 2.25" W x 1.25" D

Battery: Lithium Ion rechargeable battery included



3.2 Support Equipment / Cables used

3.2.1 Used Support Equipment

-. None

3.2.2 Used Cable(s)

Cable Name	Condition	Description
Adapter cable	Connected to the EUT	1.85 m unshielded

See "Appendix F – Test Setup Photographs" for actual system test set-up

3.3 Modification Item(s)

-. None

4. Antenna Requirement - §15.203

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the applicant can be used with the device. The use of permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with this requirement.

4.1 Description of Antenna

The **OH SUNG Electronics Co., Ltd. RF Transmitter Universal Remote Control** comply with the requirement of § 15.203 with a built-in looped antenna permanently attached to the transmitter.



5. Description of tests

5.1 Test Condition

The EUT was installed, arranged and operated in a manner that is most representative of equipment as typically used. The measurements were carried out while varying operating modes and cable positions within typically arrangement to determine maximum emission level.

The representative and worst test mode(s) were noted in the test report.

Test Voltage / Frequency: AC 120 V / 60 Hz (Li-on Rechargeable Battery 3.7 V, 1 330 mAh)

- Test Mode(s)
 - . RF transmitting mode: Continuous RF transmitting mode



5.2 Conducted Emission

The Line conducted emission test facility is inside a 4 m × 8 m × 2.5 m shielded enclosure. (FCC Registration No.: 100749)

The EUT was placed on a non-conducting 1.0 m by 1.5 m table, which is 0.8 m in height and 0.4 m away from the vertical wall of the shielded enclosure.

The EUT is powered from the Rohde & Schwarz LISN (ESH2-Z5) and the support equipment is powered from the Rohde & Schwarz LISN (ESH3-Z5). Powers to the LISN are filtered by high-current high insertion loss power line filter.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

The RF output of the LISN was connected to the EMI test receiver (Rohde & Schwarz, ESCS30).

The EMI test receiver was scanned from 150 kHz to 30 MHz with 20 ms sweep time to determine the frequency producing the maximum EME from the EUT. The frequency producing the maximum level was re-examined using Quasi-Peak mode of the EMI test receiver.

The bandwidth of Quasi-peak mode was set to 9 kHz. Each emission was maximized consistent with typical applications by varying the configuration of the test sample. Interface cables were connected to the available interface ports of the test unit. The effect of varying the position of cables was investigated to find the configuration that produces maximum diagram emission. Excess cable lengths were bundled at center with 30 cm ~ 40 cm.

Each EME reported was calibrated using the R/S signal generator

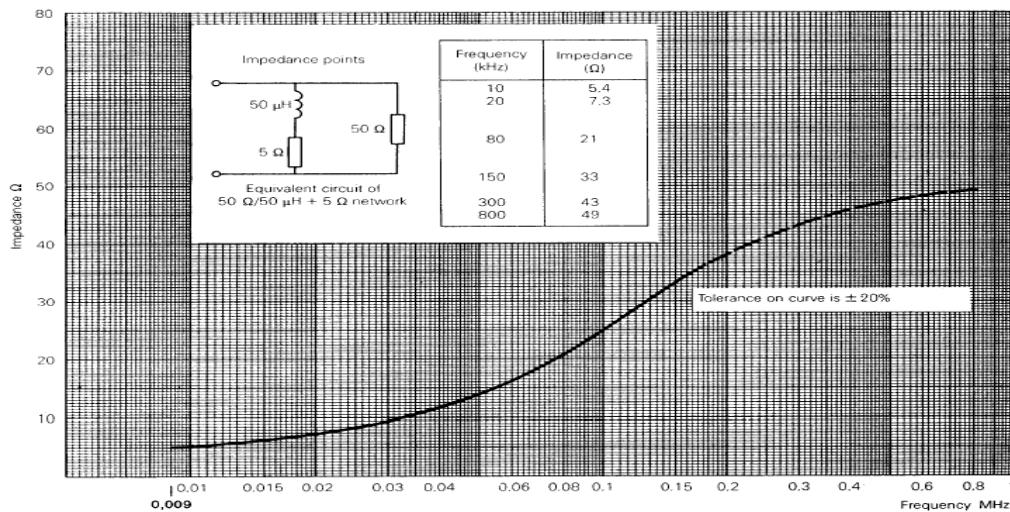


Fig 2. Impedance of LISN



5.3 Radiated Emission

The measurements were conducted in a 3 m anechoic chamber (FCC Registration No.: 443957) using broadband antennas to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The technology configuration, mode of operation and turntable azimuth with respect to antenna was noted for each frequency found.

The spectrum was scanned from 30 to 1000 MHz, using a biconical log antenna (Schwarzbeck, VULB9160).

Above 1 GHz, a horn antenna (Schwarzbeck, BBHA9120D / EMCO 3160) was used.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

Each frequency found during pre-scan measurements was re-examined and investigated using an EMI test receiver. The detector function was set to CISPR quasi-peak mode average mode and the bandwidth of the receiver was set to 120 kHz or 1 MHz depending on the frequency or type of signal.

The EUT, support equipment and interconnecting cables were reconfigured to the setup producing the maximum emission for the frequency and were placed on top of a 0.8 m high non-metallic 1.0 m × 1.5 m table.

The turntable containing the test sample was rotated; the antenna height was varied from 1 m to 4 m and stopped at the azimuth or height producing the maximum emission.

Each EME reported was calibrated using the R/S signal generator.

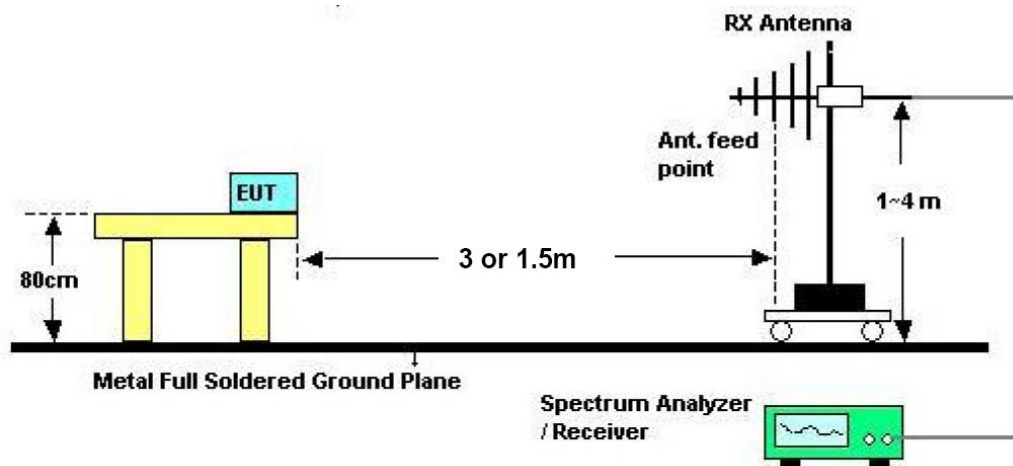


Fig 3. Dimensions of test site.



5.4 Duty Cycle Correction

Measurements may be adjusted where pulsed RF is utilized to find the average level associated with a quantity.

This calculation is applied to limits for pulsed licensed and unlicensed devices.

For unlicensed intentional radiator under 47CFR Part 15 §15.35, all duty cycle measurements are compared to a 100 millisecond period.

On time = $N_1L_1 + N_2L_2 + \dots + N_nL_n$, where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.

Duty Cycle = on time/100 millisecond.

5.5 Occupied Bandwidth

Occupied bandwidth was performed by coupling the output of the EUT to the input of a spectrum analyzer.

The bandwidth of the emission shall be no wider than 0.25 % of the center frequency for device operating above 70 MHz and below 900 MHz. For device operating above 900 MHz, the emission shall be no wider than 0.5 % of the center frequency. The bandwidth is determined at the points 20 dB down from the modulated carrier.



6. Conducted Emission

6.1 Operating environment

Temperature : 25 °C
Relative humidity : 57 % R.H

6.2 Test set-up

The conducted emission measurements were performed in the shielded room.

The EUT was placed on wooden table, 0.8 m heights above the floor, 0.4 m from the reference ground plane (GRP) wall and 0.8 m from AMN.

AMN is bonded on horizontal reference ground plane.

The ground plane, which was electrically bonded to the shield room, ground system and all power lines entering the shield room, were filtered.

6.3 Measurement uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement.”

The measurement uncertainty was given with a confidence of 95 %.

Test items	Uncertainty	Remark
Conducted emission (9 kHz ~ 150 kHz)	± 2.69 dB	Confidence levels of 95 % (k=2)
Conducted emission (150 kHz ~ 30 MHz)	± 4.16 dB	Confidence levels of 95 % (k=2)



6.4 Limit

RFI Conducted	FCC Limit(dB) Class B	
	Quasi-Peak	Average
Freq. Range		
150 kHz ~ 0.5 MHz	66 ~ 56*	56 ~ 46*
0.5 MHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50

*Limits decreases linearly with the logarithm of frequency.

6.5 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Due to calibration
■ - ESCS30	Rohde & Schwarz	EMI test receiver	839809/003	12. 14. 2009
■ - ESH2-Z5	Rohde & Schwarz	Artificial mains network	829991/009	12. 13. 2009
□ - ESH3-Z5	Rohde & Schwarz	Artificial mains network	838979/020	12. 13. 2009


6.6 Test data for power line conducted emission

6.6.1 Test mode: RF transmitting mode.

- Test Date : September 09, 2009
- Resolution Bandwidth : 9 kHz
- Frequency Range : 0.15 MHz ~ 30 MHz



Voltage with 4-Line-LISN_L1

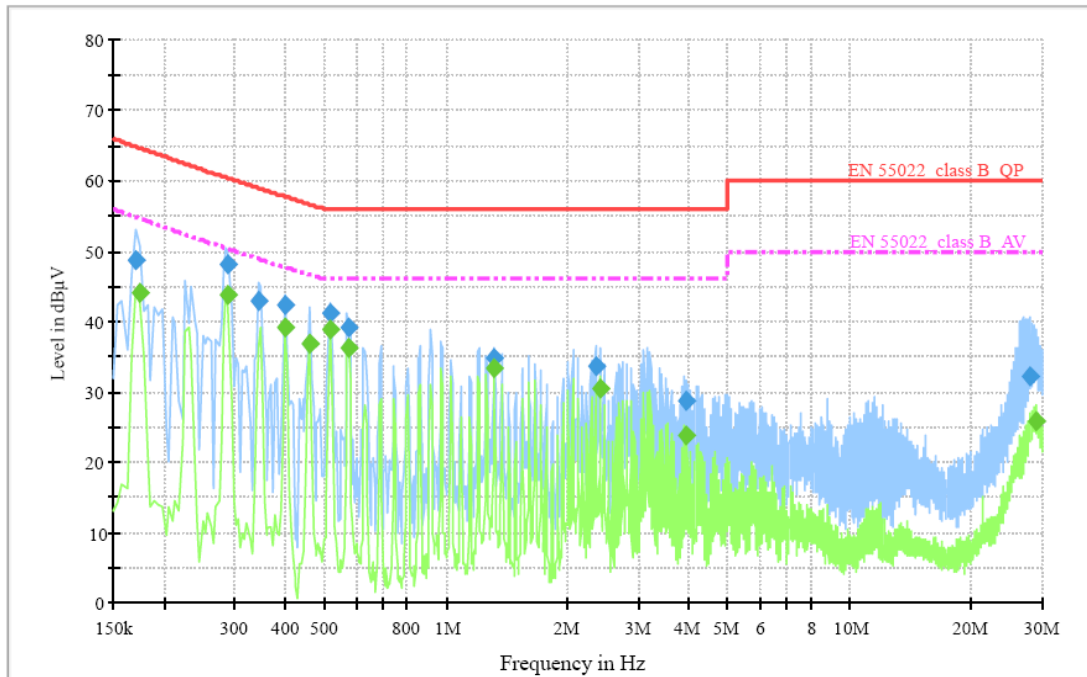

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.170000	48.6	1000.000	9.000	GND	L1	9.9	16.3	64.9	
0.288000	48.2	1000.000	9.000	GND	L1	10.0	12.2	60.4	
0.344000	42.9	1000.000	9.000	GND	L1	10.0	16.0	58.9	
0.400000	42.4	1000.000	9.000	GND	L1	10.0	15.3	57.7	
0.516000	41.0	1000.000	9.000	GND	L1	10.0	15.0	56.0	
0.572000	39.0	1000.000	9.000	GND	L1	10.0	17.0	56.0	
1.320000	34.7	1000.000	9.000	GND	L1	10.0	21.3	56.0	
2.352000	33.8	1000.000	9.000	GND	L1	10.1	22.2	56.0	
3.952000	28.8	1000.000	9.000	GND	L1	10.2	27.2	56.0	
27.916000	32.1	1000.000	9.000	GND	L1	11.0	27.9	60.0	


Final Measurement Detector 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.174000	44.0	1000.000	9.000	GND	L1	9.9	10.7	54.7	
0.288000	43.7	1000.000	9.000	GND	L1	10.0	6.6	50.3	
0.400000	39.1	1000.000	9.000	GND	L1	10.0	8.6	47.7	
0.460000	36.8	1000.000	9.000	GND	L1	10.0	9.8	46.6	
0.516000	38.7	1000.000	9.000	GND	L1	10.0	7.3	46.0	
0.572000	36.3	1000.000	9.000	GND	L1	10.0	9.7	46.0	
1.316000	33.4	1000.000	9.000	GND	L1	10.0	12.6	46.0	
2.408000	30.4	1000.000	9.000	GND	L1	10.1	15.6	46.0	
3.952000	23.8	1000.000	9.000	GND	L1	10.2	22.2	46.0	
28.924000	25.9	1000.000	9.000	GND	L1	11.1	24.1	50.0	

< Fig 4. Conducted emission result (Live line)>



Voltage with 4-Line-LISN_N

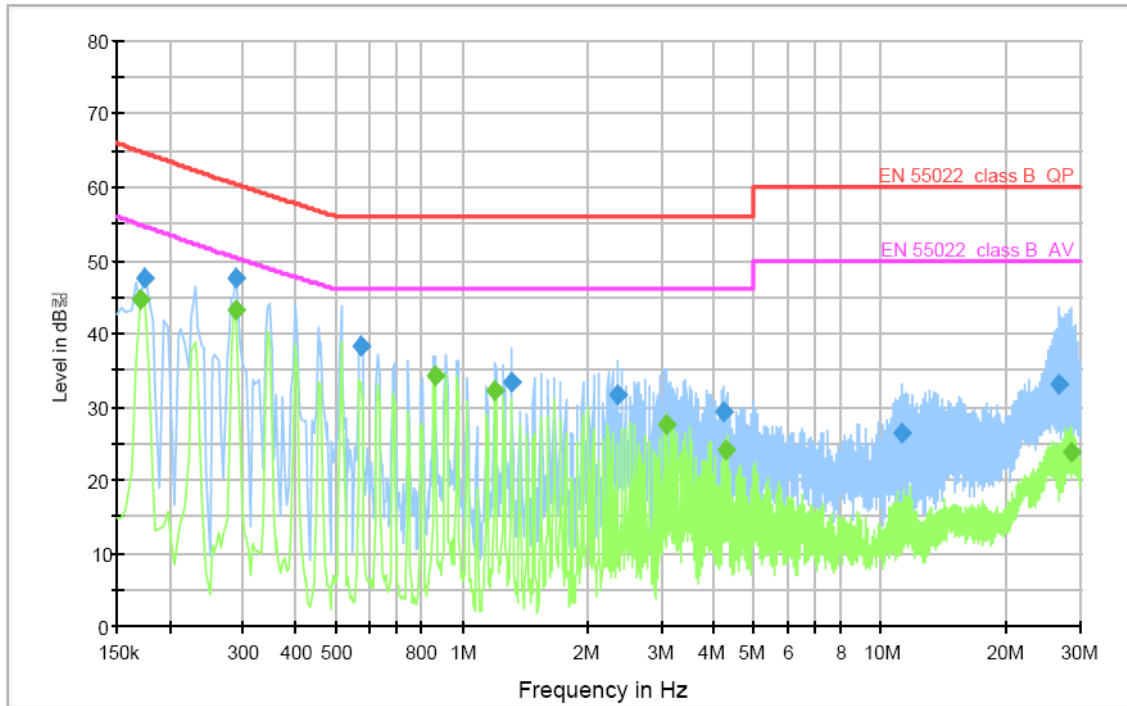

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.174000	47.5	1000.000	9.000	GND	N	9.9	17.2	64.7	
0.288000	47.5	1000.000	9.000	GND	N	10.0	12.9	60.4	
0.572000	38.1	1000.000	9.000	GND	N	10.0	17.9	56.0	
1.316000	33.2	1000.000	9.000	GND	N	10.0	22.8	56.0	
2.352000	31.7	1000.000	9.000	GND	N	10.1	24.3	56.0	
4.244000	29.2	1000.000	9.000	GND	N	10.2	26.8	56.0	
11.284000	26.4	1000.000	9.000	GND	N	10.3	33.6	60.0	
26.684000	33.1	1000.000	9.000	GND	N	10.8	26.9	60.0	

Final Measurement Detector 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.170000	44.7	1000.000	9.000	GND	N	9.9	10.2	54.9	
0.288000	43.3	1000.000	9.000	GND	N	10.0	7.0	50.3	
0.860000	34.2	1000.000	9.000	GND	N	10.0	11.8	46.0	
1.204000	32.3	1000.000	9.000	GND	N	10.0	13.7	46.0	
3.092000	27.6	1000.000	9.000	GND	N	10.1	18.4	46.0	
4.296000	24.0	1000.000	9.000	GND	N	10.2	22.0	46.0	
28.512000	23.9	1000.000	9.000	GND	N	10.8	26.1	50.0	

< Fig 5. Conducted emission result (Neutral line)>



7. Duty Cycle Correction

7.1 Operating Environment

Temperature : 21 °C
 Relative humidity : 47 % R.H.

7.2 Test Set-up

The spectrum analyzer was set to Zero span and the video triggered to collect the pulse train of the modulation. Calculations of the duty cycle correction factor were obtained from time data provided by the plots.

7.3 Test Equipment used

Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - ESI	Rohde & Schwarz	EMI test receiver	830482/010	12. 14. 2009
■ - VULB9160	Schwarzbeck	Bi-log antenna	3193	12. 11. 2009

7.4 Test result of Duty Cycle

- Test Date : September 09, 2009
 - Reference standard : Part 15 subpart C, Sec. 15.35
 - Operating condition : RF transmitting mode
 - Spectrum resolution bandwidth(6dB) : 100 kHz
 - Power Source : AC 120 V/ 60 Hz, Li-on Rechargeable Battery 3.7 V , 1 330 mAh

7.4.1 Test Frequency: 433.92 MHz

Define of duty cycle

- Number of Code groups per 100 ms = 1
 - Number of Wide Pulse = 335
 - Width of Pulses = 0.006 ms
 - Number of Narrow Pulse = 693
 - Width of Pulses = 0.006 μs

Calculation of duty cycle

- Total width of pulse train: $335 \times 0.006 \text{ ms} + 693 \times 0.006 \mu\text{s} = 6.17 \text{ ms}$
 - Duty Cycle (%): $6.17 \text{ ms} / 100 \text{ ms} = 6.17 \%$
 - Duty Cycle (dB): -24.20 dB

Fundamental Frequency	Total width of ON-Time	Duty Cycle (%)	Duty Cycle (dB)
433.92 MHz	6.17 ms	6.17 %	- 24.20 dB



8. Radiated Emission

8.1 Operating environment

Temperature : 21 °C
Relative humidity : 47 % R.H.

8.2 Test set-up

A preliminary and final measurement was at 3 m Anechoic chamber.

The EUT was placed on a non-conductive turntable approximately 0.8 m above the ground plane.

The turntable with EUT was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels.

This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

8.3 Measurement uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement”.

The measurement uncertainty was given with a confidence of 95 %.

Test items	Uncertainty	Remark
Radiated emission (30 MHz ~ 300 MHz, 3m, Vertical)	± 3.54 dB	Confidence levels of 95 % (k=2)
Radiated emission (30 MHz ~ 300 MHz, 3m, Horizontal)	± 3.49 dB	Confidence levels of 95 % (k=2)
Radiated emission (300 MHz ~ 1 000 MHz, 3m, Vertical)	± 3.70 dB	Confidence levels of 95 % (k=2)
Radiated emission (300 MHz ~ 1 000 MHz, 3m, Horizontal)	± 3.61 dB	Confidence levels of 95 % (k=2)
Radiated emission (30 MHz ~ 300 MHz, 10m, Vertical)	± 3.21 dB	Confidence levels of 95 % (k=2)
Radiated emission (30 MHz ~ 300 MHz, 10m, Horizontal)	± 3.32 dB	Confidence levels of 95 % (k=2)
Radiated emission (300 MHz ~ 1 000 MHz, 10m, Vertical)	± 3.63 dB	Confidence levels of 95 % (k=2)
Radiated emission (300 MHz ~ 1 000 MHz, 10m, Horizontal)	± 3.69 dB	Confidence levels of 95 % (k=2)



8.4 Limit

Fundamental Frequency (MHZ)	Field strength of Fundamental			Field strength of Spurious Emission	
	$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$	$\mu\text{V/m}$	$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
40.66~40.7	2 250	67.04		225	47.04
70~130	1 250	61.94		125	41.94
130~174	1 250 to 3 750	61.94 to 71.48	56.81818(F)-6136.3636	125 to 375	41.94 to 51.48
174~260	3 750	71.48		375	51.48
260~470	3 750 to 12 500	71.48 to 81.94	41.6667(F)-7083.3333	375 to 1250	51.48 to 61.94
Above 470	12 500	81.94		1250	61.94
Restricted Band	N/A			500	54.0

8.5 Test equipment used

Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - ESI	Rohde & Schwarz	EMI test receiver	830482/010	12. 14. 2009
■ - VULB9160	Schwarzbeck	Bi-log antenna	3193	12. 11. 2009
■ - BBHA9120D	Schwarzbeck	Horn antenna	207	12. 26. 2009
■ - MCU066	matur GmbH	Position Controller	1390306	N/A
■ - AM4.0	matur GmbH	Antenna Mast	1390308	N/A
■ - TT2.5SI	matur GmbH	Turntable	1390307	N/A
■ - AFS 44 00101800-25-10P-44	MITEQ	Preamplifier	1258943	11. 11. 2009



8.6 Radiated emission test data

- Test Date : September 09, 2009
- Reference standard : Part 15 subpart C, Sec.15.231
- Measuring Distance : 3 m
- Spectrum resolution bandwidth (6 dB): 120 kHz/ 1 MHz
- Detector mode : Peak detector mode/ Average detector mode
- Power Source : AC 120 V/ 60 Hz, Li-on Rechargeable Battery 3.7 V, 1 330 mAh
- Note : 1.Through three orthogonal axes were investigated and the worst case is reported.

8.6.1 Operating condition: RF mode (433.92 MHz)

♦ Field Strength of the Fundamental & harmonic frequencies emission.

Frequency (MHz)	Measurement Level					Limit		Margin		Positioning System		
	Reading (dBuV/m)	Tranduce (dB)	Duty cycle (dB)	Peak (dBuV/m)	Average (dBuV/m)	Peak (dBuV/m)	Aveage (dBuV/m)	Peak (dBuV/m)	Average (dBuV/m)	Pol. (H/V)	Height (cm)	Angle (deg)
Fundamental												
433.92	80.97	19.29	-24.20	100.26	76.06	100.83	80.83	0.57	4.76	V	100	270
Spurious												
867.84	29.4	27.58	-24.20	57.01	32.81	80.83	60.83	23.82	28.01	H	137	270
1301.76	78.7	-14.84	-24.20	63.90	39.70	74.00	54.00	10.10	14.30	V	150	90
1735.68	74.2	-13.39	-24.20	60.80	36.60	80.83	60.83	20.03	24.22	V	150	270
2169.60	67.1	-11.81	-24.20	55.30	31.10	80.83	60.83	25.53	29.72	V	100	90
2603.52	64.0	-9.98	-24.20	54.00	29.80	80.83	60.83	26.83	31.02	H	200	270
3037.44	64.3	-8.41	-24.20	55.90	31.70	80.83	60.83	24.93	29.12	H	150	180
3471.36	64.2	-7.24	-24.20	57.00	32.80	80.83	60.83	23.83	28.02	V	200	180
3905.28	62.3	-5.20	-24.20	57.10	32.90	74.00	54.00	16.90	21.10	V	200	180
4339.20				<<								

*Comment ; below 1GHz : Tranduce = ANT factor + cable loss
 above 1GHz : Tranduce = ANT factor + cable loss + AMP gain


<<: The magin is more than 30 dB

Note: "H": Horizontal, "V": Vertical



◆ Field Strength of the spurious emission except the harmonic frequencies


Frequency (MHz)	Measurement Level				Limit (dBμ V/m)	Margin (dB)	Positioning System		
	Reading	Antenna	Cable	Test Result			Pol.	Height	Angle
	Value(dBμ V)	Factor(dB/m)	Loss(dB)	(dBμ V/m)			(H/V)	(cm)	(°)
218.55	14.43	10.03	2.54	27.00	46.00	19.00	H	200	270

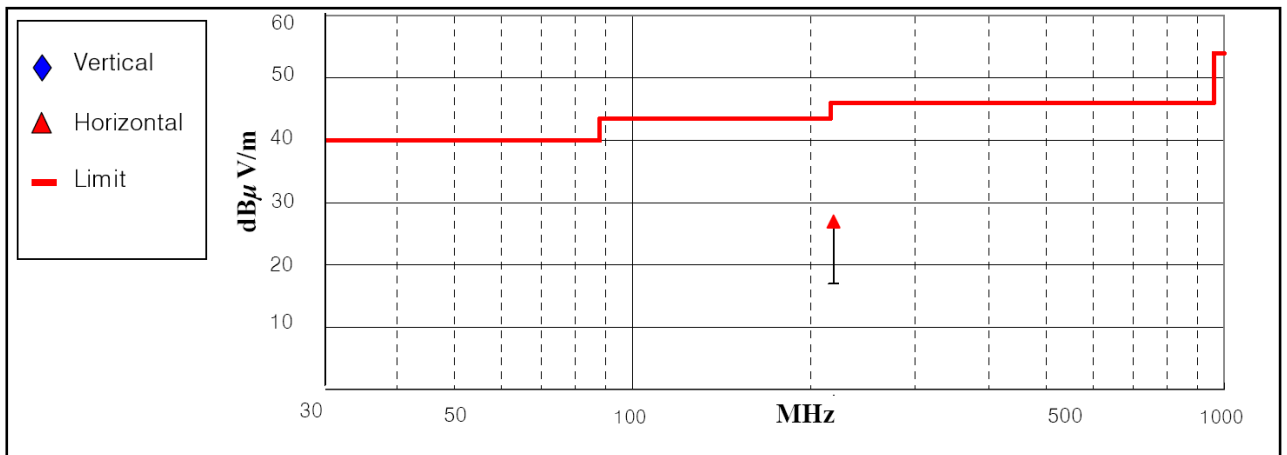

< Fig 6. Radiated emission result (30 MHz ~ 1 000 MHz) >

◆ Field Strength of the spurious emission except the harmonic frequencies

Frequency (MHz)	Measurement Level						Limit (dBμ V/m)		Margin (dB)		Positioning System		
	Reading Value (dBμ V/m)		AF	AMP / CL	Test Result (dBμ V/m)		Peak	Average	Peak	Average	Pol.	Height	Angle
	Peak	Average	(dB/m)	(dB)	Peak	Average	-	-	-	-	(H/V)	(cm)	(°)
All frequency	-	-	-	-	<<	<<	-	-	-	-	-	-	-

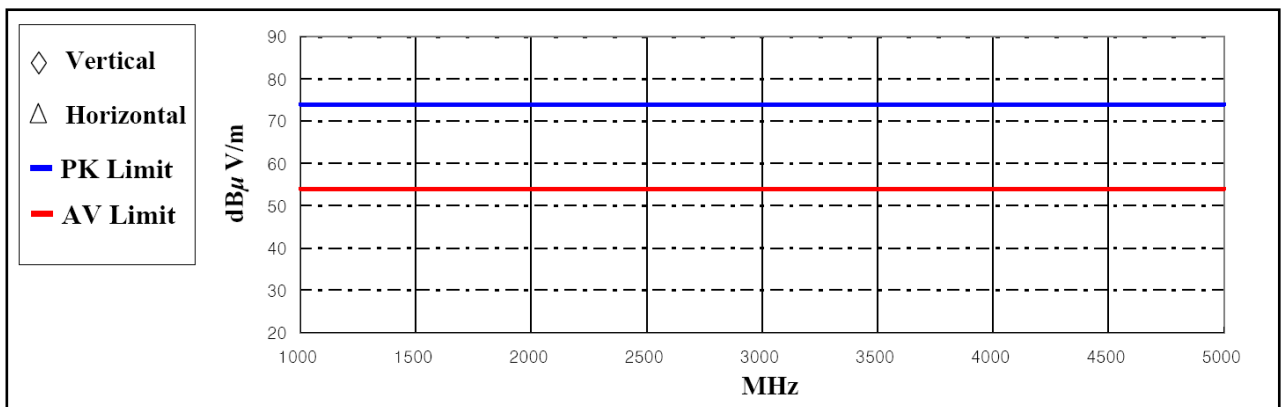

*Comment : AMP/CL_Cable loss value + AMP gain value
 AF : Antenna factor value
 Pol. : H(Horizontal), V(Vertical)

"<<" The margin is more than 30 dB

< Fig 7. Radiated Emission result (1 000 MHz ~ 5 000 MHz) >



9. Occupied Bandwidth Measurement

9.1 Operating Environment

Temperature : 21 °C
 Relative humidity : 47 % R.H.

9.2 Test Set-up

This measurement is performed with the antenna located close enough to give a full-scale deflection of the modulated carrier on the spectrum analyzer. The plot is taken at 200 kHz/division frequency span, 100 kHz 3 dB resolution bandwidth and 5 dB/division logarithmic displays from an ESI spectrum analyzer.
 The measuring bandwidth shall be set to a value greater than 5 % of the allowed bandwidth (ANSI C63.4-1992 I6)

9.3 Limit

Frequency Range(MHz)	Occupied Bandwidth Limit
70 ~ 900 MHz	0.25 %
>900 MHz	0.5 %

9.4 Test Equipment used

Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - ESI	Rohde & Schwarz	EMI test receiver	830482/010	12. 14. 2009
■ - VULB9160	Schwarzbeck	Bi-log antenna	3193	12. 11. 2009

9.5 Test result of occupied bandwidth

- . Test Date : September 09, 2009
 - . Reference standard : Part 15 subpart C, Sec. 15.231
 - . Operating condition : RF transmitting mode
 - . Spectrum resolution bandwidth(3dB) : 100 kHz
 - . Power Source : AC 120 V/ 60 Hz, Li-on Rechargeable Battery 3.7 V , 1 330 mAh

9.5.1 Test Frequency: 433.92 MHz

Allowed Bandwidth: $433.92 \times 0.0025 = 1\ 085\ \text{kHz}$

Fundamental Frequency	Bandwidth	Allowed Bandwidth	Result
433.92 MHz	809.619 kHz	1 085 kHz	PASS

Refer to APPENDIX B: Test Plots of occupied bandwidth



10. Sample Calculations

$$\begin{aligned} \text{dB}\mu\text{V} &= 20 \text{ Log}_{10}(\mu\text{V}/\text{m}) \\ \text{dB}\mu\text{V} &= \text{dBm} + 107 \\ \mu\text{V} &= 10^{(\text{dB}\mu\text{V}/20)} \end{aligned}$$

10.1 Example 1 :

■ 20.3 MHz

Class B Limit	= 250 μV = 48 dB μV
Reading	= 39.2 dB μV
$10^{(39.2\text{dB}\mu\text{V}/20)}$	= 91.2 μV
Margin	= 48 dB μV - 39.2 dB μV = 8.8 dB

10.2 Example 2 :

■ 66.7 MHz

Class B Limit	= 100 $\mu\text{V}/\text{m}$ = 40.0 dB $\mu\text{V}/\text{m}$
Reading	= 31.0 dB μV
Antenna Factor + Cable Loss	= 5.8 dB
Total	= 36.8 dB $\mu\text{V}/\text{m}$
Margin	= 40.0 dB $\mu\text{V}/\text{m}$ - 36.8 dB $\mu\text{V}/\text{m}$ = 3.2 dB



11. Recommendation & conclusion

The data collected shows that the Gumi College EMC Center.

OH SUNG Electronics Co., Ltd. RF remote controller (Model Name: MX-880i) was complies with §15.231 of the FCC Rules.