

FCC EVALUATION REPORT FOR CERTIFICATION

Manufacturer : OHSUNG ELECTRONICS CO., LTD

Date of Issue : July 7, 2008

#181 Gongdan-Dong, Gumi, GyeongBuk

Test Report S/N : GETEC-E3-08-029

Republic of Korea

Test Site : Gumi College EMC Center

Attn : Mr. Kwang-Jae Ok / Team Leader of Q.C

FCC ID

OZ5URCMX450

APPLICANT

OHSUNG ELECTRONICS CO., LTD

Rule Part(s) : FCC Part 15 Subpart C-Intentional Radiator § 15.231

Equipment Class : Remote Control Transmitter (DSC)

EUT Type : RF Remote Controller

Trade Name : UNIVERSAL remote control

Model No. : MX-450

This equipment has been shown to be in compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the vest of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Tested by,

Reviewed by,



**Hyoung Seop Kim, Associate Engineer
GUMI College EMC center**



**Tae-Sig Park, Technical Manager
GUMI College EMC center**

CONTENTS

1. GENERAL INFORMATION	4
2. INTRODUCTION	5
3. PRODUCT INFORMATION	6
3.1 DESCRIPTION OF EUT.....	6
3.2 SUPPORT EQUIPMENT / CABLES USED	7
3.3 MODIFICATION ITEM(S).....	7
4. DESCRIPTION OF TESTS.....	8
4.1 TEST CONDITION.....	8
5. ANTENNA REQUIREMENT - §15.203	8
5.1 DESCRIPTION OF ANTENNA.....	8
5.3 RADIATED EMISSION.....	9
5.4 DUTY CYCLE CORRECTION	10
5.5 OCCUPIED BANDWIDTH.....	10
6. DUTY CYCLE CORRECTION.....	11
6.1 OPERATING ENVIRONMENT	11
6.2 TEST SET-UP.....	11
6.3 TEST EQUIPMENT USED	11
6.4 TEST RESULT OF DUTY CYCLE.....	11
7. RADIATED EMISSION	12
7.1 OPERATING ENVIRONMENT	12
7.2 TEST SET-UP.....	12
7.3 MEASUREMENT UNCERTAINTY	12
7.4 LIMIT	13
7.5 TEST EQUIPMENT USED	13
7.6 RADIATED EMISSION TEST DATA	14
8. OCCUPIED BANDWIDTH MEASUREMENT.....	16
8.1 OPERATING ENVIRONMENT	16
8.2 TEST SET-UP.....	16
8.3 LIMIT	16
8.4 TEST EQUIPMENT USED	16
8.5 TEST RESULT OF OCCUPIED BANDWIDTH.....	16
9. SAMPLE CALCULATIONS.....	17
9.1 EXAMPLE 1 :	17
9.2 EXAMPLE 2 :	17
10. RECOMMENDATION & CONCLUSION.....	18
APPENDIX A – ATTESTATION STATEMENT	
APPENDIX B – TEST PLOTS	

APPENDIX C – FCC ID LABEL & LOCATION
APPENDIX D – BLOCK DIAGRAM(S)
APPENDIX E – SCHEMATIC DIAGRAM(S)
APPENDIX F – TEST SET UP PHOTOS
APPENDIX G – EXTERNAL PHOTOGRAPHS
APPENDIX H – INTERNAL PHOTOGRAPHS
APPENDIX I – USER’S MANUAL
APPENDIX J – OPERATIONAL DESCRIPTION
APPENDIX K – CONFIDENTIAL REQUEST

Scope: Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and / or unintentional radiators for compliance with technical rules and regulations of the Federal Communications Commission.

1. General Information

Applicant: OHSUNG ELECTRONICS CO., LTD.

Applicant Address: #181 Gongdan-Dong, Gumi-Si, Gyeongsangbuk-do, Korea

Manufacturer: OHSUNG ELECTRONICS CO., LTD

Manufacturer Address: #181 Gongdan-Dong, Gumi-Si, Gyeongsangbuk-do, Korea

Contact Person: Mr. Kwang-Jae Ok / Team Leader Q.C

Tel. & Fax No.: Tel No.: +82-54-468- 0831 Fax No.: +82-54- 461- 8368

- **FCC ID.** OZ5URCMX450
- **Equipment Class** Remote Control Transmitter (DSC)
- **EUT Type** RF Remote Controller
- **Power Source** DC 6 V supplied from four AA size batteries
- **Model No.** MX-450
- **Rule Part(s)** FCC Part 15, Subpart C-Intentional Radiator § 15.231
- **Type of Authority** Certification
- **Test Procedure(s)** ANSI C63.4 (2003)
- **Dates of Test** June 30, 2008
- **Place of Test** **Gumi College EMC Center** (FCC Registration No.: 100749)
407, Bugok-Dong, Gumi-si, Gyeongsangbuk-Do, Korea
- **Test Report No.** GETEC-E3-08-029
- **Dates of Issue** July 7, 2008

2. Introduction

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Nose Emissions From Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ASNI C63.4-2003) was used in determining radiated and conducted emissions emanating from **OHSUNG ELECTRONICS CO., LTD. RF Remote Controller (Model No.: MX-450)**

These measurement tests were conducted at **Gumi College EMC Center**.

The site address is 407, Bugok-Dong, Gumi-si, Gyeongsangbuk-Do, Korea

This test site is one of the highest point of Gumi 1 college at about 200 kilometers away from Seoul city and 40 kilometers away from Daege city. It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures. The detailed description of the measurement facility was found to be in compliance with the requirements of §2.948 according to ANSI C63.4 on October 19, 1992



Fig 1. The map above shows the Gumi College in vicinity area.

3. Product Information

3.1 Description of EUT

The Equipment Under Test (EUT) is the **OHSUNG ELECTRONICS CO., LTD. RF Remote Controller (Model No.: MX-450) FCC ID.: OZ5URCMX450**

Rate of Power supply	: DC 6 V supplied from four AA size battery
RF Frequency	: 418 MHz
External Connector	: USB
Crystal & Clock Frequency	: 18.432 kHz, 8 MHz on Main B'D 13.0625 MHz on RF MODULE B'D
Number of Layer	: Main B'D 2 Layer RF Module B'D 2 Layer

3.2 Support Equipment / Cables used

3.2.1 Used Support Equipment

Description	Manufacturer	Model No.	S/N & FCC ID
None	-	-	

See "Appendix F – Test Setup Photographs" for actual system test set-up

3.2.2 Used Cable(s)

Cable No.	Condition	Description
USB cable	Connected to the EUT and Notebook PC	1.2 m shielded with a ferrite core.

3.3 Modification Item(s)

-. None.

4. Description of tests

4.1 Test Condition

The EUT was installed, arranged and operated in a manner that is most representative of equipment as typically used. The measurements were carried out while varying operating modes and cable positions within typically arrangement to determine maximum emission level.

The representative and worst test mode(s) were noted in the test report.

Test Voltage / Frequency: DC 6 V supplied from four AA size batteries

- Test Mode(s)
 - . RF mode: RF transmitting mode

5. Antenna Requirement - §15.203

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the applicant can be used with the device. The use of permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with this requirement.

5.1 Description of Antenna

The **OHSUNG ELECTRONICS CO., LTD RF Transmitter Universal Remote Control** comply with the requirement of §15.203 with a built-in looped antenna permanently attached to the transmitter.

5.3 Radiated Emission

Preliminary measurements were conducted 3 m semi anechoic chamber using broadband antennas to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The technology configuration, mode of operation and turntable azimuth with respect to antenna was note for each frequency found.

The spectrum was scanned from 30 MHz to 1 000 MHz using bicornical log antenna (Schwarz beck, VULB9160). Above 1 GHz, horn antenna (Schwarz beck, BBHA9120D) was used.

Final measurements were made outdoors at 3 m/10 m test range.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

Each frequency found during pre-scan measurements was re-examined and investigated using EMI test receiver. The detector function was set to CISPR quasi-peak mode average mode and the bandwidth of the receiver was set to 120 kHz or 1 MHz depending on the frequency or type of signal.

The EUT, support equipment and interconnecting cables were reconfigured to the setup producing the maximum emission for the frequency and were placed on top of a 0.8 m high non-metallic 1.0 m × 1.5 m table.

The turntable containing the test sample was rotated; the antenna height was varied 1 m to 4 m and stopped at the azimuth or height producing the maximum emission.

Each EME reported was calibrated using the R/S signal generator

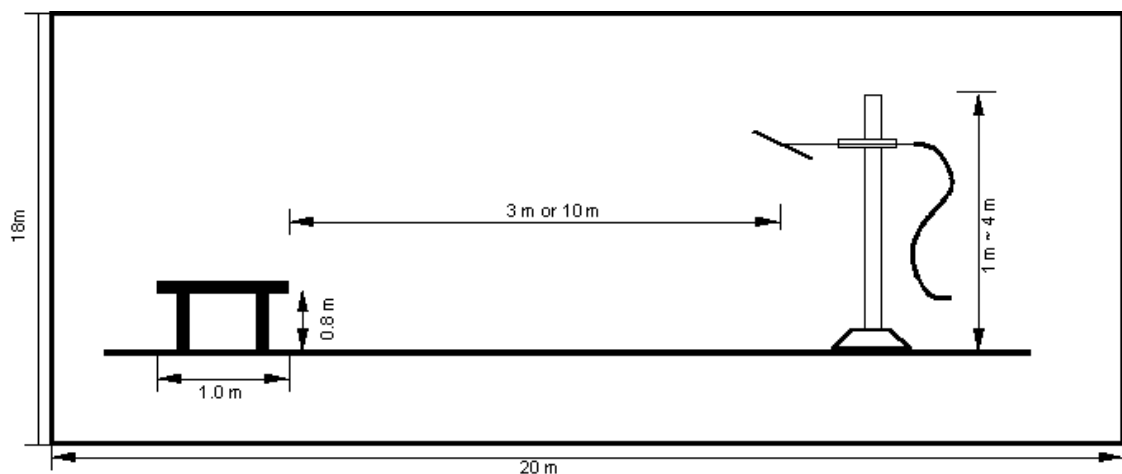


Fig.3. Dimensions of Open Site Test Area

5.4 Duty Cycle Correction

Measurements may be adjusted where pulsed RF is utilized to find the average level associated with a quantity.

This calculation is applied to limits for pulsed licensed and unlicensed devices.

For unlicensed intentional radiator under 47CFR Part 15 §15.35, all duty cycle measurements are compared to a 100 millisecond period.

On time = $N_1L_1+N_2L_2+\dots+N_nL_n$, where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.

Duty Cycle = On time/100 millisecond.

5.5 Occupied Bandwidth

Occupied bandwidth was performed by coupling the output of the EUT to the input of a spectrum analyzer.

The bandwidth of the emission shall be no wider than 0.25 % of the center frequency for device operating above 70 MHz and below 900 MHz. For device operating above 900 MHz, the emission shall be no wider than 0.5 % of the center frequency. The bandwidth is determined at the points 20 dB down from the modulated carrier.

6. Duty Cycle Correction

6.1 Operating environment

Temperature : 24 °C
Relative humidity : 56 % R.H.

6.2 Test set-up

The spectrum analyzer was set to Zero span and the video triggered to collect the pulse train of the modulation. Calculations of the duty cycle correction factor were obtained from time data provided by the plots.

6.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Due to Calibration
■ - ESI	Rohde & Schwarz	EMI test receiver	830482/010	12. 14. 2008
■ - HL223	Rohde & Schwarz	Log-periodic antenna	829228/011	12. 11. 2009

6.4 Test result of Duty Cycle

- Test Date : June 30, 2008
- Reference standard : Part 15 Subpart C, Sec. 15.35
- Operating condition : RF transmitting mode
- Spectrum resolution bandwidth(6dB) : 100 kHz
- Power Source : AC 120 V, 60 Hz

Define of duty cycle

- Number of Code groups per 100 ms = 1
- Number of Wide Pulse = 335
- Width of Pulses = 0.006 ms
- Number of Narrow Pulse = 693
- Width of Pulses = 0.006 μ s

Calculation of duty cycle

- Total width of pulse train: $335 \times 0.006 \text{ ms} + 693 \times 0.006 \mu\text{s} = 6.17 \text{ ms}$
- Duty Cycle (%): $6.17 \text{ ms} / 100 \text{ ms} = 6.17 \%$
- Duty Cycle (dB): -24.20 dB

Fundamental Frequency	Total width of ON-Time	Duty Cycle (%)	Duty Cycle (dB)
418 MHz	6.17 ms	6.17 %	-24.20 dB

Refer to APPENDIX B: Test Plots of complete Pulse Train

7. Radiated Emission

7.1 Operating environment

Temperature : 24 °C
Relative humidity : 56 % R.H.

7.2 Test set-up

A preliminary scan with peak mode was performed in the semi anechoic chamber using the procedure in ANSI C63.4/2003 13.1.4.1 and found frequency for open area test site.

The formal radiated emission was measured at 3 m distance open area test site.

The EUT was placed on a non-conductive turntable approximately 0.8 m above the ground plane.

The turntable with EUT was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels.

This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

7.3 Measurement uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement.”

The measurement uncertainty was given with a confidence of 95 %.

Test item	Uncertainty	Remark
Radiate Emission (30 MHz ~ 300 MHz, 3 m, Vertical)	± 3.54 dB	Confidence level of 95 % (k=2)
Radiate Emission (30 MHz ~ 300 MHz, 3 m, Horizontal)	± 3.49 dB	Confidence level of 95 % (k=2)
Radiate Emission (30 MHz ~ 1000 MHz, 3 m, Horizontal)	± 3.70 dB	Confidence level of 95 % (k=2)
Radiate Emission (30 MHz ~ 1000 MHz, 3 m, Horizontal)	± 3.61 dB	Confidence level of 95 % (k=2)
Radiate Emission (30 MHz ~ 300 MHz, 10 m, Vertical)	± 3.21 dB	Confidence level of 95 % (k=2)
Radiate Emission (30 MHz ~ 300 MHz, 10 m, Horizontal)	± 3.32 dB	Confidence level of 95 % (k=2)
Radiate Emission (30 MHz ~ 1000 MHz, 10 m, Horizontal)	± 3.63 dB	Confidence level of 95 % (k=2)
Radiate Emission (30 MHz ~ 1000 MHz, 10 m, Horizontal)	± 3.69 dB	Confidence level of 95 % (k=2)

7.4 Limit

Fundamental Frequency (MHZ)	Field strength of Fundamental			Field strength of Spurious Emission	
	$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$	$\mu\text{V/m}$	$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
40.66~40.7	2 250	67.04		225	47.04
70~130	1 250	61.94		125	41.94
130~174	1 250 to 3 750	61.94 to 71.48	56.818 18(F)-6136.363 6	125 to 375	41.94 to 51.48
174~260	3750	71.48		375	51.48
260~470	3 750 to 12 500	71.48 to 81.94	41.666 7(F)-7083.333 3	375 to 1 250	51.48 to 61.94
Above 470	12 500	81.94		1 250	61.94
Restricted Band	N/A			500	54.0

7.5 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Due to Calibration
■ - ESI	Rohde & Schwarz	EMI test receiver	830482/010	12. 14. 2008
■ - ESCS30	Rohde & Schwarz	EMI test receiver	839809/003	12. 14. 2008
■ - HK116	Rohde & Schwarz	Biconical ANT	826861/018	12. 11. 2009
■ - HL223	Rohde & Schwarz	Log-periodic antenna	829228/011	12. 11. 2009
■ - HD100	HD GmbH	Position Controller	100/692/01	N/A
■ - DS415S	HD GmbH	Turntable	415/657/01	N/A
■ - MA240	HD GmbH	Antenna Mast	240/565/01	N/A
■ - BBHA9120D	Schwarz beck	Horn ANT	207	04.01.2009
■ - AFS44-00101800-25-10P-44	MITEQ	Preamplifier	1258943	N/A

7.6 Radiated emission test data

- Test Date : June 30, 2008
- Reference standard : Part 15 Subpart C, Sec.15.231
- Operating condition : RF transmitting mode
- Measuring Distance : 3 m
- Spectrum resolution bandwidth (6 dB): 120 kHz/ 1 MHz
- Detector mode : Peak detector mode / Average detector mode
- Power Source : DC 6 V supplied from four AA size batteries
- Note : 1. Through three orthogonal axes were investigated and the worst case is reported.
2. The EUT was tested with new batteries.

Field Strength at the Fundamental frequency & Harmonic Frequencies


Frequency (MHz)	Measurement Level					Limit		Margin		Positioning System		
	Reading (dBuV/m)	Tranduce (dB)	Duty cycle (dB)	Peak (dBuV/m)	Average (dBuV/m)	Peak (dBuV/m)	Aveage (dBuV/m)	Peak (dBuV/m)	Average (dBuV/m)	Pol. (H/V)	Height (cm)	Angle (deg)
Fundamental												
418.00	77.82	22.14	-24.20	99.96	75.76	100.28	80.28	0.32	4.52	V	200	258
Harmonics												
836.00	34.9	30.30	-24.20	65.20	41.00	80.28	60.28	15.08	19.28	H	220	175
1254.00	71.4	-10.32	-24.20	61.10	36.90	80.28	60.28	19.18	23.38	V	195	275
1672.00	58.2	-8.62	-24.20	49.60	25.40	74.00	54.00	24.40	28.60	H	200	260
2090.00	57.8	-7.08	-24.20	50.70	26.50	80.28	60.28	29.58	33.78	V	120	220
2508.00	62.0	-5.20	-24.20	56.80	32.60	80.28	60.28	23.48	27.68	H	195	18
2926.00	55.4	-3.85	-24.20	51.60	27.40	80.28	60.28	28.68	32.88	H	120	180
3344.00	53.5	-3.17	-24.20	50.30	26.10	80.28	60.28	29.98	34.18	H	130	165
3762.00	54.2	-2.29	-24.20	51.90	27.70	74.00	54.00	22.10	26.30	H	128	32
4180.00	53.2	-1.14	-24.20	52.10	27.90	74.00	54.00	21.90	26.10	H	133.0	20.0

*Comment ; below 1GHz : Tranduce = ANT factor + cable loss
above 1GHz : Tranduce = ANT factor + cable loss + AMP gain

"The margin is more than 30 dBuV/m"

◆ Field Strength of the spurious emission except the harmonic frequencies (30 MHz ~ 1 GHz)

Frequency (MHz)	Measurement Level				Limit (dBμ V/m)	Margin (dBμ V/m)	Positioning System		
	Reading	Antenna	Cable	Test Result			Pol. (H/V)	Height (cm)	Angle (°)
	Value(dBμ V)	Factor(dB)	Loss(dB)	(dBμ V/m)					
197.82	20.11	13.52	3.87	37.50	43.50	6.00	H	336	95
273.30	6.64	16.08	4.78	27.50	46.00	18.50	H	385	175
384.48	22.69	15.17	5.94	43.80	46.00	2.20	H	300	85

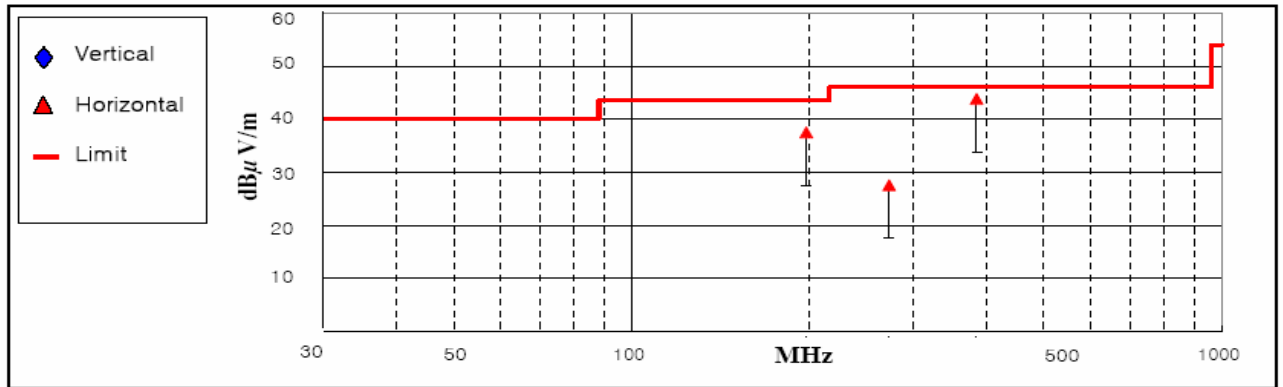


< Fig 4. Radiated emission result >

◆ Field Strength of the spurious emission except the harmonic frequencies (1 GHz ~ 5 GHz)

Frequency (MHz)	Measurement Level					AV Limit (dBuV/m)	Margin (dBuV/m)	Positioning System		
	Reading Value(dBuV)		AF (dB)	AMP / CL (dB)	Test Result (dBuV/m)			Pol. (H/V)	Height (cm)	Angle (deg)
	Peak	Average	Peak	Average						
All frequency	-	-	-	-	-	-	<<	-	-	-

"<<" The margin is more than 30dB

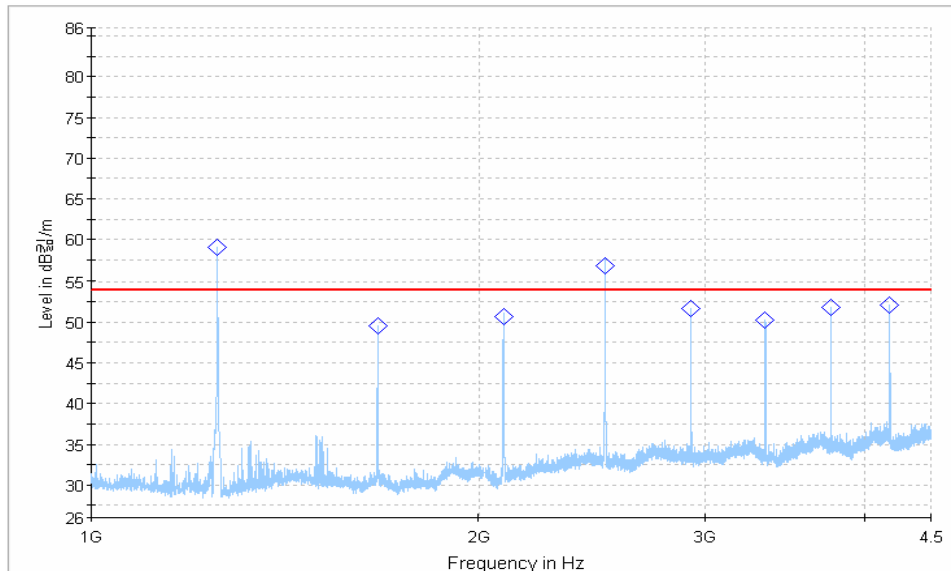

* Marks “◇” of the above graph indicate the field strength of harmonic frequencies from 3rd to 10th. The spurious emissions except the harmonic’s have more than 30dB margin.

< Fig 5. Radiated Emission result >

8. Occupied Bandwidth Measurement

8.1 Operating environment

Temperature : 24 °C
Relative humidity : 42 % R.H.

8.2 Test set-up

This measurement is performed with the antenna located close enough to give a full-scale deflection of the modulated carrier on the spectrum analyzer. The plot is taken at 200 kHz/division frequency span, 100 kHz 3 dB resolution bandwidth and 5 dB/division logarithmic display from an ESI spectrum analyzer.

The measuring bandwidth shall be set to a value greater than 5 % of the allowed bandwidth.

8.3 Limit

Frequency Range(MHz)	Occupied Bandwidth Limit
70 ~ 900 MHz	0.25 %
>900 MHz	0.5 %

8.4 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Due to Calibration
■ - ESI	Rohde & Schwarz	EMI test receiver	830482/010	12. 14. 2008
■ - HL223	Rohde & Schwarz	Log-periodic antenna	829228/011	12. 11. 2009

8.5 Test result of occupied bandwidth

- Test Date : June 30, 2008
 - Reference standard : Part 15 Subpart C, Sec. 15.231
 - Operating condition : RF transmitting mode
 - Spectrum resolution bandwidth(3dB) : 100 kHz
 - Power Source : DC 6 V supplied from four AA size battery

Allowed Bandwidth : $418 \times 0.0025 = 1\ 045\ \text{kHz}$

Fundamental Frequency	Bandwidth	Allowed Bandwidth	Result
418 MHz	921.84 kHz	1 045 kHz	PASS

Refer to APPENDIX B: Test Plots of occupied bandwidth

9. Sample Calculations

$$\begin{aligned} \text{dB}\mu\text{V} &= 20 \text{ Log}_{10}(\mu\text{V}/\text{m}) \\ \text{dB}\mu\text{V} &= \text{dBm} + 107 \\ \mu\text{V} &= 10^{(\text{dB}\mu\text{V}/20)} \end{aligned}$$

9.1 Example 1 :

■ 20.3 MHz

Class B Limit	= 250 μV	= 48 $\text{dB}\mu\text{V}$
Reading	= - 67.8 dBm (Calibrated level)	
Convert to $\text{dB}\mu\text{V}$	= - 67.8 $\text{dBm} + 107$	= 39.2 $\text{dB}\mu\text{V}$
$10^{(39.2\text{dB}\mu\text{V}/20)}$	= 91.2 μV	
Margin	= 39.2 – 48	= -8.8
	= 8.8 dB below Limit	

9.2 Example 2 :

■ 66.7 MHz

Class B Limit	= 100 $\mu\text{V}/\text{m}$	= 40.0 $\text{dB}\mu\text{V}/\text{m}$
Reading	= - 76.0 dBm (Calibrated level)	
Convert to $\text{dB}\mu\text{V}/\text{m}$	= - 76.8 $\text{dBm} + 107$	= 31.0 $\text{dB}\mu\text{V}/\text{m}$
Antenna Factor + Cable Loss	= 5.8 dB	
	Total	= 36.8 $\text{dB}\mu\text{V}/\text{m}$
Margin	= 36.8 – 40.0	= -3.2
	= 3.2 dB below Limit	

10. Recommendation & conclusion

The data collected shows that the Gumi College EMC Center.

OH SUNG ELECTRONICS CO., LTD. RF Remote Controller (Model No.: MX-450) was complies with §15.231 of the FCC Rules.