

## ***FCC EVALUATION REPORT FOR CERTIFICATION***

**Manufacturer : OHSUNG ELECTRONICS CO., LTD**

**Date of Issue : June 4, 2008**

**#181 Gongdan-Dong, Gumi, GyeongBuk**

**Test Report S/N : GETEC-E3-08-023**

**Republic of Korea**

**Test Site : Gumi College EMC Center**

**Attn : Mr. Kwang-Jae Ok / Team Leader of Q.C**

**FCC Registration No.: (100749)**

**FCC ID**

**OZ5URCMX6000**

**APPLICANT**

**OHSUNG ELECTRONICS CO., LTD**

**Rule Part(s) : FCC Part 15 Subpart C-Intentional Radiator § 15.231**

**Equipment Class : Remote Control Transmitter (DSC)**

**EUT Type : RF Remote Controller**

**Trade Name : UNIVERSAL remote control**

**Model No. : MX-6000**

This equipment has been shown to be in compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

**Tested by,**

**Reviewed by,**



**Hyoung Seop Kim, Associate Engineer**  
**GUMI College EMC center**



**Tae-Sig Park, Technical Manger**  
**GUMI College EMC center**

# CONTENTS

<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
<b>2. INTRODUCTION .....</b>	<b>5</b>
<b>3. PRODUCT INFORMATION .....</b>	<b>6</b>
3.1 DESCRIPTION OF EUT.....	6
3.2 SUPPORT EQUIPMENT / CABLES USED .....	7
3.3 MODIFICATION ITEM(S).....	7
<b>4. ANTENNA REQUIREMENT - §15.203 .....</b>	<b>8</b>
4.1 DESCRIPTION OF ANTENNA.....	8
<b>5. INTERMODULATION COMPLIANCE STATEMENT.....</b>	<b>8</b>
<b>6. DESCRIPTION OF TESTS.....</b>	<b>9</b>
6.1 TEST CONDITION.....	9
6.2 CONDUCTED EMISSION.....	10
6.3 RADIATED EMISSION.....	11
6.4 DUTY CYCLE CORRECTION .....	12
6.5 OCCUPIED BANDWIDTH.....	12
<b>7. CONDUCTED EMISSION.....</b>	<b>13</b>
7.1 OPERATING ENVIRONMENT .....	13
7.2 TEST SET-UP.....	13
7.3 MEASUREMENT UNCERTAINTY .....	13
7.4 LIMIT .....	14
7.5 TEST EQUIPMENT USED .....	14
7.6 TEST DATA FOR POWER LINE CONDUCTED EMISSION.....	15
<b>8. DUTY CYCLE CORRECTION.....</b>	<b>16</b>
8.1 OPERATING ENVIRONMENT .....	16
8.2 TEST SET-UP.....	16
8.3 TEST EQUIPMENT USED .....	16
8.4 TEST RESULT OF DUTY CYCLE.....	16
<b>9. RADIATED EMISSION .....</b>	<b>17</b>
9.1 OPERATING ENVIRONMENT .....	17
9.2 TEST SET-UP.....	17
9.3 MEASUREMENT UNCERTAINTY .....	17
9.4 LIMIT .....	18
9.5 TEST EQUIPMENT USED .....	18
9.6 RADIATED EMISSION TEST DATA .....	19
<b>10. OCCUPIED BANDWIDTH MEASUREMENT.....</b>	<b>22</b>
10.1 OPERATING ENVIRONMENT .....	22
10.2 TEST SET-UP.....	22
10.3 LIMIT .....	22

**10.4 TEST EQUIPMENT USED .....22**  
**10.5 TEST RESULT OF OCCUPIED BANDWIDTH.....22**  
**11. SAMPLE CALCULATIONS.....23**  
**11.1 EXAMPLE 1 : .....23**  
**11.2 EXAMPLE 2 : .....23**  
**12. RECOMMENDATION & CONCLUSION.....24**

**APPENDIX A – ATTESTATION STATEMENT**  
**APPENDIX B – TEST PLOTS**  
**APPENDIX C – FCC ID LABEL & LOCATION**  
**APPENDIX D – BLOCK DIAGRAM(S)**  
**APPENDIX E – SCHEMATIC DIAGRAM(S)**  
**APPENDIX F – TEST SET UP PHOTOS**  
**APPENDIX G – EXTERNAL PHOTOGRAPHS**  
**APPENDIX H – INTERNAL PHOTOGRAPHS**  
**APPENDIX I – USER’S MANUAL**  
**APPENDIX J – OPERATIONAL DESCRIPTION FOR 418MHz ASK MODULE**

*Scope: Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and / or unintentional radiators for compliance with technical rules and regulations of the Federal Communications Commission.*

## 1. General Information

**Applicant: OHSUNG ELECTRONICS CO., LTD.**

**Applicant Address: #181 Gongdan-Dong, Gumi-Si, Gyeongsangbuk-do, Korea**

**Manufacturer: OHSUNG ELECTRONICS CO., LTD**

**Manufacturer Address: #181 Gongdan-Dong, Gumi-Si, Gyeongsangbuk-do, Korea**

**Contact Person: Mr. Kwang-Jae Ok / Team Leader Q.C**

**Tel. & Fax No.: Tel No.: +82-54-468- 0831 Fax No.: +82-54- 461- 8368**

- **FCC ID.** OZ5URCMX6000
- **Equipment Class** Remote Control Transmitter (DSC)
- **EUT Type** RF Remote Controller
- **Power Source** AC 120V/ 60Hz, DC 3.7V Li-ion Rechargeable Battery
- **Model No.** MX-6000
- **Rule Part(s)** FCC Part 15, Subpart C-Intentional Radiator § 15.231
- **Type of Authority** Certification
- **Test Procedure(s)** ANSI C63.4 (2003)
- **Dates of Test** May 9, 2008
- **Place of Test** **Gumi College EMC Center** ( FCC Registration No.: 100749)  
407, Bugok-Dong, Gumi-si, Gyeongsangbuk-Do, Korea
- **Test Report No.** GETEC-E3-08-023
- **Dates of Issue** June 4, 2008

## 2. Introduction

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Nose Emissions From Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ASNI C63.4-2003) was used in determining radiated and conducted emissions emanating from **OHSUNG ELECTRONICS CO., LTD. RF Remote Controller (Model No.: MX-6000)**

These measurement tests were conducted at **Gumi College EMC Center**.

The site address is 407, Bugok-Dong, Gumi-si, Gyeongsangbuk-Do, Korea

This test site is one of the highest point of Gumi 1 college at about 200 kilometers away from Seoul city and 40 kilometers away from Daege city. It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures. The detailed description of the measurement facility was found to be in compliance with the requirements of §2.948 according to ANSI C63.4 on October 19, 1992



Fig 1. The map above shows the Gumi College in vicinity area.

### 3. Product Information

#### 3.1 Description of EUT

The equipment under test (EUT) is the **OHSUNG ELECTRONICS CO., LTD. RF Remote Controller (Model No.: MX-6000) FCC ID.: OZ5URCMX6000**

The RF Remote Controller has 2 type of RF module.

One is 418 MHz ASK module and the other is 2-way WiFi.

This Report is for 418 MHz ASK module the next report (No. GETEC-E3-08-024) is for WiFi module.

**Used AC/DC Adapter** : KSD0600200W1US(UNIVERSAL remote control)  
 Input: AC 100-240V, 50/60Hz, 0.4A  
 Output: DC5V, 2.0A

Microprocessor: 533MHz ARM9  
 RAM: 128Mbyte Mobile DDR  
 NAND: 64Mbyte  
 LCD: 4.3 Inch Wide Screen (480 by 272)  
 LCD Backlighting by LED  
 Sound: 2 x 1 watt  
 USB: 2.0  
 Devices - Supports up to 255  
 Devices with text, less with heavy  
 graphics usage  
 Pages - Supports up to 255 Pages on  
 each Device with text, less with  
 heavy graphics usage  
 Learning Capability - Standard fre-  
 quencies (15kHz to 455kHz)  
 Macro Capability - Up to 255 steps  
 each, however nesting is allowed

IR Learning: 20-455 kHz  
 IR Range (Line of Sight via Infrared):  
 30-50 feet, depending on the envi-  
 ronment  
 RF Frequency: 418MHz  
 RF Range (radio frequency): 50 to  
 100 feet, depending upon the envi-  
 ronment  
 WiFi: IEEE 802.11 B (11Mps), G  
 (54Mps)  
 Battery: Lithium Ion, 4800 mA hours  
 Battery Capacity: 4 hours continu-  
 ous use, 9 days standby  
 Battery Charging Time: 7 Hours  
 Dimensions: 7.5"Wide x 5.1"Deep  
 x 1.3"Height  
 Weight (without AC Adapter):  
 15 oz

**3.2 Support Equipment / Cables used**

3.2.1 Used Support Equipment

Description	Manufacturer	Model No.	S/N & FCC ID
None	-	-	

*See "Appendix E – Test Setup Photographs" for actual system test set-up*

3.2.2 Used Cable(s)

Cable No.	Condition	Description
Adapter cable	Connected to the EUT	1.8m Unshielded

**3.3 Modification Item(s)**

-. None

#### 4. Antenna Requirement - §15.203

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the applicant can be used with the device. The use of permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with this requirement.

##### 4.1 Description of Antenna


The **OHSUNG ELECTRONICS CO., LTD RF Transmitter Universal Remote Control** comply with the requirement of §15.203 with a built-in looped antenna permanently attached to the transmitter.

#### 5. Intermodulation Compliance Statement

The two transmitters can be operated simultaneously but, do not share a common antenna.

Therefore, according to the “EMC Co-locatin Testing Poiley”, Intermodulation test does not be required.

Although the test could be skipped, we conducted intermodulation test and there was no distortion observed.

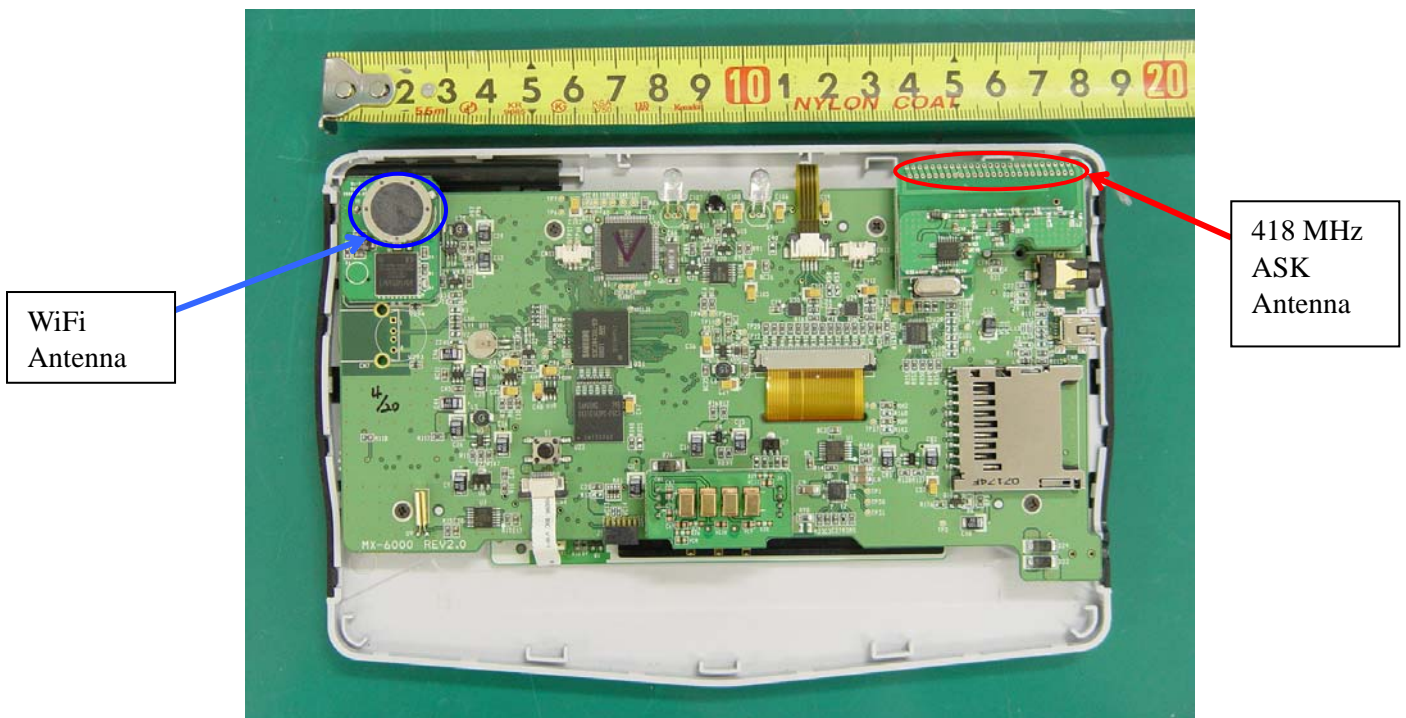



## 6. Description of tests

### 6.1 Test Condition

The EUT was installed, arranged and operated in a manner that is most representative of equipment as typically used. The measurements were carried out while varying operating modes and cable positions within typically arrangement to determine maximum emission level.

The representative and worst test mode(s) were noted in the test report.

Test Voltage / Frequency: AC 120V/ 60Hz  
DC 3.7V Li-ion Rechargeable Battery

- Test Mode(s)
  - . RF mode: Continuous RF transmitting mode

### 6.2 Conducted Emission

The Line conducted emission test facility is inside a 4×8×2.5 meter shielded enclosure.

The EUT was placed on a non-conducting 1.0 by 1.5 meter table, which is 0.8 meters in height and 0.4 meters away from the vertical wall of the shielded enclosure.

The EUT is powered from the Rohde & Schwarz LISN (ESH2-Z5) and the support equipment is powered from the Rohde & Schwarz LISN (ESH3-Z5). Powers to the LISN are filtered by high-current high insertion loss power line filter.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

The RF output of the LISN was connected to the EMI test receiver (Rohde & Schwarz, ESCS30).

The EMI test receiver was scanned from 150kHz to 30MHz with 20msec sweep time to determine the frequency producing the maximum EME from the EUT. The frequency producing the maximum level was re-examined using Quasi-Peak mode of the EMI test receiver.

The bandwidth of Quasi-peak mode was set to 9kHz. Each emission was maximized consistent with typical applications by varying the configuration of the test sample. Interface cables were connected to the available interface ports of the test unit. The effect of varying the position of cables was investigated to find the configuration that produces maximum diagram emission. Excess cable lengths were bundled at center with 30 – 40 centi-meters.

Each EME reported was calibrated using the R/S signal generator

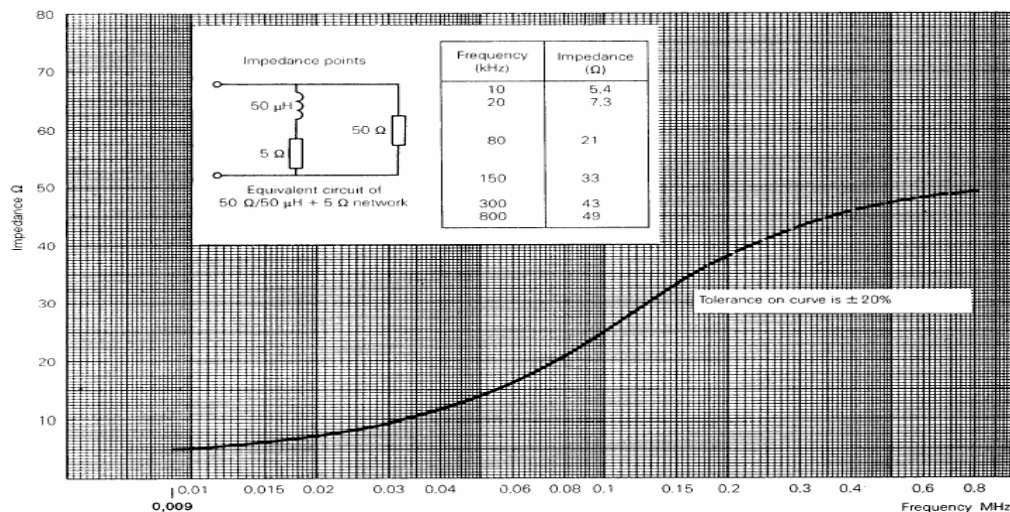


Fig 2. Impedance of LISN

### 6.3 Radiated Emission

Preliminary measurements were conducted 3m semi anechoic chamber using broadband antennas to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The technology configuration, mode of operation and turntable azimuth with respect to antenna was note for each frequency found.

The spectrum was scanned from 30 to 1000MHz using bicornical log antenna (Schwarzbeck, VULB9160). Above 1GHz, horn antenna (Schwarzbeck, BBHA9120D) was used.

Final measurements were made outdoors at 3m/10m-test range.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

Each frequency found during pre-scan measurements was re-examined and investigated using EMI test receiver. The detector function was set to CISPR quasi-peak mode average mode and the bandwidth of the receiver was set to 120kHz or 1MHz depending on the frequency or type of signal.

The EUT, support equipment and interconnecting cables were reconfigured to the setup producing the maximum emission for the frequency and were placed on top of a 0.8m high non-metallic 1.0×1.5 meter table.

The turntable containing the test sample was rotated; the antenna height was varied 1 to 4 meter and stopped at the azimuth or height producing the maximum emission.

Each EME reported was calibrated using the R/S signal generator

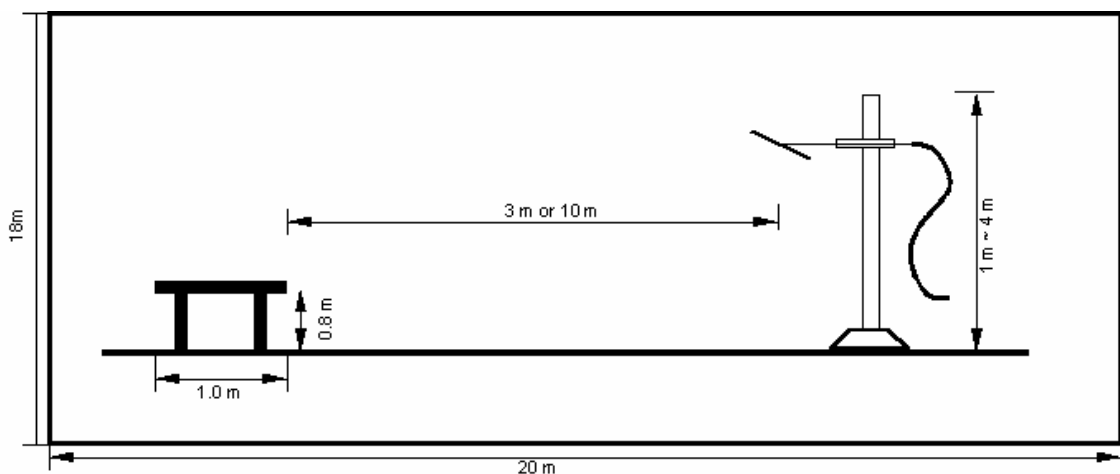


Fig 3. Dimensions of Open Site Test Area

#### 6.4 Duty Cycle Correction

Measurements may be adjusted where pulsed RF is utilized to find the average level associated with a quantity.

This calculation is applied to limits for pulsed licensed and unlicensed devices.

For unlicensed intentional radiator under 47CFR Part 15 §15.35, all duty cycle measurements are compared to a 100 millisecond period.

On time =  $N_1L_1 + N_2L_2 + \dots + N_nL_n$ , where  $N_1$  is number of type 1 pulses,  $L_1$  is length of type 1 pulses, etc.

**Duty Cycle = On time/100 millisecond.**

#### 6.5 Occupied Bandwidth

Occupied bandwidth was performed by coupling the output of the EUT to the input of a spectrum analyzer.

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for device operating above 70MHz and below 900MHz. For device operating above 900MHz, the emission shall be no wider than 0.5% of the center frequency. The bandwidth is determined at the points 20dB down from the modulated carrier.

## 7. Conducted Emission

### 7.1 Operating environment

Temperature : 25°C  
Relative humidity : 47 %

### 7.2 Test set-up

The conducted emission measurements were performed in the shielded room.

The EUT was placed on wooden table, 0.8m heights above the floor, 0.4m from the reference ground plane (GRP) wall and 0.8m from AMN.

AMN is bonded on horizontal reference ground plane.

The ground plane, which was electrically bonded to the shield room, ground system and all power lines entering the shield room, were filtered.

### 7.3 Measurement uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement”.

The measurement uncertainty was given with a confidence of 95%.

Contribution	Probability Distribution	Uncertainty ( $\pm$ dB)	
		Power Port	Communication port
Receiver specification	Rectangular	0.50	0.50
LISN coupling specification	Rectangular	1.50	
ISN coupling specification	Rectangular		1.50
Mismatch	U-shaped		
LISN VRC : $\Gamma_{l=}$ 0.20		0.05	0.05
ISN VRC : $\Gamma_{l=}$ 0.20		-0.05	-0.05
ATT VRC(IN) : $\Gamma_{g=}$ 0.03			
Uncertainty limits $20\log(1 \pm \Gamma_{l=} \Gamma_{g=})$			
Mismatch	U-shaped		
Receiver VRC : $\Gamma_{l=}$ 0.09		0.09	0.09
ATT VRC : $\Gamma_{g=}$ 0.11		-0.09	-0.09
Uncertainty limits $20\log(1 \pm \Gamma_{l=} \Gamma_{g=})$			
System repeatability	Std Deviation	0.55	0.55
Cable and input attenuator calibration	Normal (k=2)	0.08	0.08
Repeatability of EUT			
Combined standard uncertainty $U_c(y)$	Normal	1.07	1.07
		-1.07	-1.07
Extended uncertainty U	Normal (k=2)	2.15	2.15
		-2.15	-2.15

**7.4 Limit**

RFI Conducted	FCC Limit(dB) Class B	
	Quasi-Peak	Average
150kHz – 0.5MHz	66 – 56*	56 – 46*
0.5MHz – 5MHz	56	46
5MHz – 30MHz	60	50

\*Limits decreases linearly with the logarithm of frequency.

**7.5 Test equipment used**

	Model Number	Manufacturer	Description	Serial Number	Due to calibration
■ -	ESCS30	Rohde & Schwarz	EMI test receiver	839809/003	12. 14. 2008
■ -	ESH3-Z5	Rohde & Schwarz	Artificial mains network	838979/020	12. 13. 2008
■ -	ESH2-Z5	Rohde & Schwarz	Artificial mains network	829991/009	12. 13. 2008

## 7.6 Test data for power line conducted emission

### 7.6.1 Test mode: RF transmitting mode

- Test Date : May 9, 2008
- Resolution bandwidth : 9 kHz
- Frequency range : 0.15MHz ~ 30MHz

Frequency (MHz)	Insertion Loss	Cable Loss	Pol.	Quasi-Peak[dBuV]			Average[dBuV]			Margin[dBuV]	
				Limit	Reading	Result	Limit	Reading	Result	Quasi	Average
0.162	0.12	-0.16	N	65.36	53.4	53.36	55.36	33.5	33.46	12.00	21.90
0.210	0.12	-0.22	L1	63.21	49.8	49.70	53.21	28.0	27.90	13.51	25.31
0.238	0.12	-0.21	L1	62.17	47.9	47.81	52.17	28.0	27.91	14.35	24.25
0.270	0.13	-0.19	L1	61.12	46.0	45.94	51.12	23.4	23.34	15.18	27.78
0.322	0.14	-0.16	N	59.66	43.0	42.98	49.66	28.2	28.18	16.68	21.48
0.382	0.14	-0.13	L1	58.24	40.9	40.91	48.24	24.9	24.91	17.33	23.33
0.494	0.17	-0.17	N	56.10	38.1	38.10	46.10	23.3	23.30	18.00	22.80
0.766	0.15	-0.23	N	56.00	35.2	35.12	46.00	19.8	19.72	20.88	26.28
1.086	0.15	-0.24	L1	56.00	32.2	32.11	46.00	20.8	20.71	23.89	25.29
1.306	0.16	-0.26	L1	56.00	31.0	30.90	46.00	17.3	17.20	25.10	28.80
2.982	0.21	-0.14	L1	56.00	29.3	29.36	46.00	16.1	16.16	26.64	29.84
4.190	0.24	-0.14	L1	56.00	31.0	31.09	46.00	17.2	17.29	24.91	28.71
24.110	1.03	0.01	L1	60.00	22.2	23.24	50.00	16.2	17.24	36.76	32.76
27.490	1.13	0.11	L1	60.00	24.8	26.04	50.00	20.3	21.54	33.96	28.46

\*Comment : Pol : L1 (Live), N(Neut)  
 Insertion Loss : Insertion Loss of LISN  
 Cable Loss : Cable Loss + Pulse Limiter Insertion loss value

## 8. Duty Cycle Correction

### 8.1 Operating environment

Temperature : 28 °C  
Relative humidity : 42 %

### 8.2 Test set-up

The spectrum analyzer was set to Zero span and the video triggered to collect the pulse train of the modulation. Calculations of the duty cycle correction factor were obtained from time data provided by the plots.

### 8.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Due to Calibration
■ - ESI	Rohde & Schwarz	EMI test receiver	830482/010	12. 14. 2008
■ - HL223	Rohde & Schwarz	Log-periodic antenna	835998/004	12. 28. 2009

### 8.4 Test result of Duty Cycle

- Test Date : May 9, 2008  
- Reference standard : Part 15 Subpart C, Sec. 15.35  
- Operating condition : RF transmitting mode  
- Spectrum resolution bandwidth(6dB) : 100 kHz  
- Power Source : AC 120V/ 60Hz, DC 3.7V Li-ion Rechargeable battery

Define of duty cycle

- Number of Code groups per 100ms = 1  
- Number of Wide Pulse = 335  
- Width of Pulses = 0.006ms  
- Number of Narrow Pulse = 693  
- Width of Pulses = 0.006μs

Calculation of duty cycle

- Total width of pulse train :  $335 \times 0.006\text{ms} + 693 \times 0.006\mu\text{s} = 6.17\text{ms}$   
- Duty Cycle (%) :  $6.17\text{ms} / 100\text{ms} = 6.17\%$   
- Duty Cycle (dB) : -24.20dB

Fundamental Frequency	Total width of ON-Time	Duty Cycle (%)	Duty Cycle (dB)
418.008 MHz	6.17 ms	6.17%	-24.20dB

Refer to APPENDIX B: Test Plots of complete Pulse Train



## 9. Radiated Emission

### 9.1 Operating environment

Temperature : 28°C  
Relative humidity : 42 %

### 9.2 Test set-up

A preliminary scan with peak mode was performed in the semi anechoic chamber using the procedure in ANSI C63.4/2003 13.1.4.1 and found frequency for open area test site.

The formal radiated emission was measured at 3m-distance open area test site.

The EUT was placed on a non-conductive turntable approximately 0.8 meters above the ground plane.

The turntable with EUT was rotated 360°, and the antenna was varied in height between 1.0 and 4.0 meters in order to determine the maximum emission levels.

This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

### 9.3 Measurement uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement”.

The measurement uncertainty was given with a confidence of 95%.

Contribution	Probability Distribution	Uncertainty (dB)			
		Biconical Ant.		Log-periodic Ant.	
		3m	10m	3m	10m
Ambient signal					
Antenna factor calibration	Normal (k=2)	0.50	0.50	0.50	0.50
Receiver specification	Rectangular	0.50	0.50	0.50	0.50
Antenna directivity	Rectangular	0.25	0.00	1.50	0.25
Antenna phase center variation	Rectangular	0.00	0.00	1.00	0.20
Antenna factor frequency interpolation	Rectangular	0.25	0.25	0.25	0.25
Measure distance variation	Rectangular	0.60	0.40	0.60	0.40
Site imperfections	Rectangular	-2.00	-2.40	2.50	2.40
Mismatch					
Receiver VRC : $\Gamma_l = 0.09$	U-shaped	0.33	0.33	0.18	0.18
Antenna VRC : $\Gamma_g = 0.43$ (Bi) 0.23 (Lp)		-0.35	-0.35	-0.18	-0.18
Uncertainty limits $20\log(1 \pm \Gamma_l \Gamma_g)$					
System repeatability	Std Deviation	0.82	0.82	0.79	0.79
Cable loss calibration	Normal (k=2)	0.09	0.09	0.09	0.09
Combined standard uncertainty $U_c(y)$	Normal	1.54	1.70	2.03	1.68
		-1.54	-1.70	-2.03	-1.68
Extended uncertainty U	Normal (k=2)	3.09	3.39	4.05	3.36
		-3.09	-3.40	-4.05	-3.36

**9.4 Limit**

Fundamental Frequency (MHZ)	Field strength of Fundamental			Field strength of Spurious Emission	
	uV/m	dBuV/m	uV/m	uV/m	dBuV/m
40.66~40.7	2250	67.04		225	47.04
70~130	1250	61.94		125	41.94
130~174	1250 to 3750	61.94 to 71.48	56.81818(F)-6136.3636	125 to 375	41.94 to 51.48
174~260	3750	71.48		375	51.48
260~470	3750 to 12500	71.48 to 81.94	41.6667(F)-7083.3333	375 to 1250	51.48 to 61.94
Above 470	12500	81.94		1250	61.94
Restricted Band	N/A			500	54.0

**9.5 Test equipment used**

Model Number	Manufacturer	Description	Serial Number	Due to Calibration
■ - ESCS30	Rohde & Schwarz	EMI test receiver	839809/003	12. 14. 2008
■ - ESI	Rohde & Schwarz	EMI test receiver	830482/010	12. 14. 2008
■ - HK116	Rohde & Schwarz	Biconical ANT	832639/007	12. 28. 2009
■ - HL223	Rohde & Schwarz	Log-periodic antenna	835998/004	12. 28. 2009
■ - HD100	HD GmbH	Position Controller	100/692/01	N/A
■ - DS415S	HD GmbH	Turntable	415/657/01	N/A
■ - MA240	HD GmbH	Antenna Mast	240/565/01	N/A
■ - BBHA9120D	Schwarzbeck	Horn ANT	597	04.01.2009
■ - AFS44-00101800- 25-10P-44	MITEQ	Preamplifier	1258943	N/A

**9.6 Radiated emission test data**

- Test Date : May 9, 2008
- Reference standard : Part 15 Subpart C, Sec.15.231
- Operating condition : RF transmitting mode
- Measuring Distance : 3m
- Spectrum resolution bandwidth (6dB) : 120kHz / 1MHz
- Detector mode : Peak detector mode / Average detector mode
- Power Source : AC 120V/ 60Hz, DC 3.7V Li-ion Rechargeable battery
- Note : 1. Through three orthogonal axes were investigated and the worst case is reported.  
2. The EUT was tested with new batteries.

**Field Strength at the Fundamental and Harmonic frequencies**


Frequency (MHz)	Measurement Level					Limit		Margin		Positioning System		
	Reading (dBuV/m)	Tranduce (dB)	Duty cycle (dB)	Peak (dBuV/m)	Average (dBuV/m)	Peak (dBuV/m)	Average (dBuV/m)	Peak (dBuV/m)	Average (dBuV/m)	Pol. (H/V)	Height (cm)	Angle (deg)
<b>Fundamental</b>												
418.00	77.55	22.21	-24.20	99.76	75.56	100.28	80.28	0.52	4.72	H	300	158
<b>Spurious</b>												
836.00	39.8	30.91	-24.20	70.68	46.48	80.28	60.28	9.60	13.80	H	300	90
1254.00	85.0	-10.09	-24.20	74.90	50.70	80.28	60.28	5.38	9.58	H	300	95
1672.00	78.4	-8.32	-24.20	70.12	45.92	74.00	54.00	3.88	8.08	H	325	105
2090.00	84.8	-6.88	-24.20	77.90	53.70	80.28	60.28	2.38	6.58	H	375	100
2508.00	78.6	-4.87	-24.20	73.70	49.50	80.28	60.28	6.58	10.78	V	100	90
2926.00	75.3	-3.85	-24.20	71.40	47.20	80.28	60.28	8.88	13.08	V	100	90
3344.00	77.3	-3.02	-24.20	74.30	50.10	80.28	60.28	5.98	10.18	V	152	100
3762.00	73.2	-1.95	-24.20	71.23	47.03	74.00	54.00	2.77	6.97	V	100	75
4180.00	72.2	-0.88	-24.20	71.30	47.10	74.00	54.00	2.70	6.90	H	300	79

\*Comment ; below 1GHz : Tranduce = ANTI factor + cable loss  
above 1GHz : Tranduce = ANTI factor + cable loss + AMP gain

Note: "H": Horizontal, "V": Vertical

♦ Field Strength of the spurious emission except the harmonic frequencies (30MHz ~ 1GHz)

Frequency (MHz)	Measurement Level				Limit (dBuV/m)	Margin (dBuV/m)	Positioning System		
	Reading Value(dBuV)	Antenna Factor(dB)	Cable Loss(dB)	Test Result (dBuV/m)			Pol. (H/V)	Height (cm)	Angle (deg)
36.61	22.1	11.32	1.80	35.2	40.0	4.8	V	120	25
63.01	25.4	7.71	2.13	35.2	40.0	4.8	V	175	190
147.72	21.5	11.53	3.35	36.4	43.5	7.1	H	306	227

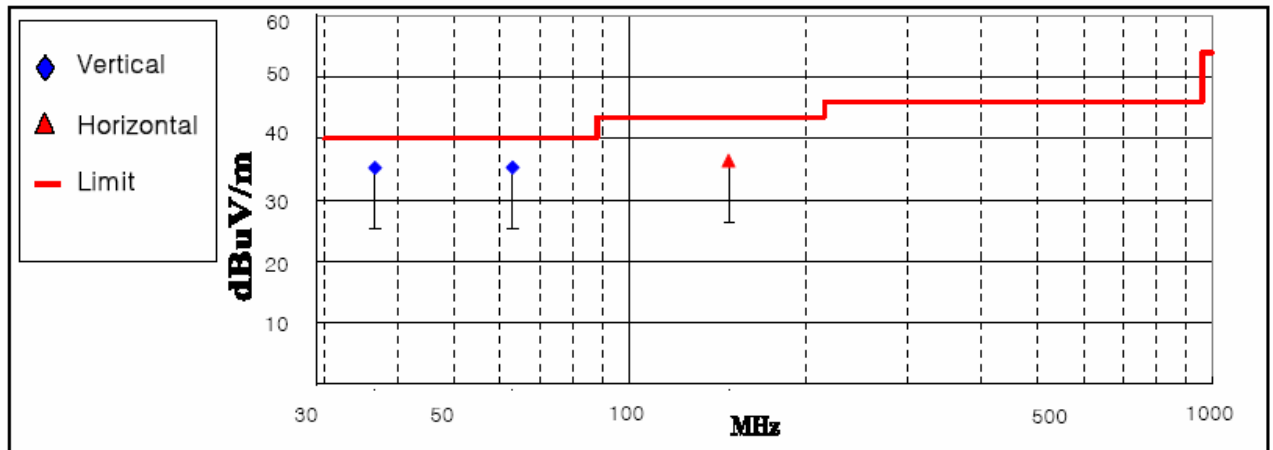


< Fig 4. Radiated emission result (30MHz ~ 1000MHz) >

◆ Field Strength of the spurious emission except the harmonic frequencies (1GHz ~ 5GHz)

Frequency (MHz)	Measurement Level						AV Limit (dBuV/m)	Margin (dBuV/m)	Positioning System		
	Reading Value(dBuV)		AF	AMP / CL	Test Result (dBuV/m)				Pol.	Height	Angle
	Peak	Average	(dB)	(dB)	Peak	Average			(H/V)	(cm)	(deg)
All frequency	-	-	-	-	-	-	-	<<	-	-	-

"<<" The margin is more than 30dB

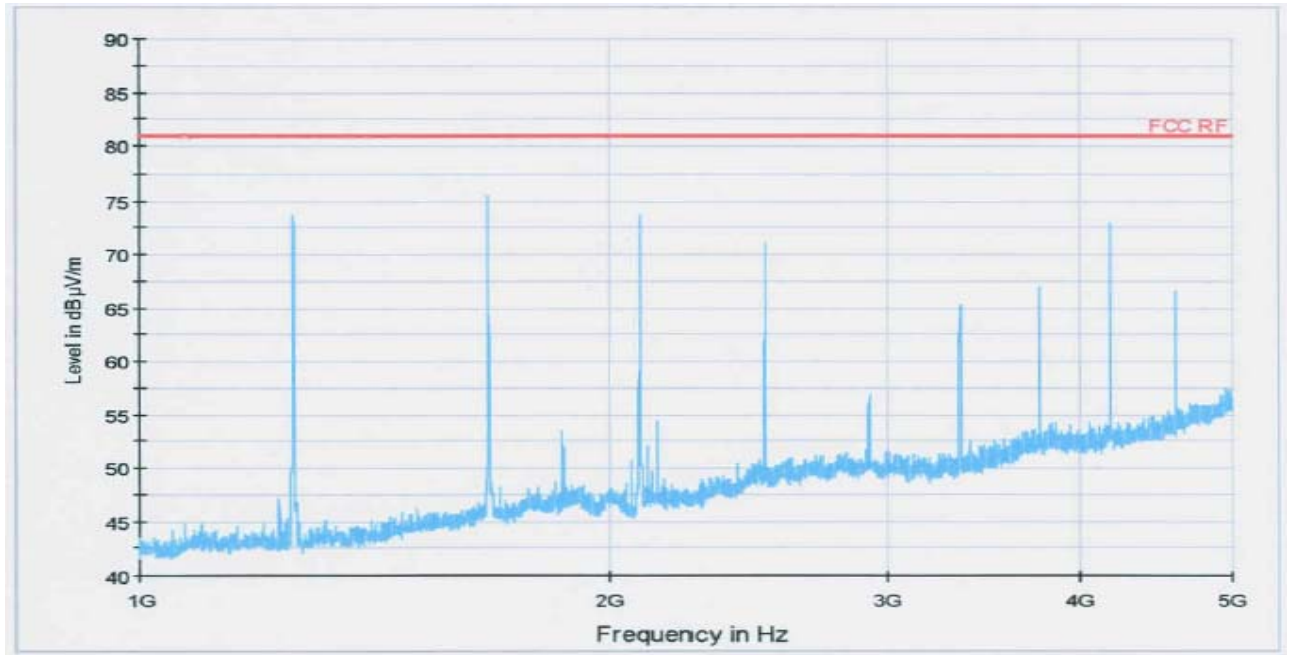

< Fig 5. Radiated Emission result (1000MHz ~ 5000MHz)>

## 10. Occupied Bandwidth Measurement

### 10.1 Operating environment

Temperature : 28 °C  
Relative humidity : 42 %

### 10.2 Test set-up

This measurement is performed with the antenna located close enough to give a full-scale deflection of the modulated carrier on the spectrum analyzer. The plot is taken at 200 kHz/division frequency span, 100 kHz 3dB resolution bandwidth and 5dB/division logarithmic display from an ESI spectrum analyzer.

The measuring bandwidth shall be set to a value greater than 5% of the allowed bandwidth (ANSI C63.4-1992 I6)

### 10.3 Limit

Frequency Range(MHz)	Occupied Bandwidth Limit
70 ~ 900 MHz	0.25%
>900 MHz	0.5%

### 10.4 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Due to Calibration
■ - ESI	Rohde & Schwarz	EMI test receiver	830482/010	12. 14. 2008
■ - HL223	Rohde & Schwarz	Log-periodic antenna	835998/004	12. 28. 2009

### 10.5 Test result of occupied bandwidth

- Test Date : May 9, 2008  
 - Reference standard : Part 15 Subpart C, Sec. 15.231  
 - Operating condition : RF transmitting mode  
 - Spectrum resolution bandwidth(3dB) : 100 kHz  
 - Power Source : AC 120V/ 60Hz, DC 3.7V Li-ion Rechargeable battery

Allowed Bandwidth :  $418.008 \times 0.0025 = 1045.02$  kHz

Fundamental Frequency	Bandwidth	Allowed Bandwidth	Result
418.008 MHz	928 kHz	1045.02 kHz	PASS

Refer to APPENDIX B: Test Plots of occupied bandwidth

## 11. Sample Calculations

$$\begin{aligned} \text{dB}\mu\text{V} &= 20 \text{ Log}_{10}(\mu\text{V}/\text{m}) \\ \text{dB}\mu\text{V} &= \text{dBm} + 107 \\ \mu\text{V} &= 10^{(\text{dB}\mu\text{V}/20)} \end{aligned}$$

### 11.1 Example 1 :

■ 20.3 MHz

Class B Limit	= 250 $\mu\text{V}$	= 48 dB $\mu\text{V}$
Reading	= - 67.8 dBm(Calibrated level)	
Convert to dB $\mu\text{V}$	= - 67.8 dBm + 107 = 39.2 dB $\mu\text{V}$	
$10^{(39.2\text{dB}\mu\text{V}/20)}$	= 91.2 $\mu\text{V}$	
Margin	= 39.2 – 48 = -8.8	
	= 8.8 dB below Limit	

### 11.2 Example 2 :

■ 66.7 MHz

Class B Limit	= 100 $\mu\text{V}/\text{m}$	= 40.0 dB $\mu\text{V}/\text{m}$
Reading	= - 76.0 dBm(Calibrated level)	
Convert to dB $\mu\text{V}/\text{m}$	= - 76.0 dBm + 107 = 31.0 dB $\mu\text{V}/\text{m}$	
Antenna Factor + Cable Loss	= 5.8 dB	
	Total = 36.8 dB $\mu\text{V}/\text{m}$	
Margin	= 36.8 – 40.0 = -3.2	
	= 3.2 dB below Limit	

## 12. Recommendation & conclusion

The data collected shows that the Gumi College EMC Center.

**OH SUNG ELECTRONICS CO., LTD. RF Remote Controller (Model No.: MX-6000)** was complies with §15.231 of the FCC Rules.