

FCC EVALUATION REPORT FOR CERTIFICATION

Manufacturer: OHSUNG ELECTRONICS CO., LTD.

#181 Gongdan-dong, Gumi-si, Gyeongbuk

Republic of Korea.

Attn : Mr. Hak-Ki Kim / General Manager

Date of Issue: February 19, 2013

Order Number: GETEC-C1-12-381

Test Report Number: GETEC-E3-12-143

Test Site: GUMI COLLEGE EMC CENTER

FCC Registration Number: (100749, 443957)

FCC ID. : OZ5URCTRG100

Applicant : OHSUNG ELECTRONICS CO., LTD.

Rule Part(s) : FCC Part 15 Subpart C-Intentional Radiator § 15.231

Test Method : ANSI C63.10 (2009)

Equipment Class : Digital Transmission System(DTS)

EUT Type : RF REMOTE CONTROLLER

Type of Authority : Certification

Model Name : TRG-100


Trade Name : UNIVERSAL Remote Control

This equipment has been shown to be in compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4 (2009)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the vest of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Tested by,

Reviewed by,

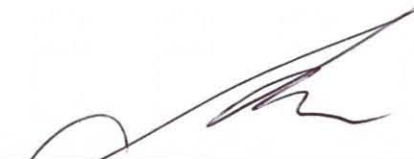
Seung-Chul Lee, Associate Engineer
GUMI COLLEGE EMC CENTER


Jae-Hoon Jeong, Technical Manager
GUMI COLLEGE EMC CENTER





CONTENTS

1. GENERAL INFORMATION	4
2. INTRODUCTION	5
3. PRODUCT INFORMATION	6
3.1 DESCRIPTION OF EUT.....	6
3.2 SUPPORT EQUIPMENT / CABLES USED	7
3.3 MODIFICATION ITEM(S).....	7
4. DESCRIPTION OF TESTS.....	8
4.1 TEST CONDITION.....	8
5. ANTENNA REQUIREMENT - §15.203	8
5.1 DESCRIPTION OF ANTENNA.....	8
5.2 CONDUCTED EMISSION	9
5.3 RADIATED EMISSION.....	10
6. CONDUCTED EMISSION.....	11
6.1 OPERATING ENVIRONMENT	11
6.2 TEST SET-UP	11
6.3 MEASUREMENT UNCERTAINTY.....	11
6.4 LIMIT	12
6.5 TEST EQUIPMENT USED.....	12
6.6 TEST DATA FOR CONDUCTED EMISSION	12
7. MAXIMUM PEAK OUTPUT POWER MEASUREMENT	14
7.1 OPERATING ENVIRONMENT.....	14
7.2 TEST SET-UP (LAYOUT)	14
7.3 LIMIT	14
7.4 TEST EQUIPMENT USED.....	14
7.5 TEST RESULT	14
8. POWER SPECTRAL DENSITY MEASUREMENT	17
8.1 OPERATING ENVIRONMENT	17
8.2 TEST SET-UP (LAYOUT)	17
8.3 LIMIT	17
8.4 TEST EQUIPMENT USED.....	17
7.5 TEST RESULT	17
9. 6 DB SPECTRUM BANDWIDTH MEASUREMENT	20
9.1 OPERATING ENVIRONMENT.....	20
9.2 TEST SET-UP (LAYOUT)	20
9.3 LIMIT	20
9.4 TEST EQUIPMENT USED.....	20
9.5 TEST RESULT	20
10. BAND EDGE MEASUREMENT	23
10.1 OPERATING ENVIRONMENT	23
10.2 TEST SET-UP (LAY-OUT).....	23
10.3 LIMIT	23
10.4 TEST EQUIPMENT USED	23
10.5 TEST RESULT	23





11. RADIATED EMISSION.....26

11.1 OPERATING ENVIRONMENT26

11.2 TEST SET-UP26

11.3 MEASUREMENT UNCERTAINTY26

11.4 LIMIT26

11.5 TEST EQUIPMENT USED27

11.6 RADIATED EMISSION TEST DATA27

APPENDIX A – ATTESTATION STATEMENT

APPENDIX B – LABELLING

APPENDIX C – BLOCK DIAGRAM

APPENDIX D – SCHEMATIC DIAGRAM

APPENDIX E – TEST SETUP PHOTOGRAPH

APPENDIX F – EXTERNAL PHOTOGRAPH

APPENDIX G – INTERNAL PHOTOGRAPH


APPENDIX H – USER’S MANUAL

APPENDIX I – OPERATIONAL DESCRIPTION

APPENDIX J – ANTENNA SPECIFICATION

APPENDIX K – PART LIST

APPENDIX L – RF EXPOSURE EVALUATION

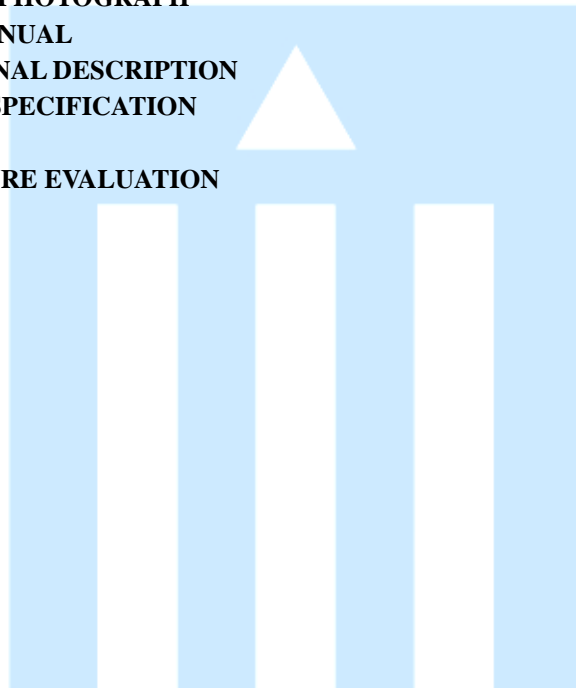



Scope: Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and / or unintentional radiators for compliance with technical rules and regulations of the Federal Communications Commission.

1. General Information

Applicant: OHSUNG ELECTRONICS CO., LTD.

Applicant Address: #181 Gongdan-dong, Gumi-si, Gyeongbuk, Republic of Korea

Manufacturer: OHSUNG ELECTRONICS CO., LTD.

Manufacturer Address: #181 Gongdan-dong, Gumi-si, Gyeongbuk, Republic of Korea

Contact Person: Mr. Hak-Ki Kim / General Manager

Tel. Number: +82-54-468- 0831 Fax Number: +82-54- 461- 8368

- **FCC ID.** OZ5URCTRG100
- **Equipment Class** Digital Transmission System (DTS)
- **EUT Type** RF REMOTE CONTROLLER
- **Model Name** TRG-100
- **Rule Part(s)** FCC Part 15 Subpart C-Intentional Radiator § 15.247
- **Test Method** ANSI C63.10 (2009)
- **Type of Authority** Certification
- **Test Procedure(s)** ANSI C63.4 (2009)
- **Dates of Test** December 29, 2012 ~ February 19, 2013
- **Place of Test** **GUMI COLLEGE EMC CENTER** (FCC Registration No.: 100749, 443957)
37 Yaeun-ro, Gumi-si, Gyeongsangbuk-do, 730-711, Republic of Korea
- **Test Report Number** GETEC-E3-12-143
- **Dates of Issue** February 19, 2013

EUT Type: RF REMOTE CONTROLLER

FCC ID.: OZ5URCTRG100





2. Introduction

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Nose Emissions From Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-2009) was used in determining radiated and conducted emissions emanating from **OHSUNG ELECTRONICS CO., LTD. RF REMOTE CONTROLLER (Model name: TRG-100)**

These measurement tests were conducted at **GUMI COLLEGE EMC CENTER**.

The site address is 37 Yaeun-ro, Gumi-si, Gyeongsangbuk-do, 730-711, Republic of Korea

This test site is one of the highest point of Gumi 1 college at about 200 kilometers away from Seoul city and 40 kilometers away from Daeje city. It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures. The detailed description of the measurement facility was found to be in compliance with the requirements of §2.948 according to ANSI C63.4 (2009)

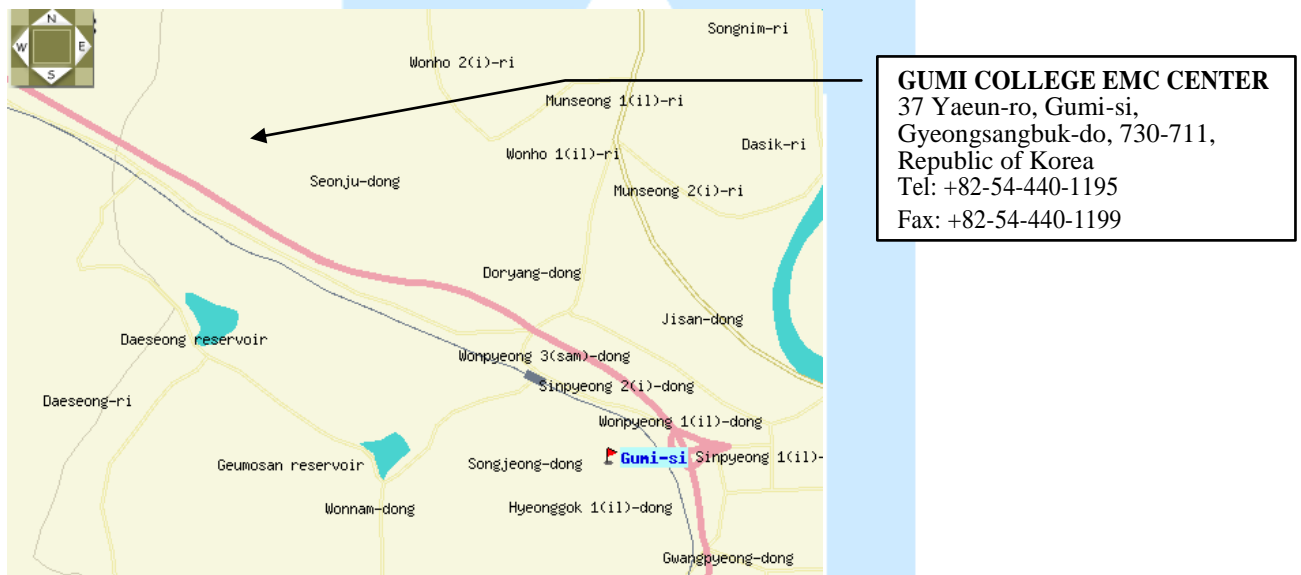


Fig 1. The map above shows the Gumi College in vicinity area.





3. Product Information

3.1 Description of EUT

The Equipment under Test (EUT) is the **OHSUNG ELECTRONICS CO., LTD. RF REMOTE CONTROLLER (Model Name: TRG-100) FCC ID.: OZ5URCTRG100**

Microprocessor: ARM 32-bit Cortex™-M3

Memory: 16 Kbytes SRAM, 128 Kbytes Flash

RF Range(radio frequency): 50 to 100 feet, depending upon the environment

RF Frequency: 2.425~2.475 GHz


Weight: 2.6 oz

Siz: 1.82" X 0.6" X 1.52"

Batteries: AA Battery 2EA

-. Crystal & Clock Frequency : Main board: 8 MHz, 32 MHz

-. I/O Port : USB port

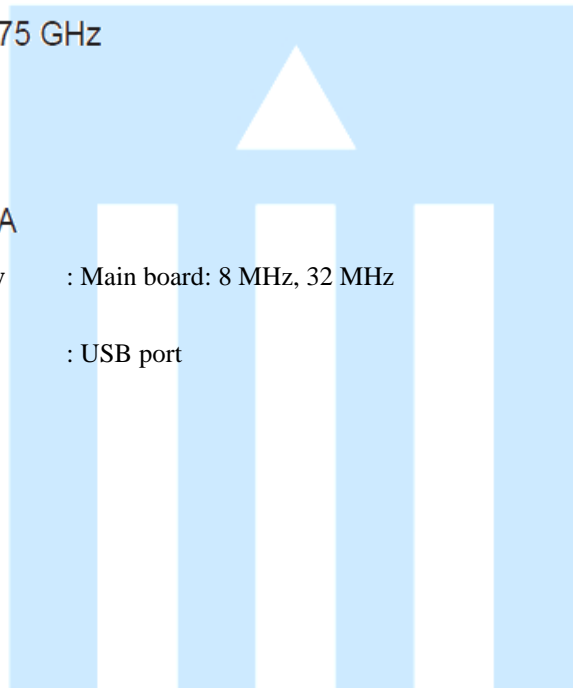



3.2 Support Equipment / Cables used

3.2.1 Used Support Equipment

Description	Manufacturer	Model Name	S/N & FCC ID.
None.	-	-	S/N: - FCC ID.: -

See "Appendix E – Test Setup Photographs" for actual system test set-up

3.2.2 System configuration

Description	Manufacturer	Model Name	S/N & FCC ID.
None.	-	-	S/N: - FCC ID: -

3.2.3 Used Cable(s)

Cable Name	Condition	Description
None.	-	-

3.3 Modification Item(s)

-. None





4. Description of tests

4.1 Test Condition

The EUT was installed, arranged and operated in a manner that is most representative of equipment as typically used. The measurements were carried out while varying operating modes and cable positions within typically arrangement to determine maximum emission level.

The representative and worst test mode(s) were noted in the test report.

- Test Voltage / Frequency: AC 120 V / 60 Hz (DC 3.0 V supplied fed from the two AA size alkaline batteries)

- Test Mode(s):
 Executed “SmartRF Studio 7 (Copyright by Texas Instruments Incorporated)” to control the EUT continuously transmit RF signal

Test Software Version	SmartRF Studio 7 V1.10.3		
Frequency	2 425 MHz	2 450 MHz	2 475 MHz
Transmit power level	4.5 dBm	4.5 dBm	4.5 dBm

5. Antenna Requirement - §15.203

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the applicant can be used with the device. The use of permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with this requirement.

5.1 Description of Antenna

The **OHSUNG ELECTRONICS CO., LTD. RF Transmitter Universal Remote Control** comply with the requirement of §15.203 with a PCB pattern antenna permanently attached to the transmitter.





5.2 Conducted Emission

The Line conducted emission test facility is inside a 4 m × 8 m × 2.5 m shielded enclosure. (FCC Registration No.: 100749)

The EUT was placed on a non-conducting 1.0 m by 1.5 m table, which is 0.8 m in height and 0.4 m away from the vertical wall of the shielded enclosure.

The EUT is powered from the Rohde & Schwarz LISN (ESH2-Z5) and the support equipment is powered from the Rohde & Schwarz LISN (ESH3-Z5). Powers to the LISN are filtered by high-current high insertion loss power line filter.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

The RF output of the LISN was connected to the EMI test receiver (Rohde & Schwarz, ESCS30).

Exploratory measurements were conducted to identify the highest emission by operating the EUT in a range of typical modes of operation, cable positions, system configuration and arrangement.

Based on exploratory measurements, the final measurements were conducted at the worst test conditions.

Exploratory measurements were scanned using Peak mode of EMI Test receiver from 150 kHz to 30 MHz with 20 ms sweep time. The final measurements were measured with Quasi-Peak and Average mode.

The bandwidth of EMI Test Receiver was set to 9 kHz. Interface cables were connected to the available interface ports of the test unit. Excess cable lengths were bundled at center with 30 cm ~ 40 cm.

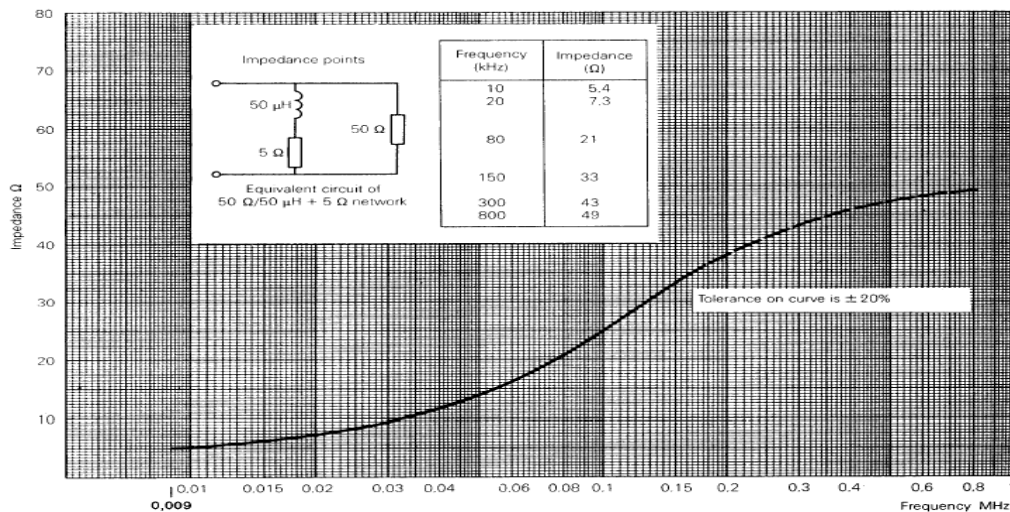


Fig 2. Impedance of LISN





5.3 Radiated Emission

Exploratory Radiated measurements were conducted at the 3m semi anechoic chamber in order to identify the highest emission by operating the EUT in a range of typical modes of operation, cable positions, system configuration and arrangement.

Based on exploratory measurements, the final measurements were conducted at the worst test conditions.

Final measurements of below 1GHz were made at 3m Chamber (FCC Registration No.: 443957) or Open area test site (FCC Registration No.: 100749) that complies with CISPR 16/ANSI C63.4.

Above 1GHz final measurements were conducted at the 3m Chamber (FCC Registration No.: 443957) only.

For measurements above 1GHz, the bottom side of 3m chamber was installed with absorbers in order to meet SVSWR Limit.

Exploratory measurements were scanned using Peak mode of EMI Test receiver and final measurements were measured with Quasi-Peak mode (Below 1GHz) and Peak & Average mode (Above 1GHz).

The measurements were performed by rotating the EUT 360° and adjusting the receive antenna height from 1.0 m to 4.0 m. All frequencies were investigated in both horizontal and vertical antenna polarity.

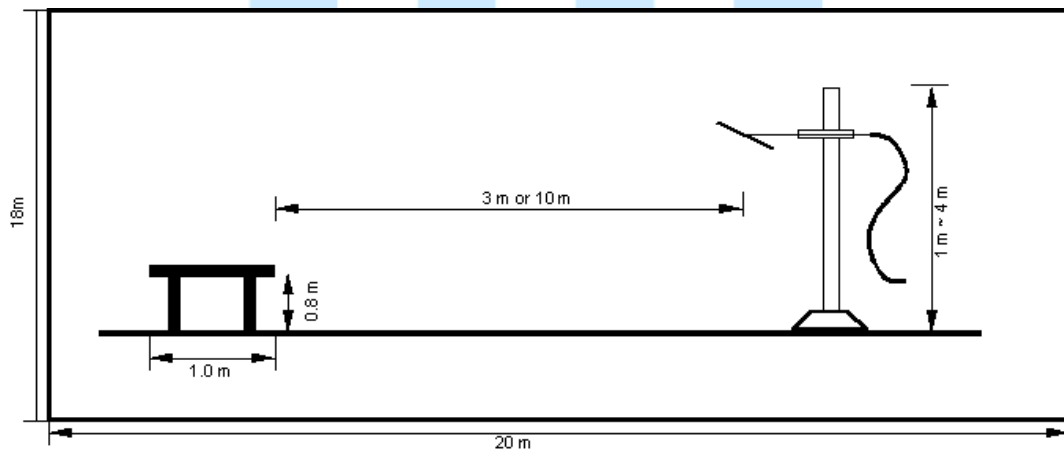


Fig 3. Dimensions of test site (Below 1GHz)

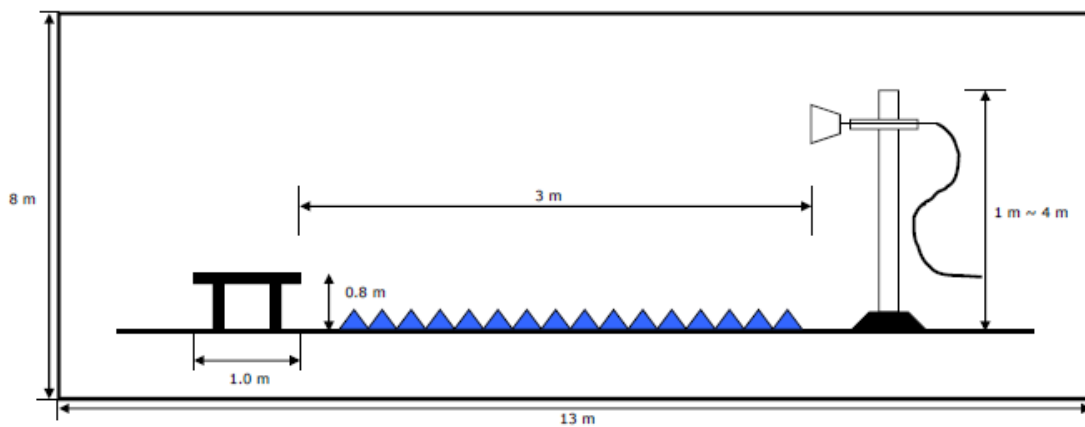


Fig 4. Dimensions of test site (Above 1GHz)





6. Conducted Emission

6.1 Operating Environment

Temperature : 22.0 °C
Relative Humidity : 42.0 % R.H.

6.2 Test Set-up

The conducted emission measurements were performed in the shielded room.

The EUT was placed on wooden table, 0.8 m heights above the floor, 0.4 m from the reference ground plane (GRP) wall and 0.8 m from AMN & ISN.

AMN is bonded on horizontal reference ground plane.

The ground plane, which was electrically bonded to the shield room, ground system and all power lines entering the shield room, were filtered.

6.3 Measurement Uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement.”

The measurement uncertainty was given with a confidence of 95 %.

Test Items	Uncertainty	Remark
Conducted emission (9 kHz ~ 150 kHz)	± 2.74 dB	Confidence levels of 95 % ($k = 2$)
Conducted emission (150 kHz ~ 30 MHz)	± 4.25 dB	Confidence levels of 95 % ($k = 2$)





6.4 Limit

RFI Conducted	FCC Limit(dB μ V/m) Class B	
	Quasi-Peak	Average
150 kHz ~ 0.5 MHz	66 ~ 56*	56 ~ 46*
0.5 MHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50

*Limits decreases linearly with the logarithm of frequency.


6.5 Test Equipment used

Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - ESCS30	Rohde & Schwarz	EMI test receiver	839809/003	05. 22. 2013
□- ESH3-Z5	Rohde & Schwarz	LISN	838979/020	05. 23. 2013
■ - ESH2-Z5	Rohde & Schwarz	LISN	829991/009	05. 23. 2013
□ - ISN T8	TESEQ. GmbH	ISN	24568	07. 04. 2013

6.6 Test data for Conducted Emission

- Test Date : January 18, 2013
- Reference Standard : Part 15 Subpart C, Sec. 15.207
- Operating Condition (Worst Case) : RF transmitting mode (Low: 2 425 MHz)
- Frequency rage : 0.15MHz ~ 30 MHz



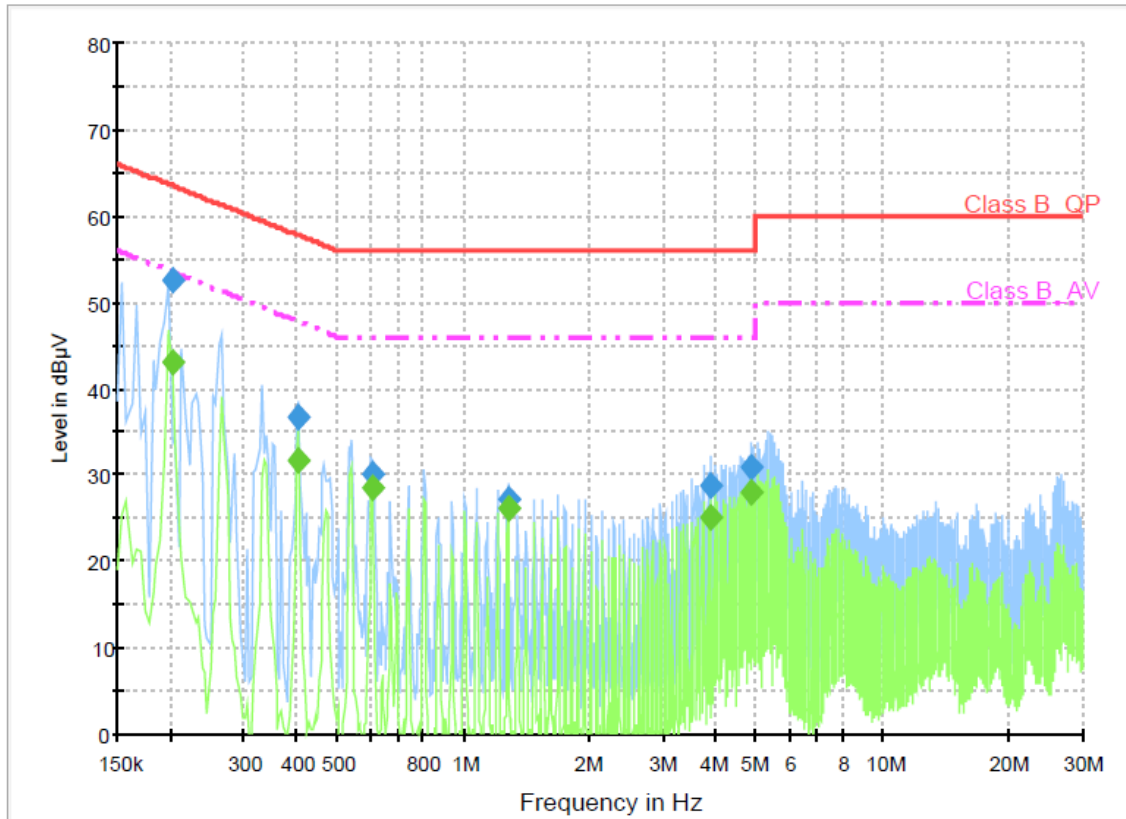

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.202000	52.5	1000.0	9.000	GND	N	10.1	11.1	63.5	
0.404000	36.7	1000.0	9.000	GND	N	10.1	21.1	57.8	
0.608000	30.0	1000.0	9.000	GND	N	10.1	26.0	56.0	
1.280000	27.3	1000.0	9.000	GND	L1	10.1	28.7	56.0	
3.912000	28.7	1000.0	9.000	GND	L1	10.1	27.3	56.0	
4.852000	30.9	1000.0	9.000	GND	L1	10.1	25.1	56.0	

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.202000	43.1	1000.0	9.000	GND	N	10.1	10.4	53.5	
0.404000	31.8	1000.0	9.000	GND	N	10.1	16.0	47.8	
0.608000	28.4	1000.0	9.000	GND	N	10.1	17.6	46.0	
1.280000	26.2	1000.0	9.000	GND	L1	10.1	19.8	46.0	
3.912000	25.0	1000.0	9.000	GND	L1	10.1	21.0	46.0	
4.852000	28.0	1000.0	9.000	GND	L1	10.1	18.0	46.0	

< Fig 5. Conducted emission result >






7. Maximum Peak Output Power Measurement

7.1 Operating environment

Temperature : 22.0 °C
 Relative Humidity : 43.0 % R.H.

7.2 Test Set-up (Layout)

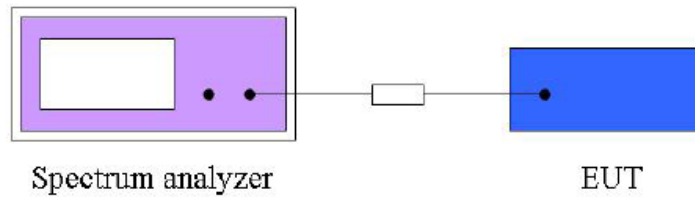

7.3 Limit

For systems using digital modulation in the (2 400~2 483.5) MHz, the limit for peak output power is 30 dBm. The limit has to be reduced by the amount in dB that the gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

7.4 Test Equipment used

Model Number	Manufacturer	Description	Serial Number	Due to Calibration
■ - FSP	Rohde & Schwarz	Spectrum Analyzer	101431	04. 26. 2013

7.5 Test Result

- Test Date : February 18, 2013
- Reference Standard : Part 15 Subpart C, Sec. 15.247(b)(3) / ANSI C63.10 Clause 6.10.2.1 (a)
- Operating Condition : RF transmitting mode (Low: 2 425 MHz, Middle: 2 450 MHz, High: 2 475 MHz)
- Power Source : AC 120 V / 60 Hz (DC 3.0 V supplied fed from the two AA size alkaline batteries)

Parameter

- Resolution bandwidth : 3 MHz
- Video bandwidth : 10 MHz
- Sweep time : Auto
- Span frequency : 20 MHz
- Detector : Peak
- Trace mode : Max. Hold

Configuration

Frequency (MHz)	Peak Conducted Power (dBm)	Peak Conducted Power (mW)	Max. Limit (dBm)	Result
2 425	4.92	3.11	30.00	Complies
2 450	4.70	2.95	30.00	Complies
2 475	4.53	2.84	30.00	Complies


EUT Type: RF REMOTE CONTROLLER

FCC ID.: OZ5URCTR100






Maximum Peak Output Power Plot on configuration / 2 425 MHz

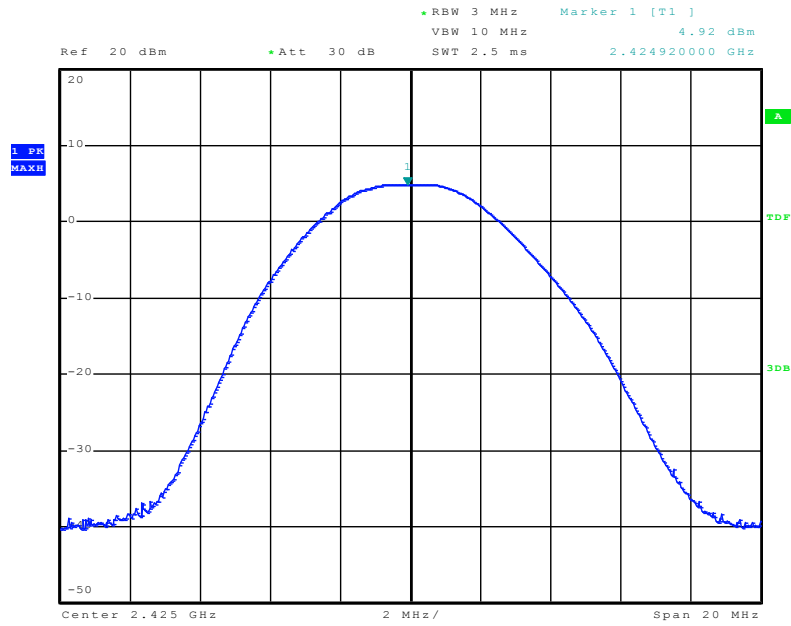

Date: 18.FEB.2013 09:08:31

Maximum Peak Output Power Plot on configuration / 2 450 MHz

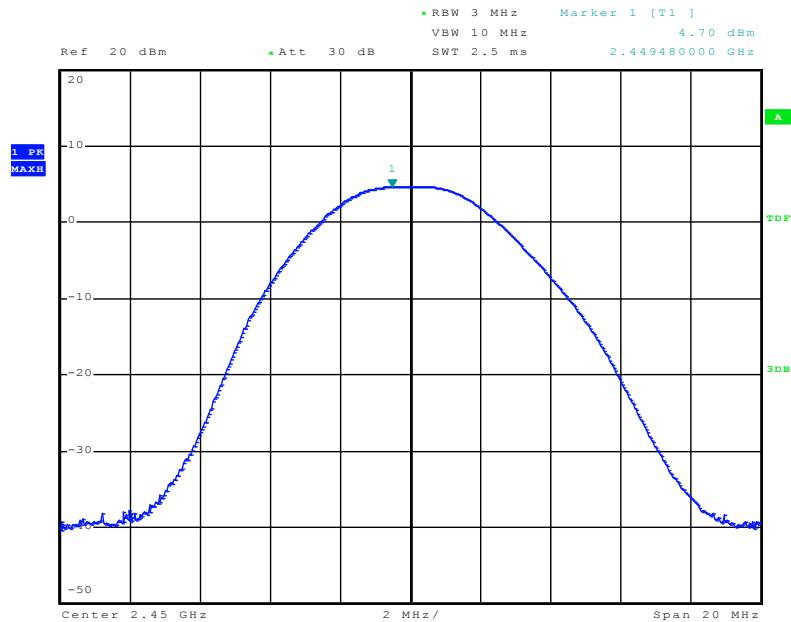


Date: 18.FEB.2013 09:06:13






Maximum Peak Output Power Plot on configuration / 2 475 MHz

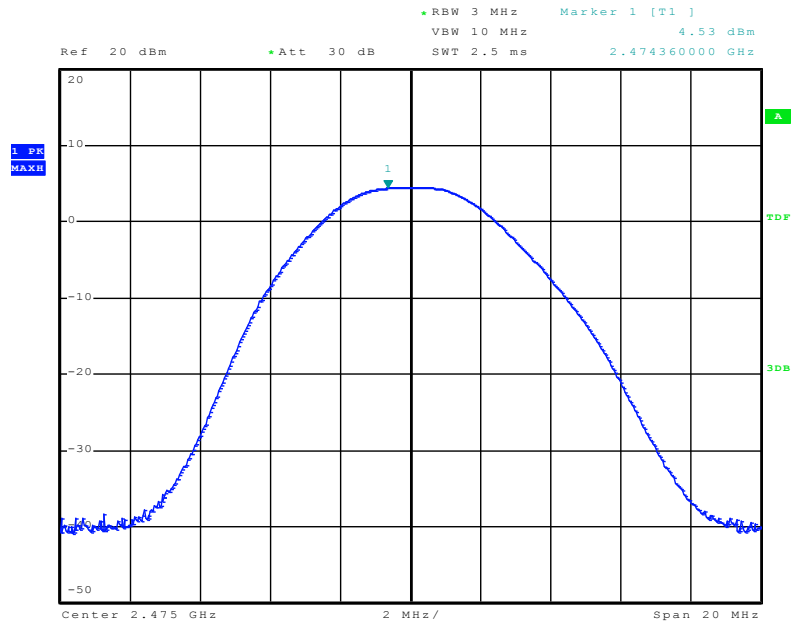

Date: 18.FEB.2013 09:03:04

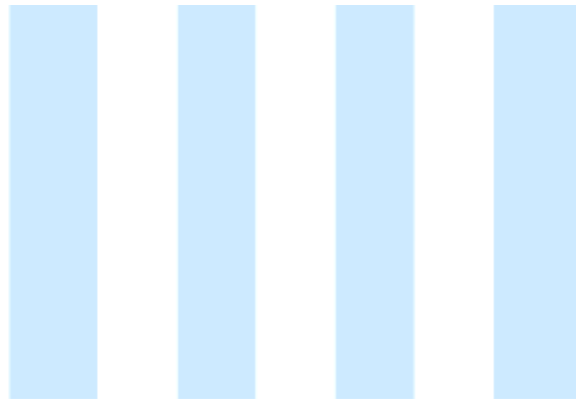




8. Power Spectral Density Measurement

8.1 Operating Environment

Temperature : 22.0 °C
 Relative Humidity : 43.0 % R.H.

8.2 Test Set-up (Layout)

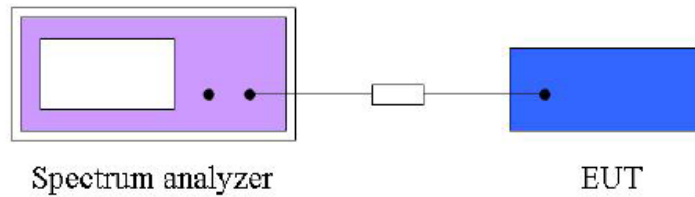

8.3 Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission

8.4 Test Equipment used

Model Number	Manufacturer	Description	Serial Number	Due to Calibration
■ - FSP	Rohde & Schwarz	Spectrum Analyzer	101431	04. 26. 2013

7.5 Test Result

- Test Date : February 18, 2013
 - Reference Standard : Part 15 Subpart C, Sec. 15.247(e)
 - Operating Condition : RF transmitting mode (Low: 2 425 MHz, Middle: 2 450 MHz, High: 2 475 MHz)
 - Power Source : AC 120 V / 60 Hz (DC 3.0 V supplied fed from the two AA size alkaline batteries)

Spectrum Parameter

- Resolution bandwidth : 3 kHz
 - Video bandwidth : 30 kHz
 - Sweep time : Auto
 - Span frequency : 5 MHz
 - Detector : Peak
 - Trace mode : Max. Hold


Configuration

Frequency (MHz)	Conducted Power (dBm)	Max. Limit (dBm)	Result
2 425	- 9.59	8.00	Complies
2 450	- 10.21	8.00	Complies
2 475	- 10.66	8.00	Complies






Power Density Plot on configuration / 2 425 MHz

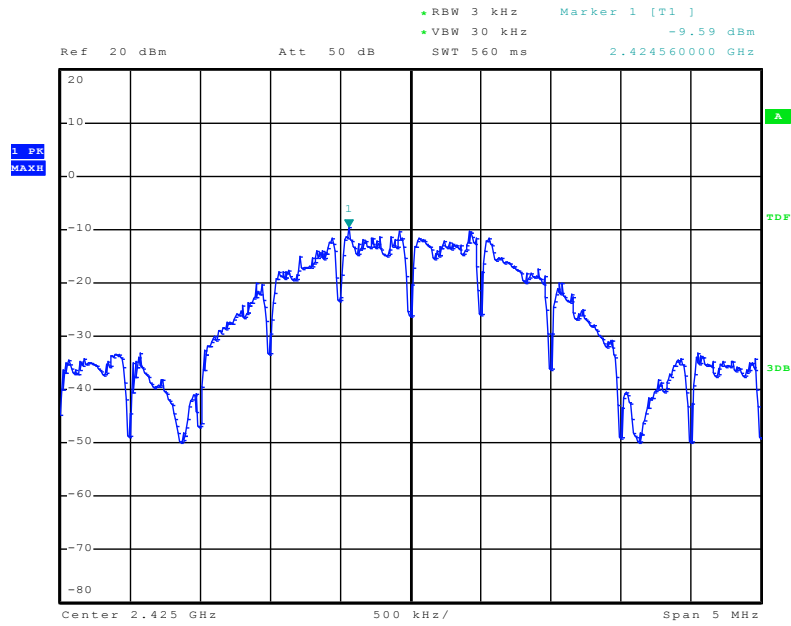

Date: 18.FEB.2013 08:57:25

Power Density Plot on configuration / 2 450 MHz

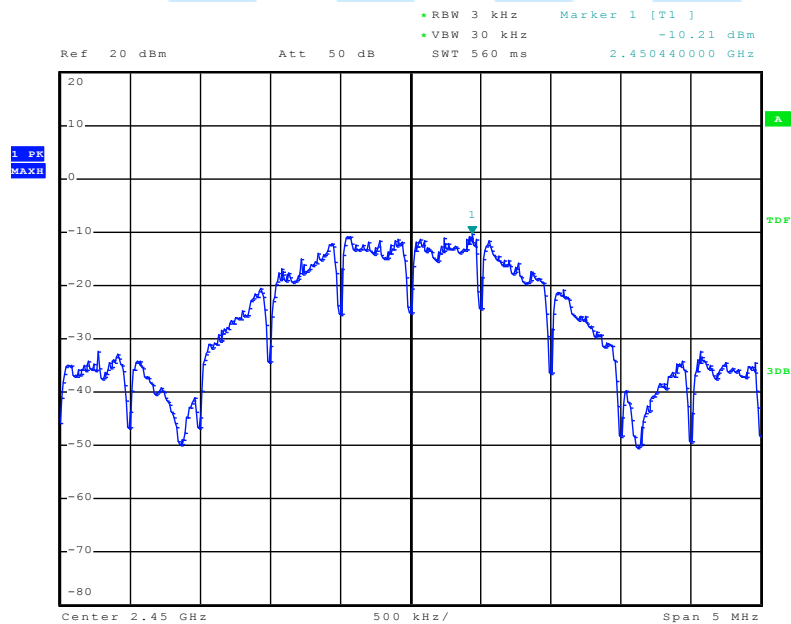


Date: 18.FEB.2013 09:00:11






Power Density Plot on configuration / 2 475 MHz

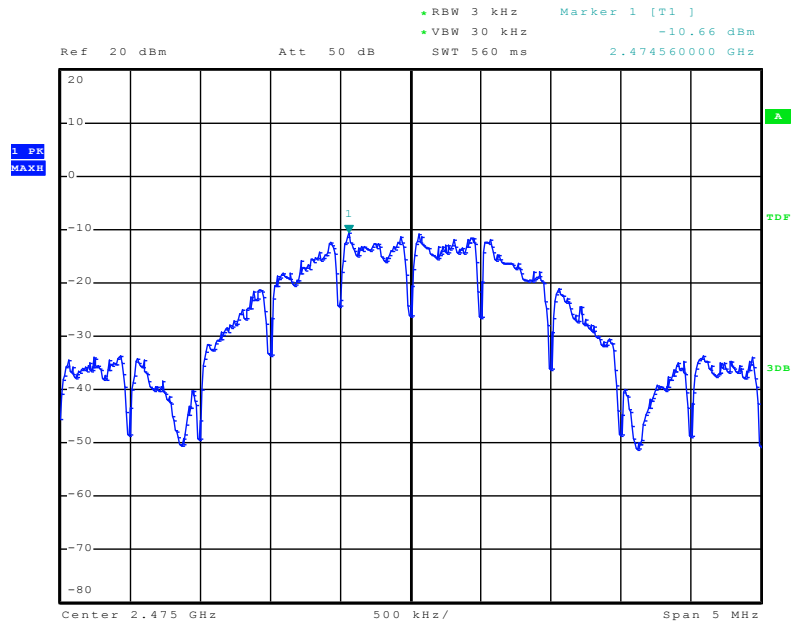

Date: 18.FEB.2013 09:02:06

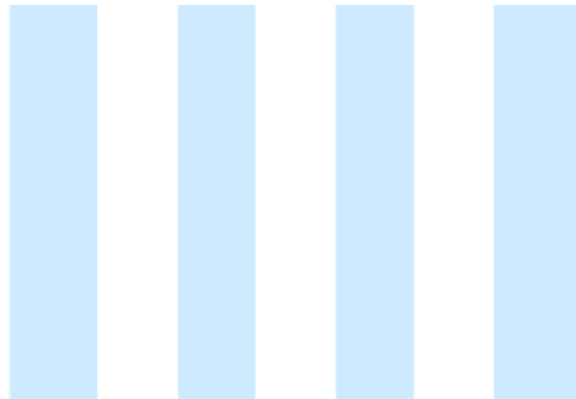




9. 6 dB Spectrum bandwidth Measurement

9.1 Operating environment

Temperature : 22.0 °C
 Relative Humidity : 43.0 % R.H.

9.2 Test Set-up (Layout)

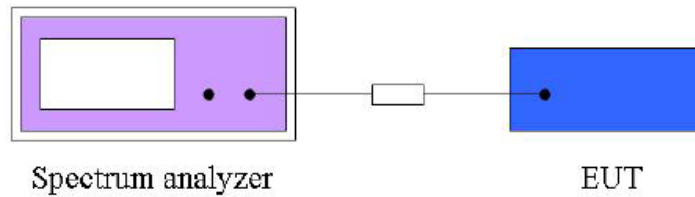

9.3 Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz

9.4 Test Equipment used

Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - FSP	Rohde & Schwarz	Spectrum Analyzer	101431	04. 26. 2013

9.5 Test result

- Test Date : February 18, 2013
 - Reference Standard : Part 15 Subpart C, Sec. 15.247(a)(2)
 - Operating Condition : RF transmitting mode (Low: 2 425 MHz, Middle: 2 450 MHz, High: 2 475 MHz)
 - Power Source : AC 120 V / 60 Hz (DC 3.0 V supplied fed from the two AA size alkaline batteries)

Spectrum Parameter

- Resolution bandwidth : 100 kHz
 - Video bandwidth : 300 kHz
 - Sweep time : Auto
 - Span frequency : 10 MHz
 - Detector : Peak
 - Trace mode : Max. Hold


Configuration

Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied bandwidth (MHz)	Min. Limit (kHz)	Result
2 425	1.60	2.64	500	Complies
2 450	1.60	2.64	500	Complies
2 475	1.60	2.64	500	Complies






6 dB Bandwidth Plot on Configuration / 2 475 MHz

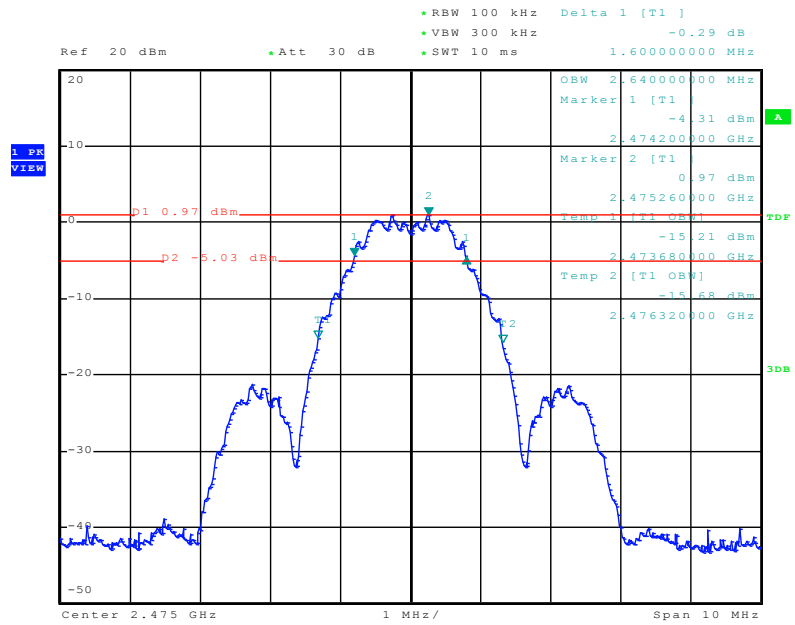

Date: 18.FEB.2013 08:55:08

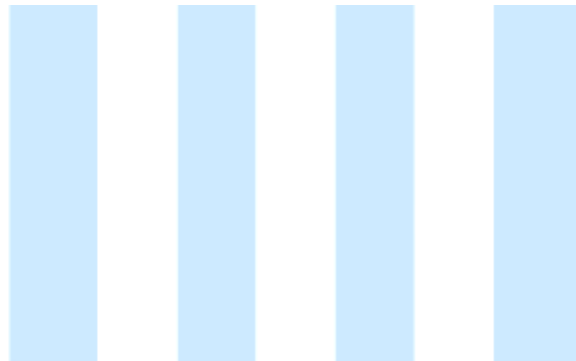




10. Band Edge Measurement

10.1 Operating environment

Temperature : 22.0 °C
 Relative Humidity : 41.0 % R.H.

10.2 Test set-up (Lay-out)

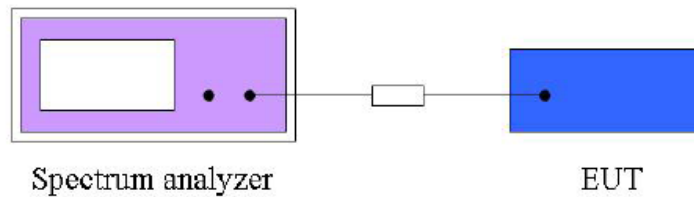

10.3 Limit

Below -20 dB of the highest emission level of operating band (in 100 kHz resolution band width)

10.4 Test equipment used

Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - FSP	Rohde & Schwarz	Spectrum Analyzer	101431	04. 26. 2013

10.5 Test Result

- Test Date : January 11 ~ February 19, 2013
 - Reference standard : Part 15 Subpart C, Sec. 15.247(d)
 - Operating condition : RF transmitting mode (Low: 2 425 MHz, High: 2 475 MHz)
 - Measuring distance : 3 m
 - Power Source : AC 120 V / 60 Hz (DC 3.0 V supplied fed from the two AA size alkaline batteries)

The spectrum plots are attached on the following 8 images, D1 line indicates the highest level, D2 line indicates the 20 Db offset below D1. It shows compliance with the requirement in part 15.247(d)


Spectrum Parameter

- Resolution bandwidth : 100 kHz
 - Video bandwidth : 300 kHz
 - Sweep time : Auto
 - Detector : Peak
 - Trace mode : Max. Hold






For Emission not in Restricted Band
Low Band Edge Plot on Configuration / 2 425 MHz

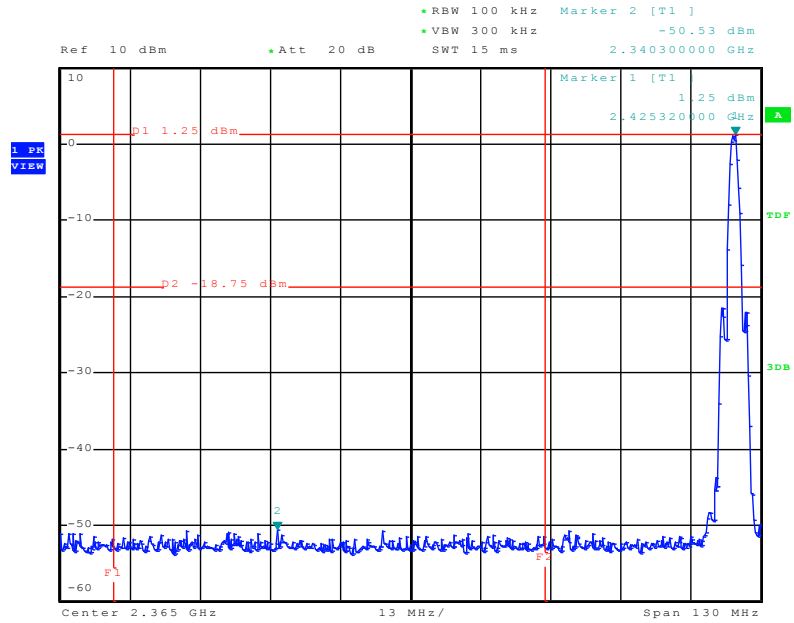

Date: 19.FEB.2013 10:42:24

High Band Edge Plot on Configuration / 2 425 MHz

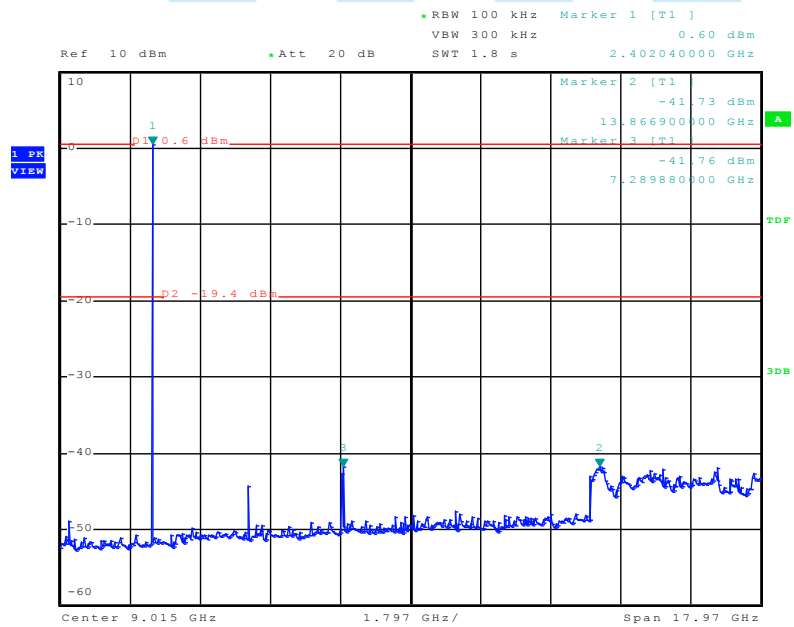


Date: 11.JAN.2013 13:01:15






For Emission not in Restricted Band
Low Band Edge Plot on Configuration / 2 475 MHz

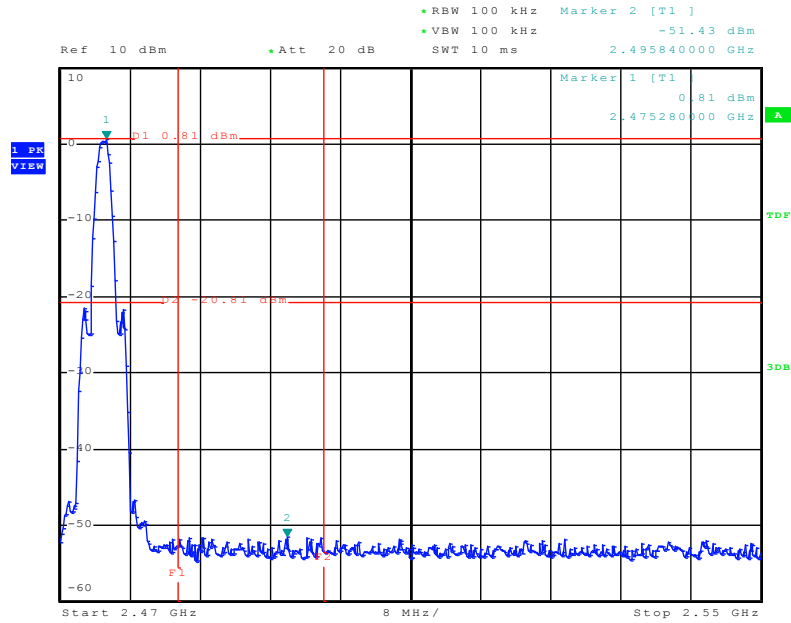

Date: 11.JAN.2013 12:47:52

High Band Edge Plot on Configuration / 2 475 MHz

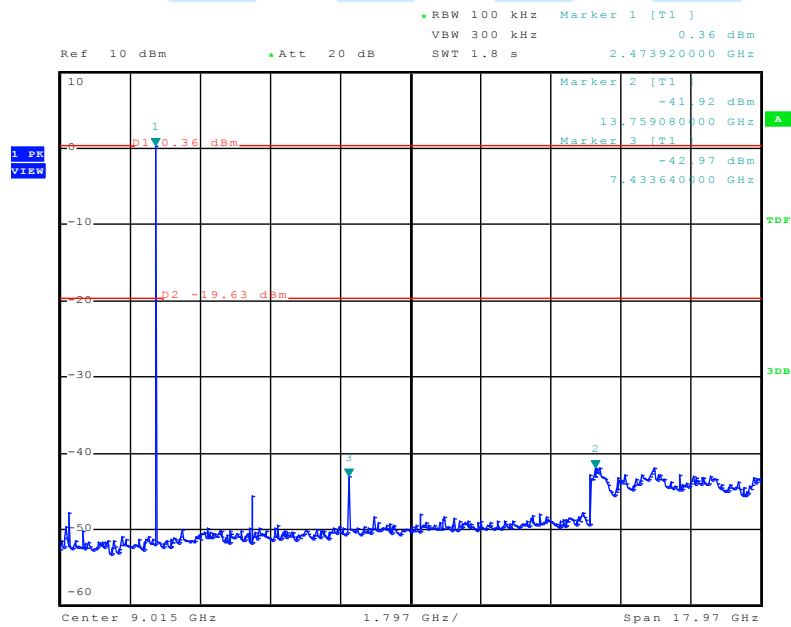

Date: 11.JAN.2013 12:53:15





11. Radiated Emission

11.1 Operating Environment

Temperature : 23.0 °C
 Relative Humidity : 43.0 % R.H.

11.2 Test set-up

The formal radiated emission was measured at 3 m distance anechoic chamber.

The EUT was placed on a non-conductive turntable approximately 0.8 m above the ground plane.

The turntable with EUT was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels.

This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

11.3 Measurement uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement”.

The measurement uncertainty was given with a confidence of 95 %.

Test Items (Semi anechoic chamber)	Uncertainty	Remark
Radiated emission (30 MHz ~ 300 MHz, 3 m, Vertical)	± 4.35 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (30 MHz ~ 300 MHz, 3 m, Horizontal)	± 4.29 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Vertical)	± 4.43 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Horizontal)	± 4.21 dB	Confidence level of approximately 95 % ($k = 2$)

11.4 Limit

20 Db in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	2400/F (kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

[Limit at 3 m] = [Limit at 300 m] -40 × log (3 [m] / 300 [m])

[Limit at 3 m] = [Limit at 30 m] -40 × log (3 [m] / 30 [m])





11.5 Test equipment used

Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - ESIB26	Rohde & Schwarz	EMI Test Receiver	830482/010	05. 23. 2013
■ - FSP	Rohde & Schwarz	Spectrum Analyzer	101431	04. 26. 2013
■ - VULB9160	Schwarzbeck	Broadband test antenna	3099	08. 07. 2013
■ - MCU066	Maturo GmbH	Position Controller	1390306	N/A
■ - TT2.5SI	Maturo GmbH	Turntable	1390307	N/A
■ - AM4.0	Maturo GmbH	Antenna Mast	1390308	N/A
■ - BBHA9120D	Schwarzbeck	Horn antenna	207	01. 29. 2014
■ - 3160-09	ETS LINDGREN	Horn antenna	LM3423	11. 14. 2013
■ - AFS44-00101800-25-10P-44	MITEQ	Preamplifier	1258942	11. 12. 2013
■ - AFS44-00101800-25-10P-44	MITEQ	Preamplifier	1258943	11. 12. 2013

11.6 Radiated emission test data

- Test Date : December 29, 2012 ~ January 9, 2013
- Reference standard : Part 15 Subpart C, Sec. 15.247(d) / ANSI C63.10
- Operating condition : RF transmitting mode (Low: 2 425 MHz, Middle: 2 450 MHz, High: 2 475 MHz)
- Measuring distance : 3 m
- Power Source : AC 120 V / 60 Hz (DC 3.0 V supplied fed from the two AA size alkaline batteries)
- Note : Through three orthogonal axes were investigated and the worst case is reported.
- Measurement

Frequency range	9 kHz ~ 90 kHz, 110 kHz ~ 150 kHz	90 kHz ~ 110 kHz	150 kHz ~ 490 kHz	490 kHz ~ 30 MHz	30 MHz ~ 1 GHz	Above 1 GHz
Detector type	Peak / Average	Quasi peak	Peak / Average	Quasi peak	Quasi peak	Peak / Average
IF bandwidth	200 Hz	200 Hz	9 kHz	9 kHz	120 kHz	1 MHz






Result of radiated emission (9 kHz to 30 MHz)

No emission found between lowest internal used/generated frequency to 30 MHz.

Result of radiated emission (30 MHz to 1 000 MHz)

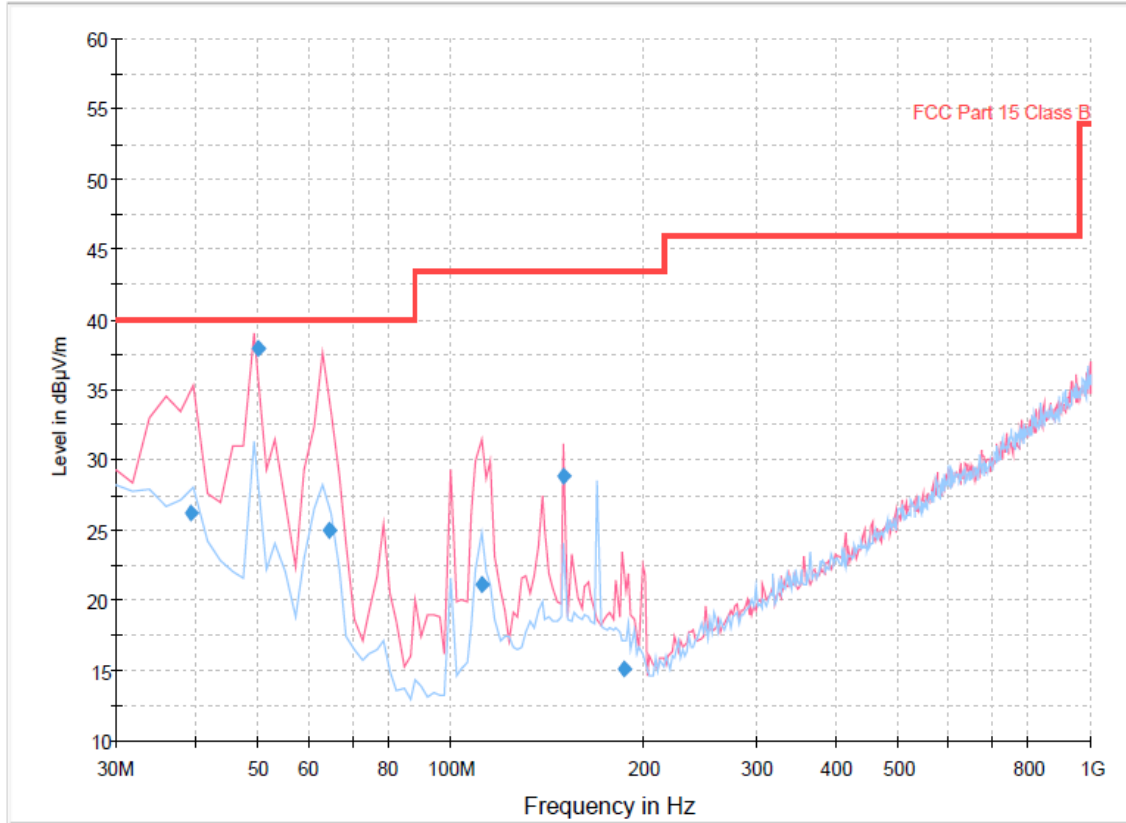

Final Result 1


Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
39.450439	26.2	1000.0	120.000	145.0	V	254.0	12.2	13.8	40.0
50.101378	38.0	1000.0	120.000	100.0	V	313.0	12.8	2.0	40.0
64.404092	24.9	1000.0	120.000	100.0	V	106.0	11.8	15.1	40.0
111.897787	21.2	1000.0	120.000	100.0	V	271.0	11.2	22.3	43.5
150.340042	28.8	1000.0	120.000	116.0	V	140.0	14.5	14.7	43.5
186.090522	15.1	1000.0	120.000	100.0	V	-8.0	12.6	28.4	43.5





Worst case result of radiated emission (1 GHz to 25 GHz)

Frequency (MHz)	Measurement Level						Limit (dB μ V/m)		Margin (dB)		Positioning System		
	Reading Value (dB μ V/m)		AF (dB/m)	AMP / CL (dB)	Test Result (dB μ V/m)		Peak	Average	Peak	Average	Pol. (H/V)	Height (cm)	Angle (°)
	Peak	Average			Peak	Average							
3571.14	50.51	33.01	29.27	-34.48	45.30	27.80	74.00	54.00	28.70	26.20	V	100	63

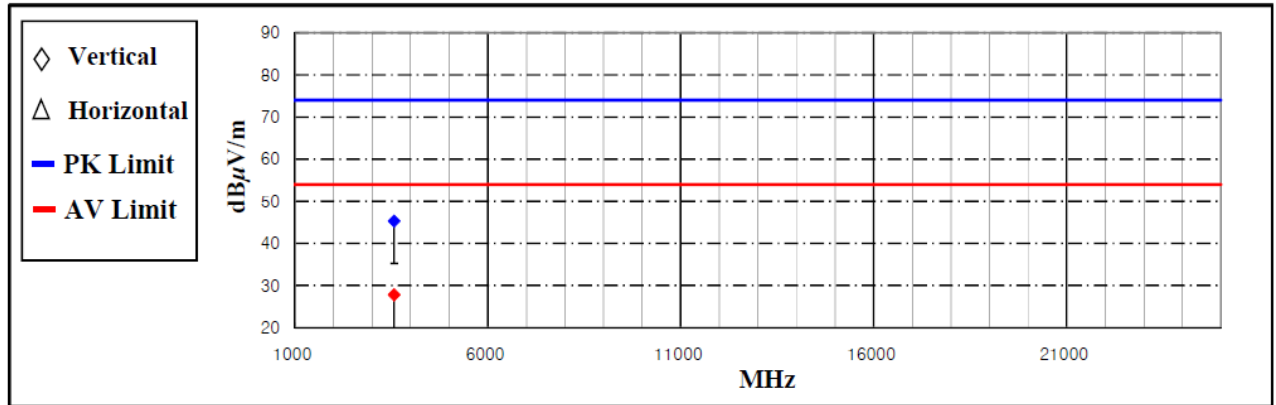

*Comment : AMP/CL_Cable loss value + AMP gain value
 AF : Antenna factor value
 Pol. : H(Horizontal), V(Vertical)

Result of radiated emission (Band Edge)

2 425 MHz

Frequency (MHz)	Measurement Level						Limit (dB μ V/m)		Margin (dB)		Positioning System		
	Reading Value (dB μ V)		AF (dB/m)	AMP / CL (dB)	Test Result (dB μ V/m)		Peak	Average	Peak	Average	Pol. (H/V)	Height (cm)	Angle (°)
	Peak	Average			Peak	Average							
2389.62	62.88	41.98	26.96	-36.94	52.90	32.00	74.00	54.00	21.10	22.00	H	136	30

2 475 MHz

Frequency (MHz)	Measurement Level						Limit (dB μ V/m)		Margin (dB)		Positioning System		
	Reading Value (dB μ V)		AF (dB/m)	AMP / CL (dB)	Test Result (dB μ V/m)		Peak	Average	Peak	Average	Pol. (H/V)	Height (cm)	Angle (°)
	Peak	Average			Peak	Average							
2489.10	56.85	39.95	27.22	-36.77	47.30	30.40	74.00	54.00	26.70	23.60	V	100	107

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dB μ V/m) = 20 log Emission level (μ V/m).

Corrected reading: Antenna factor + Cable loss + Pre-amplifier gain + Read value = Test result






Result of radiated emission (1 GHz to 10th harmonics)

2 425 MHz


Frequency (MHz)	Measurement Level						Limit (dB μ V/m)		Margin (dB)		Positioning System		
	Reading Value (dB μ V/m)		AF	AMP / CL	Test Result (dB μ V/m)						Pol.	Height	Angle
	Peak	Average	(dB/m)	(dB)	Peak	Average	Peak	Average	Peak	Average	(H/V)	(cm)	($^{\circ}$)
4849.07	49.42	29.32	31.28	-32.80	47.90	27.80	74.00	54.00	26.10	26.20	V	150	-6
7273.54	48.90	26.80	35.87	-27.27	57.50	35.40	74.00	54.00	16.50	18.60	V	158	221
12122.48	41.59	23.39	39.23	-21.72	59.10	40.90	74.00	54.00	14.90	13.10	V	150	240

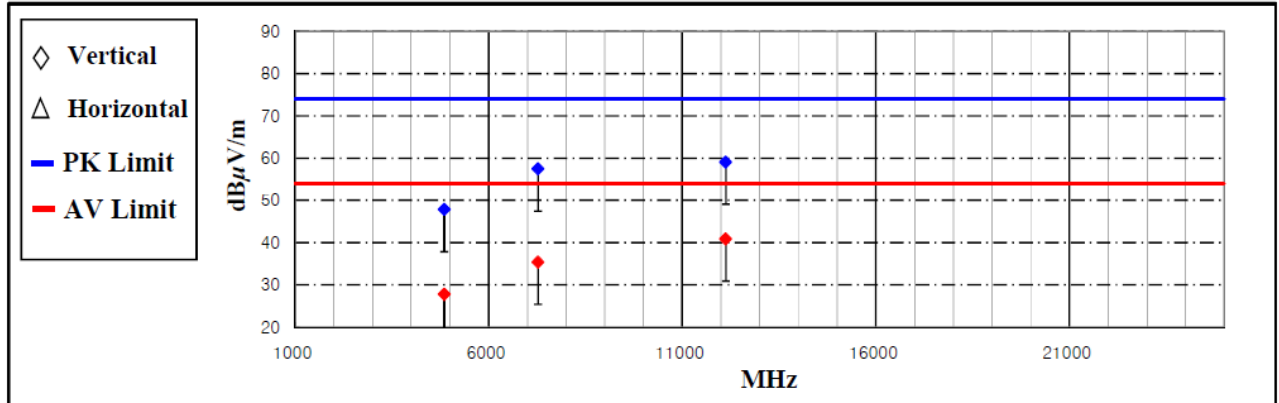

*Comment : AMP/CL_Cable loss value + AMP gain value
 AF : Antenna factor value
 Pol. : H(Horizontal), V(Vertical)

2 450 MHz

Frequency (MHz)	Measurement Level						Limit (dB μ V/m)		Margin (dB)		Positioning System		
	Reading Value (dB μ V/m)		AF	AMP / CL	Test Result (dB μ V/m)						Pol.	Height	Angle
	Peak	Average	(dB/m)	(dB)	Peak	Average	Peak	Average	Peak	Average	(H/V)	(cm)	($^{\circ}$)
4889.99	51.81	30.71	31.35	-32.76	50.40	29.30	74.00	54.00	23.60	24.70	V	100	40
7348.46	50.82	27.02	36.01	-27.13	59.70	35.90	74.00	54.00	14.30	18.10	H	146	-5
12252.32	37.43	21.63	39.19	-21.62	55.00	39.20	74.00	54.00	19.00	14.80	H	150	347

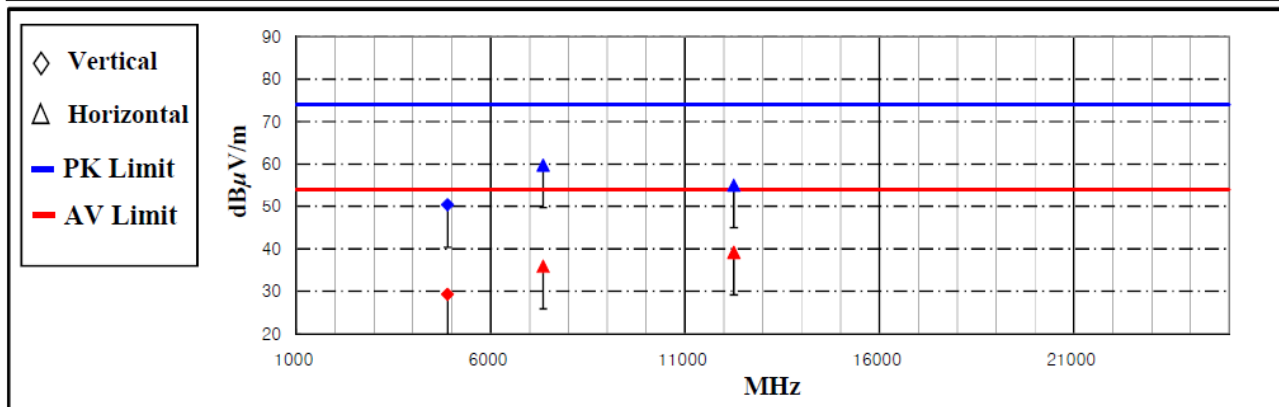


*Comment : AMP/CL_Cable loss value + AMP gain value
 AF : Antenna factor value
 Pol. : H(Horizontal), V(Vertical)





2 475 MHz

Frequency (MHz)	Measurement Level						Limit (dBμV/m)		Margin (dB)		Positioning System		
	Reading Value (dBμV/m)		AF (dB/m)	AMP / CL (dB)	Test Result (dBμV/m)		Peak	Average	Peak	Average	Pol. (H/V)	Height (cm)	Angle (°)
	Peak	Average			Peak	Average							
4948.91	46.76	28.26	31.46	-32.72	45.50	27.00	74.00	54.00	28.50	27.00	H	115	314
7423.44	532.82	24.32	36.16	-26.98	542.00	33.50	74.00	54.00	-468.00	20.50	V	160	66

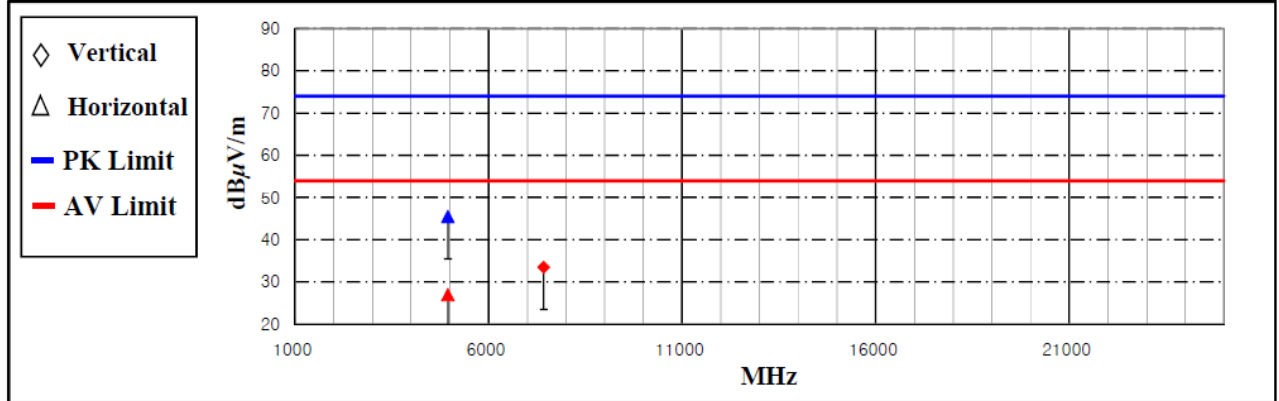

*Comment : AMP/CL_Cable loss value + AMP gain value
 AF : Antenna factor value
 Pol. : H(Horizontal), V(Vertical)

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Reading value + AF (Antenna Factor) + AMP/CL (Cable Loss + Preamp factor) = Test result

- The end -

