



FCC ID:P25S790630AC

FCC PART 15C TEST REPORT FOR CERTIFICATION  
On Behalf of

Mad Catz Inc.

Product: UNIV Tritton Headset Wireless Stereo Kunai

Model Number: 90630C

FCC ID: P25S790630AC

Prepared for : Mad Catz Inc.  
7480 Mission Valley Road, Suite 101, San Diego,  
California, 92108, USA

Prepared By : Audix Technology (Shenzhen) Co., Ltd.  
No. 6, Ke Feng Rd., 52 Block,  
Shenzhen Science & Industrial Park,  
Nantou, Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F13316  
Date of Test : Sep.20~Oct.19, 2013  
Date of Report : Dec.19, 2013

**TABLE OF CONTENTS**

<u>Description</u>	<u>Page</u>
<b>1. SUMMARY OF STANDARDS AND RESULTS.....</b>	<b>1-1</b>
1.1. Description of Standards and Results .....	1-1
<b>2. GENERAL INFORMATION .....</b>	<b>2-1</b>
2.1. Description of Device (EUT).....	2-1
2.2. Tested Supporting System Details .....	2-2
2.3. EUT Configuration and operation conditions for test.....	2-2
2.4. Test Facility .....	2-3
2.5. Measurement Uncertainty (95% confidence levels, k=2) .....	2-3
<b>3. RADIATED EMISSION TEST .....</b>	<b>3-1</b>
3.1. Test Equipment .....	3-1
3.2. Block Diagram of Test Setup.....	3-2
3.3. Radiated Emission Limit Standard: FCC 15.209 and 15.249 .....	3-3
3.4. EUT Configuration on Test.....	3-3
3.5. Operating Condition of EUT.....	3-3
3.6. Test Procedure.....	3-3
3.7. Radiated Emission Test Results .....	3-4
<b>4. 20 DB BANDWIDTH TEST .....</b>	<b>4-1</b>
4.1. Test Equipment .....	4-1
4.2. Limit.....	4-1
4.3. Test Results .....	4-1
<b>5. BAND EDGE COMPLIANCE TEST .....</b>	<b>5-1</b>
5.1. Test Equipment .....	5-1
5.2. Limit.....	5-1
5.3. Test Produce .....	5-1
5.4. Test Results .....	5-1
<b>6. ANTENNA REQUIREMENT .....</b>	<b>6-1</b>
<b>7. DEVIATION TO TEST SPECIFICATIONS.....</b>	<b>7-1</b>
<b>8. PHOTOGRAPH OF TEST .....</b>	<b>8-1</b>
8.1. Photos of Radiated Emission Test (30-1000MHz) .....	8-1
<b>9. PHOTOGRAPH OF EUT .....</b>	<b>9-1</b>

**TEST REPORT CERTIFICATION**

Applicant : Mad Catz Inc.  
Manufacturer : Mad Catz Inc.  
EUT Description : UNIV Tritton Headset Wireless Stereo Kunai  
FCC ID : P25S790630AC  
(A) MODEL NO. : 90630C  
(B) SERIAL NO. : N/A  
(C) POWER SUPPLY : DC 3V  
(D) TEST VOLTAGE : DC 3V

Tested for comply with:  
FCC Rules and Regulations Part 15 Subpart C: 2012

Test procedure used:  
ANSI C63.10:2009

The device described above is tested by AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. to confirm comply with all the FCC Part 15 Subpart C requirements.

The test results are contained in this test report and AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. is assumed full responsibility for the accuracy and completeness of these tests. This report contains data that are not covered by the NVLAP accreditation. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This Report is made under FCC Part 2.1075. No modifications were required during testing to bring this product into compliance.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Date of Test : Sep.20~ Oct.19, 2013 Report of date: Dec.19, 2013

Prepared by : Julia Zhu Reviewed by : Sunny Lu  
Julia Zhu / Assistant Sunny Lu / Assistant Manager



Approved & Authorized Signer : David Jin 12.19  
David Jin / Manager

## 1. SUMMARY OF STANDARDS AND RESULTS

### 1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION		
Description of Test Item	Standard	Results
Power Line Conducted Emission Test	FCC Part 15C: 15.207 ANSI C63.10-2009	PASS
Radiated Emission Test	FCC Part 15C: 15.209 FCC Part 15C: 15.249 ANSI C63.10-2009	PASS
Band Edge Compliance Test	FCC Part 15: 15.249 ANSI C63.10-2009	PASS
20dB Bandwidth Test	FCC Part 15: 15.215 ANSI C63.10-2009	PASS

Remark :Test According to ANSI C63.4-2009

## 2. GENERAL INFORMATION


### 2.1. Description of Device (EUT)

Product Name	: UNIV Tritton Headset Wireless Stereo Kunai
Model Number	: 90630C
FCC ID	: P25S790630AC
Operation frequency	: 2406MHz-2476MHz
Antenna	: Integrated PCB antenna, 0dBi gain
Modulation	: GFSK
Applicant	: Mad Catz Inc. 7480 Mission Valley Road, Suite 101, San Diego, California, 92108, USA
Manufacturer	: Mad Catz Inc. 7480 Mission Valley Road, Suite 101, San Diego, California, 92108, USA
Audio Cable	: Unshielded, Detachable, 1.0m
AV In Cable	: Unshielded, Detachable, 1.2m
USB Cable	: Unshielded, Detachable, 1.0m
Date of Test	: Sep.20~Oct.19, 2013
Date of Receipt	: Sep.19, 2013
Sample Type	: Prototype production

## 2.2. Tested Supporting System Details

None

## 2.3. EUT Configuration and operation conditions for test.



**(EUT: UNIV Tritton Headset Wireless Stereo Kunai)**

## 2.4. Test Facility

Site Description Name of Firm	:	Audix Technology (Shenzhen) Co., Ltd. No. 6, Ke Feng Rd., 52 Block, Shenzhen Science & Industrial Park, Nantou, Shenzhen, Guangdong, China
3m Anechoic Chamber	:	Certificated by FCC, USA Registration Number: 90454 Valid Date: Feb.22, 2015
3m & 10m Anechoic Chamber	:	Certificated by FCC, USA Registration Number: 794232 Valid Date: Dec.31, 2015
EMC Lab.	:	Certificated by Industry Canada Registration Number: IC 5183A-1 Valid Date: Jun.13, 2014  Certificated by DAkKS, Germany Registration No: D-PL-12151-01-01 Valid Date: Feb.01, 2014  Accredited by NVLAP, USA NVLAP Code: 200372-0 Valid Date: Mar.31, 2014

## 2.5. Measurement Uncertainty (95% confidence levels, k=2)

Test Item	Uncertainty
Uncertainty for Conduction emission test in No. 1 Conduction	3.08dB(9KHz to 150KHz)
	3.1dB (150KHz to 30MHz)
Uncertainty for Radiation Emission test in 3m chamber	3.22 dB(30~200MHz, Polarize: H)
	3.23 dB(30~200MHz, Polarize: V)
	3.49 dB(200M~1GHz, Polarize: H)
	3.39 dB(200M~1GHz, Polarize: V)
Uncertainty for Radiation Emission test in 3m chamber (1GHz-18GHz)	5.04 dB(1~6GHz, Distance: 3m)
	5.06 dB(6~18GHz, Distance: 3m)
Uncertainty for Radiated Spurious Emission test in RF chamber	3.57dB
Uncertainty for Conduction Spurious emission test	2.00 dB
Uncertainty for Output power test	0.73 dB
Uncertainty for Power density test	2.00 dB
Uncertainty for Frequency range test	$7 \times 10^{-8}$
Uncertainty for Bandwidth test	83 kHz
Uncertainty for DC power test	0.038 %
Uncertainty for test site temperature and humidity	0.6°C
	3%

### 3. RADIATED EMISSION TEST

#### 3.1. Test Equipment

Frequency rang: 30~1000MHz

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	3#Chamber	AUDIX	N/A	N/A	Nov.24, 12	1 Year
2	EMI Spectrum	Agilent	E4407B	MY41440292	May.08, 13	1 Year
3	Test Receiver	Rohde & Schwarz	ESVS10	834468/011	May.08, 13	1 Year
4	Amplifier	HP	8447D	2648A04738	May.08, 13	1 Year
5	Bilog Antenna	TESEQ	CBL6112D	35375	May.30, 13	1 Year
6	RF Cable	MIYAZAKI	CFD400-NL	3# Chamber No.1	May.08, 13	1 Year
7	Coaxial Switch	Anritsu	MP59B	M74389	May.08, 13	1 Year


Frequency rang: above 1000MHz

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Spectrum Analyzer	Agilent	E4407B	MY41440292	May.08, 13	1 Year
2	Horn Antenna	EMCO	3115	9510-4580	May.28, 13	1 Year
3	Amplifier	Agilent	8449B	3008A00863	May.08, 13	1 Year
4	RF Cable	Hubersuhner	SUCOFLEX106	77980/6	May.08, 13	1 Year
5	RF Cable	Hubersuhner	SUCOFLEX106	77977/6	May.08, 13	1 Year
6	Horn Antenna	EMCO	3116	00060089	Aug.28, 13	1 Year




### 3.2. Block Diagram of Test Setup

For frequency range 30MHz-1000MHz

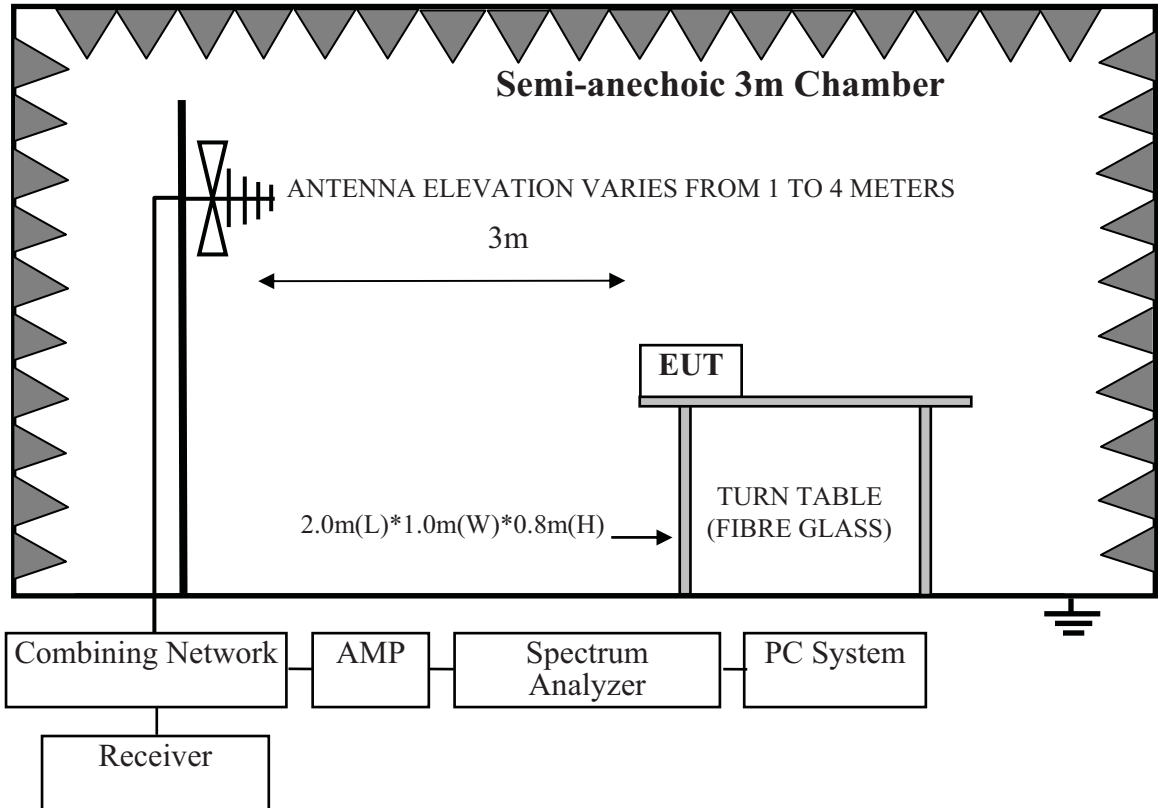

For frequency range above 1GHz

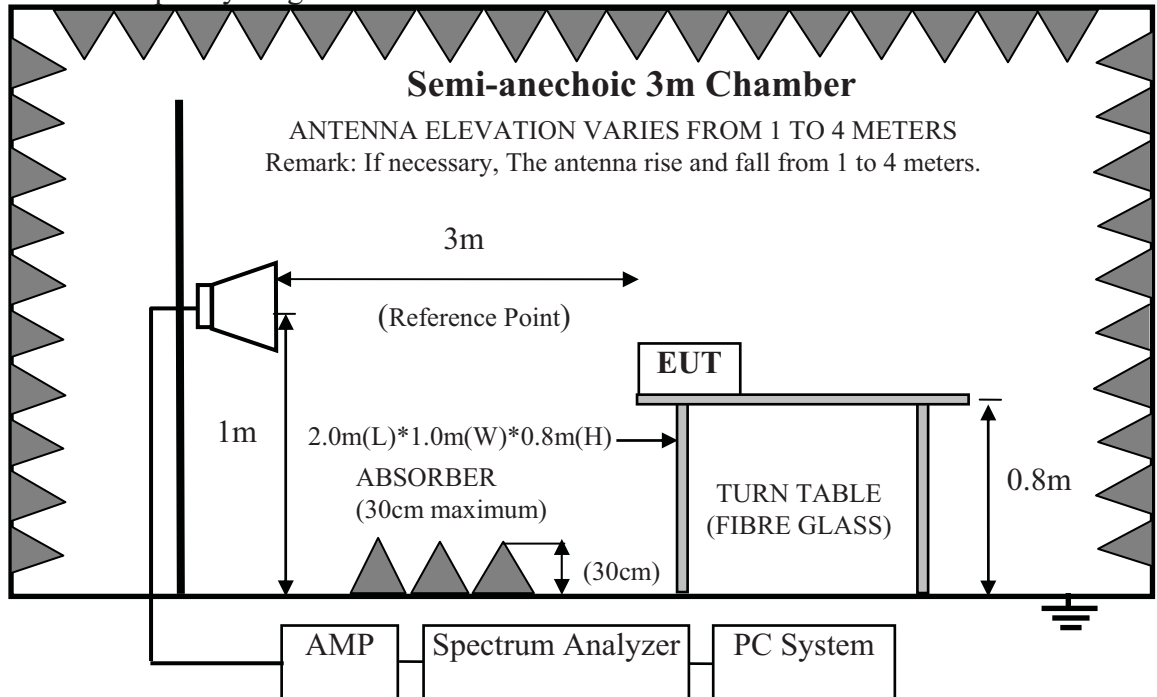

### 3.3. Radiated Emission Limit Standard: FCC 15.209 and 15.249

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000MHz	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	
Field Strength of fundamental emissions for 2.4GHz-2.4835GHz	3	114.0 dB(μV)/m (Peak) 94.0 dB(μV)/m (Average)	

- Remark :
- (1) Emission level  $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V}/\text{m}$
  - (2) The smaller limit shall apply at the cross point between two frequency bands.
  - (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.
  - (4) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

### 3.4.EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 3.5.Operating Condition of EUT

- 3.5.1. Setup the EUT and simulator as shown as Section 4.2.
- 3.5.2. Turned on the power of all equipment.
- 3.5.3. Let EUT work in Tx mode.

### 3.6.Test Procedure

The EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.10-2009 on radiated emission Test.

During the pretest the EUT was rotated through three orthogonal axes to determine the attitude that maximizes the emissions.

After that the EUT was manually handled to find the orientation that has the maximum emission, which is the orientation show in the test setup photos.

The bandwidth of the EMI test receiver (R&S ESVS10) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's RBW is set at 1MHz and VBW is set at 3MHz for peak emissions measurement above 1GHz

This device is pulse modulated, a duty cycle factor was used to calculate average level based measured peak level.

The frequency range from 30MHz to 10th harmonic (25GHz) are checked. and no any emissions were found from 18GHz to 25 GHz, So the radiated emissions from 18GHz to 25GHz were not record.

### 3.7.Radiated Emission Test Results



**PASS.**


All the emissions from 30MHz to 25GHz were comply with the 15.209 Limit.

Note: The duty cycle factor for calculate average level is 14.07 dB


For fundamental test: RBW=3MHz ,VBW=10MHz,PK detector for PK value

Duty cycle:  $0.9967\text{ms} / 5.033\text{ms} * 100\% = 19.80\%$   
 Duty cycle factor =  $20\log (1/\text{duty cycle}) = 14.07$

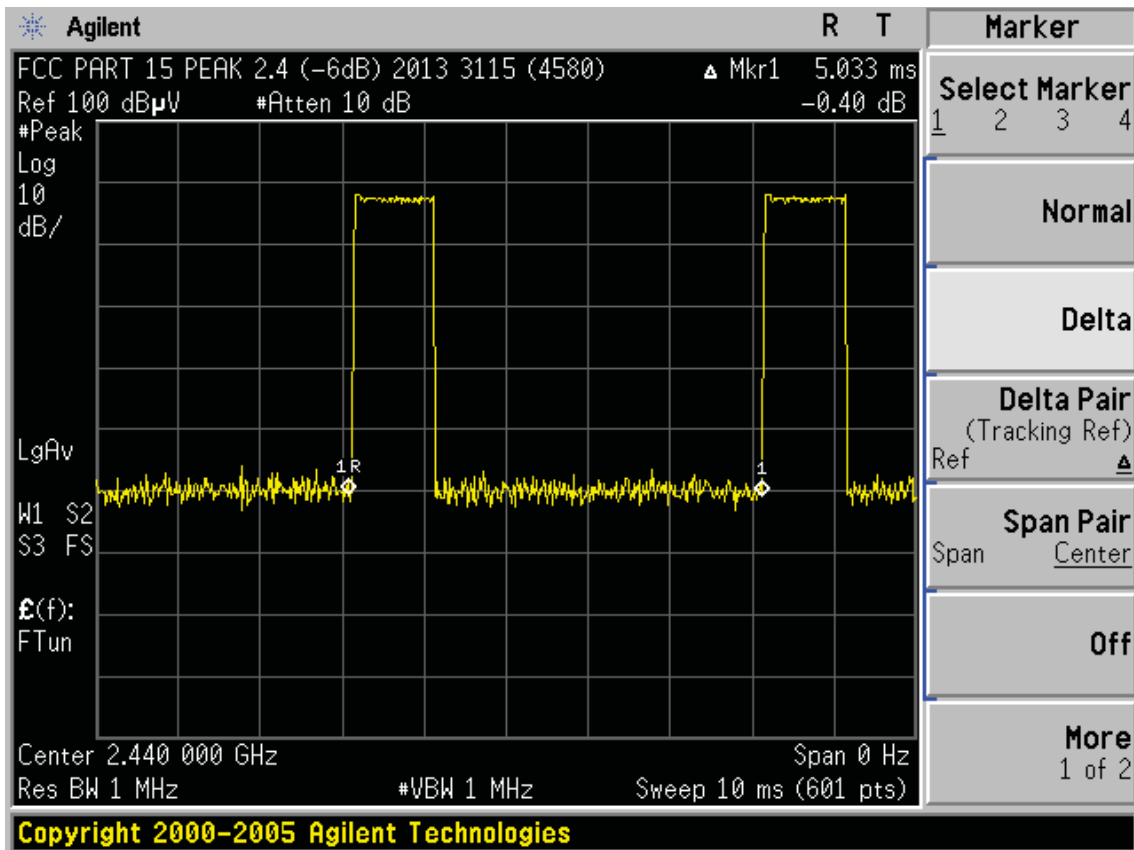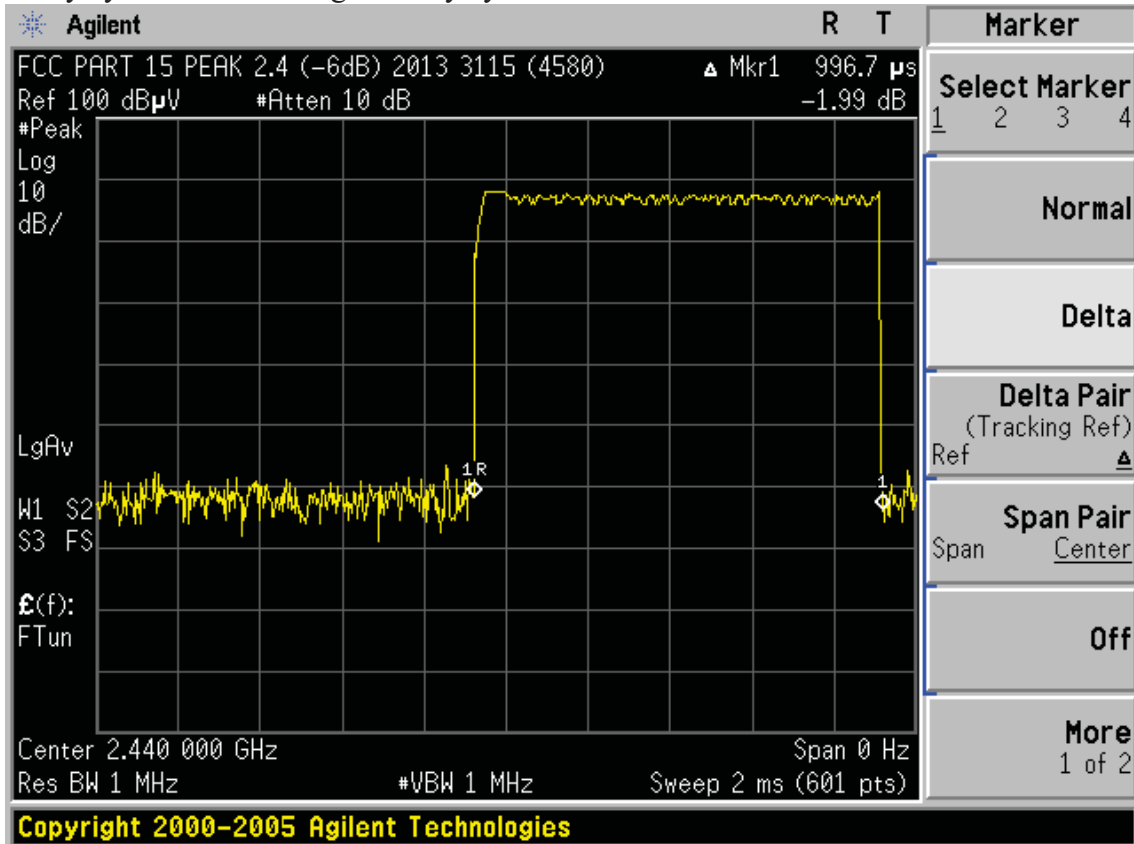

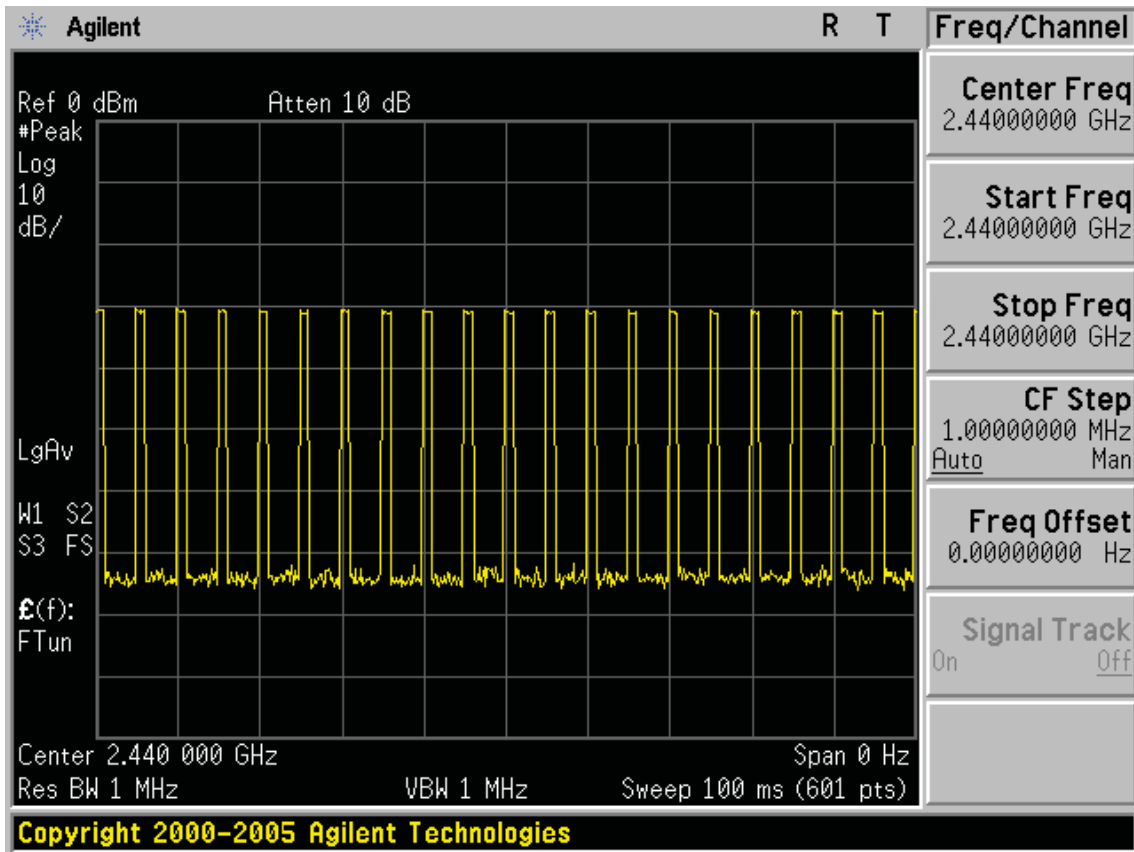


Frequency: 30MHz~1GHz

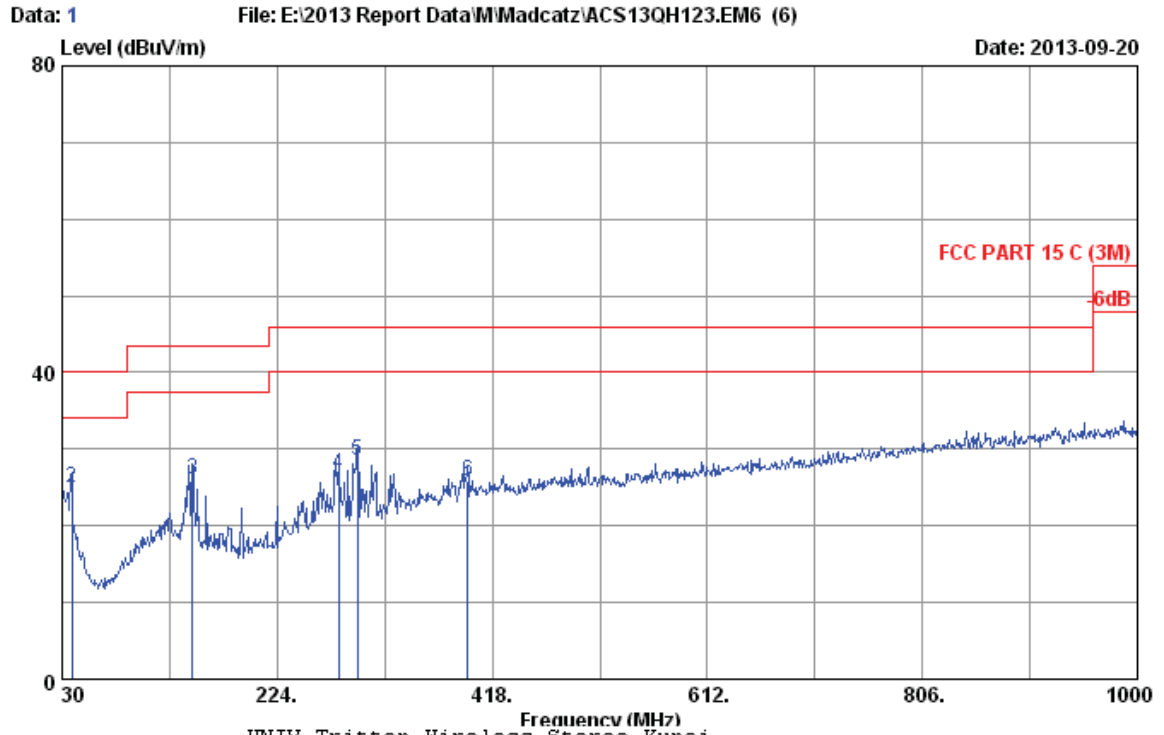

Site no. : 3m Chamber Data no. : 1  
 Dis. / Ant. : 3m 2013 CBL6112D 35375 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 C (3M)  
 Env. / Ins. : 24°C/65% Engineer : Even  
 EUT : UNIV Tritton Wireless Stereo Kunai  
 Power rating : DC 3V  
 Test Mode : Tx Mode  
 M/N:90630C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	30.000	20.10	0.83	2.01	22.94	40.00	17.06	QP
2	38.730	14.80	0.99	9.24	25.03	40.00	14.97	QP
3	147.370	11.43	1.59	12.98	26.00	43.50	17.50	QP
4	279.290	13.56	2.09	11.09	26.74	46.00	19.26	QP
5	296.750	13.90	2.16	12.46	28.52	46.00	17.48	QP
6	395.690	16.43	2.45	7.00	25.88	46.00	20.12	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

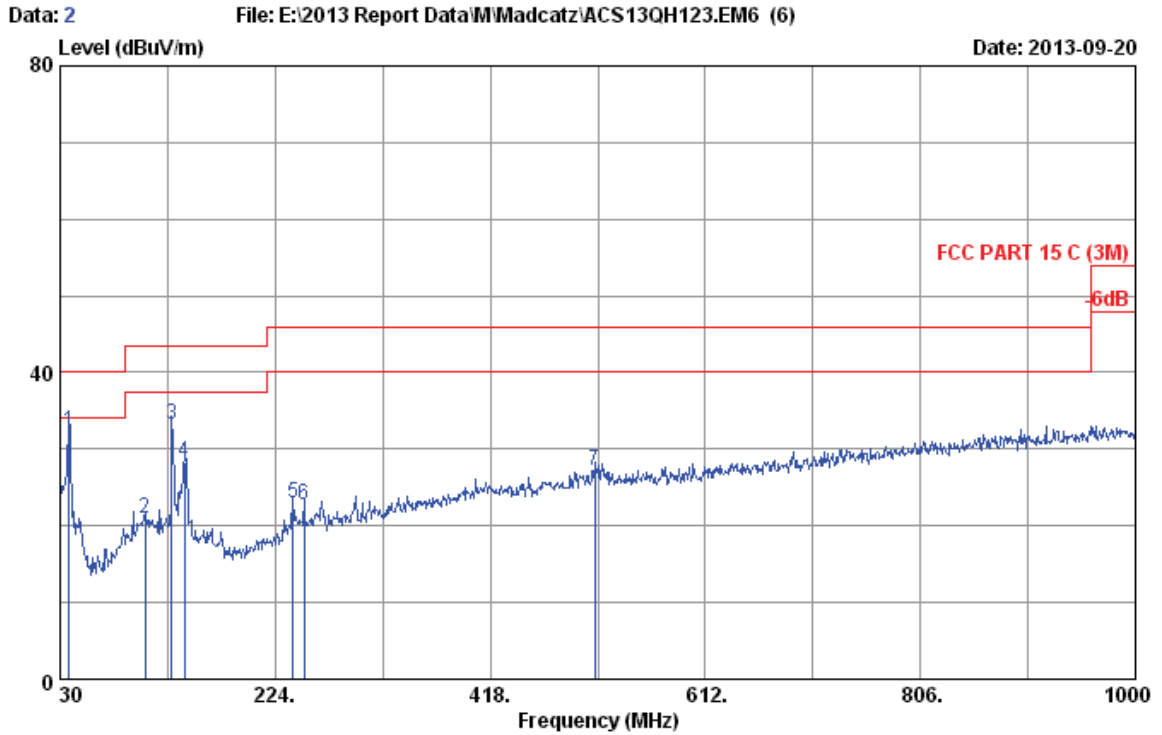


Site no. : 3m Chamber Data no. : 2  
 Dis. / Ant. : 3m 2013 CBL6112D 35375 Ant. pol. : VERTICAL  
 Limit : FCC PART 15 C (3M)  
 Env. / Ins. : 24°C/65% Engineer : Even  
 EUT : UNIV Tritton Wireless Stereo Kunai  
 Power rating : DC 3V  
 Test Mode : Tx Mode  
 M/N:90630C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	37.760	15.34	0.97	16.04	32.35	40.00	7.65	QP
2	106.630	12.03	1.44	7.46	20.93	43.50	22.57	QP
3	130.880	12.76	1.53	18.97	33.26	43.50	10.24	QP
4	142.520	11.77	1.57	14.96	28.30	43.50	15.20	QP
5	240.490	12.25	1.94	8.74	22.93	46.00	23.07	QP
6	250.190	13.11	1.98	7.58	22.67	46.00	23.33	QP
7	512.090	18.20	2.78	6.31	27.29	46.00	18.71	QP


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Frequency: 1GHz~18GHz

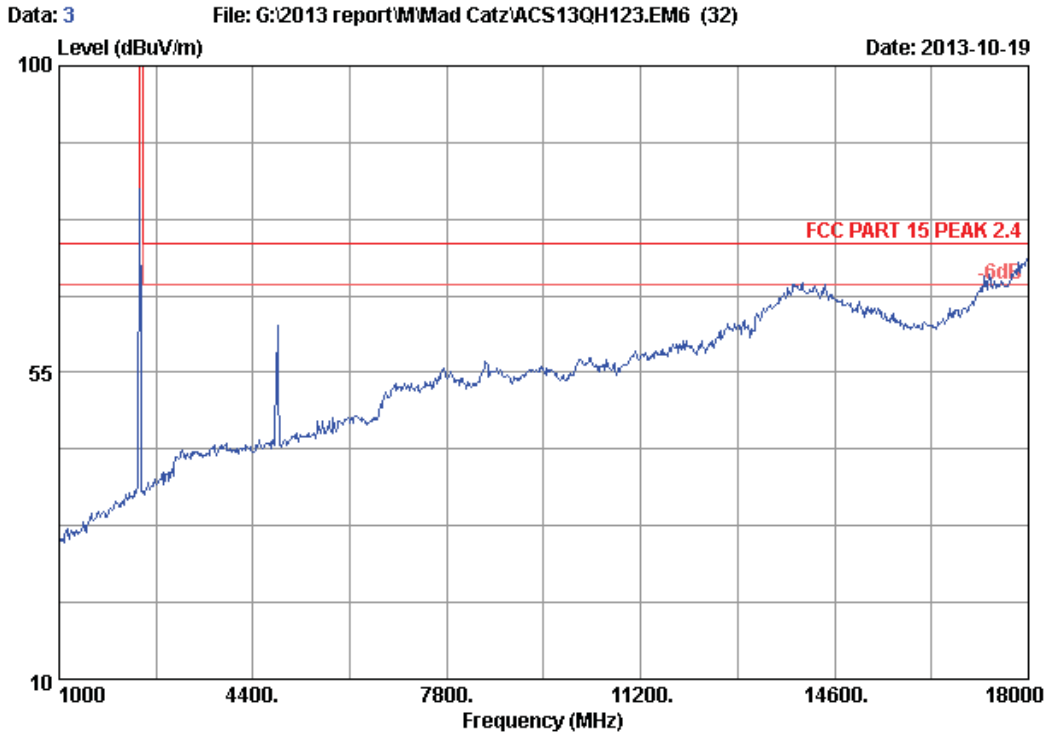

Site no. : 3m Chamber Data no. : 3  
Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL  
Limit : FCC PART 15 PEAK 2.4  
Env. / Ins. : 23°C/54% Engineer : Leo-Li  
EUT : UNIV Tritton Wireless Stereo Kunai  
Power supply : DC 3V  
Test mode : Tx Mode 2406MHz  
M/N:90630C



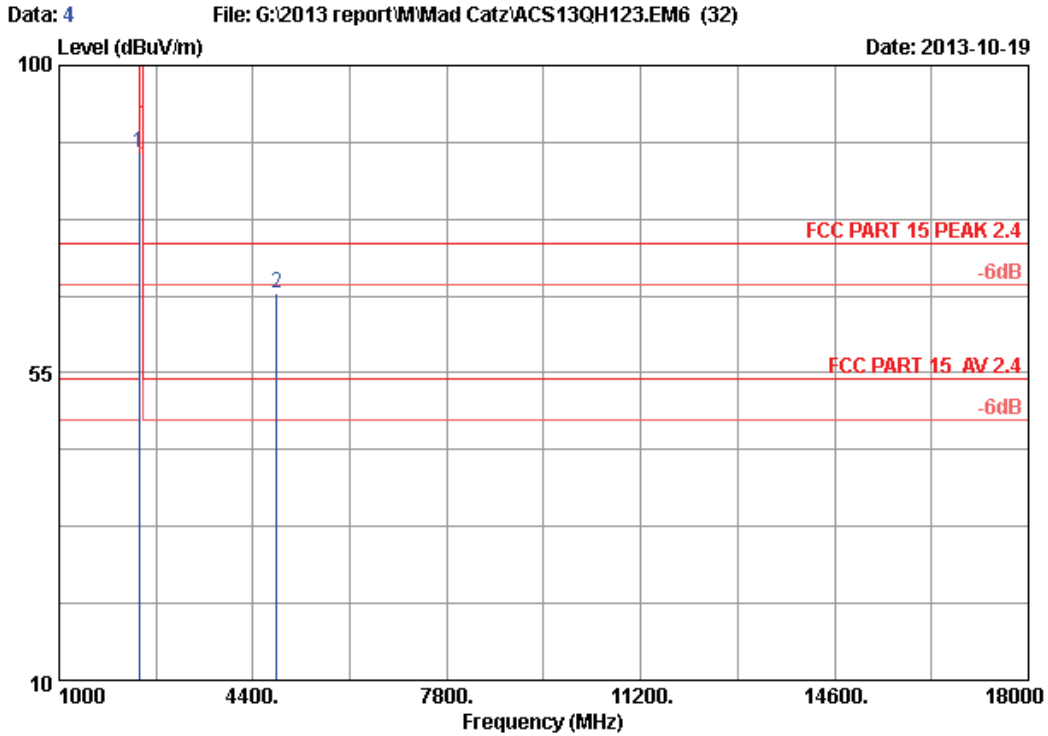


Site no. : 3m Chamber Data no. : 4  
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL  
 Limit : FCC PART 15 PEAK 2.4  
 Env. / Ins. : 23°C/54% Engineer : Leo-Li  
 EUT : UNIV Tritton Wireless Stereo Kunai  
 Power supply : DC 3V  
 Test mode : Tx Mode 2406MHz  
 M/N:90630C

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2406.000	28.19	5.81	35.70	88.86	87.16	114.00	26.84	Peak
2	4812.000	32.86	8.57	35.70	60.83	66.56	74.00	7.44	Peak


Remarks:

- Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
- The emission levels that are 20dB below the official limit are not reported.

Frequency (MHz)	Peak level (dBUV/m)	Duty cycle factor (dB)	AV level (dBUV/m)	Limit(dBUV/m)	Conclusion
4812.000	66.56	14.07	52.49	54	Pass

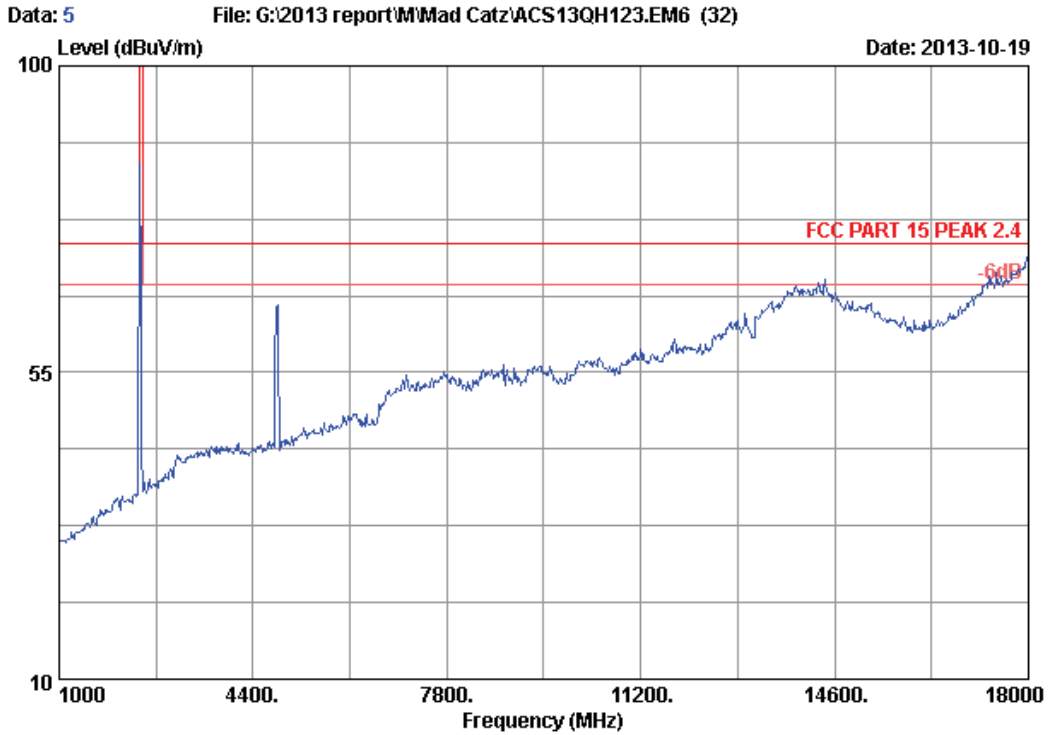

Site no. : 3m Chamber Data no. : 5  
Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL  
Limit : FCC PART 15 PEAK 2.4  
Env. / Ins. : 23°C/54% Engineer : Leo-Li  
EUT : UNIV Tritton Wireless Stereo Kunai  
Power supply : DC 3V  
Test mode : Tx Mode 2406MHz  
M/N:90630C

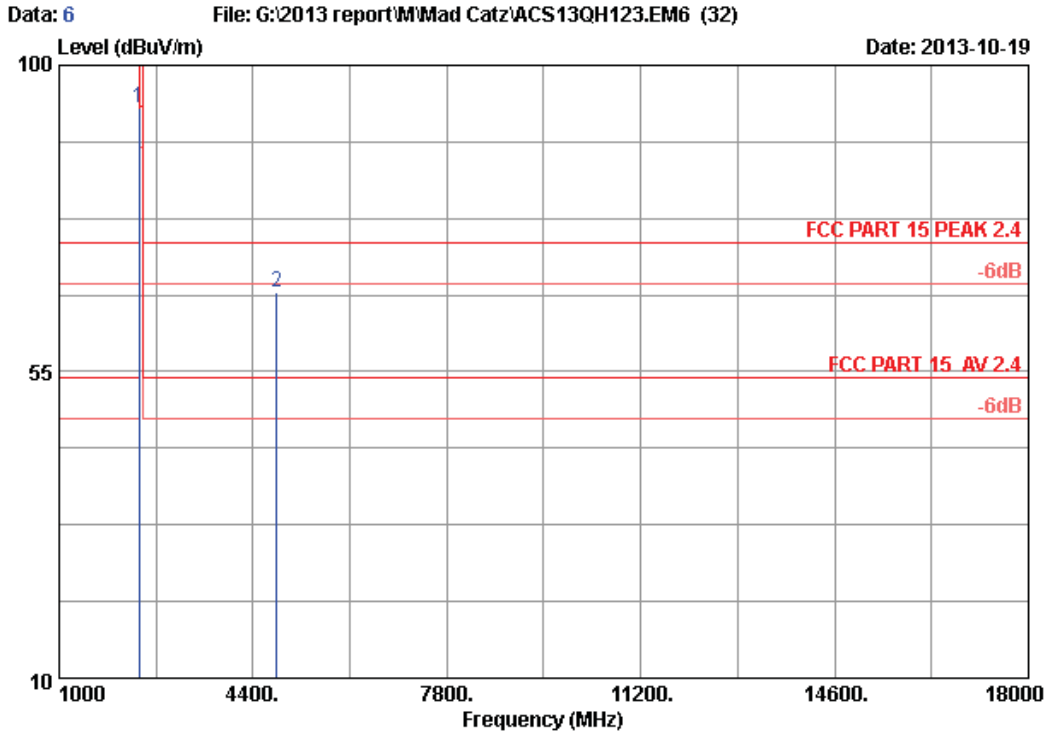


Site no. : 3m Chamber Data no. : 6  
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 PEAK 2.4  
 Env. / Ins. : 23\*C/54% Engineer : Leo-Li  
 EUT : UNIV Tritton Wireless Stereo Kunai  
 Power supply : DC 3V  
 Test mode : Tx Mode 2406MHz  
 M/N:90630C

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2406.000	28.19	5.81	35.70	95.31	93.61	114.00	20.39	Peak
2	4812.000	32.86	8.57	35.70	60.98	66.71	74.00	7.29	Peak


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

Frequency (MHz)	Peak level (dBuV/m)	Duty cycle factor (dB)	AV level (dBuV/m)	Limit(dBuV/m)	Conclusion
4812.000	66.71	14.07	52.64	54	Pass

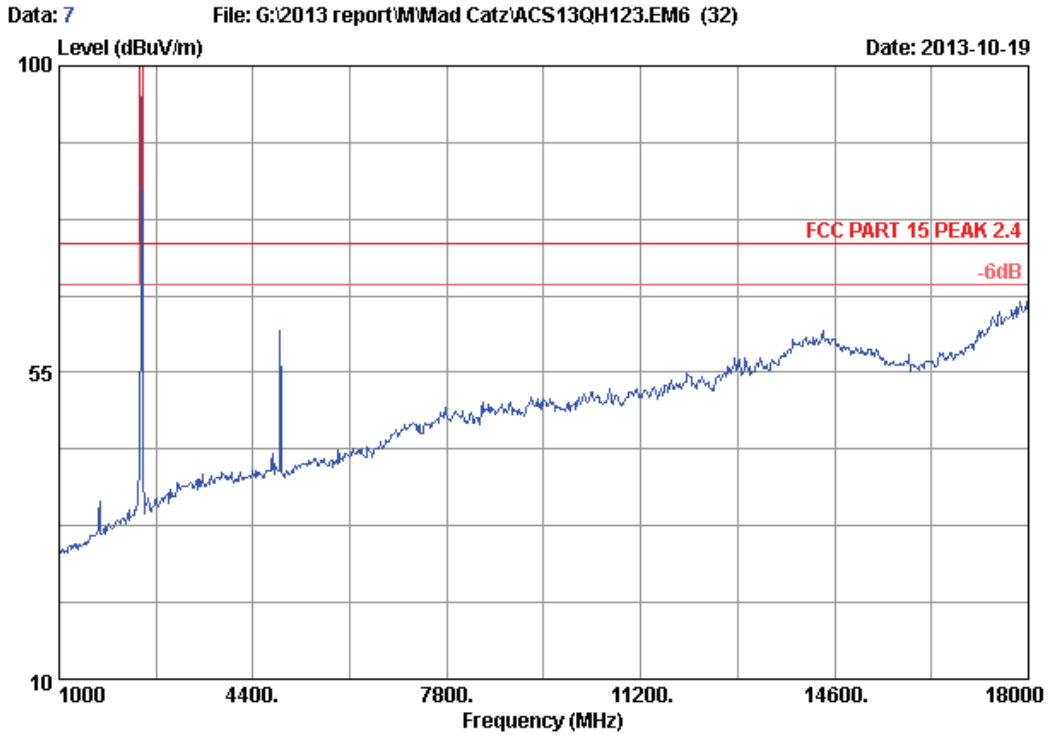

Site no. : 3m Chamber Data no. : 7  
Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL  
Limit : FCC PART 15 PEAK 2.4  
Env. / Ins. : 23°C/54% Engineer : Leo-Li  
EUT : UNIV Tritton Wireless Stereo Kunai  
Power supply : DC 3V  
Test mode : Tx Mode 2440MHz  
M/N:90630C

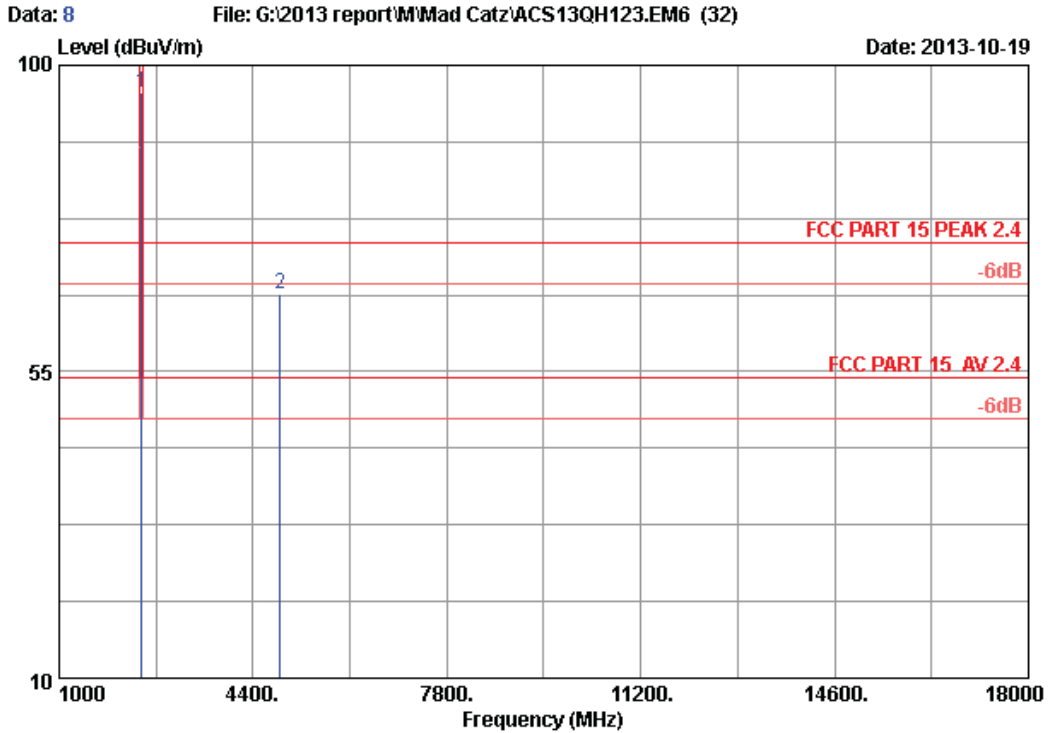


Site no. : 3m Chamber Data no. : 8  
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL  
 Limit : FCC PART 15 PEAK 2.4  
 Env. / Ins. : 23°C/54% Engineer : Leo-Li  
 EUT : UNIV Tritton Wireless Stereo Kunai  
 Power supply : DC 3V  
 Test mode : Tx Mode 2440MHz  
 M/N:90630C

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2440.000	28.27	5.86	35.70	97.54	95.97	114.00	18.03	Peak
2	4880.000	32.98	8.64	35.70	60.43	66.35	74.00	7.65	Peak


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

Frequency (MHz)	Peak level (dBuV/m)	Duty cycle factor (dB)	AV level (dBuV/m)	Limit(dBuV/m)	Conclusion
4880.000	66.35	14.07	52.28	54	Pass
2440.000	95.97	14.07	81.9	94	Pass

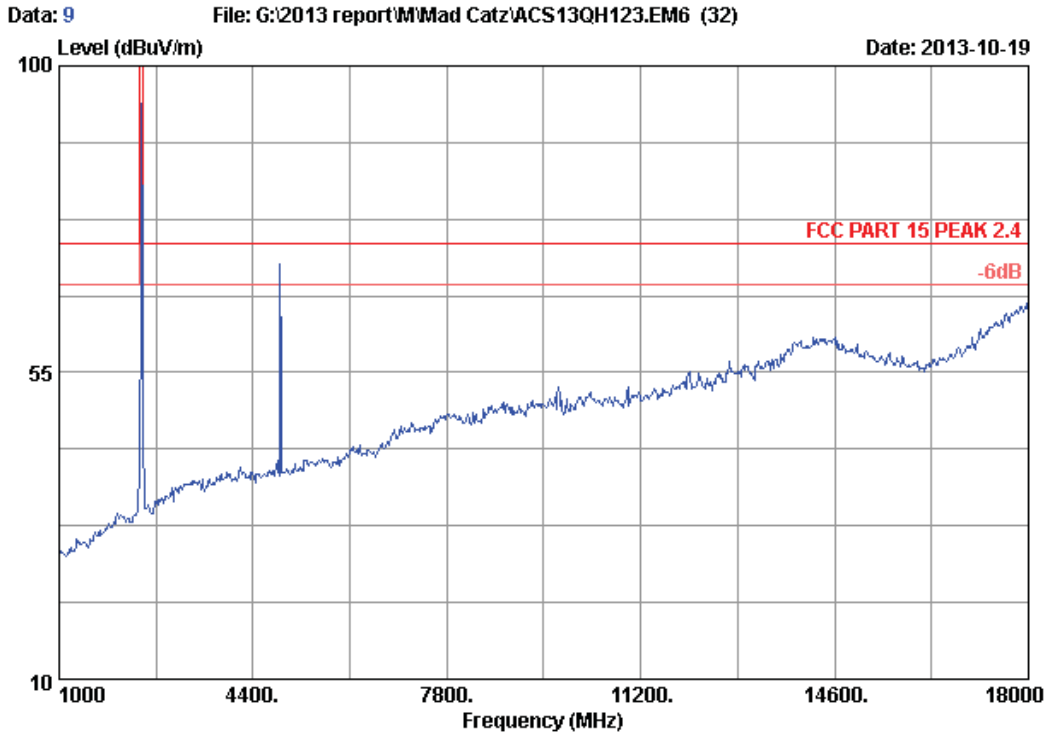

Site no. : 3m Chamber Data no. : 9  
Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL  
Limit : FCC PART 15 PEAK 2.4  
Env. / Ins. : 23°C/54% Engineer : Leo-Li  
EUT : UNIV Tritton Wireless Stereo Kunai  
Power supply : DC 3V  
Test mode : Tx Mode 2440MHz  
M/N:90630C

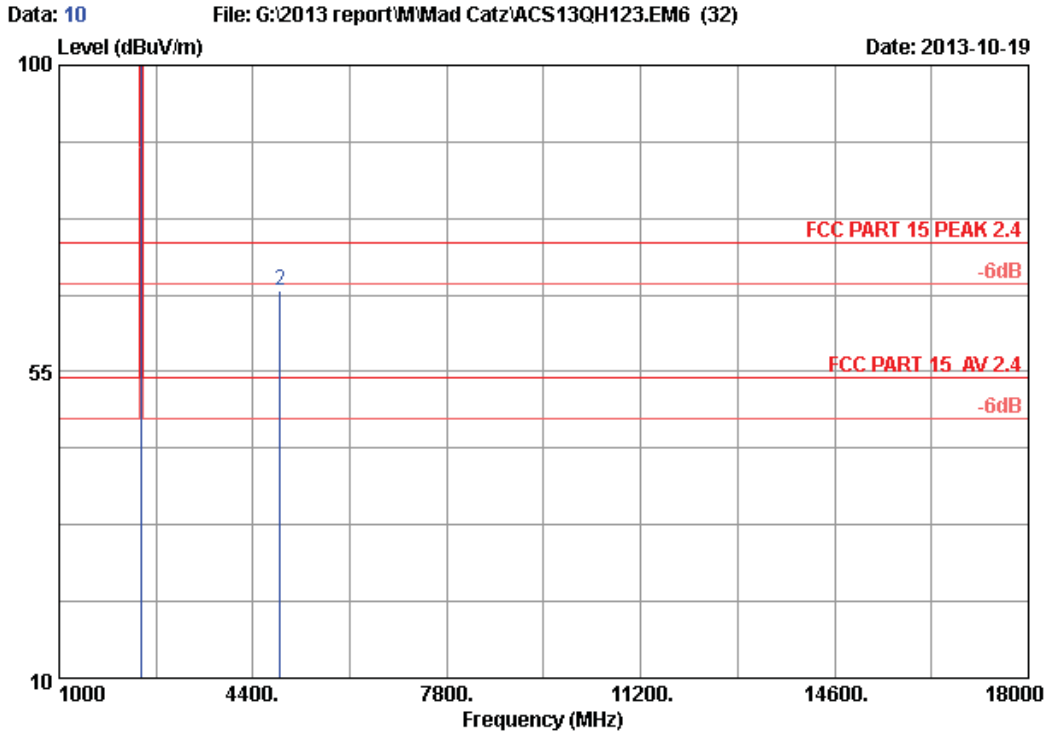


Site no. : 3m Chamber Data no. : 10  
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 PEAK 2.4  
 Env. / Ins. : 23°C/54% Engineer : Leo-Li  
 EUT : UNIV Tritton Wireless Stereo Kunai  
 Power supply : DC 3V  
 Test mode : Tx Mode 2440MHz  
 M/N:90630C

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2440.000	28.27	5.86	35.70	102.50	100.93	114.00	13.07	Peak
2	4880.000	32.98	8.64	35.70	60.93	66.85	74.00	7.15	Peak

Remarks:


1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

Frequency (MHz)	Peak level (dBuV/m)	Duty cycle factor (dB)	AV level (dBuV/m)	Limit(dBuV/m)	Conclusion
4880.000	66.85	14.07	52.78	54	Pass
2440.000	100.93	14.07	86.86	94	Pass

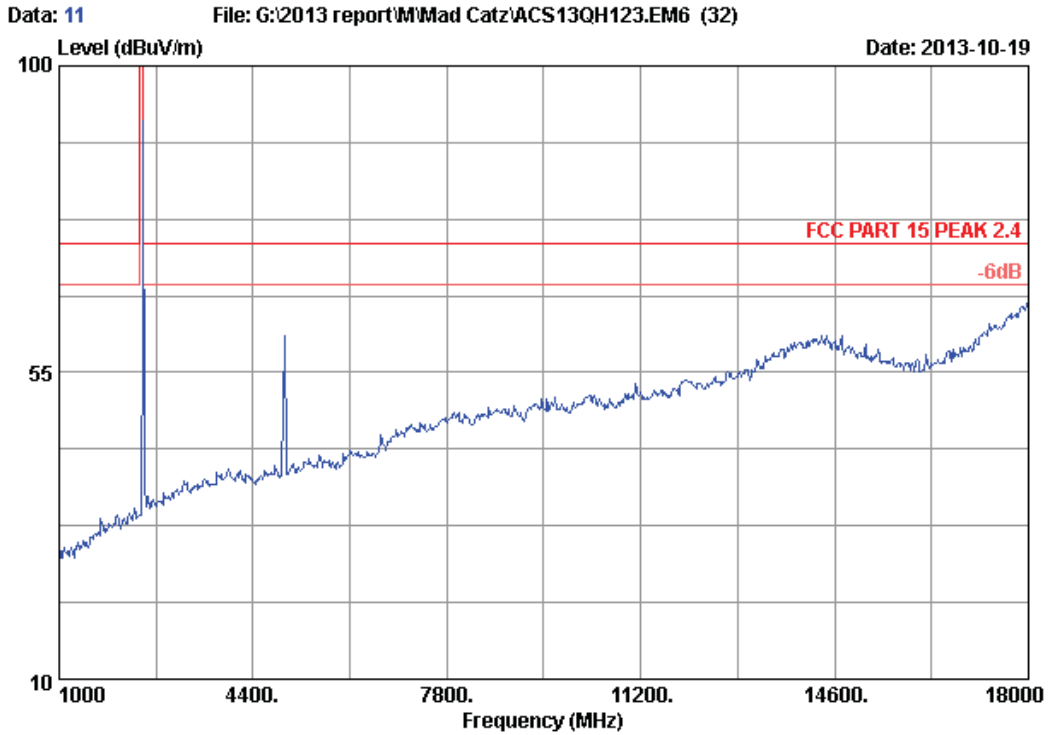

Site no. : 3m Chamber Data no. : 11  
Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL  
Limit : FCC PART 15 PEAK 2.4  
Env. / Ins. : 23°C/54% Engineer : Leo-Li  
EUT : UNIV Tritton Wireless Stereo Kunai  
Power supply : DC 3V  
Test mode : Tx Mode 2476MHz  
M/N:90630C



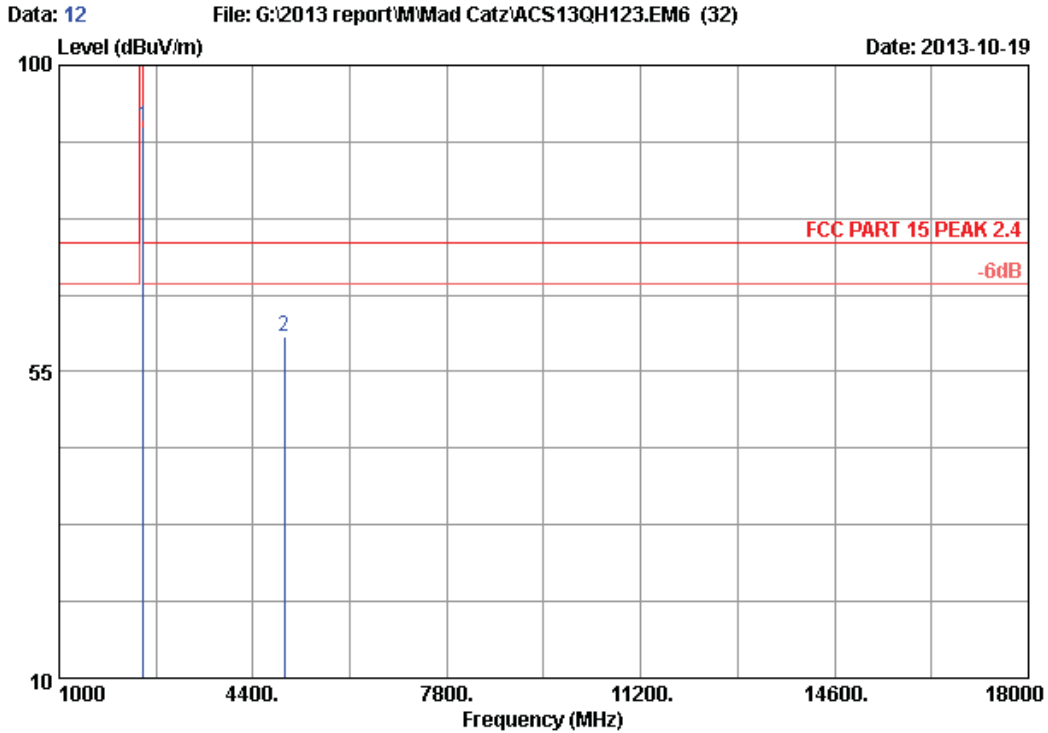


Site no. : 3m Chamber Data no. : 12  
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL  
 Limit : FCC PART 15 PEAK 2.4  
 Env. / Ins. : 23°C/54% Engineer : Leo-Li  
 EUT : UNIV Tritton Wireless Stereo Kunai  
 Power supply : DC 3V  
 Test mode : Tx Mode 2476MHz  
 M/N:90630C

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2476.000	28.35	5.91	35.70	92.49	91.05	114.00	22.95	Peak
2	4952.000	33.11	8.71	35.70	54.09	60.21	74.00	13.79	Peak


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

Frequency (MHz)	Peak level (dBuV/m)	Duty cycle factor (dB)	AV level (dBuV/m)	Limit(dBuV/m)	Conclusion
4952.000	60.21	14.07	46.14	54	Pass

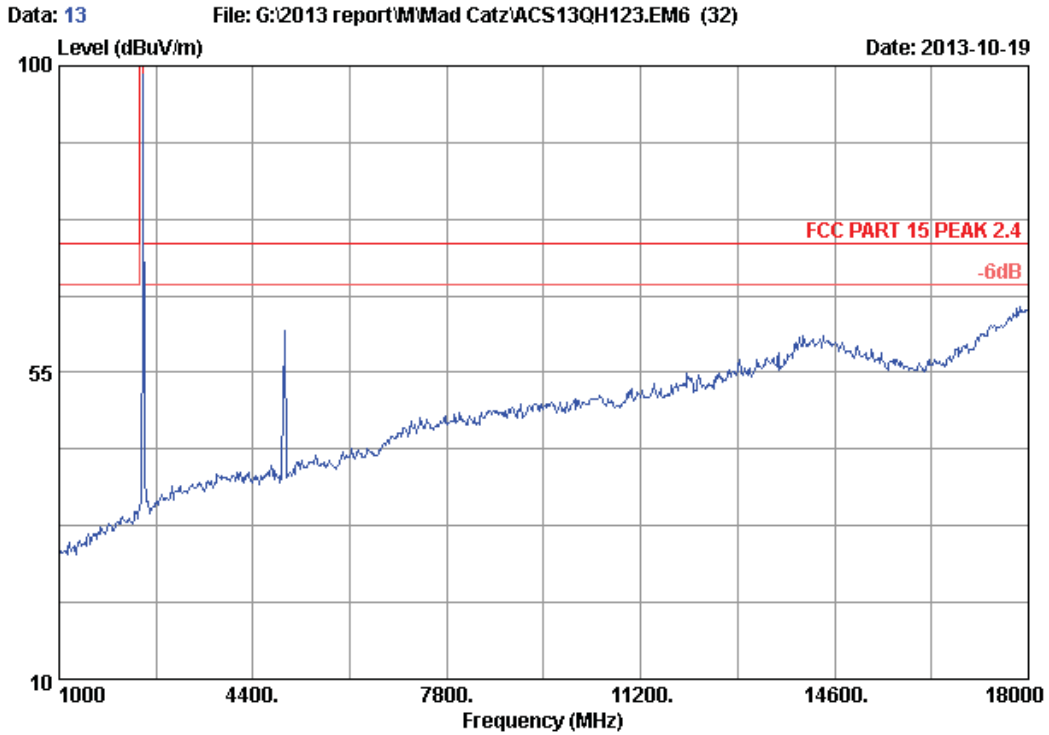

Site no. : 3m Chamber Data no. : 13  
Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL  
Limit : FCC PART 15 PEAK 2.4  
Env. / Ins. : 23°C/54% Engineer : Leo-Li  
EUT : UNIV Tritton Wireless Stereo Kunai  
Power supply : DC 3V  
Test mode : Tx Mode 2476MHz  
M/N:90630C

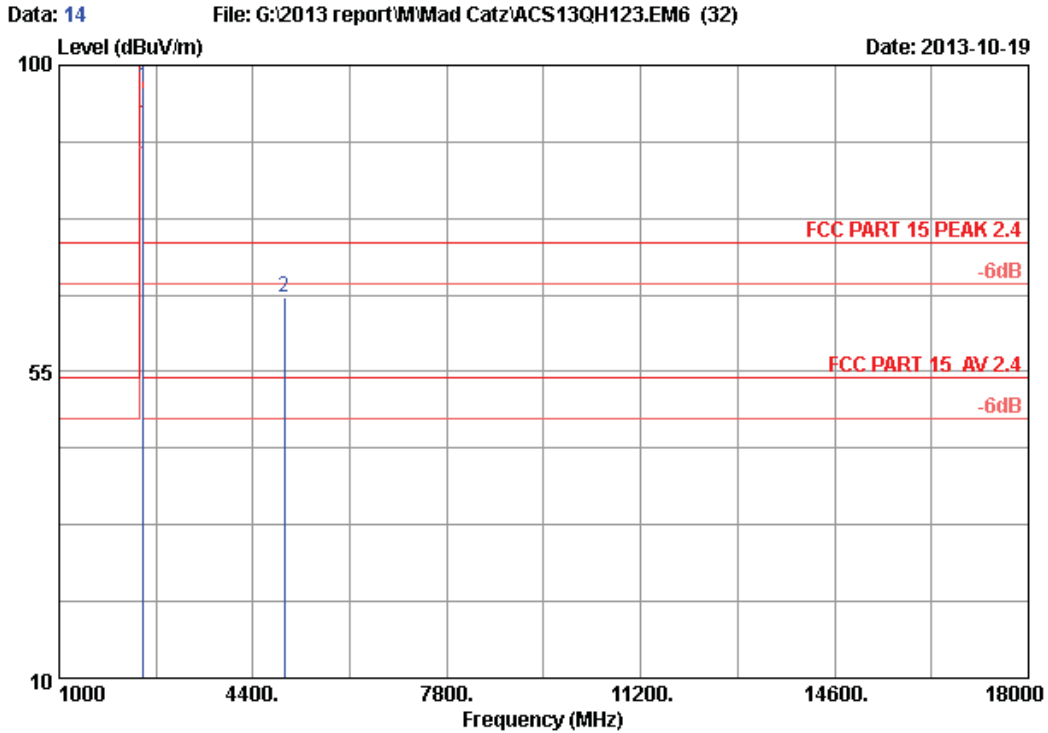

Site no. : 3m Chamber Data no. : 14  
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 PEAK 2.4  
 Env. / Ins. : 23°C/54% Engineer : Leo-Li  
 EUT : UNIV Tritton Wireless Stereo Kunai  
 Power supply : DC 3V  
 Test mode : Tx Mode 2476MHz  
 M/N:90630C

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2476.000	28.35	5.91	35.70	98.17	96.73	114.00	17.27	Peak
2	4952.000	33.11	8.71	35.70	59.68	65.80	74.00	8.20	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

Frequency (MHz)	Peak level (dBuV/m)	Duty cycle factor (dB)	AV level (dBuV/m)	Limit(dBuV/m)	Conclusion
4952.000	65.80	14.07	51.73	54	Pass
2476.000	96.73	14.07	82.66	94	Pass

## 4. 20 DB BANDWIDTH TEST

### 4.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	E4446A	US44300459	May.08, 13	1 Year

### 4.2. Limit


Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

### 4.3. Test Results


EUT:UNIV Tritton Headset Wireless Stereo Kunai		
M/N: 90630C		
Test date:2013-10-19	Pressure: 101.2±1.0 kpa	Humidity: 53.4±3.0 %
Tested by: Leo-Li	Test site: RF site	Temperature: 24.1±0.6°C

Frequency	20dB bandwidth ( MHz )	Limit (MHz)
2406MHz	2.365	N/A
2440MHz	2.359	N/A
2476MHz	2.871	N/A
Conclusion : PASS		


Test Frequency: 2406MHz

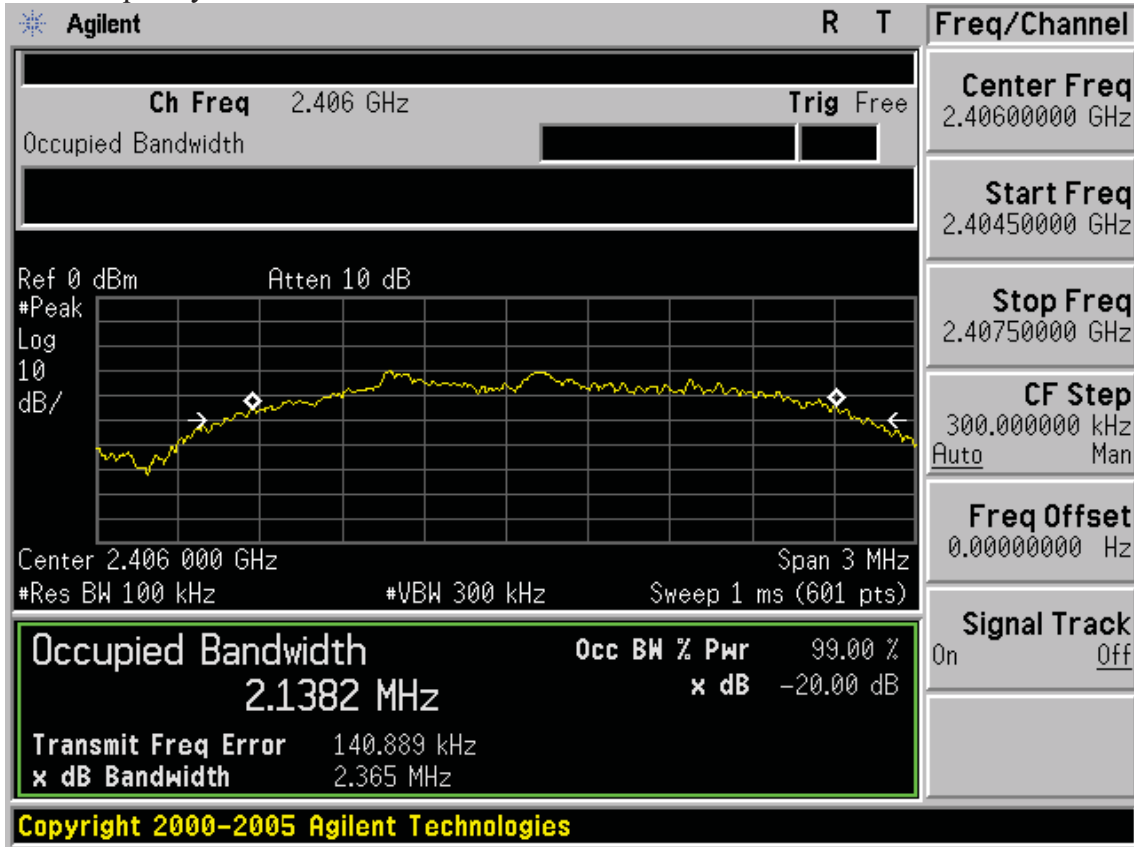

Test Frequency: 2440MHz

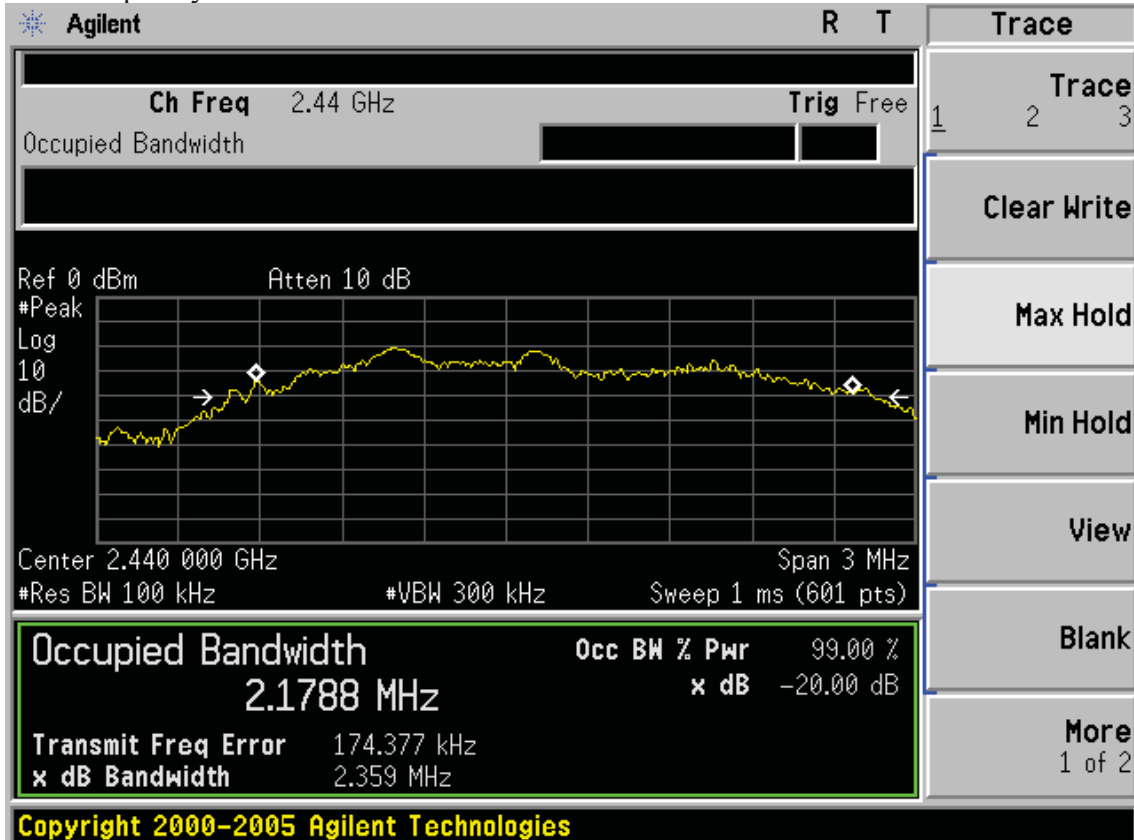

Test Frequency: 2476MHz

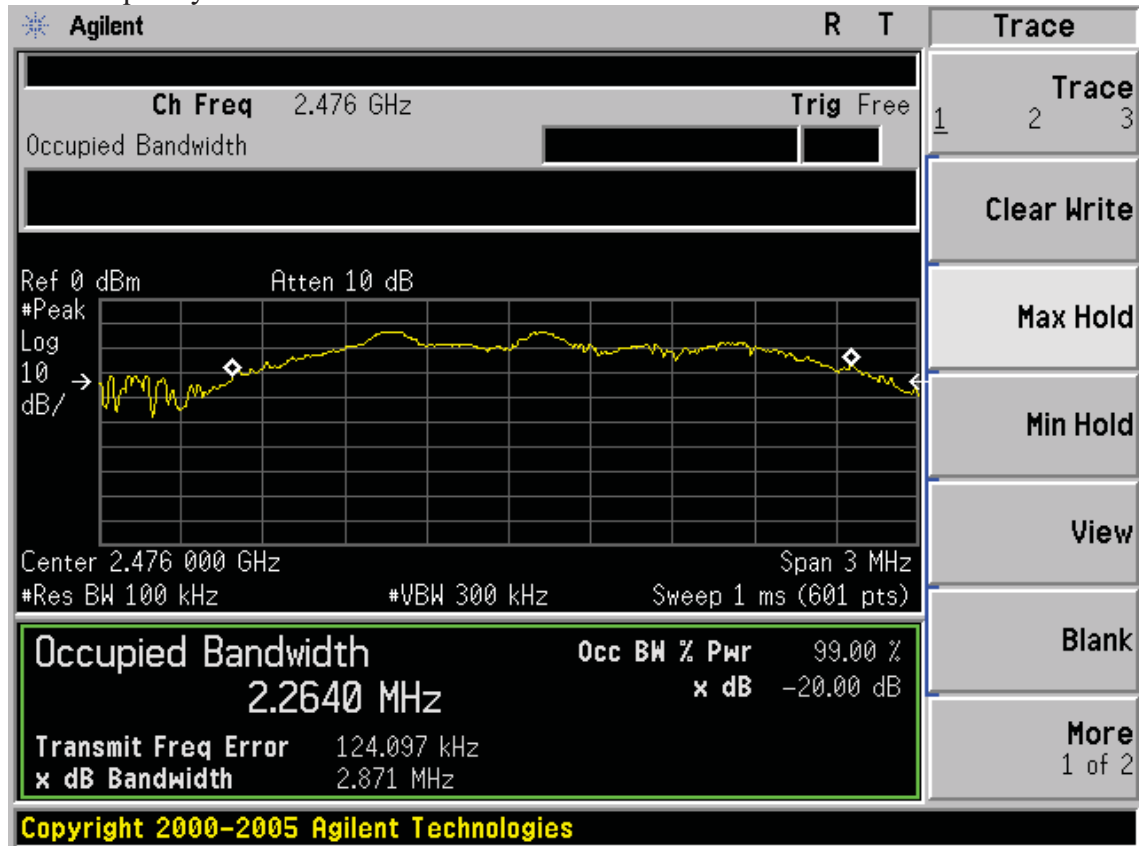

## 5. BAND EDGE COMPLIANCE TEST

### 5.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	E4446A	US44300459	May.08, 13	1 Year
2.	Amp	HP	8449B	3008A08495	May.08, 13	1 Year
3.	Antenna	EMCO	3115	9510-4580	May.08, 13	1Year
4.	HF Cable	Hubersuhne	Sucoflex104	-	May.08, 13	1 Year

### 5.2. Limit

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

### 5.3. Test Produce


1. The EUT is placed on a turntable, which is 0.8m above the ground plane and worked at highest radiated power.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upperband-edges of the emission:
  - (a) PEAK: RBW=1MHz ;VBW=3MHz, PK detector, Sweep=AUTO
  - (b)This device is pulse modulated, a duty cycle factor was used to calculate average level based measured peak level

### 5.4. Test Results

Pass (The testing data was attached in the next pages.)

Note: If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.

Note: The duty cycle factor for calculate average level is 14.07dB, and average limit is 20dB below peak limit, so if peak measured level comply with peak limit, the average level was deemed to comply with average limit.

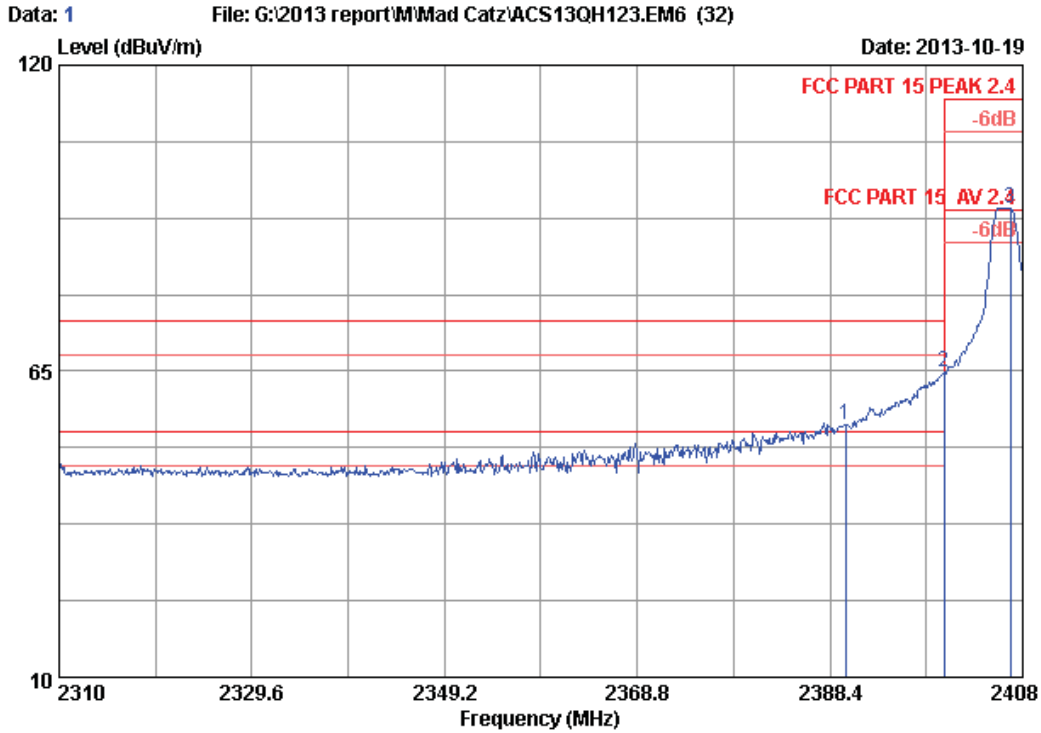

Site no. : 3m Chamber Data no. : 1  
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 PEAK 2.4  
 Env. / Ins. : 23°C/54% Engineer : Leo-Li  
 EUT : UNIV Tritton Wireless Stereo Kunai  
 Power supply : DC 3V  
 Test mode : Tx Mode 2406MHz  
 M/N:90630C


	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	28.16	5.78	35.70	57.06	55.30	74.00	18.70	Peak
2	2400.000	28.18	5.80	35.70	66.45	64.73	74.00	9.27	Peak
3	2406.726	28.19	5.81	35.70	96.03	94.33	114.00	19.67	Peak

Remarks:

- Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
- The emission levels that are 20dB below the official limit are not reported.

Frequency (MHz)	Peak level (dBuV/m)	Duty cycle factor (dB)	AV level (dBuV/m)	Limit(dBuV/m)	Conclusion
2390.000	55.30	14.07	41.23	54	Pass
2400.000	64.73	14.07	50.66	54	Pass
2406.726	94.33	14.07	80.26	94	Pass



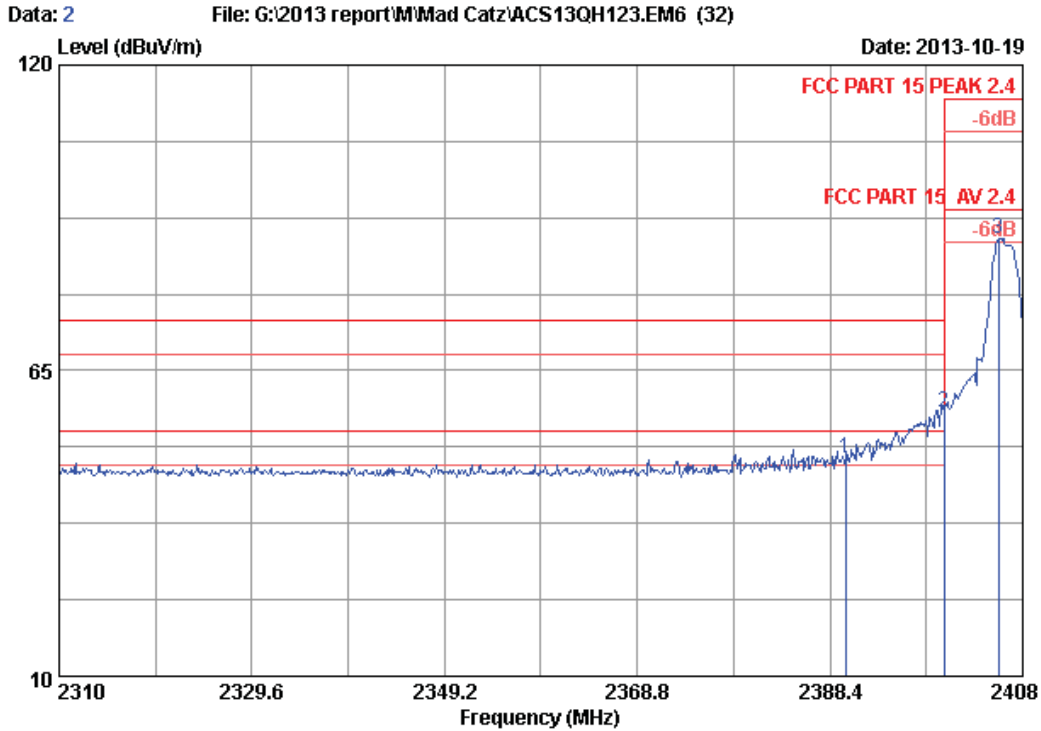


Site no. : 3m Chamber Data no. : 2  
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL  
 Limit : FCC PART 15 PEAK 2.4  
 Env. / Ins. : 23\*C/54% Engineer : Leo-Li  
 EUT : UNIV Tritton Wireless Stereo Kunai  
 Power supply : DC 3V  
 Test mode : Tx Mode 2406MHz  
 M/N:90630C

	Freq.	Ant.	Cable	Amp.	Emission				
	(MHz)	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2390.000	28.16	5.78	35.70	51.12	49.36	74.00	24.64	Peak
2	2400.000	28.18	5.80	35.70	59.23	57.51	74.00	16.49	Peak
3	2405.550	28.19	5.81	35.70	90.41	88.71	114.00	25.29	Peak

Remarks:

- Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
- The emission levels that are 20dB below the official limit are not reported.

Frequency (MHz)	Peak level (dBuV/m)	Duty cycle factor (dB)	AV level (dBuV/m)	Limit(dBuV/m)	Conclusion
2400.000	57.51	14.07	43.44	54	Pass

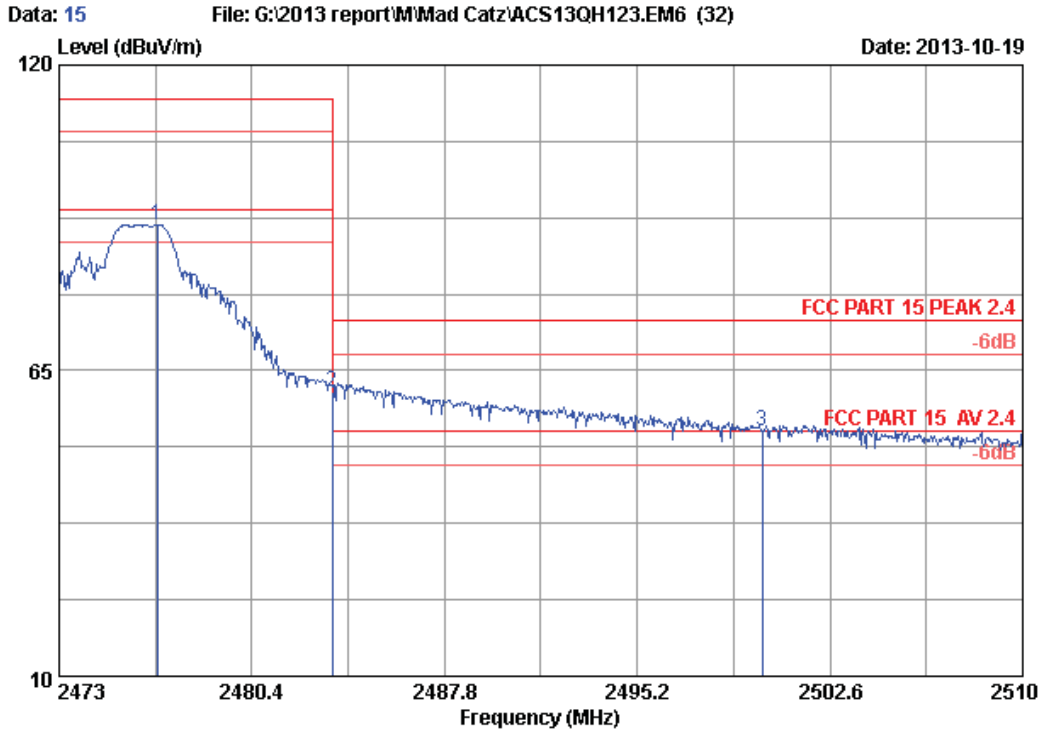


Site no. : 3m Chamber Data no. : 15  
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL  
 Limit : FCC PART 15 PEAK 2.4  
 Env. / Ins. : 23\*C/54% Engineer : Leo-Li  
 EUT : UNIV Tritton Wireless Stereo Kunai  
 Power supply : DC 3V  
 Test mode : Tx Mode 2476MHz  
 M/N:90630C

	Freq.	Ant.	Cable	Amp.	Emission				
	(MHz)	(dB/m)	loss	Factor	Reading	Level	Limits	Margin	Remark
			(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2476.774	28.35	5.91	35.70	92.75	91.31	114.00	22.69	Peak
2	2483.500	28.36	5.92	35.70	62.58	61.16	74.00	12.84	Peak
3	2500.000	28.40	5.94	35.70	55.53	54.17	74.00	19.83	Peak

Remarks:

- Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
- The emission levels that are 20dB below the official limit are not reported.

Frequency (MHz)	Peak level (dBuV/m)	Duty cycle factor (dB)	AV level (dBuV/m)	Limit(dBuv/m)	Conclusion
2483.500	61.16	14.07	47.09	54	Pass
2500.000	54.17	14.07	40.1	54	Pass

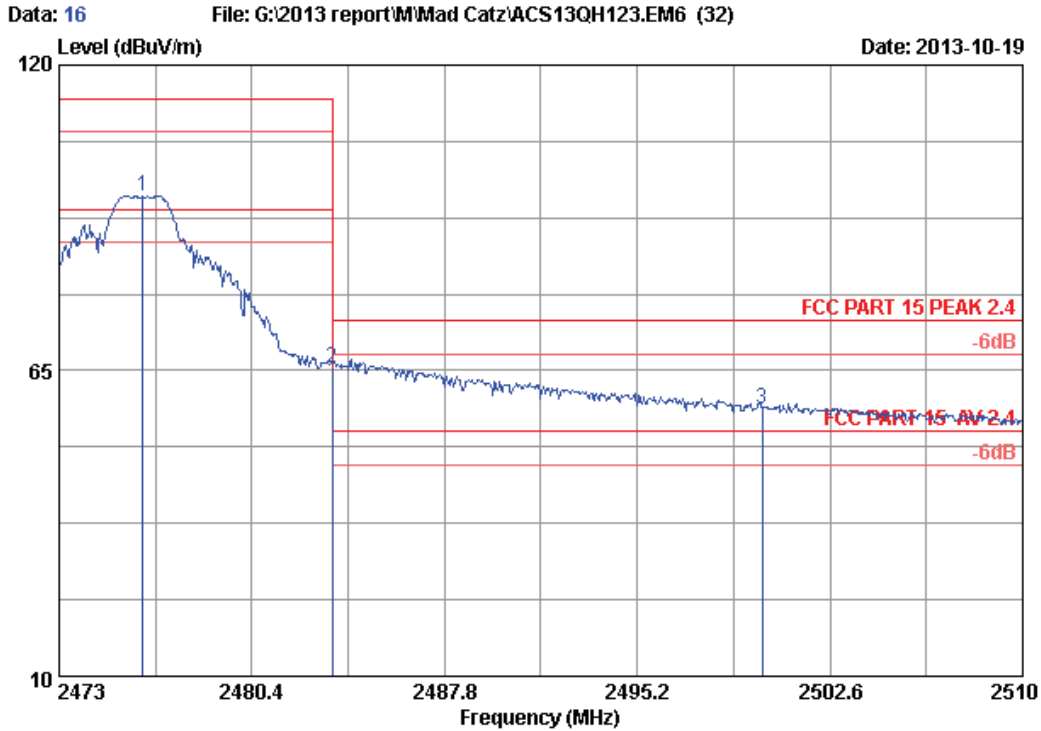

Site no. : 3m Chamber Data no. : 16  
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 PEAK 2.4  
 Env. / Ins. : 23°C/54% Engineer : Leo-Li  
 EUT : UNIV Tritton Wireless Stereo Kunai  
 Power supply : DC 3V  
 Test mode : Tx Mode 2476MHz  
 M/N:90630C

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2476.219	28.35	5.91	35.70	97.88	96.44	114.00	17.56	Peak
2	2483.500	28.36	5.92	35.70	66.76	65.34	74.00	8.66	Peak
3	2500.000	28.40	5.94	35.70	59.35	57.99	74.00	16.01	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

Frequency (MHz)	Peak level (dBuV/m)	Duty cycle factor (dB)	AV level (dBuV/m)	Limit(dBuv/m)	Conclusion
2483.500	65.34	14.07	51.27	54	Pass
2500.000	57.99	14.07	43.92	54	Pass
2476.219	96.44	14.07	82.37	94	Pass

## 6. ANTENNA REQUIREMENT

**RESULT** : **PASS**

Test Date : Sep.20~Oct.19, 2013

Test standard : FCC Part 15.203

Limit : the use of antennas with directional gains that do not exceed 6 dBi

According to the manufacturer declared, the EUT has an internal antenna, the directional gain of antenna is 0dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply the provision.

## 7. DEVIATION TO TEST SPECIFICATIONS

[NONE]