

FCC Test Report

(PART 22)

Report No.: RF190524D09

FCC ID: P27BC950NA4

Test Model: BC950NA4

Series Model: BC950NA4yxxxxxxx, BC950NA4Cyxxxxxxx (y should be "blank" or "-"; x could be 0 to 9, A to Z, a to z, "blank" or "-", for marketing purpose) (See section 3.2.1 for more details)

Received Date: May 24, 2019

Test Date: May 31, 2019 ~ Jun. 11, 2019 (for RSE for mode A, Conducted tests, and ERP)
Sep. 04, 2019 (for RSE for mode B)

Issued Date: Sep. 05, 2019

Applicant: Sercomm Corp.

Address: 8F, No. 3-1, YuanQu St., NanKang, Taipei 115, Taiwan, R.O.C. (NanKang Software Park)

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan
(R.O.C)

Test Location (1): No. 19, Hwa Ya 2nd Rd, Wen Hwa Vil, Kwei Shan Dist., Taoyuan City
33383, Taiwan (R.O.C)

Test Location (2): B2F., No.215, Sec. 3, Beixin Rd., Xindian Dist., New Taipei City 231,
Taiwan, R.O.C

**FCC Registration /
Designation Number:** 427177 / TW0011



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Test Site and Instruments	7
3 General Information	9
3.1 General Description of EUT	9
3.2 Configuration of System under Test	11
3.2.1 Description of Support Units	11
3.3 Test Mode Applicability and Tested Channel Detail	12
3.4 EUT Operating Conditions	14
3.5 General Description of Applied Standards	14
4 Test Types and Results	15
4.1 Output Power Measurement	15
4.1.1 Limits of Output Power Measurement	15
4.1.2 Test Procedures	15
4.1.3 Test Setup	16
4.1.4 Test Results	17
4.2 Modulation Characteristics Measurement	22
4.2.1 Limits of Modulation Characteristics	22
4.2.2 Test Setup	22
4.2.3 Test Procedure	22
4.2.4 Test Results	23
4.3 Frequency Stability Measurement	24
4.3.1 Limits of Frequency Stability Measurement	24
4.3.2 Test Procedure	24
4.3.3 Test Setup	24
4.3.4 Test Results	25
4.4 Occupied Bandwidth Measurement	30
4.4.1 Test Procedure	30
4.4.2 Test Setup	30
4.4.3 Test Result	31
4.5 Band Edge Measurement	34
4.5.1 Limits of Band Edge Measurement	34
4.5.2 Test Setup	34
4.5.3 Test Procedures	34
4.5.4 Test Results	35
4.6 Peak to Average Ratio	39
4.6.1 Limits of Peak to Average Ratio Measurement	39
4.6.2 Test Setup	39
4.6.3 Test Procedures	39
4.6.4 Test Results	40
4.7 Conducted Spurious Emissions	43
4.7.1 Limits of Conducted Spurious Emissions Measurement	43
4.7.2 Test Setup	43
4.7.3 Test Procedure	43
4.7.4 Test Results	44
4.8 Radiated Emission Measurement	49
4.8.1 Limits of Radiated Emission Measurement	49
4.8.2 Test Procedure	49
4.8.3 Deviation from Test Standard	49
4.8.4 Test Setup	50
4.8.5 Test Results	51

5 Pictures of Test Arrangements.....	79
Appendix – Information of the Testing Laboratories	80

Release Control Record

Issue No.	Description	Date Issued
RF190524D09	Original Release	Sep. 05, 2019

1 Certificate of Conformity

Product: LTE Battery Camera

Brand: Sercomm

Test Model: BC950NA4

Series Model: BC950NA4yxxxxxxx, BC950NA4Cyxxxxxxx (y should be "blank" or "-"; x could be 0 to 9, A to Z, a to z, "blank" or "-", for marketing purpose) (See section 3.2.1 for more details)

Sample Status: Engineering Sample


Applicant: Sercomm Corp.

Test Date: May 31, 2019 ~ Jun. 11, 2019 (for RSE for mode A, Conducted tests, and ERP)
Sep. 04, 2019 (for RSE for mode B)

Standards: FCC Part 22, Subpart H

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : , **Date:** Sep. 05, 2019
Rona Chen / Specialist

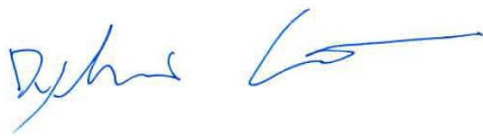Approved by : , **Date:** Sep. 05, 2019
Dylan Chiou / Project Engineer

2 Summary of Test Results

Applied Standard: FCC Part 22 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 22.913 (a)	Effective Radiated Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	Pass	Meet the requirement.
2.1046 22.913 (d)	Peak to Average Ratio	Pass	Meet the requirement of limit.
2.1055 22.355	Frequency Stability	Pass	Meet the requirement of limit.
2.1049	Occupied Bandwidth	Pass	Meet the requirement of limit.
22.917	Band Edge Measurements	Pass	Meet the requirement of limit.
2.1051 22.917	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 22.917	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -26.17 dB at 2509.50 MHz.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (\pm)
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	3.0400 dB
	30 MHz ~ 200 MHz	2.0153 dB
	200 MHz ~ 1000 MHz	2.0224 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	1.0121 dB
	18 GHz ~ 40 GHz	1.1508 dB

2.2 Test Site and Instruments

Test Duration:

May 31, 2019 ~ Jun. 11, 2019 (for RSE for mode A, Conducted tests, and EIRP)

Sep. 04, 2019 (for RSE for mode B)

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent Technologies	N9038A	MY52260177	Aug. 20, 2018	Aug. 19, 2019
			Aug. 26, 2019	Aug. 25, 2020
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Apr. 15, 2019	Apr. 14, 2020
Spectrum Analyzer ROHDE & SCHWARZ	FSW26	102023	Oct. 11, 2018	Oct. 10, 2019
BILOG Antenna SCHWARZBECK	VULB9168	9168-616	Nov. 27, 2018	Nov. 26, 2019
HORN Antenna ETS-Lindgren	3117	00143293	Nov. 25, 2018	Nov. 24, 2019
BILOG Antenna SCHWARZBECK	VULB9168	9168-631	Nov. 26, 2018	Nov. 25, 2019
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-969	Nov. 25, 2018	Nov. 24, 2019
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 15, 2019	Apr. 14, 2020
MXG Vector signal generator Agilent	N5182B	MY53050430	Nov. 19, 2018	Nov. 18, 2019
Pre-amplifier Agilent	310N	187226	Jun. 19, 2018	Jun. 18, 2019
			Jun. 18, 2019	Jun. 17, 2020
Pre-amplifier Agilent	83017A	MY39501357	Jun. 19, 2018	Jun. 18, 2019
			Jun. 18, 2019	Jun. 17, 2020
RF signal cable ETS-LINDGREN	5D-FB	Cable-CH1-01(RFC -SMS-100-SMS-12 0+RFC-SMS-100-S MS-400)	Jun. 19, 2018	Jun. 18, 2019
			Jun. 18, 2019	Jun. 17, 2020
RF signal cable ETS-LINDGREN	8D-FB	Cable-CH1-02(RFC -SMS-100-SMS-24)	Jun. 19, 2018	Jun. 18, 2019
			Jun. 18, 2019	Jun. 17, 2020
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Software BV ADT	E3 8.130425b	NA	NA	NA
Antenna Tower MF	NA	NA	NA	NA
Turn Table MF	NA	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Communications Tester-Wireless Agilent	8960 Series 10	MY53201073	Jun. 28, 2017	Jun. 27, 2019
			Jul. 01, 2019	Jun. 30, 2020
Radio Communication Analyzer Anritsu	MT8820C	6201300640	Aug. 16, 2017	Aug. 15, 2019
			Jun. 19, 2019	Jun. 18, 2020
Temperature & Humidity Chamber	GTH-120-40-CP-AR	MAA1306-019	Sep. 05, 2018	Sep. 04, 2019
DC Power Supply Topward	33010D	807748	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 / 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HsinTien Chamber 1.



3 General Information

3.1 General Description of EUT

Product	LTE Battery Camera	
Brand	Sercomm	
Test Model	BC950NA4	
Series Model	BC950NA4yxxxxxxx, BC950NA4Cyxxxxxxx (y should be "blank" or "-"; x could be 0 to 9, A to Z, a to z, "blank" or "-", for marketing purpose)	
Status of EUT	Engineering Sample	
Power Supply Rating	5.0 Vdc (Adapter) 3.6 Vdc (Li-ion battery)	
Modulation Type	WCDMA	QPSK
	LTE	QPSK, 16QAM
Frequency Range	WCDMA	826.4 ~ 846.6 MHz
	LTE 5 (Channel Bandwidth: 1.4 MHz)	824.7 ~ 848.3 MHz
	LTE 5 (Channel Bandwidth: 3 MHz)	825.5 ~ 847.5 MHz
	LTE 5 (Channel Bandwidth: 5 MHz)	826.5 ~ 846.5 MHz
	LTE 5 (Channel Bandwidth: 10 MHz)	829 ~ 844 MHz
Max. ERP Power	WCDMA	106.71 mW
	LTE 5 (Channel Bandwidth: 1.4 MHz)	78.16 mW
	LTE 5 (Channel Bandwidth: 3 MHz)	78.89 mW
	LTE 5 (Channel Bandwidth: 5 MHz)	79.62 mW
	LTE 5 (Channel Bandwidth: 10 MHz)	80.35 mW
Emission Designator	WCDMA	4M08F9W
	LTE 5 (Channel Bandwidth: 1.4 MHz)	1M09D7W
	LTE 5 (Channel Bandwidth: 3 MHz)	2M70G7D
	LTE 5 (Channel Bandwidth: 5 MHz)	4M49D7W
	LTE 5 (Channel Bandwidth: 10 MHz)	8M98D7W
Antenna Type	PIFA Antenna with -0.98 dBi gain	
Accessory Device	Refer to Note as below	
Data Cable Supplied	Refer to Note as below	

Note:

- All models are listed as below. Model : BC950NA4 is the representative for final test.

Product	Brand	Model	Difference
LTE Battery Camera	Sercomm	BC950NA4yxxxxxxx	With GPS function
		BC950NA4Cyxxxxxxx	Without GPS function
(y should be "blank" or "-"; x could be 0 to 9, A to Z, a to z, "blank" or "-", for marketing purpose)			

2. The EUT contains following accessory devices.


Product	Brand	Model	Description
Adapter 1	Lucent Trans	1A52-UB52A	I/P: 100-240 Vac, 50-60 Hz, 0.3 A O/P: 5 Vdc, 2 A
Adapter 2	PHIHONG	PSAF10A-050Q	I/P: 100-240 Vac, 50/60 Hz, 0.28 A O/P: 5 Vdc, 2 A
Battery	Sercomm	P2-01	Rating: 3.6 Vdc, 31.68 Wh Capacity: 8800 mAh Charging voltage: 4.2 A
BC950 Battery Charging Station	Sercomm	BCSP2-01	I/P: 5Vdc, 2 A
USB Cable 1	N/A	N/A	5 m shielded cable w/o core
USB Cable 2	N/A	N/A	1 m shielded cable w/o core

* We had pre-test on Adapter 1 and Adapter 2. The worst case was found on Adapter 1. Therefore, only Adapter 1 was as representative for final test.


3. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Configuration of System under Test

<Radiated Emission Test>

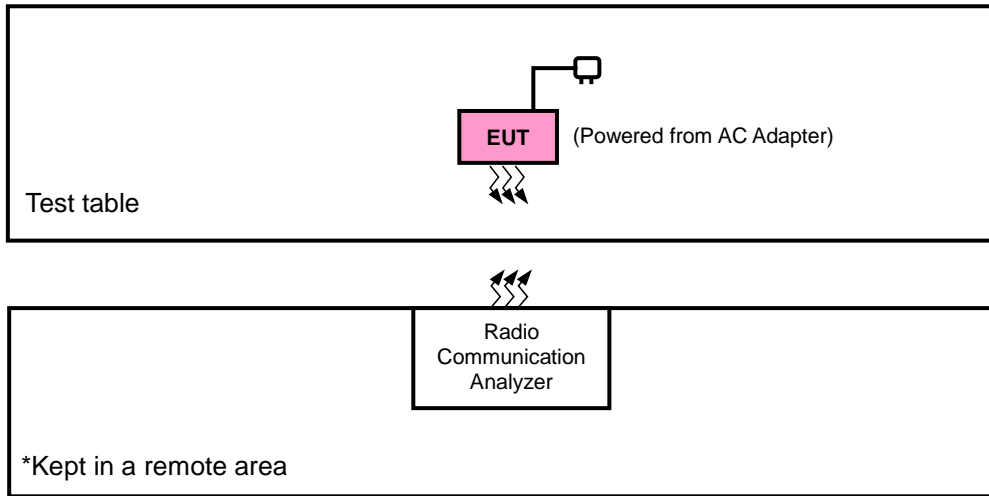

<E.R.P. Test>

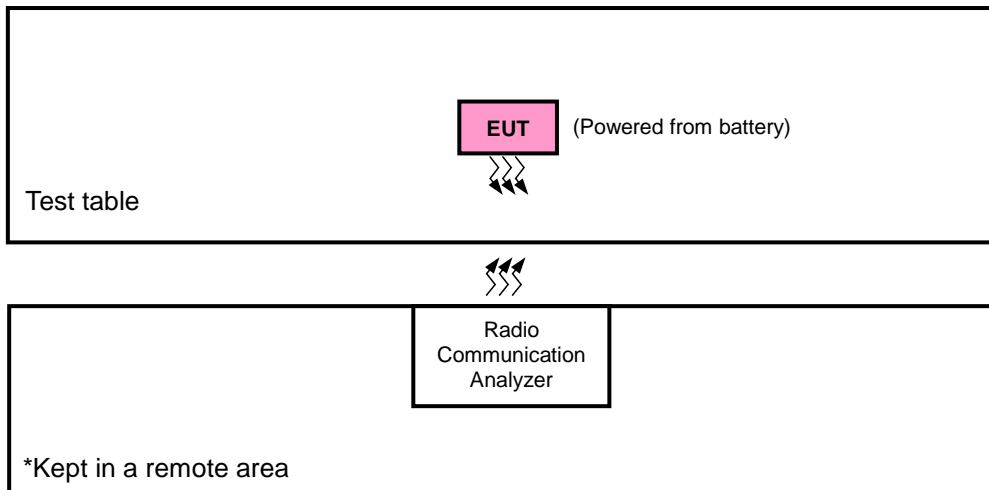

3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units.

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, 0 & 90 degree, and antenna ports.

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

EUT Configure Mode	Description
A	EUT + USB Cable 1
B	EUT + USB Cable 2

Band	ERP	Radiated Emission
WCDMA	90 degree	0 degree
LTE Band 5	90 degree	0 degree

WCDMA

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Mode
-	ERP	4132 to 4233	4132, 4182, 4233	WCDMA
-	Modulation Characteristics	4132 to 4233	4182	WCDMA
-	Frequency Stability	4132 to 4233	4132, 4233	WCDMA
-	Occupied Bandwidth	4132 to 4233	4132, 4182, 4233	WCDMA
-	Band Edge	4132 to 4233	4132, 4233	WCDMA
-	Peak to Average Ratio	4132 to 4233	4132, 4182, 4233	WCDMA
-	Conducted Emission	4132 to 4233	4132, 4182, 4233	WCDMA
A	Radiated Emission	4132 to 4233	4132, 4182, 4233	WCDMA
B			4233	

LTE Band 5

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode		
-	ERP	20407 to 20643	20407, 20525, 20643	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset		
		20415 to 20635	20415, 20525, 20635	3 MHz	QPSK, 16QAM	1 RB / 0 RB Offset		
		20425 to 20625	20425, 20525, 20625	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset		
		20450 to 20600	20450, 20525, 20600	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset		
-	Modulation Characteristics	20450 to 20600	20525	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset		
-	Frequency Stability	20407 to 20643	20407, 20643	1.4 MHz	QPSK	1 RB / 0 RB Offset		
		20415 to 20635	20415, 20635	3 MHz	QPSK	1 RB / 0 RB Offset		
		20425 to 20625	20425, 20625	5 MHz	QPSK	1 RB / 0 RB Offset		
		20450 to 20600	20450, 20600	10 MHz	QPSK	1 RB / 0 RB Offset		
-	Occupied Bandwidth	20407 to 20643	20407, 20525, 20643	1.4 MHz	QPSK, 16QAM	6 RB / 0 RB Offset		
		20415 to 20635	20415, 20525, 20635	3 MHz	QPSK, 16QAM	15 RB / 0 RB Offset		
		20425 to 20625	20425, 20525, 20625	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset		
		20450 to 20600	20450, 20525, 20600	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset		
-	Band Edge	20407 to 20643	20407	1.4MHz	QPSK	1 RB / 0 RB Offset 6 RB / 0 RB Offset		
			20643	1.4MHz	QPSK	1 RB / 5 RB Offset 6 RB / 0 RB Offset		
		20415 to 20635	20415	3 MHz	QPSK	1 RB / 0 RB Offset 15 RB / 0 RB Offset		
			20635	3 MHz	QPSK	1 RB / 14 RB Offset 15 RB / 0 RB Offset		
		20425 to 20625	20425	5 MHz	QPSK	1 RB / 0 RB Offset 25 RB / 0 RB Offset		
			20625	5 MHz	QPSK	1 RB / 24 RB Offset 25 RB / 0 RB Offset		
		20450 to 20600	20450	10 MHz	QPSK	1 RB / 0 RB Offset 50 RB / 0 RB Offset		
			20600	10 MHz	QPSK	1 RB / 49 RB Offset 50 RB / 0 RB Offset		
		-	Peak to Average Ratio	20407 to 20643	20407, 20525, 20643	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
				20415 to 20635	20415, 20525, 20635	3 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
				20425 to 20625	20425, 20525, 20625	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
				20450 to 20600	20450, 20525, 20600	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	Conducted Emission	20407 to 20643	20407, 20525, 20643	1.4 MHz	QPSK	1 RB / 0 RB Offset		
		20415 to 20635	20415, 20525, 20635	3 MHz	QPSK	1 RB / 0 RB Offset		
		20425 to 20625	20425, 20525, 20625	5 MHz	QPSK	1 RB / 0 RB Offset		
		20450 to 20600	20450, 20525, 20600	10 MHz	QPSK	1 RB / 0 RB Offset		
A	Radiated Emission	20407 to 20643	20407, 20525, 20643	1.4 MHz	QPSK	1 RB / 0 RB Offset		
		20425 to 20625	20425, 20525, 20625	5 MHz	QPSK	1 RB / 0 RB Offset		
		20450 to 20600	20450, 20525, 20600	10 MHz	QPSK	1 RB / 0 RB Offset		
B		20450 to 20600	20525	10 MHz	QPSK	1 RB / 0 RB Offset		

Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.
2. For radiated emission above 1 GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest, 5 MHz & highest channel bandwidth for final test.

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
ERP	25 deg. C, 65 % RH	3.6 Vdc	Harry Hsueh, Karl Lee, Charles Hsiao
Modulation Characteristics	25 deg. C, 65 % RH	3.6 Vdc	Gavin Wu
Frequency Stability	25 deg. C, 65 % RH	3.6 Vdc	Gavin Wu
Occupied Bandwidth	25 deg. C, 65 % RH	3.6 Vdc	Gavin Wu
Band Edge	25 deg. C, 65 % RH	3.6 Vdc	Gavin Wu
Peak to Average Ratio	25 deg. C, 65 % RH	3.6 Vdc	Gavin Wu
Conducted Emission	25 deg. C, 65 % RH	3.6 Vdc	Gavin Wu
Radiated Emission	25 deg. C, 65 % RH	120 Vac, 60 Hz	Harry Hsueh, Karl Lee, Charles Hsiao

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency.

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 22

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-E 2016

ANSI 63.26-2015

Note: All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

Mobile / Portable station are limited to 7 watts e.r.p.

4.1.2 Test Procedures

EIRP / ERP Measurement:

- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 5 MHz for WCDMA mode and 10 MHz for LTE mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step b. Record the power level of S.G.
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.R.P \text{ power} - 2.15 \text{ dB}$.


Conducted Power Measurement:

The EUT was set up for the maximum power with WCDMA and LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.


4.1.3 Test Setup

EIRP / ERP Measurement:

<Radiated Emission below or equal 1 GHz>

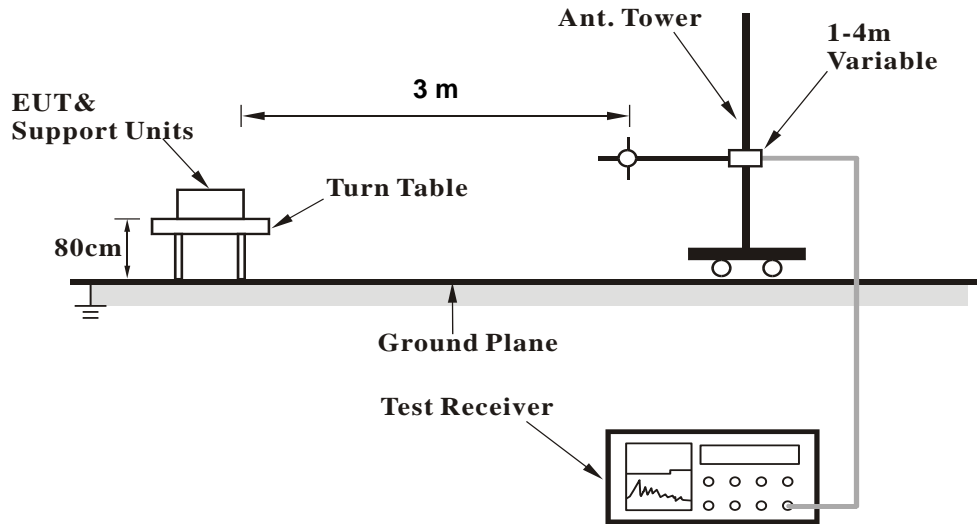


<Radiated Emission above 1 GHz>

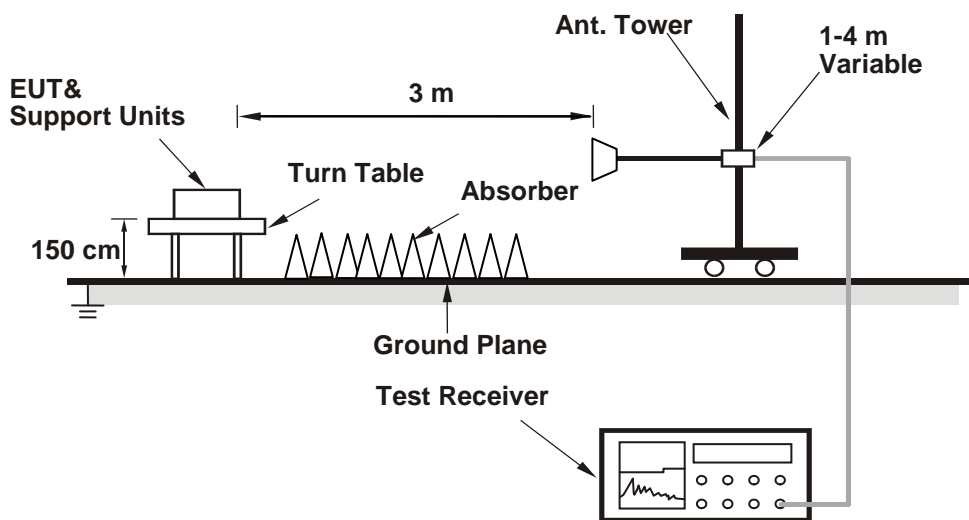

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Conducted Power Measurement:



4.1.4 Test Results

Conducted Output Power (dBm)

Band	WCDMA V		
Channel	4132	4182	4233
Frequency (MHz)	826.4	836.4	846.6
RMC 12.2K	24.09	23.96	24.05

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 20407	Mid Ch 20525	High Ch 20643		Low Ch 20407	Mid Ch 20525	High Ch 20643	
			824.7 MHz	836.5 MHz	848.3 MHz		824.7 MHz	836.5 MHz	848.3 MHz	
5 / 1.4M	1	0	22.92	22.94	22.80	0	21.85	21.86	21.78	1
	1	2	22.68	22.78	22.66	0	21.63	21.79	21.59	1
	1	5	22.53	22.72	22.57	0	21.53	21.67	21.40	1
	3	0	21.73	21.86	21.71	0	20.67	20.80	20.58	1
	3	1	21.67	21.64	21.52	0	20.64	20.69	20.36	1
	3	3	21.35	21.51	21.39	0	20.37	20.46	20.32	1
	6	0	21.79	21.82	21.63	1	20.71	20.69	20.65	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 20415	Mid Ch 20525	High Ch 20635		Low Ch 20415	Mid Ch 20525	High Ch 20635	
			825.5 MHz	836.5 MHz	847.5 MHz		825.5 MHz	836.5 MHz	847.5 MHz	
5 / 3M	1	0	22.93	23.02	22.87	0	21.56	21.60	21.51	1
	1	7	22.78	22.84	22.78	0	21.74	21.78	21.71	1
	1	14	22.52	22.75	22.65	0	21.74	21.63	21.54	1
	8	0	21.75	21.93	21.79	1	20.74	20.65	20.57	2
	8	3	21.61	21.72	21.52	1	20.56	20.55	20.46	2
	8	7	21.53	21.61	21.42	1	20.49	20.58	20.31	2
	15	0	21.73	21.89	21.69	1	20.66	20.84	20.77	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 20425	Mid Ch 20525	High Ch 20625		Low Ch 20425	Mid Ch 20525	High Ch 20625	
			826.5 MHz	836.5 MHz	846.5 MHz		826.5 MHz	836.5 MHz	846.5 MHz	
5 / 5M	1	0	23.00	23.06	22.96	0	21.74	21.78	21.69	1
	1	12	22.78	22.91	22.84	0	21.80	21.86	21.75	1
	1	24	22.61	22.76	22.61	0	21.71	21.66	21.63	1
	12	0	21.90	21.93	21.77	1	20.74	20.91	20.73	2
	12	6	21.70	21.67	21.62	1	20.69	20.70	20.54	2
	12	13	21.63	21.57	21.57	1	20.57	20.55	20.47	2
	25	0	21.89	21.89	21.83	1	20.70	20.80	20.68	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 20450	Mid Ch 20525	High Ch 20600		Low Ch 20450	Mid Ch 20525	High Ch 20600	
			829.0 MHz	836.5 MHz	844.0 MHz		829.0 MHz	836.5 MHz	844.0 MHz	
5 / 10M	1	0	23.02	23.11	22.99	0	21.83	21.96	21.75	1
	1	24	22.92	22.95	22.85	0	21.76	21.97	21.81	1
	1	49	22.77	22.77	22.79	0	21.66	21.82	21.55	1
	25	0	21.89	22.01	21.87	1	20.71	20.77	20.65	2
	25	12	21.69	21.79	21.65	1	20.66	20.78	20.64	2
	25	25	21.54	21.68	21.56	1	20.50	20.61	20.47	2
	50	0	21.88	21.96	21.91	1	20.88	21.00	20.84	2

ERP Power (dBm)

WCDMA							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
90°	4132	826.4	-9.02	31.208	20.04	100.88	H
	4182	836.4	-8.89	31.3	20.26	106.17	
	4233	846.6	-8.79	31.222	20.28	106.71	
	4132	826.4	-13.30	31.504	16.05	40.31	V
	4182	836.4	-13.10	31.117	15.87	38.61	
	4233	846.6	-13.80	31.922	15.97	39.55	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 5							
Channel Bandwidth: 1.4 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
90°	20407	824.7	-10.18	31.208	18.88	77.23	H
	20525	836.5	-10.22	31.3	18.93	78.16	
	20643	848.3	-10.28	31.222	18.79	75.72	
	20407	824.7	-14.49	31.504	14.86	30.65	V
	20525	836.5	-14.07	31.117	14.90	30.88	
	20643	848.3	-14.99	31.922	14.78	30.07	
Channel Bandwidth: 1.4 MHz / 16QAM							
90°	20407	824.7	-11.18	31.208	17.88	61.35	H
	20525	836.5	-11.23	31.3	17.92	61.94	
	20643	848.3	-11.28	31.222	17.79	60.15	
	20407	824.7	-15.50	31.504	13.85	24.29	V
	20525	836.5	-15.08	31.117	13.89	24.47	
	20643	848.3	-15.99	31.922	13.78	23.89	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 5							
Channel Bandwidth: 3 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
90°	20415	825.5	-10.14	31.208	18.92	77.95	H
	20525	836.5	-10.18	31.3	18.97	78.89	
	20635	847.5	-10.23	31.222	18.84	76.59	
	20415	825.5	-14.46	31.504	14.89	30.86	V
	20525	836.5	-14.04	31.117	14.93	31.10	
	20635	847.5	-14.95	31.922	14.82	30.35	
Channel Bandwidth: 3 MHz / 16QAM							
90°	20415	825.5	-11.14	31.208	17.92	61.92	H
	20525	836.5	-11.18	31.3	17.97	62.66	
	20635	847.5	-11.24	31.222	17.83	60.70	
	20415	825.5	-15.46	31.504	13.89	24.51	V
	20525	836.5	-15.04	31.117	13.93	24.70	
	20635	847.5	-15.95	31.922	13.82	24.11	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 5							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
90°	20425	826.5	-10.10	31.208	18.96	78.67	H
	20525	836.5	-10.14	31.3	19.01	79.62	
	20625	846.5	-10.19	31.222	18.88	77.30	
	20425	826.5	-14.42	31.504	14.93	31.15	V
	20525	836.5	-14.00	31.117	14.97	31.38	
	20625	846.5	-14.91	31.922	14.86	30.63	
Channel Bandwidth: 5 MHz / 16QAM							
90°	20425	826.5	-11.10	31.208	17.96	62.49	H
	20525	836.5	-11.15	31.3	18.00	63.10	
	20625	846.5	-11.20	31.222	17.87	61.26	
	20425	826.5	-15.43	31.504	13.92	24.68	V
	20525	836.5	-15.01	31.117	13.96	24.87	
	20625	846.5	-15.92	31.922	13.85	24.28	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 5							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
90°	20450	829.0	-10.06	31.208	19.00	79.40	H
	20525	836.5	-10.10	31.3	19.05	80.35	
	20600	844.0	-10.14	31.222	18.93	78.20	
	20450	829.0	-14.38	31.504	14.97	31.43	V
	20525	836.5	-13.95	31.117	15.02	31.75	
	20600	844.0	-14.87	31.922	14.90	30.92	
Channel Bandwidth: 10 MHz / 16QAM							
90°	20450	829.0	-11.07	31.208	17.99	62.92	H
	20525	836.5	-11.10	31.3	18.05	63.83	
	20600	844.0	-11.14	31.222	17.93	62.12	
	20450	829.0	-15.38	31.504	13.97	24.97	V
	20525	836.5	-14.96	31.117	14.01	25.16	
	20600	844.0	-15.87	31.922	13.90	24.56	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

4.2 Modulation Characteristics Measurement

4.2.1 Limits of Modulation Characteristics

N/A



4.2.2 Test Setup



4.2.3 Test Procedure

Connect the EUT to Communication Simulator via the antenna connector. The frequency band is set as EUT supported Modulation and Channels, the EUT output is matched with 50 ohm load, the waveform quality and constellation of the EUT was tested.

4.2.4 Test Results

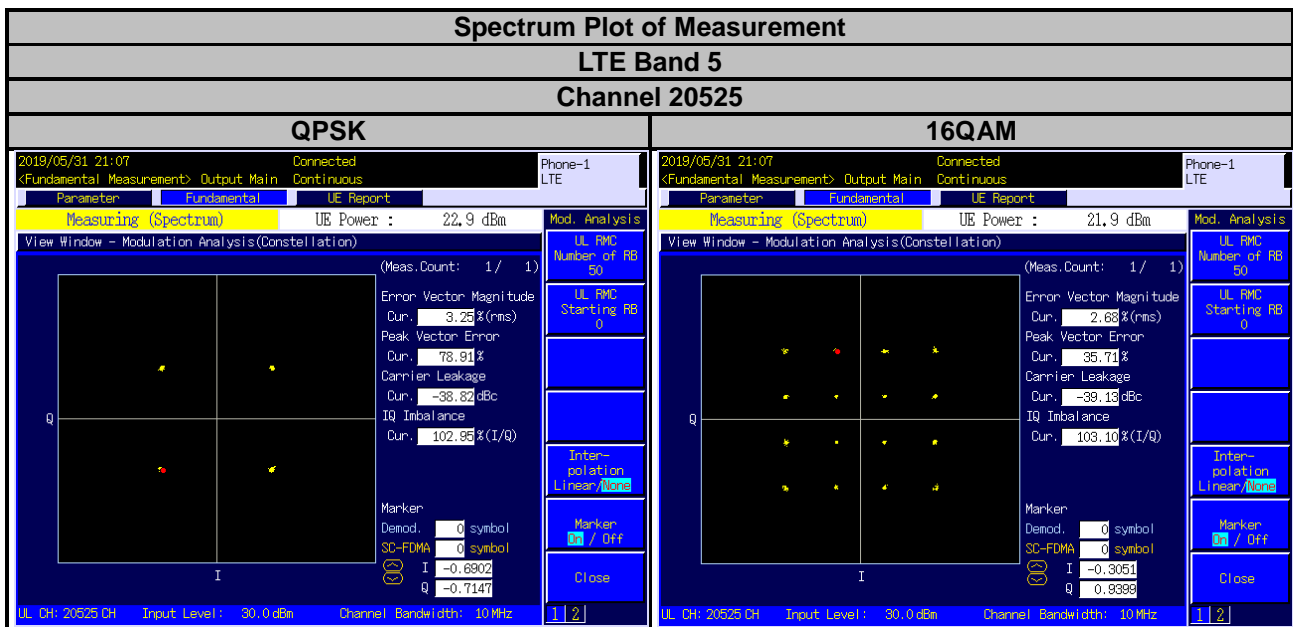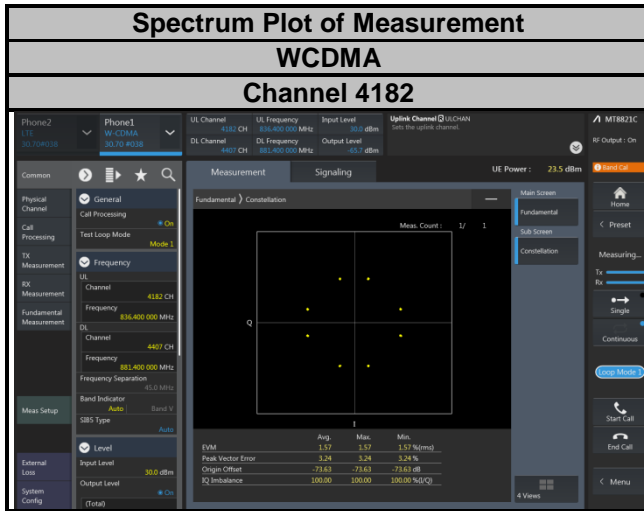

4.3 Frequency Stability Measurement

4.3.1 Limits of Frequency Stability Measurement


1.5 ppm is for base and fixed station. 2.5 ppm is for mobile station.

4.3.2 Test Procedure

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the ± 0.5 °C during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.3.3 Test Setup

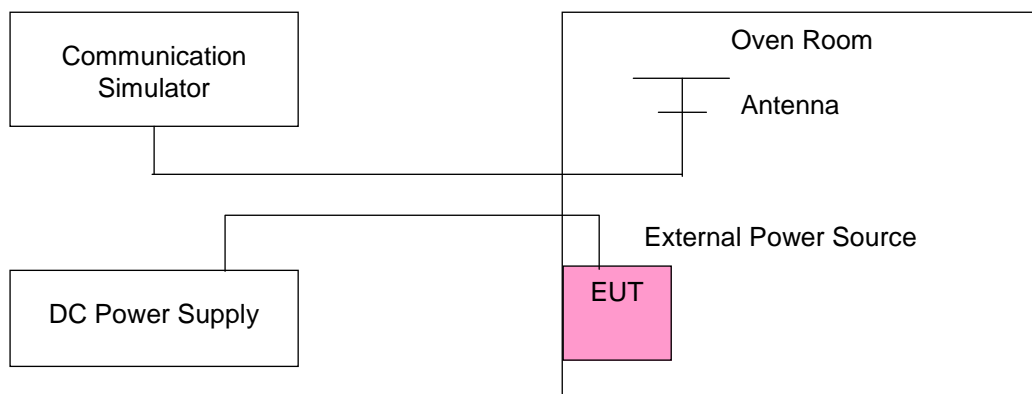

4.3.4 Test Results

Frequency Error vs. Voltage

Voltage (Volts)	WCDMA				Limit (ppm)
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.6	826.400003	0.003	846.600004	0.005	2.5
3.06	826.400002	0.002	846.600004	0.004	2.5
4.14	826.400002	0.002	846.600003	0.003	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.06 Vdc to 4.14 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	WCDMA				Limit (ppm)
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-10	826.400004	0.005	846.600002	0.003	2.5
0	826.400001	0.001	846.600001	0.002	2.5
10	826.399997	-0.004	846.599998	-0.003	2.5
20	826.399999	-0.001	846.599999	-0.001	2.5
30	826.399998	-0.003	846.599998	-0.002	2.5
40	826.399998	-0.002	846.599999	-0.002	2.5
50	826.399997	-0.004	846.599998	-0.002	2.5

Note:

1. The applicant declared that the normal operating temperature of the EUT is from -10°C to 50°C.
2. The EUT would shut down automatically as below -10°C.

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 5				Limit (ppm)
	Channel Bandwidth: 1.4 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.6	824.700004	0.004	848.300002	0.003	2.5
3.06	824.700001	0.002	848.300004	0.005	2.5
4.14	824.700002	0.002	848.300003	0.003	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.06 Vdc to 4.14 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 5				Limit (ppm)
	Channel Bandwidth: 1.4 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-10	824.700002	0.002	848.300003	0.003	2.5
0	824.700002	0.003	848.300002	0.002	2.5
10	824.699998	-0.002	848.300003	0.004	2.5
20	824.699998	-0.002	848.299997	-0.003	2.5
30	824.699998	-0.003	848.299998	-0.002	2.5
40	824.699999	-0.001	848.299997	-0.003	2.5
50	824.699998	-0.002	848.299997	-0.004	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 5				Limit (ppm)
	Channel Bandwidth: 3 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.6	825.500004	0.005	847.500001	0.002	2.5
3.06	825.500004	0.005	847.500001	0.002	2.5
4.14	825.500004	0.005	847.500004	0.004	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.06 Vdc to 4.14 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 5				Limit (ppm)
	Channel Bandwidth: 3 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-10	825.500004	0.004	847.500002	0.002	2.5
0	825.500001	0.002	847.500003	0.003	2.5
10	825.499997	-0.004	847.500002	0.002	2.5
20	825.499998	-0.002	847.499999	-0.002	2.5
30	825.499998	-0.002	847.499996	-0.004	2.5
40	825.499999	-0.001	847.499999	-0.002	2.5
50	825.499996	-0.005	847.499997	-0.003	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 5				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.6	826.500003	0.004	846.500004	0.004	2.5
3.06	826.500002	0.002	846.500003	0.003	2.5
4.14	826.500002	0.003	846.500002	0.002	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.06 Vdc to 4.14 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 5				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-10	826.500002	0.003	846.500003	0.004	2.5
0	826.500003	0.003	846.500003	0.003	2.5
10	826.499998	-0.003	846.500003	0.003	2.5
20	826.499999	-0.001	846.499997	-0.004	2.5
30	826.499996	-0.004	846.499997	-0.004	2.5
40	826.499996	-0.004	846.499998	-0.002	2.5
50	826.499999	-0.001	846.499997	-0.004	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 5				Limit (ppm)
	Channel Bandwidth: 10 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.6	829.000002	0.003	844.000004	0.005	2.5
3.06	829.000004	0.005	844.000003	0.004	2.5
4.14	829.000004	0.004	844.000004	0.004	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.06 Vdc to 4.14 Vdc.

Frequency Error vs. Temperature


Temp. (°C)	LTE Band 5				Limit (ppm)
	Channel Bandwidth: 10 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-10	829.000003	0.004	844.000002	0.002	2.5
0	829.000003	0.003	844.000001	0.001	2.5
10	828.999998	-0.003	844.000003	0.003	2.5
20	828.999999	-0.002	843.999996	-0.004	2.5
30	828.999997	-0.003	843.999997	-0.003	2.5
40	828.999997	-0.004	843.999997	-0.003	2.5
50	828.999998	-0.003	843.999998	-0.002	2.5

4.4 Occupied Bandwidth Measurement

4.4.1 Test Procedure


The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

4.4.2 Test Setup

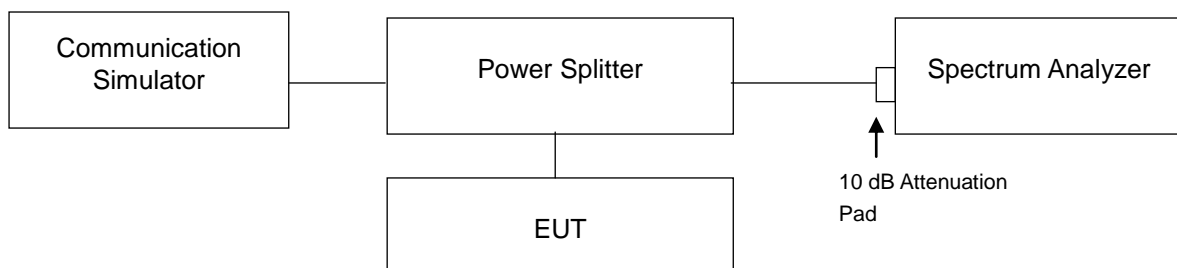


4.4.3 Test Result

WCDMA			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
4132	826.4	4.0788	4.634
4182	836.4	4.0827	4.652
4233	846.6	4.0658	4.639

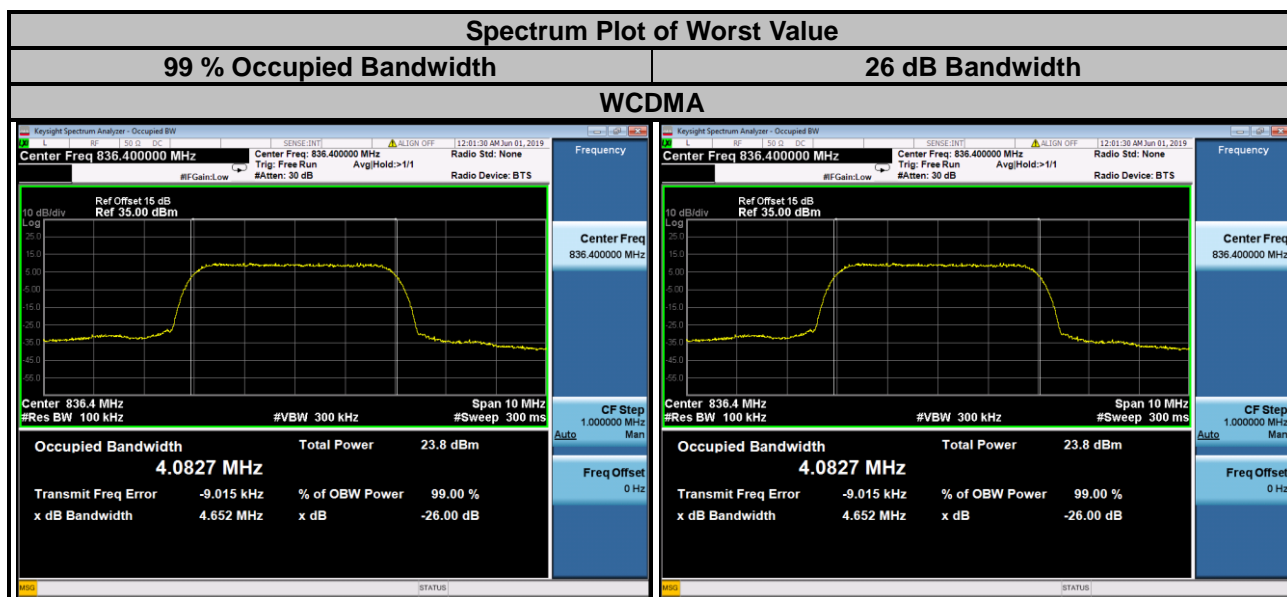


LTE Band 5					
Channel Bandwidth: 1.4 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
20407	824.7	1.0889	1.0898	1.288	1.275
20525	836.5	1.0896	1.0897	1.274	1.273
20643	848.3	1.0885	1.0894	1.272	1.274
Channel Bandwidth: 3 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
20415	825.5	2.6982	2.6964	2.912	2.933
20525	836.5	2.7006	2.6967	2.927	2.929
20635	847.5	2.7006	2.6950	2.923	2.931

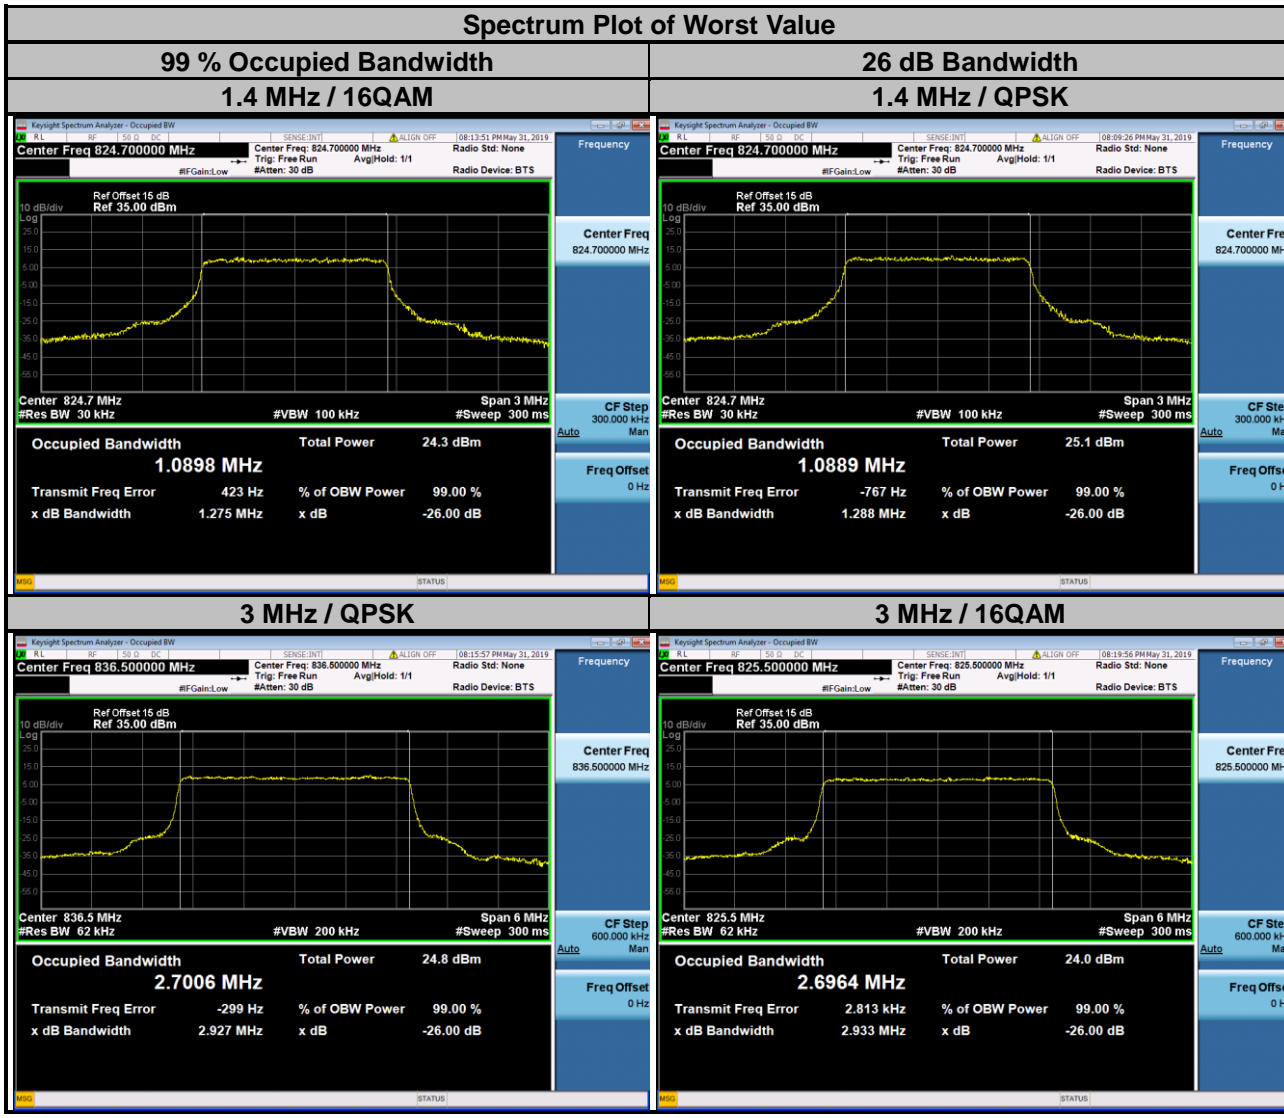

LTE Band 5					
Channel Bandwidth: 5 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
20425	826.5	4.4841	4.4857	4.816	4.818
20525	836.5	4.4836	4.4845	4.805	4.825
20625	846.5	4.4799	4.4814	4.813	4.806

Channel Bandwidth: 10 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
20450	829.0	8.9534	8.9522	9.521	9.520
20525	836.5	8.9757	8.9767	9.533	9.574
20600	844.0	8.9598	8.9650	9.536	9.567

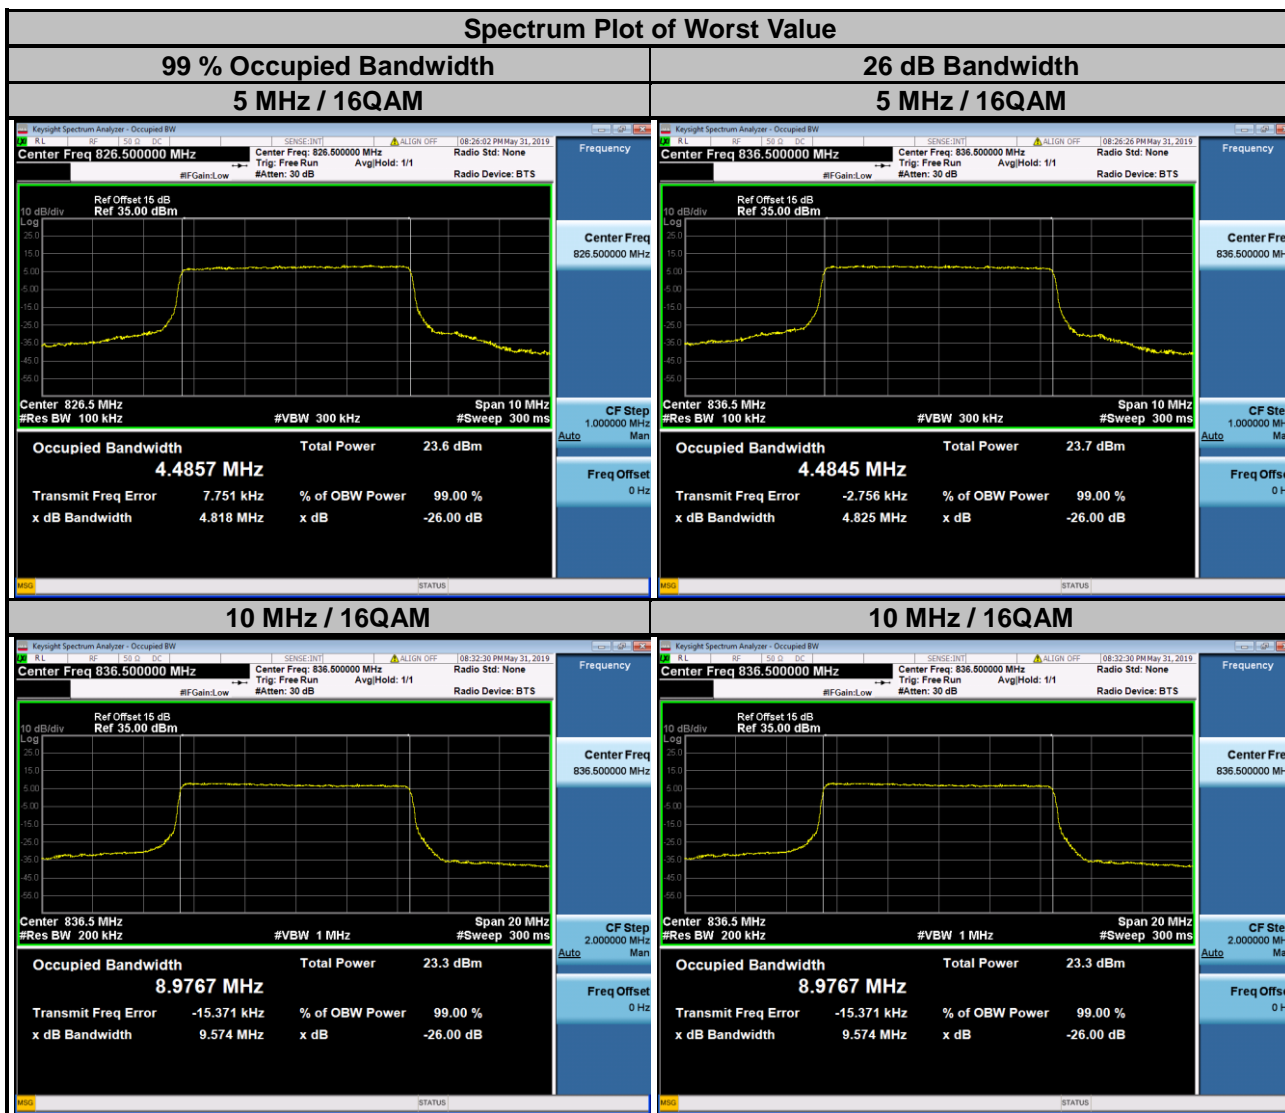


4.5 Band Edge Measurement

4.5.1 Limits of Band Edge Measurement

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.



4.5.2 Test Setup

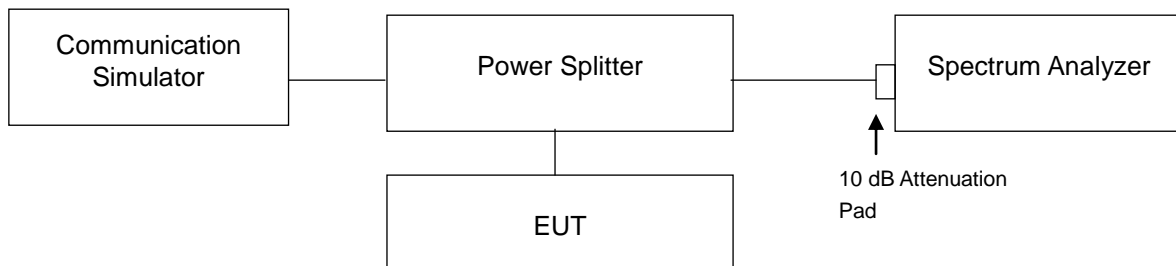



4.5.3 Test Procedures


- All measurements were done at low and high operational frequency range.
- The center frequency of spectrum is the band edge frequency and span is 5 MHz. RB of the spectrum is 47 kHz and VB of the spectrum is 150 kHz (WCDMA).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 15 kHz and VB of the spectrum is 51 kHz (LTE Bandwidth 1.4 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 30 kHz and VB of the spectrum is 100 kHz (LTE Bandwidth 3 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 51 kHz and VB of the spectrum is 160 kHz (LTE Bandwidth 5 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 100 kHz and VB of the spectrum is 300 kHz (LTE Bandwidth 10 MHz).
- Record the max trace plot into the test report.

4.5.4 Test Results

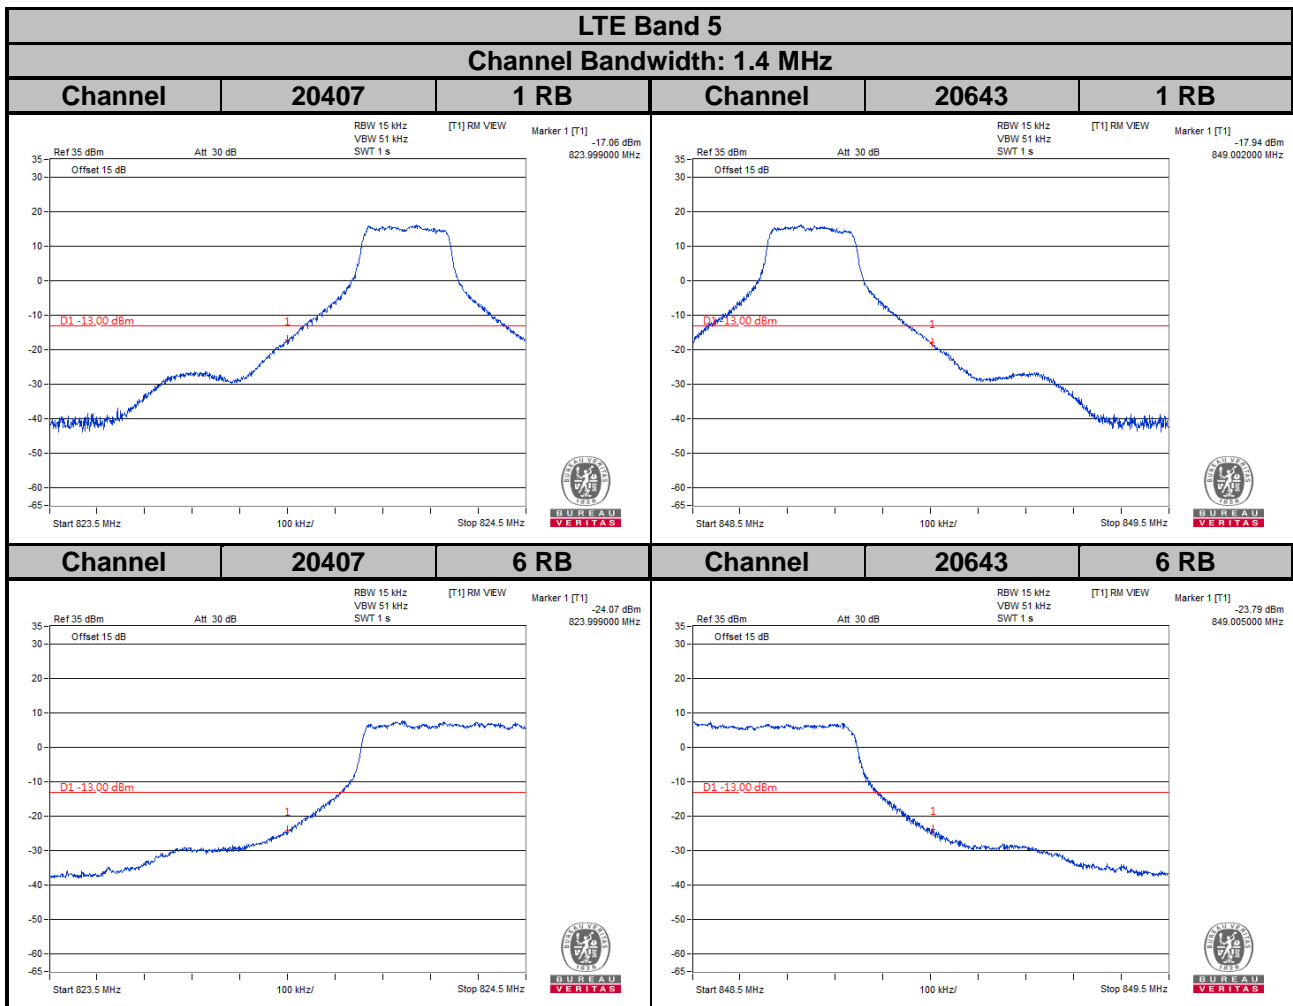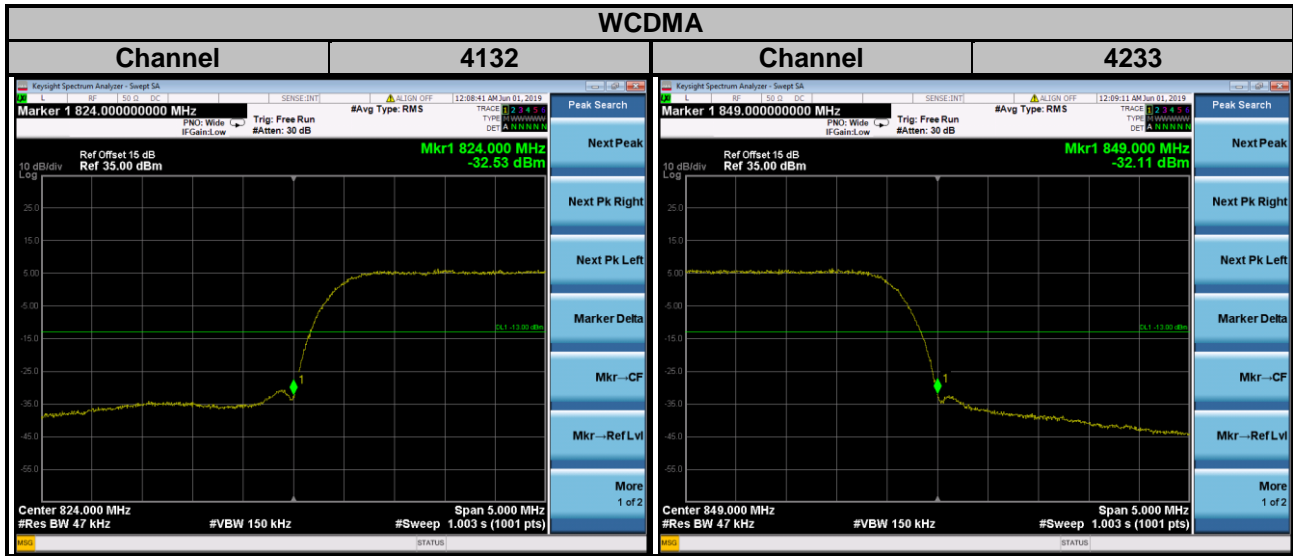

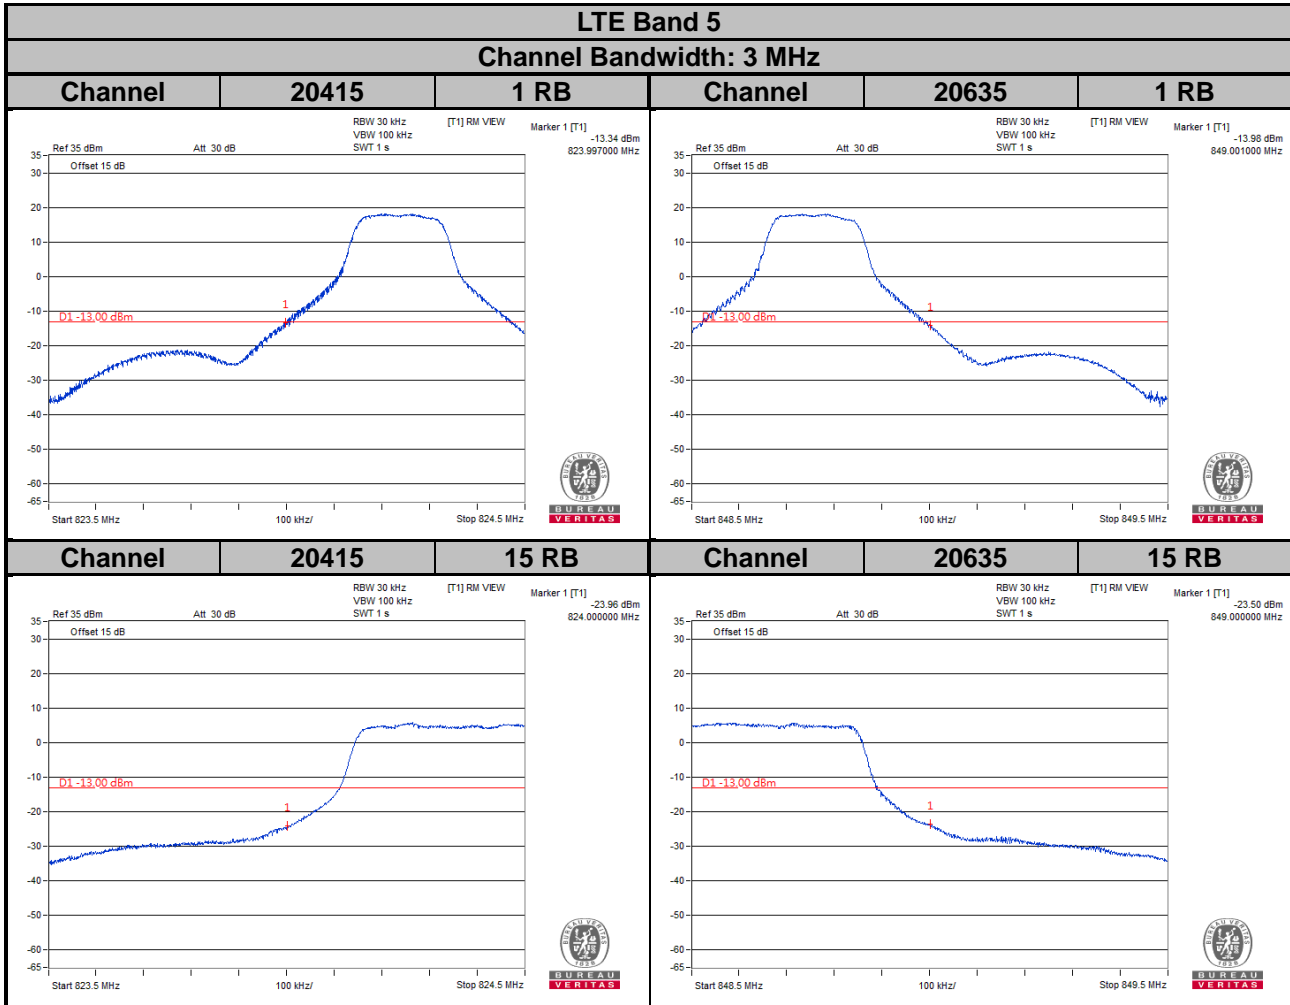

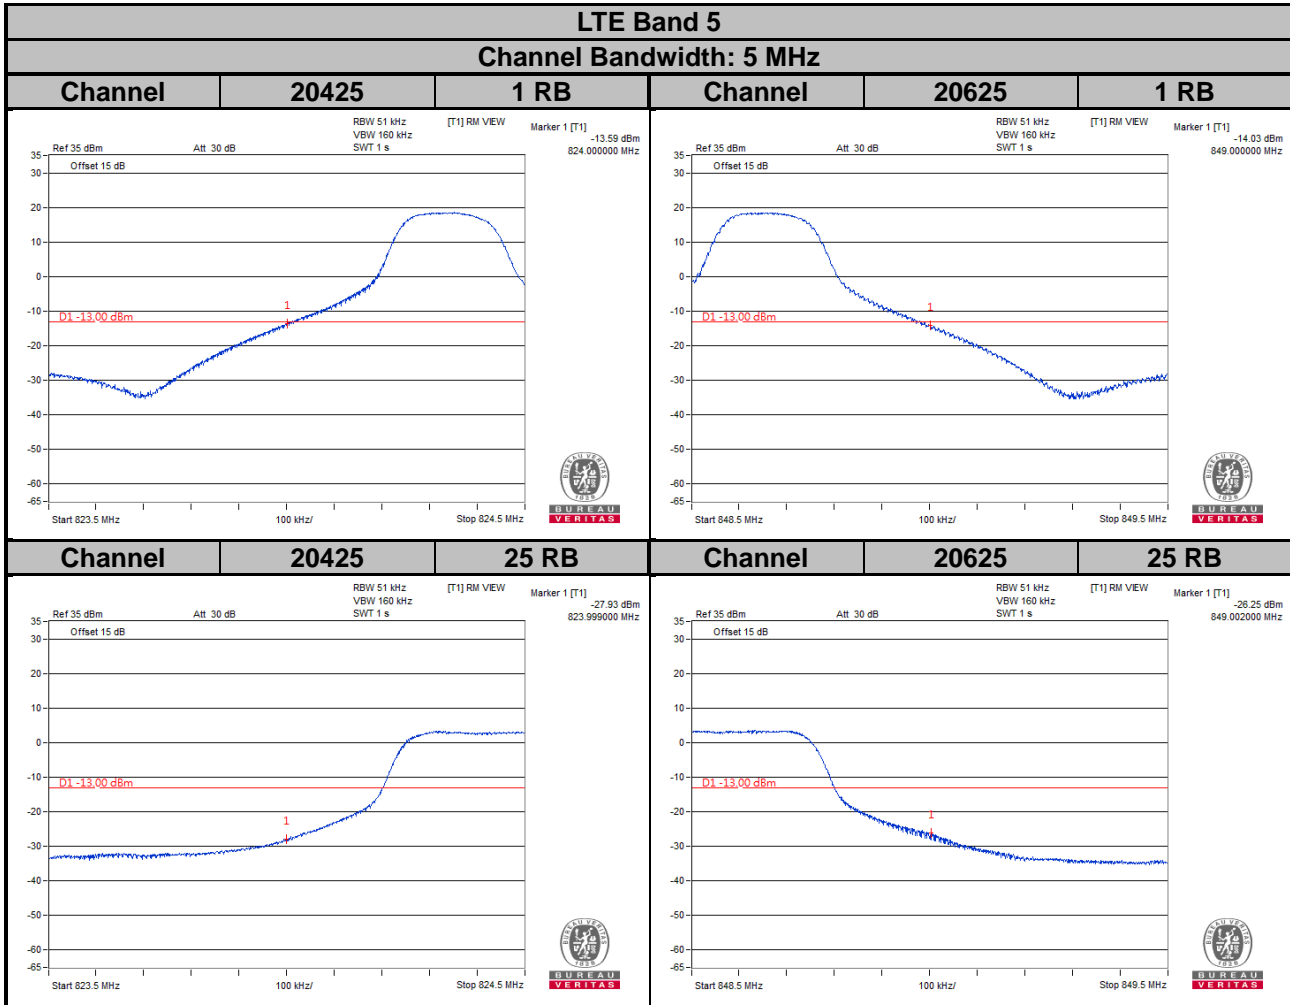

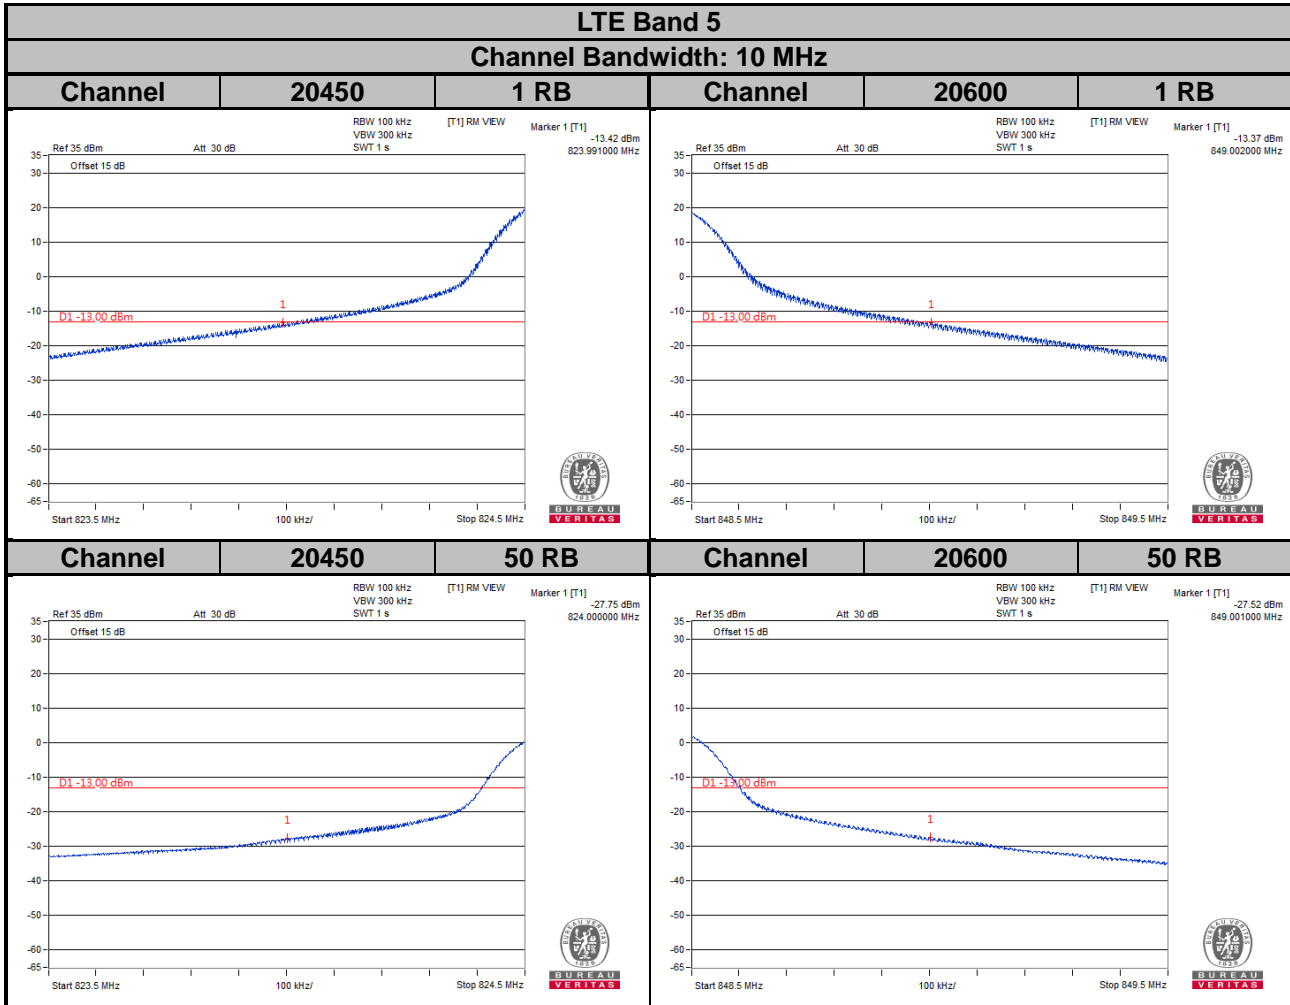


4.6 Peak to Average Ratio

4.6.1 Limits of Peak to Average Ratio Measurement

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.6.2 Test Setup

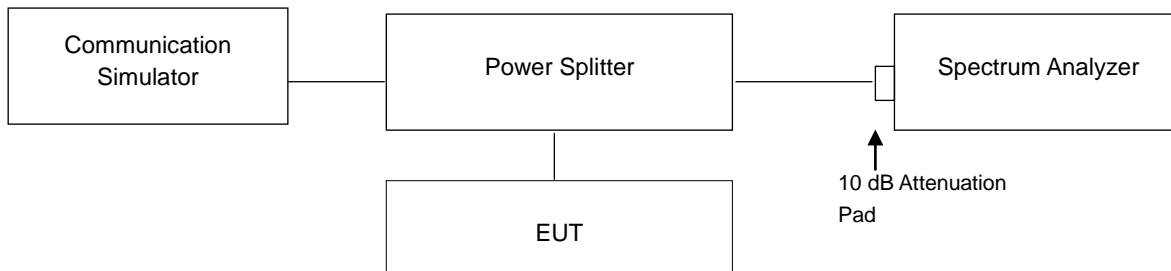


4.6.3 Test Procedures


1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1 %.

4.6.4 Test Results


Channel	Frequency (MHz)	Peak to Average Ratio (dB)
		WCDMA
4132	826.4	3.38
4182	836.4	3.16
4233	846.6	3.32

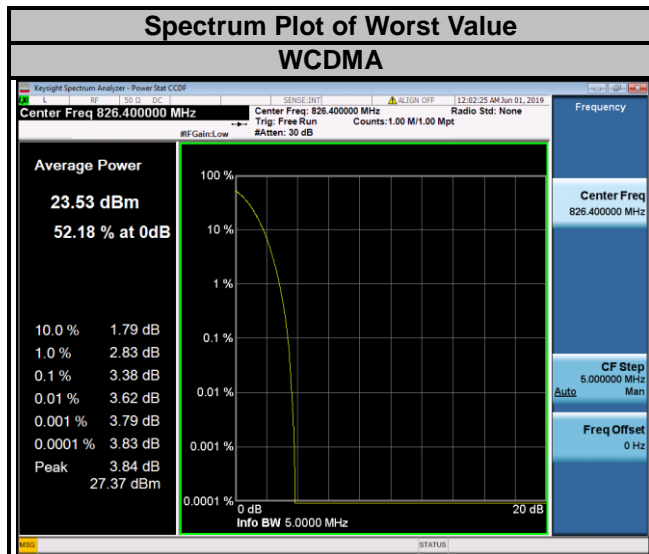

LTE Band 5							
Channel Bandwidth: 1.4 MHz				Channel Bandwidth: 3 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
20407	824.7	5.39	6.45	20415	825.5	5.28	6.01
20525	836.5	5.35	6.22	20525	836.5	5.18	5.99
20643	848.3	5.36	6.21	20635	847.5	5.32	6.14

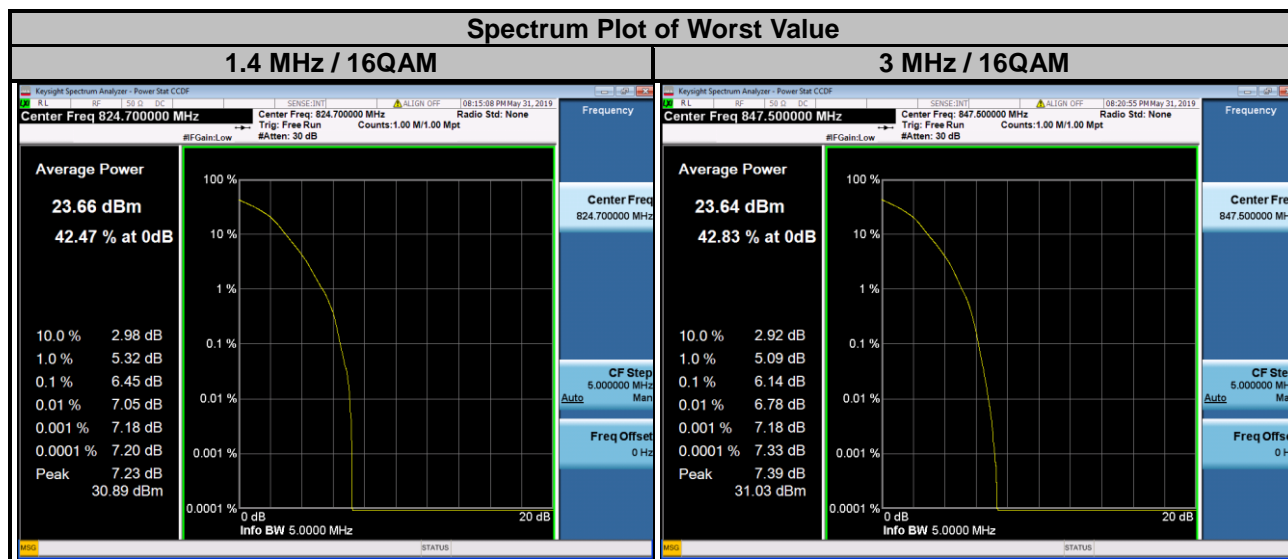

LTE Band 5							
Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
20425	826.5	5.46	6.35	20450	829.0	5.46	6.34
20525	836.5	5.30	6.17	20525	836.5	5.28	6.17
20625	846.5	5.70	6.60	20600	844.0	5.40	6.48

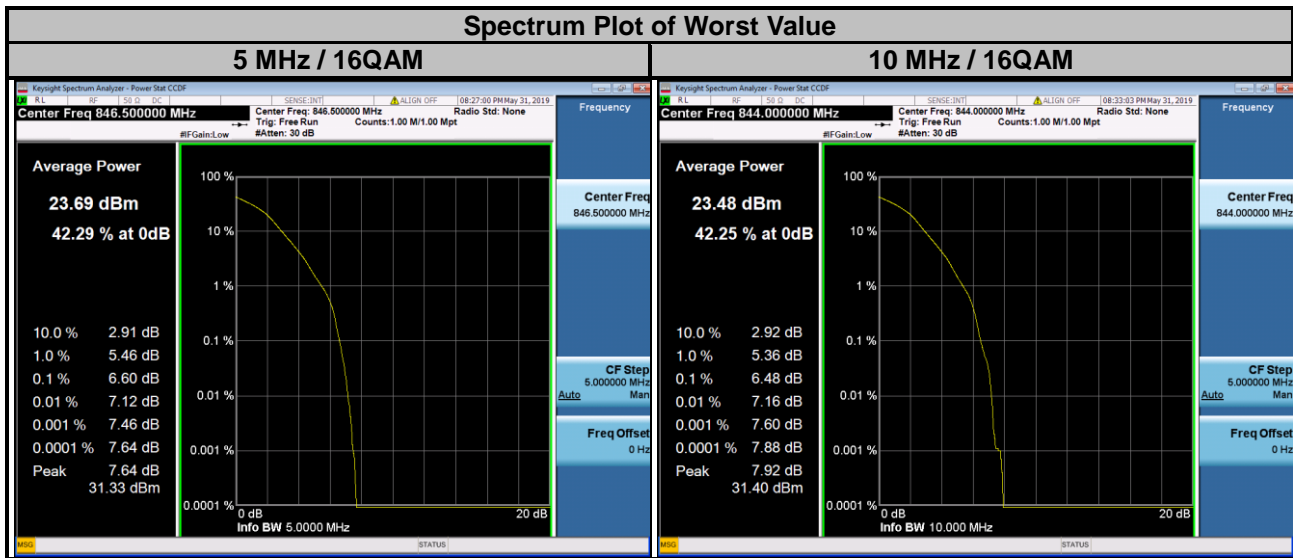


4.7 Conducted Spurious Emissions

4.7.1 Limits of Conducted Spurious Emissions Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13 dBm.


4.7.2 Test Setup

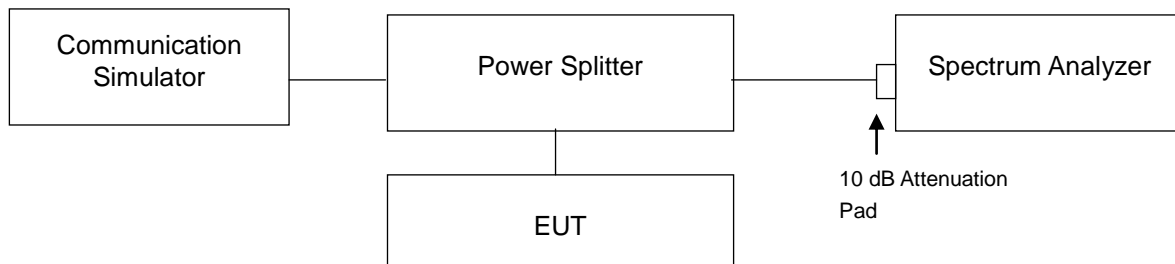

4.7.3 Test Procedure



- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 9 kHz to 1 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 100 kHz and VBW = 300 kHz is used for conducted emission measurement.
- Measuring frequency range is from 1 GHz to 9 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 1 MHz and VBW = 3 MHz is used for conducted emission measurement.

4.7.4 Test Results


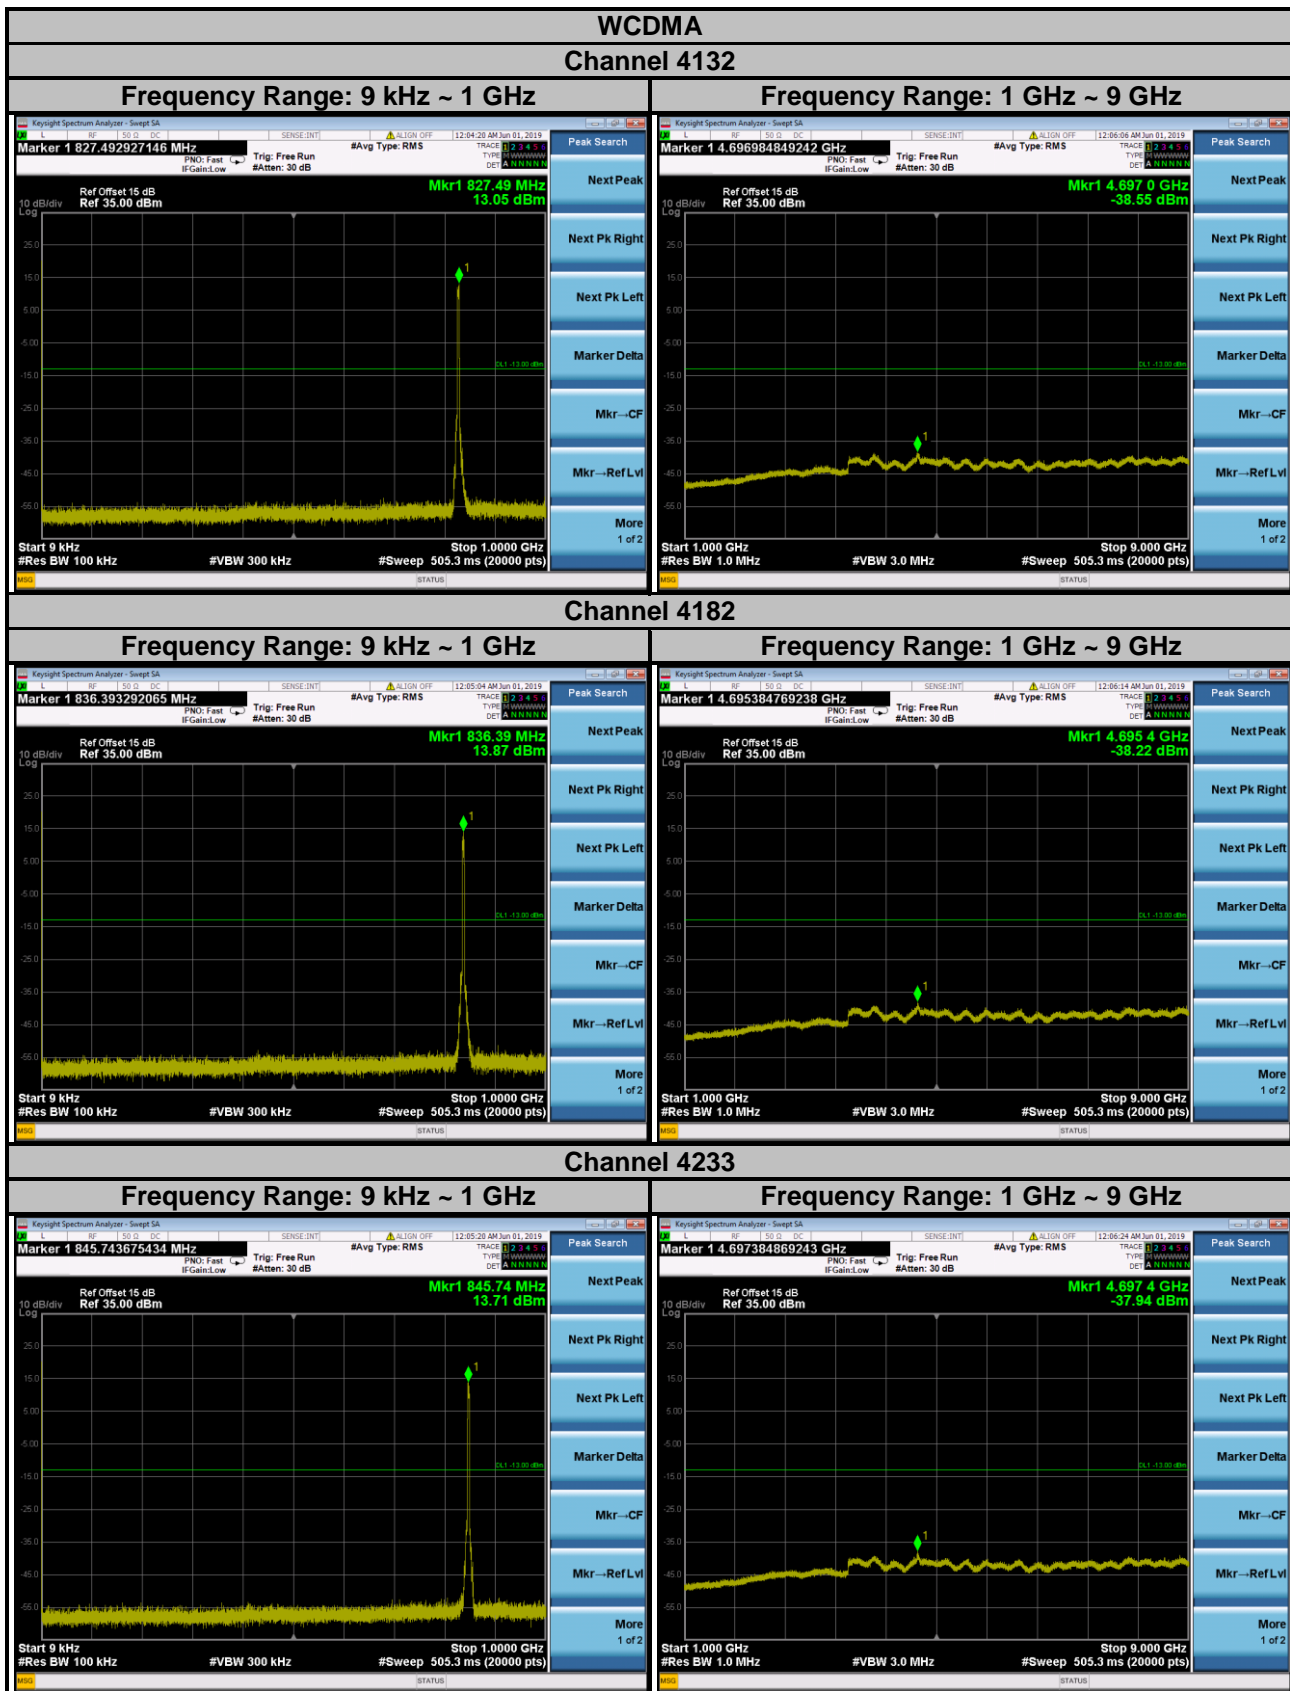


Note: The signal over the limit in 9 kHz is from spectrum analyzer.



LTE Band 5
Channel Bandwidth: 1.4 MHz
Channel 20407

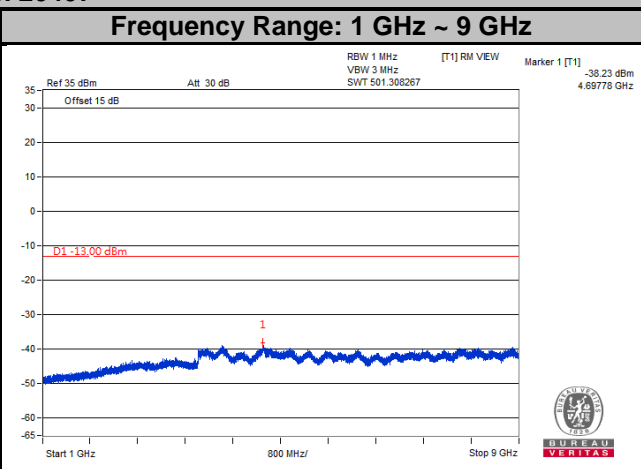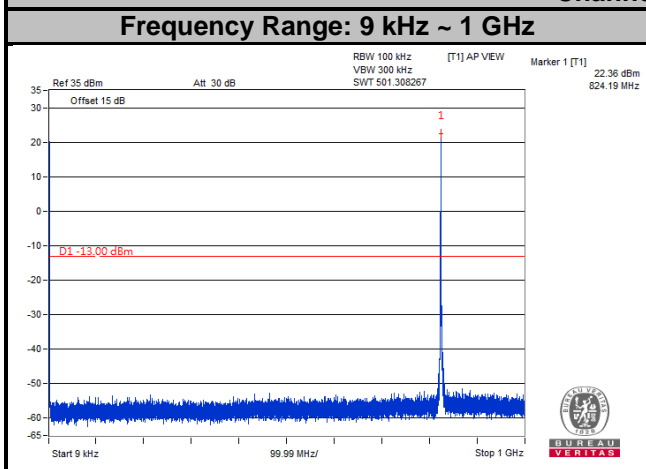

Channel 20525

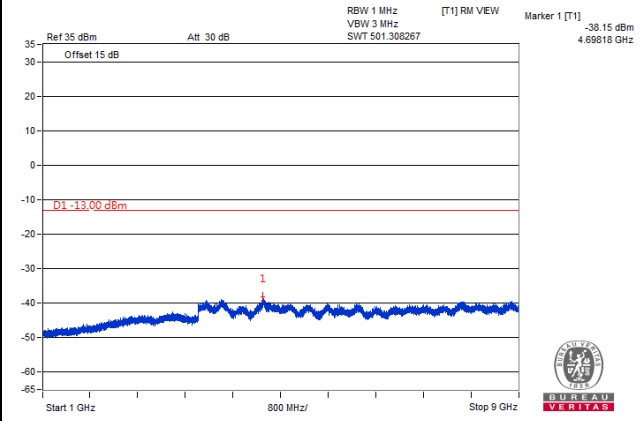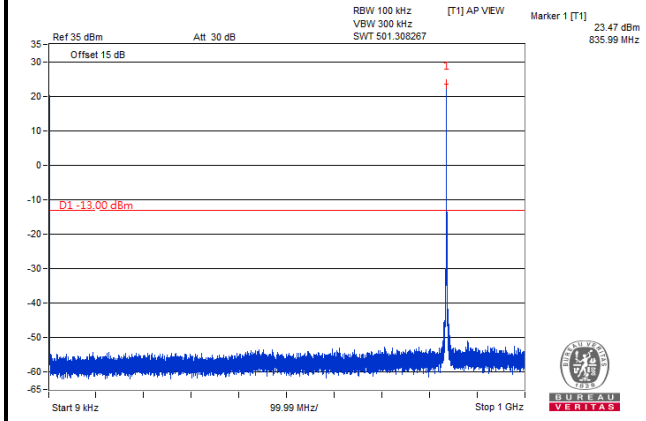


Channel 20643

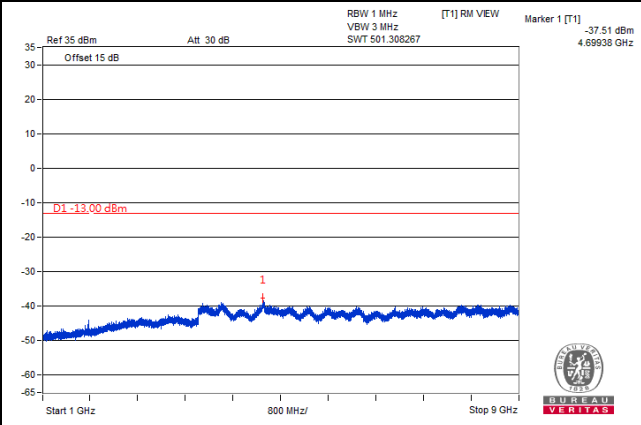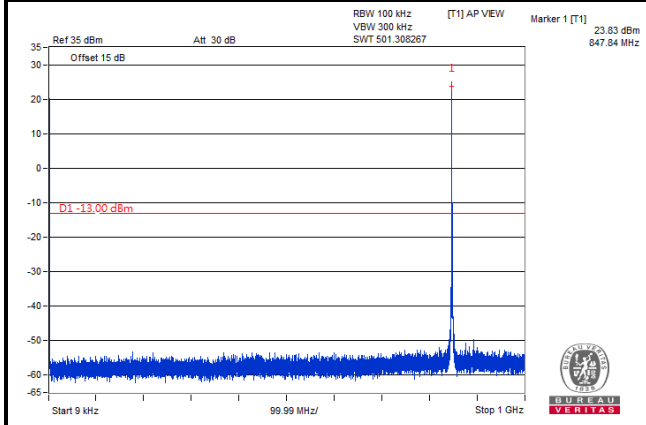


Note: The signal over the limit in 9 kHz is from spectrum analyzer.


LTE Band 5
Channel Bandwidth: 3 MHz
Channel 20415

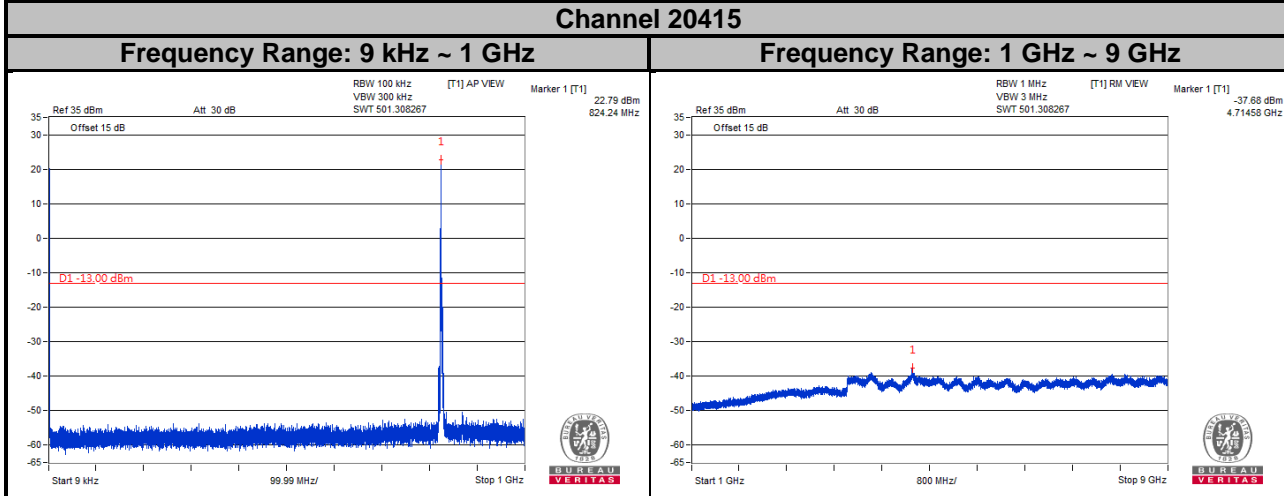

Channel 20525

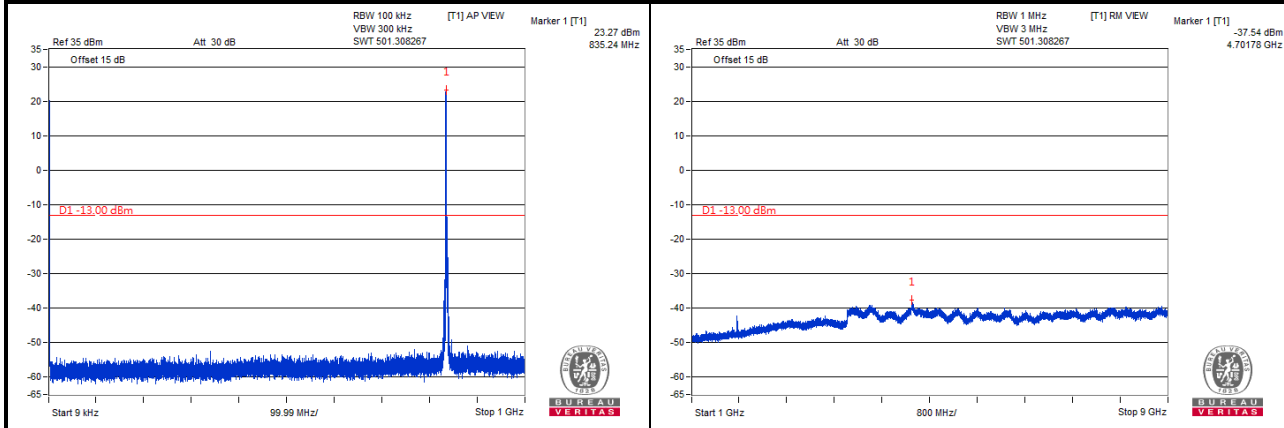


Channel 20635

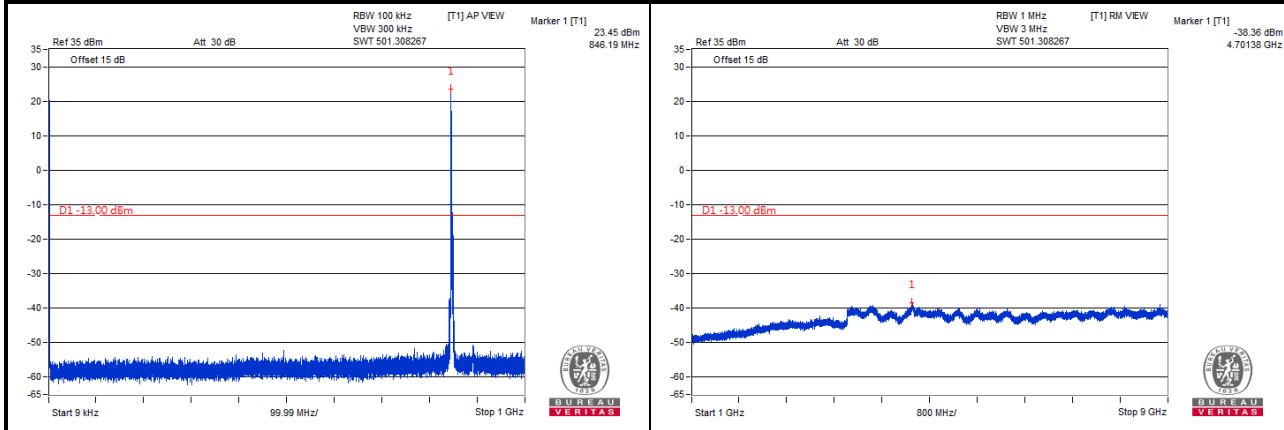


Note: The signal over the limit in 9 kHz is from spectrum analyzer.


LTE Band 5
Channel Bandwidth: 5 MHz
Channel 20425

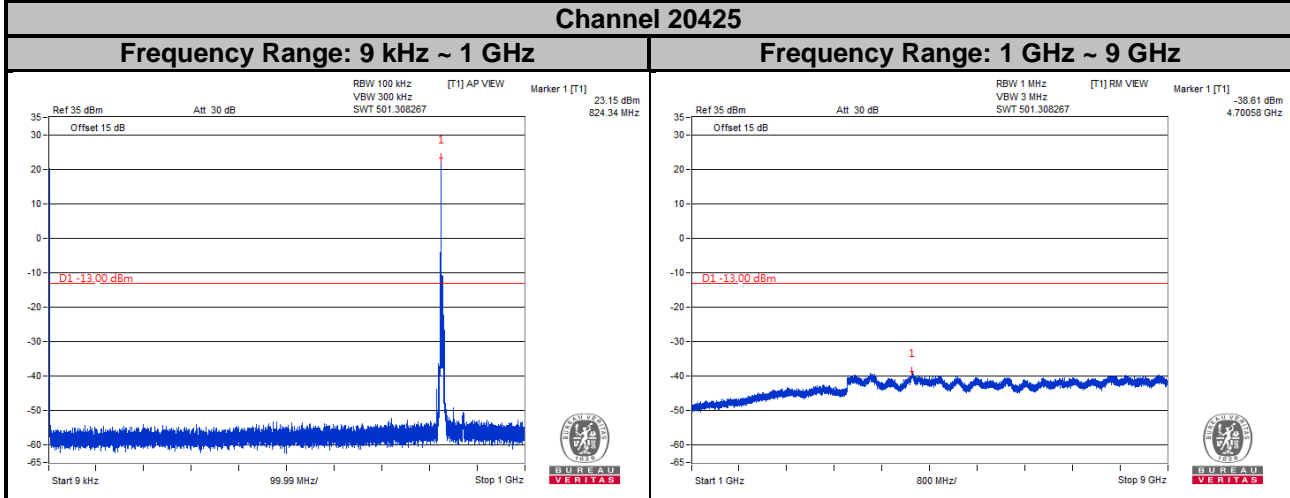

Channel 20525

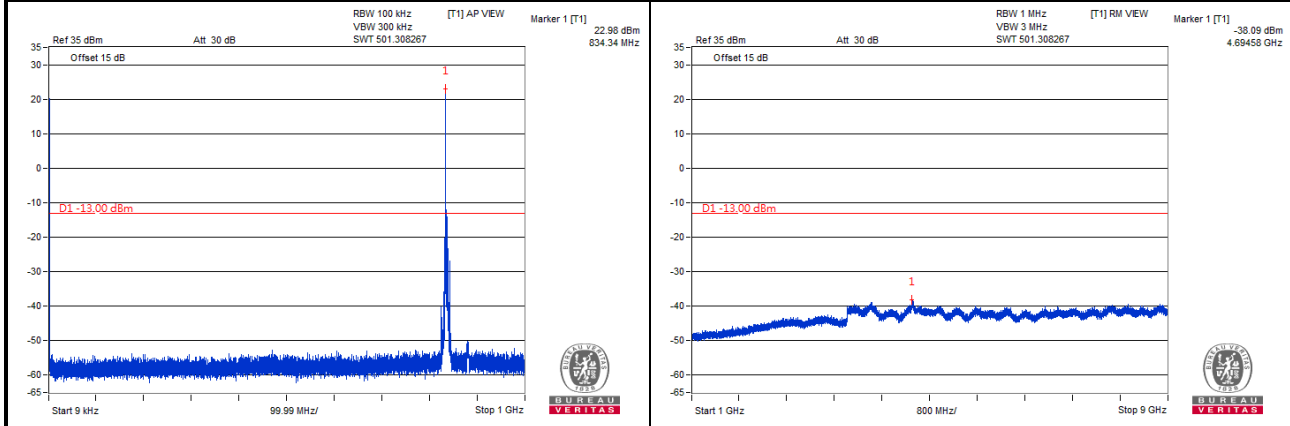


Channel 20625

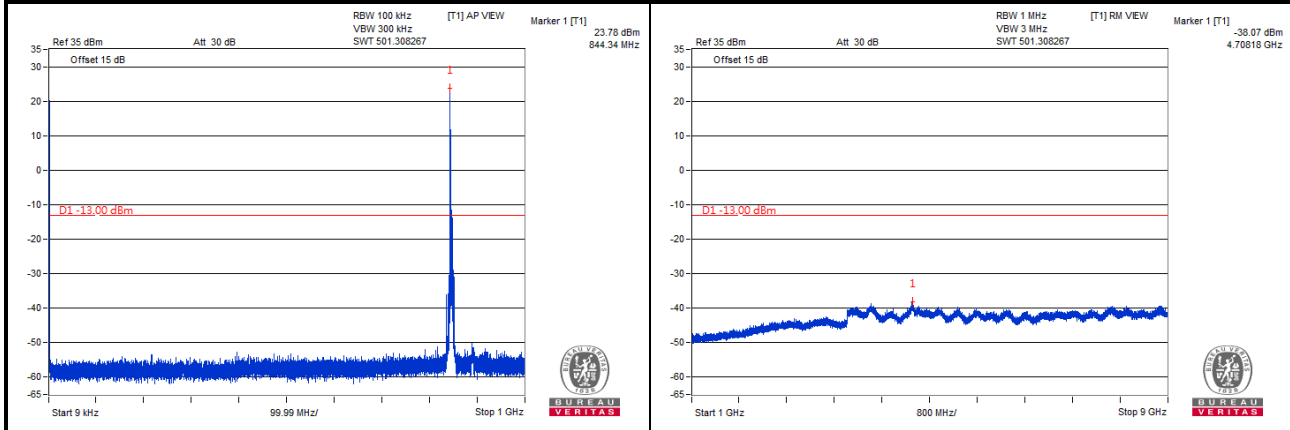


Note: The signal over the limit in 9 kHz is from spectrum analyzer.


LTE Band 5
Channel Bandwidth: 10 MHz
Channel 20450

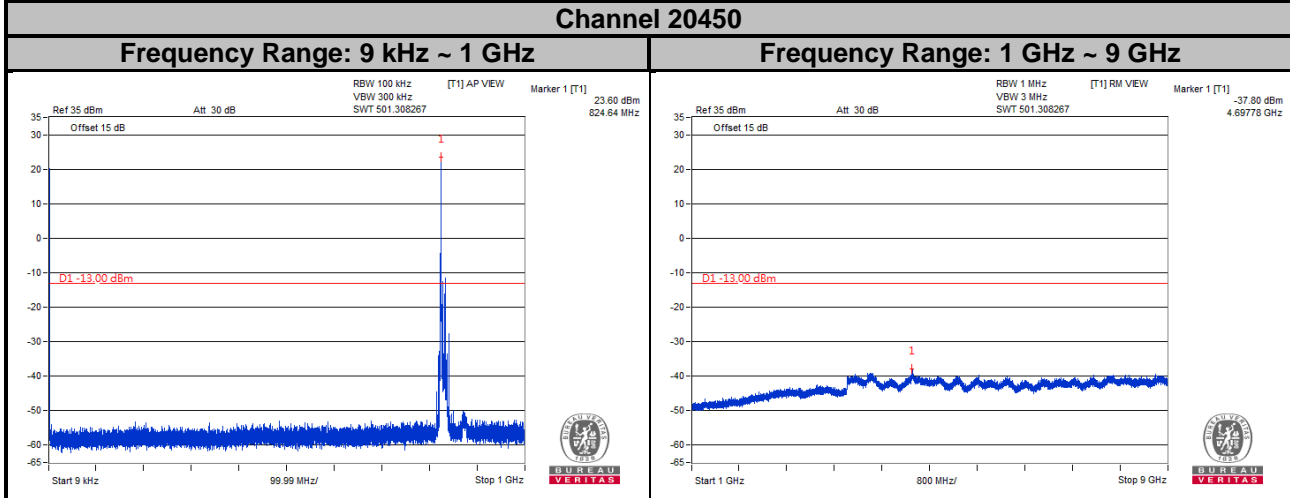

Channel 20525

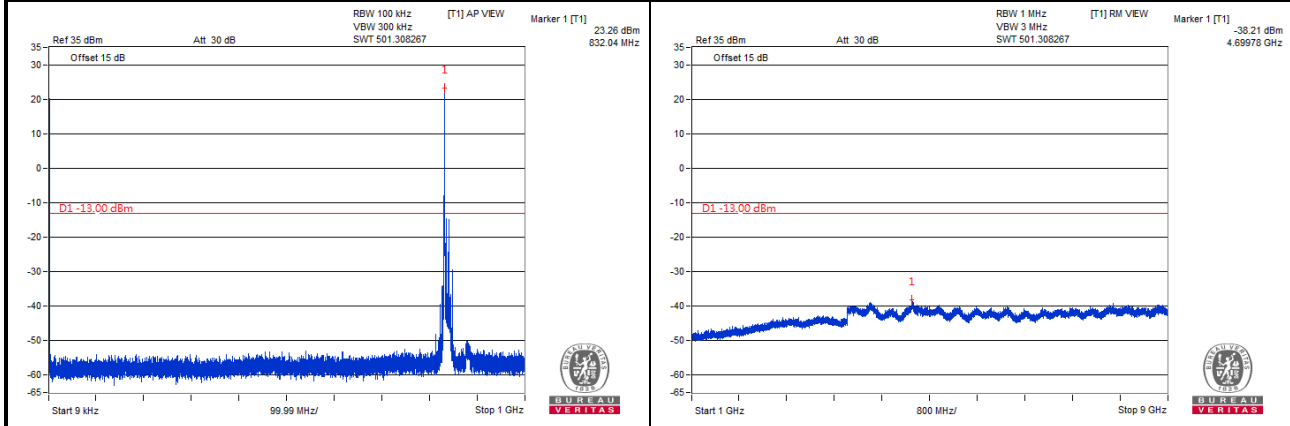

Channel 20600

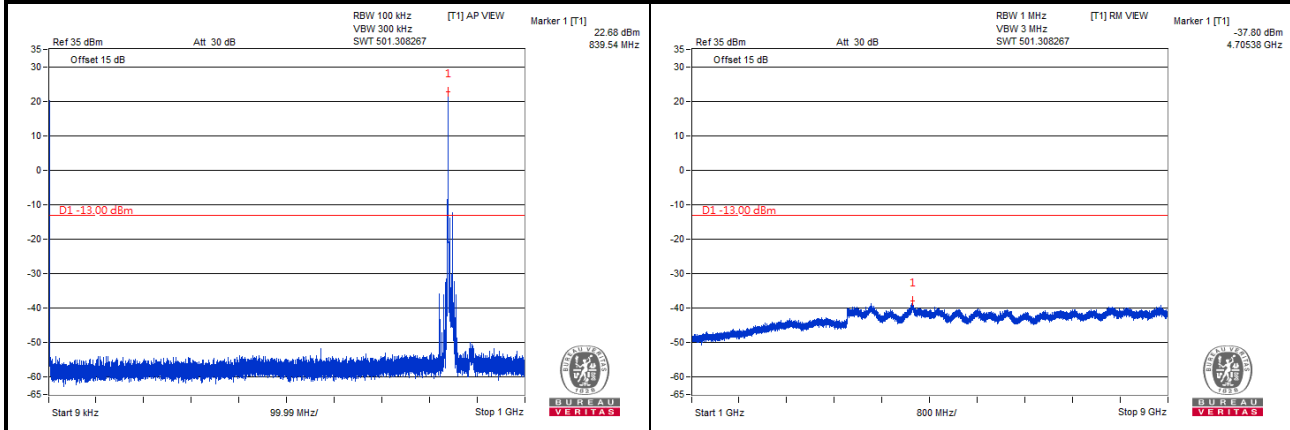

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

4.8 Radiated Emission Measurement

4.8.1 Limits of Radiated Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit is equal to -13 dBm.

4.8.2 Test Procedure

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G
- c. EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution horn.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, E.R.P power = E.I.R.P power - 2.15 dB.


NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz/3 MHz.

4.8.3 Deviation from Test Standard


No deviation.

4.8.4 Test Setup

<Radiated Emission below or equal 1 GHz>

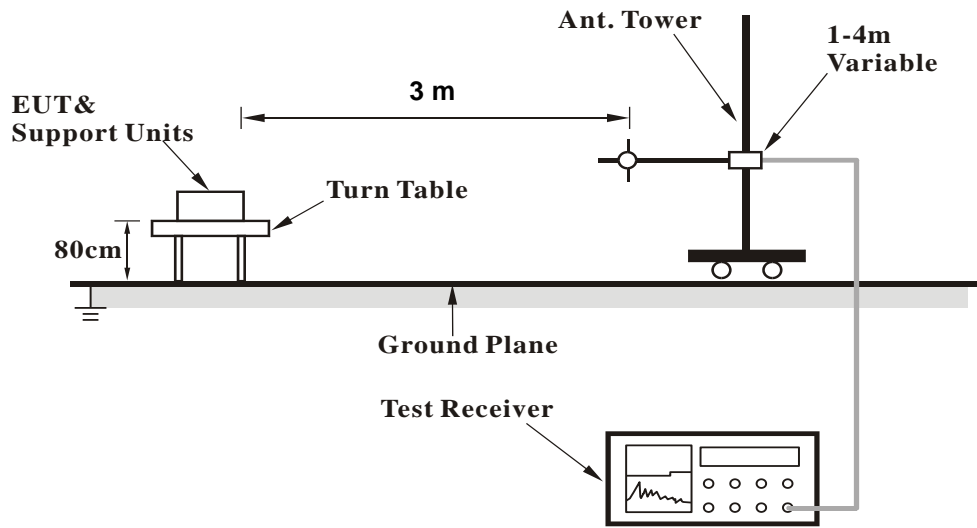

<Radiated Emission above 1 GHz>

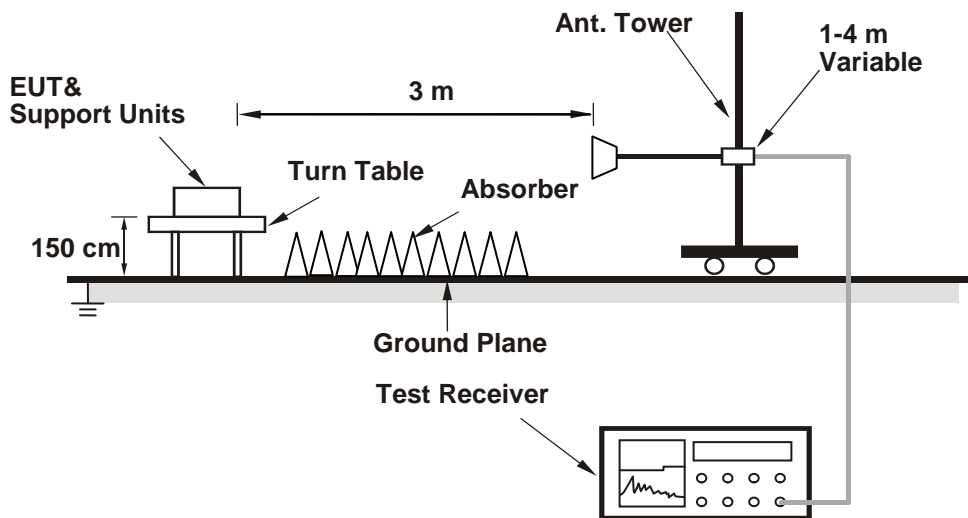

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.8.5 Test Results

Mode A

WCDMA:


Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

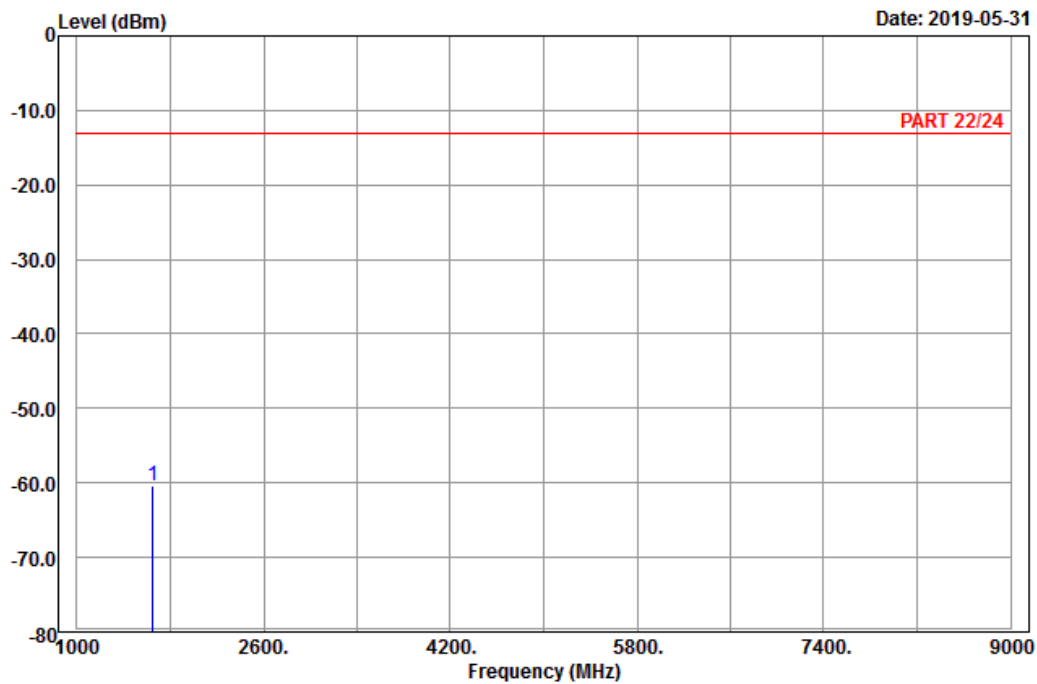

Site : 966 chamber 1
 Condition: PART 22/24 Horizontal
 Remark : Band V_Link_CH4132
 Tested by: Charles Hsiao


Freq	Level	Read Level	Limit Factor	Limit Line	Over Limit	Remark
MHz	dBm	dBm	dB	dBm	dB	
1 pp 1652.80	-60.37	-68.10	7.73	-13.00	-47.37	Peak



A D T

Data: 6

Date: 2019-05-31

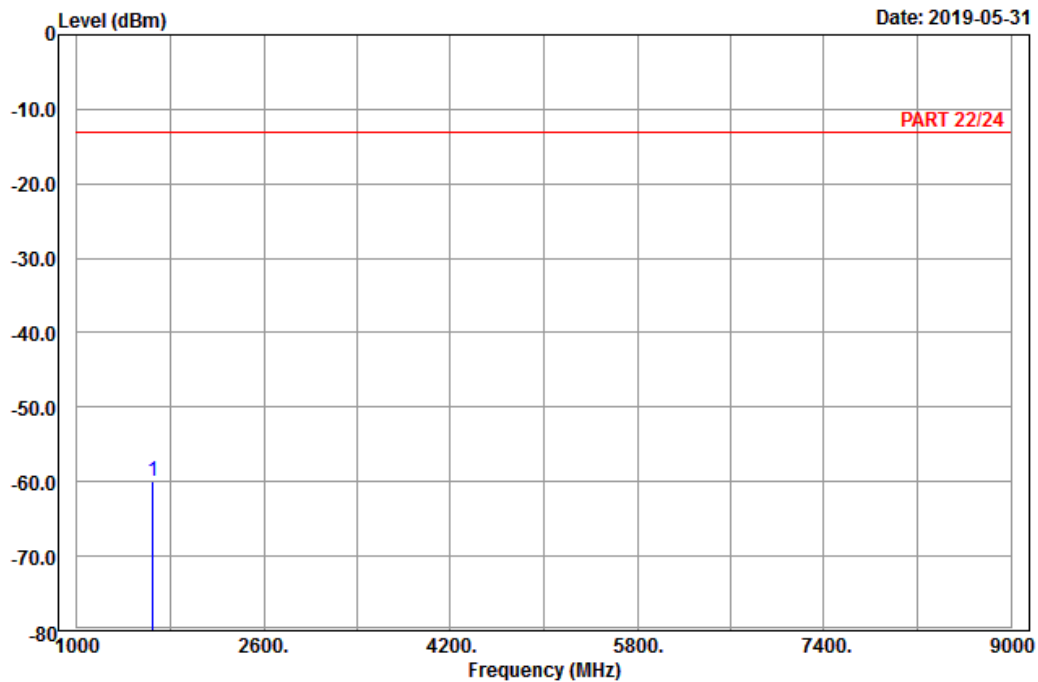

Site : 966 chamber 1
 Condition: PART 22/24 Vertical
 Remark : Band V_Link_CH4132
 Tested by: Charles Hsiao

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	pp 1652.80	-60.02	-67.75	7.73	-13.00	-47.02	Peak

Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 2019-05-31

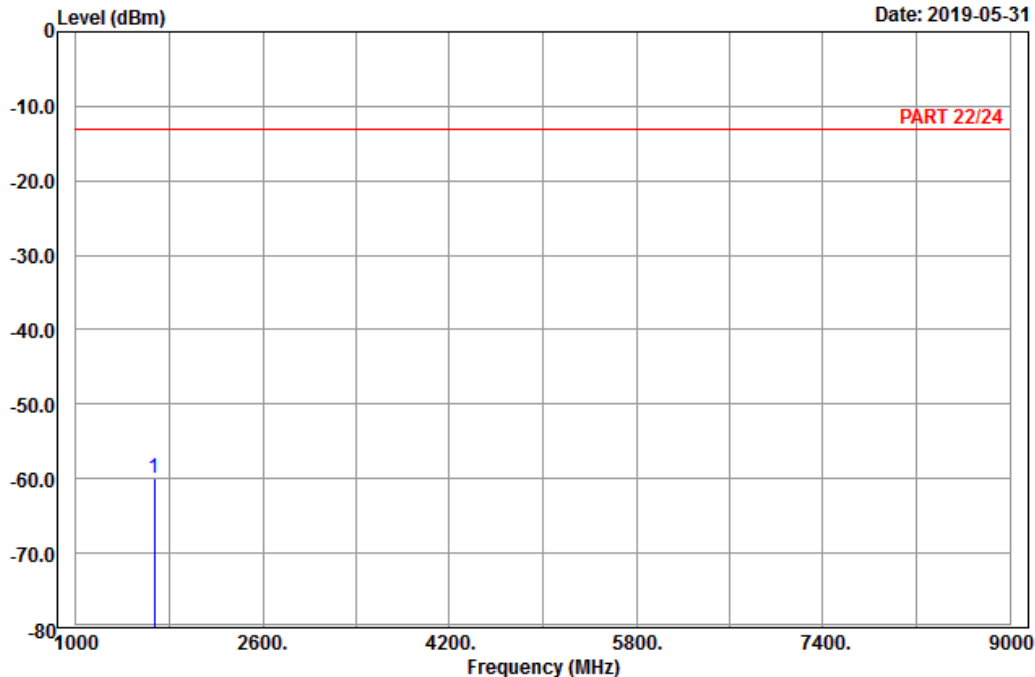

Site : 966 chamber 1
 Condition: PART 22/24 Horizontal
 Remark : Band V_Link_CH4182
 Tested by: Charles Hsiao


	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	pp 1672.80	-59.98	-67.89	7.91	-13.00	-46.98	Peak



A D T

Data: 6

Date: 2019-05-31

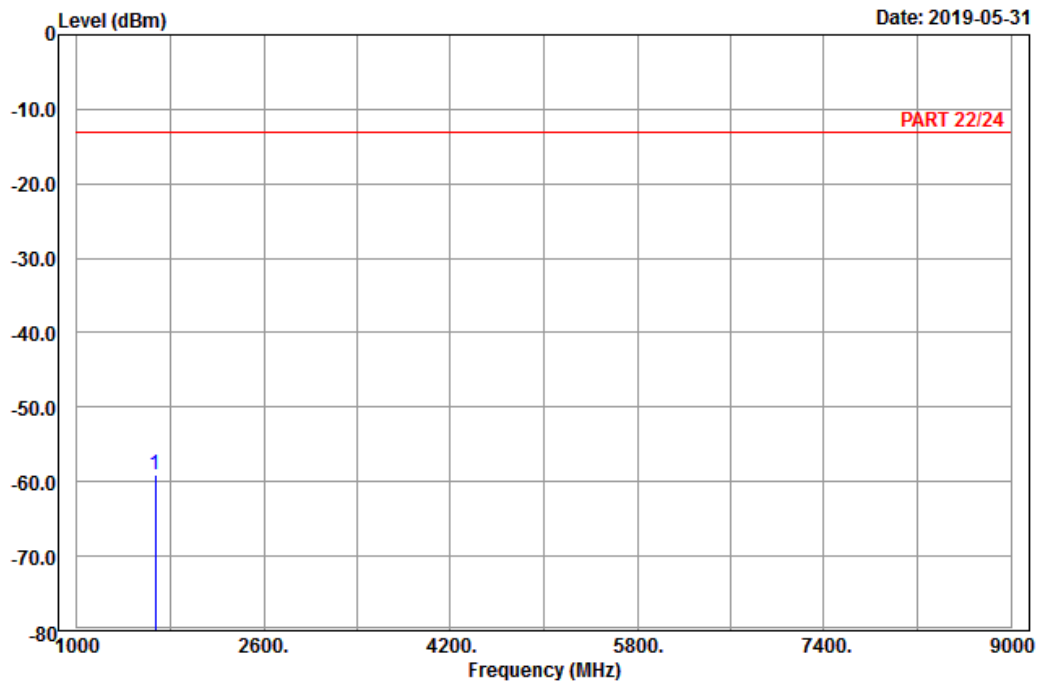

Site : 966 chamber 1
 Condition: PART 22/24 Vertical
 Remark : Band V_Link_CH4182
 Tested by: Charles Hsiao

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	pp 1672.80	-59.11	-67.02	7.91	-13.00	-46.11	Peak

High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

Date: 2019-05-31

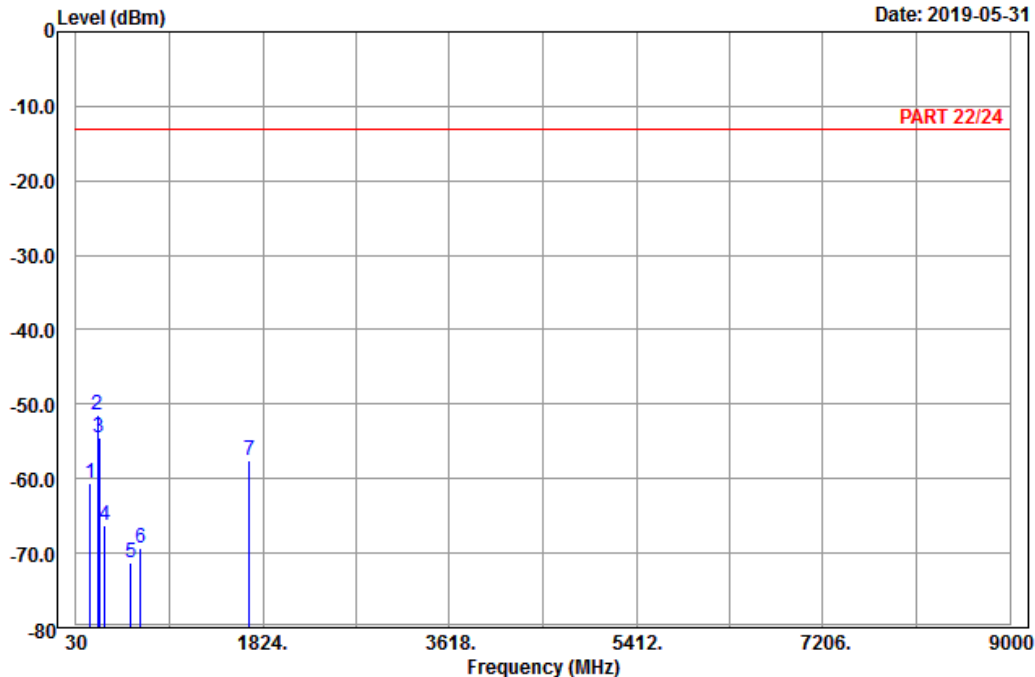

Site : 966 chamber 1
 Condition: PART 22/24 Horizontal
 Remark : Band V_Link_CH4233
 Tested by: Charles Hsiao


	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	163.11	-60.67	-53.29	-7.38	-13.00	-47.67	Peak
2	pp 233.85	-51.44	-45.71	-5.73	-13.00	-38.44	Peak
3	255.99	-54.47	-48.91	-5.56	-13.00	-41.47	Peak
4	309.10	-66.17	-60.32	-5.85	-13.00	-53.17	Peak
5	556.90	-71.20	-69.82	-1.38	-13.00	-58.20	Peak
6	647.90	-69.39	-69.28	-0.11	-13.00	-56.39	Peak
7	1693.20	-57.62	-65.76	8.14	-13.00	-44.62	Peak



A D T

Data: 10

Date: 2019-05-31

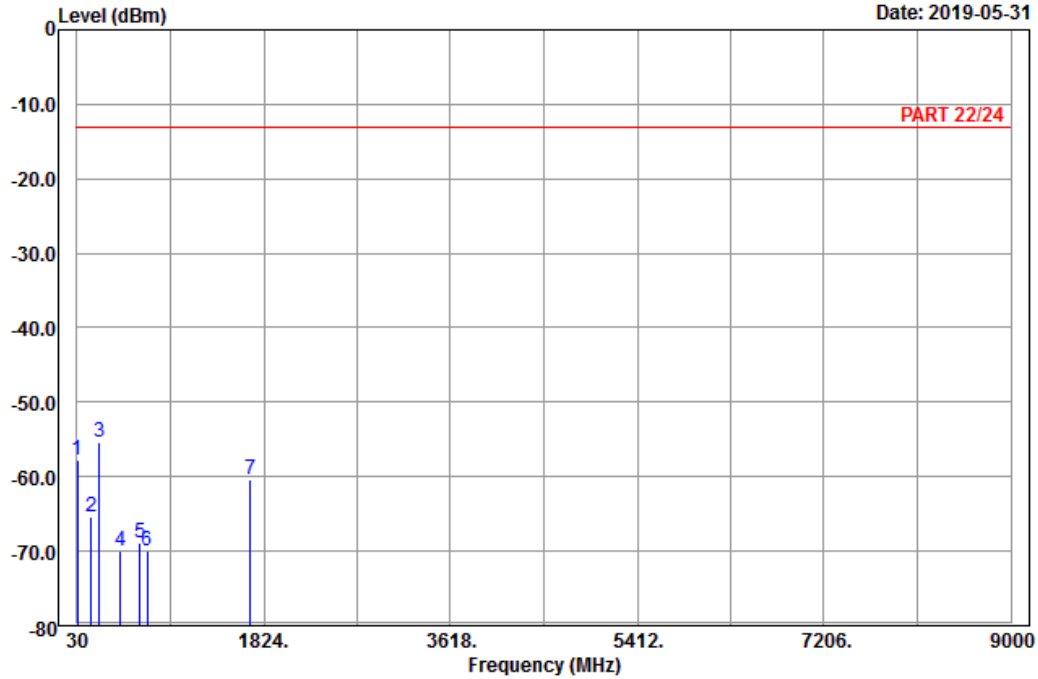

Site : 966 chamber 1
 Condition: PART 22/24 Vertical
 Remark : Band V_Link_CH4233
 Tested by: Charles Hsiao

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	35.13	-57.69	-46.59	-11.10	-13.00	-44.69	Peak
2	163.65	-65.29	-58.01	-7.28	-13.00	-52.29	Peak
3	pp 244.92	-55.37	-49.80	-5.57	-13.00	-42.37	Peak
4	448.40	-69.86	-66.06	-3.80	-13.00	-56.86	Peak
5	633.90	-68.96	-69.00	0.04	-13.00	-55.96	Peak
6	703.20	-69.91	-69.48	-0.43	-13.00	-56.91	Peak
7	1693.20	-60.36	-68.50	8.14	-13.00	-47.36	Peak

LTE Band 5
 Channel Bandwidth: 1.4 MHz / QPSK
 Low Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 2019-06-01

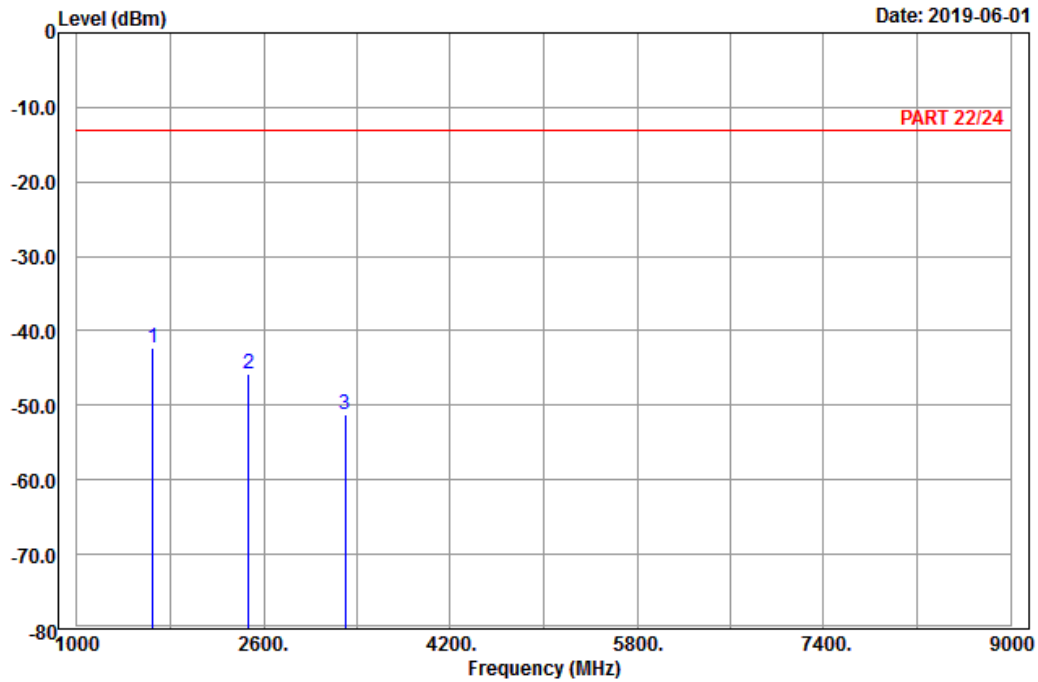

Site : 966 chamber 1
 Condition: PART 22/24 Horizontal
 Remark : LTE_Band 5_Link_CH20407
 Tested by: Harry Hsueh


	Read	Limit	Over				
Freq	Level	Level	Factor	Line	Limit	Remark	
MHz	dBm	dBm	dB	dBm	dB		
1 pp	1649.40	-42.24	-49.97	7.73	-13.00	-29.24	Peak
2	2474.10	-45.79	-56.82	11.03	-13.00	-32.79	Peak
3	3298.80	-51.31	-65.61	14.30	-13.00	-38.31	Peak



A D T

Data: 6

Date: 2019-06-01

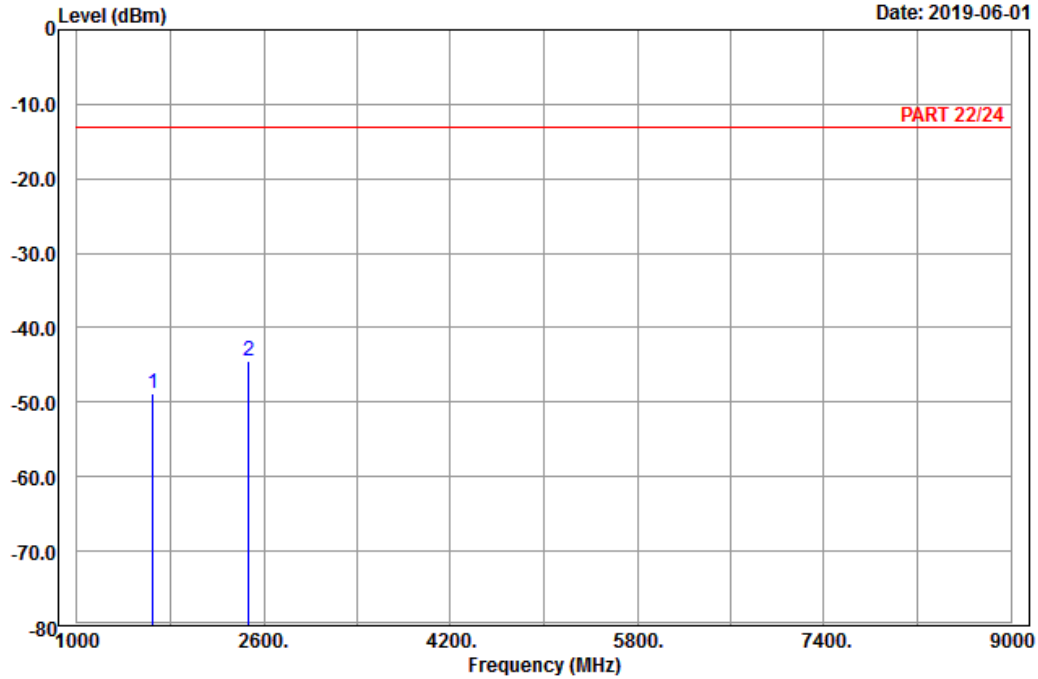

Site : 966 chamber 1
 Condition: PART 22/24 Vertical
 Remark : LTE_Band 5_Link_CH20407
 Tested by: Harry Hsueh

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	1649.40	-48.77	-56.50	7.73	-13.00	-35.77	Peak
2 pp	2474.10	-44.37	-55.40	11.03	-13.00	-31.37	Peak

Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 2019-06-01

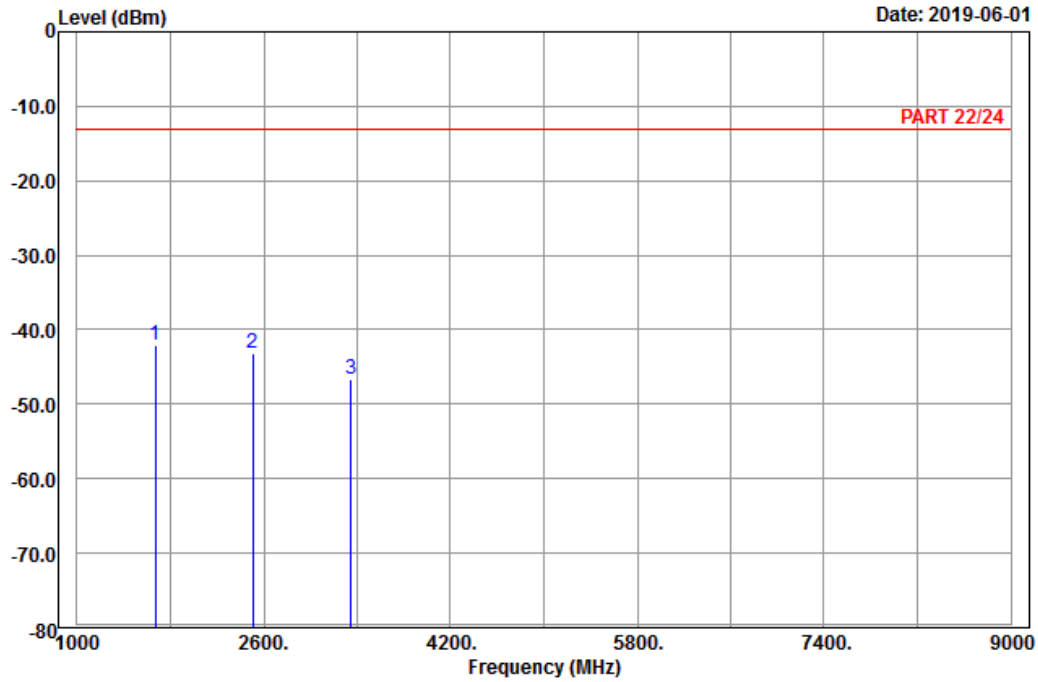

Site : 966 chamber 1
 Condition: PART 22/24 Horizontal
 Remark : LTE_Band 5_Link_CH20525
 Tested by: Harry Hsueh


	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1 pp	1673.00	-42.07	-49.98	7.91	-13.00	-29.07	Peak
2	2509.50	-43.13	-54.41	11.28	-13.00	-30.13	Peak
3	3346.00	-46.72	-61.17	14.45	-13.00	-33.72	Peak



A D T

Data: 6

Date: 2019-06-01

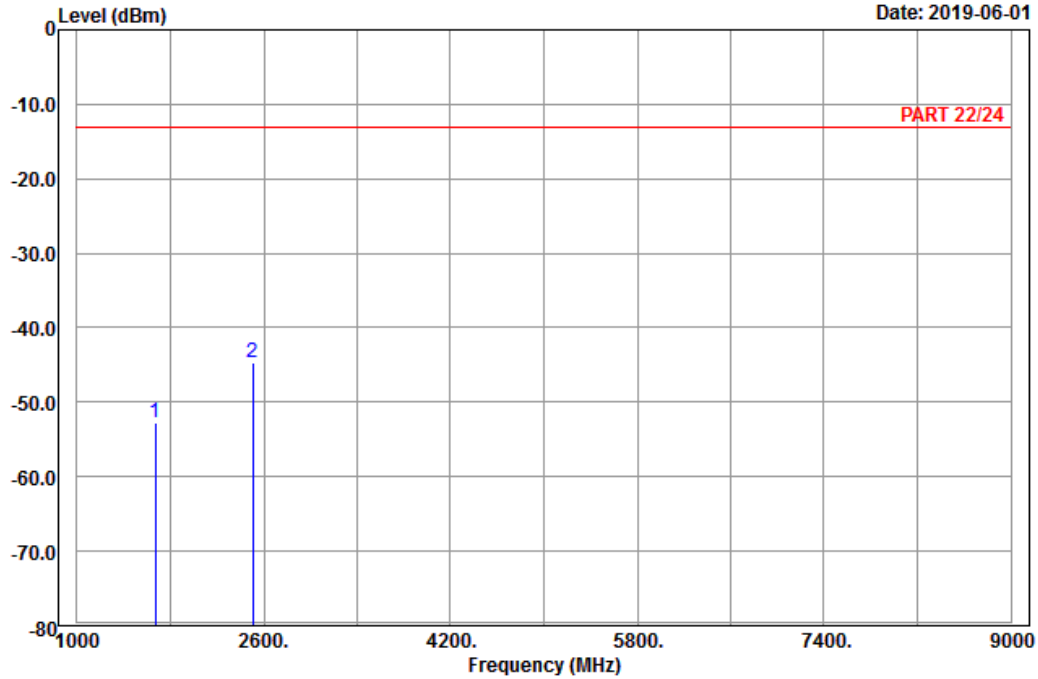

Site : 966 chamber 1
 Condition: PART 22/24 Vertical
 Remark : LTE_Band 5_Link_CH20525
 Tested by: Harry Hsueh

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	1673.00	-52.65	-60.56	7.91	-13.00	-39.65	Peak
2 pp	2509.50	-44.68	-55.96	11.28	-13.00	-31.68	Peak

High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 2019-06-01

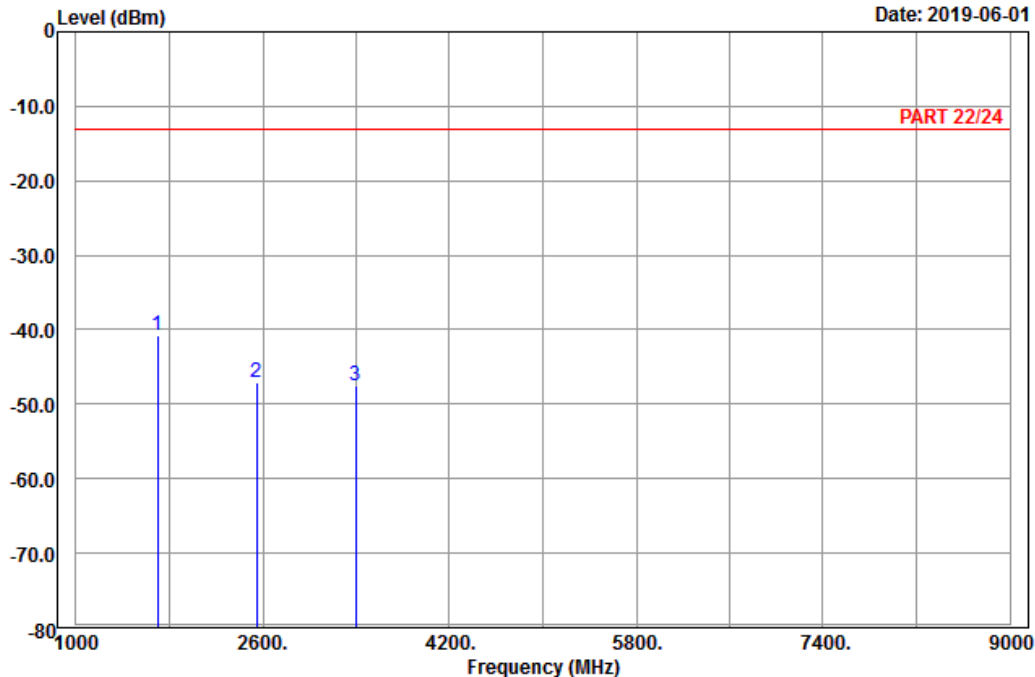

Site : 966 chamber 1
 Condition: PART 22/24 Horizontal
 Remark : LTE_Band 5_Link_CH20643
 Tested by: Harry Hsueh


	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1 pp	1696.60	-40.73	-48.87	8.14	-13.00	-27.73	Peak
2	2544.90	-47.09	-58.56	11.47	-13.00	-34.09	Peak
3	3393.20	-47.42	-61.82	14.40	-13.00	-34.42	Peak



A D T

Data: 6

Date: 2019-06-01

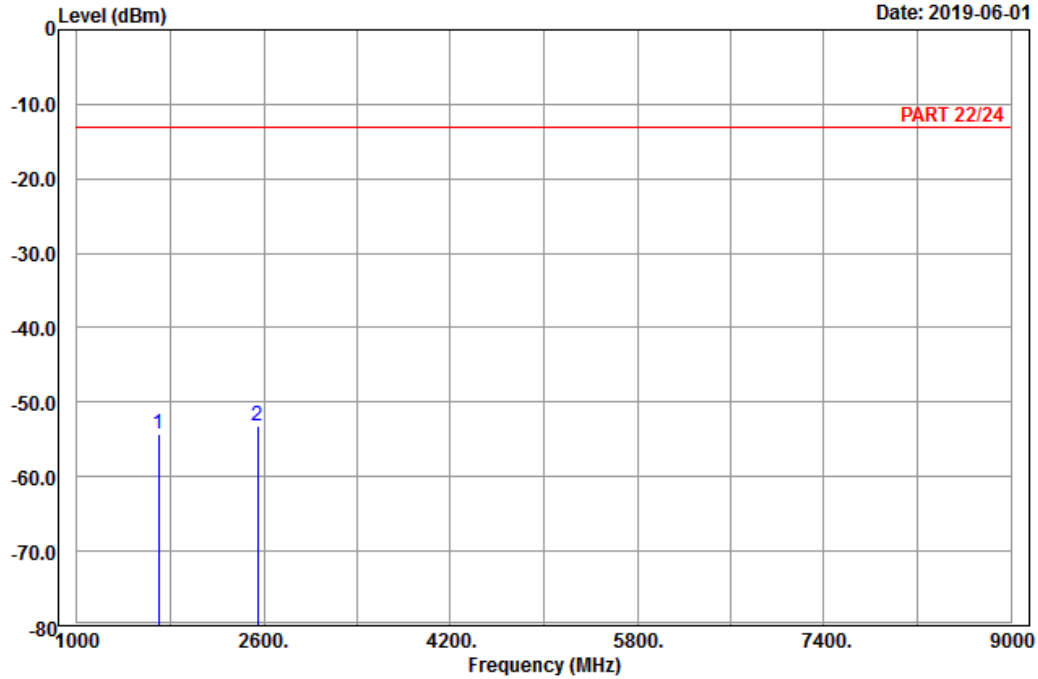

Site : 966 chamber 1
 Condition: PART 22/24 Vertical
 Remark : LTE_Band 5_Link_CH20643
 Tested by: Harry Hsueh

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	1696.60	-54.34	-62.48	8.14	-13.00	-41.34	Peak
2 pp	2544.90	-53.09	-64.56	11.47	-13.00	-40.09	Peak

Channel Bandwidth: 5 MHz / QPSK
Low Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 2019-06-11

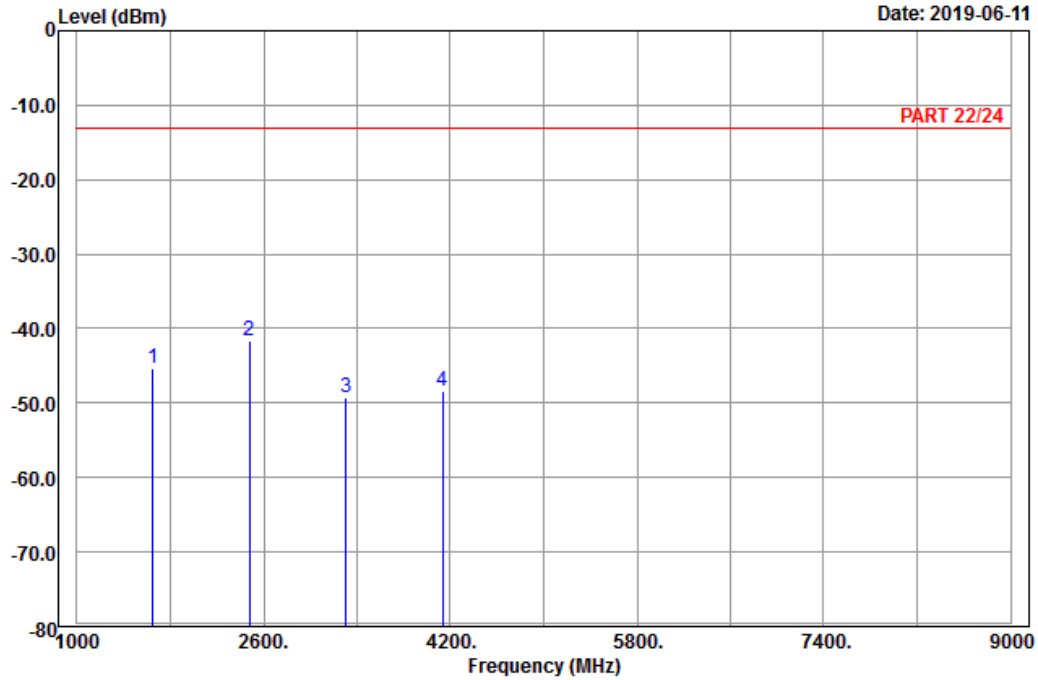

Site : 966 chamber 1
Condition: PART 22/24 Horizontal
Remark : LTE_Band 5_Link_CH20425
Tested by: Harry Hsueh


	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	1653.00	-45.24	-52.97	7.73	-13.00	-32.24	Peak
2	pp 2479.50	-41.68	-52.71	11.03	-13.00	-28.68	Peak
3	3306.00	-49.31	-63.61	14.30	-13.00	-36.31	Peak
4	4132.50	-48.48	-65.50	17.02	-13.00	-35.48	Peak



A D T

Data: 6

Date: 2019-06-01

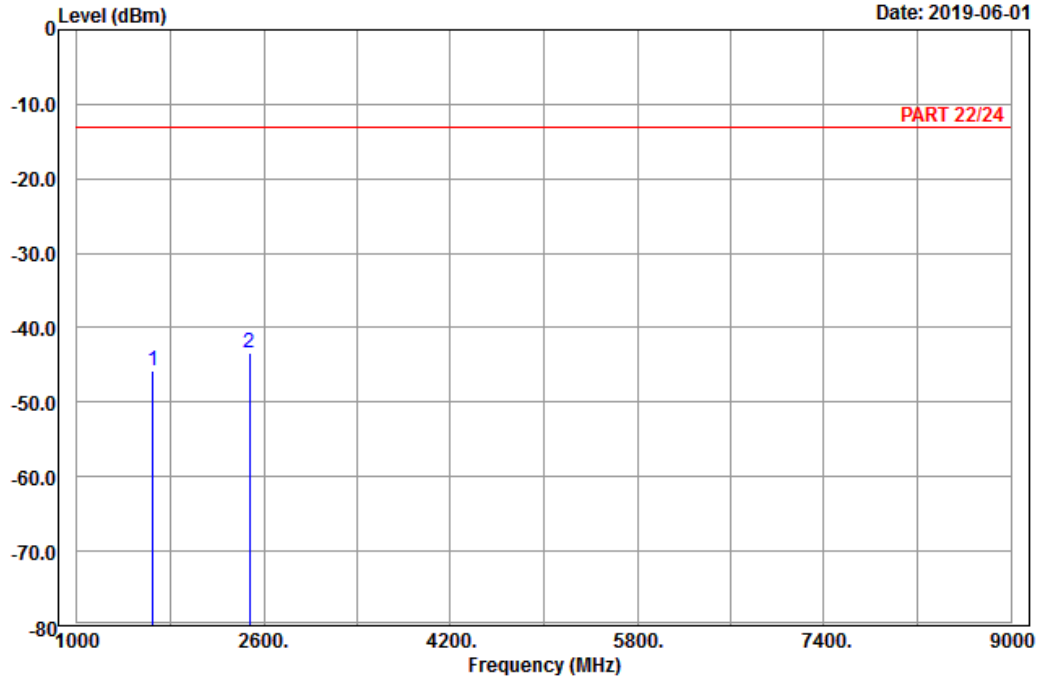

Site : 966 chamber 1
 Condition: PART 22/24 Vertical
 Remark : LTE_Band 5_Link_CH20425
 Tested by: Harry Hsueh

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	1653.00	-45.78	-53.51	7.73	-13.00	-32.78	Peak
2 pp	2479.50	-43.35	-54.38	11.03	-13.00	-30.35	Peak

Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 2019-06-11

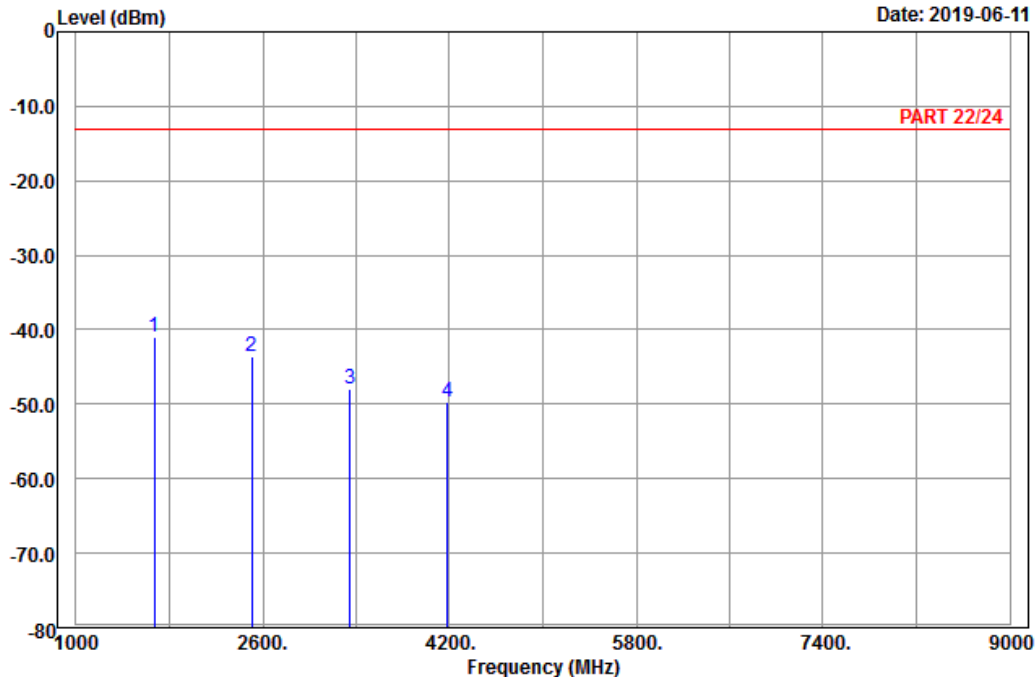

Site : 966 chamber 1
 Condition: PART 22/24 Horizontal
 Remark : LTE_Band 5_Link_CH20525
 Tested by: Harry Hsueh


	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1 pp	1673.00	-40.91	-48.82	7.91	-13.00	-27.91	Peak
2	2509.50	-43.66	-54.94	11.28	-13.00	-30.66	Peak
3	3346.00	-47.86	-62.31	14.45	-13.00	-34.86	Peak
4	4182.50	-49.67	-66.80	17.13	-13.00	-36.67	Peak



A D T

Data: 6

Date: 2019-06-01

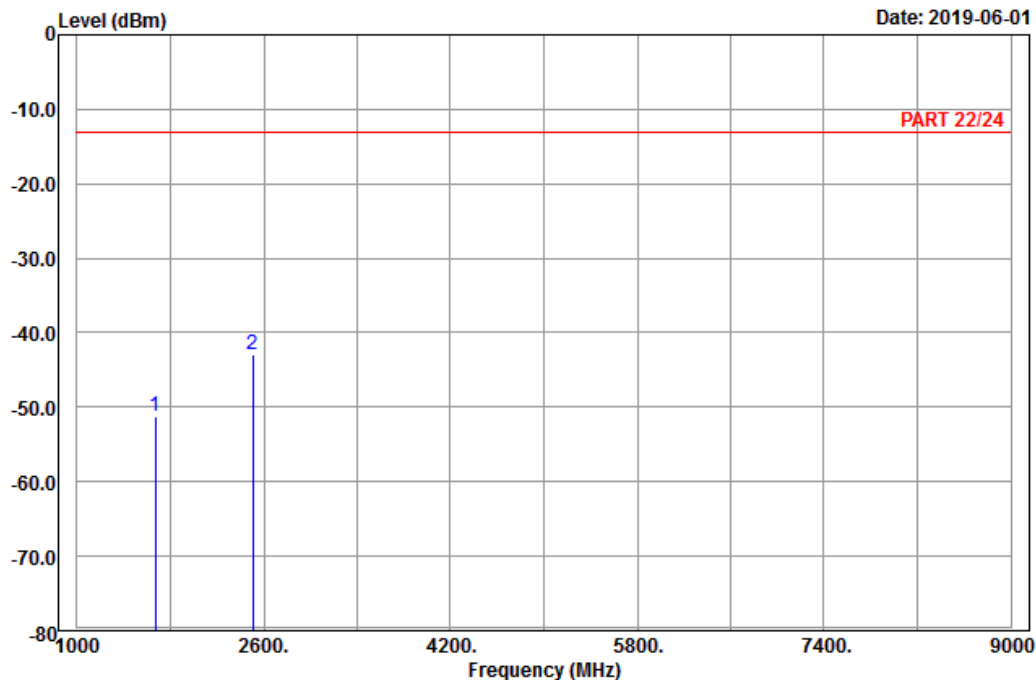

Site : 966 chamber 1
 Condition: PART 22/24 Vertical
 Remark : LTE_Band 5_Link_CH20525
 Tested by: Harry Hsueh

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	1673.00	-51.22	-59.13	7.91	-13.00	-38.22	Peak
2 pp	2509.50	-43.01	-54.29	11.28	-13.00	-30.01	Peak

High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 2019-06-11

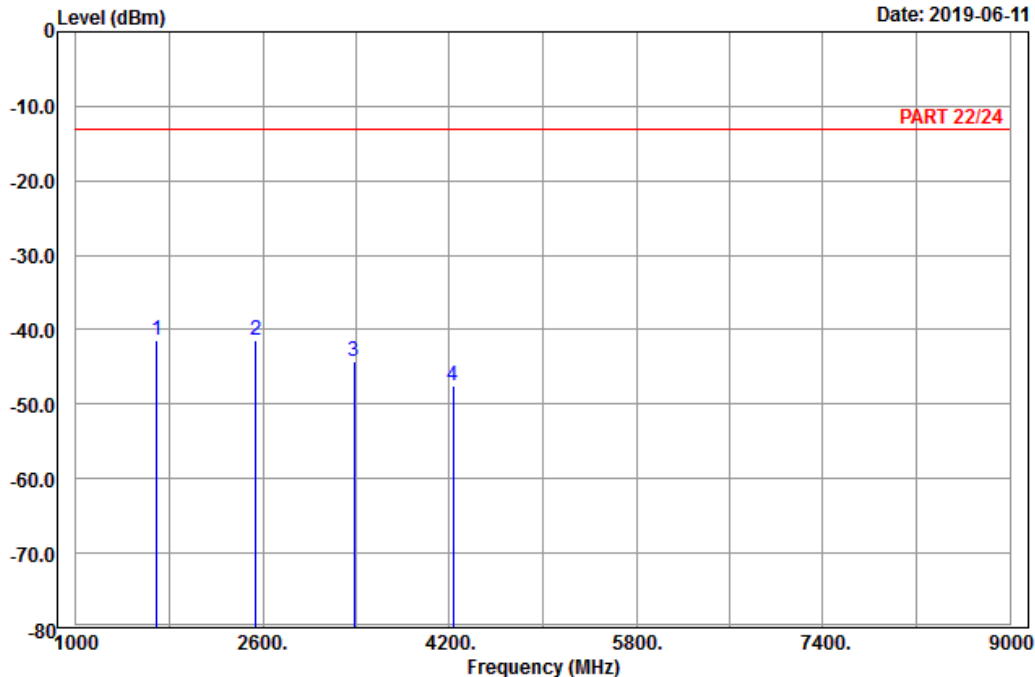

Site : 966 chamber 1
 Condition: PART 22/24 Horizontal
 Remark : LTE_Band 5_Link_CH20625
 Tested by: Harry Hsueh


	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	1693.00	-41.51	-49.53	8.02	-13.00	-28.51	Peak
2	pp 2539.50	-41.42	-52.89	11.47	-13.00	-28.42	Peak
3	3386.00	-44.26	-58.66	14.40	-13.00	-31.26	Peak
4	4232.50	-47.42	-64.78	17.36	-13.00	-34.42	Peak



A D T

Data: 6

Date: 2019-06-01

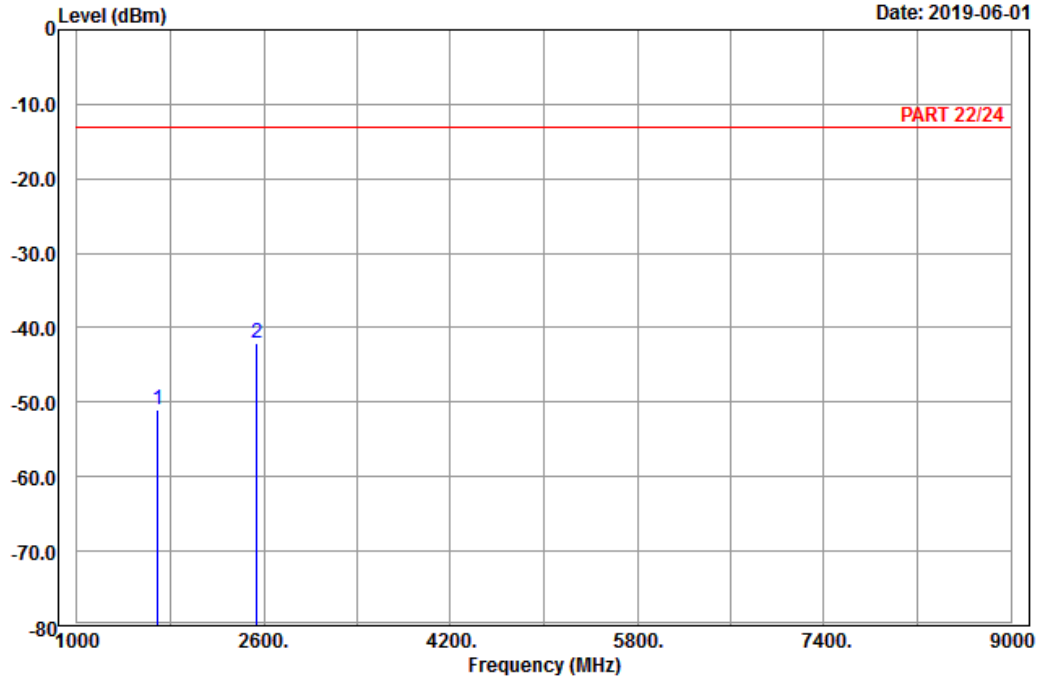

Site : 966 chamber 1
 Condition: PART 22/24 Vertical
 Remark : LTE_Band 5_Link_CH20625
 Tested by: Harry Hsueh

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	1693.00	-50.94	-58.96	8.02	-13.00	-37.94	Peak
2 pp	2539.50	-42.05	-53.52	11.47	-13.00	-29.05	Peak

Channel Bandwidth: 10 MHz / QPSK
Low Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 2019-06-01

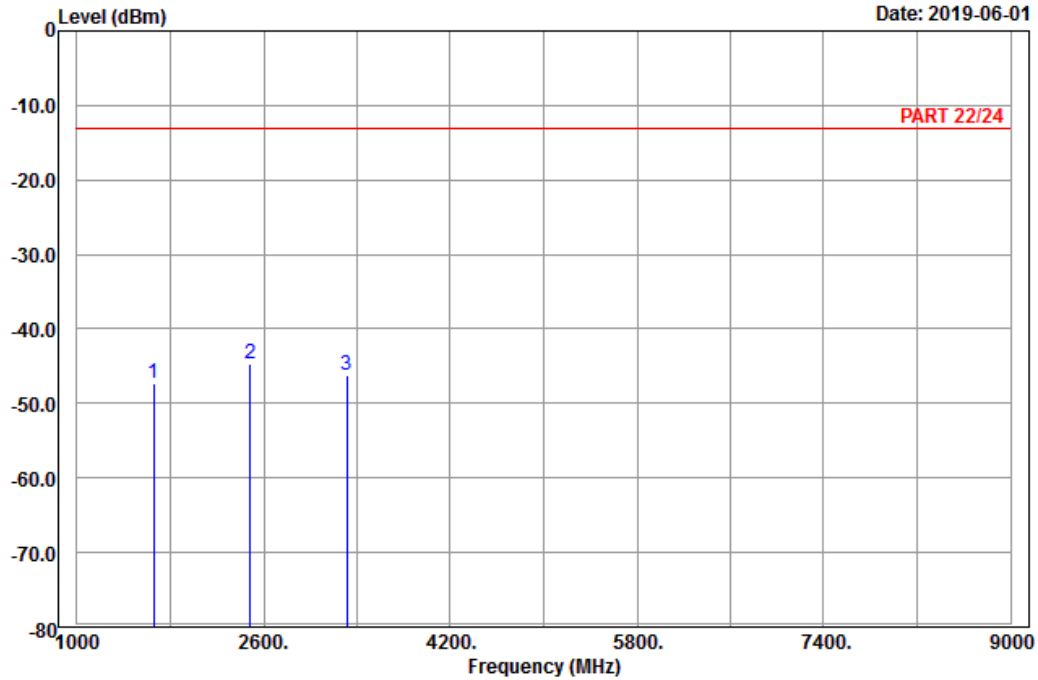

Site : 966 chamber 1
Condition: PART 22/24 Horizontal
Remark : LTE_Band 5_Link_CH20450
Tested by: Karl Lee


	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	1658.00	-47.27	-55.18	7.91	-13.00	-34.27	Peak
2 pp	2487.00	-44.72	-55.76	11.04	-13.00	-31.72	Peak
3	3316.00	-46.32	-60.70	14.38	-13.00	-33.32	Peak



A D T

Data: 6

Date: 2019-06-01

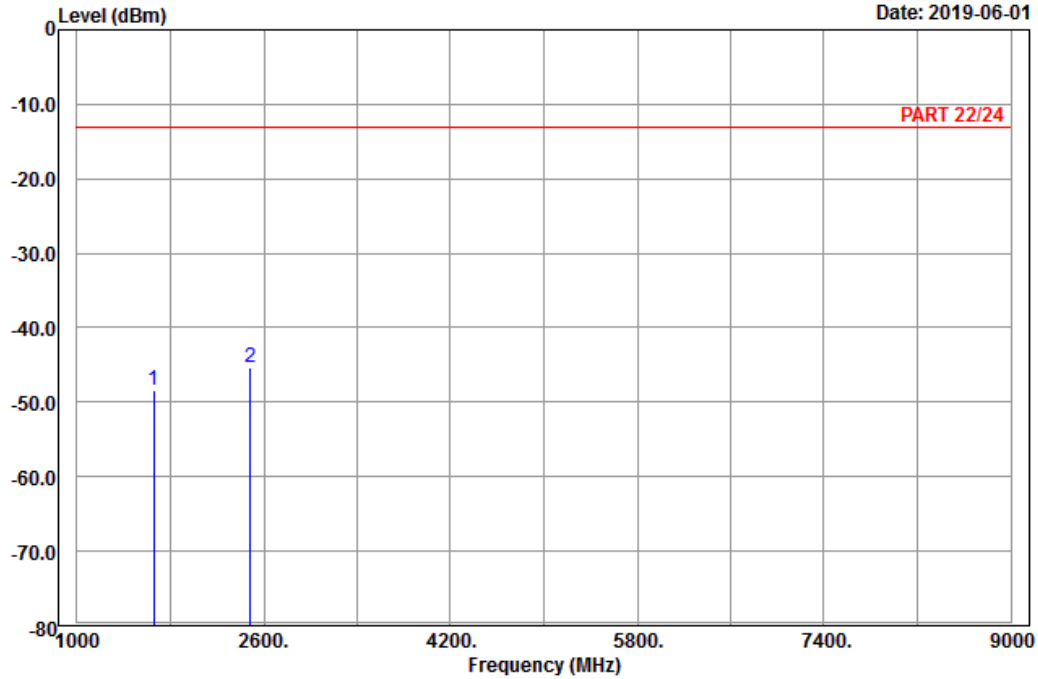

Site : 966 chamber 1
 Condition: PART 22/24 Vertical
 Remark : LTE_Band 5_Link_CH20450
 Tested by: Karl Lee

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	1658.00	-48.39	-56.30	7.91	-13.00	-35.39	Peak
2 pp	2487.00	-45.27	-56.31	11.04	-13.00	-32.27	Peak

Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

Date: 2019-06-01

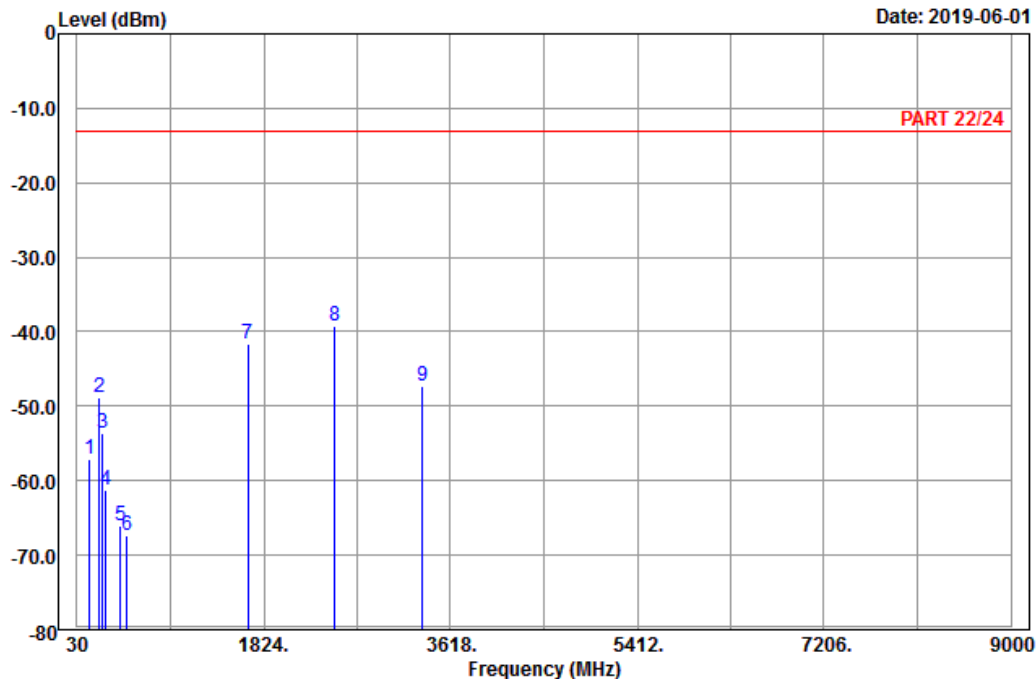

Site : 966 chamber 1
 Condition: PART 22/24 Horizontal
 Remark : LTE_Band 5_Link_CH20525
 Tested by: Karl Lee


	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	152.04	-57.17	-49.28	-7.89	-13.00	-44.17	Peak
2	242.22	-48.81	-43.20	-5.61	-13.00	-35.81	Peak
3	275.43	-53.59	-47.85	-5.74	-13.00	-40.59	Peak
4	306.30	-61.26	-55.38	-5.88	-13.00	-48.26	Peak
5	449.80	-66.10	-62.25	-3.85	-13.00	-53.10	Peak
6	512.10	-67.38	-62.95	-4.43	-13.00	-54.38	Peak
7	1673.00	-41.64	-49.55	7.91	-13.00	-28.64	Peak
8 pp	2509.50	-39.17	-50.45	11.28	-13.00	-26.17	Peak
9	3346.00	-47.32	-61.77	14.45	-13.00	-34.32	Peak



A D T

Data: 10

Date: 2019-06-01

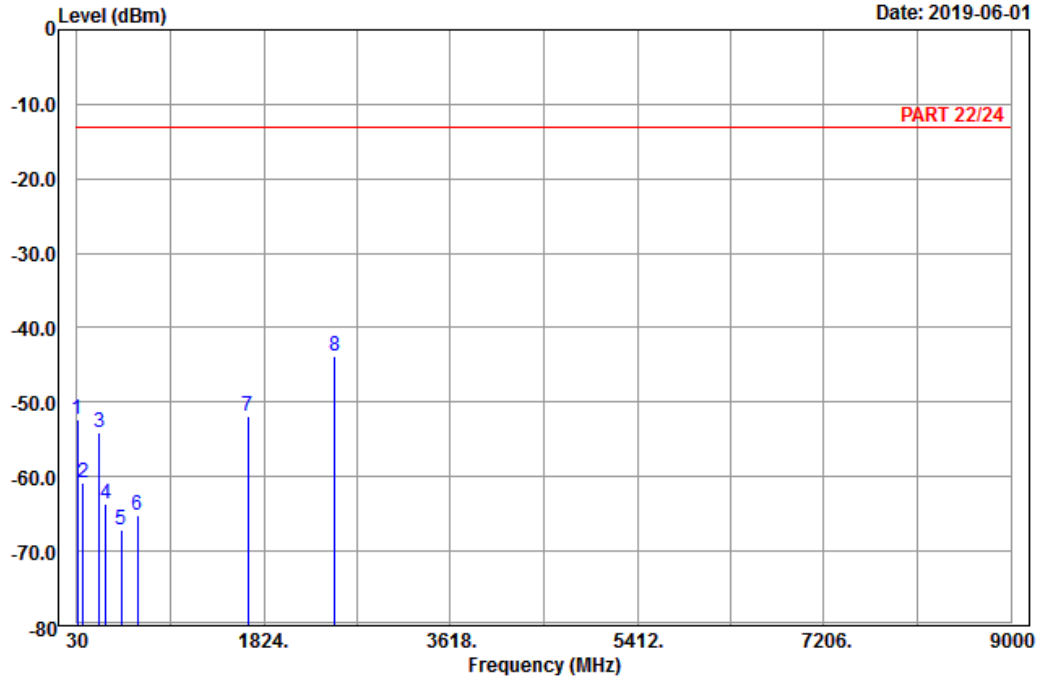

Site : 966 chamber 1
 Condition: PART 22/24 Vertical
 Remark : LTE_Band 5_Link_CH20525
 Tested by: Karl Lee

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	32.97	-52.36	-41.49	-10.87	-13.00	-39.36	Peak
2	90.21	-60.90	-50.23	-10.67	-13.00	-47.90	Peak
3	241.14	-54.09	-48.47	-5.62	-13.00	-41.09	Peak
4	309.80	-63.57	-57.72	-5.85	-13.00	-50.57	Peak
5	456.10	-67.18	-63.17	-4.01	-13.00	-54.18	Peak
6	612.90	-65.24	-65.52	0.28	-13.00	-52.24	Peak
7	1673.00	-51.97	-59.88	7.91	-13.00	-38.97	Peak
8 pp	2509.50	-43.83	-55.11	11.28	-13.00	-30.83	Peak


High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

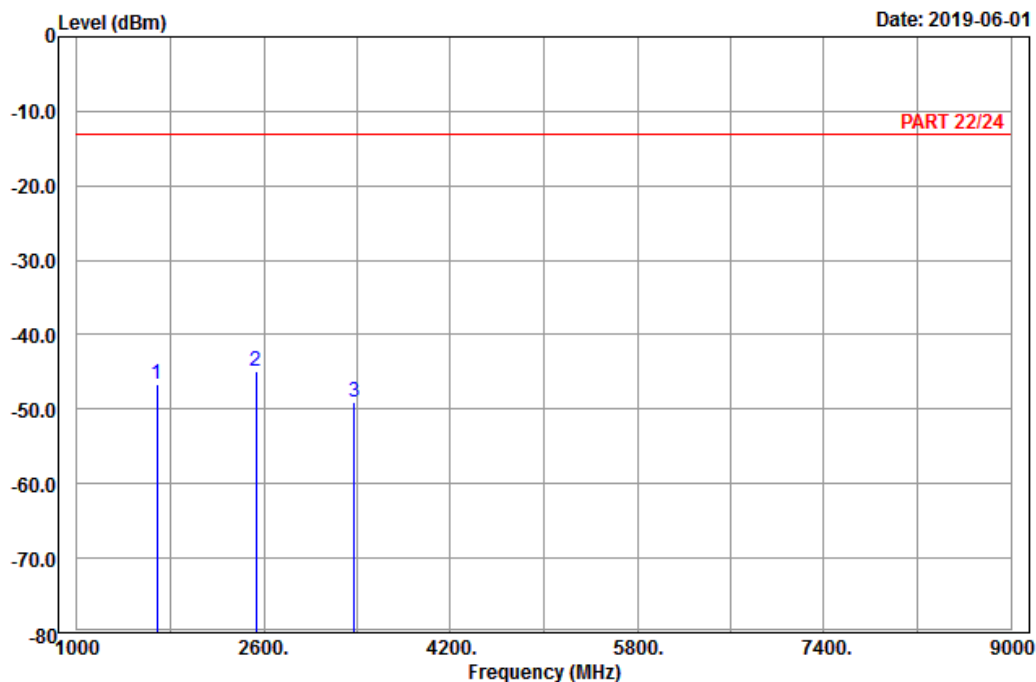

Site : 966 chamber 1
 Condition: PART 22/24 Horizontal
 Remark : LTE_Band 5_Link_CH20600
 Tested by: Karl Lee


	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	1688.00	-46.62	-54.64	8.02	-13.00	-33.62	Peak
2	pp 2532.00	-44.99	-56.37	11.38	-13.00	-31.99	Peak
3	3376.00	-49.11	-63.53	14.42	-13.00	-36.11	Peak



A D T

Data: 6

Date: 2019-06-01

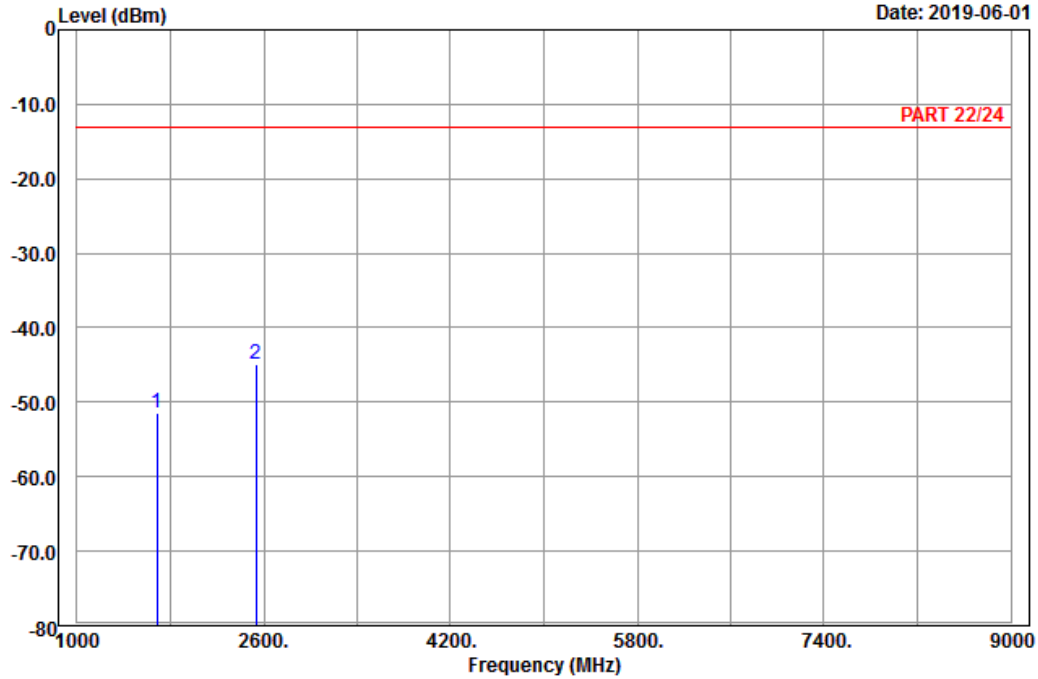

Site : 966 chamber 1
 Condition: PART 22/24 Vertical
 Remark : LTE_Band 5_Link_CH20600
 Tested by: Karl Lee

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	1688.00	-51.50	-59.52	8.02	-13.00	-38.50	Peak
2 pp	2532.00	-45.00	-56.38	11.38	-13.00	-32.00	Peak

Mode B
WCDMA:
High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 2019-09-04

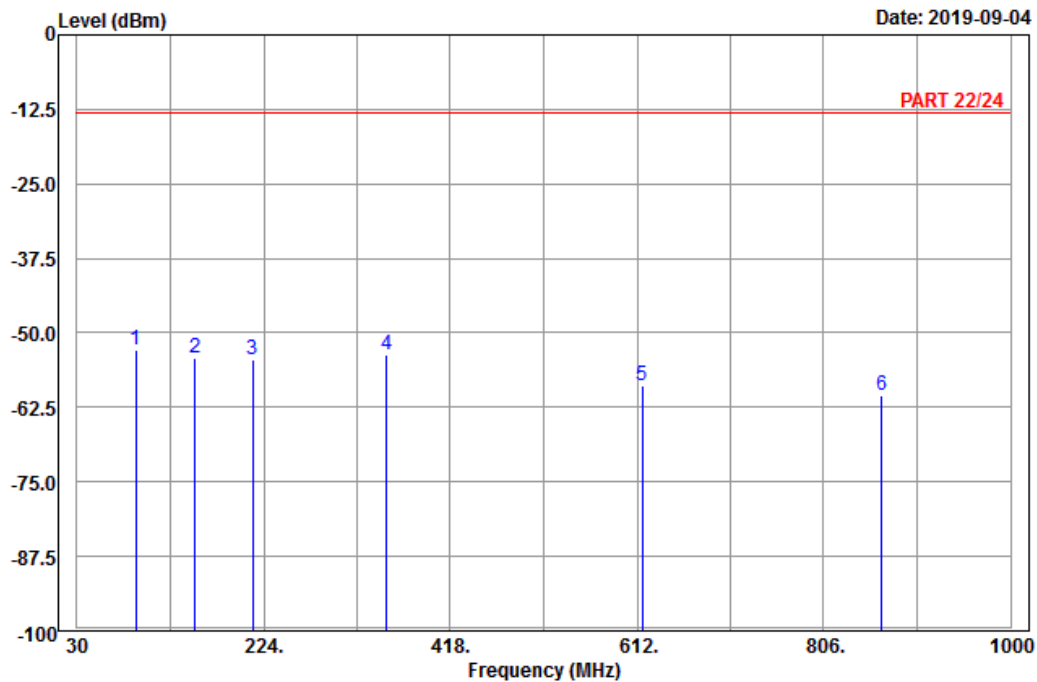

Site : 966 chamber 1
Condition: PART 22/24 Horizontal
Remark : Band V_Link_CH4233
Tested by: Charles Hsiao


	Read	Limit	Over				
Freq	Level	Level	Line	Limit	Factor	Remark	
MHz	dBm	dBm	dBm	dB	dB		
1 pp	90.75	-52.88	-42.26	-13.00	-39.88	-10.62	Peak
2	153.12	-54.16	-46.30	-13.00	-41.16	-7.86	Peak
3	212.52	-54.49	-48.48	-13.00	-41.49	-6.01	Peak
4	351.80	-53.55	-48.28	-13.00	-40.55	-5.27	Peak
5	617.10	-58.82	-59.06	-13.00	-45.82	0.24	Peak
6	866.30	-60.37	-62.29	-13.00	-47.37	1.92	Peak



A D T

Data: 6

Date: 2019-09-04

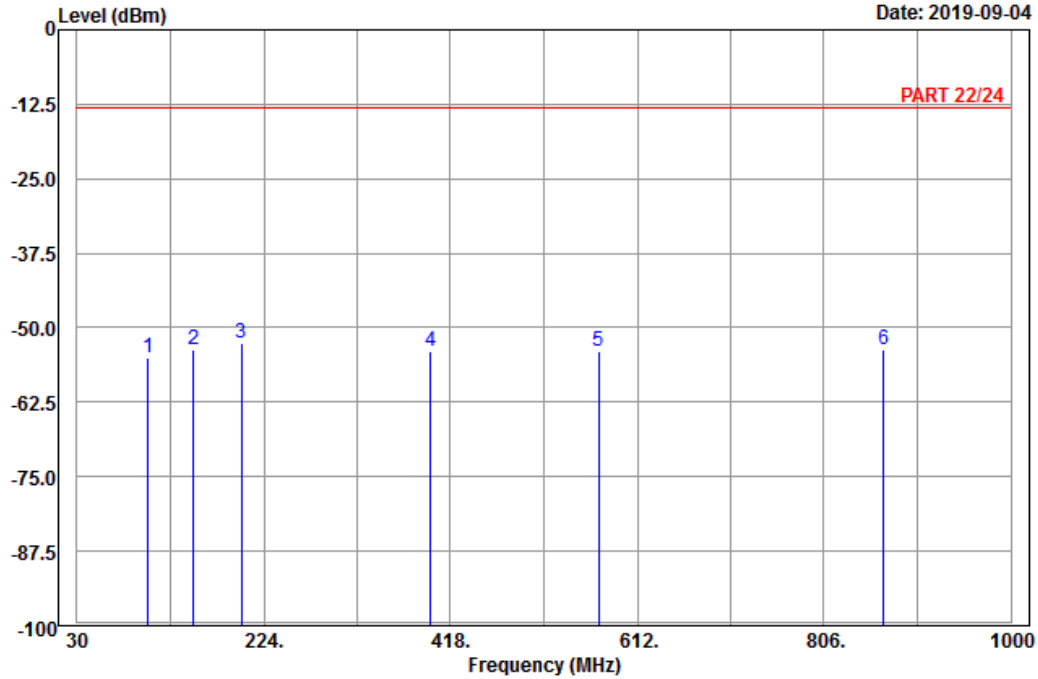

Site : 966 chamber 1
 Condition: PART 22/24 Vertical
 Remark : Band V_Link_CH4233
 Tested by: Charles Hsiao

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	103.44	-55.05	-45.40	-13.00	-42.05	-9.65	Peak
2	151.23	-53.79	-45.87	-13.00	-40.79	-7.92	Peak
3 pp	201.18	-52.59	-46.42	-13.00	-39.59	-6.17	Peak
4	397.30	-53.82	-50.98	-13.00	-40.82	-2.84	Peak
5	571.60	-54.05	-53.27	-13.00	-41.05	-0.78	Peak
6	868.40	-53.80	-55.77	-13.00	-40.80	1.97	Peak

LTE Band 5
 Channel Bandwidth: 10 MHz / QPSK
 Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 2019-09-04

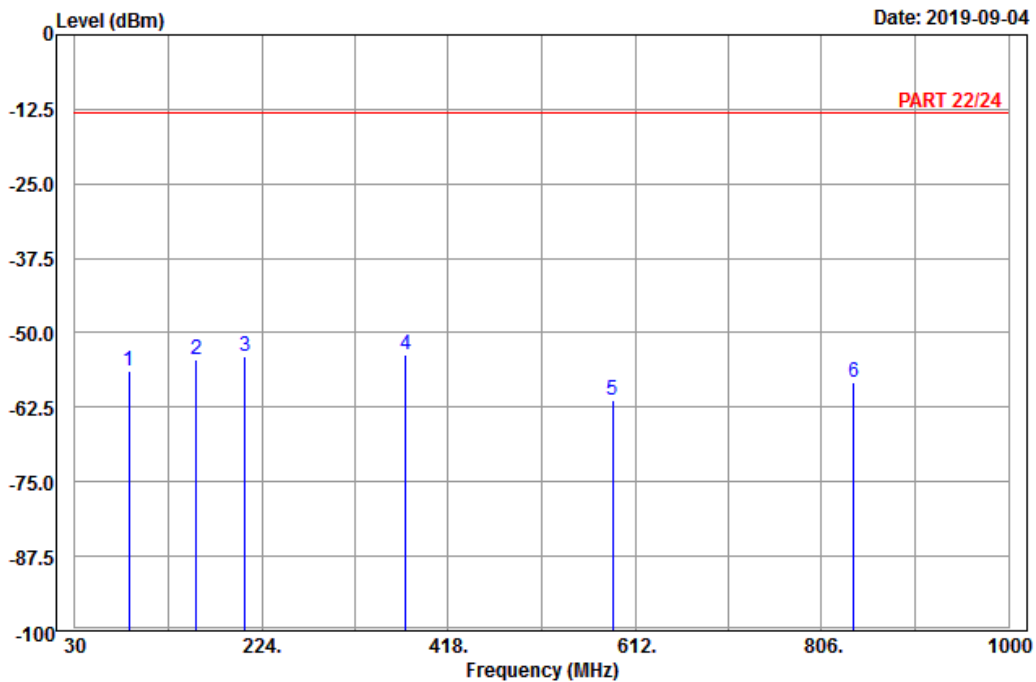

Site : 966 chamber 1
 Condition: PART 22/24 Horizontal
 Remark : LTE_Band 5_Link_CH20525
 Tested by: Karl Lee


	Read	Limit	Over				
Freq	Level	Level	Line	Limit	Factor	Remark	
MHz	dBm	dBm	dBm	dB	dB		
1	86.43	-56.40	-45.29	-13.00	-43.40	-11.11	Peak
2	156.09	-54.50	-46.72	-13.00	-41.50	-7.78	Peak
3	206.58	-53.89	-47.80	-13.00	-40.89	-6.09	Peak
4 pp	373.50	-53.58	-49.44	-13.00	-40.58	-4.14	Peak
5	589.10	-61.26	-61.21	-13.00	-48.26	-0.05	Peak
6	839.00	-58.43	-60.00	-13.00	-45.43	1.57	Peak



A D T

Data: 6

Date: 2019-09-04

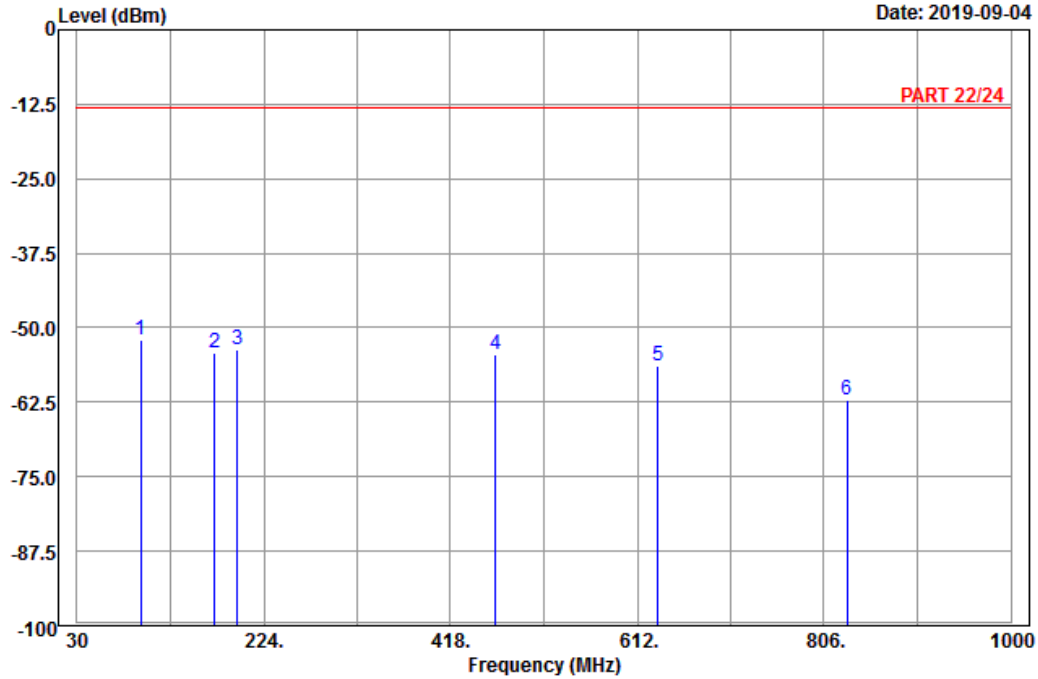

Site : 966 chamber 1
 Condition: PART 22/24 Vertical
 Remark : LTE_Band 5_Link_CH20525
 Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	95.88	-52.15	-41.81	-13.00	-39.15	-10.34	Peak
2	173.10	-54.32	-48.02	-13.00	-41.32	-6.30	Peak
3	196.59	-53.68	-47.63	-13.00	-40.68	-6.05	Peak
4	464.50	-54.62	-50.36	-13.00	-41.62	-4.26	Peak
5	633.20	-56.43	-56.48	-13.00	-43.43	0.05	Peak
6	829.90	-62.06	-63.73	-13.00	-49.06	1.67	Peak

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---