

# FCC RADIO TEST REPORT

## FCC 47 CFR PART 15 SUBPART C

Test Standard	FCC Part 15.247
FCC ID	P27DBC831V2
Brand name	1) Scout; Sercomm 2) LifeShield,LLC
Product name	1) Wireless FHD Doorbell Camera 2) HD Video Doorbell
Model No.	1) DBC831v2xxxxxxxx (the 1st x should be "blank" or "-"; the rest x could be 0 to 9, A to Z, a to z, "blank" or "-"), for marketing purpose. 2) SCD1R0-29
Test Result	Pass

The test Result was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were given in ANSI C63.10: 2013 and compliance standards.

The test results of this report relate only to the tested sample (EUT) identified in this report.

The test Report of full or partial shall not copy. Without written approval of Compliance Certification Services Inc. (Wugu Laboratory)

Approved by:

Tested by:



Kevin Tsai  
Deputy Manager

Jerry Chuang  
Engineer

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部分複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	March 15, 2019	Initial Issue	ALL	Allison Chen
01	March 20, 2019	1. Revised Applicant address. 2. Revised adapter information in EUT Accessories Equipment 3. Revised Limit with the Average. 4. Added "End of Test Report".	P.4, P.8, P.50, P.76	Allison Chen

## Table of contents

<b>1.</b>	<b>GENERAL INFORMATION .....</b>	<b>4</b>
<b>1.1</b>	<b>EUT INFORMATION.....</b>	<b>4</b>
<b>1.2</b>	<b>EUT CHANNEL INFORMATION .....</b>	<b>5</b>
<b>1.3</b>	<b>ANTENNA INFORMATION .....</b>	<b>5</b>
<b>1.4</b>	<b>MEASUREMENT UNCERTAINTY .....</b>	<b>6</b>
<b>1.5</b>	<b>FACILITIES AND TEST LOCATION.....</b>	<b>7</b>
<b>1.6</b>	<b>INSTRUMENT CALIBRATION.....</b>	<b>7</b>
<b>1.7</b>	<b>SUPPORT AND EUT ACCESSORIES EQUIPMENT .....</b>	<b>8</b>
<b>1.8</b>	<b>TEST METHODOLOGY AND APPLIED STANDARDS .....</b>	<b>8</b>
<b>2.</b>	<b>TEST SUMMERY .....</b>	<b>9</b>
<b>3.</b>	<b>DESCRIPTION OF TEST MODES .....</b>	<b>10</b>
<b>3.1</b>	<b>THE WORST MODE OF OPERATING CONDITION .....</b>	<b>10</b>
<b>3.2</b>	<b>THE WORST MODE OF MEASUREMENT.....</b>	<b>11</b>
<b>3.3</b>	<b>EUT DUTY CYCLE.....</b>	<b>12</b>
<b>4.</b>	<b>TEST RESULT.....</b>	<b>13</b>
<b>4.1</b>	<b>AC POWER LINE CONDUCTED EMISSION.....</b>	<b>13</b>
<b>4.2</b>	<b>6dB BANDWIDTH AND OCCUPIED BANDWIDTH(99%).....</b>	<b>16</b>
<b>4.3</b>	<b>OUTPUT POWER MEASUREMENT.....</b>	<b>24</b>
<b>4.4</b>	<b>POWER SPECTRAL DENSITY.....</b>	<b>26</b>
<b>4.5</b>	<b>CONDUCTED BANDEDGE AND SPURIOUS EMISSION .....</b>	<b>31</b>
<b>4.6</b>	<b>RADIATION BANDEDGE AND SPURIOUS EMISSION .....</b>	<b>41</b>
<b>APPENDIX 1 - PHOTOGRAPHS OF EUT</b>		

# 1. GENERAL INFORMATION

## 1.1 EUT INFORMATION

Applicant	Sercomm Corporation 8F, No. 3-1, YuanQu St., NanKang, Taipei 115, Taiwan			
Equipment	1) Wireless FHD Doorbell Camera 2) HD Video Doorbell			
Model Name	1) DBC831v2xxxxxxxx (the 1st x should be "blank" or "-"; the rest x could be 0 to 9, A to Z, a to z, "blank" or "-"), for marketing purpose. 2) SCD1R0-29			
Model Discrepancy	<b>Model Name</b>	<b>Product Name</b>	<b>Brand Name</b>	<b>Difference</b>
	DBC831v2xxxxxxxx (the 1st x should be "blank" or "-"; the rest x could be 0 to 9, A to Z, a to z, "blank" or "-", for marketing purpose)	Wireless FHD Doorbell Camera	Scout; Sercomm	The suffix of (the 1st x should be "blank" or "-"; the rest x could be 0 to 9, A to Z, a to z, "blank" or "-") on model number is just for marketing purpose only.
	SCD1R0-29	HD Video Doorbell	LifeShield,LLC	Brand name difference
Received Date	December 27, 2018			
Date of Test	January 11 ~ 15, 2019			
Output Power (W)	IEEE 802.11b mode: 0.2404 IEEE 802.11g mode: 0.4188 IEEE 802.11n HT 20 mode: 0.4457			
Power Supply	1. AC 8~24V (by transformer) 2. USB 5V (adapter) 3. Battery 3.7Vdc			

Report No.: T181227D06-RP

## 1.2 EUT CHANNEL INFORMATION

Frequency Range	2412MHz-2462MHz
Modulation Type	1. IEEE 802.11b Mode: DSSS(DBPSK/DQPSK/CCK) 2. IEEE 802.11g Mode: OFDM (BPSK/QPSK/16QAM/64QAM) 3. IEEE 802.11n HT20 Mode : OFDM (BPSK/QPSK/16QAM/64QAM)
Number of channels	1. IEEE 802.11b mode: 11 Channels 2. IEEE 802.11g mode: 11 Channels 3. IEEE 802.11n HT 20 MHz mode: 11 Channels

**Remark:**

Refer as ANSI C63.10: 2013 clause 5.6.1 Table 4 for test channels

Number of frequencies to be tested		
Frequency range in which device operates	Number of frequencies	Location in frequency range of operation
<input type="checkbox"/> 1 MHz or less	1	Middle
<input type="checkbox"/> 1 MHz to 10 MHz	2	1 near top and 1 near bottom
<input checked="" type="checkbox"/> More than 10 MHz	3	1 near top, 1 near middle, and 1 near bottom

## 1.3 ANTENNA INFORMATION

Antenna Type	<input type="checkbox"/> PIFA <input type="checkbox"/> PCB <input checked="" type="checkbox"/> Dipole <input type="checkbox"/> Coils
Antenna Gain	Gain: 3.11dBi
Antenna Connector	I-PEX Connector

## 1.4 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	+/- 1.2575
Emission bandwidth, 20dB bandwidth	+/- 0.0014
RF output power, conducted	+/- 1.14
Power density, conducted	+/- 1.40
3M Semi Anechoic Chamber / 30M~200M	+/- 4.12
3M Semi Anechoic Chamber / 200M~1000M	+/- 4.68
3M Semi Anechoic Chamber / 1G~8G	+/- 5.18
3M Semi Anechoic Chamber / 8G~18G	+/- 5.47
3M Semi Anechoic Chamber / 18G~26G	+/- 3.81
3M Semi Anechoic Chamber / 26G~40G	+/- 3.87

**Remark:**

1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$
2. ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report.

Report No.: T181227D06-RP

## 1.5 FACILITIES AND TEST LOCATION

All measurement facilities used to collect the measurement data are located at  
 No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.)

Test site	Test Engineer	Remark
AC Conduction Room	Dally Hong	-
Radiation	Jerry Chuang	-
RF Conducted	Dally Hong	-

**Remark:** The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

## 1.6 INSTRUMENT CALIBRATION

RF Conducted Test Site					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
Power Meter	Anritsu	ML2495A	1149001	02/06/2018	02/05/2019
Power Sensor	Anritsu	MA2491A	030982	02/07/2018	02/06/2019
Signal Analyzer	R&S	FSV 40	101073	09/27/2018	09/26/2019

3M 966 Chamber Test Site					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
Band Reject Filters	MICRO TRONICS	BRM 50702	120	05/14/2018	05/13/2019
Bilog Antenna	Sunol Sciences	JB3	A030105	07/13/2018	07/12/2019
Cable	HUBER SUHNER	SUCOFLEX 104PEA	25157	06/29/2018	06/28/2019
Cable	HUBER SUHNER	SUCOFLEX 104PEA	20995	06/29/2018	06/28/2019
Digital Thermo-Hygro Meter	WISEWIND	1206	D07	02/08/2018	02/07/2019
double Ridged Guide Horn Antenna	ETC	MCTD 1209	DRH13M02003	08/20/2018	08/19/2019
Loop Ant	COM-POWER	AL-130	121051	03/21/2018	03/20/2019
Pre-Amplifier	EMEC	EM330	060609	06/29/2018	06/28/2019
Pre-Amplifier	HP	8449B	3008A00965	06/29/2018	06/28/2019
PSA Series Spectrum Analyzer	Agilent	E4446A	MY46180323	05/31/2018	05/30/2019
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R
Turn Table	CCS	CC-T-1F	N/A	N.C.R	N.C.R

AC Conducted Emissions Test Site					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
CABLE	EMCI	CFD300-NL	CERF	06/29/2018	06/28/2019
EMI Test Receiver	R&S	ESCI	100064	07/24/2018	07/23/2019
LISN	SCHWARZBECK	NSLK 8127	8127-541	02/09/2018	02/08/2019
LISN	SCHAFFNER	NNB41	03/10013	02/06/2018	02/05/2019

**Remark:** Each piece of equipment is scheduled for calibration once a year.

## 1.7 SUPPORT AND EUT ACCESSORIES EQUIPMENT

EUT Accessories Equipment					
No.	Equipment	Brand	Model	BSMI ID	FCC ID
1	AC Adapter	TOSHIBA	PA5114E-1AC3	R33030	DoC

Support Equipment					
No.	Equipment	Brand	Model	BSMI ID	FCC ID
1	NB(H)	Acer	Aspire 4320 series	R33142	QDS-BRCM1018

## 1.8 TEST METHODOLOGY AND APPLIED STANDARDS

The test methodology, setups and results comply with all requirements in accordance with ANSI C63.10:2013, FCC Part 2, FCC Part 15.247, KDB 558074 D01



## 2. TEST SUMMERY

FCC Standard Section	Report Section	Test Item	Result
15.203	1.3	Antenna Requirement	Pass
15.207(a)	4.1	AC Conducted Emission	Pass
15.247(a)(2)	4.2	6 dB Bandwidth	Pass
-	4.2	Occupied Bandwidth (99%)	-
15.247(b)(3)	4.3	Output Power Measurement	Pass
15.247(e)	4.4	Power Spectral Density	Pass
15.247(d)	4.5	Conducted Band Edge	Pass
15.247(d)	4.5	Conducted Spurious Emission	Pass
15.247(d)	4.6	Radiation Band Edge	Pass
15.247(d)	4.6	Radiation Spurious Emission	Pass

### 3. DESCRIPTION OF TEST MODES

#### 3.1 THE WORST MODE OF OPERATING CONDITION

<p>Operation mode</p>	<p>IEEE 802.11b mode :1Mbps          IEEE 802.11g mode :6Mbps          IEEE 802.11n HT20 mode: MCS0</p>
<p>Test Channel Frequencies</p>	<p><b>IEEE 802.11b mode:</b>          1. Lowest Channel: 2412MHz          2. Middle Channel: 2437MHz          3. Highest Channel: 2462MHz  <b>IEEE 802.11g mode:</b>          1. Lowest Channel: 2412MHz          2. Middle Channel: 2437MHz          3. Highest Channel: 2462MHz  <b>IEEE 802.11n HT20 mode:</b>          1. Lowest Channel: 2412MHz          2. Middle Channel: 2437MHz          3. Highest Channel: 2462MHz</p>
<p>Operation Transmitter</p>	<p>IEEE 802.11b mode :1T1R          IEEE 802.11g mode :1T1R          IEEE 802.11n HT20 mode :1T1R</p>

**Remark:**

1. EUT pre-scanned data rate of output power for each mode, the worst data rate were recorded in this report.

### 3.2 THE WORST MODE OF MEASUREMENT

AC Power Line Conducted Emission	
Test Condition	AC Power line conducted emission for line and neutral
Power supply Mode	Mode 1: EUT power by host system Mode 2: EUT power by Battery
Worst Mode	<input checked="" type="checkbox"/> Mode 1 <input type="checkbox"/> Mode 2 <input type="checkbox"/> Mode 3 <input type="checkbox"/> Mode 4

Radiated Emission Measurement Above 1G	
Test Condition	Band edge, Emission for Unwanted and Fundamental
Power supply Mode	Mode 1: EUT power by host system Mode 2: EUT power by Battery
Worst Mode	<input checked="" type="checkbox"/> Mode 1 <input type="checkbox"/> Mode 2 <input type="checkbox"/> Mode 3 <input type="checkbox"/> Mode 4
Worst Position	<input type="checkbox"/> Placed in fixed position. <input type="checkbox"/> Placed in fixed position at X-Plane (E2-Plane) <input checked="" type="checkbox"/> Placed in fixed position at Y-Plane (E1-Plane) <input type="checkbox"/> Placed in fixed position at Z-Plane (H-Plane)
Worst Polarity	<input type="checkbox"/> Horizontal <input checked="" type="checkbox"/> Vertical

Radiated Emission Measurement Below 1G	
Test Condition	Radiated Emission Below 1G
Power supply Mode	Mode 1: EUT power by host system Mode 2: EUT power by Battery
Worst Mode	<input checked="" type="checkbox"/> Mode 1 <input type="checkbox"/> Mode 2 <input type="checkbox"/> Mode 3 <input type="checkbox"/> Mode 4

**Remark:**

1. The worst mode was record in this test report.
2. EUT pre-scanned in three axis ,X,Y, Z and two polarity, Horizontal and Vertical for radiated measurement. The worst case(Y-Plane and Vertical) were recorded in this report
3. AC power line conducted emission and for below 1G radiation emission were performed the EUT transmit at the highest output power channel as worse case.

Report No.: T181227D06-RP

## 3.3 EUT DUTY CYCLE

Duty Cycle			
Configuration	TX ON (ms)	TX ALL (ms)	Duty Cycle (%)
802.11b	12.4600	12.5300	99.44%
802.11g	2.0500	2.1100	97.16%
802.11n HT20	1.9500	2.0200	96.53%



Report No.: T181227D06-RP

## 4. TEST RESULT

### 4.1 AC POWER LINE CONDUCTED EMISSION

#### 4.1.1 Test Limit

According to §15.207(a)(2)

Frequency Range (MHz)	Limits(dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50


\* Decreases with the logarithm of the frequency.

#### 4.1.2 Test Procedure

Test method Refer as ANSI C63.10: 2013 clause 6.2,

1. The EUT was placed on a non-conducted table, which is 0.8m above horizontal ground plane and 0.4m above vertical ground plane.
2. EUT connected to the line impedance stabilization network (LISN)
3. Receiver set RBW of 9kHz and Detector Peak, and note as quasi-peak and average.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. Recorded Line for Neutral and Line.

#### 4.1.3 Test Setup

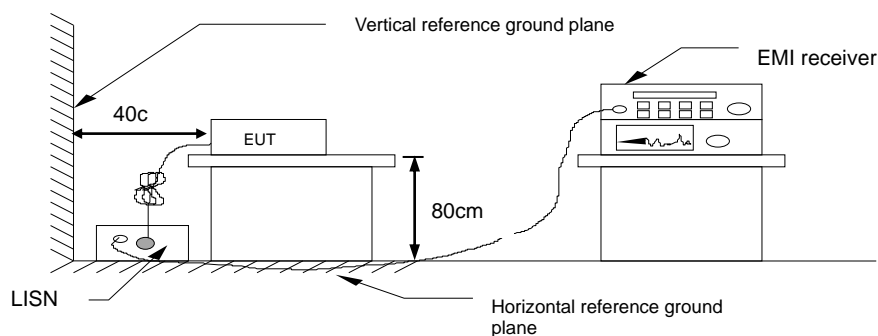


#### 4.1.4 Test Result

**Pass.**

Report No.: T181227D06-RP

### Test Data


Test Mode:	Mode 1	Temp/Hum	24(°C)/ 50%RH
Phase:	Line	Test Date	2019/01/11
		Test Engineer	Dally Hong

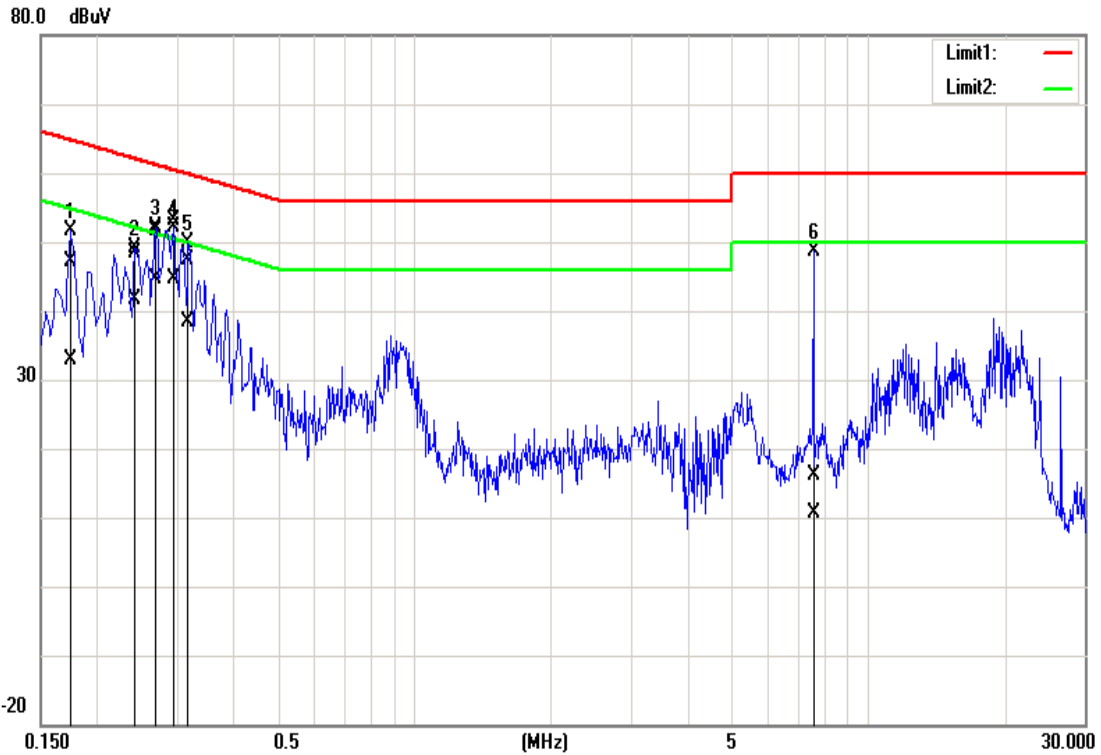

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)
1	0.1740	46.97	32.79	0.16	47.13	32.95	64.77	54.77	-17.64	-21.82
2	0.2420	48.22	41.46	0.16	48.38	41.62	62.03	52.03	-13.65	-10.41
3	0.2700	51.35	44.49	0.16	51.51	44.65	61.12	51.12	-9.61	-6.47
4*	0.2940	52.88	44.41	0.16	53.04	44.57	60.41	50.41	-7.37	-5.84
5	0.3180	47.23	38.21	0.18	47.41	38.39	59.76	49.76	-12.35	-11.37
6	7.5780	15.69	10.26	0.40	16.09	10.66	60.00	50.00	-43.91	-39.34

Report No.: T181227D06-RP

Test Mode:	Mode 1	Temp/Hum	24(°C)/ 50%RH
Phase:	Neutral	Test Date	2019/01/11
		Test Engineer	Dally Hong

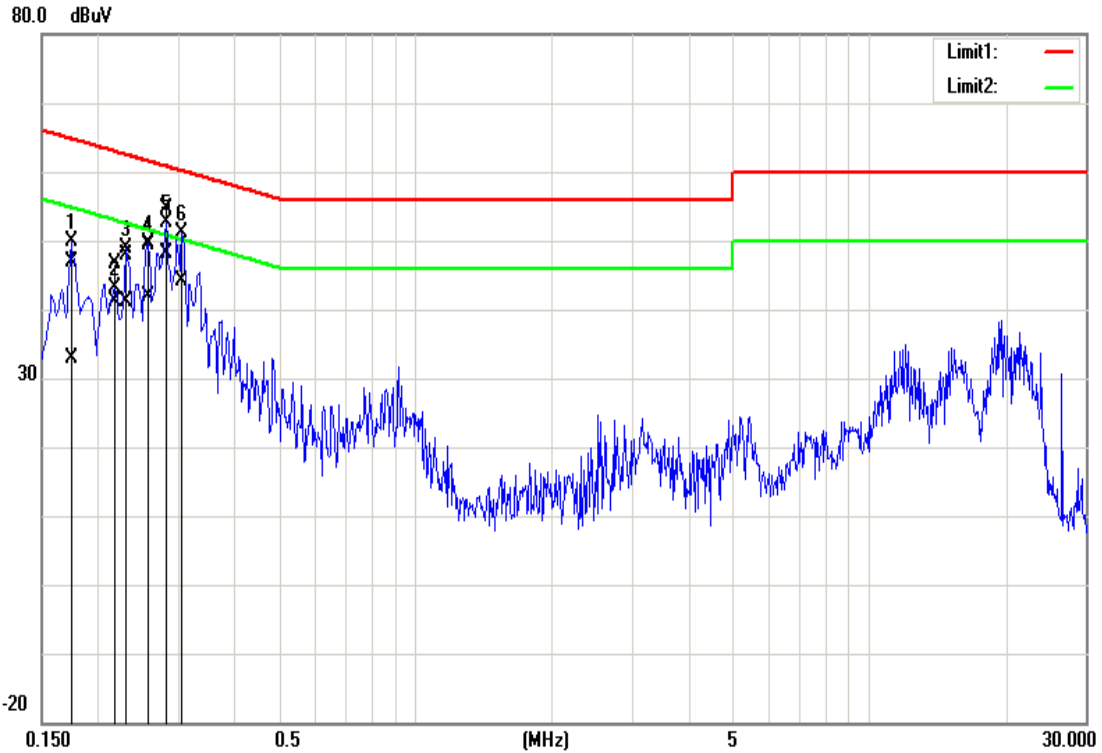

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)
1	0.1740	46.78	32.72	0.19	46.97	32.91	64.77	54.77	-17.80	-21.86
2	0.2180	46.43	40.96	0.18	46.61	41.14	62.89	52.89	-16.28	-11.75
3	0.2300	47.69	41.03	0.18	47.87	41.21	62.45	52.45	-14.58	-11.24
4	0.2580	49.23	41.73	0.18	49.41	41.91	61.50	51.50	-12.09	-9.59
5*	0.2820	54.39	48.05	0.18	54.57	48.23	60.76	50.76	-6.19	-2.53
6	0.3060	50.95	43.93	0.19	51.14	44.12	60.08	50.08	-8.94	-5.96

Report No.: T181227D06-RP

## 4.2 6dB BANDWIDTH AND OCCUPIED BANDWIDTH(99%)

### 4.2.1 Test Limit

According to §15.247(a)(2)

#### 6 dB Bandwidth :

Limit	Shall be at least 500kHz
-------	--------------------------


Occupied Bandwidth(99%) : For reporting purposes only.

### 4.2.2 Test Procedure

Test method Refer as KDB 558074 D01 and ANSI C63.10: 2013 clause 6.9.2,

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW =100KHz , VBW = 300KHz and Detector = Peak, to measurement 6dB Bandwidth
4. SA set RBW = 1% ~ 5% OBW, VBW = three times the RBW and Detector = Peak, to measurement 99% Bandwidth
5. Measure and record the result of 6 dB Bandwidth and 99% Bandwidth. in the test report.

### 4.2.3 Test Setup

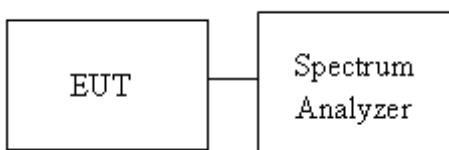



Report No.: T181227D06-RP

#### 4.2.4 Test Result

Test mode: IEEE 802.11b mode / 2412-2462 MHz						
Channel	Frequency (MHz)	Chain 0 OBW(99%) (MHz)	Chain 1 OBW(99%) (MHz)	Chain 0 6dB BW (MHz)	Chain 1 6dB BW (MHz)	6dB limit (kHz)
Low	2412	13.9797	-	9.0435	-	≥500
Mid	2437	13.9797	-	9.0435	-	
High	2462	13.9797	-	8.5652	-	

Test mode: IEEE 802.11g mode / 2412-2462 MHz						
Channel	Frequency (MHz)	Chain 0 OBW(99%) (MHz)	Chain 1 OBW(99%) (MHz)	Chain 0 6dB BW (MHz)	Chain 1 6dB BW (MHz)	6dB limit (kHz)
Low	2412	16.3675	-	15.1304	-	≥500
Mid	2437	16.4544	-	15.087	-	
High	2462	16.4109	-	15.1304	-	


Test mode: IEEE 802.11n HT 20 mode / 2412-2462 MHz						
Channel	Frequency (MHz)	Chain 0 OBW(99%) (MHz)	Chain 1 OBW(99%) (MHz)	Chain 0 6dB BW (MHz)	Chain 1 6dB BW (MHz)	6dB limit (kHz)
Low	2412	17.4963	-	15.087	-	≥500
Mid	2437	17.4963	-	15.1304	-	
High	2462	17.4963	-	15.1304	-	

Report No.: T181227D06-RP


## Test Data (6dB BANDWIDTH)

### IEEE 802.11b mode- chain 0


#### Low CH

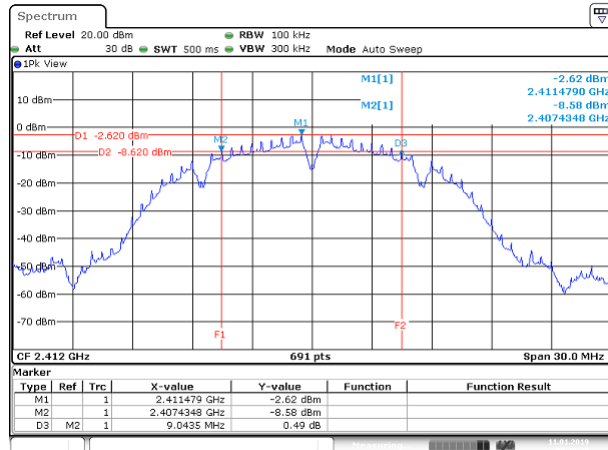

#### Mid CH

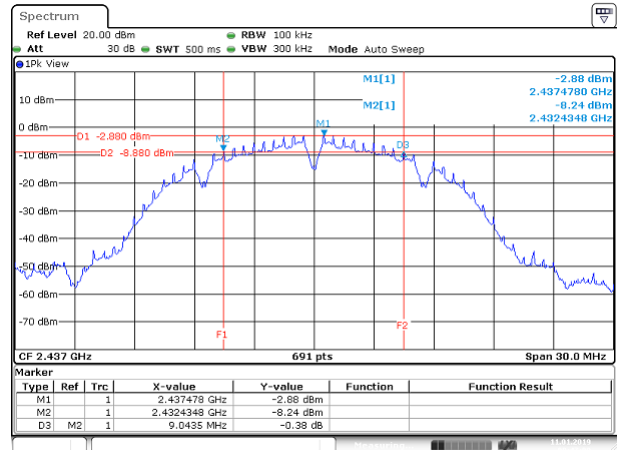


#### High CH

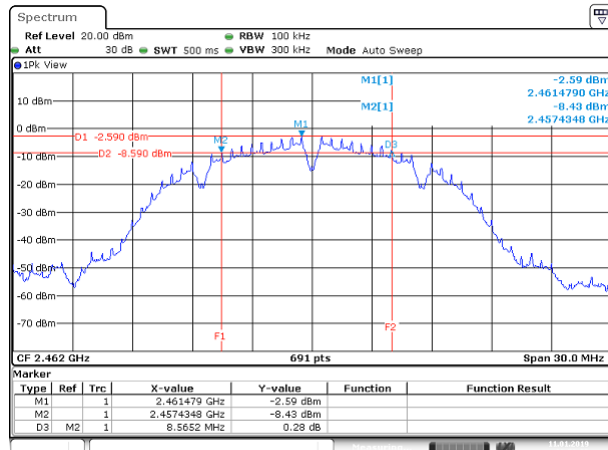


Report No.: T181227D06-RP

## IEEE 802.11g mode- chain 0


### Low CH

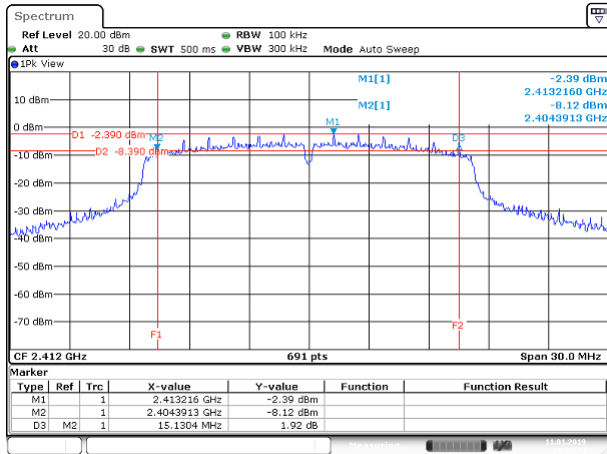

### Mid CH

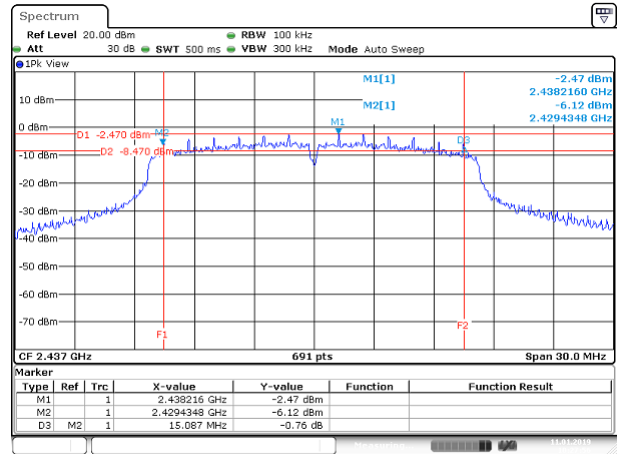


### High CH

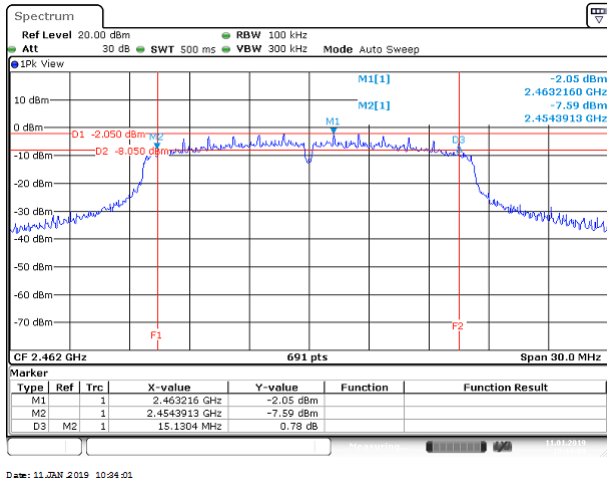

Report No.: T181227D06-RP


## IEEE 802.11n HT20 mode- chain 0

### Low CH

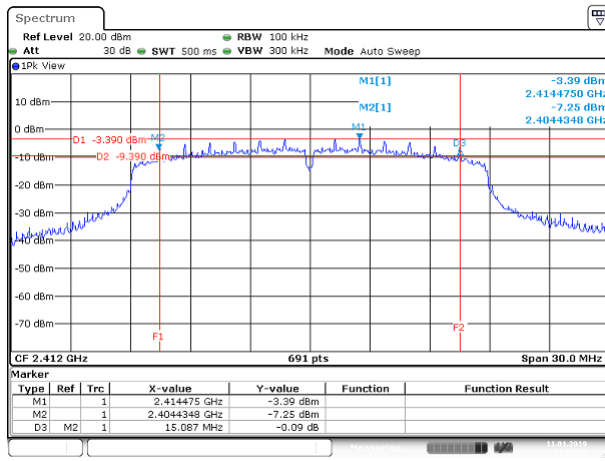


Date: 11 JAN 2019 12:05:59

### Mid CH

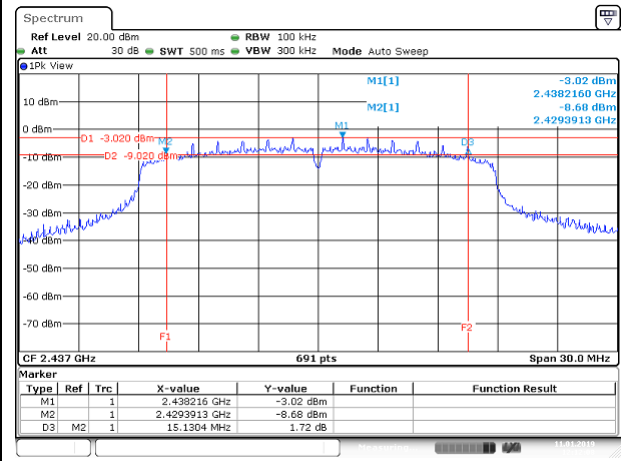

Date: 11 JAN 2019 12:12:08


### High CH

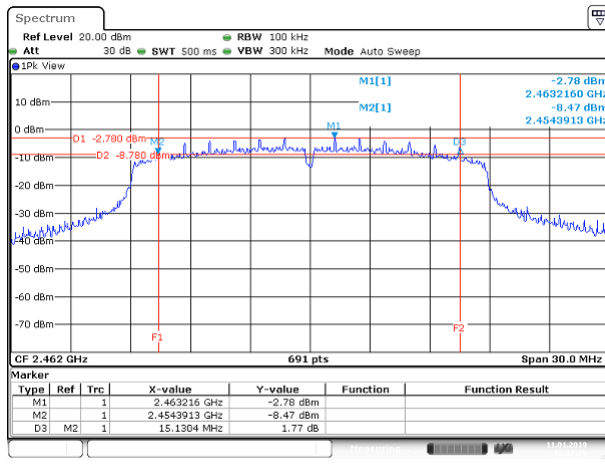

Date: 11 JAN 2019 12:17:25

Report No.: T181227D06-RP


## Test Data (BANDWIDTH 99%)

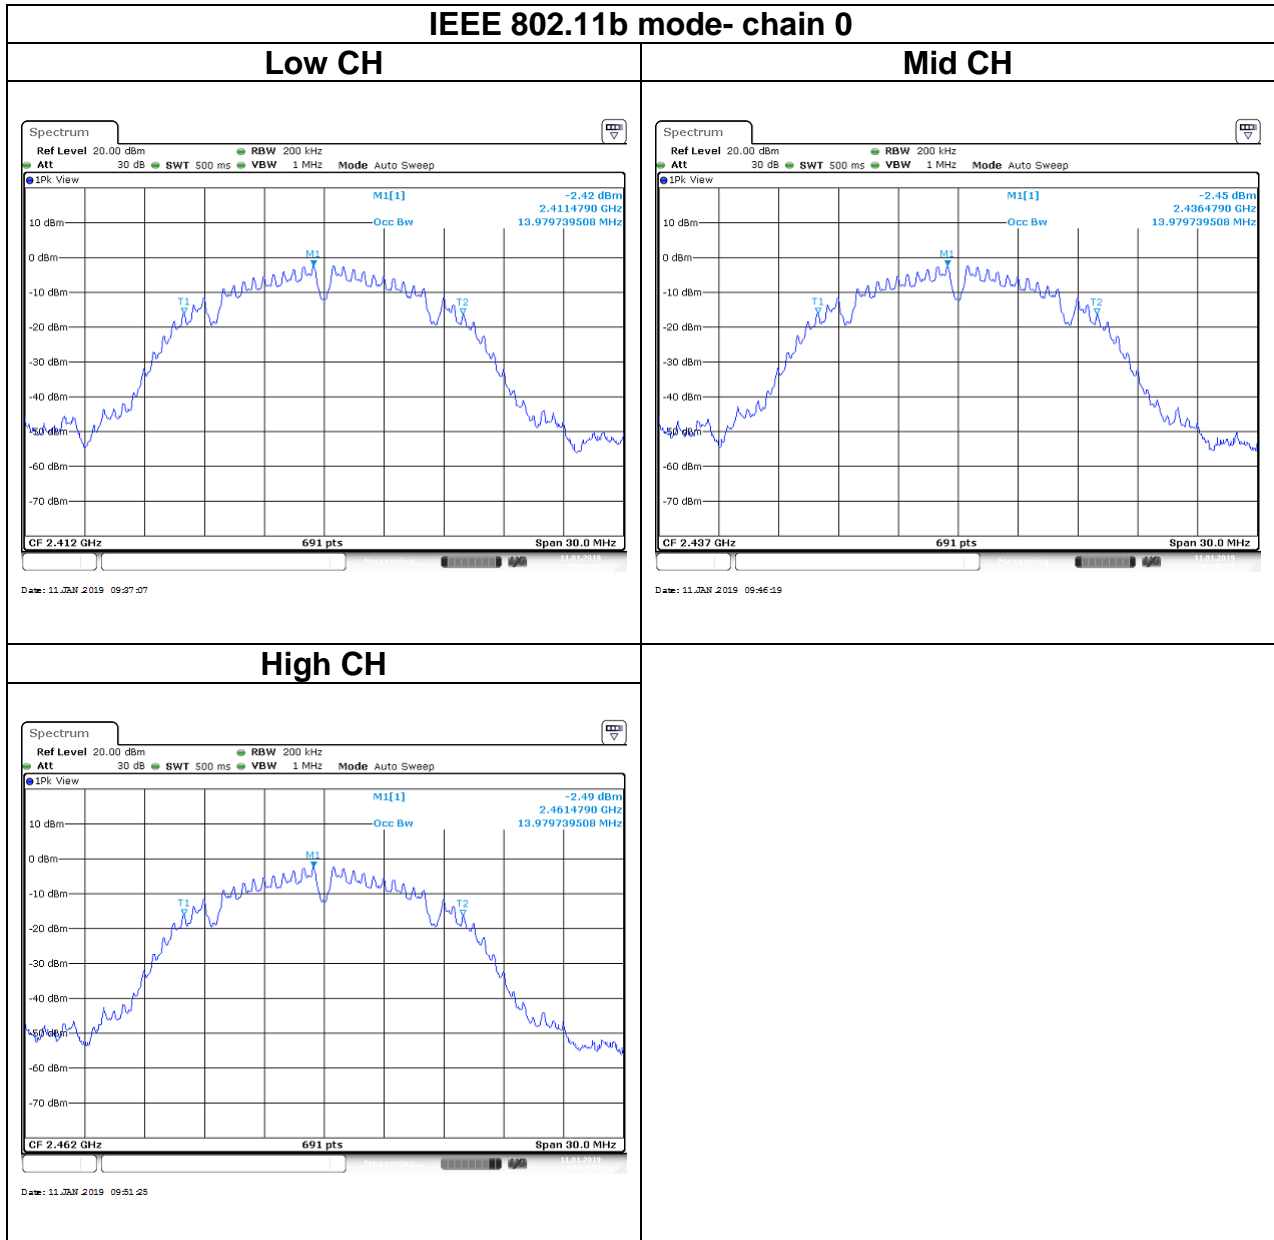


Report No.: T181227D06-RP

## IEEE 802.11g mode- chain 0


### Low CH

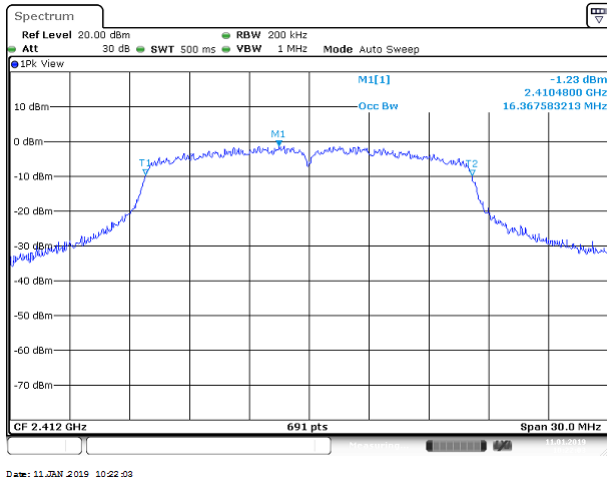

### Mid CH

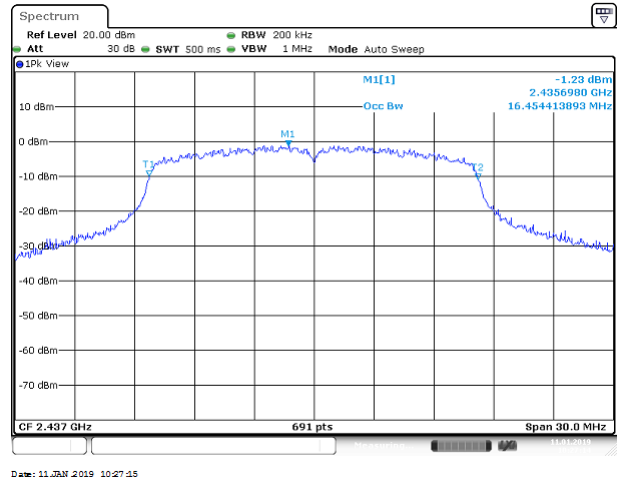


### High CH

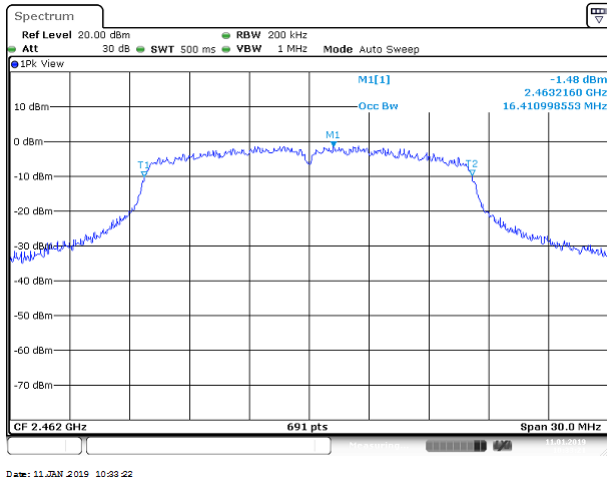


Report No.: T181227D06-RP

## IEEE 802.11n HT20 mode- chain 0


### Low CH

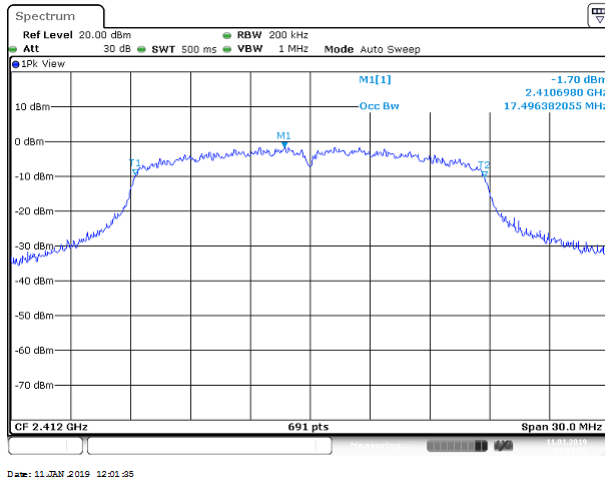

### Mid CH

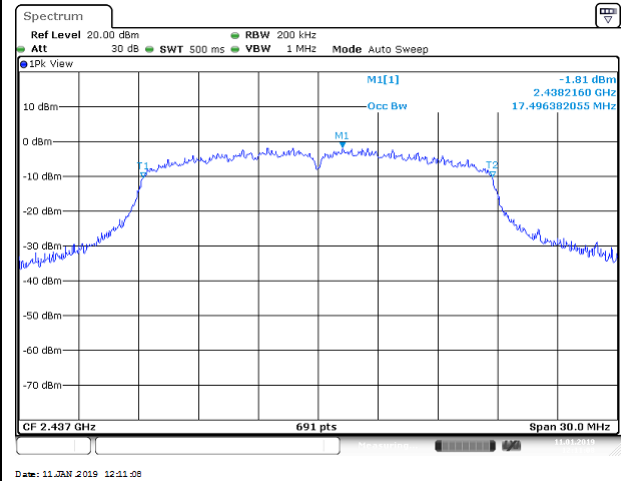

### High CH

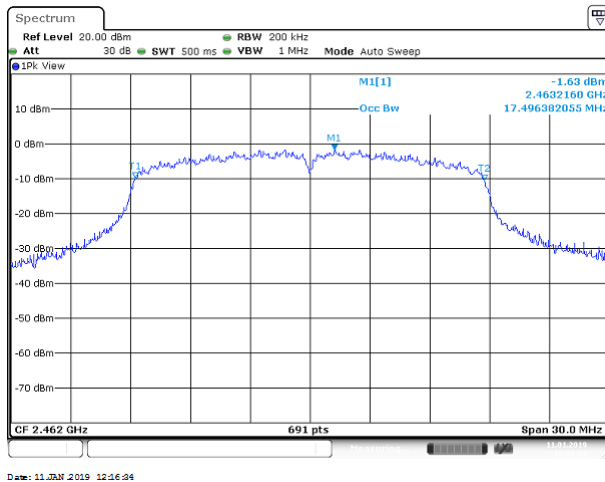

Report No.: T181227D06-RP

## 4.3 OUTPUT POWER MEASUREMENT

### 4.3.1 Test Limit

According to §15.247(b)

#### Peak output power :

For systems using digital modulation in the 2400-2483.5 MHz: 1 Watt(30 dBm), base on the use of antennas with directional gain not exceed 6 dBi If transmitting antennas of directional gain greater than 6dBi are used the peak output power the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Limit	<input checked="" type="checkbox"/> Antenna not exceed 6 dBi : 30dBm <input type="checkbox"/> Antenna with DG greater than 6 dBi : [Limit = 30 – (DG – 6)] <input type="checkbox"/> Point-to-point operation :
-------	---


Average output power : For reporting purposes only.

### 4.3.2 Test Procedure

Test method Refer as KDB 558074 D01

1. The EUT RF output connected to the power meter by RF cable.
2. Setting maximum power transmit of EUT.
3. The path loss was compensated to the results for each measurement.
4. Measure and record the result of Peak output power and Average output power. in the test report.

### 4.3.3 Test Setup





Report No.: T181227D06-RP

### 4.3.4 Test Result

**Peak output power :**

Wifi 2.4G						
Config	CH	Freq. (MHz)	power set	PK Power (dBm)	PK Power (W)	Limit (dBm)
IEEE 802.11b Data rate: 1Mbps	Low	2412	17	21.66	0.1466	30
	Mid	2437	18	23.81	0.2404	
	High	2462	17	21.61	0.1449	
IEEE 802.11g Data rate: 6Mbps	Low	2412	15	25.88	0.3873	
	Mid	2437	17	26.22	0.4188	
	High	2462	15	26.05	0.4027	
IEEE 802.11n HT20 Data rate: MCS0	Low	2412	14	25.44	0.3499	
	Mid	2437	18	26.49	0.4457	
	High	2462	14	25.56	0.3597	

**Average output power :**

Wifi 2.4G			
Config	CH	Freq. (MHz)	AV Power (dBm)
IEEE 802.11b Data rate: 1Mbps	Low	2412	19.25
	Mid	2437	21.53
	High	2462	19.17
IEEE 802.11g Data rate: 6Mbps	Low	2412	17.03
	Mid	2437	19.22
	High	2462	17.15
IEEE 802.11n HT20 Data rate: MCS0	Low	2412	15.94
	Mid	2437	19.44
	High	2462	15.84

Report No.: T181227D06-RP

## 4.4 POWER SPECTRAL DENSITY

### 4.4.1 Test Limit

According to §15.247(e)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


Limit	<input checked="" type="checkbox"/> Antenna not exceed 6 dBi : 8dBm <input type="checkbox"/> Antenna with DG greater than 6 dBi : [ Limit = 8 – (DG – 6) ] <input type="checkbox"/> Point-to-point operation :
-------	---

### 4.4.2 Test Procedure

Test method Refer as KDB 558074 D01

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW = 3kHz, VBW = 30kHz, Span = 1.5 times DTS Bandwidth (6 dB BW), Detector = Peak, Sweep Time = Auto and Trace = Max hold.
4. The path loss was compensated to the results for each measurement by SA.
5. Mark the maximum level.
6. Measure and record the result of power spectral density. in the test report.

### 4.4.3 Test Setup



Report No.: T181227D06-RP

#### 4.4.4 Test Result

Test mode: IEEE 802.11b mode / 2412-2462 MHz					
Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	Total PSSD (dBm)	Limit (dBm)
Low	2412	-3.50	-	-3.50	8
Mid	2437	-2.84	-	-2.84	
High	2462	-3.61	-	-3.61	


Test mode: IEEE 802.11g mode / 2412-2462 MHz					
Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	Total PSSD (dBm)	Limit (dBm)
Low	2412	-9.13	-	-9.13	8
Mid	2437	-6.08	-	-6.08	
High	2462	-8.94	-	-8.94	

Test mode: IEEE 802.11n HT 20 mode / 2412-2462 MHz					
Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	Total PSSD (dBm)	Limit (dBm)
Low	2412	-9.19	-	-9.19	8
Mid	2437	-6.22	-	-6.22	
High	2462	-9.70	-	-9.70	


## Test Data

### IEEE 802.11b mode- chain 0


#### Low CH

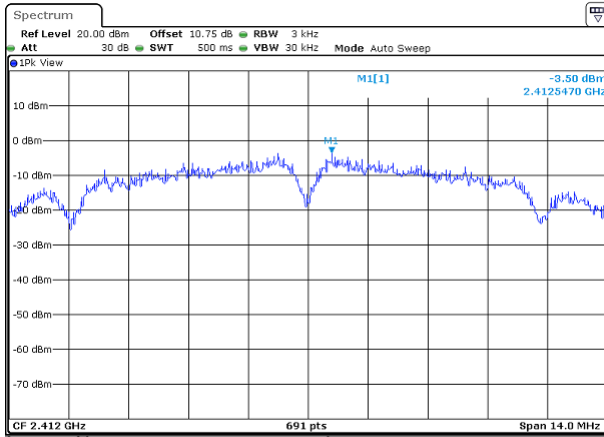


#### Mid CH

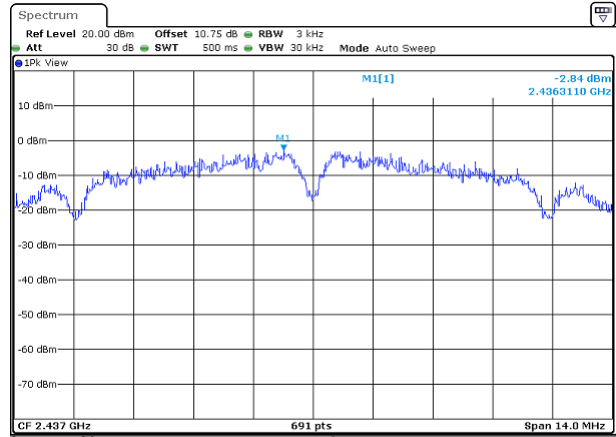


#### High CH

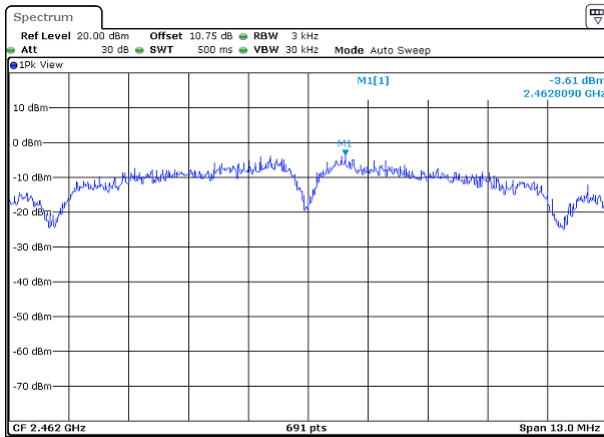

Report No.: T181227D06-RP

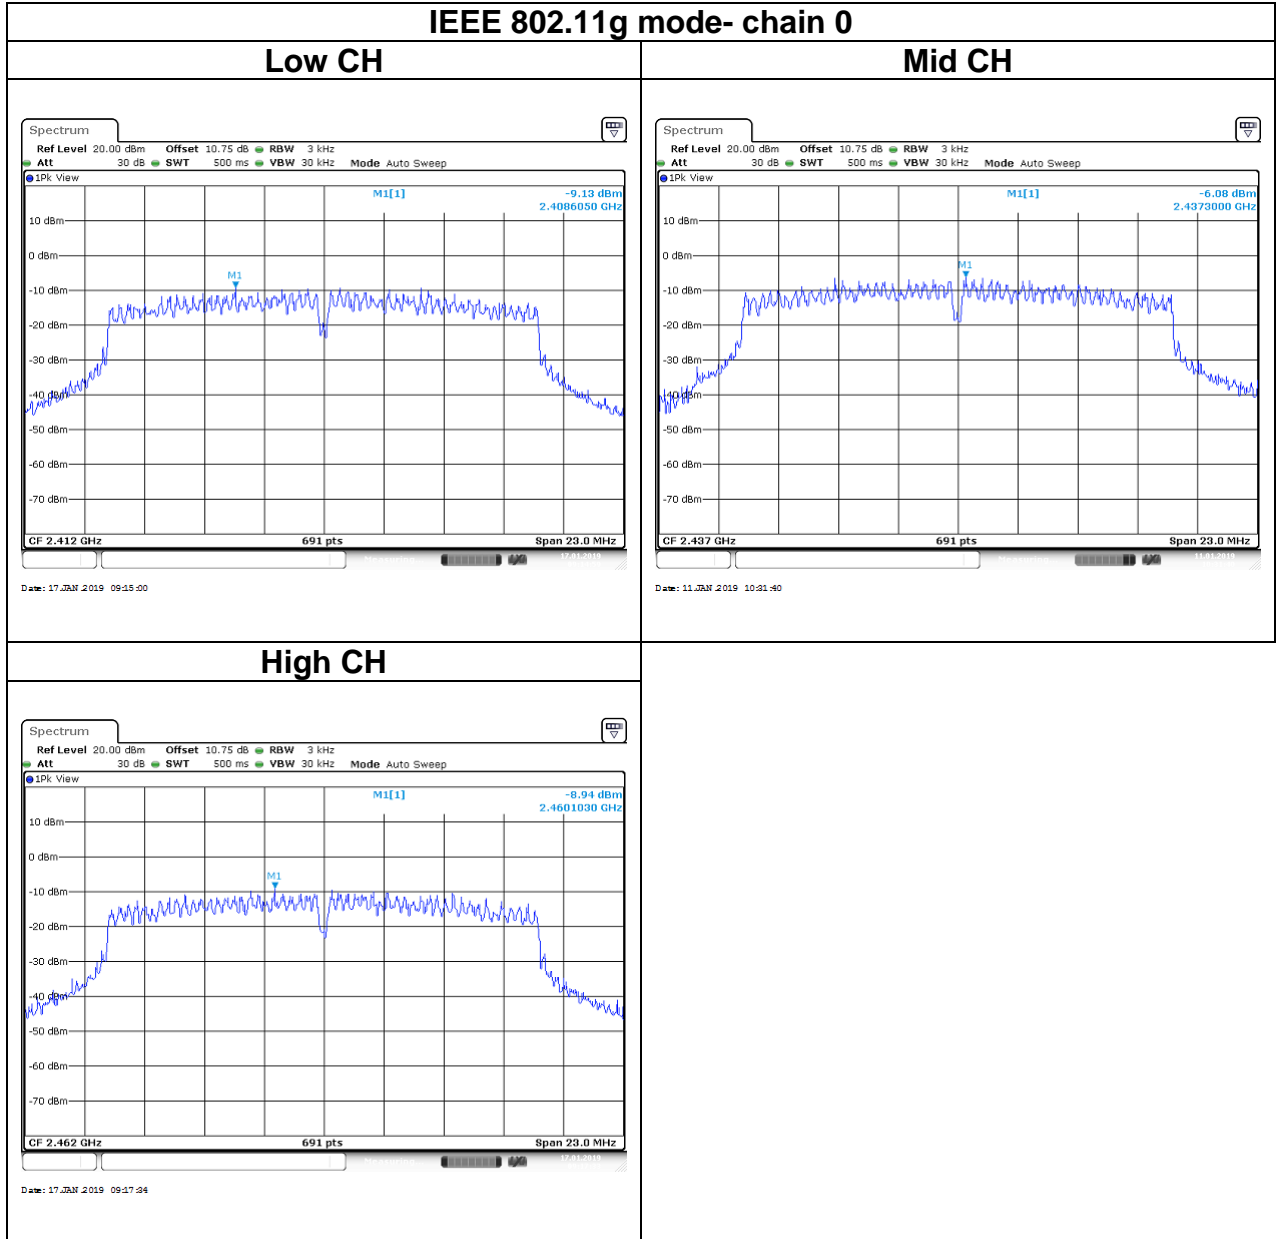

Report No.: T181227D06-RP

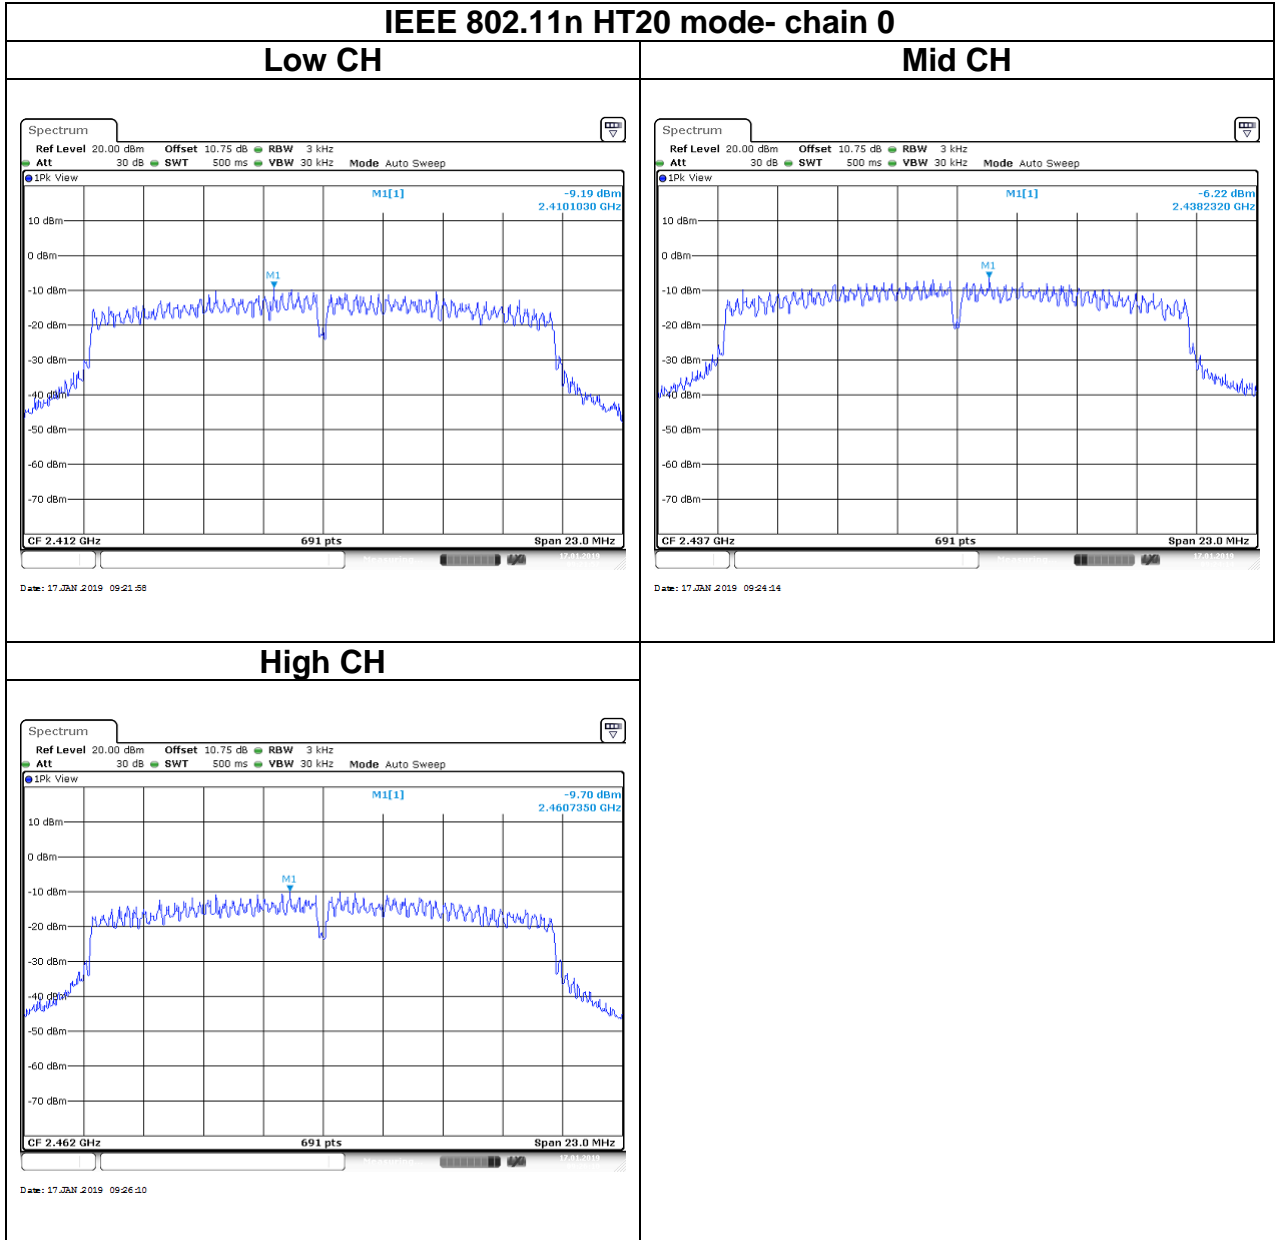

Report No.: T181227D06-RP

## 4.5 CONDUCTED BANDEDGE AND SPURIOUS EMISSION

### 4.5.1 Test Limit

According to §15.247(d)

In any 100 kHz bandwidth outside the authorized frequency band,


Non-restricted bands shall be attenuated at least 20 dB/30 dB relative to the maximum PSD level in 100 kHz by RF conducted or a radiated measurement which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

### 4.5.2 Test Procedure

Test method Refer as KDB 558074 D01

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.
3. In any 100 kHz bandwidth outside the authorized frequency band, shall be attenuated at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when conducted power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.


### 4.5.3 Test Setup




Report No.: T181227D06-RP


## 4.5.4 Test Result

### Test Data

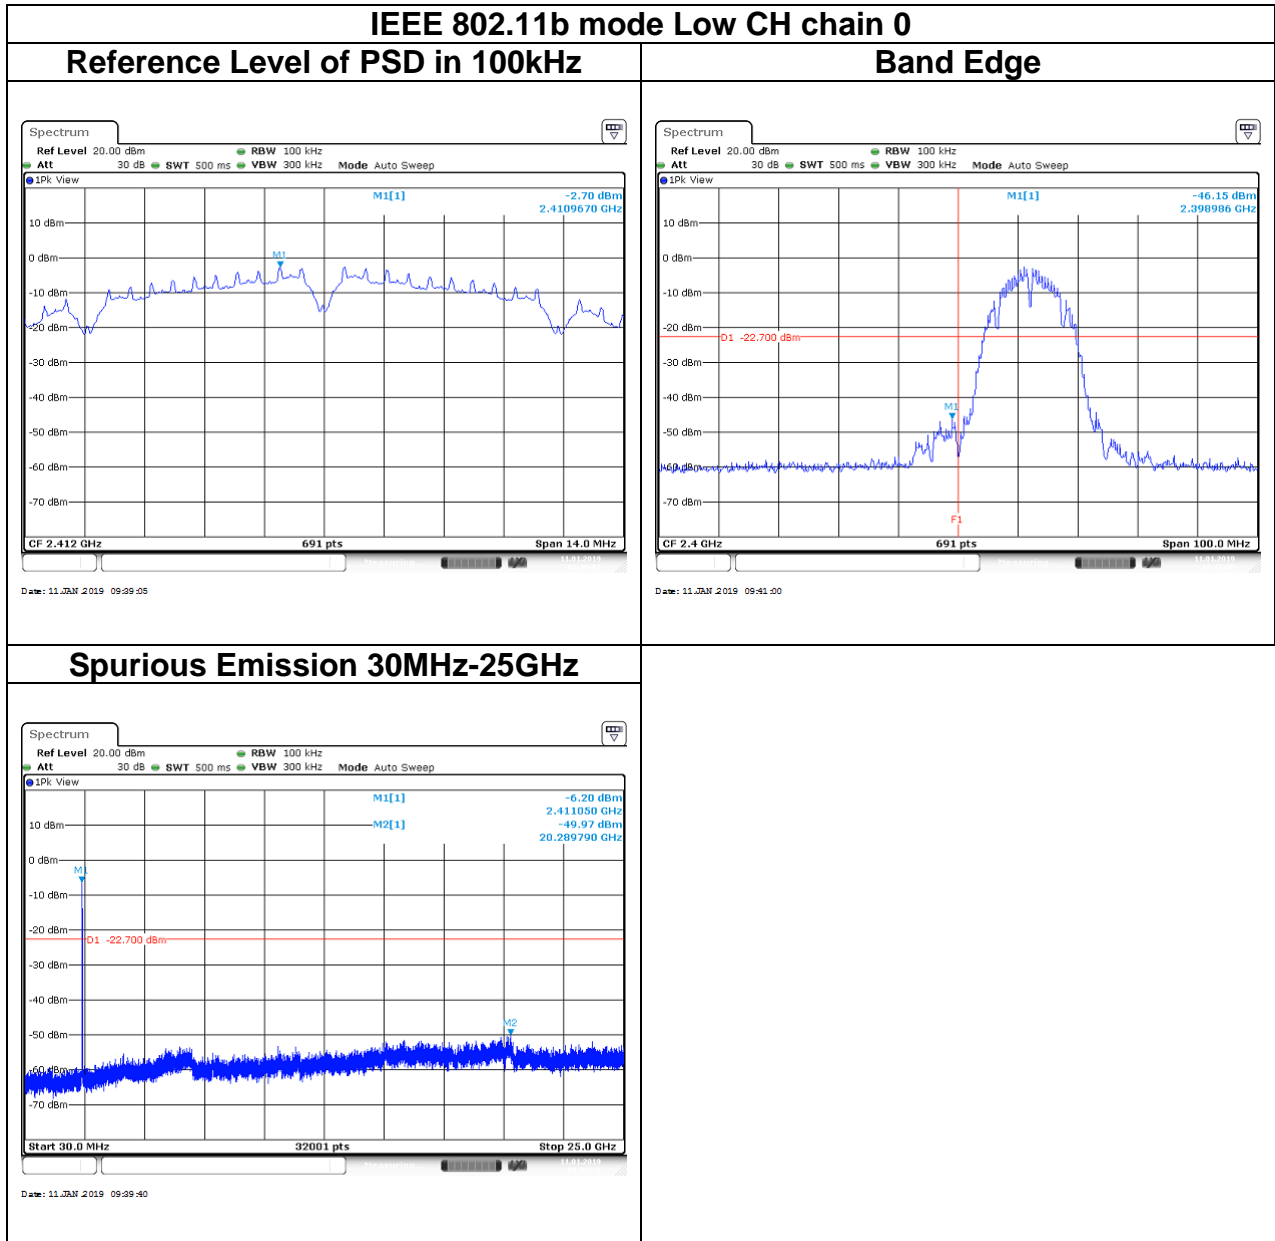





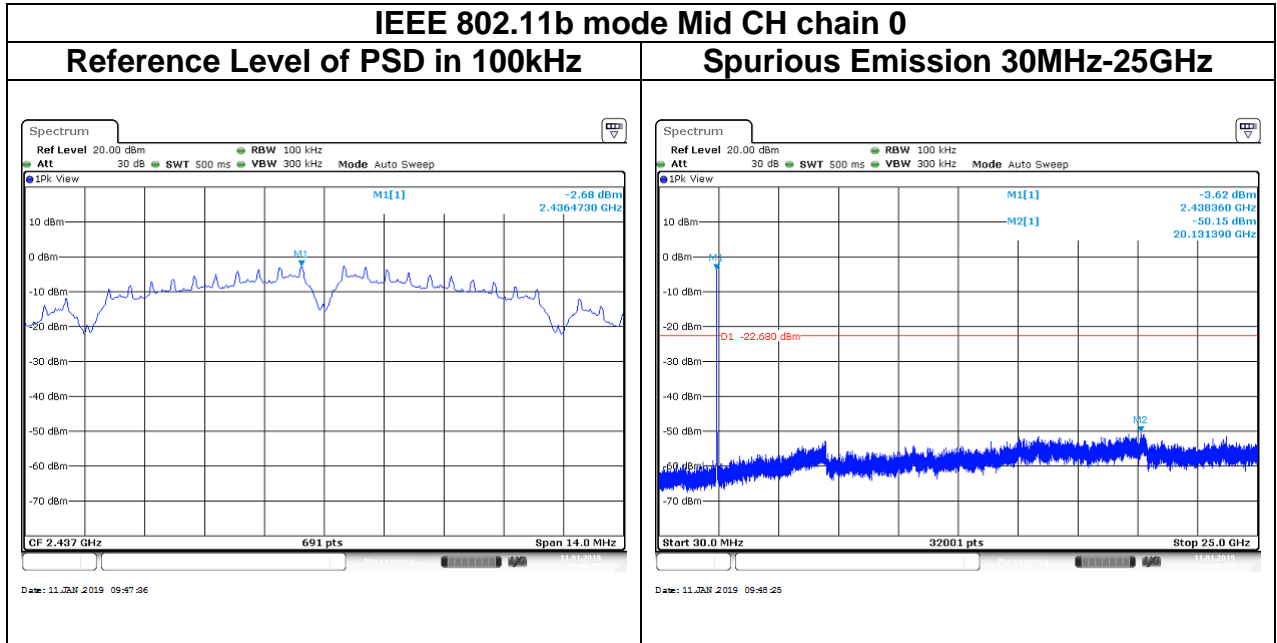

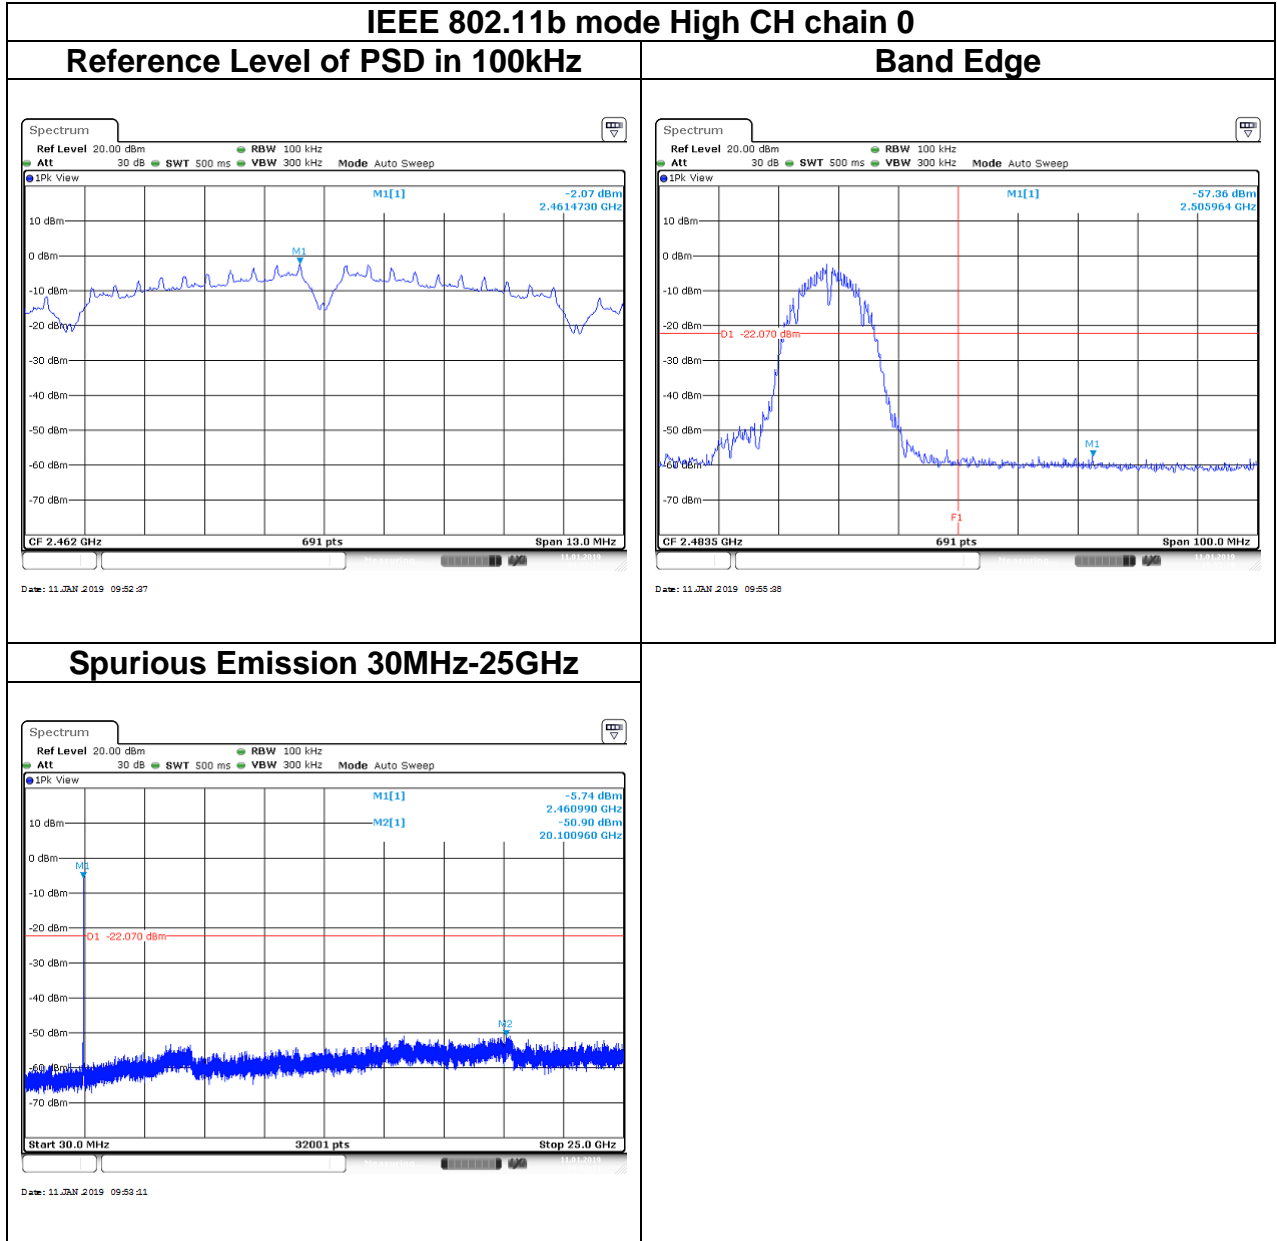


Report No.: T181227D06-RP

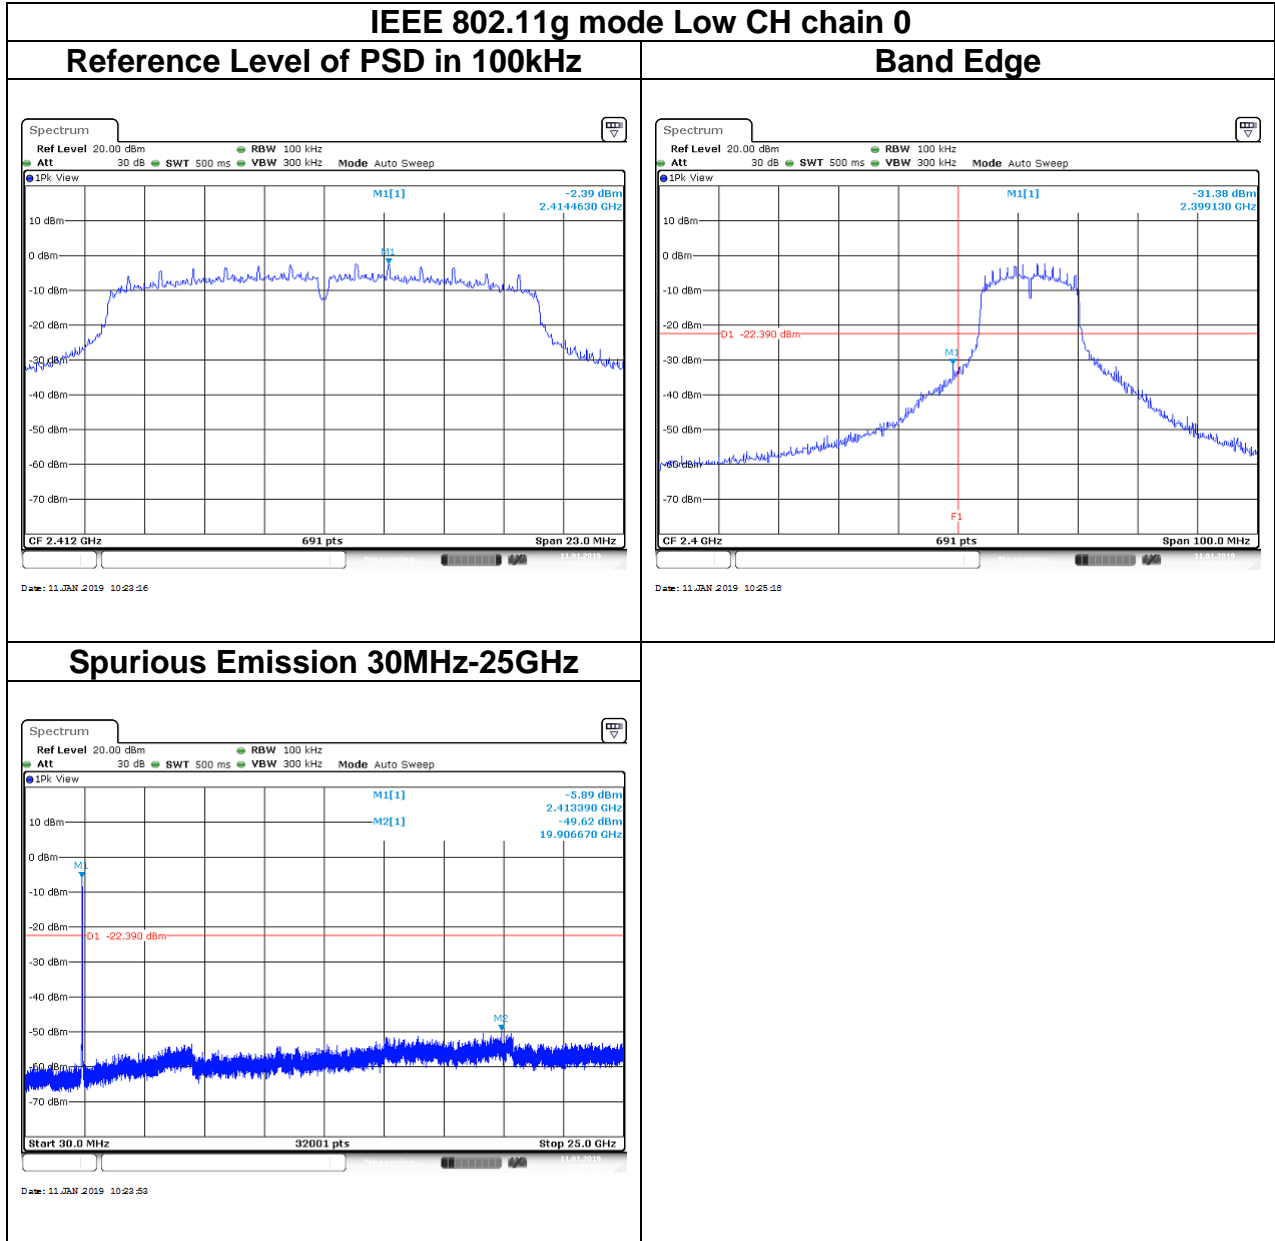

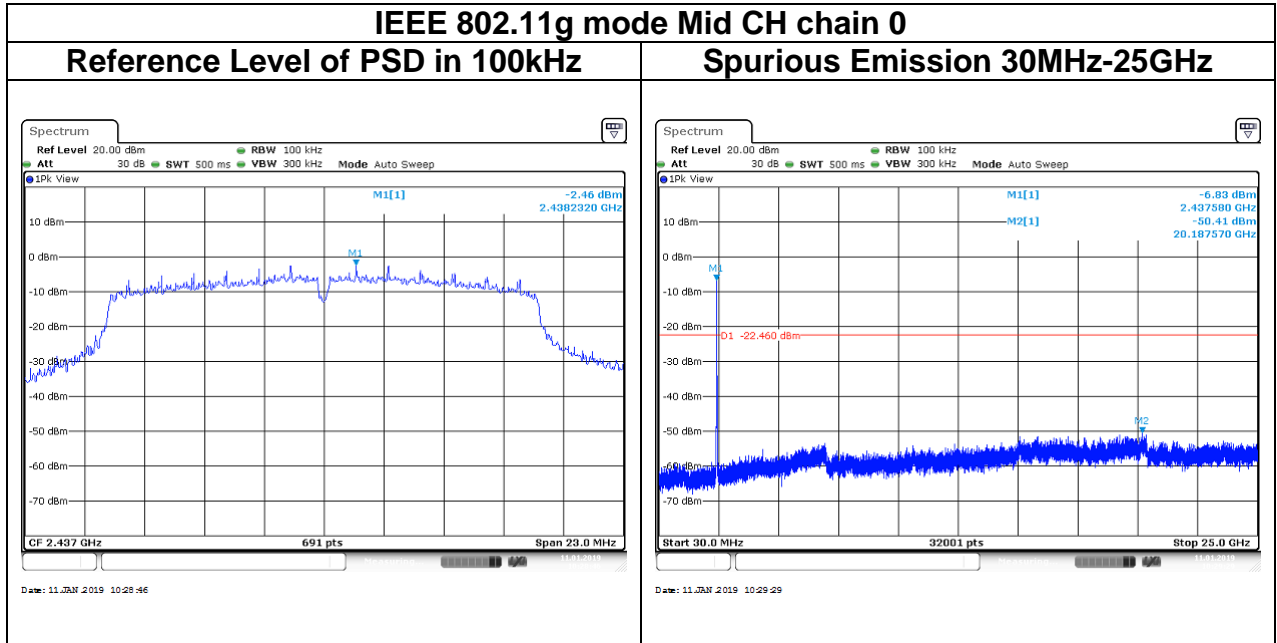


## IEEE 802.11g mode High CH chain 0


### Reference Level of PSD in 100kHz

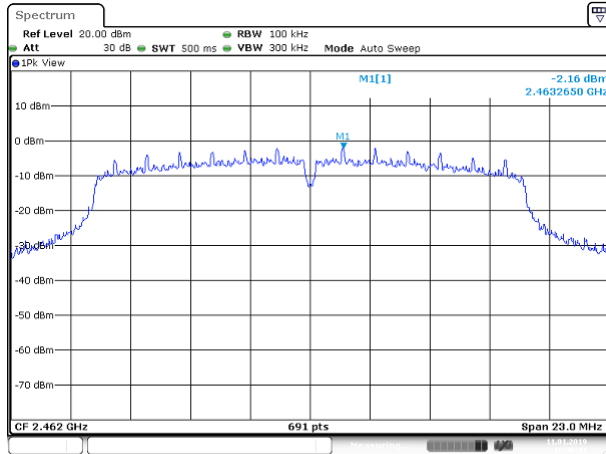


### Band Edge

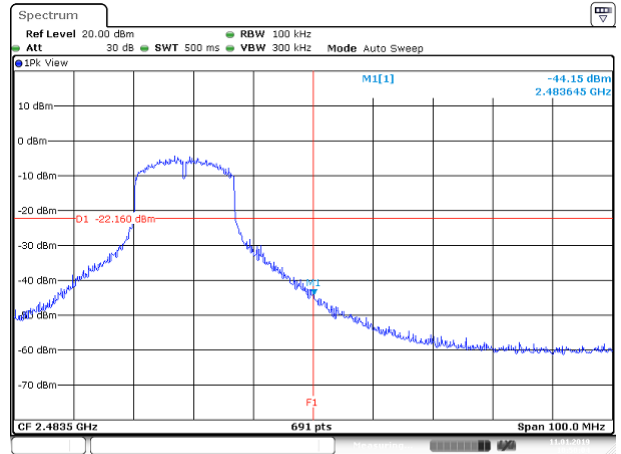


### Spurious Emission 30MHz-25GHz

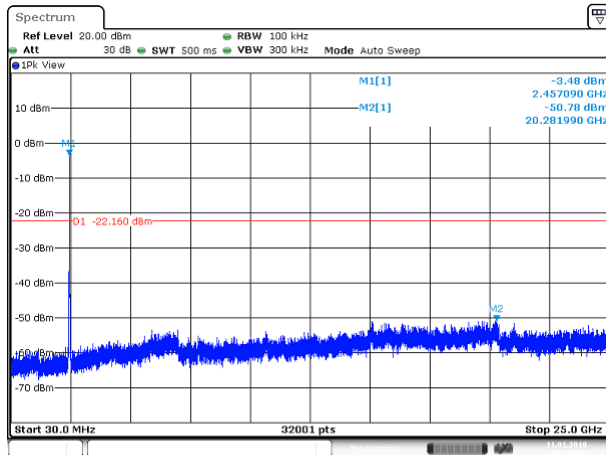


Report No.: T181227D06-RP

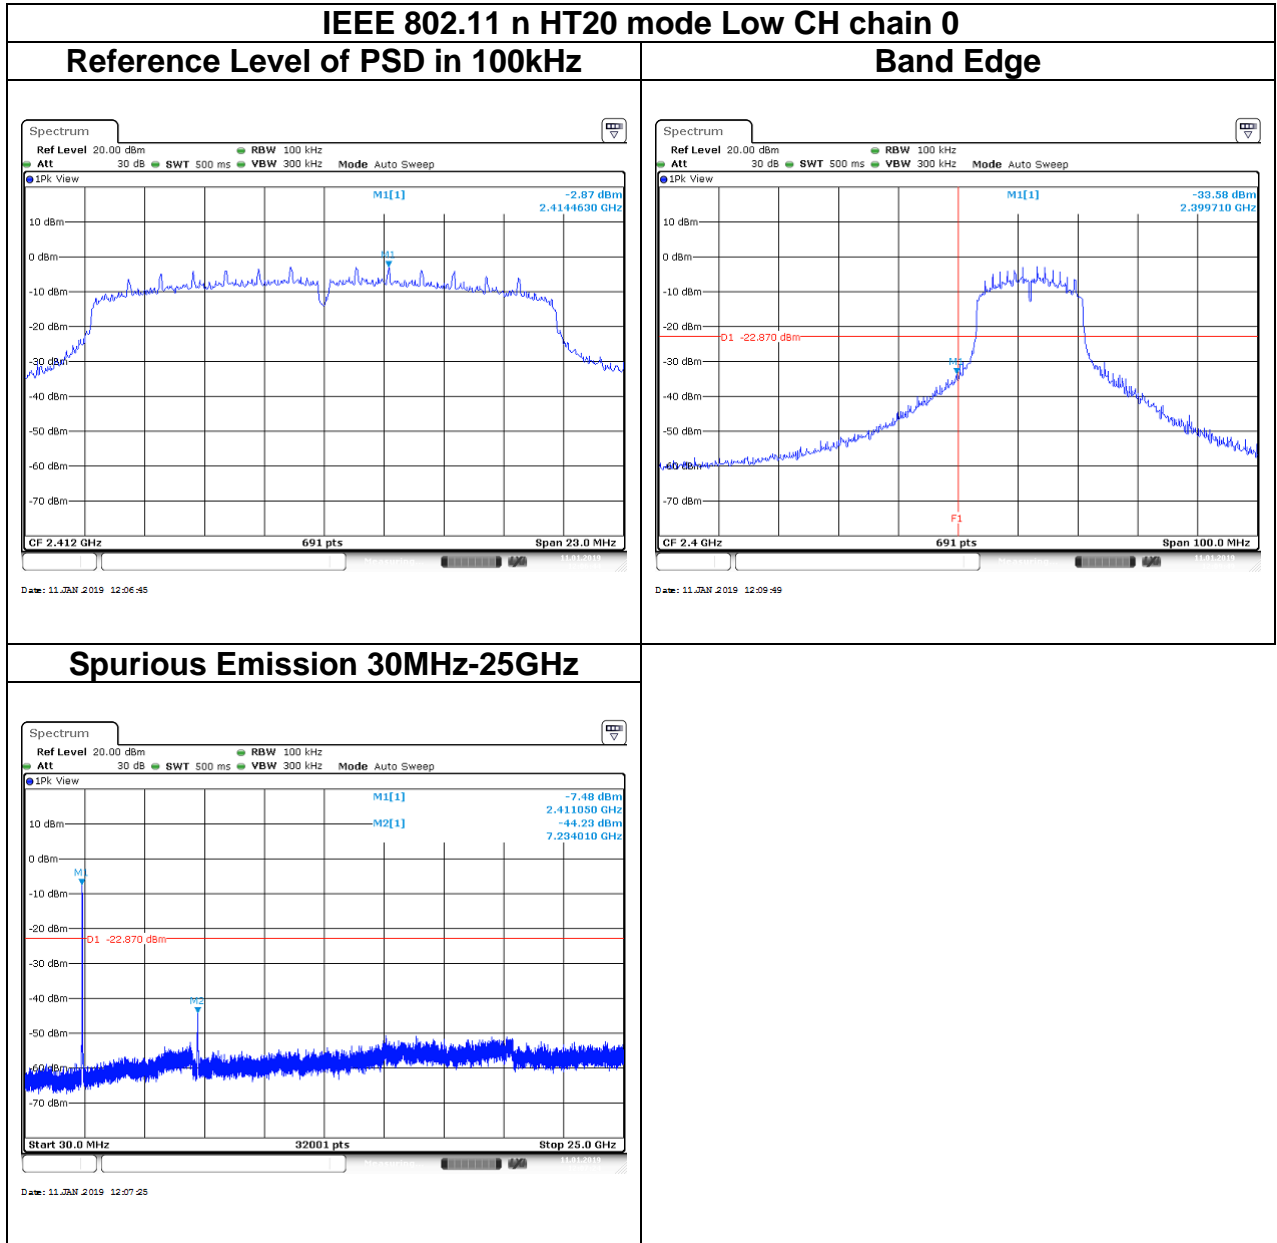

Report No.: T181227D06-RP

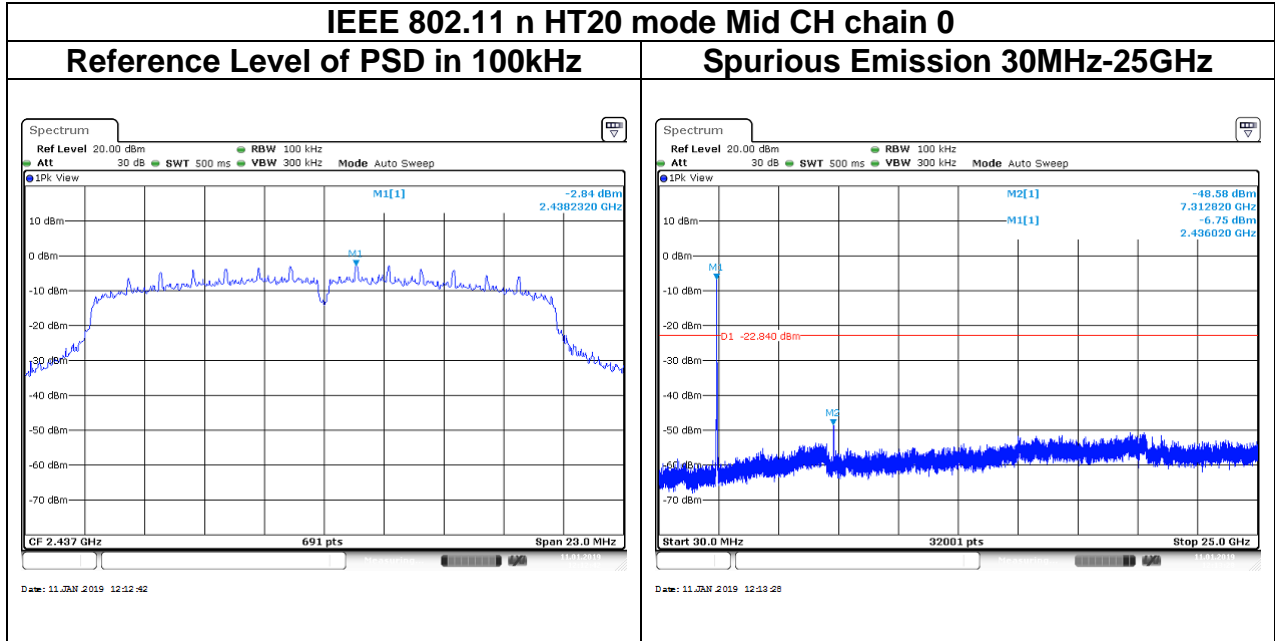

Report No.: T181227D06-RP

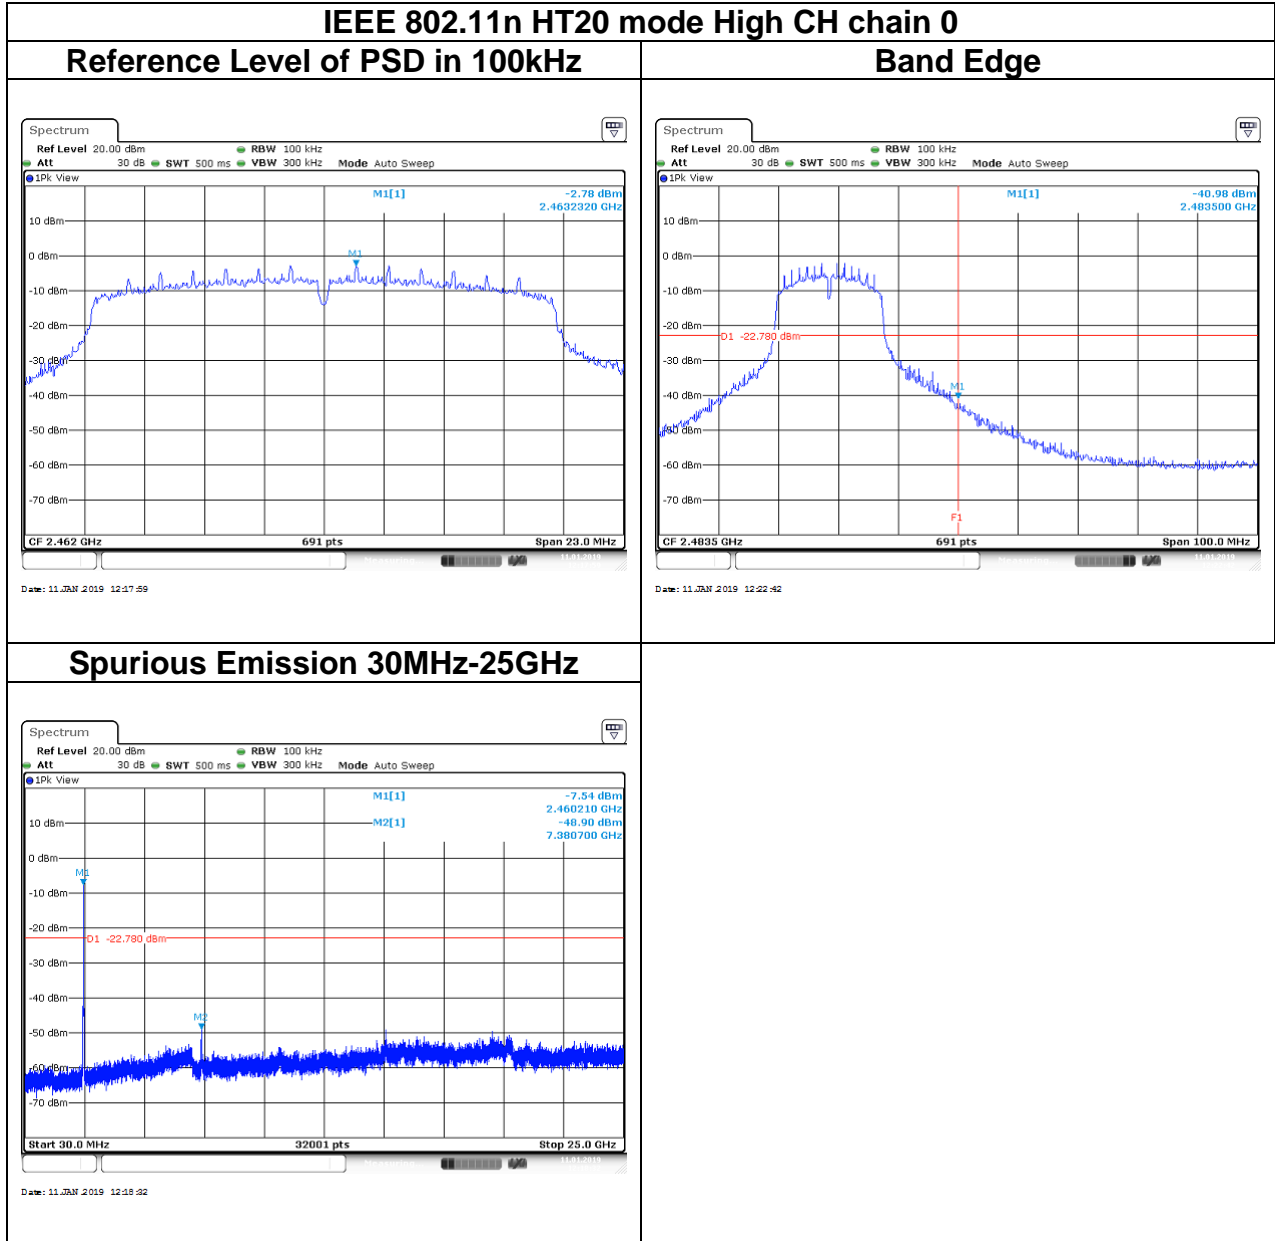



Report No.: T181227D06-RP

## 4.6 RADIATION BANDEDGE AND SPURIOUS EMISSION

### 4.6.1 Test Limit

FCC according to §15.247(d), §15.209 and §15.205,

In any 100 kHz bandwidth outside the authorized frequency band, all harmonic and spurious must be least 20 dB below the highest emission level with the authorized frequency band. Radiation emission which fall in the restricted bands must also follow the FCC section 15.209 as below limit in table.

#### Below 30 MHz

Frequency	Field Strength (microvolts/m)	Magnetic H-Field (microamperes/m)	Measurement Distance (metres)
9-490 kHz	2,400/F (F in kHz)	2,400/F (F in kHz)	300
490-1,705 kHz	24,000/F (F in kHz)	24,000/F (F in kHz)	30
1.705-30 MHz	30	N/A	30

#### Above 30 MHz

Frequency	Field Strength (microvolts/m)	Measurement Distance (metres)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Report No.: T181227D06-RP

### 4.6.2 Test Procedure

Test method Refer as KDB 558074 D01

1. The EUT is placed on a turntable, Above 1 GHz is 1.5m and below 1 GHz is 0.8m above ground plane. The EUT Configured un accordance with ANSI C63.10: 2013, and the EUT set in a continuous mode.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. And EUT is set 3m away from the receiving antenna, which is scanned from 1m to 4m above the ground plane to find out the highest emissions. Measurement are made polarized in both the vertical and the horizontal positions with antenna.
3. Span shall wide enough to full capture the emission measured. The SA from 30MHz to 26.5GHz set to the low, Mid and High channels with the EUT transmit.

Remark:

1. Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.
2. Note: No emission found between lowest internal used/generated frequency to 30MHz (9KHz~30MHz)

4. The SA setting following :


- (1) Below 1G : RBW = 100kHz, VBW  $\geq$  3 RBW, Sweep = Auto, Detector = Peak, Trace = Max hold.
- (2) Above 1G :
  - (2.1) For Peak measurement : RBW = 1MHz, VBW  $\geq$  3 RBW, Sweep = Auto, Detector = Peak, Trace = Max hold.
  - (2.2) For Average measurement : RBW = 1MHz, VBW
    - If Duty Cycle  $\geq$  98%, VBW=10Hz.
    - If Duty Cycle < 98%, VBW=1/T.

Configuration	Duty Cycle (%)	T(ms)	1/T (kHz)	VBW Setting
802.11b	99.44%	12.4600	-	10Hz
802.11g	97.16%	2.0500	0.488	510Hz
802.11n HT20	96.53%	1.9500	0.513	560Hz


Report No.: T181227D06-RP

## 4.6.3 Test Setup


### 9kHz ~ 30MHz

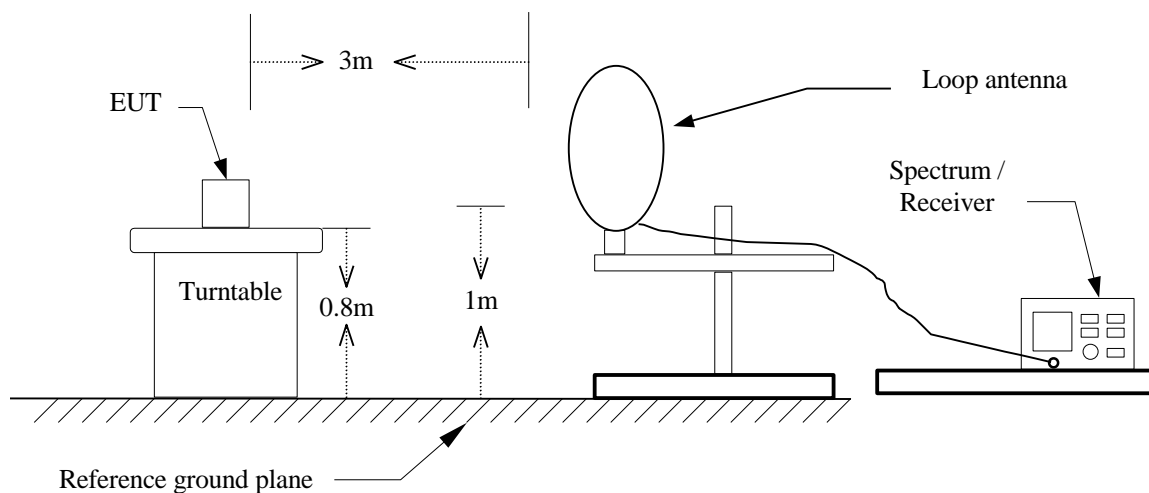

### 30MHz ~ 1GHz

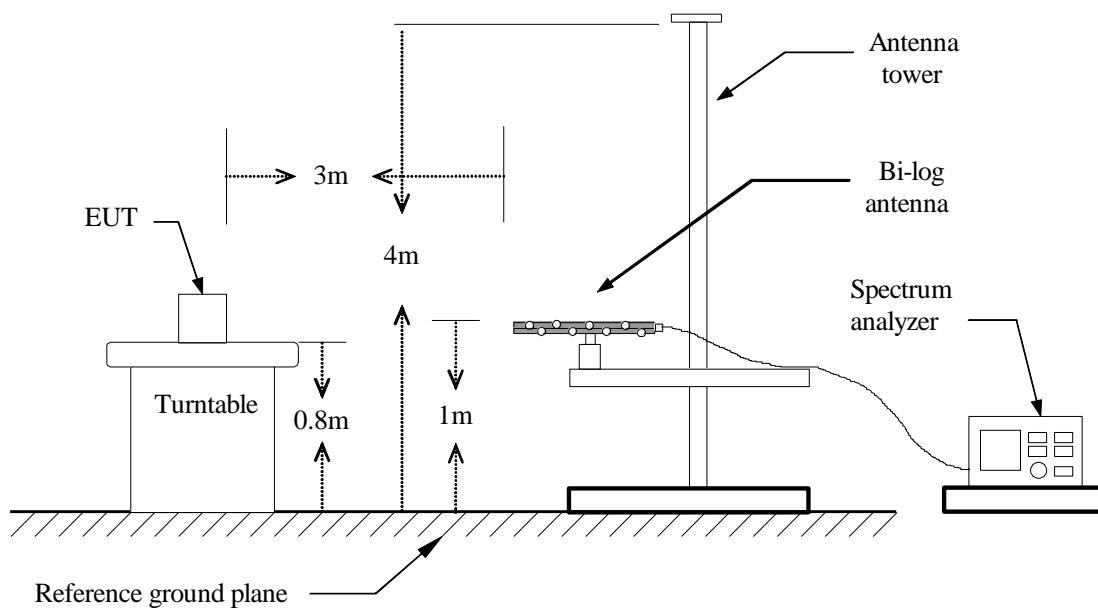

## Above 1 GHz

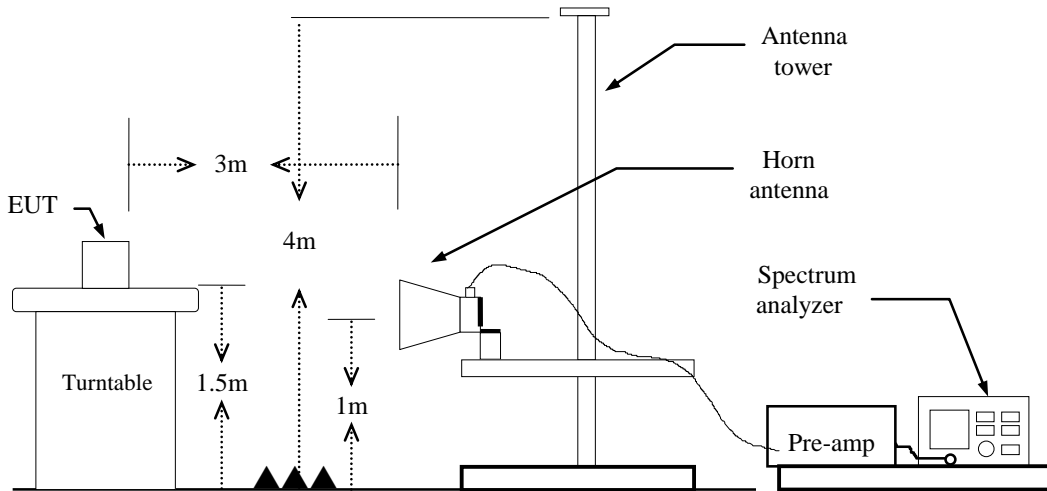


Report No.: T181227D06-RP

### 4.6.4 Test Result

#### Band Edge Test Data


Test Mode	IEEE 802.11b Low CH	Temp/Hum	23.1(°C)/ 59%RH
Test Item	Band Edge	Test Date	January 14, 2019
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

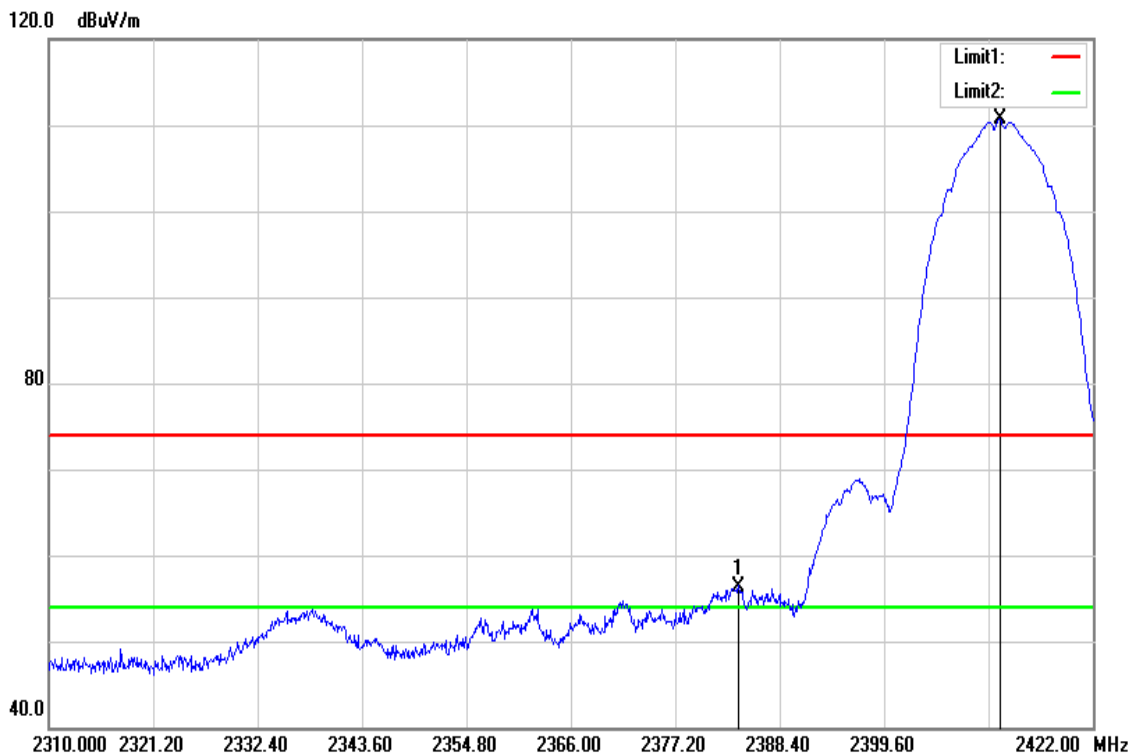

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2383.920	59.52	-3.12	56.40	74.00	-17.60	peak
2412.032	113.75	-3.08	110.67	-	-	peak

Report No.: T181227D06-RP


Test Mode	IEEE 802.11b Low CH	Temperature:	23.1(°C)/ 59%RH
Test Item	Band Edge	Test Date	January 14, 2019
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average		

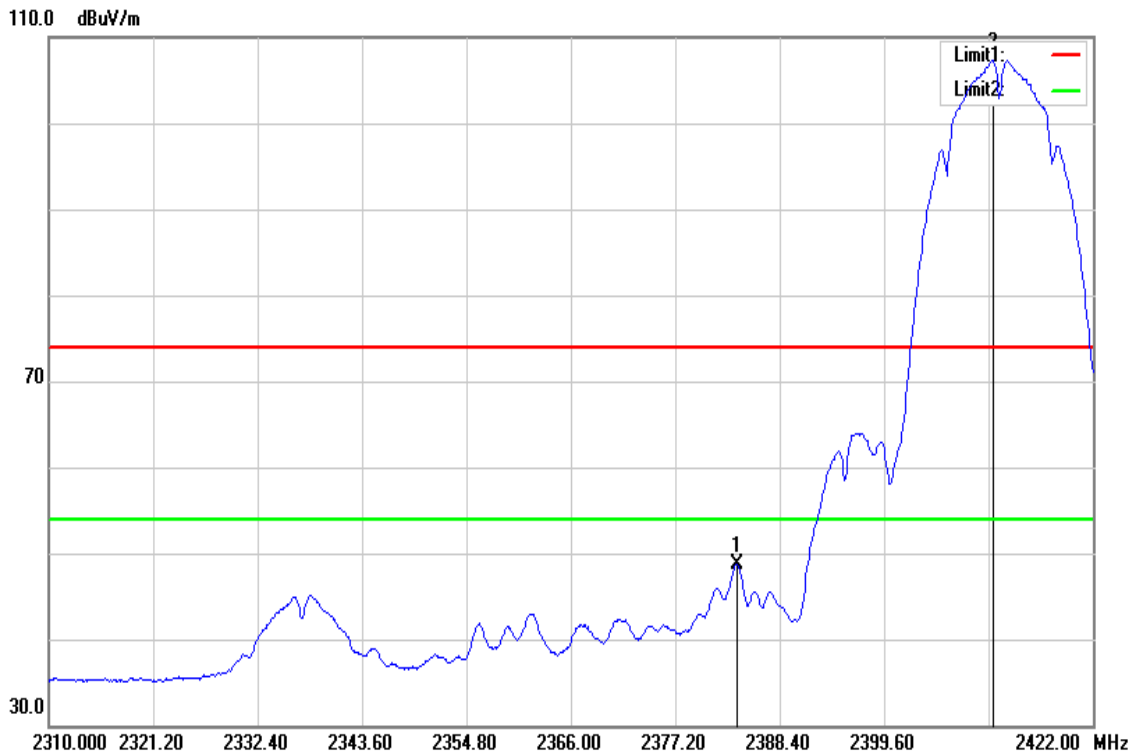

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2383.808	51.78	-3.12	48.66	54.00	-5.34	AVG
2411.248	110.46	-3.08	107.38	-	-	AVG

Report No.: T181227D06-RP


Test Mode	IEEE 802.11b High CH	Temp/Hum	23.1(°C)/ 59%RH
Test Item	Band Edge	Test Date	January 14, 2019
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

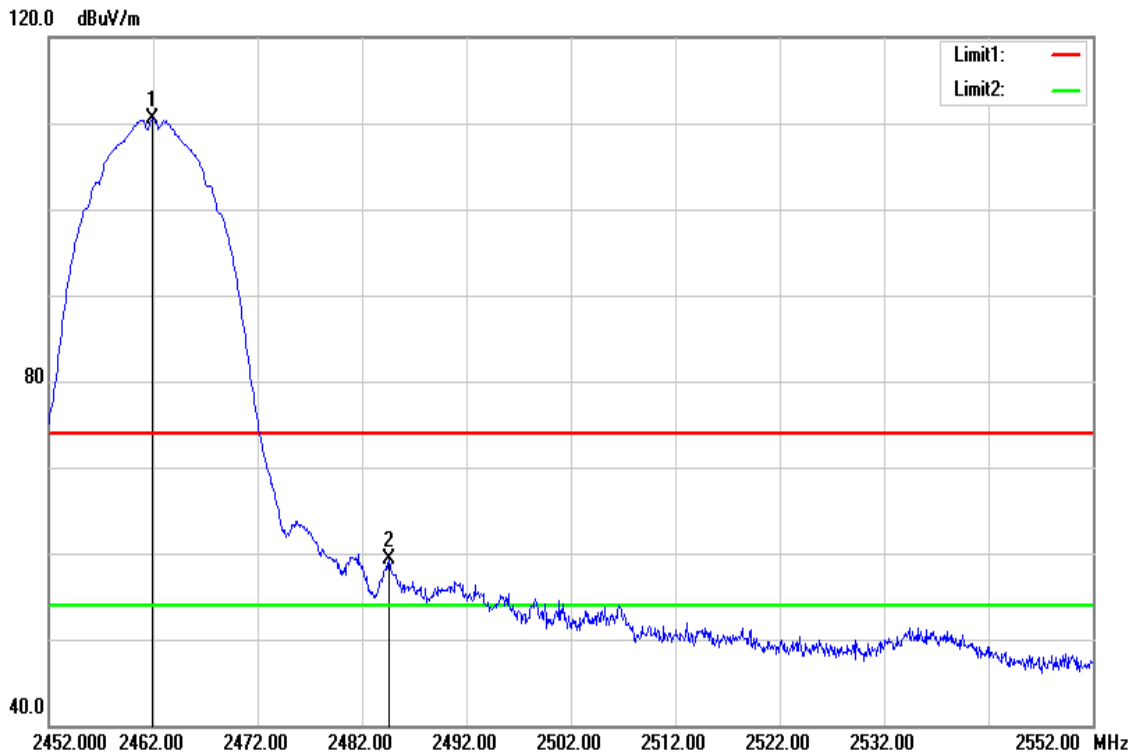

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2461.900	113.28	-2.82	110.46	-	-	peak
2484.600	62.04	-2.70	59.34	74.00	-14.66	peak

Report No.: T181227D06-RP

Test Mode	IEEE 802.11b High CH	Temperature:	23.1(°C)/ 59%RH
Test Item	Band Edge	Test Date	January 14, 2019
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average		

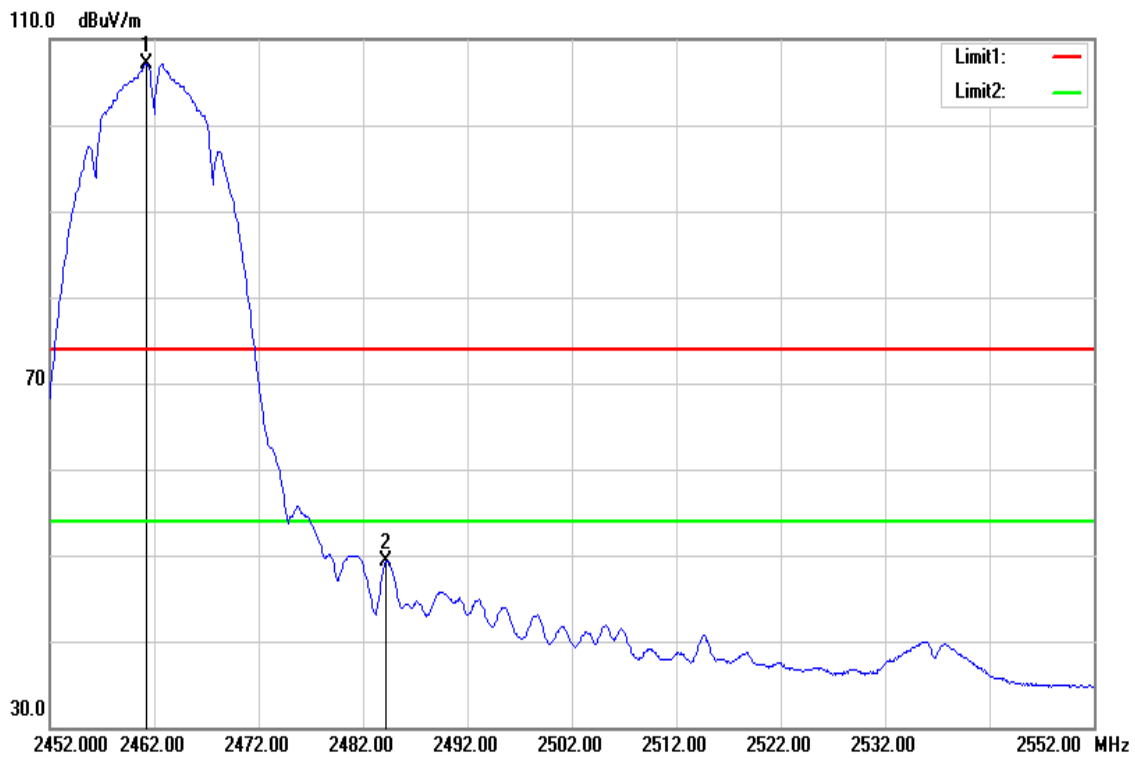


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2461.300	109.95	-2.84	107.11	-	-	AVG
2484.200	52.11	-2.71	49.40	54.00	-4.60	AVG



Report No.: T181227D06-RP


Test Mode	IEEE 802.11g Low CH	Temp/Hum	23.1(°C)/ 59%RH
Test Item	Band Edge	Test Date	January 14, 2019
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

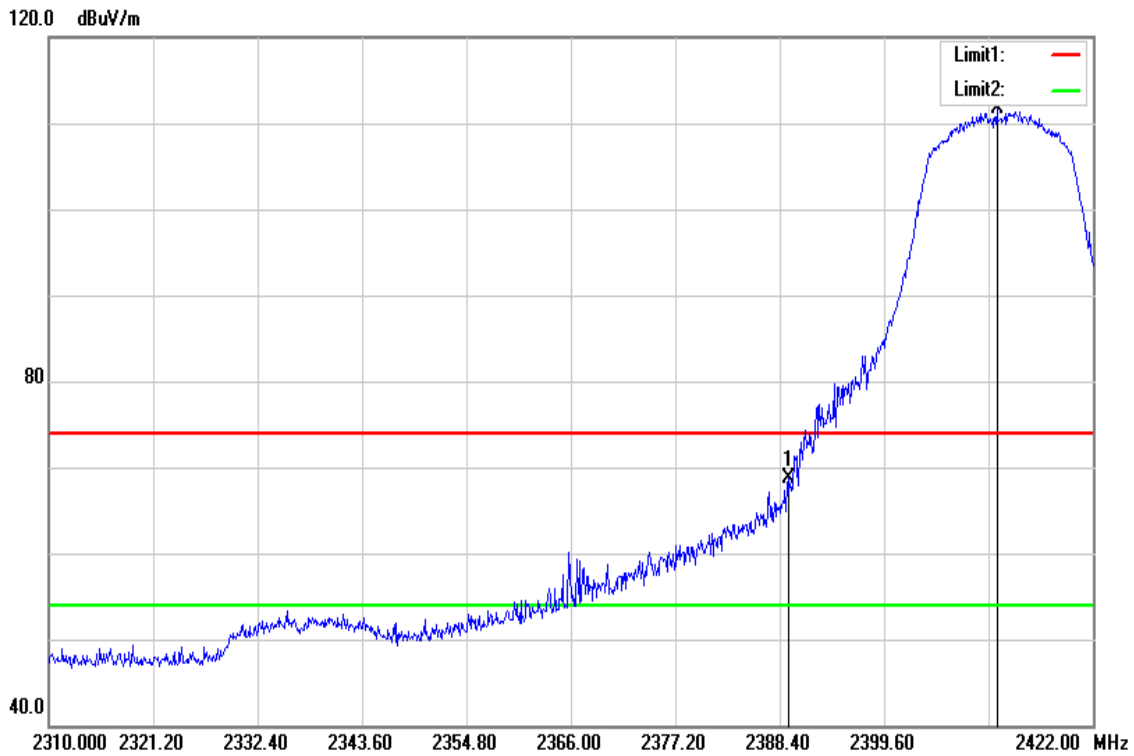

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2389.296	71.85	-3.13	68.72	74.00	-5.28	peak
2411.696	114.80	-3.08	111.72	-	-	peak

Report No.: T181227D06-RP


Test Mode	IEEE 802.11g Low CH	Temperature:	23.1(°C)/ 59%RH
Test Item	Band Edge	Test Date	January 14, 2019
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average		

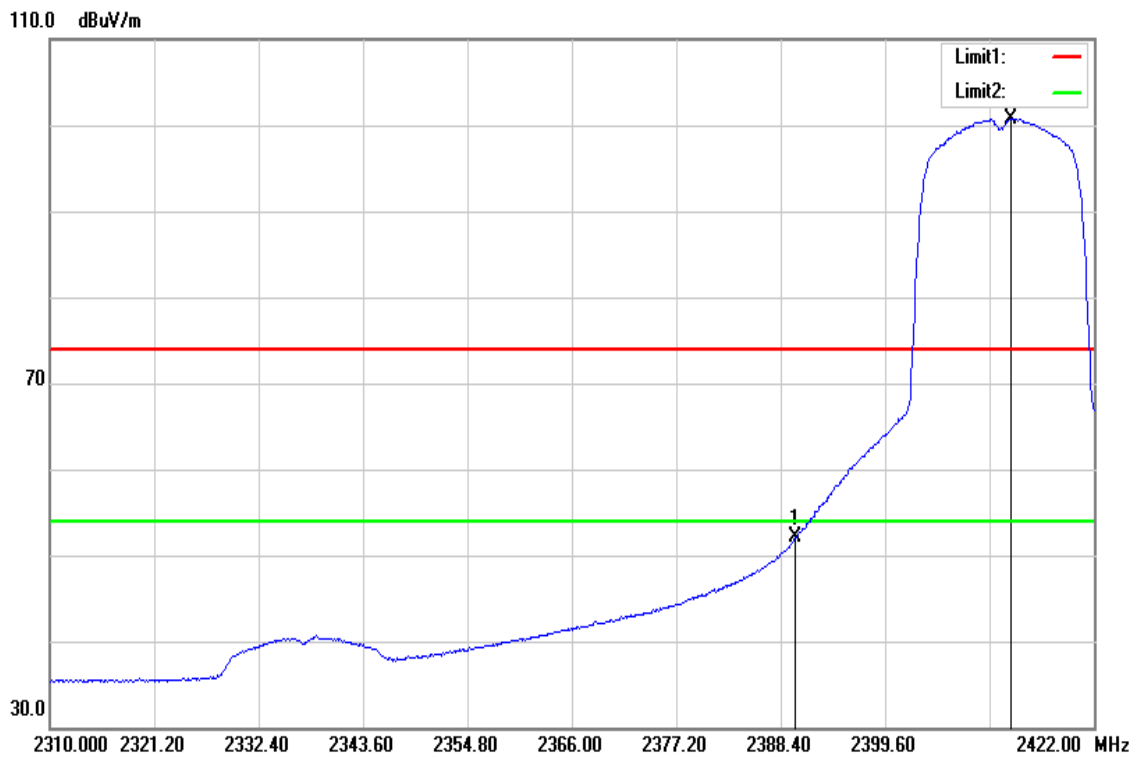

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2390.000	55.19	-3.13	52.06	54.00	-1.94	AVG
2413.152	103.80	-3.07	100.73	-	-	AVG

Report No.: T181227D06-RP


Test Mode	IEEE 802.11g High CH	Temp/Hum	23.1(°C)/ 59%RH
Test Item	Band Edge	Test Date	January 14, 2019
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

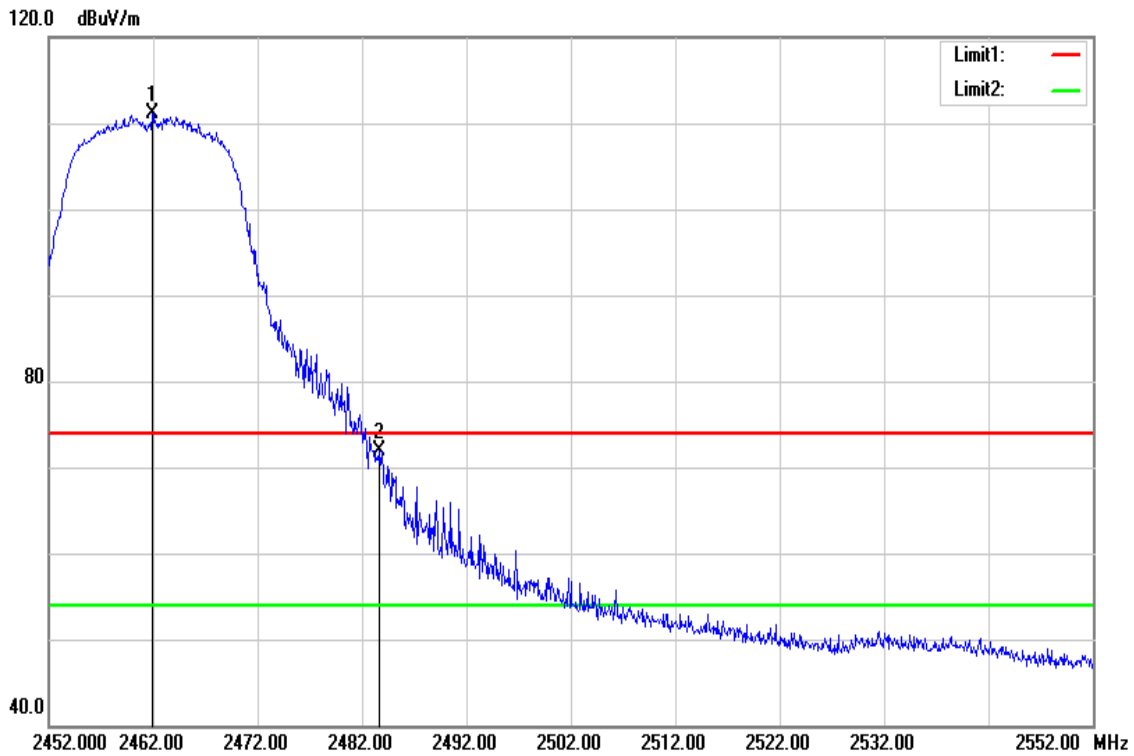

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2461.900	113.95	-2.82	111.13	-	-	peak
2483.700	74.65	-2.71	71.94	74.00	-2.06	peak

Report No.: T181227D06-RP


Test Mode	IEEE 802.11g High CH	Temperature:	23.1(°C)/ 59%RH
Test Item	Band Edge	Test Date	January 14, 2019
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average		

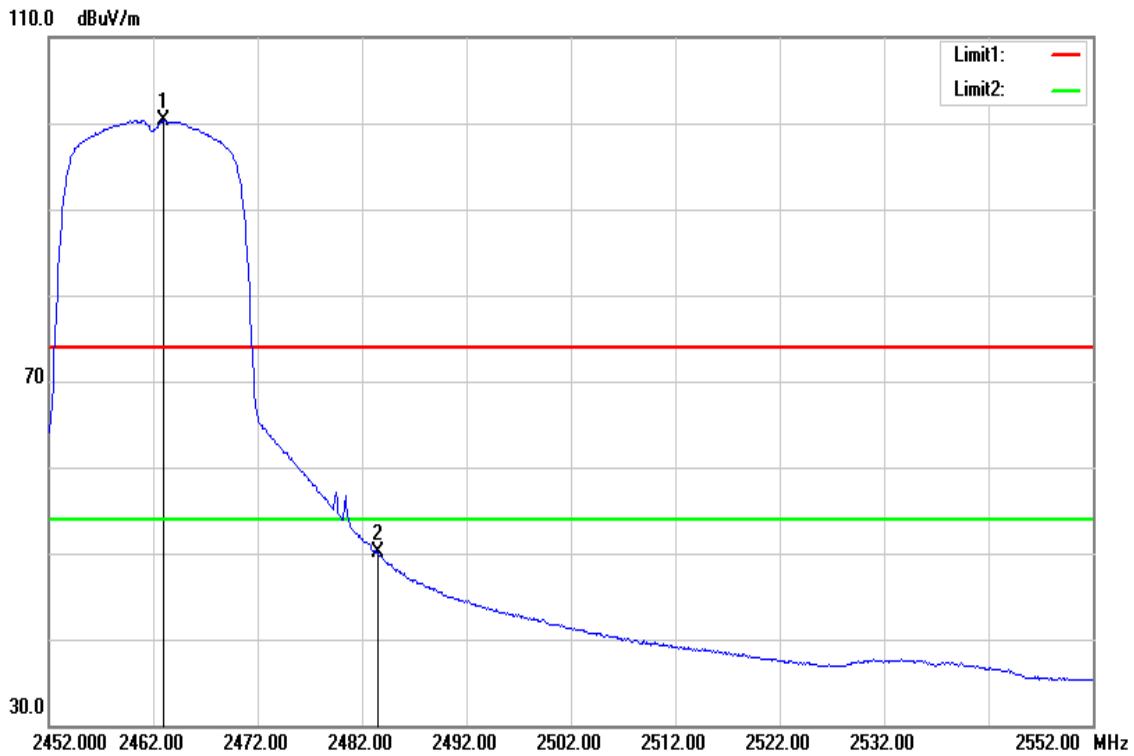

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2463.000	103.18	-2.82	100.36	-	-	AVG
2483.500	52.75	-2.71	50.04	54.00	-3.96	AVG

Report No.: T181227D06-RP


Test Mode	IEEE 802.11n HT20 Low CH	Temp/Hum	23.1(°C)/ 59%RH
Test Item	Band Edge	Test Date	January 14, 2019
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

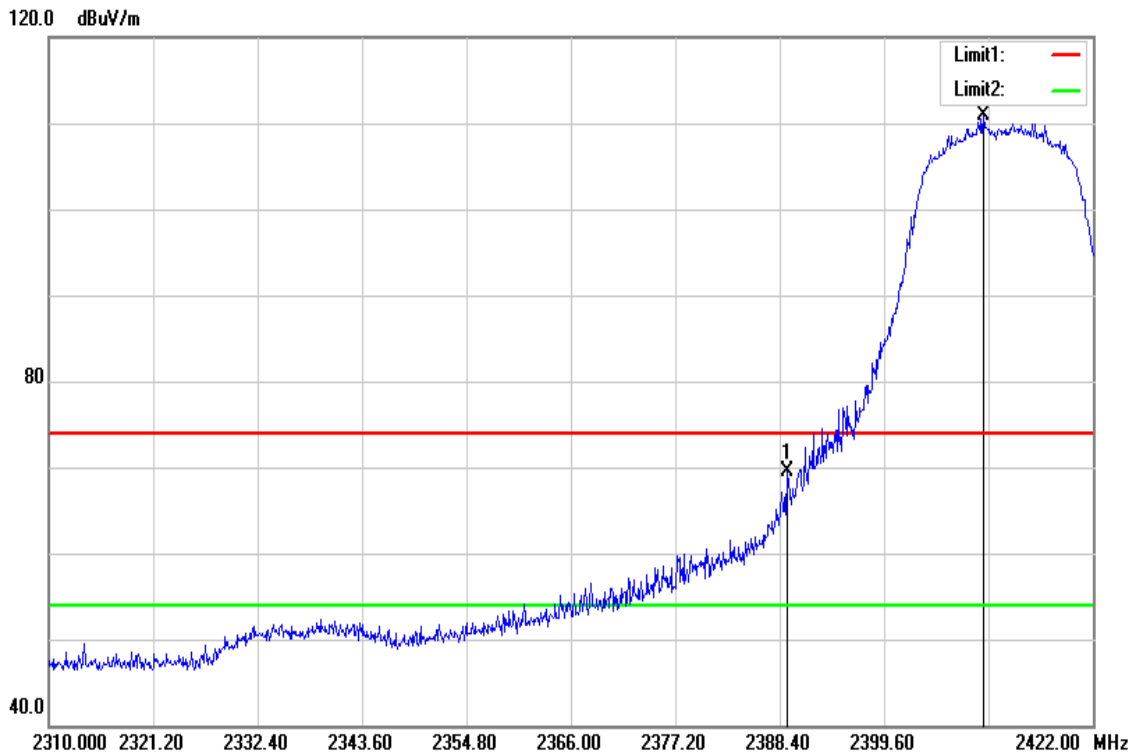

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2389.184	72.68	-3.13	69.55	74.00	-4.45	peak
2410.240	113.97	-3.08	110.89	-	-	peak

Report No.: T181227D06-RP


Test Mode	IEEE 802.11n HT20 Low CH	Temperature:	23.1(°C)/ 59%RH
Test Item	Band Edge	Test Date	January 14, 2019
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average		

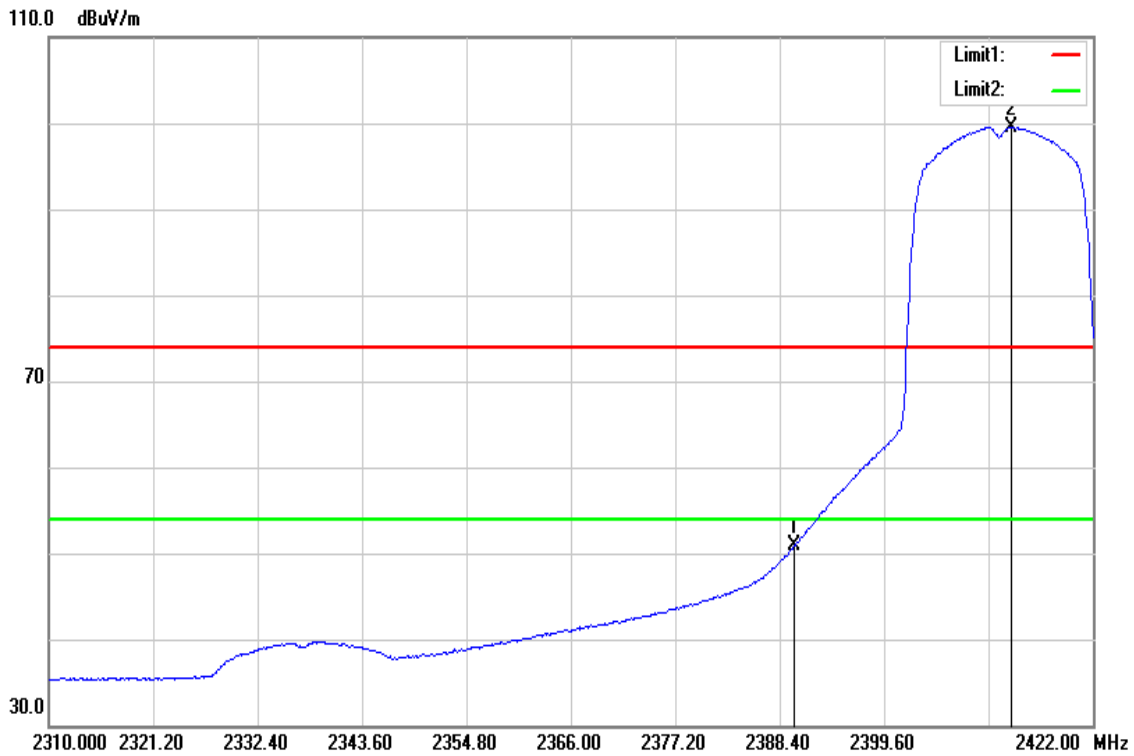

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2390.000	54.12	-3.13	50.99	54.00	-3.01	AVG
2413.264	102.60	-3.06	99.54	-	-	AVG

Report No.: T181227D06-RP


Test Mode	IEEE 802.11n HT20 High CH	Temp/Hum	23.1(°C)/ 59%RH
Test Item	Band Edge	Test Date	January 14, 2019
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

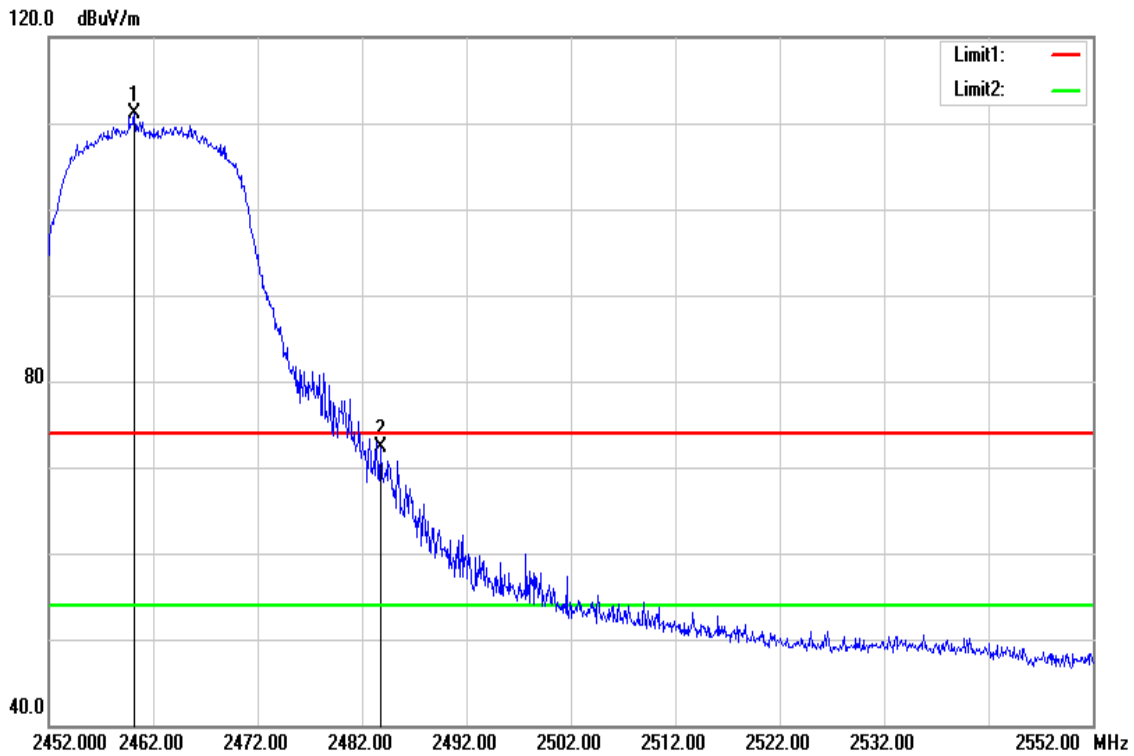

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2460.200	113.88	-2.84	111.04	-	-	peak
2483.800	74.93	-2.71	72.22	74.00	-1.78	peak

Report No.: T181227D06-RP

Test Mode	IEEE 802.11n HT20 High CH	Temperature:	23.1(°C)/ 59%RH
Test Item	Band Edge	Test Date	January 14, 2019
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average		

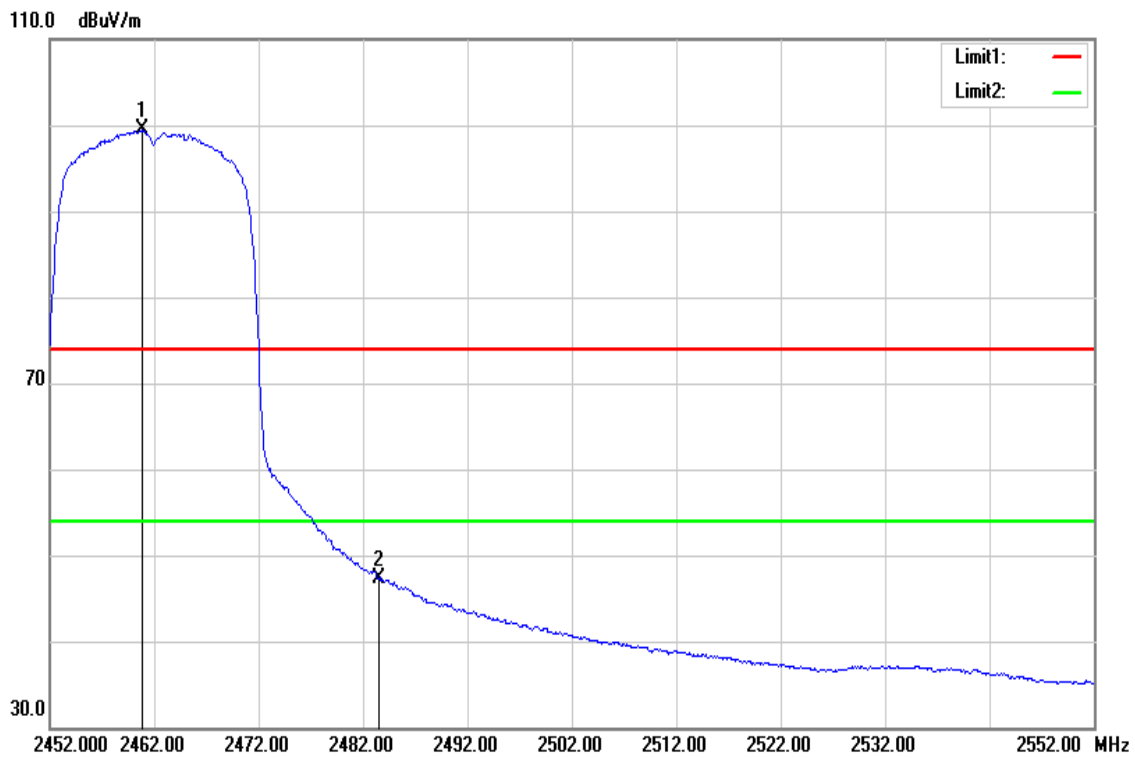


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2460.800	102.26	-2.84	99.42	-	-	AVG
2483.500	50.06	-2.71	47.35	54.00	-6.65	AVG



Report No.: T181227D06-RP

**Below 1G Test Data**


Test Mode	Mode 1	Temp/Hum	23.1(°C)/ 59%RH
Test Item	30MHz-1GHz	Test Date	January 14, 2019
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

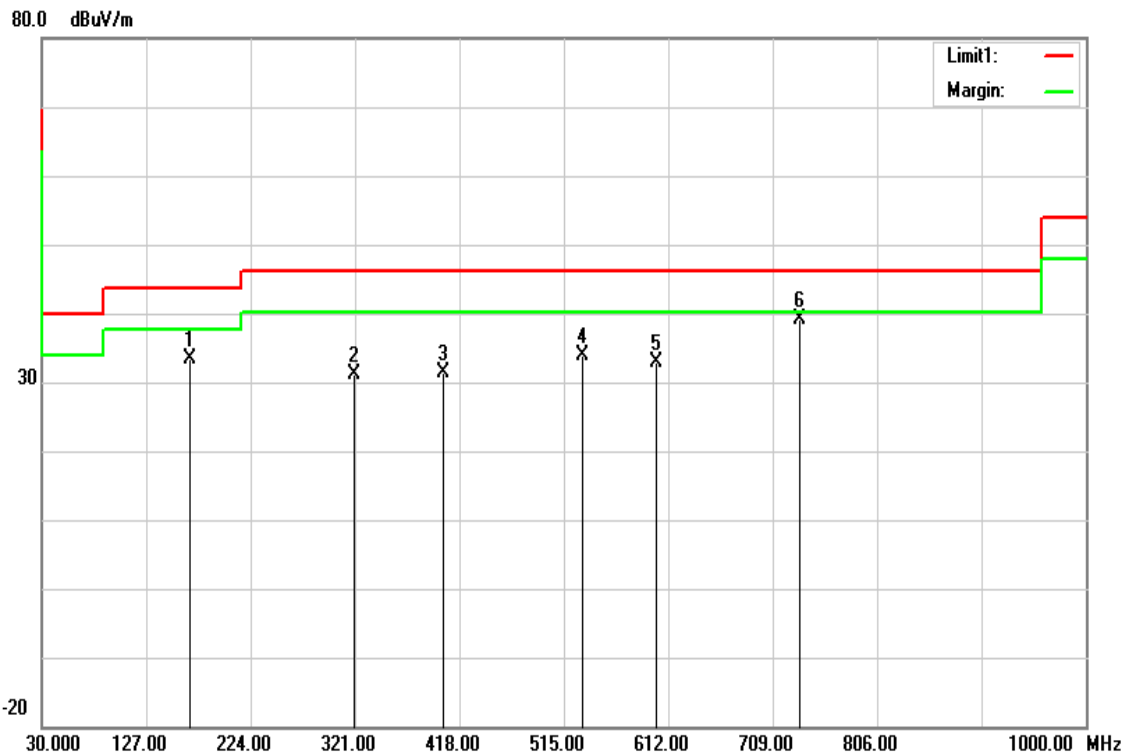

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
167.7400	43.32	-9.90	33.42	43.52	-10.10	peak
320.0300	38.01	-6.90	31.11	46.02	-14.91	peak
402.4800	36.15	-4.70	31.45	46.02	-14.57	peak
532.4600	35.69	-1.72	33.97	46.02	-12.05	peak
600.3600	33.62	-0.79	32.83	46.02	-13.19	peak
734.2200	37.20	1.86	39.06	46.02	-6.96	peak

Report No.: T181227D06-RP

Test Mode	Mode 1	Temp/Hum	23.1(°C)/ 59%RH
Test Item	30MHz-1GHz	Test Date	January 14, 2019
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Quasi-Peak		

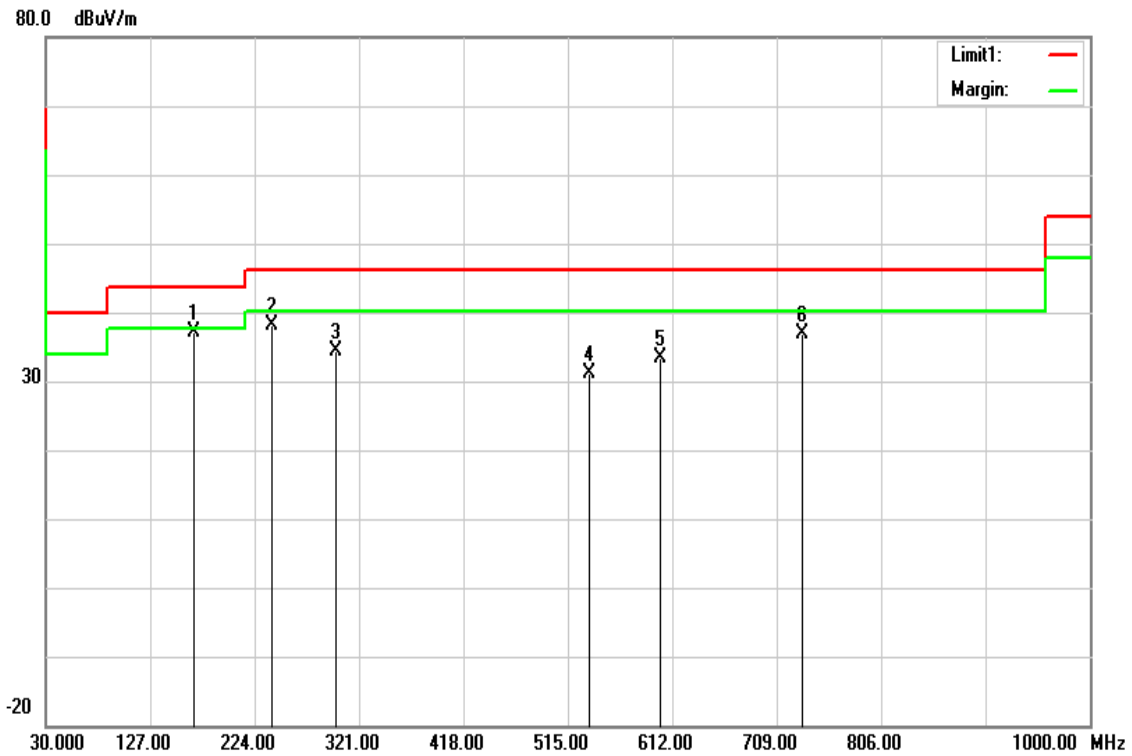


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
167.7400	47.15	-9.90	37.25	43.52	-6.27	QP
240.4900	47.74	-9.64	38.10	46.02	-7.92	peak
299.6600	41.81	-7.51	34.30	46.02	-11.72	peak
534.4000	32.70	-1.67	31.03	46.02	-14.99	peak
600.3600	34.21	-0.79	33.42	46.02	-12.60	peak
732.2800	35.10	1.85	36.95	46.02	-9.07	peak

Report No.: T181227D06-RP

**Above 1G Test Data**

Test Mode	IEEE 802.11b Low CH	Temp/Hum	23.1(°C)/ 59%RH
Test Item	Harmonic	Test Date	January 15, 2019
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

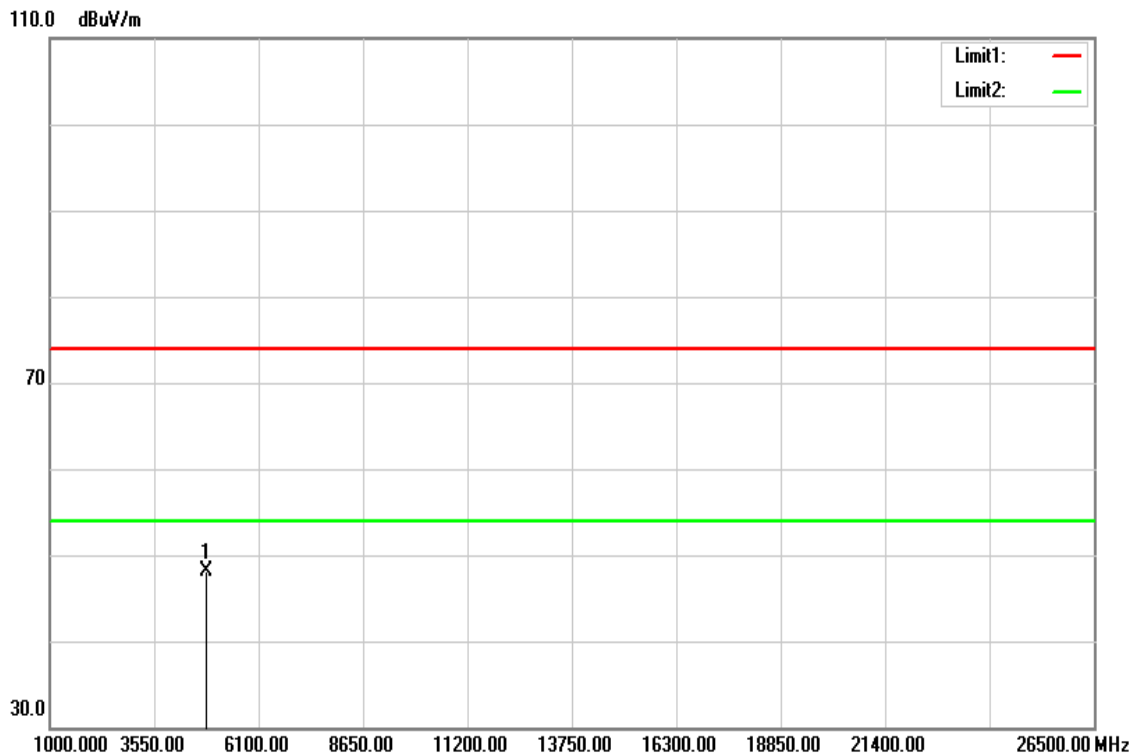


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4827.000	44.82	3.25	48.07	74.00	-25.93	peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T181227D06-RP

Test Mode	IEEE 802.11b Low CH	Temp/Hum	23.1(°C)/ 59%RH
Test Item	Harmonic	Test Date	January 15, 2019
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak		

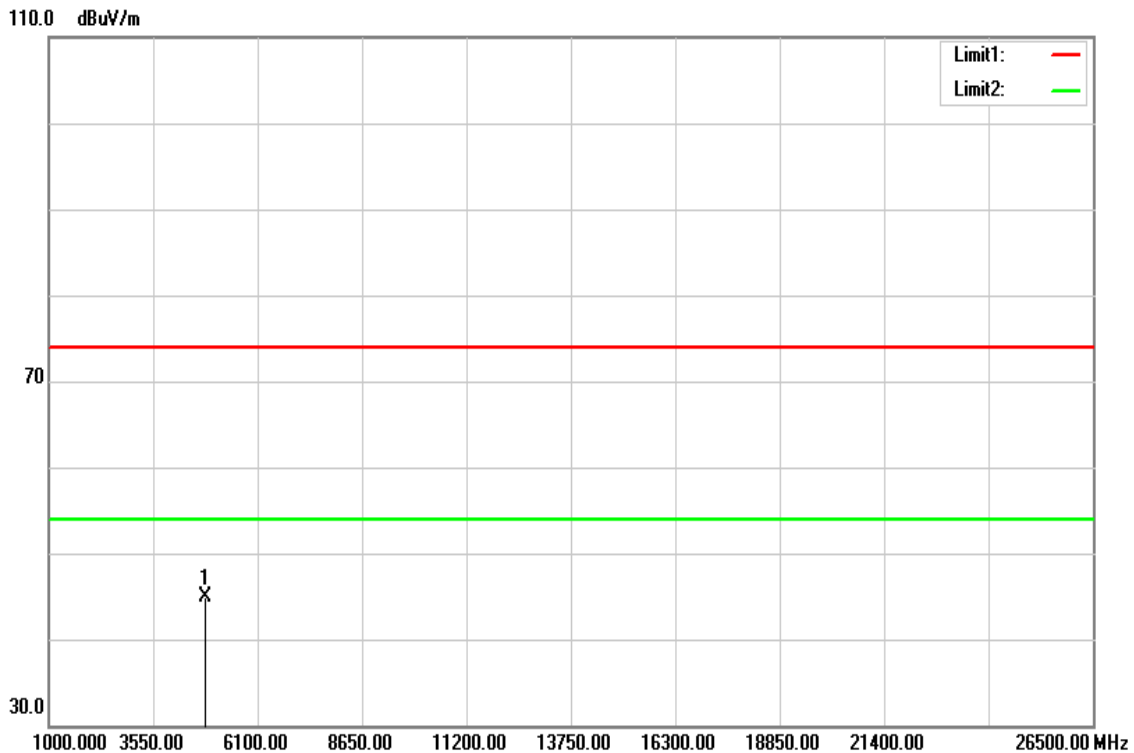


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (BuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4827.000	41.59	3.25	44.84	74.00	-29.16	peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T181227D06-RP

Test Mode	IEEE 802.11b Mid CH	Temp/Hum	23.1(°C)/ 59%RH
Test Item	Harmonic	Test Date	January 15, 2019
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

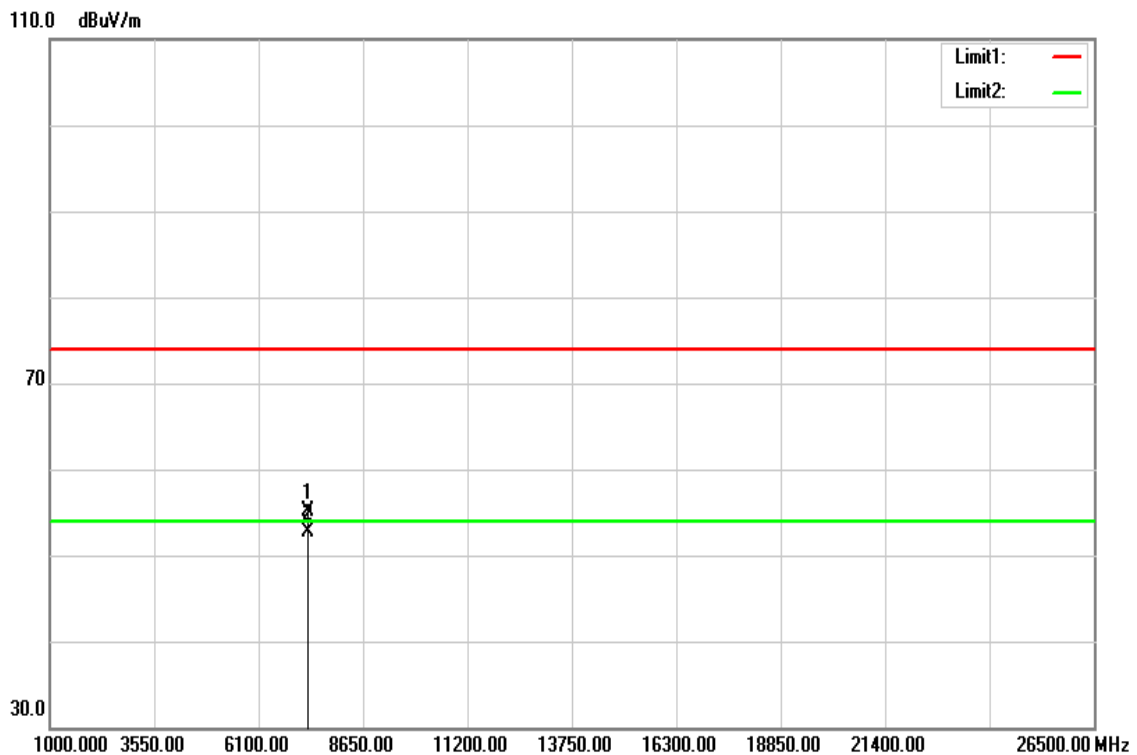


Frequency (MHz)	Reading (dBu )	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
7312.000	44.54	10.48	55.02	74.00	-18.98	peak
7312.000	42.25	10.48	52.73	54.00	-1.27	AVG

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T181227D06-RP

Test Mode	IEEE 802.11b Mid CH	Temp/Hum	23.1(°C)/ 59%RH
Test Item	Harmonic	Test Date	January 15, 2019
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak		

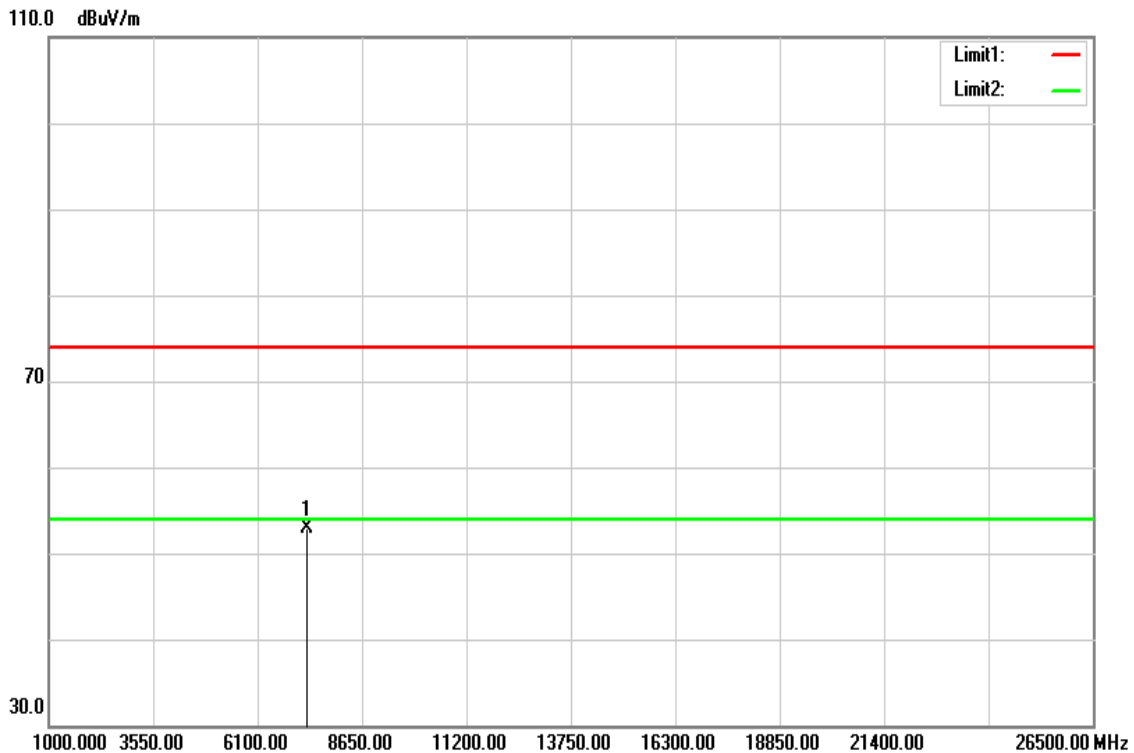


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
7312.000	42.33	10.48	52.81	74.00	-21.19	peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T181227D06-RP

Test Mode	IEEE 802.11b High CH	Temp/Hum	23.1(°C)/ 59%RH
Test Item	Harmonic	Test Date	January 15, 2019
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

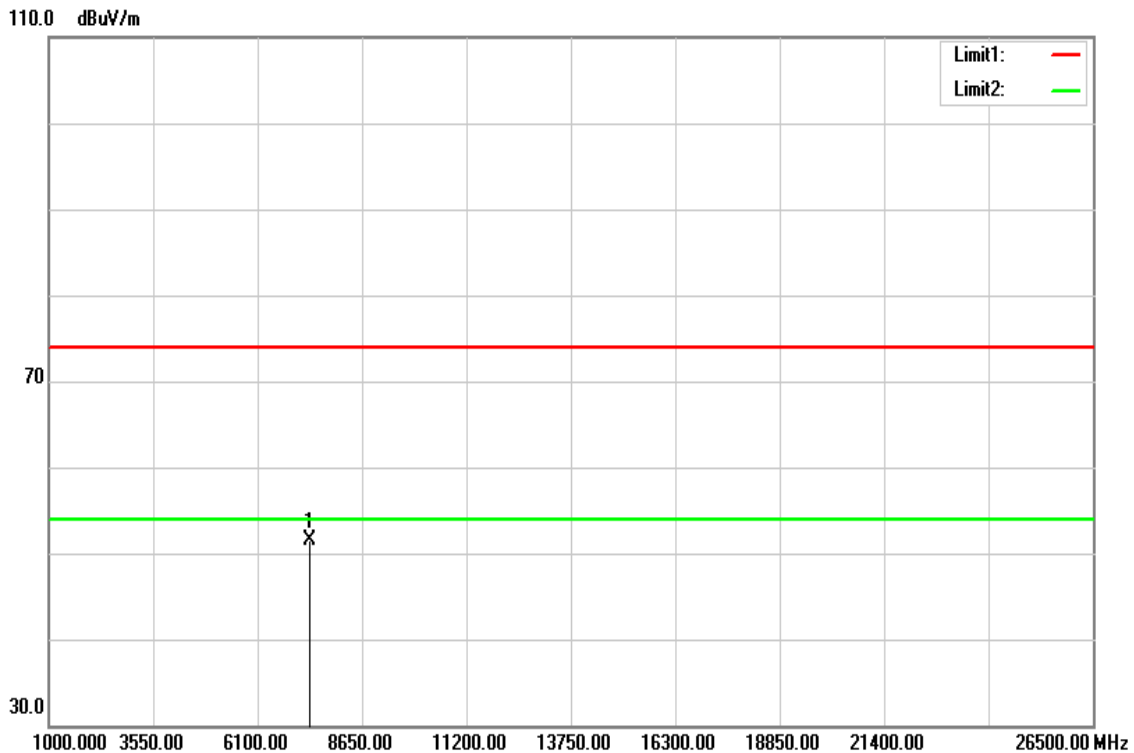


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
7389.000	41.12	10.46	51.58	74.00	-22.42	peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T181227D06-RP

Test Mode	IEEE 802.11b High CH	Temp/Hum	23.1(°C)/ 59%RH
Test Item	Harmonic	Test Date	January 15, 2019
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak		

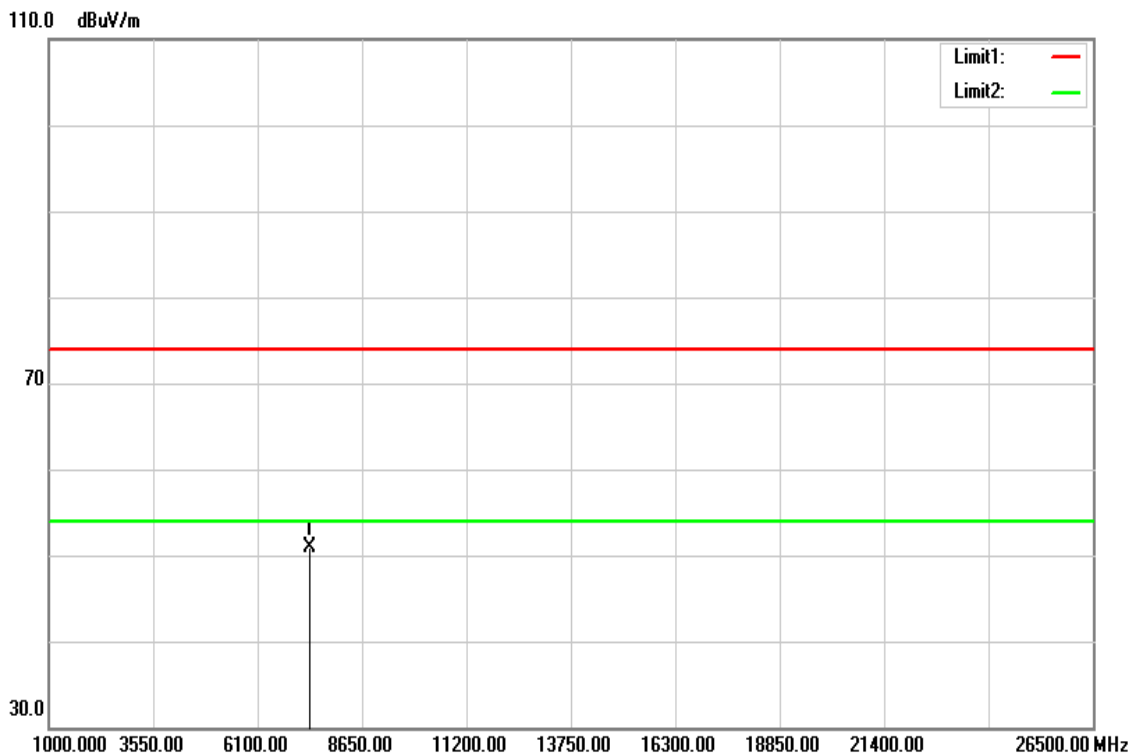

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
7382.000	40.41	10.45	50.86	74.00	-23.14	peak


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit



Report No.: T181227D06-RP

Test Mode	IEEE 802.11g Low CH	Temp/Hum	23.1(°C)/ 59%RH
Test Item	Harmonic	Test Date	January 15, 2019
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

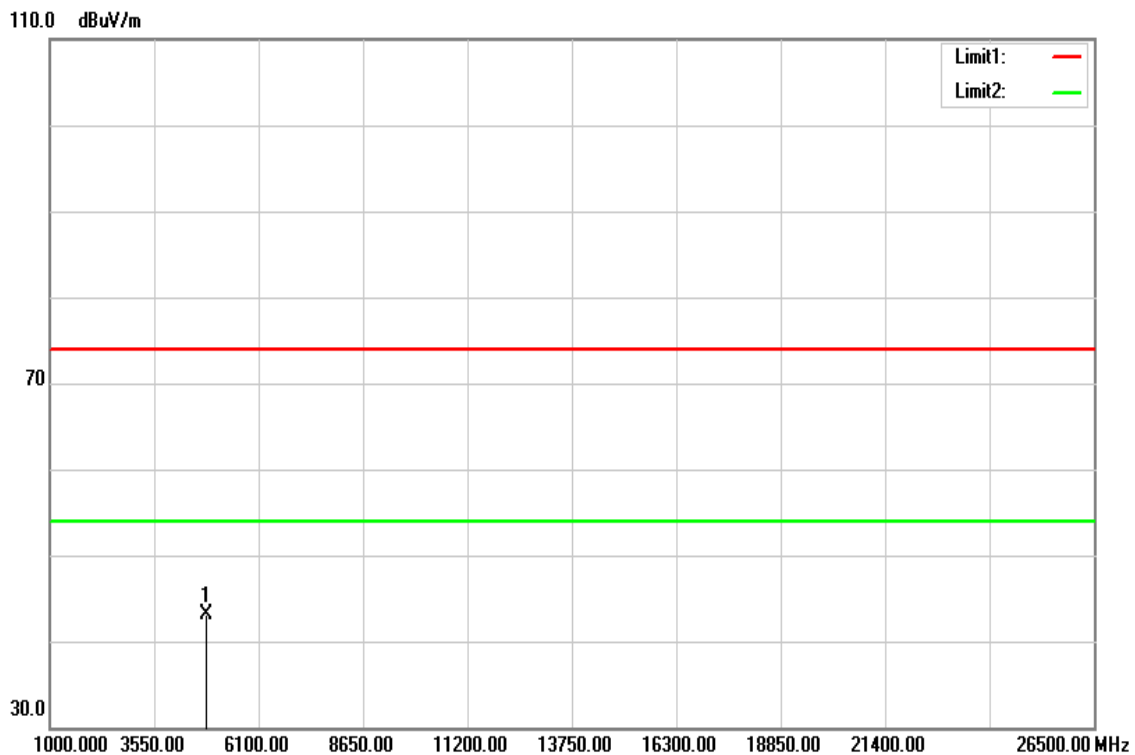


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4824.000	39.85	3.23	43.08	74.00	-30.92	peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T181227D06-RP

Test Mode	IEEE 802.11g Low CH	Temp/Hum	23.1(°C)/ 59%RH
Test Item	Harmonic	Test Date	January 15, 2019
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak		

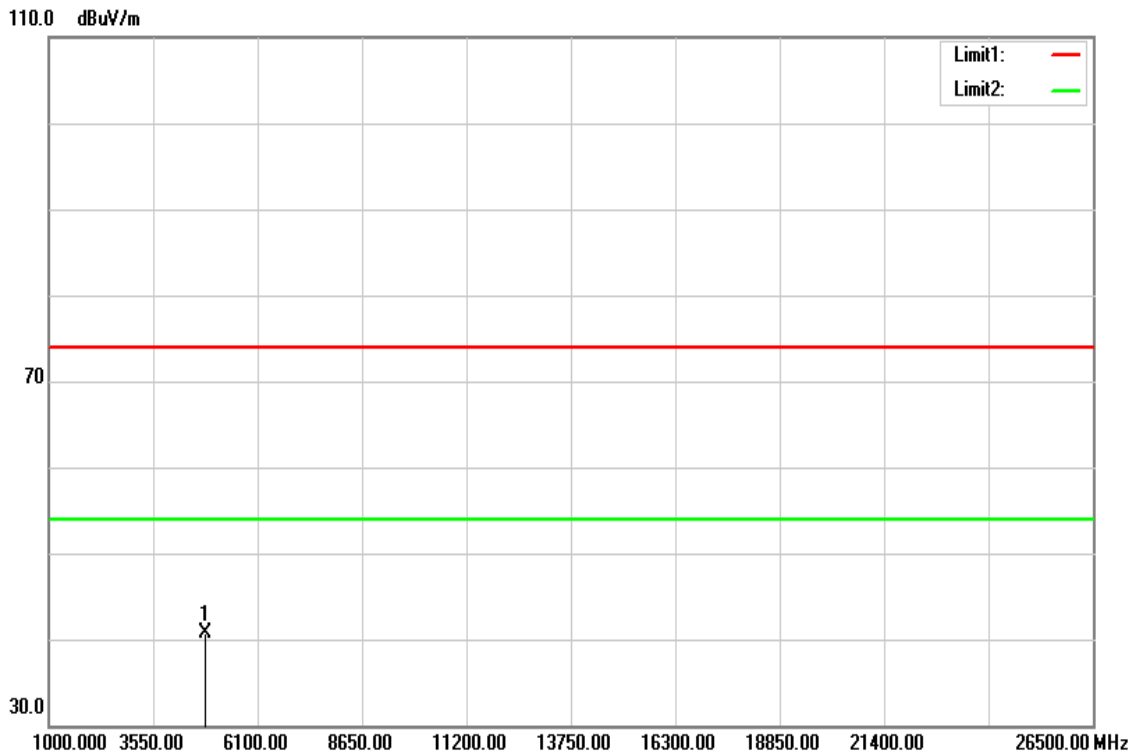


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (BuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4824.000	37.43	3.23	40.66	74.00	-33.34	peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T181227D06-RP

Test Mode	IEEE 802.11g Mid CH	Temp/Hum	23.1(°C)/ 59%RH
Test Item	Harmonic	Test Date	January 15, 2019
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

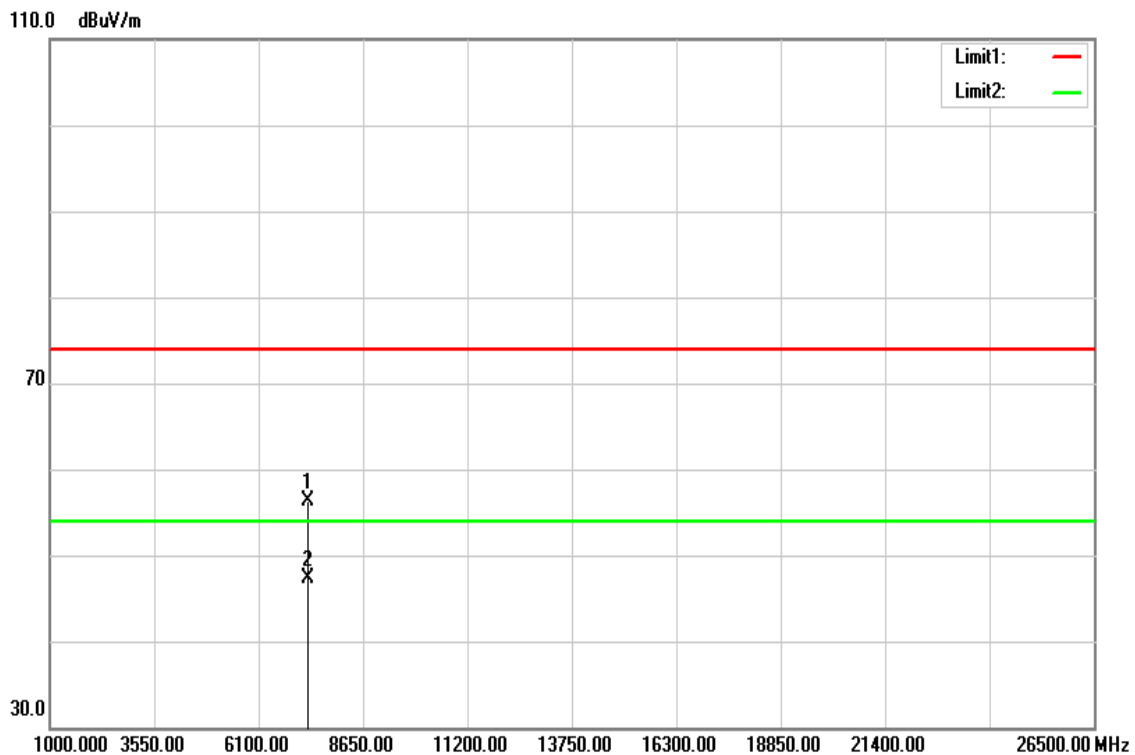


Frequency (MHz)	Reading (dBu )	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
7312.000	45.74	10.48	56.22	74.00	-17.78	peak
7312.000	36.88	10.48	47.36	54.00	-6.64	AVG

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T181227D06-RP

Test Mode	IEEE 802.11g Mid CH	Temp/Hum	23.1(°C)/ 59%RH
Test Item	Harmonic	Test Date	January 15, 2019
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

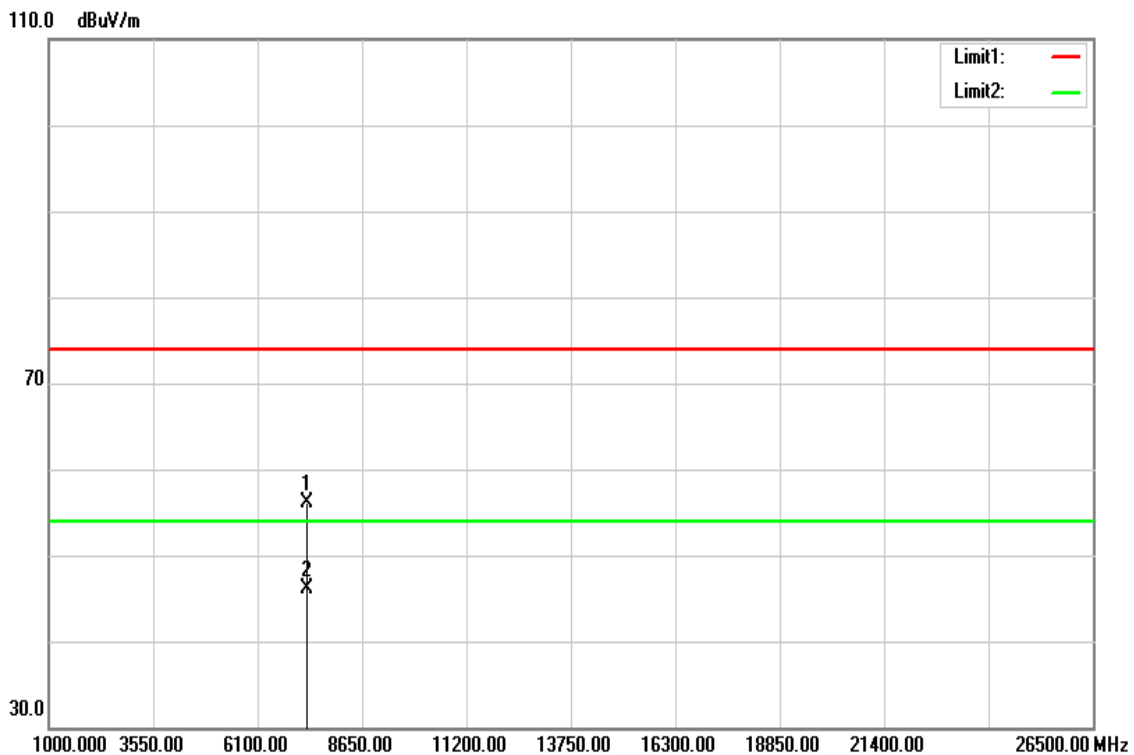


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
7312.000	45.53	10.48	56.01	74.00	-17.99	peak
7312.000	35.71	10.48	46.19	54.00	-7.81	AVG

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T181227D06-RP

Test Mode	IEEE 802.11g High CH	Temp/Hum	23.1(°C)/ 59%RH
Test Item	Harmonic	Test Date	January 15, 2019
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

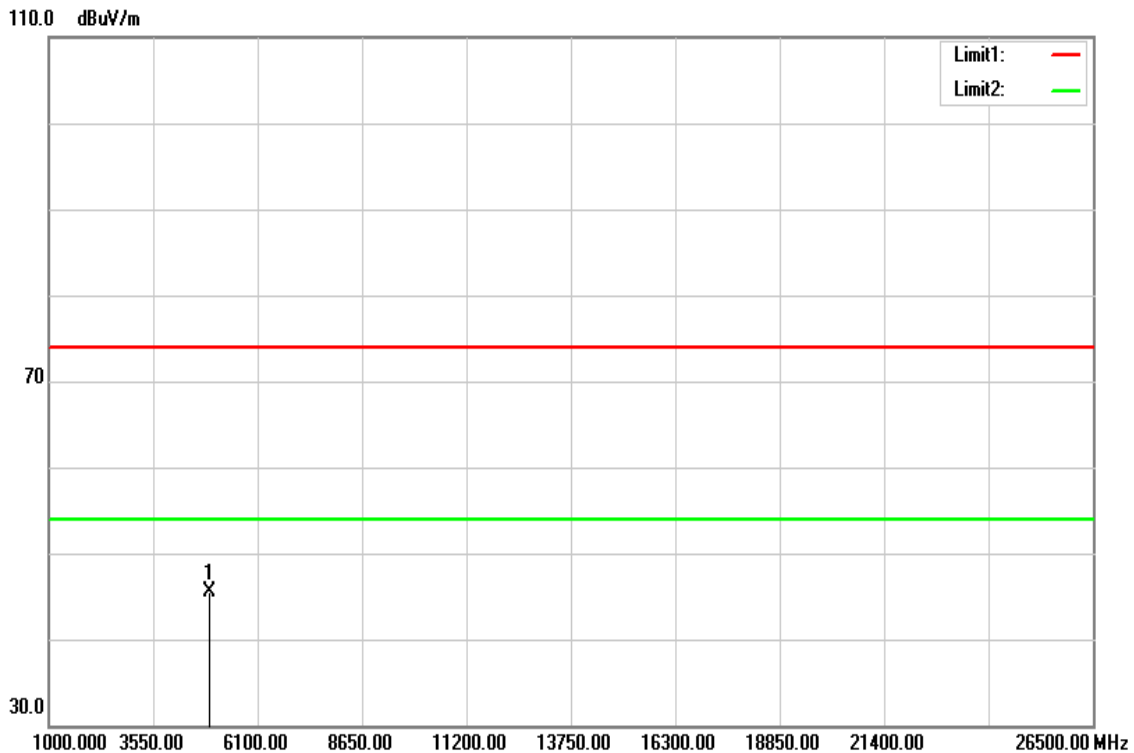


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4925.000	41.56	3.90	45.46	74.00	-28.54	peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T181227D06-RP

Test Mode	IEEE 802.11g High CH	Temp/Hum	23.1(°C)/ 59%RH
Test Item	Harmonic	Test Date	January 15, 2019
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak		

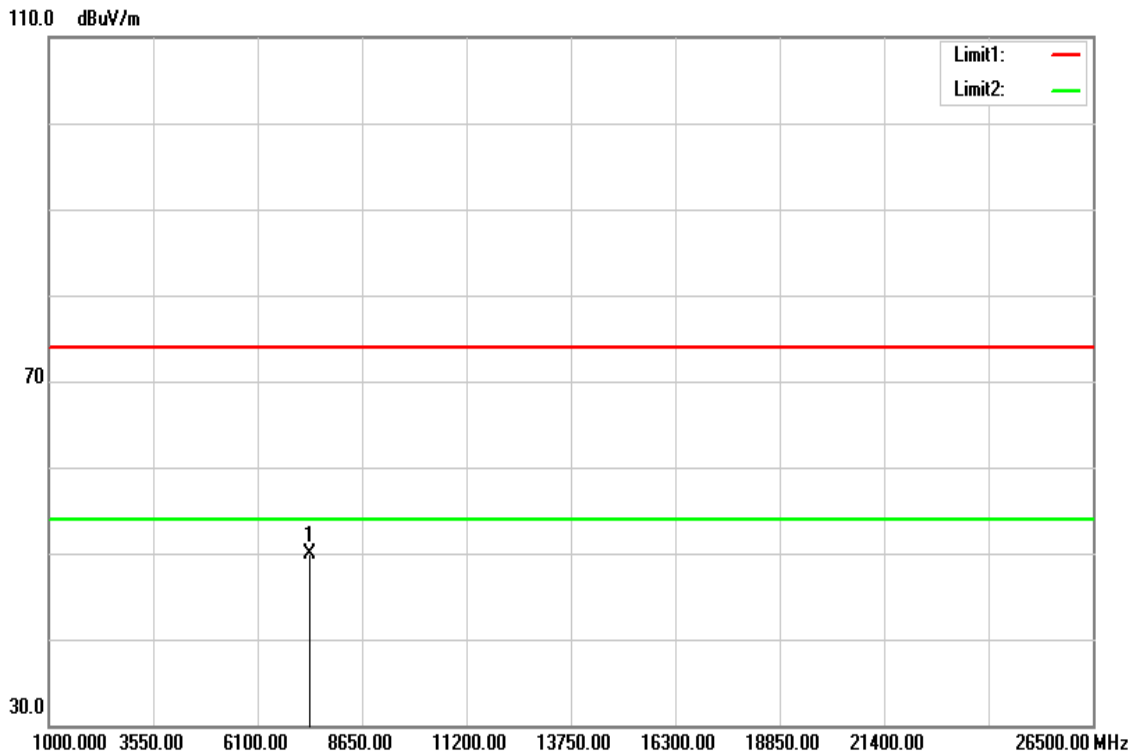


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
7382.000	39.51	10.45	49.96	74.00	-24.04	peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T181227D06-RP

Test Mode	IEEE 802.11n HT20 Low CH	Temp/Hum	23.1(°C)/ 59%RH
Test Item	Harmonic	Test Date	January 15, 2019
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

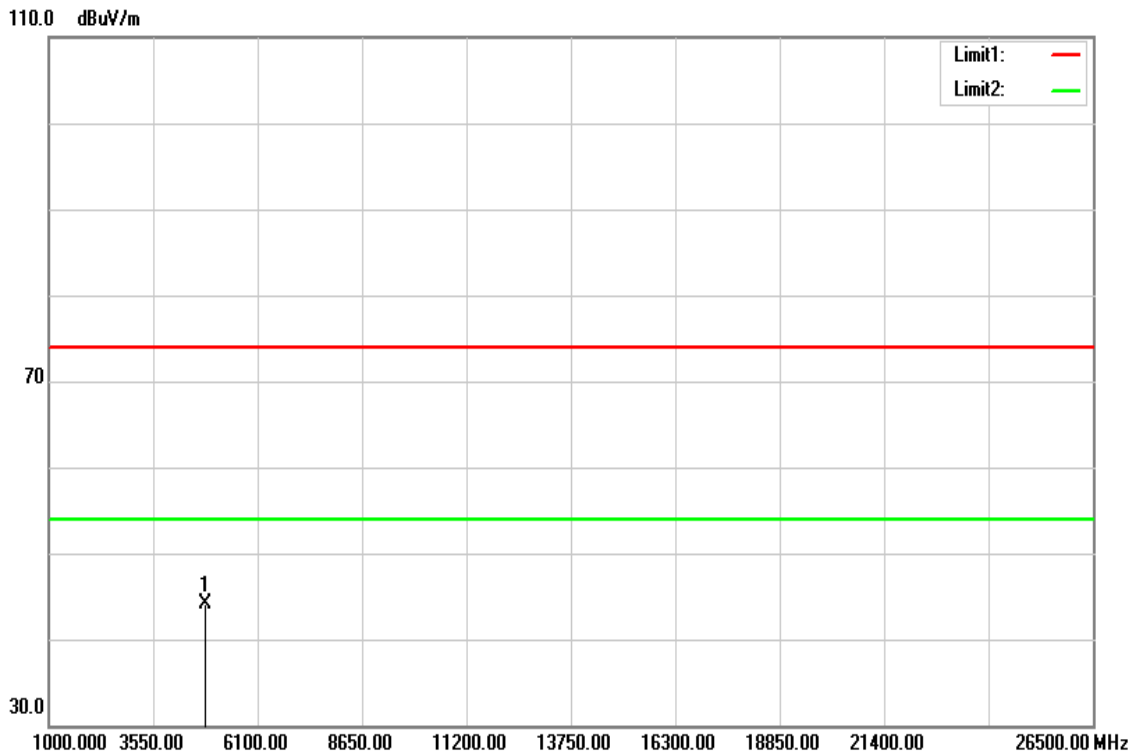


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4827.000	40.93	3.25	44.18	74.00	-29.82	peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T181227D06-RP

Test Mode	IEEE 802.11n HT20 Low CH	Temp/Hum	23.1(°C)/ 59%RH
Test Item	Harmonic	Test Date	January 15, 2019
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak		

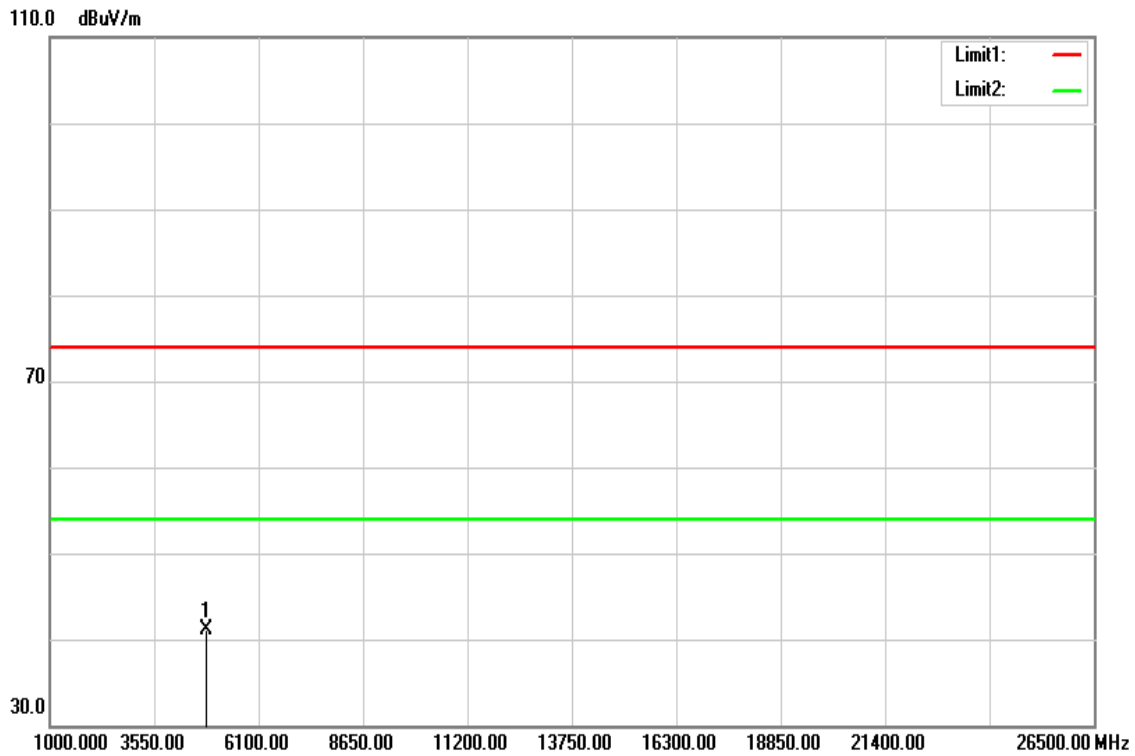

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4824.000	37.86	3.23	41.09	74.00	-32.91	peak


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit



Report No.: T181227D06-RP

Test Mode	IEEE 802.11n HT20 Mid CH	Temp/Hum	23.1(°C)/ 59%RH
Test Item	Harmonic	Test Date	January 15, 2019
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

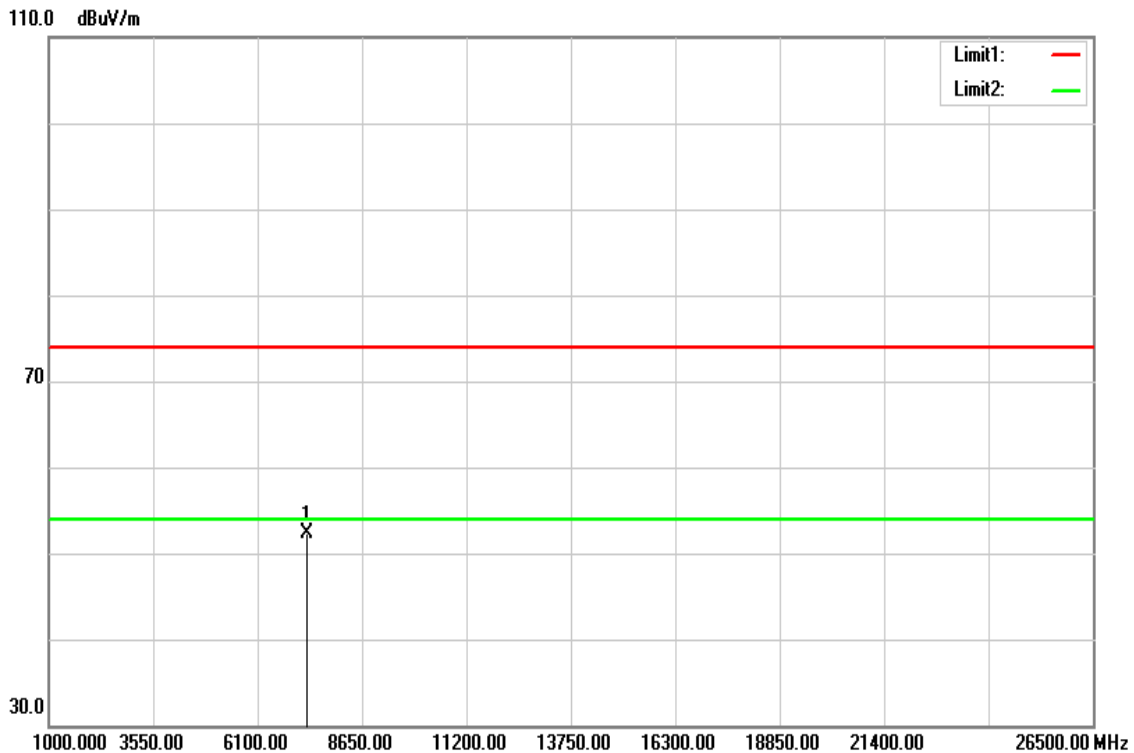


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
7305.000	41.77	10.49	52.26	74.00	-21.74	peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T181227D06-RP

Test Mode	IEEE 802.11n HT20 Mid CH	Temp/Hum	23.1(°C)/ 59%RH
Test Item	Harmonic	Test Date	January 15, 2019
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak		

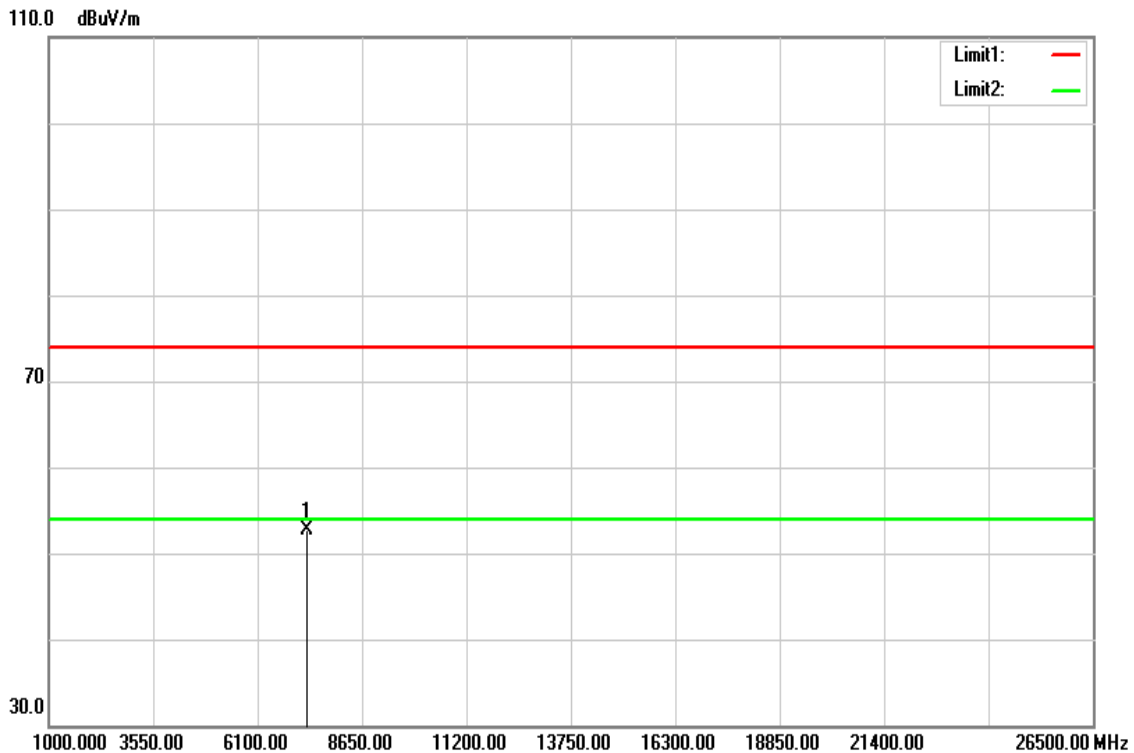


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
7312.000	42.21	10.48	52.69	74.00	-21.31	peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T181227D06-RP

Test Mode	IEEE 802.11n HT20 High CH	Temp/Hum	23.1(°C)/ 59%RH
Test Item	Harmonic	Test Date	January 15, 2019
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

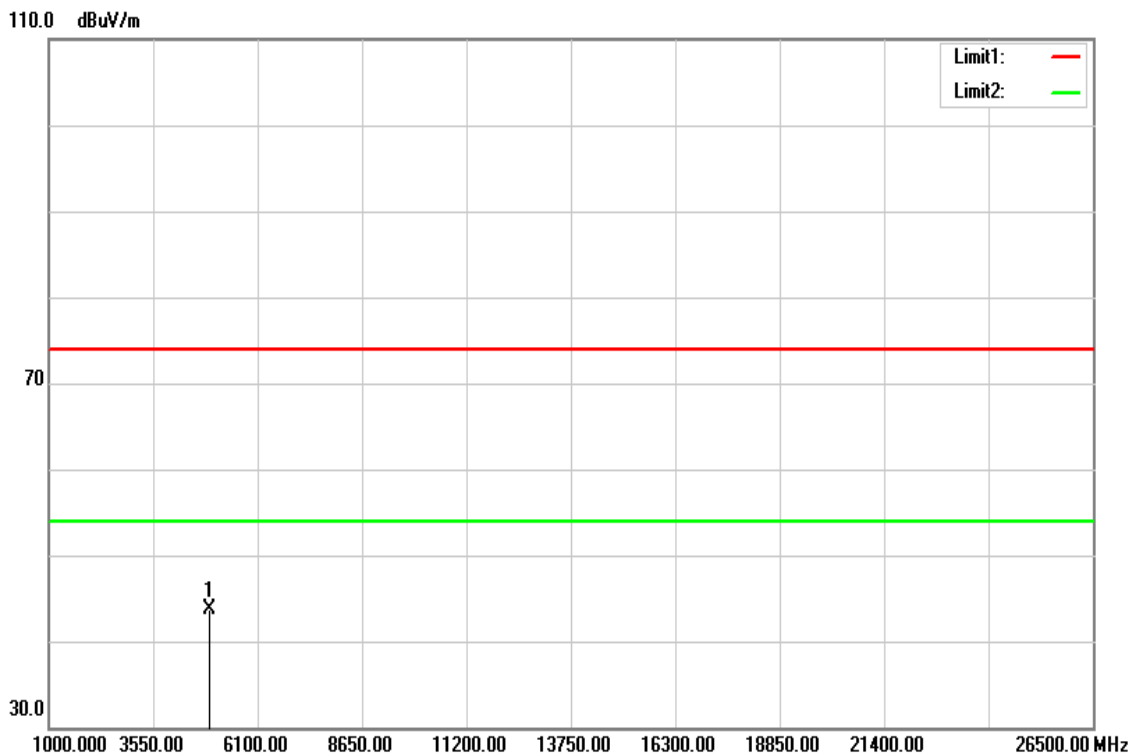


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4932.000	39.67	3.95	43.62	74.00	-30.38	peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T181227D06-RP

Test Mode	IEEE 802.11n HT20 High CH	Temp/Hum	23.1(°C)/ 59%RH
Test Item	Harmonic	Test Date	January 15, 2019
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak		

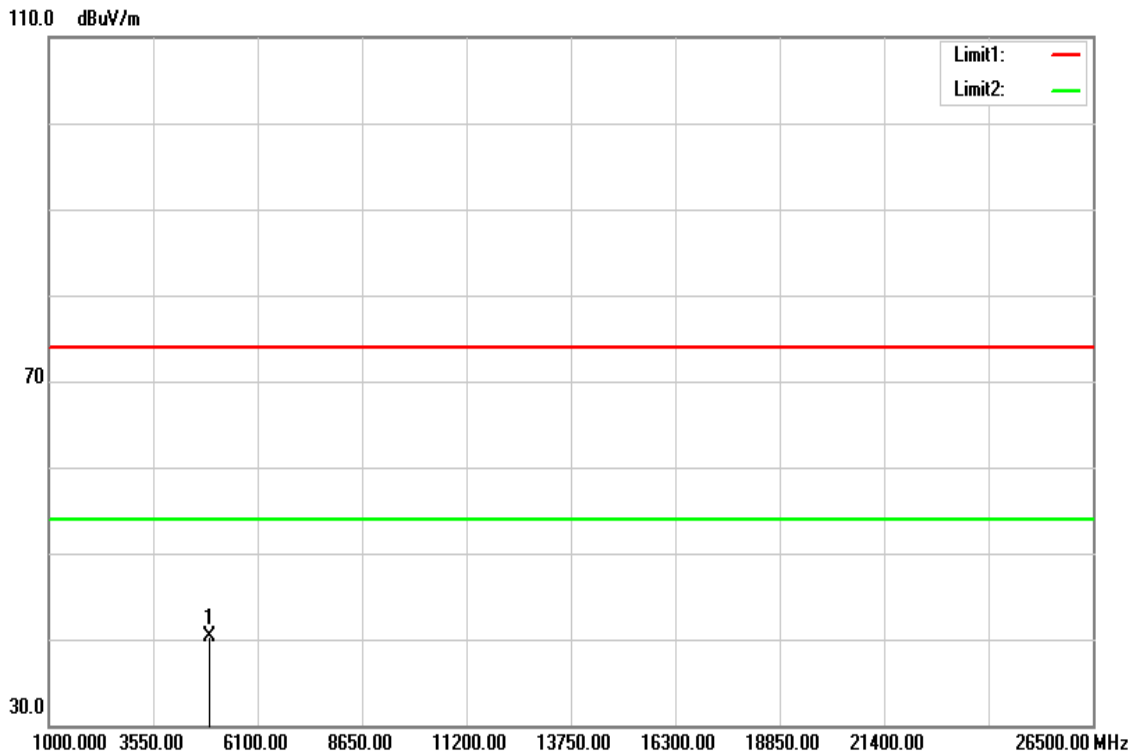

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4924.000	36.32	3.89	40.21	74.00	-33.79	peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

**- End of Test Report -**