

# FCC TEST REPORT

according to

## FCC Rules and Regulations

### Part 15 Subpart C

Applicant	SerComm Corporation
Address	8F, No. 3-1, YuanQu St., NanKang, Taipei 115, Taiwan, R.O.C.
Equipment	3 in 1 AP
Model No.	IP802SM
FCC ID	P27IP802SM
Trade Name	SerComm

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of **Exclusive Certification Corp.** the test report shall not be reproduced except in full.

## Contents

1.	Report of Measurements and Examinations .....	4
1.1.	List of Measurements and Examinations .....	4
1.2.	Antenna Requirements .....	5
1.3.	Test of Conducted Emission .....	6
1.4.	Test of Radiated Emission .....	8
1.5.	6dB Bandwidth .....	9
1.6.	Maximum Peak Output Power .....	9
1.7.	Band Edges Measurement .....	10
1.8.	Power Spectral Density .....	10
1.9.	Restricted Bands of Operation .....	11
1.10.	Labeling Requirement .....	11
1.11.	RF Exposure .....	12
2.	Test Configuration of Equipment under Test .....	14
2.1.	Test Mode and Test Software .....	14
2.2.	Description of Test System .....	14
2.3.	Connection Diagram of Test System .....	15
2.4.	Feature of Equipment under Test .....	15
2.5.	History of this test report .....	15
3.	General Information of Test .....	16
4.	Test Result and Data .....	17
4.1.	Antenna Requirement .....	17
4.2.	Test Result of Conducted Emission .....	18
4.3.	RF Portion .....	33
4.4.	6dB Bandwidth Measurement Data .....	49
4.5.	Peak Output Power Measurement Data .....	53
4.6.	Band Edges Measurement Data .....	57
4.7.	Power Spectral Density Measurement Data .....	69
4.8.	Test Result of RF Exposure Evaluation .....	73
5.	List of Measuring Equipment Used .....	74
	Appendix A. Photographs of EUT .....	A1 ~ A7

# CERTIFICATE OF COMPLIANCE

according to

## FCC Rules and Regulations


### Part 15 Subpart C

Applicant	SerComm Corporation
Address	8F, No. 3-1, YuanQu St., NanKang, Taipei 115, Taiwan, R.O.C.
Equipment	3 in 1 AP
Model No.	IP802SM
FCC ID	P27IP802SM

#### I HEREBY CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4**. The equipment was ***passed*** the test performed according to **FCC Rules and Regulations Part 15 Subpart C (2002)**. The test was carried out on May. 24, 2004 at ***Exclusive Certification Corp.***

Signature



Anson Chou / Manager

# 1. Report of Measurements and Examinations

## 1.1. List of Measurements and Examinations

FCC Rule	Description of Test	Result
15.203	. Antenna Requirement	Pass
15.207	. Conducted Emission	Pass
15.209	. Radiated Emission	Pass
15.247(a)(2)	. 6dB Bandwidth	Pass
15.247(b)	. Maximum Peak Output Power	Pass
15.247(c)	. 100kHz Bandwidth of Frequency Band Edges	Pass
15.247(d)	. Power Spectral Density	Pass
1.1307 1.1310 2.1091 2.1093	. RF Exposure Compliance	Pass

Test by:

Jerry

## 1.2. Antenna Requirements

### 1.2.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


### 1.3. Test of Conducted Emission

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 115 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-1992 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 2.2. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

#### 1.3.1. Test Procedures

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connecting to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

### 1.3.2. Typical Test Setup Layout of Conducted Emission

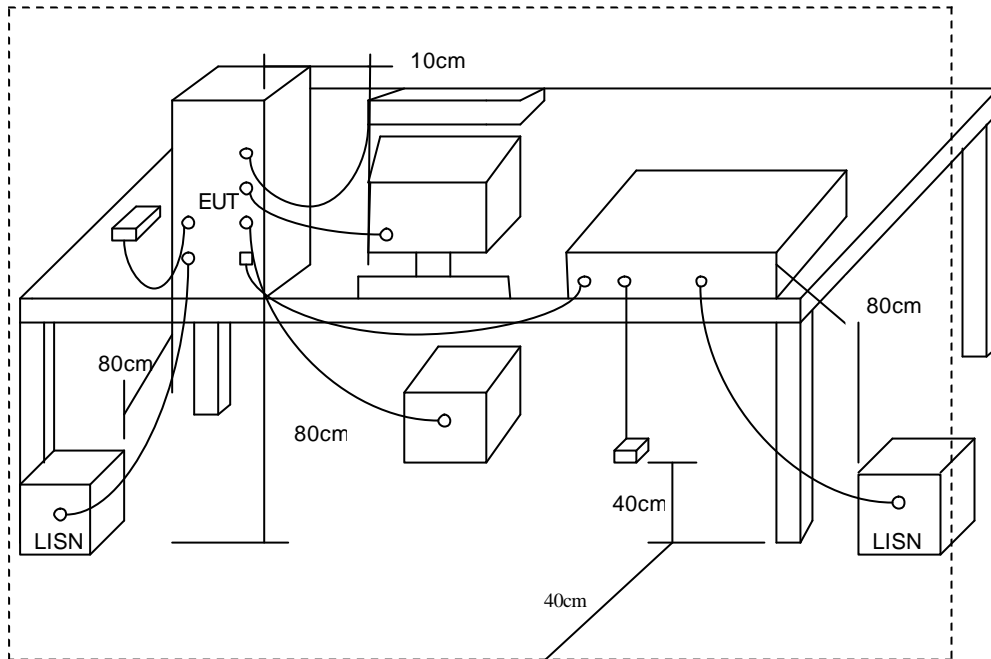

### 1.3.3. Conducted Emission Requirement

Except for A digital devices, for equipment that is designed to be connected to the public utility (AC) power line on any frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150KHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the Radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

Frequency (MHz)	Quasi Peak (dB $\mu$ V)	Average (dB $\mu$ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50

\*Decreases with the logarithm of the frequency.


## 1.4. Test of Radiated Emission

Radiated emissions from 30 MHz to 25 GHz were measured according to the methods defines in ANSI C63.4-2001. The EUT was placed, 0.8 meter above the ground plane, as shown in section 5.6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions

### 1.4.1. Test Procedures

1. The EUT was placed on a rotatable table top 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
5. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

### 1.4.2. Typical Test Setup Layout of Radiated Emission

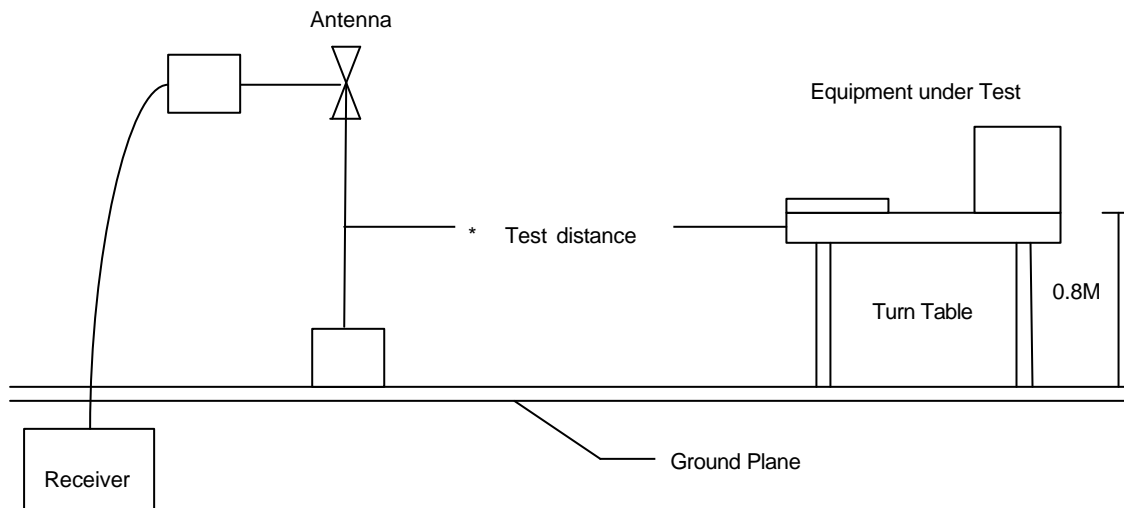




## 1.5. 6dB Bandwidth

### 1.5.1. Test Procedure :

1. The transmitter output was connected to the spectrum analyzer.
2. Set RBW of spectrum analyzer to 100 KHz and VBW to 100 KHz.
3. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

### 1.5.2. Test Setup Layout :




## 1.6. Maximum Peak Output Power

### 1.6.1. Test Procedure :

The antenna port ( RF output ) of the EUT was connected to the input ( RF input ) of a spectrum analyzer. Power was read directly from the analyzer and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

### 1.6.2. Test Setup Layout :



## 1.7. Band Edges Measurement

### 1.7.1. Test Procedure :


1. The transmitter output was connected to the spectrum analyzer via a low lose cable.
2. Set both RBW and VBW of spectrum analyzer to 100 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
3. The band edges was measured and recorded.

## 1.8. Power Spectral Density

### 1.8.1. Test Procedure :

1. The transmitter output was connected to spectrum analyzer.
2. The spectrum analyzer' s resolution bandwidth were set at 3KHz RBW and 30KHz VBW as that of the fundamental frequency. Set the sweep time=span/3KHz.
3. The power spectral density was measured and recorded.
4. The Sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

### 1.8.2. Test Setup Layout :



### 1.9. Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

\*\* : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

### 1.10. Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

## 1.11. RF Exposure

FCC Rules and Regulations Part 1.1307, 1.1310, 2.1091, 2.1093:

RF Exposure Compliance

### 1.11.1. Limit For Maximum Permissible Exposure (MPE)

#### (A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842/f	4.89/f	(900/f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

#### (B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S ( minutes )
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

F=frequency in MHz

\*Plane-wave equivalent power density

## 1.11.2. MPE Calculations

$$E \text{ (V/m)} = \frac{\sqrt{30 \cdot P \cdot G}}{d} \quad \text{Power Density: } Pd \text{ (mW/cm}^2\text{)} = \frac{E^2}{3770}$$

E = Electric field (V/m)

P = Peak output power (W)

G = Antenna numeric gain (numeric)

d = Separation distance (m)

Because the EUT is belong to General Population/ Uncontrolled Exposure. So the Limit of Power Density is 10 W/m<sup>2</sup>. We can change the formula to:

$$d = \sqrt{\frac{30 \cdot P \cdot G}{3770}}$$

## 1.11.3. FCC Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. In order to avoid the possibility of exceeding the FCC radio frequency exposure limits, human proximity to the antenna shall not be less than 20cm (8 inches) during normal operation. Proposed RF exposure safety information to include in User's Manual.

## 2. Test Configuration of Equipment under Test

### 2.1. Test Mode and Test Software

The following test mode was performed for conducted and radiated test:

- 802.11b (CH LO) • 802.11b (CH MID) • 802.11b (CH HI)  
802.11g (CH LO) • 802.11g (CH MID) • 802.11g (CH HI)
- An executive programs, "DUTAPIDLL" Application under WIN XP.
- Link Mode (The function of EUT is data transmitting which can be operated by connecting with two hosts through UTP cable and wireless .)
- During the test, "Ping. exe" was executive under WinXP to link with the remote workstation to transmitting data by UTP cable and wireless.


### 2.2. Description of Test System

Device	Model No.	Manufacturer	Description
PC (Remote site)	IGV	IBM	Power Cord, Unshielding, 1.8m
Monitor (Remote site)	510A	SlimAGE	Power Cord, Unshielding, 1.8m Data Cable, Shielding, 1.35m
Keyboard (Remote site)	KB-0225	IBM	Data Cable, Shielding, 1.85m
Mouse (Remote site)	MO28VO	IBM	Data Cable, Shielding, 1.85m
Notebook(Remote site)	R40(2723-BV1)	IBM	Power Cord, Unshielding, 1.8m

Use Cable:

Cable	Description
RJ-45	Unshielding, 10m

### 2.3. Connection Diagram of Test System

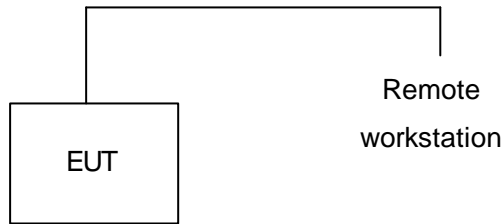

The TP cable is connected from remote workstation to the EUT.

### 2.4. Feature of Equipment under Test

- 802.11g wireless networking, with the ability to operate in 802.11g-only, or 802.11b+g modes.
- Easy, web-based setup for installation and management.
- Ethernet connection to an RJ45 wall slot, router, or cable modem.
- Extensive Protocol Support.
- Login capability.
- Front panel LEDs for easy monitoring of status and activity.
- Flash memory for firmware upgrade.

### 2.5. History of this test report

The Model No. WGR101 (Report No: FI04051202-A) and Model No. IP802SM (Report No: FI04051202-B) are the same and they only differ from the outside cosmetic. The function and specifications are the same

### 3. General Information of Test

Test Site:	Exclusive Certification Corp. 4F-2, No. 28, Lane 78, Xing-Ai Rd. Nei-hu, Taipei City 114 Taiwan R.O.C.
Test Site Location (OATS1-SD):	No.68-1, Shihbachongsi, shihding Township, Taipei County 223, Taiwan, R.O.C.
Test Voltage:	AC 110V/ 60Hz
Test in Compliance with:	ANSI C63.4-1992 FCC Part 15 Subpart C
Frequency Range Investigated:	Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 24620MHz
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.



## 4. Test Result and Data

### 4.1. Antenna Requirement


#### 4.1.1. Antenna Construction and Directional Gain

Antenna type: integral antenna; the maximum antenna gain: 1.0dBi.

## 4.2. Test Result of Conducted Emission

EUT : WGR-101(IP802SM)  
 Power : 110V 60Hz  
 Test Mode : LINK  
 Memo :


Pol/Phase : NEUTRAL  
 Temperature : 26 °C  
 Humidity : 57 %

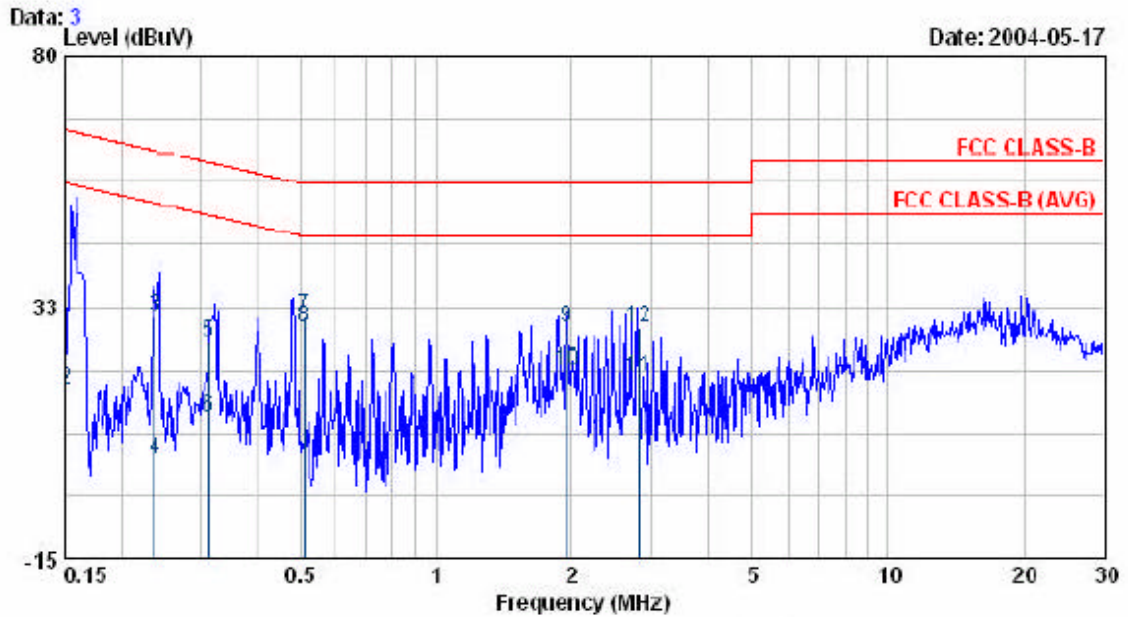

Freq	Read	Factor	Level	Limit	Over	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.150	40.41	0.40	40.81	66.00	-25.19	QP
0.150	16.69	0.40	17.09	56.00	-38.91	AVERAGE
0.237	30.19	0.43	30.62	62.19	-31.57	QP
0.237	3.47	0.43	3.90	52.19	-48.29	AVERAGE
0.313	25.43	0.44	25.87	59.89	-34.01	QP
0.313	11.21	0.44	11.65	49.89	-38.23	AVERAGE
0.508	30.09	0.47	30.56	56.00	-25.44	QP
0.508	28.07	0.47	28.54	46.00	-17.46	AVERAGE
1.958	27.89	0.54	28.43	56.00	-27.57	QP
1.958	20.05	0.54	20.59	46.00	-25.41	AVERAGE
2.810	18.90	0.56	19.46	46.00	-26.54	AVERAGE
2.810	27.93	0.56	28.49	56.00	-27.51	QP

EUT : W6R-101 (IP802SM)  
 Power : 110V 60Hz  
 Test Mode : LINK  
 Memo :


Pol/Phase : LINE  
 Temperature : 26 °C  
 Humidity : 57 %

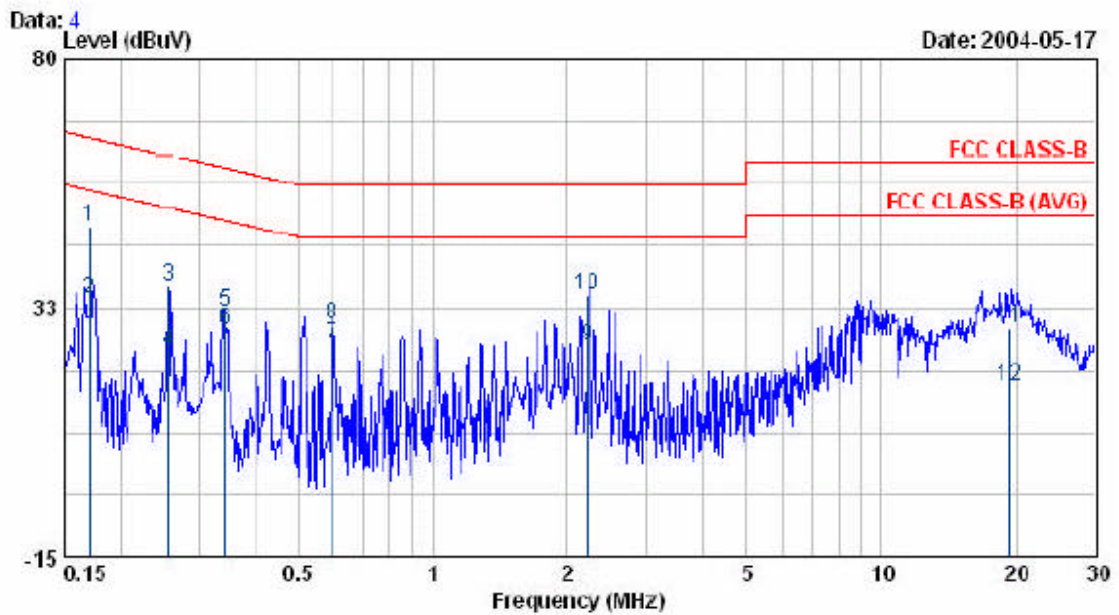

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.171	47.44	0.41	47.85	64.92	-17.07	QP
0.171	33.77	0.41	34.18	54.92	-20.74	AVERAGE
0.256	36.08	0.43	36.51	61.56	-25.04	QP
0.256	23.37	0.43	23.80	51.56	-27.75	AVERAGE
0.342	31.21	0.45	31.66	59.16	-27.51	QP
0.342	27.77	0.45	28.22	49.16	-20.95	AVERAGE
0.597	24.87	0.48	25.35	46.00	-20.65	AVERAGE
0.597	28.73	0.48	29.21	56.00	-26.79	QP
2.220	24.61	0.55	25.16	46.00	-20.84	AVERAGE
2.220	34.27	0.55	34.82	56.00	-21.18	QP
19.424	27.52	0.86	28.38	60.00	-31.62	QP
19.424	16.87	0.86	17.73	50.00	-32.27	AVERAGE

EUT : W6R-101( IP802SM)  
 Power : 110V 60Hz  
 Test Mode : 802.11b CH L0  
 Memo :


Pol/Phase : NEUTRAL  
 Temperature : 26 °C  
 Humidity : 57 %

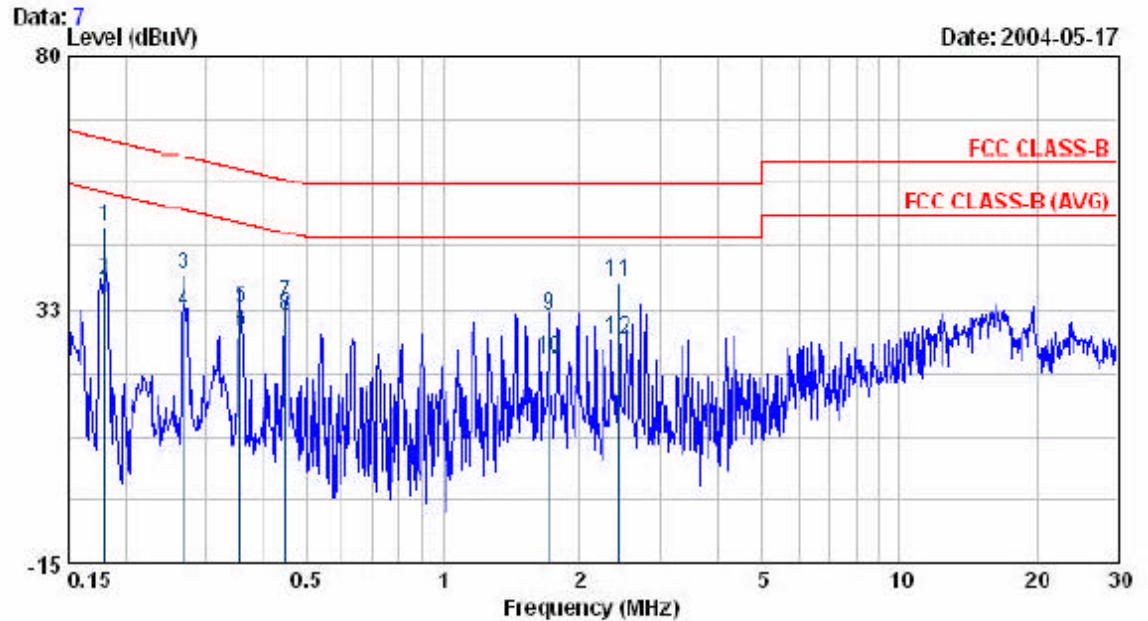

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.180	47.56	0.41	47.97	64.49	-16.52	QP
0.180	37.31	0.41	37.72	54.49	-16.77	AVERAGE
0.270	38.50	0.44	38.94	61.13	-22.20	QP
0.270	31.55	0.44	31.99	51.13	-19.15	AVERAGE
0.358	32.26	0.45	32.71	58.77	-26.06	QP
0.358	27.75	0.45	28.20	48.77	-20.57	AVERAGE
0.448	33.29	0.47	33.76	56.91	-23.15	QP
0.448	30.79	0.47	31.26	46.91	-15.65	AVERAGE
1.713	30.71	0.54	31.25	56.00	-24.75	QP
1.713	22.67	0.54	23.21	46.00	-22.79	AVERAGE
2.431	36.96	0.55	37.51	56.00	-18.49	QP
2.431	26.28	0.55	26.83	46.00	-19.17	AVERAGE

EUT : W6R-101(IP802SM)  
 Power : 110V 60Hz  
 Test Mode : 802.11b CH L0  
 Memo :

Pol/Phase : LINE  
 Temperature : 26 °C  
 Humidity : 57 %

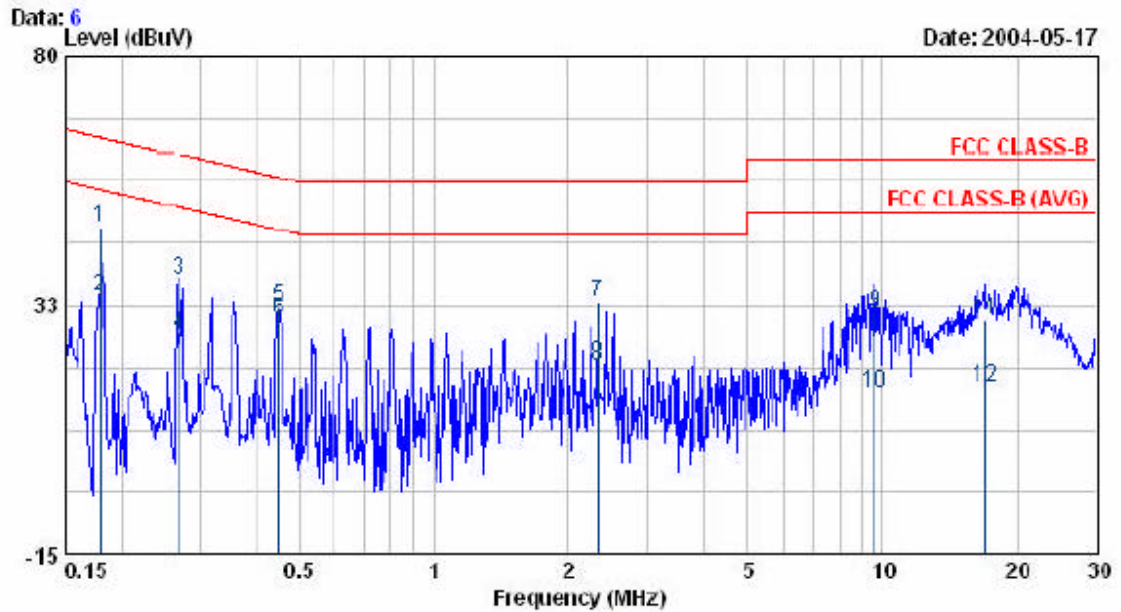


Freq	Read	Factor	Level	Limit	Over	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.179	46.80	0.41	47.21	64.54	-17.33	QP
0.179	33.54	0.41	33.95	54.54	-20.59	AVERAGE
0.269	36.77	0.43	37.20	61.15	-23.95	QP
0.269	26.32	0.43	26.75	51.15	-24.40	AVERAGE
0.449	31.64	0.47	32.11	56.90	-24.80	QP
0.449	29.07	0.47	29.54	46.90	-17.37	AVERAGE
2.340	32.41	0.55	32.96	56.00	-23.04	QP
2.340	20.59	0.55	21.14	46.00	-24.86	AVERAGE
9.603	30.24	0.62	30.86	60.00	-29.14	QP
9.603	15.26	0.62	15.88	50.00	-34.12	AVERAGE
16.958	28.77	0.80	29.57	60.00	-30.43	QP
16.958	16.28	0.80	17.08	50.00	-32.92	AVERAGE



EUT : W6R-101(IP802SM)  
 Power : 110V 60Hz  
 Test Mode : 802.11b CH MID  
 Memo :


Pol/Phase : NEUTRAL  
 Temperature : 26 °C  
 Humidity : 57 %

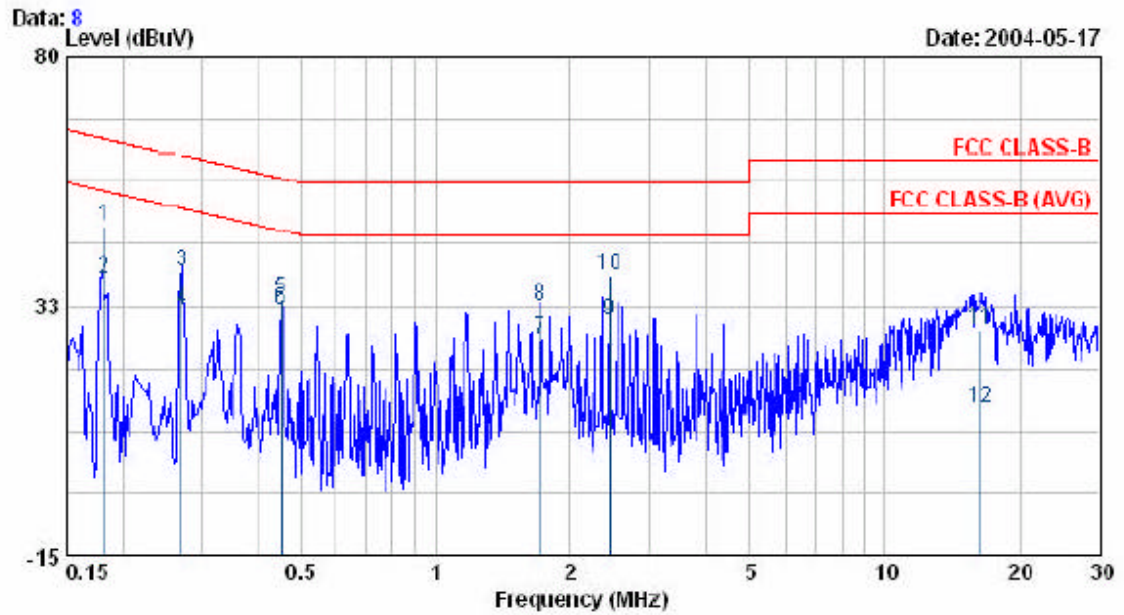

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.181	47.34	0.41	47.75	64.44	-16.69	QP
0.181	37.08	0.41	37.49	54.44	-16.95	AVERAGE
0.270	38.47	0.44	38.91	61.11	-22.20	QP
0.270	31.36	0.44	31.80	51.11	-19.31	AVERAGE
0.451	33.36	0.47	33.83	56.86	-23.04	QP
0.451	31.32	0.47	31.79	46.86	-15.00	AVERAGE
1.719	25.53	0.54	26.07	46.00	-19.93	AVERAGE
1.719	31.68	0.54	32.22	56.00	-23.78	QP
2.441	28.97	0.55	29.52	46.00	-16.48	AVERAGE
2.441	37.66	0.55	38.21	56.00	-17.79	QP
16.297	27.08	0.79	27.87	60.00	-32.13	QP
16.297	12.47	0.79	13.26	50.00	-36.74	AVERAGE

EUT : W6R-101(IP802SM)  
 Power : 110V 60Hz  
 Test Mode : 802.11b CH MID  
 Memo :


Pol/Phase : LINE  
 Temperature : 26 °C  
 Humidity : 57 %

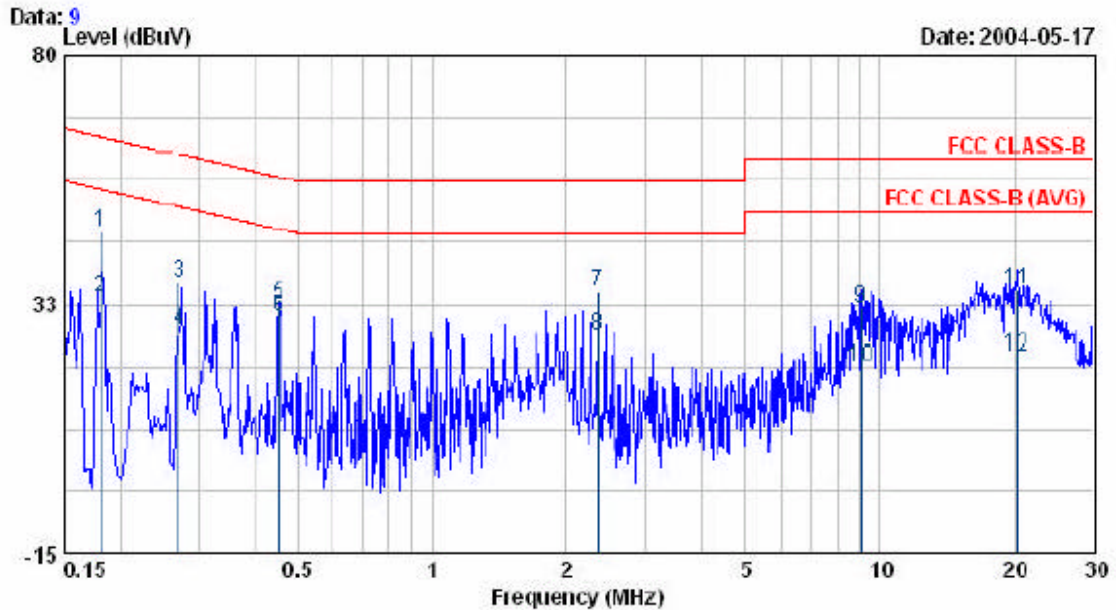

Freq	Read	Factor	Level	Limit	Over	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.181	45.83	0.41	46.24	64.46	-18.22	QP
0.181	33.19	0.41	33.60	54.46	-20.86	AVERAGE
0.271	36.20	0.44	36.64	61.10	-24.46	QP
0.271	26.86	0.44	27.30	51.10	-23.80	AVERAGE
0.453	32.03	0.47	32.50	56.82	-24.32	QP
0.453	29.46	0.47	29.93	46.02	-16.09	AVERAGE
2.352	34.30	0.55	34.85	56.00	-21.15	QP
2.352	25.79	0.55	26.34	46.00	-19.66	AVERAGE
9.050	31.06	0.62	31.68	60.00	-28.32	QP
9.050	19.99	0.62	20.61	50.00	-29.39	AVERAGE
20.271	34.27	0.90	35.17	60.00	-24.83	QP
20.271	21.76	0.90	22.66	50.00	-27.34	AVERAGE

EUT : W6R-101(IP8025M)  
 Power : 110V 60Hz  
 Test Mode : 802.11b CH HI  
 Memo :

Pol/Phase : NEUTRAL  
 Temperature : 26 °C  
 Humidity : 57 %

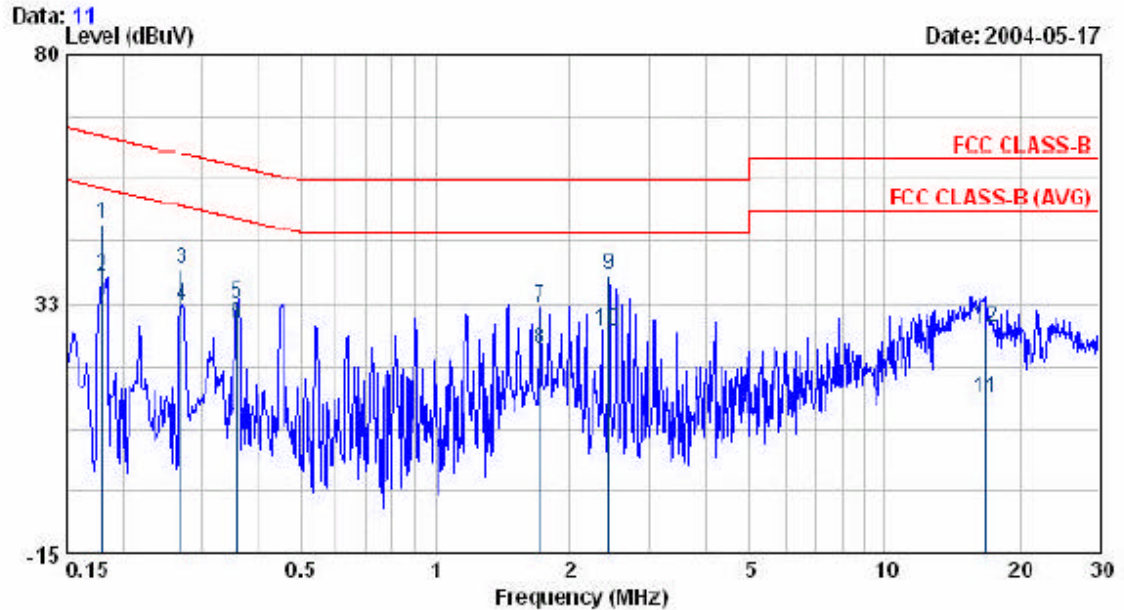


Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.179	47.24	0.41	47.65	64.52	-16.87	QP
0.179	37.05	0.41	37.46	54.52	-17.06	AVERAGE
0.271	38.34	0.44	38.78	61.10	-22.32	QP
0.271	31.45	0.44	31.89	51.10	-19.21	AVERAGE
0.361	31.96	0.45	32.41	58.71	-26.30	QP
0.361	28.06	0.45	28.51	48.71	-20.20	AVERAGE
1.717	31.12	0.54	31.66	56.00	-24.34	QP
1.717	23.21	0.54	23.75	46.00	-22.25	AVERAGE
2.438	37.18	0.55	37.73	56.00	-18.27	QP
2.438	26.57	0.55	27.12	46.00	-18.88	AVERAGE
16.759	13.86	0.80	14.66	50.00	-35.34	AVERAGE
16.759	26.83	0.80	27.63	60.00	-32.37	QP



EUT : W6R-101(IP802SM)  
 Power : 110V 60Hz  
 Test Mode : 802.11b CH HI  
 Memo :

Pol/Phase : LINE  
 Temperature : 26 °C  
 Humidity : 57 %

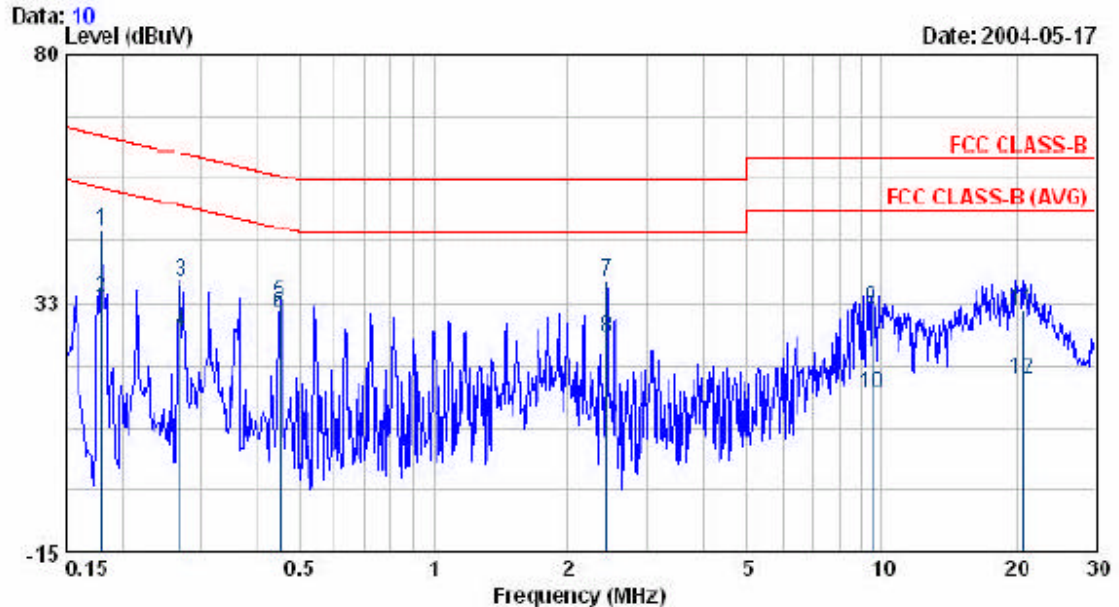

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.179	45.72	0.41	46.13	64.52	-18.39	QP
0.179	33.02	0.41	33.43	54.52	-21.09	AVERAGE
0.271	35.98	0.44	36.42	61.10	-24.68	QP
0.271	26.45	0.44	26.89	51.10	-24.21	AVERAGE
0.451	32.02	0.47	32.49	56.86	-24.38	QP
0.451	29.60	0.47	30.07	46.86	-16.80	AVERAGE
2.436	35.99	0.55	36.54	56.00	-19.46	QP
2.436	25.05	0.55	25.60	46.00	-20.40	AVERAGE
9.489	30.75	0.62	31.37	60.00	-28.63	QP
9.489	14.76	0.62	15.38	50.00	-34.62	AVERAGE
20.694	30.02	0.94	30.96	60.00	-29.04	QP
20.694	17.02	0.94	17.96	50.00	-32.04	AVERAGE


EUT : W6R-101(IP802SM)  
 Power : 110V 60Hz  
 Test Mode : 802.11g CH L0  
 Memo :

Pol/Phase : NEUTRAL  
 Temperature : 26 °C  
 Humidity : 57 %

Data: 12

Level (dBuV)


Date: 2004-05-17

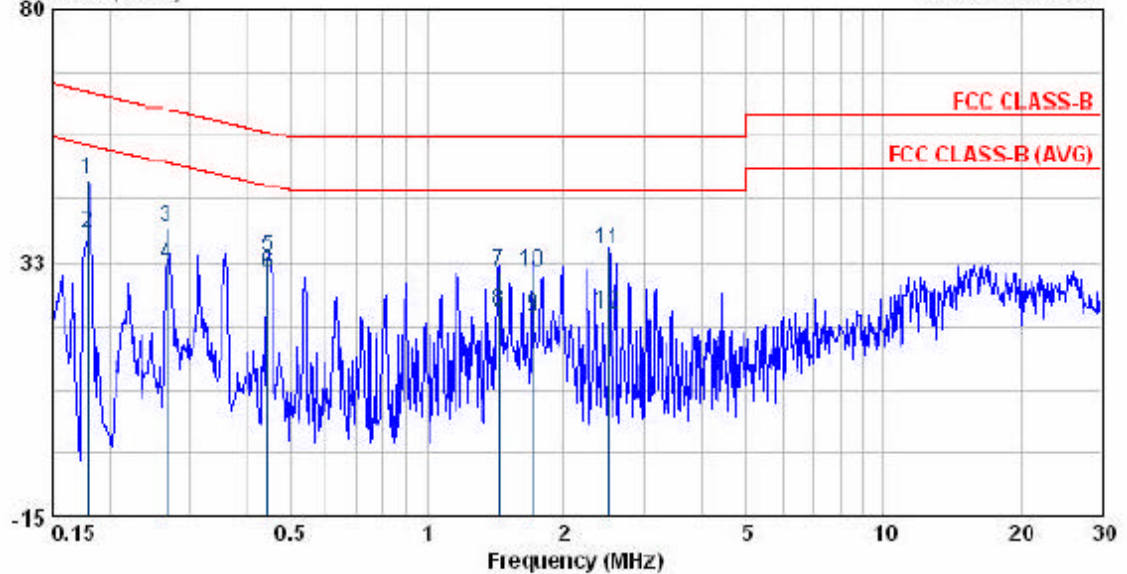

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.179	47.70	0.41	48.11	64.55	-16.44	QP
0.179	37.60	0.41	38.01	54.55	-16.54	AVERAGE
0.268	38.52	0.43	38.95	61.20	-22.24	QP
0.268	31.43	0.43	31.86	51.20	-19.33	AVERAGE
0.445	33.04	0.46	33.50	56.96	-23.46	QP
0.445	29.62	0.46	30.08	46.96	-16.88	AVERAGE
1.435	30.11	0.53	30.64	56.00	-25.36	QP
1.435	22.62	0.53	23.15	46.00	-22.85	AVERAGE
1.706	21.62	0.53	22.15	46.00	-23.85	AVERAGE
1.706	30.05	0.53	30.58	56.00	-25.42	QP
2.508	34.34	0.55	34.89	56.00	-21.11	QP
2.508	22.39	0.55	22.94	46.00	-23.06	AVERAGE

EUT : W6R-101(IP002SM)  
 Power : 110V 60Hz  
 Test Mode : 802.11g CH L0  
 Memo :


Pol/Phase : LINE  
 Temperature : 26 ℃  
 Humidity : 57 %

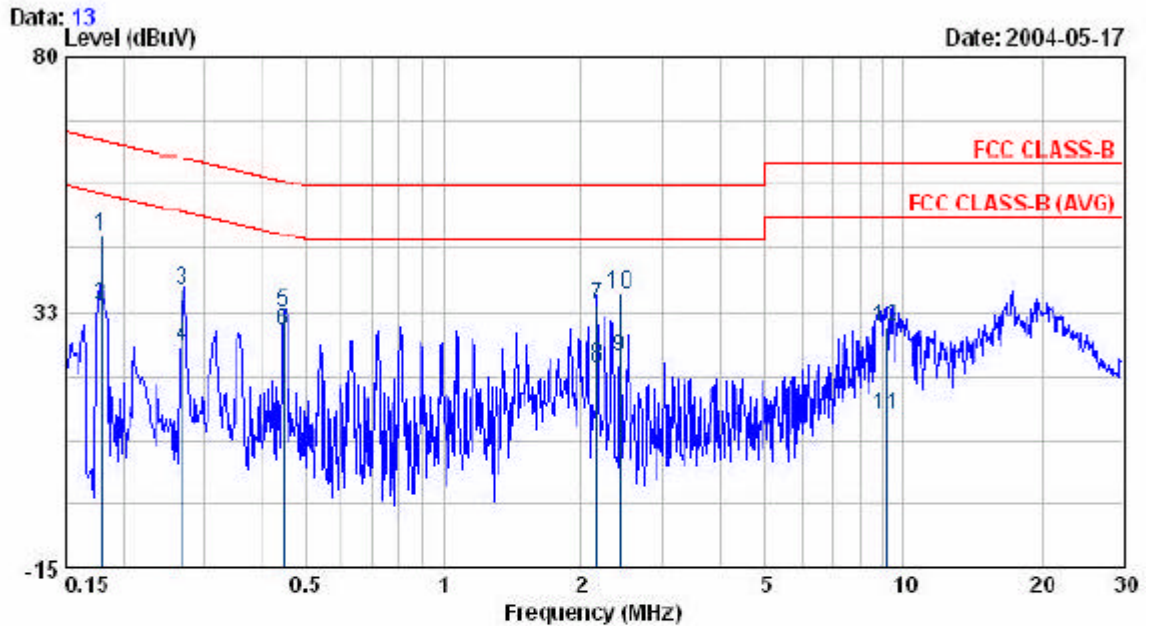

Freq	Read	Factor	Level	Limit	Over	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.179	46.14	0.41	46.55	64.55	-18.00	QP
0.179	33.30	0.41	33.71	54.55	-20.84	AVERAGE
0.268	36.10	0.43	36.53	61.17	-24.64	QP
0.268	25.80	0.43	26.23	51.17	-24.94	AVERAGE
0.446	31.73	0.47	32.20	56.95	-24.75	QP
0.446	20.40	0.47	20.95	46.95	-10.00	AVERAGE
2.155	33.32	0.55	33.87	56.00	-22.13	QP
2.155	21.78	0.55	22.33	46.00	-23.67	AVERAGE
2.422	23.25	0.55	23.80	46.00	-22.20	AVERAGE
2.422	35.21	0.55	35.76	56.00	-20.24	QP
9.153	12.87	0.62	13.49	50.00	-36.51	AVERAGE
9.153	29.06	0.62	29.68	60.00	-30.32	QP

EUT : W6R-101(IP802SM)  
 Power : 110V 60Hz  
 Test Mode : 802.11g CH MID  
 Memo :

Pol/Phase : NEUTRAL  
 Temperature : 26 °C  
 Humidity : 57 %

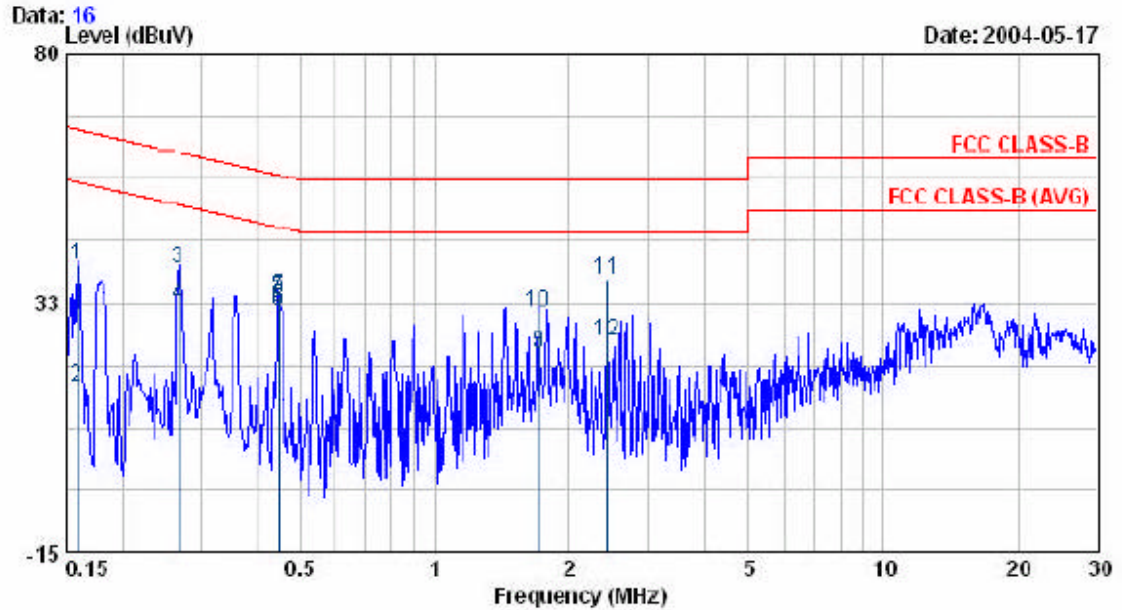

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.158	39.37	0.40	39.77	65.55	-25.78	QP
0.158	16.15	0.40	16.55	55.55	-39.00	AVERAGE
0.268	38.47	0.43	38.90	61.20	-22.29	QP
0.268	31.40	0.43	31.83	51.20	-19.36	AVERAGE
0.446	33.15	0.47	33.62	56.95	-23.33	QP
0.446	30.50	0.47	31.05	46.95	-15.90	AVERAGE
0.448	33.01	0.47	33.48	56.92	-23.44	QP
0.448	31.09	0.47	31.56	46.92	-15.36	AVERAGE
1.705	22.46	0.53	22.99	46.00	-23.01	AVERAGE
1.705	30.14	0.53	30.67	56.00	-25.33	QP
2.423	36.13	0.55	36.68	56.00	-19.32	QP
2.423	24.55	0.55	25.10	46.00	-20.90	AVERAGE