



**FCC 47 CFR PART 15 SUBPART C**

**TEST REPORT**

**For**

**Home Monitoring Gateway**

**Model: NA910**

**Trade Name: SerComm**

*Issued to*

**SerComm Corporation**  
**8F, No.3-1, YuanQu St., NanKang,**  
**Taipei 115, Taiwan, R.O.C.**

*Issued by*

**Compliance Certification Services Inc.**  
**No.11, Wugong 6th Rd., Wugu Dist.,**  
**Xinbei City 24891, Taiwan**  
**<http://www.ccsrf.com>**  
**[service@ccsrf.com](mailto:service@ccsrf.com)**



---

***Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.*



## TABLE OF CONTENTS

<b>1. TEST RESULT CERTIFICATION.....</b>	<b>3</b>
<b>2. EUT DESCRIPTION .....</b>	<b>3</b>
<b>3. TEST METHODOLOGY .....</b>	<b>3</b>
3.1 EUT CONFIGURATION .....	3
3.2 EUT EXERCISE.....	3
3.3 GENERAL TEST PROCEDURES.....	3
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....	3
3.5 DESCRIPTION OF TEST MODES .....	3
<b>4. INSTRUMENT CALIBRATION.....</b>	<b>3</b>
4.1 MEASURING INSTRUMENT CALIBRATION .....	3
4.2 MEASUREMENT EQUIPMENT USED .....	3
4.3 MEASUREMENT UNCERTAINTY .....	3
<b>5. FACILITIES AND ACCREDITATIONS .....</b>	<b>3</b>
5.1 FACILITIES .....	3
5.2 EQUIPMENT.....	3
5.3 TABLE OF ACCREDITATIONS AND LISTINGS.....	3
<b>6. SETUP OF EQUIPMENT UNDER TEST .....</b>	<b>3</b>
6.1 SETUP CONFIGURATION OF EUT.....	3
6.2 SUPPORT EQUIPMENT .....	3
<b>7. FCC PART 15.247 REQUIREMENTS.....</b>	<b>3</b>
7.1 6DB BANDWIDTH.....	3
7.2 PEAK POWER.....	3
7.3 AVERAGE POWER .....	3
7.4 BAND EDGES MEASUREMENT .....	3
7.5 PEAK POWER SPECTRAL DENSITY.....	3
7.6 SPURIOUS EMISSIONS.....	3
7.7 RADIATED EMISSIONS .....	3
7.8 POWERLINE CONDUCTED EMISSIONS.....	3
<b>APPENDIX I RADIO FREQUENCY EXPOSURE.....</b>	<b>3</b>
<b>APPENDIX II PHOTOGRAPHS OF TEST SETUP .....</b>	<b>3</b>
<b>APPENDIX 1 - PHOTOGRAPHS OF EUT</b>	



# 1. TEST RESULT CERTIFICATION

**Applicant:** SerComm Corporation  
 8F, No.3-1, YuanQu St., NanKang,  
 Taipei 115, Taiwan, R.O.C.

**Equipment Under Test:** Home Monitoring Gateway

**Trade Name:** SerComm

**Model:** NA910

**Date of Test:** December 2 ~ 24, 2010

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

### We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:

---

Rex Lai  
 Section Manager  
 Compliance Certification Services Inc.

---

Gina Lo  
 Section Manager  
 Compliance Certification Services Inc.



## 2. EUT DESCRIPTION

<b>Product</b>	Home Monitoring Gateway		
<b>Trade Name</b>	SerComm		
<b>Model Number</b>	NA910		
<b>Model Discrepancy</b>	N/A		
<b>Power Adapter</b>	1. LEADER/ MU12-G120100-A1 I/P: 100-240V, 50-60Hz, 0.5A O/P: DC 12 V, 1.0 A 2. Sunny/ SYS1381-1212-W2 I/P: 100-240V, 50-60Hz, 0.5A O/P: DC 12 V, 1.0 A		
<b>Frequency Range</b>	2412 ~ 2462 MHz		
<b>Transmit Power</b>	IEEE 802.11b mode: 18.18 dBm IEEE 802.11g mode: 26.77 dBm IEEE 802.11n HT 20 MHz mode: 25.13 dBm IEEE 802.11n HT 40 MHz mode: 28.79 dBm		
<b>Modulation Technique</b>	IEEE 802.11b mode: DSSS (1, 2, 5.5 and 11 Mbps) IEEE 802.11g mode: OFDM (6, 9, 12, 18, 24, 36, 48 and 54 Mbps) IEEE 802.11n HT 20 MHz mode: OFDM (6.5, 7.22, 13, 14.44, 19.5, 21.67, 26, 28.89, 39, 43.33, 52, 57.78, 57.78, 58.5, 65.0, 72.22, 78, 86.67, 104, 115.56, 117, 130, 144.44 Mbps) IEEE 802.11n HT 40 MHz mode: OFDM (13.5, 15, 27, 30, 40.5, 45, 54, 60, 81, 90, 108, 120, 121.5, 135, 150, 162, 180, 216, 240, 243, 270, 300 Mbps)		
<b>Number of Channels</b>	IEEE 802.11b/g mode: 11 Channels IEEE 802.11n HT 20 MHz mode: 11 Channels IEEE 802.11n HT 40 MHz mode: 7 Channels		
<b>Antenna Specification</b>	PIFA Antenna:		
	Brand	Part Number	Position
	Wha Yu	C147-510649-A(SSR-210213)	Left
	Wha Yu	C147-510652-A(SSR-209470)	Middle
	Wha Yu	C147-510674-A(SSR-210468)	Right
Antenna Calculation for MIMO Mode			
$10 * \text{LOG}(((10^{(3.3/20)} + 10^{(2.4/20)})^2) / 2) = 5.87 \text{ dBi}$			

**Remark:**

1. The sample selected for test was production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **P27NA910B** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



### **3. TEST METHODOLOGY**

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.247.

#### **3.1 EUT CONFIGURATION**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### **3.2 EUT EXERCISE**

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

#### **3.3 GENERAL TEST PROCEDURES**

##### **Conducted Emissions**

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

##### **Radiated Emissions**

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.



### 3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41	322 - 335.4		

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



### **3.5 DESCRIPTION OF TEST MODES**

The EUT (model: NA403) comes with two types of power adapter (MU12-G120100-A1 / SYS1381-1212-W2) for sale. After the preliminary test, the power adapter MU12-G120100-A1 was found to emit the worst emissions and therefore had been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting mode was programmed.

The EUT is a 2x3 configuration spatial MIMO (2Tx & 3Rx) without beam forming function that operate in double TX chains and triple RX chains. The 2x3 configuration is implemented with two outside TX & three outside RX chains (Chain 1 and chain 0).

#### **IEEE 802.11b mode:**

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 1Mbps data rate were chosen for full testing.

#### **IEEE 802.11g mode:**

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing.

#### **IEEE 802.11n HT 20 MHz mode:**

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6.5Mbps data rate were chosen for full testing.

#### **IEEE 802.11n HT 40 MHz mode:**

Channel Low (2422MHz), Channel Mid (2437MHz) and Channel High (2452MHz) with 13.5Mbps data rate were chosen for full testing.



## 4. INSTRUMENT CALIBRATION

### 4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### 4.2 MEASUREMENT EQUIPMENT USED

#### Equipment Used for Emissions Measurement

*Remark: Each piece of equipment is scheduled for calibration once a year and Loop Antenna is scheduled for calibration once three years.*

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	03/03/2011
Power Meter	Anritsu	ML2495A	1012009	03/28/2011
Power Sensor	Anritsu	MA2411B	0917072	03/09/2011

3M Semi Anechoic Chamber				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510252	10/25/2011
EMI Test Receiver	R&S	ESCI	100064	02/04/2011
Pre-Amplifier	Mini-Circuits	ZFL-1000LN	SF350700823	01/13/2011
Pre-Amplifier	MITEQ	AFS44-00102650-42-10P-44	1415367	11/19/2011
Bilog Antenna	Sunol Sciences	JB3	A030105	09/10/2011
Horn Antenna	EMCO	3117	00055165	12/06/2011
Loop Antenna	EMCO	6502	8905/2356	06/10/2013
Turn Table	CCS	CC-T-1F	N/A	N.C.R
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R
Site NSA	CCS	N/A	N/A	12/31/2010
Test S/W	EZ-EMC (CCS-3A1RE)			





<b>Conducted Emission room # B</b>				
<b>Name of Equipment</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Serial Number</b>	<b>Calibration Due</b>
TEST RECEIVER	R&S	ESCI	100234	06/13/2011
LISN (EUT)	FCC	FCC-LISN-50-32-2	08009	03/25/2011
LISN	EMCO	3825/2	1382	01/11/2011
BNC CABLE	MIYAZAKI	5D-FB	BNC B3	08/10/2011
Pulse Limiter	R&S	ESH3-Z2	100374	08/19/2011
THERMO-HYGRO METER	TOP	HA-202	9303-3	01/31/2011
Test S/W	EZ-EMC			



### 4.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
Powerline Conducted Emission	+/- 1.1089
3M Semi Anechoic Chamber / 30M~200M	+/- 4.0606
3M Semi Anechoic Chamber / 200M~1000M	+/- 3.9979
3M Semi Anechoic Chamber / 1G~8G	+/- 2.5790
3M Semi Anechoic Chamber / 8G~18G	+/- 2.5928
3M Semi Anechoic Chamber / 18G~26G	+/- 2.7212
3M Semi Anechoic Chamber / 26G~40G	+/- 2.9520

**Remark:** This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .



## 5. FACILITIES AND ACCREDITATIONS

### 5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

- No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.  
Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

**Remark:** The radiated emissions test items was tested at Compliance Certification Services Inc. (Sindian Lab.)  
The test equipments were listed in page 9 and the test data, please refer page 93-94.

- No.11, Wugong 6th Rd., Wugu Industrial Park, Taipei Hsien 248, Taiwan  
Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

- No.81-1, Lane 210, Bade 2nd Rd., Luchu Hsiang, Taoyuan Hsien 338, Taiwan  
Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

### 5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.




Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."



### 5.3 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3M Semi Anechoic Chamber (FCC MRA: TW1039) to perform FCC Part 15 measurements	 FCC MRA: TW1039
Taiwan	TAF	LP0002, RTTE01, FCC Method-47 CFR Part 15 Subpart C, D, E, RSS-210, RSS-310 IDA TS SRD, AS/NZS 4268, AS/NZS 4771, TS 12.1 & 12.2, ETSI EN 300 440-1, ETSI EN 300 440-2, ETSI EN 300 328, ETSI EN 300 220-1, ETSI EN 300 220-2, ETSI EN 301 893, ETSI EN 301 489-1/3/7/17 FCC OET Bulletin 65 + Supplement C, EN 50360, EN 50361, EN 50371, RSS 102, EN 50383, EN 50385, EN 50392, IEC 62209, CNS 14958-1, CNS 14959 FCC Method -47 CFR Part 15 Subpart B IEC / EN 61000-3-2, IEC / EN 61000-3-3, IEC / EN 61000-4-2/3/4/5/6/8/11	
Canada	Industry Canada	3M Semi Anechoic Chamber (IC 2324G-1 / IC 2324G-2) to perform	 IC 2324G-1 IC 2324G-2

\* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.



## 6. SETUP OF EQUIPMENT UNDER TEST

### 6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

### 6.2 SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1.	Earphone & Microphone	e-Sense	MSB301	N/A	N/A	Unshielded, 1.7m	N/A
2.	USB 2.0 HDD	TeraSys	F12-U	N/A	BSMI ID: 4912A002	Shielded, 1.8m	N/A
3.	iPOD	Apple	A1112	N/A	R33057	Shielded, 1.0m	N/A
4.	iPOD	Apple	A1112	N/A	R33057	Shielded, 1.0m	N/A
5.	USB Mouse	DELL	MO56UC	443007221	DOC BSMI: R41108	Shielded, 1.8m	N/A
6.	USB Keyboard	DELL	SK-8115	N/A	DOC BSMI: T3A002	Shielded, 1.8m with a core	N/A
7.	Notebook	HP	Compaq 2210b	CNU7472KDP	N/A	Unshielded, 1.0m	Unshielded, 1.8m
8.	Monitor	SAMSUNG	933SN+	N/A	DOC BSMI: R33475	Shielded, 1.8m with two cores	Unshielded, 1.8m
9.	Server PC	HP	HD075AV	SGH948QGVW	DOC BSMI: R33001	Unshielded, 20m	Unshielded, 1.8m
10.	LAN Cable	N/A	N/A	N/A	N/A	Unshielded, 3.0m X3	N/A
11.	Notebook PC (Remote)	DELL	PP10L	7B3ZP1S	N/A	N/A	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core

**Remark:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.




## 7. FCC PART 15.247 REQUIREMENTS

### 7.1 6DB BANDWIDTH

#### LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

#### Test Configuration

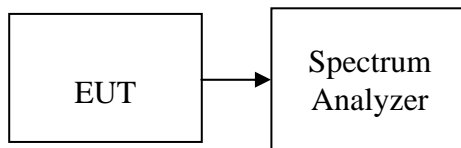

#### TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 100 kHz, VBW = RBW, Span = 50 MHz, Sweep = auto.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

#### TEST RESULTS

*No non-compliance noted.*



**Test Data**

**Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Result
Low	2412	12170	>500	PASS
Mid	2437	10080		PASS
High	2462	10170		PASS

**Test mode: IEEE 802.11g mode**

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Result
Low	2412	16500	>500	PASS
Mid	2437	16250		PASS
High	2462	16330		PASS



**Test mode: IEEE 802.11n HT 20 MHz mode / Chain 0**

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Result
Low	2412	17670	>500	PASS
Mid	2437	17000		PASS
High	2462	17580		PASS

**Test mode: IEEE 802.11n HT 20 MHz mode / Chain 1**

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Result
Low	2412	17080	>500	PASS
Mid	2437	17580		PASS
High	2462	17250		PASS

**Test mode: IEEE 802.11n HT 40 MHz mode / Chain 0**

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Result
Low	2422	34000	>500	PASS
Mid	2437	35000		PASS
High	2452	32920		PASS

**Test mode: IEEE 802.11n HT 40 MHz mode / Chain 1**

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Result
Low	2422	35000	>500	PASS
Mid	2437	33580		PASS
High	2452	35000		PASS





### Test Plot


### IEEE 802.11b mode

### 6dB Bandwidth (CH Low)

Agilent 16:59:40 Dec 24, 2010

R T

Δ Mkr1 12.17 MHz  
-0.03 dB

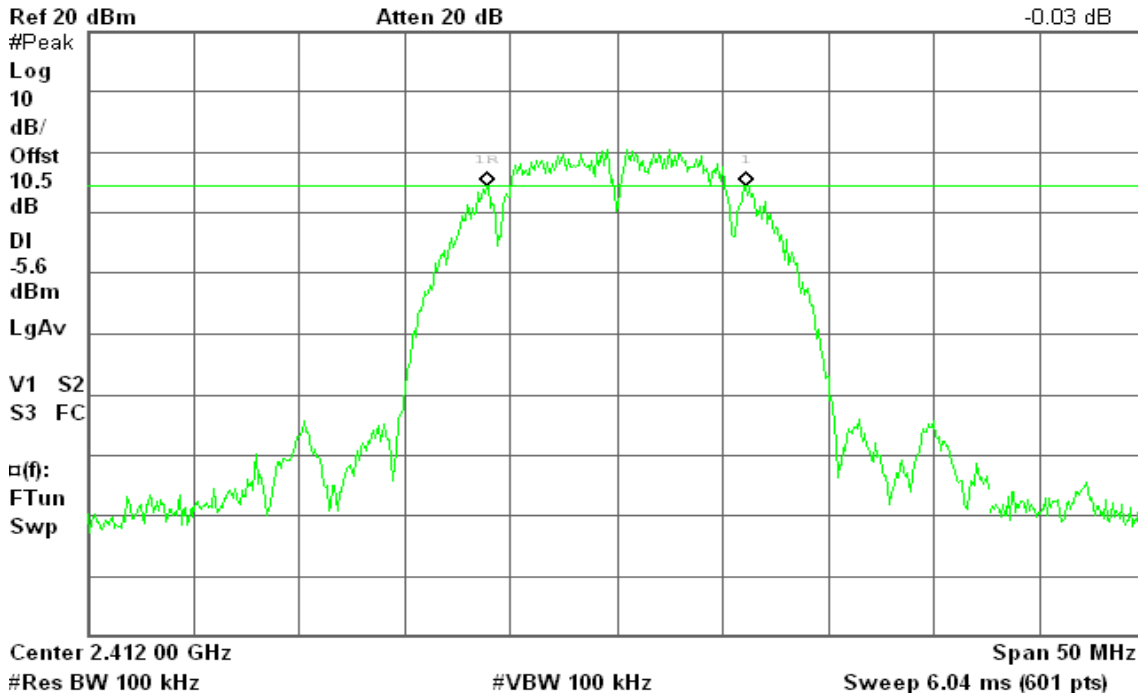


### 6dB Bandwidth (CH Mid)

Agilent 17:09:24 Dec 24, 2010

R T

Δ Mkr1 10.08 MHz  
2.27 dB

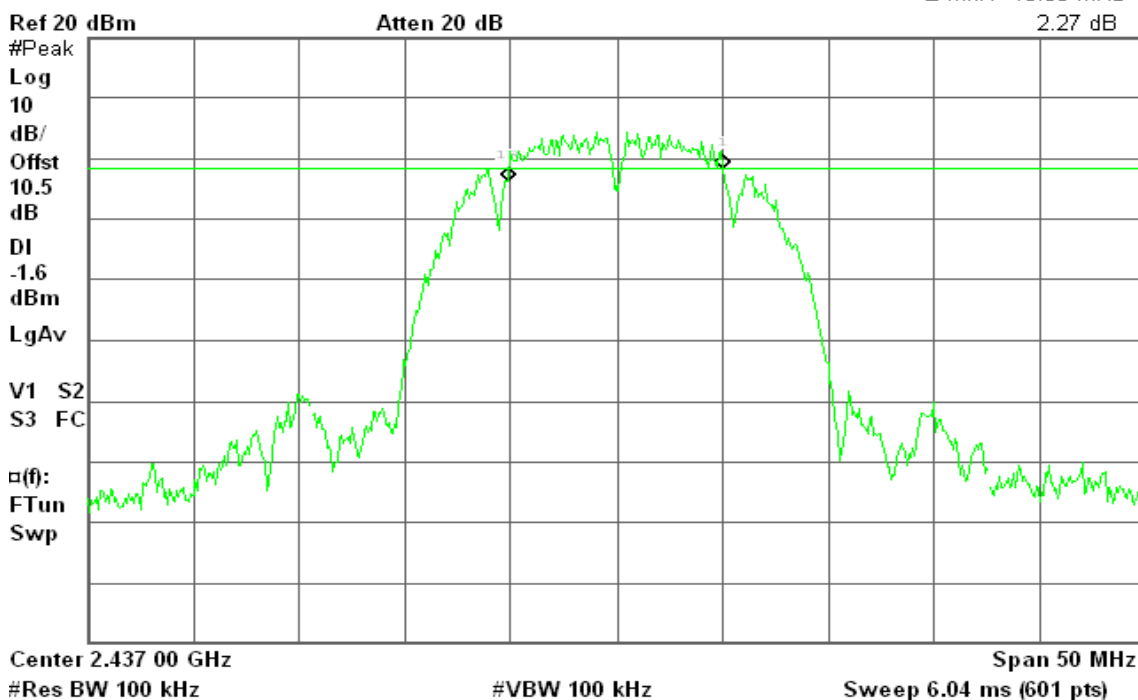




### 6dB Bandwidth (CH High)

Agilent 17:33:53 Dec 24, 2010

R T

Δ Mkr1 10.17 MHz  
-0.81 dB

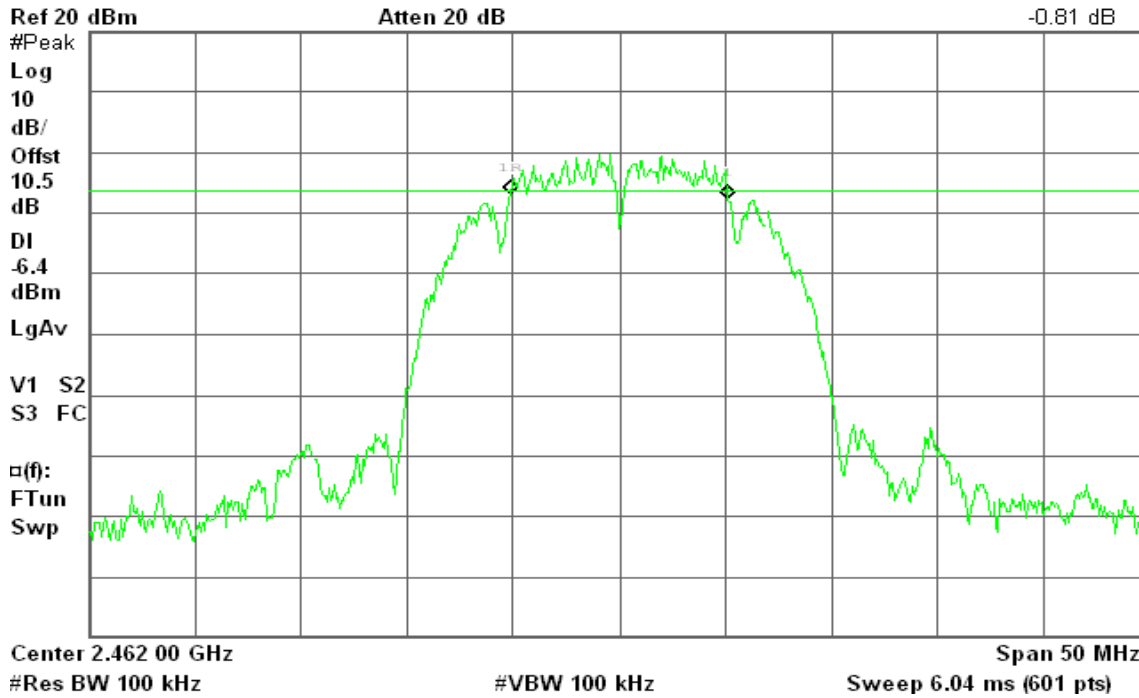


### IEEE 802.11g mode

### 6dB Bandwidth (CH Low)

Agilent 17:54:16 Dec 24, 2010

R T

Δ Mkr1 16.50 MHz  
-0.97 dB

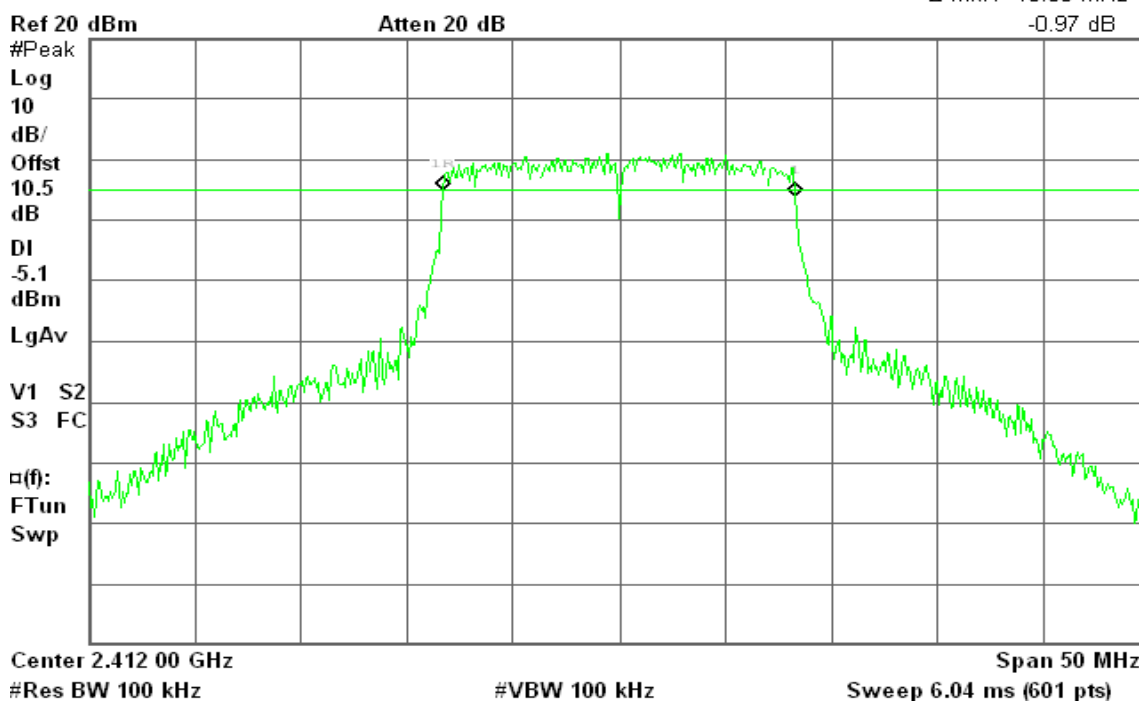




### 6dB Bandwidth (CH Mid)

Agilent 18:02:09 Dec 24, 2010

R T

Δ Mkr1 16.25 MHz  
1.61 dB

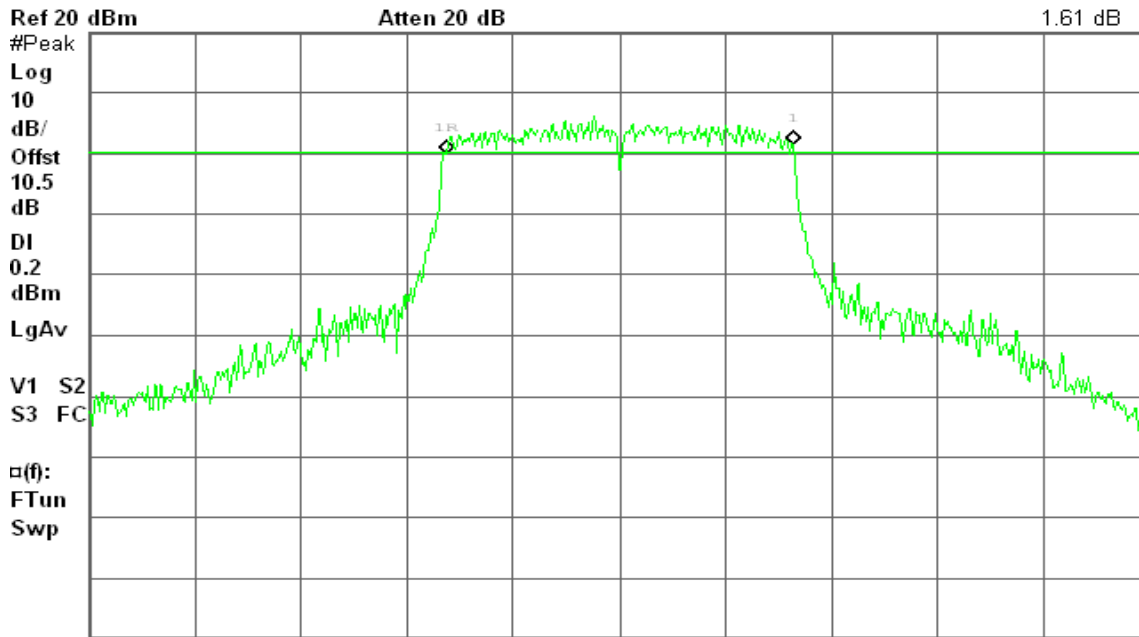

Center 2.437 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz


Sweep 6.04 ms (601 pts)

### 6dB Bandwidth (CH High)

Agilent 18:08:23 Dec 24, 2010

R L

Δ Mkr1 16.33 MHz  
-0.19 dB

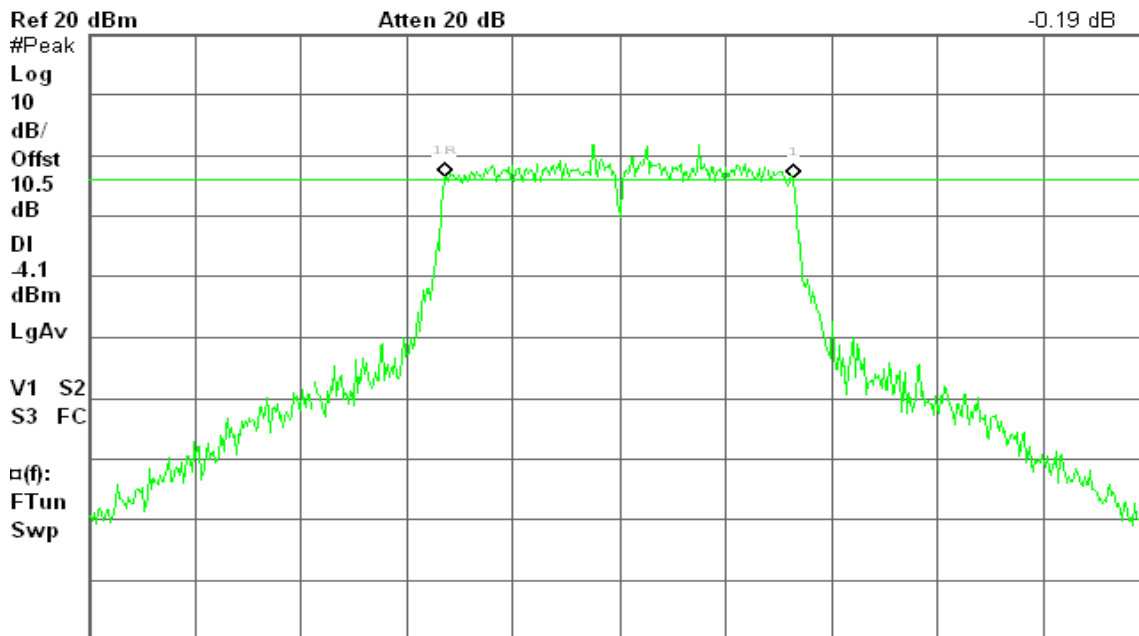

Center 2.462 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)




IEEE 802.11n HT 20 MHz mode / Chain 0

6dB Bandwidth (CH Low)

Agilent 05:24:35 Dec 27, 2010

R T

Δ Mkr1 17.67 MHz  
0.19 dB

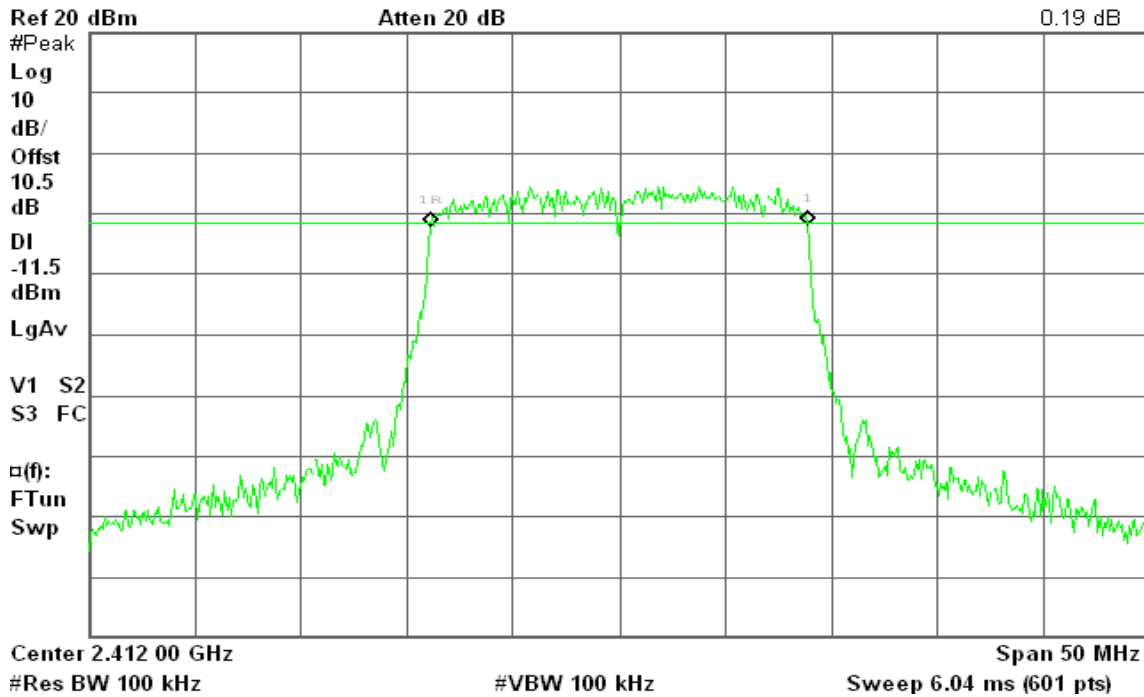


6dB Bandwidth (CH Mid)

Agilent 10:49:19 Dec 27, 2010

R T

Δ Mkr1 17.00 MHz  
-0.25 dB

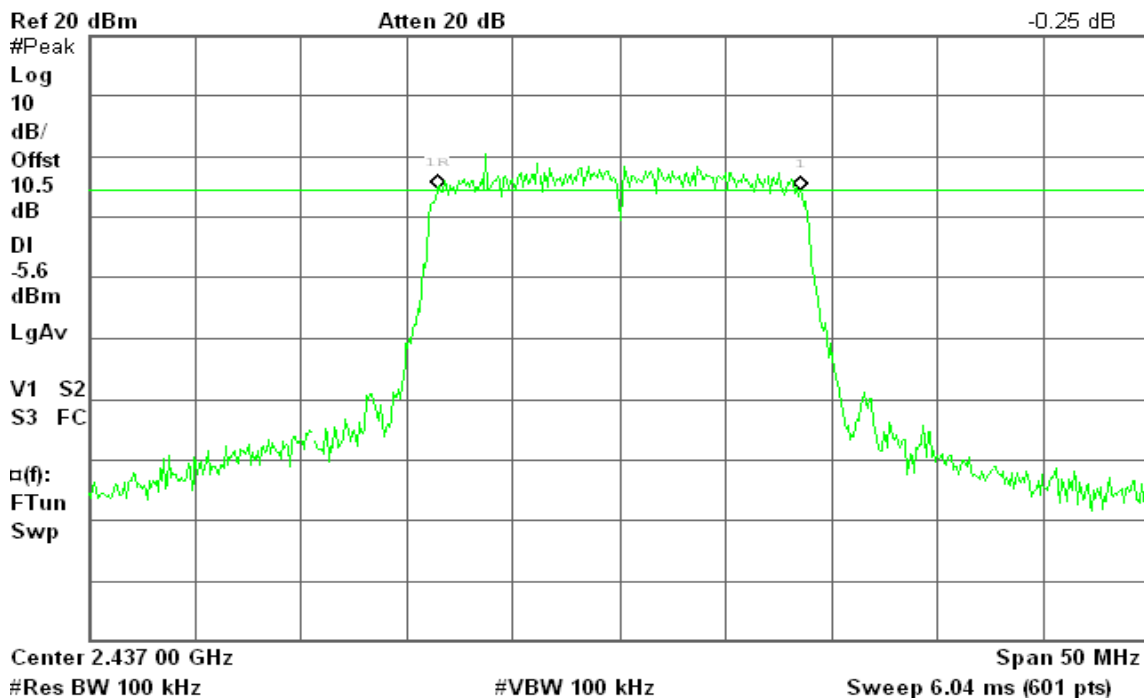




### 6dB Bandwidth (CH High)

Agilent 11:13:30 Dec 27, 2010

R T

Δ Mkr1 17.58 MHz  
0.42 dB

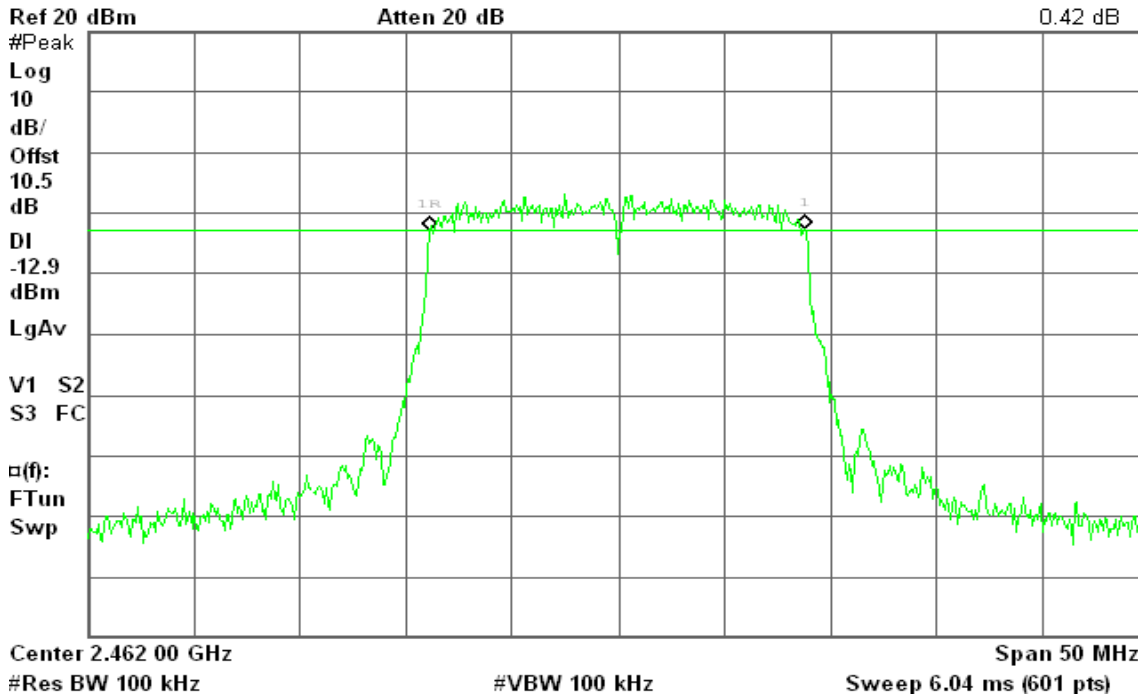


IEEE 802.11n HT 20 MHz mode / Chain 1

### 6dB Bandwidth (CH Low)

Agilent 13:10:16 Dec 27, 2010

R T

Δ Mkr1 17.08 MHz  
0.92 dB

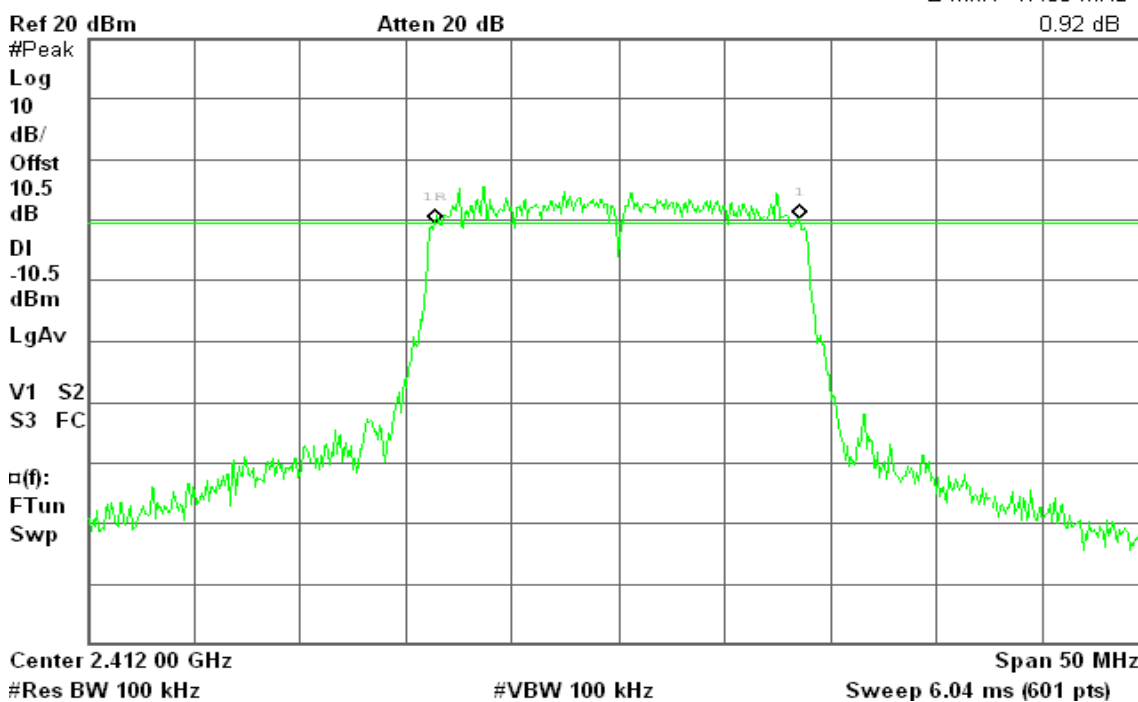




### 6dB Bandwidth (CH Mid)

Agilent 11:54:13 Dec 27, 2010

R T

Δ Mkr1 17.58 MHz  
-0.31 dB

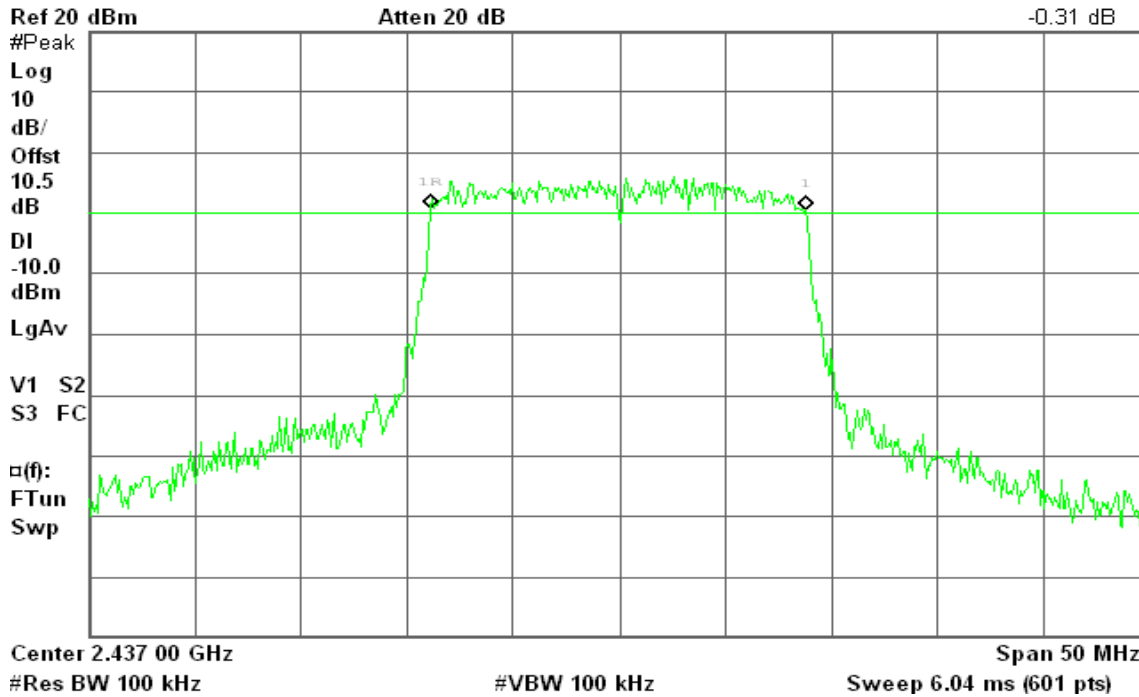


### 6dB Bandwidth (CH High)

Agilent 11:23:21 Dec 27, 2010

R T

Δ Mkr1 17.25 MHz  
-2.18 dB

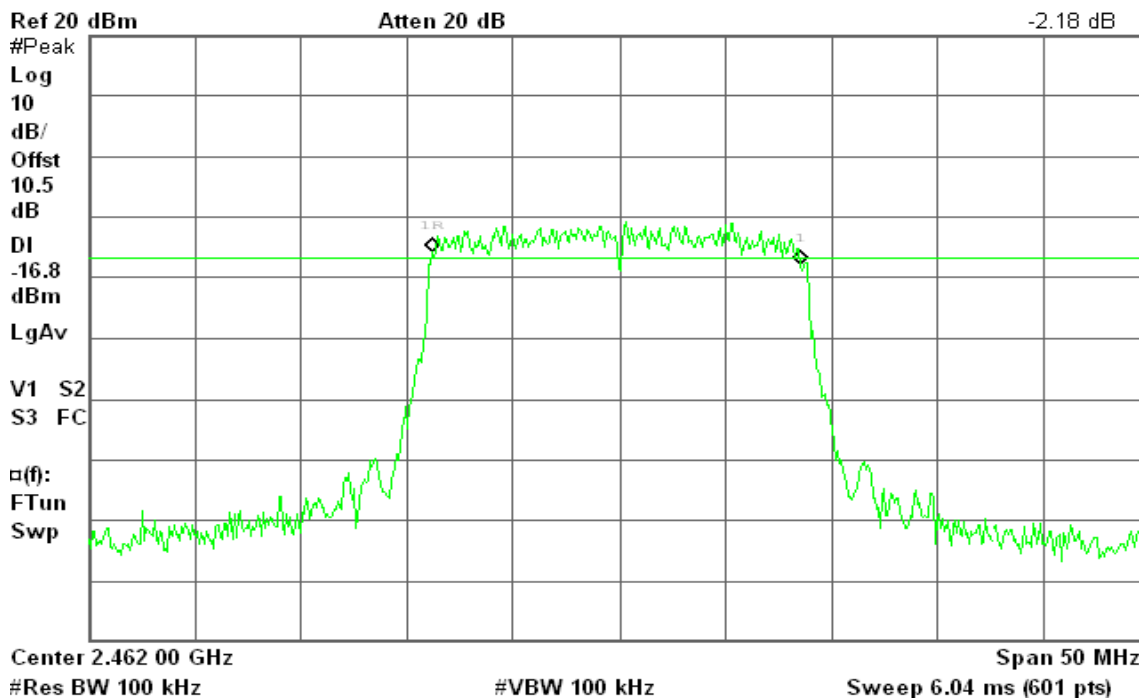




### IEEE 802.11n HT 40 MHz mode / Chain 0

#### 6dB Bandwidth (CH Low)

Agilent 13:56:24 Dec 27, 2010

R T

Δ Mkr1 34.00 MHz  
-1.30 dB

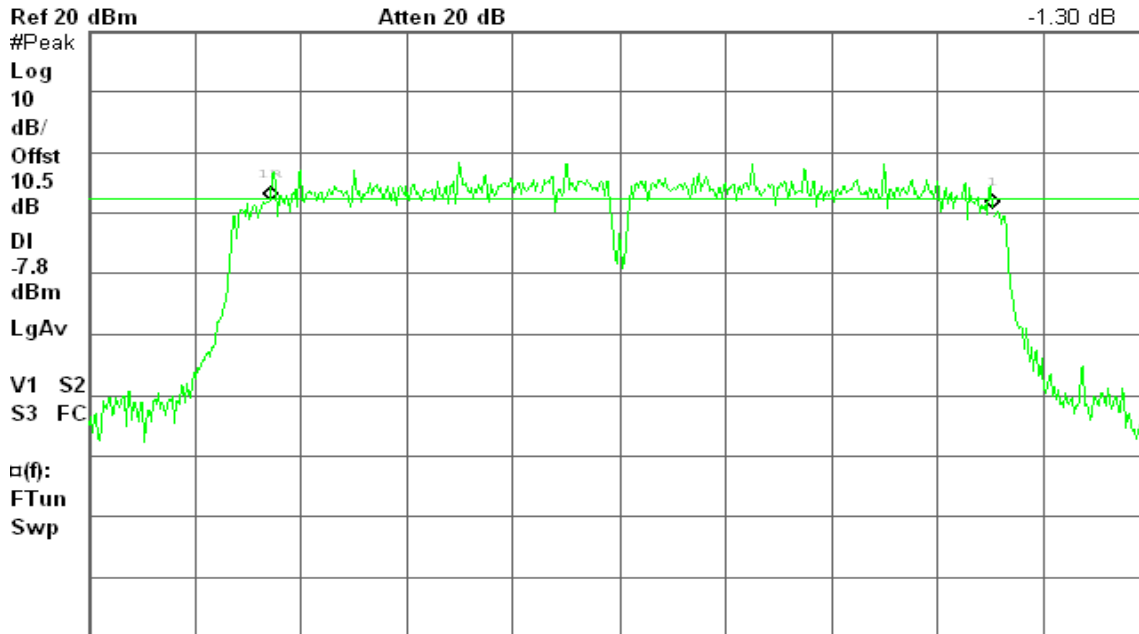


Center 2.422 00 GHz Span 50 MHz  
#Res BW 100 kHz #VBW 100 kHz Sweep 6.04 ms (601 pts)

#### 6dB Bandwidth (CH Mid)

Agilent 13:50:50 Dec 27, 2010

R T

Δ Mkr1 35.00 MHz  
-2.32 dB

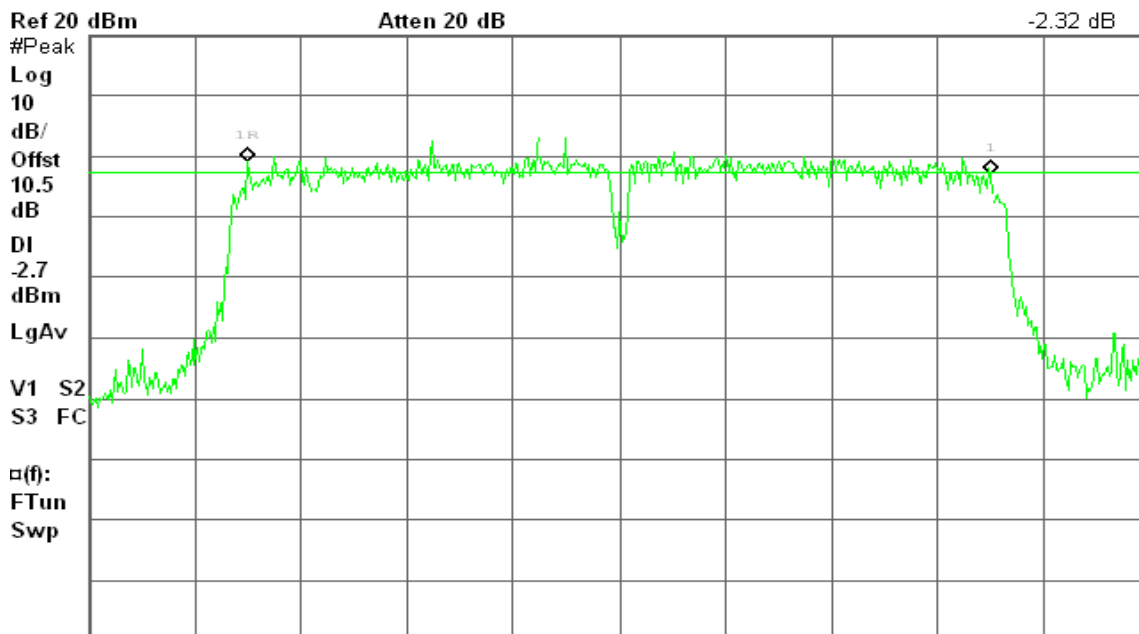

Center 2.437 00 GHz Span 50 MHz  
#Res BW 100 kHz #VBW 100 kHz Sweep 6.04 ms (601 pts)




### 6dB Bandwidth (CH High)

Agilent 13:41:20 Dec 27, 2010

R L

Δ Mkr1 32.92 MHz  
0.79 dB

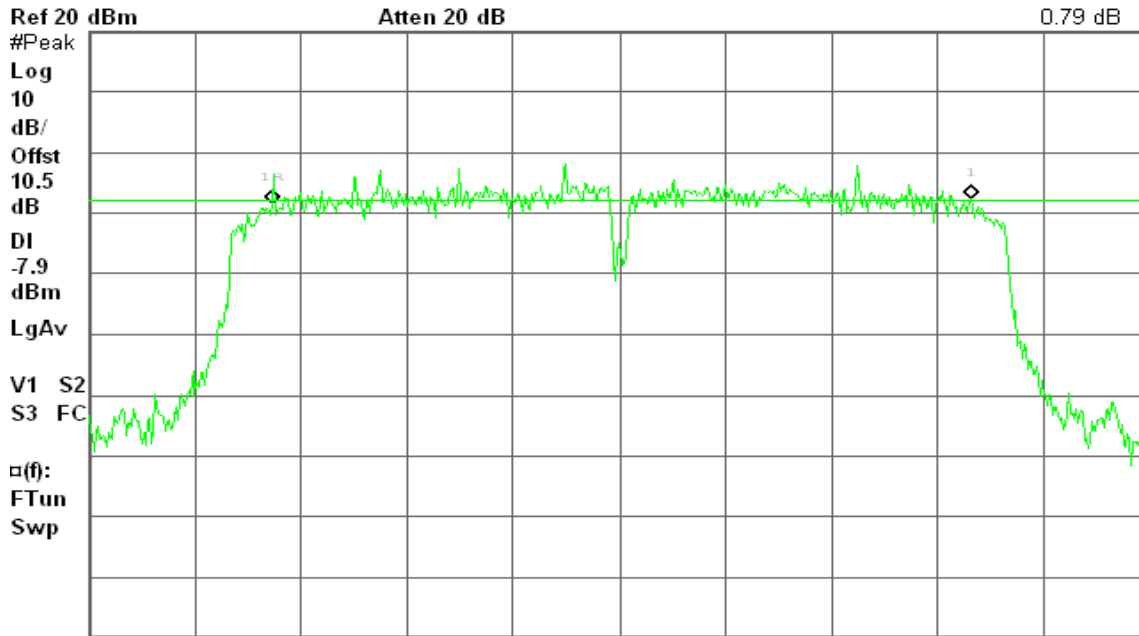

Center 2.452 00 GHz Span 50 MHz  
#Res BW 100 kHz #VBW 100 kHz Sweep 6.04 ms (601 pts)


### IEEE 802.11n HT 20 MHz mode / Chain 1

### 6dB Bandwidth (CH Low)

Agilent 13:18:44 Dec 27, 2010

R T

Δ Mkr1 35.00 MHz  
1.19 dB

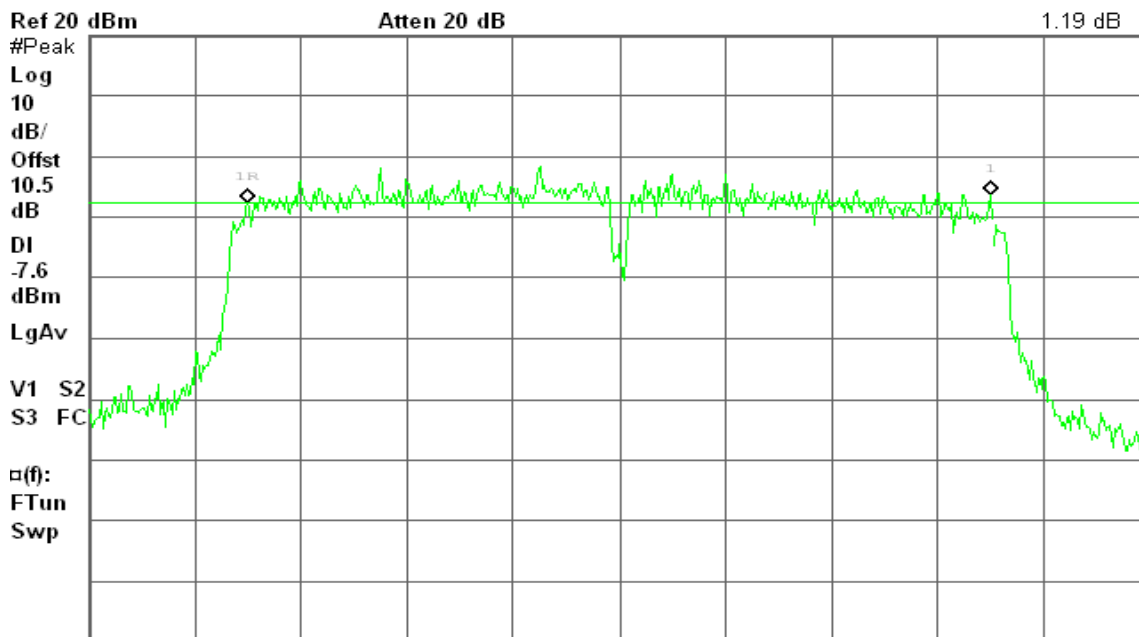

Center 2.422 00 GHz Span 50 MHz  
#Res BW 100 kHz #VBW 100 kHz Sweep 6.04 ms (601 pts)






### 6dB Bandwidth (CH Mid)

Agilent 13:26:48 Dec 27, 2010

R T

Δ Mkr1 33.58 MHz  
0.45 dB

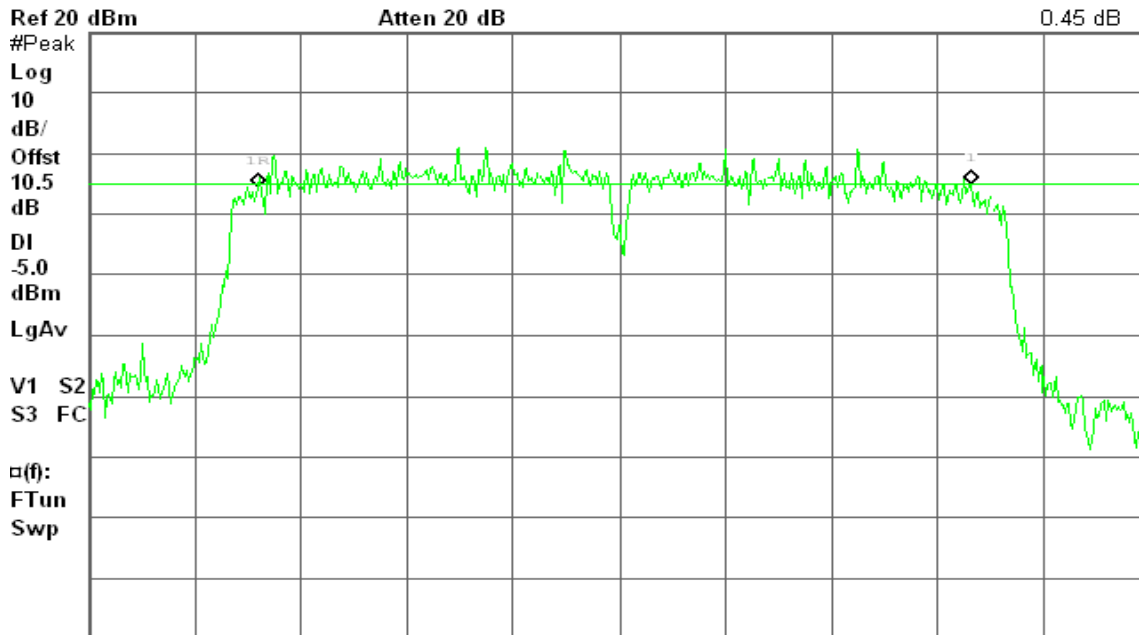


Center 2.437 00 GHz Span 50 MHz  
#Res BW 100 kHz #VBW 100 kHz Sweep 6.04 ms (601 pts)

### 6dB Bandwidth (CH High)

Agilent 13:32:48 Dec 27, 2010

R T

Δ Mkr1 35.00 MHz  
-0.95 dB

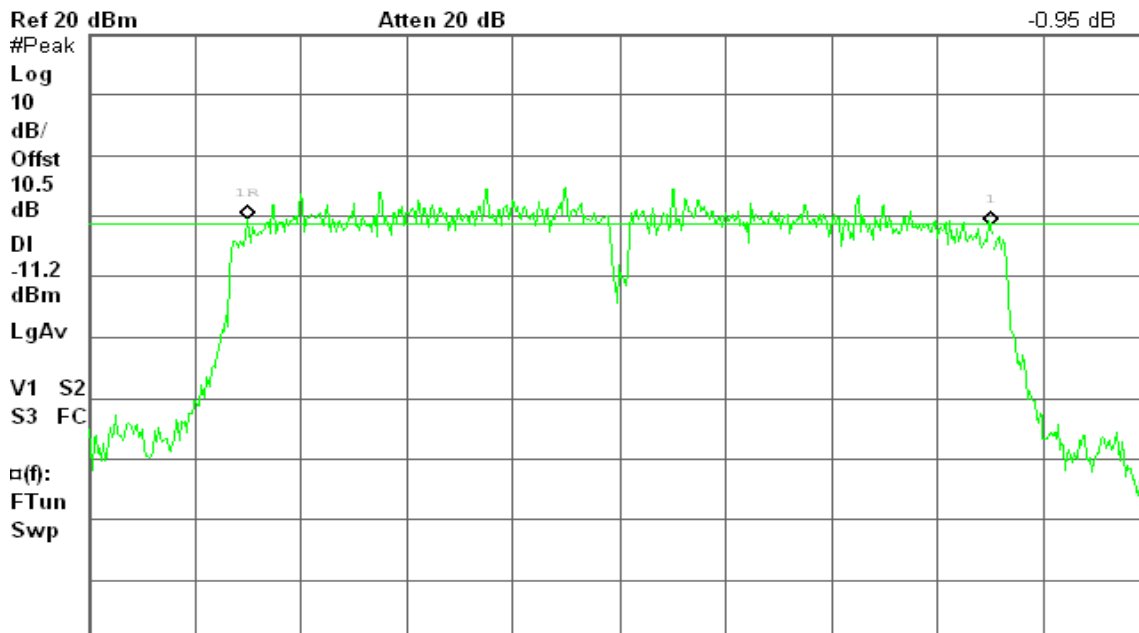

Center 2.452 00 GHz Span 50 MHz  
#Res BW 100 kHz #VBW 100 kHz Sweep 6.04 ms (601 pts)




## 7.2 PEAK POWER

### LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### Test Configuration

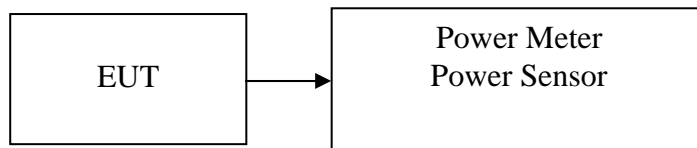

### TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.

### TEST RESULTS

*No non-compliance noted.*



**Test Data**

**Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	14.01	0.02518	1.00	PASS
Mid	2437	18.18	0.06577		PASS
High	2462	12.56	0.01803		PASS

**Test mode: IEEE 802.11g mode**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	23.94	0.24774	1.00	PASS
Mid	2437	26.77	0.47534		PASS
High	2462	22.72	0.18707		PASS

**Test mode: IEEE 802.11n HT 20 MHz mode**

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	18.54	18.24	21.40	0.1381	1.00	PASS
Mid	2437	23.13	20.79	25.13	0.3255		PASS
High	2462	17.09	13.35	18.62	0.0728		PASS

**Test mode: IEEE 802.11n HT 40 MHz mode**

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2422	22.87	22.38	25.64	0.3666	1.00	PASS
Mid	2437	26.33	25.14	28.79	0.7561		PASS
High	2452	21.95	18.89	23.69	0.2341		PASS

**Remark:** Total Output Power (w) = Chain 0 (10^(Output Power /10)/1000)+ Chain 1 (10^(Output Power /10)/1000)




## 7.3 AVERAGE POWER

### LIMIT

None; for reporting purposes only.

### Test Configuration

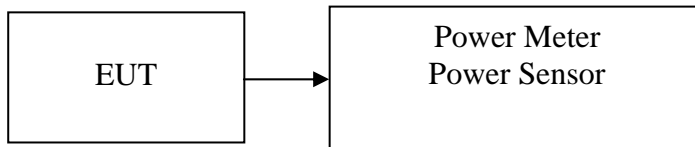

### TEST PROCEDURE

*The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.*

### TEST RESULTS

*No non-compliance noted.*



**Test Data**

**Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	11.69	0.01476
Mid	2437	15.65	0.03673
High	2462	10.23	0.01054

**Test mode: IEEE 802.11g mode**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	14.39	0.02748
Mid	2437	18.35	0.06839
High	2462	12.75	0.01884

**Test mode: IEEE 802.11n HT 20 MHz mode**

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Output Power (dBm)	Output Power (W)
Low	2412	8.07	7.79	10.94	0.0124
Mid	2437	12.09	10.19	14.25	0.0266
High	2462	6.44	2.66	7.96	0.0063

**Test mode: IEEE 802.11n HT 40 MHz mode**

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Output Power (dBm)	Output Power (W)
Low	2422	11.62	10.92	14.29	0.0269
Mid	2437	15.82	13.88	17.97	0.0626
High	2452	10.63	7.54	12.36	0.0172

**Remark:** Total Output Power (w) = Chain 0 (10^(Output Power /10)/1000)+ Chain 1 (10^(Output Power /10)/1000)




## 7.4 BAND EDGES MEASUREMENT

### LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

### Test Configuration

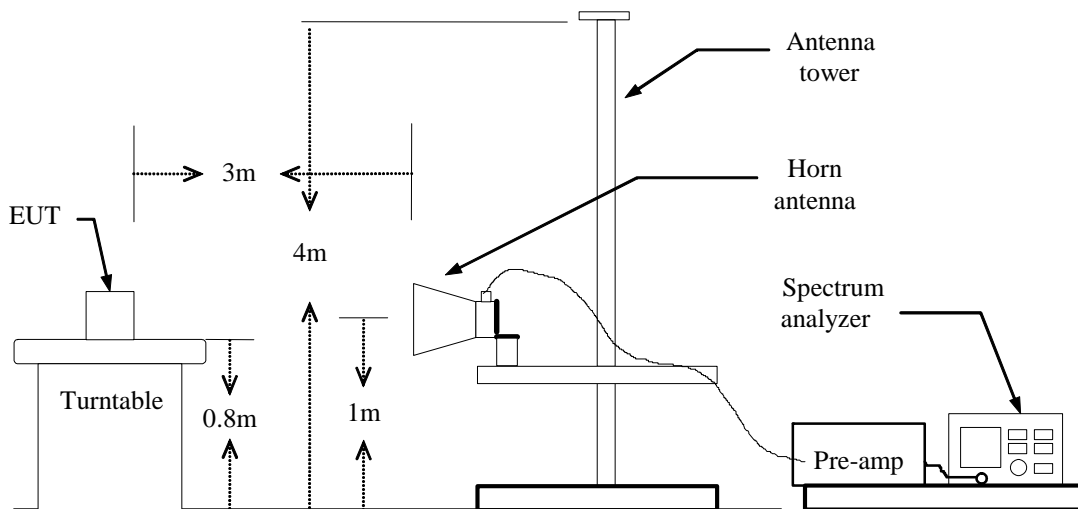

### TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
  - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
  - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

### TEST RESULTS

Refer to attach spectrum analyzer data chart.




### Band Edges (IEEE 802.11b mode / CH Low)

Detector mode: Peak

Polarity: Vertical

Agilent 11:24:06 Dec 22, 2010

R T

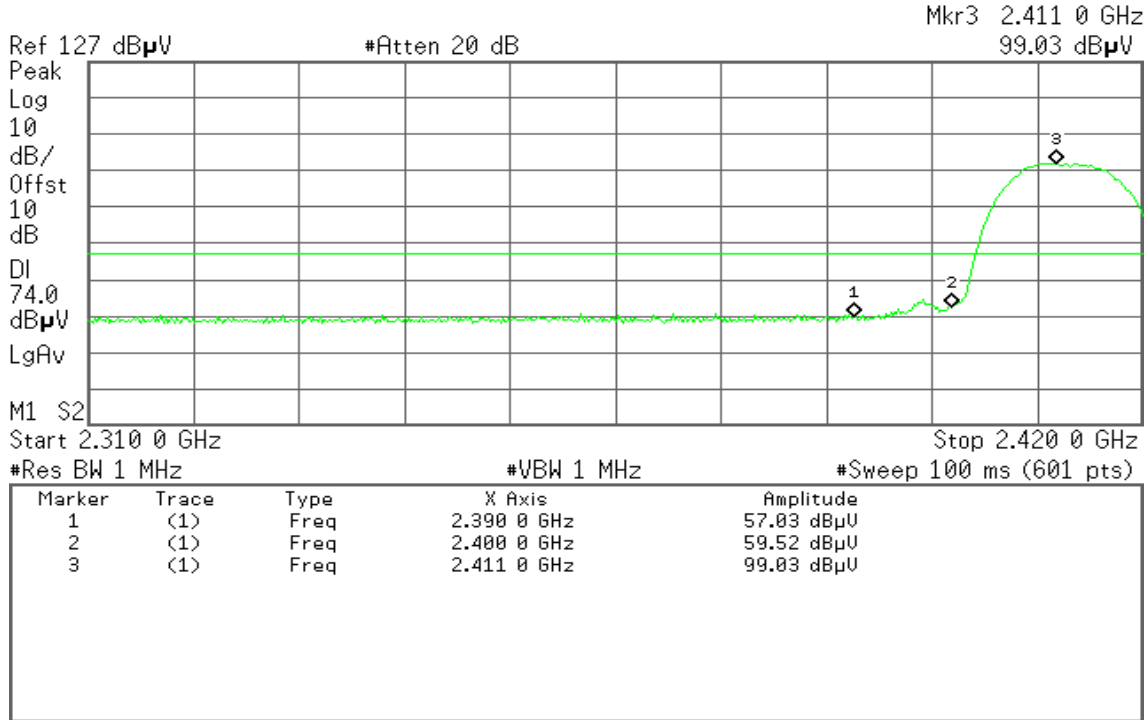


Detector mode: Average

Polarity: Vertical

Agilent 11:23:33 Dec 22, 2010

R T

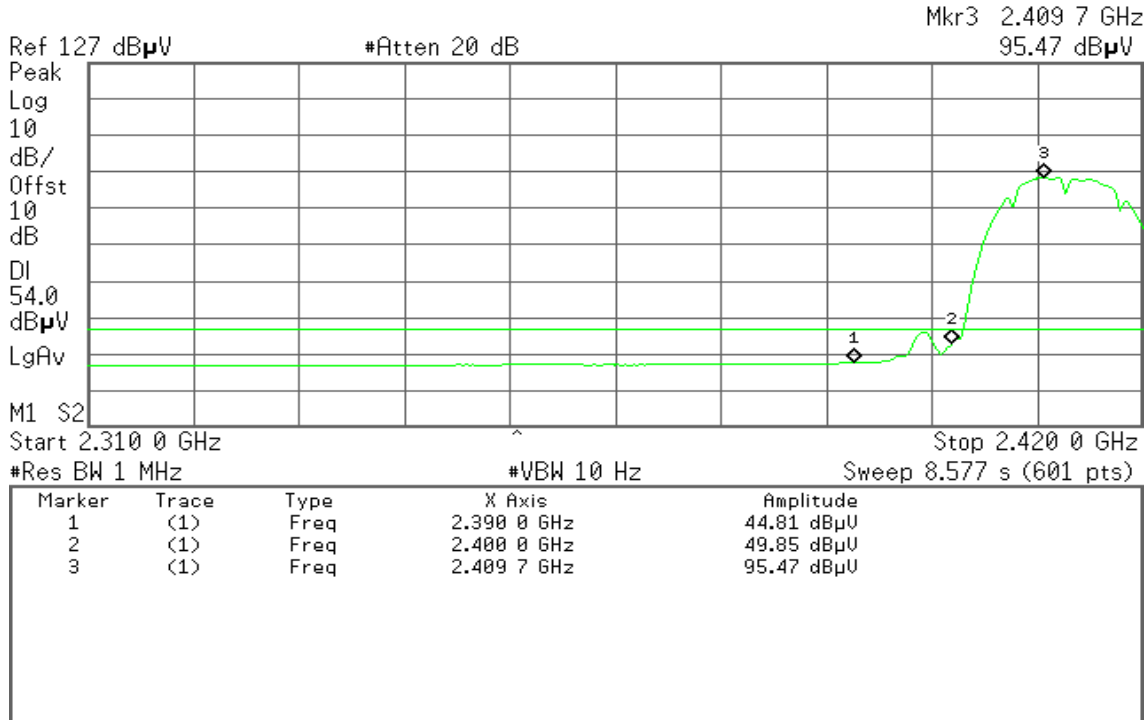




Detector mode: Peak

Polarity: Horizontal

Agilent 11:43:05 Dec 22, 2010

R T

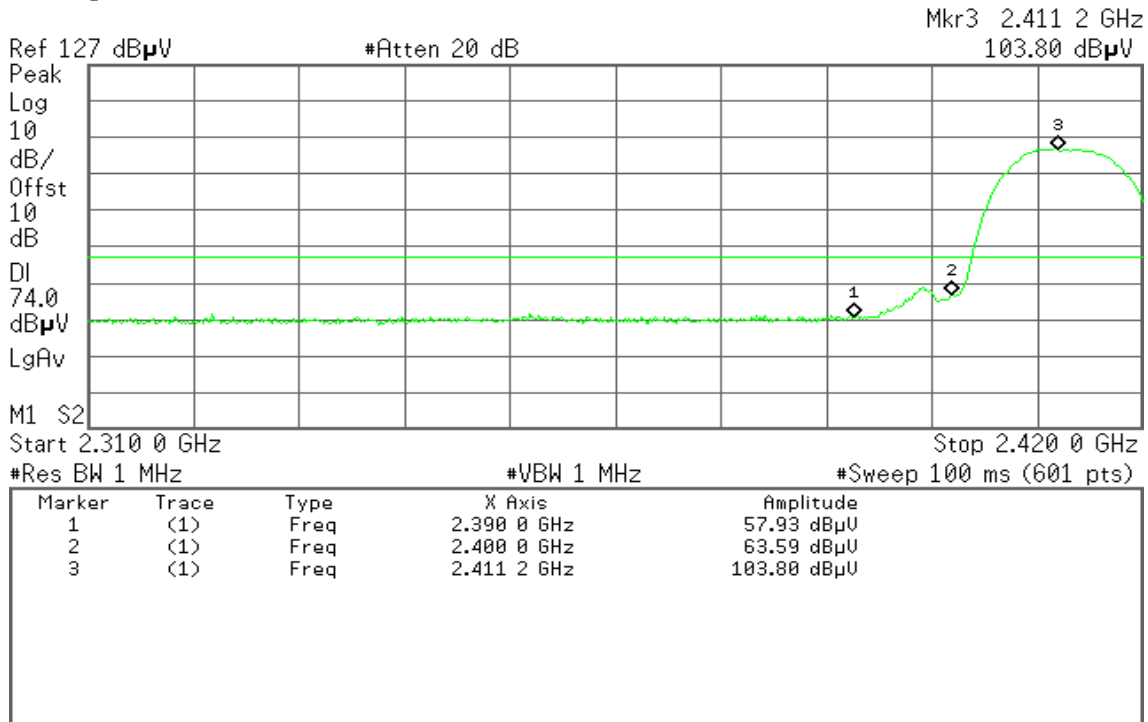


Detector mode: Average

Polarity: Horizontal

Agilent 11:41:55 Dec 22, 2010

R T

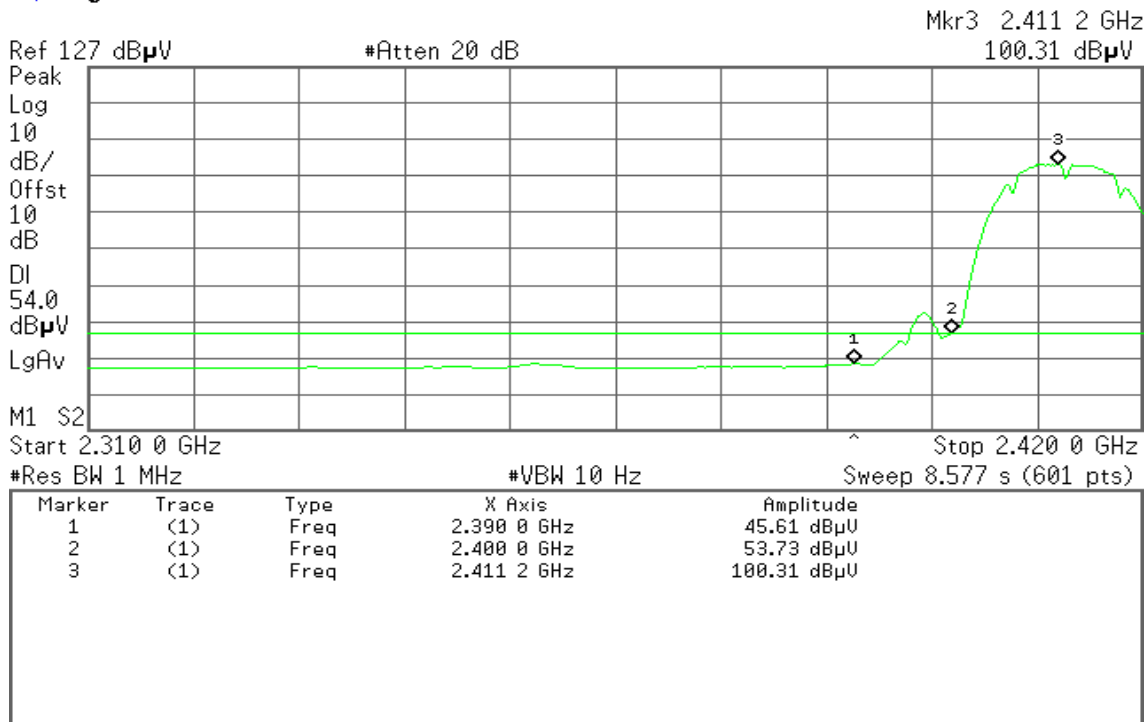





### Band Edges (IEEE 802.11b mode / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 11:34:02 Dec 22, 2010

R T

Mkr1 2.483 50 GHz  
56.50 dBμV

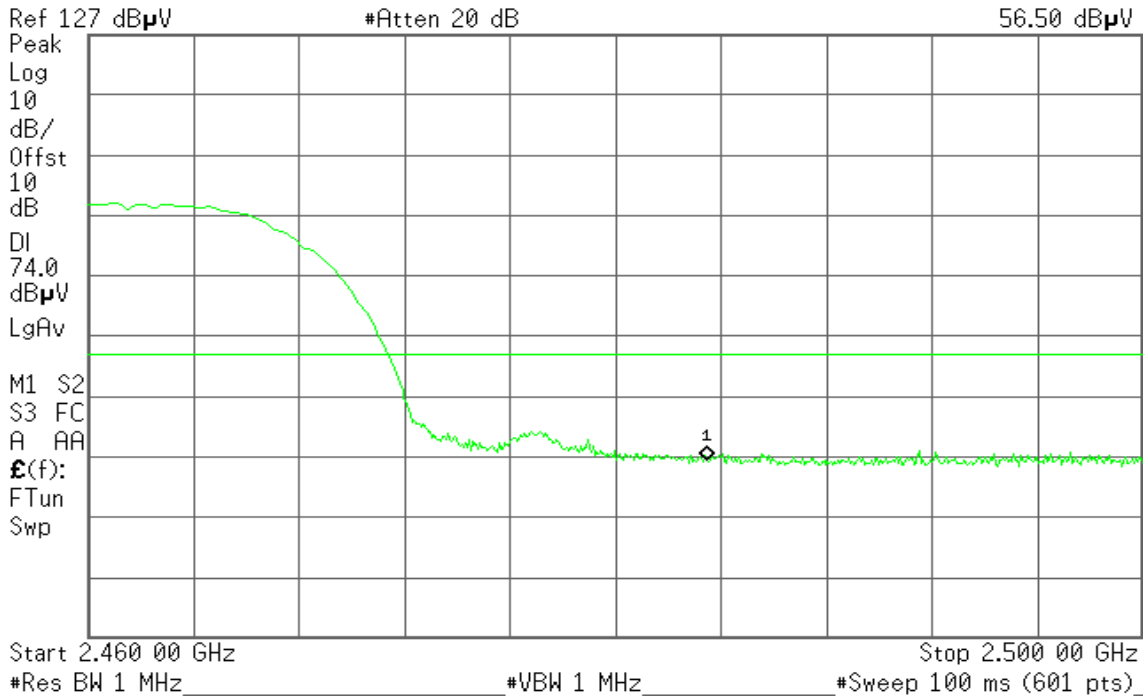


Detector mode: Average

Polarity: Vertical

Agilent 11:33:39 Dec 22, 2010

R T

Mkr1 2.483 50 GHz  
44.96 dBμV

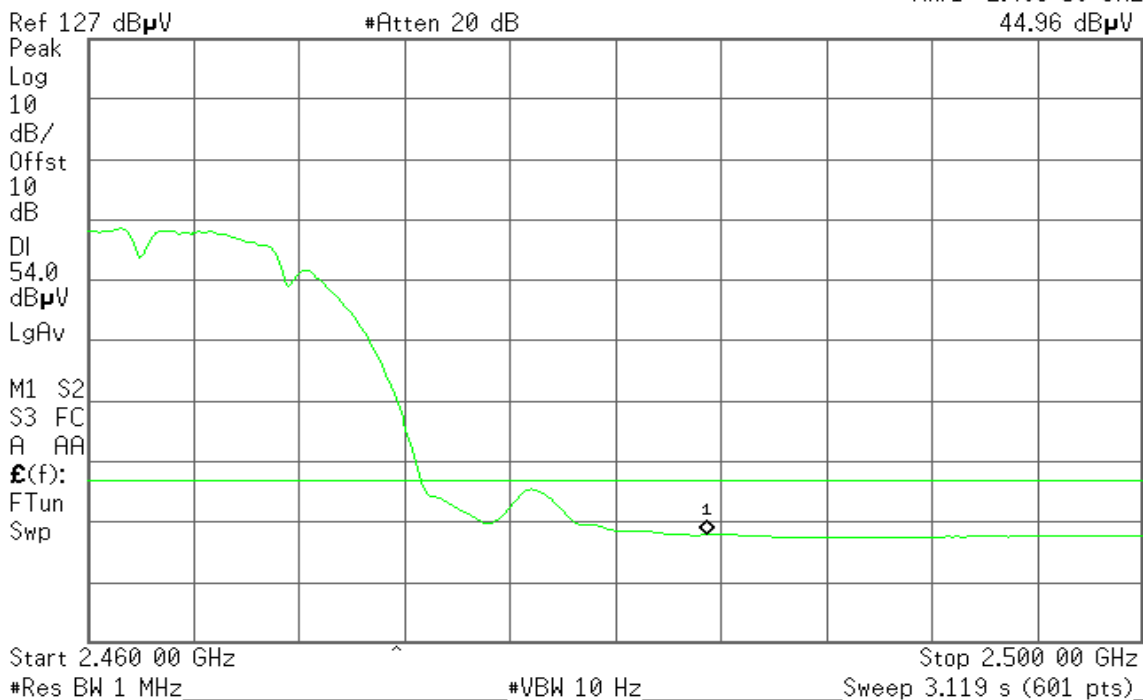




**Detector mode: Peak**

**Polarity: Horizontal**

Agilent 11:37:03 Dec 22, 2010

R T

Mkr1 2.483 50 GHz  
57.33 dB $\mu$ V

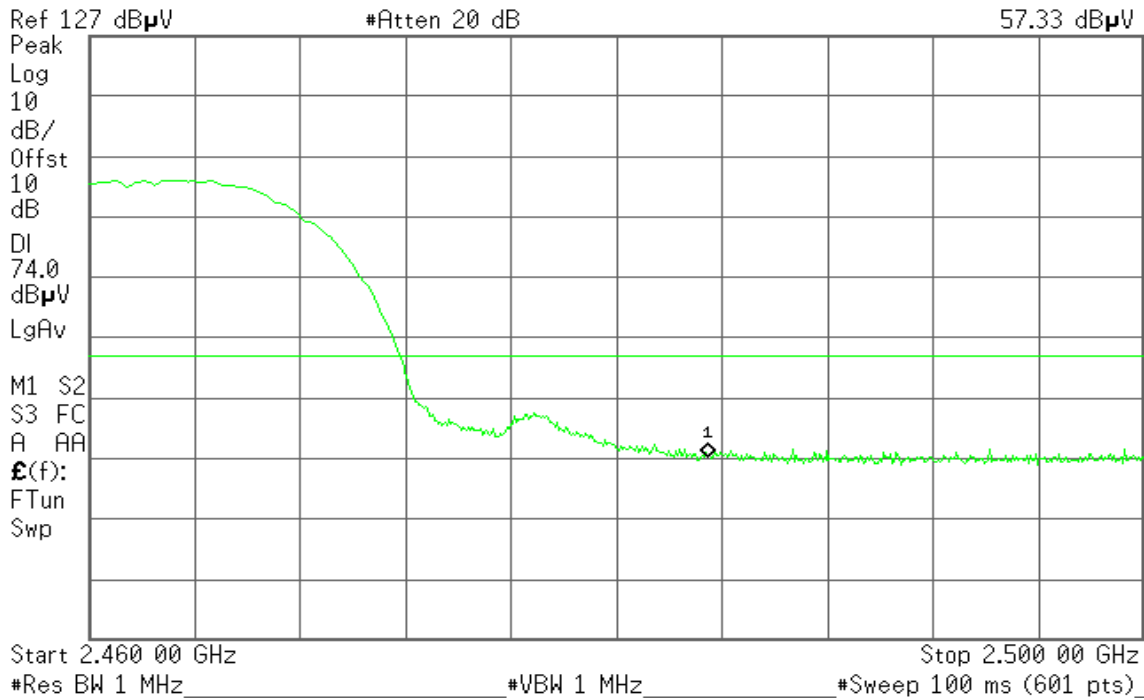


**Detector mode: Average**

**Polarity: Horizontal**

Agilent 11:38:06 Dec 22, 2010

R T

Mkr1 2.483 50 GHz  
45.70 dB $\mu$ V

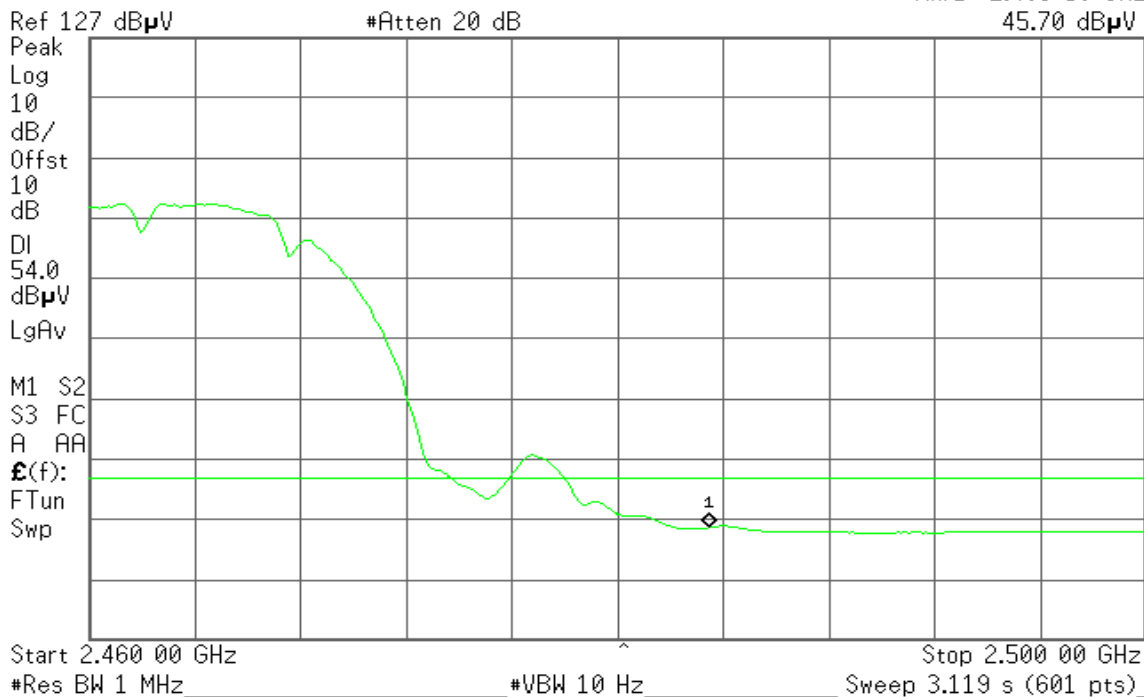




### Band Edges (IEEE 802.11g mode / CH Low)

Detector mode: Peak

Polarity: Vertical

Agilent 11:58:10 Dec 22, 2010

R T

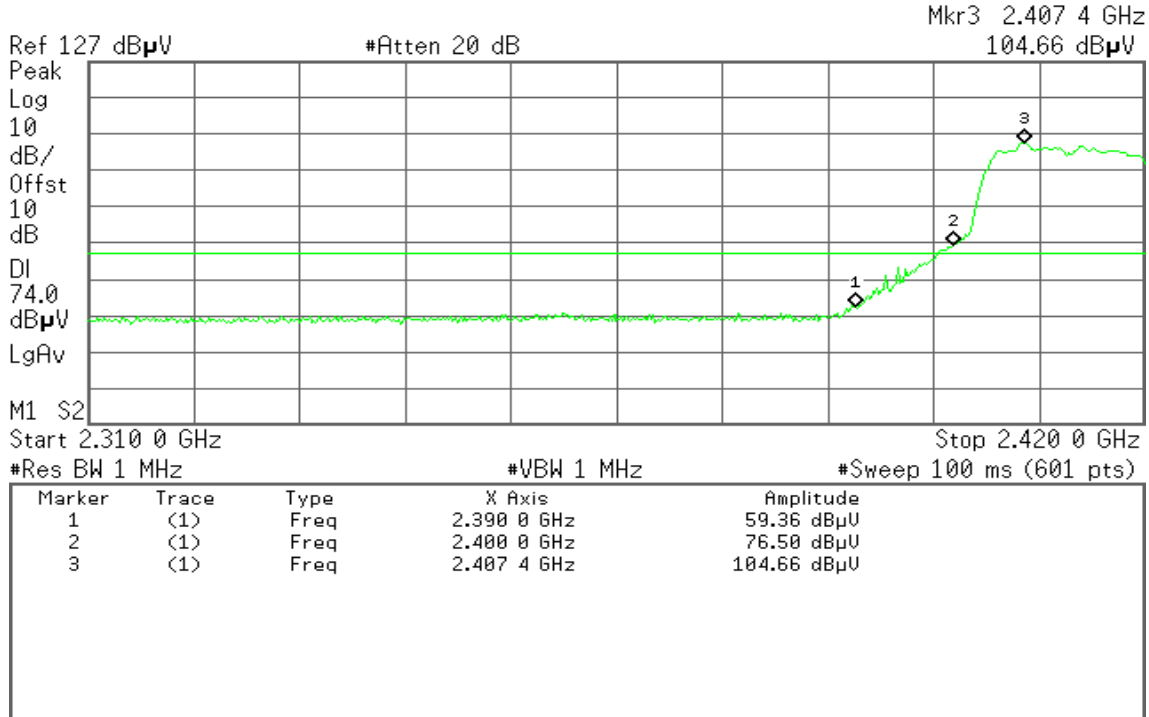


Detector mode: Average

Polarity: Vertical

Agilent 11:58:38 Dec 22, 2010

R T

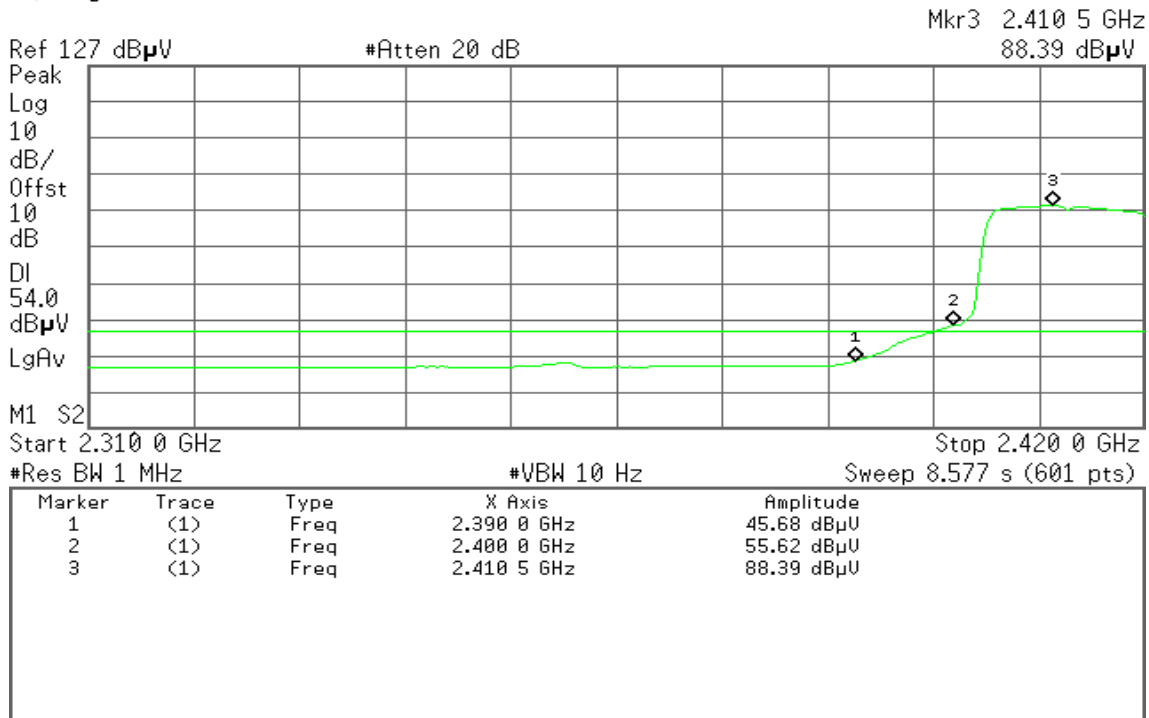




Detector mode: Peak

Polarity: Horizontal

Agilent 11:52:20 Dec 22, 2010

R T

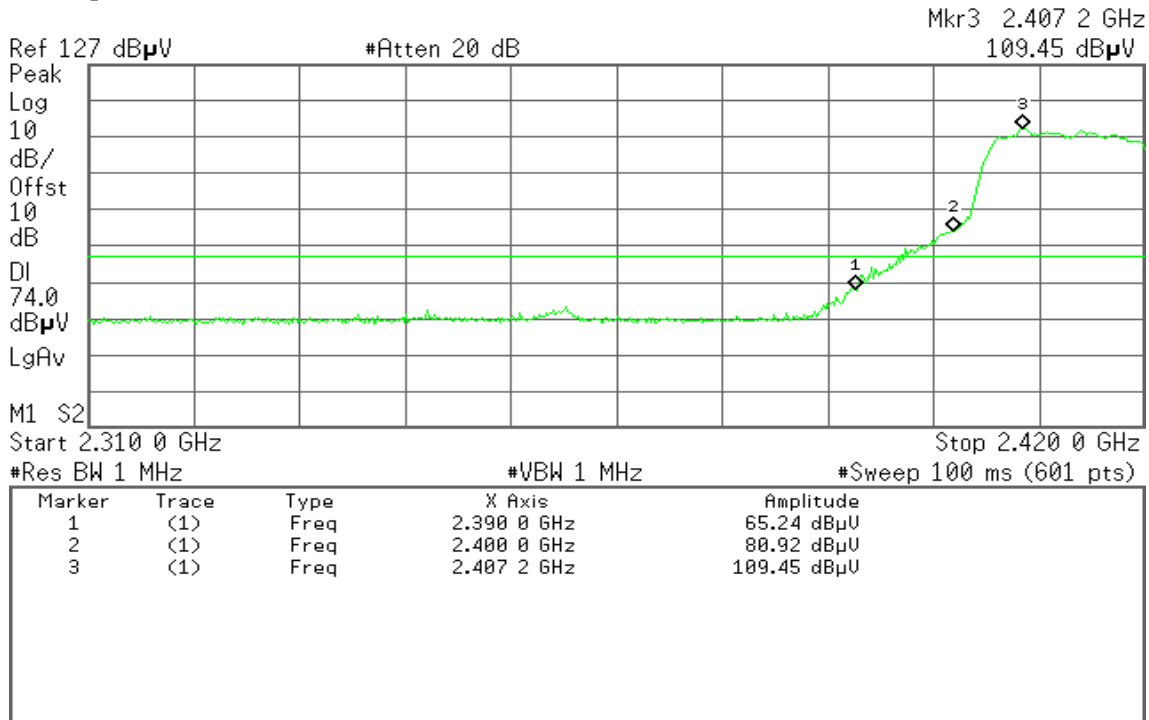


Detector mode: Average

Polarity: Horizontal

Agilent 11:51:20 Dec 22, 2010

R T

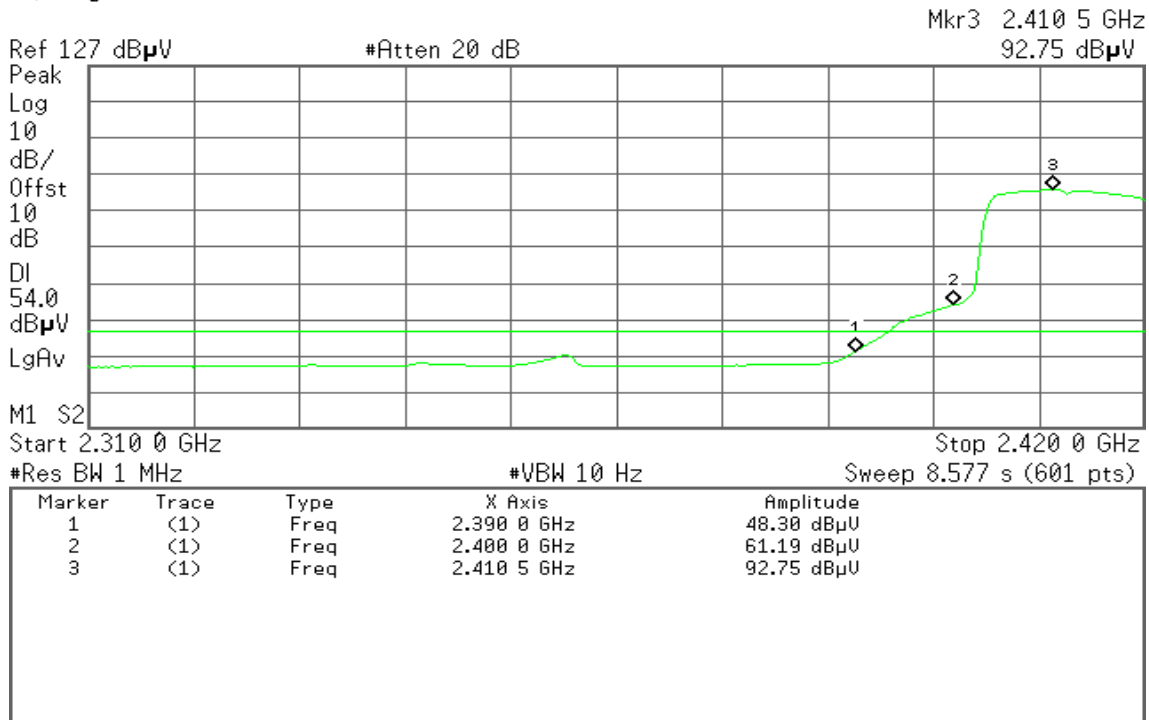



### Band Edges (IEEE 802.11g mode / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 12:14:18 Dec 22, 2010

R T

Mkr1 2.483 50 GHz  
58.36 dB $\mu$ V

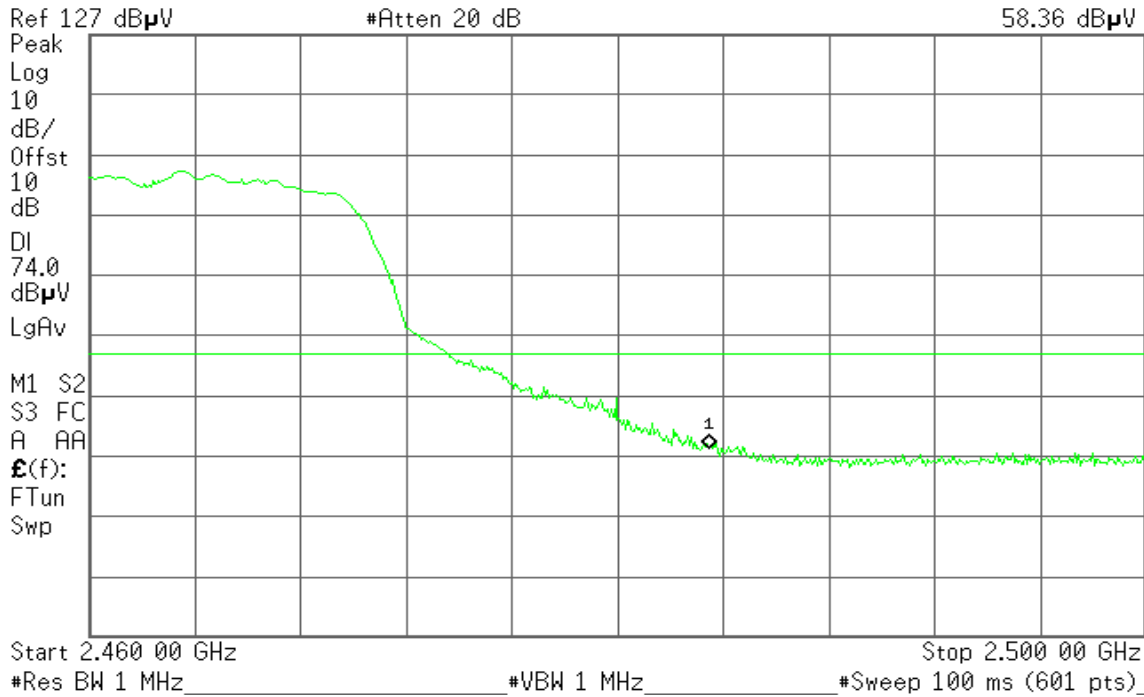


Detector mode: Average

Polarity: Vertical

Agilent 12:13:58 Dec 22, 2010

R L

Mkr1 2.483 50 GHz  
45.57 dB $\mu$ V

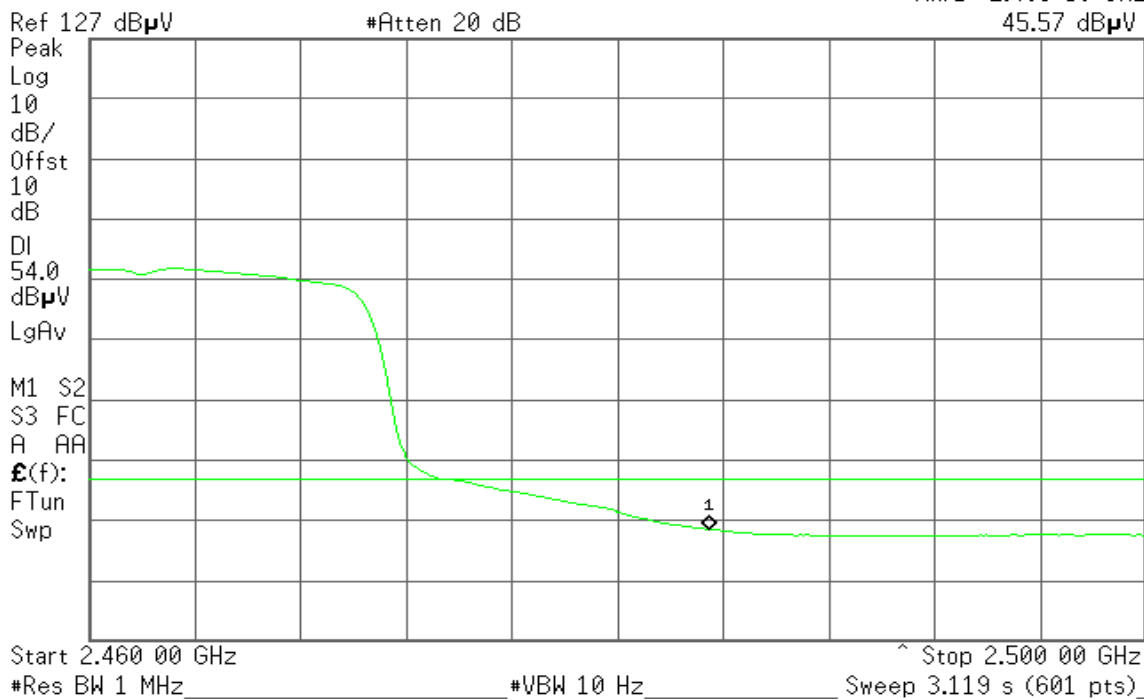




**Detector mode: Peak**

**Polarity: Horizontal**

Agilent 12:08:47 Dec 22, 2010

R T

Mkr1 2.483 50 GHz  
62.85 dB $\mu$ V

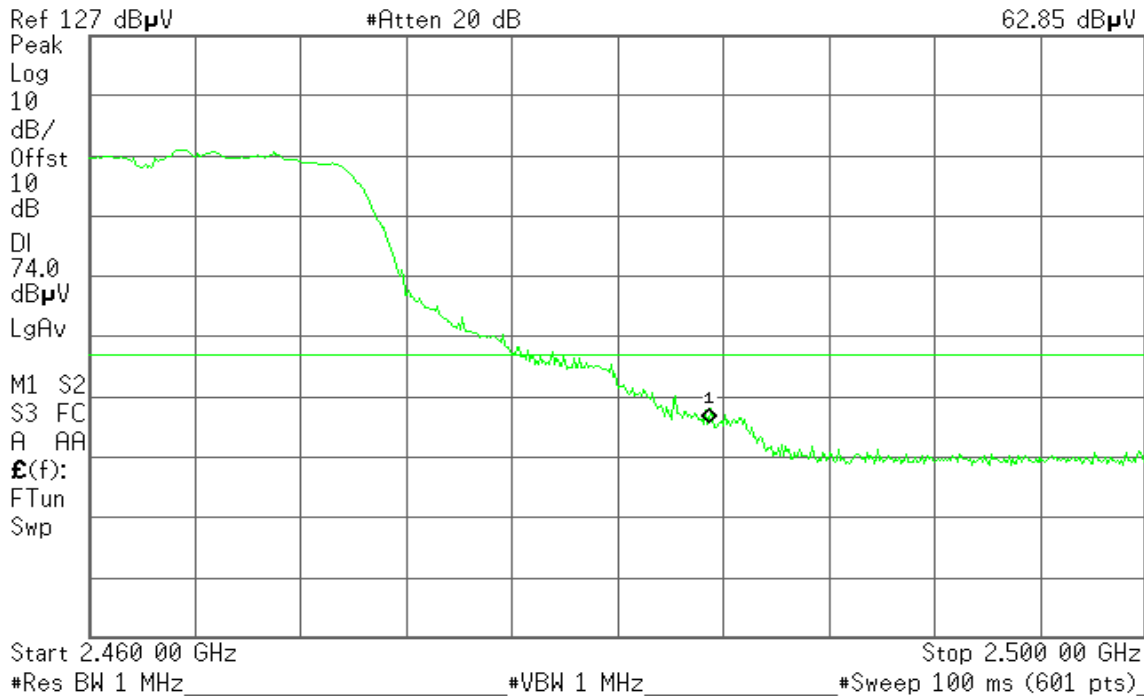


**Detector mode: Average**

**Polarity: Horizontal**

Agilent 12:08:27 Dec 22, 2010

R T

Mkr1 2.483 50 GHz  
47.64 dB $\mu$ V

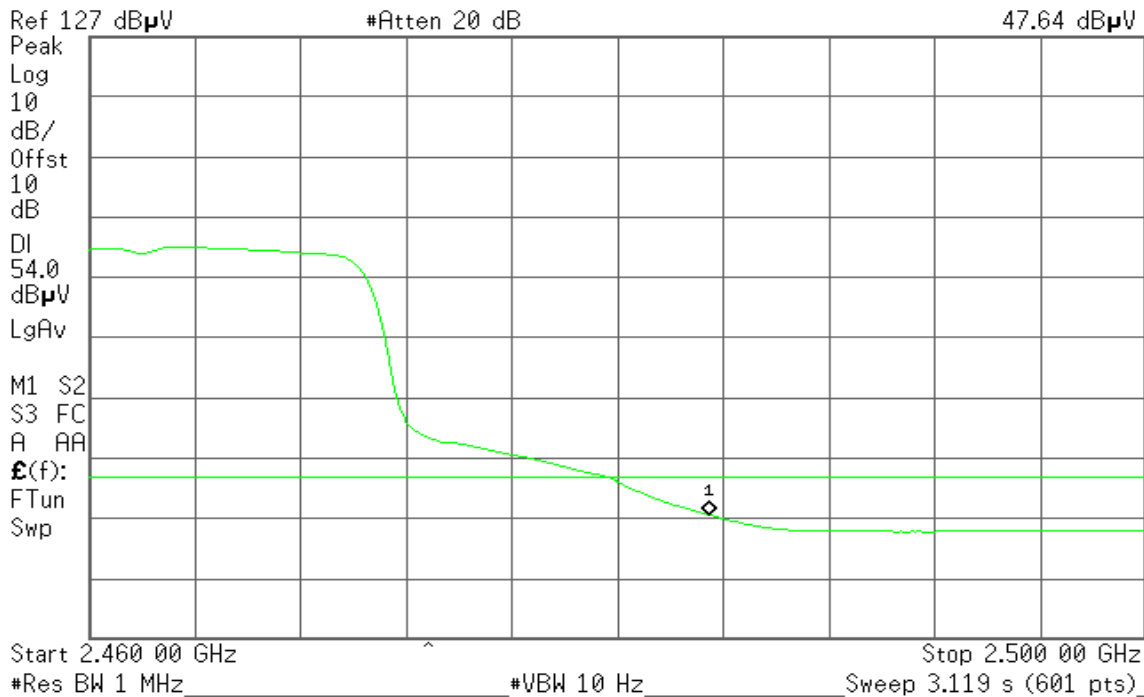




**Band Edges (IEEE 802.11n HT 20 MHz mode / CH Low)**

**Detector mode: Peak**

**Polarity: Vertical**

Agilent 12:59:21 Dec 22, 2010

R T

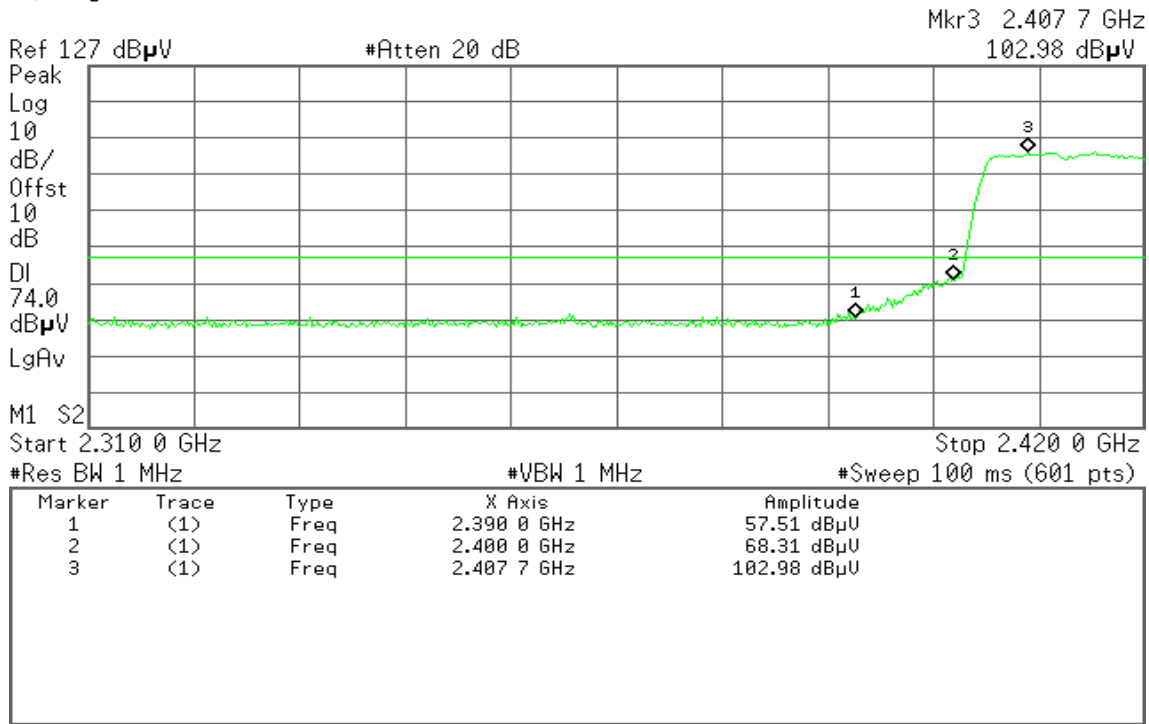


**Detector mode: Average**

**Polarity: Vertical**

Agilent 12:58:49 Dec 22, 2010

R T

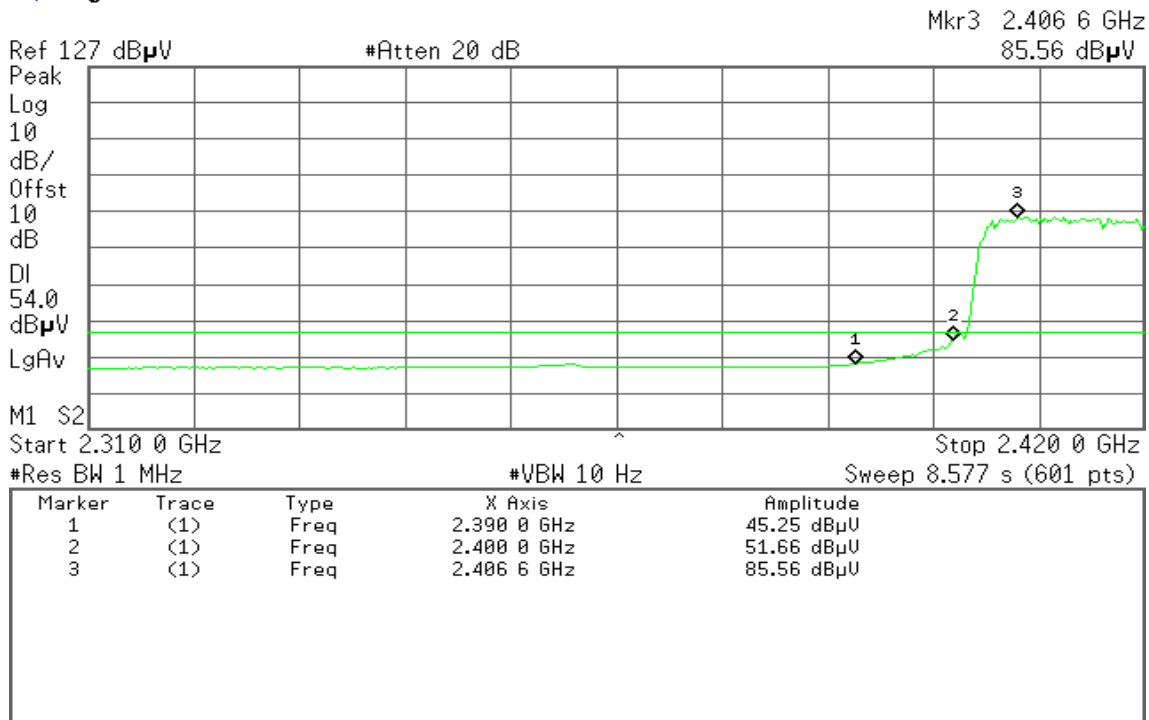




Detector mode: Peak

Polarity: Horizontal

Agilent 13:04:45 Dec 22, 2010

R T

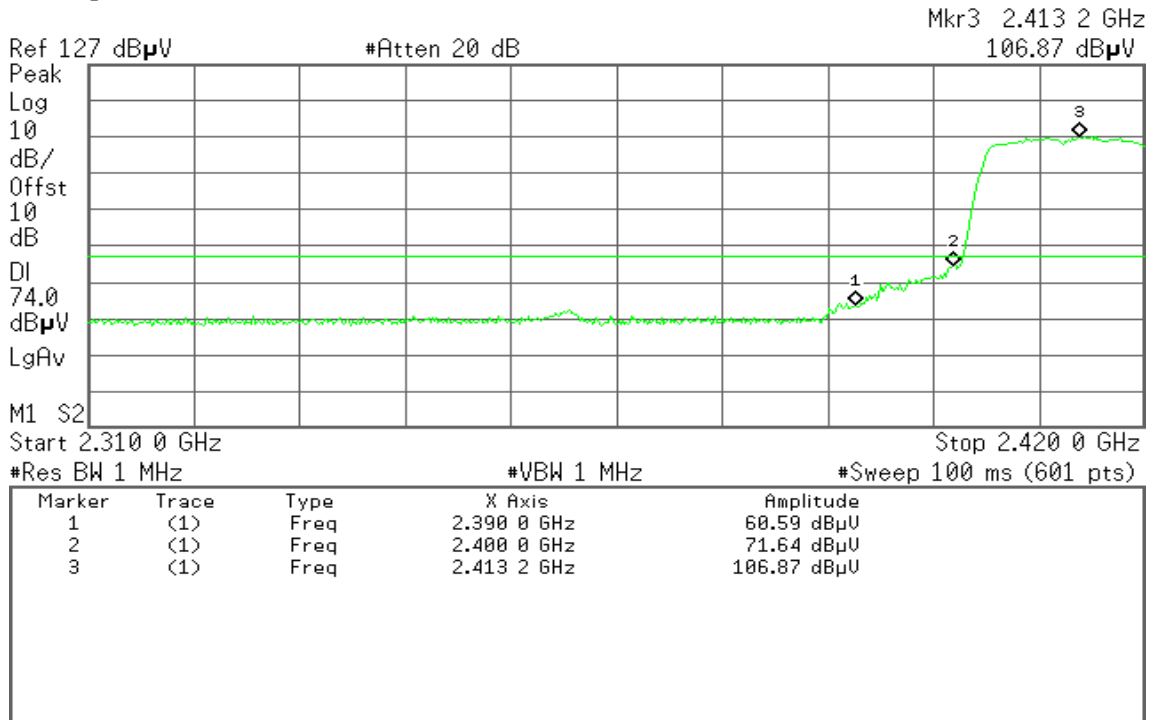


Detector mode: Average

Polarity: Horizontal

Agilent 13:04:22 Dec 22, 2010

R T

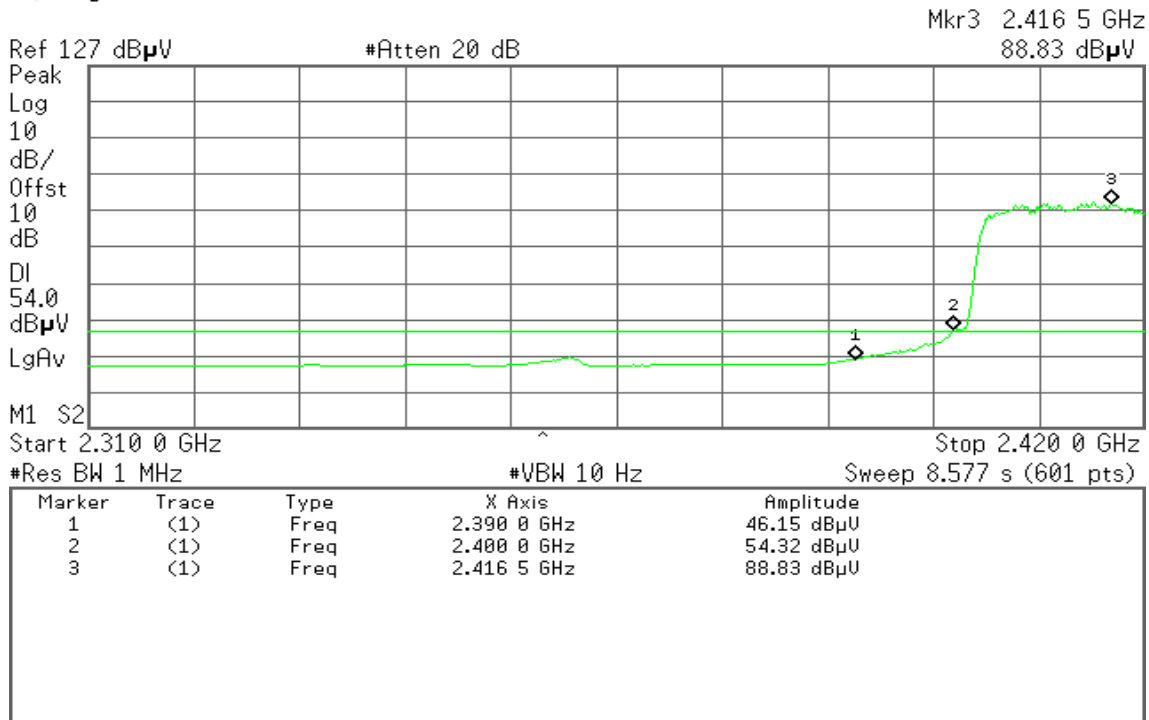





**Band Edges (IEEE 802.11n HT 20 MHz mode / CH High)**


**Detector mode: Peak**

**Polarity: Vertical**

Agilent 12:20:49 Dec 22, 2010

R T

Mkr1 2.483 50 GHz  
62.20 dB $\mu$ V

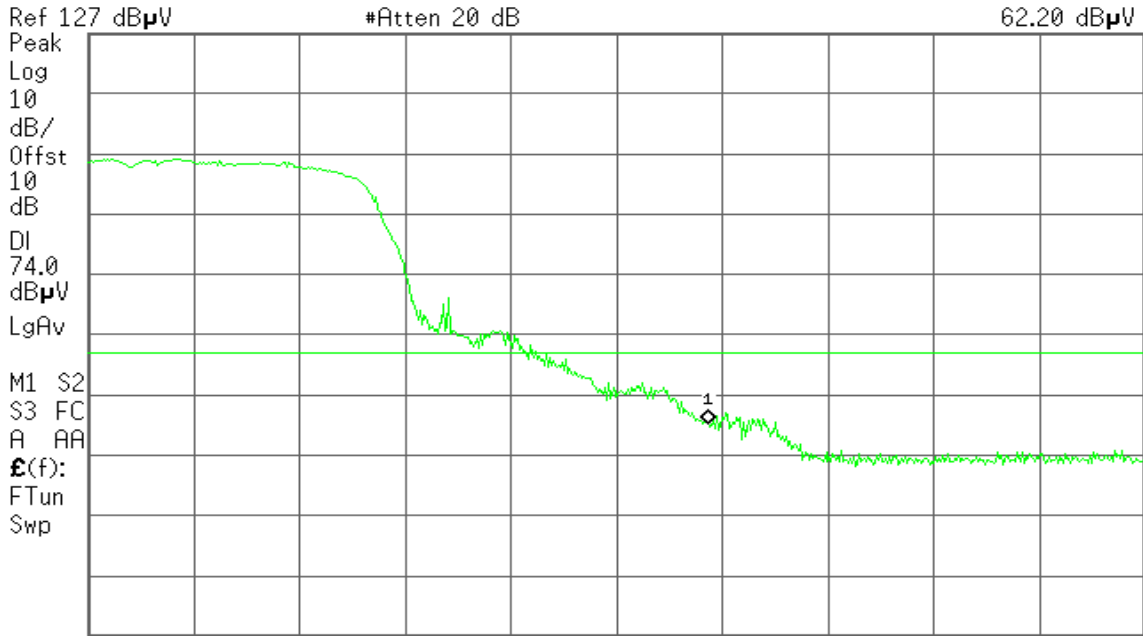

Start 2.460 00 GHz Stop 2.500 00 GHz  
#Res BW 1 MHz #VBW 1 MHz #Sweep 100 ms (601 pts)


**Detector mode: Average**

**Polarity: Vertical**

Agilent 12:20:30 Dec 22, 2010

R T

Mkr1 2.483 50 GHz  
46.92 dB $\mu$ V

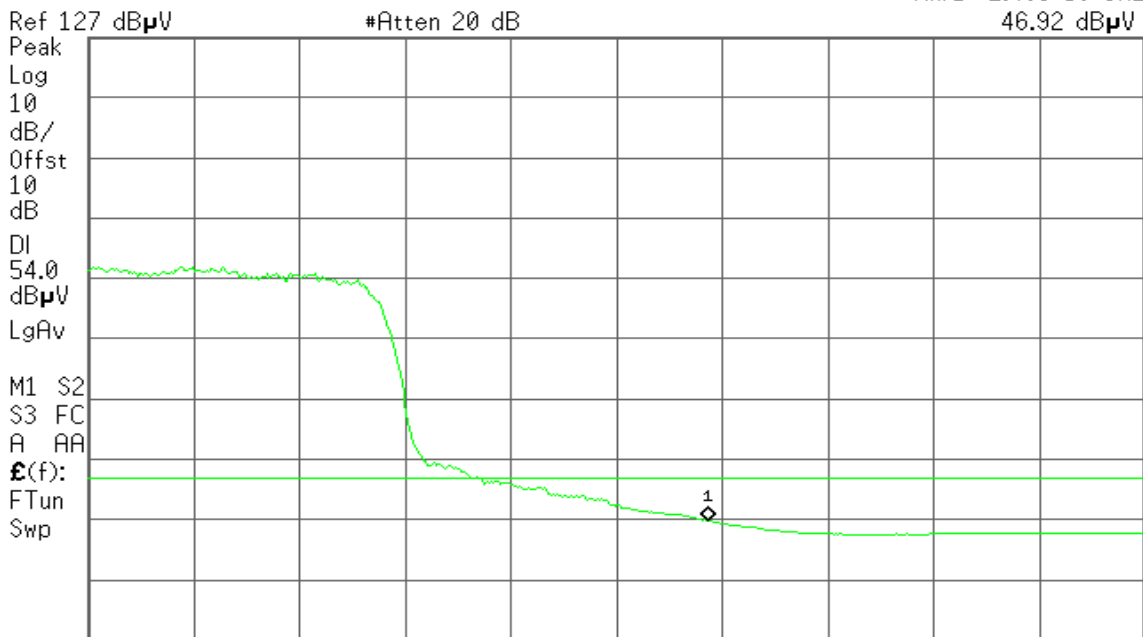

Start 2.460 00 GHz Stop 2.500 00 GHz  
#Res BW 1 MHz #VBW 10 Hz Sweep 3.119 s (601 pts)




**Detector mode: Peak**

**Polarity: Horizontal**

Agilent 12:33:28 Dec 22, 2010

R T

Mkr1 2.483 50 GHz  
69.86 dB $\mu$ V

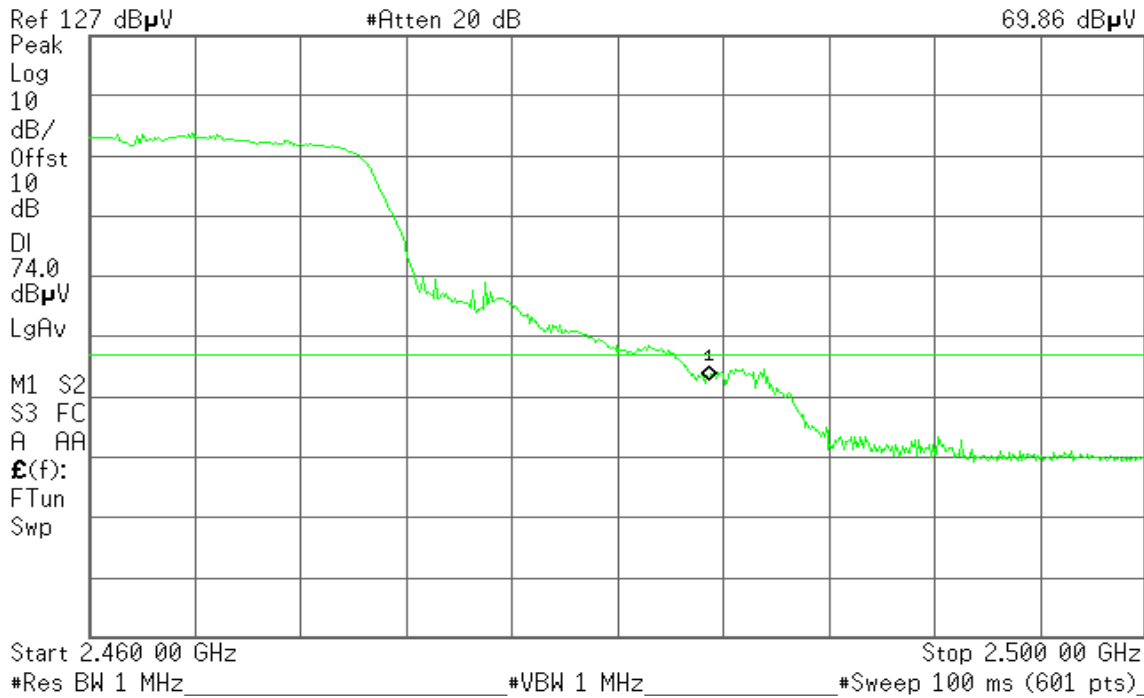


**Detector mode: Average**

**Polarity: Horizontal**

Agilent 12:28:38 Dec 22, 2010

R T

Mkr1 2.483 50 GHz  
51.52 dB $\mu$ V

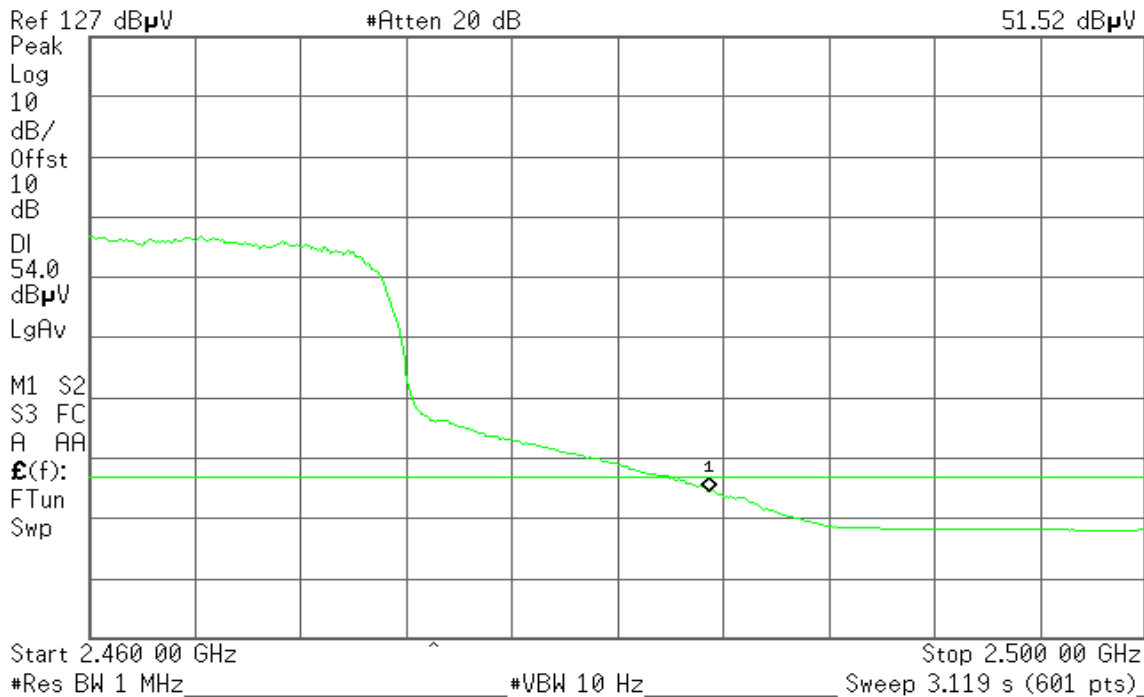




**Band Edges (IEEE 802.11n HT 40 MHz mode / CH Low)**

**Detector mode: Peak**

**Polarity: Vertical**

Agilent 09:14:26 Dec 22, 2010

R T

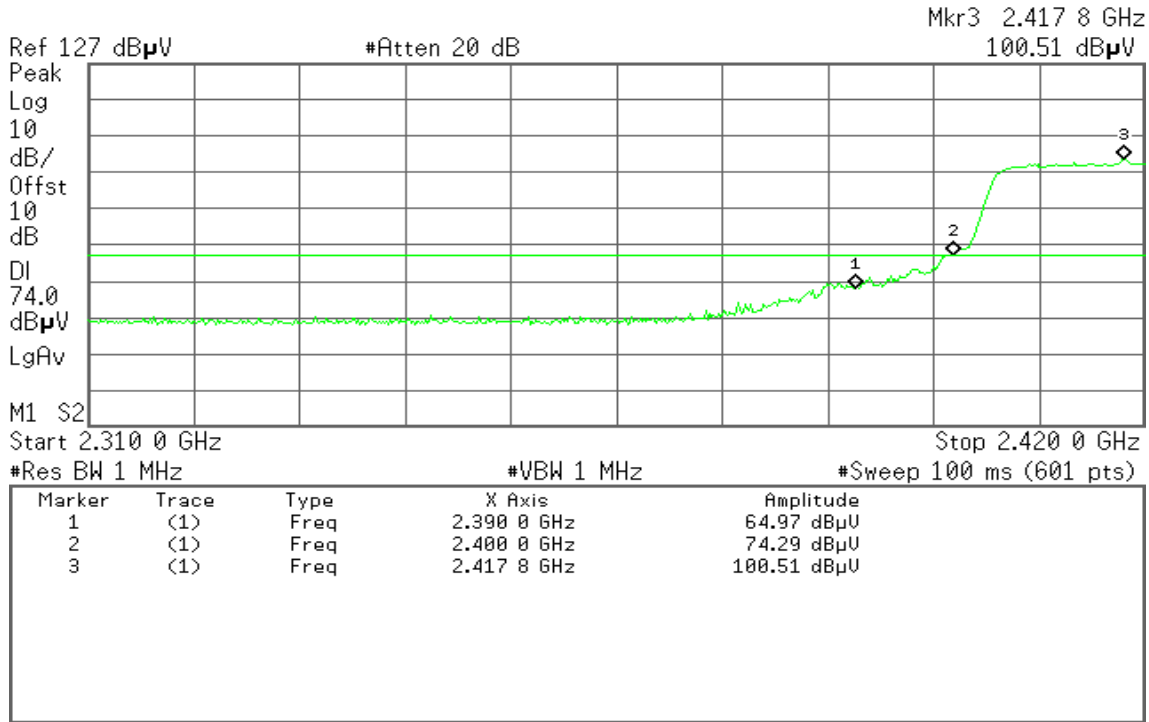


**Detector mode: Average**

**Polarity: Vertical**

Agilent 09:13:48 Dec 22, 2010

R T

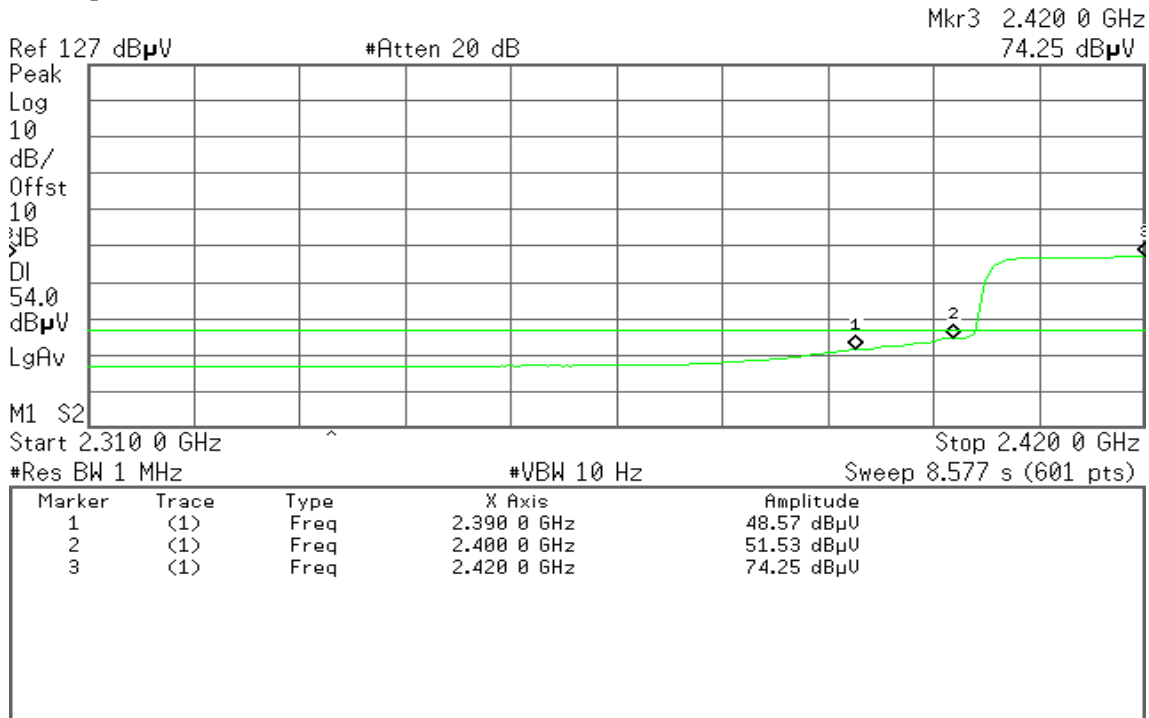




Detector mode: Peak

Polarity: Horizontal

Agilent 09:07:29 Dec 22, 2010

R T

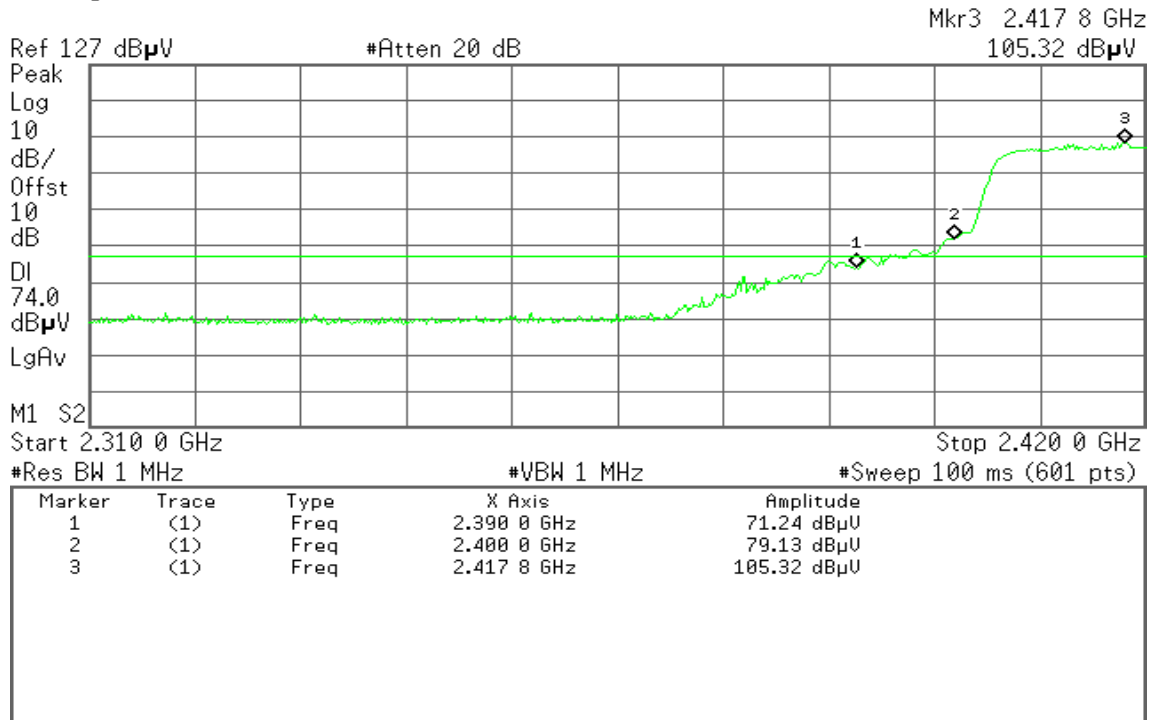


Detector mode: Average

Polarity: Horizontal

Agilent 09:06:35 Dec 22, 2010

R T

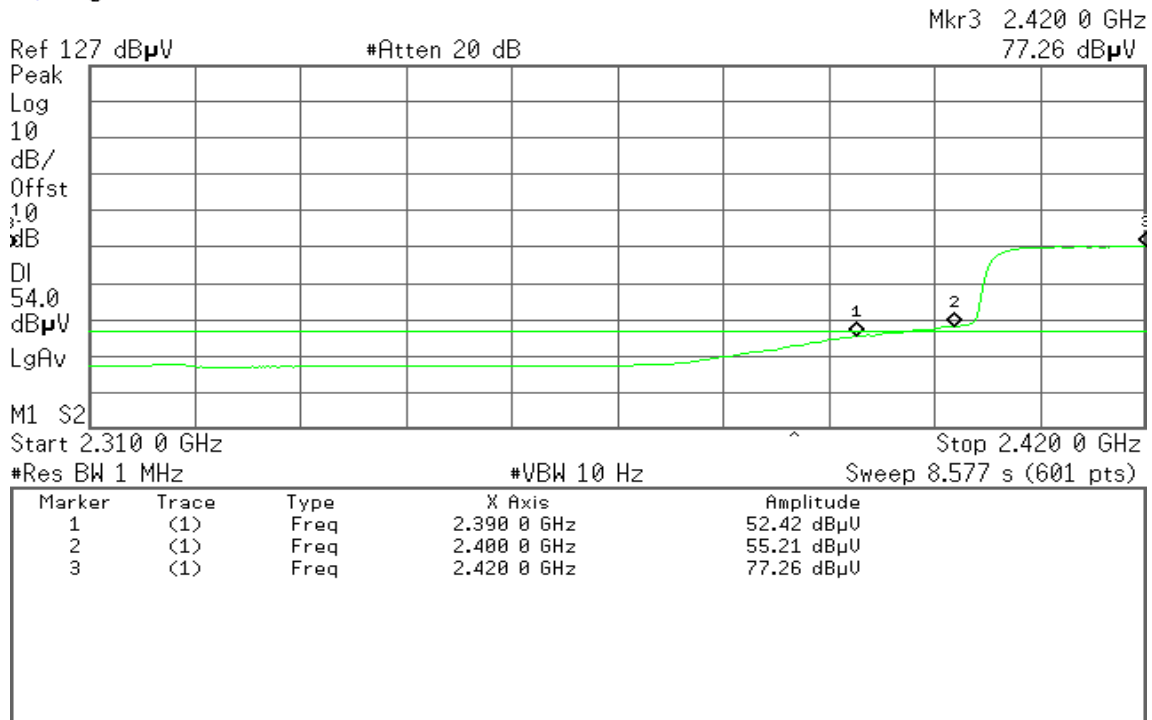



**Band Edges (IEEE 802.11n HT 40 MHz mode / CH High)**


**Detector mode: Peak**

**Polarity: Vertical**

Agilent 08:55:27 Dec 22, 2010

R T

Mkr1 2.483 50 GHz  
65.03 dB $\mu$ V

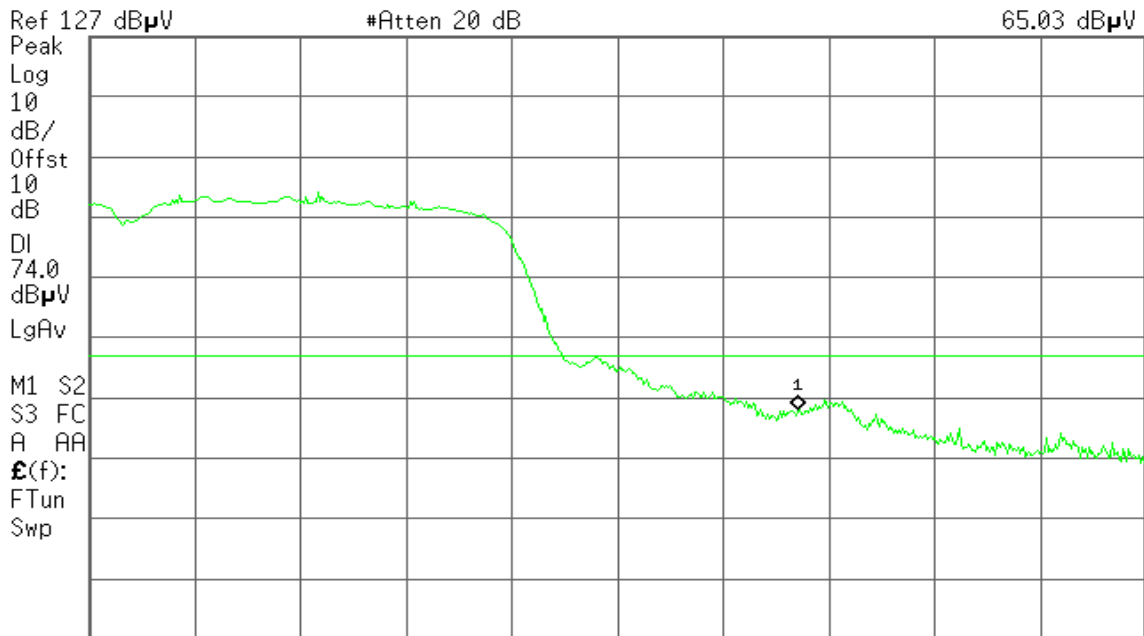

Start 2.450 00 GHz Stop 2.500 00 GHz  
#Res BW 1 MHz #VBW 1 MHz #Sweep 100 ms (601 pts)


**Detector mode: Average**

**Polarity: Vertical**

Agilent 08:54:58 Dec 22, 2010

R T

Mkr1 2.483 50 GHz  
47.59 dB $\mu$ V

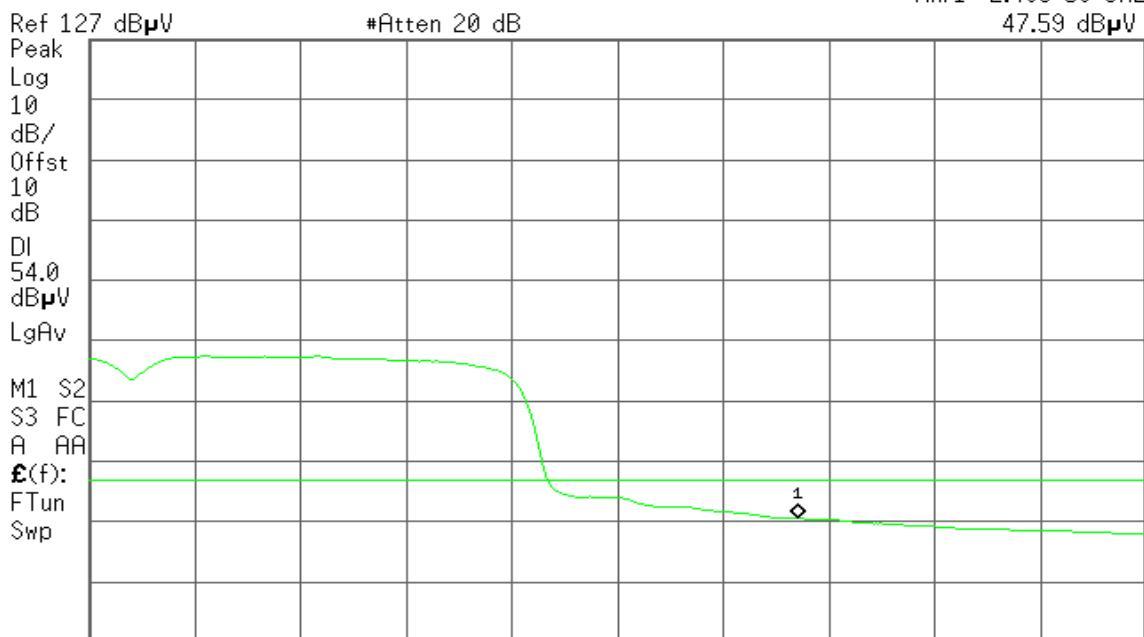

Start 2.450 00 GHz Stop 2.500 00 GHz  
#Res BW 1 MHz #VBW 10 Hz Sweep 3.899 s (601 pts)



Detector mode: Peak

Polarity: Horizontal


Agilent 08:48:06 Dec 22, 2010

R L

Mkr2 2.485 58 GHz  
72.54 dBμV

Ref 127 dBμV

#Atten 20 dB

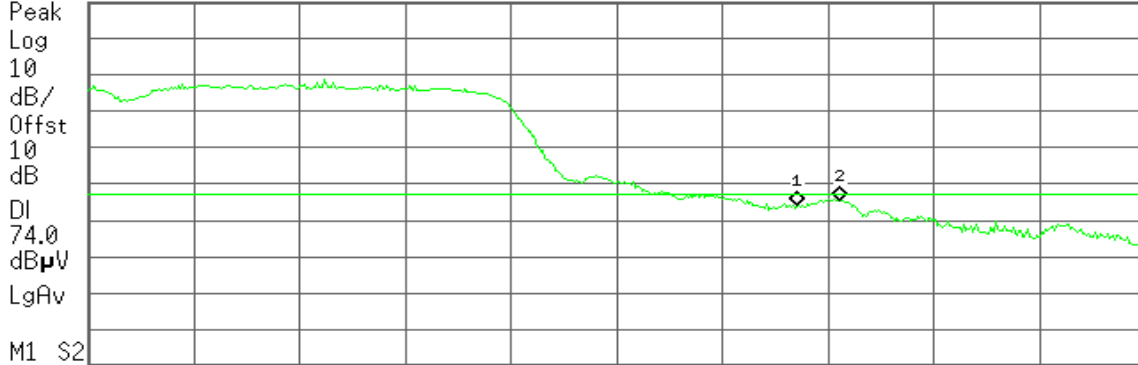

M1 S2  
Start 2.450 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.483 50 GHz	71.21 dBμU
2	(1)	Freq	2.485 58 GHz	72.54 dBμU

Detector mode: Average

Polarity: Horizontal


Agilent 08:57:05 Dec 22, 2010

R T

Mkr1 2.483 50 GHz  
51.23 dBμV

Ref 127 dBμV

#Atten 20 dB

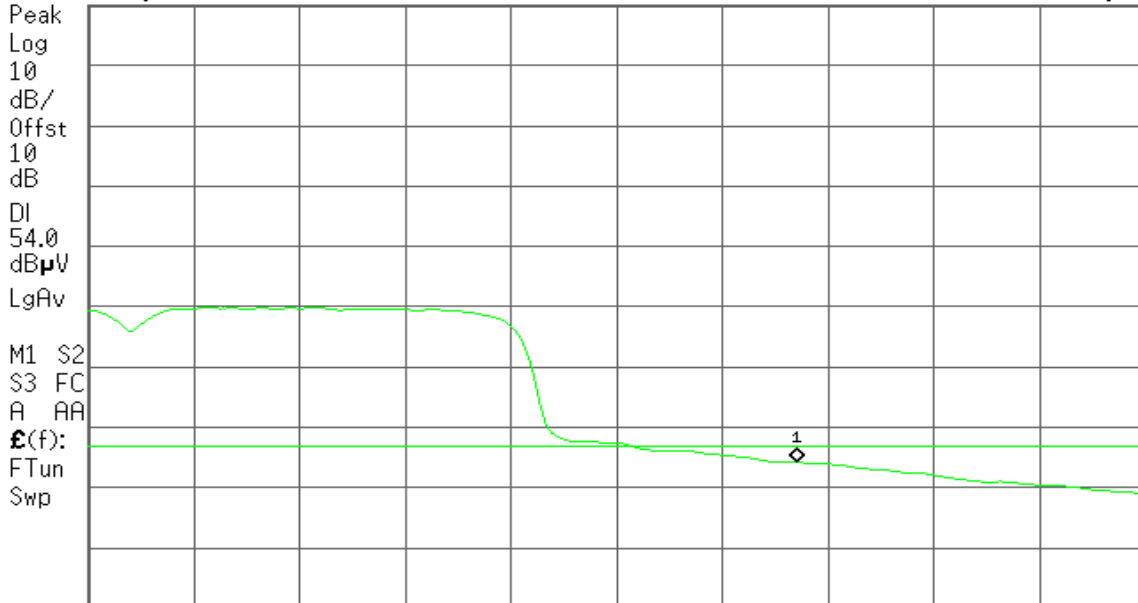

M1 S2  
S3 FC  
A AA  
£(f):  
FTun  
Swp  
Start 2.450 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 3.899 s (601 pts)




## 7.5 PEAK POWER SPECTRAL DENSITY

### LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

### Test Configuration

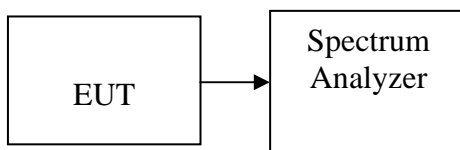

### TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.  
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3 kHz, VBW = 10 kHz, Span = 300 kHz, Sweep time = 100 s
3. Record the max reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

### TEST RESULTS

*No non-compliance noted.*



**Test Data**

**Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-5.01	8.00	PASS
Mid	2437	-6.41		PASS
High	2462	-9.39		PASS

**Test mode: IEEE 802.11g mode**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-12.35	8.00	PASS
Mid	2437	-5.20		PASS
High	2462	-11.32		PASS

**Test mode: IEEE 802.11n HT 20 MHz mode**

Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-16.95	-17.82	-14.35	8.00	PASS
Mid	2437	-11.62	-15.18	-10.03		PASS
High	2462	-18.21	-21.93	-16.67		PASS

**Test mode: IEEE 802.11n HT 40 MHz mode**

Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	PPSD (dBm)	Limit (dBm)	Result
Low	2422	-14.33	-15.43	-11.83	8.00	PASS
Mid	2437	-10.79	-11.73	-8.22		PASS
High	2452	-17.26	-19.2	-15.11		PASS

**Remark:** Total PPSD (dBm) = 10\*LOG(10^(Chain 0 PPSD / 10)+10^(Chain12 PPSD /10))





**Test mode: IEEE 802.11n HT 20 MHz mode with combiner**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-11.92	8.00	PASS
Mid	2437	-7.78		PASS
High	2462	-15.80		PASS

**Test mode: IEEE 802.11n HT 40 MHz mode with combiner**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2422	-12.15	8.00	PASS
Mid	2437	-7.99		PASS
High	2452	-13.96		PASS



**Test Plot**


**IEEE 802.11b mode**

**PPSD (CH Low)**

Agilent 17:05:43 Dec 24, 2010

R T

Mkr1 2.415 246 0 GHz  
-5.01 dBm

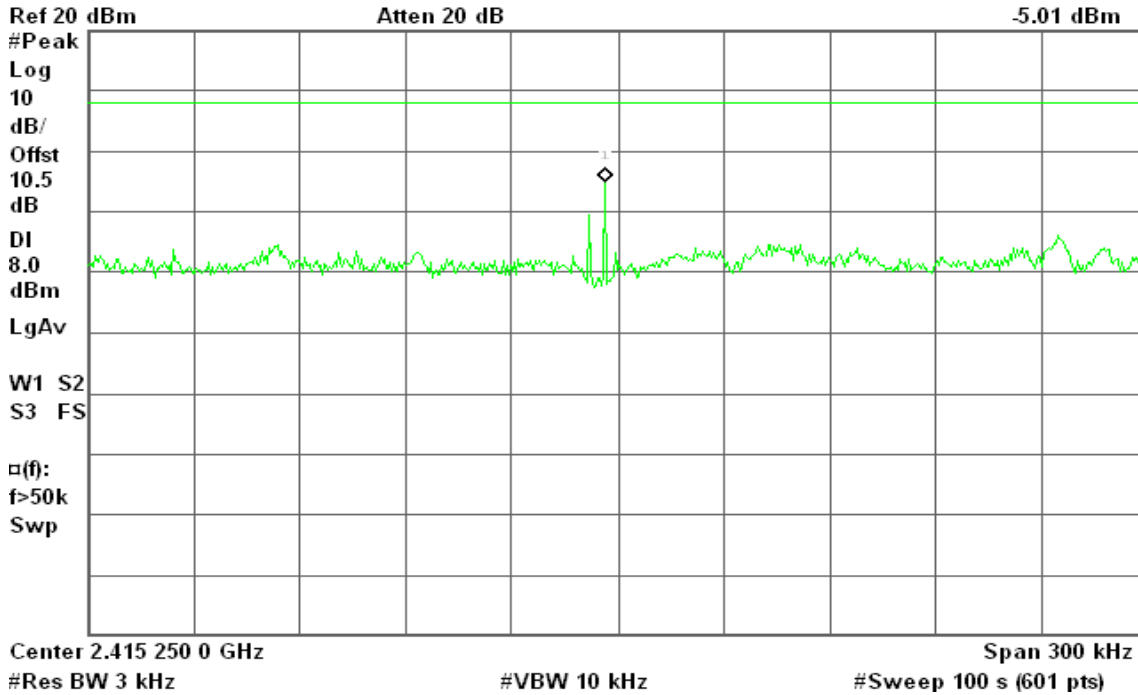


**PPSD (CH Mid)**

Agilent 17:18:01 Dec 24, 2010

R T

Mkr1 2.442 242 0 GHz  
-6.41 dBm

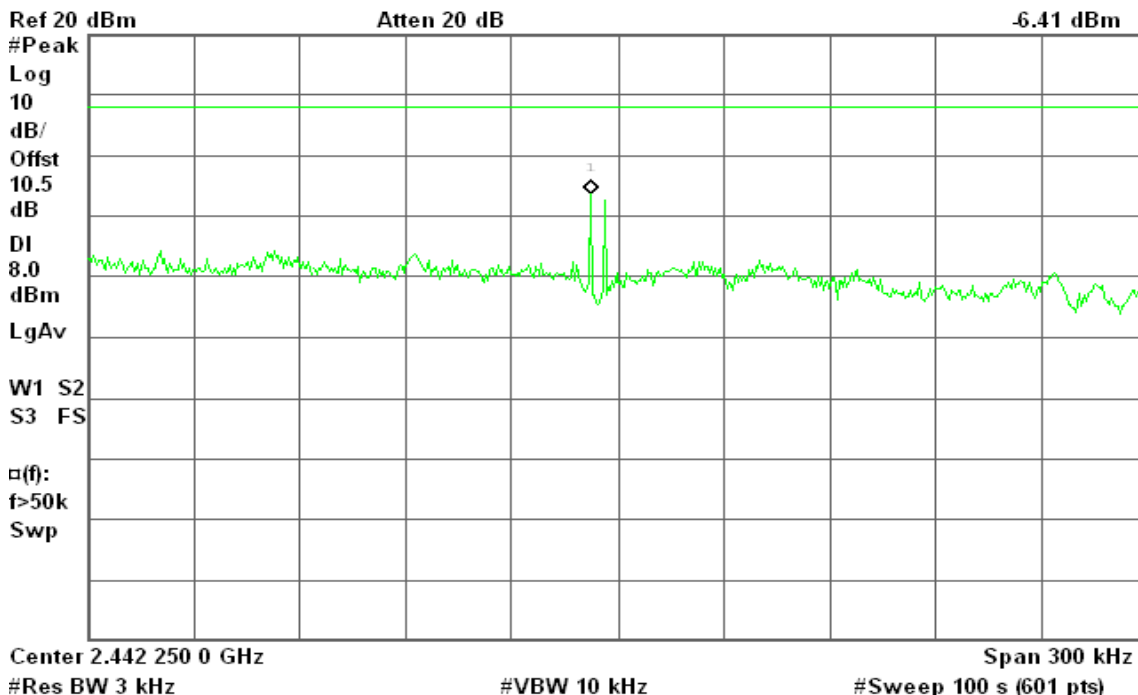




### PPSD (CH High)

Agilent 17:49:06 Dec 24, 2010

R T

Mkr1 2.463 739 6 GHz  
-9.39 dBm

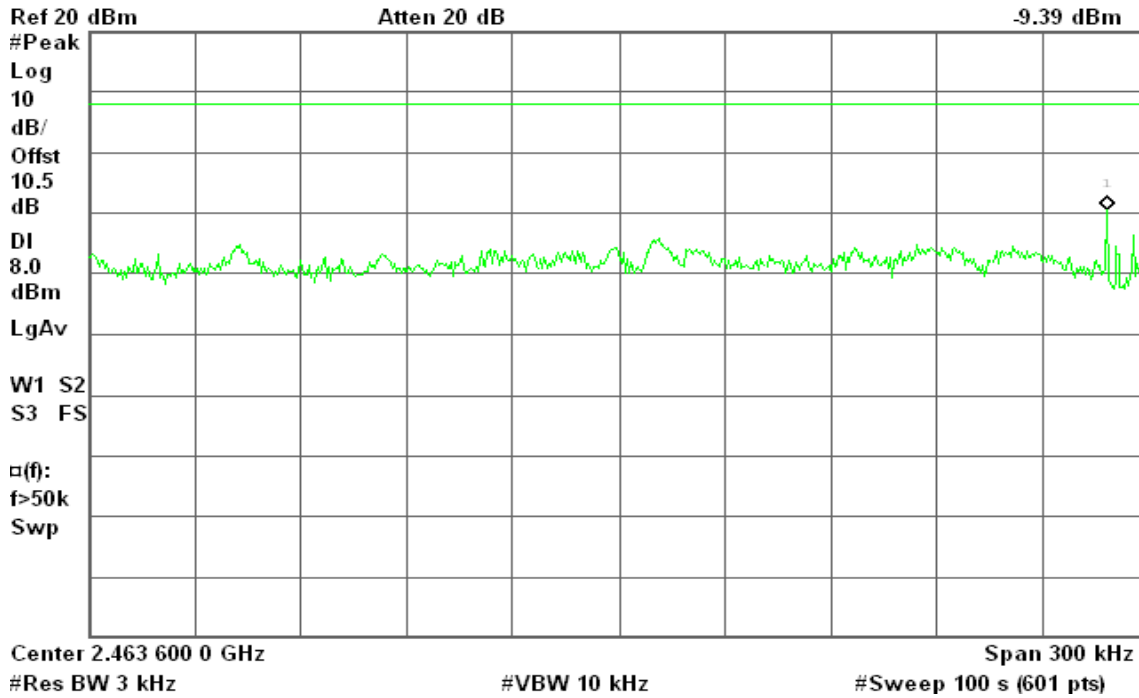


### IEEE 802.11g mode

### PPSD (CH Low)

Agilent 17:58:03 Dec 24, 2010

R L

Mkr1 2.417 617 6 GHz  
-12.35 dBm

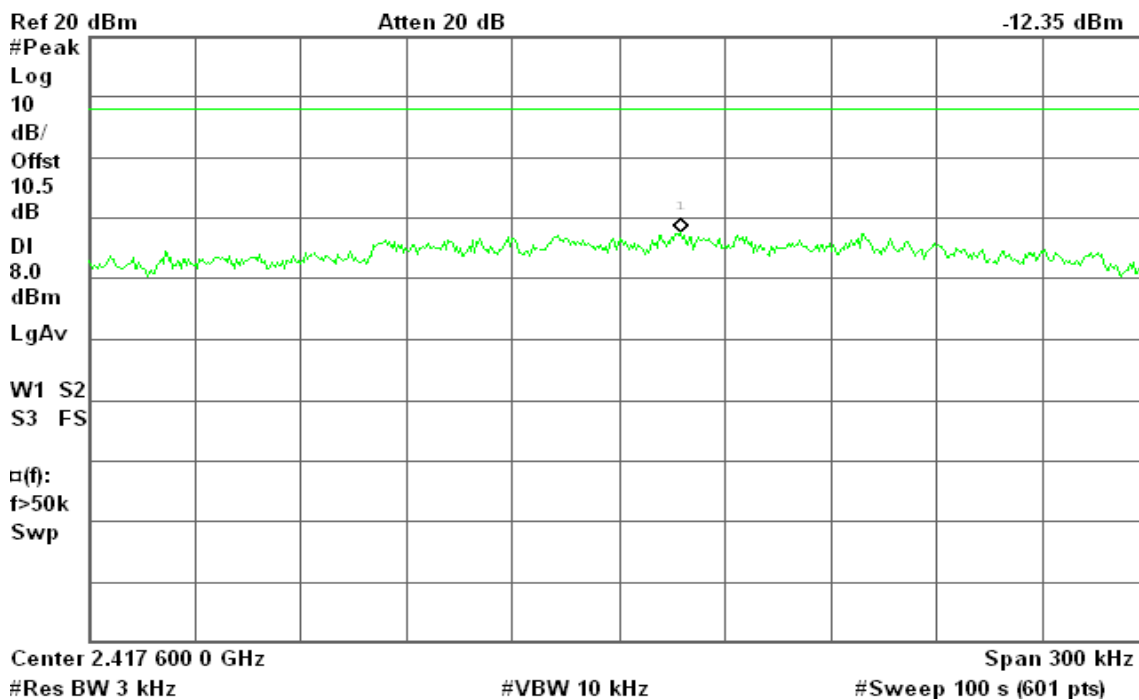




### PPSD (CH Mid)

Agilent 18:06:10 Dec 24, 2010

R L

Mkr1 2.435 735 4 GHz  
-5.20 dBm

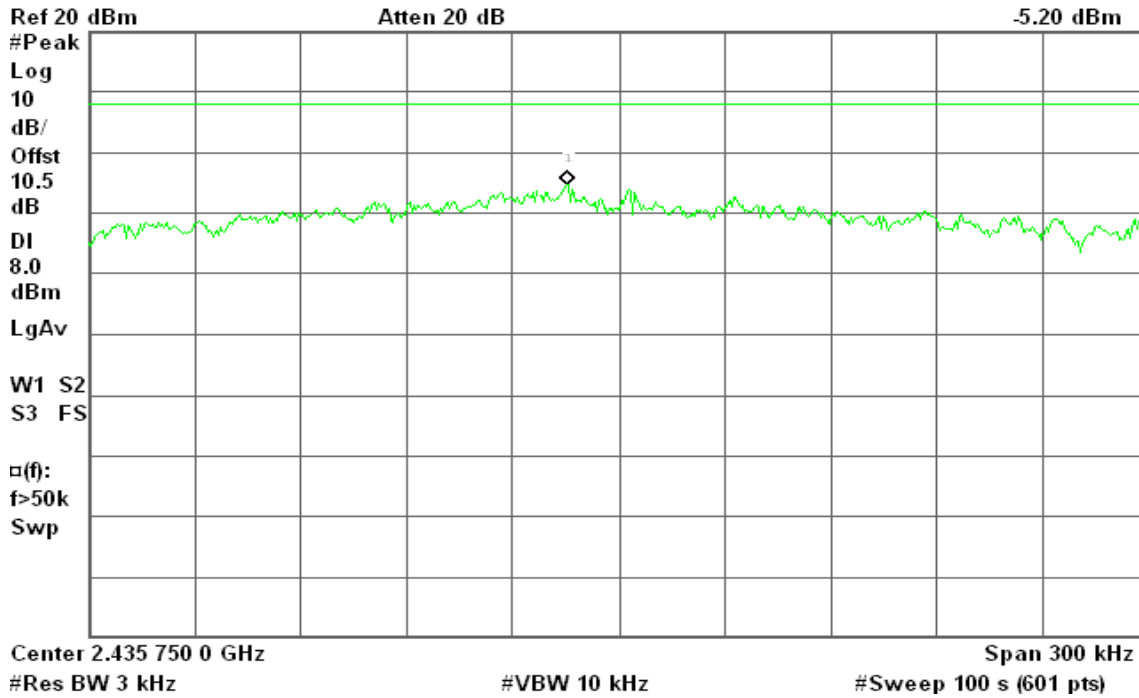


### PPSD (CH High)

Agilent 18:14:49 Dec 24, 2010

R T

Mkr1 2.460 736 2 GHz  
-11.32 dBm

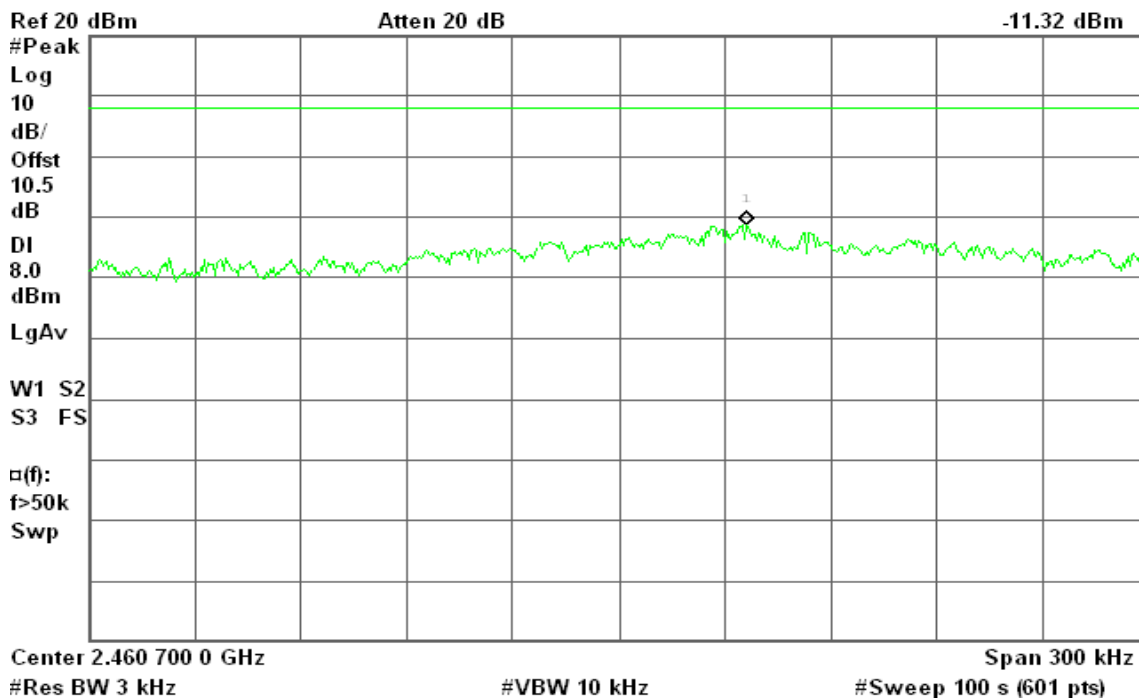




**IEEE 802.11n HT 20 MHz mode / Chain 0**

**PPSD (CH Low)**

Agilent 05:28:45 Dec 27, 2010

R T

Mkr1 2.409 544 5 GHz  
-16.95 dBm

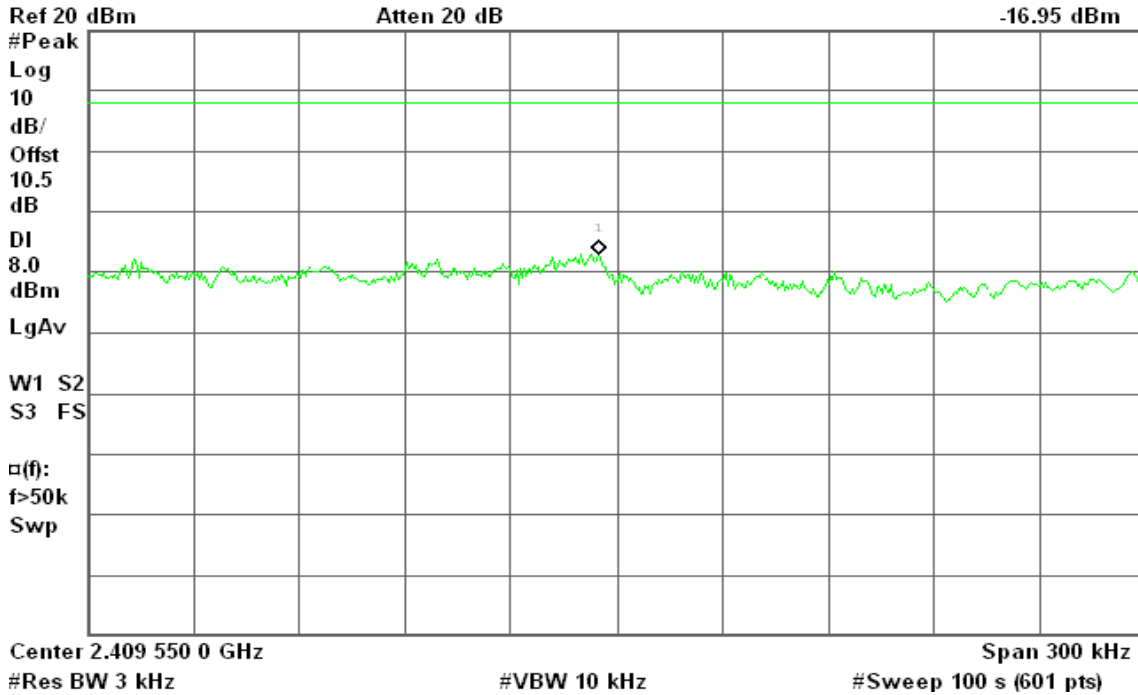


**PPSD (CH Mid)**

Agilent 11:11:12 Dec 27, 2010

R T

Mkr1 2.436 994 5 GHz  
-11.62 dBm

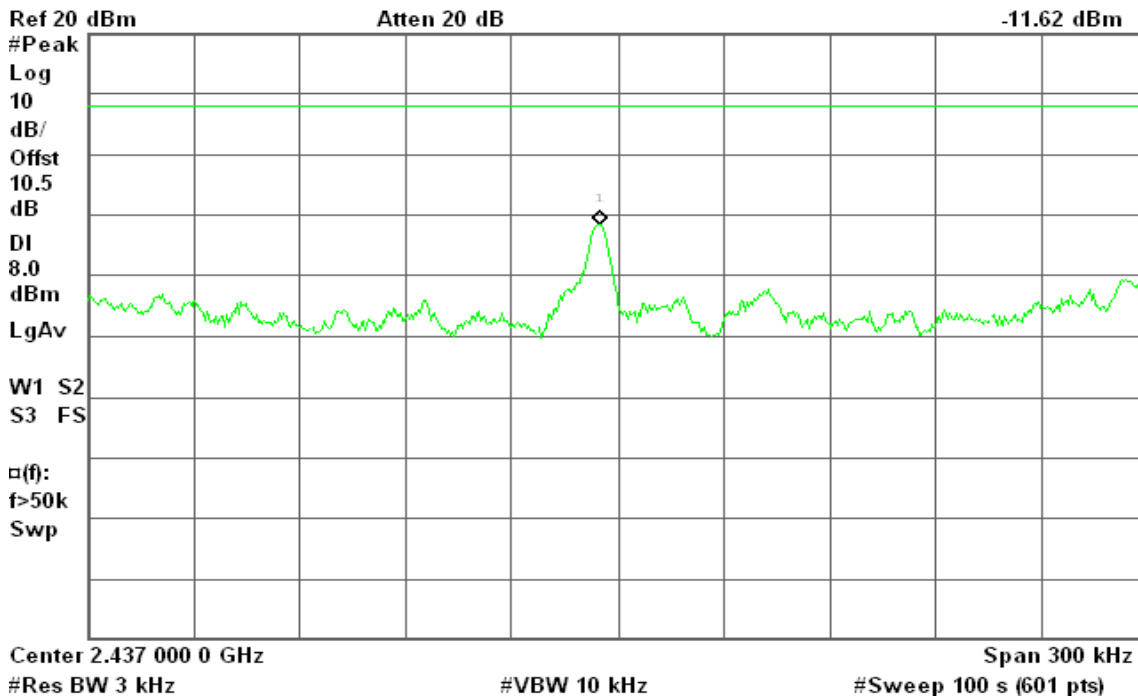




### PPSD (CH High)

Agilent 11:17:20 Dec 27, 2010

R T

Mkr1 2.461 994 0 GHz  
-18.21 dBm

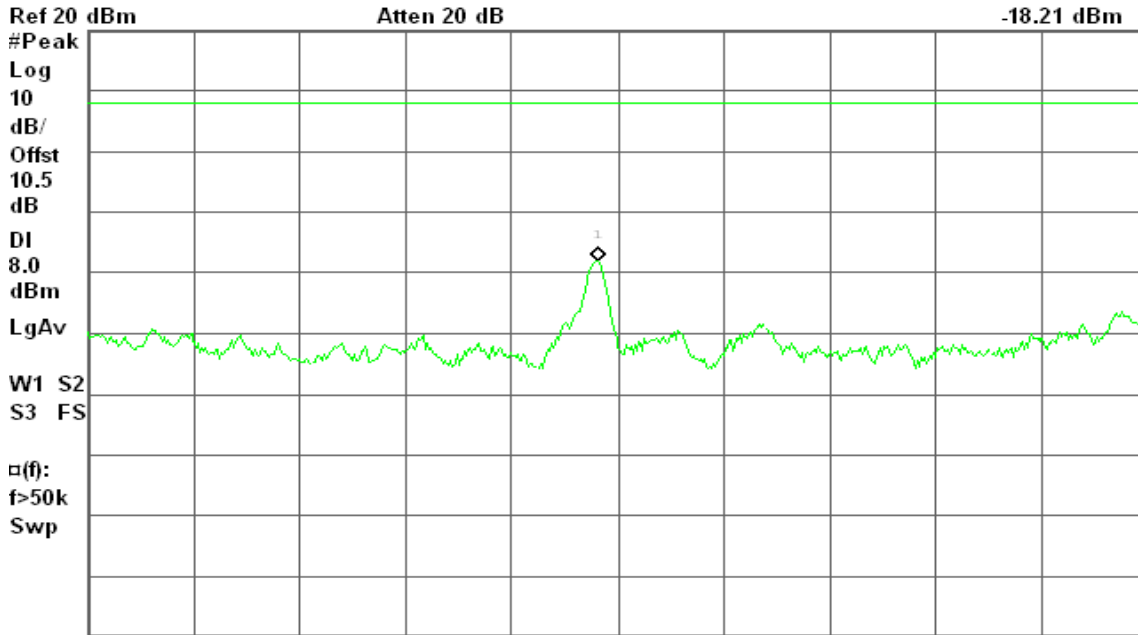

Center 2.462 000 0 GHz Span 300 kHz  
#Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (601 pts)


### IEEE 802.11n HT 20 MHz mode / Chain 1

### PPSD (CH Low)

Agilent 13:13:26 Dec 27, 2010

R T

Mkr1 2.414 163 0 GHz  
-17.82 dBm

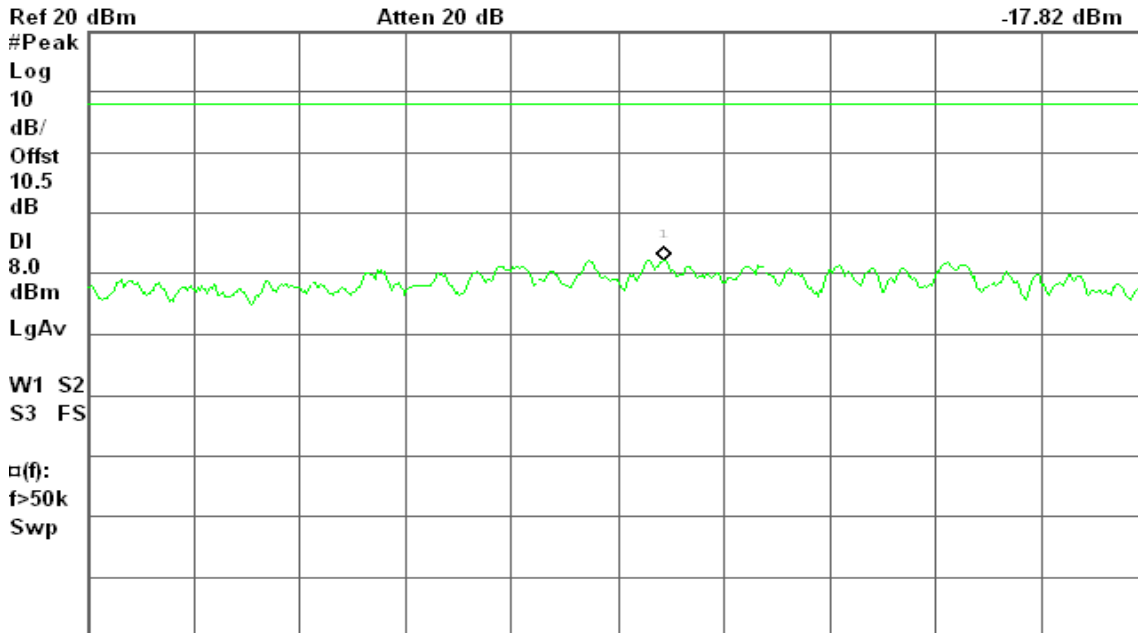

Center 2.414 150 0 GHz Span 300 kHz  
#Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (601 pts)




### PPSD (CH Mid)

Agilent 11:57:59 Dec 27, 2010

R T

Mkr1 2.436 993 5 GHz  
-15.18 dBm

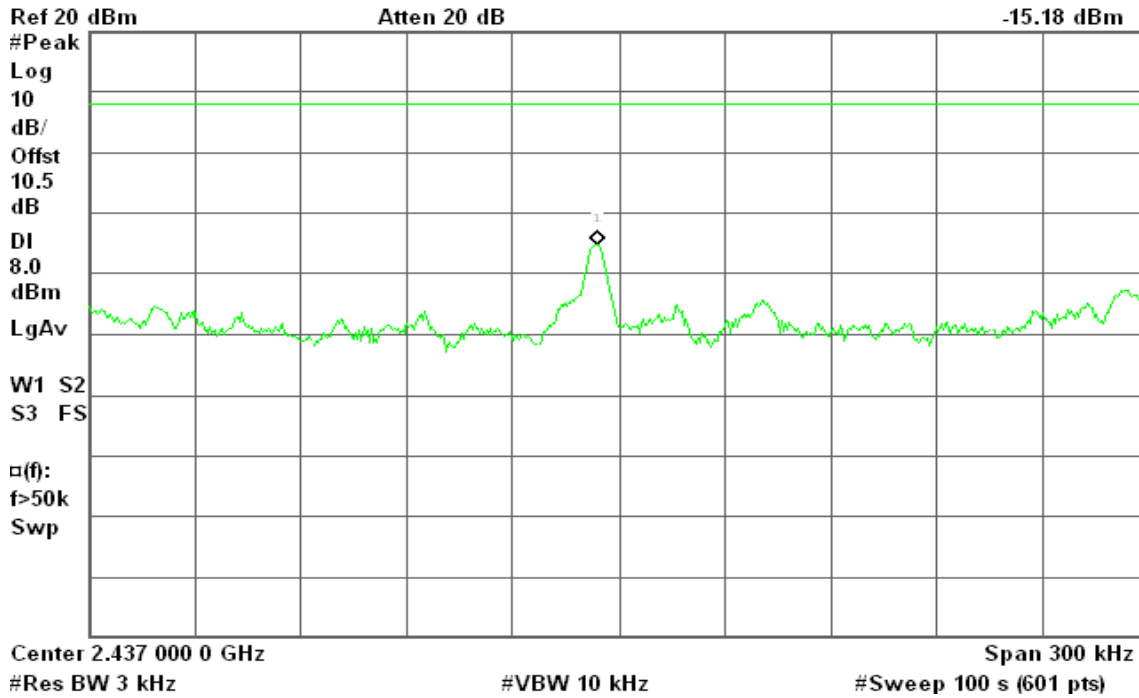


### PPSD (CH High)

Agilent 11:52:08 Dec 27, 2010

R L

Mkr1 2.459 541 5 GHz  
-21.93 dBm

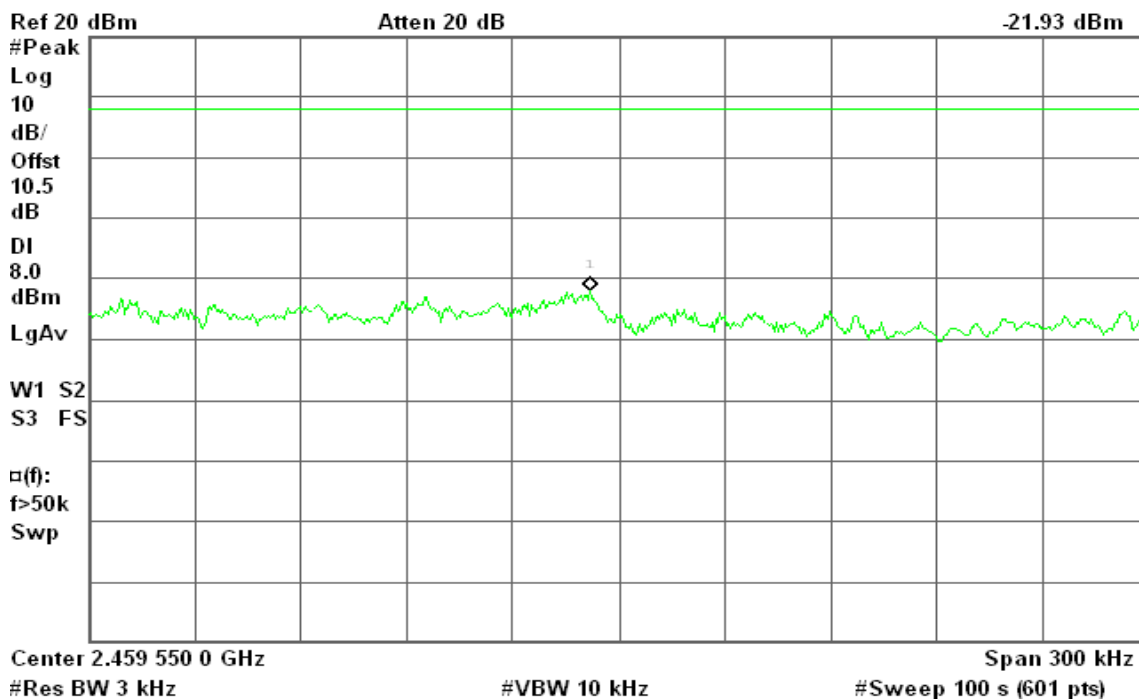



### IEEE 802.11n HT 40 MHz mode / Chain 0


#### PPSD (CH Low)

Agilent 14:00:08 Dec 27, 2010

R T

Mkr1 2.419 800 0 GHz

-14.33 dBm

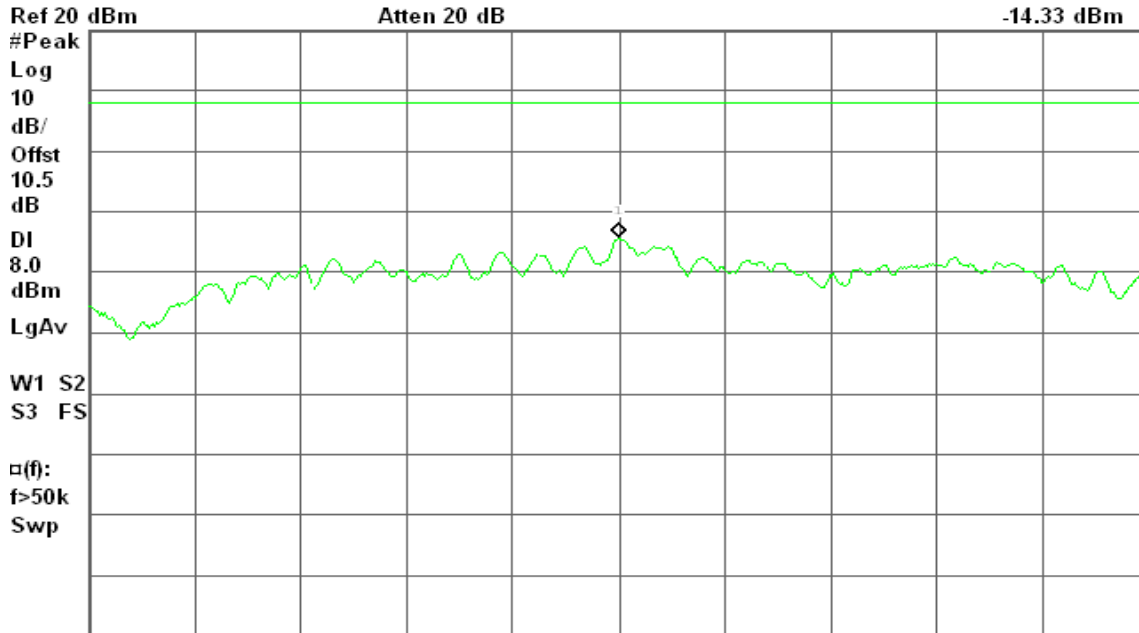

Center 2.419 800 0 GHz

#Res BW 3 kHz

#VBW 10 kHz

Span 300 kHz

#Sweep 100 s (601 pts)


#### PPSD (CH Mid)

Agilent 13:54:20 Dec 27, 2010

R T

Mkr1 2.439 539 0 GHz

-10.79 dBm

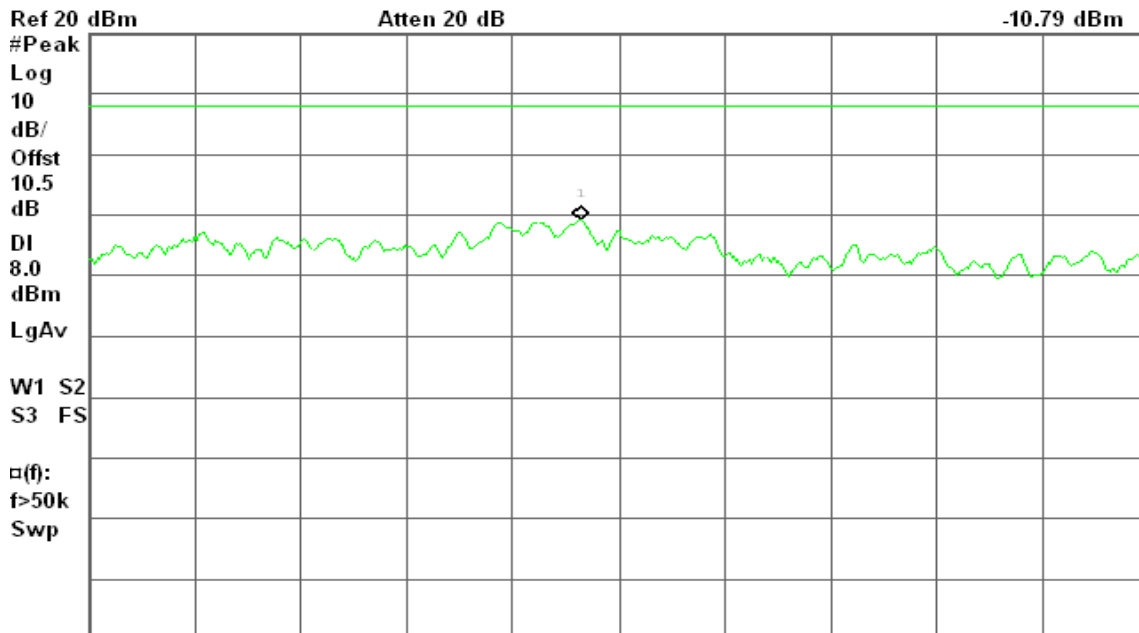

Center 2.439 550 0 GHz

#Res BW 3 kHz

#VBW 10 kHz

Span 300 kHz

#Sweep 100 s (601 pts)






### PPSD (CH High)

Agilent 13:47:27 Dec 27, 2010

R T

Mkr1 2.456 953 8 GHz  
-17.26 dBm

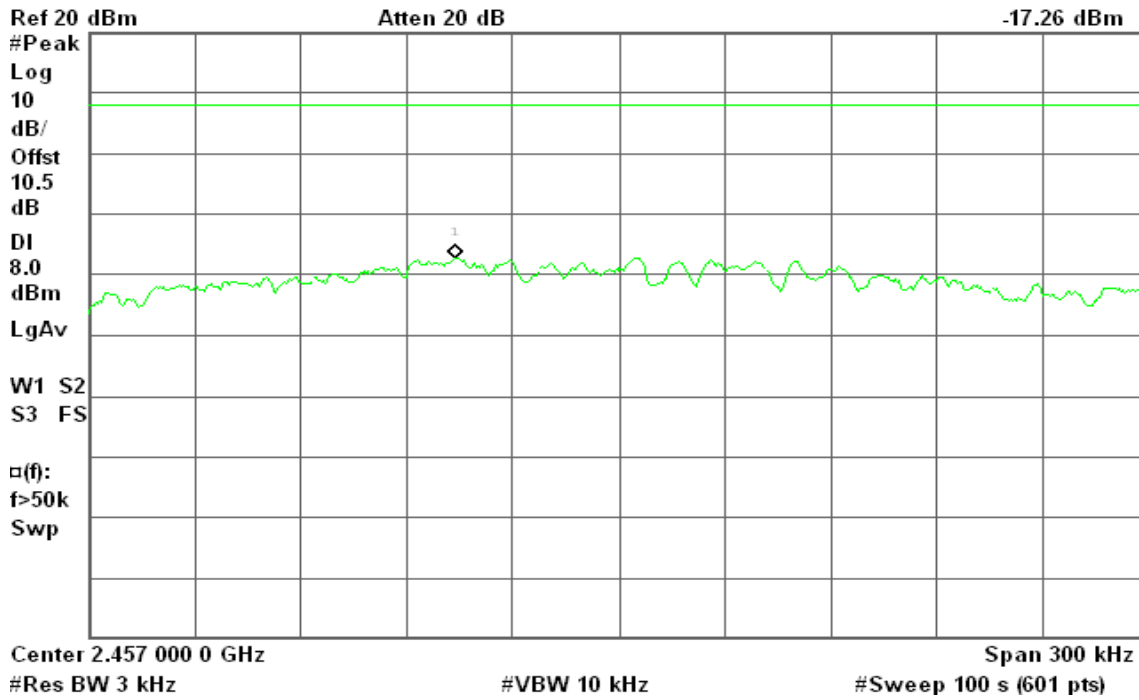


### IEEE 802.11n HT 40 MHz mode / Chain 1

#### PPSD (CH Low)

Agilent 13:22:14 Dec 27, 2010

R T

Mkr1 2.414 518 2 GHz  
-15.43 dBm

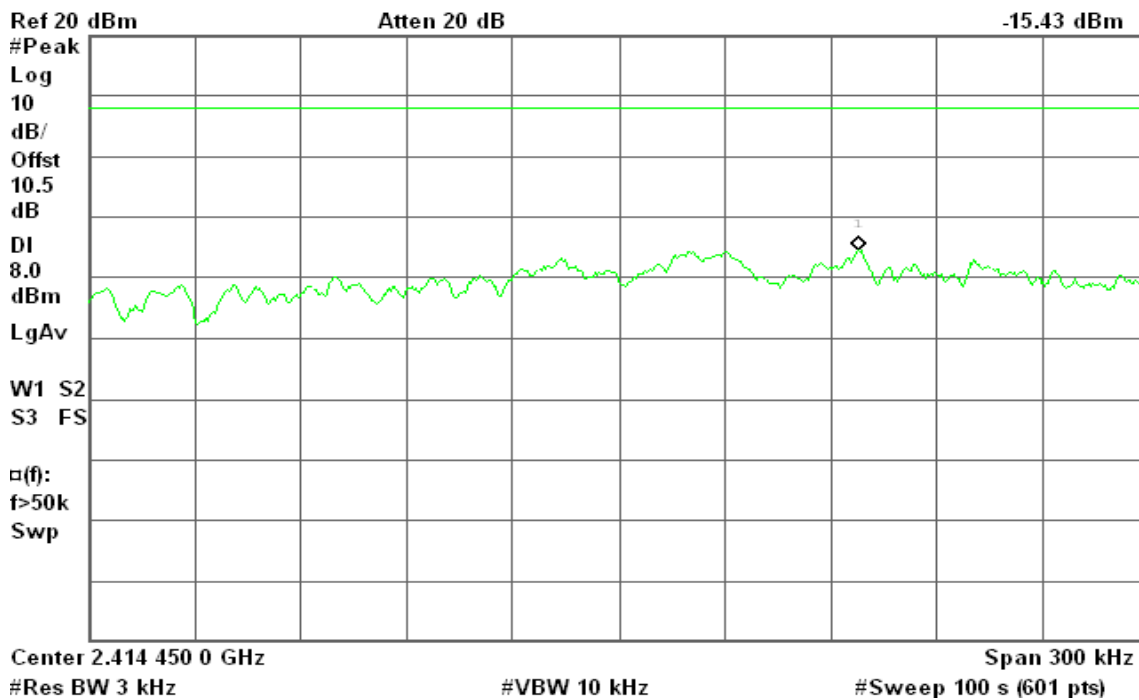




### PPSD (CH Mid)

Agilent 13:31:04 Dec 27, 2010

R T

Mkr1 2.434 470 1 GHz  
-11.73 dBm

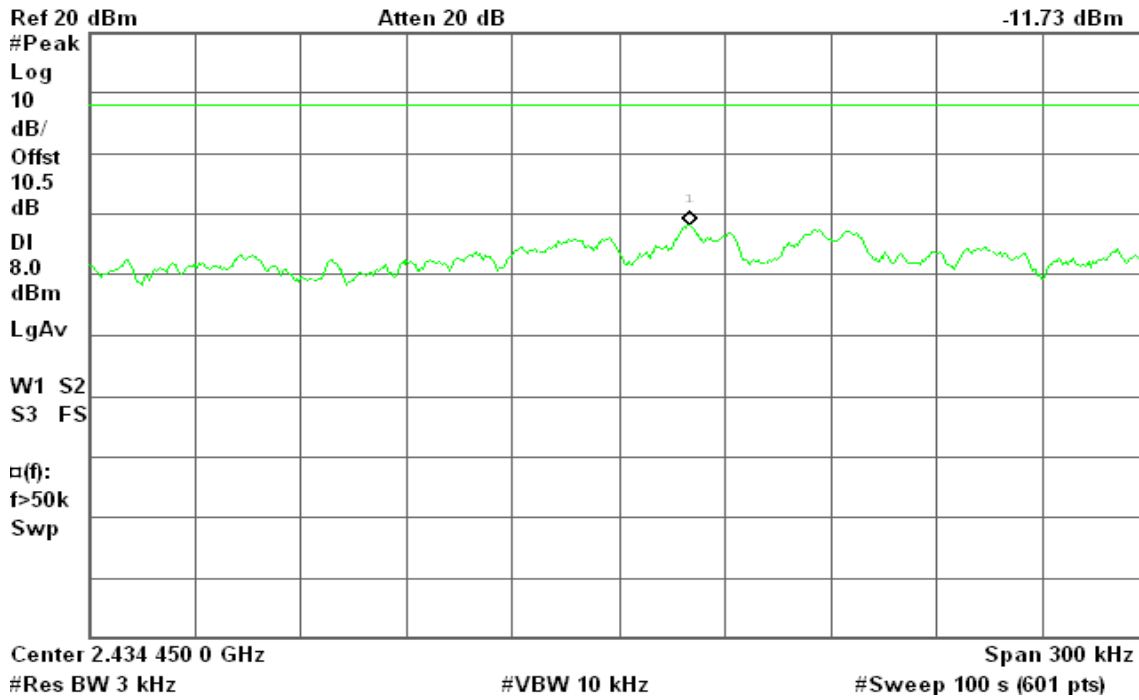


### PPSD (CH High)

Agilent 13:36:39 Dec 27, 2010

R T

Mkr1 2.439 517 1 GHz  
-19.20 dBm

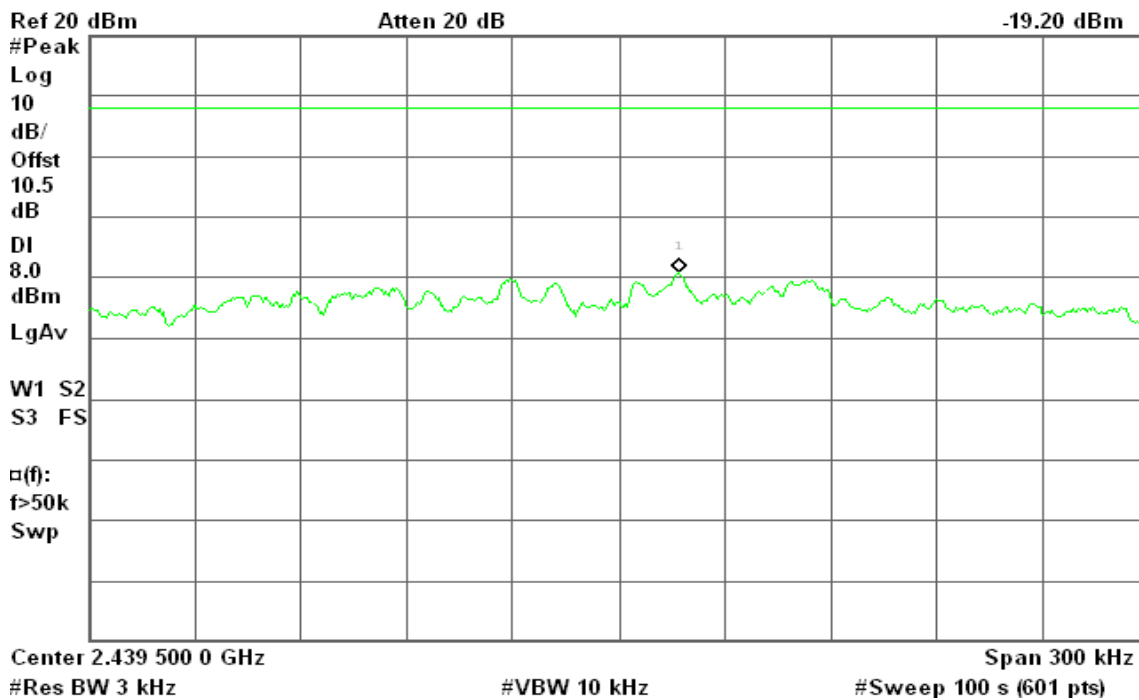




### IEEE 802.11n HT 20 MHz mode with combiner

#### PPSD (CH Low)

Agilent 17:02:15 Dec 27, 2010

R T

Mkr1 2.414 165 1 GHz

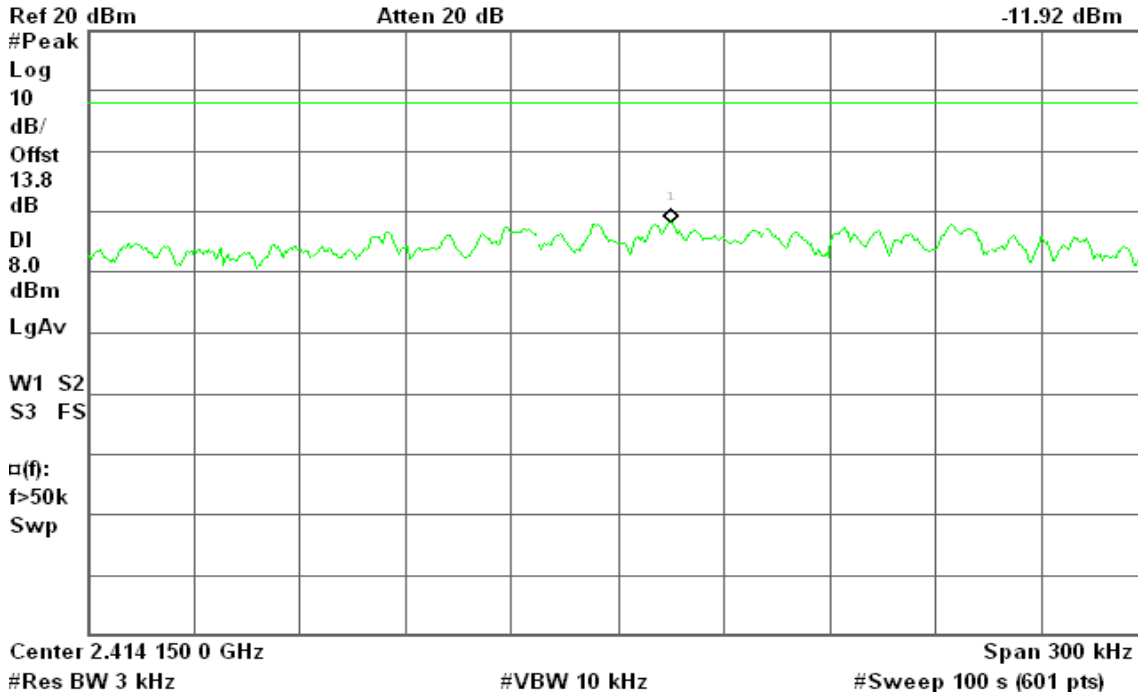


#### PPSD (CH Mid)

Agilent 17:09:30 Dec 27, 2010

R T

Mkr1 2.436 995 0 GHz

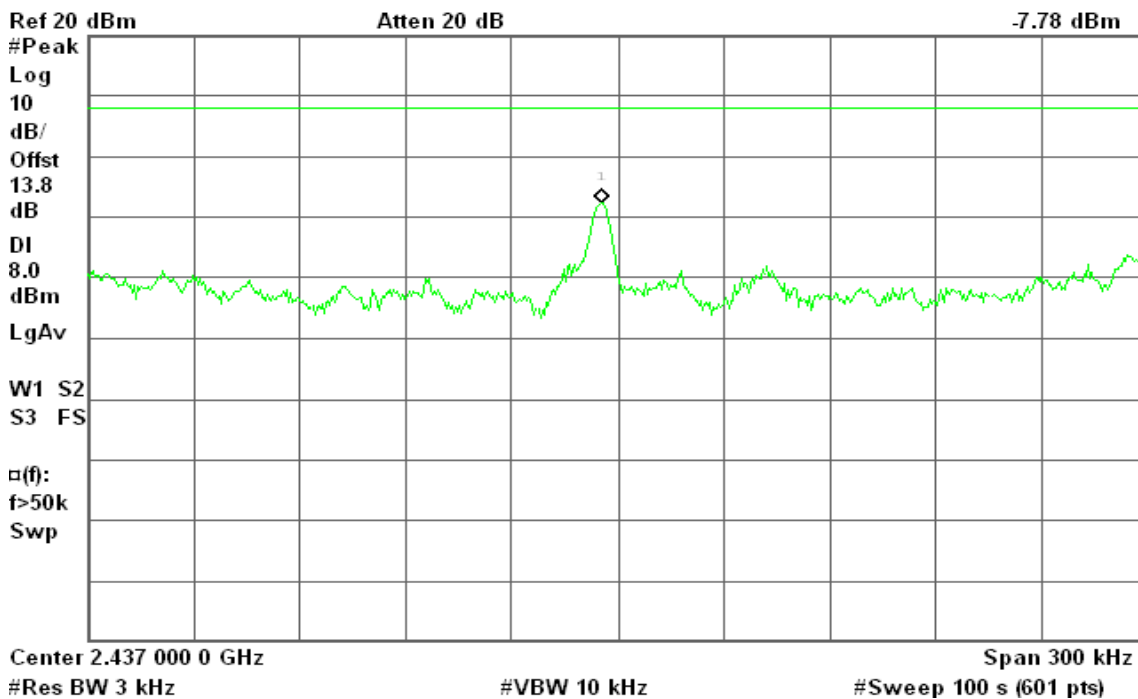




### PPSD (CH High)

Agilent 17:13:39 Dec 27, 2010

R T

Mkr1 2.458 893 1 GHz

-15.80 dBm

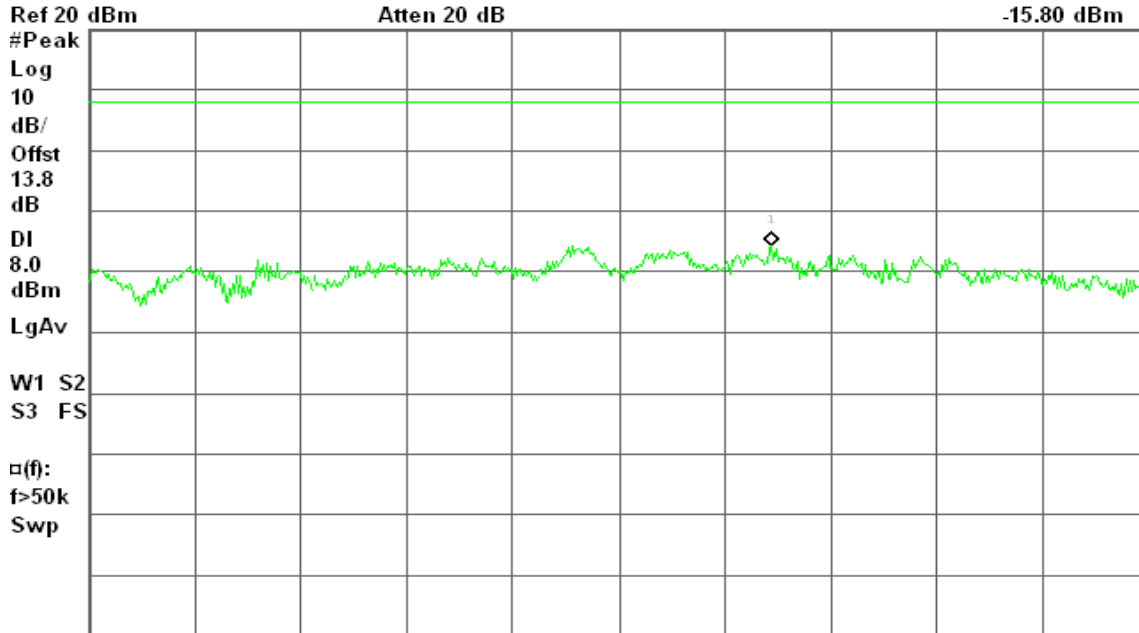

Center 2.458 850 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)

### IEEE 802.11n HT 40 MHz mode with combiner


### PPSD (CH Low)

Agilent 17:20:09 Dec 27, 2010

R T

Mkr1 2.415 396 2 GHz

-12.15 dBm

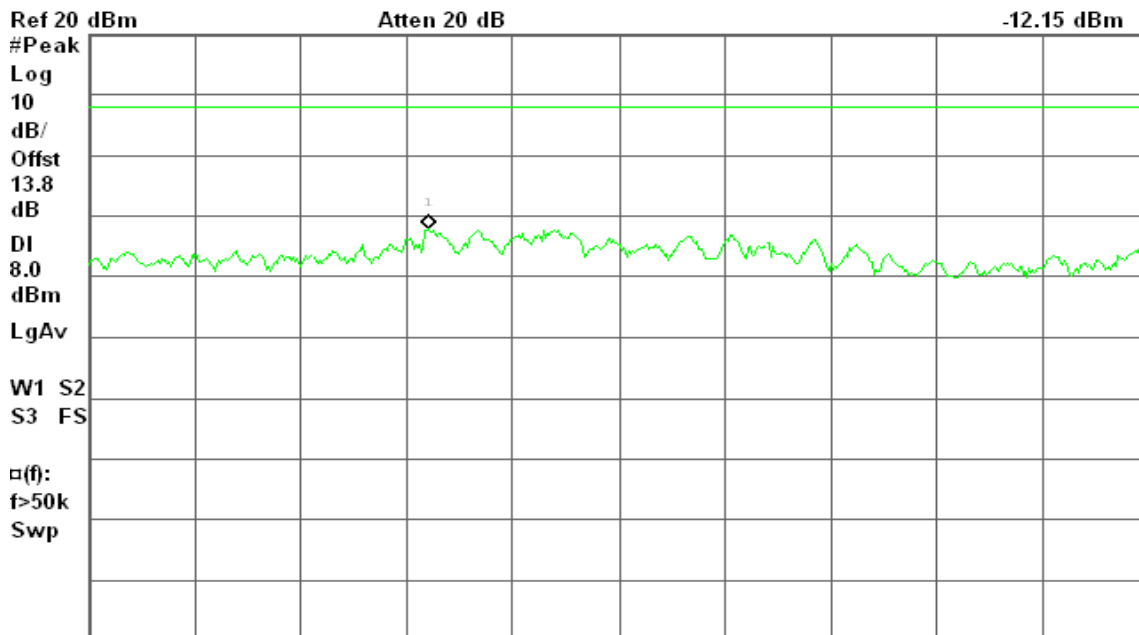

Center 2.415 450 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)




### PPSD (CH Mid)

Agilent 17:28:11 Dec 27, 2010

R T

Mkr1 2.439 516 6 GHz  
-7.99 dBm

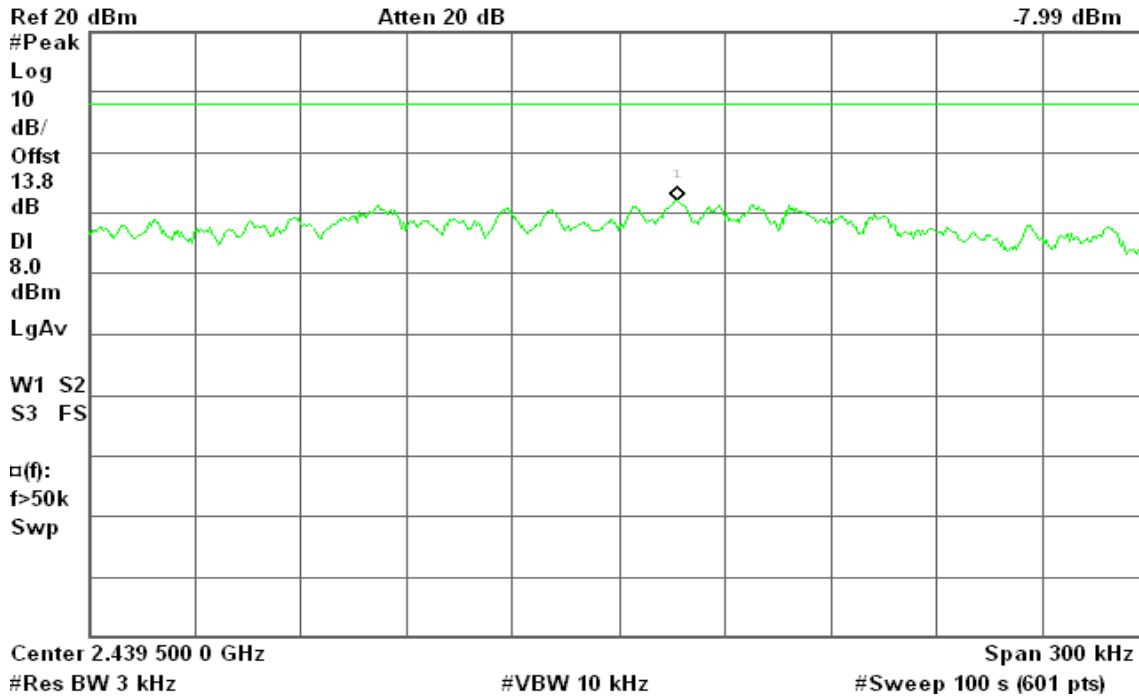


### PPSD (CH High)

Agilent 17:33:36 Dec 27, 2010

R T

Mkr1 2.456 953 5 GHz  
-13.96 dBm

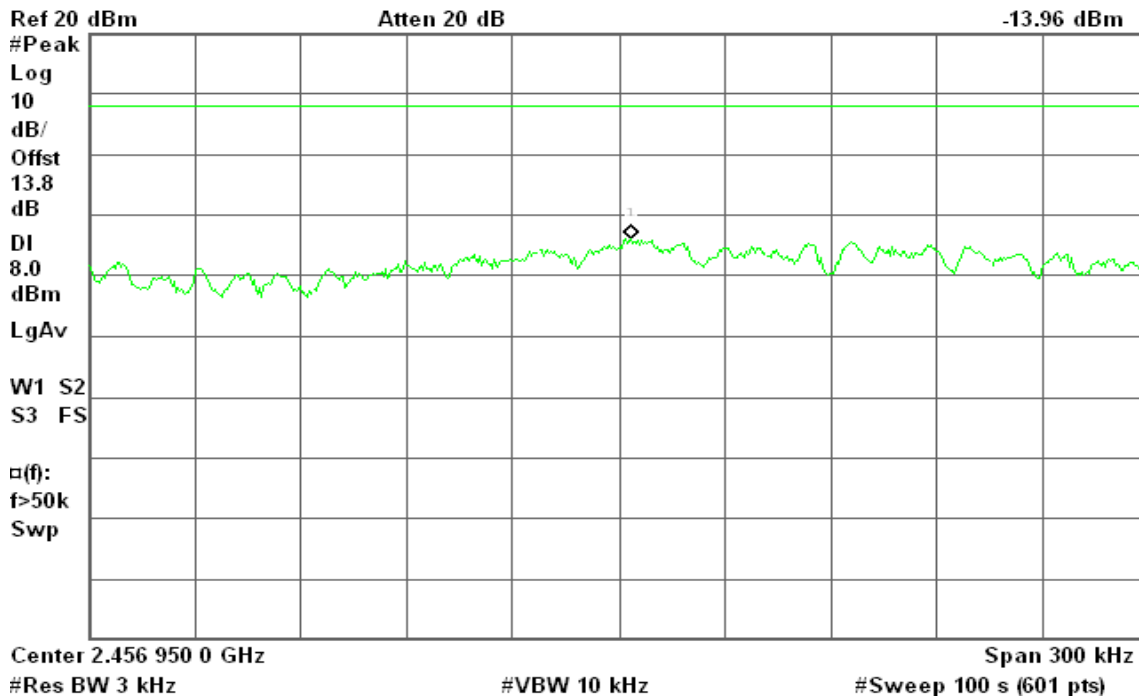




## 7.6 SPURIOUS EMISSIONS

### 7.6.1 Conducted Measurement

#### LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

#### Test Configuration

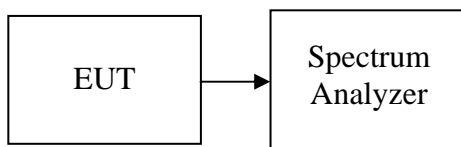

#### TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 13GHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

#### TEST RESULTS

*No non-compliance noted.*




**Test Plot**

**IEEE 802.11b mode**

**CH Low**

Agilent 17:31:59 Dec 24, 2010


R T

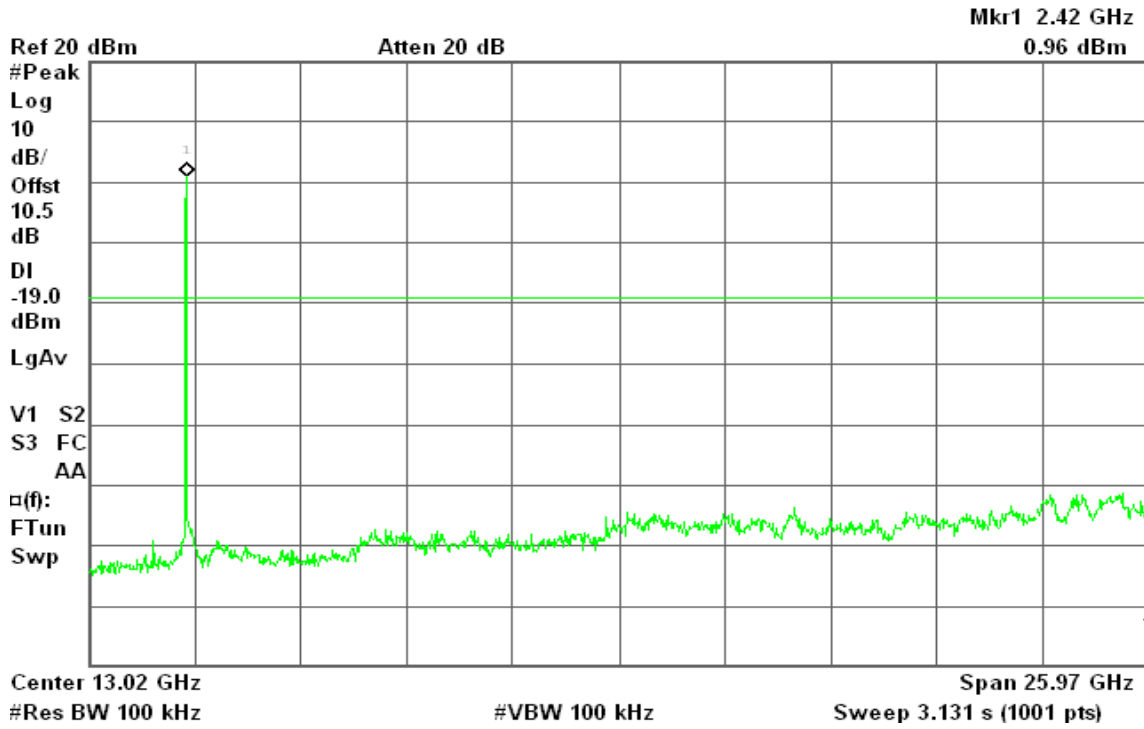

**CH Mid**

Agilent 17:30:31 Dec 24, 2010

R T

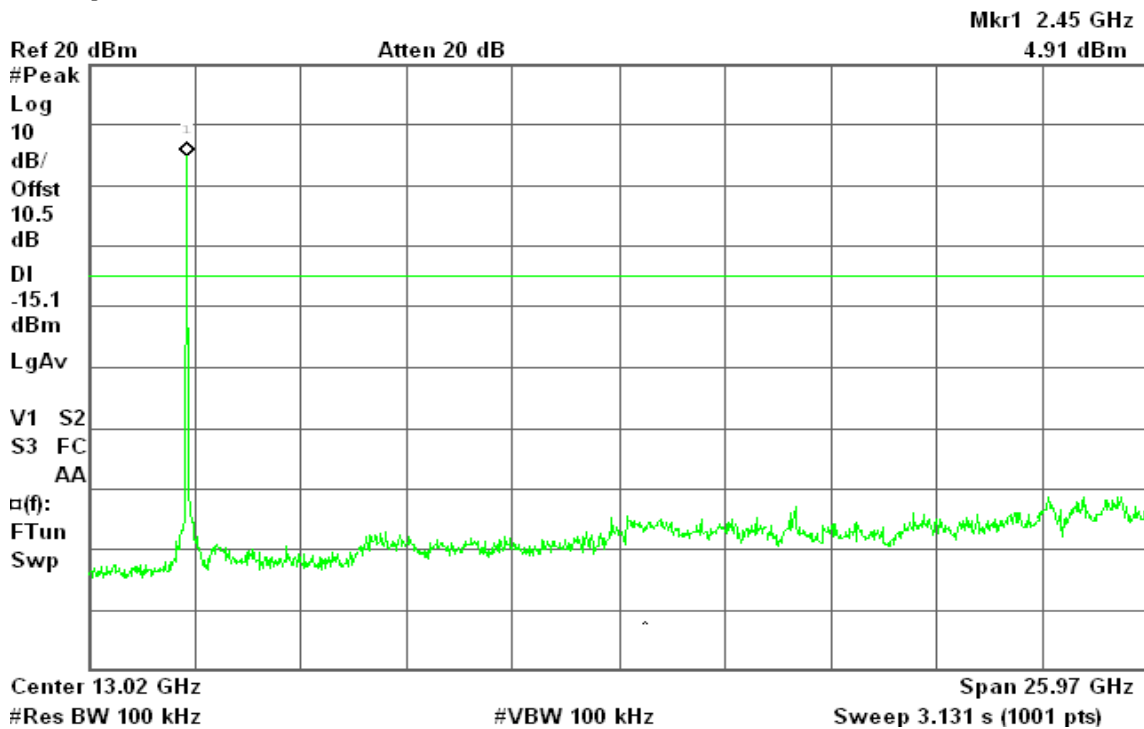




### CH High

Agilent 17:33:14 Dec 24, 2010

R T

Mkr1 2.47 GHz  
-0.84 dBm

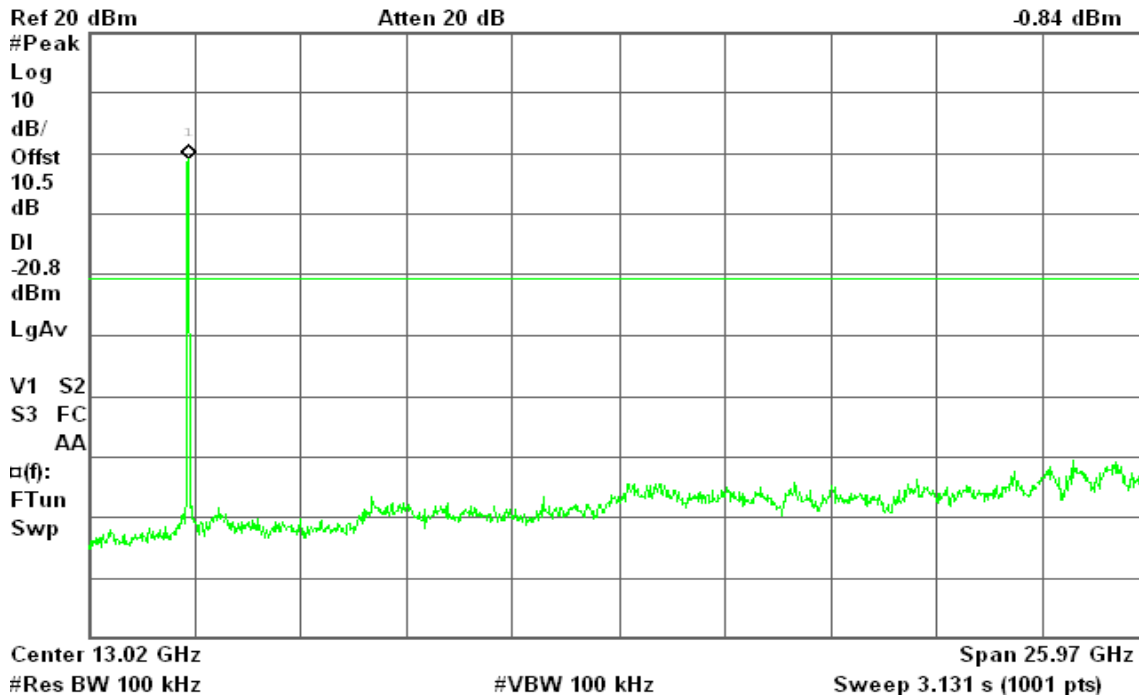


### IEEE 802.11g mode

#### CH Low

Agilent 17:59:22 Dec 24, 2010

R T

Mkr1 2.42 GHz  
0.95 dBm

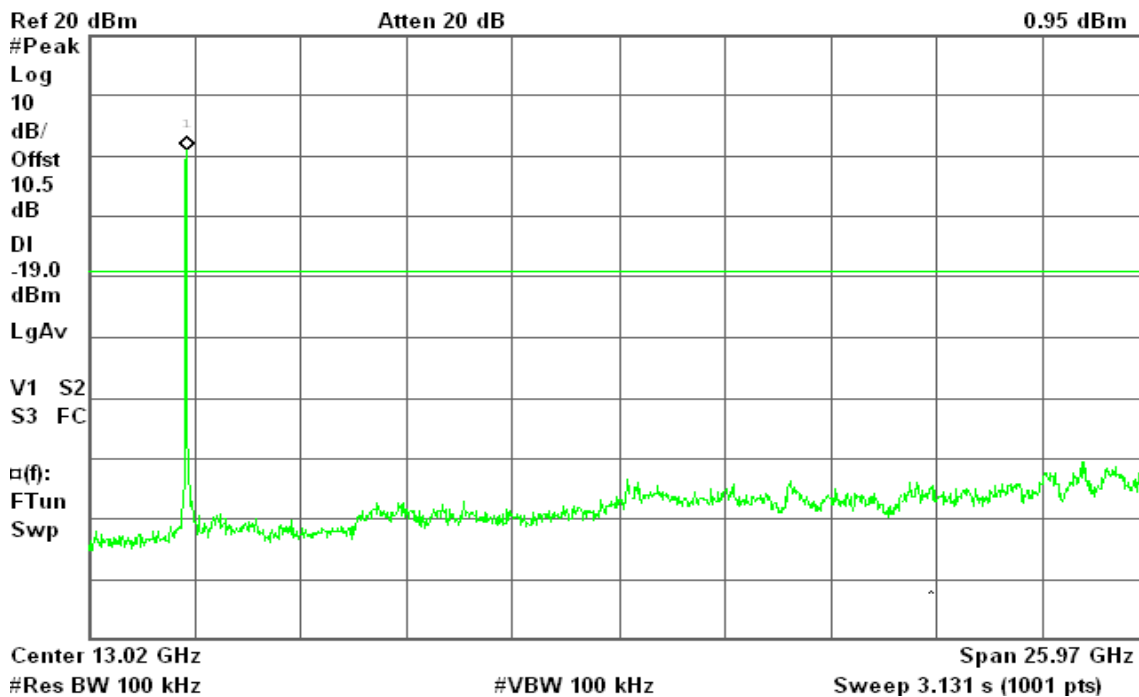






### CH Mid

Agilent 18:00:36 Dec 24, 2010

R T

Mkr1 2.45 GHz  
4.88 dBm

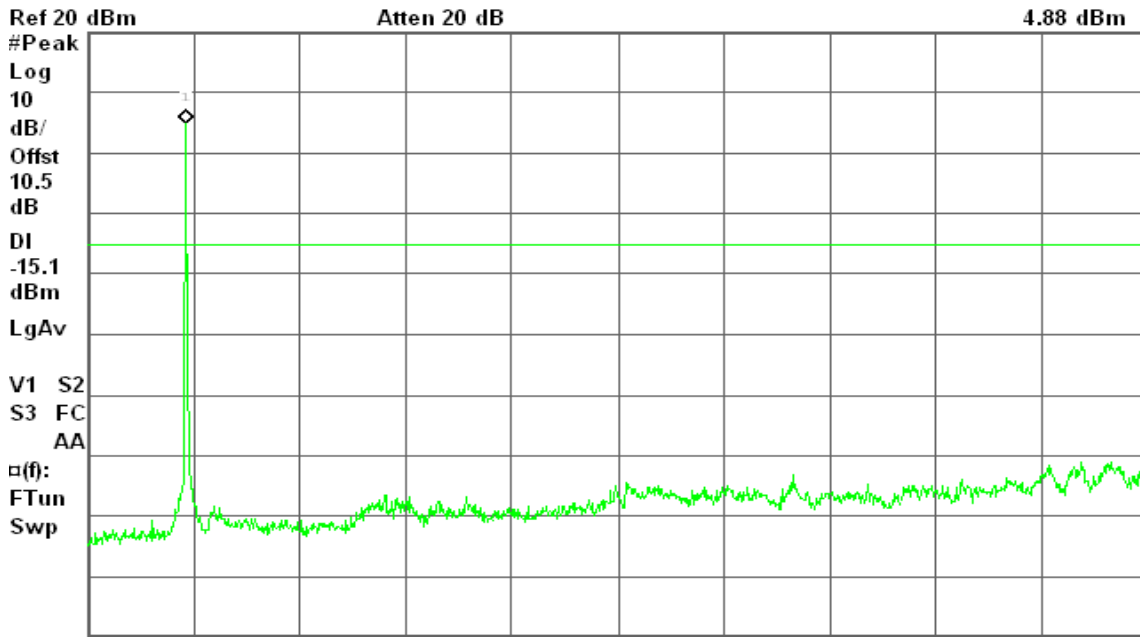


Center 13.02 GHz Span 25.97 GHz  
#Res BW 100 kHz #VBW 100 kHz Sweep 3.131 s (1001 pts)

### CH High

Agilent 18:01:30 Dec 24, 2010

R T

Mkr1 2.47 GHz  
-1.06 dBm

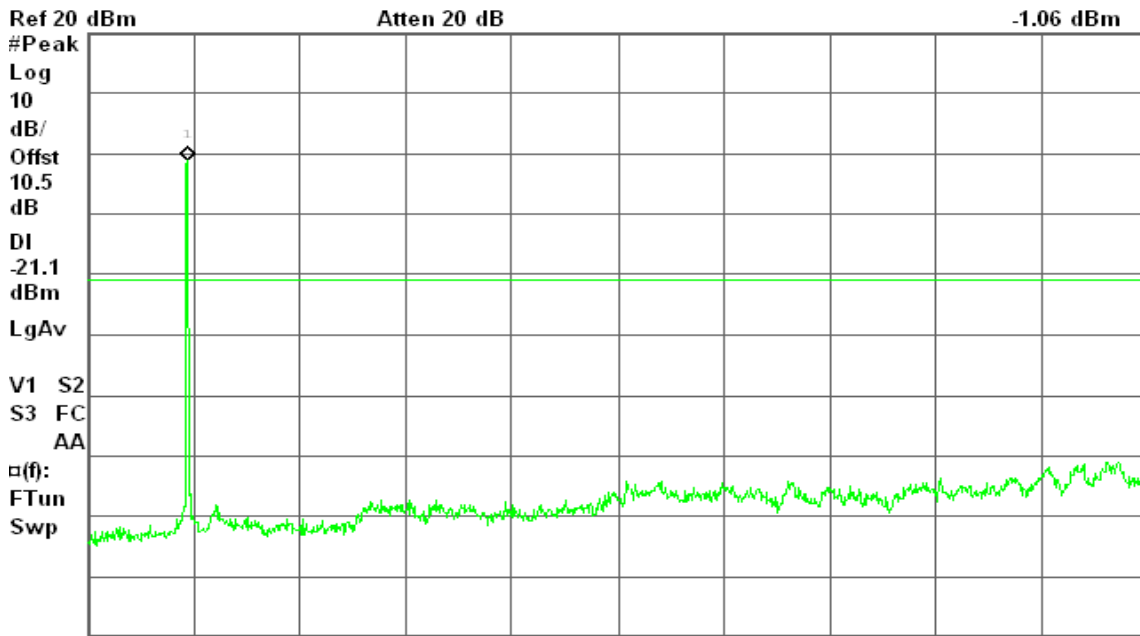

Center 13.02 GHz Span 25.97 GHz  
#Res BW 100 kHz #VBW 100 kHz Sweep 3.131 s (1001 pts)




### IEEE 802.11n HT 20 MHz mode / Chain 0

#### CH Low

Agilent 05:31:09 Dec 27, 2010


R T

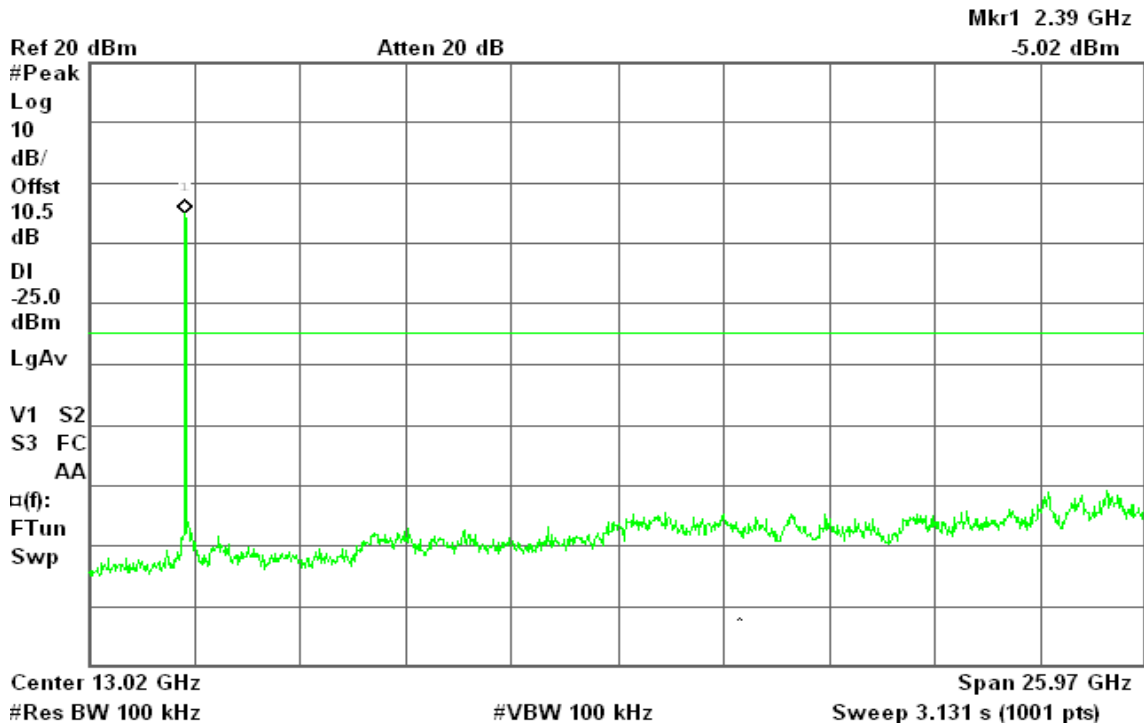

#### CH Mid

Agilent 11:12:43 Dec 27, 2010

R T

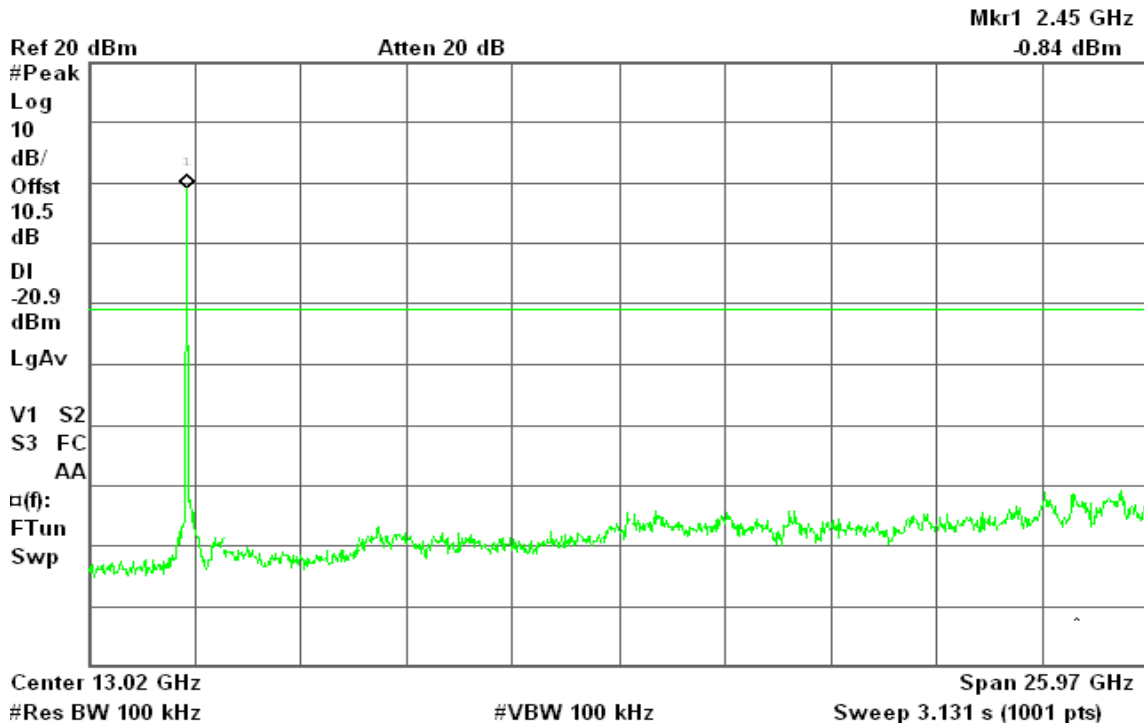




### CH High

Agilent 11:18:17 Dec 27, 2010

R T

Mkr1 2.47 GHz  
-7.27 dBm

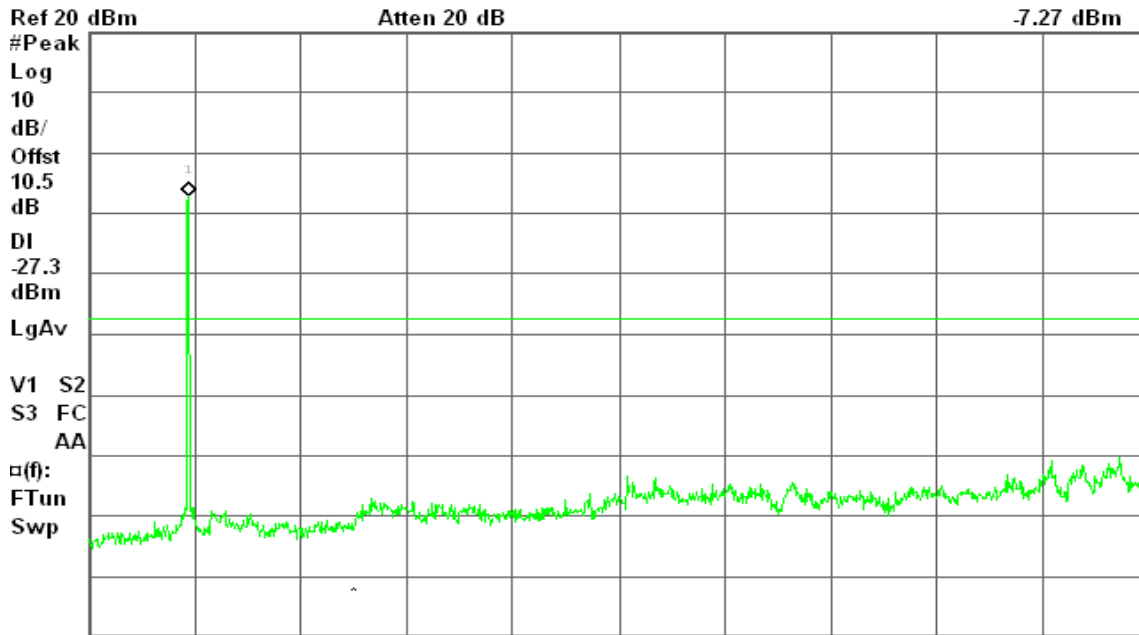

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)


### IEEE 802.11n HT 20 MHz mode / Chain 1

### CH Low

Agilent 13:14:21 Dec 27, 2010

R T

Mkr1 2.42 GHz  
-6.27 dBm

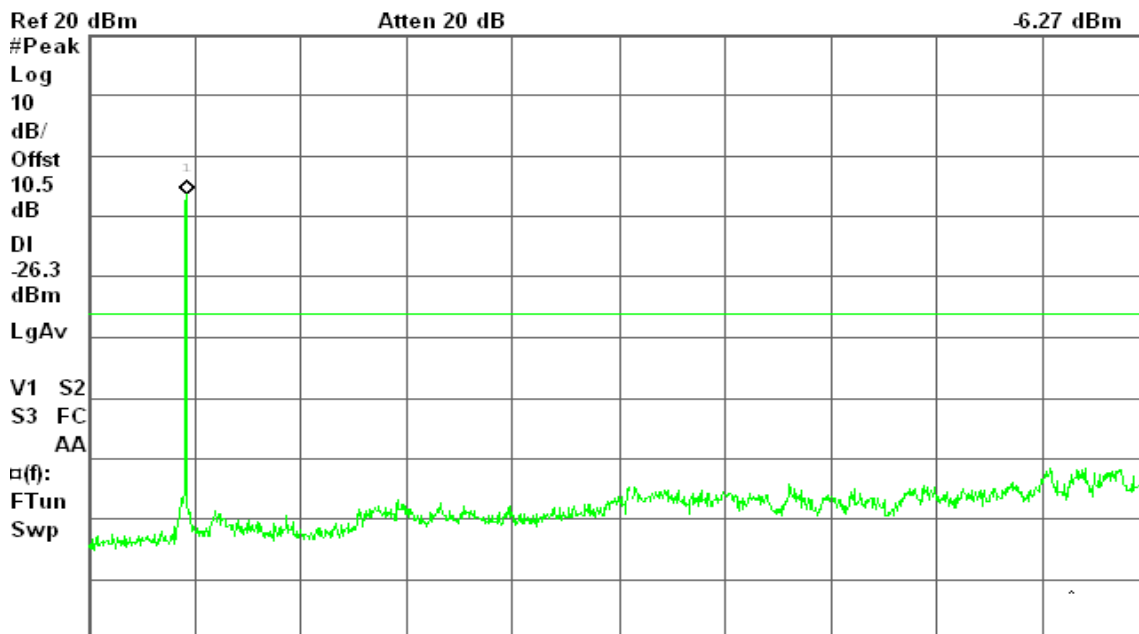

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)




### CH Mid

Agilent 11:59:14 Dec 27, 2010

R T

Mkr1 2.45 GHz  
-3.34 dBm

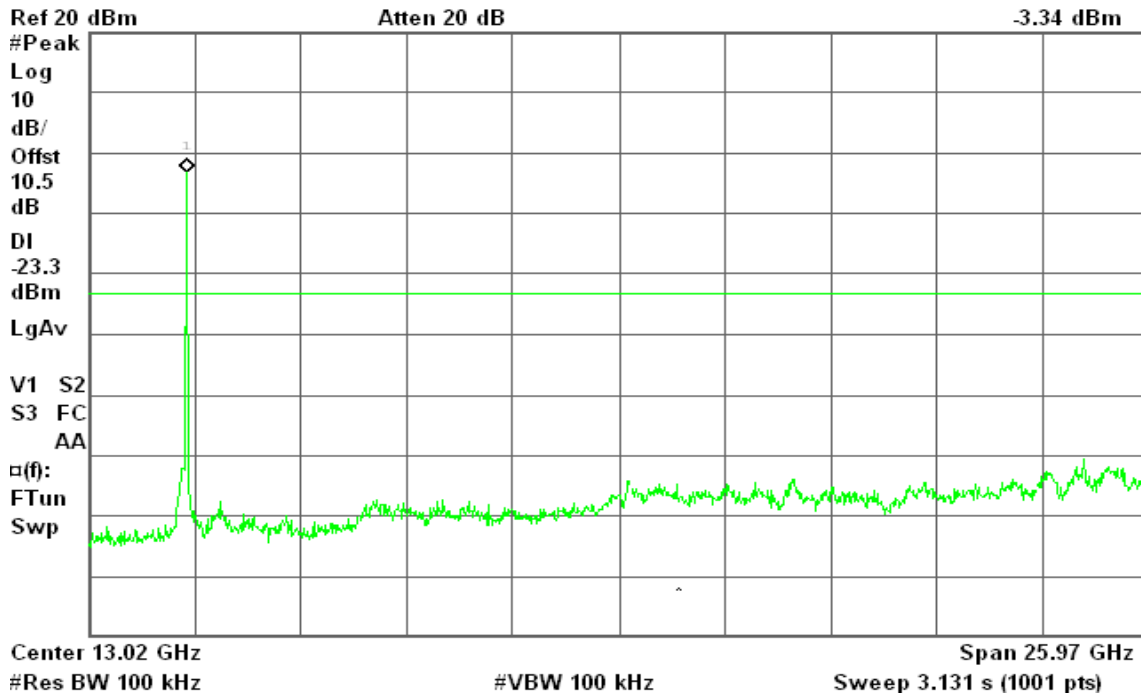


### CH High

Agilent 11:53:16 Dec 27, 2010

R T

Mkr1 2.47 GHz  
-7.55 dBm

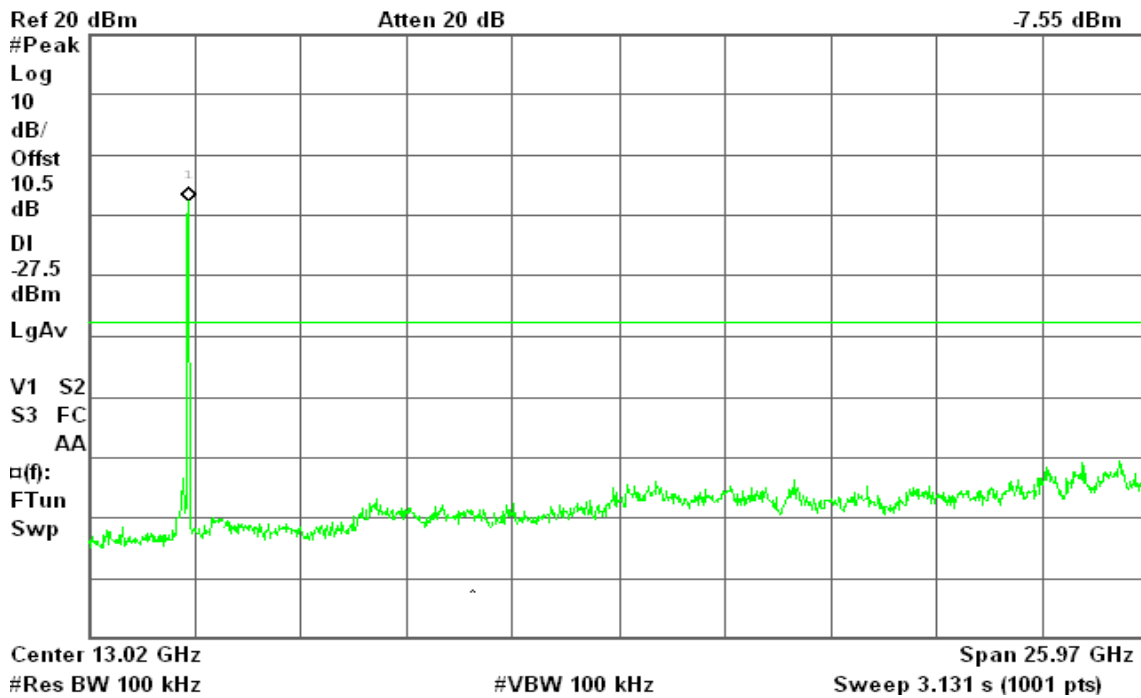




**IEEE 802.11n HT 40 MHz mode / Chain 0**

**CH Low**

Agilent 14:02:11 Dec 27, 2010


R T

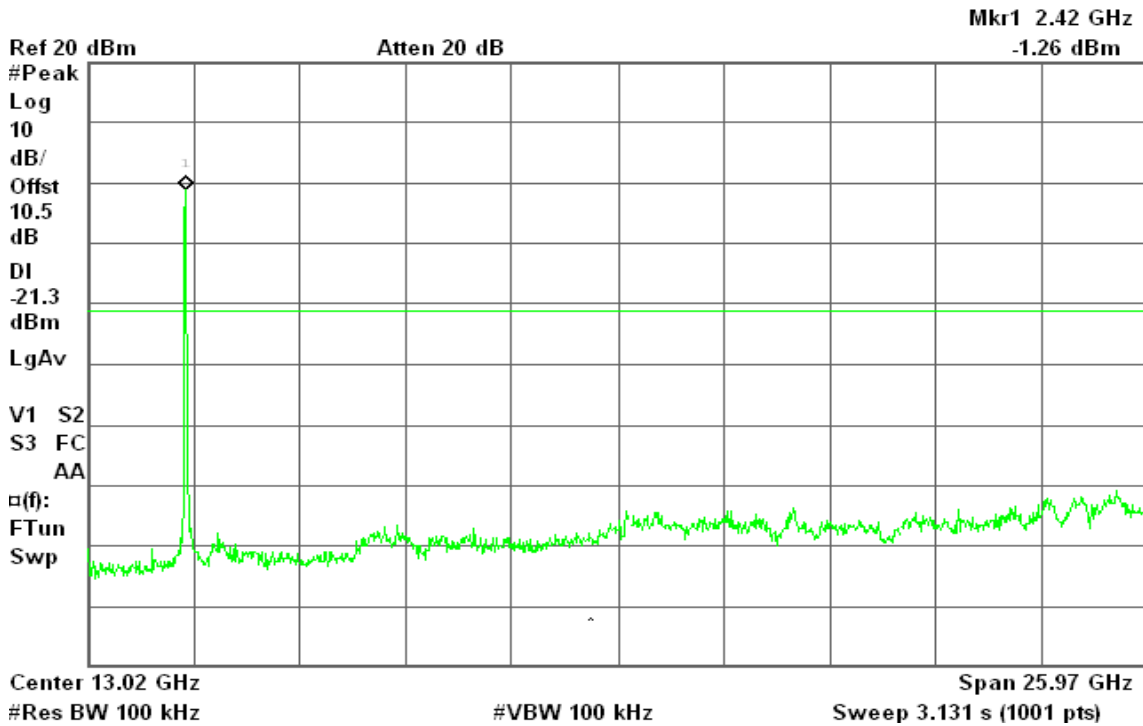

**CH Mid**

Agilent 13:55:20 Dec 27, 2010

R T

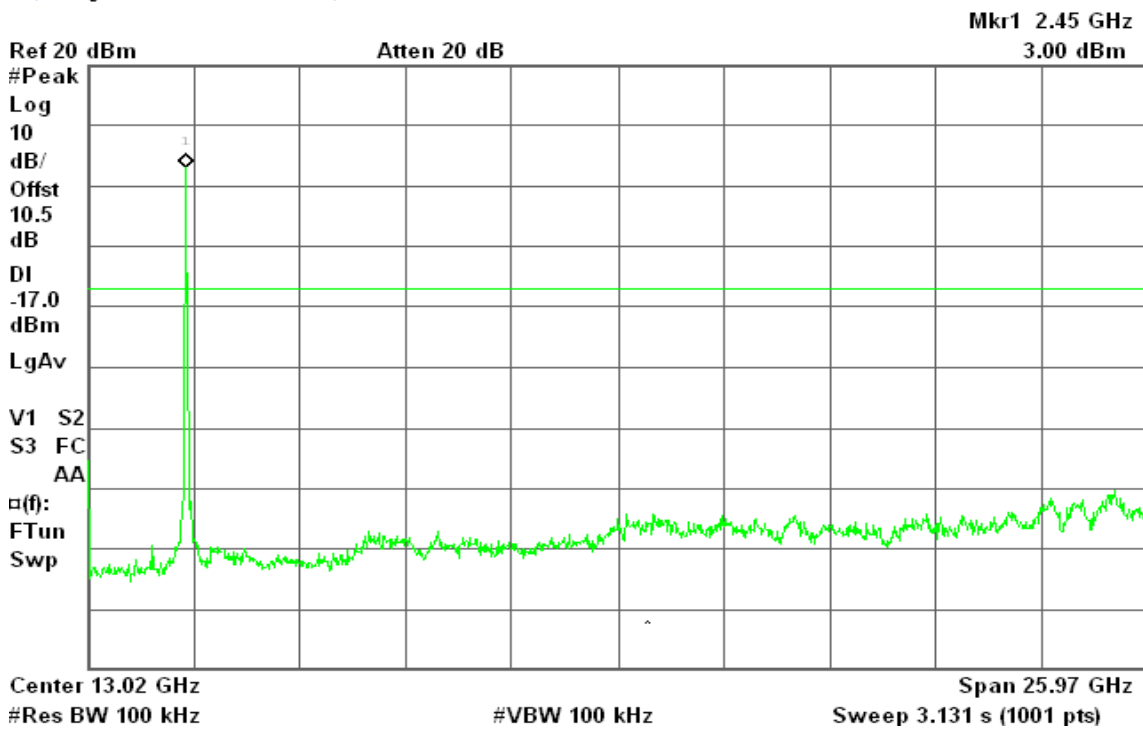




### CH High

Agilent 13:48:32 Dec 27, 2010

R T

Mkr1 2.47 GHz  
-4.28 dBm

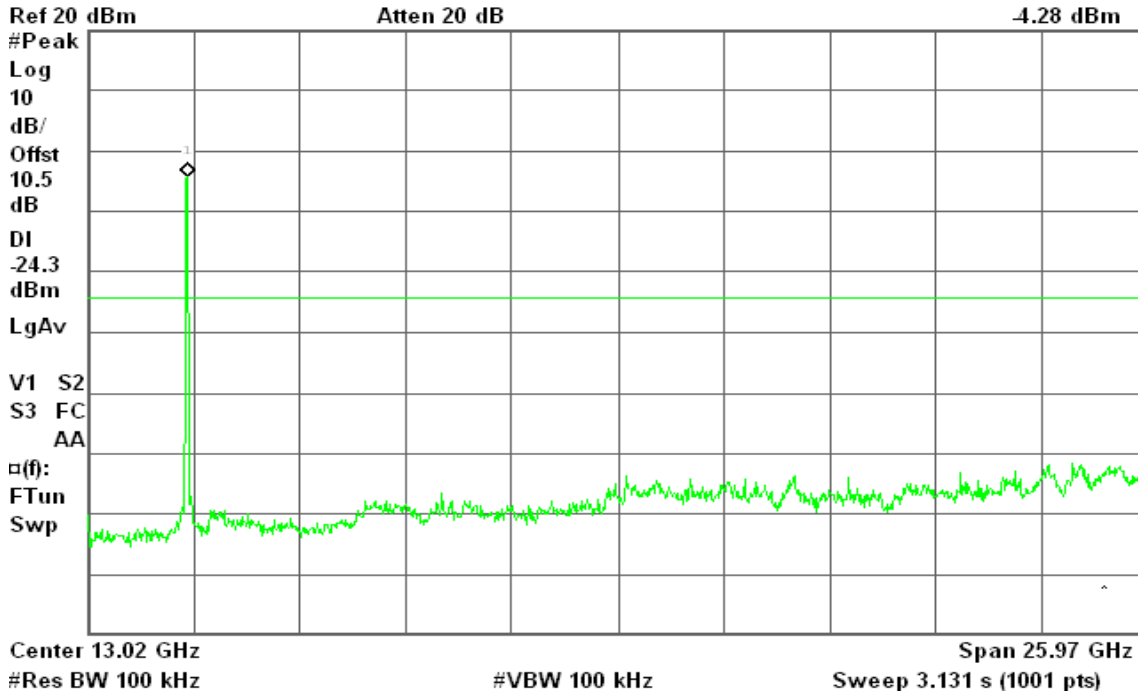


### IEEE 802.11n HT 40 MHz mode / Chain 1

#### CH Low

Agilent 13:23:24 Dec 27, 2010

R T

Mkr1 2.42 GHz  
-2.21 dBm

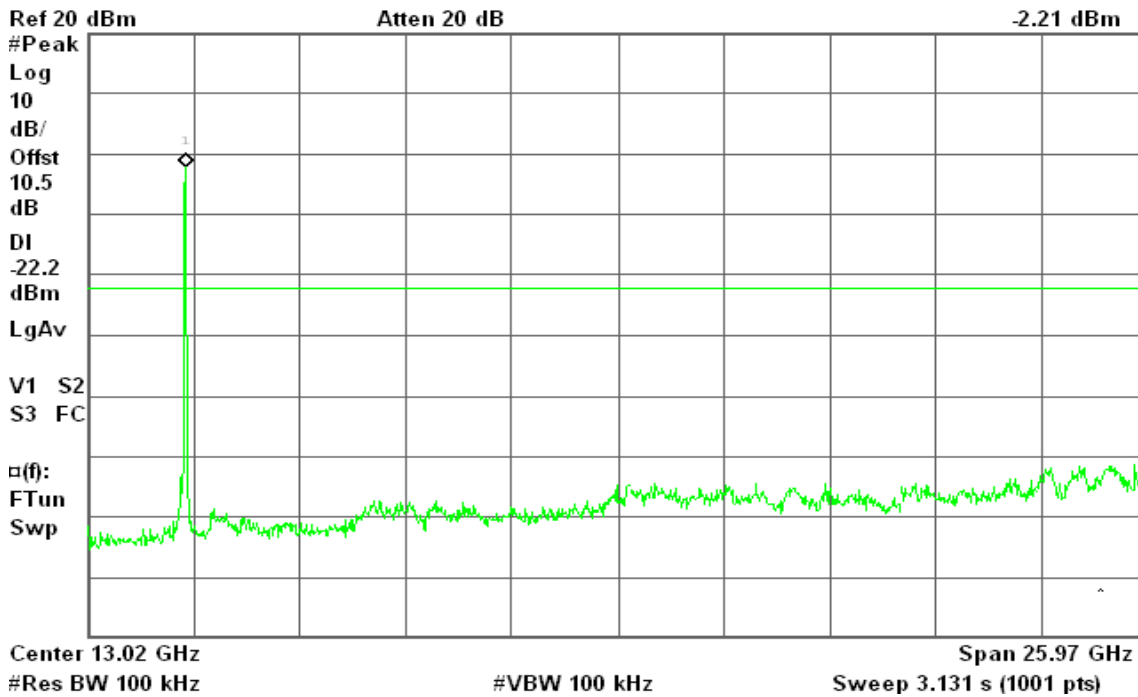




### CH Mid

Agilent 13:32:04 Dec 27, 2010

R T

Mkr1 2.45 GHz  
1.55 dBm

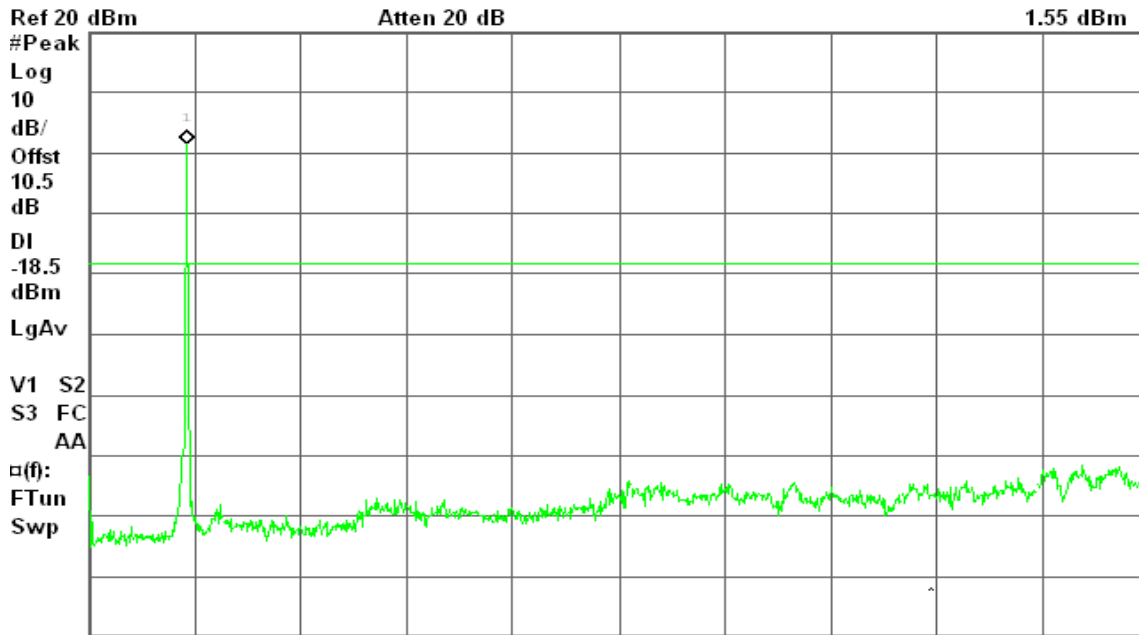

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz


Sweep 3.131 s (1001 pts)

### CH High

Agilent 13:37:36 Dec 27, 2010

R T

Mkr1 2.45 GHz  
-5.39 dBm

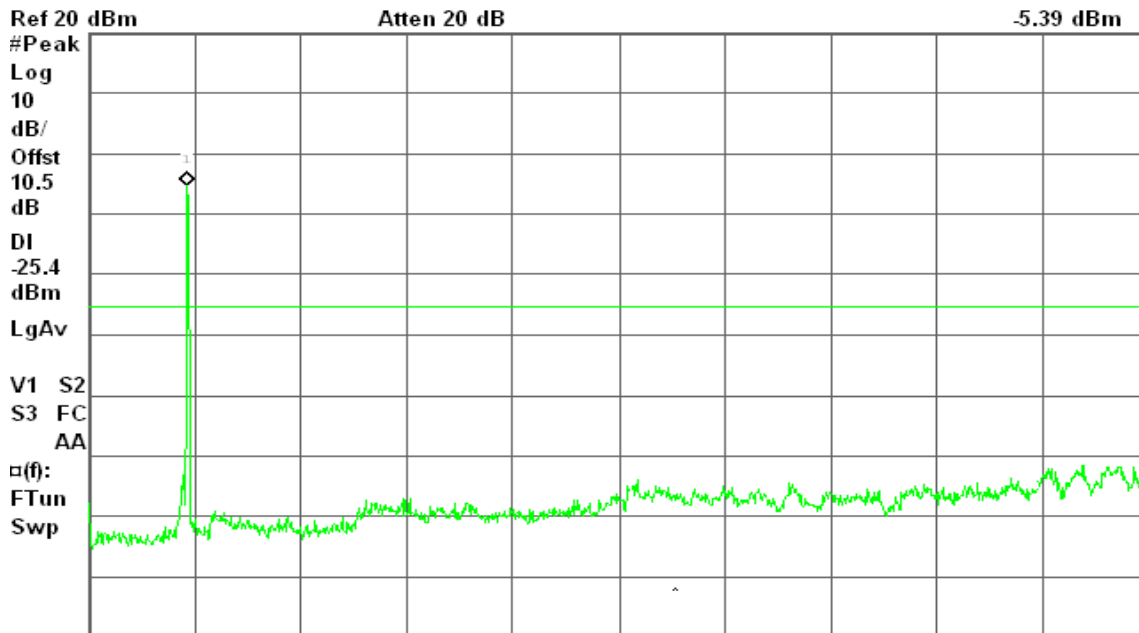

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)




### IEEE 802.11n HT 20 MHz mode with combiner

#### CH Low

Agilent 17:04:14 Dec 27, 2010


R T

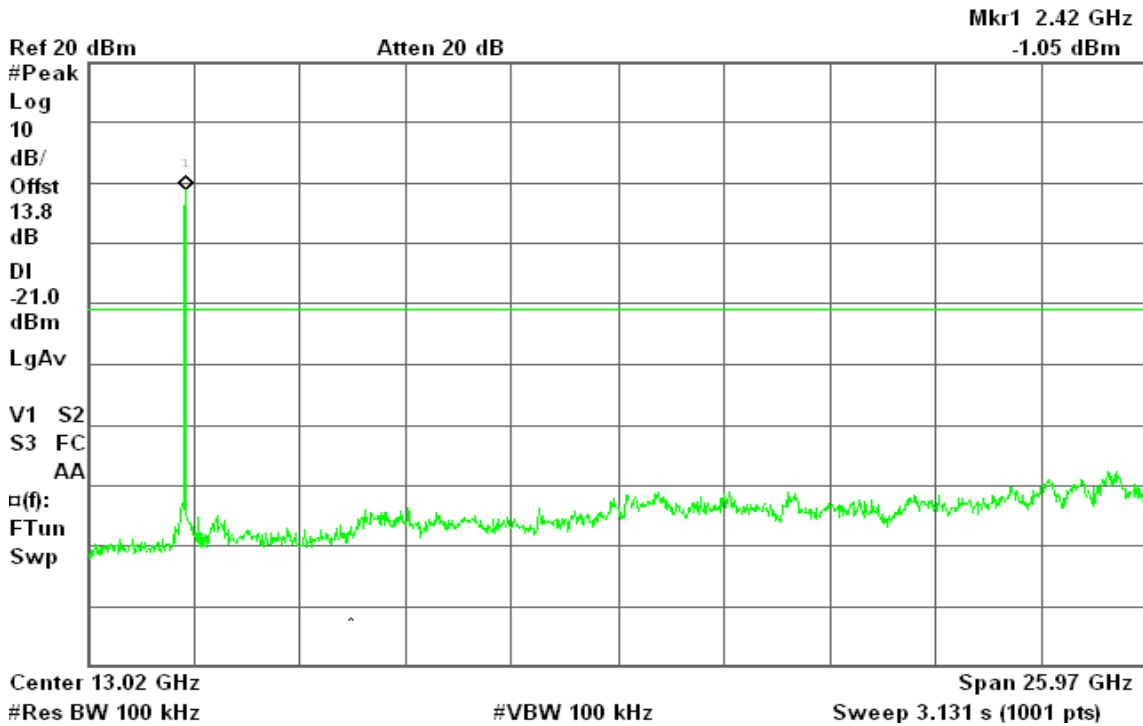

#### CH Mid

Agilent 17:10:42 Dec 27, 2010

R T

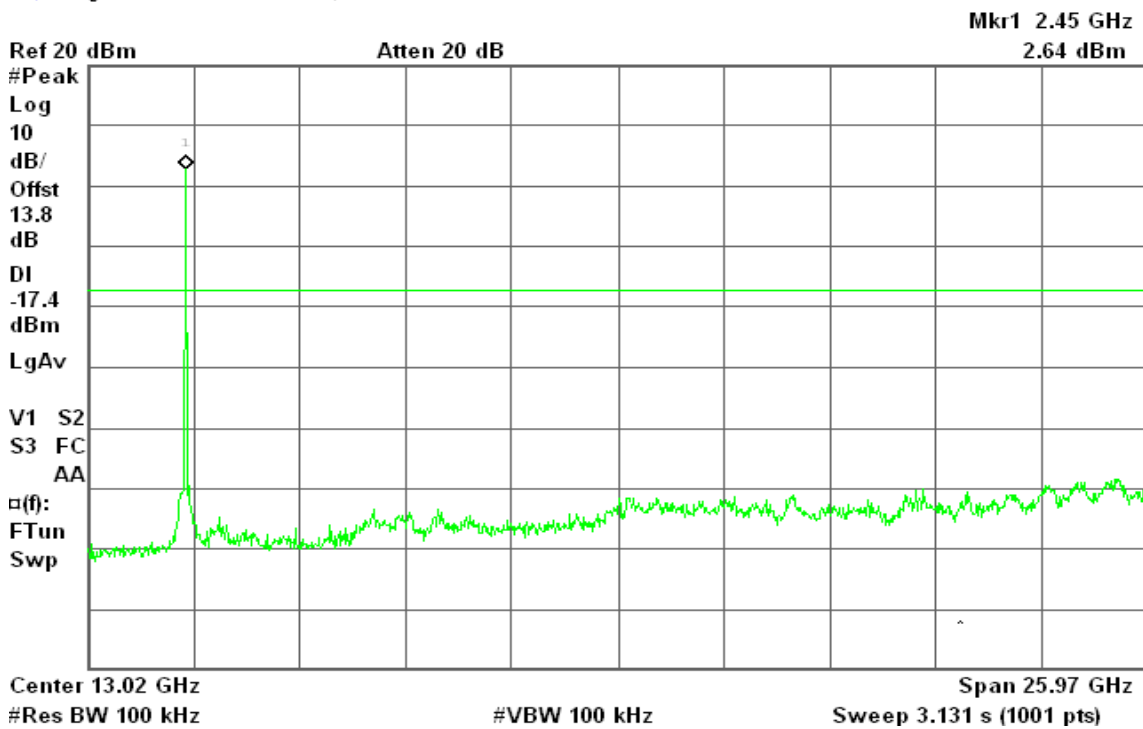






### CH High

Agilent 17:14:41 Dec 27, 2010

R T

Mkr1 2.47 GHz  
-3.82 dBm

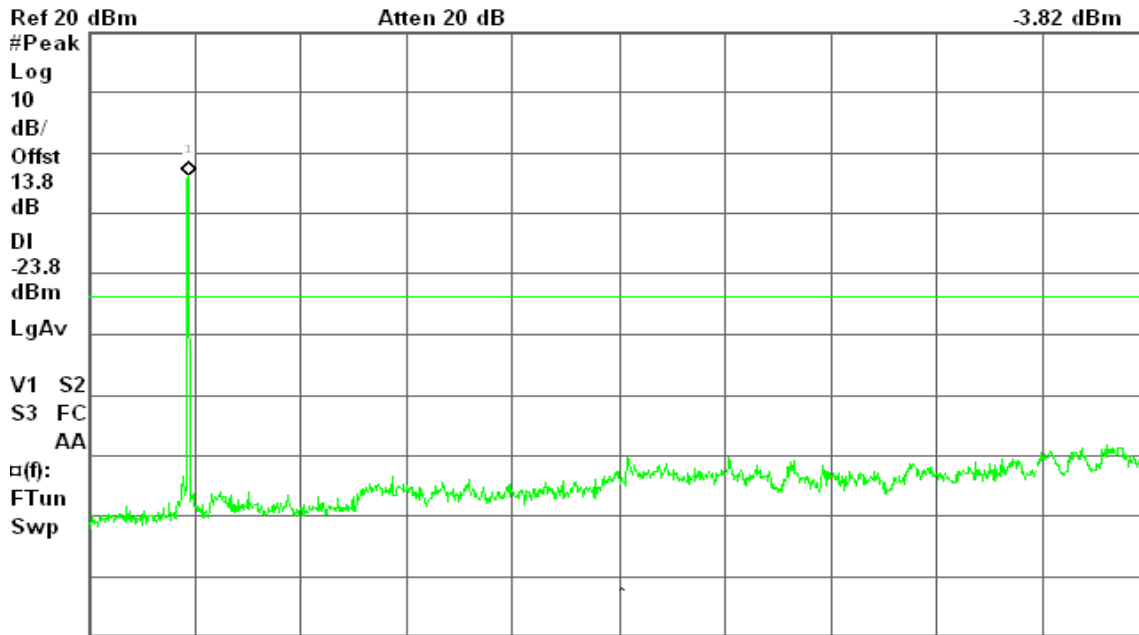

Center 13.02 GHz Span 25.97 GHz  
#Res BW 100 kHz #VBW 100 kHz Sweep 3.131 s (1001 pts)


### IEEE 802.11n HT 40 MHz mode with combiner

#### CH Low

Agilent 17:23:29 Dec 27, 2010

R T

Mkr1 2.42 GHz  
3.12 dBm

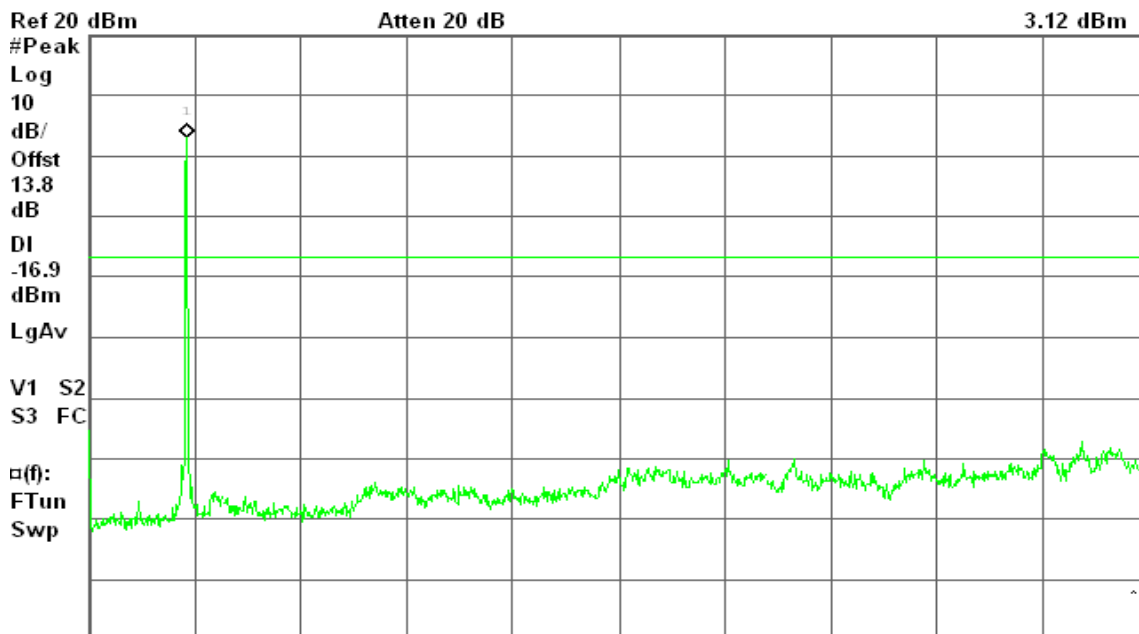

Center 13.02 GHz Span 25.97 GHz  
#Res BW 100 kHz #VBW 100 kHz Sweep 3.131 s (1001 pts)




### CH Mid

Agilent 17:29:07 Dec 27, 2010

R T

Mkr1 2.45 GHz  
5.82 dBm

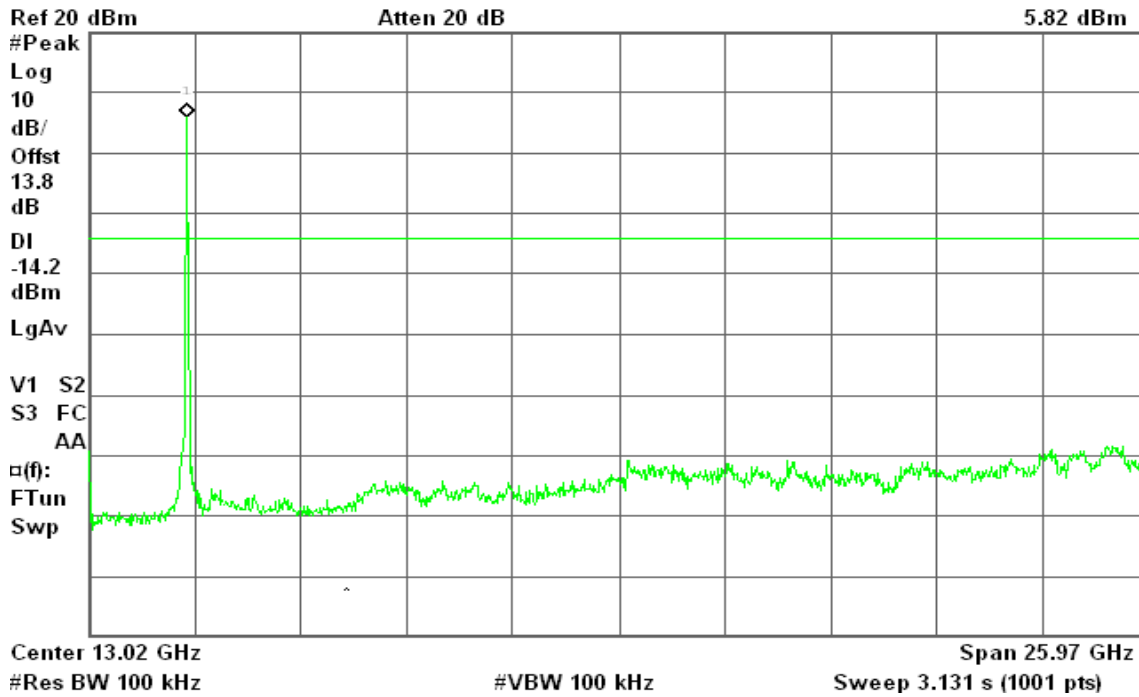


### CH High

Agilent 17:34:57 Dec 27, 2010

R T

Mkr1 2.45 GHz  
1.65 dBm

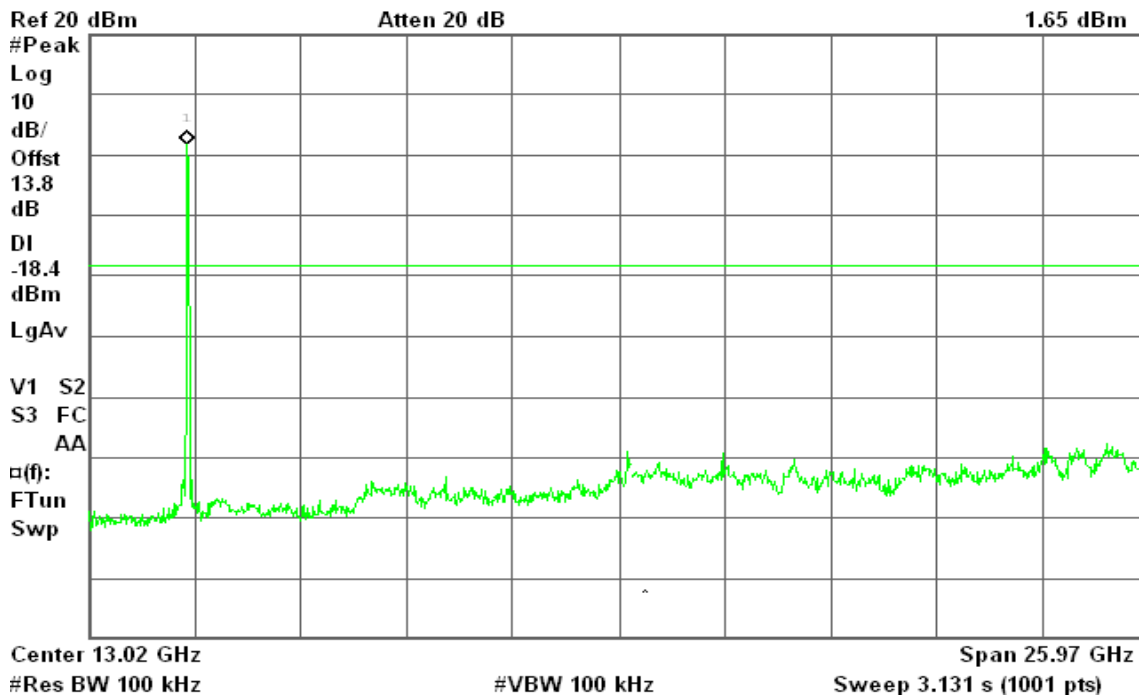



## 7.7 RADIATED EMISSIONS

### LIMIT

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ )	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

**Remark:** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.


2. In the emission table above, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ at 3-meter)	Field Strength (dB $\mu\text{V}/\text{m}$ at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54




**Test Configuration**

**9kHz ~ 30MHz**

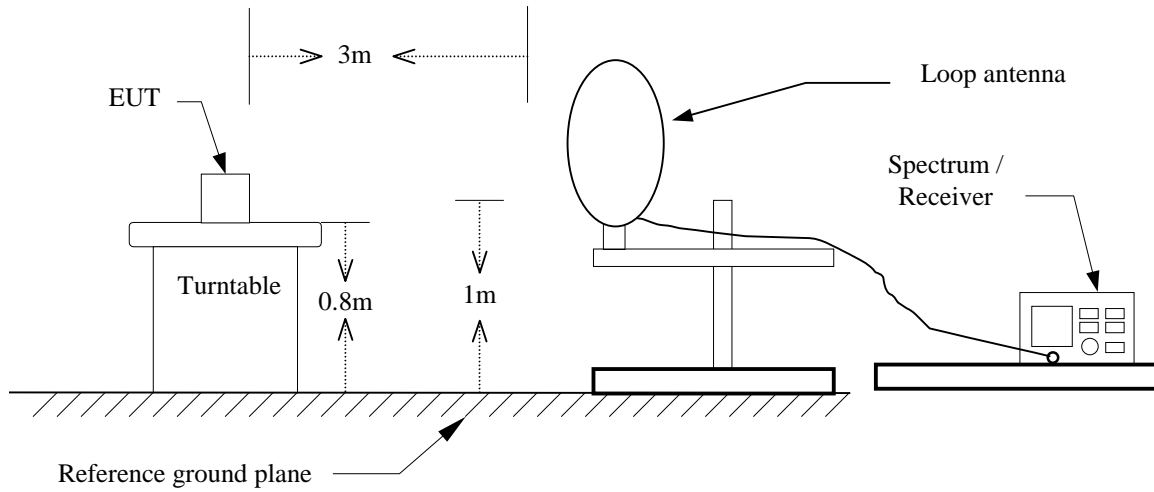


**30MHz ~ 1GHz**

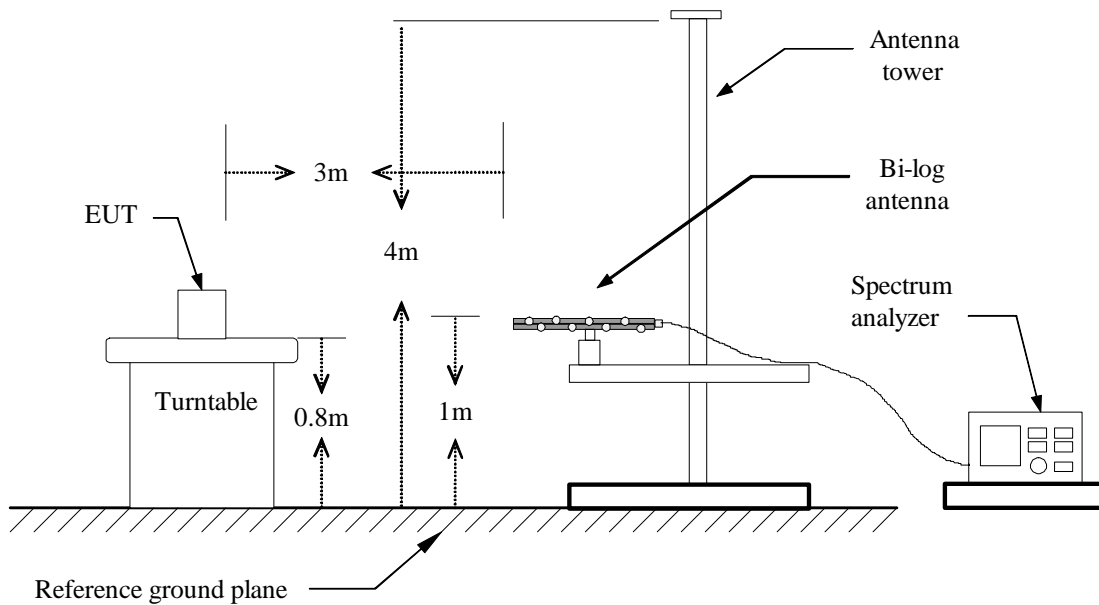



Above 1 GHz

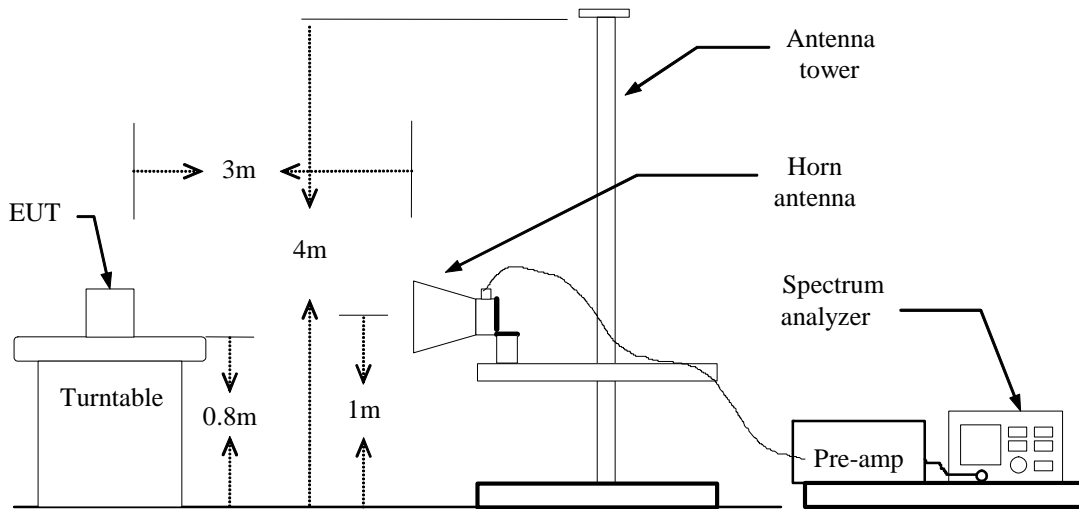



## **TEST PROCEDURE**

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:  
Below 1GHz:  
RBW=100kHz / VBW=300kHz / Sweep=AUTO  
Above 1GHz:  
(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO  
(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.

## **TEST RESULTS**

*No non-compliance noted.*



**Below 1GHz**

**Operation Mode:** Normal Link

**Test Date:** December 24, 2010

**Temperature:** 20°C

**Tested by:** Wolf Huang

**Humidity:** 45% RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
68.80	49.12	-14.76	34.36	40.00	-5.64	Peak	V
372.73	42.49	-7.61	34.87	46.00	-11.13	Peak	V
500.45	34.89	-5.14	29.74	46.00	-16.26	Peak	V
856.12	41.50	-0.81	40.69	46.00	-5.31	Peak	V
893.30	40.51	-0.67	39.85	46.00	-6.15	Peak	V
982.22	35.77	0.74	36.51	54.00	-17.49	Peak	V
143.17	40.55	-10.00	30.55	43.50	-12.95	Peak	H
371.12	43.34	-7.64	35.70	46.00	-10.30	Peak	H
624.93	37.07	-3.48	33.60	46.00	-12.40	Peak	H
749.42	40.69	-1.83	38.86	46.00	-7.14	Peak	H
856.12	44.50	-0.81	43.69	46.00	-2.31	Peak	H
893.30	44.21	-0.67	43.54	46.00	-2.46	Peak	H

**Remark:**

1. *No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz)*
2. *Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.*
3. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
4. *Margin (dB) = Result (dBuV/m) – Limit (dBuV/m).*



**Above 1 GHz**

**Operation Mode:** TX / IEEE 802.11b / CH Low

**Test Date:** December 22, 2010

**Temperature:** 25°C

**Tested by:** Wolf Huang

**Humidity:** 50 % RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1090.00	62.66	---	-10.98	51.68	---	74.00	54.00	-2.32	Peak	V
N/A										
1083.33	62.97	---	-10.98	51.99	---	74.00	54.00	-2.01	Peak	H
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).





Operation Mode: TX / IEEE 802.11b / CH Mid

Test Date: December 22, 2010

Temperature: 25°C

Tested by: Wolf Huang

Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1140.00	62.29	---	-10.92	51.36	---	74.00	54.00	-2.64	Peak	V
4875.00	52.10	41.97	2.71	54.81	44.68	74.00	54.00	-9.32	AVG	V
7308.33	48.58	43.40	7.23	55.81	50.63	74.00	54.00	-3.37	AVG	V
N/A										
1056.67	62.74	---	-11.01	51.73	---	74.00	54.00	-2.27	Peak	H
4875.00	51.82	47.18	2.71	54.53	49.89	74.00	54.00	-4.11	AVG	H
7308.33	48.57	42.87	7.23	55.81	50.10	74.00	54.00	-3.90	AVG	H
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11b / CH High

Test Date: December 22, 2010

Temperature: 25°C

Tested by: Wolf Huang

Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1106.67	62.27	---	-10.96	51.31	---	74.00	54.00	-2.69	Peak	V
N/A										
1090.00	62.24	---	-10.98	51.26	---	74.00	54.00	-2.74	Peak	H
4925.00	52.10	40.80	2.81	54.91	43.61	74.00	54.00	-10.39	AVG	H
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11g / CH Low

Test Date: December 22, 2010

Temperature: 25°C

Tested by: Wolf Huang

Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1046.67	63.00	---	-11.02	51.98	---	74.00	54.00	-2.02	Peak	V
N/A										
1103.33	62.51	---	-10.96	51.55	---	74.00	54.00	-2.45	Peak	H
4166.67	50.04	---	0.97	51.01	---	74.00	54.00	-2.99	Peak	H
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11g / CH Mid

Test Date: December 22, 2010

Temperature: 25°C

Tested by: Wolf Huang

Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1123.33	62.24	---	-10.94	51.30	---	74.00	54.00	-2.70	Peak	V
7308.33	55.75	45.46	7.23	62.98	52.69	74.00	54.00	-1.31	AVG	V
N/A										
1146.67	61.73	---	-10.92	50.81	---	74.00	54.00	-3.19	Peak	H
7308.33	47.99	37.42	7.23	55.22	44.65	74.00	54.00	-9.35	AVG	H
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11g / CH High

Test Date: December 22, 2010

Temperature: 25°C

Tested by: Wolf Huang

Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1116.67	62.08	---	-10.95	51.13	---	74.00	54.00	-2.87	Peak	V
7391.67	48.54	37.68	7.20	55.74	44.88	74.00	54.00	-9.12	AVG	V
N/A										
1116.67	62.38	---	-10.95	51.43	---	74.00	54.00	-2.57	Peak	H
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11n HT 20 MHz mode / CH Low Test Date: December 22, 2010

Temperature: 25°C

Tested by: Wolf Huang

Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1053.33	62.58	---	-11.01	51.57	---	74.00	54.00	-2.43	Peak	V
N/A										
1063.33	62.61	---	-11.00	51.61	---	74.00	54.00	-2.39	Peak	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11n HT 20 MHz mode / CH Mid Test Date: December 22, 2010

Temperature: 25°C

Tested by: Wolf Huang

Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1176.67	61.78	---	-10.89	50.89	---	74.00	54.00	-3.11	Peak	V
7316.67	54.70	44.11	7.23	61.93	51.34	74.00	54.00	-2.66	AVG	V
N/A										
1120.00	62.69	---	-10.95	51.74	---	74.00	54.00	-2.26	Peak	H
2383.33	67.62	57.11	-4.35	63.27	52.76	74.00	54.00	-1.24	AVG	H
2490.00	68.59	52.90	-3.91	64.68	48.99	74.00	54.00	-5.01	AVG	H
7316.67	47.63	38.74	7.23	54.86	45.97	74.00	54.00	-8.03	AVG	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11n HT 20 MHz mode / CH High Test Date: December 22, 2010

Temperature: 25°C

Tested by: Wolf Huang

Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1056.67	63.13	---	-11.01	52.12	---	74.00	54.00	-1.88	Peak	V
N/A										
1126.67	62.35	---	-10.94	51.42	---	74.00	54.00	-2.58	Peak	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).





Operation Mode: TX / IEEE 802.11n HT 40 MHz mode / CH Low

Test Date: December 22, 2010

Temperature: 25°C

Tested by: Wolf Huang

Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1213.33	62.40	---	-10.85	51.55	---	74.00	54.00	-2.45	Peak	V
N/A										
1043.33	62.81	---	-11.02	51.78	---	74.00	54.00	-2.22	Peak	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11n HT 40 MHz mode / CH Mid

Test Date: December 22, 2010

Temperature: 25°C

Tested by: Wolf Huang

Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1263.33	62.55	---	-10.80	51.75	---	74.00	54.00	-2.25	Peak	V
7308.33	51.02	41.37	7.23	58.25	48.60	74.00	54.00	-5.40	AVG	V
N/A										
1126.67	61.83	---	-10.94	50.89	---	74.00	54.00	-3.11	Peak	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11n HT 40 MHz mode / CH High

Test Date: December 22, 2010

Temperature: 25°C

Tested by: Wolf Huang

Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1213.33	62.43	---	-10.85	51.58	---	74.00	54.00	-2.42	Peak	V
N/A										
1166.67	62.32	---	-10.90	51.42	---	74.00	54.00	-2.58	Peak	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



## 7.8 POWERLINE CONDUCTED EMISSIONS

### LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

\* Decreases with the logarithm of the frequency.

### Test Configuration

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

### TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.



## TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

### Test Data

**Operation Mode:** Normal Link                      **Test Date:** December 2, 2010  
**Temperature:** 24°C                                      **Tested by:** John Yen  
**Humidity:** 60% RH

Freq. (MHz)	QP Reading (dBuV)	AV Reading (dBuV)	Corr. factor (dB/m)	QP Result (dBuV/m)	AV Result (dBuV/m)	QP Limit (dBuV)	AV Limit (dBuV)	QP Margin (dB)	AV Margin (dB)	Note
0.1500	44.20	30.93	10.84	55.04	41.77	65.99	55.99	-10.95	-14.22	L1
0.3339	29.82	18.71	10.74	40.56	29.45	59.35	49.35	-18.79	-19.90	L1
0.3780	33.13	20.23	10.72	43.85	30.95	58.32	48.32	-14.47	-17.37	L1
2.0300	18.56	8.68	10.68	29.24	19.36	56.00	46.00	-26.76	-26.64	L1
7.8140	27.47	21.59	10.81	38.28	32.40	60.00	50.00	-21.72	-17.60	L1
12.6380	30.02	22.82	10.96	40.98	33.78	60.00	50.00	-19.02	-16.22	L1
0.1500	43.64	29.05	10.62	54.26	39.67	66.00	56.00	-11.74	-16.33	L2
0.1668	41.67	28.80	10.63	52.30	39.43	65.12	55.12	-12.82	-15.69	L2
0.3820	33.29	21.30	10.61	43.90	31.91	58.24	48.24	-14.34	-16.33	L2
0.8340	22.98	13.95	10.62	33.60	24.57	56.00	46.00	-22.40	-21.43	L2
7.7940	26.60	20.71	10.74	37.34	31.45	60.00	50.00	-22.66	-18.55	L2
11.5260	31.16	23.57	10.85	42.01	34.42	60.00	50.00	-17.99	-15.58	L2


### **Remark:**

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10 kHz; the IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9 kHz;
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)



**Test Plots**

**Conducted emissions (Line 1)**

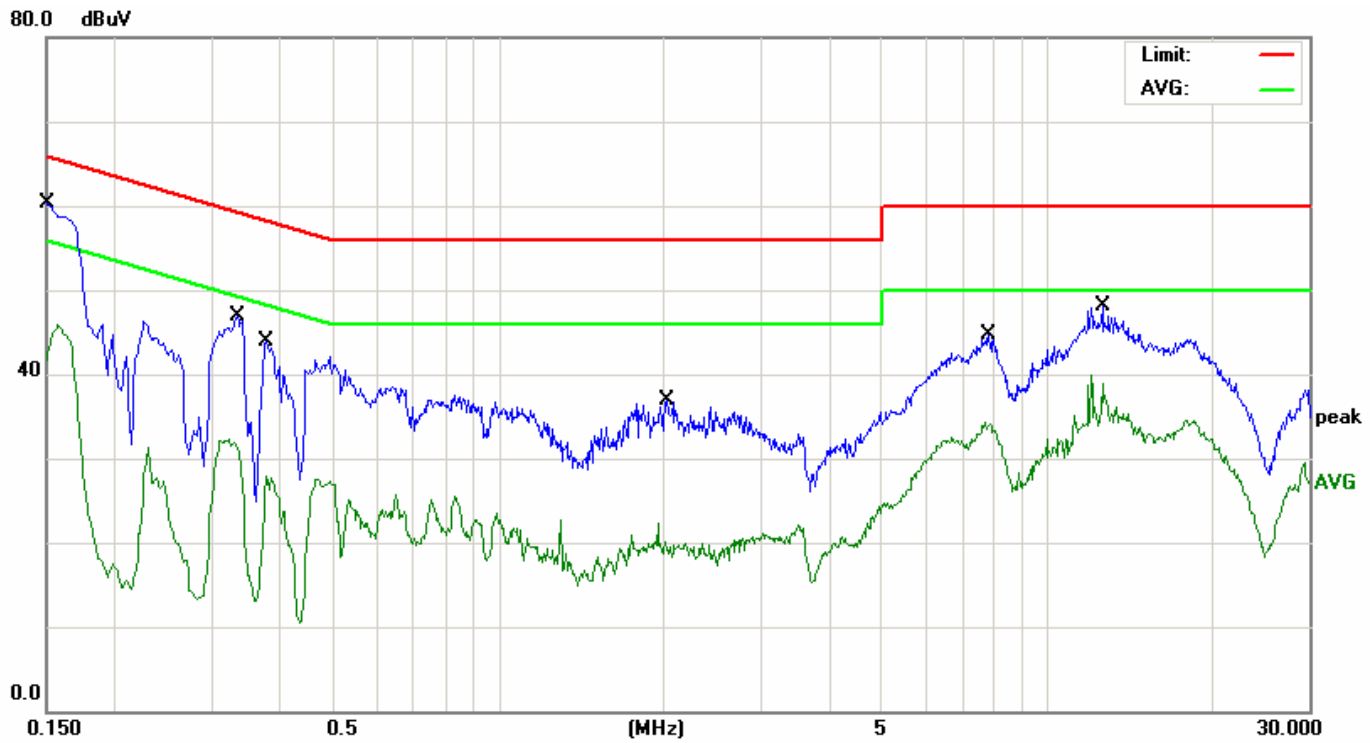

**Conducted emissions (Line 2)**

