



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

Wireless Outdoor camera

Model: OC810

Trade Name: SerComm

Issued to

SerComm Corporation
8F, No. 3-1, YuanQu St., NanKang, Taipei 115,
Taiwan, R.O.C.

Issued by

Compliance Certification Services Inc.
No. 11, Wu-Gong 6th Rd., Wugu Industrial Park,
Taipei Hsien 248, Taiwan (R.O.C.)
<http://www.ccsrf.com>
service@ccsrf.com



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION.....	3
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	5
3.1 EUT CONFIGURATION	5
3.2 EUT EXERCISE.....	5
3.3 GENERAL TEST PROCEDURES.....	5
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	6
3.5 DESCRIPTION OF TEST MODES	7
4. INSTRUMENT CALIBRATION.....	8
4.1 MEASURING INSTRUMENT CALIBRATION	8
4.2 MEASUREMENT EQUIPMENT USED	9
4.3 MEASUREMENT UNCERTAINTY	10
5. FACILITIES AND ACCREDITATIONS.....	11
5.1 FACILITIES	11
5.2 EQUIPMENT.....	11
5.3 TABLE OF ACCREDITATIONS AND LISTINGS.....	12
6. SETUP OF EQUIPMENT UNDER TEST	13
6.1 SETUP CONFIGURATION OF EUT.....	13
6.2 SUPPORT EQUIPMENT	13
7. FCC PART 15.247 REQUIREMENTS.....	14
7.1 6DB BANDWIDTH.....	14
7.2 PEAK POWER.....	22
7.3 BAND EDGES MEASUREMENT	24
7.4 PEAK POWER SPECTRAL DENSITY	41
7.5 SPURIOUS EMISSIONS.....	49
7.6 RADIATED EMISSIONS	56
7.7 POWERLINE CONDUCTED EMISSIONS.....	73
APPENDIX I RADIO FREQUENCY EXPOSURE.....	76
APPENDIX II PHOTOGRAPHS OF TEST SETUP	79
APPENDIX 1 - PHOTOGRAPHS OF EUT	



1. TEST RESULT CERTIFICATION

Applicant: SerComm Corporation
8F, No. 3-1, YuanQu St., NanKang, Taipei 115,
Taiwan, R.O.C.

Equipment Under Test: Wireless Outdoor camera

Trade Name: SerComm

Model: OC810

Date of Test: June 7 ~ July 13, 2010

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:

Rex Lai
Section Manager
Compliance Certification Services Inc.

Gina Lo
Section Manager
Compliance Certification Services Inc.



2. EUT DESCRIPTION

Product	Wireless Outdoor camera
Trade Name	SerComm
Model Number	OC810
Model Discrepancy	N/A
Power Rating	Power Adapter Sunny / SYS1381-1212-W2 I/P: 100-240V, 50/60Hz, 0.5A O/P: 12V, 1.0A
Frequency Range	2412 ~ 2462 MHz
Transmit Power	IEEE 802.11b mode: 14.41 dBm IEEE 802.11g mode: 22.02 dBm draft 802.11n Standard-20 MHz Channel mode: 21.74 dBm draft 802.11n Wide-40 MHz Channel mode: 21.55 dBm
Modulation Technique	IEEE 802.11b mode: DSSS (1, 2, 5.5 and 11 Mbps) IEEE 802.11g mode: OFDM (6, 9, 12, 18, 24, 36, 48 and 54 Mbps) draft 802.11n Standard-20 MHz Channel mode: OFDM (6.5, 7.22, 13, 14.44, 19.5, 21.67, 26, 28.89, 39, 43.33, 52, 57.78, 58.5, 65.0, 72.22Mbps) draft 802.11n Wide-40 MHz Channel mode: OFDM (13.5, 15, 27, 30, 40.5, 45, 54, 60, 81, 90, 108, 120, 121.5, 135, 150Mbps)
Number of Channels	IEEE 802.11b/g mode: 11 Channels draft 802.11n Standard-20 MHz Channel mode: 11 Channels draft 802.11n Wide-40 MHz Channel mode: 7 Channels
Antenna Specification	1. 5.4 dBi for black 2. 4.2 dBi for white
Antenna Designation	Omni Antenna

Remark:

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **P27OC810** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.247.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.



3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



3.5 DESCRIPTION OF TEST MODES

The EUT (model: OC810) had been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

RF out put power of IEEE 802.11b mode is reduced 4dBm in order to meet radiated spurious emission above 1GHz test.

IEEE 802.11b mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 1Mbps data rate were chosen for full testing.

IEEE 802.11g mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing.

draft 802.11n Standard-20 MHz Channel mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6.5Mbps data rate were chosen for full testing.

draft 802.11n Wide-40 MHz Channel mode:

Channel Low (2422MHz), Channel Mid (2437MHz) and Channel High (2452MHz) with 13.5Mbps data rate were chosen for full testing.



4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.



4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year and Loop Antenna is scheduled for calibration once three years.

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	03/03/2011
Spectrum Analyzer	R&S	FSEK30	100264	04/13/2011
Power Meter	Agilent	E4416A	GB41291611	06/27/2011
Power Sensor	Agilent	E9327A	US40441097	06/27/2011

3M Semi Anechoic Chamber				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510252	10/26/2010
EMI Test Receiver	R&S	ESCI	100064	02/04/2011
Pre-Amplifier	Mini-Circuits	ZFL-1000LN	SF350700823	01/13/2011
Pre-Amplifier	MITEQ	AFS44-00102650-42-10P-44	1415367	11/20/2010
Bilog Antenna	Sunol Sciences	JB3	A030105	09/11/2010
Horn Antenna	EMCO	3117	00055165	12/07/2010
Loop Antenna	EMCO	6502	8905/2356	06/10/2013
Turn Table	CCS	CC-T-1F	N/A	N.C.R
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R
Site NSA	CCS	N/A	N/A	12/31/2010
Test S/W	EZ-EMC (CCS-3A1RE)			

Powerline Conducted Emissions Test Site # B				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
TEST RECEIVER	R&S	ESCI	100234	06/13/2011
LISN (EUT)	FCC	FCC-LISN-50-32-2	08009	03/25/2011
LISN	EMCO	3825/2	1382	01/11/2011
BNC CABLE	Huber+Suhner	RG 223/U	BNC B2	01/12/2011
Pulse Limiter	R&S	ESH3-Z2	100374	08/23/2010
THERMO-HYGRO METER	TOP	HA-202	9303-3	01/31/2011
Test S/W	EZ-EMC			



4.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
Powerline Conducted Emission	+/- 1.6202
3M Semi Anechoic Chamber / 30M~200M	+/- 4.0606
3M Semi Anechoic Chamber / 200M~1000M	+/- 3.9979
3M Semi Anechoic Chamber / 1G~8G	+/- 2.5790
3M Semi Anechoic Chamber / 8G~18G	+/- 2.5928
3M Semi Anechoic Chamber / 18G~26G	+/- 2.7212
3M Semi Anechoic Chamber / 26G~40G	+/- 2.9520

Remark: *This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.*



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

Remark: The powerline conducted emissions test items was tested at Compliance Certification Services Inc. (Hsintien Lab.) The test equipments were listed in page 9 and the test data, please refer page 76- 77.

No.11, Wugong 6th Rd., Wugu Industrial Park, Taipei Hsien 248, Taiwan

Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

No.81-1, Lane 210, Bade 2nd Rd., Luchu Hsiang, Taoyuan Hsien 338, Taiwan

Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.




Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."



5.3 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3M Semi Anechoic Chamber (FCC MRA: TW1039) to perform FCC Part 15 measurements	 FCC MRA: TW1039
Taiwan	TAF	LP0002, RTTE01, FCC Method-47 CFR Part 15 Subpart C, D, E, RSS-210, RSS-310 IDA TS SRD, AS/NZS 4268, AS/NZS 4771, TS 12.1 & 12.2, ETSI EN 300 440-1, ETSI EN 300 440-2, ETSI EN 300 328, ETSI EN 300 220-1, ETSI EN 300 220-2, ETSI EN 301 893, ETSI EN 301 489-1/3/7/17 FCC OET Bulletin 65 + Supplement C, EN 50360, EN 50361, EN 50371, RSS 102, EN 50383, EN 50385, EN 50392, IEC 62209, CNS 14958-1, CNS 14959 FCC Method -47 CFR Part 15 Subpart B IEC / EN 61000-3-2, IEC / EN 61000-3-3, IEC / EN 61000-4-2/3/4/5/6/8/11	
Canada	Industry Canada	3M Semi Anechoic Chamber (IC 2324G-1 / IC 2324G-2) to perform	

* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.



6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

No	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1.	Server Nobebook	HP	2210B	CNV7472KG5	DOC BSMI: R33001	Unshielded, 20m	Unshielded, 1.8m
2	Notebook PC	ASUS	M5200AE	5BN0AG019631	PD9WM3B2100	LAN Cable: Unshielded, 10m	AC I/P: Unshielded, 1.8m with a core DC O/P: Unshielded, 1.8m
3	USB Mouse	GIGABYTE	GK-KM6150	094425002038	FCC DoC	Shielded, 1.5m	N/A
4	Notebook PC (Remote)	DELL	PP19L	GK102 A00	QDS-BRCM1021	LAN Cable: Unshielded, 10m	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core

Remark:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.




7. FCC PART 15.247 REQUIREMENTS

7.1 6DB BANDWIDTH

LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

Test Configuration

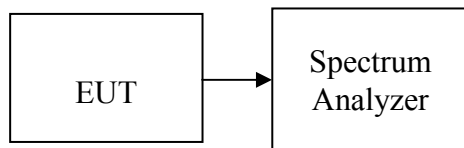

TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 100 kHz, VBW = RBW, Span = 50 MHz, Sweep = auto.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

TEST RESULTS

No non-compliance noted



Test Data

Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	10.25	>500	PASS
Mid	2437	10.17		PASS
High	2462	10.17		PASS

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.50	>500	PASS
Mid	2437	16.58		PASS
High	2462	16.58		PASS

Test mode: draft 802.11n Standard-20 MHz Channel mode

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	17.75	>500	PASS
Mid	2437	17.67		PASS
High	2462	17.67		PASS

Test mode: draft 802.11n Wide-40 MHz Channel mode

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	2422	36.33	>500	PASS
Mid	2437	36.33		PASS
High	2452	36.50		PASS




IEEE 802.11b mode

6dB Bandwidth (CH Low)

Agilent 10:06:31 Jul 13, 2010

R T

Δ Mkr1 10.25 MHz
-0.18 dB

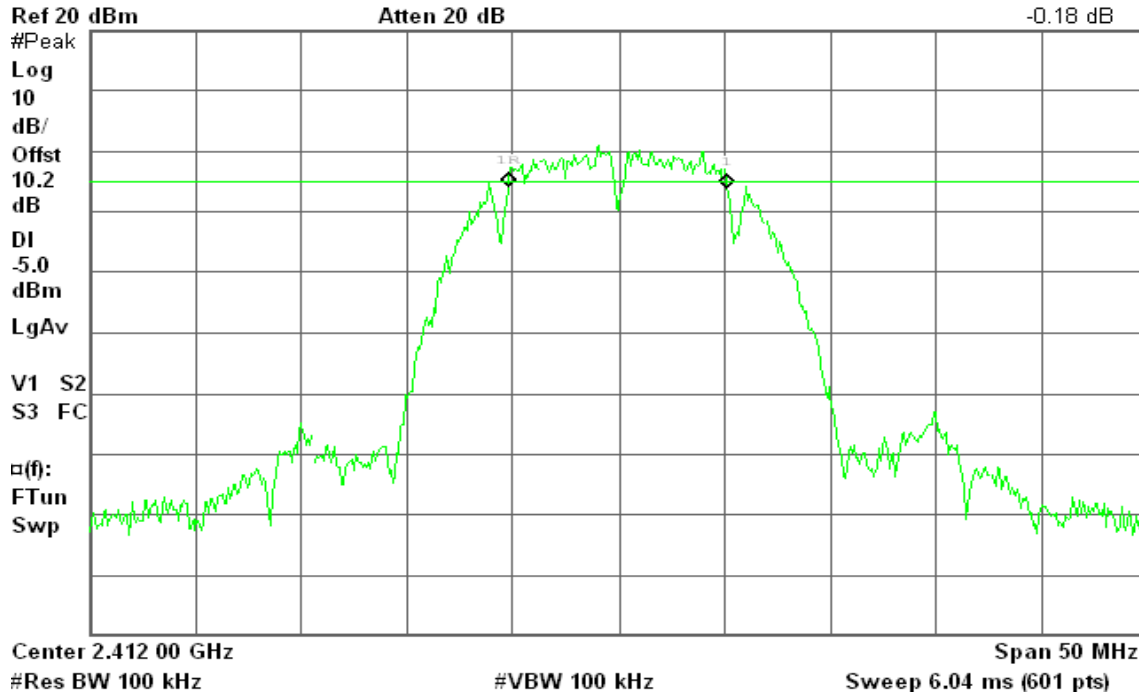


6dB Bandwidth (CH Mid)

Agilent 10:15:48 Jul 13, 2010

R T

Δ Mkr1 10.17 MHz
0.79 dB

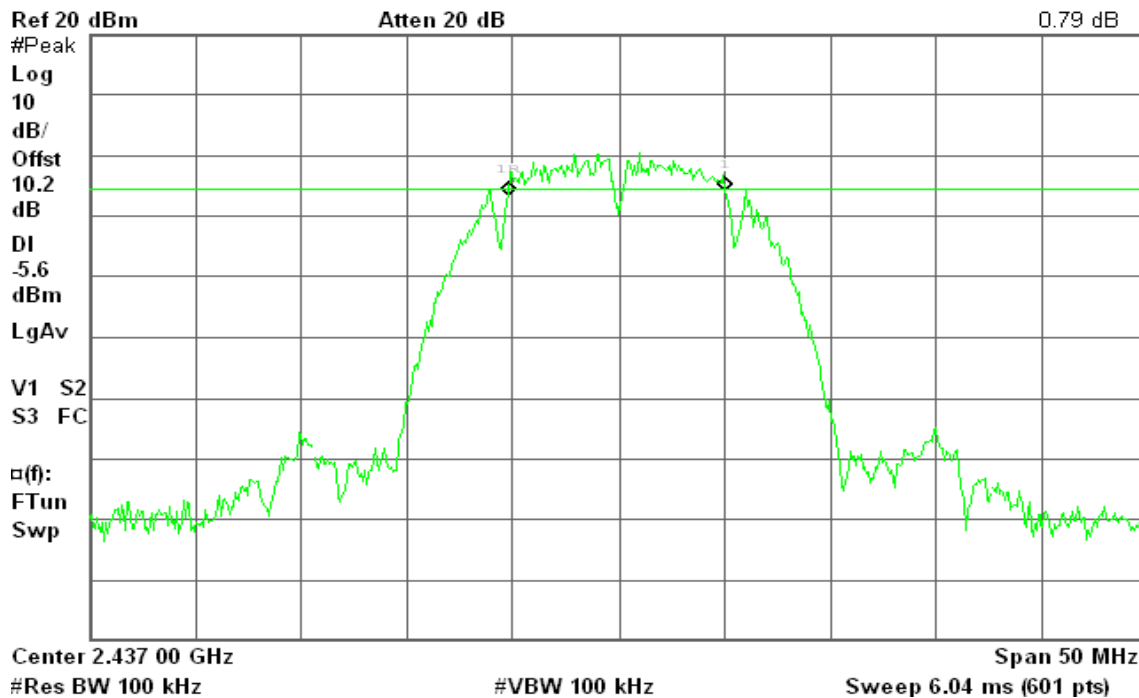




6dB Bandwidth (CH High)

Agilent 10:19:57 Jul 13, 2010

R T

Δ Mkr1 10.17 MHz
0.39 dB

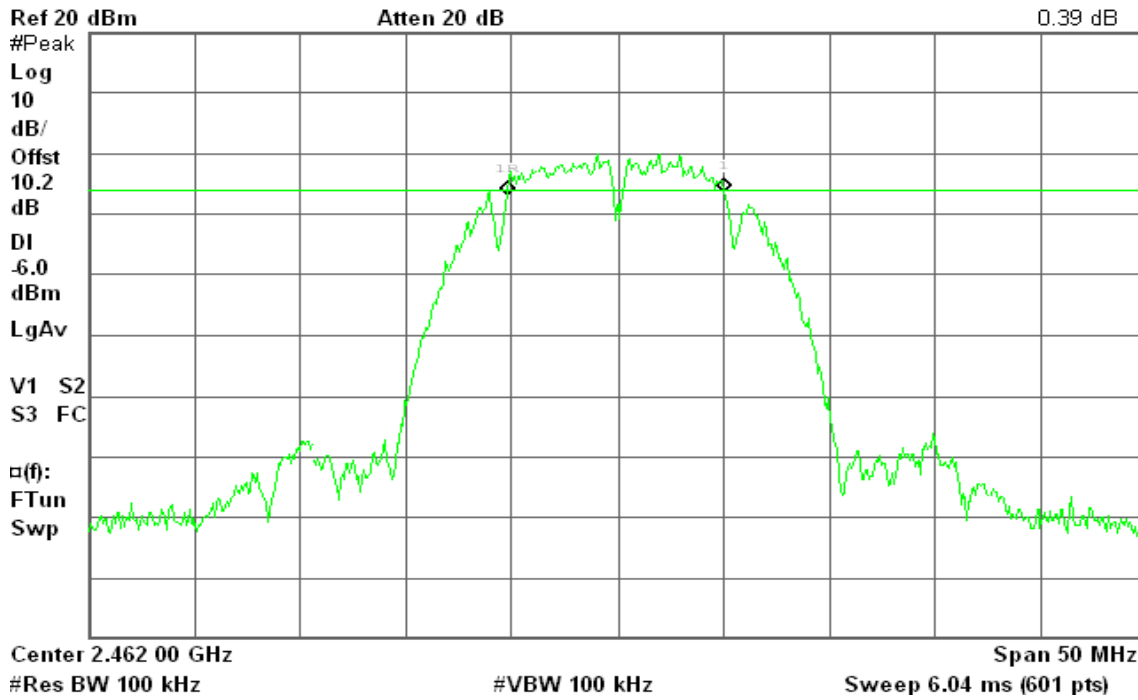


IEEE 802.11g mode

6dB Bandwidth (CH Low)

Agilent 10:27:21 Jul 13, 2010

R T

Δ Mkr1 16.50 MHz
-0.55 dB

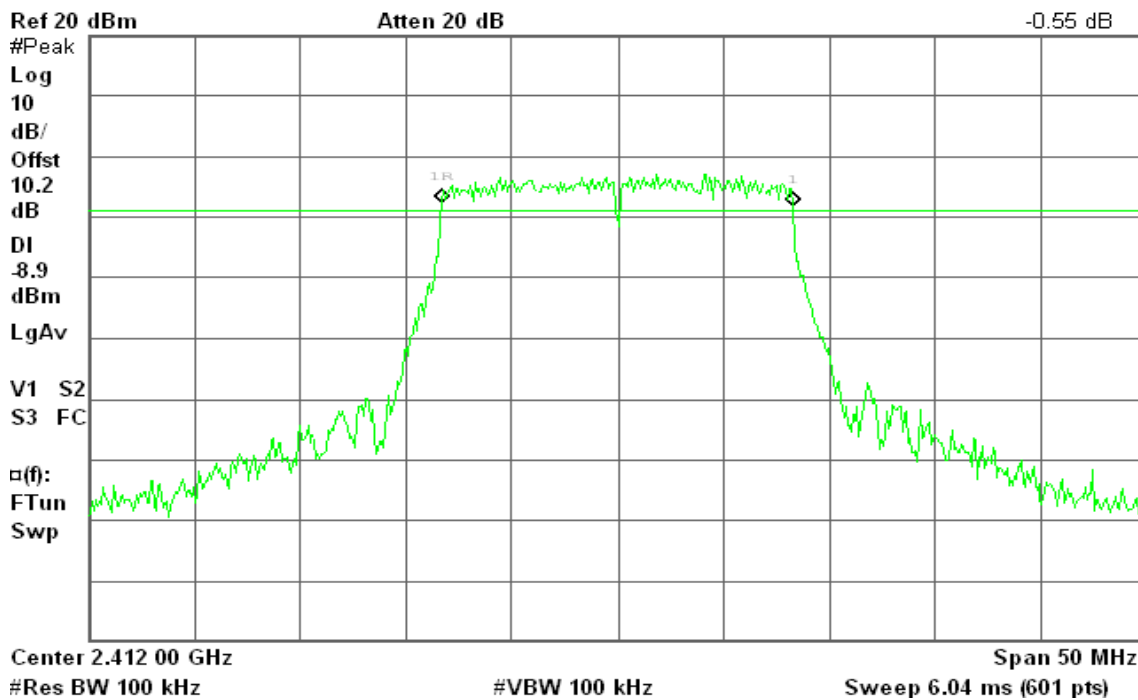




6dB Bandwidth (CH Mid)

Agilent 10:31:09 Jul 13, 2010

R T

Δ Mkr1 16.58 MHz
0.86 dB

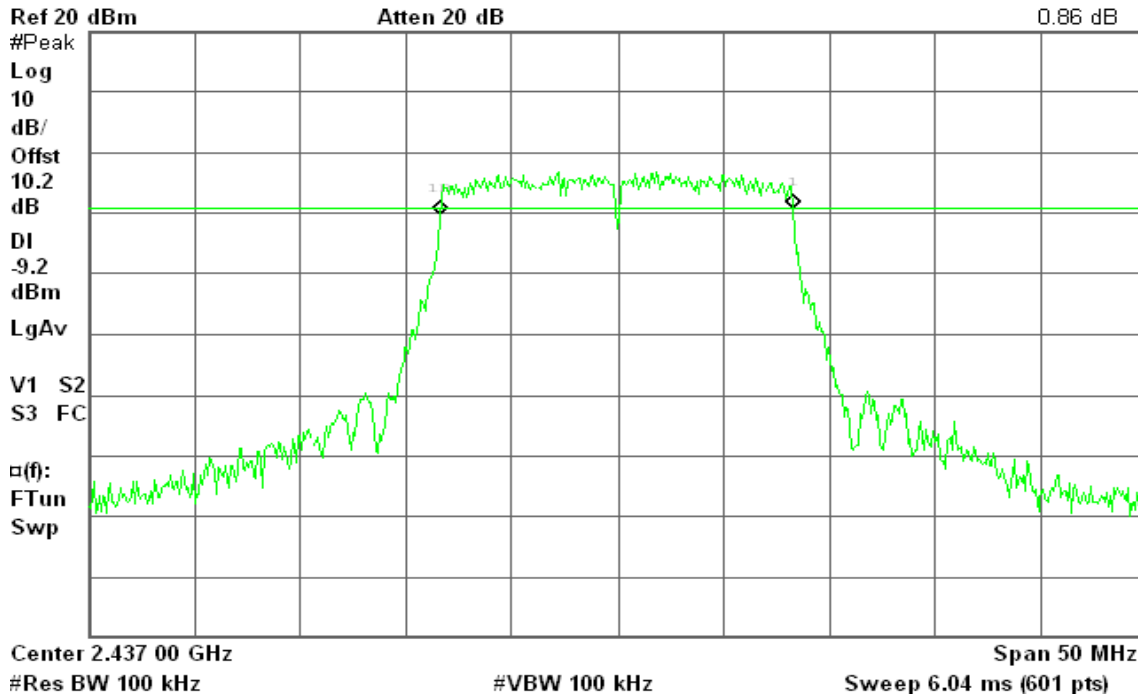


6dB Bandwidth (CH High)

Agilent 10:43:50 Jul 13, 2010

R T

Δ Mkr1 16.58 MHz
-0.28 dB

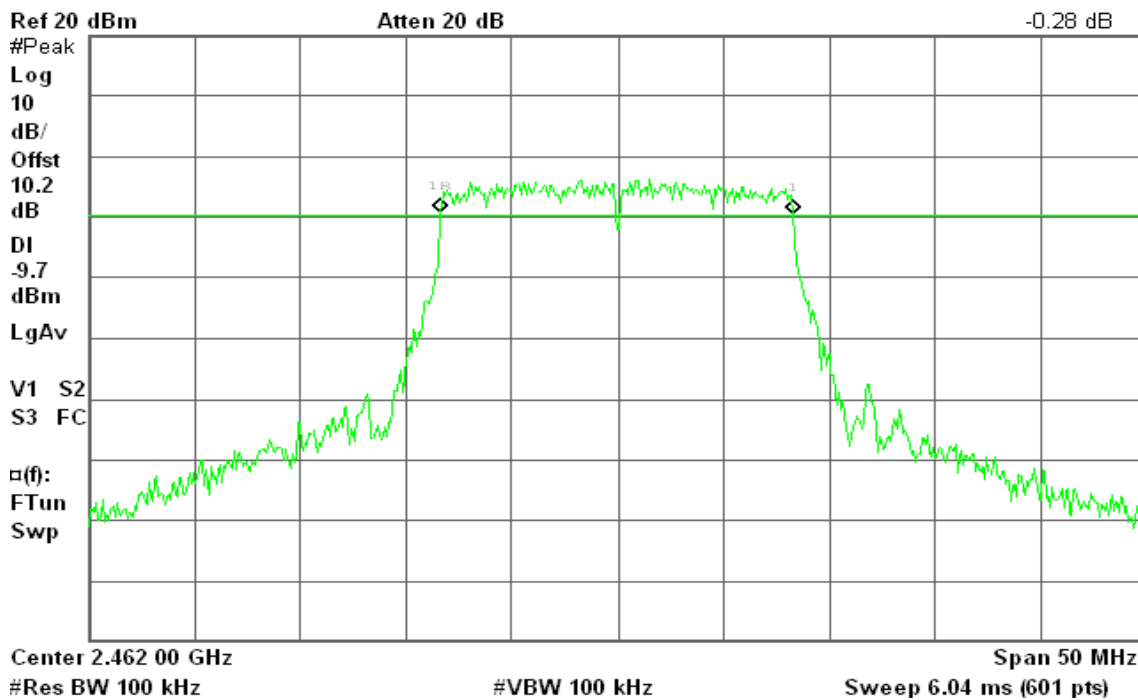




draft 802.11n Standard-20 MHz Channel mode

6dB Bandwidth (CH Low)

Agilent 10:48:21 Jul 13, 2010

R T

Δ Mkr1 17.75 MHz
1.38 dB

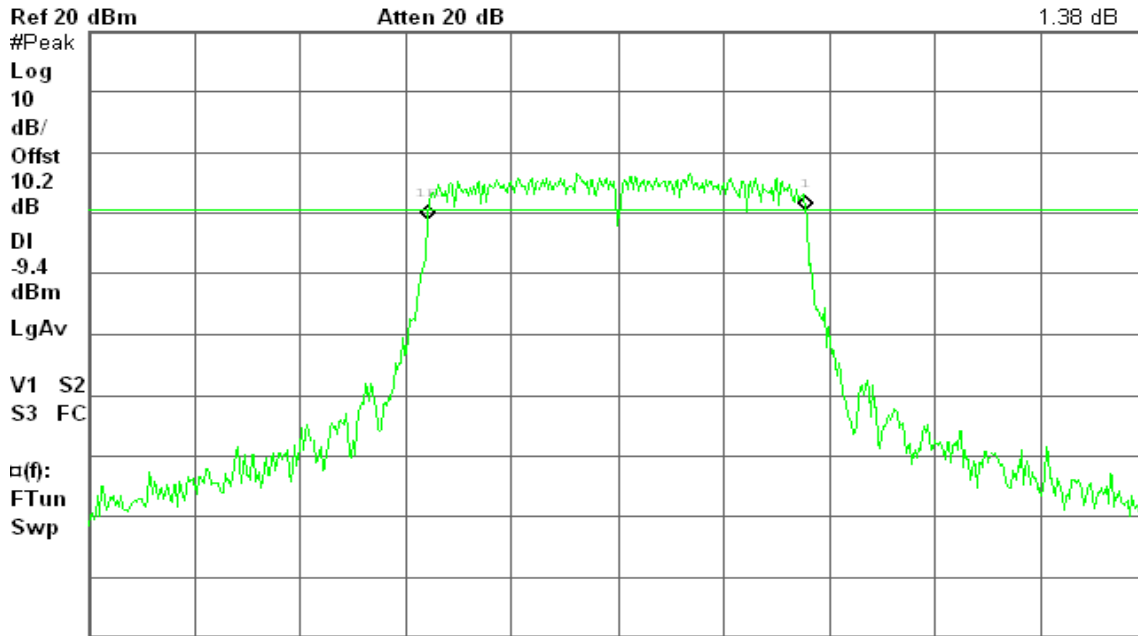

Center 2.412 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz


Sweep 6.04 ms (601 pts)

6dB Bandwidth (CH Mid)

Agilent 10:52:17 Jul 13, 2010

R T

Δ Mkr1 17.67 MHz
-1.20 dB

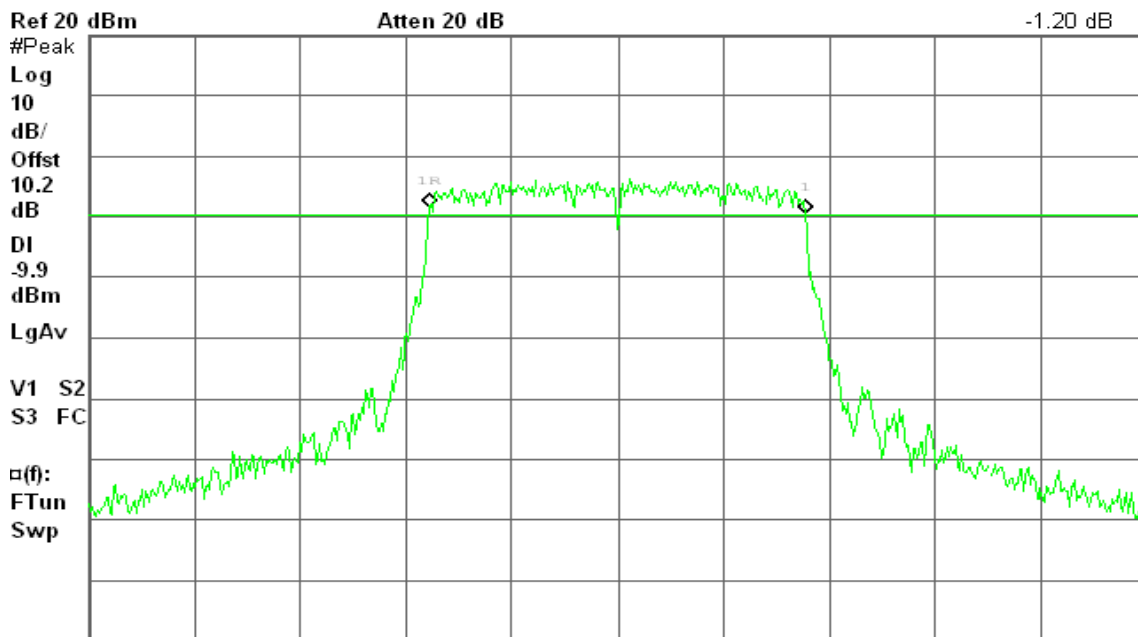

Center 2.437 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)




6dB Bandwidth (CH High)

Agilent 10:59:05 Jul 13, 2010

R T

Δ Mkr1 17.67 MHz
-0.38 dB

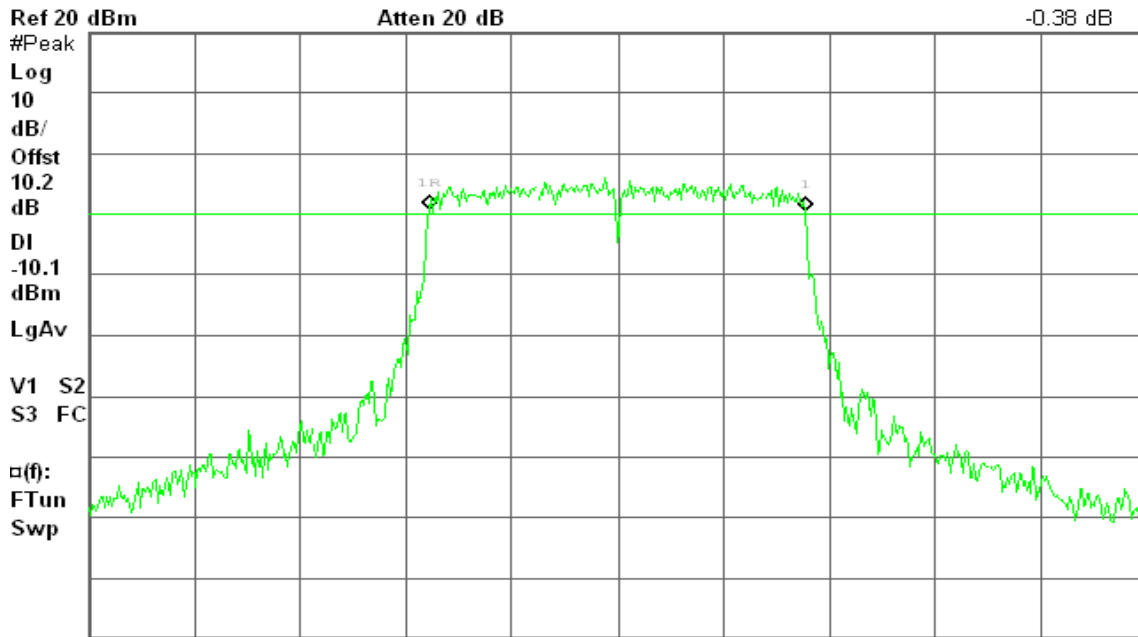

Center 2.462 00 GHz Span 50 MHz
#Res BW 100 kHz #VBW 100 kHz Sweep 6.04 ms (601 pts)


draft 802.11n Wide-40 MHz Channel mode

6dB Bandwidth (CH Low)

Agilent 11:15:06 Jul 13, 2010

R T

Δ Mkr1 36.33 MHz
-0.55 dB

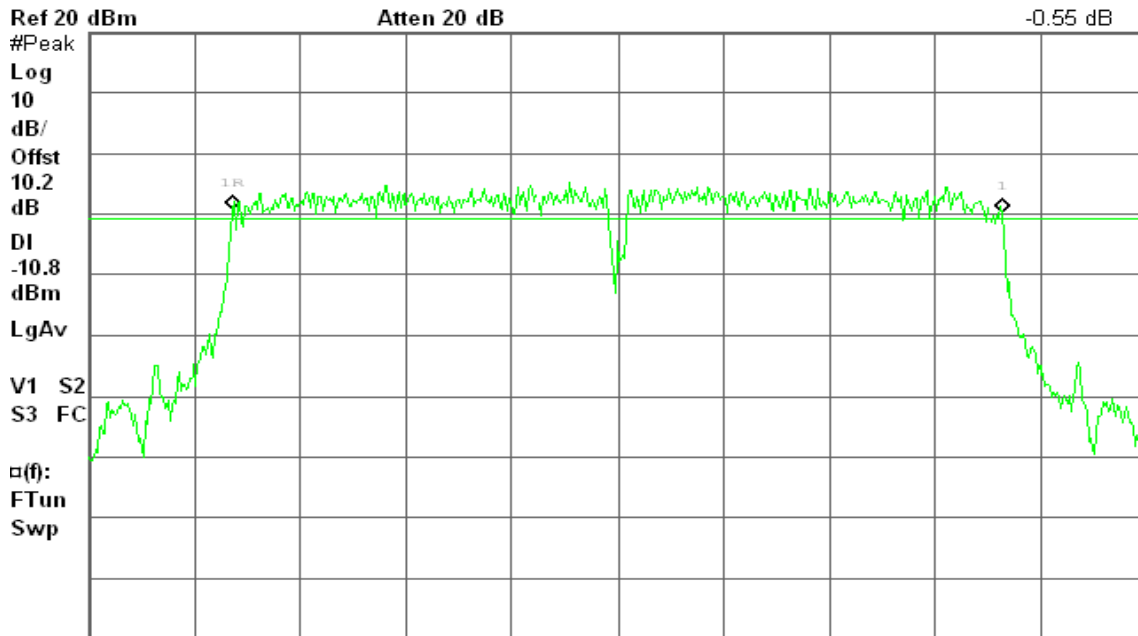

Center 2.422 00 GHz Span 50 MHz
#Res BW 100 kHz #VBW 100 kHz Sweep 6.04 ms (601 pts)




6dB Bandwidth (CH Mid)

Agilent 11:22:07 Jul 13, 2010

R T

Δ Mkr1 36.33 MHz
0.88 dB

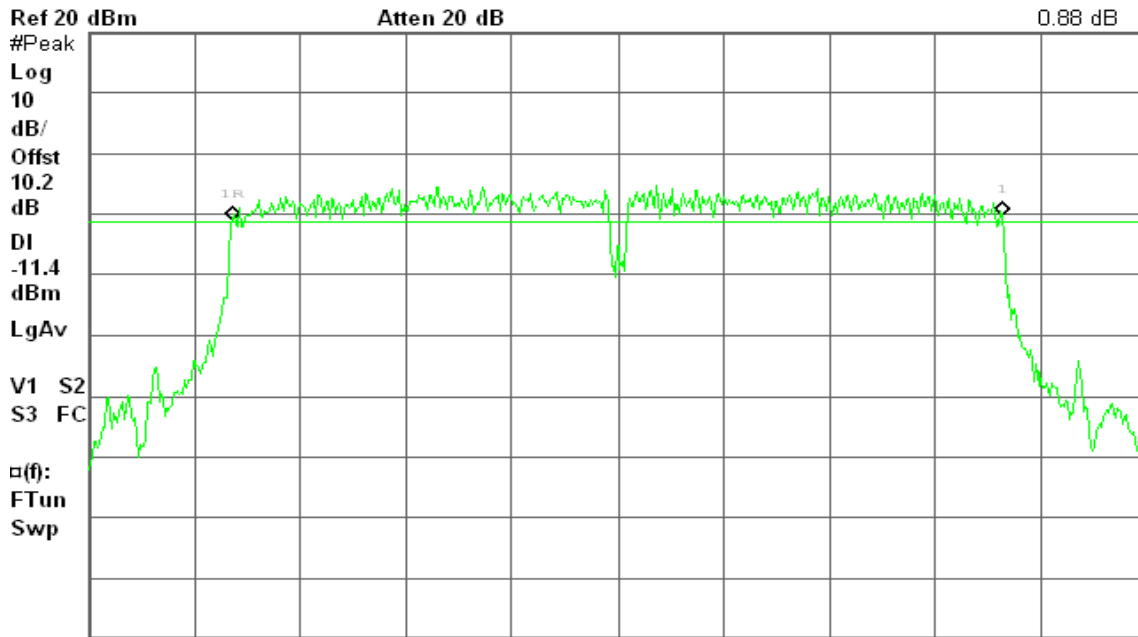

Center 2.437 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz


Sweep 6.04 ms (601 pts)

6dB Bandwidth (CH High)

Agilent 11:43:05 Jul 13, 2010

R T

Δ Mkr1 36.50 MHz
-1.50 dB

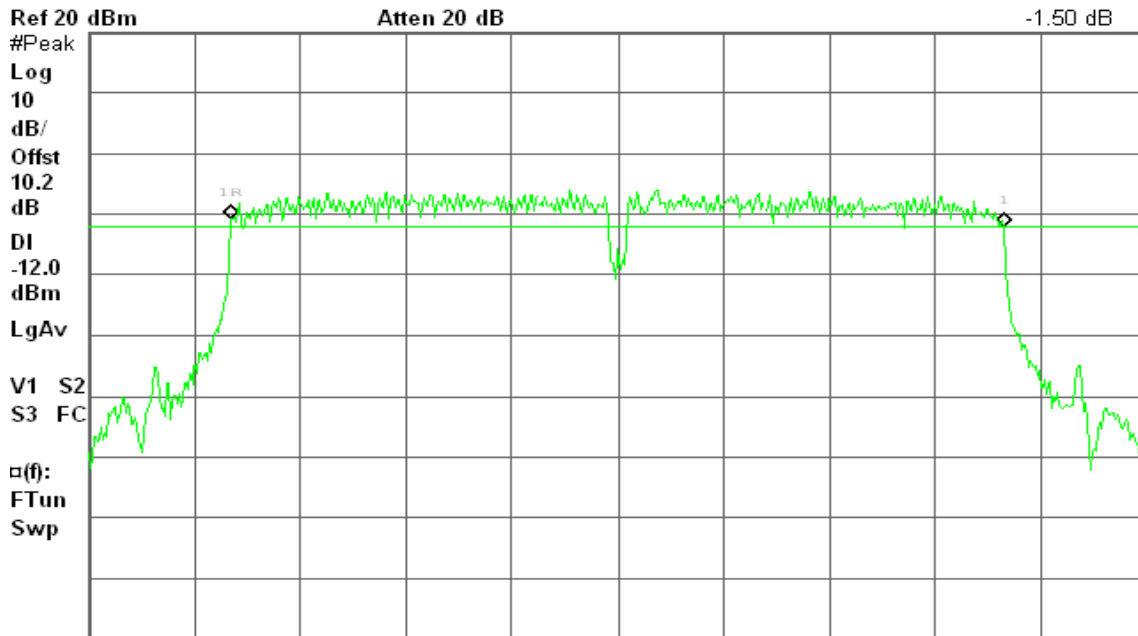

Center 2.452 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)




7.2 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.

TEST RESULTS

No non-compliance noted



Test Data

Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	14.41	0.0276	1.00	PASS
Mid	2437	14.18	0.0262		PASS
High	2462	13.75	0.0237		PASS

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	22.02	0.1592	1.00	PASS
Mid	2437	21.75	0.1496		PASS
High	2462	21.23	0.1327		PASS

Test mode: draft 802.11n Standard-20 MHz Channel mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	21.74	0.1493	1.00	PASS
Mid	2437	21.55	0.1429		PASS
High	2462	21.09	0.1285		PASS

Test mode: draft 802.11n Wide-40 MHz Channel mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2422	21.55	0.1429	1.00	PASS
Mid	2437	21.43	0.1390		PASS
High	2452	21.05	0.1274		PASS




7.3 BAND EDGES MEASUREMENT

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration

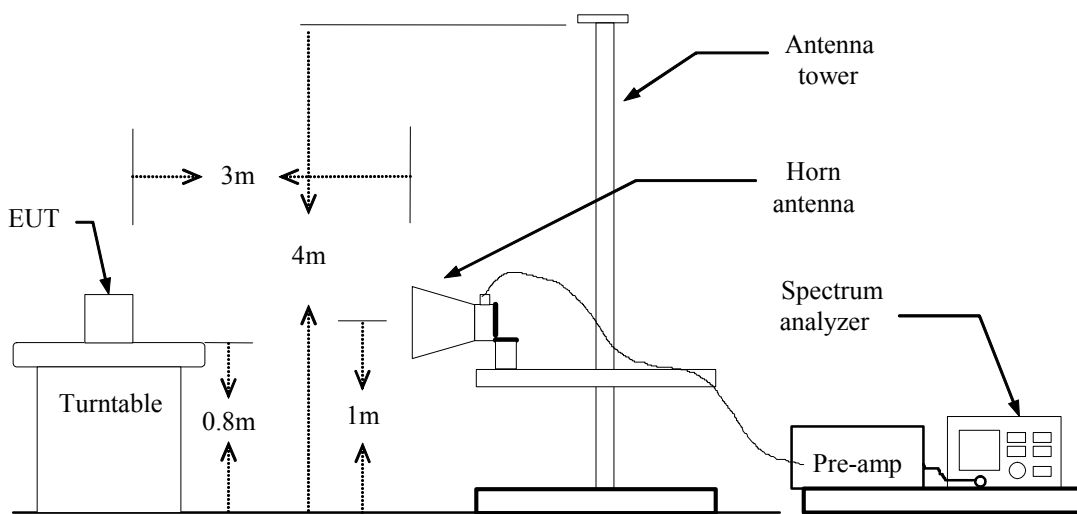

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS

Refer to attach spectrum analyzer data chart.




Band Edges (IEEE 802.11b mode / CH Low)

Detector mode: Peak

Polarity: Vertical

Agilent 23:04:40 Jul 12, 2010

T

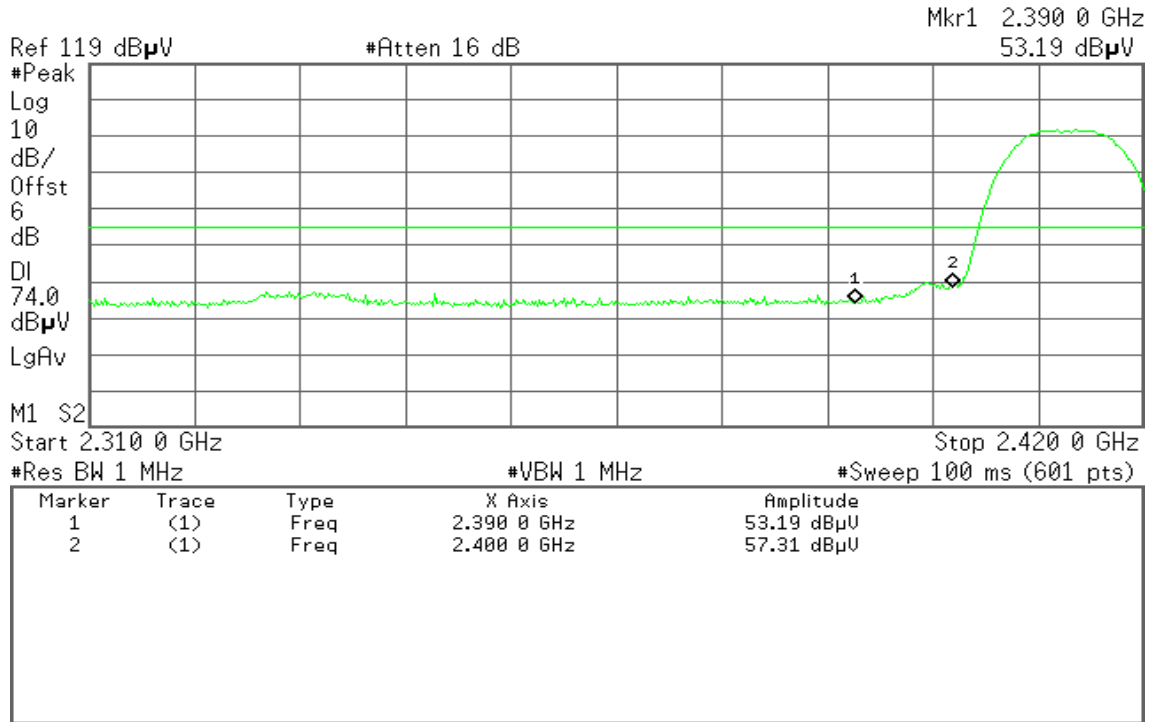


Detector mode: Average

Polarity: Vertical

Agilent 23:05:25 Jul 12, 2010

T

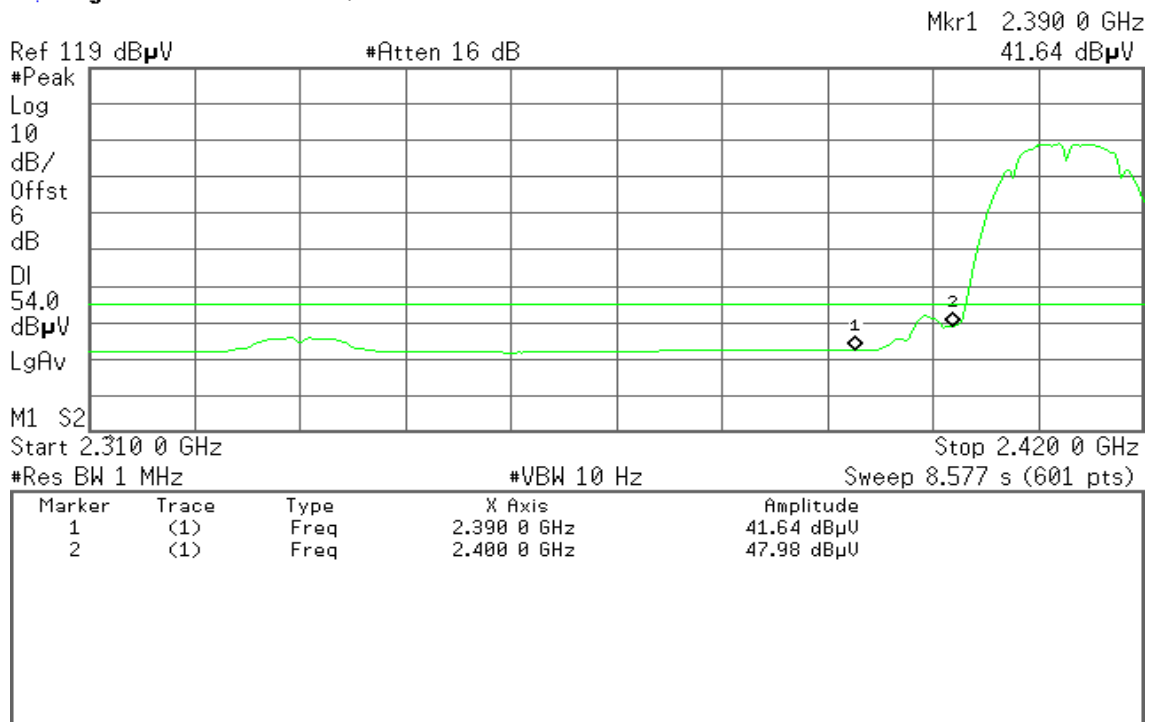




Detector mode: Peak

Polarity: Horizontal

Agilent 23:01:29 Jul 12, 2010

T

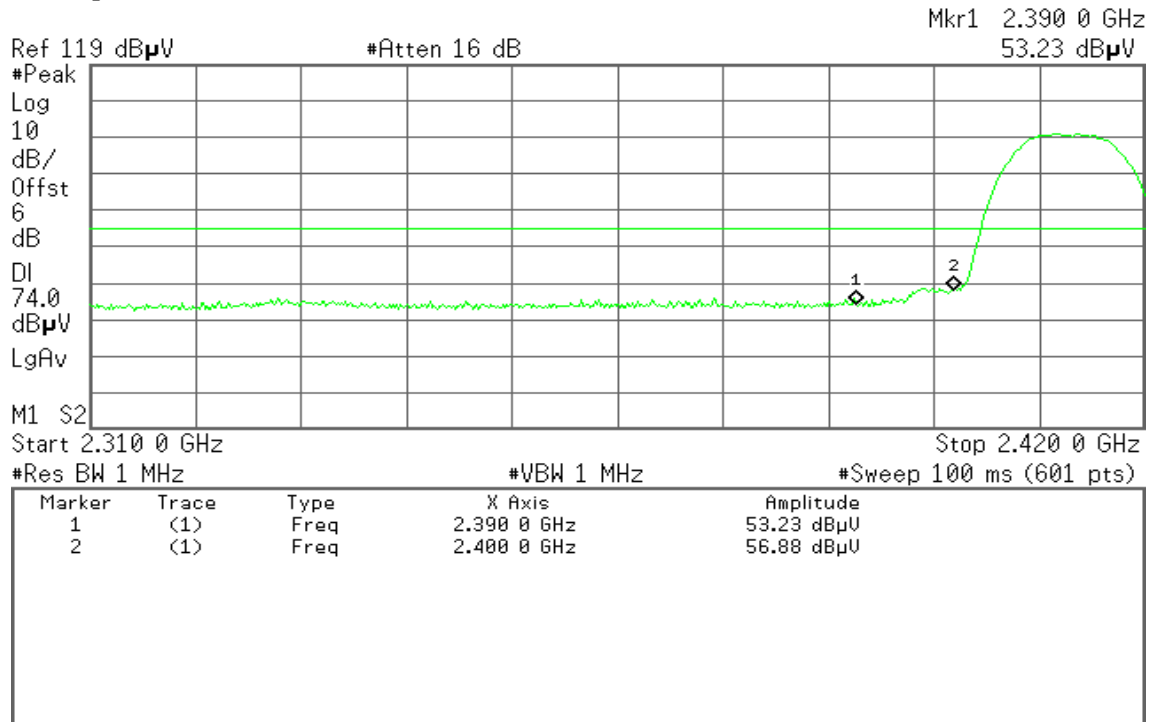


Detector mode: Average

Polarity: Horizontal

Agilent 23:01:03 Jul 12, 2010

T

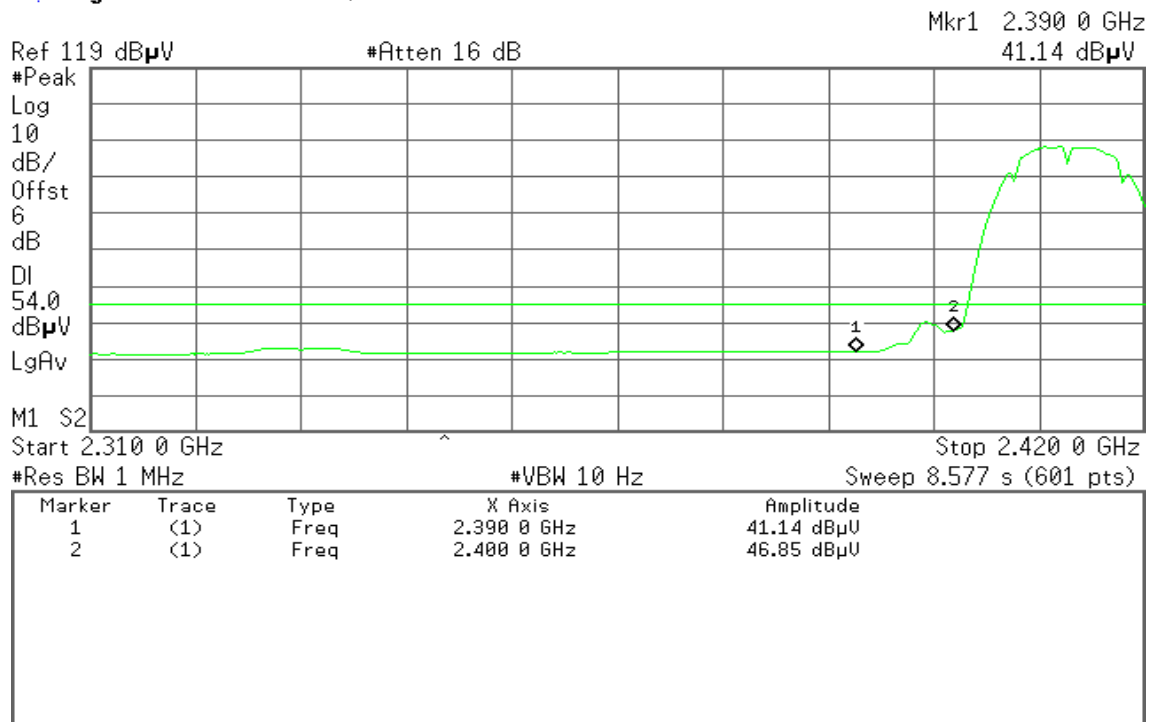



Band Edges (IEEE 802.11b mode / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 23:08:08 Jul 12, 2010

T

Mkr1 2.483 50 GHz
53.70 dB μ V

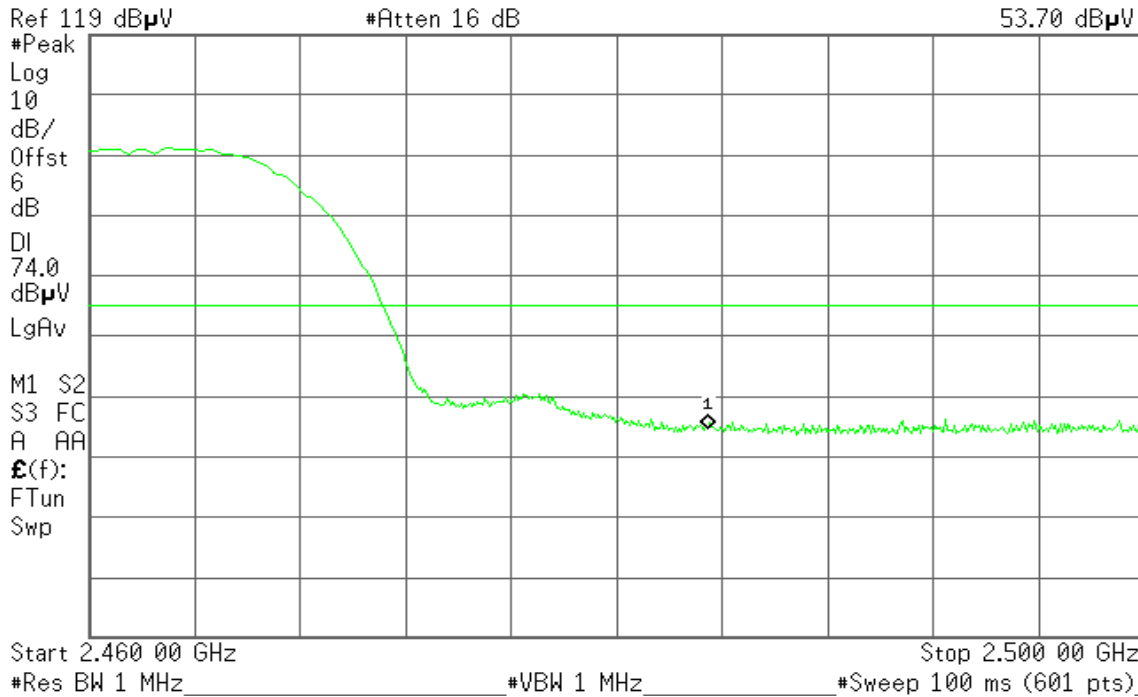


Detector mode: Average

Polarity: Vertical

Agilent 23:07:38 Jul 12, 2010

T

Mkr1 2.483 50 GHz
41.57 dB μ V

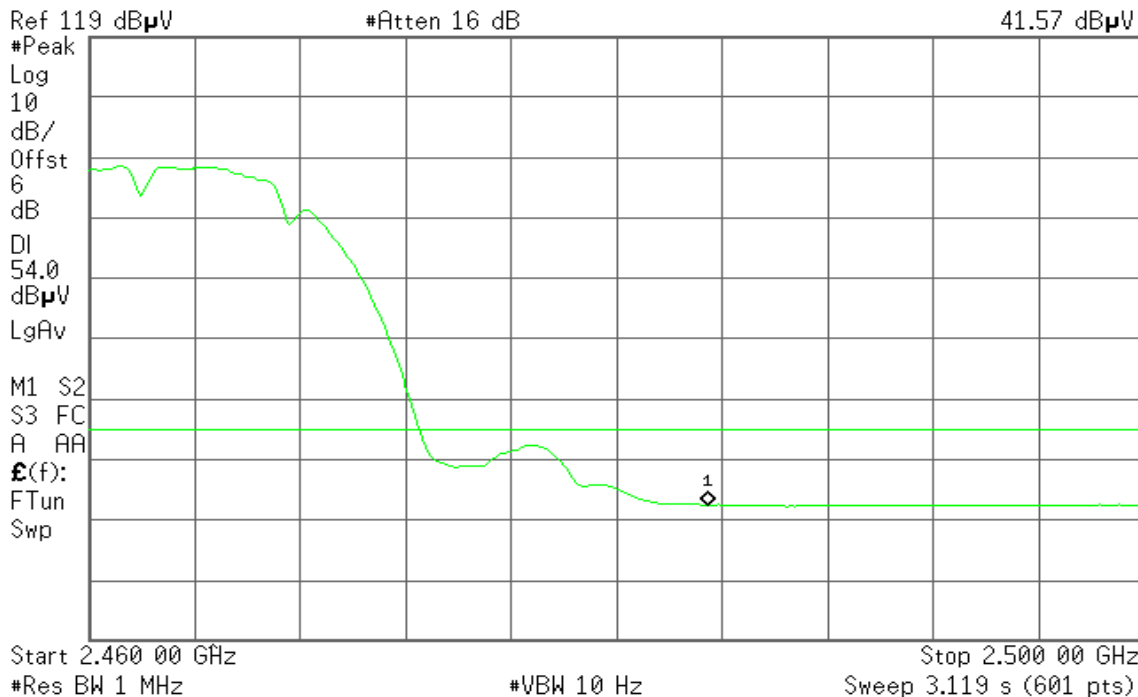




Detector mode: Peak

Polarity: Horizontal

Agilent 23:11:06 Jul 12, 2010

T

Mkr1 2.483 50 GHz
52.94 dB μ V

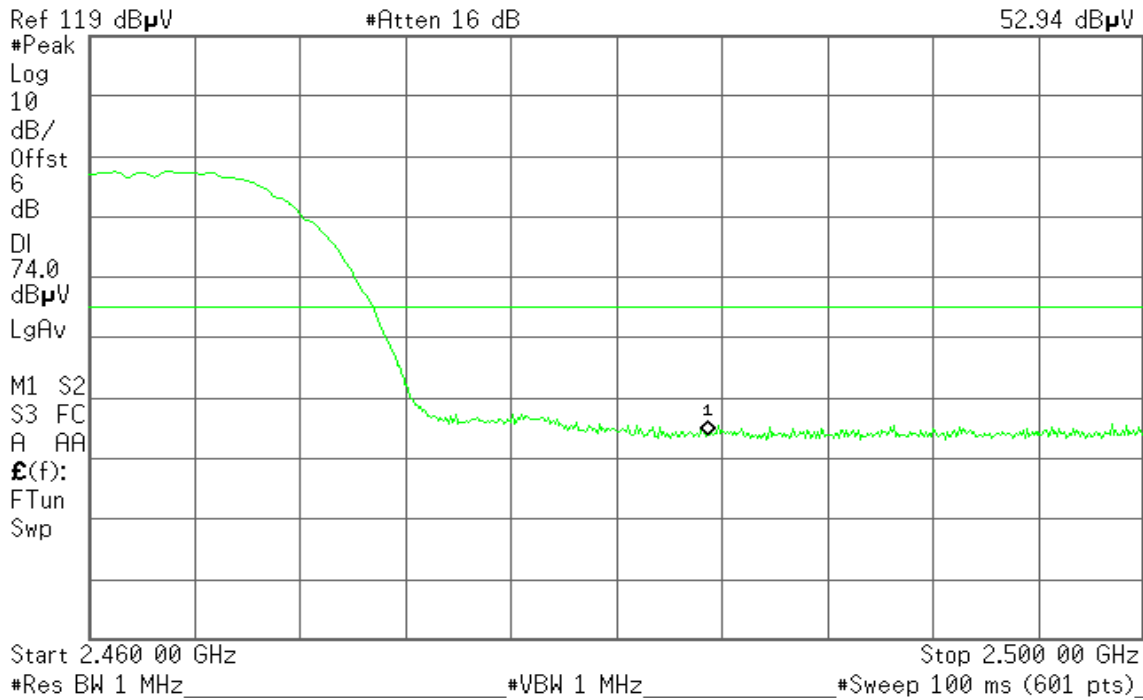


Detector mode: Average

Polarity: Horizontal

Agilent 23:11:34 Jul 12, 2010

T

Mkr1 2.483 50 GHz
40.87 dB μ V

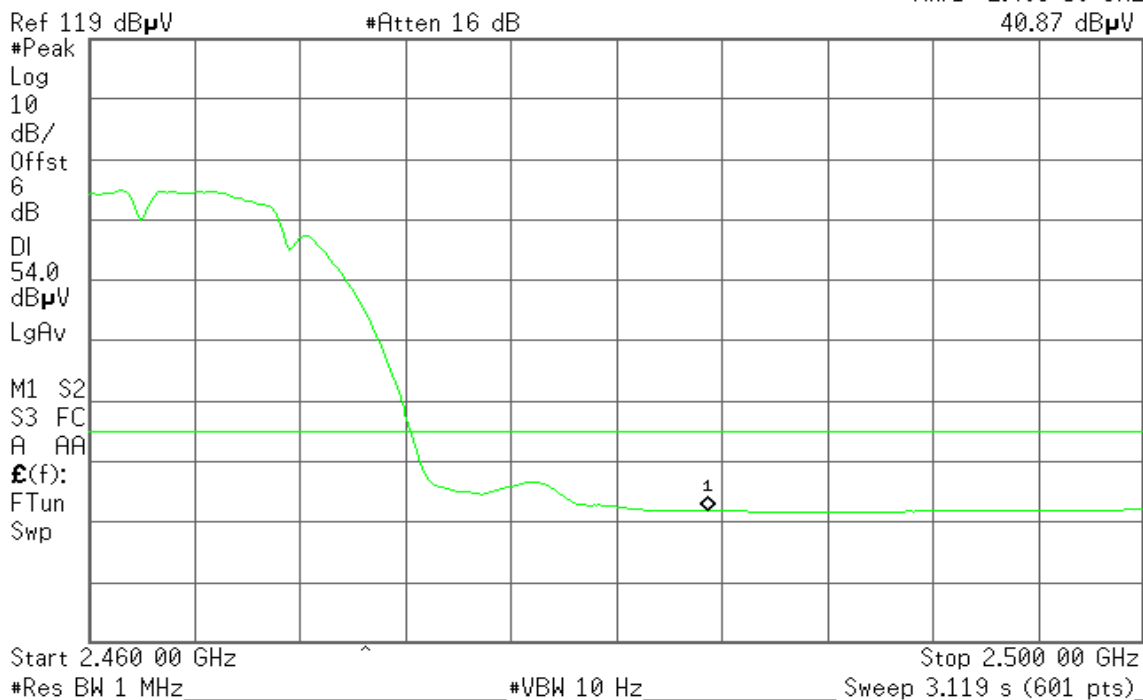




Band Edges (IEEE 802.11g mode / CH Low)

Detector mode: Peak

Polarity: Vertical

Agilent 21:13:13 Jul 12, 2010

R T

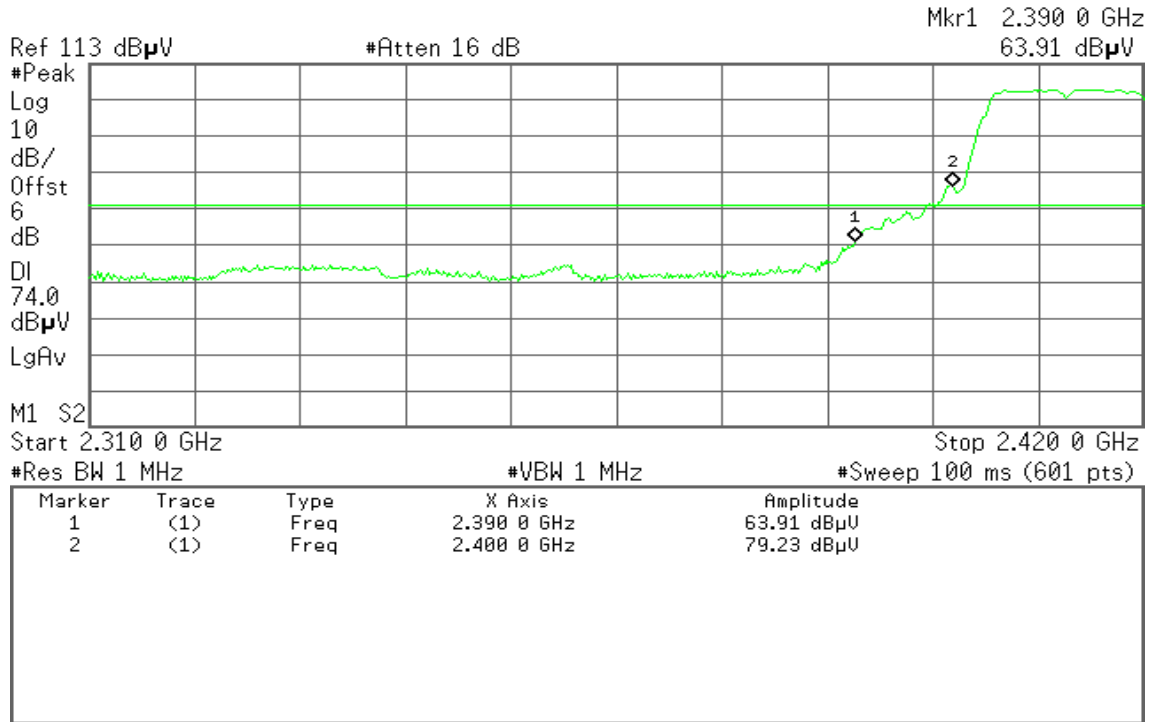


Detector mode: Average

Polarity: Vertical

Agilent 21:12:34 Jul 12, 2010

R T

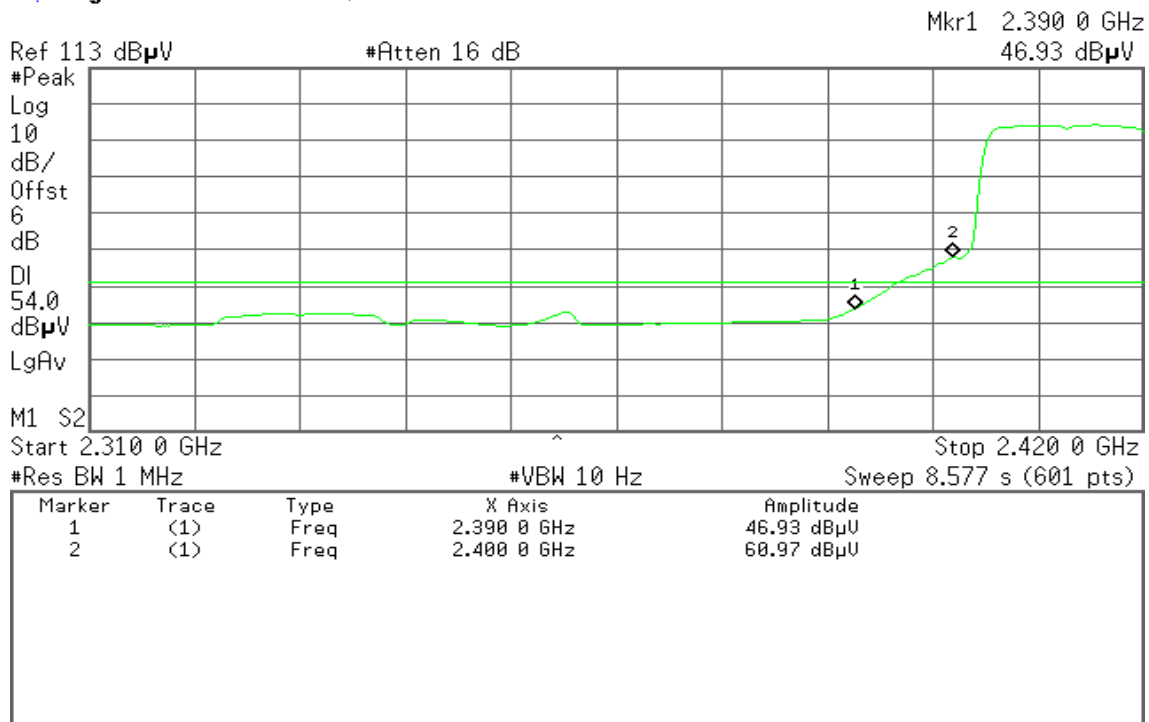




Detector mode: Peak

Polarity: Horizontal

Agilent 22:09:53 Jul 12, 2010

T

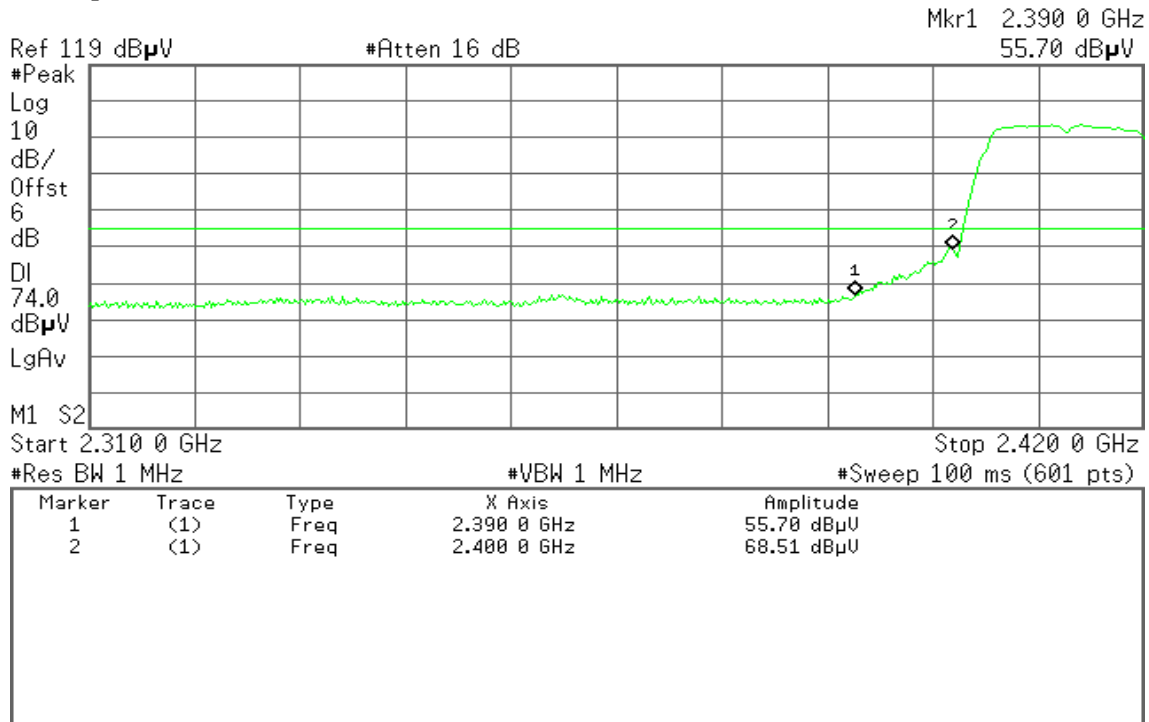


Detector mode: Average

Polarity: Horizontal

Agilent 22:09:15 Jul 12, 2010

T

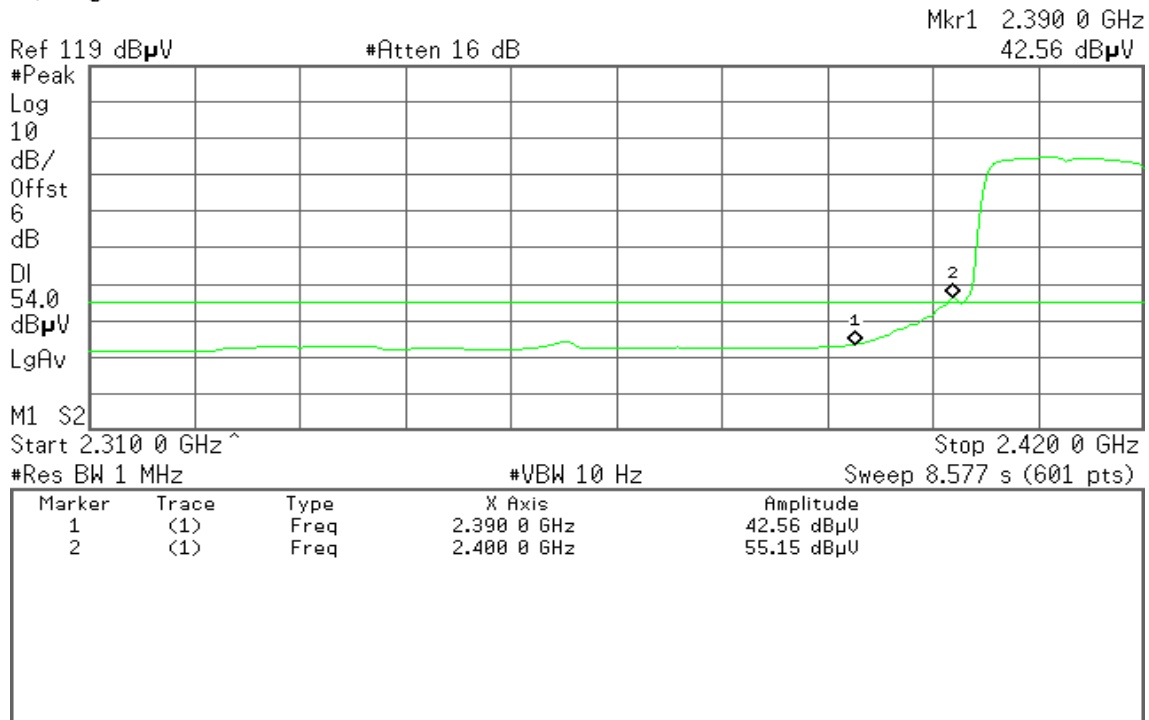



Band Edges (IEEE 802.11g mode / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 22:22:03 Jul 12, 2010

T

Mkr1 2.483 50 GHz
55.82 dB μ V

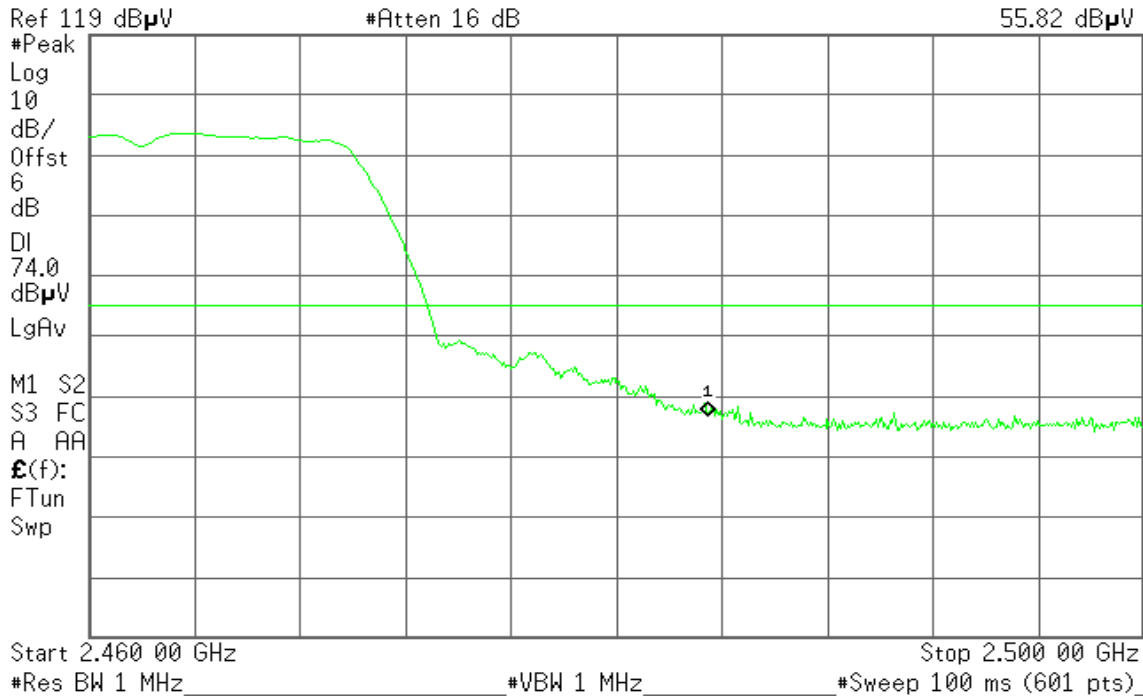


Detector mode: Average

Polarity: Vertical

Agilent 22:21:25 Jul 12, 2010

T

Mkr1 2.483 50 GHz
43.43 dB μ V

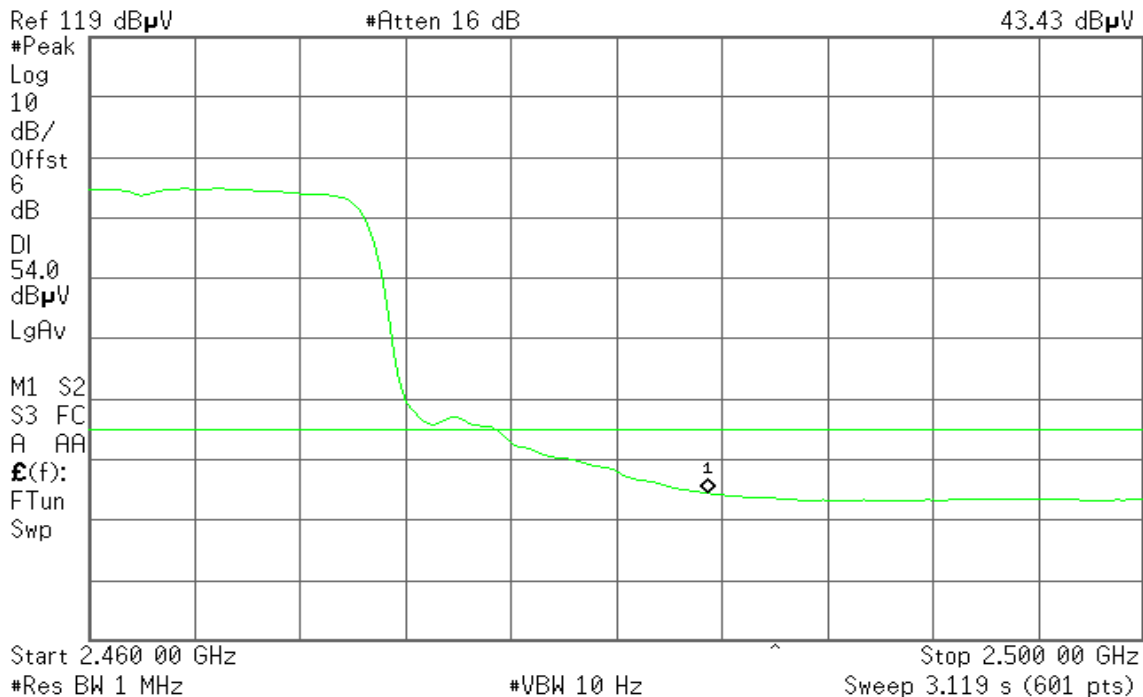




Detector mode: Peak

Polarity: Horizontal

Agilent 22:33:12 Jul 12, 2010

T

Mkr1 2.483 50 GHz
53.46 dB μ V

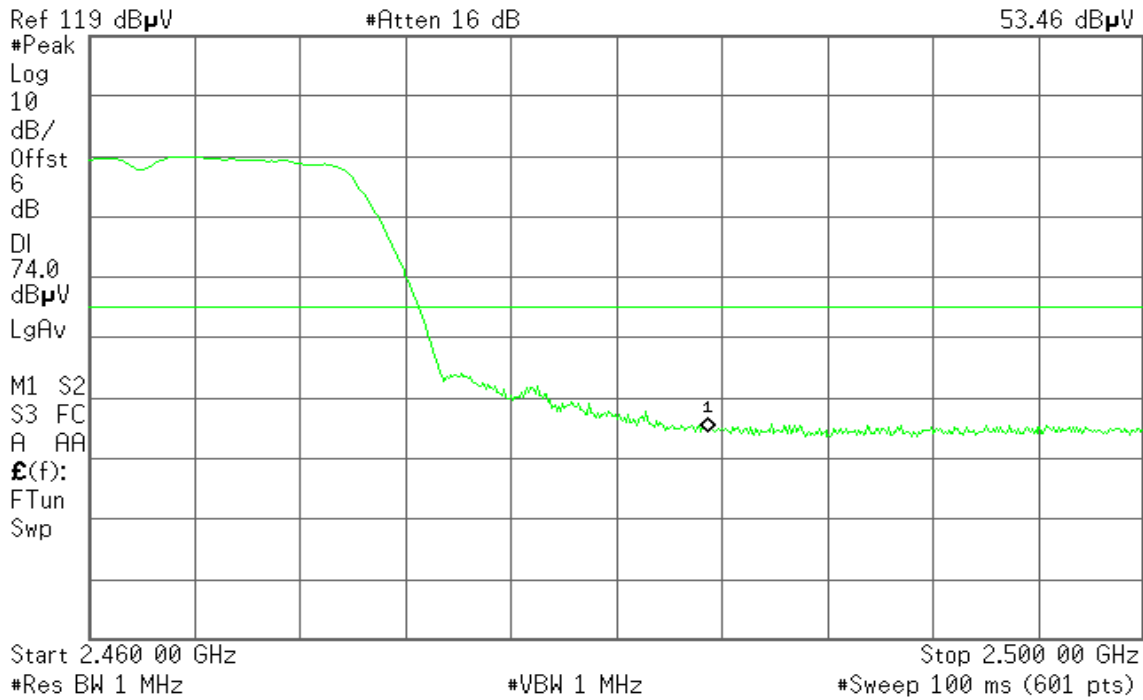


Detector mode: Average

Polarity: Horizontal

Agilent 22:32:12 Jul 12, 2010

T

Mkr1 2.483 50 GHz
41.46 dB μ V

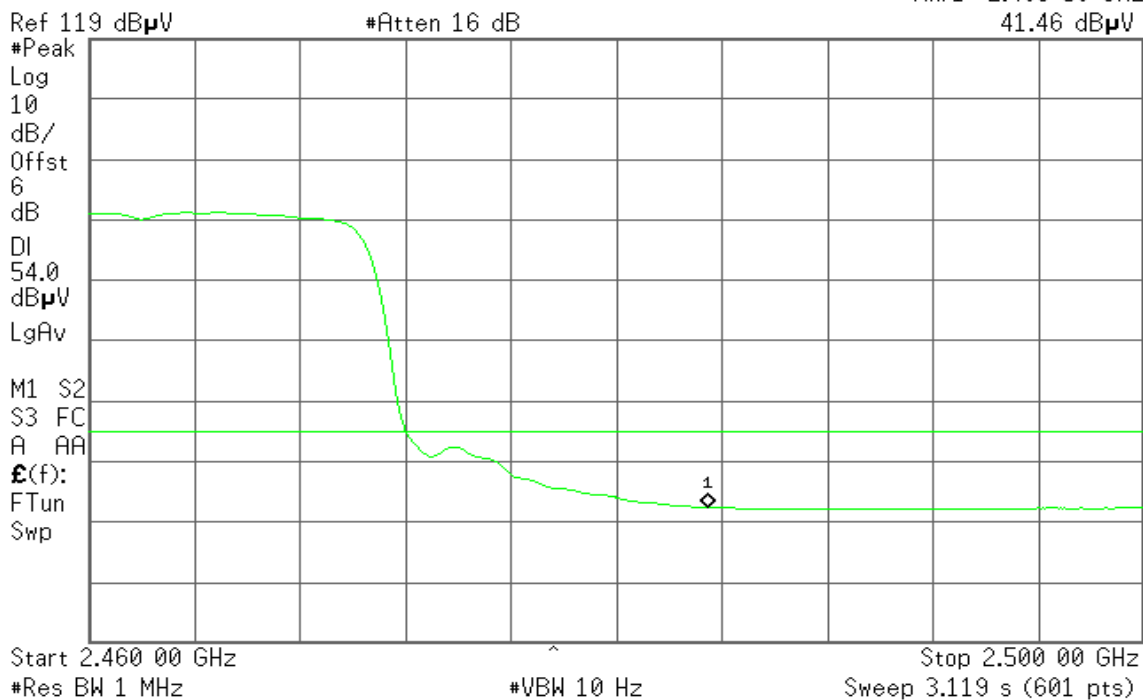




Band Edges (draft 802.11n Standard-20 MHz Channel mode / CH Low)

Detector mode: Peak

Polarity: Vertical

Agilent 22:52:53 Jul 12, 2010

T

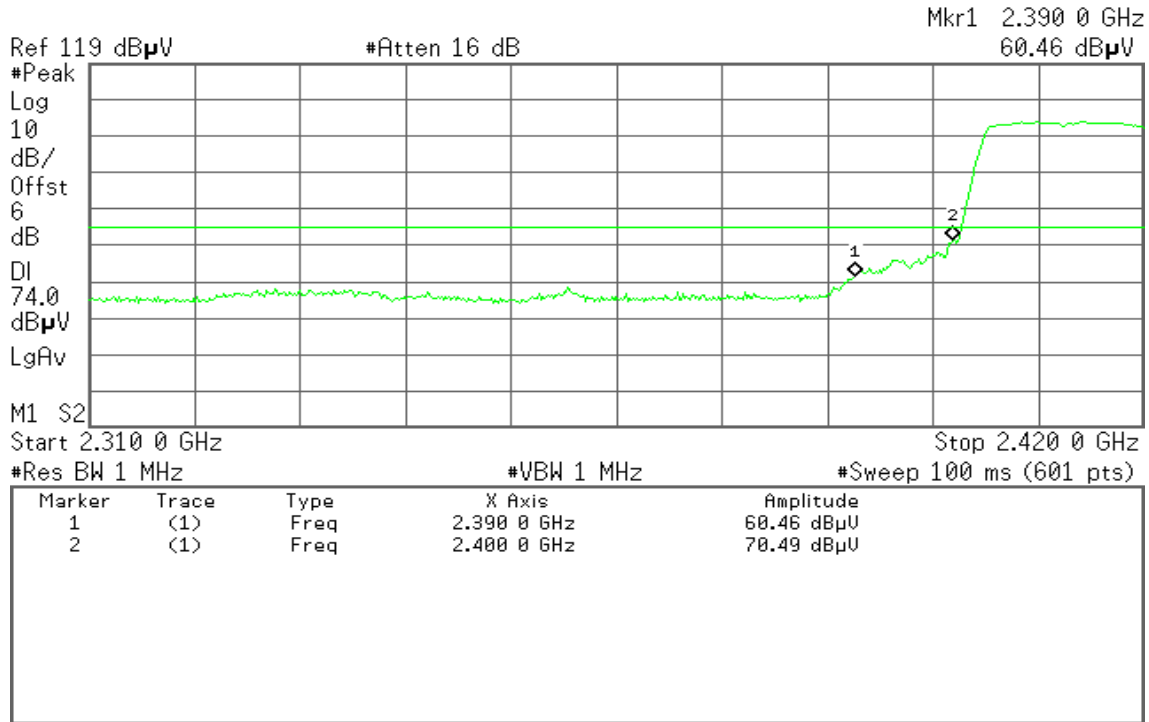


Detector mode: Average

Polarity: Vertical

Agilent 22:51:51 Jul 12, 2010

T

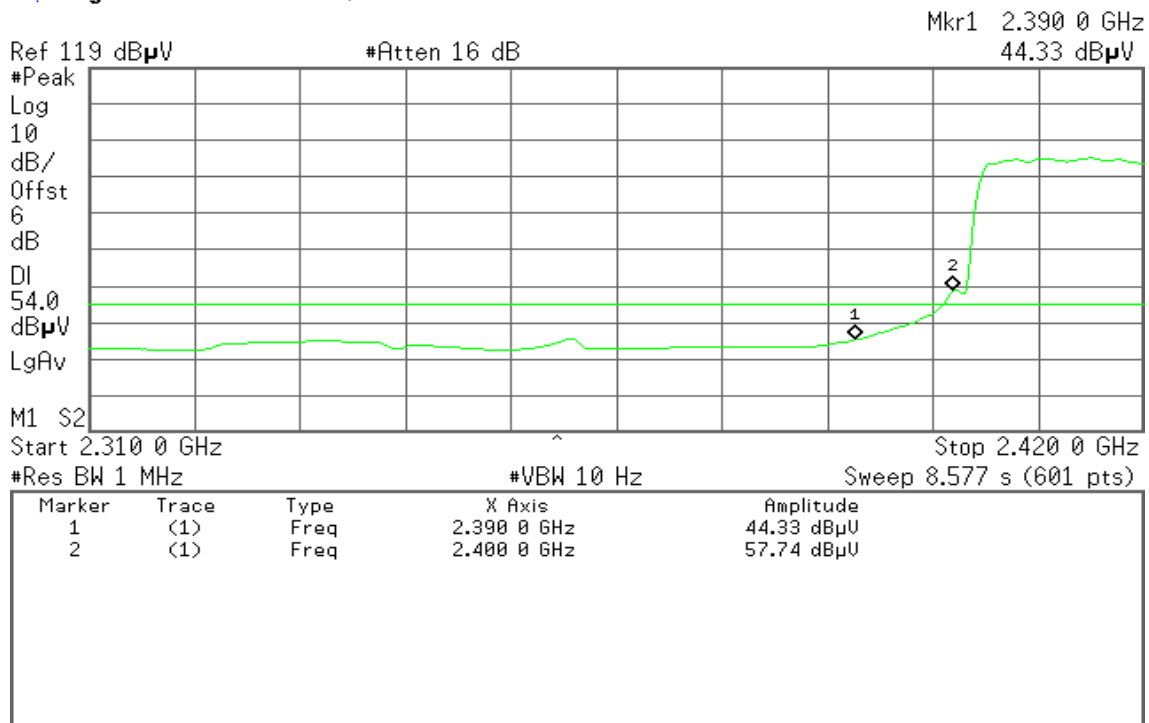




Detector mode: Peak

Polarity: Horizontal

Agilent 22:58:12 Jul 12, 2010

T

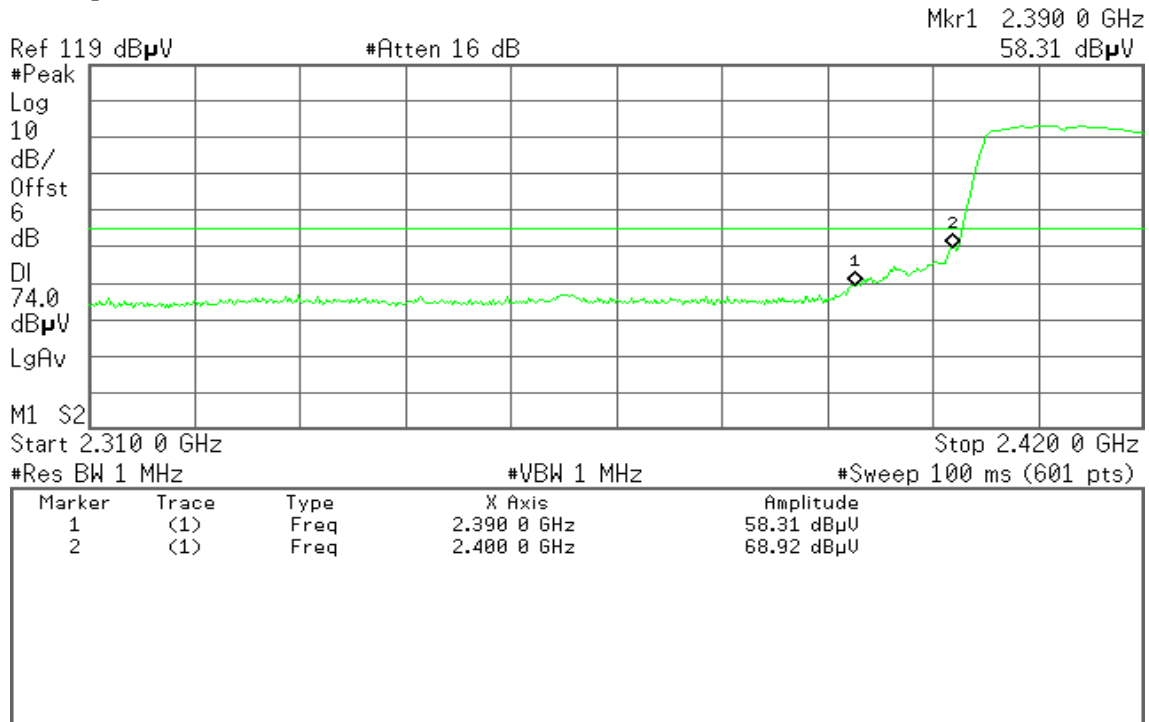


Detector mode: Average

Polarity: Horizontal

Agilent 22:58:29 Jul 12, 2010

T

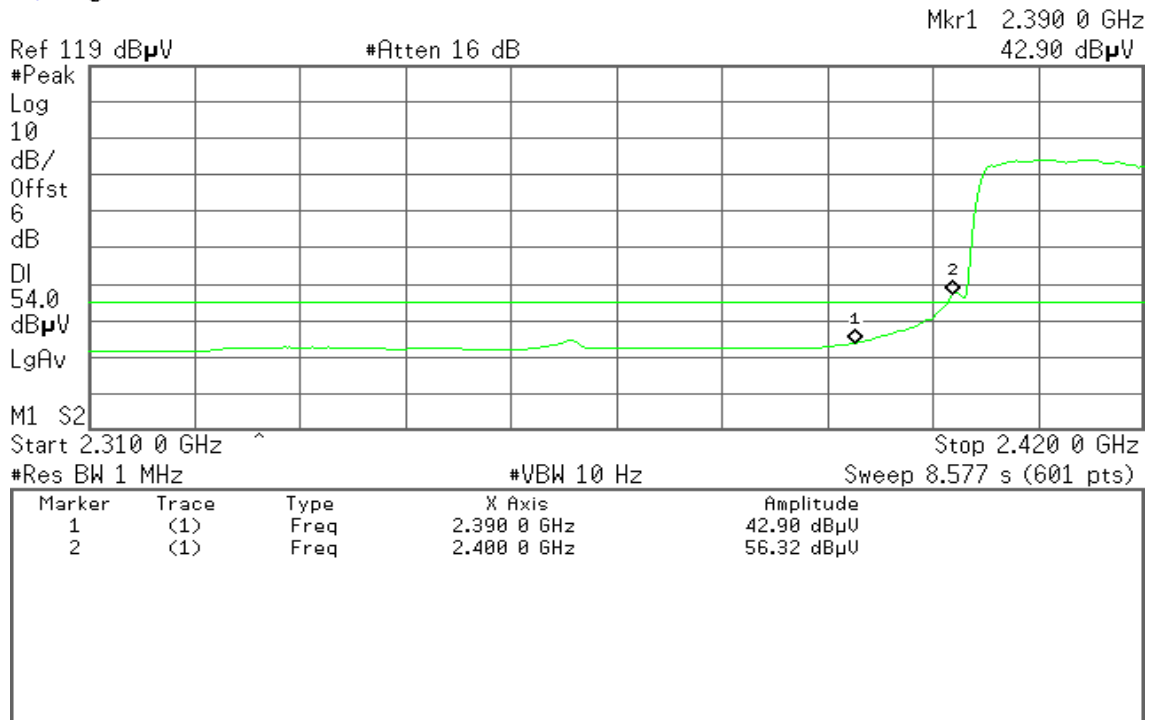



Band Edges (draft 802.11n Standard-20 MHz Channel mode / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 22:46:19 Jul 12, 2010

T

Mkr1 2.483 50 GHz
58.82 dB μ V

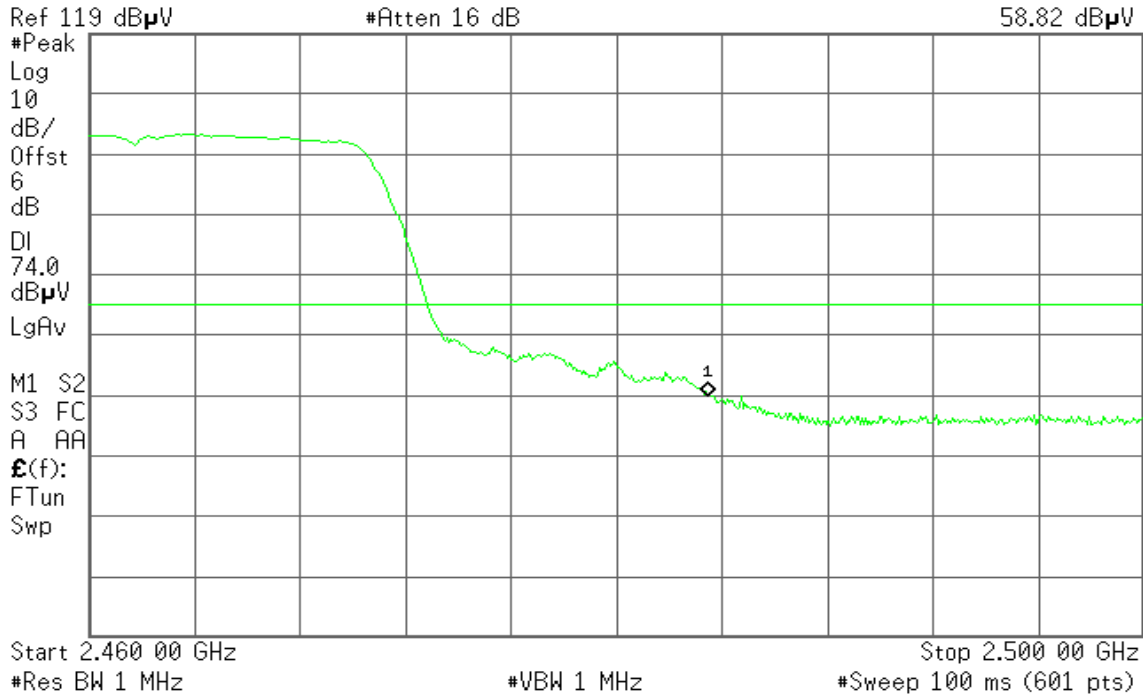


Detector mode: Average

Polarity: Vertical

Agilent 22:47:12 Jul 12, 2010

T

Mkr1 2.483 50 GHz
44.10 dB μ V

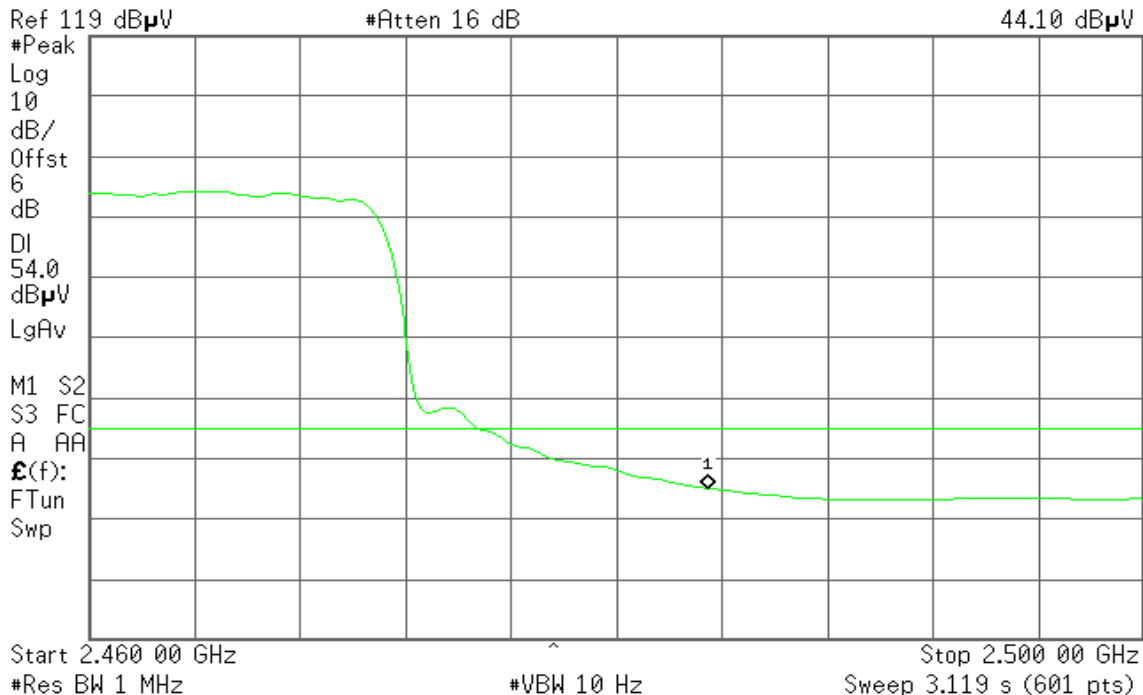




Detector mode: Peak

Polarity: Horizontal

Agilent 22:41:36 Jul 12, 2010

T

Mkr1 2.483 50 GHz
55.54 dB μ V

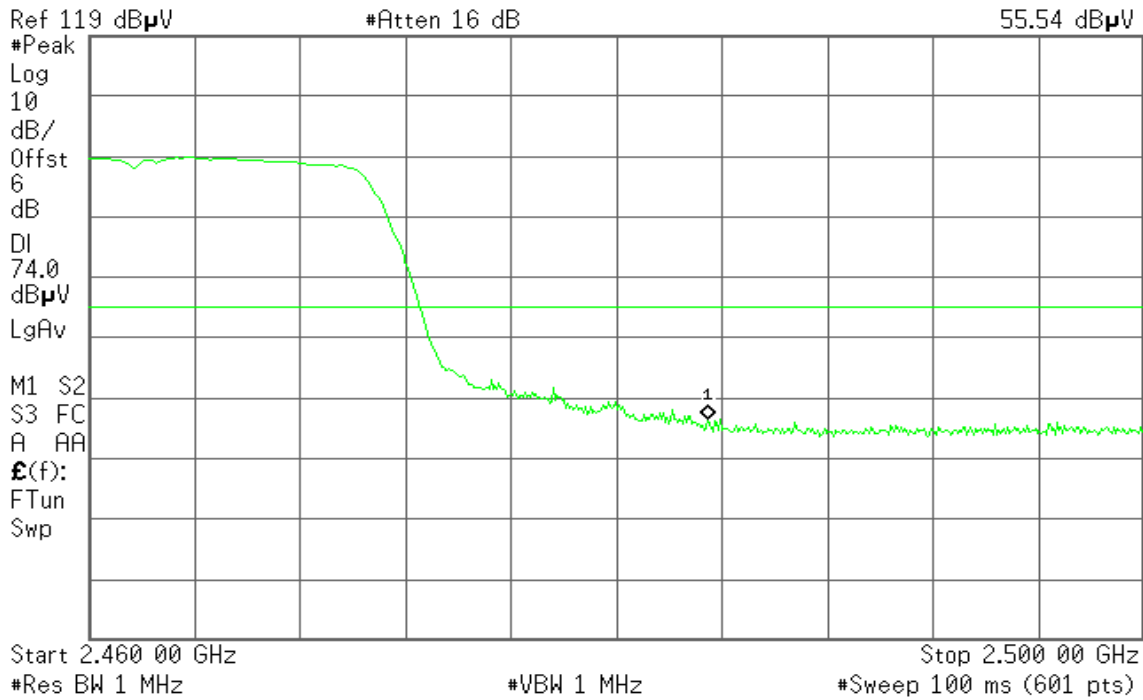


Detector mode: Average

Polarity: Horizontal

Agilent 22:42:21 Jul 12, 2010

T

Mkr1 2.483 50 GHz
41.64 dB μ V

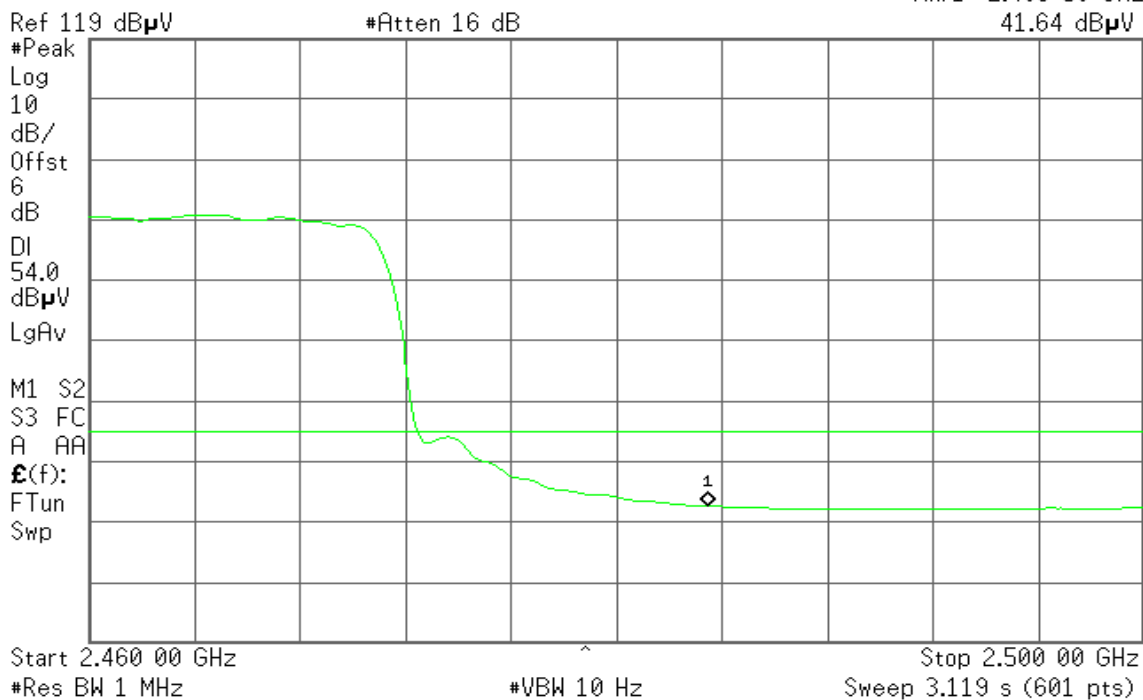




Band Edges (draft 802.11n Wide-40 MHz Channel mode / CH Low)

Detector mode: Peak

Polarity: Vertical

Agilent 00:34:48 Jul 13, 2010

T

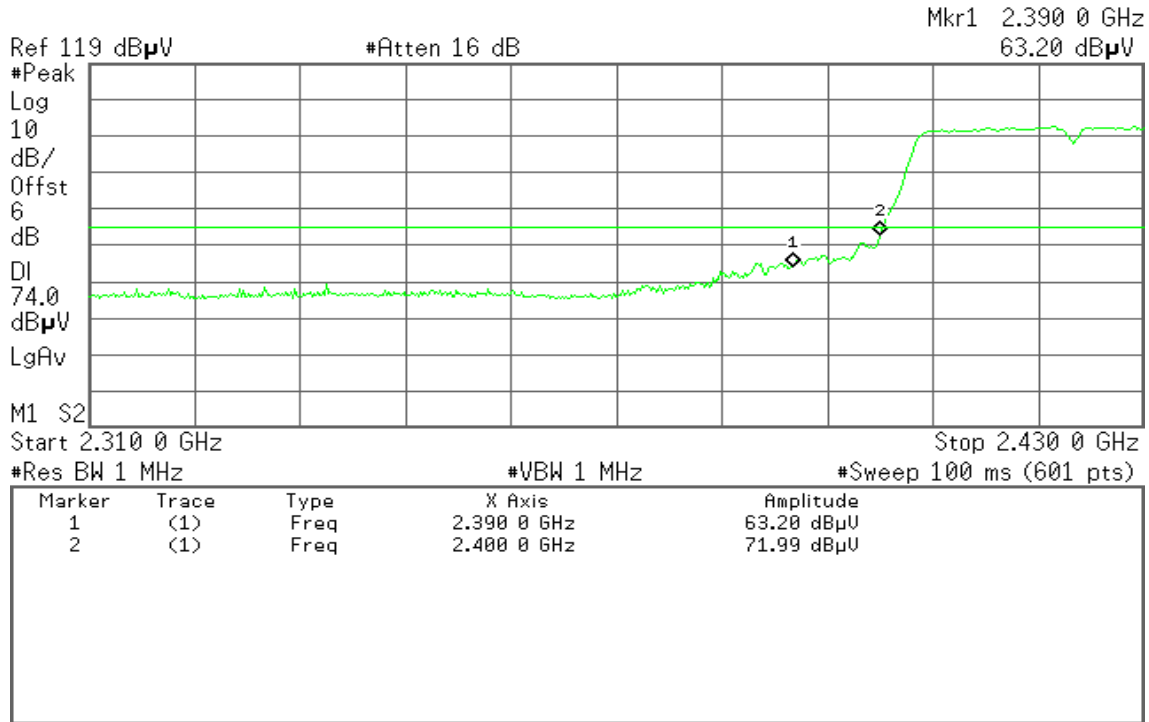


Detector mode: Average

Polarity: Vertical

Agilent 00:35:32 Jul 13, 2010

T

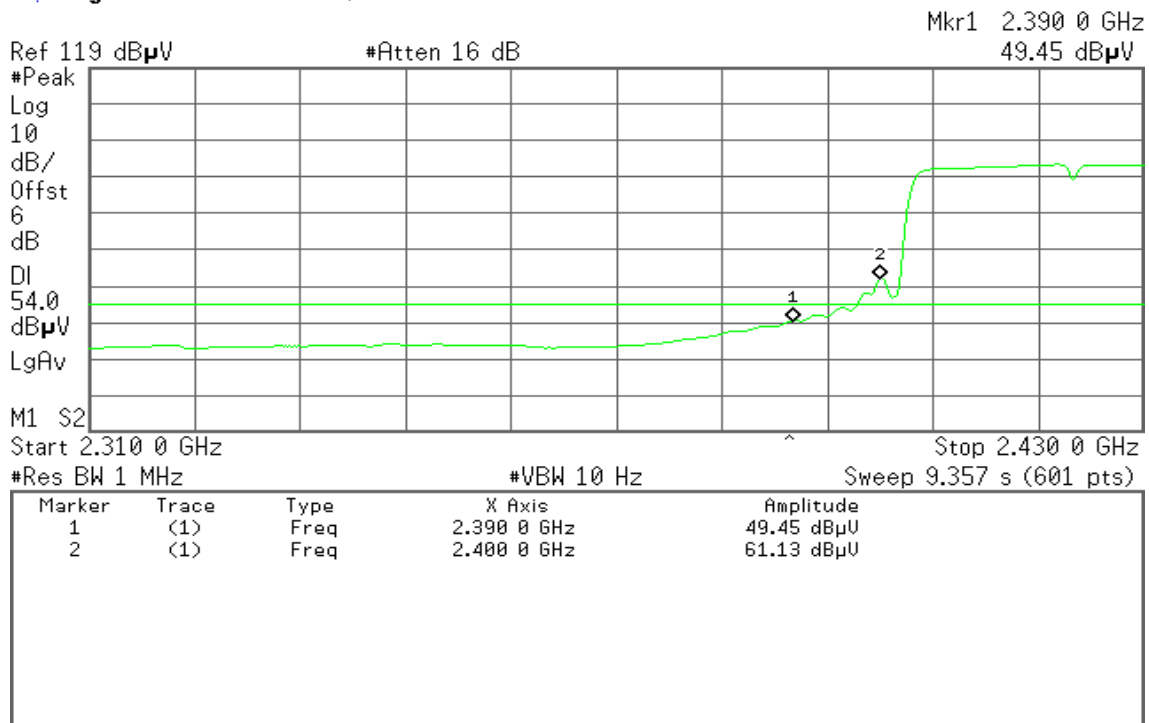




Detector mode: Peak

Polarity: Horizontal

Agilent 00:41:57 Jul 13, 2010

T

Mkr1 2.390 0 GHz
60.62 dBµV

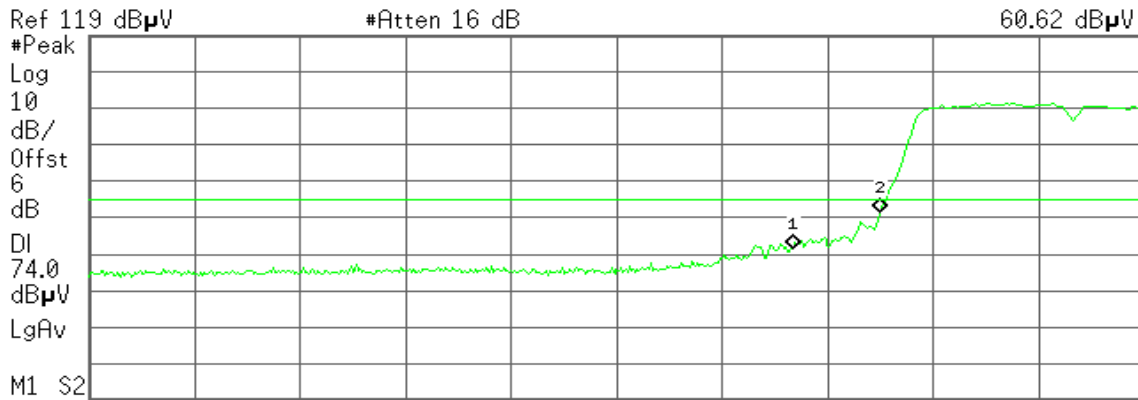

Start 2.310 0 GHz Stop 2.430 0 GHz
#Res BW 1 MHz #VBW 1 MHz #Sweep 100 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.390 0 GHz	60.62 dBµU
2	(1)	Freq	2.400 0 GHz	70.51 dBµU


Detector mode: Average

Polarity: Horizontal

Agilent 00:41:26 Jul 13, 2010

T

Mkr1 2.390 0 GHz
47.36 dBµV

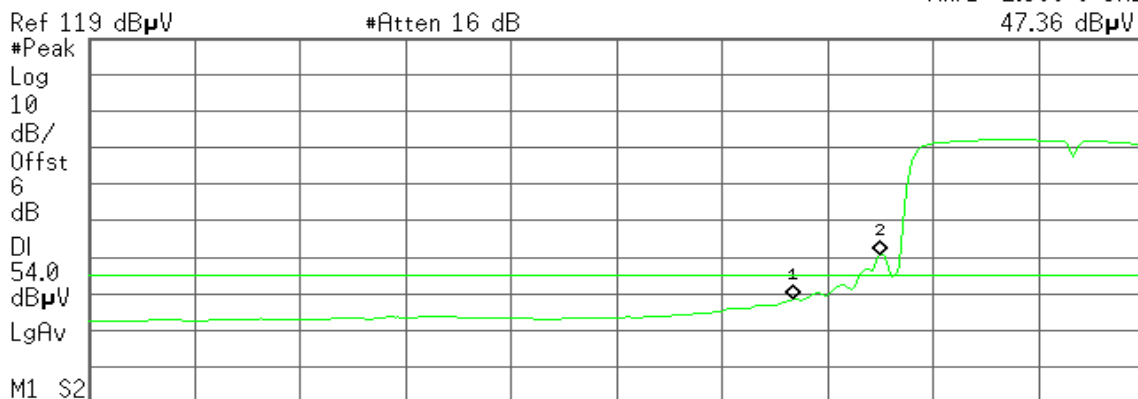

Start 2.310 0 GHz Stop 2.430 0 GHz
#Res BW 1 MHz #VBW 10 Hz Sweep 9.357 s (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.390 0 GHz	47.36 dBµU
2	(1)	Freq	2.400 0 GHz	59.78 dBµU




Band Edges (draft 802.11n Wide-40 MHz Channel mode / CH High)

Detector mode: Peak

Polarity: Vertical

Agilent 01:00:43 Jul 13, 2010

T

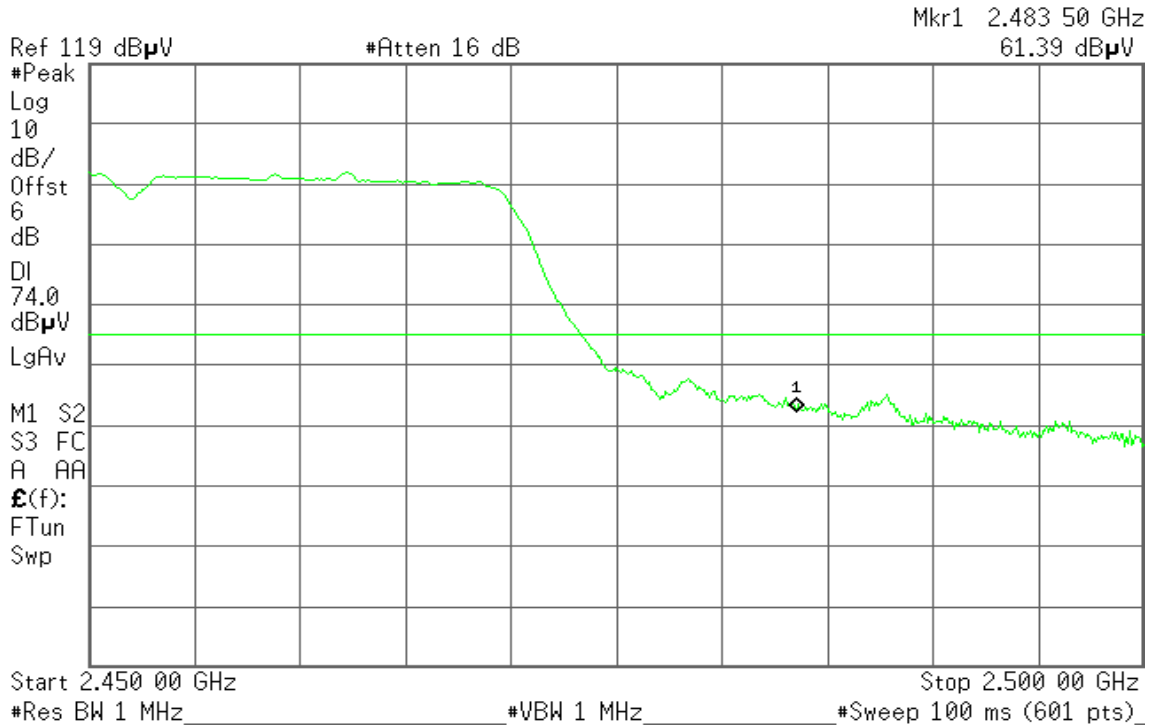


Detector mode: Average

Polarity: Vertical

Agilent 01:00:23 Jul 13, 2010

T

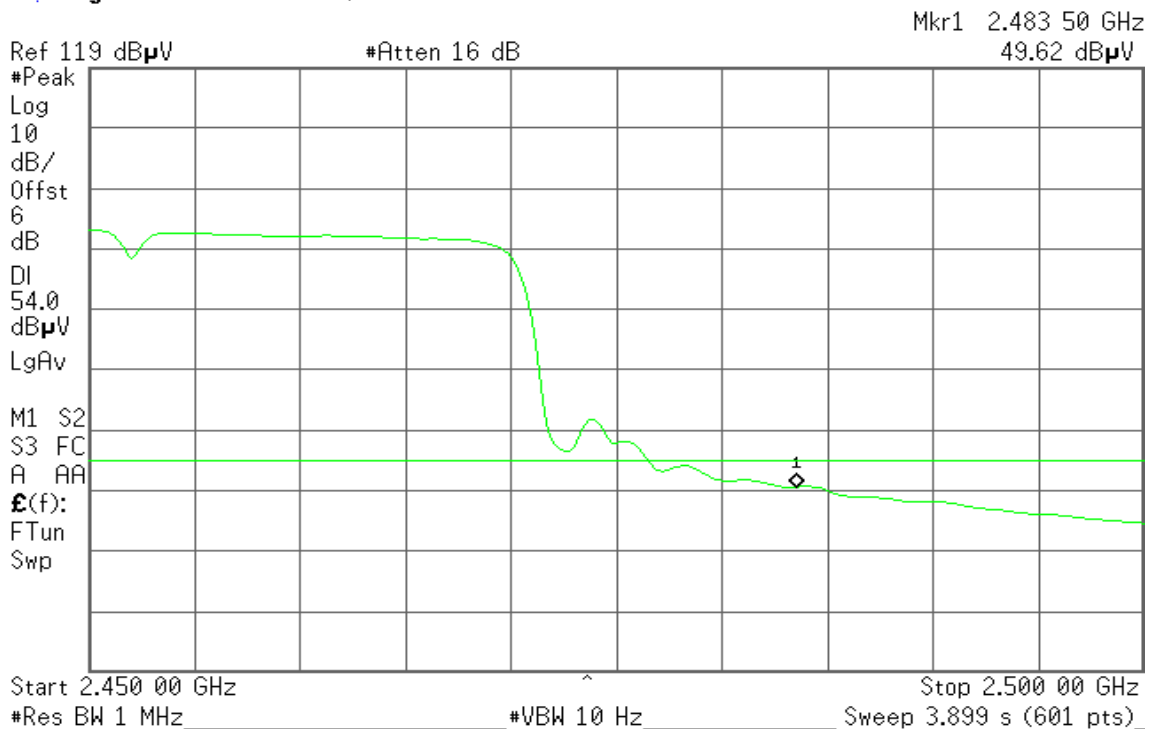




Detector mode: Peak

Polarity: Horizontal

Agilent 00:47:38 Jul 13, 2010

T

Mkr1 2.483 50 GHz
56.68 dB μ V

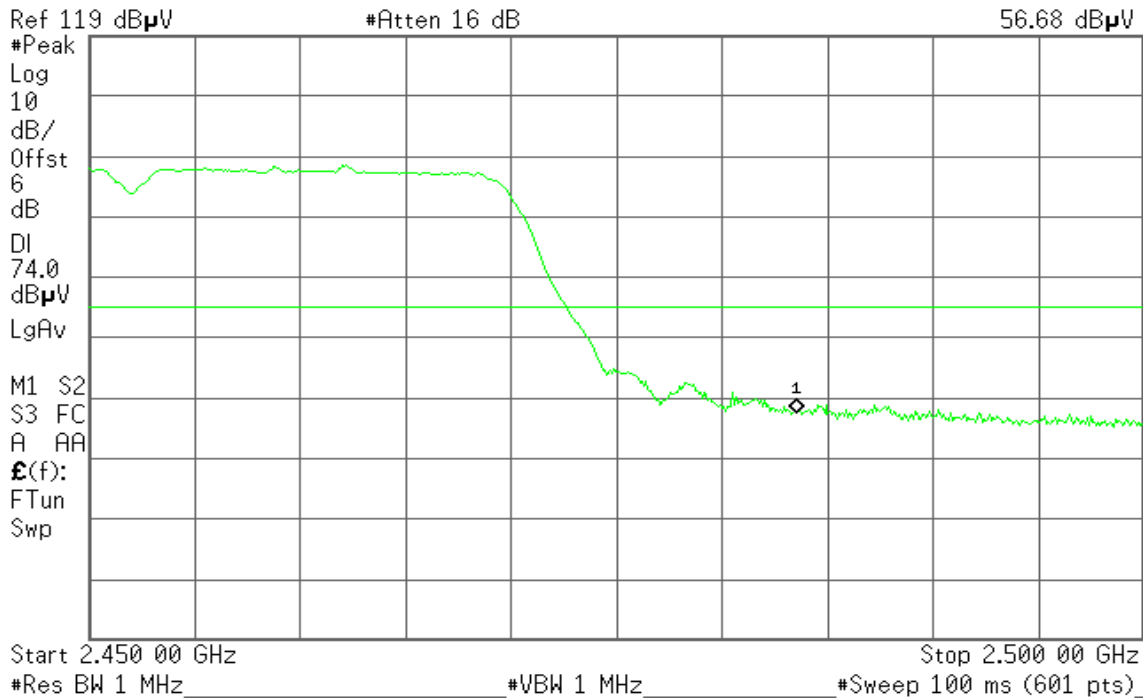


Detector mode: Average

Polarity: Horizontal

Agilent 00:48:05 Jul 13, 2010

T

Mkr1 2.483 50 GHz
44.19 dB μ V

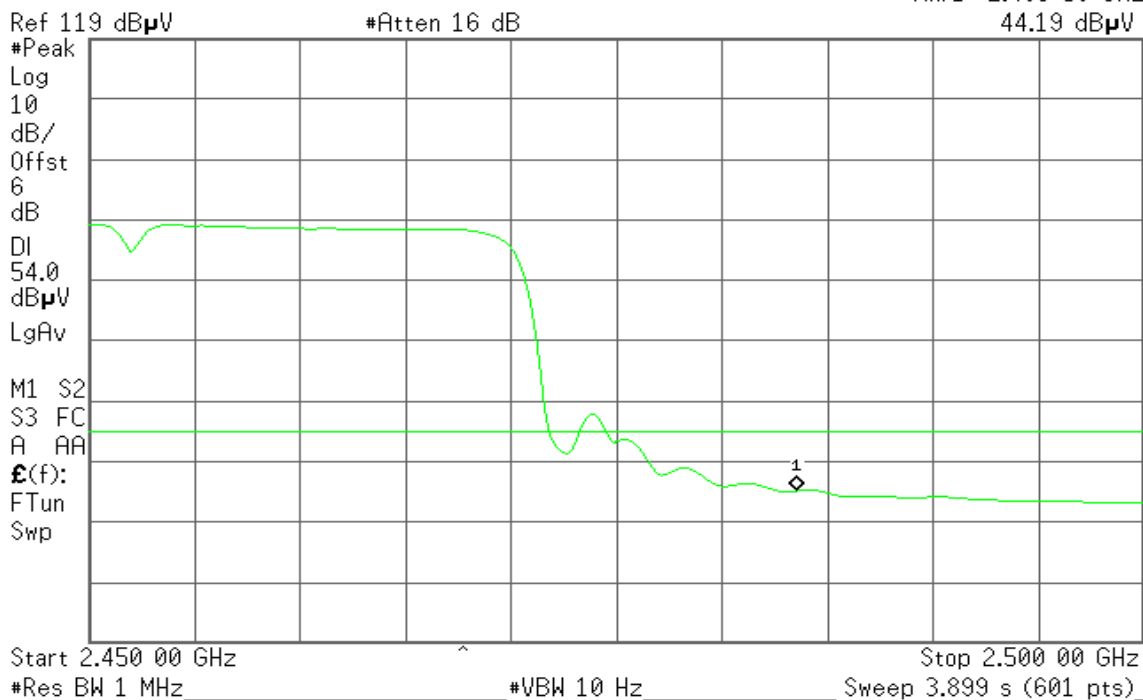




7.4 PEAK POWER SPECTRAL DENSITY

LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

Test Configuration

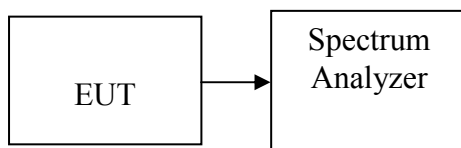

TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3 kHz, VBW = 10 kHz, Span = 300 kHz, Sweep time = 100 s
3. Record the max reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

TEST RESULTS

No non-compliance noted



Test Data

Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-17.01	8.00	PASS
Mid	2437	-17.57		PASS
High	2462	-17.73		PASS

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-17.56	8.00	PASS
Mid	2437	-17.28		PASS
High	2462	-17.74		PASS

Test mode: draft 802.11n Standard-20 MHz Channel mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-15.99	8.00	PASS
Mid	2437	-17.36		PASS
High	2462	-17.01		PASS

Test mode: draft 802.11n Wide-40 MHz Channel mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2422	-17.86	8.00	PASS
Mid	2437	-18.17		PASS
High	2452	-18.35		PASS




Test Plot

IEEE 802.11b mode

PPSD (CH Low)

Agilent 10:13:21 Jul 13, 2010


R T
Mkr1 2.412 676 9 GHz
-17.01 dBm

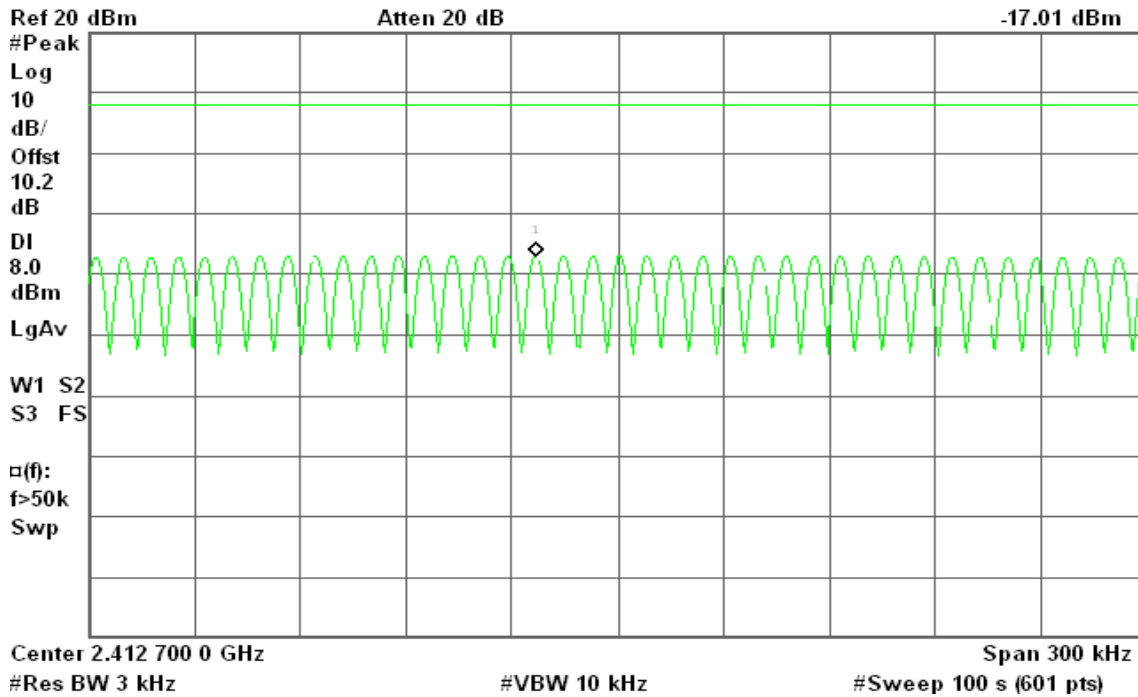

PPSD (CH Mid)

Agilent 10:18:32 Jul 13, 2010

R T
Mkr1 2.437 725 1 GHz
-17.57 dBm

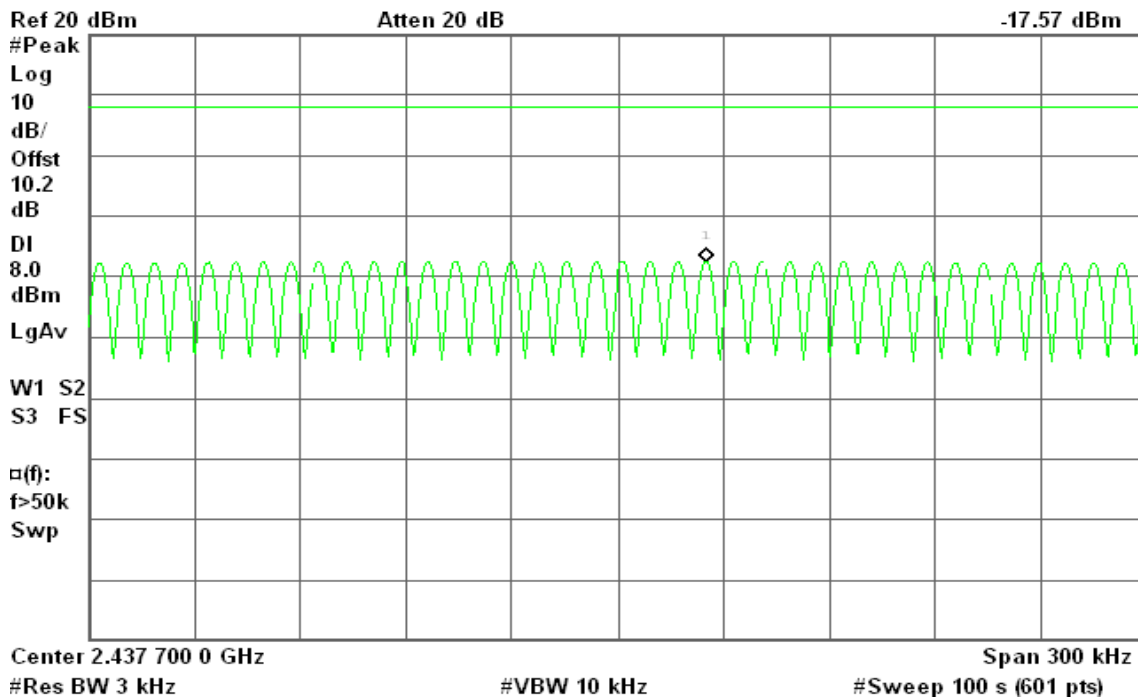




PPSD (CH High)

Agilent 10:22:28 Jul 13, 2010

R T

Mkr1 2.461 308 0 GHz
-17.73 dBm

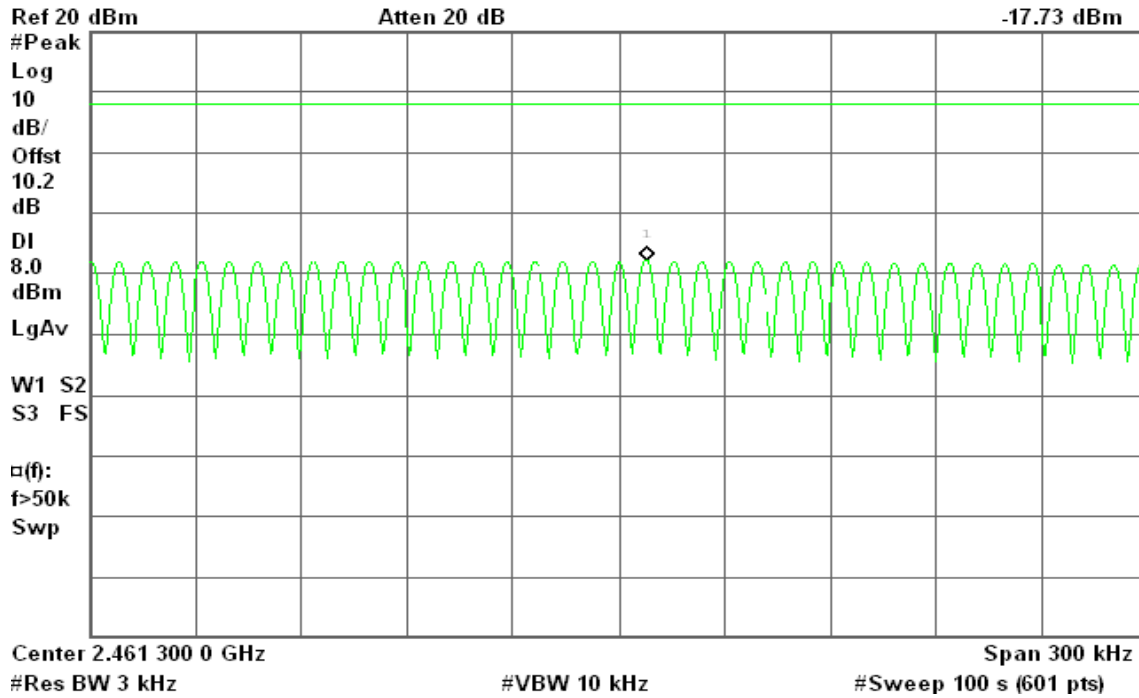


IEEE 802.11g mode

PPSD (CH Low)

Agilent 10:29:55 Jul 13, 2010

R T

Mkr1 2.417 290 0 GHz
-17.56 dBm

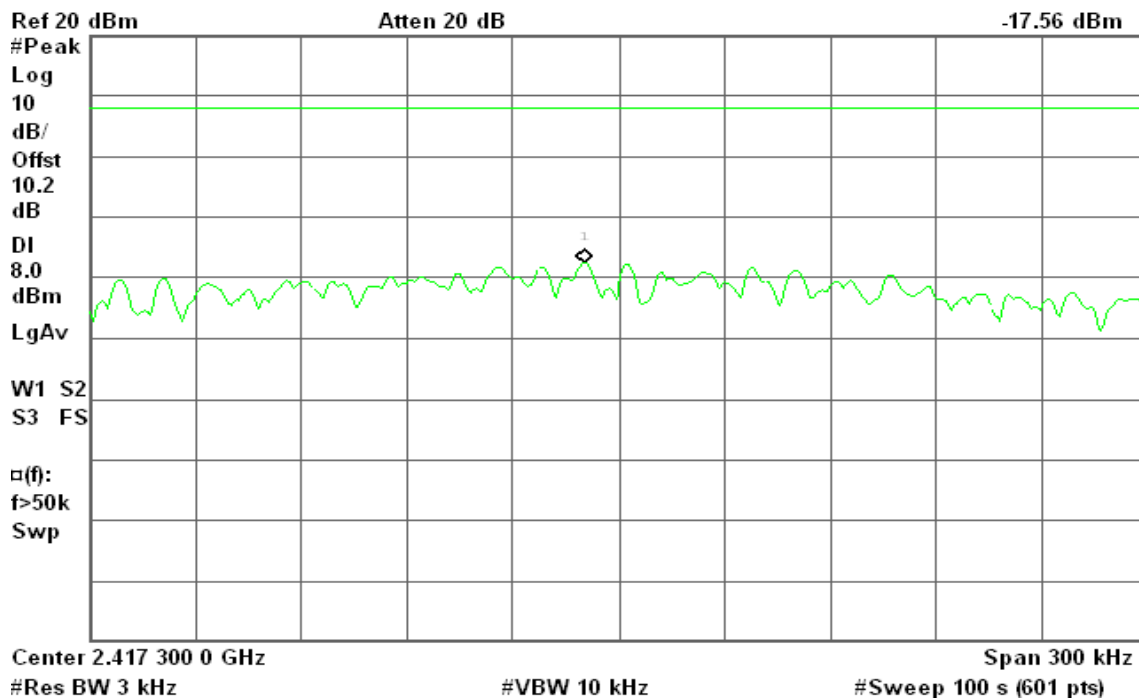




PPSD (CH Mid)

Agilent 10:42:22 Jul 13, 2010

R T

Mkr1 2.436 040 5 GHz
-17.28 dBm

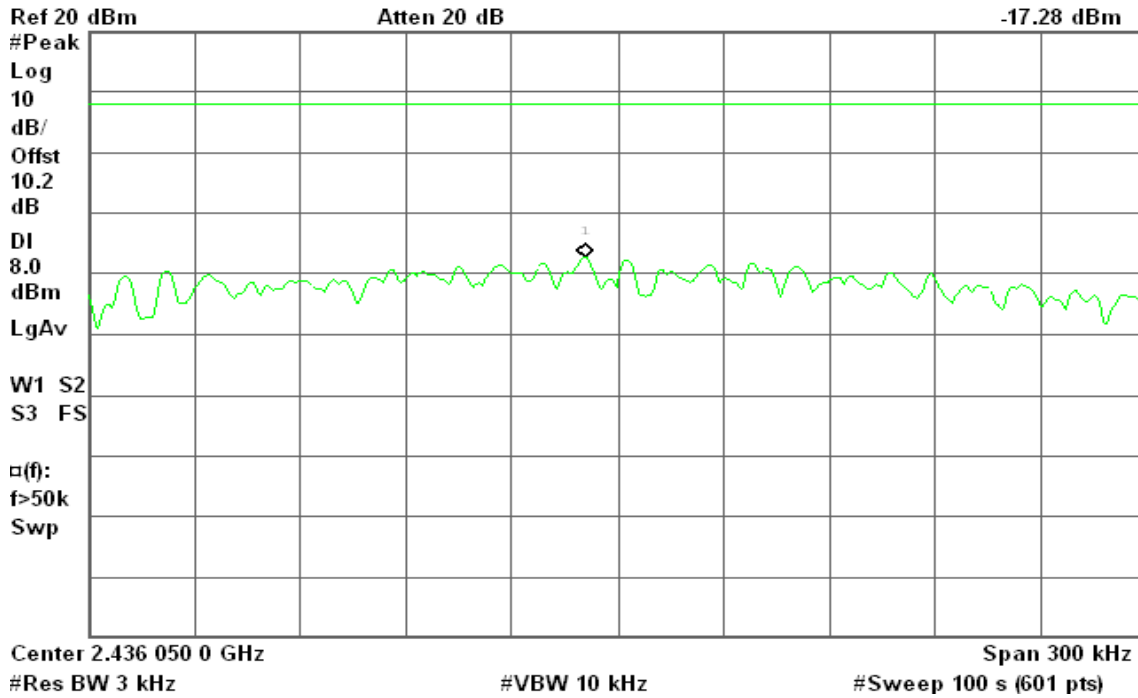


PPSD (CH High)

Agilent 10:46:27 Jul 13, 2010

R T

Mkr1 2.461 041 0 GHz
-17.74 dBm

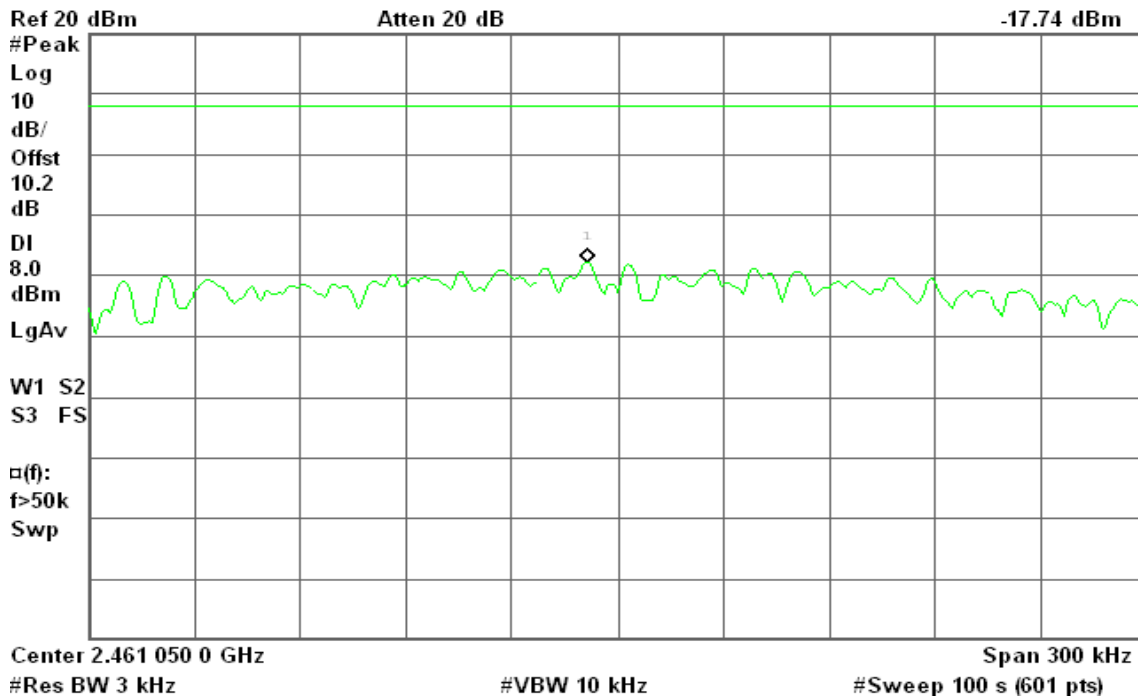




draft 802.11n Standard-20 MHz Channel mode

PPSD (CH Low)

Agilent 10:50:55 Jul 13, 2010

R T

Mkr1 2.414 187 9 GHz
-15.99 dBm

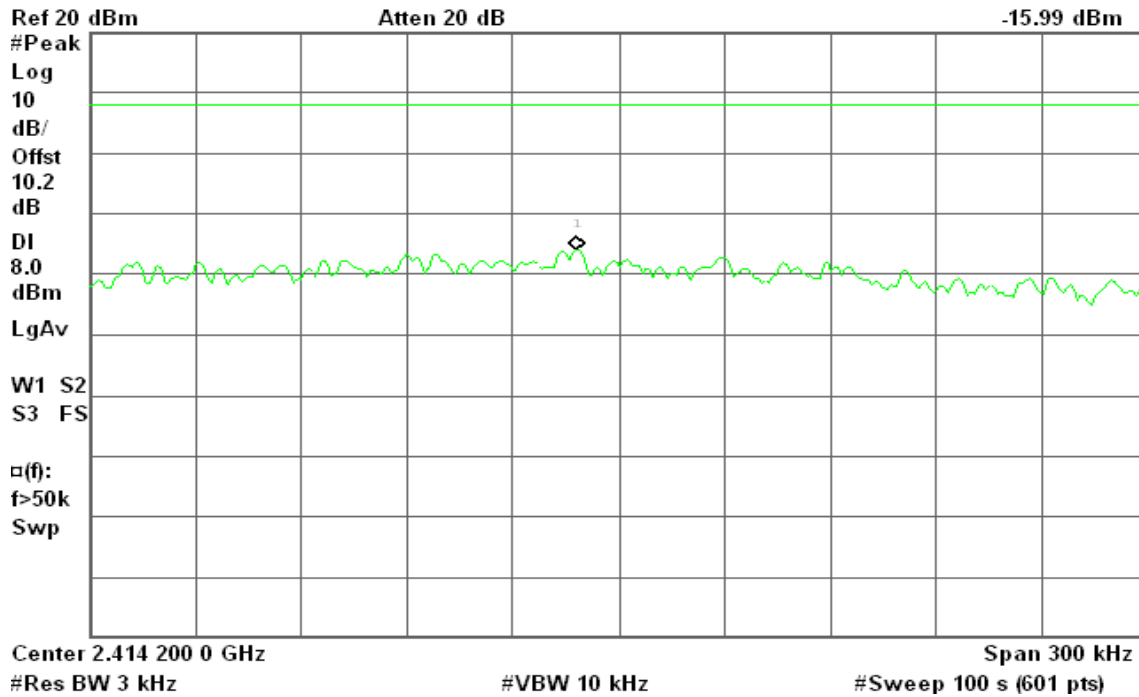


PPSD (CH Mid)

Agilent 10:55:32 Jul 13, 2010

R T

Mkr1 2.439 498 5 GHz
-17.36 dBm

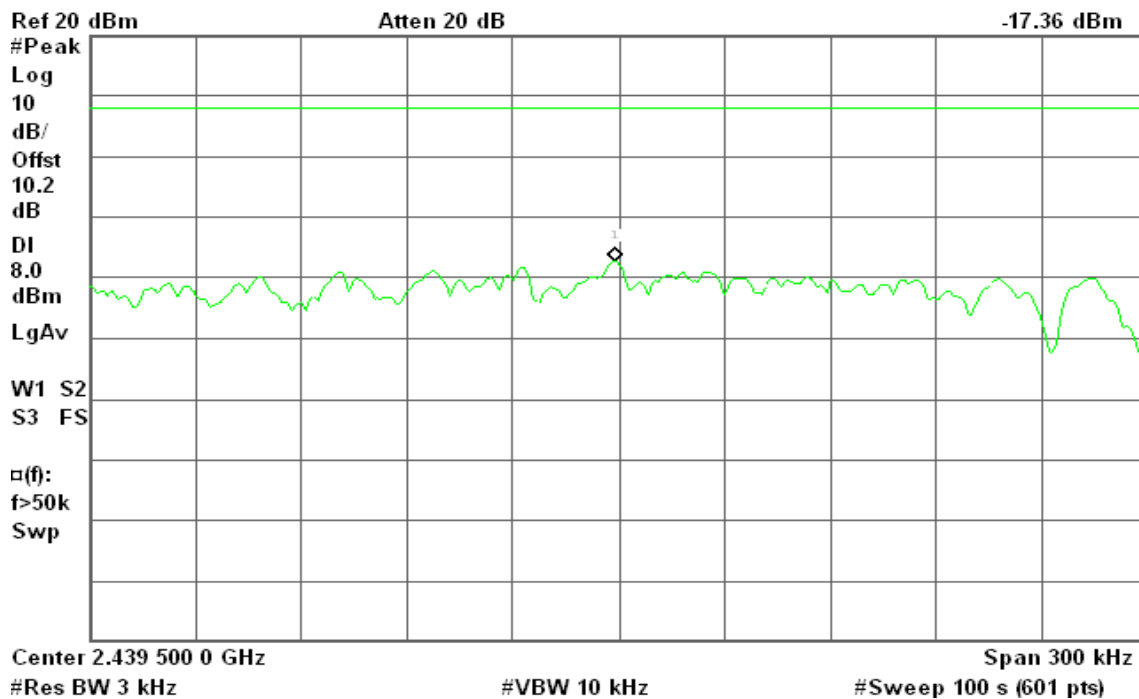




PPSD (CH High)

Agilent 11:02:51 Jul 13, 2010

R T

Mkr1 2.455 353 5 GHz
-17.01 dBm

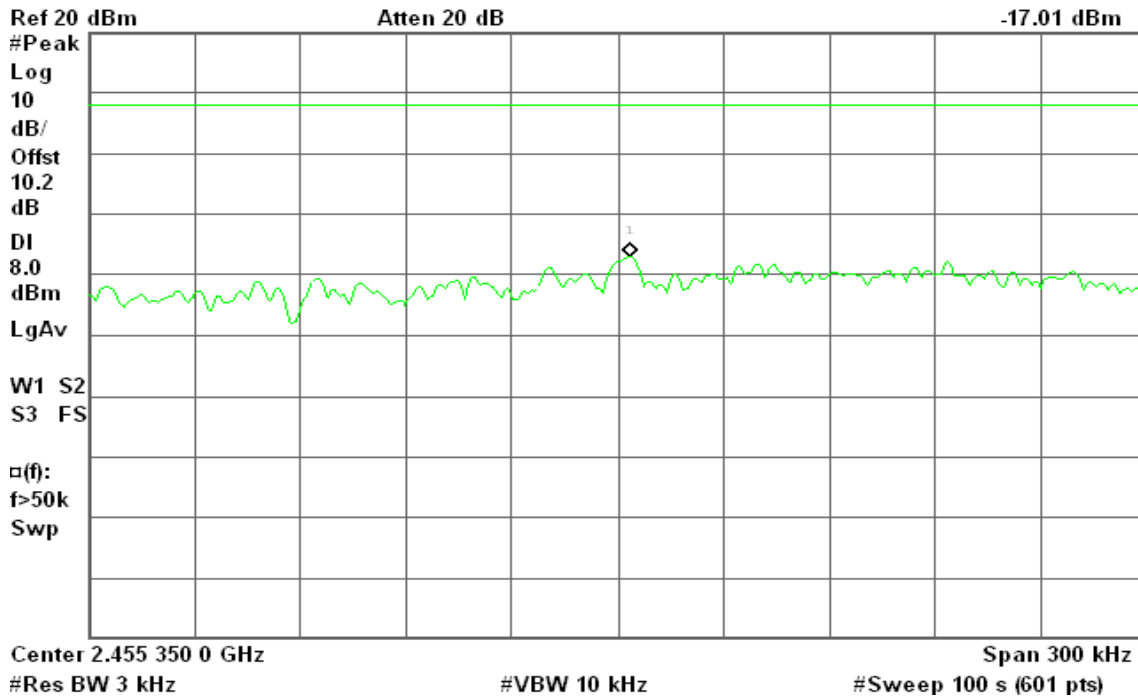


draft 802.11n Wide-40 MHz Channel mode

PPSD (CH Low)

Agilent 11:19:24 Jul 13, 2010

R T

Mkr1 2.426 048 0 GHz
-17.86 dBm

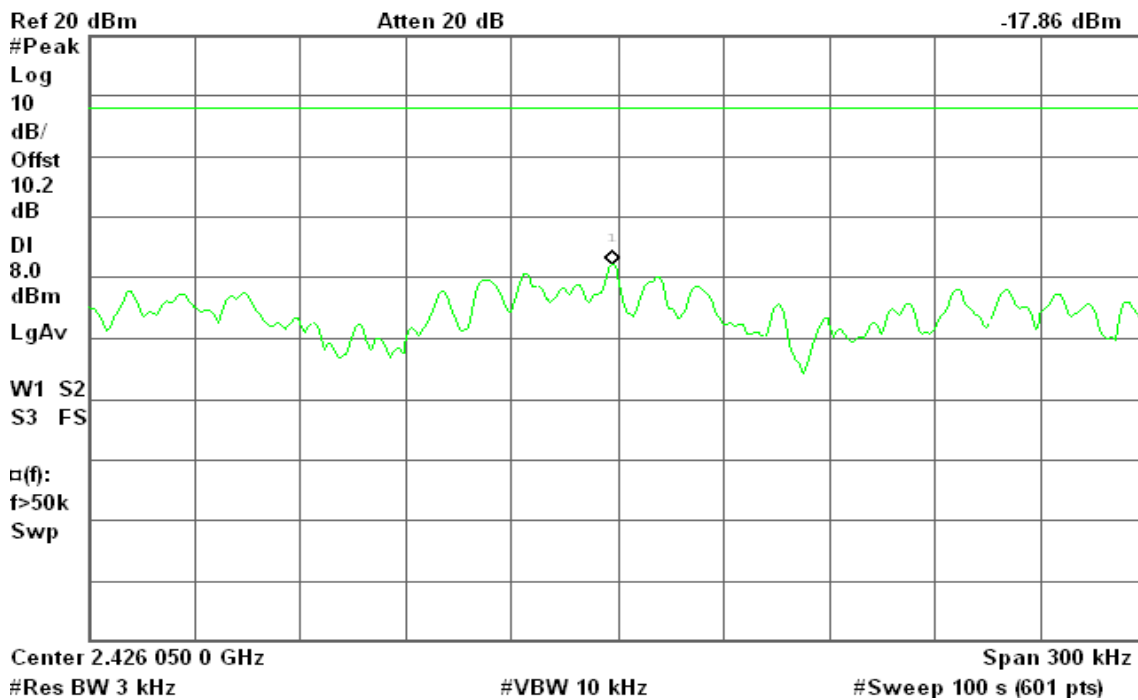




PPSD (CH Mid)

Agilent 11:24:59 Jul 13, 2010

R T

Mkr1 2.440 440 0 GHz
-18.17 dBm

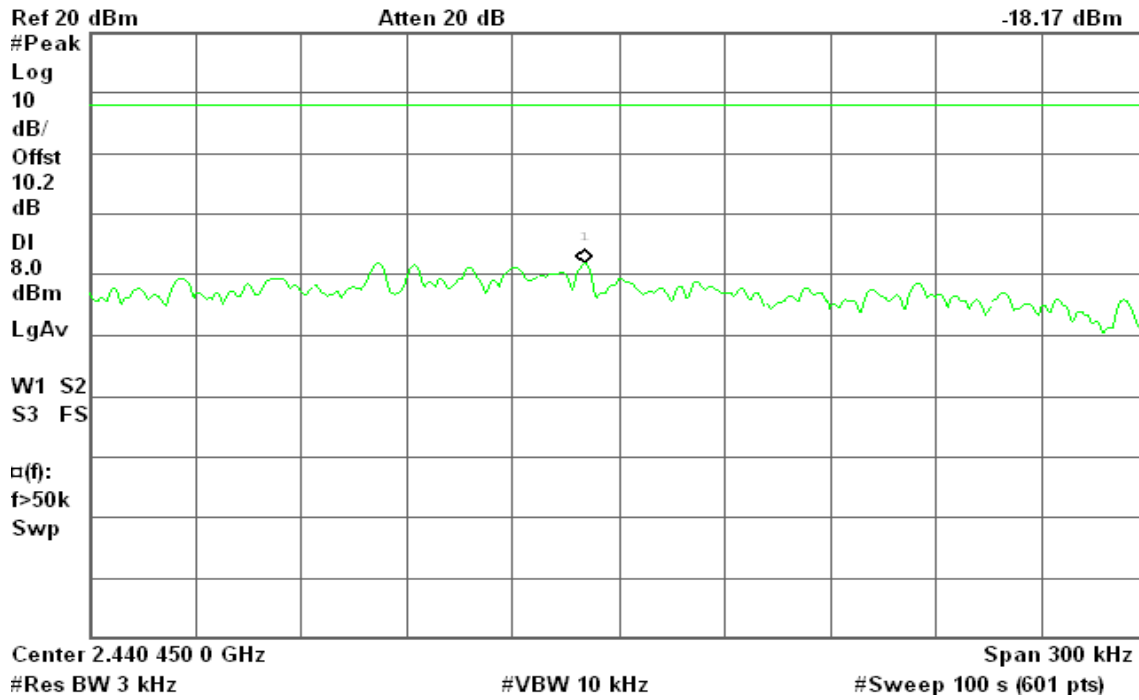


PPSD (CH High)

Agilent 11:46:09 Jul 13, 2010

R T

Mkr1 2.446 048 5 GHz
-18.35 dBm

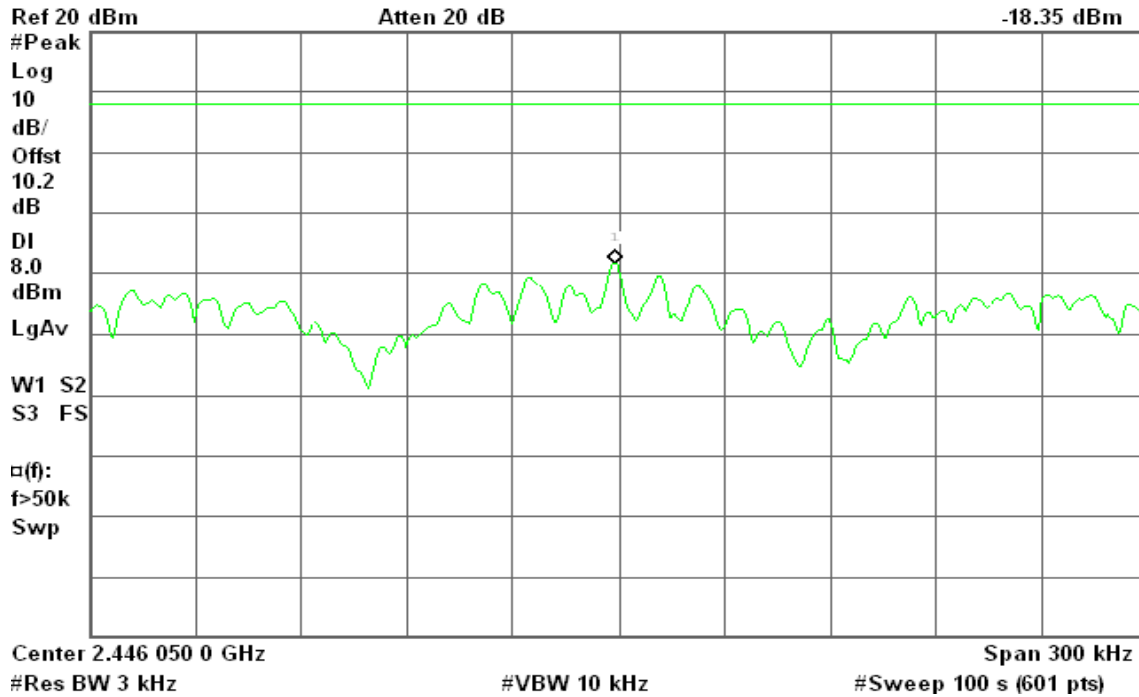




7.5 SPURIOUS EMISSIONS

7.5.1 Conducted Measurement

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration

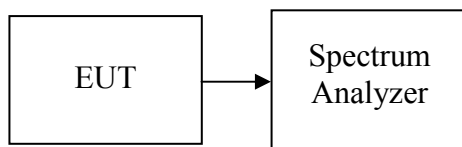

TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

TEST RESULTS

No non-compliance noted




Test Plot

IEEE 802.11b mode

CH Low

Agilent 10:14:08 Jul 13, 2010


R T

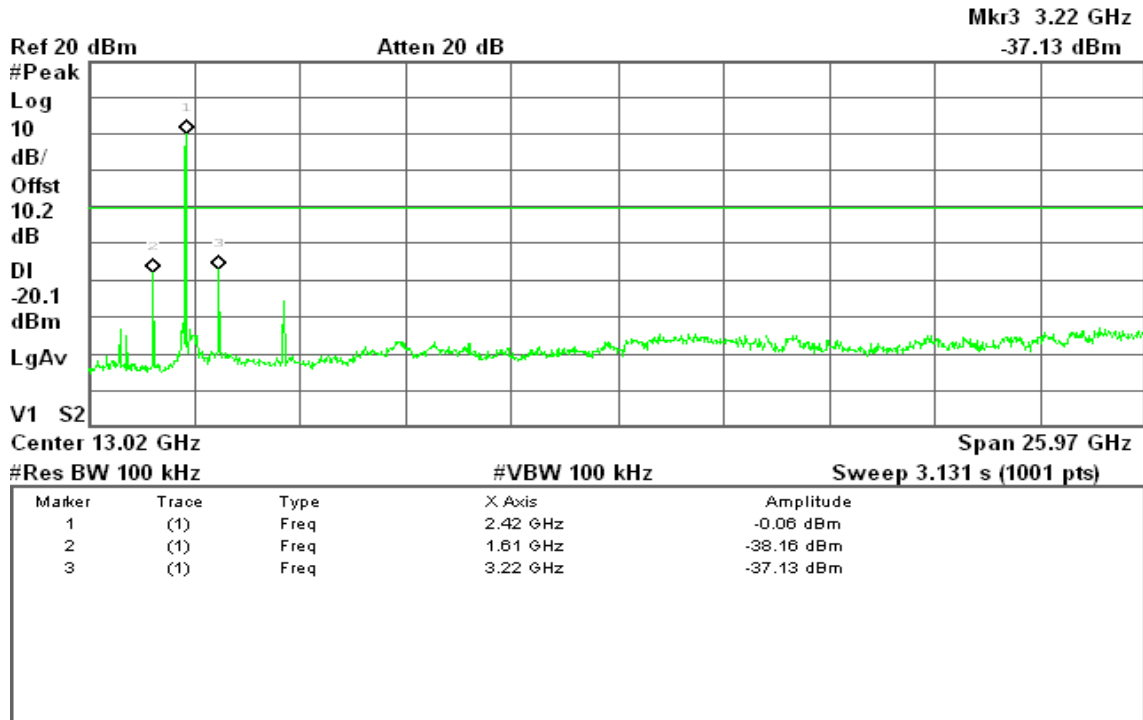

CH Mid

Agilent 10:19:27 Jul 13, 2010

R T

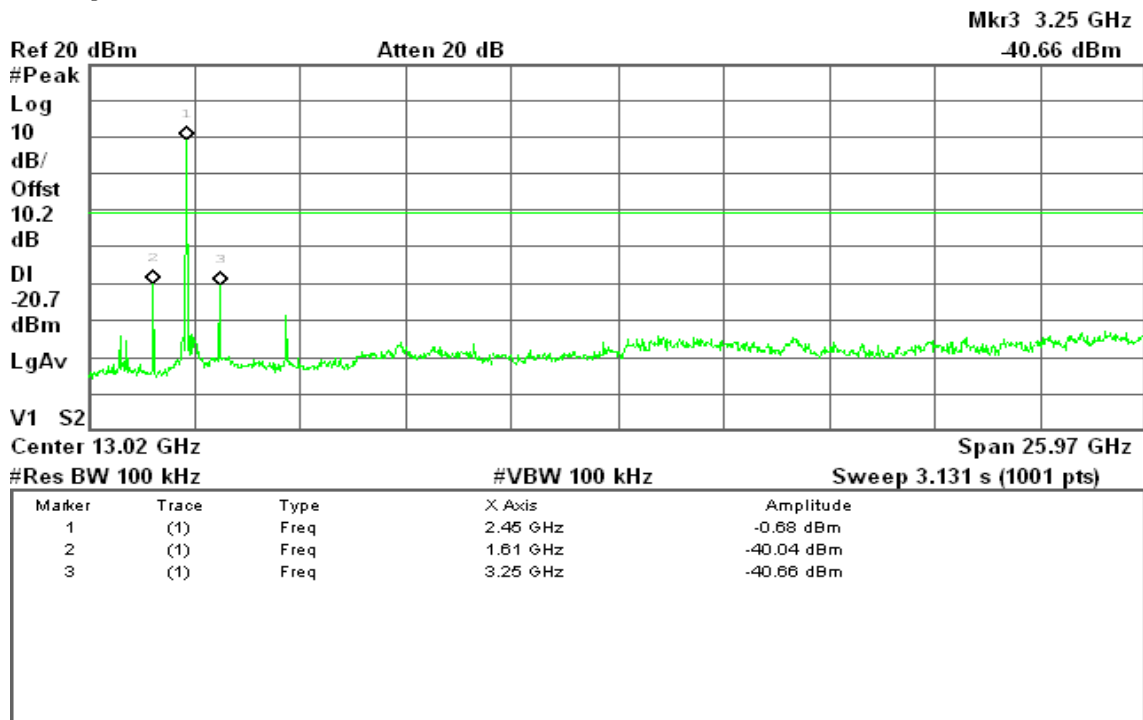




CH High

Agilent 10:23:15 Jul 13, 2010

R T

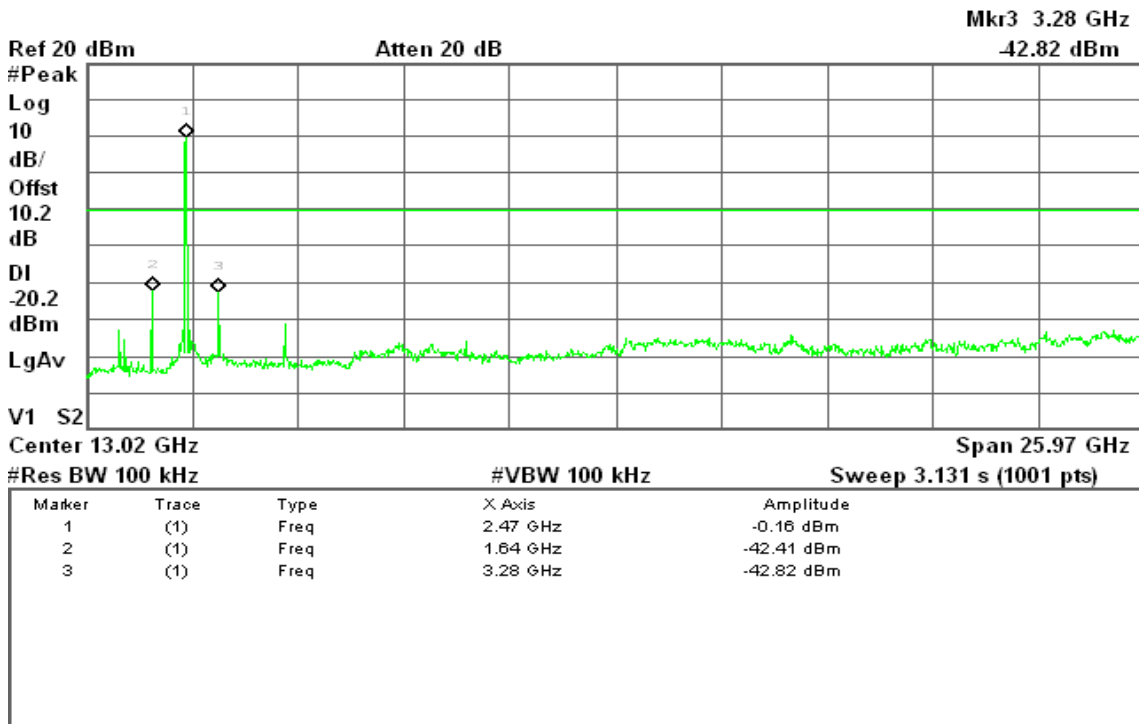


IEEE 802.11g mode

CH Low

Agilent 10:30:41 Jul 13, 2010

R L

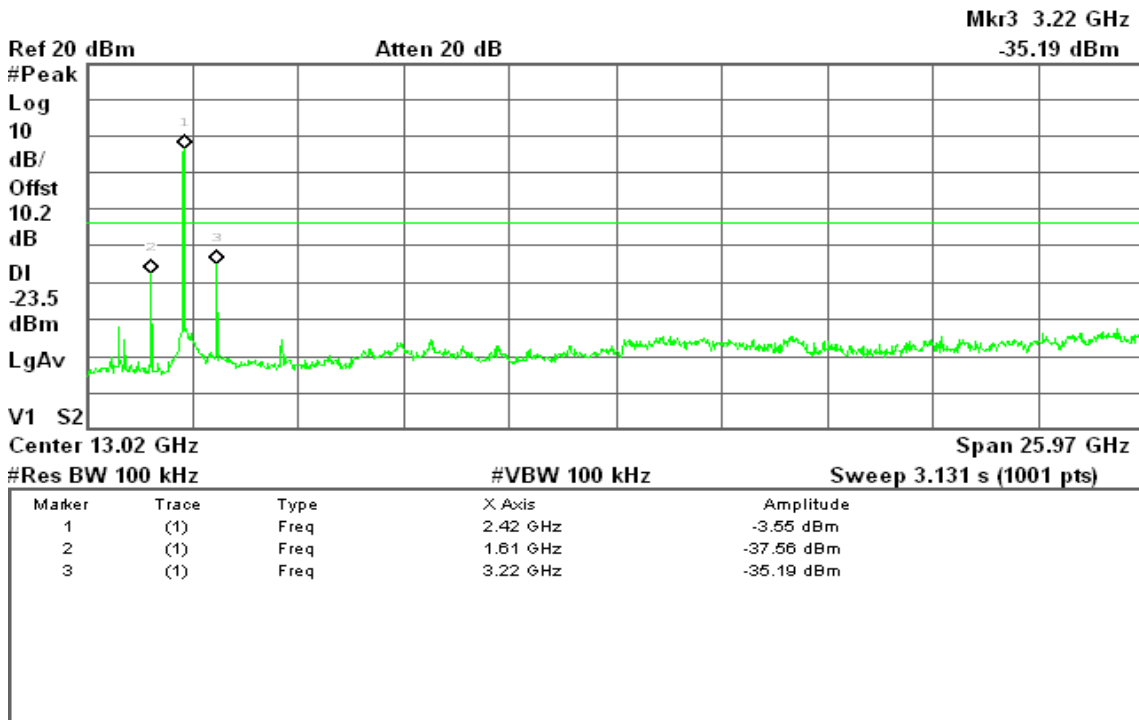




CH Mid

Agilent 10:43:16 Jul 13, 2010


R T

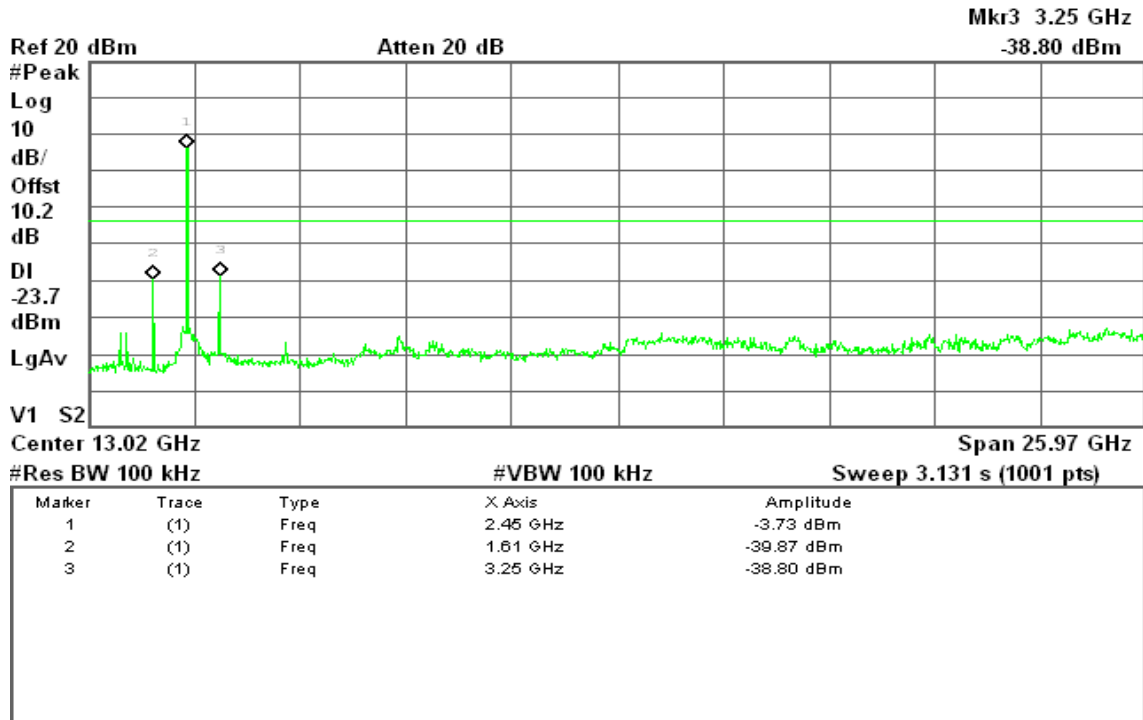

CH High

Agilent 10:47:05 Jul 13, 2010

R T

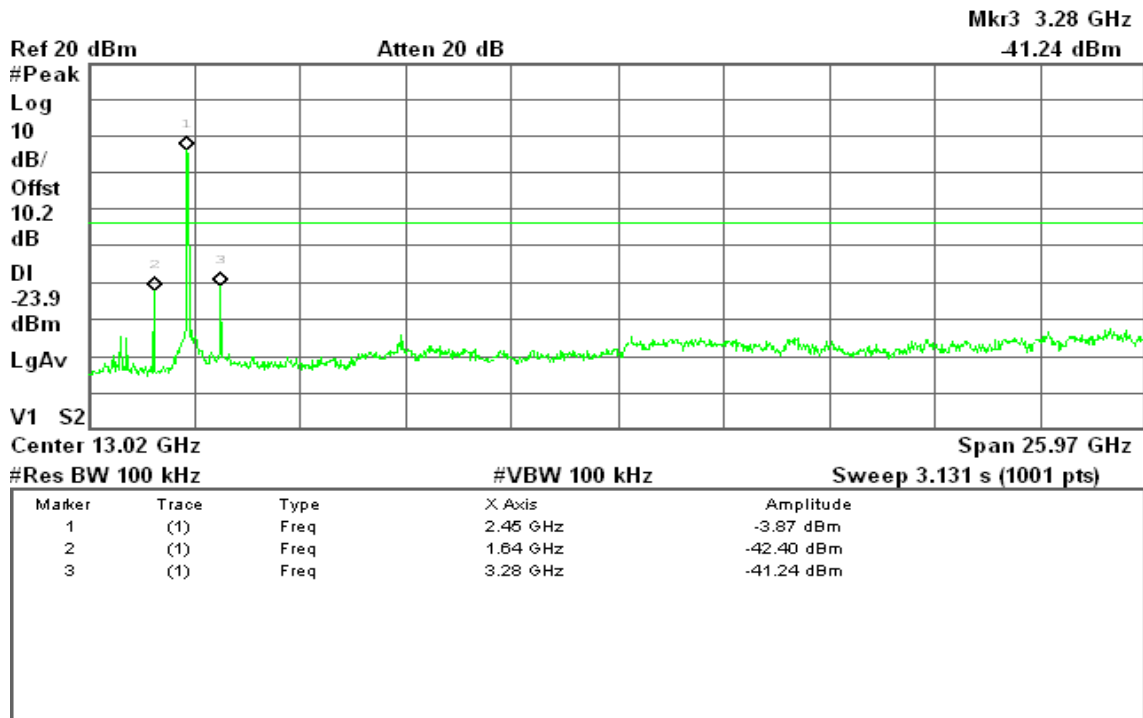




draft 802.11n Standard-20 MHz Channel mode

CH Low

Agilent 10:51:44 Jul 13, 2010


R T

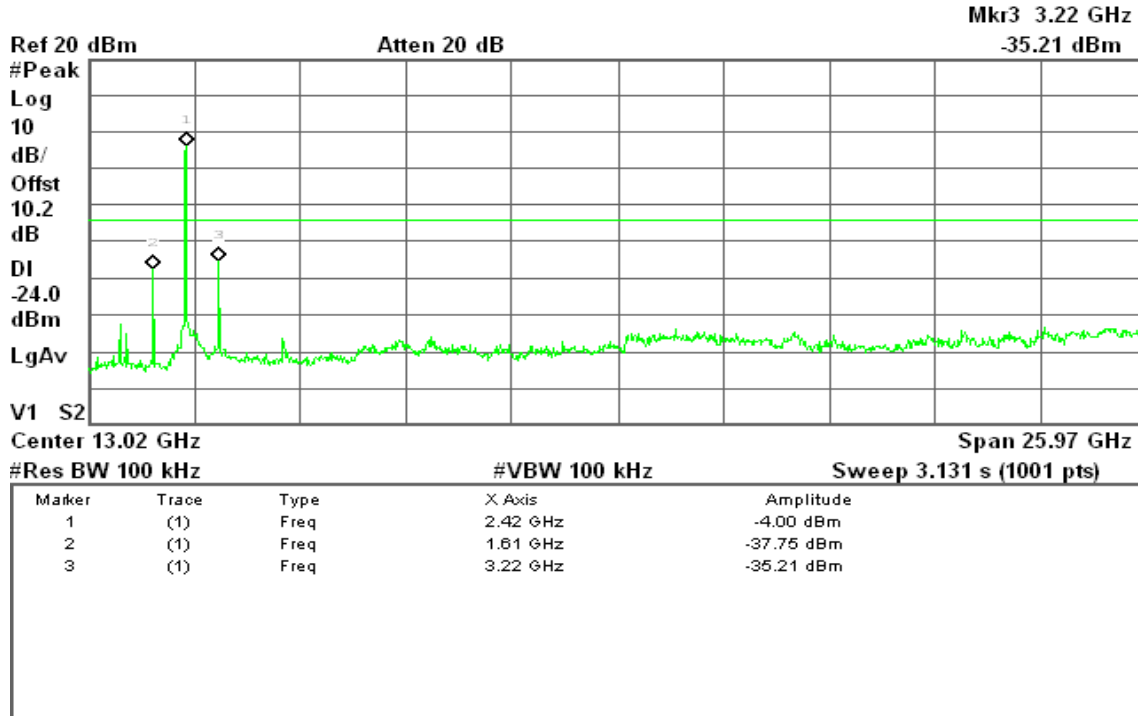

CH Mid

Agilent 10:56:42 Jul 13, 2010

R T

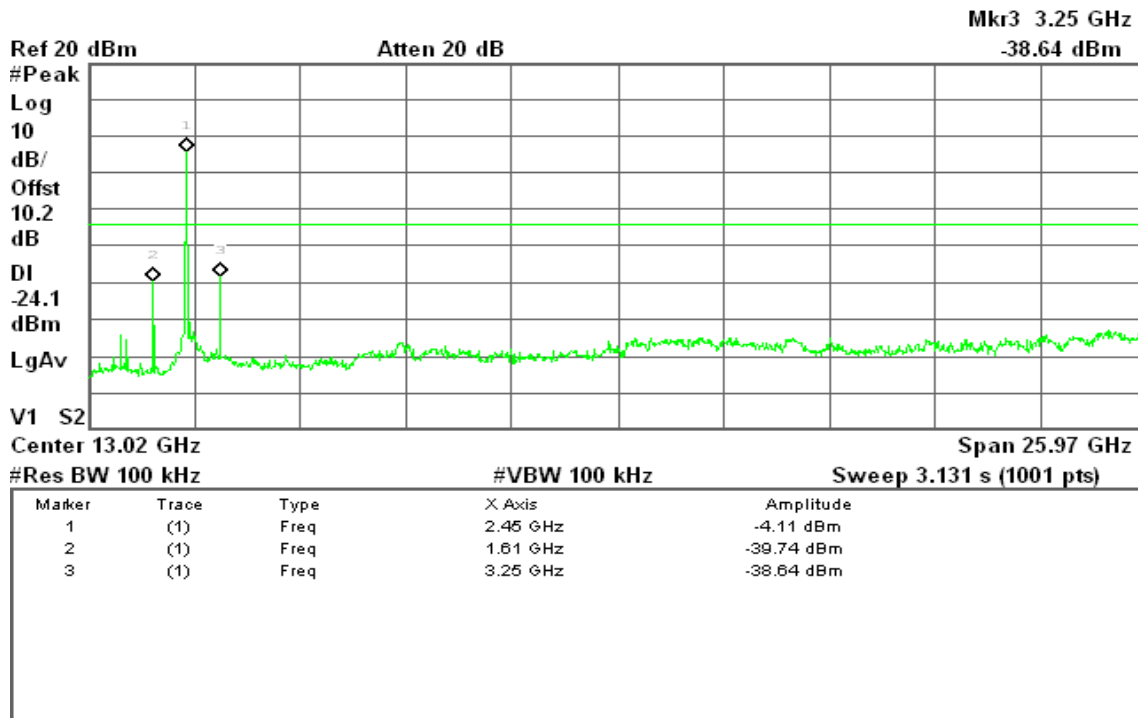




CH High

Agilent 11:03:28 Jul 13, 2010

R L

Mkr3 3.28 GHz
-41.35 dBm

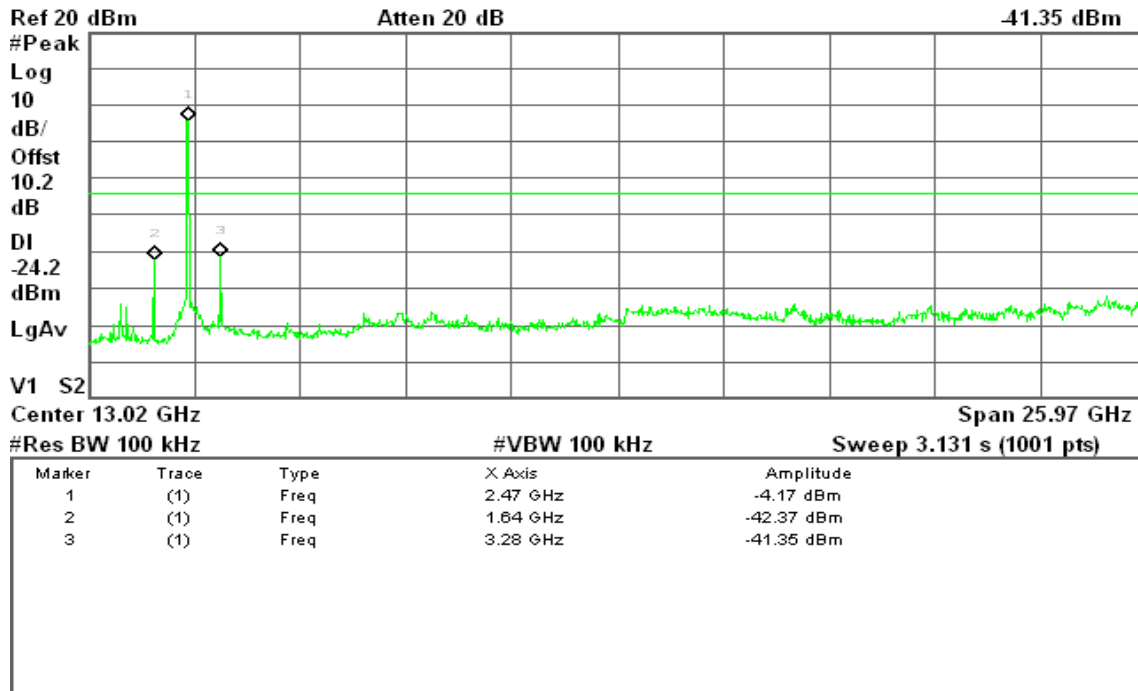


draft 802.11n Wide-40 MHz Channel mode

CH Low

Agilent 11:20:13 Jul 13, 2010

R T

Mkr3 3.22 GHz
-36.84 dBm

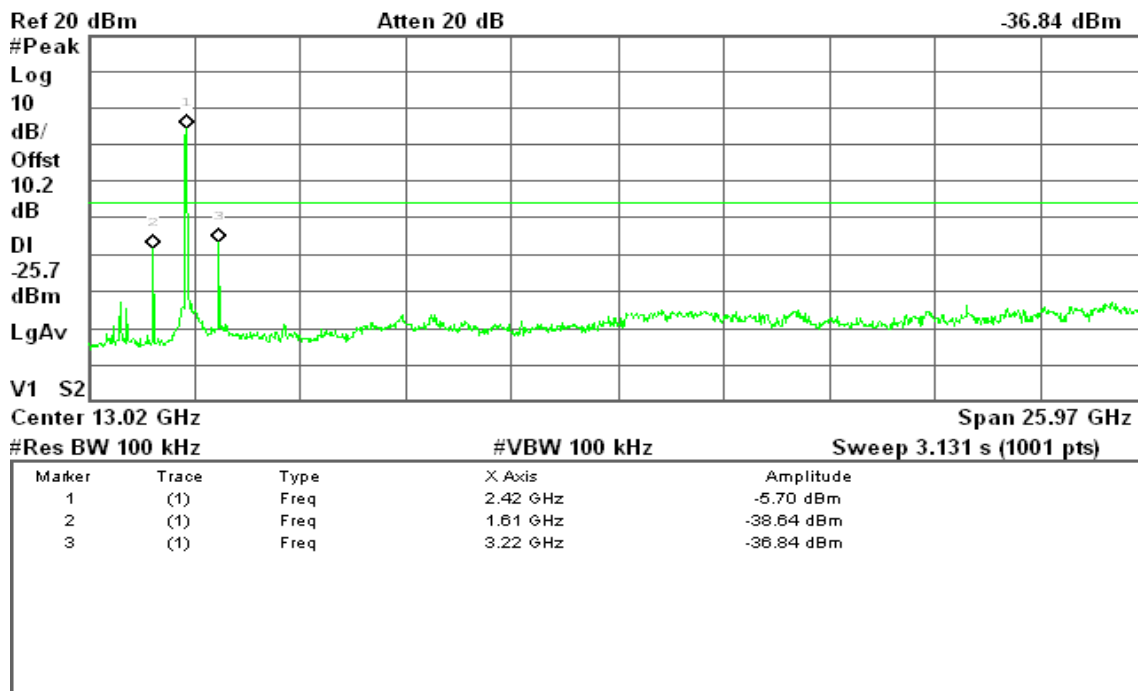




CH Mid

Agilent 11:42:30 Jul 13, 2010


R T

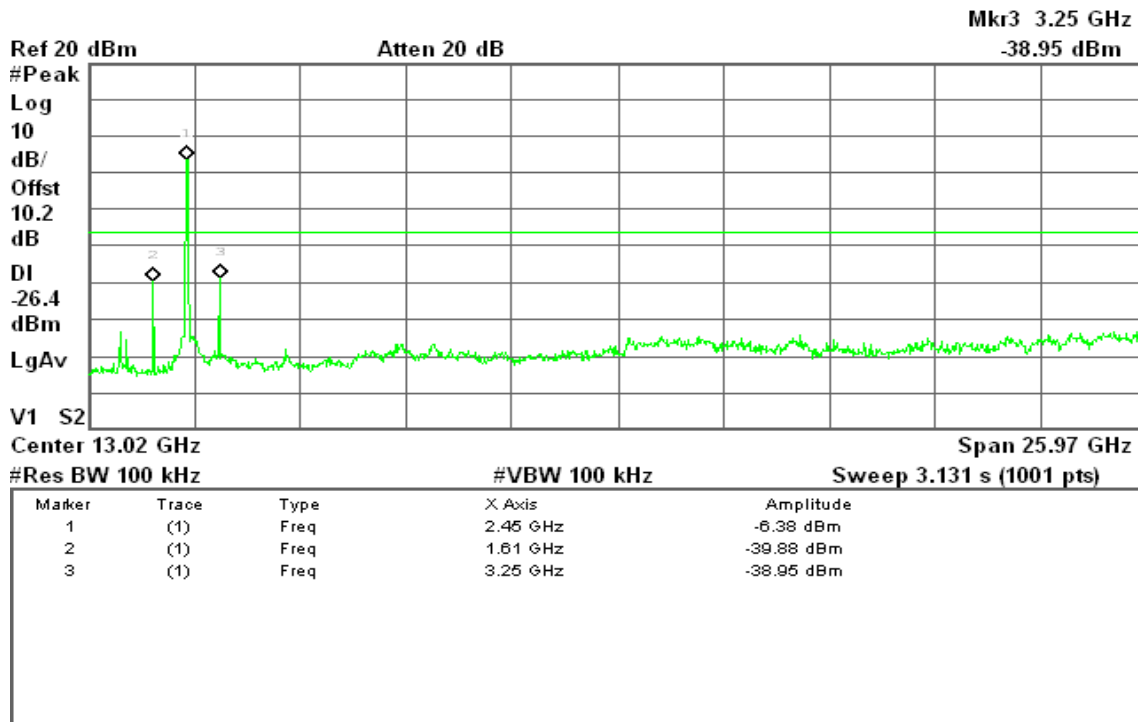

CH High

Agilent 11:47:03 Jul 13, 2010

R T

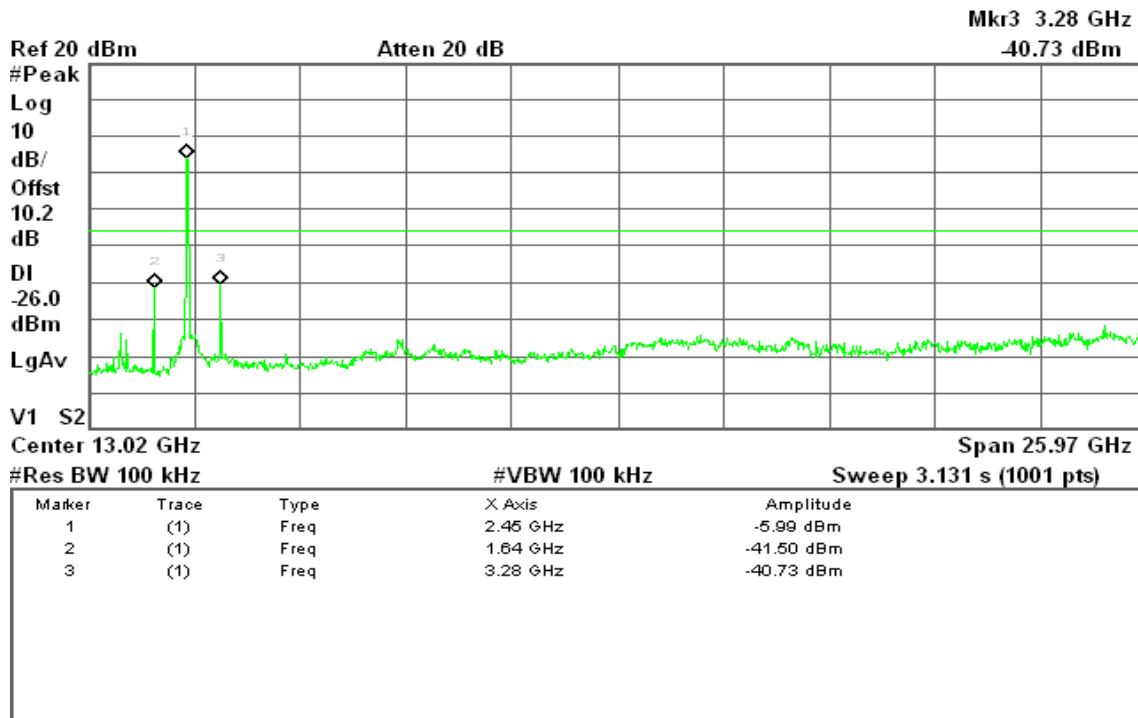



7.6 RADIATED EMISSIONS

LIMIT

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.


2. In the emission table above, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$ at 3-meter)	Field Strength (dB $\mu\text{V}/\text{m}$ at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54




Test Configuration

9kHz ~ 30MHz

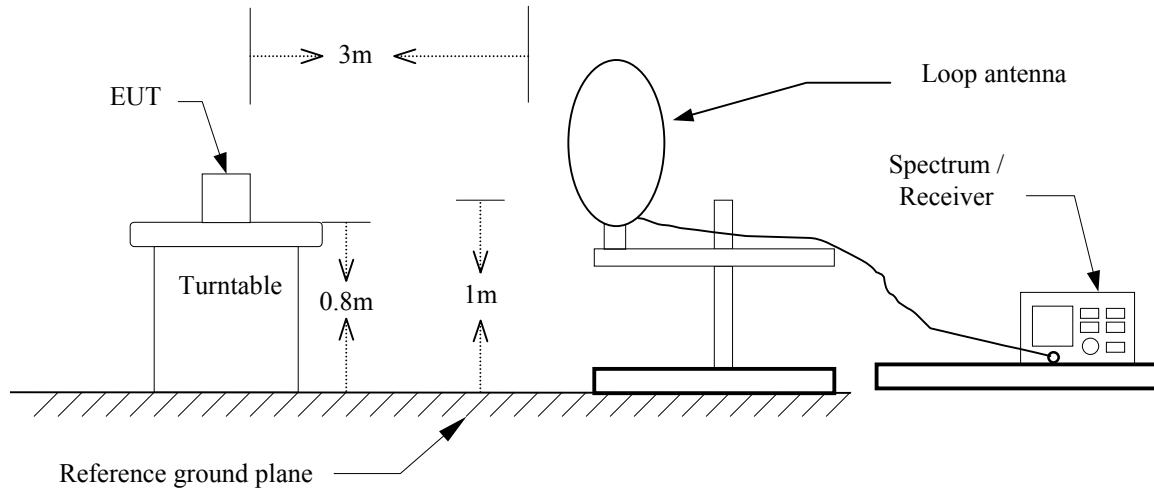


30MHz ~ 1GHz

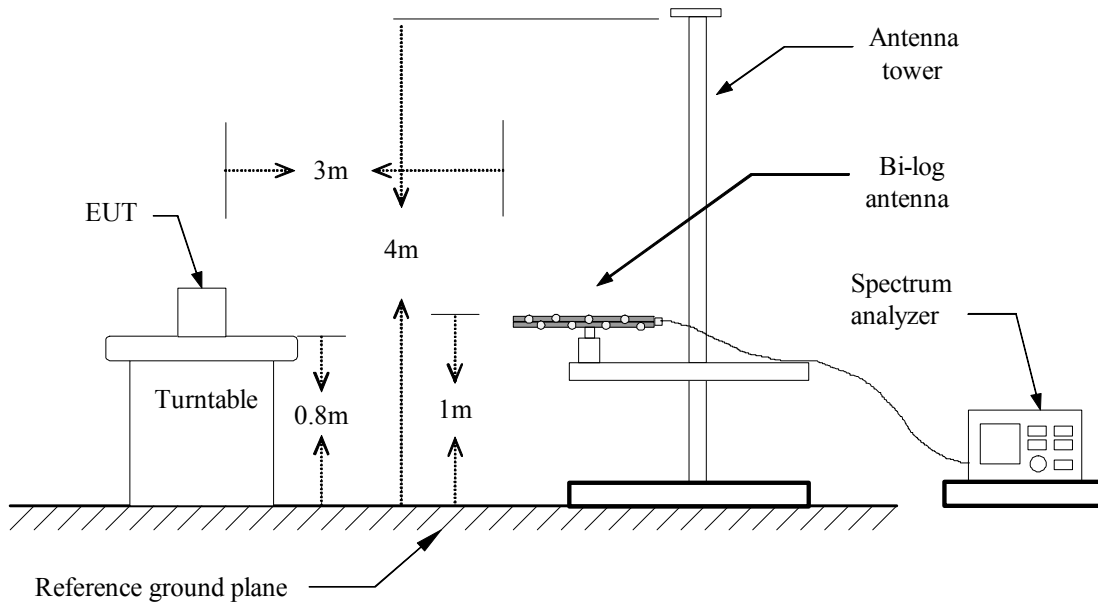



Above 1 GHz

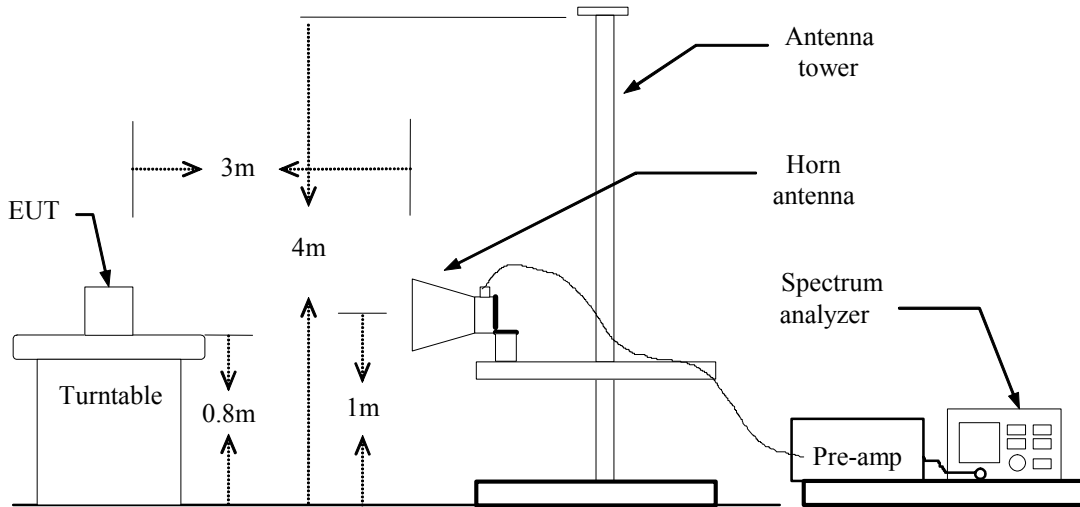



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:
Below 1GHz:
RBW=100kHz / VBW=300kHz / Sweep=AUTO
Above 1GHz:
(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.



TEST RESULTS

Below 1GHz

Operation Mode: Normal Link

Test Date: July 9, 2010

Temperature: 25°C

Tested by: Ming Chen

Humidity: 55% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
59.10	V	51.36	-15.90	35.46	40.00	-4.54	QP
159.33	V	50.04	-10.53	39.51	43.50	-3.99	Peak
319.38	V	49.50	-8.78	40.72	46.00	-5.28	Peak
639.48	V	43.53	-3.14	40.39	46.00	-5.61	Peak
880.37	V	42.28	-0.71	41.57	46.00	-4.43	Peak
959.58	V	42.88	0.44	43.32	46.00	-2.68	QP
159.33	H	47.53	-10.53	37.00	43.50	-6.50	QP
240.17	H	54.13	-11.09	43.04	46.00	-2.96	Peak
319.38	H	51.25	-8.78	42.47	46.00	-3.53	QP
639.48	H	46.45	-3.14	43.32	46.00	-2.68	Peak
696.07	H	44.61	-2.57	42.04	46.00	-3.96	QP
799.53	H	40.75	-1.34	39.41	46.00	-6.59	QP

Remark:

1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz)
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Result (dBuV/m) – Limit (dBuV/m).



Above 1 GHz

Operation Mode: TX / IEEE 802.11b / CH Low

Test Date: July 12, 2010

Temperature: 23°C

Tested by: Ming Chen

Humidity: 51 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2412.00	V	103.54	100.95	-2.93	100.61	98.02	Fundamental			
1606.67	V	59.39	---	-7.78	51.61	---	74.00	54.00	-2.39	Peak
3216.67	V	63.32	61.03	-1.17	62.16	59.86	80.61	78.02	-18.16	20dBc AVG Fundamental
4825.00		53.87	51.40	1.18	55.05	52.58	74.00	54.00	-1.42	AVG
N/A										
2412.00	H	102.82	100.24	-2.93	99.89	97.31	Fundamental			
1606.67	H	59.75	---	-7.78	51.97	---	74.00	54.00	-2.03	Peak
3216.67	H	58.72	57.75	-1.17	59.89	56.58	79.89	77.31	-20.73	20dBc AVG Fundamental
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).
7. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.



Operation Mode: TX / IEEE 802.11b / CH Mid

Test Date: July 12, 2010

Temperature: 23°C

Tested by: Ming Chen

Humidity: 51 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2437.00	V	103.45	100.33	-2.86	100.59	97.47	Fundamental			
1623.33	V	59.54	---	-7.62	51.92	---	74.00	54.00	-2.08	Peak
3250.00	V	60.04	57.91	-1.16	58.88	56.75	80.59	77.47	-20.72	20dBc AVG Fundamental
4875.00	V	55.71	51.01	1.16	56.87	52.17	74.00	54.00	-1.83	AVG
N/A										
2437.00	H	99.74	97.08	-2.85	96.89	94.23	Fundamental			
1626.67	H	58.30	---	-7.59	50.71	---	74.00	54.00	-3.29	Peak
3250.00	H	52.30	---	-1.16	51.14	---	76.89	74.23	-25.75	20dBc Peak Fundamental
4875.00	H	49.43	---	1.16	50.59	---	74.00	54.00	-3.41	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).
7. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.



Operation Mode: TX / IEEE 802.11b / CH High

Test Date: July 12, 2010

Temperature: 23°C

Tested by: Ming Chen

Humidity: 51 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2462.00	V	102.87	100.21	-2.77	100.10	97.44	Fundamental			
1640.00	V	59.41	---	-7.47	51.94	---	74.00	54.00	-2.06	Peak
3283.33	V	58.75	57.27	-1.15	57.60	56.12	80.10	77.44	-21.32	20dBc AVG Fundamental
4925.00	V	54.53	51.74	1.14	55.67	52.88	74.00	54.00	-1.12	AVG
N/A										
2462.00	H	99.25	96.61	-2.78	96.47	93.83	Fundamental			
1640.00	H	58.71	---	-7.47	51.24	---	74.00	54.00	-2.76	Peak
3283.33	H	51.56	---	-1.15	50.41	---	76.47	73.83	-26.06	20dBc Peak Fundamental
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).
7. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.



Operation Mode: TX / IEEE 802.11g / CH Low

Test Date: July 12, 2010

Temperature: 23°C

Tested by: Ming Chen

Humidity: 51 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2412.00	V	105.17	97.15	-2.91	102.26	94.24	Fundamental			
1606.67	V	64.19	60.08	-7.78	56.41	52.30	74.00	54.00	-1.70	AVG
3216.67	V	64.05	61.02	-1.17	62.89	59.85	82.26	74.24	-14.39	20dBc AVG Fundamental
4825.00	V	57.33	43.78	1.18	58.51	44.96	74.00	54.00	-9.04	AVG
N/A										
2412.00	H	105.59	96.75	-2.93	102.66	93.82	Fundamental			
1606.67	H	65.03	60.62	-7.78	57.25	52.84	74.00	54.00	-1.16	AVG
3216.67	H	59.85	56.43	-1.17	58.68	55.26	82.66	73.82	-18.56	20dBc AVG Fundamental
4825.00	H	50.17	---	1.18	51.35	---	74.00	54.00	-2.65	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).
7. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.



Operation Mode: TX / IEEE 802.11g / CH Mid

Test Date: July 12, 2010

Temperature: 23°C

Tested by: Ming Chen

Humidity: 51 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2437.00	V	105.53	97.15	-2.86	102.67	94.29	Fundamental			
1623.33	V	59.54	---	-7.62	51.92	---	74.00	54.00	-2.08	Peak
3250.00	V	60.85	58.20	-1.16	59.69	57.04	82.67	74.29	-17.25	20dBc AVG Fundamental
4875.00	V	52.30	48.96	1.16	53.46	50.12	74.00	54.00	-3.88	AVG
N/A										
2437.00	H	99.36	96.52	-2.84	96.52	93.68	Fundamental			
1623.33	H	59.53	---	-7.62	51.91	---	74.00	54.00	-2.09	Peak
3250.00	H	53.19	---	-1.16	52.03	---	76.52	73.68	-24.49	20dBc Peak Fundamental
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).
7. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.



Operation Mode: TX / IEEE 802.11g / CH High

Test Date: July 12, 2010

Temperature: 23°C

Tested by: Ming Chen

Humidity: 51 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2462.00	V	105.41	96.58	-2.77	102.64	93.81	Fundamental			
1640.00	V	59.10	---	-7.47	51.63	---	74.00	54.00	-2.37	Peak
3283.33	V	57.75	54.28	-1.15	56.60	53.13	82.64	73.81	-20.68	20dBc AVG Fundamental
4925.00	V	49.95	---	1.14	51.10	---	74.00	54.00	-2.90	Peak
N/A										
1640.00	H	58.08	---	-7.47	50.61	---	74.00	54.00	-3.39	Peak
4941.67	H	48.34	---	1.14	49.48	---	74.00	54.00	-4.52	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).
7. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel mode / CH Low
Temperature: 23°C
Humidity: 51 % RH

Test Date: July 12, 2010
Tested by: Ming Chen
Polarity: Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2412.00	V	105.81	96.95	-2.91	102.90	94.04	Fundamental			
1606.67	V	59.58	---	-7.78	51.80	---	74.00	54.00	-2.20	Peak
3216.67	V	65.10	63.82	-1.17	63.93	62.65	82.90	74.04	-11.39	20dBc AVG Fundamental
4816.67	V	50.48	---	1.18	51.66	---	74.00	54.00	-2.34	Peak
N/A										
2412.00	H	105.12	96.08	-2.92	102.20	93.16	Fundamental			
1606.67	H	59.75	---	-7.78	51.97	---	74.00	54.00	-2.03	Peak
3216.67	H	58.10	55.89	-1.17	56.93	54.72	82.20	73.16	-18.44	20dBc AVG Fundamental
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).
7. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel mode / CH Mid

Test Date: July 12, 2010

Temperature: 23°C

Tested by: Ming Chen

Humidity: 51 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2437.00	V	105.82	96.01	-2.84	102.98	93.17	Fundamental			
1623.33	V	59.54	---	-7.62	51.92	---	74.00	54.00	-2.08	Peak
3250.00	V	60.30	57.96	-1.16	59.14	56.80	82.98	73.17	-16.37	20dBc AVG Fundamental
4866.67	V	55.66	40.33	1.16	56.82	41.49	74.00	54.00	-12.51	AVG
N/A										
2437.00	H	102.84	93.61	-2.84	100.00	90.77	Fundamental			
1623.33	H	59.57	---	-7.62	51.95	---	74.00	54.00	-2.05	Peak
3250.00	H	54.32	51.20	-1.16	53.16	50.04	80.00	70.77	-20.73	20dBc AVG Fundamental
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).
7. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel mode / CH High

Test Date: July 12, 2010

Temperature: 23°C

Tested by: Ming Chen

Humidity: 51 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2462.00	V	105.10	96.02	-2.77	102.33	93.25	Fundamental			
1640.00	V	59.15	---	-7.47	51.69	---	74.00	54.00	-2.31	Peak
3283.33	V	58.20	56.32	-1.15	57.05	55.17	82.33	73.25	-18.08	20dBc AVG Fundamental
4925.00	V	53.96	39.00	1.14	55.10	40.14	74.00	54.00	-13.86	AVG
N/A										
2462.00	H	101.55	92.51	-2.76	98.79	89.75	Fundamental			
1640.00	H	58.52	---	-7.47	51.05	---	74.00	54.00	-2.95	Peak
3283.33	H	52.30	50.10	-1.15	51.15	48.95	78.79	69.75	-20.80	20dBc AVG Fundamental
4925.00	H	50.45	---	1.14	51.59	---	74.00	54.00	-2.41	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).
7. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.



Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode / CH Low

Test Date: July 12, 2010

Temperature: 23°C

Tested by: Ming Chen

Humidity: 51 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2422.00	V	104.18	95.21	-2.93	101.25	92.28	Fundamental			
1616.67	V	59.62	---	-7.68	51.94	---	74.00	54.00	-2.06	Peak
3233.33	V	62.47	60.55	-1.16	61.31	59.39	81.25	72.28	-12.89	20dBc AVG Fundamental
4841.67	V	50.07	---	1.17	51.25	---	74.00	54.00	-2.75	Peak
N/A										
2422.00	H	100.41	90.12	-2.91	97.50	87.21	Fundamental			
1613.33	H	59.47	---	-7.72	51.75	---	74.00	54.00	-2.25	Peak
3233.33	H	55.96	53.25	-1.16	54.80	52.09	77.50	67.21	-15.12	20dBc AVG Fundamental
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).
7. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.



Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode / CH Mid

Test Date: July 12, 2010

Temperature: 23°C

Tested by: Ming Chen

Humidity: 51 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2437.00	V	103.84	94.31	-2.86	100.98	91.45	Fundamental			
1623.33	V	59.61	---	-7.62	51.99	---	74.00	54.00	-2.01	Peak
3250.00	V	62.47	60.28	-1.16	61.31	59.12	80.98	71.45	-12.33	20dBc AVG Fundamental
4883.33	V	50.82	---	1.16	51.98	---	74.00	54.00	-2.02	Peak
N/A										
2437.00	H	100.49	90.39	-2.83	97.66	87.56	Fundamental			
1623.33	H	59.38	---	-7.62	51.76	---	74.00	54.00	-2.24	Peak
3250.00	H	52.57	---	-1.16	51.41	---	77.66	67.56	-26.25	20dBc Peak Fundamental
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).
7. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.



Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode / CH High

Test Date: July 12, 2010

Temperature: 23°C

Tested by: Ming Chen

Humidity: 51 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1633.33	V	59.35	---	-7.53	51.82	---	74.00	54.00	-2.18	Peak
3266.67	V	57.20	53.06	-1.16	56.04	51.90	74.00	54.00	-2.10	AVG
4916.67	V	50.48	---	1.15	51.62	---	74.00	54.00	-2.38	Peak
N/A										
2452.00	H	100.03	91.08	-2.83	97.20	88.25	Fundamental			
1633.33	H	59.30	---	-7.53	51.77	---	74.00	54.00	-2.23	Peak
3266.67	H	52.35	---	-1.16	51.20	---	77.20	68.25	-26.00	20dBc Peak Fundamental
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).
7. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power; based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.



7.7 POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.



TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Test Data

Operation Mode: Normal Link **Test Date:** June 7, 2010
Temperature: 20°C **Tested by:** Howard Pang
Humidity: 62% RH

Freq. (MHz)	QP Reading (dBuV)	AV Reading (dBuV)	Corr. factor (dB/m)	QP Result (dBuV/m)	AV Result (dBuV/m)	QP Limit (dBuV)	AV Limit (dBuV)	QP Margin (dB)	AV Margin (dB)	Note
0.1500	31.78	18.41	10.90	42.68	29.31	65.99	55.99	-23.31	-26.68	L1
1.9500	29.19	15.35	10.64	39.83	25.99	56.00	46.00	-16.17	-20.01	L1
4.2300	27.22	12.29	10.69	37.91	22.98	56.00	46.00	-18.09	-23.02	L1
9.5060	31.11	26.41	10.80	41.91	37.21	60.00	50.00	-18.09	-12.79	L1
14.2740	30.96	26.09	10.90	41.86	36.99	60.00	50.00	-18.14	-13.01	L1
18.2420	28.26	22.30	10.97	39.23	33.27	60.00	50.00	-20.77	-16.73	L1
0.3100	28.23	19.66	10.58	38.81	30.24	59.97	49.97	-21.16	-19.73	L2
4.2220	26.80	10.83	10.62	37.42	21.45	56.00	46.00	-18.58	-24.55	L2
9.5060	29.12	25.60	10.73	39.85	36.33	60.00	50.00	-20.15	-13.67	L2
14.2740	30.76	25.26	10.83	41.59	36.09	60.00	50.00	-18.41	-13.91	L2
18.2420	27.72	20.80	10.91	38.63	31.71	60.00	50.00	-21.37	-18.29	L2
29.2340	26.62	21.24	11.09	37.71	32.33	60.00	50.00	-22.29	-17.67	L2


Remark:

1. *Measuring frequencies from 0.15 MHz to 30MHz.*
2. *The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.*
3. *The IF bandwidth of SPA between 0.15MHz and 30MHz was 10 kHz; the IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9 kHz;*
4. *L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)*



Test Plots

Conducted emissions (Line 1)

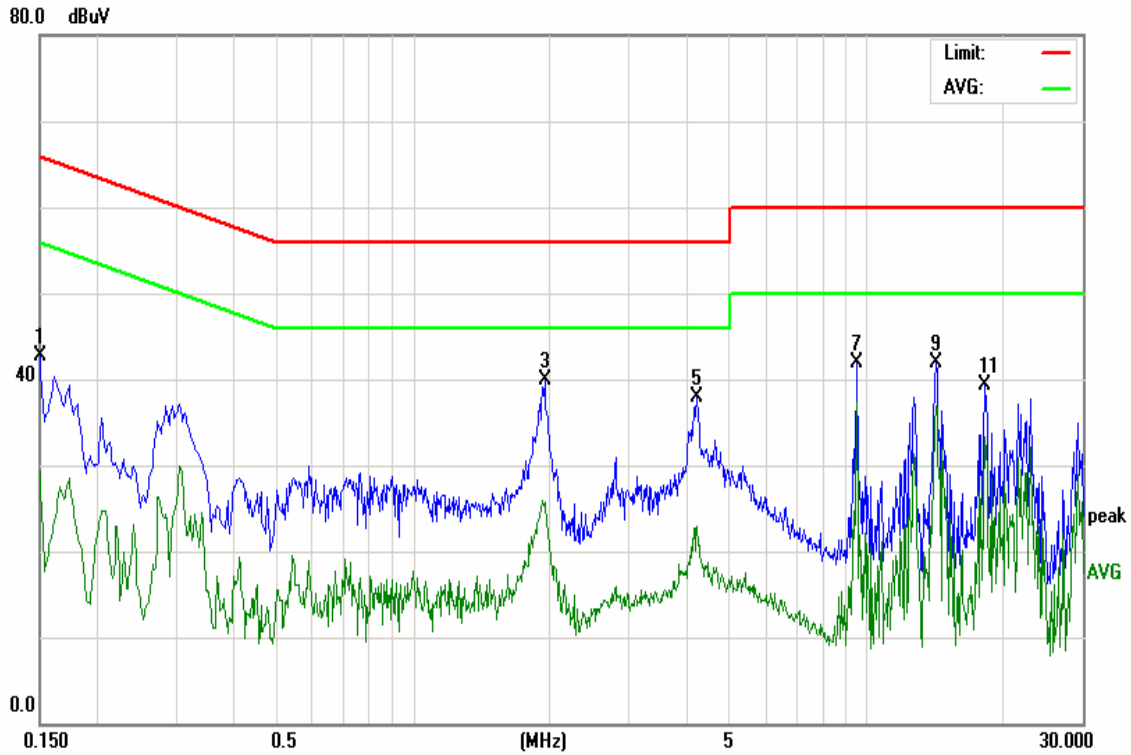

Conducted emissions (Line 2)

