

# FCC Co-Location Test Report

**FCC ID** : P27RP362M  
**Equipment** : AC2100 Wi-Fi Mesh Extender ;  
AC2100 Wi-Fi Mesh Router  
**Model No.** : RP362M ; IP3421M  
**Multiple Listing** : Refer to item 1.1.1 for more details  
**Brand Name** : Sercomm  
**Applicant** : Sercomm Corporation  
**Address** : 8F, No. 3-1, YuanQu St., NanKang, Taipei 115,  
Taiwan, R.O.C.  
**Standard** : 47 CFR FCC Part 15.247  
47 CFR FCC Part 15.407  
**Received Date** : Feb. 12, 2020  
**Tested Date** : Mar. 04 ~ Mar. 24, 2020

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:

  
Along Chen / Assistant Manager

Approved by:

  
Gary Chang / Manager



---

## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Information.....	5
1.2	The Equipment List .....	6
1.3	Test Standards .....	7
1.4	Deviation from Test Standard and Measurement Procedure.....	7
1.5	Measurement Uncertainty .....	7
<b>2</b>	<b>TEST CONFIGURATION.....</b>	<b>7</b>
2.1	Testing Condition .....	8
2.2	The Worst Test Modes and Channel Details .....	8
<b>3</b>	<b>TRANSMITTER TEST RESULTS .....</b>	<b>9</b>
3.1	Unwanted Emissions into Restricted Frequency Bands .....	9
<b>4</b>	<b>TEST LABORATORY INFORMATION .....</b>	<b>18</b>

---

## Release Record

Report No.	Version	Description	Issued Date
FR021202CO	Rev. 01	Initial issue	Apr. 22, 2020

## Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.247(d) 15.407(b) 15.209	Radiated Emissions	[dBuV/m at 3m]: 52.44MHz 36.31 (Margin -3.69dB) - PK	Pass

### Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

### Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

# 1 General Description

## 1.1 Information

### 1.1.1 Product Details

The following models are provided to this EUT.

Brand Name	Model Name	Product Name	Description
Sercomm	RP362MXXXXXXXXXX	AC2100 Wi-Fi Mesh Extender	FW: v1.00.01 supports 2 LANs. Indoor AP / Client
Sercomm	IP3421MXXXXXXXXXX	AC2100 Wi-Fi Mesh Router	FW: v1.00.00.001 supports 1 WAN & 1 LAN Indoor AP
<ul style="list-style-type: none"> <li>✦ the 1st X should be "blank" or "-"; the rest X could be 0 to 9, A to Z, "blank", "-" or "/" , for marketing purpose.</li> <li>✦ The above models used the same hardware but with the different firmware.</li> <li>✦ The above models, model <b>RP362M</b> and <b>IP3421M</b> were selected as a representative one for the final test</li> </ul>			

### 1.1.2 Specification of the Equipment under Test (EUT)

WLAN	
Operating Frequency	802.11b/g/n: 2412 MHz ~ 2462 MHz 802.11a/n/ac: 5180 MHz ~ 5240 MHz, 5745 ~ 5825 MHz
Modulation Type	802.11b: DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n/ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)

### 1.1.3 Antenna Details

Ant. No.	Model	Type	Connector	Operating Frequency (MHz) / Gain (dBi)		
				2400~2483.5	5150~5250	5725~5850
1	Dual Ant 1	Dipole	i-pex	2.32	2.03	2.45
2	Dual ANT 2	Dipole	i-pex	2.22	2.24	2.59
3	Wi Fi 5G Ant 1	PIFA	N/A	--	2.35	2.5
4	Wi Fi 5G Ant 2	PIFA	N/A	--	2.29	2.66

### 1.1.4 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	12Vdc from AC adapter
-------------------	-----------------------

## 1.2 The Equipment List

Test Item	Radiated Emission				
Test Site	966 chamber 3 / (03CH03-WS)				
Tested Date	Mar. 04 ~ Mar. 24, 2020				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101499	Jan. 09, 2020	Jan. 08, 2021
Receiver	R&S	ESR3	101657	Feb. 14, 2020	Feb. 13, 2021
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-685	Apr. 17, 2019	Apr. 16, 2020
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1206	Dec. 27, 2019	Dec. 26, 2020
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 15, 2019	Nov. 14, 2020
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 13, 2019	Nov. 12, 2020
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 07, 2019	Oct. 06, 2020
Preamplifier	EMC	EMC02325	980187	Aug. 14, 2019	Aug. 13, 2020
Preamplifier	Agilent	83017A	MY53270014	Aug. 07, 2019	Aug. 06, 2020
Preamplifier	EMC	EMC184045B	980192	Aug. 01, 2019	Jul. 31, 2020
RF cable-3M	HUBER+SUHNER	SUCOFLEX104	MY22620/4	Sep. 27, 2019	Sep. 26, 2020
RF cable-8M	EMC	EMC104-SM-SM-80 00	181107	Sep. 27, 2019	Sep. 26, 2020
RF cable-1M	HUBER+SUHNER	SUCOFLEX104	MY22624/4	Sep. 27, 2019	Sep. 26, 2020
LF cable-0.8M	EMC	EMC8D-NM-NM-800	EMC8D-NM-NM-800 -001	Sep. 27, 2019	Sep. 26, 2020
LF cable-3M	EMC	EMC8D-NM-NM-300 0	131103	Sep. 27, 2019	Sep. 26, 2020
LF cable-13M	EMC	EMC8D-NM-NM-130 00	131104	Sep. 27, 2019	Sep. 26, 2020
Measurement Software	AUDIX	e3	6.120210g	NA	NA

Note: Calibration Interval of instruments listed above is one year.

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Tested Date	Mar. 04 ~ Mar. 24, 2020				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101063	Apr. 17, 2019	Apr. 16, 2020
Power Meter	Anritsu	ML2495A	1241002	Oct. 23, 2019	Oct. 22, 2020
Power Sensor	Anritsu	MA2411B	1207366	Oct. 23, 2019	Oct. 22, 2020
Signal Generator	R&S	SMB100A	175727	Dec. 27, 2019	Dec. 26, 2020
AC POWER SOURCE	APC	AFC-500W	F312060012	Dec. 02, 2019	Dec. 01, 2020
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA

Note: Calibration Interval of instruments listed above is one year.

### 1.3 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247

47 CFR FCC Part 15.407

ANSI C63.10-2013

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01

FCC KDB 412172 D01 Determining ERP and EIRP v01r01

### 1.4 Deviation from Test Standard and Measurement Procedure

None

### 1.5 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ( $k=2$ )).

Measurement Uncertainty	
Parameters	Uncertainty
Radiated emission $\leq$ 1GHz	$\pm 3.96$ dB
Radiated emission $>$ 1GHz	$\pm 4.51$ dB

## 2 Test Configuration

### 2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
Radiated Emissions	03CH03-WS	20-22°C / 63-67%	Roger Lu
Conducted Emissions	TH01-WS	20-22°C / 63-67%	Roger Lu

- FCC Designation No.: TW0009
- FCC site registration No.: 207696
- ISED#: 10807A
- CAB identifier: TW2732

### 2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Channel	Data Rate	Test Configuration
Radiated Emissions ≤1GHz	2.4G 11n 20 + 5G 11ac VHT40	CH6 + CH159	MCS 0 + MCS 0	1, 2
Radiated Emissions >1GHz	2.4G 11n 20 + 5G 11ac VHT40	CH6 + CH159		1
Conducted Emissions	2.4G 11n 20 + 5G 11ac VHT40	CH6 + CH159		1
		CH6 + CH159		1

**NOTE:**

1. The selected channel is the maximum power channel of Wi-Fi mode.
2. The adapter have two configurations (with Y capacitor / without Y capacitor) had been covered during the pretest, and found that without Y was the worst case and was selected for final test.
3. Thee EUT had been tested by following test configurations.  
 Configuration 1 , Model name: IP3421M  
 Configuration 2 , Model name: RP362M



### 3 Transmitter Test Results

#### 3.1 Unwanted Emissions into Restricted Frequency Bands

##### 3.1.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

**Note 1:**  
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

**Note 2:**  
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

##### 3.1.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m.
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

**Note:**


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

### 3.1.3 Test Setup


#### Radiated Emissions below 1 GHz

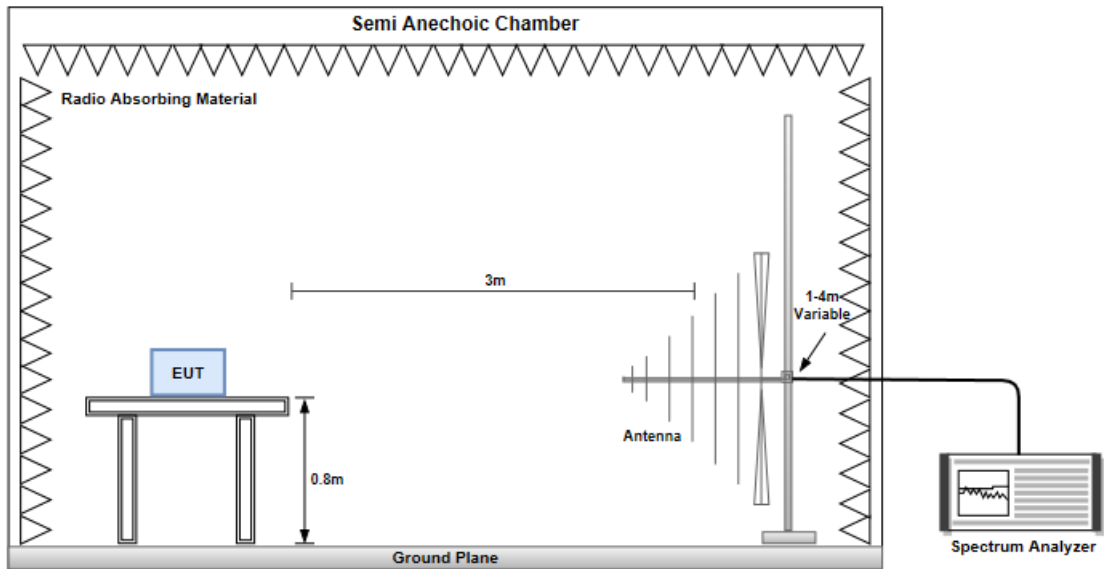

#### Radiated Emissions above 1 GHz

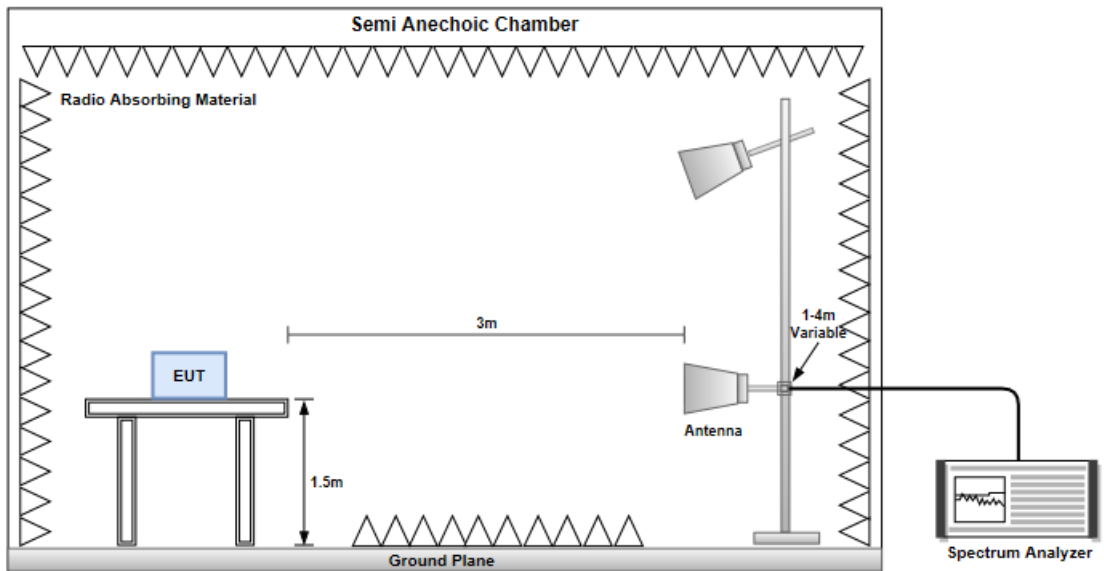


#### Transmitter Conducted Unwanted Emissions (30MHz~40GHz)

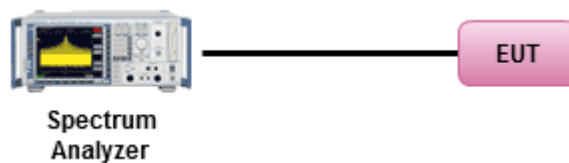

### 3.1.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

<b>Modulation</b>	2.4G 11n 20 + 5G 11ac VHT40	<b>Test Channel</b>	CH6 + CH159
<b>Polarization</b>	Horizontal	<b>Test Configuration</b>	1

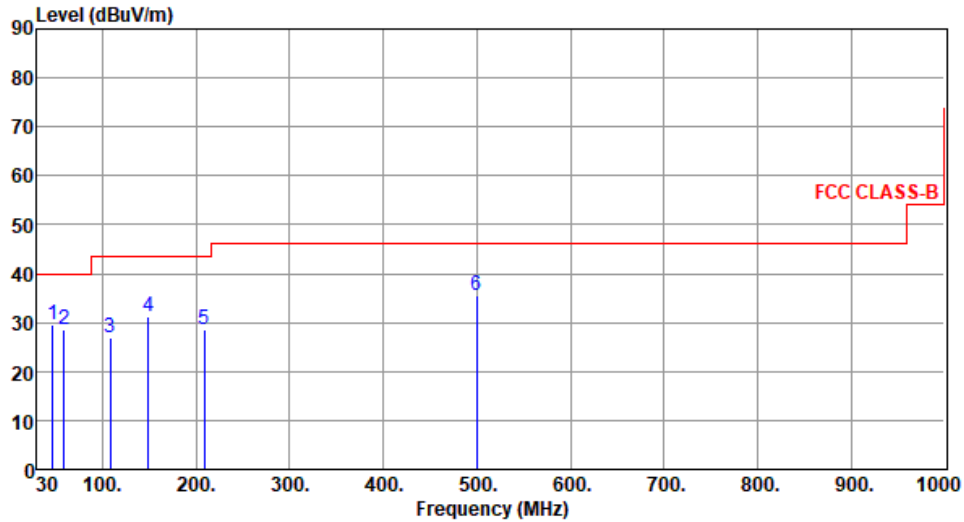

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	46.49	29.59	40.00	-10.41	38.19	-8.60	Peak	---	---
2	59.10	28.60	40.00	-11.40	37.82	-9.22	Peak	---	---
3	108.57	26.89	43.50	-16.61	39.12	-12.23	Peak	---	---
4	149.31	31.28	43.50	-12.22	40.03	-8.75	Peak	---	---
5	208.48	28.44	43.50	-15.06	40.49	-12.05	Peak	---	---
6	499.48	35.62	46.00	-10.38	38.67	-3.05	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Modulation</b>	2.4G 11n 20 + 5G 11ac VHT40	<b>Test Channel</b>	CH6 + CH159
<b>Polarization</b>	Vertical	<b>Test Configuration</b>	1

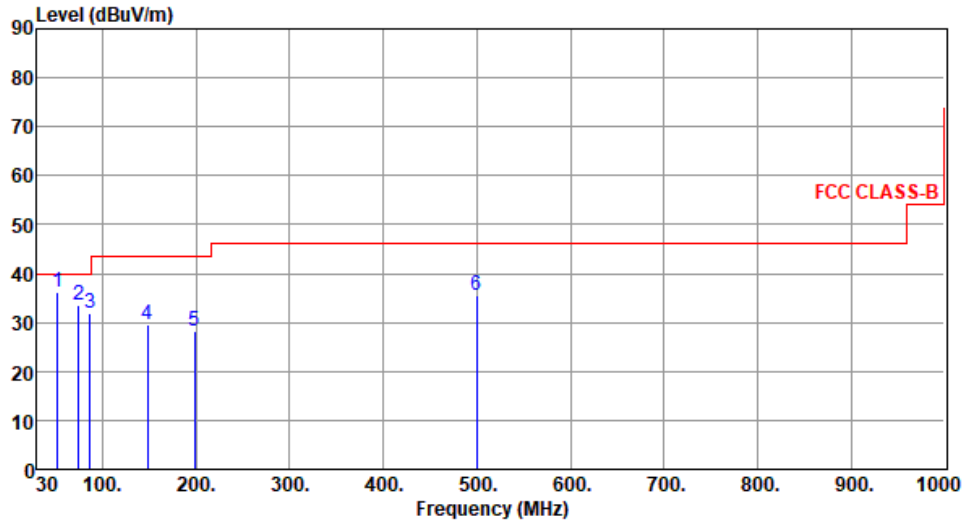

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	52.31	36.23	40.00	-3.77	44.93	-8.70	Peak	---	---
2	74.62	33.61	40.00	-6.39	45.49	-11.88	Peak	---	---
3	86.26	32.01	40.00	-7.99	46.56	-14.55	Peak	---	---
4	148.34	29.53	43.50	-13.97	38.28	-8.75	Peak	---	---
5	198.78	28.34	43.50	-15.16	40.23	-11.89	Peak	---	---
6	499.48	35.62	46.00	-10.38	38.67	-3.05	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Modulation</b>	2.4G 11n 20 + 5G 11ac VHT40	<b>Test Channel</b>	CH6 + CH159
<b>Polarization</b>	Horizontal	<b>Test Configuration</b>	2

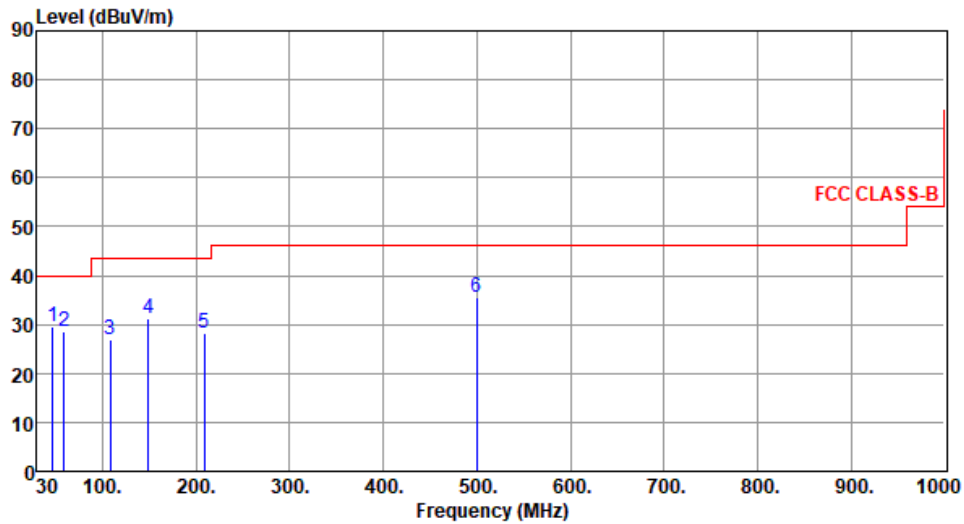

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	46.55	29.45	40.00	-10.55	38.05	-8.60	Peak	---	---
2	59.22	28.49	40.00	-11.51	37.72	-9.23	Peak	---	---
3	108.61	26.75	43.50	-16.75	38.97	-12.22	Peak	---	---
4	149.33	31.36	43.50	-12.14	40.11	-8.75	Peak	---	---
5	208.50	28.34	43.50	-15.16	40.39	-12.05	Peak	---	---
6	499.55	35.54	46.00	-10.46	38.59	-3.05	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Modulation</b>	2.4G 11n 20 + 5G 11ac VHT40	<b>Test Channel</b>	CH6 + CH159
<b>Polarization</b>	Vertical	<b>Test Configuration</b>	2

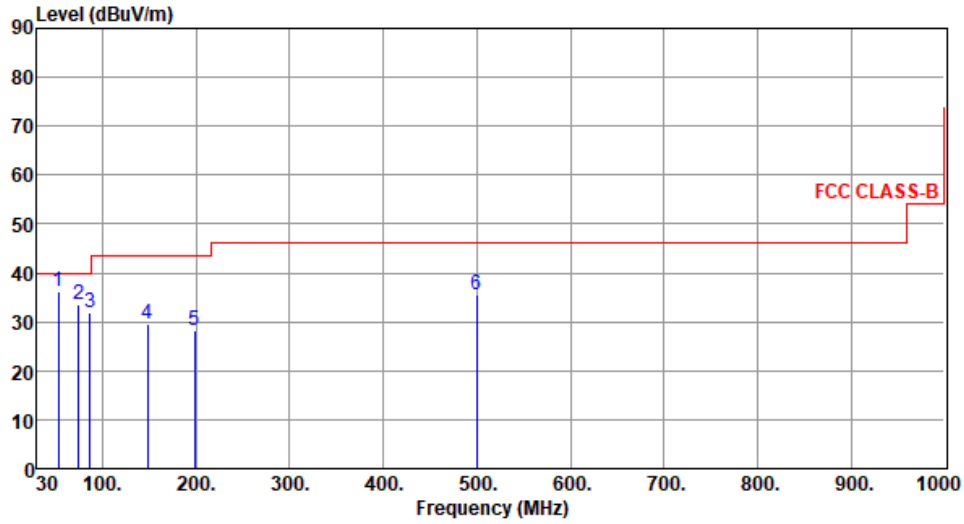

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	52.44	36.31	40.00	-3.69	45.00	-8.69	Peak	---	---
2	74.58	33.54	40.00	-6.46	45.42	-11.88	Peak	---	---
3	86.31	32.02	40.00	-7.98	46.58	-14.56	Peak	---	---
4	148.42	29.42	43.50	-14.08	38.17	-8.75	Peak	---	---
5	198.66	28.33	43.50	-15.17	40.22	-11.89	Peak	---	---
6	499.54	35.57	46.00	-10.43	38.62	-3.05	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

### 3.1.5 Transmitter Radiated Unwanted Emissions (Above 1GHz)

<b>Modulation</b>	2.4G 11n 20 + 5G 11ac VHT40	<b>Test Channel</b>	CH6 + CH159
<b>Polarization</b>	Horizontal	<b>Test Configuration</b>	1

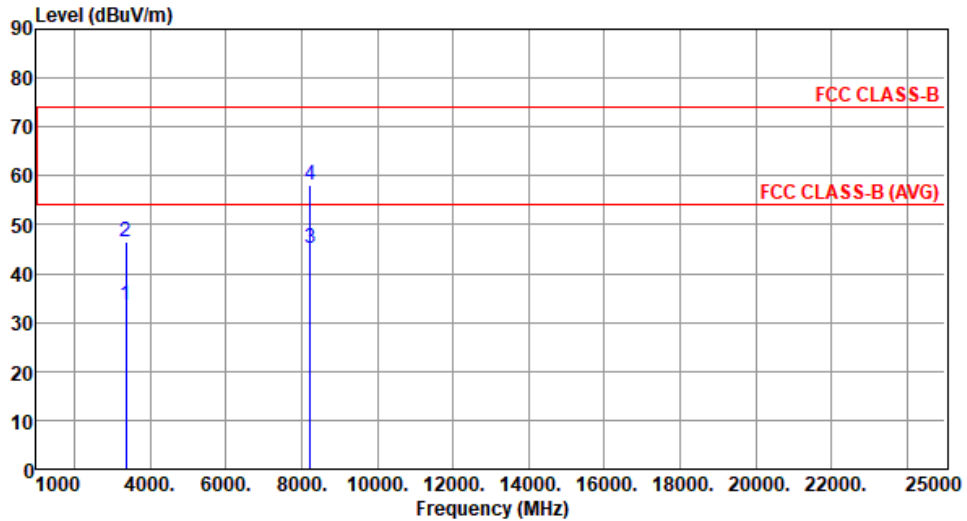


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3358.00	33.40	54.00	-20.60	31.28	2.12	Average	155	111
2	3358.00	46.47	74.00	-27.53	44.35	2.12	Peak	155	111
3	8232.00	45.06	54.00	-8.94	32.69	12.37	Average	156	121
4	8232.00	58.10	74.00	-15.90	45.73	12.37	Peak	156	121

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	2.4G 11n 20 + 5G 11ac VHT40	<b>Test Channel</b>	CH6 + CH159
<b>Polarization</b>	Vertical	<b>Test Configuration</b>	1

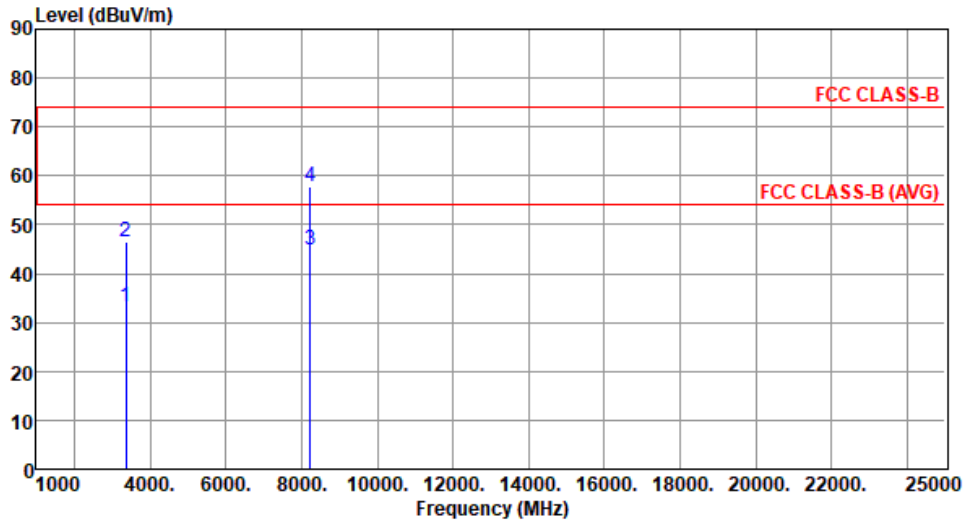

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3358.00	33.27	54.00	-20.73	31.15	2.12	Average	196	125
2	3358.00	46.49	74.00	-27.51	44.37	2.12	Peak	196	125
3	8232.00	44.75	54.00	-9.25	32.38	12.37	Average	186	135
4	8232.00	57.76	74.00	-16.24	45.39	12.37	Peak	186	135



Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



### 3.1.6 Conducted Emissions (30MHz~40GHz)

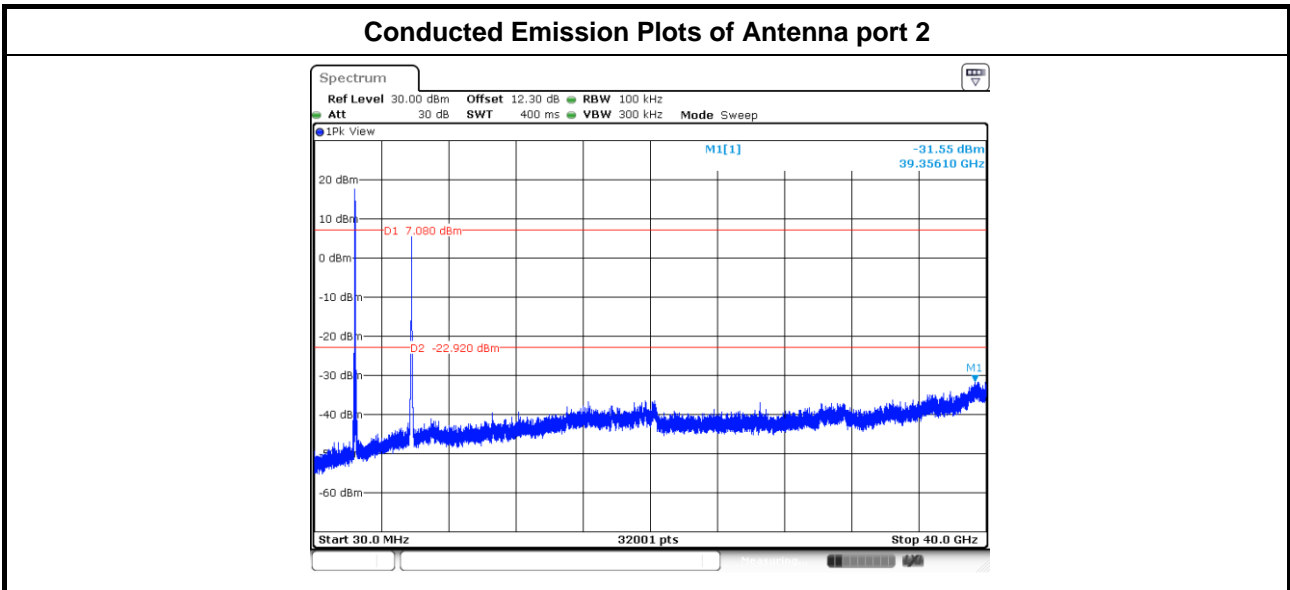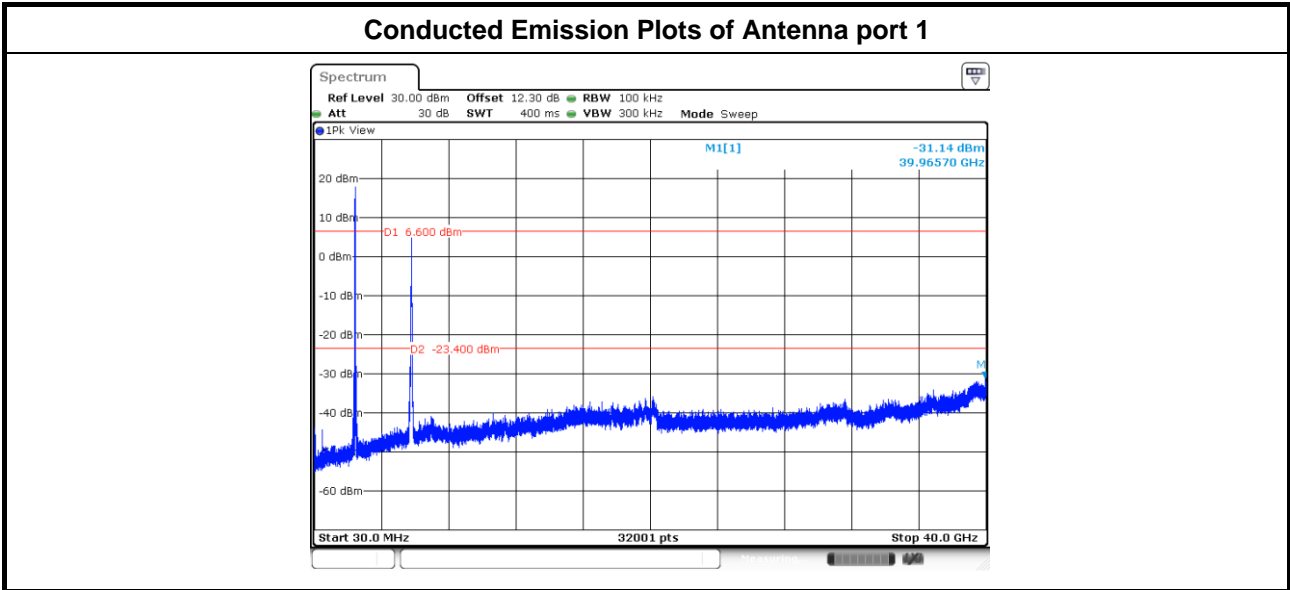

## 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

### **Linkou**

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin  
Kou District, New Taipei City,  
Taiwan, R.O.C.

### **Kwei Shan**

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd St.,  
Kwei Shan District, Tao Yuan City  
333, Taiwan, R.O.C.

### **Kwei Shan Site II**

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd  
St., Kwei Shan District, Tao Yuan  
City 333, Taiwan, R.O.C..

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC\_Service@icertifi.com.tw

==END==