

An IIA Company

## Test Report - FCC PART 90 Booster Class A (B9A)

Prepared For: Fiplex Communications Inc.

Approved for Release By:

Signature: Bruno Clavier

Name & Title: Bruno Clavier, General Manager

Date of Signature

(YYYY-MM-DD): 2021-06-10

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA). This test report relates only to the items tested as identified and is not valid for any subsequent changes or modifications made to the equipment under test.



Table of Contents

<b>1.</b>	<b>CUSTOMER INFORMATION.....</b>	<b>4</b>
1.1	TEST RESULT SUMMARY .....	4
<b>2.</b>	<b>LOCATION OF TESTING .....</b>	<b>7</b>
2.1	TEST LABORATORY.....	7
2.2	TESTING WAS PERFORMED, REVIEWED BY .....	7
<b>3.</b>	<b>TEST SAMPLE(S) (EUT/DUT).....</b>	<b>8</b>
3.1	DEFINITIONS .....	8
3.2	DESCRIPTION OF THE EUT .....	9
3.3	CONFIGURATION OF EUT .....	10
3.4	TEST SETUP OF EUT .....	10
<b>4.</b>	<b>TEST METHODS &amp; APPLICABLE REGULATORY LIMITS.....</b>	<b>11</b>
4.1	TEST METHODS/STANDARDS/GUIDANCE:.....	11
4.2	APPLIED LIMITS AND REGULATORY LIMITS:.....	11
<b>5.</b>	<b>MEASUREMENT UNCERTAINTY.....</b>	<b>11</b>
<b>6.</b>	<b>ENVIRONMENTAL CONDITIONS .....</b>	<b>11</b>
6.1	TEMPERATURE & HUMIDITY .....	11
<b>7.</b>	<b>LIST OF TEST EQUIPMENT AND TEST FACILITY.....</b>	<b>12</b>
7.1	LIST OF TEST EQUIPMENT .....	12
<b>8.</b>	<b>TEST RESULTS .....</b>	<b>13</b>
8.1	POWER AT THE FINAL AMPLIFIER.....	14
8.2	RF OUTPUT POWER & GAIN.....	15
8.3	OUT-OF-BAND REJECTION.....	16
8.3.1	VHF Band, Uplink.....	18
8.4	BANDWIDTH & EMISSION .....	20
8.5	INPUT VS OUTPUT SIGNAL COMPARISON .....	21
8.5.1	12.5 kHz FM .....	22
8.5.2	25 kHz FM.....	23
8.5.3	C4FM.....	24
8.5.4	H-CPM.....	25
8.5.5	H-DQPSK .....	26
8.5.1	12.5 kHz FM, Uplink, AGC.....	27
8.5.2	12.5 kHz FM, Uplink, AGC +3dB .....	28
8.5.3	C4FM, Uplink, AGC.....	29
8.5.4	C4FM, Uplink, AGC +3dB.....	30
8.5.5	H-CPM, Uplink, AGC.....	31
8.5.6	H-CPM, Uplink, AGC +3dB .....	32
8.5.7	H-DQPSK, Uplink, AGC.....	33
8.5.8	H-DQPSK, Uplink, AGC +3dB .....	34



8.5.9	12.5 kHz FM, Uplink, AGC.....	35
8.5.10	12.5 kHz FM, Uplink, AGC +3dB.....	36
8.5.11	25 kHz FM, Uplink, AGC.....	37
8.5.12	25 kHz FM, Uplink, AGC +3dB.....	38
8.5.13	C4FM, Uplink, AGC.....	39
8.5.14	C4FM, Uplink, AGC +3dB.....	40
8.5.15	H-CPM, Uplink, AGC.....	41
8.5.16	H-CPM, Uplink, AGC +3dB.....	42
8.5.17	H-DQPSK, Uplink, AGC.....	43
8.5.18	H-DQPSK, Uplink, AGC +3dB.....	44
8.6	NOISE FIGURE.....	45
8.7	OUT-OF-BAND/OUT-OF-BLOCK EMISSIONS (INTERMODULATION PRODUCTS).....	46
8.7.1	12.5 kHz Signal, Uplink, AGC.....	47
8.7.2	12.5 kHz Signal, Uplink, AGC +3dB.....	48
8.7.3	25 kHz Signal, Uplink, AGC.....	49
8.7.4	25 kHz Signal, Uplink, AGC +3dB.....	50
8.7.5	12.5 kHz Signal, Uplink, AGC.....	51
8.7.6	12.5 kHz Signal, Uplink, AGC +3dB.....	52
8.7.7	25 kHz Signal, Uplink, AGC.....	53
8.7.8	25 kHz Signal, Uplink, AGC +3dB.....	54
8.8	EMISSION MASK, OUT-OF-BAND.....	55
8.8.1	30 MHz to 1 GHz, VHF Band Uplink.....	56
8.8.2	1 GHz to 10 <sup>th</sup> Harmonic, VHF Band Uplink.....	57
8.8.3	30 MHz to 1 GHz, UHF Band Uplink.....	58
8.8.4	1 GHz to 10 <sup>th</sup> Harmonic, UHF Band Uplink.....	59
8.9	SPURIOUS RADIATED EMISSIONS.....	60
8.9.1	VHF Uplink.....	61
8.9.2	UHF Uplink.....	61
8.10	MODULATION CHARACTERISTICS.....	62
8.11	FREQUENCY STABILITY.....	63
8.12	TRANSIENT FREQUENCY BEHAVIOR.....	64
8.13	ADJACENT CHANNEL POWER LIMITS.....	65
9.	PHOTOGRAPHS OF THE EUT.....	66
10.	TEST SETUP PHOTOGRAPHS.....	66
11.	HISTORY OF TEST REPORT CHANGES.....	66



## 1. Customer Information

**Applicant:** Fiplex Communications Inc.  
**Address:** 2101 NW 79th Ave.  
Miami FL 33122

### 1.1 Test Result Summary

The following test procedure and guidance were used for measuring FCC PART 90 (PRIVATE LAND MOBILE RADIO SERVICES) known as Licensed Land Mobile; ANSI C63.26-2015 and FCC KDB 935210 D05 v01r04 Industrial Signal Boosters. Full test results are available in this report.

No additions to the test methods were needed. There were no deviations, or exclusions from the test methods. No test results are from external providers or from the customer. The test results relate only to the items tested. Timco does not offer opinions and interpretations, only a pass/fail statement.

The Following is for Test item FCC ID: P3TDH14-9A

Applicable Clauses from Part 2		
FCC Part 2 Clauses	Description of the requirements	Result: (Pass, Fail, N/A)
2.202	Bandwidth & Emission	Pass
2.1033 (c)(8)	Power at the Final Amplifier	Pass
2.1046 (a)	RF Output Power	Pass
2.1047	Modulation characteristics	n/a
2.1049	Occupied Bandwidth	Pass
2.1051	Spurious emissions at antenna terminals	Pass
2.1053	Field strength of spurious radiation	Pass
2.1055	Frequency stability	n/a



Applicable Clauses from Part 90 Subpart I		
FCC Part 90 Clauses	Description of the requirements	Result: (Pass, Fail, N/A)
90.205	Transmitter Power	Pass
90.207	Types of Emissions	Pass
90.209	Bandwidth limitations	Pass
90.210	Emission masks, In-band	Pass
90.210	Emission masks, Out-of-band	Pass
90.213	Frequency stability	n/a
90.214	Transient Frequency Behavior	n/a
90.219 (d)(6)(i)	ERP of intermodulation products	n/a <sup>1</sup>
90.219 (d)(6)(ii)	ERP of noise within the passband	n/a <sup>1</sup>
90.219 (d)(6)(iii)	ERP of noise on spectrum < 1 MHz outside of the passband	n/a <sup>1</sup>
90.219 (d)(3)(i), (e)(1)	ERP of Radiated Power	n/a <sup>1</sup>
90.219 (e)(2)	Noise figure	Pass
90.219 (e)(3)	Spurious emissions	Pass
90.219 (e)(4)(i)(ii)(iii)	Retransmitted Signals	Pass
90.221	Adjacent channel power limits	n/a

**Note 1:** Requirements in Part 90.219 (d) apply at deployment of this EUT, therefore are not applicable at certification.

KDB 935210 D05 v01r04		
FCC KDB 935210 D05 Clauses	Description of the requirements	Result: (Pass, Fail, N/A)
4.1	Test Signals for PLMRS (Input Signals)	Pass
4.2	AGC Threshold	Reported
4.3	Out-of-Band Rejection	Reported
4.4	Input-versus-Output Signal Comparison	Pass
4.5	Output Power	Pass
4.5	Amplifier/Booster Gain (optional)	Reported
4.6	Noise Figure	Pass
4.7.2	Out-of-band/Out-of-block Conducted Emissions (Intermodulation Products)	Pass
4.7.3	EUT Spurious Conducted Emissions	Pass
4.8	Frequency Stability	n/a
4.9	Spurious Radiated Emissions	Pass



KDB 484596 D01 v01		
FCC KDB 935210 D05 Clauses	Description of the requirements	Result: (Pass, Fail, N/A)
3 a	Introduction	Reported
3 b	Explain the Differences	Reported
3 c	Spot-check Verification Data	Pass
3 d	Reference Section	Reported

## Introduction

Equipment classes B9A and B9B are not allowed to be filed under the same FCC ID. However, FCC ID P3TDH14-9A is electrically identical to FCC ID P3TDH14-9B. The EUT uses software to limit the passband, converting the EUT from a Class B Industrial Signal Booster into a Class A Industrial Signal Booster. The test data is valid to be re-used due to the Class B operation of the EUT being worst-case in all aspects. The Class A operation represented in this filing was equal or more compliant with FCC Part 90 in all respects. Therefore all testing is to be considered identical, and has been re-used following the guidelines of KDB 484596.

## Explain the Differences

FCC ID P3TDH14-9A is electrically identical to FCC ID P3TDH14-9B and has no difference in hardware. The EUT uses software to limit the passband from widths equal to or greater than 75 kHz to widths less than 75 kHz.

## Spot-Check Verification Data

Please see sections Out-of-Band Rejection and Spurious Radiated Emissions in this report for Spot-Check data.

## Reference Section

All original test data is from FCC ID P3TDH14-9B, test report "TR\_2117-21\_FCC\_UL\_PT90\_Booster Class B\_".



Timco Engineering, Inc., an IIA Company  
 849 NW State Road 45, Newberry, Florida 32669  
 (352) 472-5500 / [testing@timcoengr.com](mailto:testing@timcoengr.com)

## 2. Location of Testing

### 2.1 Test Laboratory

Timco Engineering Inc. is a subsidiary of Industrial Inspection & Analysis, Inc. ("IIA").  
 Testing was performed at Timco's permanent laboratory located at 849 NW State Road 45, Newberry, Florida 32669

FCC test firm # 578780  
 FCC Designation # US1070  
 FCC site registration is under A2LA certificate # 0955.01  
 ISED Canada test site registration # 2056A  
 EU Notified Body # 1177  
 For all designations see A2LA scope # 0955.01

### 2.2 Testing was performed, reviewed by

Dates of Testing: May 03, 2021 – June 07, 2021

Signature: Terri Allen

Name & Title: Terri Allen, Technical Assistant

Date of Signature  
 (YYYY-MM-DD): 2021-06-10

Signature: 



Name & Title: Tim Royer, EMC Engineer

Date of Signature  
 (YYYY-MM-DD): 2021-06-10



Timco Engineering, Inc., an IIA Company  
849 NW State Road 45, Newberry, Florida 32669  
(352) 472-5500 / [testing@timcoengr.com](mailto:testing@timcoengr.com)

### 3. Test Sample(s) (EUT/DUT)

The test sample was received: February 12, 2021

#### 3.1 Definitions

*Signal booster:* A device or system that automatically receives, amplifies, and retransmits signals from wireless stations into and out of building interiors, tunnels, shielded outdoor areas and other locations where these signals would otherwise be too weak for reliable communications. Signal booster systems may contain both Class A and Class B signal boosters as components.

*Class A signal booster:* A signal booster designed to retransmit signals on one or more specific channels. A signal booster is deemed to be a Class A signal booster if none of its passbands exceed 75 kHz.

*Class B signal booster:* A signal booster designed to retransmit any signals within a wide frequency band. A signal booster is deemed to be a Class B signal booster if it has a passband that exceeds 75 kHz.





### 3.2 Description of the EUT

A description as well as unambiguous identification of the EUT(s) tested. Where more than one sample is required for technical reasons (such as the use of connected units for the purpose of conducted output power testing where the product units will have integral antennas), each specific test shall identify which unit was tested.

Identification	
FCC ID:	P3TDH14-9A
Brief Description	Enterprise DAS VHF/UHF HP - Master Unit
Type of Modular	n/a
Model(s) #	DH14EA-E4-AVUT-NDND-3037
Serial Number	20213254FU

Technical Characteristics	
Technology	DAS Industrial Signal Booster Master Unit
Frequency Range	150 – 174 MHz; and 450 - 470 MHz
RF O/P Power (Max.)	VHF UL: 22.26 dBm (0.16 W) UHF UL: 25.69 dBm (0.37 W)
Modulation	n/a
Bandwidth & Emission Class	11K3F3E, 8K10F1D, 8K10F1E, 8K10F1W, 9K80F1D, 9K80F1E, 9K81D7W
Number of Channels	Variable.
Duty Cycle	100%
Antenna Connector	n/a
Voltage Rating (AC or Batt.)	0 dBi

Antenna Characteristics				
Antenna Name	Frequency Range	Antenna Type	Dimensions	Antenna Gain
n/a	n/a	n/a	n/a	n/a

**Note:** This EUT does not include antenna(s).



### 3.3 Configuration of EUT

Test Modes		
Band	Link Direction	Test Frequencies
150.0 – 173.4 MHz	Uplink	150.80625 MHz
		162.1 MHz
		173.39375 MHz
450 – 512 MHz	Uplink	450.0125 MHz
		460 MHz
		511.9875 MHz

#### Operating conditions during Testing:

No other modifications of the device under test (including firmware, specific software settings, and input/output signal levels to the EUT) were made.

#### Peripherals used during Testing:

A laptop was used to control the EUT.

### 3.4 Test Setup of EUT

Equipment, antenna, and cable arrangement. The setup of the equipment and cable or wire placement on the test site that produces the highest radiated and the highest ac power line conducted emissions shall be shown clearly and described. Information on the orientation of portable equipment during testing shall be included. Drawings or photographs may be used for this purpose.

Test Setups are included in the test report.



#### 4. Test methods & Applicable Regulatory Limits

##### 4.1 Test methods/Standards/Guidance:

Test procedures and guidance for measuring Licensed Part 90 Licensed device:

- 1) ANSI C63.26-2015
- 2) FCC KDB 935210 D05 v01r04 Industrial Signal Boosters

##### 4.2 Applied Limits and Regulatory Limits:

- 1) FCC CFR 47 Part 90 Subpart I, 90.219

#### 5. Measurement Uncertainty

Parameter	Uncertainty (dB)
Conducted Emissions	± 3.14 dB
Radiated Emissions (9kHz – 30 MHz)	± 3.08 dB
Radiated Emissions (30 – 200 MHz)	± 2.16 dB
Radiated Emissions (200 – 1000 MHz)	± 2.15 dB
Radiated Emissions (1 GHz – 18 GHz)	± 2.14 dB
Radiated Emissions (18 GHz – 40 GHz)	± 2.31 dB
<b>Note:</b> The uncertainties provided in this table represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of K=2.	

#### 6. Environmental Conditions

##### 6.1 Temperature & Humidity

Measurements performed at the test site did not exceed the following:

Temperature	23 C +/- 5%
Humidity	55% +/- 5%
<b>Note:</b> Specific environmental conditions that are applicable to a specific test are available in the test result section.	



## 7. List of Test Equipment and Test Facility

The test equipment used identified by type, manufacturer, serial number, or other identification and the date on which the next calibration or service check is due.

Description of the firmware or software used to operate EUT for testing purposes.

A complete list of all test equipment used shall be included with the test report. The manufacturer's model and serial numbers, and date of last calibration, and calibration interval shall be included. Measurement cable loss, measuring instrument bandwidth and detector function, video bandwidth, if appropriate, and antenna factors shall also be included where applicable.

### 7.1 List of Test Equipment

Device	Manufacturer	Model	SN #	Current Cal	Cal Due
<a href="#">Signal Generator R&amp;S SMU-200A</a>	Rohde & Schwarz	SMU200A	103195	4/23/19	4/22/2022
<a href="#">Sweep/Signal Generator</a>	Anritsu	68369B	985112	1/19/21	1/19/2024
<a href="#">Digital Multimeter</a>	Fluke	77	35053830	9/9/20	9/9/2023
<a href="#">R&amp;S 18 GHz USB Peak Power Sensor</a>	Rohde & Schwarz	NRP-Z85	1411.7501.02-102085-VV	2/4/19	2/3/2022
<a href="#">Active Loop</a>	ETS-Lindgren	6502	00062529	10/20/20	10/20/2023
<a href="#">Biconical 1057</a>	Eaton	94455-1	1057	10/16/20	10/16/2023
<a href="#">Log-Periodic 1243</a>	Eaton	96005	1243	5/4/21	5/3/2024
<a href="#">Double-Ridged Horn/ETS Horn 1</a>	ETS-Lindgren	3117	00035923	2/25/20	2/24/2023
<a href="#">CHAMBER</a>	Panashield	3M	N/A	3/12/19	3/11/2022
<a href="#">Frequency Counter Small</a>	HP	5385A	3242A07460	9/9/20	9/9/2023
<a href="#">Type K J Thermometer</a>	Martel	303	080504494	1/18/20	1/17/2023
<a href="#">EMI Test Receiver R&amp;S ESU 40</a>	Rohde & Schwarz	ESU 40	100320	8/28/18	8/27/2021

Type	Device	Manufacturer	Model	SN #	Last Verified
Attenuator	N 20dB 20W DC-4G	Narda	766-20	0605	1/6/21
Attenuator	N 20dB 2W DC-13G	Narda	757C	30201	1/6/21
Coaxial Cable	BMBM-0061-01 RG400	Pasternack	PE3582LF-24	BMBM-0061-01	1/6/21
Coaxial Cable	BMBM-0061-02 RG400	Pasternack	PE3582LF-24	BMBM-0061-02	1/6/21
Coaxial Cable	BMBM-0061-03 RG400	Pasternack	PE3582LF-24	BMBM-0061-03	1/6/21
Coaxial Cable	BMBM-0061-04 RG400	Pasternack	PE3582LF-24	BMBM-0061-04	1/6/21
Coaxial Cable	BMBM-0122-01 RG400	Pasternack	PE3582LF-48	BMBM-0122-01	1/6/21
Coaxial Cable	BMBM-0122-02 RG400	Pasternack	PE3582LF-48	BMBM-0122-02	1/6/21
Coaxial Cable	BMBM-0122-03 RG400	Pasternack	PE3582LF-48	BMBM-0122-03	1/6/21
Coaxial Cable	BMBM-0122-04 RG400	Pasternack	PE3582LF-48	BMBM-0122-04	1/6/21
Coaxial Cable	Chamber 3 cable set (backup)	Micro-Coax	Chamber 3 cable set (backup)	KMKM-0244-02 ; KMKM-0670-0	1/6/21
Combiner	Splitter/Combiner 1-1000MHz	Mini-Circuits	ZFSC-4-1-BNC+	U115700825	1/6/21
Combiner	Splitter/Combiner 1-1000MHz	Mini-Circuits	ZFSC-4-1-BNC+	U115700826	1/6/21
Noise Source	Noise Source 10MHz - 18GHz	Agilent	346B	MY44421884	1/6/21
Terminator	Terminator N 20W DC-18G	Narda	8205	#14	1/6/21
Test Equipment Adapter	Type R&S to NF			Test Equipment Adapter 04	1/6/21

Software	Author	Version
ESU Firmware	Rohde & Schwarz	4.43 SP3; BIOS v5.1-24-3
RSCommander	Rohde & Schwarz	1.6.4
Field Strength	Timco	v4.10.7.0

\*\*The EMI Test Receiver R&S ESU 40 used to take plots for this report the date was not setup within the equipment. All plots below were taken in May and June of 2021. \*\*



Timco Engineering, Inc., an IIA Company  
849 NW State Road 45, Newberry, Florida 32669  
(352) 472-5500 / [testing@timcoengr.com](mailto:testing@timcoengr.com)

## 8. Test Results

The results of the test are usually indicated in the form of tables, spectrum analyzer plots, charts, sample calculations, as appropriate for each test procedure.

A description and/or a block diagram of the test setup is usually provided.

The measurement results, along with the appropriate limits for comparison, may be presented in tabular or graphical form. In addition, any variation in the measurement environment may be reported if applicable (e.g., a significant change of temperature that could affect the cable loss and amplifier response).

Unless noted otherwise in the referenced standard, the measurements of **ac power-line conducted emissions and conducted power output** will be reported in units of dB $\mu$ V. Unless noted otherwise in the referenced standard, the measurements of **radiated emissions** will be reported in units of decibels, referenced to one microvolt per meter (dB $\mu$ V/m) for electric fields, or to one ampere per meter (dBA/m) for magnetic fields, at the distance specified in the appropriate standards or requirements. The measurements of antenna-conducted power for receivers may be reported in units of dB $\mu$ V if the impedance of the measuring instrument is also reported. Otherwise, antenna-conducted power will be reported in units of decibels referenced to one milliwatt (dBm). All formulas for data conversions and conversion factors, if used, will be included in this measurement report.



## 8.1 Power at the Final Amplifier

Limits from FCC Part 2.1033 (c)(8).

*Referenced from test report "TR\_2117-21\_FCC\_UL\_PT90\_Booster Class B\_".*

No method of measurement is specified. The result has been calculated based on all available information.


Test Results		
EUT Operating Voltage (V)	EUT Current (A)	Power at the Final Amplifier
28 V DC	2.86	80 W
120 V AC	0.67	80 W



## 8.2 RF Output Power & Gain

Referenced from test report "TR\_2117-21\_FCC\_UL\_PT90\_Booster Class B\_".

Limits from FCC Parts 2.1046(a), and 90.205 and test procedure from ANSI C63.26-2015 and FCC KDB 935210 D05 v01r04 Industrial Signal Boosters.

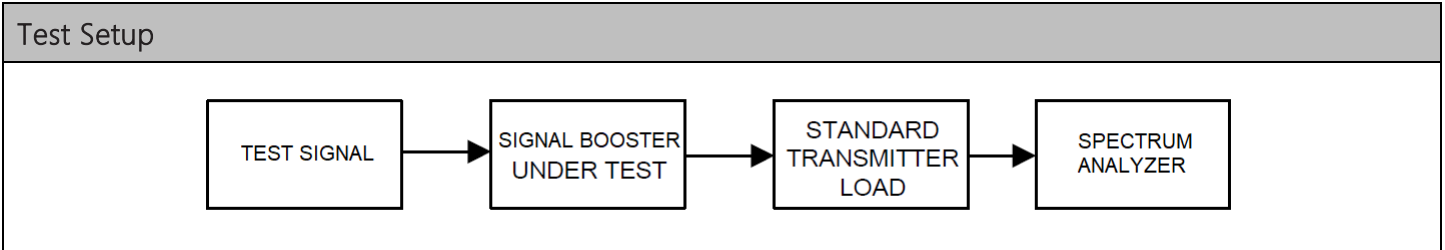

Test Results, Power Output		
Link Direction	Max Power Output (dBm)	Max Power Output (W)
Uplink (VHF)	22.26	0.16
Uplink (UHF)	25.69	0.37



### VHF Band Gain

Test Results, Gain					
Link Direction	Tuned Frequency (MHz)	Input Level	Power Input (dBm)	Power Output (dBm)	Gain (dB)
Uplink	150.8125 MHz	AGC	-63.3	20.72	84.02
		AGC+3	-60.3	21.37	81.67
		Maximum	0	22.26	22.26
Uplink	160 MHz	AGC	-63.4	21.87	85.27
		AGC+3	-60.4	22.16	82.56
		Maximum	0	21.98	21.98
Uplink	173.9875 MHz	AGC	-61.8	22.23	84.03
		AGC+3	-58.8	22.06	80.86
		Maximum	0	21.89	21.89


### UHF Band Gain

Test Results, Gain					
Link Direction	Tuned Frequency (MHz)	Input Level	Power Input (dBm)	Power Output (dBm)	Gain (dB)
Uplink	450 MHz	AGC	-48.5	24.23	72.73
		AGC +3	-45.5	24.42	69.92
		Maximum	0	24.27	24.27
Uplink	469.9975 MHz	AGC	-51.6	22.6	74.2
		AGC+3	-48.6	25.69	74.29
		Maximum	0	25.51	25.51
Uplink	511.9975 MHz	AGC	-47.6	18.89	66.49
		AGC+3	-44.6	19.11	63.71
		Maximum	0	18.97	18.97

### 8.3 Out-of-band Rejection

Limits and test method from FCC KDB 935210 D05 v01r04 Industrial Signal Boosters.



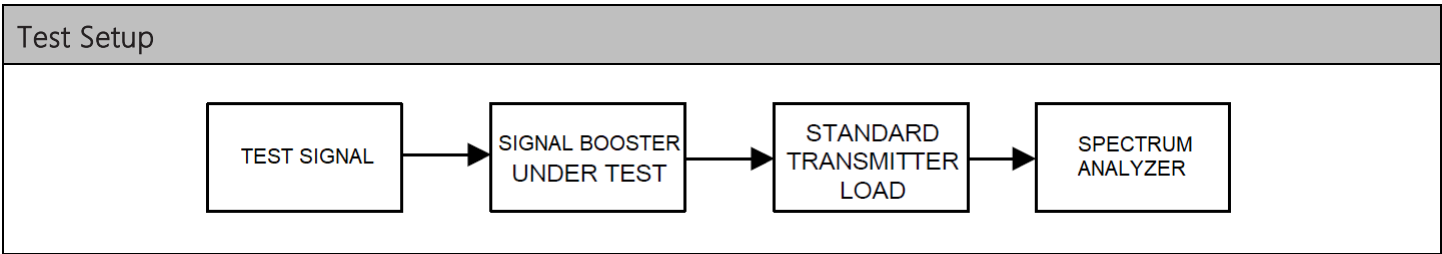


Test Results, Out-of-band Rejection and Class of Operation

Operating Band	Link Direction	Passband (kHz)	Class of Operation
VHF 150.8-173.4 MHz	Uplink	> 75 kHz	Class A
UHF 450-512 MHz	Uplink	> 75 kHz	Class A




## Out-of-band Rejection, Spectrum Plots

### 8.3.1 VHF Band, Uplink

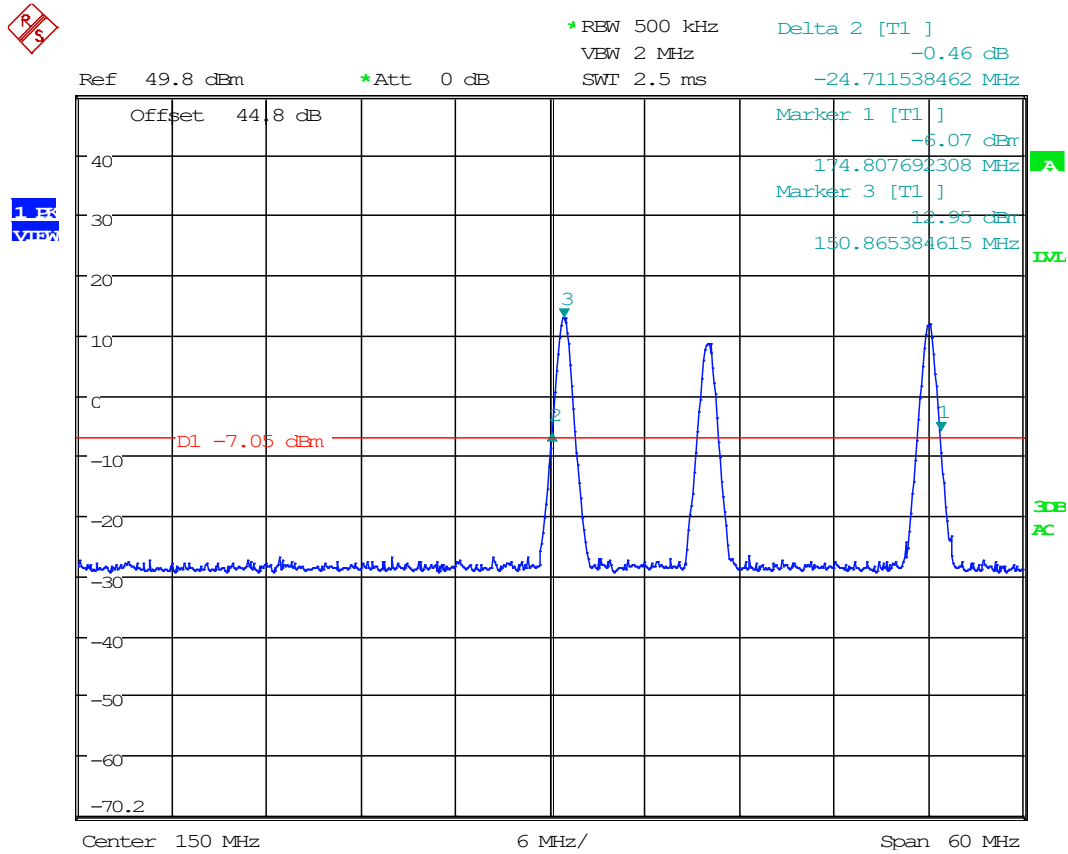

Date: 8.JAN.2003 06:52:57

### 8.3.1 UHF Band, Uplink

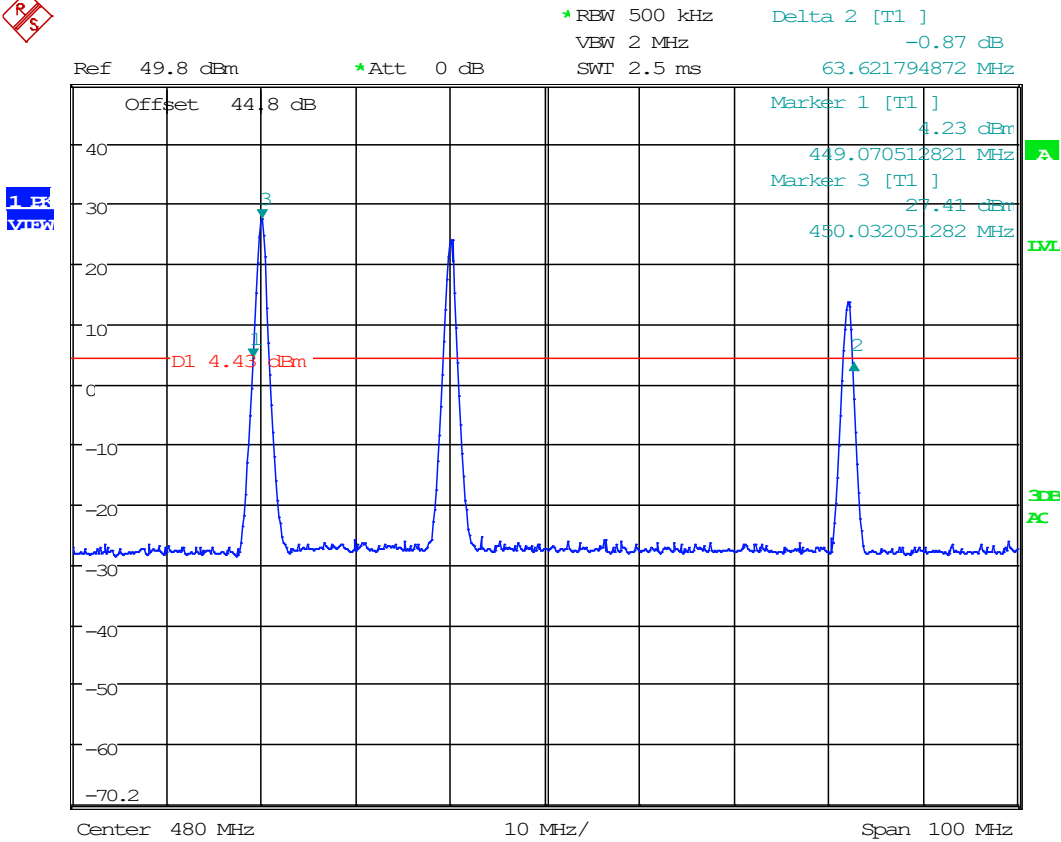

Date: 8.JAN.2003 07:12:35



## 8.4 Bandwidth & Emission

Referenced from test report "TR\_2117-21\_FCC\_UL\_PT90\_Booster Class B\_".

Limits from FCC Parts 90.209 and FCC KDB 935210 D05 v01r04 Industrial Signal Boosters.


Authorized Bandwidth		
Rule Part	Operating Range	Authorized Bandwidth
Part 90	150-174 MHz	20 kHz, 11.25 kHz, 6.0 kHz
Part 90	406-512 MHz	20 kHz, 11.25 kHz, 6.0 kHz

Applicable Input Signals		
Signal	Occupied Bandwidth (kHz)	Representative Emission Designator(s)
CW	n/a	n/a
12.5 kHz FM	7.89	7K89F3E
25 kHz FM	12.5	12K5F3E
C4FM (P25 Phase I)	7.97	7K97F1D, 7K97F1E
HCPM (P25 Phase II SU)	8.13	8K13F1W
HDQPSK (P25 Phase II BS)	9.89	9K89F1D, 9K89F1E

## 8.5 Input VS Output Signal Comparison


*Referenced from test report "TR\_2117-21\_FCC\_UL\_PT90\_Booster Class B\_".*

Limits from FCC Parts 90.210 and test procedure from ANSI C63.26-2015 and FCC KDB 935210 D05 v01r04 Industrial Signal Boosters.

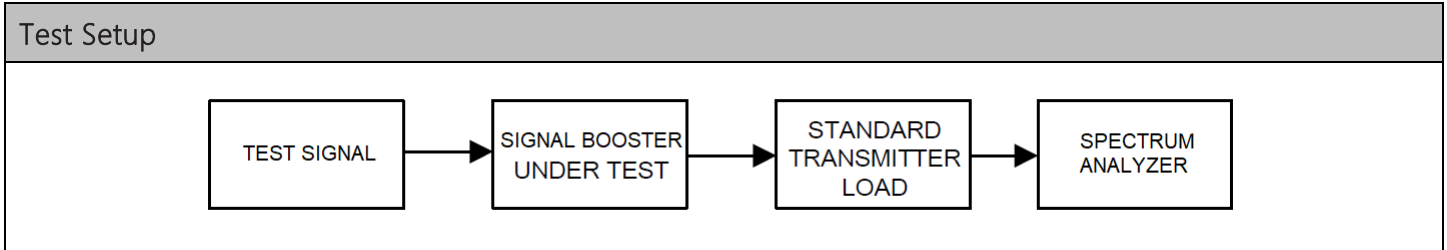


Input VS Output, Input Spectrum Plots

8.5.1 12.5 kHz FM

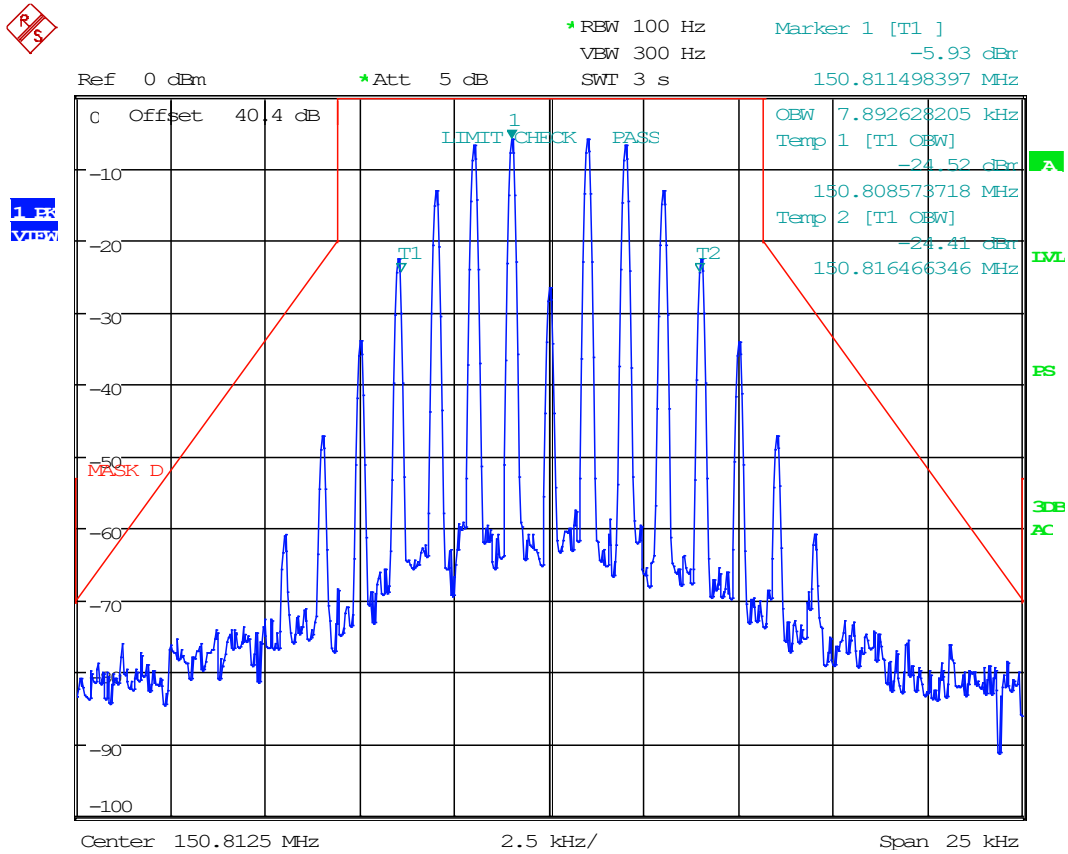


Date: 6.OCT.2020 20:08:30

### 8.5.2 25 kHz FM

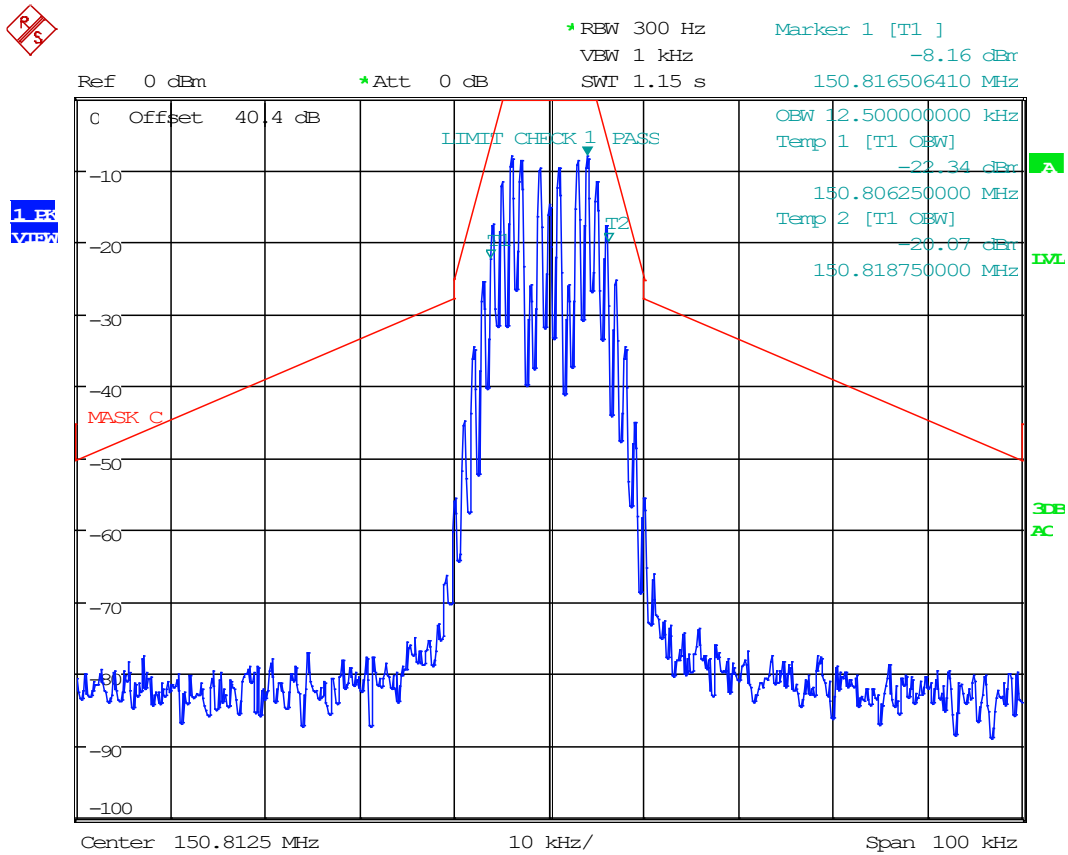

Date: 6.OCT.2020 20:01:25


### 8.5.3 C4FM

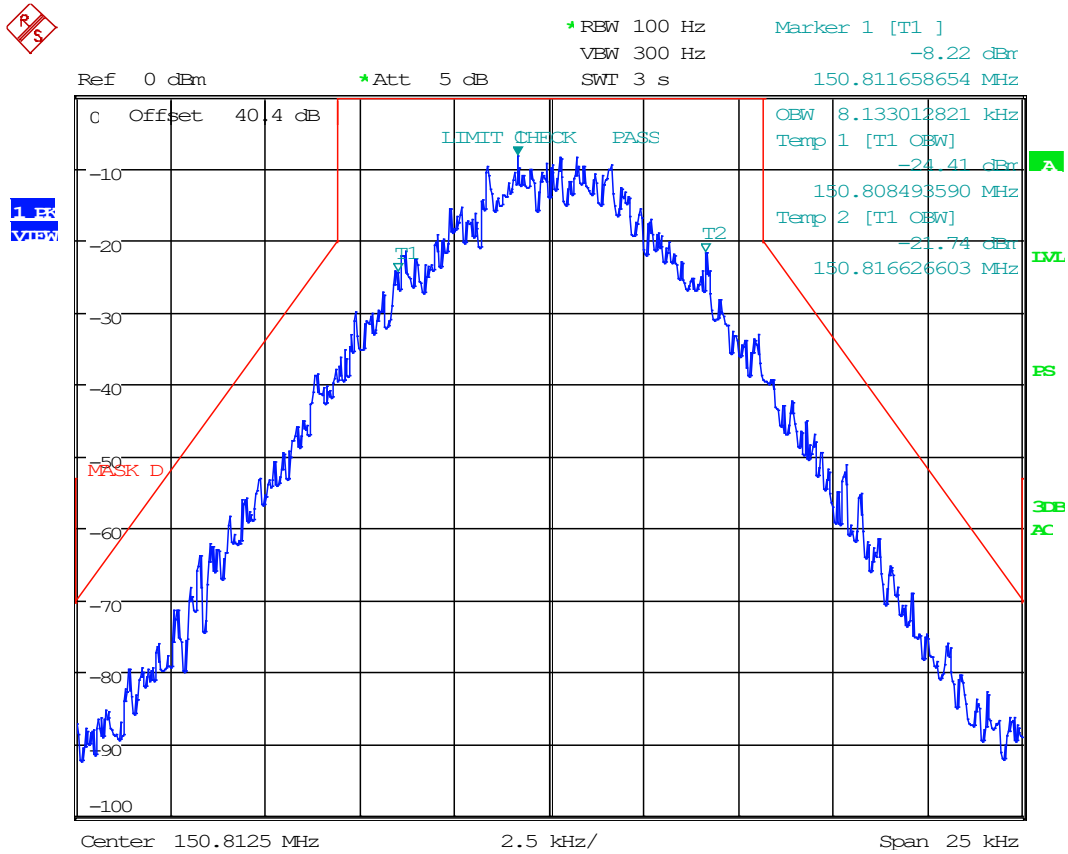

Date: 6.OCT.2020 20:10:17




### 8.5.4 H-CPM

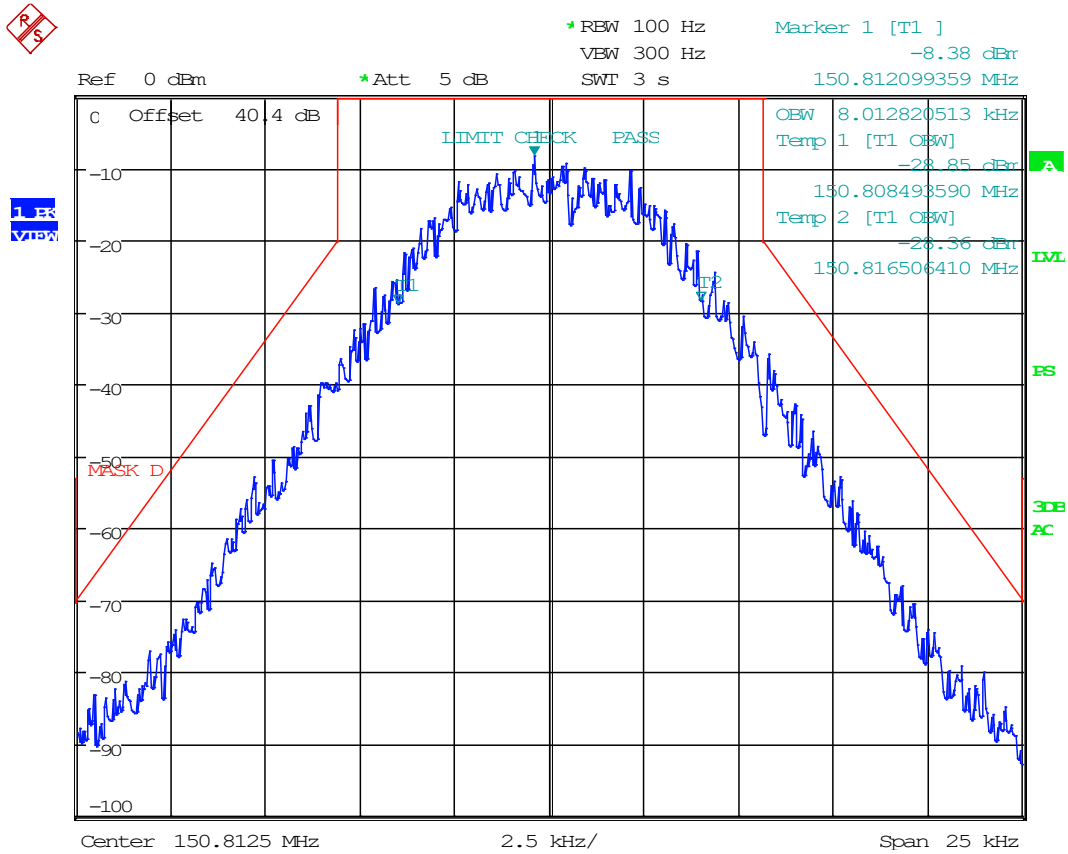

Date: 6.OCT.2020 20:11:03

### 8.5.5 H-DQPSK

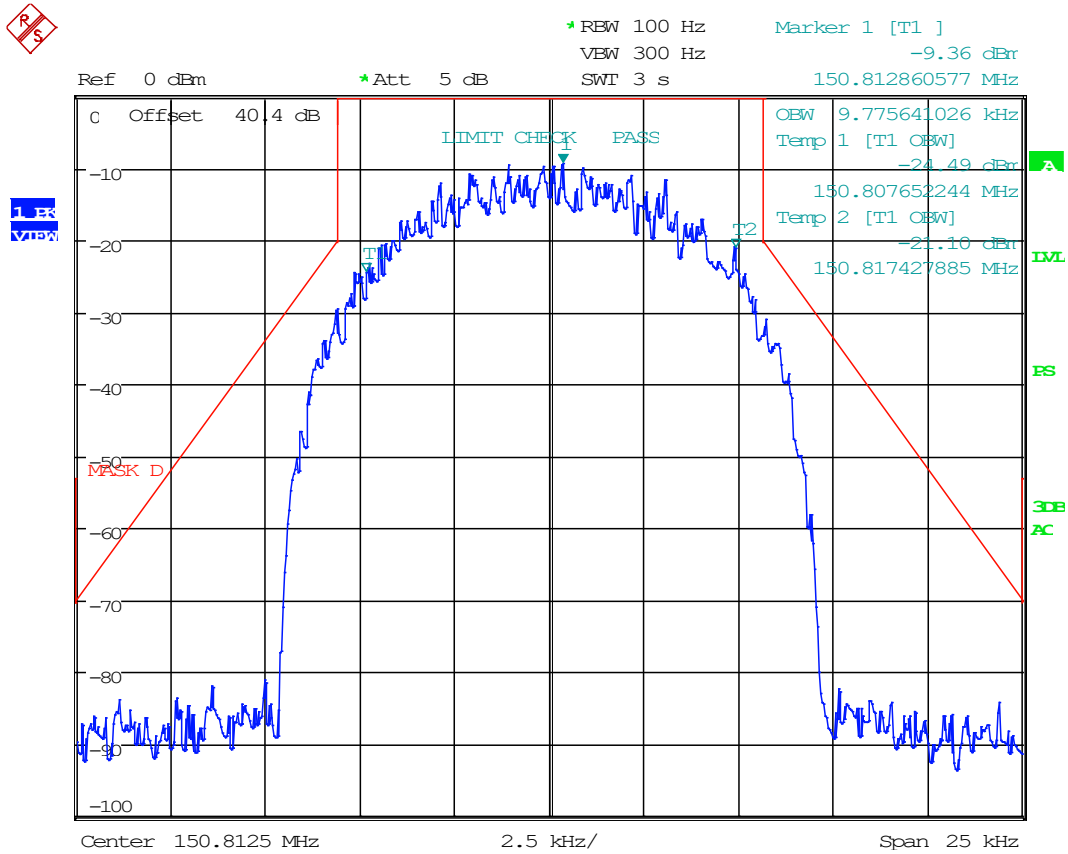


Date: 6.OCT.2020 20:12:07




### Input VS Output, Output Spectrum Plots, VHF Band

#### 8.5.1 12.5 kHz FM, Uplink, AGC

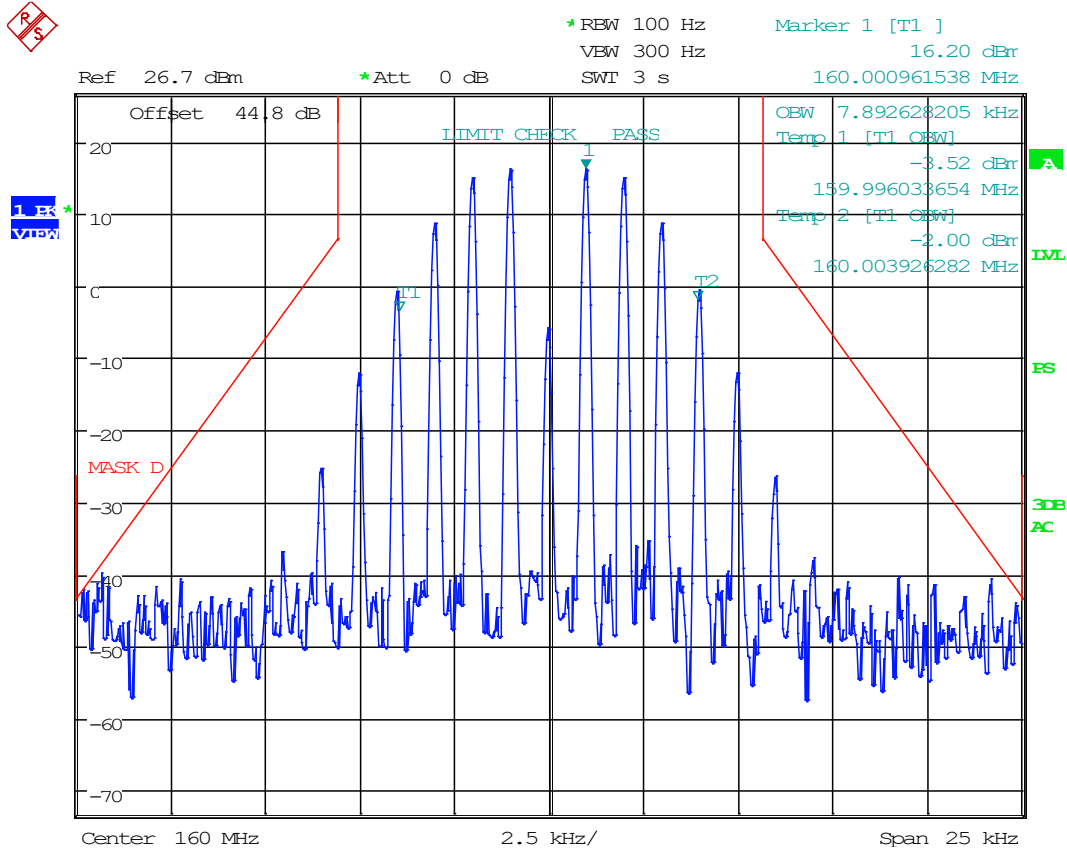


Date: 8.JAN.2003 03:40:54

### 8.5.2 12.5 kHz FM, Uplink, AGC +3dB

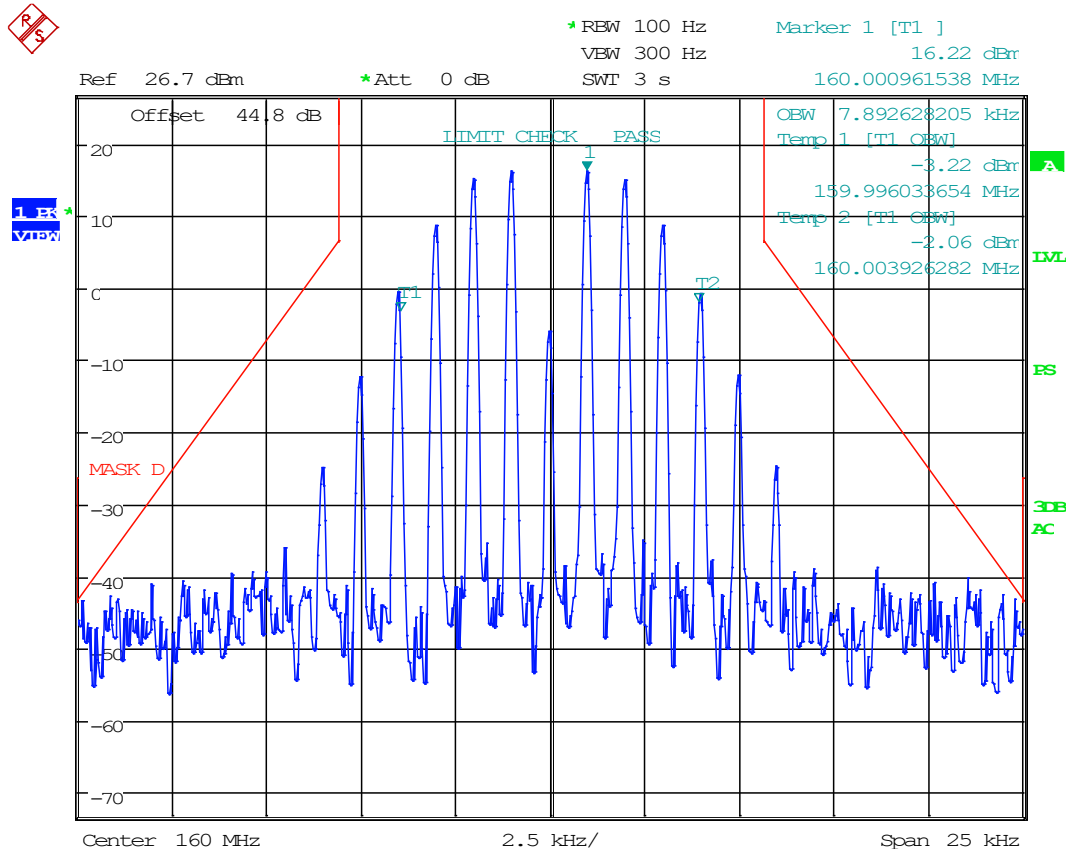


Date: 8.JAN.2003 03:40:26

### 8.5.3 C4FM, Uplink, AGC

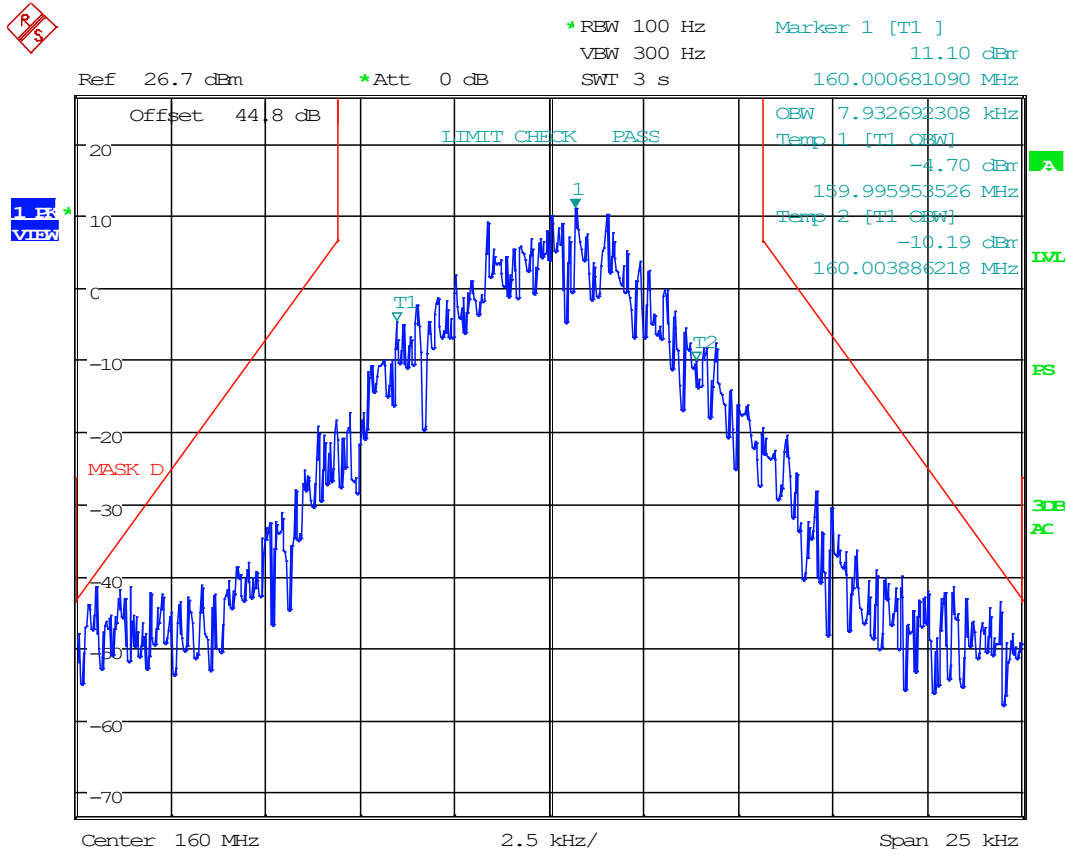


Date: 8.JAN.2003 03:38:08

### 8.5.4 C4FM, Uplink, AGC +3dB

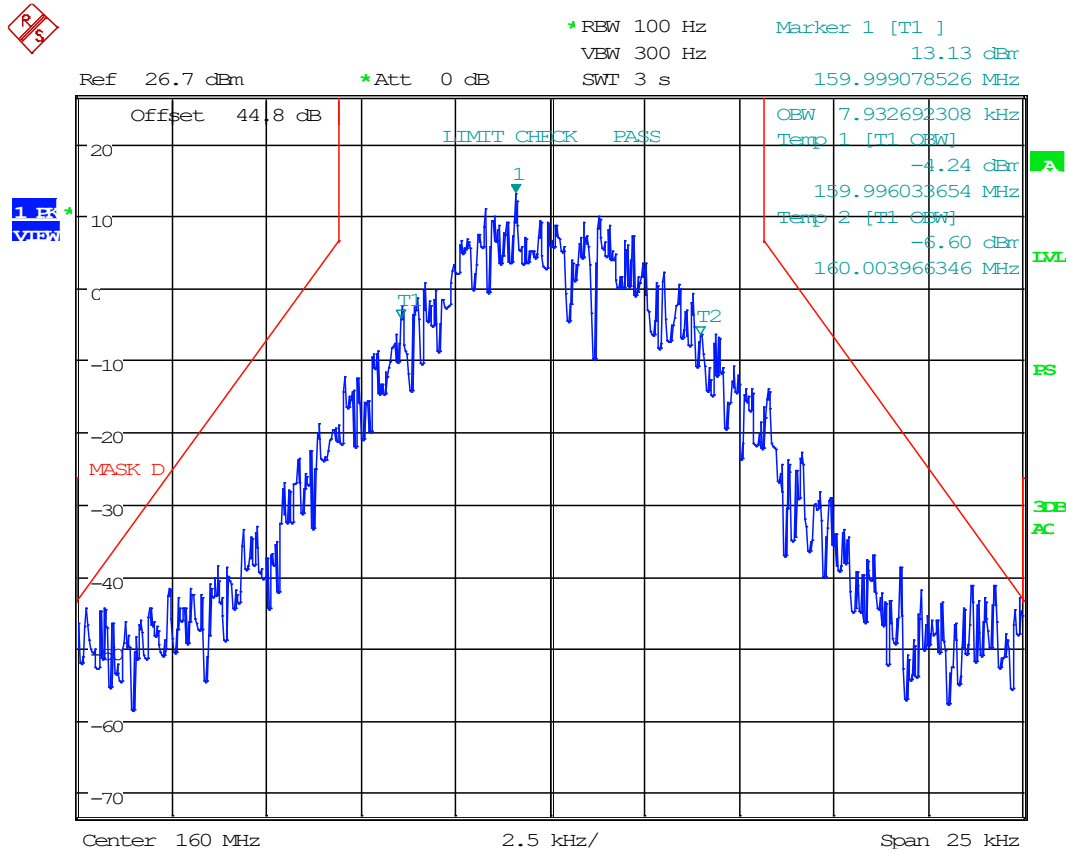


Date: 8.JAN.2003 03:39:45

### 8.5.5 H-CPM, Uplink, AGC

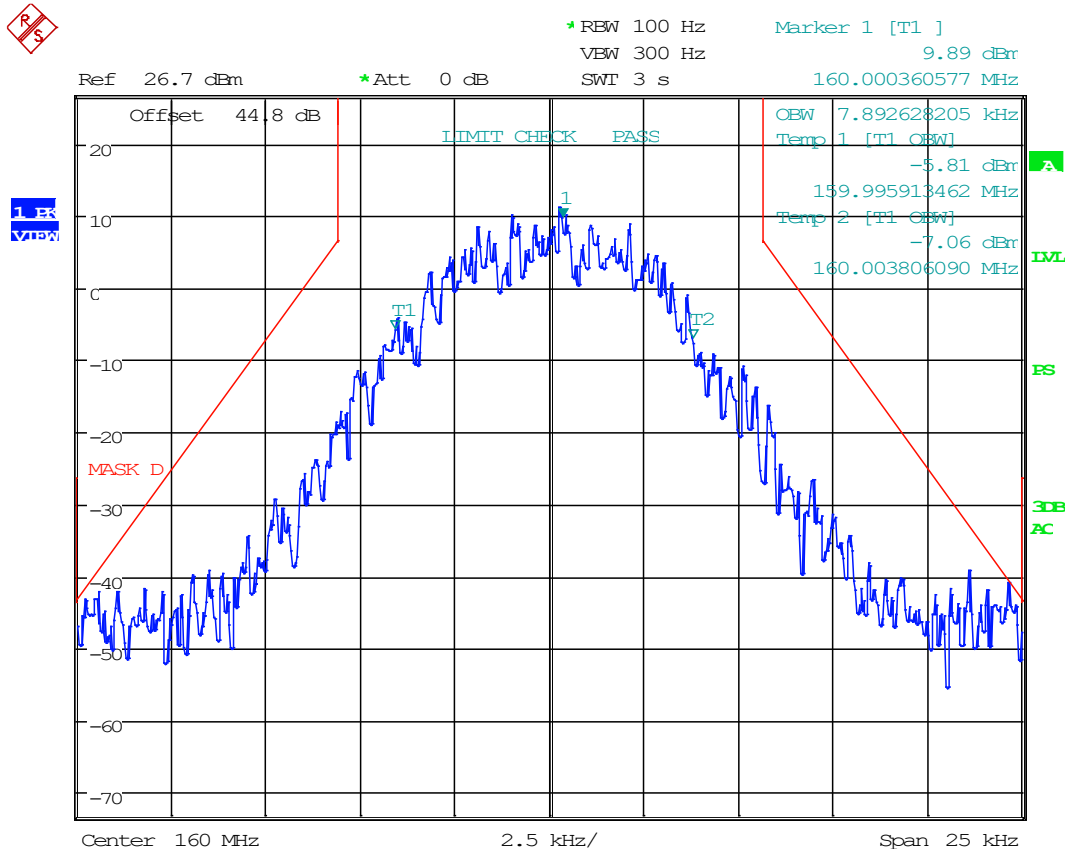

Date: 8.JAN.2003 03:35:56


### 8.5.6 H-CPM, Uplink, AGC +3dB

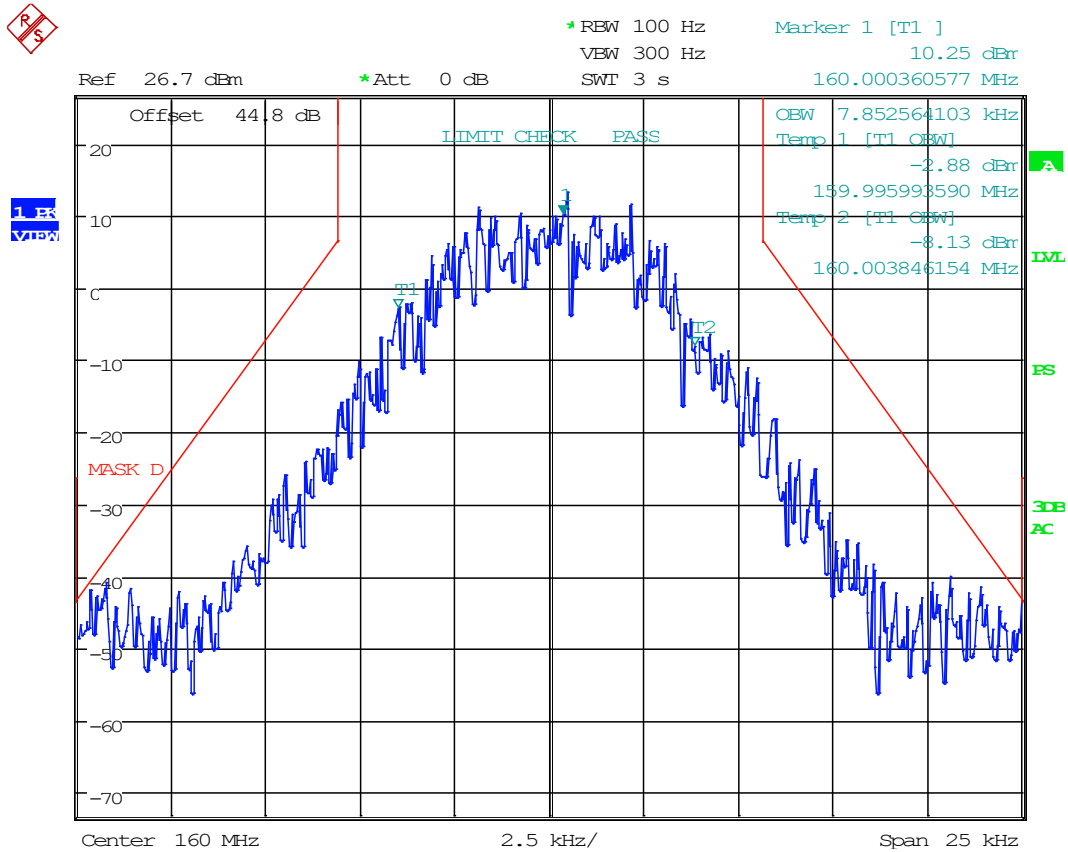

Date: 8.JAN.2003 03:35:28




### 8.5.7 H-DQPSK, Uplink, AGC

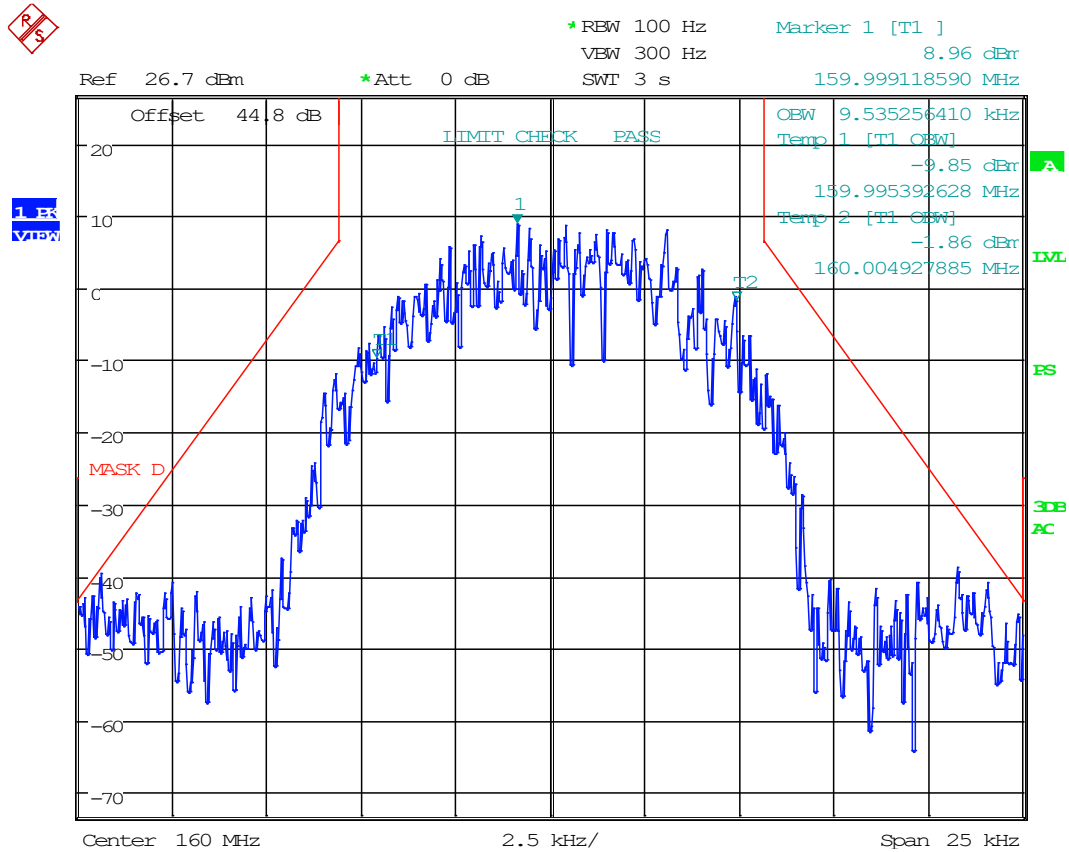

Date: 8.JAN.2003 03:33:22

### 8.5.8 H-DQPSK, Uplink, AGC +3dB

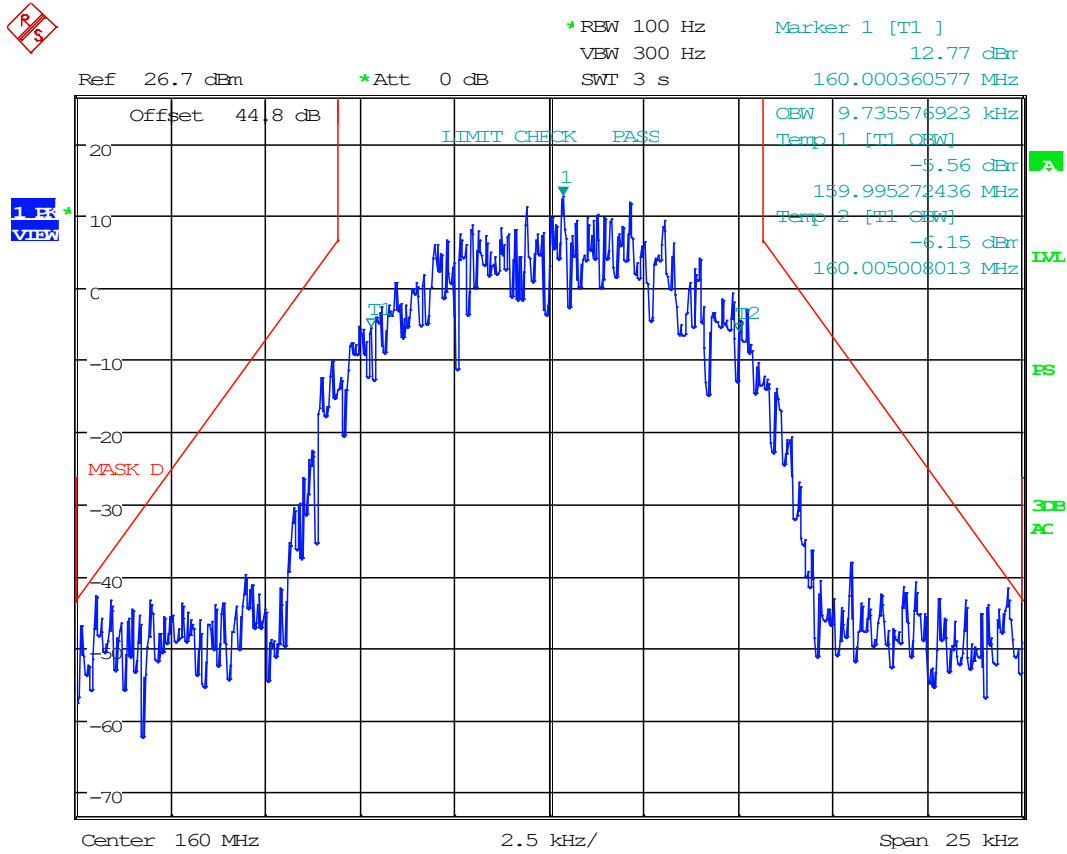


Date: 8.JAN.2003 03:34:59




### Input VS Output, Output Spectrum Plots, UHF Band

#### 8.5.9 12.5 kHz FM, Uplink, AGC

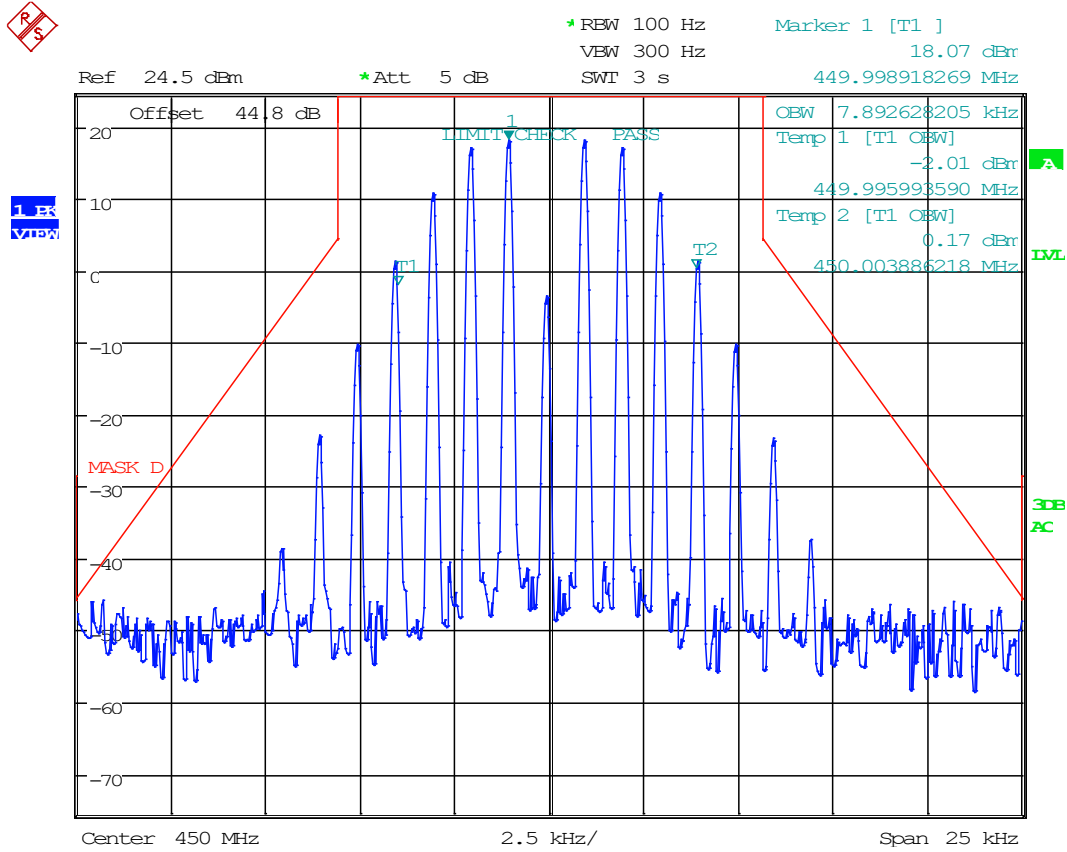

Date: 8.JAN.2003 03:19:28


### 8.5.10 12.5 kHz FM, Uplink, AGC +3dB

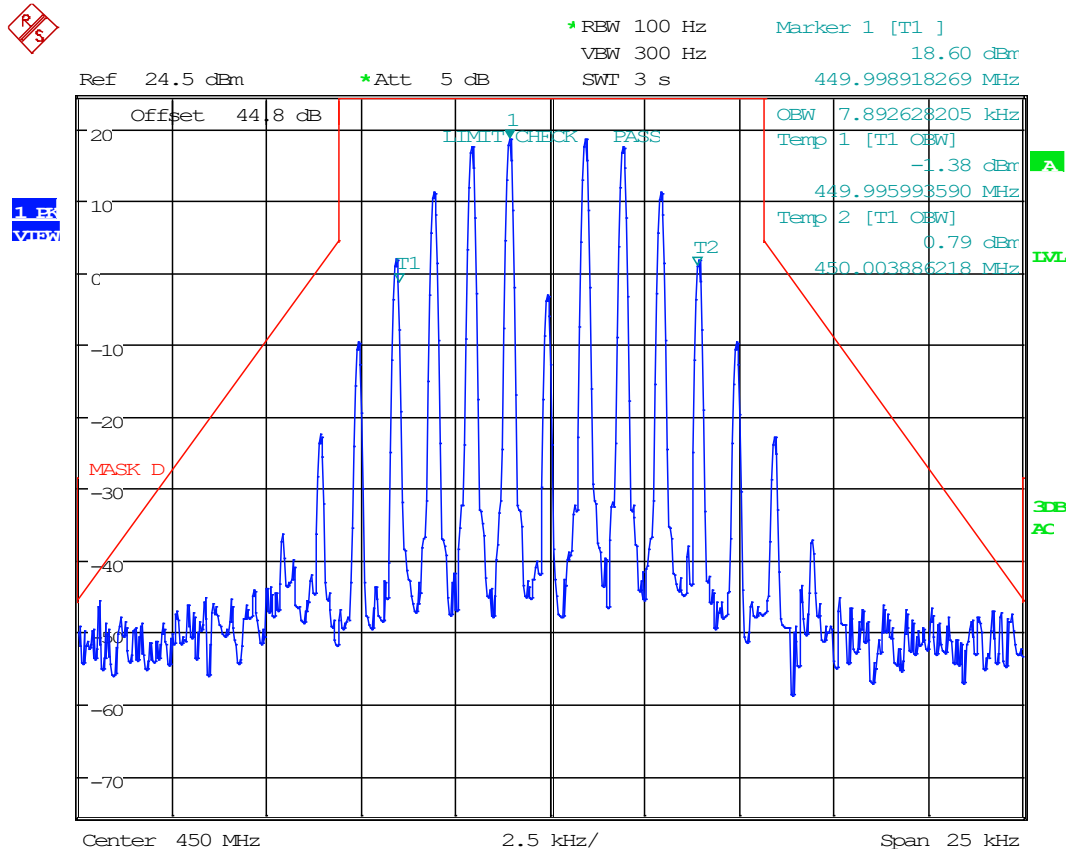

Date: 8.JAN.2003 03:19:56




### 8.5.11 25 kHz FM, Uplink, AGC

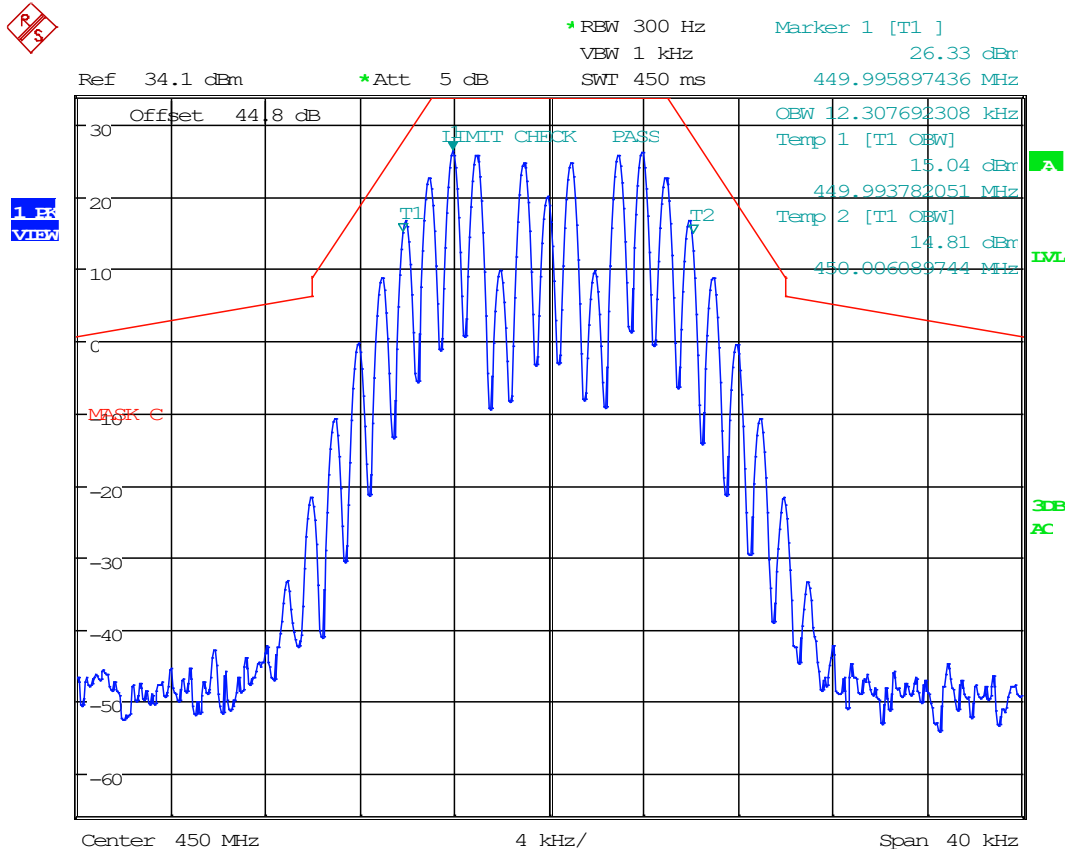


Date: 11.JAN.2003 01:30:49

### 8.5.12 25 kHz FM, Uplink, AGC +3dB

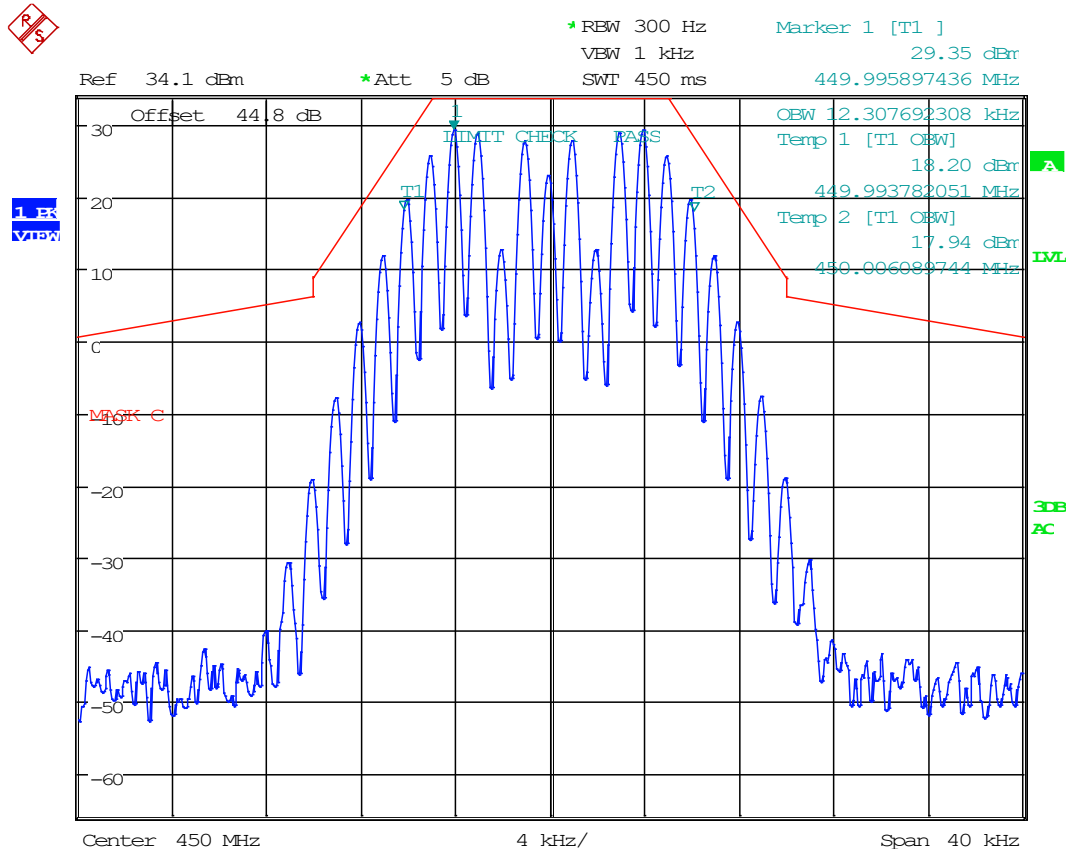


Date: 11.JAN.2003 01:31:12

### 8.5.13 C4FM, Uplink, AGC

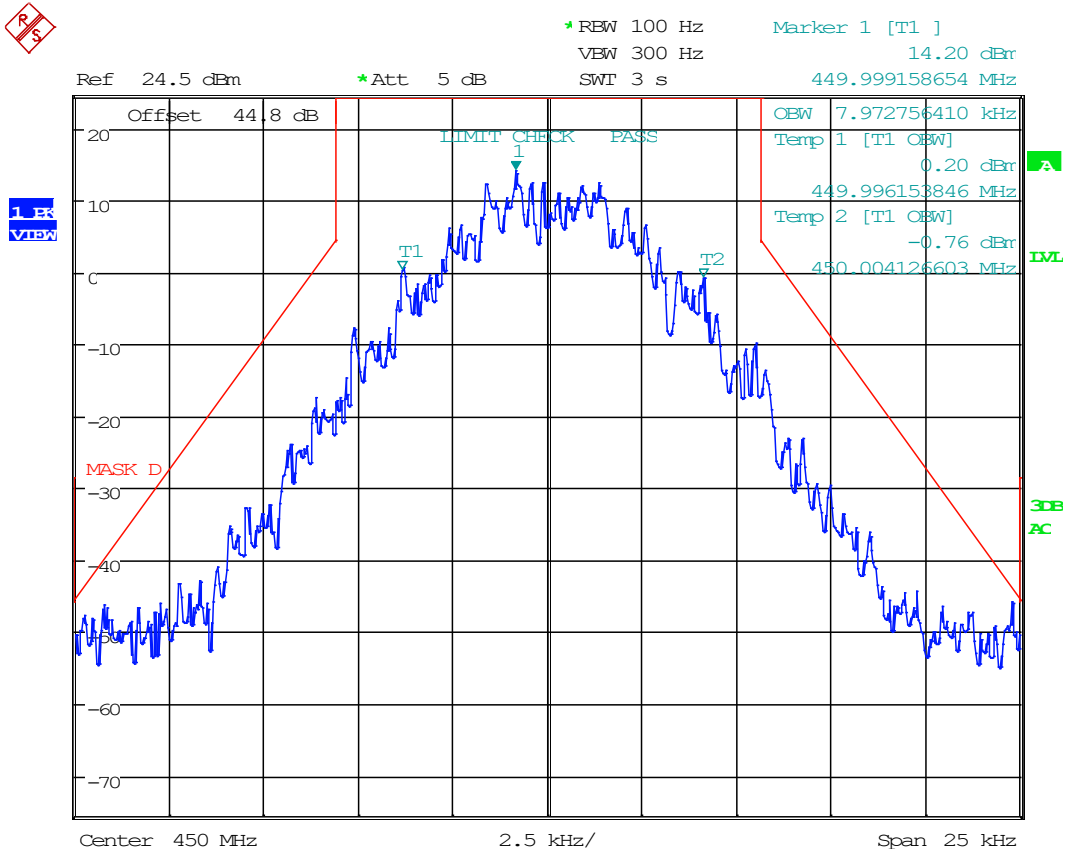

Date: 8.JAN.2003 03:18:15


### 8.5.14 C4FM, Uplink, AGC +3dB

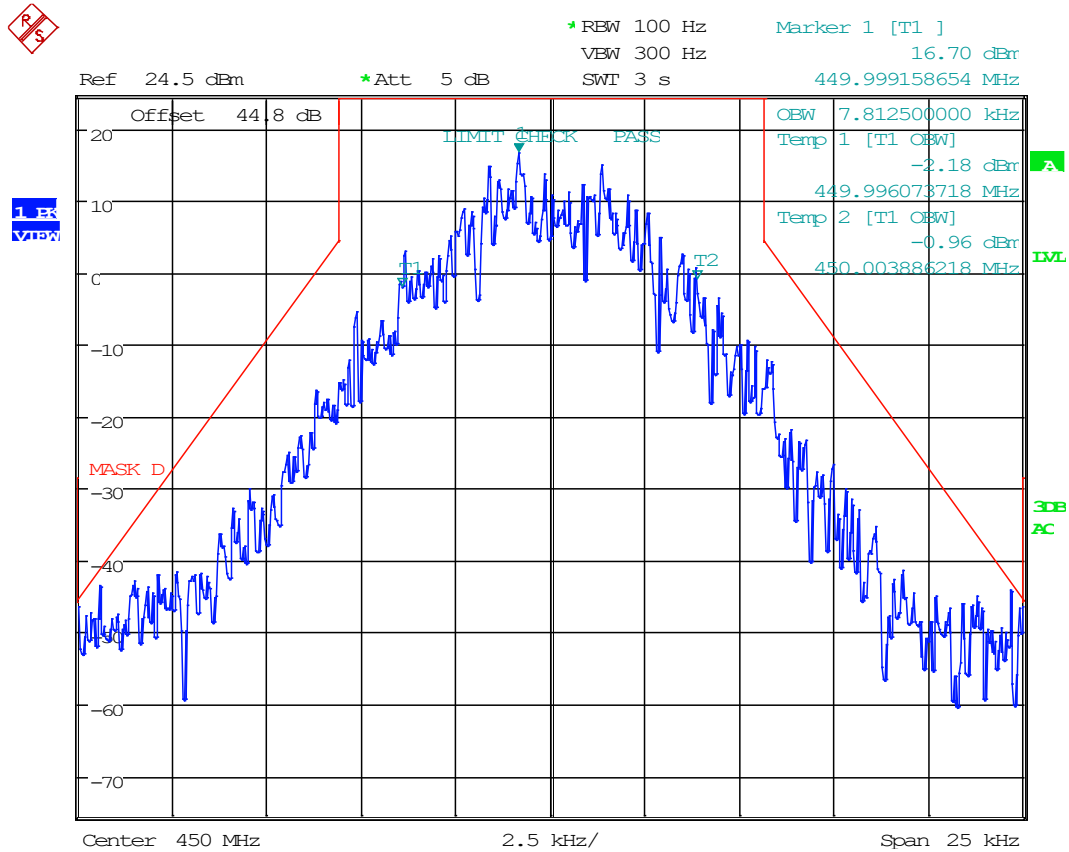

Date: 8.JAN.2003 03:18:54




### 8.5.15 H-CPM, Uplink, AGC

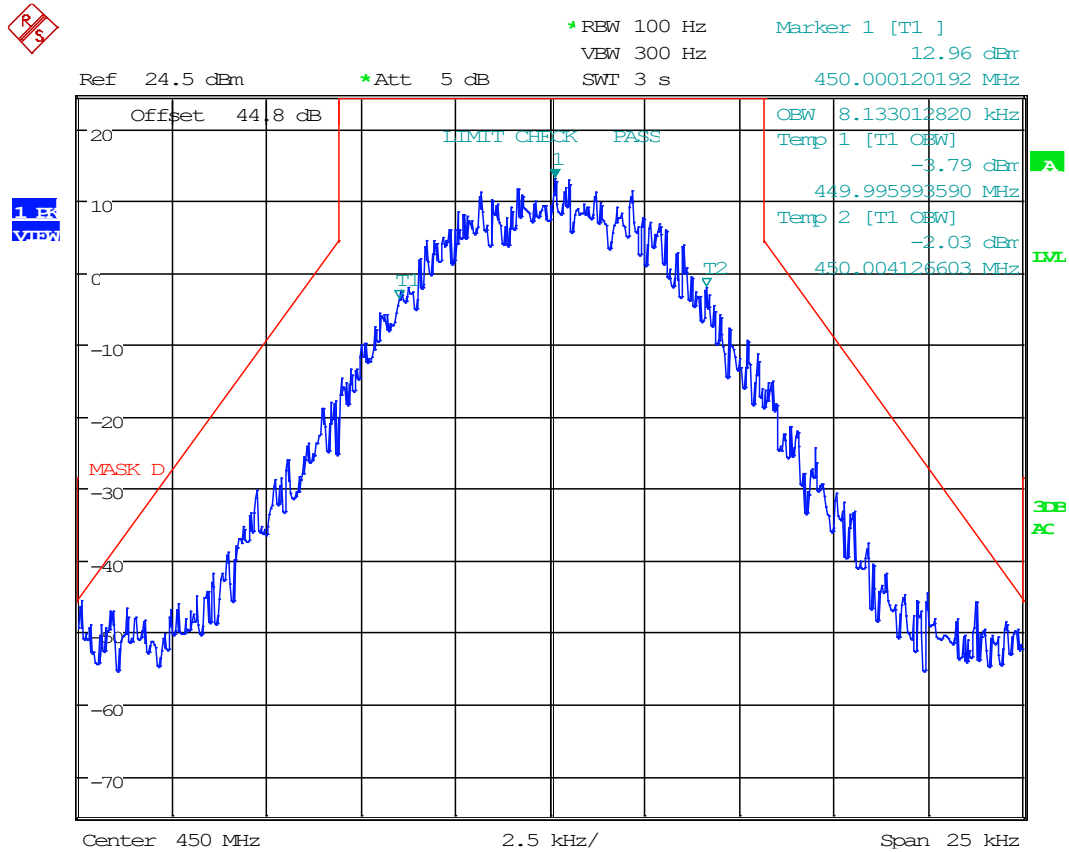


Date: 8.JAN.2003 03:16:34

### 8.5.16 H-CPM, Uplink, AGC +3dB

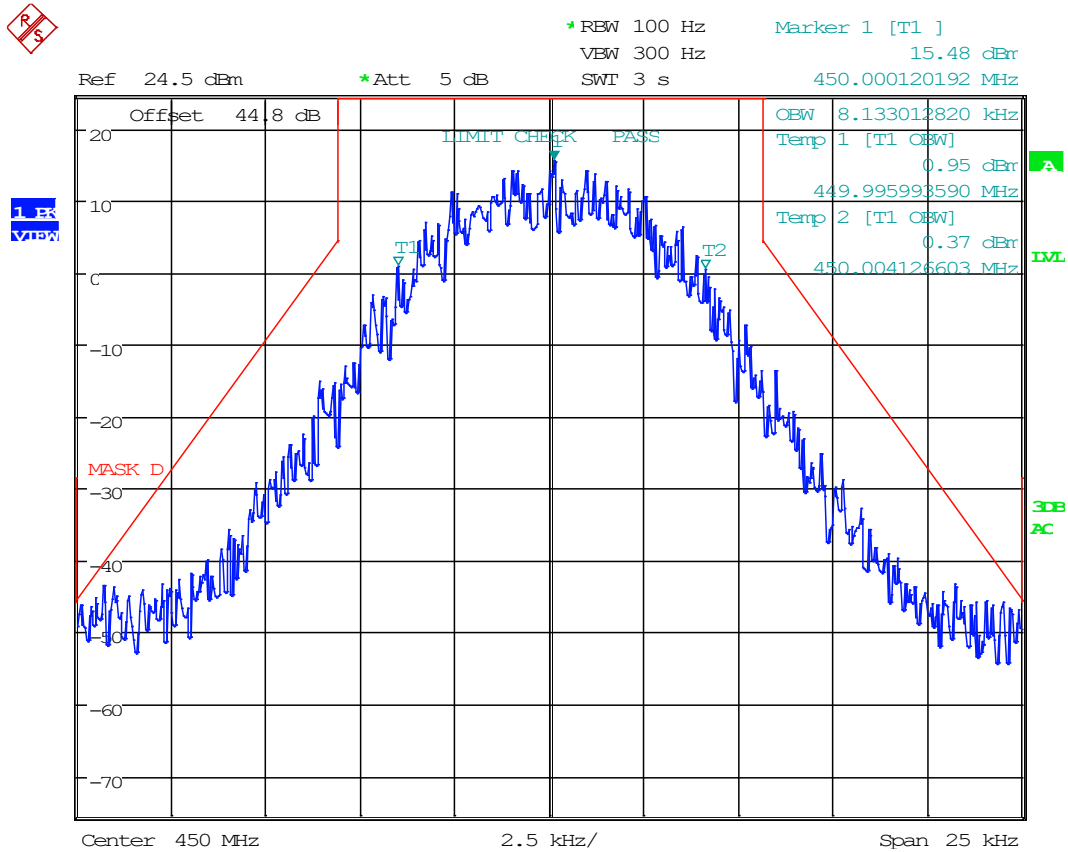


Date: 8.JAN.2003 03:15:59

### 8.5.17 H-DQPSK, Uplink, AGC

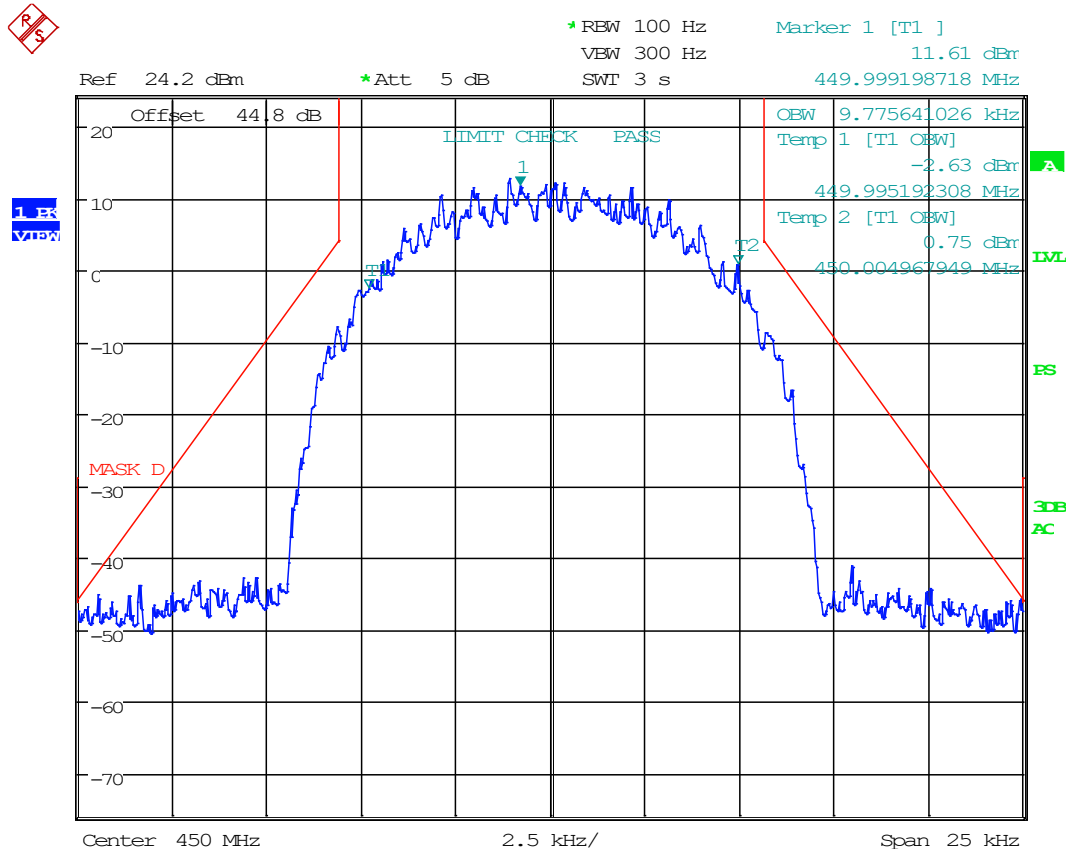

Date: 8.JAN.2003 03:14:11

### 8.5.18 H-DQPSK, Uplink, AGC +3dB

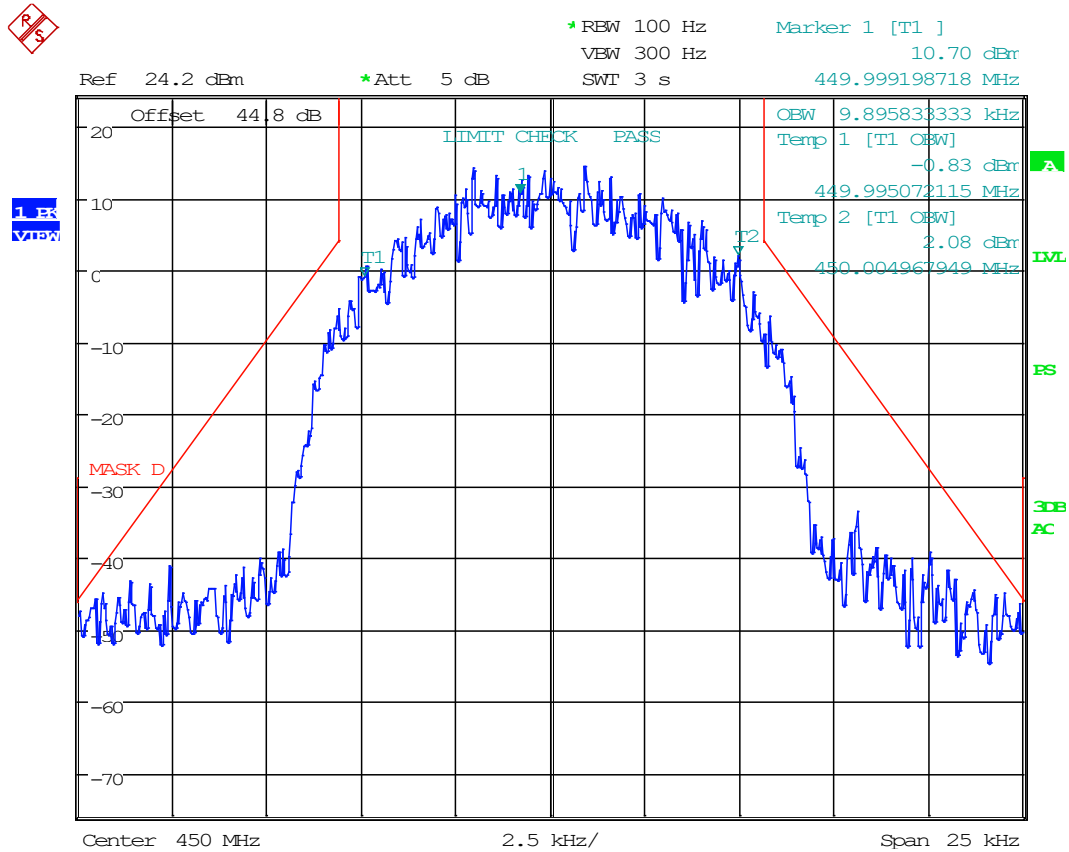


Date: 8.JAN.2003 03:14:53



## 8.6 Noise Figure

*Referenced from test report "TR-2117-21\_FCC\_UL\_PT90\_Booster Class B."*

Limits from FCC KDB 935210 D05 v01r04 Industrial Signal Boosters. Test method from "Noise Figure Measurement Accuracy: The Y-Factor Method" by Keysight Technologies.

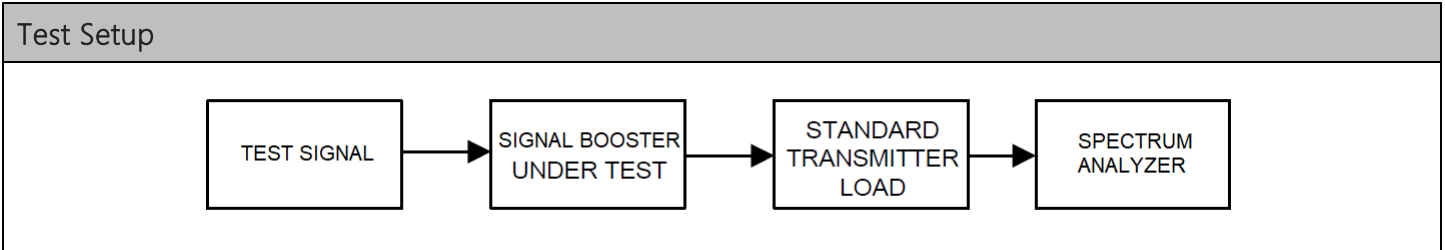

**Test Results, Out-of-band Rejection and Class of Operation**


Operating Band	Link Direction	Noise Figure (dB)	Limit
150-174 MHz	Uplink	8.17	< 9 dB
450-512 MHz	Uplink	6.69	< 9 dB



## 8.7 Out-of-Band/Out-of-Block Emissions (Intermodulation Products)


Referenced from test report "TR\_2117-21\_FCC\_UL\_PT90\_Booster Class B\_".

Limits from FCC Parts 2.1051, 90.210 and test procedure from ANSI C63.26-2015 and FCC KDB 935210 D05 v01r04 Industrial Signal Boosters.

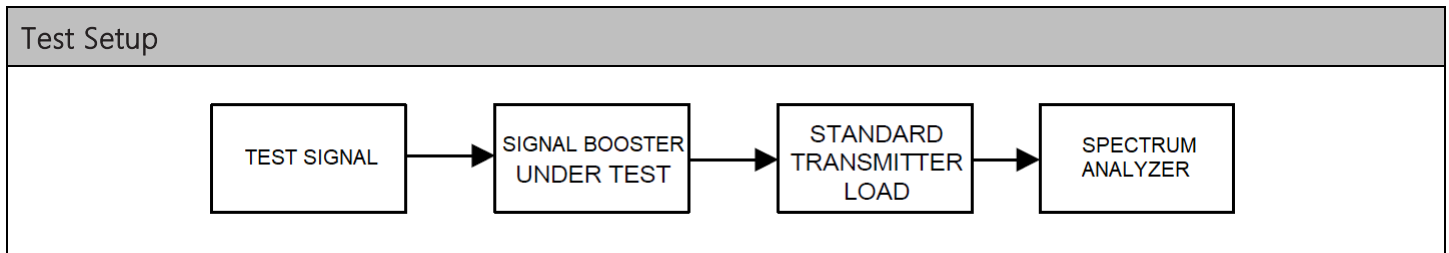




### 8.7.2 12.5 kHz Signal, Uplink, AGC +3dB

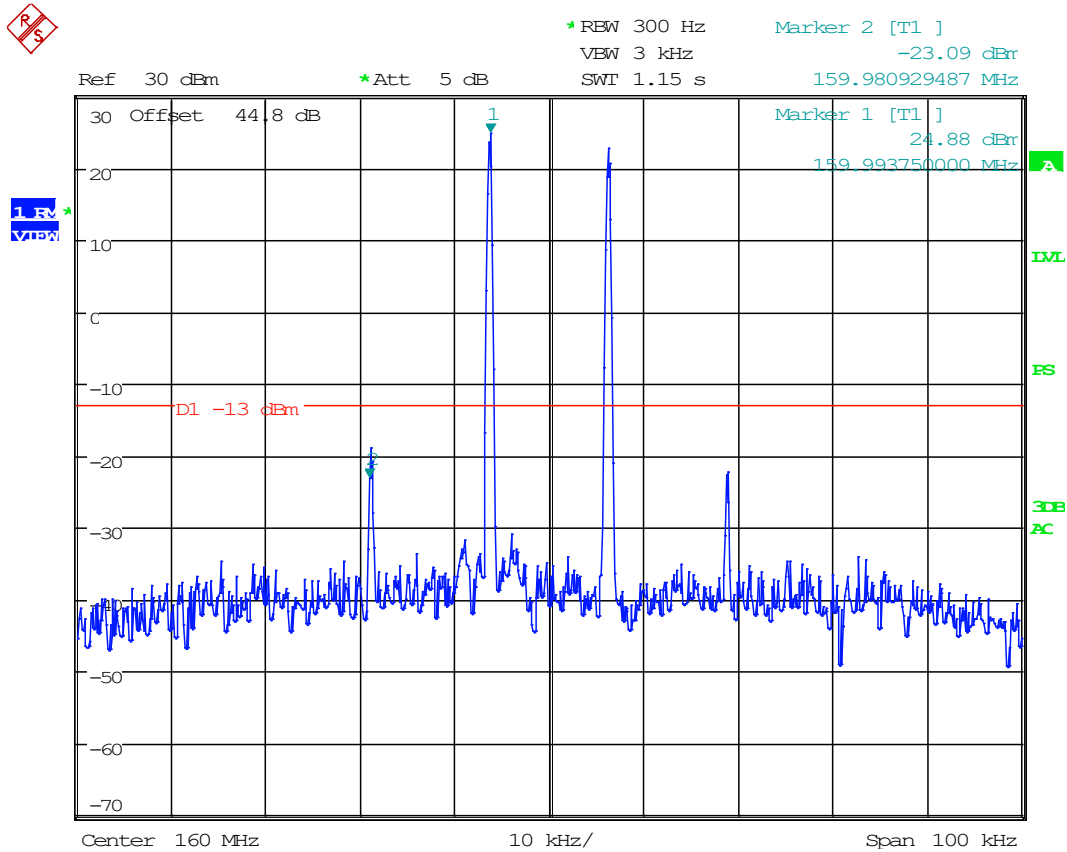

Date: 11.JAN.2003 01:20:18




### 8.7.3 25 kHz Signal, Uplink, AGC

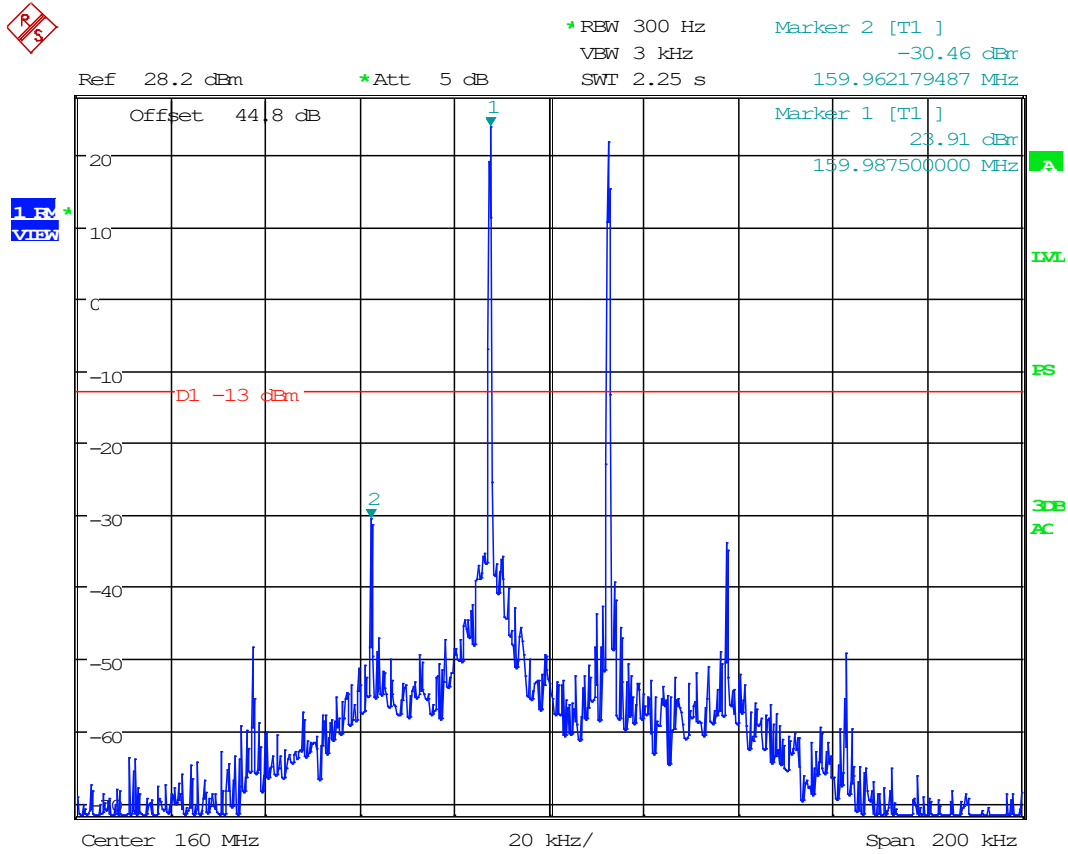

Date: 8.JAN.2003 06:05:36


### 8.7.4 25 kHz Signal, Uplink, AGC +3dB

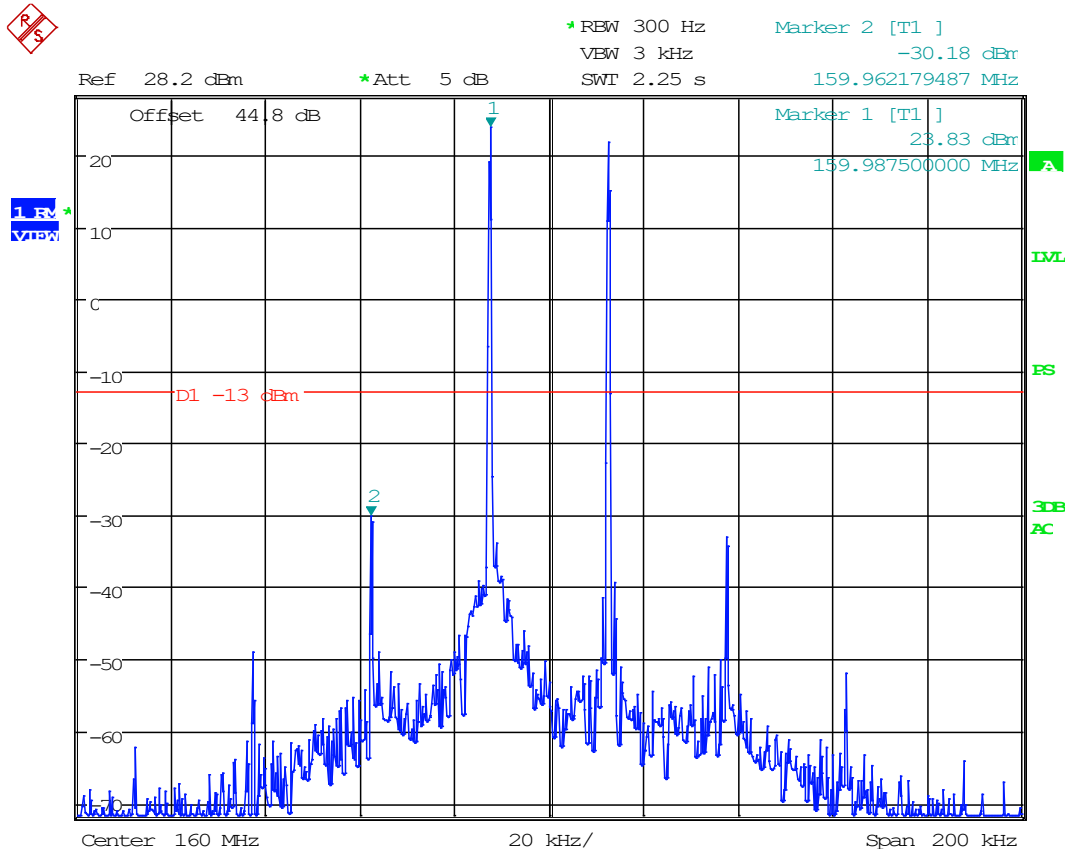

Date: 8.JAN.2003 06:06:05




### 8.7.6 12.5 kHz Signal, Uplink, AGC +3dB

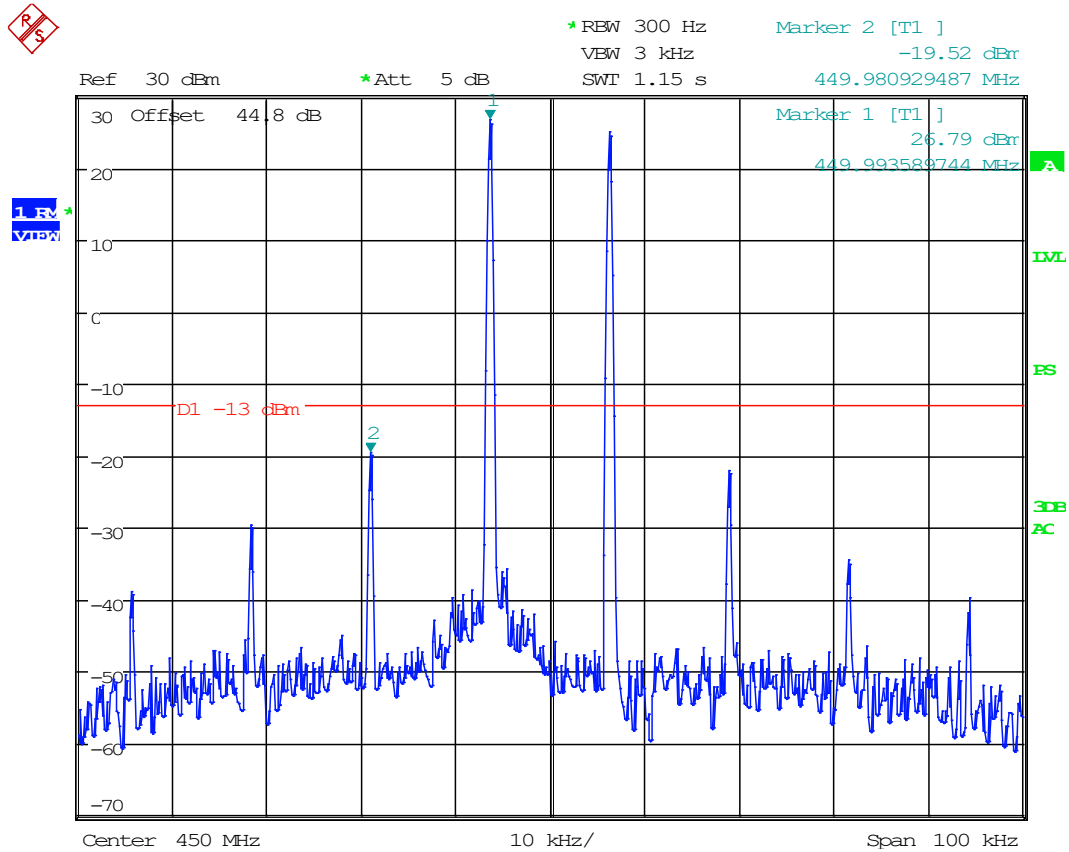

Date: 11.JAN.2003 01:08:33



### 8.7.8 25 kHz Signal, Uplink, AGC +3dB

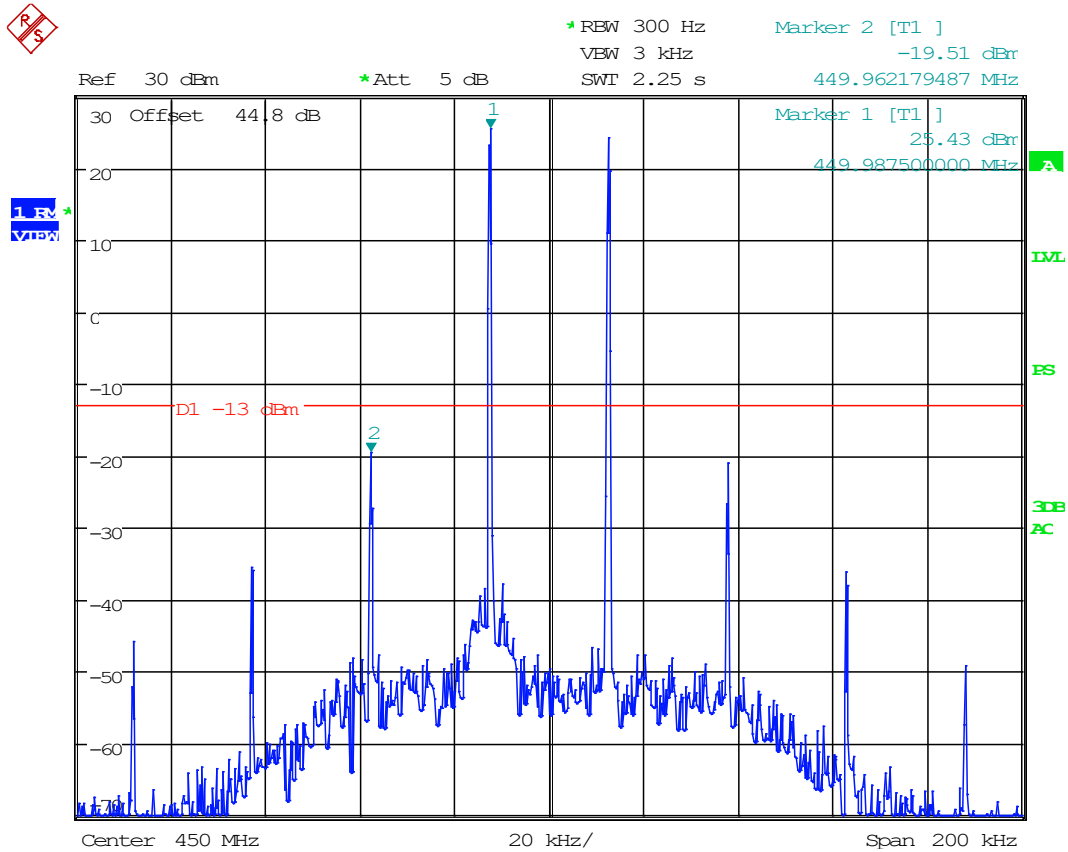


Date: 11.JAN.2003 01:11:36



## 8.8 Emission Mask, Out-of-Band

Referenced from test report ""TR\_2117-21\_FCC\_UL\_PT90\_Booster Class B\_".


Limits from FCC Parts 2.1051, 90.210 and test procedure from ANSI C63.26-2015 and FCC KDB 935210 D05 v01r04 Industrial Signal Boosters.

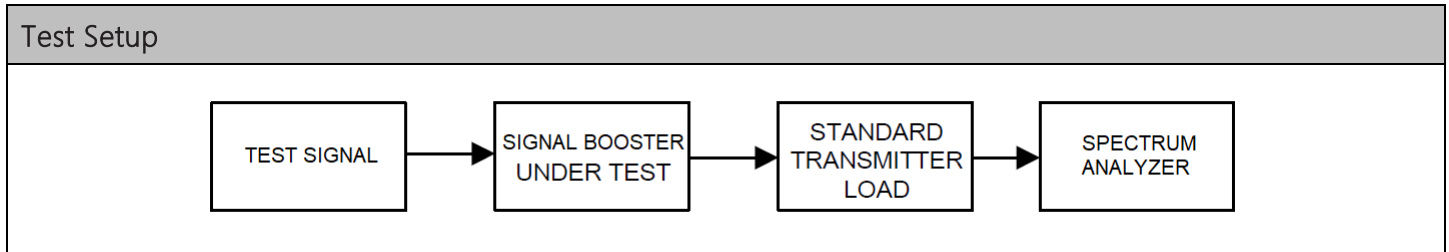



### Conducted Emissions Spectrum Plots

#### 8.8.1 30 MHz to 1 GHz, VHF Band Uplink

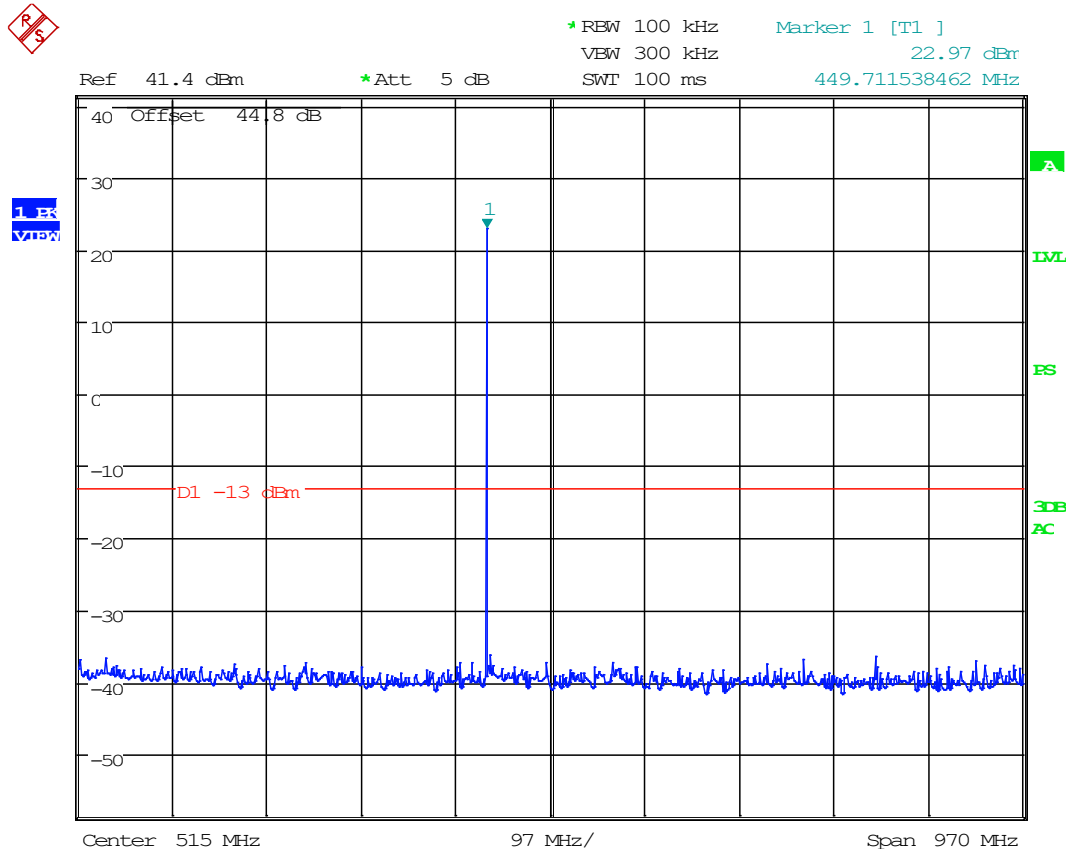


Date: 11.JAN.2003 00:25:24






### 8.8.2 1 GHz to 10<sup>th</sup> Harmonic, VHF Band Uplink

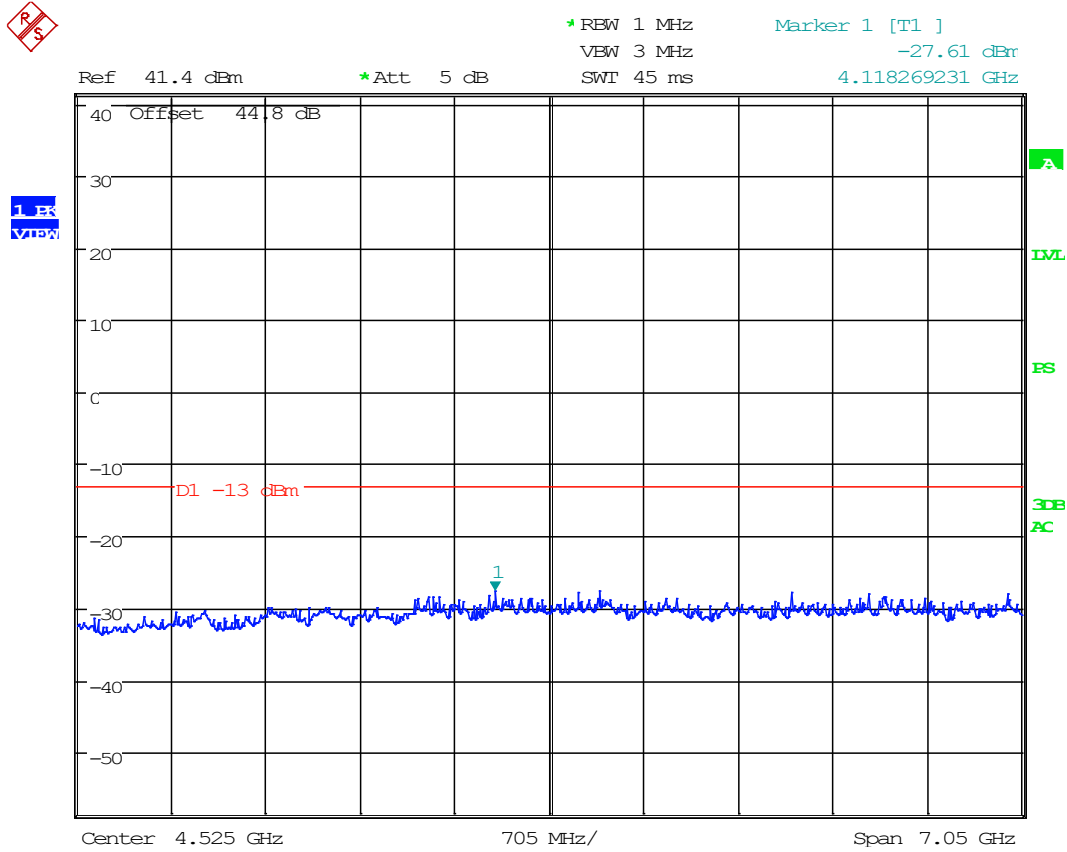

Date: 11.JAN.2003 00:55:39




### 8.8.3 30 MHz to 1 GHz, UHF Band Uplink

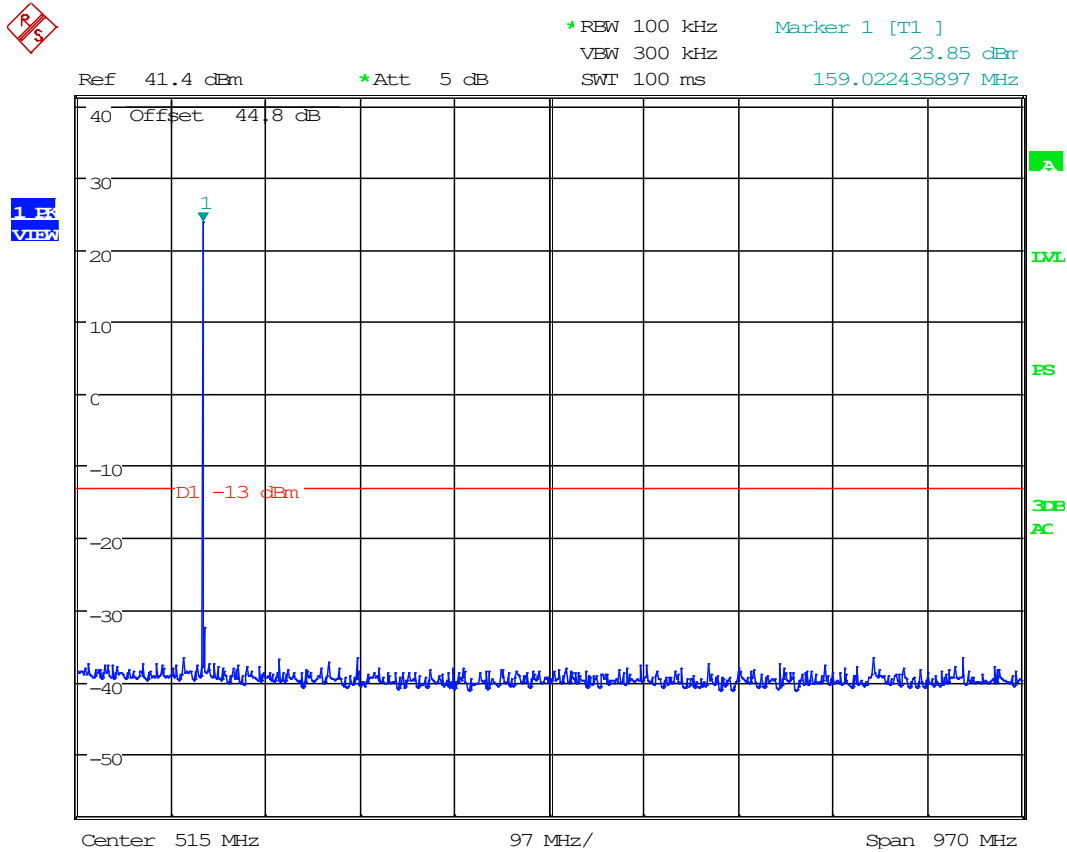

Date: 11.JAN.2003 00:26:44



### 8.8.4 1 GHz to 10<sup>th</sup> Harmonic, UHF Band Uplink

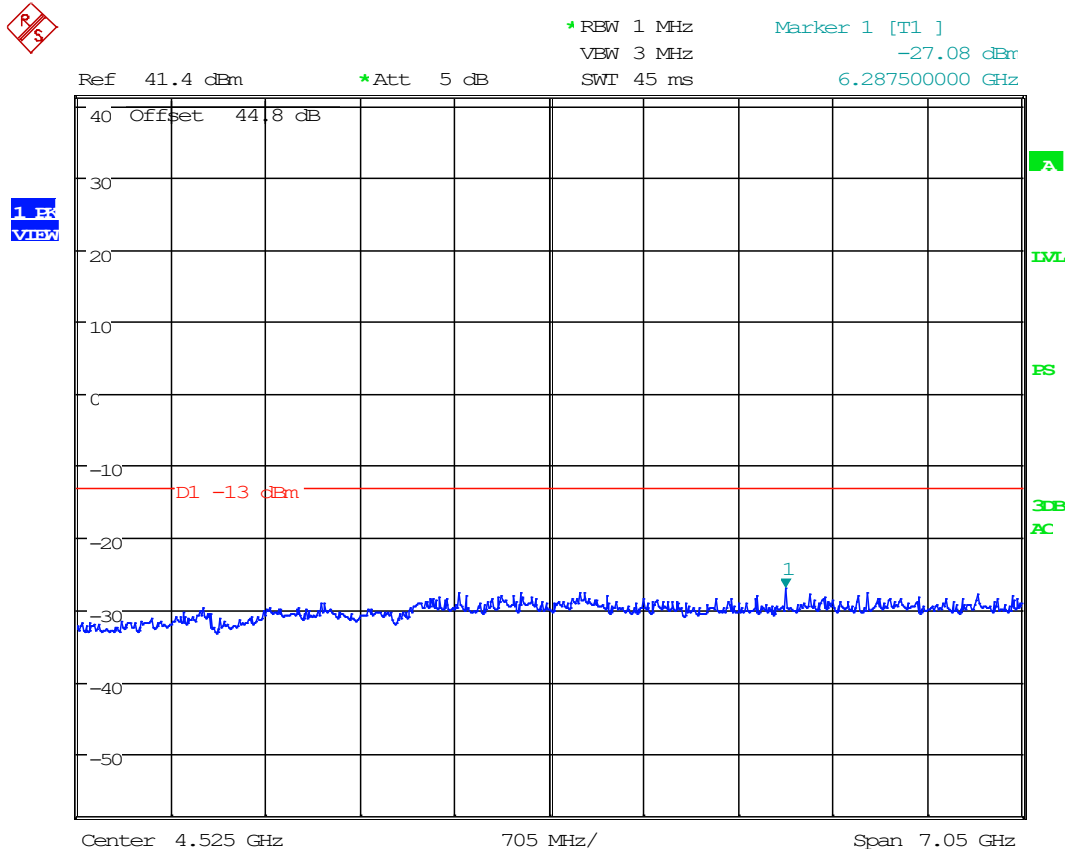


Date: 11.JAN.2003 00:56:46


## 8.9 Spurious Radiated Emissions

Limits from FCC Parts 2.1053, 90.210 and test procedure from ANSI C63.26-2015 and FCC KDB 935210 D05 v01r04 Industrial Signal Boosters.

### Radiated Test Setup, 30 – 1000 MHz

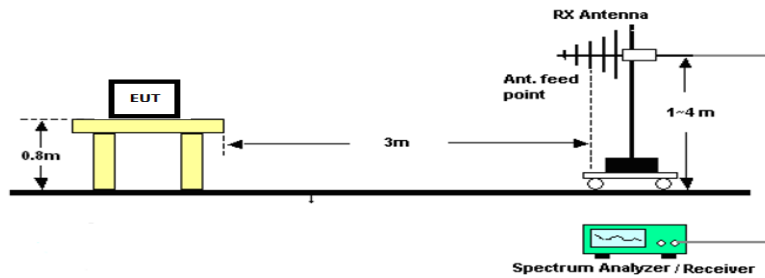

### Radiated Test Setup, Above 1000 MHz

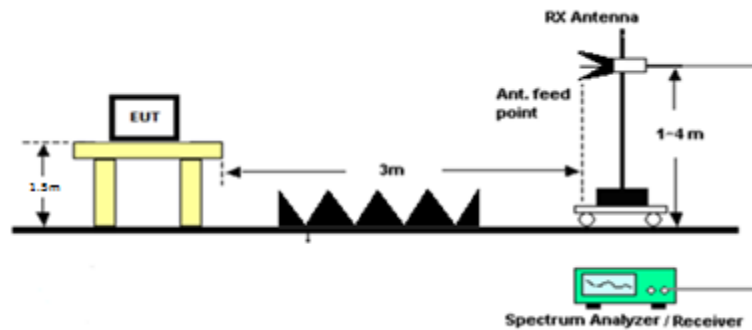



Radiated Emissions, Tabular Data, VHF Band

8.9.1 VHF Uplink

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBµV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
160.00	320.00	PK	2.83	H	2.09	13.90	3.00	18.82	-78.56	-13.00	65.56
160.00	320.00	PK	-0.70	V	2.09	13.90	3.00	15.29	-82.09	-13.00	69.09
160.00	480.00	PK	1.98	H	2.59	16.90	3.00	21.47	-75.91	-13.00	62.91
160.00	480.00	PK	2.18	V	2.59	16.90	3.00	21.67	-75.71	-13.00	62.71
160.00	640.00	PK	-0.30	H	2.96	19.50	3.00	22.16	-75.22	-13.00	62.22
160.00	640.00	PK	0.25	V	2.96	19.50	3.00	22.71	-74.67	-13.00	61.67
160.00	800.00	PK	1.14	H	3.34	20.30	3.00	24.78	-72.60	-13.00	59.60
160.00	800.00	PK	-0.96	V	3.34	20.30	3.00	22.68	-74.70	-13.00	61.70
160.00	960.00	PK	-1.88	H	3.64	23.20	3.00	24.96	-72.42	-13.00	59.42
160.00	960.00	PK	-0.38	V	3.64	23.20	3.00	26.46	-70.92	-13.00	57.92
160.00	1120.00	PK	21.47	H	3.87	27.24	3.00	52.58	-44.80	-13.00	31.80
160.00	1120.00	PK	21.28	V	3.87	27.24	3.00	52.39	-44.99	-13.00	31.99
160.00	1280.00	PK	22.04	H	4.13	28.57	3.00	54.75	-42.63	-13.00	29.63
160.00	1280.00	PK	21.63	V	4.13	28.57	3.00	54.34	-43.04	-13.00	30.04
160.00	1440.00	PK	20.89	H	4.33	28.16	3.00	53.38	-44.00	-13.00	31.00
160.00	1440.00	PK	21.47	V	4.33	28.16	3.00	53.96	-43.42	-13.00	30.42
160.00	1600.00	PK	20.94	H	4.65	28.07	3.00	53.67	-43.71	-13.00	30.71
160.00	1600.00	PK	20.91	V	4.65	28.07	3.00	53.64	-43.74	-13.00	30.74

Radiated Emissions, Tabular Data, UHF Band


8.9.2 UHF Uplink

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBµV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
450.00	900.00	PK	0.81	H	3.54	21.70	3.00	26.05	-71.33	-13.00	58.33
450.00	900.00	PK	2.00	V	3.54	21.70	3.00	27.24	-70.14	-13.00	57.14
450.00	1350.00	PK	11.89	H	4.26	28.76	3.00	44.91	-52.47	-13.00	39.47
450.00	1350.00	PK	11.18	V	4.26	28.76	3.00	44.20	-53.18	-13.00	40.18
450.00	1800.00	PK	10.55	H	4.90	30.29	3.00	45.74	-51.64	-13.00	38.64
450.00	1800.00	PK	12.10	V	4.90	30.29	3.00	47.29	-50.09	-13.00	37.09
450.00	2250.00	PK	11.65	H	5.43	31.23	3.00	48.31	-49.07	-13.00	36.07
450.00	2250.00	PK	12.24	V	5.43	31.23	3.00	48.90	-48.48	-13.00	35.48
450.00	2700.00	PK	13.04	H	5.98	32.51	3.00	51.52	-45.85	-13.00	32.85
450.00	2700.00	PK	12.36	V	5.98	32.51	3.00	50.84	-46.53	-13.00	33.53
450.00	3150.00	PK	12.77	H	6.53	32.78	3.00	52.07	-45.31	-13.00	32.31
450.00	3150.00	PK	13.03	V	6.53	32.78	3.00	52.33	-45.05	-13.00	32.05
450.00	3600.00	PK	12.75	H	6.67	33.11	3.00	52.52	-44.85	-13.00	31.85
450.00	3600.00	PK	13.77	V	6.67	33.11	3.00	53.54	-43.83	-13.00	30.83
450.00	4050.00	PK	9.66	H	7.19	33.38	3.00	50.22	-47.15	-13.00	34.15
450.00	4050.00	PK	10.78	V	7.19	33.38	3.00	51.34	-46.03	-13.00	33.03
450.00	4500.00	PK	9.69	H	7.33	33.89	3.00	50.90	-46.47	-13.00	33.47
450.00	4500.00	PK	9.85	V	7.33	33.89	3.00	51.06	-46.31	-13.00	33.31

## 8.10 Modulation Characteristics

Referenced from test report "TR\_1361-21\_FCC\_DL\_PT90\_Booster Class B\_".

Limits from FCC Parts 2.1047, and test procedure from ANSI C63.26-2015.

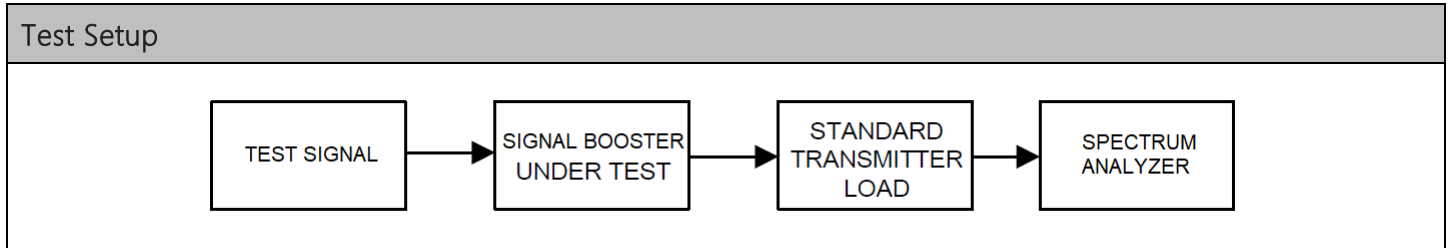


N/A. The EUT does not have any means to modulate the incoming signal.

### 8.11 Frequency Stability

Referenced from test report "TR\_1361-21\_FCC\_DL\_PT90\_Booster Class B\_".

Limits from FCC Parts 2.1055, 90.213 (a); and test procedure from ANSI C63.26-2015 and FCC KDB 935210 D05 v01r04 Industrial Signal Boosters.

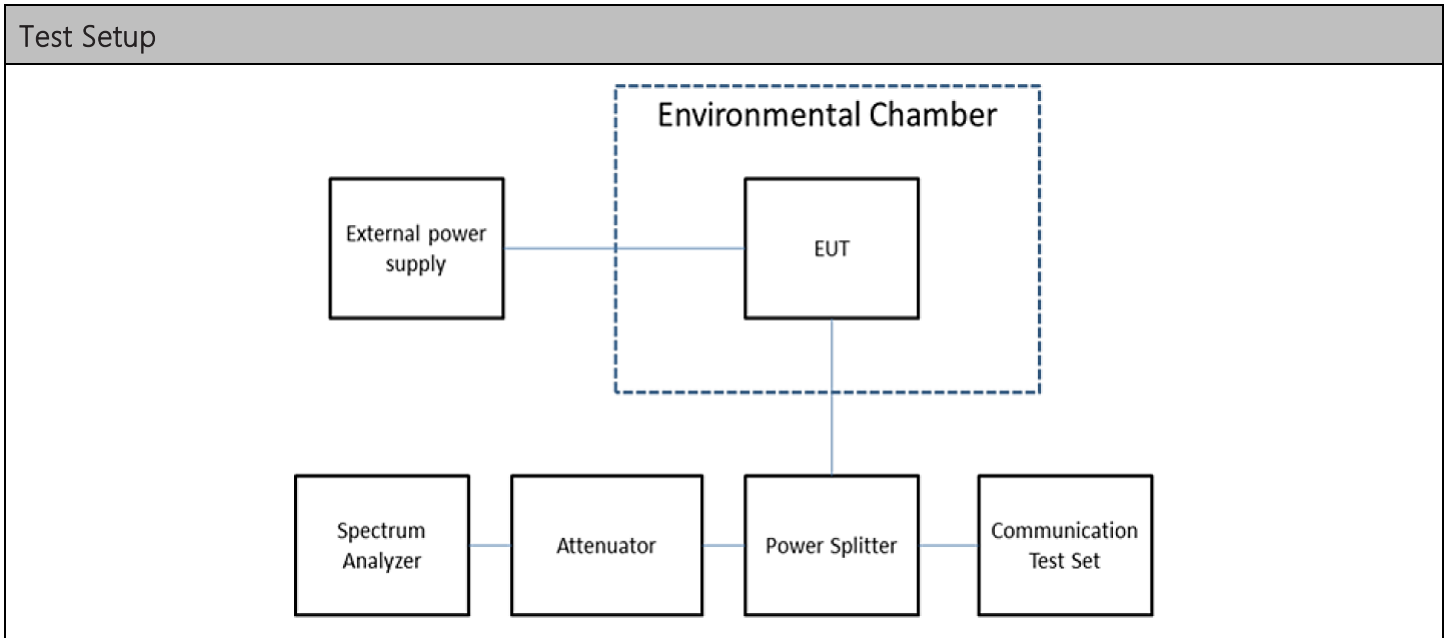

**Test Results, Mode 1**

Tuned Frequency (MHz)	Max Deviation (ppm)	Limit (ppm)
n/a	n/a	n/a

N/A. The EUT does not alter the input signal in any way.



Timco Engineering, Inc., an IIA Company  
849 NW State Road 45, Newberry, Florida 32669  
(352) 472-5500 / [testing@timcoengr.com](mailto:testing@timcoengr.com)

## 8.12 Transient Frequency Behavior

*Referenced from test report ""TR\_1361-21\_FCC\_DL\_PT90\_Booster Class B\_".*

Limits from FCC Part 90.214; and test procedure from ANSI C63.26-2015.

N/A. The EUT does not "key-on" or "key off", and instead transmits indefinitely.





Timco Engineering, Inc., an IIA Company  
849 NW State Road 45, Newberry, Florida 32669  
(352) 472-5500 / [testing@timcoengr.com](mailto:testing@timcoengr.com)

### 8.13 Adjacent channel power limits

*Referenced from test report "TR\_1361-21\_FCC\_DL\_PT90\_Booster Class B\_"..*

Limits from FCC Part 90.221, and test procedure from ANSI C63.26-2015.

N/A. Testing Not Applicable.



### 9. Photographs of the EUT

Photographs of the EUT and any manufacturer supplied accessories to be used with the EUT are in separate supplementary documents labelled EXTERNAL PHOTOS and INTERNAL PHOTOS.

### 10. Test Setup Photographs

Test setup photographs are located in a separate supplementary document labelled TEST SETUP PHOTOS.

### 11. History of Test Report Changes

Test Report #	Revision #	Description	Date of Issue
TR_2122-21_FCC_PT90_UL_Booster Class A_1	1	Initial release	June 10, 2021



Timco Engineering, Inc., an IIA Company  
849 NW State Road 45, Newberry, Florida 32669  
(352) 472-5500 / [testing@timcoengr.com](mailto:testing@timcoengr.com)

---

END OF TEST REPORT

---