



Test Report No.: RF2203WDG0289



# TEST REPORT



Applicant	FUJIAN TEAMDA PHOTOELECTRICITY CO.,LTD
Address	Trangulation Point Shengqiao Town, Zhaoan County,Zhangzhou City, Fujian Province P.R. China

Manufacturer or Supplier	FUJIAN TEAMDA PHOTOELECTRICITY CO.,LTD
Address	Trangulation Point Shengqiao Town, Zhaoan County,Zhangzhou City, Fujian Province P.R. China
Product	Toy RC Monster Spinning Car
Brand Name	SHARPER IMAGE
Model	1012328
Additional Models & Model Difference	1012329, 1013270, 1013271, 1014554, 1014555, 1014556, 1015631, 1015647, 1013243, 1014391, 101XXXX (where XXXX can be digits 0000-9999 which represent different customers); see item 3.1
Date of tests	Mar. 29, 2022 ~ Apr. 12, 2022

the tests have been carried out according to the requirements of the following standard:

**FCC Part 15, Subpart C, Section 15.235**

**CONCLUSION: The submitted sample was found to COMPLY with the test requirement**

Tested by Loren Luo Project Engineer / EMC Department	Approved by Glyn He Assistant Manager / EMC Department
	
	Date: Jun. 29, 2022

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



## TABLE OF CONTENTS

<b>RELEASE CONTROL RECORD .....</b>	<b>3</b>
<b>1 SUMMARY OF TEST RESULTS .....</b>	<b>4</b>
<b>2 MEASUREMENT UNCERTAINTY .....</b>	<b>4</b>
<b>3 GENERAL INFORMATION .....</b>	<b>5</b>
3.1 GENERAL DESCRIPTION OF EUT .....	5
3.2 DESCRIPTION OF TEST MODES .....	6
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS .....	6
3.4 DESCRIPTION OF SUPPORT UNITS .....	6
<b>4. TEST TYPES AND RESULTS .....</b>	<b>7</b>
4.1 RADIATED EMISSION MEASUREMENT .....	7
4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT .....	7
4.1.2 TEST INSTRUMENTS.....	8
4.1.3 TEST PROCEDURES .....	9
4.1.4 DEVIATION FROM TEST STANDARD .....	9
4.1.5 TEST SETUP .....	10
4.1.6 EUT OPERATING CONDITIONS .....	11
4.1.7 TEST RESULTS .....	11
4.2 BANDWIDTH MEASUREMENT .....	16
4.2.1 LIMITS OF BANDWIDTH MEASUREMENT .....	16
4.2.2 TEST INSTRUMENTS.....	16
4.2.3 TEST PROCEDURE.....	17
4.2.4 DEVIATION FROM TEST STANDARD .....	17
4.2.5 TEST SETUP .....	17
4.2.6 EUT OPERATING CONDITIONS .....	17
4.2.7 TEST RESULTS .....	18
<b>5 PHOTOGRAPHS OF THE TEST CONFIGURATION.....</b>	<b>19</b>
<b>6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB .....</b>	<b>20</b>



**BUREAU  
VERITAS**

Test Report No.: RF2203WDG0289

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF2203WDG0289	Original release	Jun. 29, 2022

## 1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.235)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
§15.207 (a)	Conducted Emission	N/A	EUT is powered by battery
§15.209 §15.235(a)	Radiated Emission	PASS	Compliant
§15.235(b) §15.215(c)	Measured Bandwidth	PASS	Compliant
§15.203	Antenna Requirement	PASS	No antenna connector is used

## 2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Radiated emissions	9KHz ~ 30MHz	2.66dB
	30MHz ~ 1GHz	4.06dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .



### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	Toy RC Monster Spinning Car
<b>MODEL NO.</b>	1012328
<b>ADDITIONAL MODELS</b>	1012329, 1013270, 1013271, 1014554, 1014555, 1014556, 1015631, 1015647, 1013243, 1014391, 101XXXX (where XXXX can be digits 0000-9999 which represent different customers)
<b>FCC ID</b>	P45TD2022A49
<b>NOMINAL VOLTAGE</b>	DC 9V(9V*6LR6*1) from battery;
<b>MODULATION TYPE</b>	ASK
<b>OPERATING FREQUENCY</b>	49.86 MHz
<b>NUMBER OF CHANNEL</b>	1
<b>ANTENNA TYPE</b>	Spring Antenna ,with 0dBi Gain
<b>I/O PORTS</b>	Refer to user's manual
<b>CABLE SUPPLIED</b>	N/A

#### NOTES:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions, but only the worst case was shown in test report.
3. Please refer to the EUT photo document (Reference No.: 2203WDG0289) for detailed product photo.
4. Additional models (see above table) are identical with the test model 1012328 except the color of the appearance, trade name and model number for trading purpose.



### 3.2 DESCRIPTION OF TEST MODES

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and packet type. The worst case was found when the EUT was positioned on Y axis for radiated emission. The EUT was tested under the following mode.

FREQUENCY	TEST MODE
49.86MHz	Transmitting

### 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C, 15.235**

**ANSI C63.10-2013**

### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit without any other necessary accessories or support units.

## 4 TEST TYPES AND RESULTS

### 4.1 RADIATED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

According to §15.235(a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Frequency Range of Fundamental [MHz]	Field Strength of Fundamental Emission [Peak] [ $\mu$ V/m]	Field Strength of Fundamental Emission [Average] [ $\mu$ V/m]
49.82 – 49.90	100,000 (100 dB $\mu$ V/m)	10,000 (80 dB $\mu$ V/m)

#### NOTES:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level ( $\mu$ V/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

#### 4.1.2 TEST INSTRUMENTS

##### For Below 30MHz

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESC17	100962	Apr.18.23
Loop Antenna	COM-POWER	AL-130	121031	Apr. 27,23
Coaxial RF Cable	Joinfront	JFAA6-NMNM-8000	2100033742	Aug.08, 22
Coaxial RF Cable	Joinfront	JFAR-NMBNCM-2000	2100033742	Aug.08, 22
Coaxial RF Cable	Joinfront	JFAR-BNCMSMM-500	2100033742	Aug.08, 22
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A

- NOTES:**
1. The test was performed in 3m Chamber.
  2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
  3. The FCC Site Registration No. is 749762

##### For 30MHz ~1GHz

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
Spectrum Analyzer	Rohde&Schwarz	FSV40-N	101817	July 04, 22
Bilog Antenna	SCHWARZBECK	VULB 9168	01281	July 30, 22
Pre-Amplifier	Agilent	8447D	2944A10488	Aug.08, 22
3m Semi-anechoic Chamber	ETS-Lindgren	9m*6m*6m	D3040003DG-1	July 30, 24
Coaxial RF Cable	Joinfront	JFAA6-NMNM-8000	2100033742	Aug.08, 22
Coaxial RF Cable	Joinfront	JFAR-NMBNCM-2000	2100033742	Aug.08, 22
Coaxial RF Cable	Joinfront	JFAR-BNCMSMM-500	2100033742	Aug.08, 22
Test software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A
Horn Antenna	ETS-Lindgren	3117	00240041	July 22, 22
Horn Antenna	SCHWARZBECK	BBHA 9170	01024	Dec. 25, 22
Pre-Amplifier (1GHz-18GHz)	SCHWARZBECK	BBV 9718C	00142	Aug. 06, 22
Pre-Amplifier (18GHz-40GHz)	Rohde&Schwarz	SCU40	100437	Nov. 16, 22
Coaxial RF Cable	Joinfront	JFAA6-NMNM-8000	2100033742	Aug.08, 22
Coaxial RF Cable	Joinfront	JFAA6-NMSMM-2000	2100033742	Aug.08, 22
Coaxial RF Cable	Joinfront	JFAA6-NMSMM-800	2100033742	Aug.08, 22

- NOTES:**
1. The test was performed at 966 Chamber-3 (Baodun).
  2. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
  3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
  4. The FCC Site Registration No. is 749762.



#### 4.1.3 TEST PROCEDURES

The basic test procedure was in accordance with ANSI C63.10 (section 6).

Below 30MHz:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters Semi-anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1.3 meter and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

30MHz~1GHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

**NOTES:**


1. The resolution bandwidth of test receiver/spectrum analyzer is 200Hz for Quasi-peak detection (QP) at fundamental frequency 9K-150KHz;
2. The resolution bandwidth of test receiver/spectrum analyzer is 9KHz for Quasi-peak detection (QP) at fundamental frequency 150K-30MHz;
3. The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at radiated spurious emission frequency 30MHz-1GHz.

#### 4.1.4 DEVIATION FROM TEST STANDARD


No deviation.

#### 4.1.5 TEST SETUP

##### Below 30MHz test setup

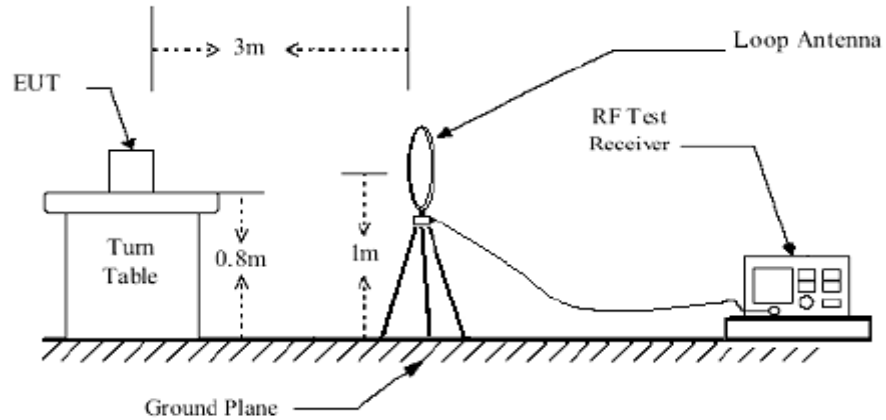

##### Below 1GHz test setup

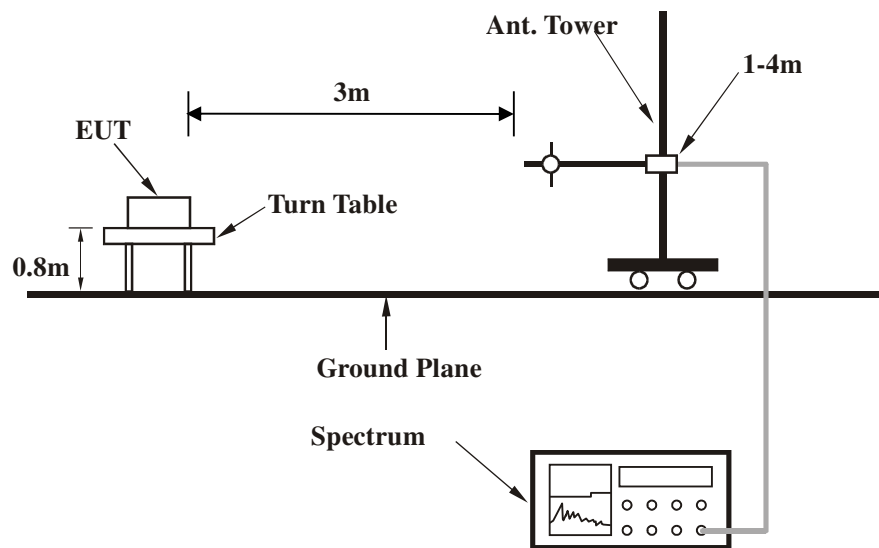

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power of equipment.
- b. Hold down the TX of button, and then the EUT was operating.
- c. EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.

#### 4.1.7 TEST RESULTS

##### FIELD STRENGTH OF FUNDAMENTAL

No.	Freq. (MHz)	Antenna Polarization	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
*	49.86(PK)	H	-14.07	60.89	46.82	100	-53.18
*	49.86(AV)	H	-4.893	-	41.927	80	-38.073
*	49.86(PK)	V	-14.07	81.37	67.3	100	-32.7
*	49.86(AV)	V	-4.893	-	62.407	80	-17.593

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The emission levels of other frequencies were greater than 20dB margin.
  4. Margin value = Emission level – Limit value.
  5. “ \* “: Fundamental frequency.
  6. The average value of fundamental frequency is: Average value = Peak value +AV factor, where the AV factor is calculated from following formula: AV factor=20 log (Duty cycle) = 20 log (56.93%) = -4.893dB, Please see page 12~13 for plotted duty.




Duty Cycle:

$$T_p = 51.014 \text{ms}$$

$$\text{Ton} = \text{Ton1} * \text{Number} + \text{Ton2} * \text{Number} = 1.6087 * 4 + 0.5652 * 40 = 29.0428 \text{ms}$$

$$\text{Duty Cycle} = \text{Ton} / T_p * 100\% = 29.0428 / 51.01 = 56.93\%$$

$$T_p = 51.014 \text{ms}$$

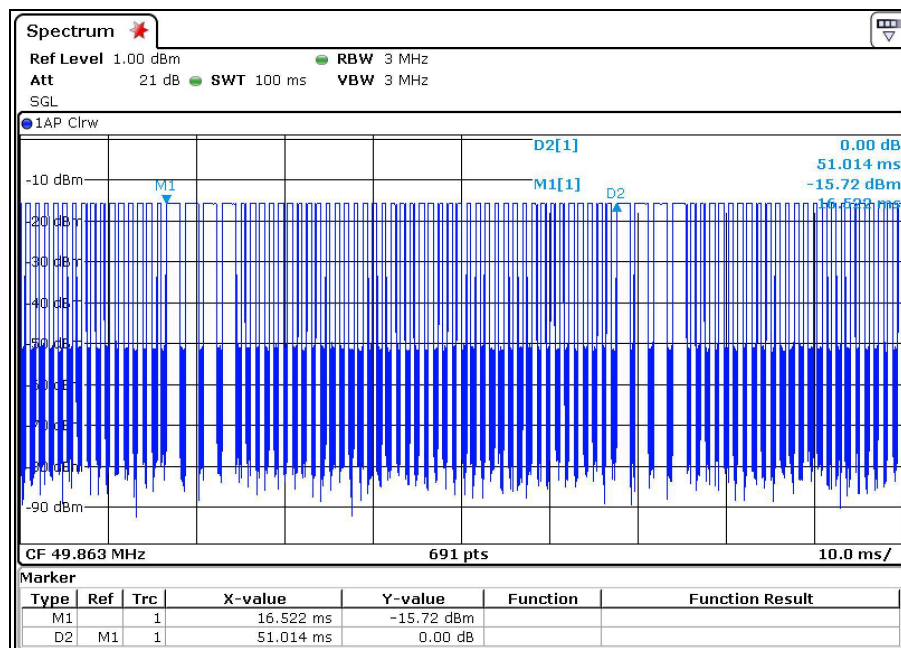




Test Report No.: RF2203WDG0289

$T_{on1} = 1.6087\text{ms}$

$T_{on2} = 0.5652\text{ms}$

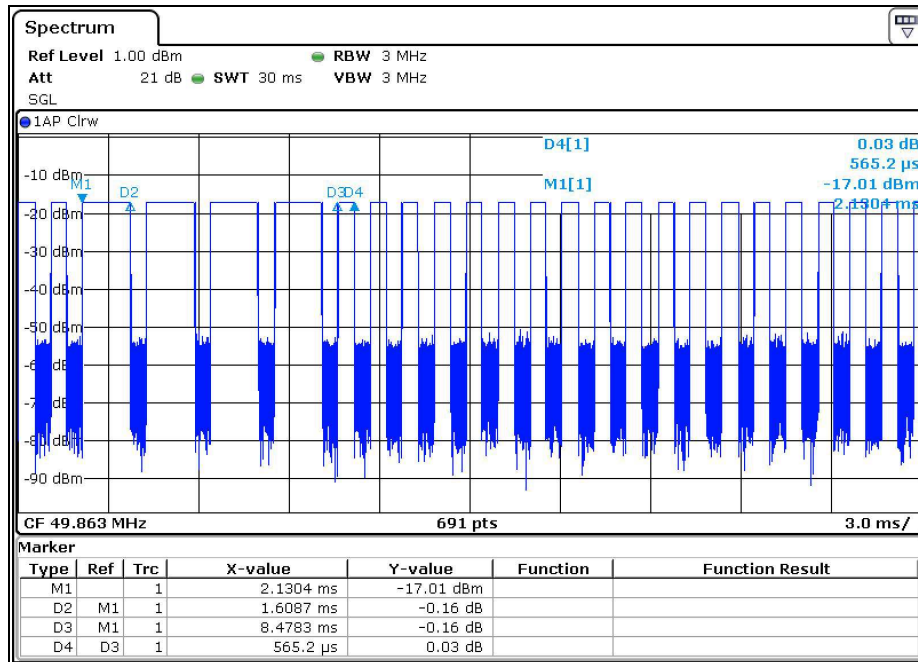


<b>FREQUENCY RANGE</b>	9KHz ~ 1GHz	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
------------------------	-------------	--------------------------	-----------------

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	148.34	17.66 QP	43.50	-25.84	1.80 H	58	-13.71	31.37
2	198.78	17.40 QP	43.50	-26.10	2.54 H	80	-16.31	33.71
3	249.22	20.01 QP	46.00	-25.99	1.63 H	291	-14.25	34.26
4	299.66	19.15 QP	46.00	-26.85	2.42 H	278	-12.54	31.69
5	495.60	19.34 QP	46.00	-26.66	2.37 H	124	-9.19	28.53
6	582.90	23.07 QP	46.00	-22.93	2.82 H	222	-7.01	30.08

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. 9KHz~30MHz have been test and test data more than 20dB margin.
5. Margin value = Emission level – Limit value.

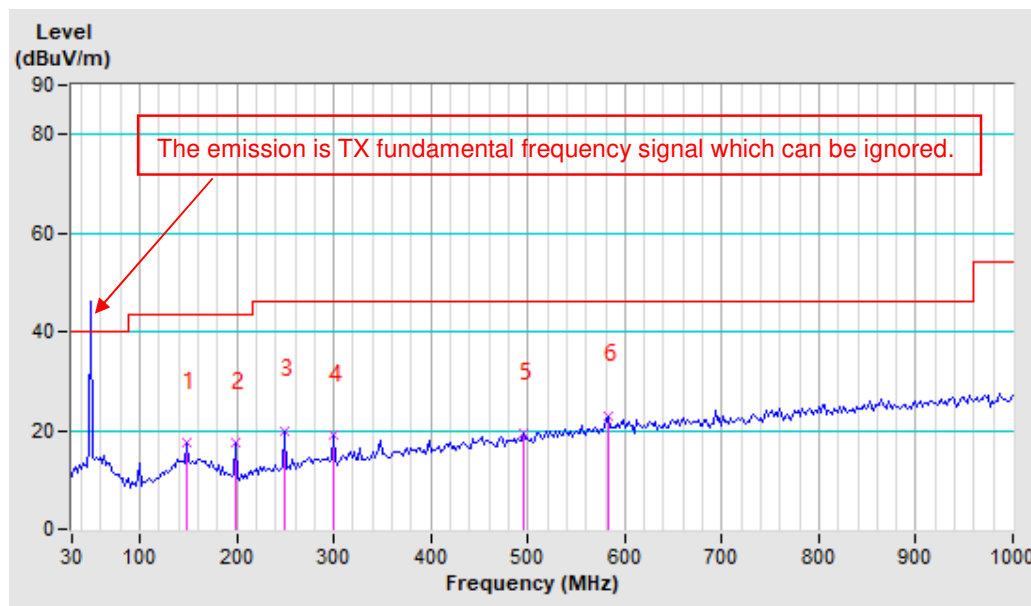


<b>FREQUENCY RANGE</b>	9KHz ~ 1GHz	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
------------------------	-------------	--------------------------	-----------------

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	99.84	26.74 QP	43.50	-16.76	2.64 V	83	-18.42	45.16
2	148.34	19.04 QP	43.50	-24.46	1.59 V	9	-13.71	32.75
3	198.78	23.27 QP	43.50	-20.23	2.70 V	270	-16.31	39.58
4	249.22	31.76 QP	46.00	-14.24	1.92 V	324	-14.25	46.01
5	299.66	27.22 QP	46.00	-18.78	1.92 V	53	-12.54	39.76
6	348.16	21.85 QP	46.00	-24.15	2.57 V	206	-11.52	33.37

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. 9KHz~30MHz have been test and test data more than 20dB margin.
5. Margin value = Emission level – Limit value.

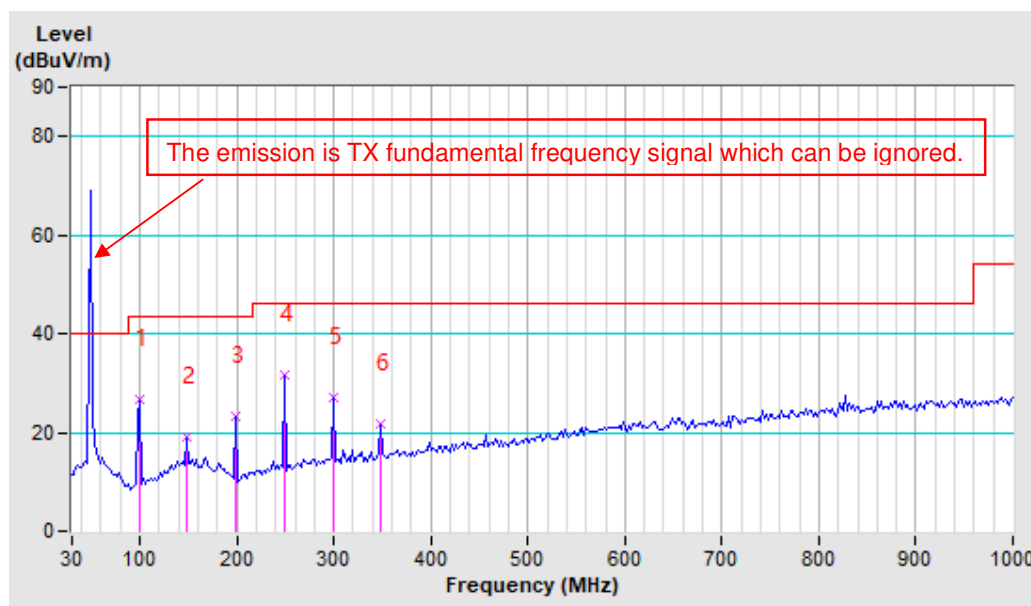

## 4.2 BANDWIDTH MEASUREMENT

### 4.2.1 LIMITS OF BANDWIDTH MEASUREMENT

The field strength of any emissions appearing between the band edges and up to 10 kHz above and below the band edges shall be attenuated at least 26 dB below the level of the unmodulated carrier or to the general limits in Section 15.209.

FREQUENCY (MHz)	Limits
	[MHz]
49.86	within 49.81~49.91

### 4.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
Wireless Connectivity Tester	Rohde&Schwarz	CMW270	101601	Nov. 21, 22
MXA signal analyzer	Agilent	N9020A	MY49100060	Apr. 19, 23
Network Analyzer	Agilent	8753ES	US39173518	Mar. 28, 23
Spectrum Analyzer	Rohde&Schwarz	FSV7	101574	July 04, 22
Frequency Analyzer	Keysight	N9010B	MY60240432	Nov. 25, 22
Programmable Temperature&Humidity Chamber	Hongjin	HYC-TH-225DH	DG-180746	Feb. 16, 23
DC Source	Agilent	E3640A	MY40004013	Feb. 23, 23
Test software	ADT	ADT_RF Test Software V6.6.5.3	N/A	N/A
Test software	ADT	ADT_RF Test Software V6.6.5.4	N/A	N/A

#### NOTES:

1. The test was performed in RF Oven room (Baodun).
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.




#### 4.2.3 TEST PROCEDURE

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 26dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat above procedures until all frequencies measured were complete.

#### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.2.5 TEST SETUP




#### 4.2.6 EUT OPERATING CONDITIONS

Same as item 4.1.6



4.2.7 TEST RESULTS

Lower & Upper Test Frequency Point (MHz)	Test Frequency (MHz)	P/F
Lower	49.84708	PASS
Upper	49.87515	PASS

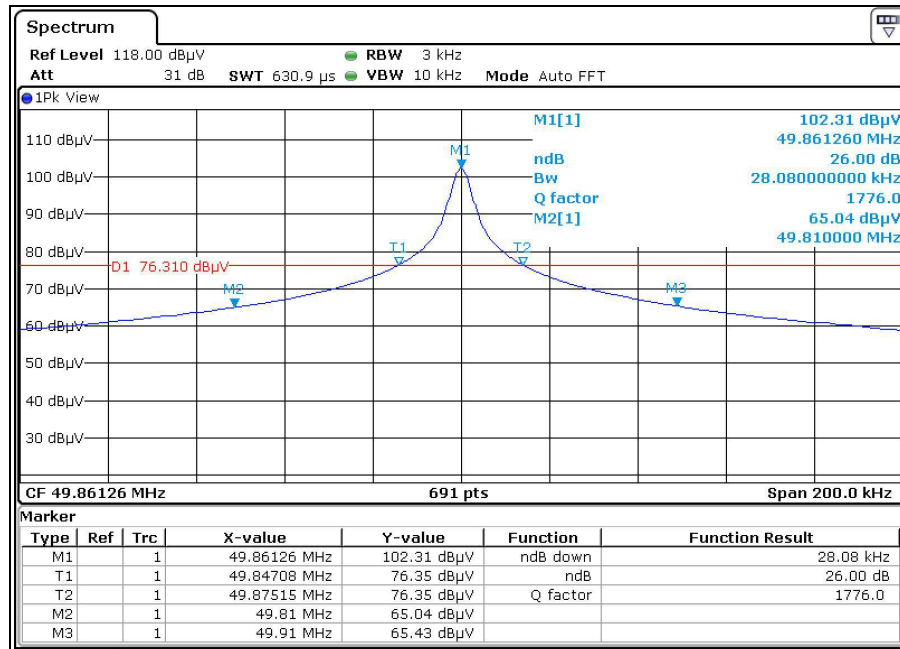



**BUREAU  
VERITAS**

Test Report No.: RF2203WDG0289

## 5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



**BUREAU  
VERITAS**

Test Report No.: RF2203WDG0289

## **6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No any modifications are made to the EUT by the lab during the test.

**---END---**