




# RF TEST REPORT



Report No.: 16070898-FCC-R2

Supersede Report No.: N/A

Applicant	Unimax Communications	
Product Name	Mobile Phone	
Model No.	MXG-408	
Serial No.	N/A	
Test Standard	FCC Part 15.247: 2015, ANSI C63.10: 2013	
Test Date	July 22 to August 15, 2016	
Issue Date	August 16, 2016	
Test Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	
Equipment complied with the specification	<input checked="" type="checkbox"/>	
Equipment did not comply with the specification	<input type="checkbox"/>	
		
Loren Luo Test Engineer	David Huang Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

**SIEMIC (SHENZHEN-CHINA) LABORATORIES**

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: [China@siemic.com.cn](mailto:China@siemic.com.cn)

## Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

### Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report	16070898-FCC-R2
Page	3 of 60

This page has been left blank intentionally.

# CONTENTS

<b>1. REPORT REVISION HISTORY .....</b>	<b>5</b>
<b>2. CUSTOMER INFORMATION .....</b>	<b>5</b>
<b>3. TEST SITE INFORMATION.....</b>	<b>5</b>
<b>4. EQUIPMENT UNDER TEST (EUT) INFORMATION .....</b>	<b>6</b>
<b>5. TEST SUMMARY .....</b>	<b>8</b>
<b>6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS .....</b>	<b>9</b>
6.1 ANTENNA REQUIREMENT.....	9
6.2 CHANNEL SEPARATION .....	10
6.3 20DB BANDWIDTH .....	14
6.4 PEAK OUTPUT POWER.....	18
6.5 NUMBER OF HOPPING CHANNEL.....	22
6.6 TIME OF OCCUPANCY (DWELL TIME) .....	24
6.7 BAND EDGE & RESTRICTED BAND .....	28
6.8 AC POWER LINE CONDUCTED EMISSIONS.....	36
6.9 RADIATED SPURIOUS EMISSIONS & RESTRICTED BAND.....	42
<b>ANNEX A. TEST INSTRUMENT.....</b>	<b>48</b>
<b>ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS.....</b>	<b>49</b>
<b>ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....</b>	<b>55</b>
<b>ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST .....</b>	<b>59</b>
<b>ANNEX E. DECLARATION OF SIMILARITY.....</b>	<b>60</b>

## 1. Report Revision History

Report No.	Report Version	Description	Issue Date
16070898-FCC-R2	NONE	Original	August 16, 2016

## 2. Customer information

Applicant Name	Unimax Communications
Applicant Add	18201 Mcdurmott St. West Suite E, Irvine, CA 92614
Manufacturer	Unimax Communications LLC
Manufacturer Add	18201 Mcdurmott St. West Suite E, Irvine, CA 92614

## 3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	718246
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0

## 4. Equipment under Test (EUT) Information

Description of EUT:	Mobile Phone
Main Model:	MXG-408
Serial Model:	N/A
Date EUT received:	July 21, 2016
Test Date(s):	July 22 to August 15, 2016
Equipment Category :	DSS
Antenna Gain:	GSM850: 0.33dBi PCS1900: 3.92dBi UMTS-FDD Band V: 0.33dBi UMTS-FDD Band II: 3.92dBi Bluetooth/BLE/WIFI: 1.98dBi
Antenna Type:	PIFA antenna
Type of Modulation:	GSM / GPRS: GMSK EGPRS: GMSK,8PSK UMTS-FDD: QPSK 802.11b/g/n: DSSS, OFDM Bluetooth: GFSK, $\pi$ /4DQPSK, 8DPSK BLE: GFSK
RF Operating Frequency (ies):	GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz UMTS-FDD Band II TX:1852.4 ~ 1907.6 MHz; RX: 1932.4 ~ 1987.6 MHz WIFI: 802.11b/g/n(20M): 2412-2462 MHz Bluetooth& BLE: 2402-2480 MHz
Max. Output Power:	1.988dBm

Test Report	16070898-FCC-R2
Page	7 of 60

Number of Channels: GSM 850: 124CH  
PCS1900: 299CH  
UMTS-FDD Band V : 102CH  
UMTS-FDD Band II : 277CH  
WIFI :802.11b/g/n(20M): 11CH  
Bluetooth: 79CH  
BLE: 40CH

Port: Earphone Port, USB Port

Input Power: Adapter:  
Model:UMXCHG  
Input: AC 100-240V~50/60Hz;0.15A  
Output: DC 5.0V,500mA  
Battery:  
Model:BU1350  
Spec: 3.7V,1350mAh(4.995Wh)

Trade Name : Unimax Communications

GPRS/EGPRS Multi-slot class 8/10/12

FCC ID: P46-UMX40INT

## 5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.247(a)(1)	Channel Separation	Compliance
§15.247(a)(1)	20 dB Bandwidth	Compliance
§15.247(b)(1)	Peak Output Power	Compliance
§15.247(a)(1)(iii)	Number of Hopping Channel	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(d)	Band Edge& Restricted Band	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Emissions& Restricted Band	Compliance

### Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-



## 6. Measurements, Examination And Derived Results

### 6.1 Antenna Requirement

#### **Applicable Standard**

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **Antenna Connector Construction**

The EUT has 2 antennas:

A permanently attached PIFA antenna for Bluetooth/BLE/WIFI, the gain is 1.98dBi .

A permanently attached PIFA antenna for GSM/PCS/UMTS, the gain is 0.33dBi for GSM850, 3.92dBi for PCS1900, 0.33dBi for UMTS-FDD Band V, 3.92dBi for UMTS-FDD Band II.

**The antenna meets up with the ANTENNA REQUIREMENT.**

**Result:** Compliance.

## 6.2 Channel Separation

Temperature	25°C
Relative Humidity	54%
Atmospheric Pressure	1012mbar
Test date :	August 12, 2016
Tested By :	Loren Luo

### Requirement(s):

Spec	Item	Requirement	Applicable
§ 15.247(a)(1)	a)	Channel Separation < 20dB BW and 20dB BW < 25KHz ; Channel Separation Limit=25KHz Chanel Separation < 20dB BW and 20dB BW > 25kHz ; Channel Separation Limit=2/3 20dB BW	<input checked="" type="checkbox"/>

Test Setup	
------------	--

Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Use the following spectrum analyzer settings:</p> <ul style="list-style-type: none"> <li>- The EUT must have its hopping function enabled</li> <li>- Span = wide enough to capture the peaks of two adjacent channels</li> <li>- Resolution (or IF) Bandwidth (RBW) <math>\geq</math> 1% of the span</li> <li>- Video (or Average) Bandwidth (VBW) <math>\geq</math> RBW</li> <li>- Sweep = auto</li> <li>- Detector function = peak</li> <li>- Trace = max hold</li> <li>- Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.</li> </ul>
----------------	--

Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data  Yes  N/A


Test Plot  Yes (See below)  N/A

### Channel Separation measurement result

Type/ Modulation	CH	CH Frequency (MHz)	CH Separation (MHz)	Limit (MHz)	Result
CH Separation GFSK	Low Channel	2402	1.005	0.959	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.005	0.701	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.005	0.697	Pass
	Adjacency Channel	2479			
CH Separation $\pi/4$ DQPSK	Low Channel	2402	1.005	0.951	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.005	0.985	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.005	0.997	Pass
	Adjacency Channel	2479			
CH Separation 8DPSK	Low Channel	2402	1.005	0.968	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.005	0.964	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.005	0.969	Pass
	Adjacency Channel	2479			

## Test Plots

### Channel Separation measurement result

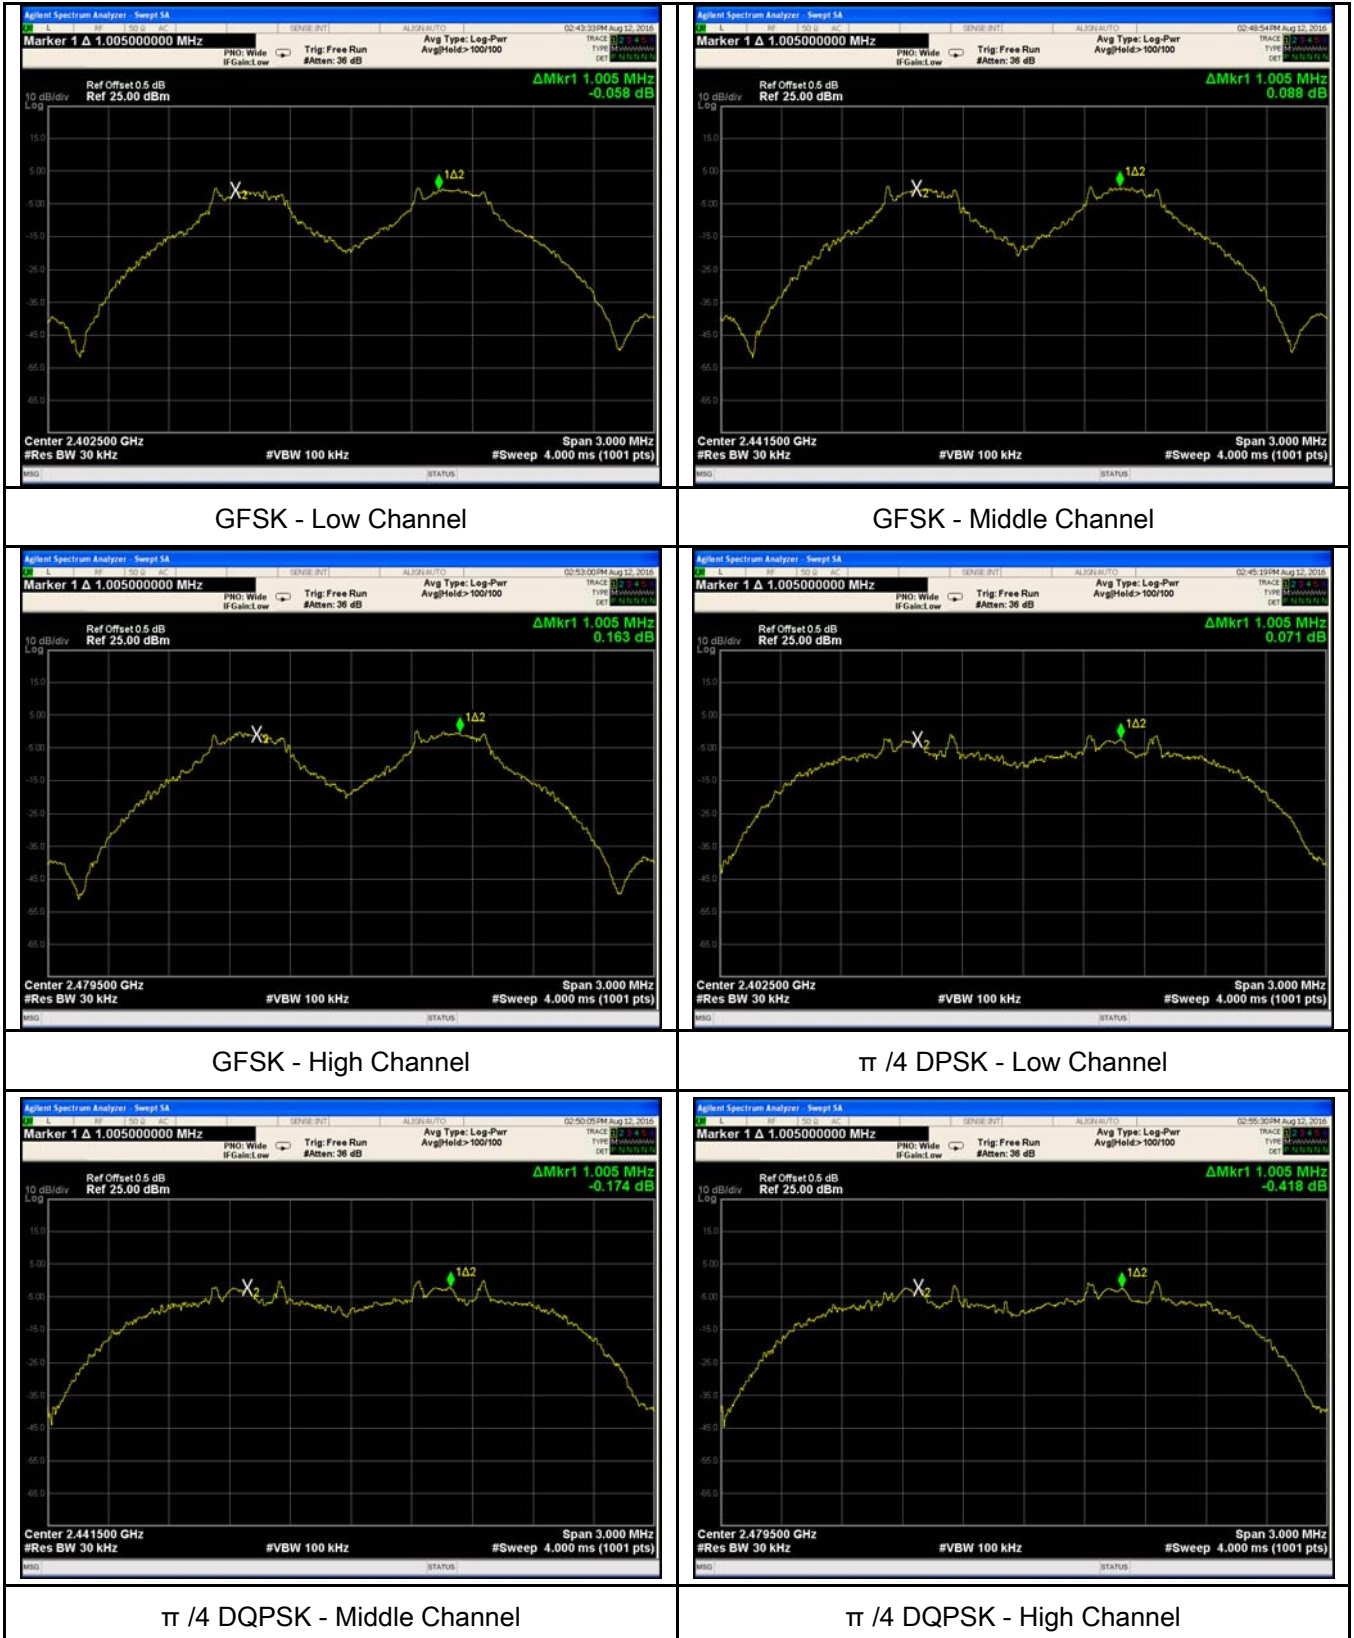



8DPSK - Low Channel



8DPSK - Middle Channel



8DPSK - High Channel




### 6.3 20dB Bandwidth

Temperature	25°C
Relative Humidity	54%
Atmospheric Pressure	1012mbar
Test date :	August 12, 2016
Tested By :	Loren Luo

**Requirement(s):**

Spec	Item	Requirement	Applicable
§15.247(a) (1)	a)	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.	<input checked="" type="checkbox"/>

Test Setup	
------------	--

Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer settings:</u></p> <ul style="list-style-type: none"> <li>- Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel</li> <li>- RBW <math>\geq</math> 1% of the 20 dB bandwidth</li> <li>- VBW <math>\geq</math> RBW</li> <li>- Sweep = auto</li> <li>- Detector function = peak</li> <li>- Trace = max hold.</li> <li>- The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference</li> </ul>
----------------	--

	marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data  Yes  N/A

Test Plot  Yes (See below)  N/A

#### Measurement result


Modulation	CH	CH Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
GFSK	Low	2402	0.9591	0.8792
	Mid	2441	1.052	0.9191
	High	2480	1.046	0.9020
$\pi/4$ DQPSK	Low	2402	1.427	1.3175
	Mid	2441	1.477	1.3371
	High	2480	1.495	1.3470
8-DPSK	Low	2402	1.452	1.3437
	Mid	2441	1.446	1.3401
	High	2480	1.453	1.3451

## Test Plots

### 20dB Bandwidth measurement result



GFSK - Low Channel

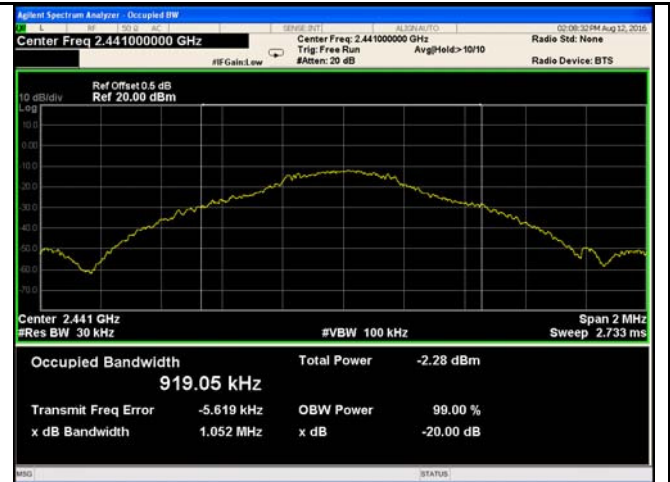


GFSK - Middle Channel



GFSK - High Channel



$\pi/4$  DPSK - Low Channel

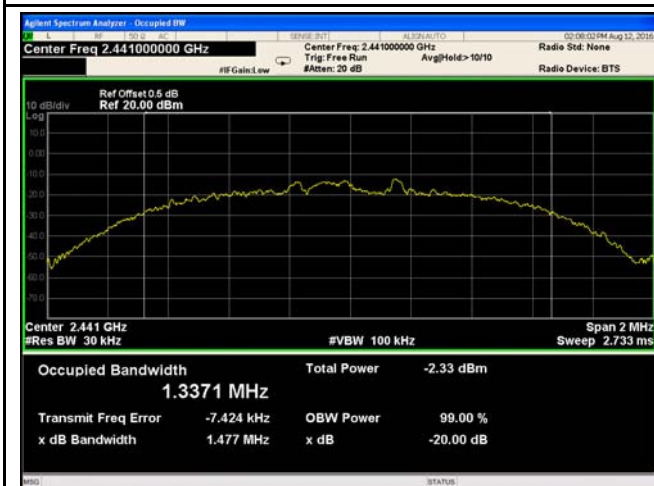


$\pi/4$  DQPSK - Middle Channel



$\pi/4$  DQPSK - High Channel



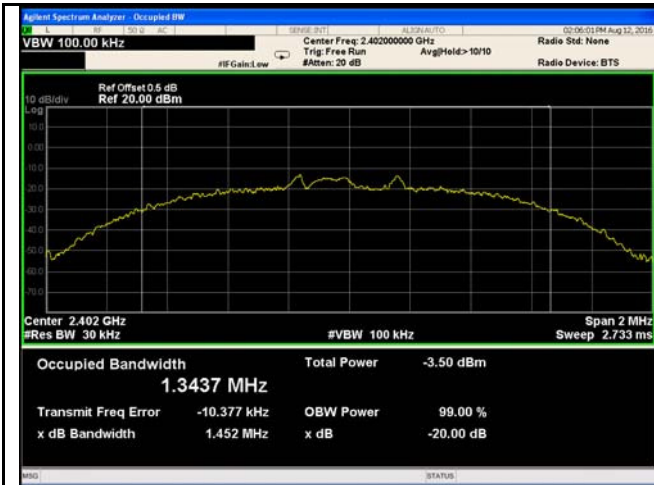

8DPSK - Low Channel



8DPSK - Middle Channel




8DPSK - High Channel

## 6.4 Peak Output Power

Temperature	25°C
Relative Humidity	54%
Atmospheric Pressure	1012mbar
Test date :	August 12, 2016
Tested By :	Loren Luo

### Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(b) (3)	a)	FHSS in 2400-2483.5MHz with $\geq 75$ channels: $\leq 1$ Watt	<input checked="" type="checkbox"/>
	b)	FHSS in 5725-5850MHz: $\leq 1$ Watt	<input type="checkbox"/>
	c)	For all other FHSS in the 2400-2483.5MHz band: $\leq 0.125$ Watt.	<input checked="" type="checkbox"/>
	d)	FHSS in 902-928MHz with $\geq 50$ channels: $\leq 1$ Watt	<input type="checkbox"/>
	e)	FHSS in 902-928MHz with $\geq 25$ & $< 50$ channels: $\leq 0.25$ Watt	<input type="checkbox"/>
	f)	DTS in 902-928MHz, 2400-2483.5MHz: $\leq 1$ Watt	<input type="checkbox"/>

Test Setup	
------------	--

Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p>Use the following spectrum analyzer settings:</p> <ul style="list-style-type: none"> <li>- Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel</li> <li>- RBW &gt; the 20 dB bandwidth of the emission being measured</li> <li>- VBW <math>\geq</math> RBW</li> <li>- Sweep = auto</li> <li>- Detector function = peak</li> <li>- Trace = max hold</li> <li>- Allow the trace to stabilize.</li> </ul>
----------------	---

	<ul style="list-style-type: none"> <li>- Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power (see the note above regarding external attenuation and cable loss). The limit is specified in one of the subparagraphs of this Section. Submit this plot. A peak responding power meter may be used instead of a spectrum analyzer.</li> </ul>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail


Test Data     Yes                       N/A  
 Test Plot     Yes (See below)             N/A

**Peak Output Power measurement result**

Type	Modulation	CH	Frequency (MHz)	Conducted Power (dBm)	Limit (mW)	Result
Output power	GFSK	Low	2402	0.608	1000	Pass
		Mid	2441	1.298	125	Pass
		High	2480	1.047	125	Pass
	$\pi/4$ DQPSK	Low	2402	1.390	125	Pass
		Mid	2441	<b>1.988</b>	125	Pass
		High	2480	1.837	125	Pass
	8-DPSK	Low	2402	1.270	125	Pass
		Mid	2441	1.880	125	Pass
		High	2480	1.736	125	Pass

Test Plots


Output Power measurement result

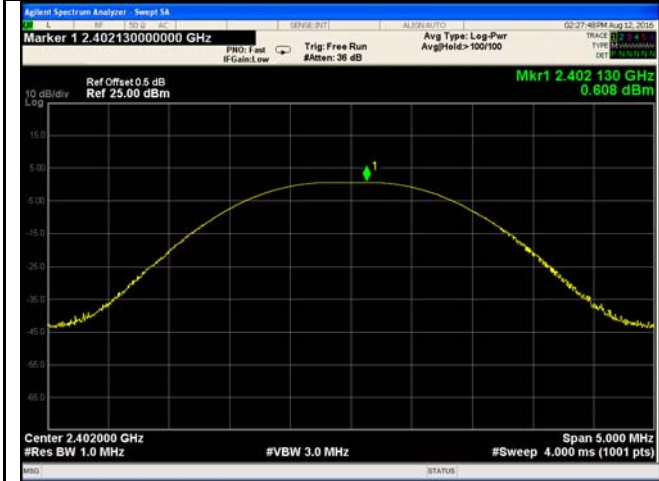


GFSK Output power - Low CH 2402




GFSK Output power - Mid CH 2441

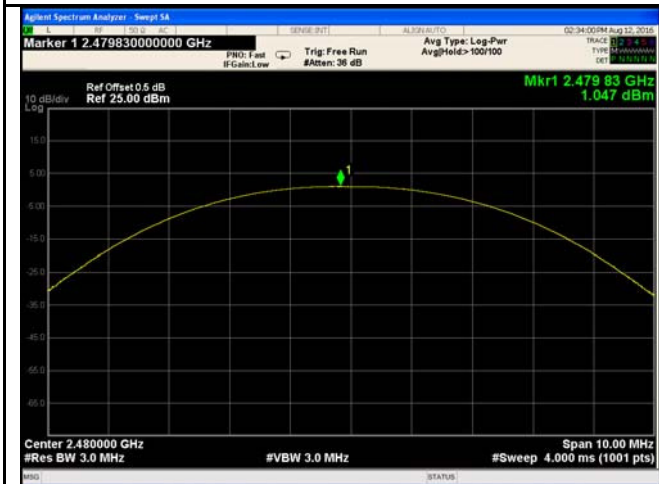


GFSK Output power - High CH 2480

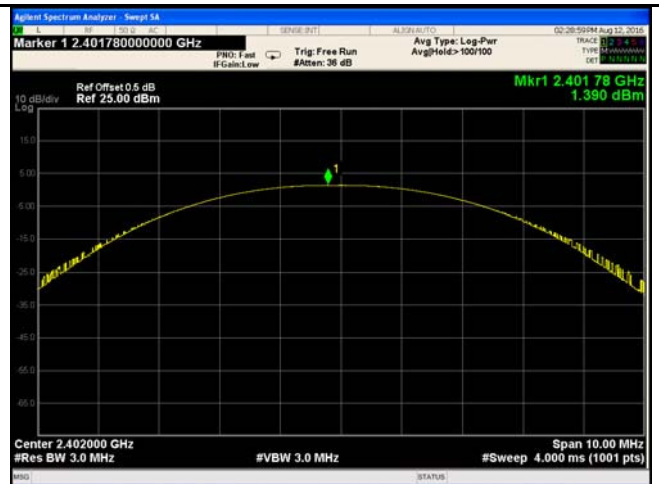

$\pi/4$  DQPSK Output power - Low CH 2402

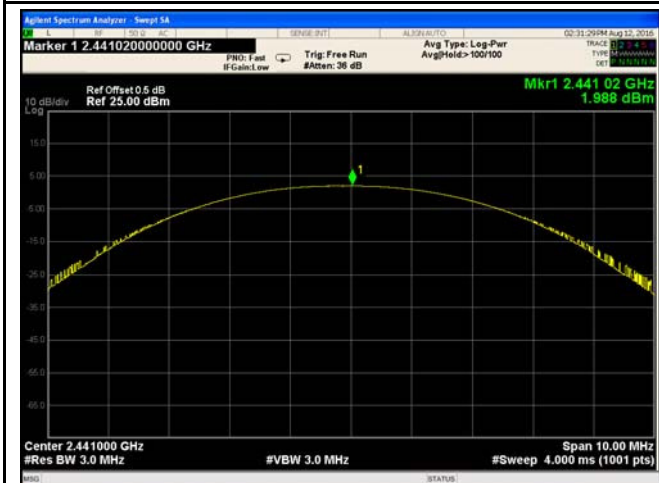

$\pi/4$  DQPSK Output power - Mid CH 2441

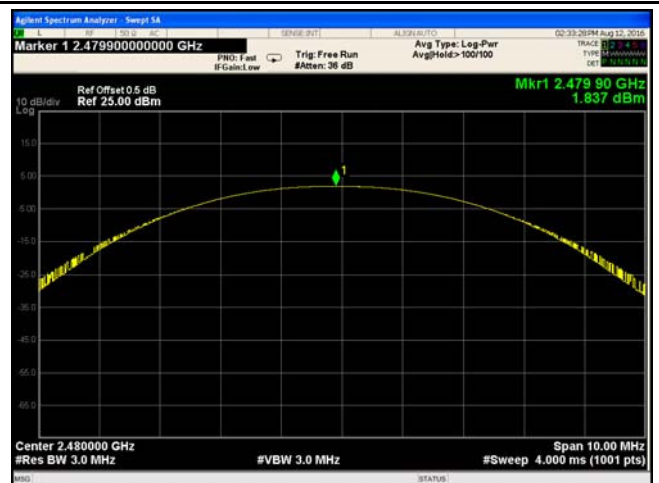

$\pi/4$  DQPSK Output power - High CH 2480



8DPSK Output power - Low CH 2402



8DPSK Output power - Mid CH 2441



8DPSK Output power - High CH 2480



## 6.5 Number of Hopping Channel

Temperature	25°C
Relative Humidity	54%
Atmospheric Pressure	1012mbar
Test date :	August 12, 2016
Tested By :	Loren Luo

### Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	FHSS in 2400-2483.5MHz ≥ 15 channels	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Use the following spectrum analyzer settings:</p> <p>The EUT must have its hopping function enabled.</p> <ul style="list-style-type: none"> <li>- Span = the frequency band of operation</li> <li>- RBW ≥ 1% of the span</li> <li>- VBW ≥ RBW</li> <li>- Sweep = auto</li> <li>- Detector function = peak</li> <li>- Trace = max hold</li> <li>- Allow trace to fully stabilize.</li> <li>- It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).</li> </ul>		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		


Test Data     Yes       N/A  
 Test Plot     Yes (See below)       N/A

### Number of Hopping Channel measurement result

Type	Modulation	Frequency Range	Number of Hopping Channel	Limit
Number of Hopping Channel	GFSK	2400-2483.5	79	15
	$\pi/4$ DQPSK	2400-2483.5	79	15
	8-DPSK	2400-2483.5	79	15

### Test Plots


#### Number of Hopping Channels measurement result

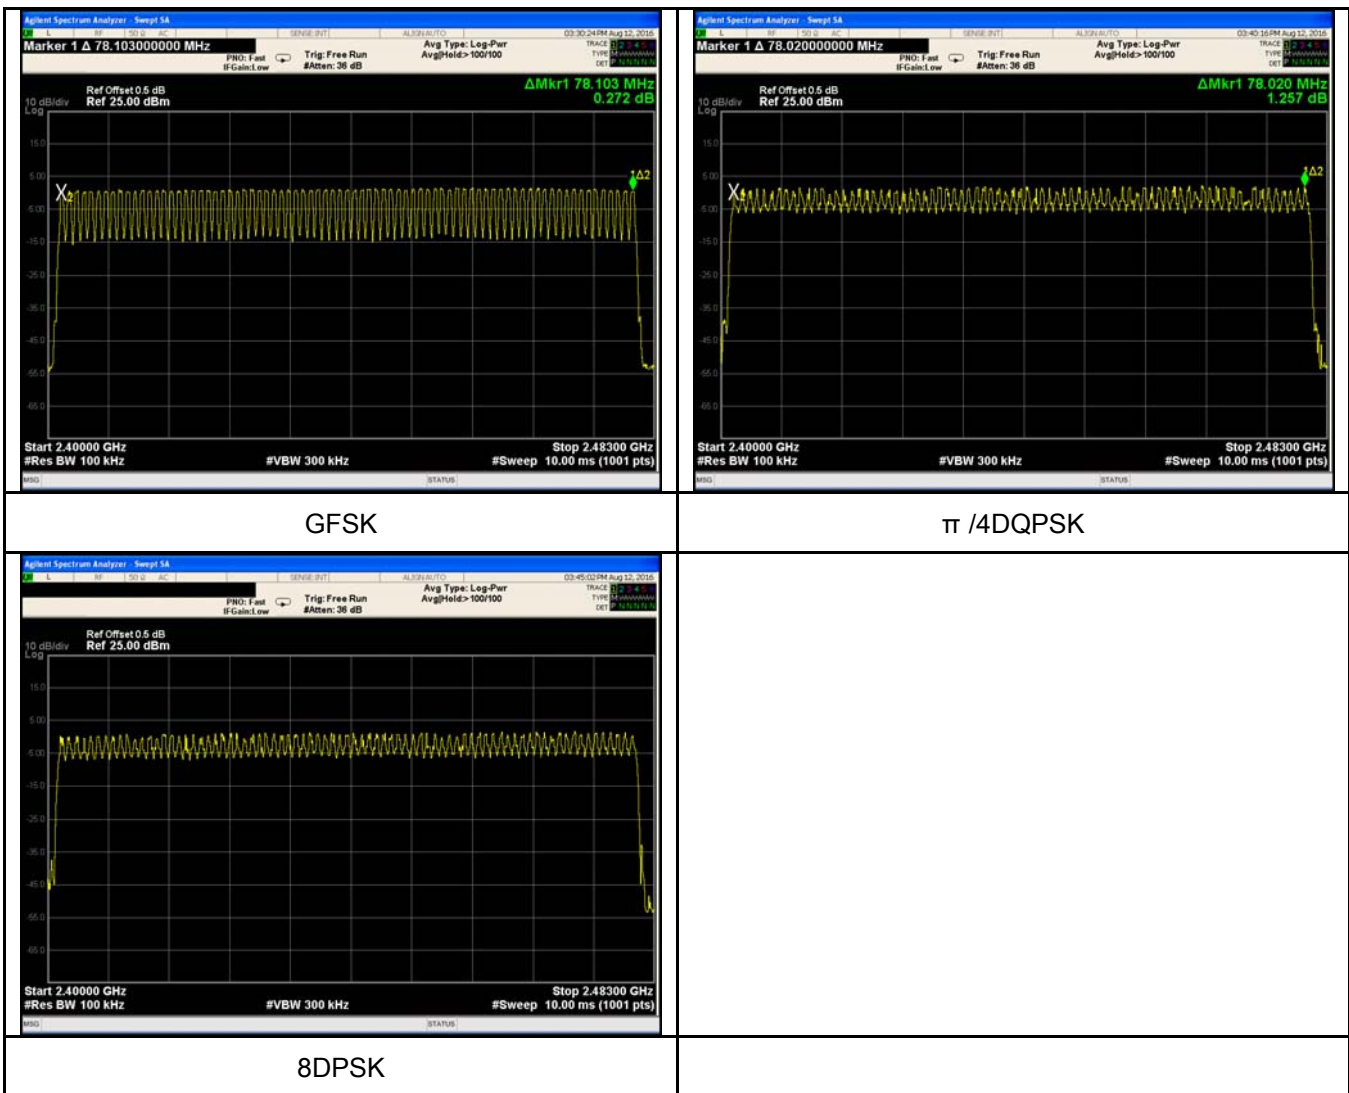

## 6.6 Time of Occupancy (Dwell Time)

Temperature	25°C
Relative Humidity	54%
Atmospheric Pressure	1012mbar
Test date :	August 12, 2016
Tested By :	Loren Luo

### Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	Dwell Time < 0.4s	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.  <u>Use the following spectrum analyzer</u></p> <ul style="list-style-type: none"> <li>- Span = zero span, centered on a hopping channel</li> <li>- RBW = 1 MHz</li> <li>- VBW ≥ RBW</li> <li>- Sweep = as necessary to capture the entire dwell time per hopping channel</li> <li>- Detector function = peak</li> <li>- Trace = max hold</li> <li>- use the marker-delta function to determine the dwell time</li> </ul>		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data     Yes       N/A  
 Test Plot     Yes (See below)       N/A



**Dwell Time measurement result**


Type	Modulation	CH	Pulse Width (ms)	Dwell Time (ms)	Limit (ms)	Result
Dwell Time	GFSK	Low	2.880	307.200	400	Pass
		Mid	2.880	307.200	400	Pass
		High	2.880	307.200	400	Pass
	π /4 DQPSK	Low	2.880	307.200	400	Pass
		Mid	2.880	307.200	400	Pass
		High	2.880	307.200	400	Pass
	8-DPSK	Low	2.880	307.200	400	Pass
		Mid	2.880	307.200	400	Pass
		High	2.880	307.200	400	Pass
Note: Dwell time=Pulse Time (ms) × (1600 ÷ 6 ÷ 79) ×31.6						

Test Plots


Dwell Time measurement result




GFSK - Low CH 2402

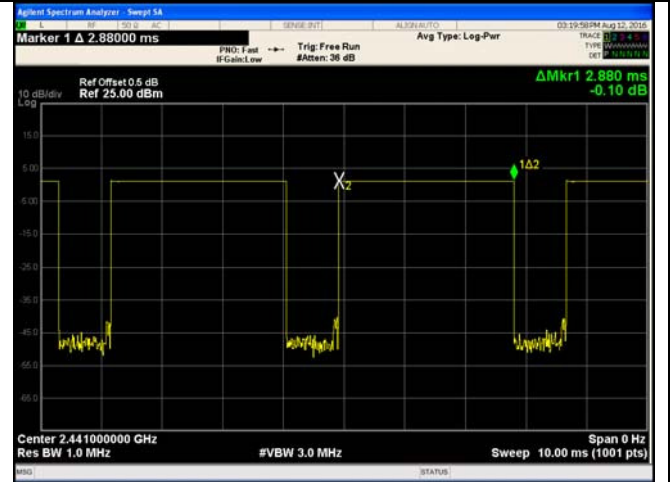


GFSK - Mid CH 2441

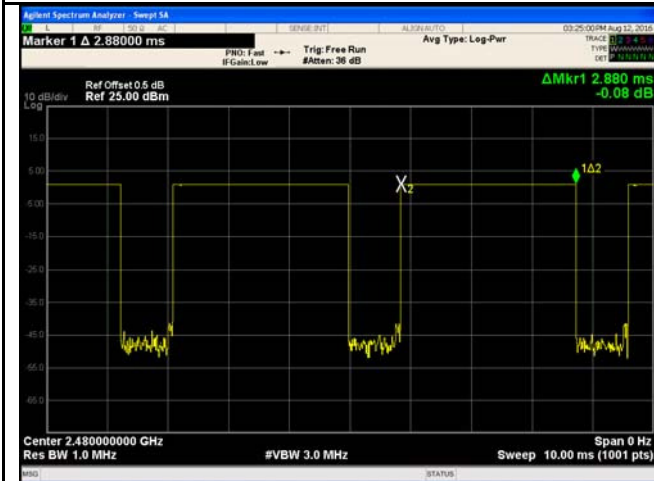

GFDK - High CH 2480

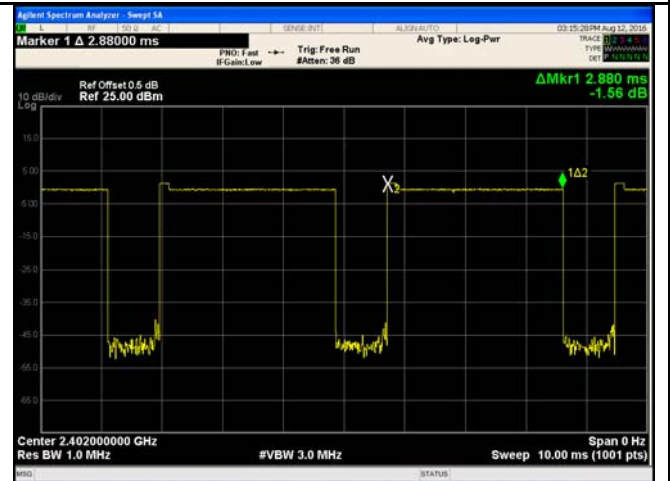


$\pi/4$  DQPSK - Low CH 2402

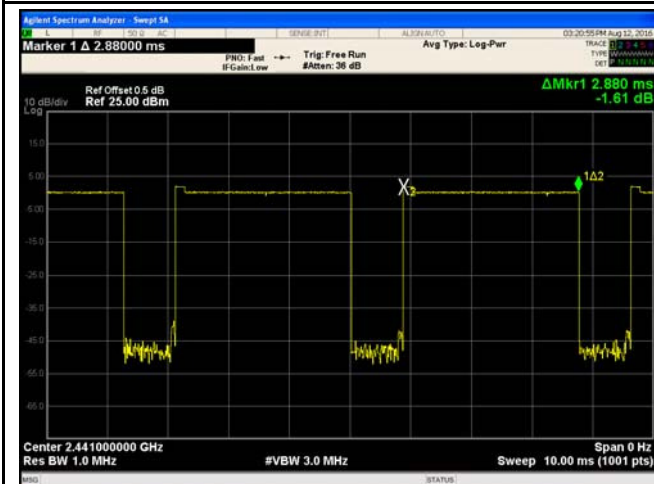


$\pi/4$  DQPSK - Mid CH 2441



$\pi/4$  DQPSK - High CH 2480

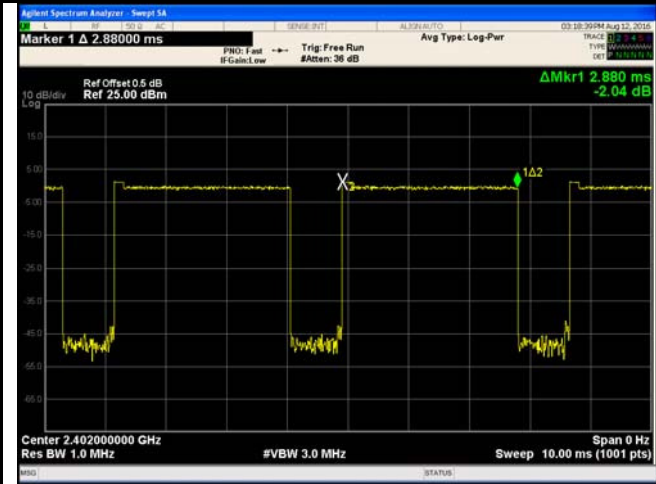

8DPSK - Low CH 2402

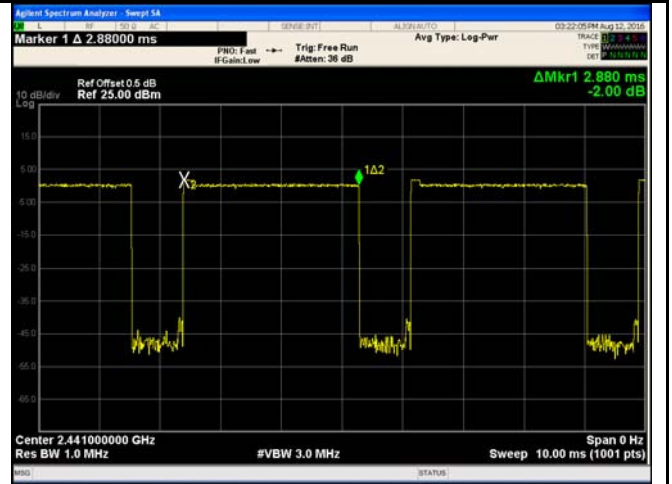

8DPSK - Mid CH 2441



8DPSK - High CH 2480



## 6.7 Band Edge & Restricted Band

Temperature	24°C
Relative Humidity	57%
Atmospheric Pressure	1015mbar
Test date :	August 15, 2016
Tested By :	Loren Luo

### Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.	<input checked="" type="checkbox"/>

Test Setup	
------------	--

Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Radiated Method Only</p> <ul style="list-style-type: none"> <li>- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.</li> <li>- 2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range,</li> </ul>
----------------	--


	<p>and make sure the instrument is operated in its linear range.</p> <ul style="list-style-type: none"> <li>- 3. First, set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, check the emission of EUT, if pass then set Spectrum Analyzer as below:           <ul style="list-style-type: none"> <li>a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz.</li> <li>b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz.</li> <li>c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz.</li> </ul> </li> <li>- 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.</li> <li>- 5. Repeat above procedures until all measured frequencies were complete.</li> </ul>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data     Yes                       N/A  
 Test Plot     Yes (See below)       N/A


**Radiated method:**

**Test Plots**


**GFSK Mode:**

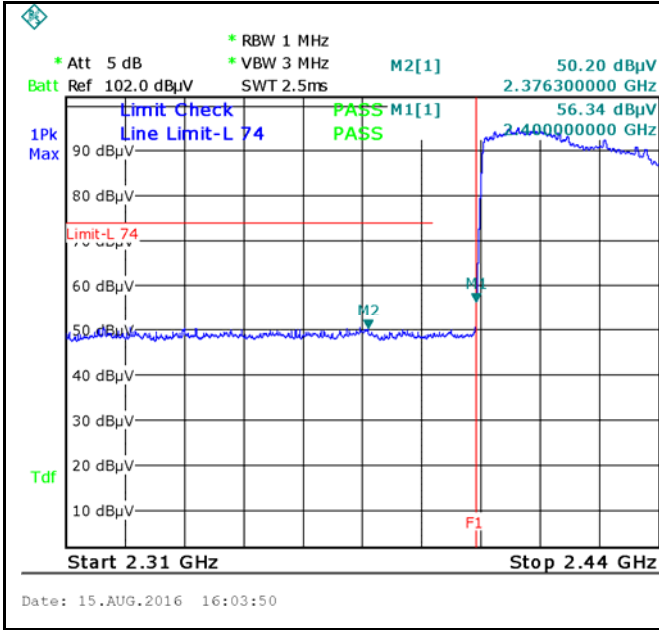

GFSK-Hopping Left Side-PK  
 Note: F1 is frequency 2400MHz

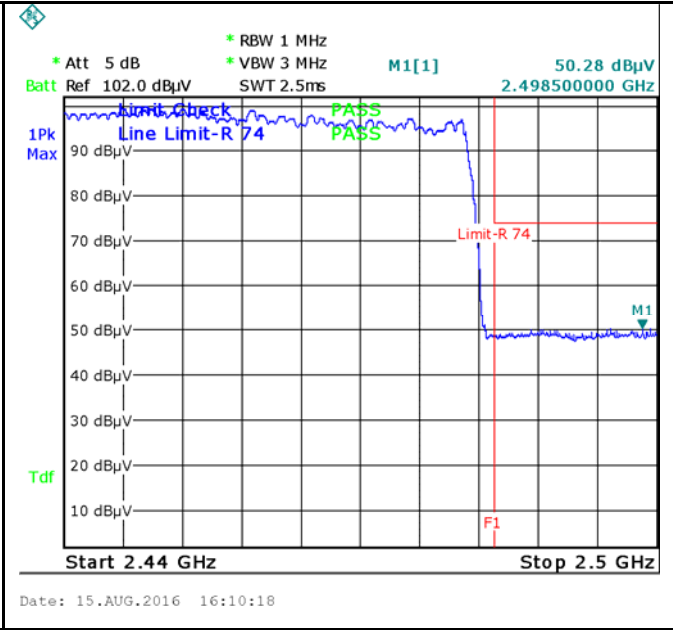



GFSK-Hopping Right Side-PK  
 Note: F1 is frequency 2483.5MHz

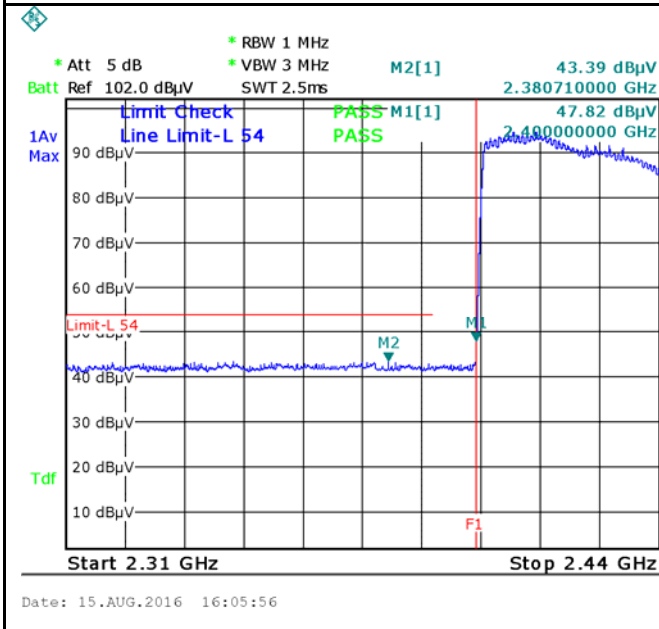

GFSK-Hopping Left Side-AV

Note: (no need if PK value less than the AV limit)

GFSK-Hopping Right Side-AV

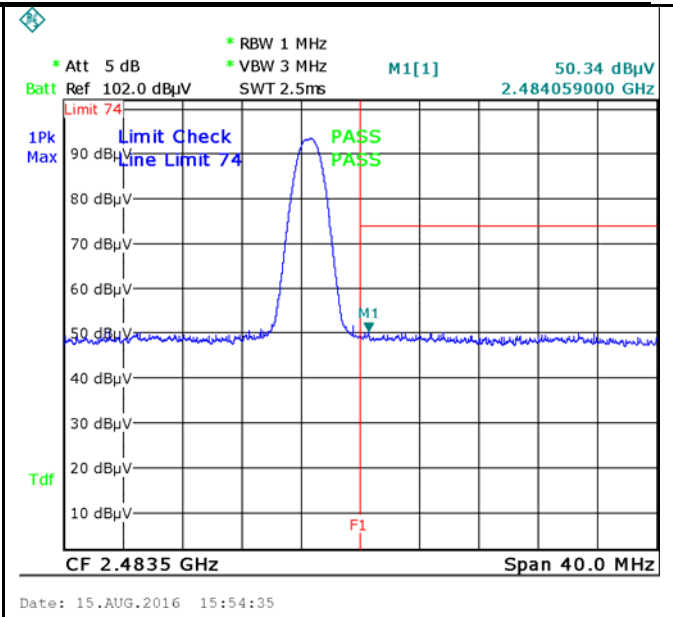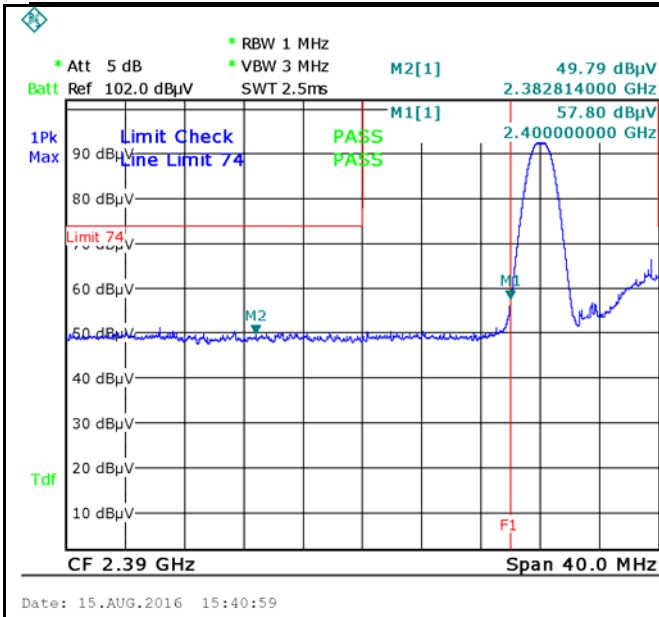


GFSK-Left Side-PK

Note: F1 is frequency 2400MHz

GFSK-Right Side-PK

Note: F1 is frequency 2483.5MHz

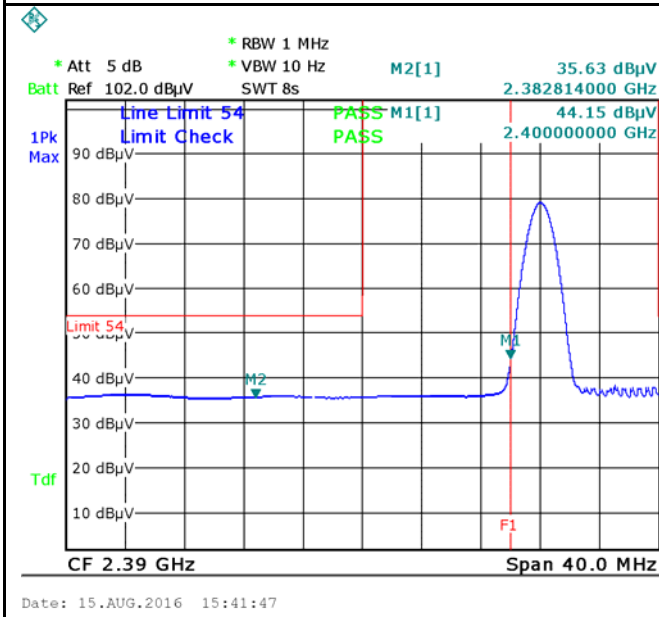



Note: (no need if PK value less than the AV limit)

GFSK-Left Side-AV

GFSK-Right Side-AV





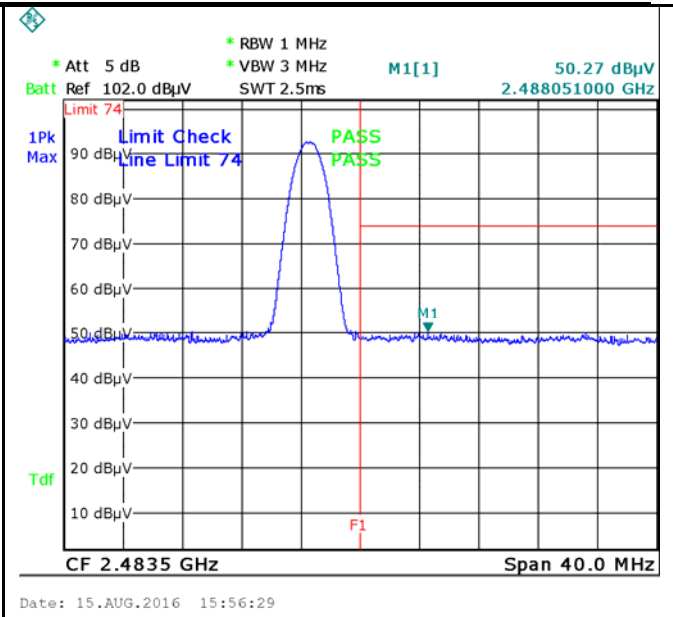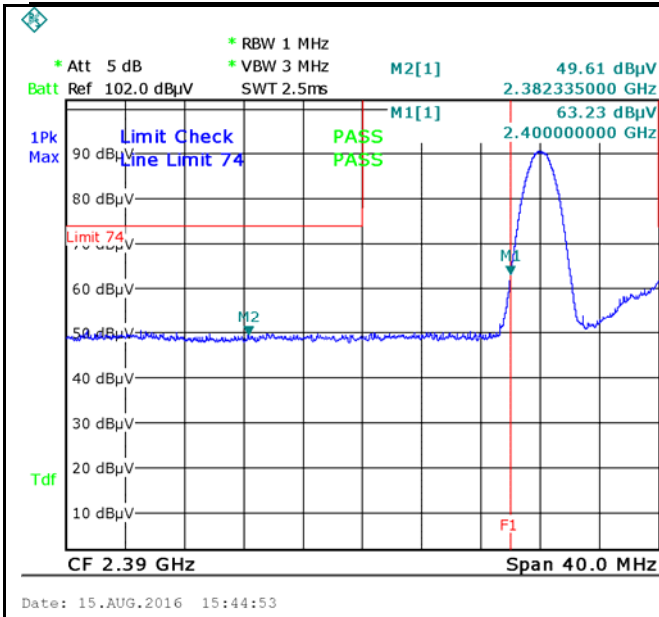


$\pi$  / 4 DQPSK-Left Side-PK

Note: F1 is frequency 2400MHz

$\pi$  / 4 DQPSK-Right Side-PK

Note: F1 is frequency 2483.5MHz

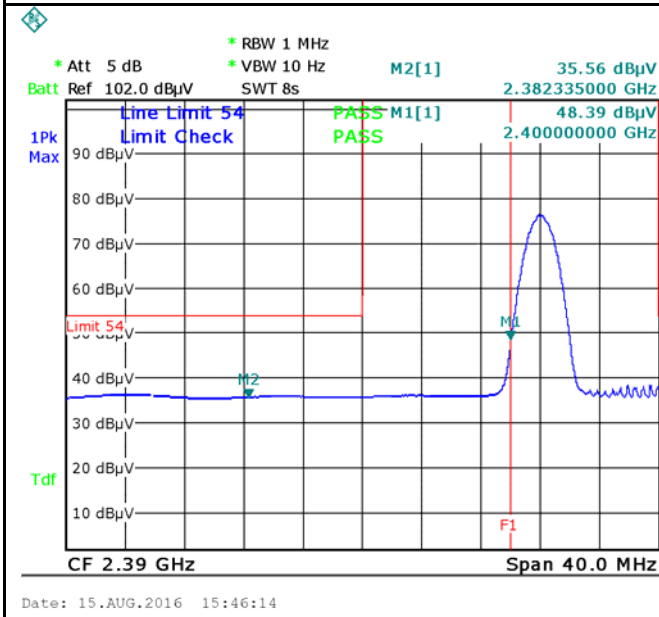


Note: (no need if PK value less than the AV limit)

$\pi$  / 4 DQPSK-Left Side-AV


$\pi$  / 4 DQPSK-Right Side-AV

**8-DPSK Mode:**

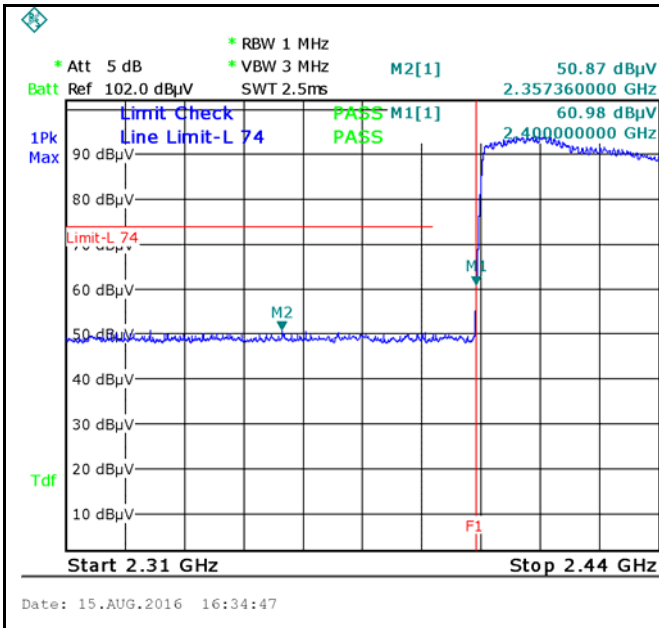


8DPSK-Hopping Left Side-PK

Note: F1 is frequency 2400MHz

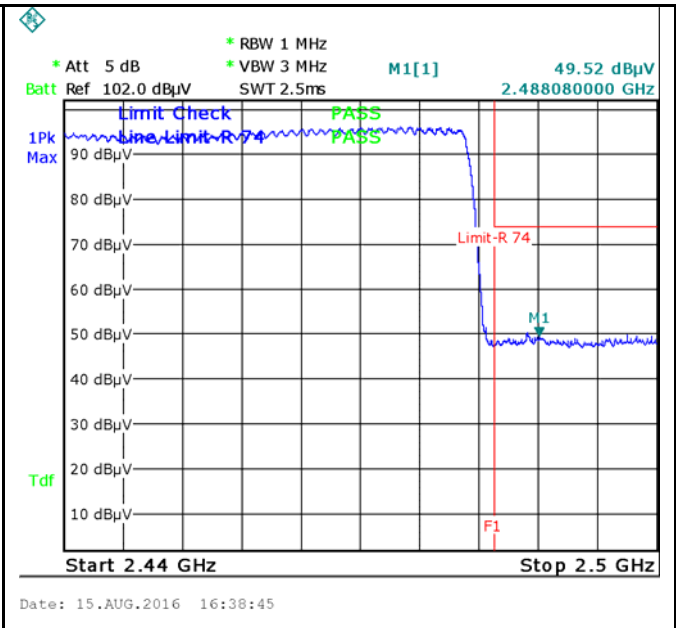

8DPSK-Hopping Right Side-PK



Note: F1 is frequency 2483.5MHz

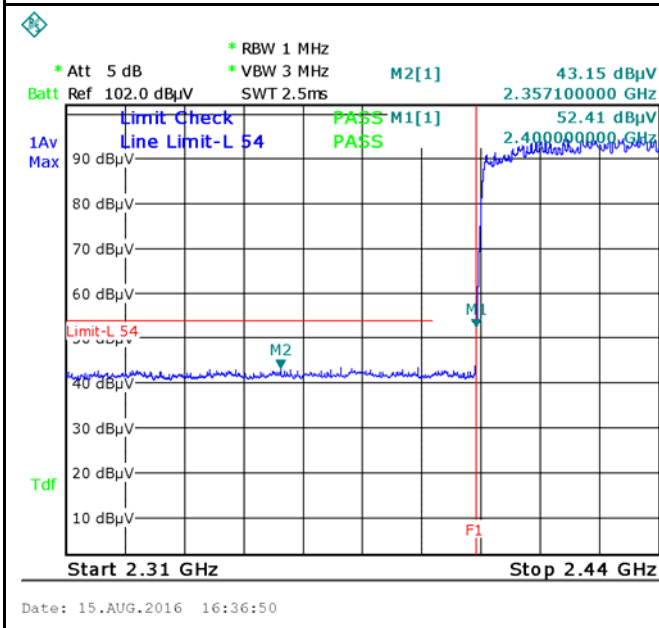

8DPSK-Hopping Left-AV

Note: (no need if PK value less than the AV limit)

8DPSK-Hopping Right-AV

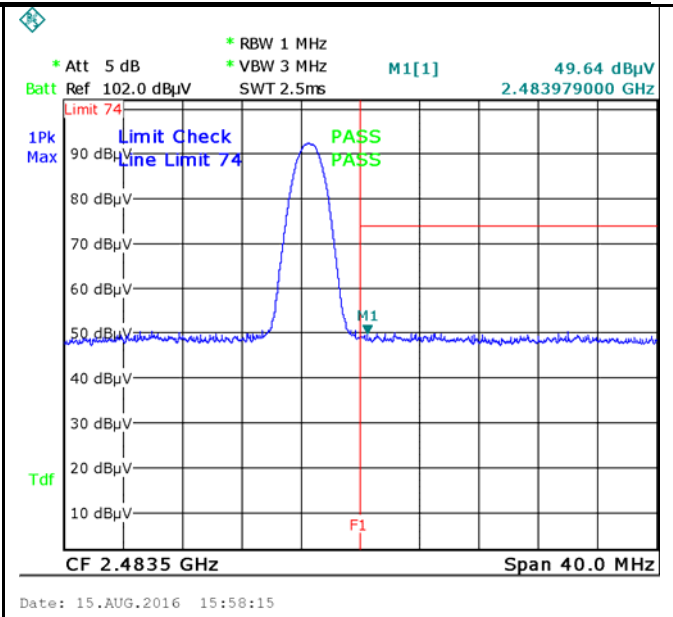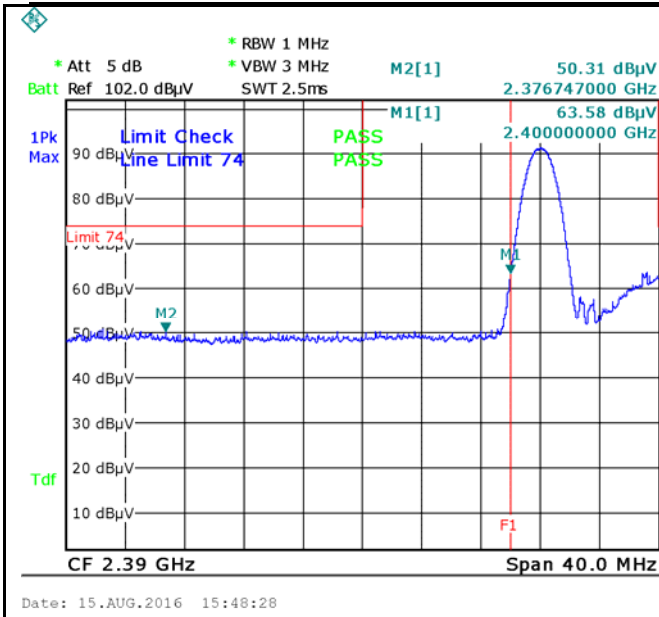


8DPSK-Left Side-PK

Note: F1 is frequency 2400MHz

8DPSK-Right Side-PK

Note: F1 is frequency 2483.5MHz

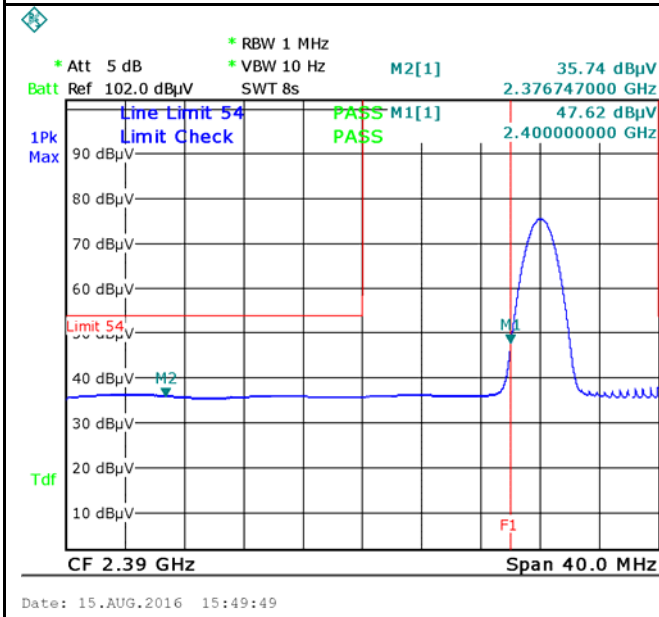

Note: (no need if PK value less than the AV limit)

8DPSK-Left Side-AV

8DPSK-Right Side-AV

## 6.8 AC Power Line Conducted Emissions

Temperature	23°C
Relative Humidity	58%
Atmospheric Pressure	1006mbar
Test date :	August 06, 2016
Tested By :	Loren Luo

### Requirement(s):

Spec	Item	Requirement	Applicable														
47CFR§15.207, RSS210 (A8.1)	a)	For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [μ]H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.	<input checked="" type="checkbox"/>														
		<table border="1"> <thead> <tr> <th rowspan="2">Frequency ranges (MHz)</th> <th colspan="2">Limit (dBμV)</th> </tr> <tr> <th>QP</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15 ~ 0.5</td> <td>66 – 56</td> <td>56 – 46</td> </tr> <tr> <td>0.5 ~ 5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5 ~ 30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>		Frequency ranges (MHz)	Limit (dBμV)		QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50
		Frequency ranges (MHz)			Limit (dBμV)												
				QP	Average												
0.15 ~ 0.5	66 – 56	56 – 46															
0.5 ~ 5	56	46															
5 ~ 30	60	50															

Test Setup	<p>Note: 1.Support units were connected to second LISN. 2.Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.</p>
------------	--

Procedure	<ol style="list-style-type: none"> <li>The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table.</li> <li>The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains.</li> <li>The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss</li> </ol>
-----------	---


Test Report	16070898-FCC-R2
Page	37 of 60

	<p>coaxial cable.</p> <ol style="list-style-type: none"> <li>4. All other supporting equipment were powered separately from another main supply.</li> <li>5. The EUT was switched on and allowed to warm up to its normal operating condition.</li> <li>6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver.</li> <li>7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz.</li> <li>8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).</li> </ol>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data     Yes                       N/A

Test Plot     Yes (See below)             N/A

<b>Test Mode:</b>	<b>Bluetooth Mode</b>
-------------------	-----------------------

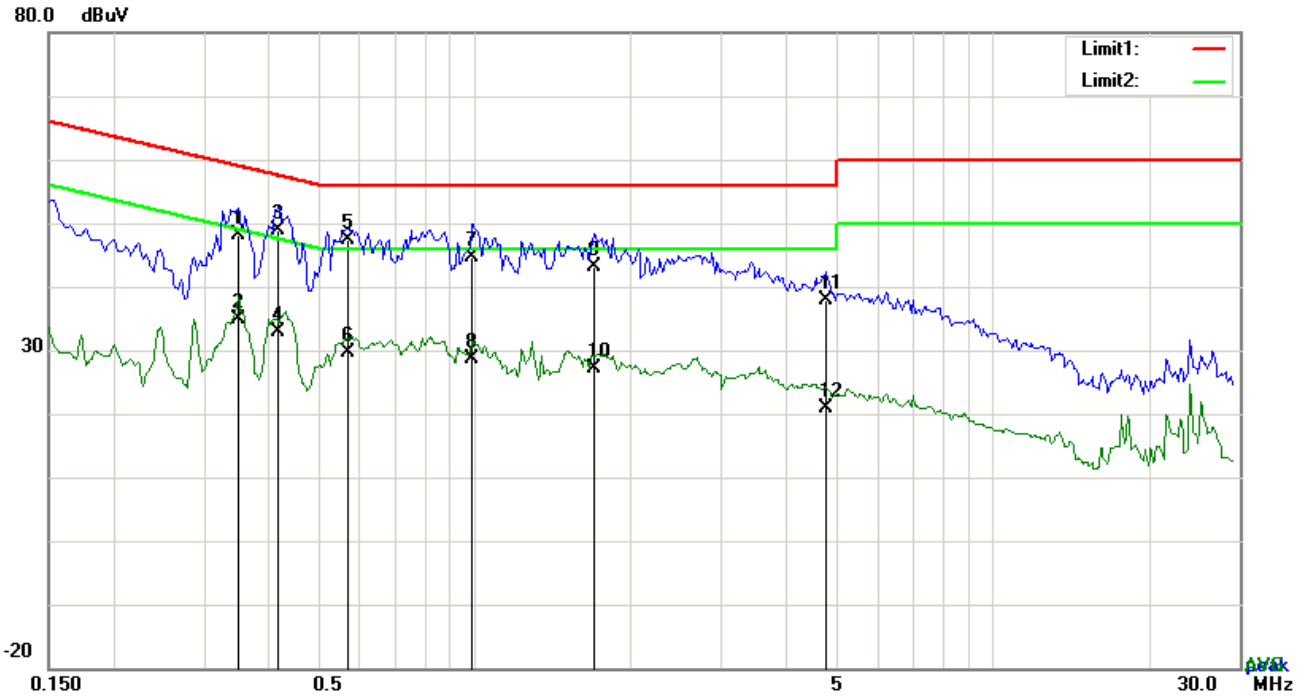


**Test Data**

**Phase Line Plot at 120Vac, 60Hz**

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	L1	0.3489	38.15	QP	10.03	48.18	58.99	-10.81
2	L1	0.3489	24.91	AVG	10.03	34.94	48.99	-14.05
3	L1	0.4191	38.95	QP	10.03	48.98	57.47	-8.49
4	L1	0.4191	22.78	AVG	10.03	32.81	47.47	-14.66
5	L1	0.5673	37.40	QP	10.03	47.43	56.00	-8.57
6	L1	0.5673	19.50	AVG	10.03	29.53	46.00	-16.47
7	L1	0.9885	34.52	QP	10.03	44.55	56.00	-11.45
8	L1	0.9885	18.48	AVG	10.03	28.51	46.00	-17.49
9	L1	1.7061	33.03	QP	10.04	43.07	56.00	-12.93
10	L1	1.7061	17.06	AVG	10.04	27.10	46.00	-18.90
11	L1	4.7667	27.82	QP	10.08	37.90	56.00	-18.10
12	L1	4.7667	10.74	AVG	10.08	20.82	46.00	-25.18

<b>Test Mode:</b>	<b>Bluetooth Mode</b>
-------------------	-----------------------

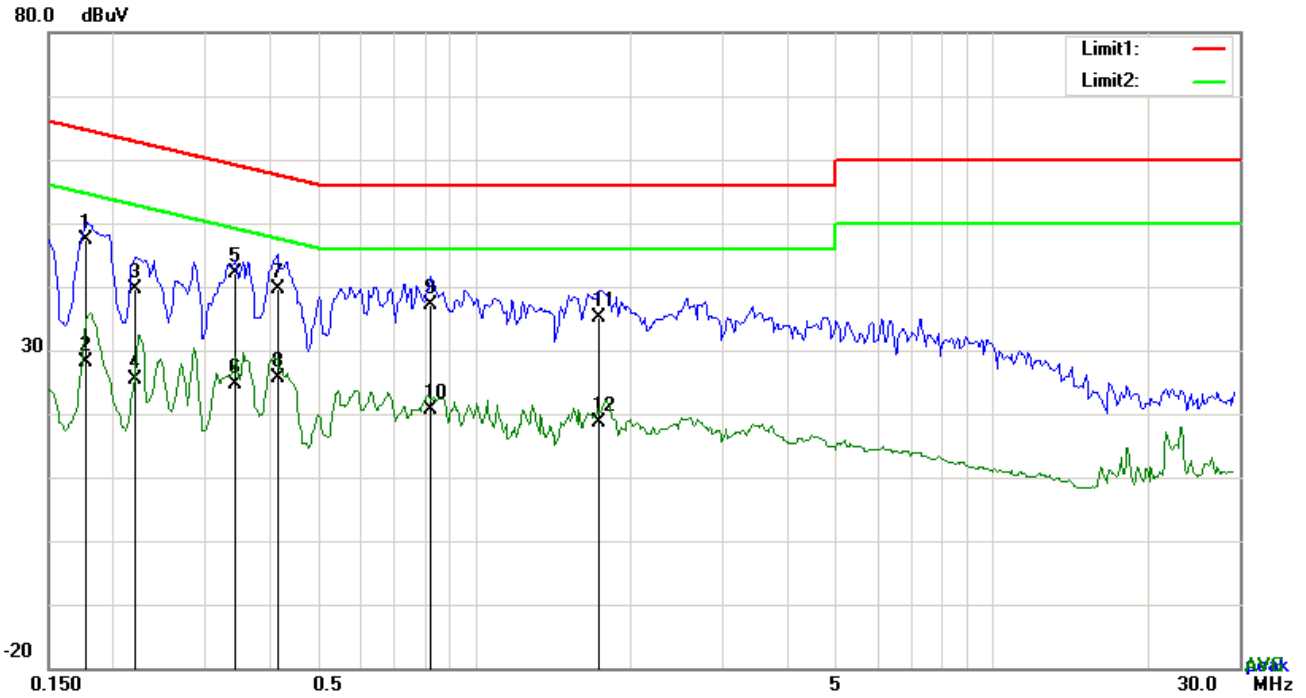


**Test Data**

**Phase Neutral Plot at 120Vac, 60Hz**

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	N	0.1773	37.28	QP	10.02	47.30	64.61	-17.31
2	N	0.1773	18.07	AVG	10.02	28.09	54.61	-26.52
3	N	0.2202	29.59	QP	10.02	39.61	62.81	-23.20
4	N	0.2202	15.24	AVG	10.02	25.26	52.81	-27.55
5	N	0.3450	32.18	QP	10.02	42.20	59.08	-16.88
6	N	0.3450	14.57	AVG	10.02	24.59	49.08	-24.49
7	N	0.4152	29.64	QP	10.02	39.66	57.54	-17.88
8	N	0.4152	15.68	AVG	10.02	25.70	47.54	-21.84
9	N	0.8208	27.16	QP	10.03	37.19	56.00	-18.81
10	N	0.8208	10.57	AVG	10.03	20.60	46.00	-25.40
11	N	1.7412	25.01	QP	10.04	35.05	56.00	-20.95
12	N	1.7412	8.58	AVG	10.04	18.62	46.00	-27.38

<b>Test Mode:</b>	<b>Bluetooth Mode</b>
-------------------	-----------------------

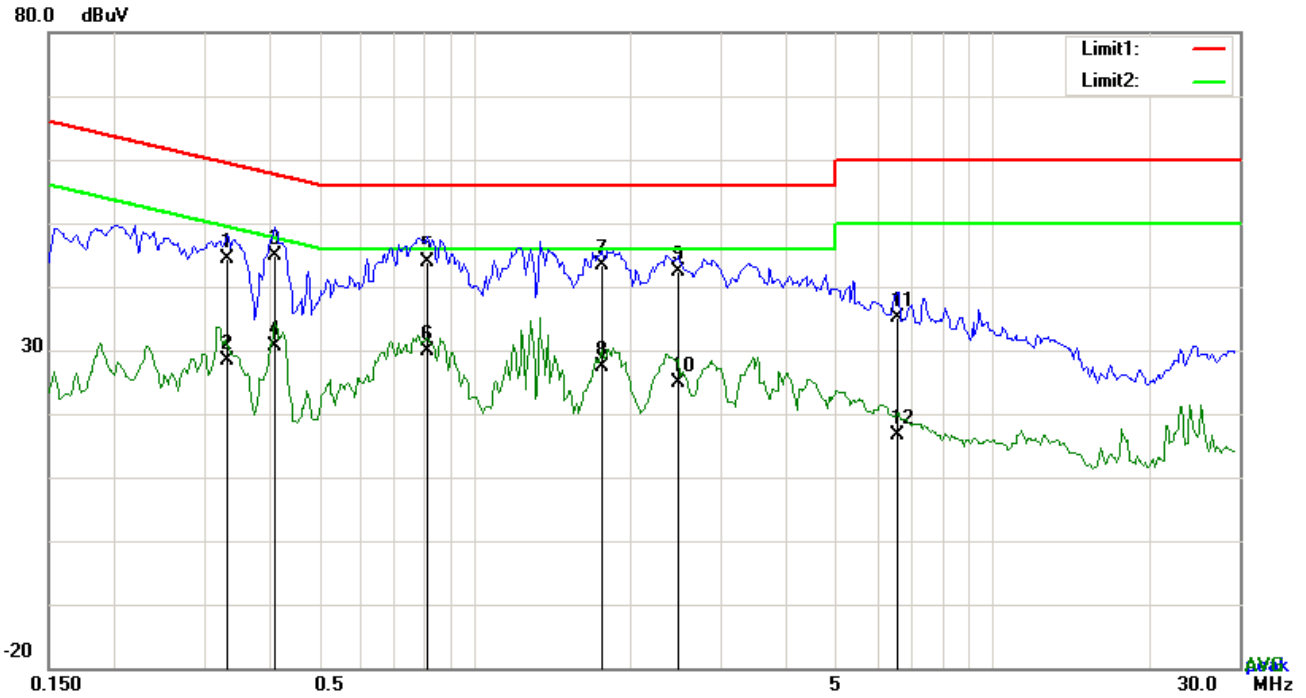


**Test Data**

**Phase Line Plot at 240Vac, 60Hz**

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	L1	0.3333	34.31	QP	10.03	44.34	59.37	-15.03
2	L1	0.3333	18.40	AVG	10.03	28.43	49.37	-20.94
3	L1	0.4113	34.83	QP	10.03	44.86	57.62	-12.76
4	L1	0.4113	20.50	AVG	10.03	30.53	47.62	-17.09
5	L1	0.8091	33.90	QP	10.03	43.93	56.00	-12.07
6	L1	0.8091	19.93	AVG	10.03	29.96	46.00	-16.04
7	L1	1.7529	33.41	QP	10.04	43.45	56.00	-12.55
8	L1	1.7529	17.30	AVG	10.04	27.34	46.00	-18.66
9	L1	2.4783	32.38	QP	10.05	42.43	56.00	-13.57
10	L1	2.4783	14.85	AVG	10.05	24.90	46.00	-21.10
11	L1	6.5919	25.12	QP	10.10	35.22	60.00	-24.78
12	L1	6.5919	6.55	AVG	10.10	16.65	50.00	-33.35



<b>Test Mode:</b>	<b>Bluetooth Mode</b>
-------------------	-----------------------

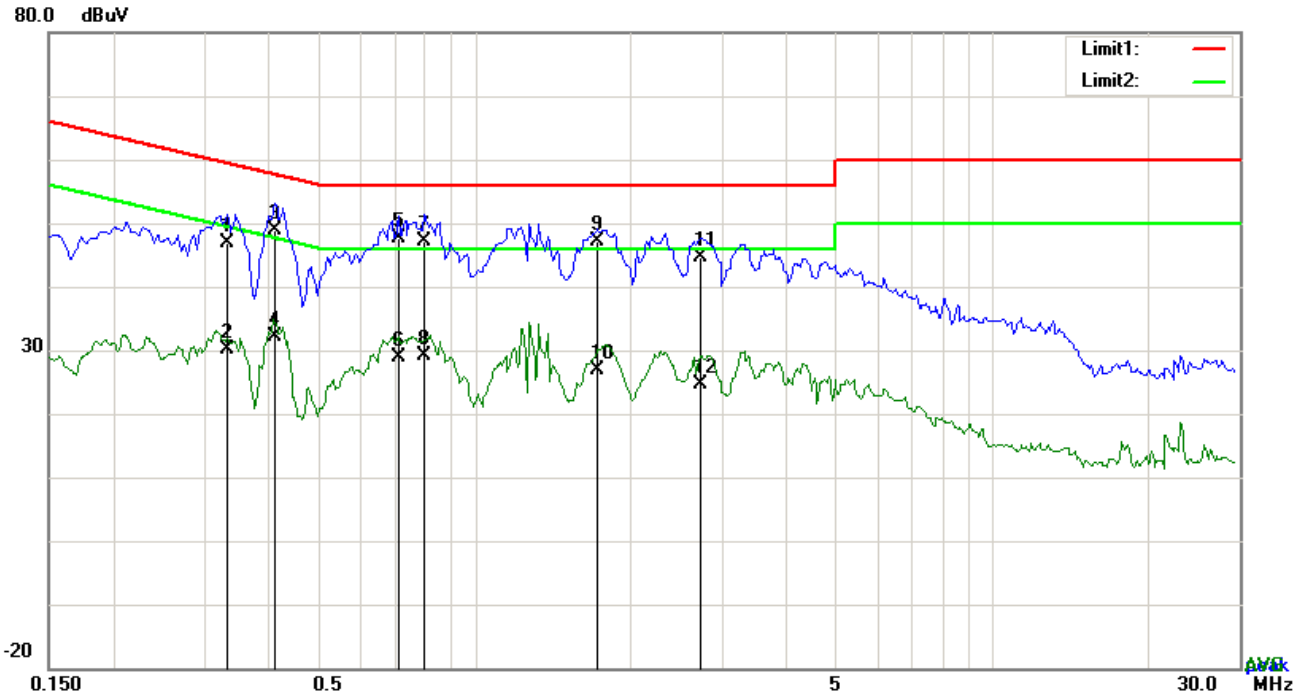

**Test Data**

**Phase Neutral Plot at 240Vac, 60Hz**


No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	N	0.3333	36.90	QP	10.02	46.92	59.37	-12.45
2	N	0.3333	20.22	AVG	10.02	30.24	49.37	-19.13
3	N	0.4113	38.96	QP	10.02	48.98	57.62	-8.64
4	N	0.4113	22.17	AVG	10.02	32.19	47.62	-15.43
5	N	0.7155	37.71	QP	10.02	47.73	56.00	-8.27
6	N	0.7155	18.91	AVG	10.02	28.93	46.00	-17.07
7	N	0.7974	37.02	QP	10.03	47.05	56.00	-8.95
8	N	0.7974	19.06	AVG	10.03	29.09	46.00	-16.91
9	N	1.7334	37.07	QP	10.04	47.11	56.00	-8.89
10	N	1.7334	16.80	AVG	10.04	26.84	46.00	-19.16
11	N	2.7279	34.58	QP	10.05	44.63	56.00	-11.37
12	N	2.7279	14.66	AVG	10.05	24.71	46.00	-21.29

## 6.9 Radiated Spurious Emissions & Restricted Band

Temperature	23°C
Relative Humidity	58%
Atmospheric Pressure	1006mbar
Test date :	August 06, 2016
Tested By :	Loren Luo

### Requirement(s):

Spec	Item	Requirement	Applicable										
47CFR§15.205, §15.209, §15.247(d)	a)	<p>Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges</p> <table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (<math>\mu\text{V/m}</math>)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>	Frequency range (MHz)	Field Strength ( $\mu\text{V/m}$ )	30 – 88	100	88 – 216	150	216 960	200	Above 960	500	<input checked="" type="checkbox"/>
Frequency range (MHz)	Field Strength ( $\mu\text{V/m}$ )												
30 – 88	100												
88 – 216	150												
216 960	200												
Above 960	500												

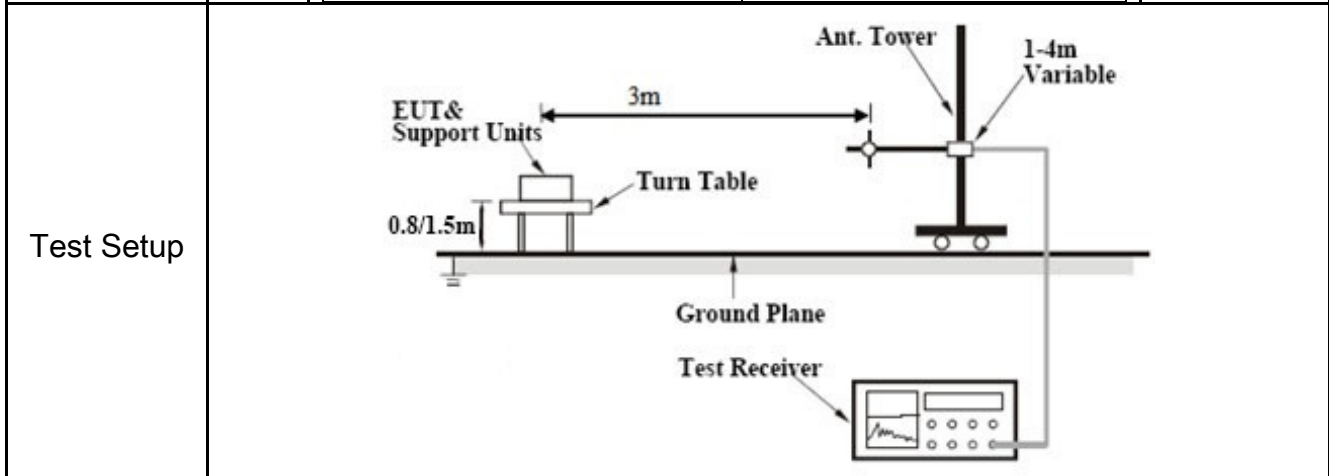

Procedure	<ol style="list-style-type: none"> <li>The EUT was switched on and allowed to warm up to its normal operating condition.</li> <li>The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:</li> </ol>
-----------	---

Test Report	16070898-FCC-R2
Page	43 of 60


	<p>a. Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen.</p> <p>b. The EUT was then rotated to the direction that gave the maximum emission.</p> <p>c. Finally, the antenna height was adjusted to the height that gave the maximum emission.</p> <p>3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz.</p> <p>4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz.          The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz.</p> <p>5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</p>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data  Yes  N/A

Test Plot  Yes (See below)  N/A

**Test Mode:** Bluetooth Mode

**Below 1GHz**

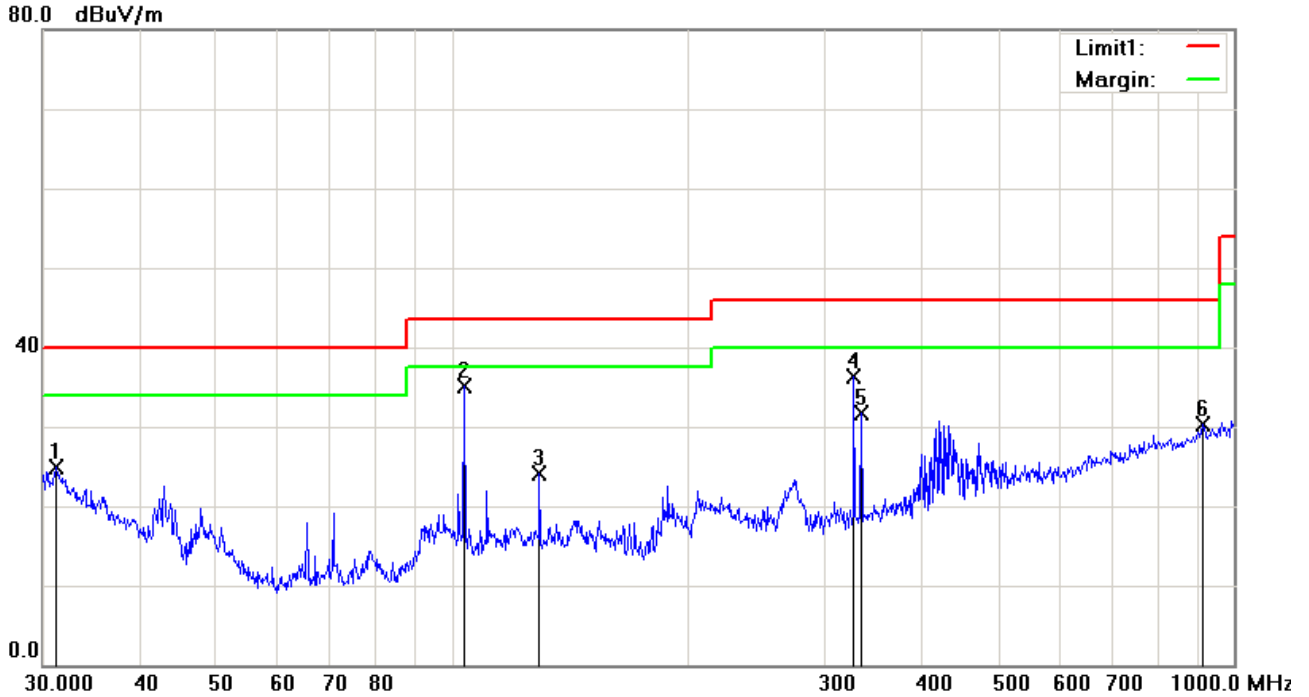


**Test Data**

**Horizontal Polarity Plot @3m**

No.	P/L	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree ( ° )
1	H	31.1798	25.94	peak	-1.13	24.81	40.00	-15.19	100	165
2	H	103.8055	45.26	peak	-10.12	35.14	43.50	-8.36	100	66
3	H	129.4678	32.09	peak	-7.90	24.19	43.50	-19.31	100	198
4	H	326.7395	42.38	peak	-6.14	36.24	46.00	-9.76	100	123
5	H	333.6867	37.61	peak	-5.93	31.68	46.00	-14.32	100	225
6	H	912.8620	25.44	peak	4.80	30.24	46.00	-15.76	100	298

**Below 1GHz**

80.0 dBuV/m

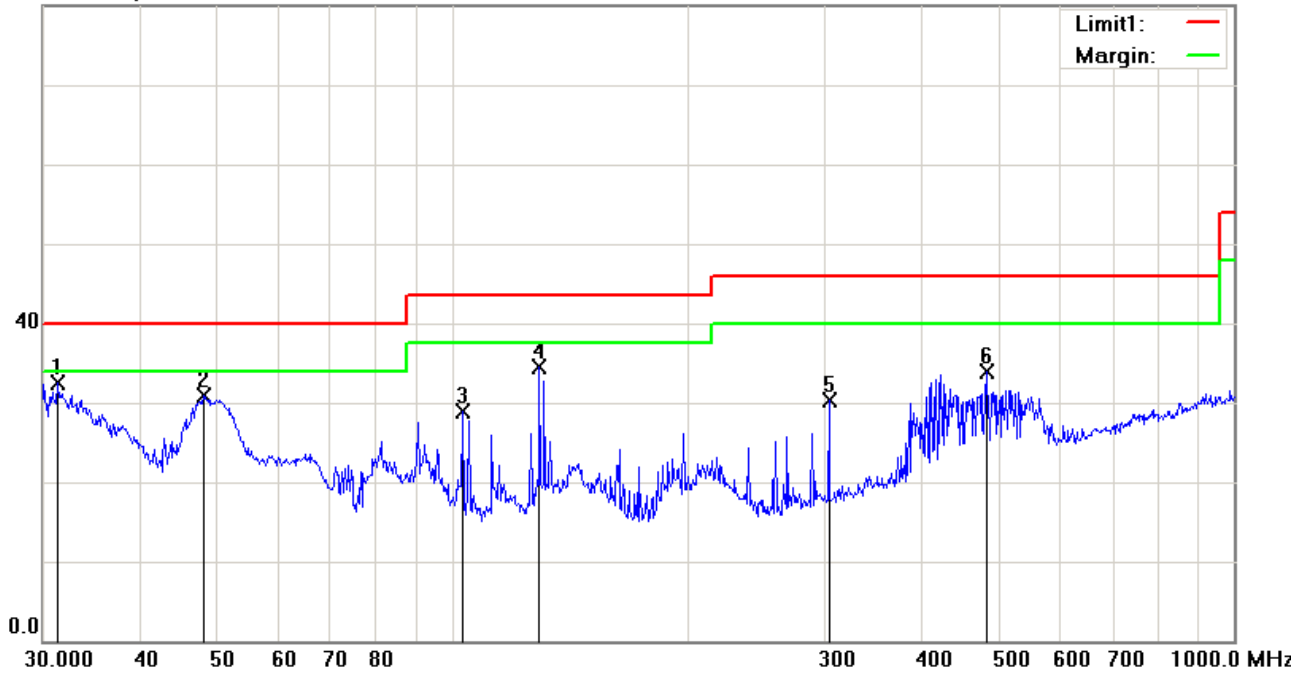

**Test Data**

**Vertical Polarity Plot @3m**

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin	Height	Degree
		(MHz)	(dBuV/m)		(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	( ° )
1	V	31.2893	33.79	peak	-1.20	32.59	40.00	-7.41	100	123
2	V	48.1626	43.17	peak	-12.36	30.81	40.00	-9.19	100	98
3	V	103.4421	39.10	peak	-10.19	28.91	43.50	-14.59	100	198
4	V	129.4678	42.48	peak	-7.90	34.58	43.50	-8.92	100	36
5	V	303.5437	37.01	peak	-6.80	30.21	46.00	-15.79	100	225
6	V	482.2156	36.15	peak	-2.19	33.96	46.00	-12.04	100	300

### Above 1GHz

<b>Test Mode:</b>	<b>Transmitting Mode</b>
-------------------	--------------------------

#### Low Channel (2402 MHz) ( $\pi/4$ DQPSK Worst Case )

Frequency (MHz)	S.A. Reading (dB $\mu$ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4804	38.26	AV	V	33.67	6.86	32.66	46.13	54	-7.87
4804	37.54	AV	H	33.67	6.86	32.66	45.41	54	-8.59
4804	49.05	PK	V	33.67	6.86	32.66	56.92	74	-17.08
4804	48.23	PK	H	33.67	6.86	32.66	56.1	74	-17.9
17799	25.37	AV	V	45.03	11.21	32.38	49.23	54	-4.77
17799	24.67	AV	H	45.03	11.21	32.38	48.53	54	-5.47
17799	41.59	PK	V	45.03	11.21	32.38	65.45	74	-8.55
17799	40.98	PK	H	45.03	11.21	32.38	64.84	74	-9.16

#### Middle Channel (2441 MHz) ( $\pi/4$ DQPSK Worst Case )

Frequency (MHz)	S.A. Reading (dB $\mu$ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4882	38.57	AV	V	33.71	6.95	32.74	46.49	54	-7.51
4882	37.76	AV	H	33.71	6.95	32.74	45.68	54	-8.32
4882	48.92	PK	V	33.71	6.95	32.74	56.84	74	-17.16
4882	47.38	PK	H	33.71	6.95	32.74	55.3	74	-18.7
17786	26.05	AV	V	45.15	11.18	32.41	49.97	54	-4.03
17786	25.36	AV	H	45.15	11.18	32.41	49.28	54	-4.72
17786	42.06	PK	V	45.15	11.18	32.41	65.98	74	-8.02
17786	41.23	PK	H	45.15	11.18	32.41	65.15	74	-8.85

**High Channel (2480 MHz) (  $\pi$  /4 DQPSK Worst Case )**

Frequency (MHz)	S.A. Reading (dB $\mu$ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4960	39.12	AV	V	33.9	6.76	32.74	47.04	54	-6.96
4960	39.08	AV	H	33.9	6.76	32.74	47	54	-7
4960	48.67	PK	V	33.9	6.76	32.74	56.59	74	-17.41
4960	48.34	PK	H	33.9	6.76	32.74	56.26	74	-17.74
17817	25.87	AV	V	45.22	11.35	32.38	50.06	54	-3.94
17817	24.89	AV	H	45.22	11.35	32.38	49.08	54	-4.92
17817	42.35	PK	V	45.22	11.35	32.38	66.54	74	-7.46
17817	41.28	PK	H	45.22	11.35	32.38	65.47	74	-8.53

**Note:**

- 1, The testing has been conformed to  $10 \times 2480 \text{MHz} = 24,800 \text{MHz}$
- 2, All other emissions more than 30 dB below the limit
- 3, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

## Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
<b>AC Line Conducted</b>					
EMI test receiver	ESCS30	8471241027	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191106	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191107	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>
LISN	ISN T800	34373	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/24/2015	09/23/2016	<input checked="" type="checkbox"/>
Transient Limiter	LIT-153	531118	09/01/2015	08/31/2016	<input checked="" type="checkbox"/>
<b>RF conducted test</b>					
Agilent ESA-E SERIES	E4407B	MY45108319	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
Power Splitter	1#	1#	09/01/2015	08/31/2016	<input checked="" type="checkbox"/>
DC Power Supply	E3640A	MY40004013	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
<b>Radiated Emissions</b>					
EMI test receiver	ESL6	100262	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
Positioning Controller	UC3000	MF780208282	11/19/2015	11/18/2016	<input checked="" type="checkbox"/>
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	09/01/2015	08/31/2016	<input checked="" type="checkbox"/>
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/24/2016	03/23/2017	<input checked="" type="checkbox"/>
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/21/2015	09/20/2016	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/24/2015	09/23/2016	<input checked="" type="checkbox"/>
Universal Radio Communication Tester	CMU200	121393	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>



## Annex B. EUT And Test Setup Photographs

### Annex B.i. Photograph: EUT External Photo



Whole Package View




Adapter - Front View




EUT - Front View




EUT - Rear View

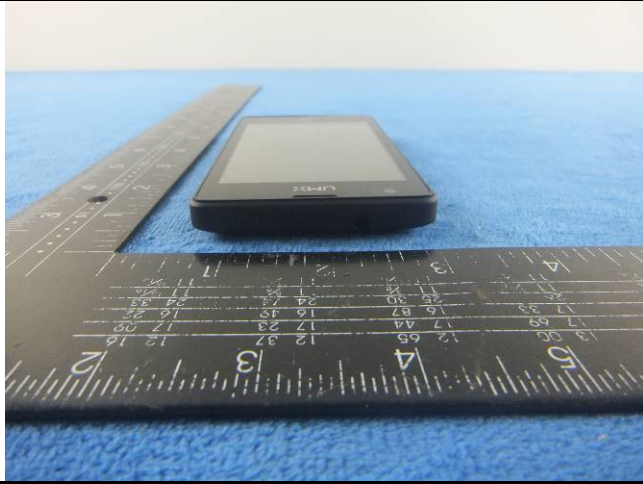


EUT - Top View

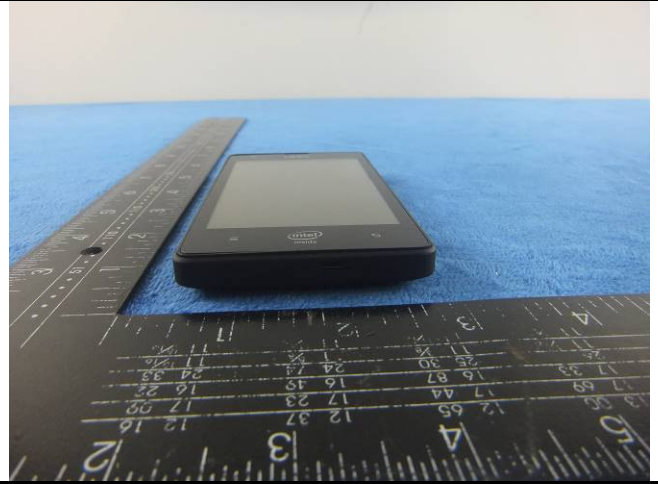

EUT - Bottom View

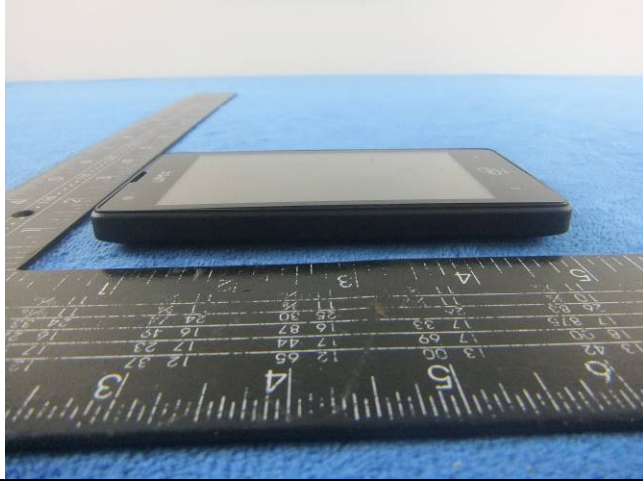

EUT - Left View

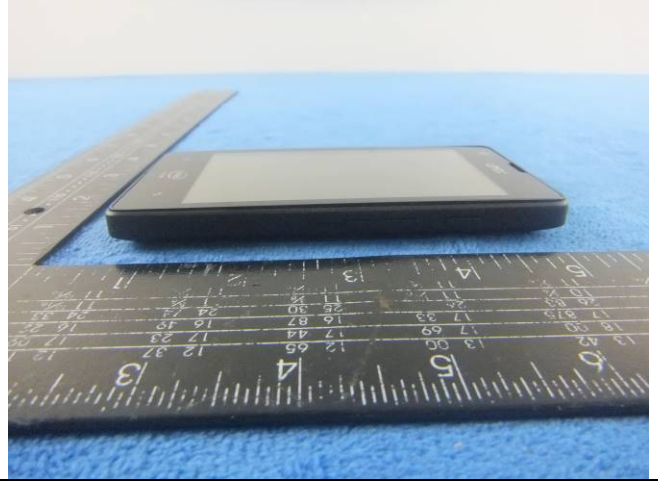

EUT - Right View



**Annex B.ii. Photograph: EUT Internal Photo**




Cover Off - Top View 1



Cover Off - Top View 2



Battery - Front View

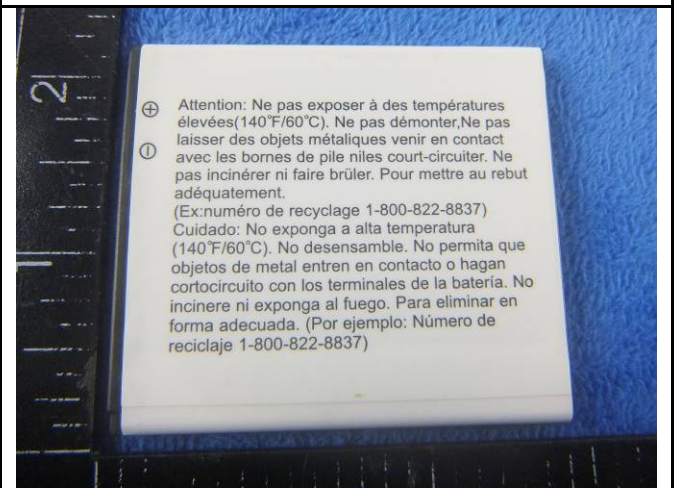

Battery - Rear View




Mainboard with Shielding - Front View




Mainboard without Shielding - Front View




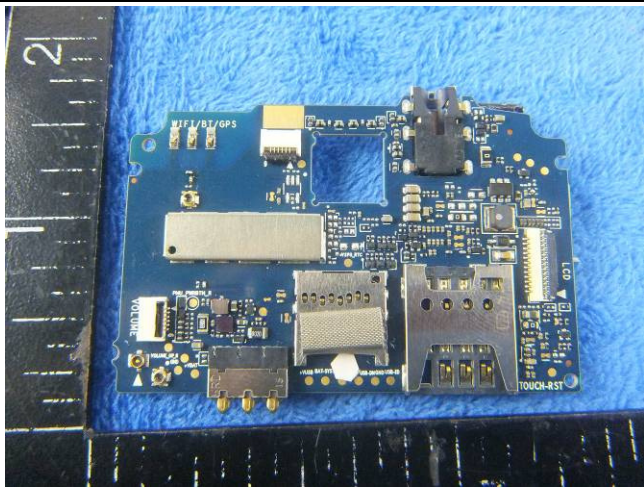


Mainboard with Shielding - Rear View

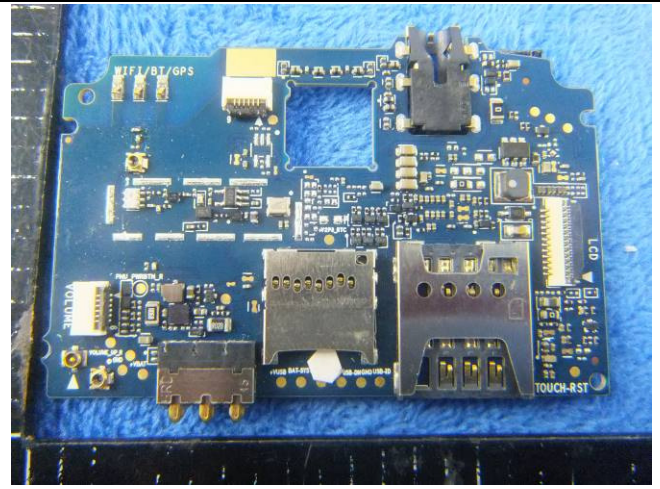

Mainboard without Shielding - Rear View

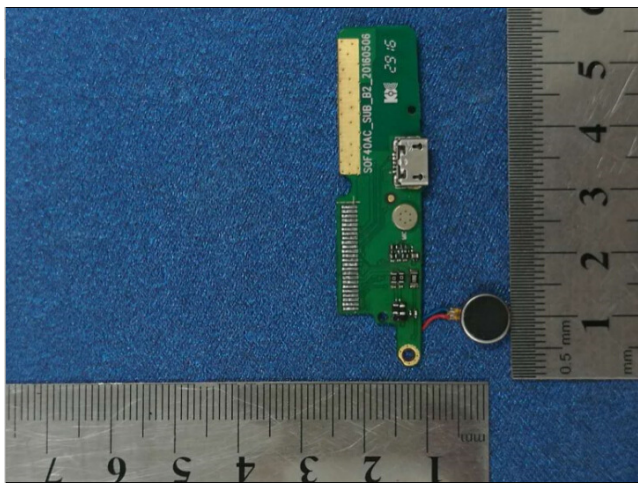


Small Board - Front View

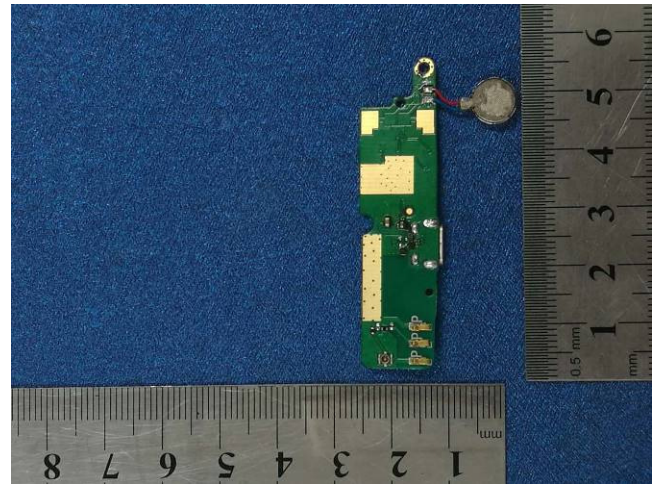


Small Board - Rear View




LCD - Front View

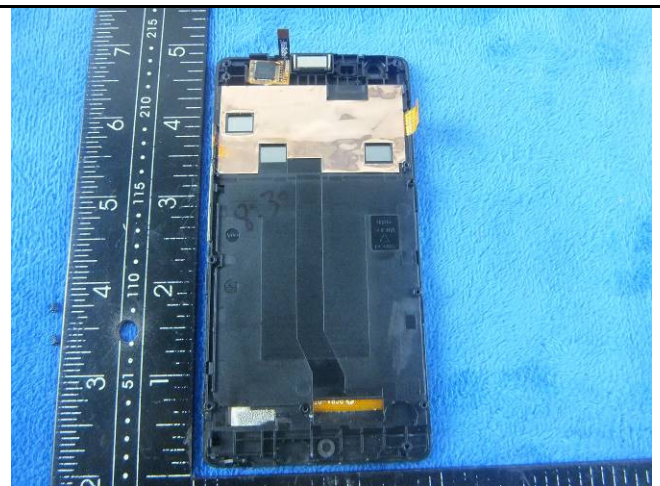

LCD - Rear View

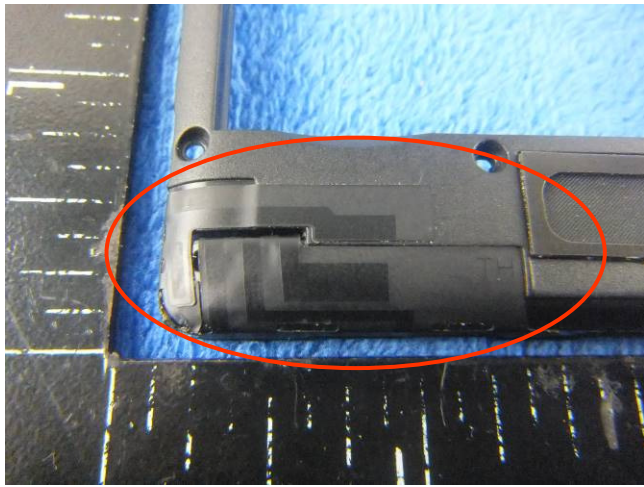

GSM/PCS/UMTS-FDD Antenna View

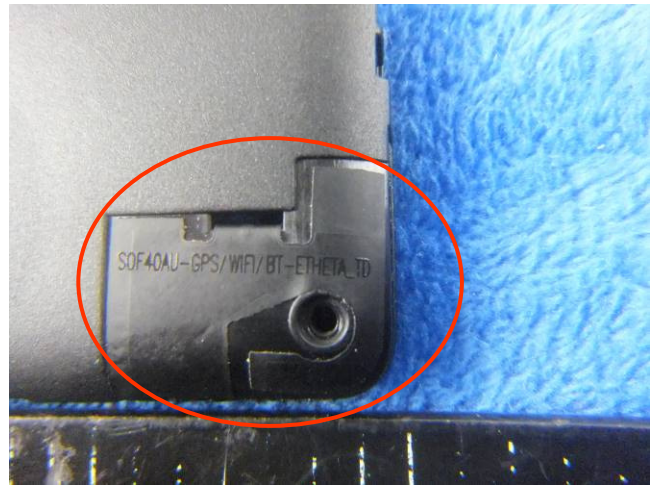

WIFI/BT/BLE - Antenna View




**Annex B.iii. Photograph: Test Setup Photo**




Conducted Emissions Test Setup Front View



Conducted Emissions Test Setup Side View

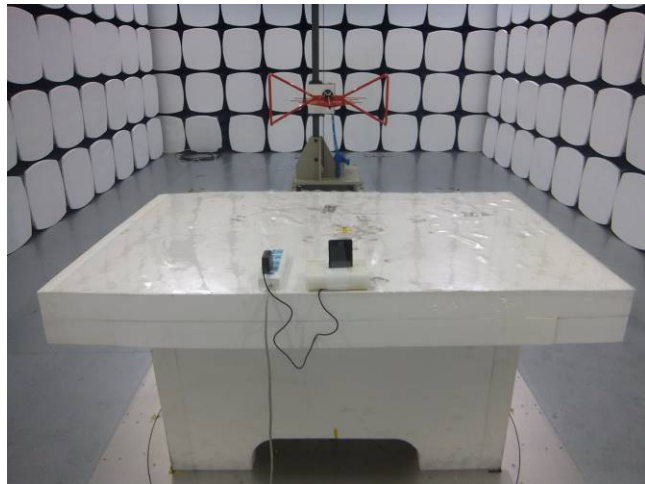

Radiated Spurious Emissions Test Setup Below 1GHz

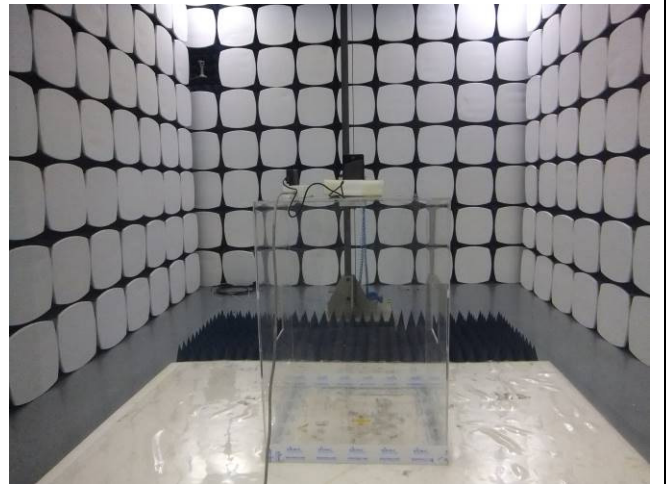


Radiated Spurious Emissions Test Setup Above 1GHz


## Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

### Annex C.ii. TEST SET UP BLOCK

#### Block Configuration Diagram for AC Line Conducted Emissions

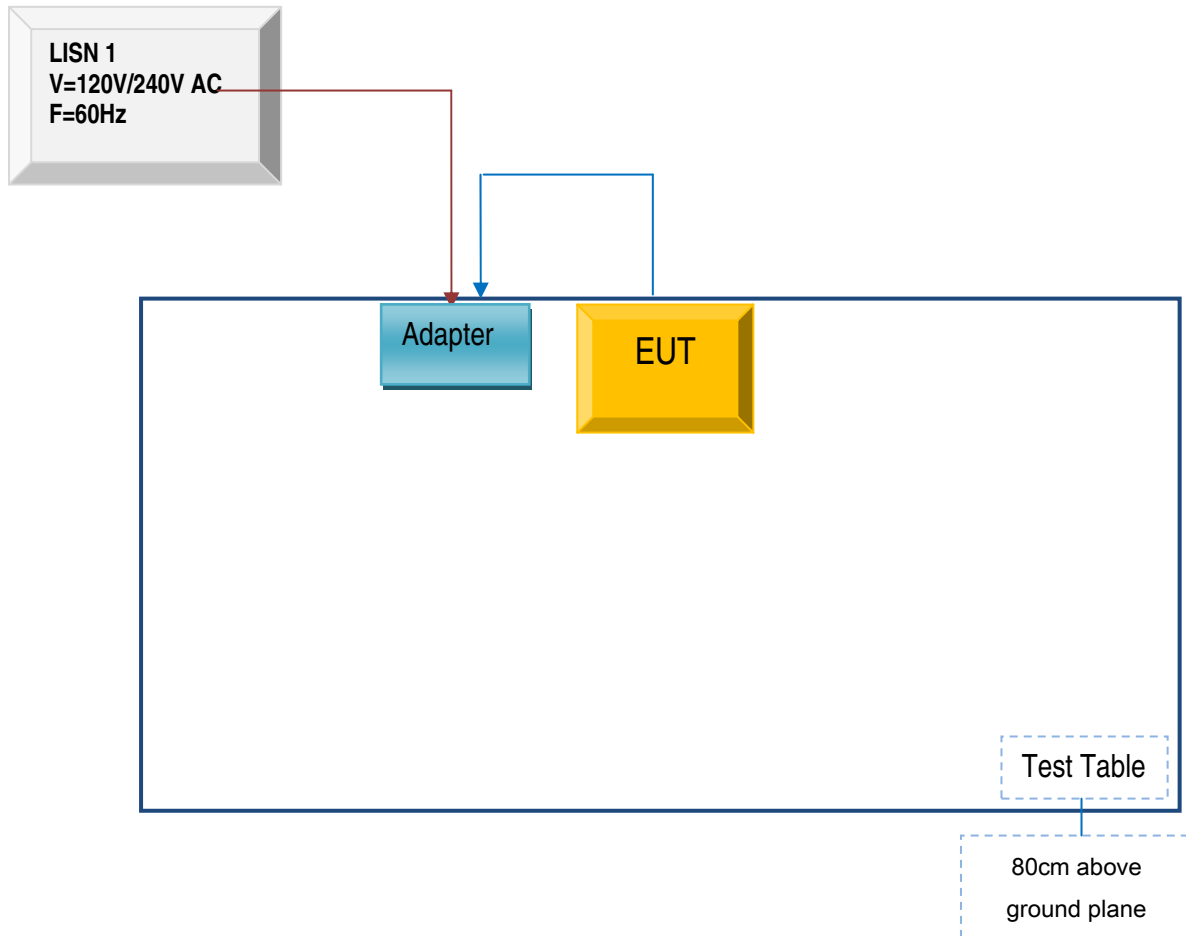


**Block Configuration Diagram for Radiated Emissions ( Below 1GHz ) .**

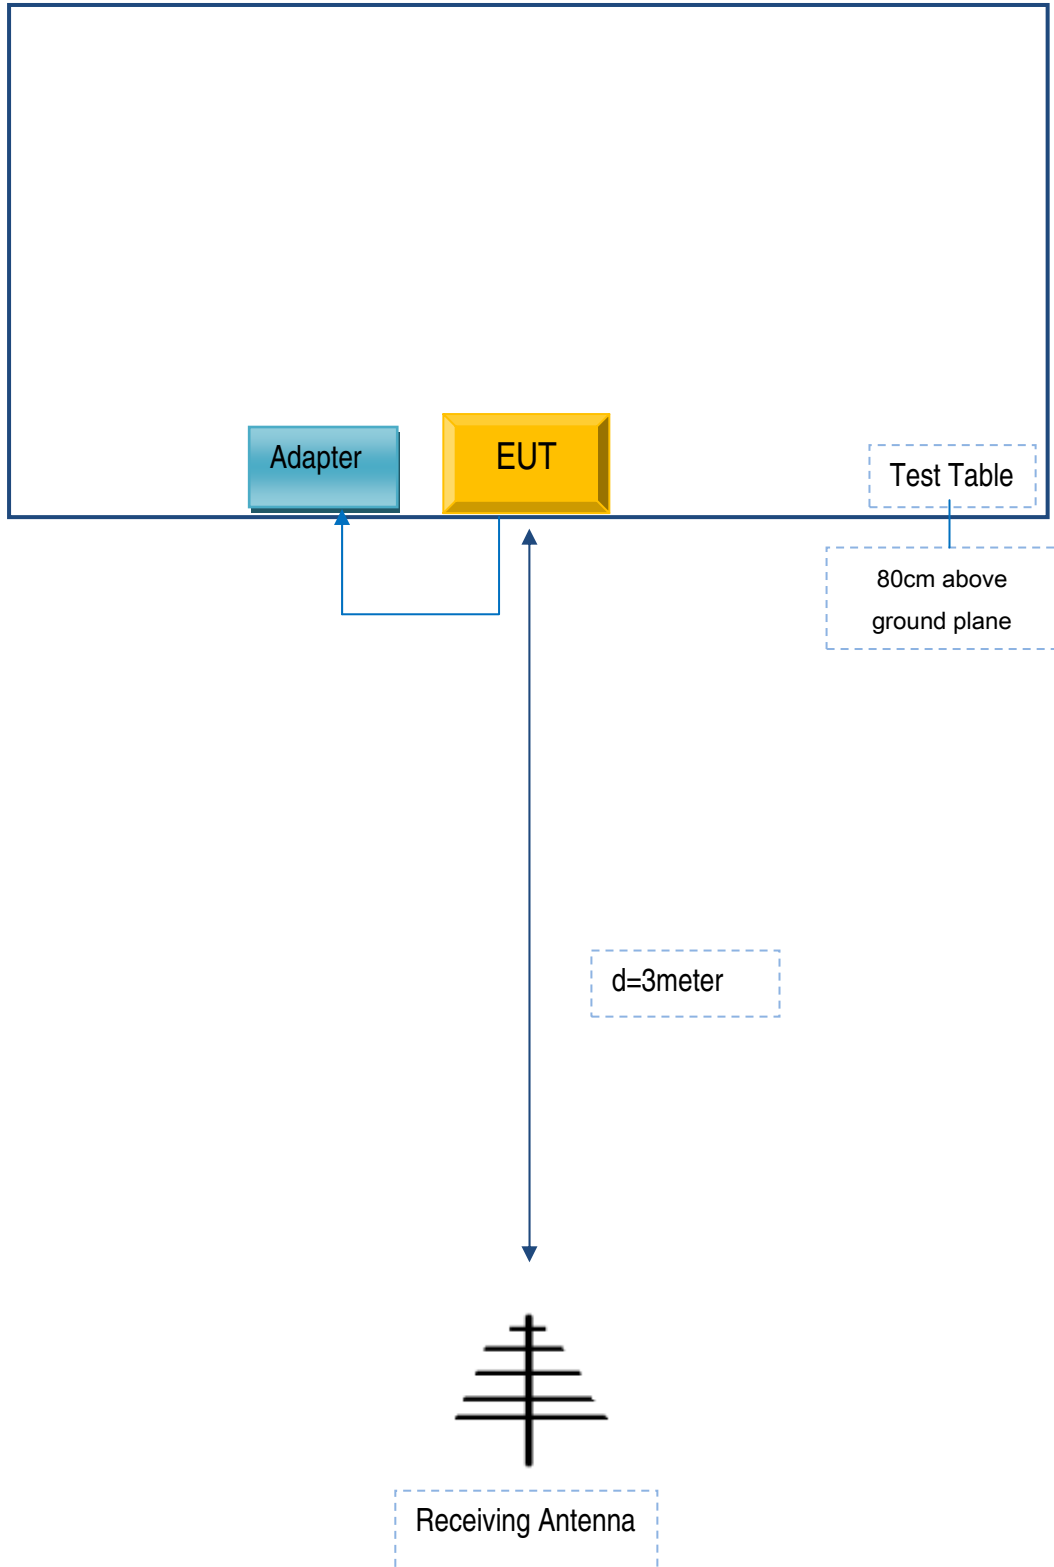



**Block Configuration Diagram for Radiated Emissions ( Above 1GHz ) .**

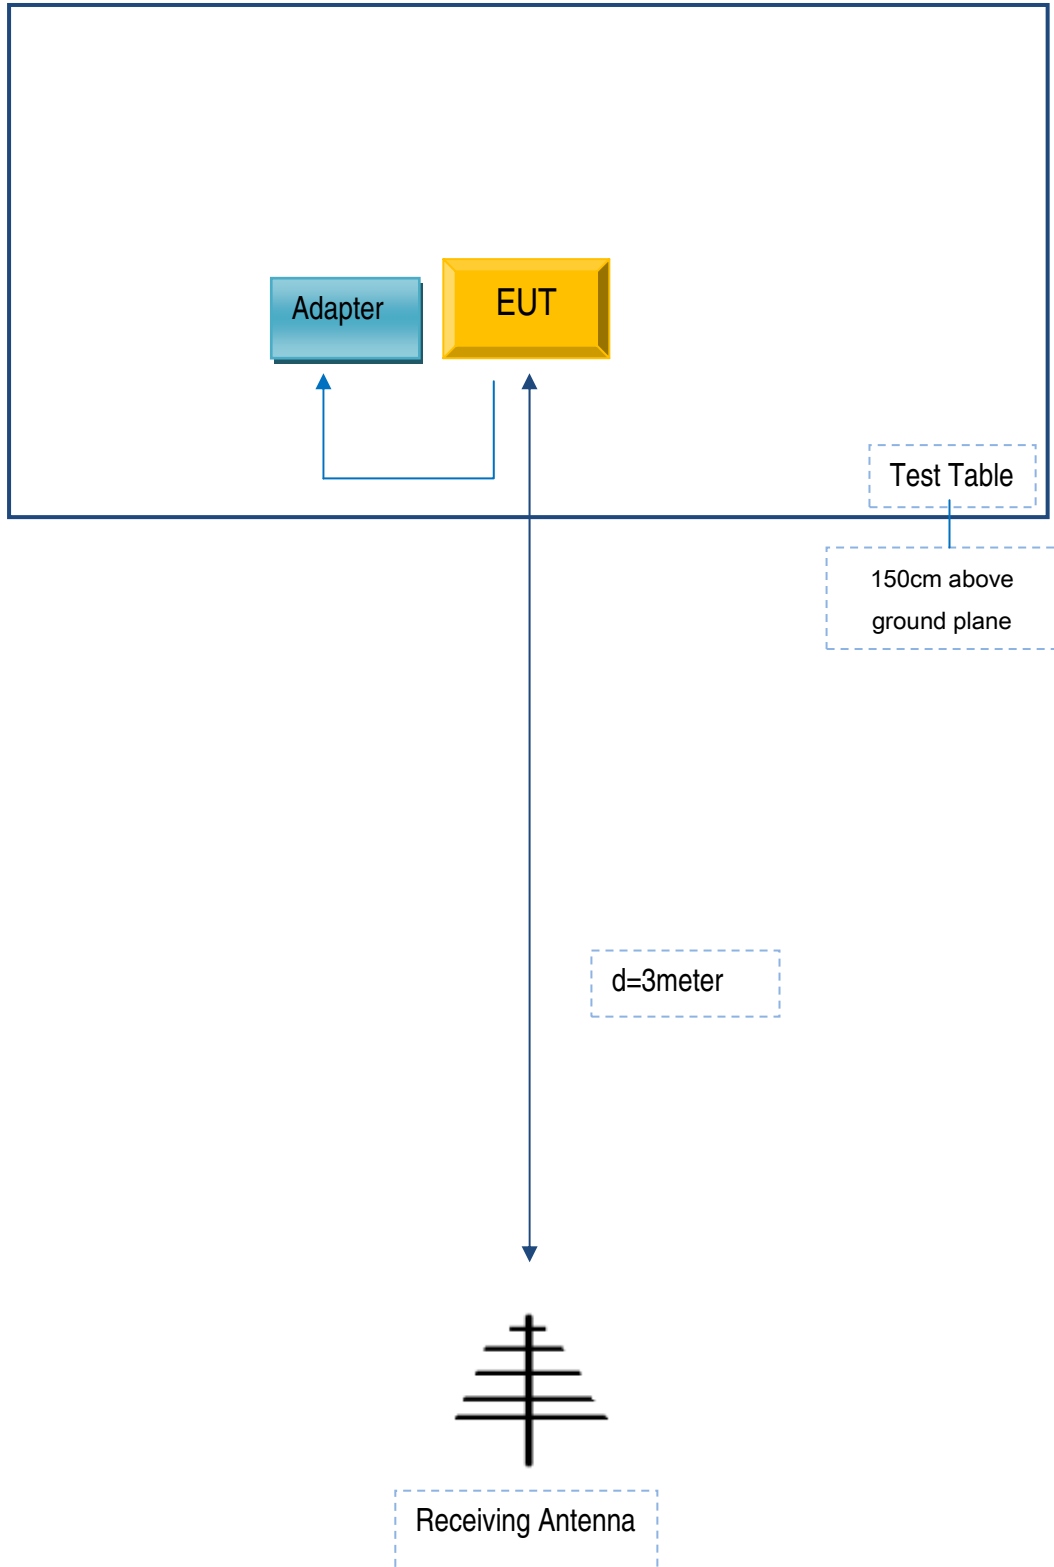

## Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

### Supporting Equipment:

Manufacturer	Equipment Description	Model	Serial No
Unimax Communications	Adapter	UMXCHG	C0005

### Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	0.8m	C0005

Test Report	16070898-FCC-R2
Page	59 of 60

**Annex D. User Manual / Block Diagram / Schematics / Partlist**

Please see attachment

Test Report	16070898-FCC-R2
Page	60 of 60

## Annex E. DECLARATION OF SIMILARITY

N/A