



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

Portable Navigator

Model: BE 7977

Trade Name: HARMAN/BECKER AUTOMATIVE SYSTEM

Prepared for

Mitac International Corporation

6th Fl., No. 187, Tiding Blvd., Sec. 2, Nei-Hu, Taipei, Taiwan, R.O.C.

Issued by

COMPLIANCE CERTIFICATION SERVICES (KUNSHAN) INC.

10#Weiye Rd, Innovation Park Eco. & Tec. Development Zone

Kunshan city JiangSu, (215300) CHINA

TEL: 86-512-57355888

FAX: 86-512-57370818



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.



TABLE OF CONTENTS

- 1. TEST RESULT CERTIFICATION..... 3**
- 2. COMPLIANCE CERTIFICATION SERVICES INC. EUT DESCRIPTION..... 4**
- 3. TEST METHODOLOGY 5**
 - EUT CONFIGURATION.....5
 - EUT EXERCISE5
 - GENERAL TEST PROCEDURES.....5
 - MODIFICATION5
 - FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....6
 - DESCRIPTION OF TEST MODES.....6
- 4. INSTRUMENT CALIBRATION..... 7**
- 5. FACILITIES AND ACCREDITATIONS 8**
 - FACILITIES8
 - EQUIPMENT8
 - TABLE OF ACCREDITATIONS AND LISTINGS.....9
- 6. SETUP OF EQUIPMENT UNDER TEST 10**
 - SETUP CONFIGURATION OF EUT10
- 7. FCC PART 15.247 REQUIREMENTS..... 11**
 - PEAK POWER 11
 - BAND EDGES MEASUREMENT.....12
 - PEAK POWER SPECTRAL DENSITY18
 - FREQUENCY SEPARATION21
 - NUMBER OF HOPPING FREQUENCY.....23
 - TIME OF OCCUPANCY (DWELL TIME).....25
 - RADIO FREQUENCY EXPOSURE29
 - SPURIOUS EMISSIONS.....30
 - POWERLINE CONDUCTED EMISSIONS41
- APPENDIX 1 PHOTOGRAPHS OF TEST SETUP 45**



1. TEST RESULT CERTIFICATION

Applicant: Mitac International Corporation
 6th Fl., No. 187, Tiding Blvd., Sec. 2, Nei-Hu, Taipei, Taiwan,
 R.O.C.

Equipment Under Test: Portable Navigator

Trade Name: HARMAN/BECKER AUTOMATIVE SYSTEM

Model: BE 7977

Date of Test: From October 9, 2007 to October 17,2007

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

We here by certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Miro Chueh
 EMC Manager
 Compliance Certification Service Inc.

Reviewed by:

Lin Zhang
 EMC Section Manager
 Compliance Certification Service Inc.



2. COMPLIANCE CERTIFICATION SERVICES INC. EUT DESCRIPTION

Product	Portable Navigator
Trade Name	HARMAN/BECKER AUTOMATIVE SYSTEM
Model Number	BE 7977
Model Discrepancy	N/A
Bluetooth module Model Number	BC41B143A
Bluetooth module Brand name	CSR
Power Supply	For DC adapter: Trade name: UDID Model number: G12PCL-535-A061 Input DC: 12-24V, 0.8A Output DC: 5V, 1A; For AC adapter: Trade name: PHIHONG Model number: PSAA05R-050 Input: 100-240V, 50~60Hz, 0.3A Output: 5V, 1A;
Frequency Range	2402 ~ 2480 MHz
Transmit Power	2.41 dBm
Modulation Technique	FHSS
Transmit Data Rate	1Mbps
Number of Channels	79 Channels
Antenna Specification	EMBEDDED Antenna / Gain: -0.02 dBi

Remark: This submittal(s) (test report) is intended for FCC ID: P4Q-BE7977 filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.247.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.

MODIFICATION

Note: please refer to the file BE7977.PDF



FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

Table with 4 columns: MHz, MHz, MHz, GHz. It lists various frequency ranges for restricted bands.

1 Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

2 Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

DESCRIPTION OF TEST MODES

The EUT had been tested under operating condition.

There are three channels have been tested as following:

Table with 2 columns: Channel, Frequency (MHz). It lists LOW (2402), Middle (2441), and High (2480) channels.

Bluetooth mode: GFSK (worst case) was chosen for full testing.

Note: After the preliminary san GFSK, pi/4-DQPSK,8-DPSK. we found the test mode(s) producing the highest emission level, so evaluated we chosen the above modes (worst case) as a representative.



4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.



5. FACILITIES AND ACCREDITATIONS

FACILITIES

All measurement facilities used to collect the measurement data are located at CCS China Kunshan Lab at 10#Weiye Rd, Innovation Park Eco. & Tec. Development Zone Kunshan city JiangSu, (215300), CHINA.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."



TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	A2LA	47 CFR FCC Part 15/18 (using ANSI C63.4:2003); VCCI V3; CNS 13438; CNS 13439; CNS 13803; CISPR 11; EN 55011; CISPR 13; EN 55013; CISPR 22:2005; CISPR 22:1997 +A1 :2000+A2 :2002; EN 55022:2006; EN55022 :1998 +A1 :2001+A2 :2003; EN 61000-6-3 (excluding discontinuous interference); EN 61000-6-4; AS/NZS CISPR 22; CAN/CSA-CEI/IEC CISPR 22; EN 61000-3-2; EN 61000-3-3; EN550024; EN 61000-4-2; EN 61000-4-3; EN61000-4-4; EN 61000-4-5; EN 61000-4-6; IEC 61000-4-8; EN 61000-4-11; IEC61000-3-2; IEC61000-3-3; IEC 61000-4-2; IEC 61000-4-3; IEC 61000-4-4; IEC 61000-4-5; IEC 61000-4-6; IEC 61000-4-8; IEC 61000-4-11; EN 300 220-3; EN 300 328; EN 300 330-2; EN 300 440-1; EN 300-440-2; EN 300 893; EN 301 489-01; EN 301 489-3; EN 301 489-07; EN 301 489-17; 47 CFR FCC Part 15, 22, 24	
USA	FCC	3/10 meter Sites to perform FCC Part 15/18 measurements	
Japan	VCCI	3/10 meter Sites and conducted test sites to perform radiated/conducted measurements	

* No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government.



6. SETUP OF EQUIPMENT UNDER TEST

SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

SUPPORT EQUIPMENT

No.	Equipment	Model No.	Serial No.	FCC ID	Trade Name	Data Cable	Power Cord
1	HDD	HTS421240 H9AT00	AHCM30SJ	DoC	Hitachi	N/A	N/A
2	earphone	CD-371	N/A	N/A	JINLIAN	Un-Shielded, 2.0m	N/A



7. FCC PART 15.247 REQUIREMENTS


PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
2. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
3. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Power Meter.

TEST RESULTS

No non-compliance noted

Test Data


Channel	Frequency (MHz)	Reading Power (dBm)	Factor (dB)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2402	0.91	1.50	2.41	0.00174	0.125	PASS
Mid	2441	0.73	1.50	2.23	0.00167		PASS
High	2480	0.68	1.50	2.18	0.00165		PASS

BAND EDGES MEASUREMENT

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration

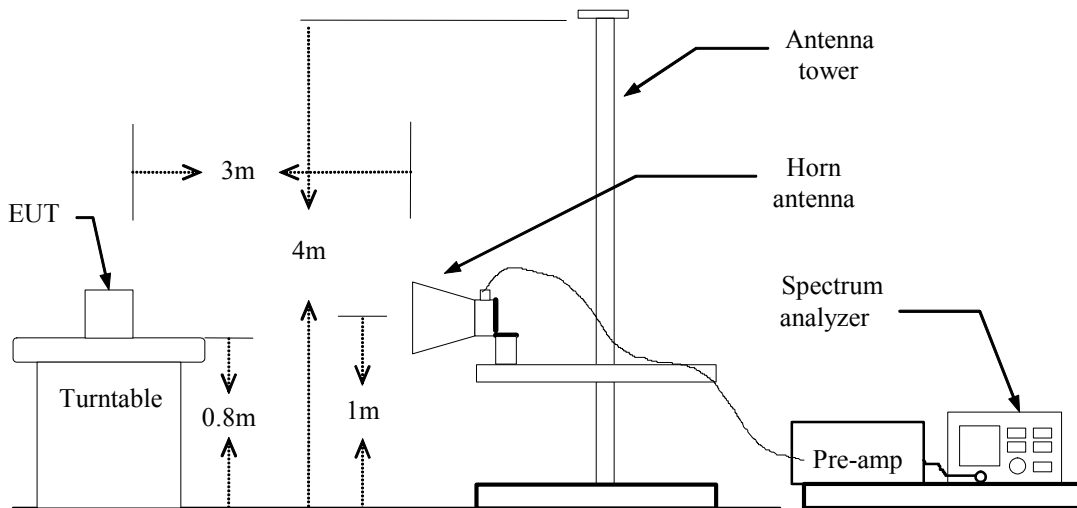

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.



TEST RESULTS

CH LOW

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Peak Margin (dB)	AV Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)				
2390.10	V	48.05	34.64	4.50	52.55	39.14	74	54	-21.45	-14.86
2390.10	H	46.17	34.18	4.50	50.67	38.68	74	54	-23.33	-15.32

CH HIGH

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Peak Margin (dB)	AV Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)				
2483.50	V	53.83	38.38	4.50	58.33	42.88	74	54	-15.67	-11.12
	V									
2483.50	H	51.28	37.05	4.50	55.78	41.55	74	54	-18.22	-12.45


Refer to attach spectrum analyzer data chart.



Band Edges (CH Low)

Detector mode: Peak Polarity: Vertical

Agilent 01:20:30 Oct 9, 2007

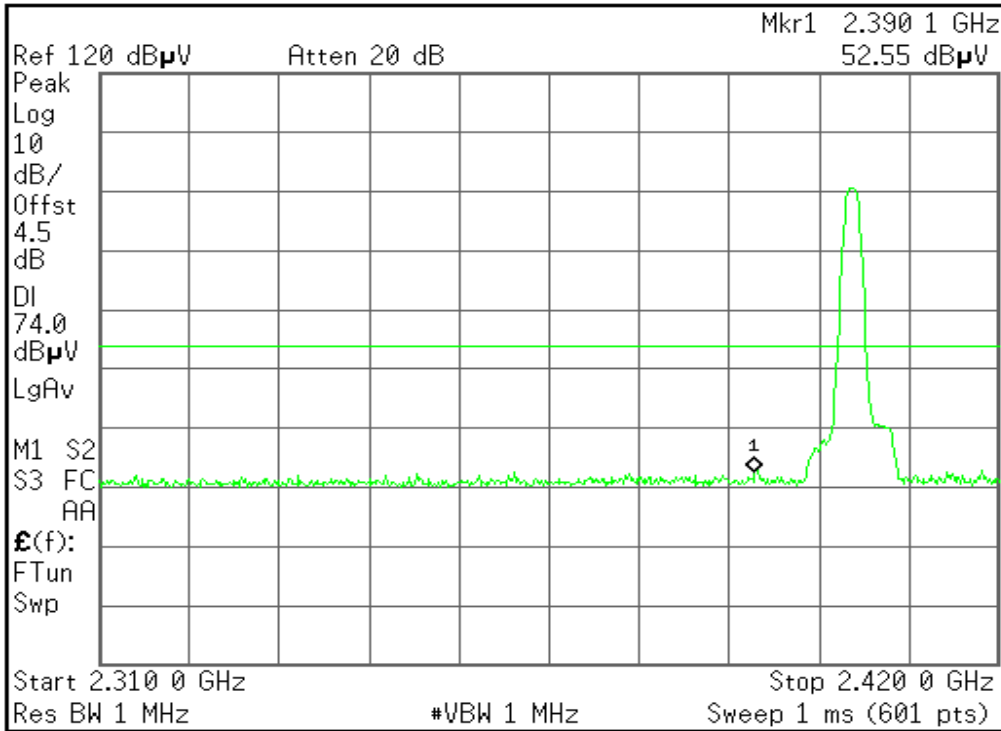


Marker			
Select Marker	1	2	3 4
Normal			
Delta			
Delta Pair (Tracking Ref) Ref \blacktriangle			
Span Pair Span Center			
Off			
More 1 of 2			

Copyright 2000-2004 Agilent Technologies

Detector mode: Average Polarity: Vertical

Agilent 01:21:39 Oct 9, 2007

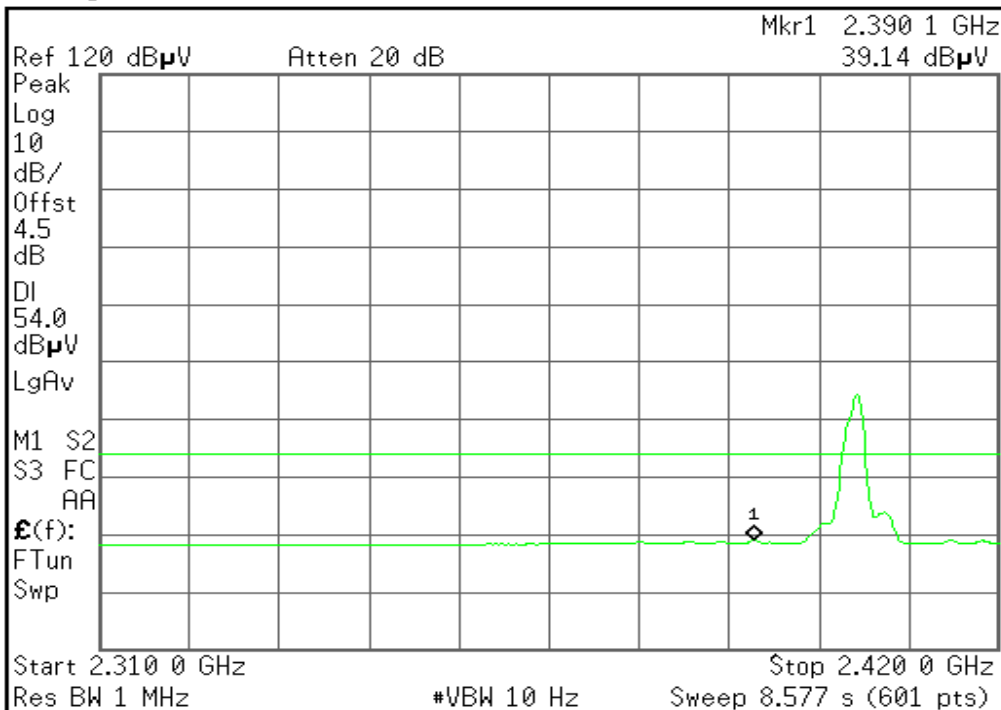


Marker			
Select Marker	1	2	3 4
Normal			
Delta			
Delta Pair (Tracking Ref) Ref \blacktriangle			
Span Pair Span Center			
Off			
More 1 of 2			

Copyright 2000-2004 Agilent Technologies



Detector mode: Peak Polarity: Horizontal

Agilent 01:30:27 Oct 9, 2007

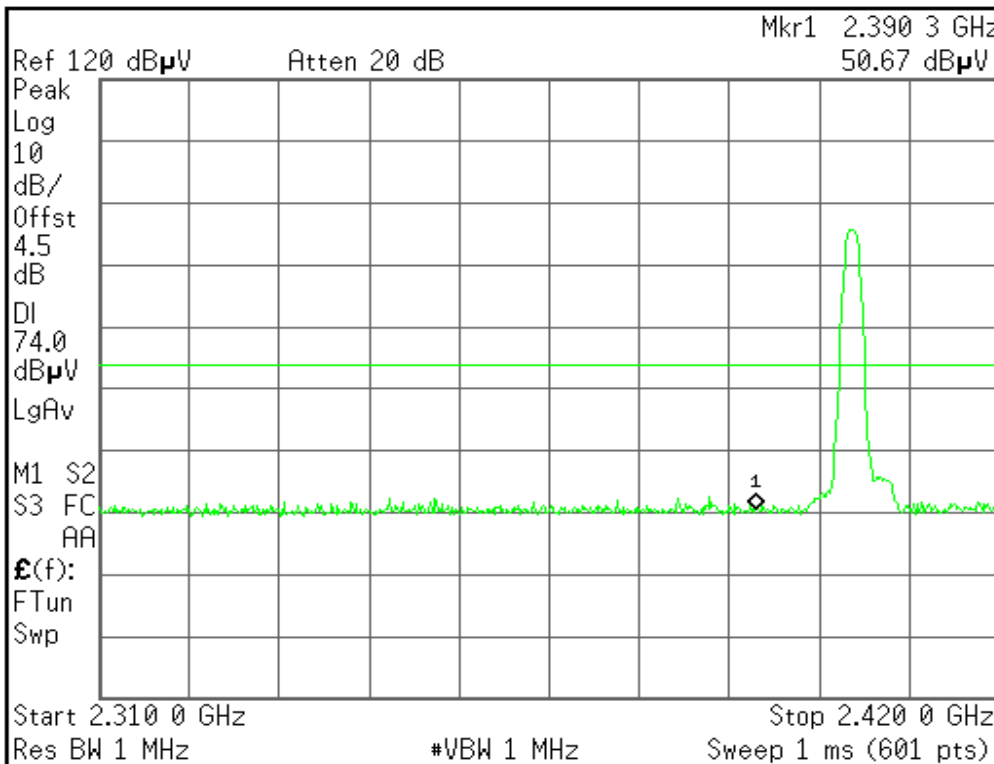


Marker				
Select Marker	1	2	3	4
Normal				
Delta				
Delta Pair (Tracking Ref) Ref ▲				
Span Pair Span Center				
Off				
More 1 of 2				

Copyright 2000-2004 Agilent Technologies

Detector mode: Average Polarity: Horizontal

Agilent 01:39:53 Oct 9, 2007

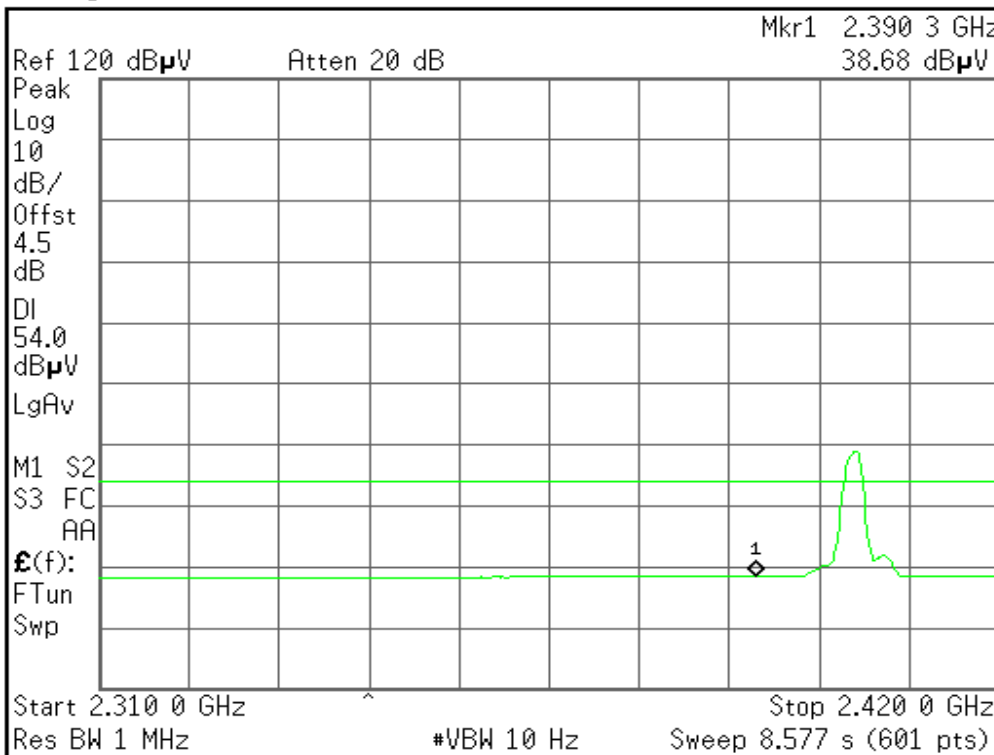

Marker				
Select Marker	1	2	3	4
Normal				
Delta				
Delta Pair (Tracking Ref) Ref ▲				
Span Pair Span Center				
Off				
More 1 of 2				

Copyright 2000-2004 Agilent Technologies




Band Edges (CH High)

Detector mode: Peak

Polarity: Vertical

Agilent 01:58:13 Oct 9, 2007

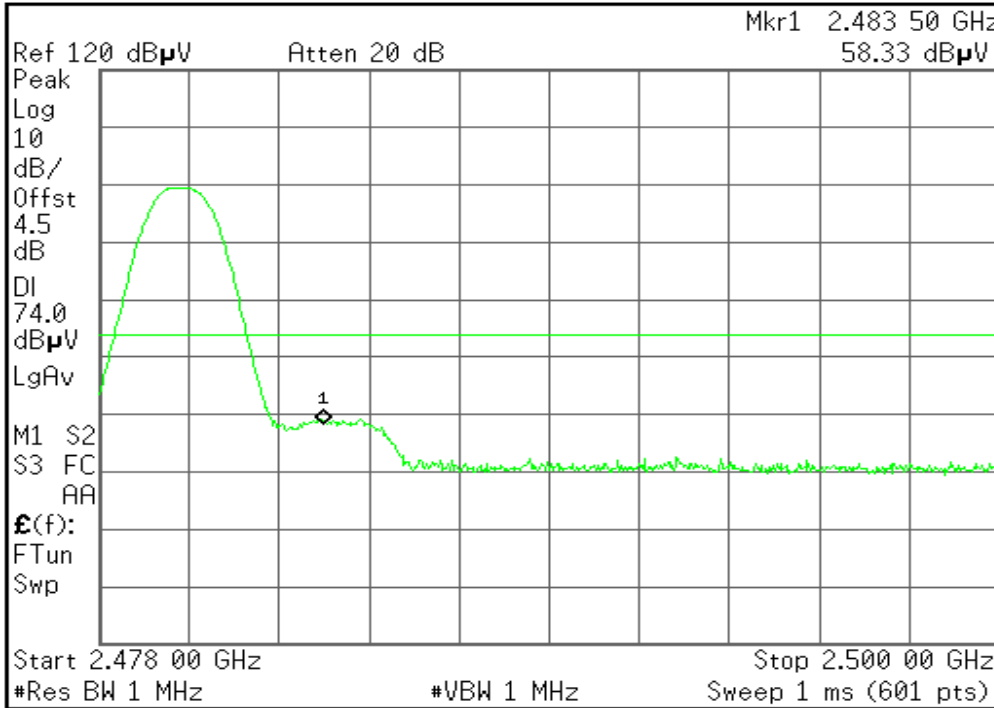


Marker			
Select Marker	1	2	3
Normal			
Delta			
Delta Pair (Tracking Ref)	Ref		▲
Span Pair	Span	Center	
Off			
More	1 of 2		

File Operation Status, A:\SCREN012.GIF file saved

Detector mode: Average

Polarity: Vertical

Agilent 01:59:06 Oct 9, 2007

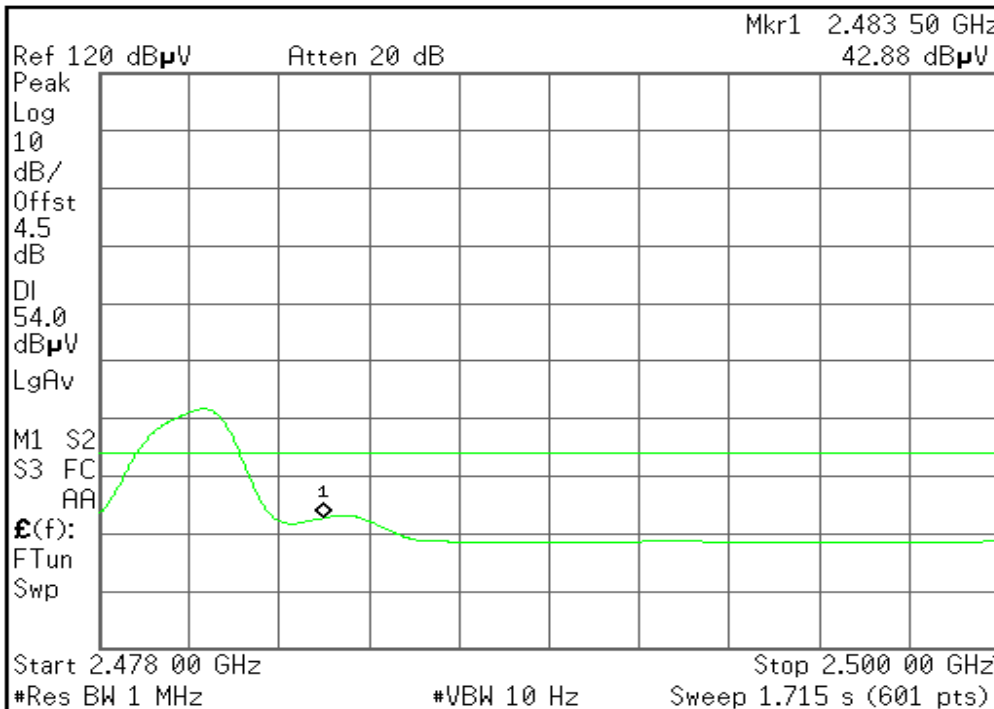


Marker			
Select Marker	1	2	3
Normal			
Delta			
Delta Pair (Tracking Ref)	Ref		▲
Span Pair	Span	Center	
Off			
More	1 of 2		

Copyright 2000-2004 Agilent Technologies



Detector mode: Peak Polarity: Horizontal

Agilent 01:49:29 Oct 9, 2007

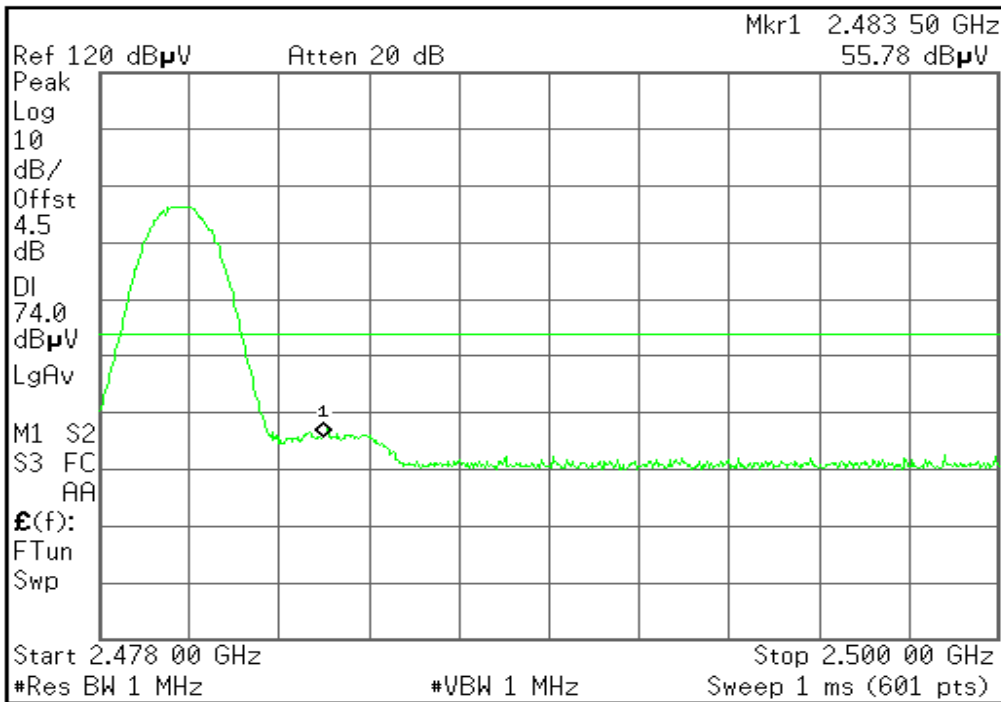


Marker				
Select Marker	1	2	3	4
Normal				
Delta				
Delta Pair (Tracking Ref)	Ref ▲			
Span Pair	Span Center			
Off				
More 1 of 2				

Copyright 2000-2004 Agilent Technologies

Detector mode: Average Polarity: Horizontal

Agilent 01:50:35 Oct 9, 2007

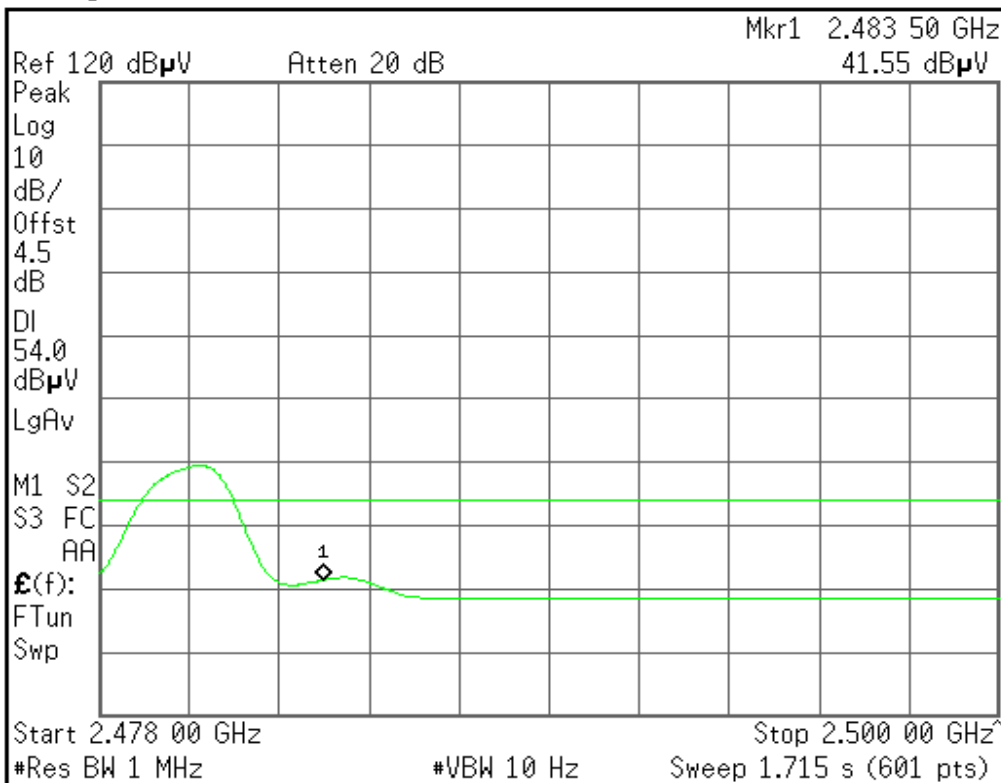

Marker				
Select Marker	1	2	3	4
Normal				
Delta				
Delta Pair (Tracking Ref)	Ref ▲			
Span Pair	Span Center			
Off				
More 1 of 2				

Copyright 2000-2004 Agilent Technologies




PEAK POWER SPECTRAL DENSITY

LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 300kHz, Sweep=100s
4. Record the max. reading.
5. Repeat the above procedure until the measurements for all frequencies are completed.

TEST RESULTS

No non-compliance noted

Test Data


Channel	Frequency	PPSD (dBm)	Limit (dBm)	Result
Low	2402	-6.31	8.00	PASS
Mid	2441	-6.79		PASS
High	2480	-6.70		PASS



Test Plot

PPSD (CH Low)

Agilent 13:45:34 Oct 8, 2007

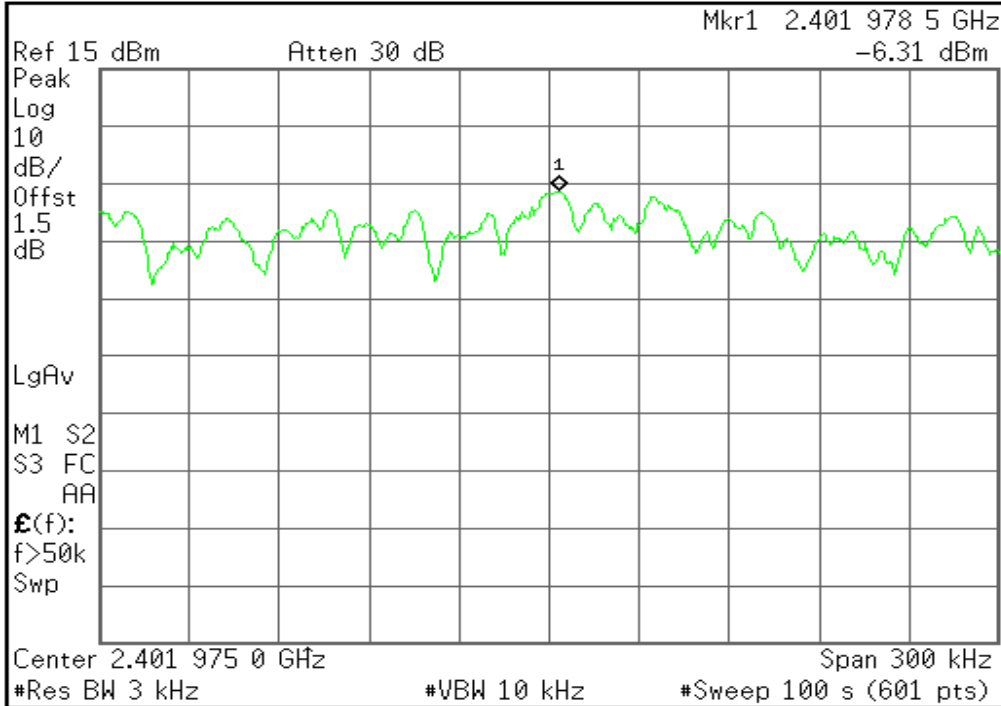


Marker				
Select Marker	1	2	3	4
Normal				
Delta				
Delta Pair (Tracking Ref)				
Ref	▲			
Span Pair				
Span	Center			
Off				
More 1 of 2				

Copyright 2000-2004 Agilent Technologies

PPSD (CH Mid)

Agilent 13:41:23 Oct 8, 2007

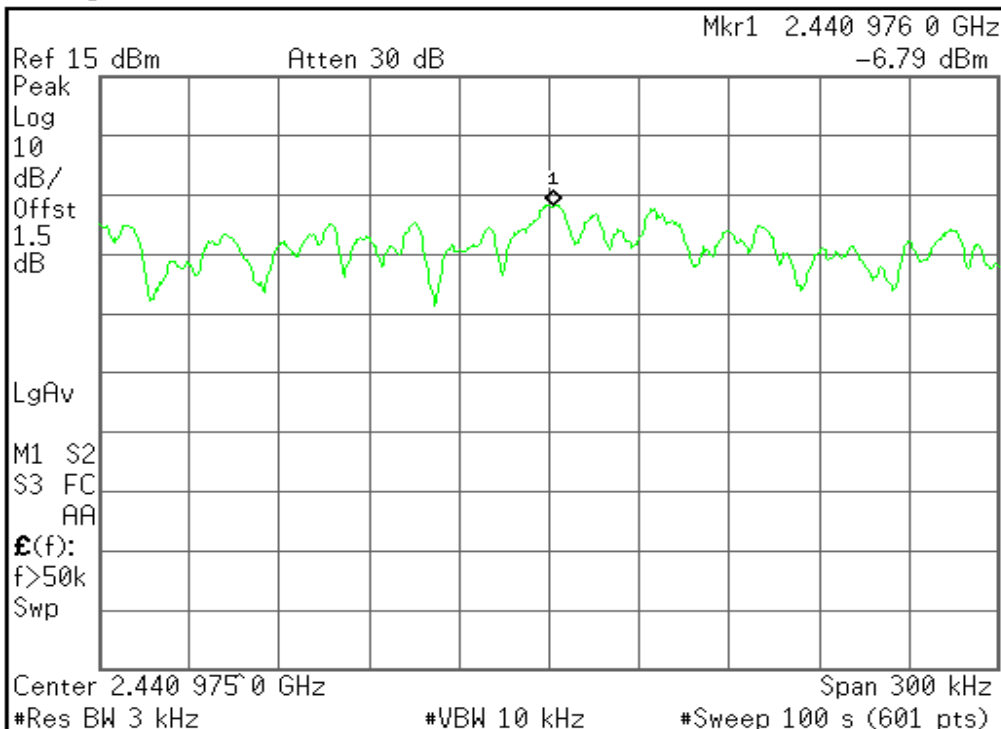


Marker				
Select Marker	1	2	3	4
Normal				
Delta				
Delta Pair (Tracking Ref)				
Ref	▲			
Span Pair				
Span	Center			
Off				
More 1 of 2				

Copyright 2000-2004 Agilent Technologies



PPSD (CH High)

Agilent 13:50:49 Oct 8, 2007

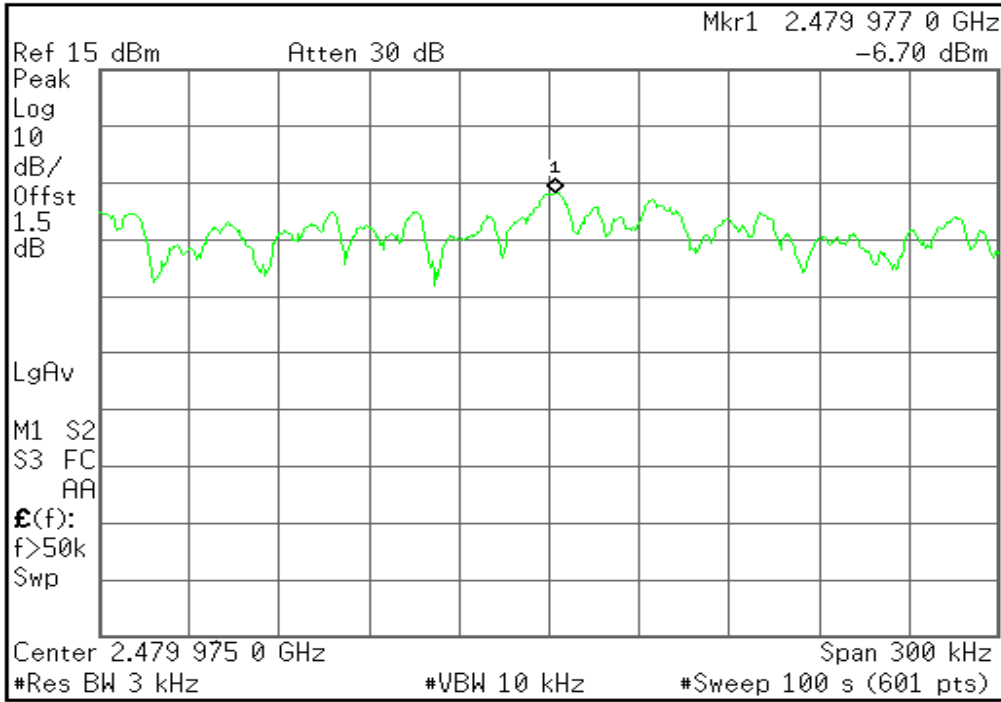

Marker			
Select Marker			
1	2	3	4
Normal			
Delta			
Delta Pair (Tracking Ref)			
Ref	▲		
Span Pair			
Span	Center		
Off			
More 1 of 2			

Copyright 2000-2004 Agilent Technologies




FREQUENCY SEPARATION

LIMIT

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Configuration

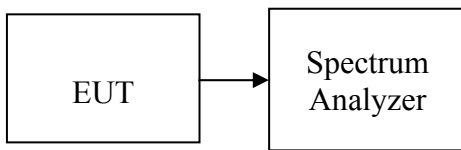

TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = middle of hopping channel.
4. Set the spectrum analyzer as RBW = 100kHz, VBW = 100kHz, Span = 3MHz, Sweep = auto.
5. Max hold, mark 2 peaks of hopping channel and record the 2 peaks frequency.

TEST RESULTS

No non-compliance noted

Test Data


Channel Separation (MHz)	20dB Bandwidth (kHz)	Limit (kHz)	Result
1.001	1109	739	Pass



Test Plot

Measurement of Channel Separation

Agilent 11:58:05 Oct 8, 2007

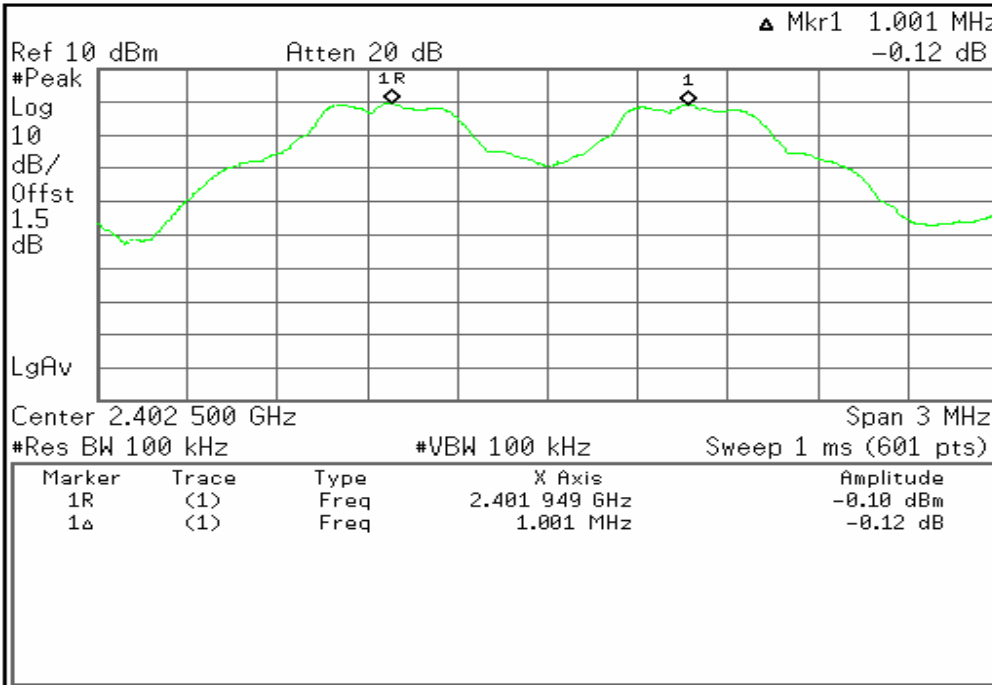

Marker

Select Marker 1 2 3 4

Normal

Delta

Delta Pair (Tracking Ref) Ref ▲

Span Pair Span Center


Off

More 1 of 2

Copyright 2000-2003 Agilent Technologies

Measurement of 20dB Bandwidth

Agilent 12:07:32 Oct 8, 2007

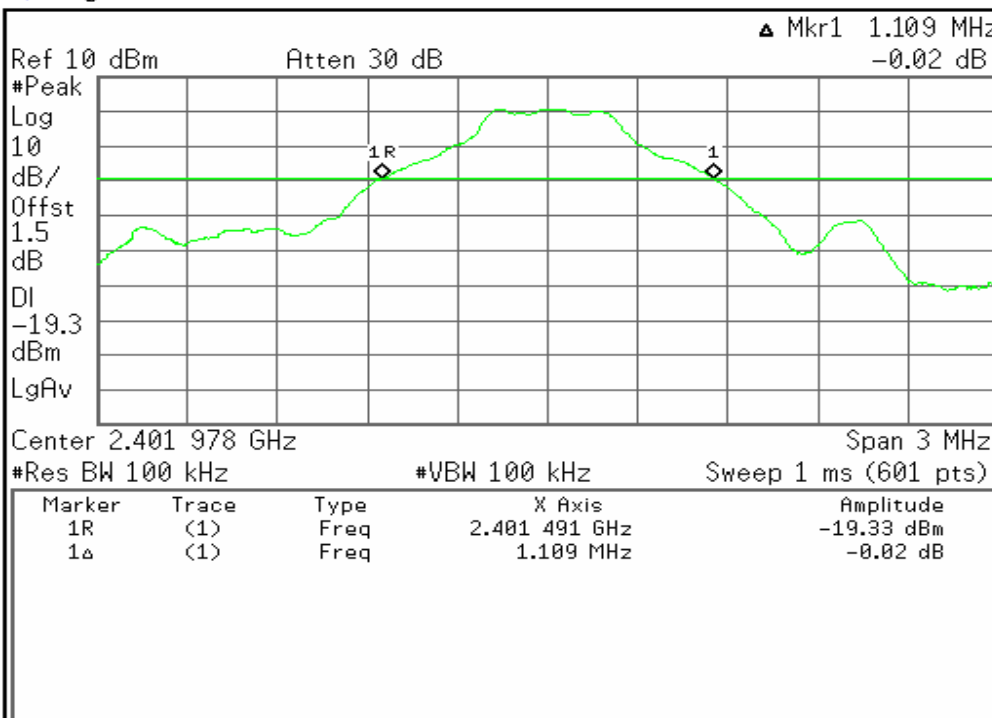

Display

Full Screen

Display Line -19.33 dBm On Off

Limits>

Active Fctn Position> Center

Title>

Preferences>

Copyright 2000-2003 Agilent Technologies




NUMBER OF HOPPING FREQUENCY

LIMIT

According to §15.247(a)(1)(ii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 75 hopping frequencies.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set spectrum analyzer Start=2400MHz, Stop = 2441.5MHz, Sweep = auto and Start=2441.5MHz, Stop = 2483.5MHz, Sweep = auto.
4. Set the spectrum analyzer as RBW, VBW=100kHz.
5. Max hold, view and count how many channel in the band.

TEST RESULTS

No non-compliance noted

Test Data

Result (No. of CH)	Limit (No. of CH)	Result
79	>15	PASS




Test Plot

Channel Number

2.4 GHz – 2.4415 GHz

Agilent 14:04:41 Oct 8, 2007

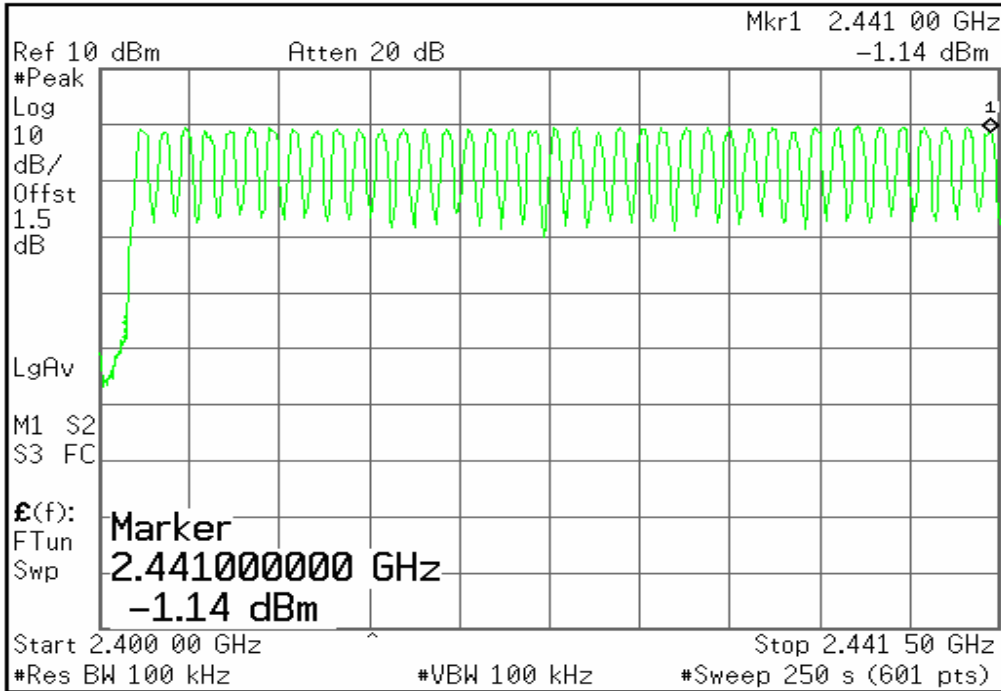


Marker				
Select Marker	1	2	3	4
Normal				
Delta				
Delta Pair (Tracking Ref)				
Ref				▲
Span Pair				
Span				Center
Off				
More				1 of 2

File Operation Status, A:\SCREN401.GIF file saved

2.4415 GHz – 2.4835 GHz

Agilent 14:17:53 Oct 8, 2007

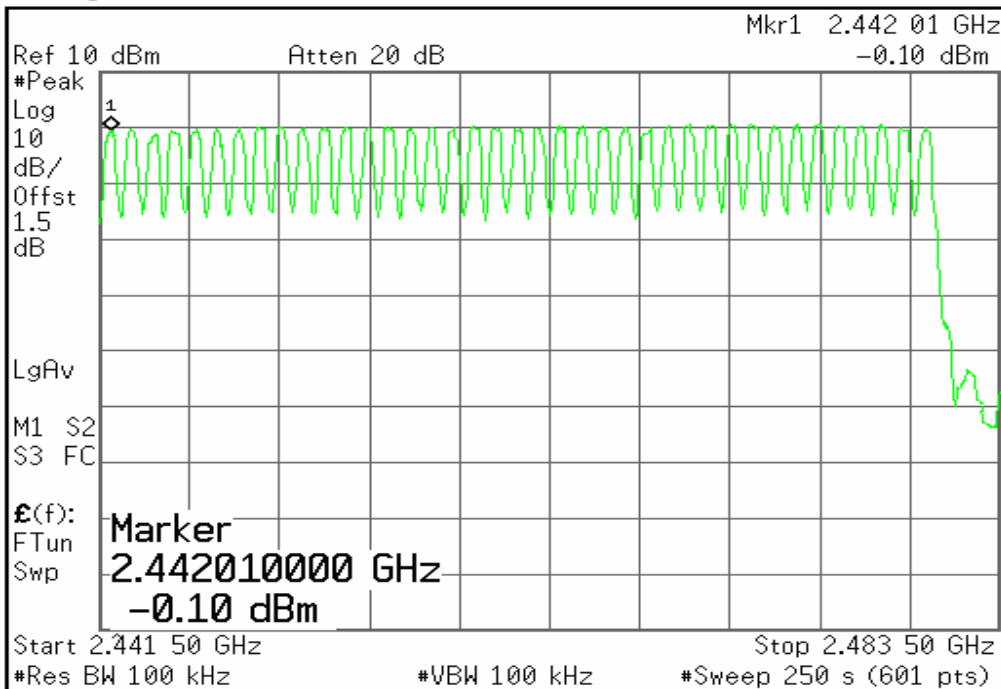

Marker				
Select Marker	1	2	3	4
Normal				
Delta				
Delta Pair (Tracking Ref)				
Ref				▲
Span Pair				
Span				Center
Off				
More				1 of 2

File Operation Status, A:\SCREN403.GIF file saved




TIME OF OCCUPANCY (DWELL TIME)

LIMIT

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.
5. Repeat above procedures until all frequency measured were complete.



TEST RESULTS

No non-compliance noted

Test Data

DH 1

$0.402 * (1600/2)/79 * 31.6 = 128.64 \text{ (ms)}$

Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
0.402	128.64	31.60	400	PASS

DH 3

$1.60 * (1600/4)/79 * 31.6 = 256.00 \text{ (ms)}$

Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
1.60	256.00	31.60	400	PASS

DH 5

$2.912 * (1600/6)/79 * 31.6 = 310.61 \text{ (ms)}$


Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
2.912	310.61	31.60	400	PASS



Test Plot

DH 1

Agilent 13:21:17 Oct 8, 2007

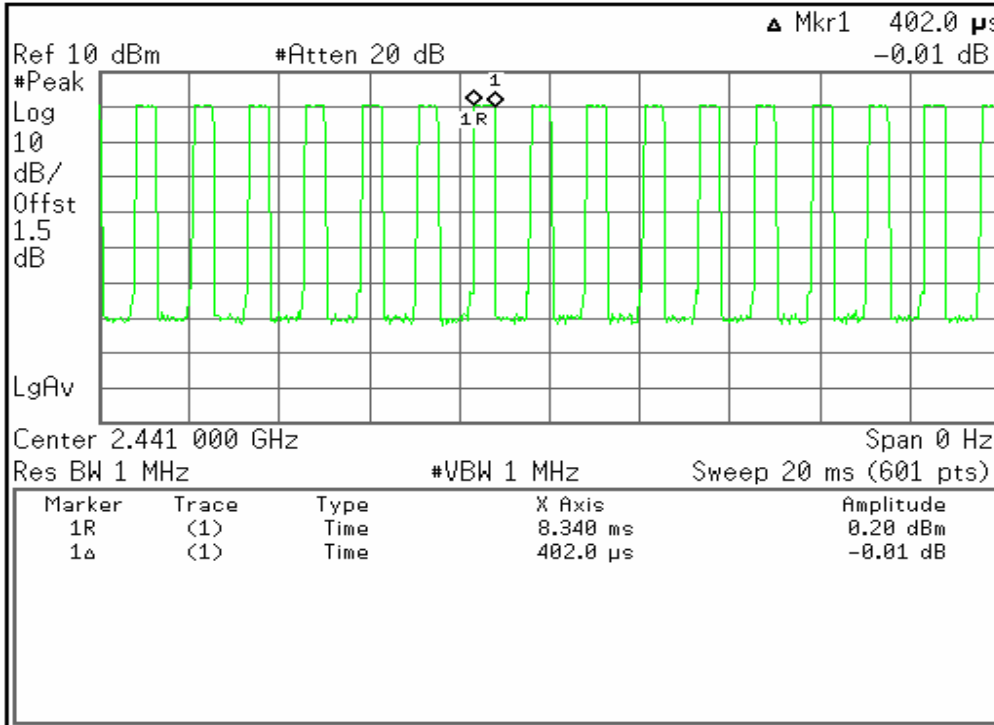

Marker

Select Marker 1 2 3 4

Normal

Delta

Delta Pair (Tracking Ref) Ref ▲

Span Pair Span Center


Off

More 1 of 2

Copyright 2000-2004 Agilent Technologies

DH 3

Agilent 13:32:01 Oct 8, 2007

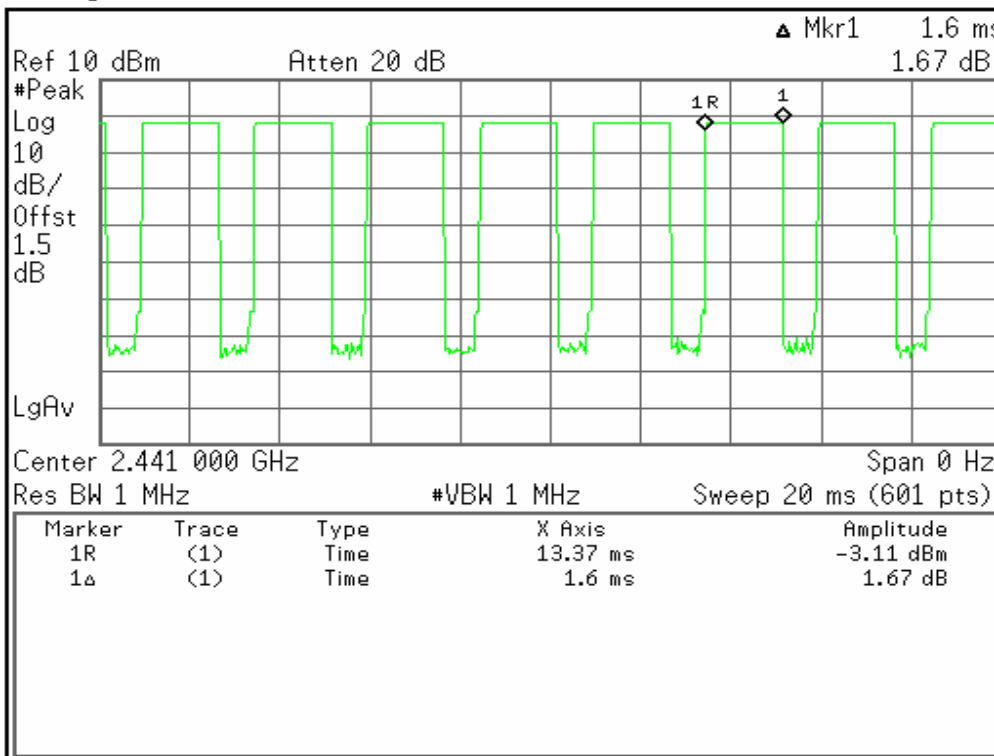

Marker

Select Marker 1 2 3 4

Normal

Delta

Delta Pair (Tracking Ref) Ref ▲

Span Pair Span Center

Off


More 1 of 2

Copyright 2000-2003 Agilent Technologies



DH 5

Agilent 13:38:28 Oct 8, 2007

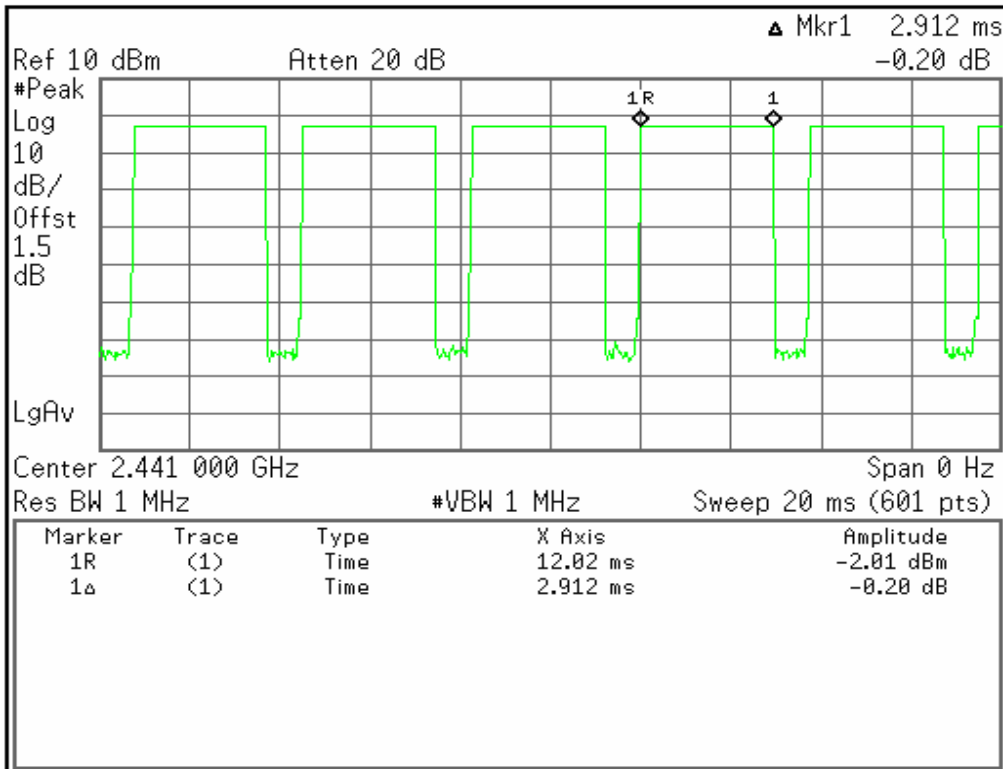

Marker
Select Marker 1 2 3 4
Normal
Delta
Delta Pair (Tracking Ref) Ref ▲
Span Pair Span Center
Off
More 1 of 2

Copyright 2000-2003 Agilent Technologies



RADIO FREQUENCY EXPOSURE

LIMIT

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See §15.247(b)(4) and §1.1307(b)(1) of this chapter.

EUT Specification

EUT	Portable Navigator
Frequency band (Operating)	<input type="checkbox"/> WLAN: 2.412GHz ~ 2.462GHz <input type="checkbox"/> WLAN: 5.18GHz ~ 5.32GHz / 5.50GHz ~ 5.70GHz <input type="checkbox"/> WLAN: 5.745GHz ~ 5.825GHz <input checked="" type="checkbox"/> Others: <u>Bluetooth: 2.402GHz ~ 2.480GHz</u>
Device category	<input type="checkbox"/> Portable (<20cm separation) <input checked="" type="checkbox"/> Mobile (>20cm separation) <input type="checkbox"/> Others
Exposure classification	<input type="checkbox"/> Occupational/Controlled exposure ($S = 5mW/cm^2$) <input checked="" type="checkbox"/> General Population/Uncontrolled exposure ($S=1mW/cm^2$)
Antenna diversity	<input checked="" type="checkbox"/> Single antenna <input type="checkbox"/> Multiple antennas <input type="checkbox"/> Tx diversity <input type="checkbox"/> Rx diversity <input type="checkbox"/> Tx/Rx diversity
Max. output power	2.41dBm (1.742mW)
Antenna gain (Max)	-0.02dBi (Numeric gain: 0.955mW)
Evaluation applied	<input type="checkbox"/> MPE Evaluation <input type="checkbox"/> SAR Evaluation <input checked="" type="checkbox"/> N/A

Remark:

- The maximum output power is 2.41dBm (1.742mW) at 2402MHz (with 0.955numeric antenna gain.)*
- DTS device is not subject to routine RF evaluation; MPE estimate is used to justify the compliance.*
- For mobile or fixed location transmitters, no SAR consideration applied. The minimum separation generally be used is at least 20 cm, even if the calculations indicate that the MPE distance would be lesser.*

TEST RESULTS

Non-compliance.



SPURIOUS EMISSIONS

Conducted Measurement

LIMIT


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY44020154	11/16/2007

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 KHz. The video bandwidth is set to 100 KHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

TEST RESULTS

No non-compliance noted




Test Plot

CH Low


30MHz ~ 2.9GHz

Agilent 15:26:11 Oct 8, 2007

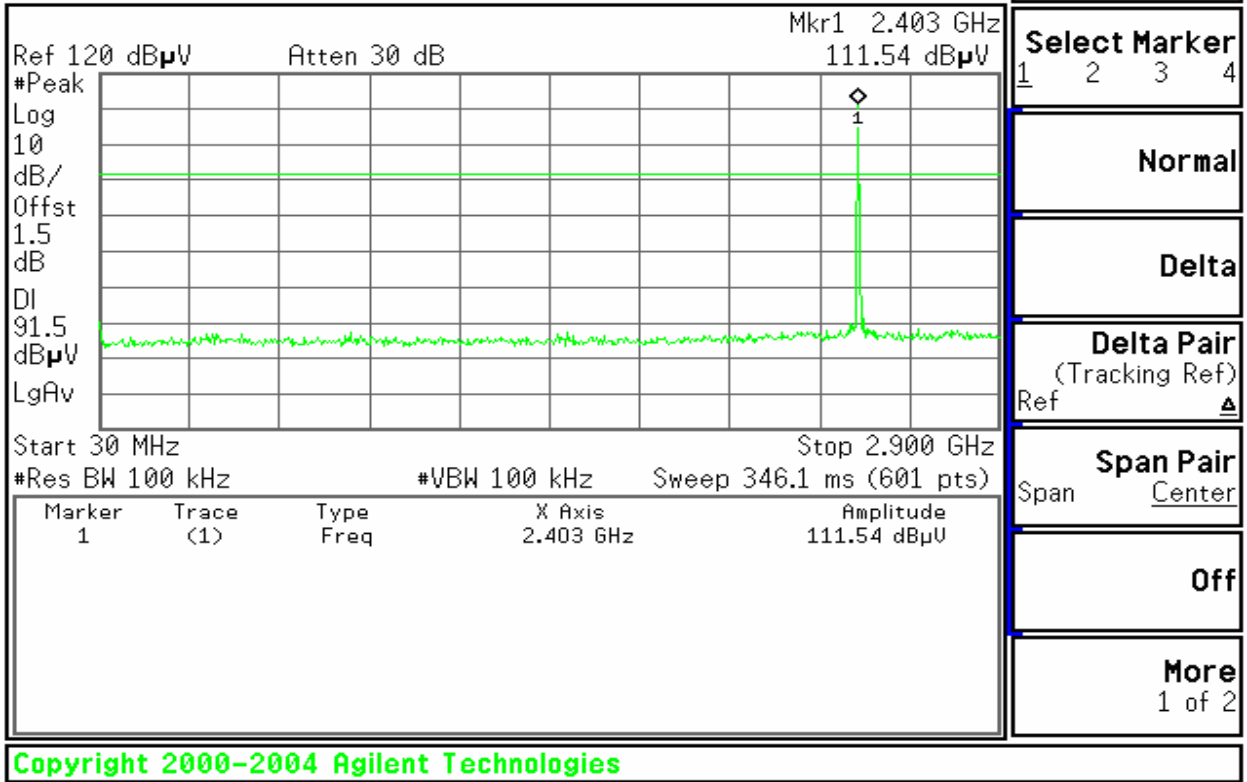

2.9GHz ~ 26.5GHz

Agilent 15:25:58 Oct 8, 2007

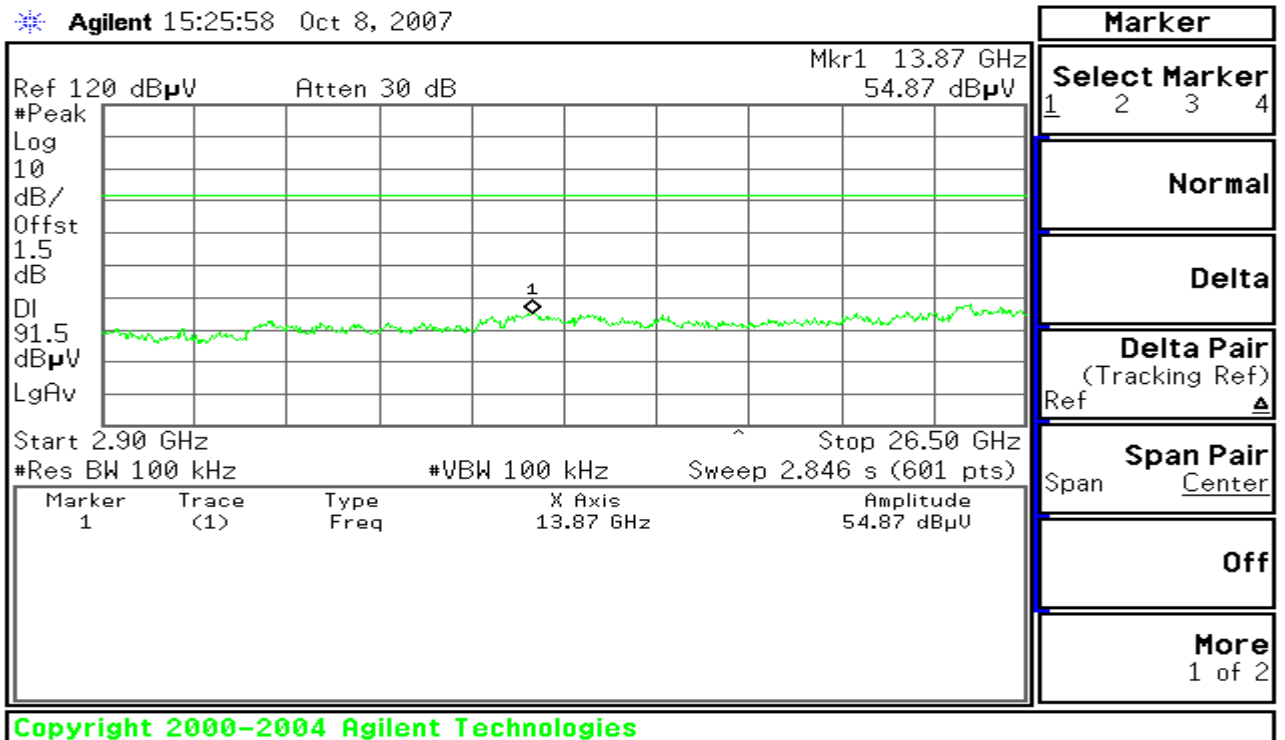




CH Mid

30MHz ~ 2.9GHz

Agilent 15:32:41 Oct 8, 2007

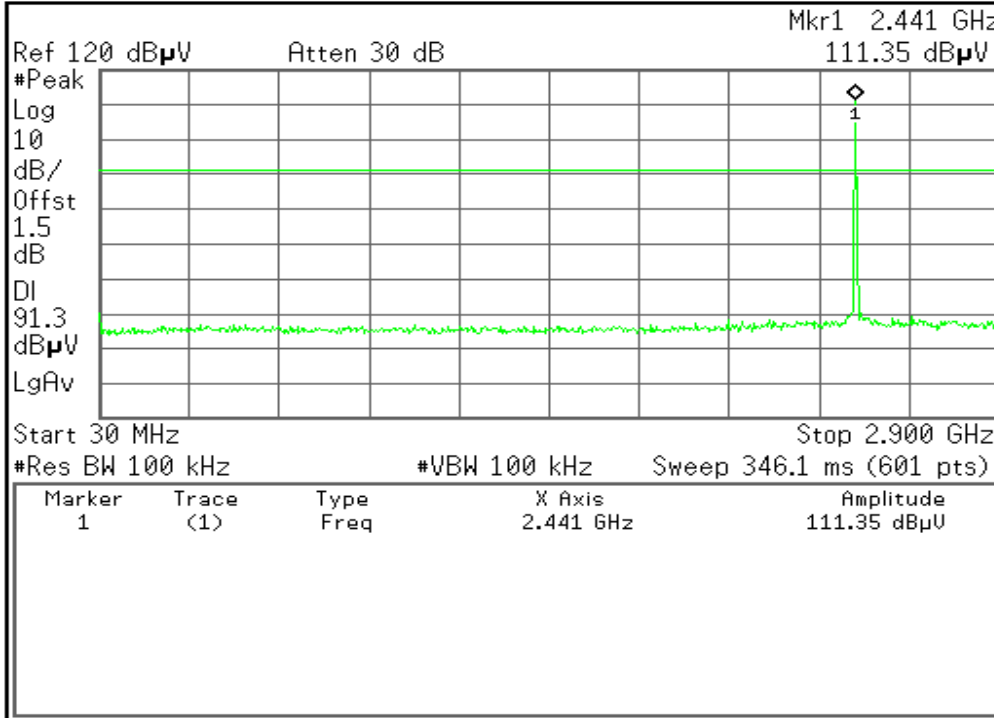


Marker
Select Marker 1 2 3 4
Normal
Delta
Delta Pair (Tracking Ref) Ref ▲
Span Pair Span Center
Off
More 1 of 2

Copyright 2000-2004 Agilent Technologies

2.9GHz ~ 26.5GHz

Agilent 15:34:50 Oct 8, 2007

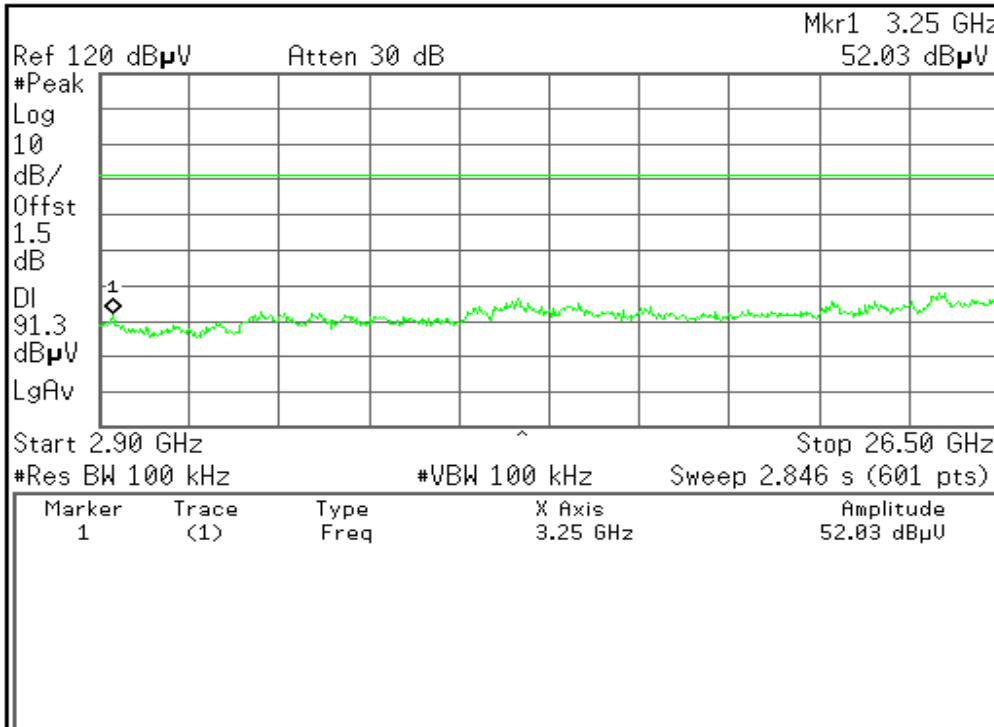

Marker
Select Marker 1 2 3 4
Normal
Delta
Delta Pair (Tracking Ref) Ref ▲
Span Pair Span Center
Off
More 1 of 2


Copyright 2000-2004 Agilent Technologies



CH High

30MHz ~ 2.9GHz

Agilent 15:41:39 Oct 8, 2007

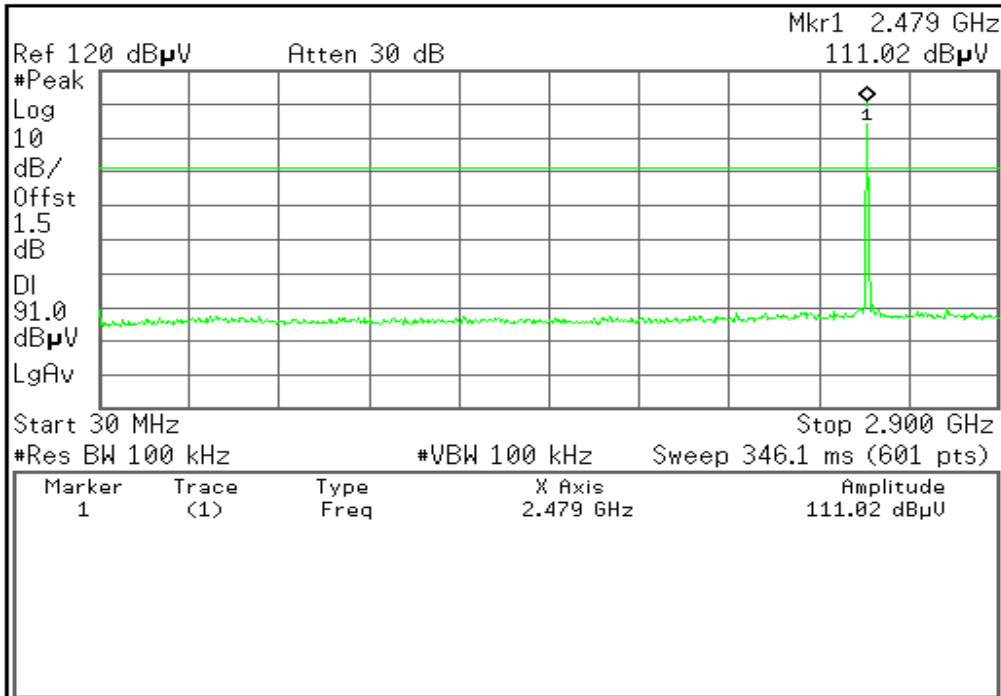


Marker				
Select Marker	1	2	3	4
Normal				
Delta				
Delta Pair (Tracking Ref)				
Span Pair Center				
Off				
More 1 of 2				

Copyright 2000-2004 Agilent Technologies

2.9GHz ~ 26.5GHz

Agilent 15:43:10 Oct 8, 2007

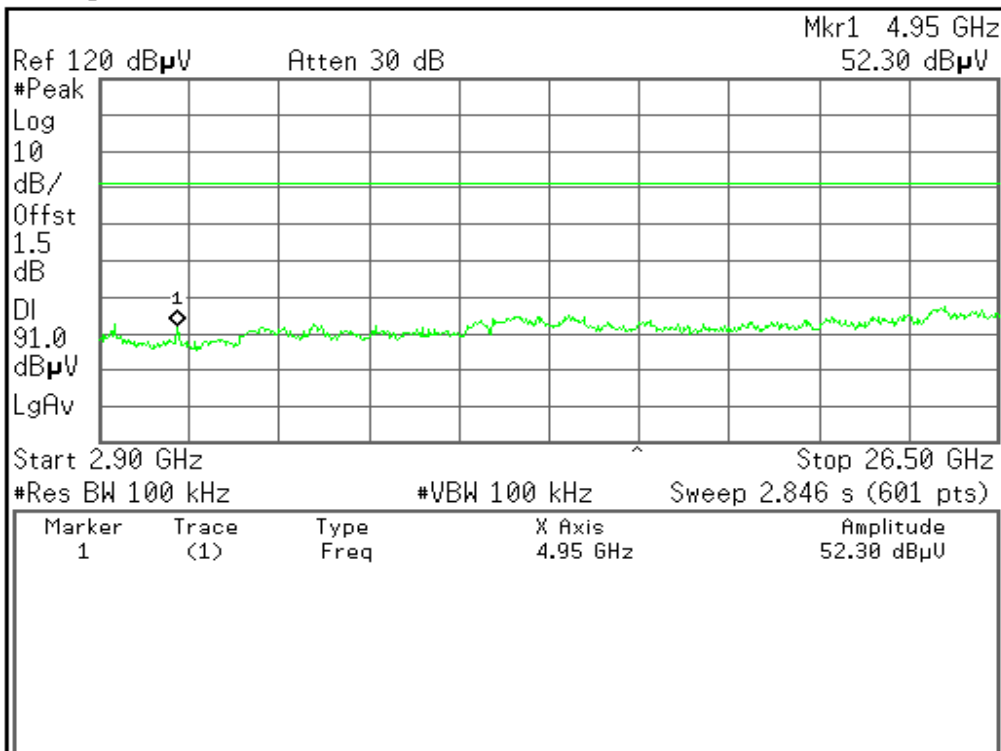

Marker				
Select Marker	1	2	3	4
Normal				
Delta				
Delta Pair (Tracking Ref)				
Span Pair Center				
Off				
More 1 of 2				

Copyright 2000-2004 Agilent Technologies



Radiated Emissions

LIMIT

1. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the above emission table, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength ($\mu\text{V/m}$ at 3-meter)	Field Strength (dB $\mu\text{V/m}$ at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54


MEASUREMENT EQUIPMENT USED

977 Chamber (3m)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY44020154	11/16/2007
ESPI3 EMI RECEIVER	R&S	ESPI3	101026	11/10/2007
Pre-Amplifier	MINI	ZFL-1000VH2	d041703	12/12/2007
Pre-Amplifier	Miteq	NSP4000-NF	870731	01/21/2008
Bi-log Antenna	Sunol Sciences	JB1	A110204-2	11/09/2007
Horn Antenna	Austriah	BBHA9120D	D267	09/20/2008
Turn Table	CT	CT123	4162	N.C.R
Antenna Tower	CT	CTERG23	3253	N.C.R
Controller	CT	CT100	95635	N.C.R
Coax Switch	Anitsu	MP 598	M 80094	N/A
Site NSA	CCS Lab.	N/A	N/A	02/15/2008


Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration

Below 1 GHz

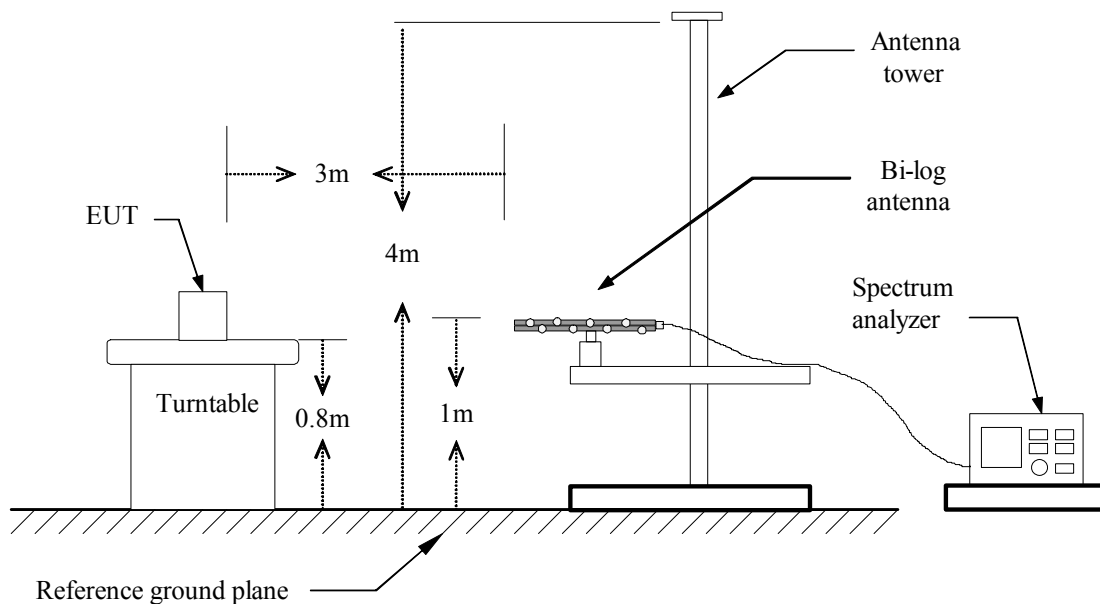

Above 1 GHz

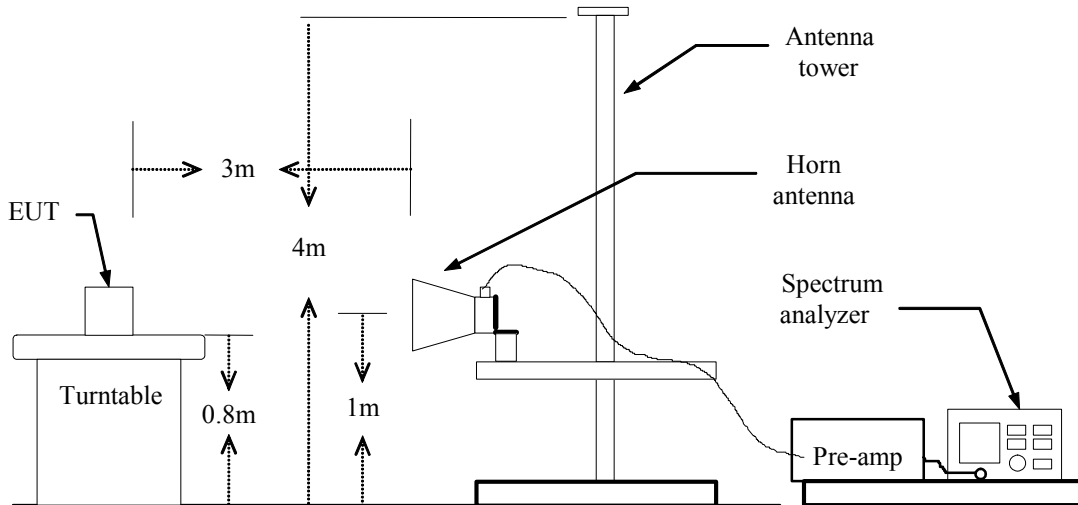

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

7. Repeat above procedures until the measurements for all frequencies are complete.



TEST RESULTS

Below 1 GHz

Operation Mode: Normal Link

Test Date: October 10, 2007

Temperature: 25°C

Tested by: healing

Humidity: 45 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
35.44	V	Peak	40.11	-5.04	35.07	40.0	-4.93
80.29	V	Peak	46.27	-11.99	34.28	40.0	-5.72
95.02	V	Peak	50.06	-13.76	36.3	43.5	-7.20
175.59	V	Peak	47.53	-10.48	37.05	43.5	-6.45
597.54	V	Peak	40.11	-0.89	39.22	46.0	-6.78
959.75	V	Peak	37.19	4.45	41.64	46.0	-4.36
94.68	H	Peak	39.93	-3.76	36.17	43.5	-7.33
124.22	H	Peak	46.08	-8.21	37.87	43.5	-5.63
206.55	H	Peak	48.43	-10.15	38.28	43.5	-5.22
227.76	H	Peak	49.29	-9.98	39.31	46.0	-6.69
311.39	H	Peak	46.06	-7.29	38.77	46.0	-7.23
959.47	H	Peak	36.08	4.45	40.53	46.0	-5.47

Notes:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.



Above 1 GHz

Operation Mode: TX/ CH Low

Test Date: October 10, 2007

Temperature: 25°C

Tested by: healing

Humidity: 43 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
4800.00	V	34.48	23.27	12.35	46.83	35.62	74	54	-18.38	Avg
7208.33	V	32.47	18.13	19.42	51.89	37.55	74	54	-16.45	Avg
4800.00	H	37.94	24.09	12.35	50.29	36.44	74	54	-17.56	Avg
7208.33	H	30.76	18.19	19.42	50.18	37.61	74	54	-16.39	Avg

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
 - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto.



Operation Mode: TX/ CH Mid

Test Date: October 10, 2007

Temperature: 25°C

Tested by: healing

Humidity: 43 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
4883.33	V	36.31	21.82	12.42	48.73	34.24	74	54	-19.76	Avg
7325.00	V	30.84	19.08	19.35	50.19	38.43	74	54	-15.57	Avg
4883.33	H	38.92	24.39	12.42	51.34	36.81	74	54	-17.19	Avg
7325.00	H	33.43	20.3	19.35	52.78	39.65	74	54	-14.35	Avg

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
 - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto.



Operation Mode: TX/ CH High

Test Date: October 10, 2007

Temperature: 25°C

Tested by: healing

Humidity: 43 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. Gain CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
4958.33	V	37.18	23.37	12.49	49.67	35.86	74	54	-18.14	Avg
7441.67	V	31.62	18.34	19.40	51.02	37.74	74	54	-16.26	Avg
4958.33	H	38	24.94	12.49	50.49	37.43	74	54	-16.57	Avg
7441.67	H	32.22	19.78	19.40	51.62	39.18	74	54	-14.82	Avg

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
 - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto.



POWERLINE CONDUCTED EMISSIONS

LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dBµV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50


Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

MEASUREMENT EQUIPMENT USED

Conducted Emission Test Site A (10m chamber)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESI26	100068	02/11/2008
EMC Analyzer	Agilent	E7402A	US41160329	02/11/2008
LISN	FCC	FCC-LISN-50-50-2-M	01067	02/11/2008
LISN (EUT)	FCC	FCC-LISN-50-50-2-M	01068	02/11/2008
TRANSIENT LIMITER	SCHAFFNER	CFL9206	1710	03/15/2008
EMI Monitor control box	FCC	0-SVDC	N/A	N/A

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration

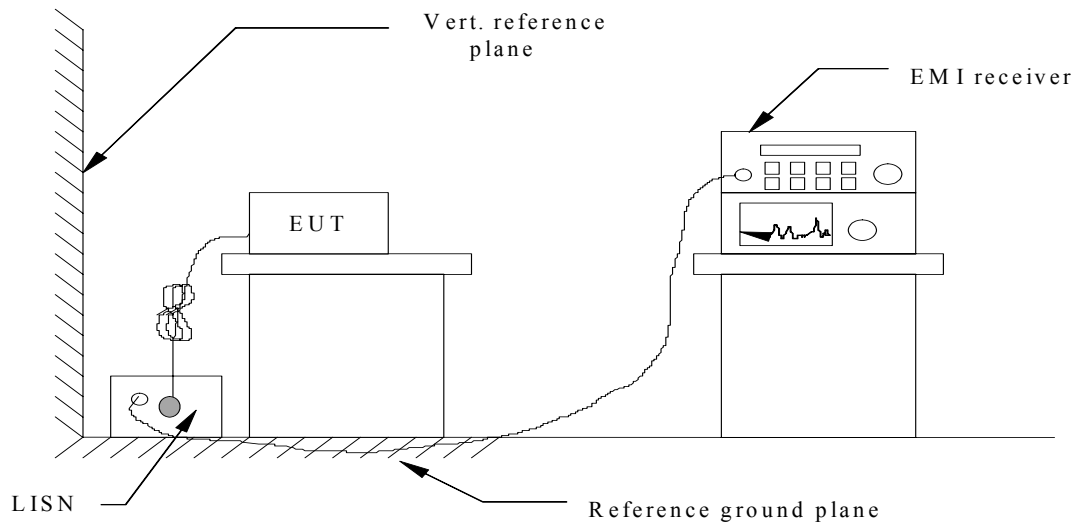

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.



TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Test Data

Model: BE7977

Test Mode: Normal Link

Temperature: 25°C

Humidity: 43% RH

Tested by: healing

Test Results: Pass

Freq. (MHz)	Q.P. Raw reading (dBuV)	AVG Raw reading (dBuV)	Correction factor(dB)	Q.P. Amptd. (dBuV)	AVG Amptd. (dBuV)	Q.P. Limit (dBuV)	AVG Limit (dBuV)	Q.P. Margin (dB)	AVG Margin (dB)	Line/Neutral
0.200	26.45	25.31	10.36	36.81	35.67	62.56	52.56	-25.75	-16.89	Line
0.800	26.33	25.06	10.42	36.75	35.48	58.93	48.93	-22.18	-13.45	Line
1.520	25.63	23.08	10.47	36.10	33.55	56.00	46.00	-19.90	-12.45	Line
2.160	25.54	24.31	10.52	36.06	34.83	56.00	46.00	-19.94	-11.17	Line
2.400	24.38	23.37	10.54	34.92	33.91	56.00	46.00	-21.08	-12.09	Line
2.800	24.89	24.19	10.57	35.46	34.76	56.00	46.00	-20.54	-11.24	Line
0.200	24.66	24.60	10.39	35.05	34.99	60.75	50.75	-25.70	-15.76	Neutral
0.480	23.74	23.04	10.39	34.13	33.43	56.96	46.96	-22.83	-13.53	Neutral
0.800	19.50	19.01	10.41	29.91	29.42	56.00	46.00	-26.09	-16.58	Neutral
1.150	17.63	16.93	10.46	28.09	27.39	56.00	46.00	-27.91	-18.61	Neutral
2.080	18.20	17.71	10.50	28.70	28.21	56.00	46.00	-27.30	-17.79	Neutral
2.400	18.26	17.30	10.52	28.78	27.82	56.00	46.00	-27.22	-18.18	Neutral

Remark:

1. The measuring frequencies range between 0.15 MHz and 30 MHz.
2. The emissions measured in the frequency range between 0.15 MHz and 30MHz were made with an instrument using Quasi-peak detector and Average detector.
3. “---” denotes the emission level was or more than 2dB below the Average limit, and no re-check was made.
4. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10KHz. The IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9kHz.

Note:

Freq. = Emission frequency in KHz

Factor (dB) = cable loss + Insertion loss of LISN+ Insertion loss of TRANSIENT LIMITER (The TRANSIENT LIMITER included 10 dB ATTENUATION)



$Amptd\ dBuV = Uncorrected\ Analyzer/Receiver\ reading + cable\ loss + Insertion\ loss\ of\ LISN +$
 $Insertion\ loss\ of\ TRANSIENT\ LIMITER,$
 $if\ it > 0.5\ dB$

$Limit\ dBuV = Limit\ stated\ in\ standard$


$Margin\ dB = Reading\ in\ reference\ to\ limit$

Calculation Formula

$Margin\ (dB) = Amptd\ (dBuV) - Limit\ (dBuV)$


Test Plot

Conducted emissions (Line 1)

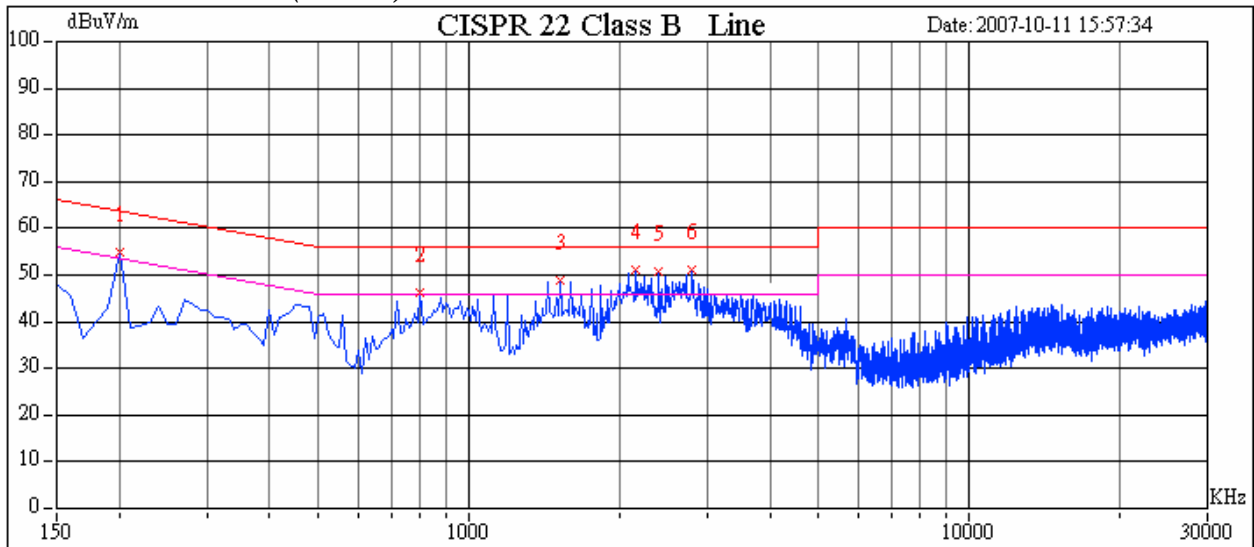

Test Plot


Conducted emissions (Line 2)

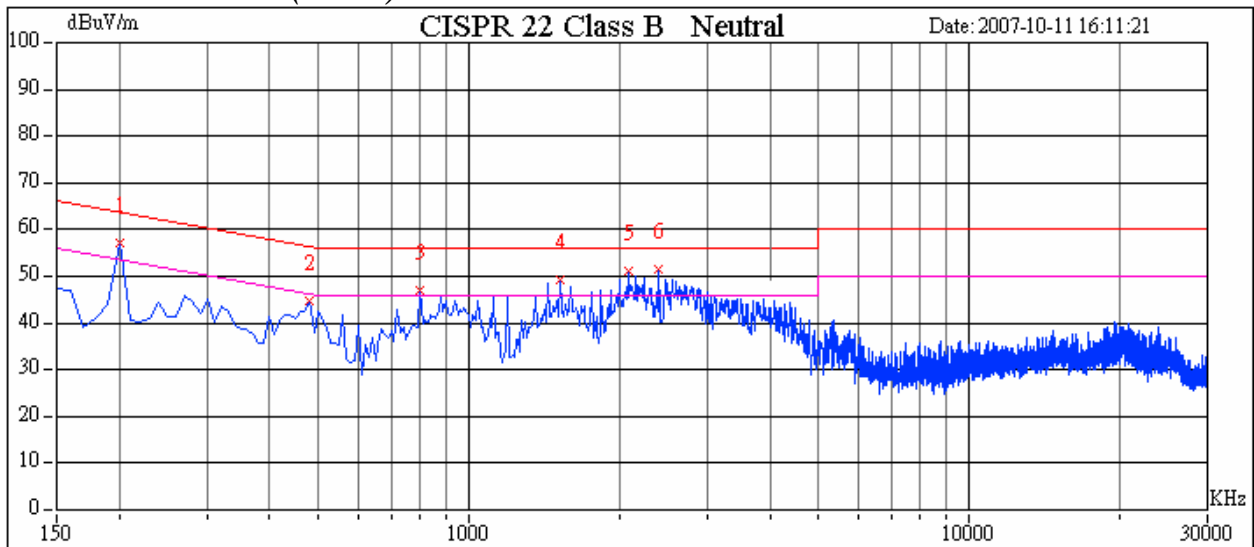


APPENDIX 1 PHOTOGRAPHS OF TEST SETUP

Radiated Emission Set up Photos

Front of view

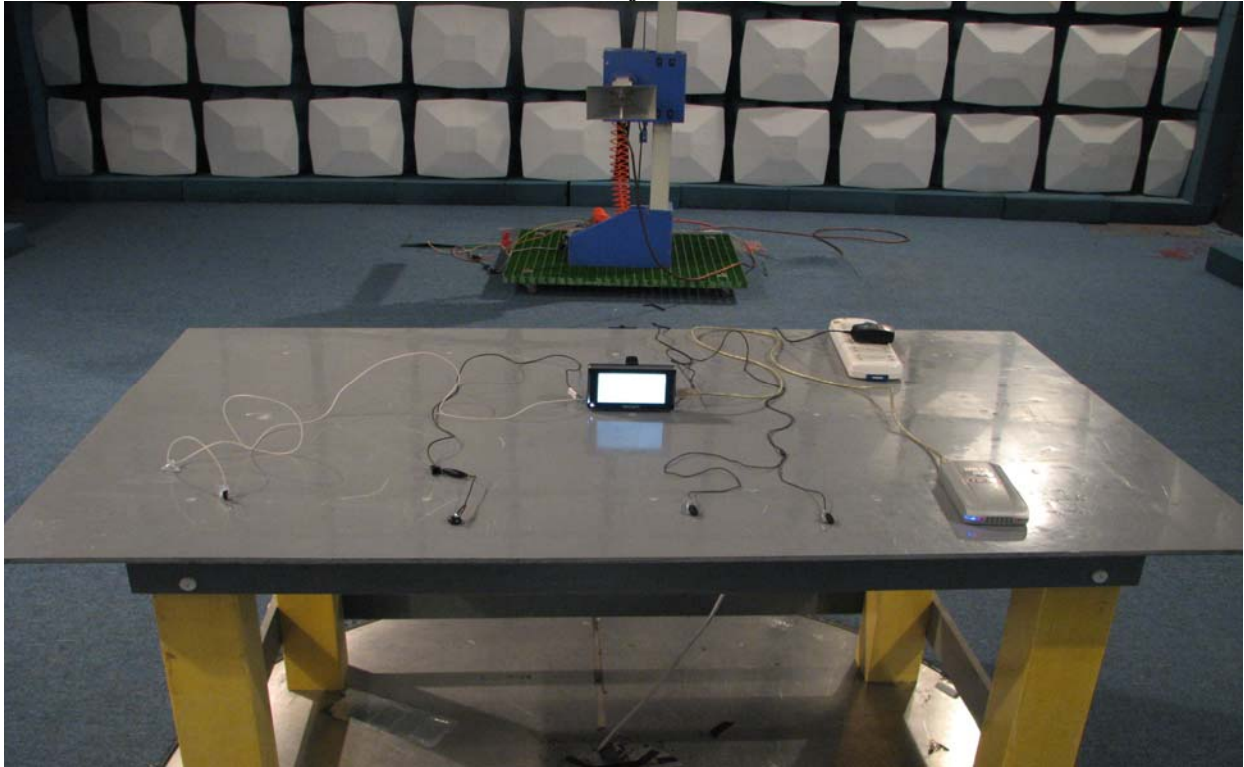

Back of view

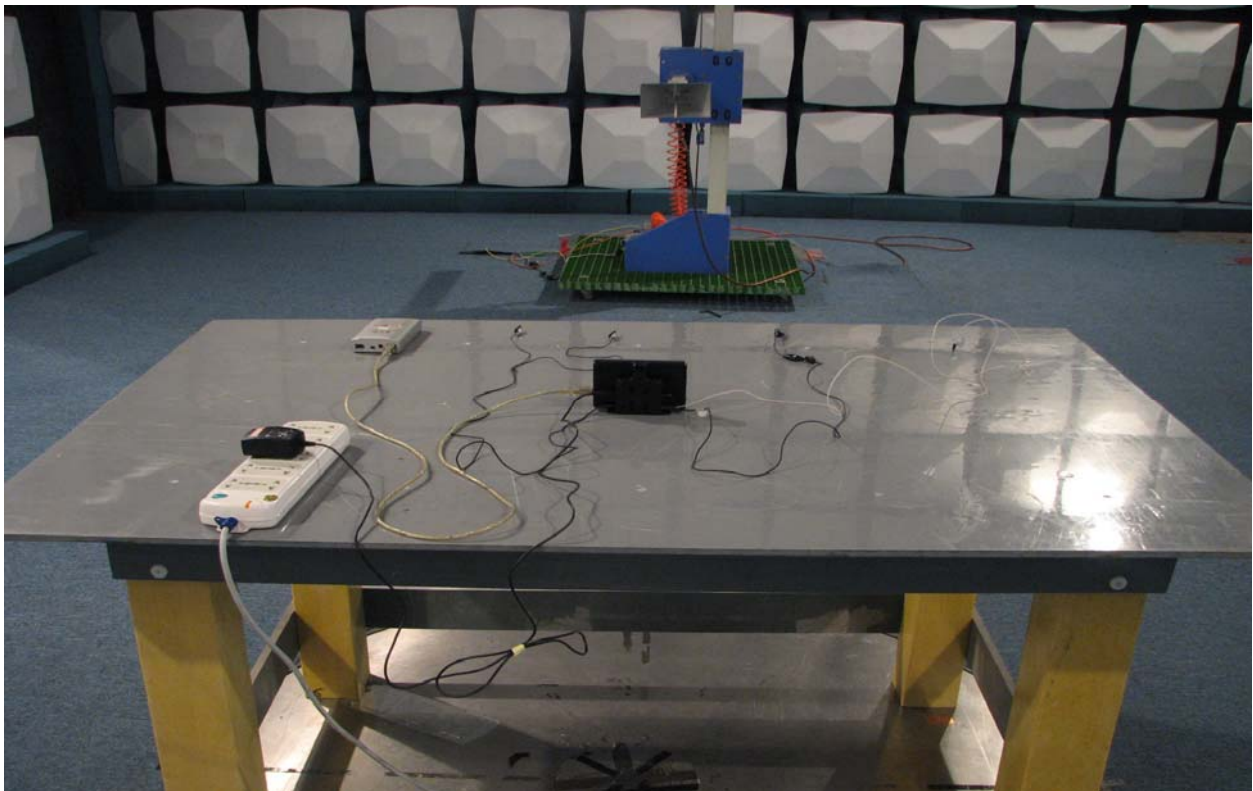



Conducted Emission Set Up Photos

