


FCC RADIO TEST REPORT

FCC ID : P4Q-N536A
Equipment : Tablet
Brand Name : Mitac, Magellan
Model Name : N536A
Applicant : MiTAC Digital Technology Corporation
No. 200, Wen Hua 2nd Rd., Guishan Dist., Taoyuan
City 333, Taiwan (R.O.C.)
Manufacturer : MITAC COMPUTER (KUSHAN) CO. LTD
No. 269, 2nd Rd, Export Processing Zone
Changjiang South Road Kushan, Jiangsu China
Standard : FCC Part 15 Subpart C §15.247

The product was received on Mar. 23, 2018 and testing was started from Apr. 24, 2018 and completed on May 16, 2018. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Reviewed by: Jones Tsai

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	10
3 Test Result.....	11
3.1 Output Power Measurement.....	11
3.2 Radiated Band Edges and Spurious Emission Measurement	12
3.3 AC Conducted Emission Measurement.....	16
3.4 Antenna Requirements.....	18
4 List of Measuring Equipment	19
5 Uncertainty of Evaluation.....	21
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission	
Appendix D. Radiated Spurious Emission Plots	
Appendix E. Duty Cycle Plots	
Appendix F. Setup Photographs	



History of this test report

Report No.	Version	Description	Issued Date
FR720610-11A	01	Initial issue of report	Aug. 06, 2018



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
-	15.247(a)(1)	Number of Channels	Not Required	-
-	15.247(a)(1)	Hopping Channel Separation	Not Required	-
-	15.247(a)(1)	Dwell Time of Each Channel	Not Required	-
-	15.247(a)(1)	20dB Bandwidth	Not Required	-
-	2.1049	99% Occupied Bandwidth	Not Required	-
3.1	15.247(b)(1)	Peak Output Power	Pass	-
-	15.247(d)	Conducted Band Edges	Not Required	-
-	15.247(d)	Conducted Spurious Emission	Not Required	-
3.2	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass	Under limit 4.85 dB at 200.100 MHz
3.3	15.207	AC Conducted Emission	Pass	Under limit 5.82 dB at 13.560 MHz
3.4	15.203 & 15.247(b)	Antenna Requirement	Pass	-
Remark: 1. Not required means after assessing, test items are not necessary to carry out. 2. This is a variant report which can be referred change list. All the test cases were performed on original report which can be referred to Sporton Report Number FR720610-10A (FCC ID: P4Q-N536B).				

Reviewed by: Joseph Lin**Report Producer: Natasha Hsieh**

1 General Description

1.1 Product Feature of Equipment Under Test

Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n, Wi-Fi 5GHz 802.11a/n, and NFC

Product Specification subjective to this standard	
Sample 1	EUT with SKU 5
Sample 2	EUT with SKU 6
Sample 3	EUT with SKU 7
Integrated WLAN Module	Brand Name: Qualcomm Model Name: WCN3660B
Antenna Type	WLAN: Holder with FPC Antenna Bluetooth: Holder with FPC Antenna NFC : Loop Antenna

Remark: All the tests were performed with Sample 1.

<Sample Information>

Sample List			
SKU	SKU 5	SKU 6	SKU 7
Model name	N536A	N536A	N536A
WLAN	Support	Support	Support
WWAN	Not Support	Not Support	Not Support
RFID(13.56MHz)	Support	Not Support	Support
Barcode	Support(MR)	Not Support	Support(SR)
GPS	Not Support	Not Support	Not Support

1.2 Modification of EUT

No modifications are made to the EUT during all test items.

1.3 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1190 and TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH05-HY	CO05-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
Test Site No.	Sporton Site No.	
	03CH12-HY	

Note: The test site complies with ANSI C63.4 2014 requirement.

1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ ANSI C63.10-2013

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	27	2429	54	2456
	1	2403	28	2430	55	2457
	2	2404	29	2431	56	2458
	3	2405	30	2432	57	2459
	4	2406	31	2433	58	2460
	5	2407	32	2434	59	2461
	6	2408	33	2435	60	2462
	7	2409	34	2436	61	2463
	8	2410	35	2437	62	2464
	9	2411	36	2438	63	2465
	10	2412	37	2439	64	2466
	11	2413	38	2440	65	2467
	12	2414	39	2441	66	2468
	13	2415	40	2442	67	2469
	14	2416	41	2443	68	2470
	15	2417	42	2444	69	2471
	16	2418	43	2445	70	2472
	17	2419	44	2446	71	2473
	18	2420	45	2447	72	2474
	19	2421	46	2448	73	2475
	20	2422	47	2449	74	2476
	21	2423	48	2450	75	2477
	22	2424	49	2451	76	2478
	23	2425	50	2452	77	2479
	24	2426	51	2453	78	2480
	25	2427	52	2454	-	-
	26	2428	53	2455	-	-

2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report, and the worst mode of radiated spurious emissions is Bluetooth 3Mbps mode, and recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
Radiated Test Cases	Bluetooth EDR 3Mbps 8-DPSK
	CH78_2480 MHz
AC Conducted Emission	Mode 1 :Bluetooth Link + WLAN (2.4GHz) Link + NFC Link + Earphone + USB Cable (Charging from AC Adapter)
Remark: For radiated test cases, the worst mode data rate 3Mbps was reported only since the highest RF output power in the preliminary tests. The conducted spurious emissions and conducted band edge measurement for other data rates were not worse than 3Mbps, and no other significantly frequencies found in conducted spurious emission.	

2.3 Connection Diagram of Test System



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Base Station	R&S	CBT32	N/A	N/A	Unshielded, 1.8 m
2.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
3.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8m
4.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0 m	N/A
5.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
6.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A



2.5 EUT Operation Test Setup

The RF test items, utility “QRCT” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to contact with base station to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

3 Test Result

3.1 Output Power Measurement

3.1.1 Limit of Output Power

The maximum peak conducted output power of the intentional radiator shall not exceed the following:

(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. The power limit for 1Mbps, 2Mbps, 3Mbps and AFH modes are 0.125 watts.


3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
1. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Measure the conducted output power with cable loss and record the results in the test report.
4. Measure and record the results in the test report.

3.1.4 Test Setup

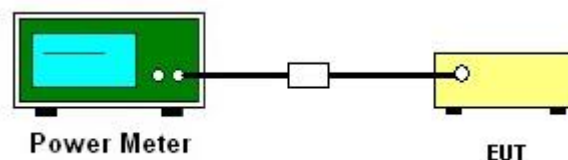

3.1.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.1.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.2 Radiated Band Edges and Spurious Emission Measurement

3.2.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2 Measuring Instruments

See list of measuring equipment of this test report.

3.2.3 Test Procedures


1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$ GHz ; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
$$\text{On time} = N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$$

Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.76dB) derived from $20 \log(\text{dwell time}/100\text{ms})$. This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

3.2.4 Test Setup


For radiated emissions below 30MHz

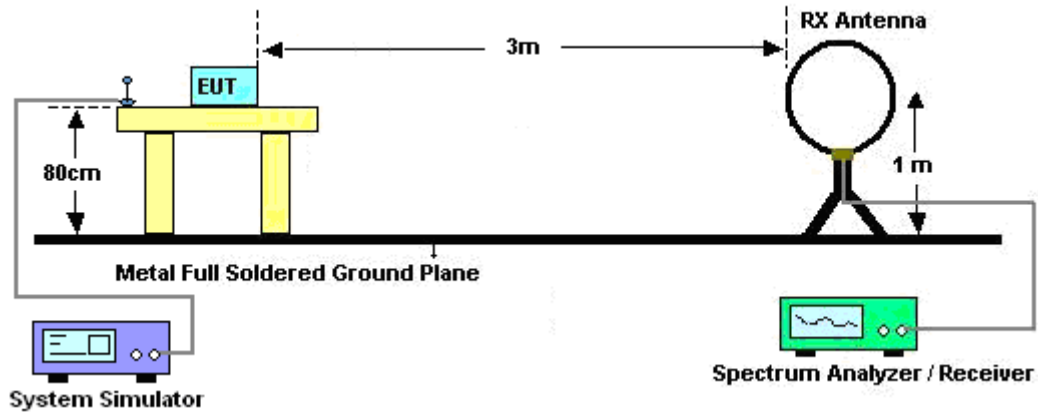

For radiated emissions from 30MHz to 1GHz

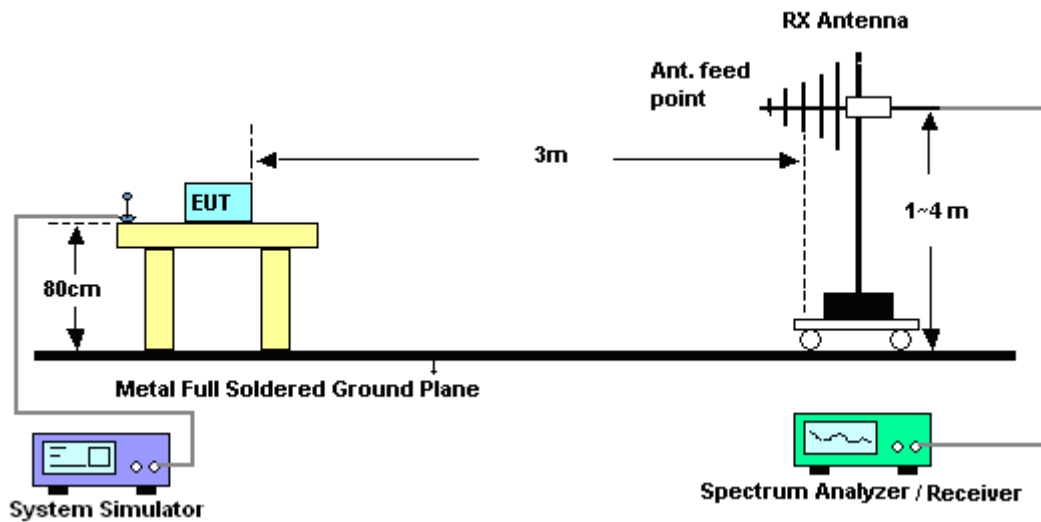

For radiated emissions above 1GHz

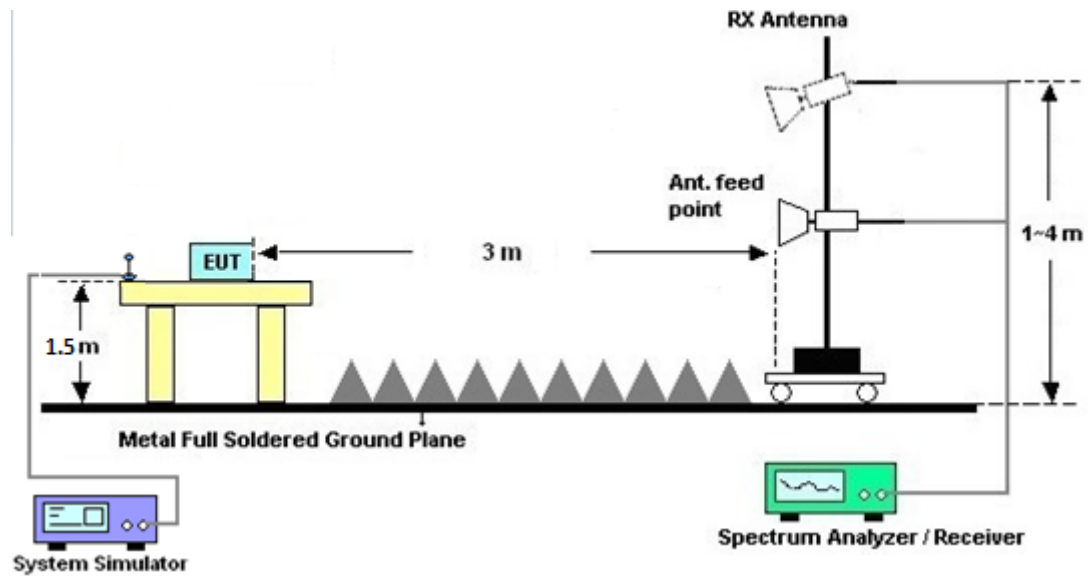

3.2.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.2.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

3.2.7 Duty Cycle

Please refer to Appendix E.

3.2.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C and D.

3.3 AC Conducted Emission Measurement

3.3.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.3.4 Test Setup

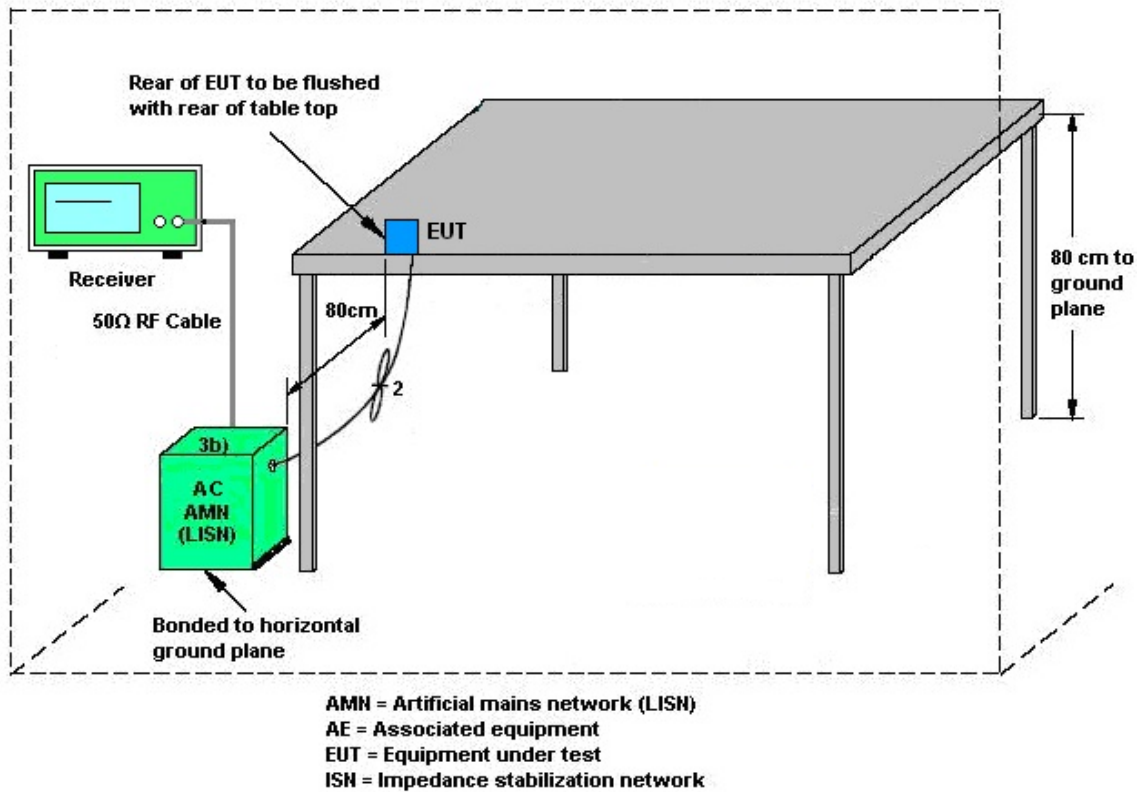

3.3.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.4 Antenna Requirements

3.4.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.4.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.4.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Agilent	E4416A	GB4129234 4	N/A	Dec. 20, 2017	May 01, 2018 ~ May 11, 2018	Dec. 19, 2018	Conducted (TH05-HY)
Power Sensor	Agilent	E9327A	US40441548	50MHz~18GHz	Dec. 20, 2017	May 01, 2018 ~ May 11, 2018	Dec. 19, 2018	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100057	9kHz-40GHz	Nov. 21, 2017	May 01, 2018 ~ May 11, 2018	Nov. 20, 2018	Conducted (TH05-HY)
BT Base Station (Measure)	Rohde & Schwarz	CBT	101136	BT 3.0	Sep. 20, 2017	May 01, 2018 ~ May 11, 2018	Sep. 19, 2018	Conducted (TH05-HY)
Switch Box & RF Cable	Burgeon	ETF-058	EC1300484	N/A	Mar. 01, 2018	May. 01, 2018 ~ May. 11, 2018	Feb. 28, 2019	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Apr. 24, 2018~ Apr. 25, 2018	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	3.6GHz	Dec. 08, 2017	Apr. 24, 2018~ Apr. 25, 2018	Dec. 07, 2018	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 30, 2017	Apr. 24, 2018~ Apr. 25, 2018	Nov. 29, 2018	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Dec. 08, 2017	Apr. 24, 2018~ Apr. 25, 2018	Dec. 07, 2018	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Apr. 24, 2018~ Apr. 25, 2018	N/A	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Jan. 03, 2018	Apr. 24, 2018~ Apr. 25, 2018	Jan. 02, 2019	Conduction (CO05-HY)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100851	N/A	Jan. 03, 2018	Apr. 24, 2018~ Apr. 25, 2018	Jan. 02, 2019	Conduction (CO05-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz, VSWR : 2.5:1 max	Jul. 18, 2017	May 15, 2018 ~ May 16, 2018	Jul. 17, 2018	Radiation (03CH12-HY)
Spectrum Analyzer	Keysight	N9010A	MY5420048 5	10Hz ~ 44GHz	Oct. 31, 2017	May 15, 2018 ~ May 16, 2018	Oct. 30, 2018	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CBL 6111D&N-6- 06	35414&AT-N 0602	30MHz~1GHz	Oct. 14, 2017	May 15, 2018 ~ May 16, 2018	Oct. 13, 2018	Radiation (03CH12-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Nov. 23, 2017	May 15, 2018 ~ May 16, 2018	Nov. 22, 2018	Radiation (03CH12-HY)
EMI Test Receiver	Rohde & Schwarz	ESU26	100390	20Hz~26.5GHz	Dec. 25, 2017	May 15, 2018 ~ May 16, 2018	Dec. 24, 2018	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120D	9120D-1328	1GHz ~ 18GHz	Oct. 20, 2017	May 15, 2018 ~ May 16, 2018	Oct. 19, 2018	Radiation (03CH12-HY)
Preamplifier	COM-POWER	PA-103	161075	10MHz~1GHz	Mar. 26, 2018	May 15, 2018 ~ May 16, 2018	Mar. 25, 2019	Radiation (03CH12-HY)
Preamplifier	Keysight	83017A	MY5327014 8	1GHz~26.5GHz	Jan. 15, 2018	May 15, 2018 ~ May 16, 2018	Jan. 14, 2019	Radiation (03CH12-HY)
Filter	Wainwright	WHKX12-27 00-3000-180 00-60ST	SN2	3 GHz Highpass	Jul. 17, 2017	May 15, 2018 ~ May 16, 2018	Jul. 16, 2018	Radiation (03CH12-HY)
Filter	Wainwright	WLKS1200- 12SS	SN2	1.2G Low Pass	Jul. 17, 2017	May 15, 2018 ~ May 16, 2018	Jul. 16, 2018	Radiation (03CH12-HY)
Attenuator	Fairview Microwave	SA18S5W-1 0	n/a	10db	Jul. 17, 2017	May 15, 2018 ~ May 16, 2018	Jul. 16, 2018	Radiation (03CH12-HY)
Antenna Mast	EMEC	AM-BS-4500 -B	N/A	1m~4m	N/A	May 15, 2018 ~ May 16, 2018	N/A	Radiation (03CH12-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	May 15, 2018 ~ May 16, 2018	N/A	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA91705 84	18GHz ~ 40GHz	Nov. 27, 2017	May 15, 2018 ~ May 16, 2018	Nov. 26, 2018	Radiation (03CH12-HY)
Preamplifier	Jet-Power	JPA0118-55- 303K	1710001800 054002	1GHz~18GHz	Apr. 17, 2018	May 15, 2018 ~ May 16, 2018	Apr. 16, 2019	Radiation (03CH12-HY)
Software	Audix	E3 6.2009-8-24	RK-000989	N/A	N/A	May 15, 2018 ~ May 16, 2018	N/A	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0058/126E	30M-18G	Mar. 14, 2018	May 15, 2018 ~ May 16, 2018	Mar. 13, 2019	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY15539/4	30M-18G	Mar. 14, 2018	May 15, 2018 ~ May 16, 2018	Mar. 13, 2019	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY36979/4	30M-18G	Mar. 14, 2018	May 15, 2018 ~ May 16, 2018	Mar. 13, 2019	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30M~40GHz	Oct. 17, 2017	May 15, 2018 ~ May 16, 2018	Oct. 16, 2018	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	800740/2	30M~40GHz	Oct. 17, 2017	May 15, 2018 ~ May 16, 2018	Oct. 16, 2018	Radiation (03CH12-HY)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.70
---	------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.10
---	------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.20
---	------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.70
---	------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Tommy Lee	Temperature:	21~25	°C
Test Date:	2018/5/1~2018/5/11	Relative Humidity:	51~54	%

TEST RESULTS DATA					
Peak Power Table					
DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
DH1	0	1	9.27	20.97	Pass
	39	1	8.95	20.97	Pass
	78	1	8.70	20.97	Pass
2DH1	0	1	9.28	20.97	Pass
	39	1	9.05	20.97	Pass
	78	1	8.57	20.97	Pass
3DH1	0	1	9.63	20.97	Pass
	39	1	9.36	20.97	Pass
	78	1	9.02	20.97	Pass

TEST RESULTS DATA				
Average Power Table				
(Reporting Only)				
DH	CH.	NTX	Average Power (dBm)	Duty Factor (dB)
DH1	0	1	9.17	5.16
	39	1	8.83	5.16
	78	1	8.52	5.16
2DH1	0	1	7.11	5.12
	39	1	6.83	5.12
	78	1	6.36	5.12
3DH1	0	1	6.94	5.07
	39	1	6.68	5.07
	78	1	6.26	5.07




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Shareef Yu	Temperature :	23~24℃
		Relative Humidity :	58~63%

EUT Information

Report NO : 720610-11
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Line

Full Spectrum

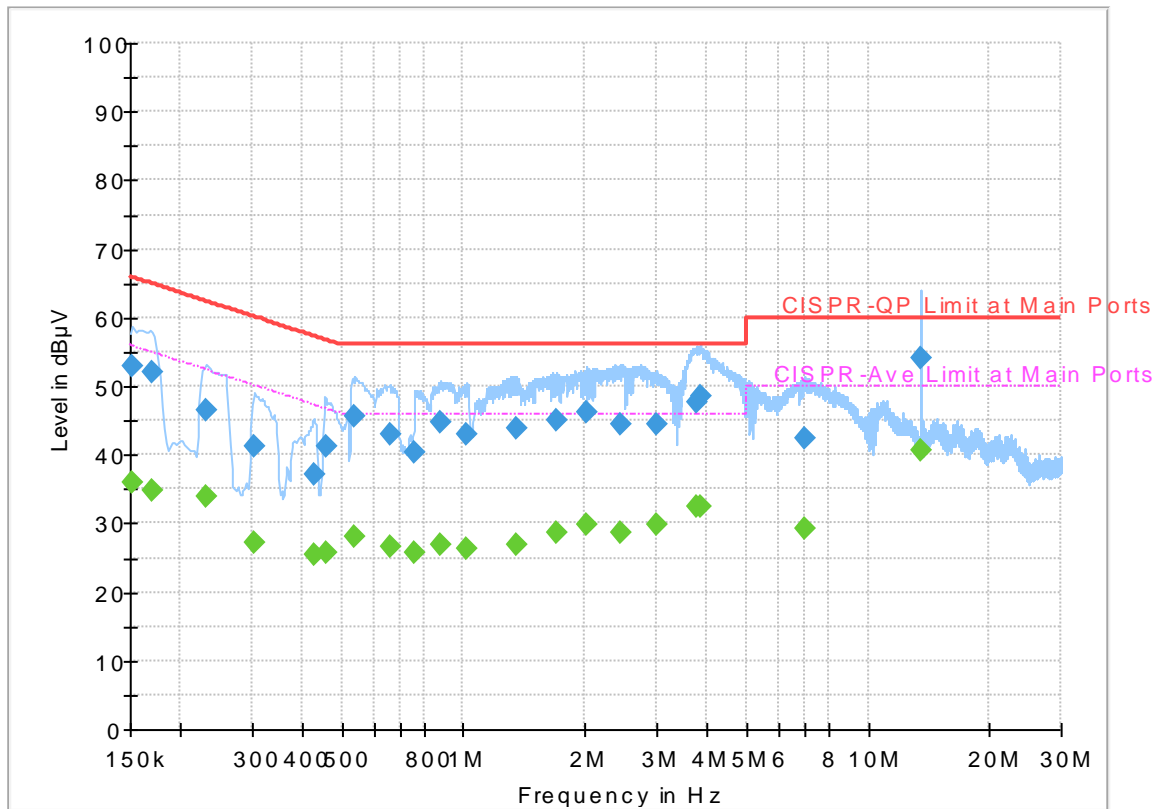

Final_Result


Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	36.02	55.88	19.86	L1	OFF	19.5
0.152250	52.99	---	65.88	12.89	L1	OFF	19.5
0.170250	---	34.84	54.95	20.11	L1	OFF	19.5
0.170250	51.94	---	64.95	13.01	L1	OFF	19.5
0.231000	---	33.99	52.41	18.42	L1	OFF	19.5
0.231000	46.35	---	62.41	16.06	L1	OFF	19.5
0.305250	---	27.19	50.10	22.91	L1	OFF	19.5
0.305250	41.27	---	60.10	18.83	L1	OFF	19.5
0.426750	---	25.43	47.32	21.89	L1	OFF	19.5
0.426750	37.11	---	57.32	20.21	L1	OFF	19.5
0.456000	---	25.72	46.77	21.05	L1	OFF	19.5
0.456000	41.10	---	56.77	15.67	L1	OFF	19.5
0.534750	---	28.01	46.00	17.99	L1	OFF	19.5
0.534750	45.59	---	56.00	10.41	L1	OFF	19.5
0.656250	---	26.51	46.00	19.49	L1	OFF	19.5
0.656250	43.08	---	56.00	12.92	L1	OFF	19.5
0.757500	---	25.71	46.00	20.29	L1	OFF	19.5
0.757500	40.28	---	56.00	15.72	L1	OFF	19.5
0.881250	---	26.84	46.00	19.16	L1	OFF	19.5
0.881250	44.68	---	56.00	11.32	L1	OFF	19.5
1.023000	---	26.44	46.00	19.56	L1	OFF	19.5

1.023000	43.03	---	56.00	12.97	L1	OFF	19.5
1.353750	---	26.99	46.00	19.01	L1	OFF	19.6
1.353750	43.82	---	56.00	12.18	L1	OFF	19.6
1.704750	---	28.65	46.00	17.35	L1	OFF	19.6
1.704750	44.96	---	56.00	11.04	L1	OFF	19.6
2.015250	---	29.83	46.00	16.17	L1	OFF	19.6
2.015250	46.30	---	56.00	9.70	L1	OFF	19.6
2.451750	---	28.78	46.00	17.22	L1	OFF	19.5
2.451750	44.38	---	56.00	11.62	L1	OFF	19.5
3.007500	---	29.68	46.00	16.32	L1	OFF	19.6
3.007500	44.36	---	56.00	11.64	L1	OFF	19.6
3.770250	---	32.60	46.00	13.40	L1	OFF	19.6
3.770250	47.59	---	56.00	8.41	L1	OFF	19.6
3.851250	---	32.34	46.00	13.66	L1	OFF	19.6
3.851250	48.54	---	56.00	7.46	L1	OFF	19.6
6.994500	---	29.31	50.00	20.69	L1	OFF	19.6
6.994500	42.30	---	60.00	17.70	L1	OFF	19.6
13.560000	---	40.79	50.00	9.21	L1	OFF	19.7
13.560000	54.18	---	60.00	5.82	L1	OFF	19.7

EUT Information

Report NO : 720610-11
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

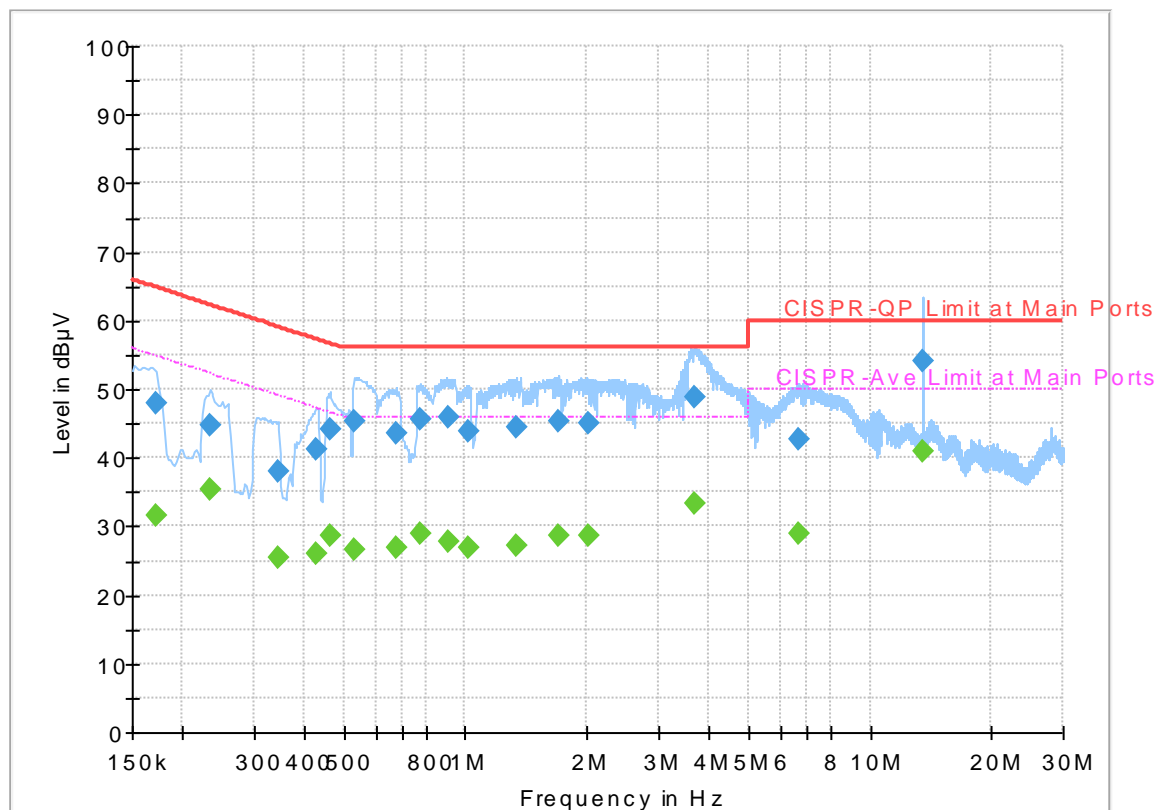

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.172500	---	31.66	54.84	23.18	N	OFF	19.5
0.172500	47.83	---	64.84	17.01	N	OFF	19.5
0.233250	---	35.33	52.33	17.00	N	OFF	19.5
0.233250	44.82	---	62.33	17.51	N	OFF	19.5
0.343500	---	25.47	49.12	23.65	N	OFF	19.5
0.343500	38.03	---	59.12	21.09	N	OFF	19.5
0.429000	---	26.03	47.27	21.24	N	OFF	19.5
0.429000	41.18	---	57.27	16.09	N	OFF	19.5
0.462750	---	28.70	46.64	17.94	N	OFF	19.5
0.462750	44.29	---	56.64	12.35	N	OFF	19.5
0.530250	---	26.49	46.00	19.51	N	OFF	19.5
0.530250	45.36	---	56.00	10.64	N	OFF	19.5
0.676500	---	26.82	46.00	19.18	N	OFF	19.5
0.676500	43.59	---	56.00	12.41	N	OFF	19.5
0.771000	---	28.99	46.00	17.01	N	OFF	19.5
0.771000	45.69	---	56.00	10.31	N	OFF	19.5
0.903750	---	27.65	46.00	18.35	N	OFF	19.5
0.903750	46.01	---	56.00	9.99	N	OFF	19.5
1.023000	---	27.00	46.00	19.00	N	OFF	19.5
1.023000	43.86	---	56.00	12.14	N	OFF	19.5
1.342500	---	27.16	46.00	18.84	N	OFF	19.5

1.342500	44.51	---	56.00	11.49	N	OFF	19.5
1.691250	---	28.57	46.00	17.43	N	OFF	19.6
1.691250	45.25	---	56.00	10.75	N	OFF	19.6
2.013000	---	28.67	46.00	17.33	N	OFF	19.6
2.013000	44.90	---	56.00	11.10	N	OFF	19.6
3.680250	---	33.32	46.00	12.68	N	OFF	19.6
3.680250	48.75	---	56.00	7.25	N	OFF	19.6
6.695250	---	29.09	50.00	20.91	N	OFF	19.6
6.695250	42.57	---	60.00	17.43	N	OFF	19.6
13.560000	---	40.98	50.00	9.02	N	OFF	19.8
13.560000	54.16	---	60.00	5.84	N	OFF	19.8



Appendix C. Radiated Spurious Emission

Test Engineer :	Watt Tseng, Karl Hou, and Nick Yu	Temperature :	23~25°C
		Relative Humidity :	61~65%

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BT CH 78 2480MHz	*	2480	99.9	-	-	100.01	27.36	4.09	31.56	114	317	P	H
	*	2480	75.14	-	-	-	-	-	-	-	-	A	H
		2496.52	48.95	-25.05	74	48.99	27.4	4.11	31.55	114	317	P	H
		2496.52	24.19	-29.81	54	-	-	-	-	-	-	A	H
													H
													H
	*	2480	101.7	-	-	101.81	27.36	4.09	31.56	386	2	P	V
	*	2480	76.94	-	-	-	-	-	-	-	-	A	V
		2483.52	49.92	-24.08	74	50.01	27.36	4.11	31.56	386	2	P	V
		2483.52	25.16	-28.84	54	-	-	-	-	-	-	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**2.4GHz 2400~2483.5MHz****BT (Harmonic @ 3m)**

BT	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BT CH 78 2480MHz		4960	39.78	-34.22	74	57.92	31.63	6.75	56.52	100	0	P	H
		4960	15.02	-38.98	54	-	-	-	-	-	-	A	H
		7440	44.57	-29.43	74	56.1	36.47	8.07	56.07	100	0	P	H
		7440	19.81	-34.19	54	-	-	-	-	-	-	A	H
		4960	39.43	-34.57	74	57.57	31.63	6.75	56.52	100	0	P	V
		4960	14.67	-39.33	54	-	-	-	-	-	-	A	V
		7440	44.88	-29.12	74	56.41	36.47	8.07	56.07	100	0	P	V
		7440	20.12	-33.88	54	-	-	-	-	-	-	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Emission below 1GHz

2.4GHz BT (LF)

[illegible]



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical

A calculation example for radiated spurious emission is shown as below:

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BT CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Radiated Spurious Emission Plots



Test Engineer :	Watt Tseng, Karl Hou, and Nick Yu	Temperature :	23~25°C
		Relative Humidity :	61~65%

Note symbol



-L	Low channel location
-R	High channel location

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

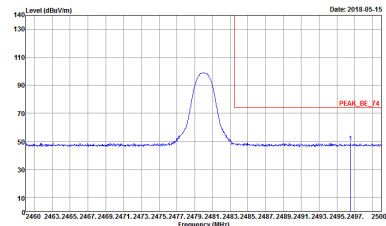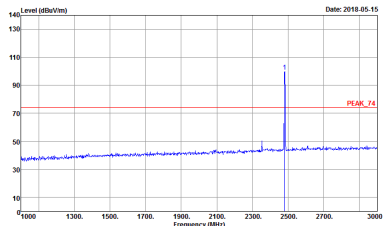BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH78 2480MHz	
1	Horizontal	Fundamental
Peak	 <p>Site : 03CH12-4V Condition : PEAK_BE_74 3m HORN_91200_1328 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 720610-11 Mode : 3</p>	 <p>Site : 03CH12-4V Condition : PEAK_74 3m HORN_91200_1328 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 720610-11 Mode : 3</p>

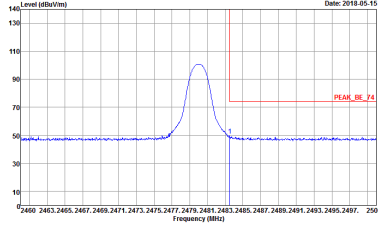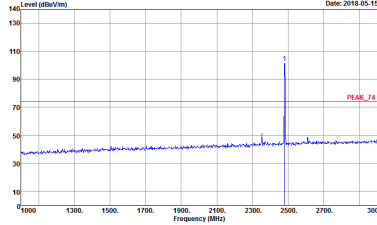

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH78 2480MHz	
1	Vertical	Fundamental
Peak	<div><p>Site : 03CH12-11Y Condition : PEAK_BE_T4 3m HORN_91200_1328 VERTICAL Detector : RBW:3000.0000Hz VBW:3000.0000Hz SWT:Auto Project : 720610-11 Mode : 3</p></div>	<div><p>Site : 03CH12-11Y Condition : PEAK_T4 3m HORN_91200_1328 VERTICAL Detector : RBW:3000.0000Hz VBW:3000.0000Hz SWT:Auto Project : 720610-11 Mode : 3</p></div>



2.4GHz 2400~2483.5MHz



BT (Harmonic @ 3m)

BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT CH78 2480MHz	
1	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH12-44Y Condition : PEAK_74 3m HORN_91200_1328 HORIZONTAL Detector : Peak Project : 720610-11 Mode : 3</p>	<p>Site : 03CH12-44Y Condition : PEAK_74 3m HORN_91200_1328 VERTICAL Detector : Peak Project : 720610-11 Mode : 3</p>




Emission below 1GHz

2.4GHz BT (LF)

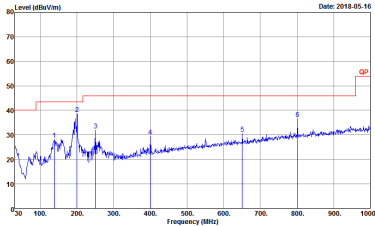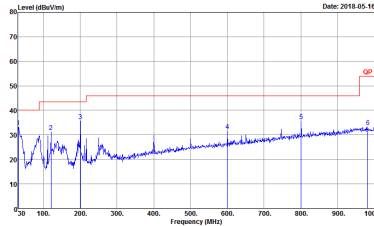BT	2.4GHz 2400~2483.5MHz	
ANT	BT LF	
1	Horizontal	Vertical
QP / Peak	 <p>Site : 03CH12-HY Condition : QP 3m SILEN_6110_47020406 HORIZONTAL Detector : Peak Project : 720610-11 Mode : 19</p>	 <p>Site : 03CH12-HY Condition : QP 3m SILEN_6110_47020406 VERTICAL Detector : Peak Project : 720610-11 Mode : 19</p>


Appendix E. Duty Cycle Plots

3DH5 on time (One Pulse) Plot on Channel 39

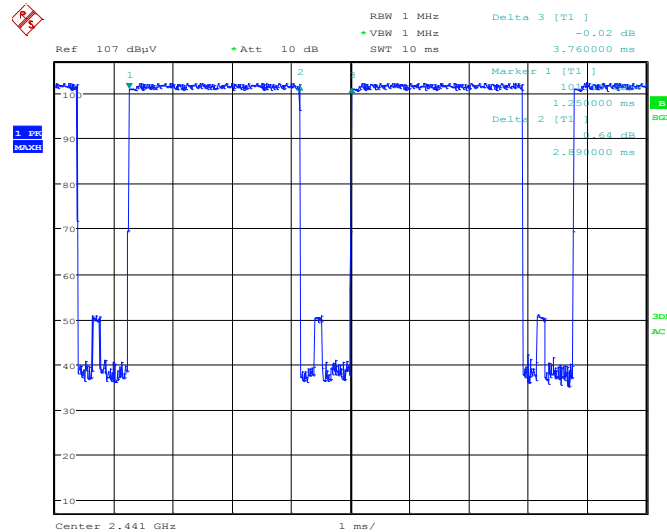

Date: 15.MAY.2018 05:01:08

on time (Count Pulses) Plot on Channel 39

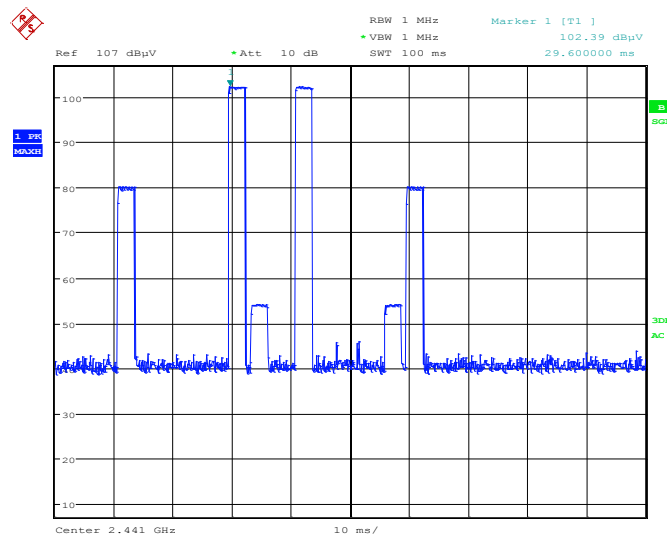

Date: 15.MAY.2018 05:01:36

Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.89 / 100 = 5.78 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.76 \text{ dB}$
3. **3DH5** has the highest duty cycle worst case and is reported.

Duty Cycle Correction Factor Consideration for AFH mode:

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the period to have DH5 packet completing one hopping sequence is

$$2.89 \text{ ms} \times 20 \text{ channels} = 57.8 \text{ ms}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period. $[100\text{ms} / 57.6\text{ms}] = 2 \text{ hops}$

Thus, the maximum possible ON time:

$$2.89 \text{ ms} \times 2 = 5.78 \text{ ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.78 \text{ ms}/100\text{ms}) = -24.76 \text{ dB}$$