



FCC ID: P4Q-N653  
 Report No.: T200407W01-RP13

IC: 2420C-N653

Page: 1 / 27  
 Rev.: 01

**FCC 47 CFR PART 27 SUBPART C, M  
 &  
 INDUSTRY CANADA RSS-199**

**TEST REPORT**

**For**

**PRO 8475**

**Trade Name:  
 MiTAC, Webfleet Solutions**

**Model: N653**

*Issued to*

<b>FCC:</b>	<b>Mitac Digital Technology Corporation    No.200, Wen Hwa 2nd Rd.,Kuei Shan Dist. Taoyuan, 33383 Taiwan</b>
<b>IC:</b>	<b>MiTAC Digital Technology Corporation    No.200, Wenhua 2nd Rd.,, Guishan Dist. Taoyuan City 333 Taiwan</b>

*Issued by*

**Compliance Certification Services Inc.  
 Wugu Laboratory  
 No.11, Wugong 6th Rd., Wugu Dist.,  
 New Taipei City, Taiwan. (R.O.C.)  
 Issued Date: June 9, 2020**

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
 除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

### Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	May 21, 2020	Initial Issue	ALL	Allison Chen
01	June 9, 2020	See the following note Rev.(01)	ALL	Allison Chen

**Rev.(01)**

1. Added test data for power table and radiated emission.
2. Revised product name: PRO 8475, and model name: N653.

## TABLE OF CONTENTS

<b>1.</b>	<b>TEST RESULT CERTIFICATION .....</b>	<b>4</b>
<b>2.</b>	<b>EUT DESCRIPTION .....</b>	<b>5</b>
<b>3.</b>	<b>TEST METHODOLOGY .....</b>	<b>6</b>
3.1	DESCRIPTION OF TEST TYPE .....	6
3.2	THE WORST MODE OF MEASUREMENT .....	7
<b>4.</b>	<b>TEST SUMMARY .....</b>	<b>8</b>
<b>5.</b>	<b>INSTRUMENT CALIBRATION .....</b>	<b>9</b>
5.1	MEASURING INSTRUMENT CALIBRATION .....	9
5.2	MEASUREMENT EQUIPMENT USED .....	9
5.3	MEASUREMENT UNCERTAINTY .....	11
<b>6.</b>	<b>FACILITIES AND ACCREDITATIONS .....</b>	<b>12</b>
6.1	FACILITIES .....	12
6.2	EQUIPMENT .....	12
<b>7.</b>	<b>SETUP OF EQUIPMENT UNDER TEST .....</b>	<b>13</b>
7.1	SETUP CONFIGURATION OF EUT .....	13
7.2	SUPPORT EQUIPMENT .....	13
<b>8.</b>	<b>TEST PROCEDURE AND RESULT .....</b>	<b>14</b>
8.1	EIRP MEASUREMENT .....	14
8.2	RADIATED EMISSION MEASUREMENT .....	19
8.3	TEST DATA RE-USE SUMMARY .....	26
<b>9.</b>	<b>APPENDIX A PHOTOGRAPHS OF TEST SETUP .....</b>	<b>A-1</b>

## 1. TEST RESULT CERTIFICATION

**FCC Applicant:** Mitac Digital Technology Corporation  
No.200, Wen Hwa 2nd Rd.,Kuei Shan Dist. Taoyuan, 33383  
Taiwan

**IC Applicant:** MiTAC Digital Technology Corporation  
No.200, Wenhua 2nd Rd., Guishan Dist. Taoyuan City 333  
Taiwan

**Manufacturer:** MITAC COMPUTER (KUNSHAN) CO., LTD.  
No. 269, 2nd Avenue, District A, Comprehensive Free Trade  
Zone, Kunshan, Jiangsu, P.R. China

**Equipment Under Test:** PRO 8475

**Trade Name:** MiTAC, Webfleet Solutions

**Model:** N653

**Date of Test:** June 1 ~ 6, 2020

APPLICABLE STANDARDS	
Standard	TEST RESULT
FCC Part 27, Subpart C, M, FCC Part 2 & RSS-199 Issue 3 December 2016	No non-compliance noted
Statements of Conformity	
Determination of compliance is based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.	

The above equipment has been tested by Compliance Certification Services Inc., and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Approved by:




---

Kevin Tsai  
Deputy Manager  
Compliance Certification Services Inc.

## 2. EUT DESCRIPTION

<b>Product</b>	PRO 8475	
<b>Model</b>	N653	
<b>Model Discrepancy</b>	Difference of the those trade names (list on this report) are just for marketing purpose only.	
<b>Trade</b>	MiTAC, Webfleet Solutions	
<b>Received Date</b>	April 7, 2020	
<b>Power Supply</b>	1. Powered from Rechargeable Li-ion Polymer Battery. Rating: 3.7VDC, 4000mAh, 14.8Wh 2. Powered from Cradle Fleet cable 12/24V (Pogo power pin) USB Type-C 5V	
<b>Modulation Technology</b>	LTE Band 41	QPSK, 16QAM
<b>Frequency Range</b>	LTE Band 41 Channel Bandwidth: 5MHz	2498.5MHz ~2687.5MHz
	LTE Band 41 Channel Bandwidth: 10MHz	2501MHz ~2685MHz
	LTE Band 41 Channel Bandwidth: 15MHz	2503.5MHz ~2682.5MHz
	LTE Band 41 Channel Bandwidth: 20MHz	2506MHz ~2680MHz
<b>Antenna Specification</b>	Antenna type: Integral Band 41: 1.99 dBi	

**Note:** 1. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

Report No.: T200407W01-RP13

### 3. TEST METHODOLOGY

#### 3.1 DESCRIPTION OF TEST TYPE

The EUT (model: N653) had been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting mode was programmed.

#### LTE Band 41: 2496MHz ~ 2690MHz

Three channels had been tested for each channel bandwidth.

Channel Bandwidth	5MHz		10MHz		15MHz		20MHz	
	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
Low CH	39675	2498.5	39700	2501	39725	2503.5	39750	2506
Middle CH	40620	2593	40620	2593	40620	2593	40620	2593
High CH	41565	2687.5	41540	2685	41515	2682.5	41490	2680

Report No.: T200407W01-RP13

### 3.2 THE WORST MODE OF MEASUREMENT

#### 3.2.1 The worst mode of measurement

Radiated Emission Measurement Above 1G	
Test Condition	Radiated Emission Above 1G
Power supply Mode	Mode 1: EUT power by Battery Mode 2: EUT+Cradle
Worst Mode	<input checked="" type="checkbox"/> Mode 1 <input type="checkbox"/> Mode 2 <input type="checkbox"/> Mode 3 <input type="checkbox"/> Mode 4
Worst Position	<input type="checkbox"/> Placed in fixed position. <input type="checkbox"/> Placed in fixed position at X-Plane (E2-Plane) <input type="checkbox"/> Placed in fixed position at Y-Plane (E1-Plane) <input checked="" type="checkbox"/> Placed in fixed position at Z-Plane (H-Plane)

Radiated Emission Measurement Below 1G	
Test Condition	Radiated Emission Below 1G
Power supply Mode	Mode 1: EUT power by Battery Mode 2: EUT+Cradle
Worst Mode	<input checked="" type="checkbox"/> Mode 1 <input type="checkbox"/> Mode 2 <input type="checkbox"/> Mode 3 <input type="checkbox"/> Mode 4

**Remark:**

1. The worst mode was record in this test report.
2. EUT pre-scanned in three axis ,X,Y, Z and two polarity, for radiated measurement. The worst case(Z-Plane) were recorded in this report

#### 4. TEST SUMMARY

FCC Standard Section	IC Standard Section	Report Section	Test Item	Result
-	-	2	Antenna Requirement	Pass
2.1046 27.50(h)(2)	RSS-199, section 4.4	8.1	ERP and EIRP Measurement	Pass
27.53(h)	RSS-199 section 4.5	8.2	Spurious Radiation Measurement	Pass



## 5. INSTRUMENT CALIBRATION

### 5.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### 5.2 MEASUREMENT EQUIPMENT USED

#### Equipment Used for Emissions Measurement

*Remark: Each piece of equipment is scheduled for calibration once a year.*

RF Conducted Test Site					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
Coaxial Cable	Woken	WC12	CC003	06/28/2019	06/27/2020
Wideband Radio Communication Tester	R&S	CMW 500	116875	07/29/2019	07/28/2020
Software	N/A				

3M 966 Chamber Test Site					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
Band Reject Filters	MICRO TRONICS	BRM 50702	120	02/25/2020	02/24/2021
Bilog Antenna	Sunol Sciences	JB3	A030105	07/26/2019	07/25/2020
Coaxial Cable	HUBER SUHNER	SUCOFLEX 104PEA	20995	02/25/2020	02/24/2021
Coaxial Cable	EMCI	EMC105	190914+25111	09/20/2019	09/19/2020
Digital Thermo-Hygro Meter	WISEWIND	1206	D07	01/15/2020	01/14/2021
double Ridged Guide Horn Antenna	ETC	MCTD 1209	DRH13M02003	10/04/2019	10/03/2020
High Pass Filter	SOLVANG TECHNOLOGY INC.	STI15	9923	02/25/2020	02/24/2021
High Pass Filters	MICRO TRONICS	HPM13195	003	02/25/2020	02/24/2021
Horn Antenna	ETS LINDGREN	3116	00026370	12/18/2019	12/17/2020
Horn Antenna / Harmonic Mixer	A-INFOMW / ROHDE&SCHWARZ	LB-19-20-A / FS-Z60	J202020872 / 100142	12/09/2019	12/08/2021
Horn Antenna / Harmonic Mixer	ROHDE&SCHWARZ	FH-PP-110 / FS-Z110	10003 / 100096	12/09/2019	12/08/2021
Horn Antenna / Harmonic Mixer	ROHDE&SCHWARZ	FH-PP-75 / FS-Z75	10001 / 100162	12/09/2019	12/08/2021
Horn Antenna / Spectrum Analyzer Mixer	Radiometer Physics GmbH	FH-PP-170 / SAM-170	10003 / 20011	12/09/2019	12/08/2021
Horn Antenna / Spectrum Analyzer Mixer	Radiometer Physics GmbH	FH-PP-220 / SAM-220	10003 / 20013	12/09/2019	12/08/2021
Horn Antenna / Spectrum Analyzer Mixer	Radiometer Physics GmbH	FH-PP-325 / SAM-325	10007 / 20048	12/09/2019	12/08/2021
Loop Ant	COM-POWER	AL-130	121051	03/27/2020	03/26/2021
Pre-Amplifier	EMEC	EM330	060609	02/25/2020	02/24/2021
Pre-Amplifier	HP	8449B	3008A00965	02/25/2020	02/24/2021
Pre-Amplifier	MITEQ	AMF-6F-180040 00-37-8P	985646	06/18/2019	06/17/2020
Signal Analyzer	Agilent	N9010A	MY52220817	03/19/2020	03/18/2021
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R
Turn Table	CCS	CC-T-1F	N/A	N.C.R	N.C.R
Software	e3 6.11-20180413				

### 5.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	+/- 1.2575
Emission bandwidth, 20dB bandwidth	+/- 0.0014
RF output power, conducted	+/- 1.14
Power density, conducted	+/- 1.40
3M Semi Anechoic Chamber / 30M~200M	+/- 4.12
3M Semi Anechoic Chamber / 200M~1000M	+/- 4.68
3M Semi Anechoic Chamber / 1G~8G	+/- 5.18
3M Semi Anechoic Chamber / 8G~18G	+/- 5.47
3M Semi Anechoic Chamber / 18G~26G	+/- 3.81
3M Semi Anechoic Chamber / 26G~40G	+/- 3.87

**Remark:** This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

## 6. FACILITIES AND ACCREDITATIONS

### 6.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

No.11, Wugong 6th Rd., Wugu Dist., New Taipei City, Taiwan. (R.O.C.)

Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10: 2013 and CISPR Publication 22.

### 6.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

## 7. SETUP OF EQUIPMENT UNDER TEST

### 7.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix I for the actual connections between EUT and support equipment.

### 7.2 SUPPORT EQUIPMENT

Support Equipment						
No.	Equipment	Brand	Model	Series No.	FCC ID	IC ID
1	NB(L)	Toshiba	PORTEGE R30-A	N/A	PD97260H	N/A
2	DC Power Source	Agilent	E3640A	N/A	N/A	N/A

**Remark:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

## 8. TEST PROCEDURE AND RESULT

### 8.1 EIRP MEASUREMENT

#### LIMIT

According to FCC §2.1046

**FCC 27.50 (h)(2):** Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

RSS-199 § 4.4,

For mobile subscriber equipment, the e.i.r.p. shall not exceed 2 W. For fixed subscriber equipment, the transmitter output power shall not exceed 2 W and the e.i.r.p. shall be limited to 40 W.

#### TEST PROCEDURES

##### **CONDUCTED POWER MEASUREMENT:**

1. The transmitter output power was connected to the call box.
2. Set EUT at maximum output power via call box.
3. Set Call box at lowest, middle and highest channels for each band and modulation.

#### TEST RESULTS

*No non-compliance noted.*

**LTE Band 41**

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power (dBm)	EIRP Power
Band 41	5M	39675	2498.5	QPSK	1	0	0	22.26	24.25
					1	12	0	22.00	23.99
					1	24	0	22.59	24.58
					12	0	1	21.71	23.70
					12	6	1	22.12	24.11
					12	11	1	22.14	24.13
					25	0	1	21.86	23.85
				16QAM	1	0	1	21.69	23.68
					1	12	1	21.85	23.84
					1	24	1	21.81	23.80
					12	0	2	20.85	22.84
					12	6	2	20.81	22.80
					12	11	2	20.60	22.59
					25	0	2	20.93	22.92
		40620	2593.0	QPSK	1	0	0	22.62	24.61
					1	12	0	22.55	24.54
					1	24	0	22.51	24.50
					12	0	1	22.02	24.01
					12	6	1	21.83	23.82
					12	11	1	21.71	23.70
					25	0	1	21.66	23.65
				16QAM	1	0	1	21.90	23.89
					1	12	1	21.98	23.97
					1	24	1	21.53	23.52
					12	0	2	20.90	22.89
					12	6	2	21.10	23.09
					12	11	2	20.92	22.91
					25	0	2	21.11	23.10
		41565	2687.5	QPSK	1	0	0	23.12	<b>25.11</b>
					1	12	0	22.59	24.58
1	24				0	23.11	25.10		
12	0				1	22.29	24.28		
12	6				1	22.29	24.28		
12	11				1	22.34	24.33		
25	0				1	22.16	24.15		
16QAM	1			0	1	22.42	24.41		
	1			12	1	21.90	23.89		
	1			24	1	22.15	24.14		
	12			0	2	21.21	23.20		
	12			6	2	21.04	23.03		
	12			11	2	21.13	23.12		
	25			0	2	21.21	23.20		

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power (dBm)	EIRP Power	
Band 41	10M	39700	2501.0	QPSK	1	0	0	22.28	24.27	
					1	24	0	22.02	24.01	
					1	49	0	22.61	24.60	
					25	0	1	21.73	23.72	
					25	12	1	22.14	24.13	
					25	24	1	22.16	24.15	
				50	0	1	21.88	23.87		
				16QAM	1	0	1	21.71	23.70	
					1	24	1	21.87	23.86	
					1	49	1	21.83	23.82	
					25	0	2	20.87	22.86	
					25	12	2	20.83	22.82	
		25	24		2	20.62	22.61			
		40620	2593.0	QPSK	2593.0	1	0	0	22.64	24.63
						1	24	0	22.57	24.56
						1	49	0	22.53	24.52
						25	0	1	22.04	24.03
						25	12	1	21.85	23.84
						25	24	1	21.73	23.72
				50	0	1	21.68	23.67		
				16QAM	1	0	1	21.92	23.91	
					1	24	1	22.00	23.99	
					1	49	1	21.55	23.54	
					25	0	2	20.92	22.91	
					25	12	2	21.12	23.11	
		25	24		2	20.94	22.93			
		41540	2685.0	QPSK	2685.0	1	0	0	23.15	<b>25.14</b>
						1	24	0	22.62	24.61
						1	49	0	23.14	25.13
						25	0	1	22.32	24.31
25	12					1	22.32	24.31		
25	24					1	22.37	24.36		
50	0			1	22.19	24.18				
16QAM	1			0	1	22.45	24.44			
	1			24	1	21.93	23.92			
	1			49	1	22.18	24.17			
	25			0	2	21.24	23.23			
	25			12	2	21.07	23.06			
	25	24	2	21.16	23.15					
50	0	2	21.24	23.23						



Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power (dBm)	EIRP Power	
Band 41	15M	39725	2503.5	QPSK	1	0	0	22.29	24.28	
					1	37	0	22.03	24.02	
					1	74	0	22.62	24.61	
					36	0	1	21.74	23.73	
					36	18	1	22.15	24.14	
					36	35	1	22.17	24.16	
					75	0	1	21.89	23.88	
				16QAM	1	0	1	21.72	23.71	
					1	37	1	21.88	23.87	
					1	74	1	21.84	23.83	
					36	0	2	20.88	22.87	
					36	18	2	20.84	22.83	
					36	35	2	20.63	22.62	
					75	0	2	20.96	22.95	
		40620	2593.0	QPSK	2593.0	1	0	0	22.65	24.64
						1	37	0	22.58	24.57
						1	74	0	22.54	24.53
						36	0	1	22.05	24.04
						36	18	1	21.86	23.85
						36	35	1	21.74	23.73
						75	0	1	21.69	23.68
				16QAM	1	0	1	21.93	23.92	
					1	37	1	22.01	24.00	
					1	74	1	21.56	23.55	
					36	0	2	20.93	22.92	
					36	18	2	21.13	23.12	
					36	35	2	20.95	22.94	
					75	0	2	21.14	23.13	
		41515	2682.5	QPSK	2682.5	1	0	0	23.16	<b>25.15</b>
						1	37	0	22.63	24.62
1	74					0	23.15	25.14		
36	0					1	22.33	24.32		
36	18					1	22.33	24.32		
36	35					1	22.38	24.37		
75	0					1	22.20	24.19		
16QAM	1			0	1	22.46	24.45			
	1			37	1	21.94	23.93			
	1			74	1	22.19	24.18			
	36			0	2	21.25	23.24			
	36			18	2	21.08	23.07			
	36			35	2	21.17	23.16			
	75			0	2	21.25	23.24			

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power (dBm)	EIRP Power	
Band 41	20M	39750	2506.0	QPSK	1	0	0	22.32	24.31	
					1	49	0	22.06	24.05	
					1	99	0	22.65	24.64	
					50	0	1	21.77	23.76	
					50	24	1	22.18	24.17	
					50	49	1	22.20	24.19	
				100	0	1	21.92	23.91		
				16QAM	1	0	1	21.75	23.74	
					1	49	1	21.91	23.90	
					1	99	1	21.87	23.86	
					50	0	2	20.91	22.90	
					50	24	2	20.87	22.86	
		50	49		2	20.66	22.65			
		100	0	2	20.99	22.98				
		40620	2593.0	QPSK	2593.0	1	0	0	22.71	24.70
						1	49	0	22.64	24.63
						1	99	0	22.60	24.59
						50	0	1	22.11	24.10
						50	24	1	21.92	23.91
						50	49	1	21.80	23.79
				100	0	1	21.75	23.74		
				16QAM	1	0	1	21.99	23.98	
					1	49	1	22.07	24.06	
					1	99	1	21.62	23.61	
					50	0	2	20.99	22.98	
					50	24	2	21.19	23.18	
		50	49		2	21.01	23.00			
		100	0	2	21.20	23.19				
		41490	2680.0	QPSK	2680.0	1	0	0	23.23	<b>25.22</b>
						1	49	0	22.70	24.69
1	99					0	23.22	25.21		
50	0					1	22.40	24.39		
50	24					1	22.40	24.39		
50	49					1	22.45	24.44		
100	0			1	22.27	24.26				
16QAM	1			0	1	22.53	24.52			
	1			49	1	22.01	24.00			
	1			99	1	22.26	24.25			
	50			0	2	21.32	23.31			
	50			24	2	21.15	23.14			
	50	49	2	21.24	23.23					
100	0	2	21.32	23.31						

Report No.: T200407W01-RP13

## 8.2 RADIATED EMISSION MEASUREMENT

### LIMITS

#### **FCC §27.53(h), Band 41**

General protection levels. Except as otherwise specified below, for operations in the 1710-1755MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10}(P)$  dB.

#### **According to RSS-199, Band 41**

For mobile subscriber equipment, the power of any unwanted emissions measured as above shall be attenuated (in dB) below the transmitter power, P (dBW), by at least:

- (i)  $40 + 10 \log_{10} p$  from the channel edges to 5 MHz away
- (ii)  $43 + 10 \log_{10} p$  between 5 MHz and X MHz from the channel edges, and
- (iii)  $55 + 10 \log_{10} p$  at X MHz and beyond from the channel edges

In addition, the attenuation shall not be less than  $43 + 10 \log_{10} p$  on all frequencies between 2490.5 MHz and 2496 MHz, and  $55 + 10 \log_{10} p$  at or below 2490.5 MHz.

**p** is the transmitter power measured in watts and **X** is 6 MHz or the equipment occupied bandwidth, whichever is greater.

### TEST PROCEDURES


1. According to KDB 971168 D01 and TIA-603-E.
2. The EUT was placed on a turntable
  - (1) Below 1G : 0.8m
  - (2) Above 1G : 1.5m
  - (3) EUT set 3m from the receiving antenna
  - (4) The table was rotated 360 degrees of the highest spurious emission to determine the position.
3. Set the spectrum analyzer , RBW=1MHz, VBW=3MHz.
4. A horn antenna was driven by a signal generator.
5. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.

Report No.: T200407W01-RP13

## Test Results

LTE Band 41 / BW: 20MHz / QPSK / RB =1, RB Offset = 0

<b>Operation Mode:</b>	Tx / Low CH	<b>Test Date:</b>	June 6, 2020
<b>Temperature:</b>	24.9°C	<b>Tested by:</b>	Jerry Chang
<b>Humidity:</b>	51% RH	<b>Polarity:</b>	Ver.

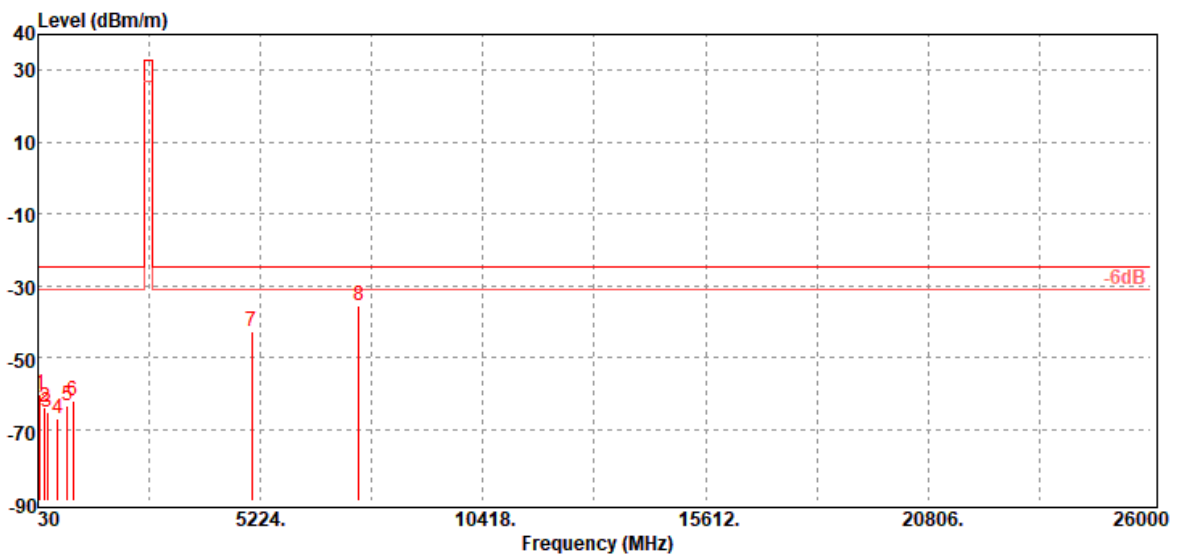


Freq. MHz	ERP/EIRP dBm	SG Output Level dBm	Antenna Gain dBd/dBi	Cable Loss dB	Limit dBm	Margin dB	Antenna Polarization (V/H)
86.26	-60.45	-52.14	-7.55	-0.76	-25.00	-35.45	V
185.20	-63.99	-58.79	-4.08	-1.12	-25.00	-38.99	V
255.04	-65.14	-62.23	-1.60	-1.31	-25.00	-40.14	V
488.81	-67.28	-63.22	-2.22	-1.84	-25.00	-42.28	V
709.00	-63.39	-59.73	-1.42	-2.24	-25.00	-38.39	V
841.89	-62.11	-58.27	-1.40	-2.44	-25.00	-37.11	V
5012.00	-42.58	-48.49	12.48	-6.57	-25.00	-17.58	V
7518.00	-35.49	-38.22	10.84	-8.11	-25.00	-10.49	V

Report No.: T200407W01-RP13

**Operation Mode:** Tx / Low CH  
**Temperature:** 24.9°C  
**Humidity:** 51% RH

**Test Date:** June 6, 2020  
**Tested by:** Jerry Chang  
**Polarity:** Hor.

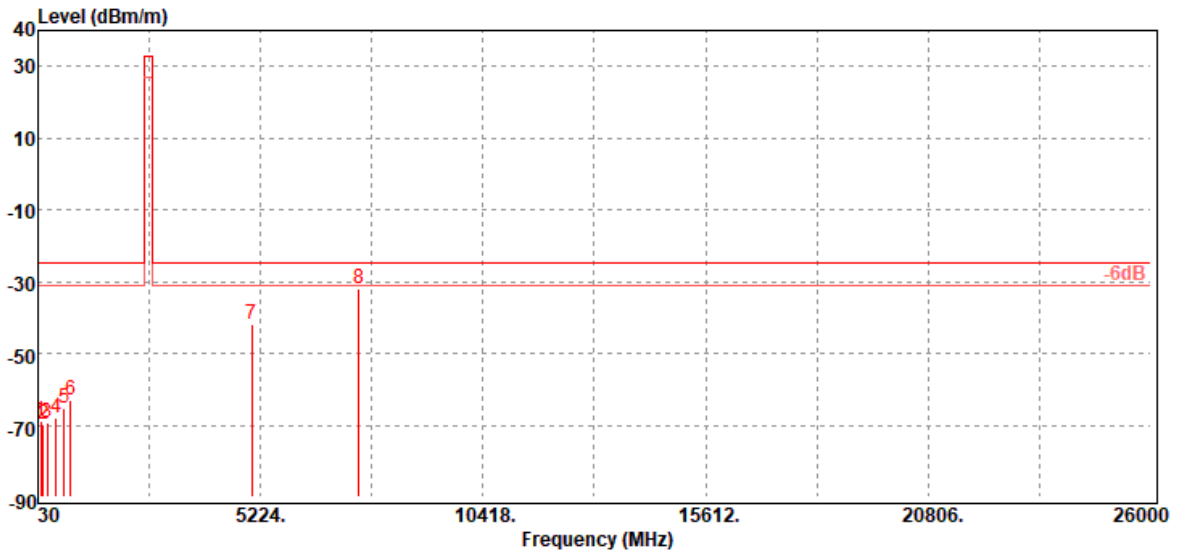

Freq. MHz	ERP/EIRP dBm	SG Output Level dBm	Antenna Gain dBd/dBi	Cable Loss dB	Limit dBm	Margin dB	Antenna Polarization (V/H)
104.69	-68.64	-58.56	-9.24	-0.84	-25.00	-43.64	H
156.10	-69.81	-62.19	-6.59	-1.03	-25.00	-44.81	H
250.19	-69.17	-66.08	-1.79	-1.30	-25.00	-44.17	H
456.80	-67.96	-64.09	-2.10	-1.77	-25.00	-42.96	H
639.16	-65.48	-61.65	-1.70	-2.13	-25.00	-40.48	H
799.21	-63.23	-59.58	-1.28	-2.37	-25.00	-38.23	H
5012.00	-41.98	-47.89	12.48	-6.57	-25.00	-16.98	H
7518.00	-32.19	-34.92	10.84	-8.11	-25.00	-7.19	H

Report No.: T200407W01-RP13

**Operation Mode:** Tx / Mid CH


**Test Date:** June 6, 2020

**Temperature:** 24.9°C

**Tested by:** Jerry Chang

**Humidity:** 51% RH

**Polarity:** Ver.

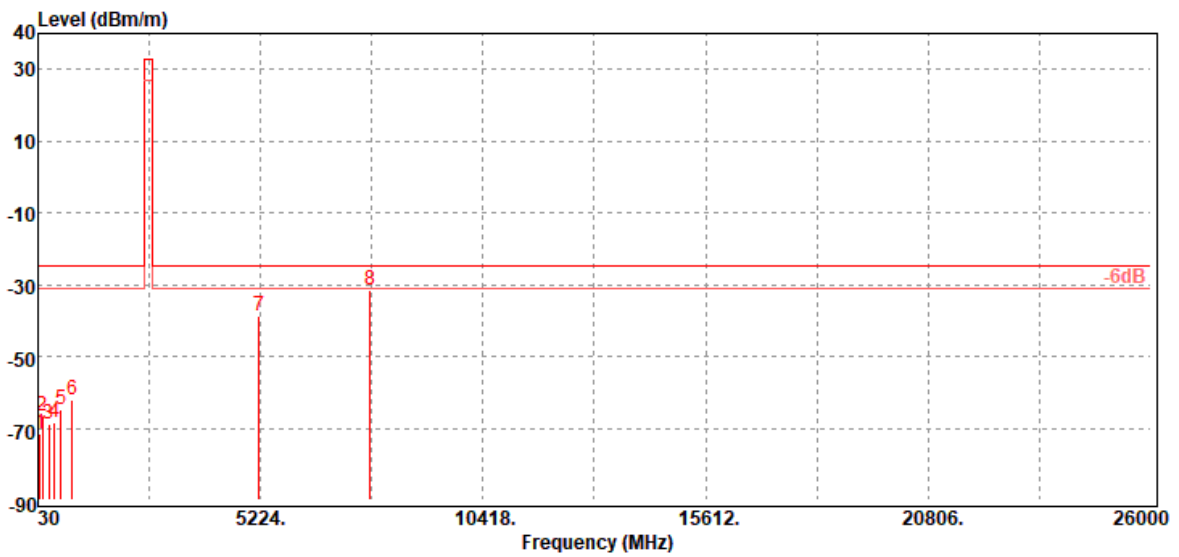

Freq. MHz	ERP/EIRP dBm	SG Output Level dBm	Antenna Gain dBd/dBi	Cable Loss dB	Limit dBm	Margin dB	Antenna Polarization (V/H)
86.26	-71.70	-63.39	-7.55	-0.76	-25.00	-46.70	V
134.76	-66.45	-56.15	-9.35	-0.95	-25.00	-41.45	V
274.44	-68.88	-64.91	-2.60	-1.37	-25.00	-43.88	V
418.00	-68.30	-64.71	-1.90	-1.69	-25.00	-43.30	V
561.56	-64.61	-61.23	-1.40	-1.98	-25.00	-39.61	V
835.10	-62.16	-58.23	-1.50	-2.43	-25.00	-37.16	V
5186.00	-38.85	-45.03	12.92	-6.74	-25.00	-13.85	V
7779.00	-31.65	-34.53	11.14	-8.26	-25.00	-6.65	V

Report No.: T200407W01-RP13

**Operation Mode:** Tx / Mid CH


**Test Date:** June 6, 2020

**Temperature:** 24.9°C

**Tested by:** Jerry Chang

**Humidity:** 51% RH

**Polarity:** Hor.

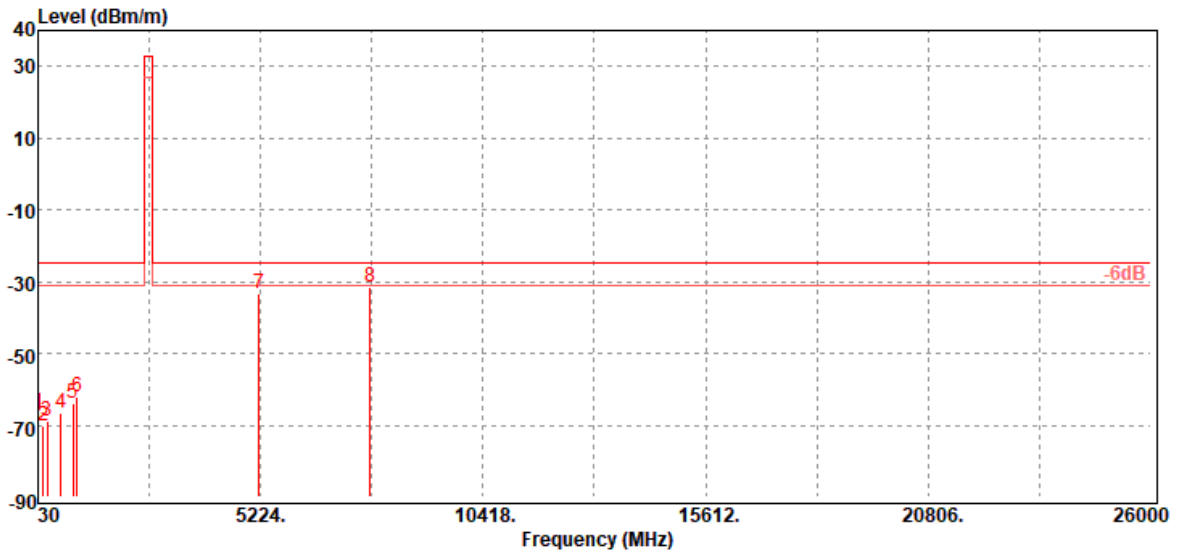


Freq. MHz	ERP/EIRP dBm	SG Output Level dBm	Antenna Gain dBd/dBi	Cable Loss dB	Limit dBm	Margin dB	Antenna Polarization (V/H)
40.67	-66.46	-46.44	-19.50	-0.52	-25.00	-41.46	H
159.01	-69.98	-62.54	-6.40	-1.04	-25.00	-44.98	H
255.04	-69.07	-66.16	-1.60	-1.31	-25.00	-44.07	H
570.29	-66.45	-63.05	-1.40	-2.00	-25.00	-41.45	H
839.95	-63.74	-59.90	-1.40	-2.44	-25.00	-38.74	H
935.01	-62.09	-58.19	-1.30	-2.60	-25.00	-37.09	H
5186.00	-33.46	-39.64	12.92	-6.74	-25.00	-8.46	H
7779.00	-31.57	-34.45	11.14	-8.26	-25.00	-6.57	H

Report No.: T200407W01-RP13

**Operation Mode:** Tx / High CH  
**Temperature:** 24.9°C  
**Humidity:** 51% RH

**Test Date:** June 6, 2020  
**Tested by:** Jerry Chang  
**Polarity:** Ver.

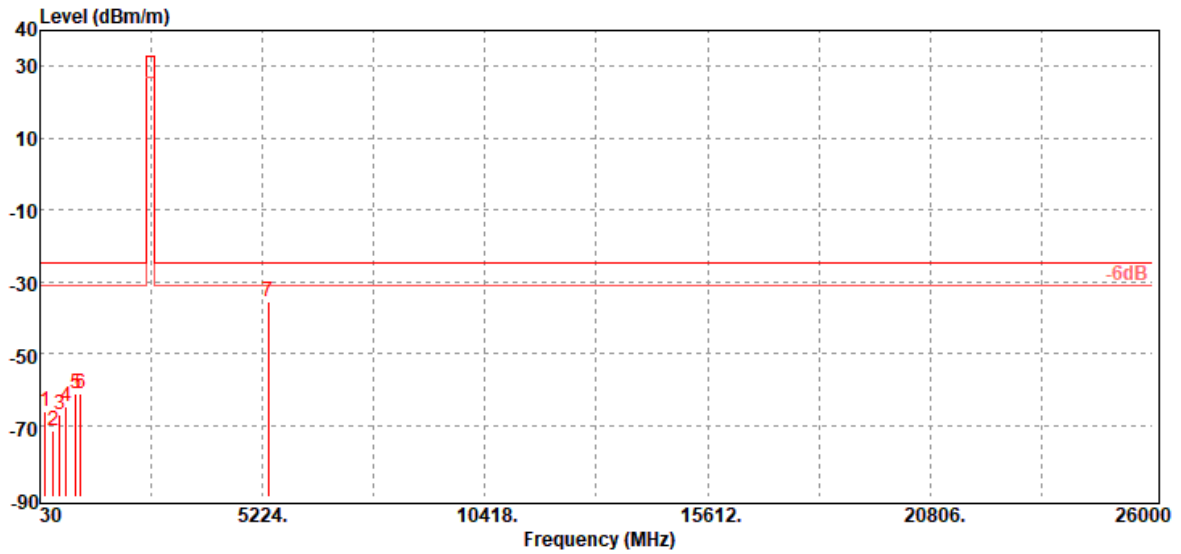

Freq. MHz	ERP/EIRP dBm	SG Output Level dBm	Antenna Gain dBd/dBi	Cable Loss dB	Limit dBm	Margin dB	Antenna Polarization (V/H)
148.34	-66.23	-57.96	-7.27	-1.00	-25.00	-41.23	V
343.31	-71.70	-68.67	-1.50	-1.53	-25.00	-46.70	V
493.66	-67.03	-63.13	-2.05	-1.85	-25.00	-42.03	V
648.86	-64.78	-60.95	-1.68	-2.15	-25.00	-39.78	V
870.99	-61.21	-57.50	-1.22	-2.49	-25.00	-36.21	V
972.84	-60.99	-56.99	-1.36	-2.64	-25.00	-35.99	V
5360.00	-35.62	-41.97	13.26	-6.91	-25.00	-10.62	V



Report No.: T200407W01-RP13

**Operation Mode:** Tx / High CH


**Test Date:** June 6, 2020

**Temperature:** 24.9°C

**Tested by:** Jerry Chang

**Humidity:** 51% RH

**Polarity:** Hor.

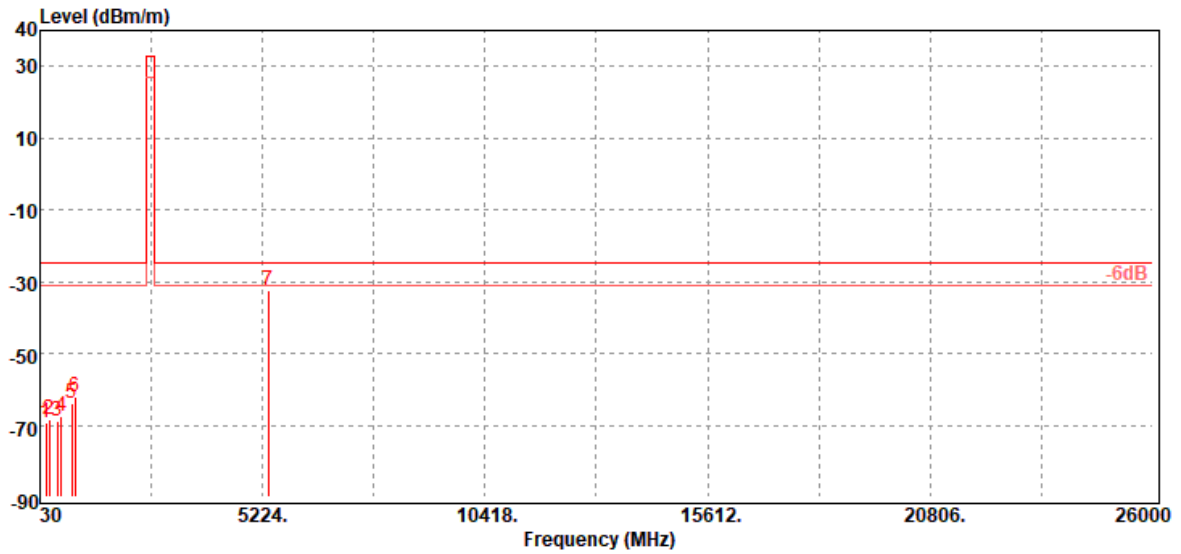

Freq. MHz	ERP/EIRP dBm	SG Output Level dBm	Antenna Gain dBd/dBi	Cable Loss dB	Limit dBm	Margin dB	Antenna Polarization (V/H)
173.56	-69.12	-63.05	-4.99	-1.08	-25.00	-44.12	H
244.37	-68.48	-65.26	-1.93	-1.29	-25.00	-43.48	H
434.49	-68.73	-65.01	-1.99	-1.73	-25.00	-43.73	H
526.64	-67.29	-64.07	-1.30	-1.92	-25.00	-42.29	H
773.99	-63.80	-60.06	-1.40	-2.34	-25.00	-38.80	H
846.74	-62.25	-58.43	-1.37	-2.45	-25.00	-37.25	H
5360.00	-32.32	-38.67	13.26	-6.91	-25.00	-7.32	H

### 8.3 TEST DATA RE-USE SUMMARY

#### Introduction Section:

The application re-uses data collected on a similar device. The subject device of this application (Model: N653, FCC ID: P4Q-N653, IC: 2420C-N653) is electrically identical to the reference device (Model: N635, FCC ID: P4Q-N635A, IC: 2420C-N635A) for the portions of the circuitry corresponding to the data being re-used, as treated by KDB Publication 484596 D01.

#### Differences Brief Description:

The WLAN, WWAN, BT and RFID hardware of this device are identical to the implementation in

FCC ID: P4Q-N653.

IC: 2420C-N653

The Product Equality Declaration document includes detailed information about the changes between the devices. The data from that application has been verified through appropriate spot checks to demonstrate compliance for this device as shown in the summary table below.



Report No.: T200407W01-RP13

Page: 27 / 27

Rev.: 01

### Spot Check Verification Result Summary

Equipment Class	Reference FCC ID / IC No.	Folder Test	Report Title/ Section
Part 27 / RSS-199	P4Q-N635A / 2420C-N635A	T191105W01-RP13	All Section ( <i>Except for EIRP Measurement, Spurious Radiation Measurement</i> )

### Summary of the spot check for Unlicensed bands and Licensed bands

In order to confirm hardware similarity of the subject device with the reference device, we used same setting power to radiated emission measurement were performed on the subject device for the Band edge and Harmonic, the test result were similar with FCC ID: P4Q-N635A / IC: 2420C-N635A.

#### WWAN: LTE

Report	Test Item	Frequency (MHz)	Channel	P4Q-N635A / 2420C-N635A		P4Q-N653 / 2420C-N653		Gap (dB)
				Measured Frequency (MHz)	EIRP/ERP	Measured Frequency (MHz)	EIRP/ERP	
Band 41	RSE	2593	40620	7779	-29.97	7779	-31.57	1.6

**- End of Test Report -**