



TTI-P-G-166/98-30

Accredited Bluetooth Test Facility (BQTF)

Test report no.: 2_2639-01-01/01

FCC Part 24

Fixed Cellular Terminal Type 0130101-BV

CETECOM – ICT Services GmbH

Untertürkheimerstr. 6-10

66117 Saarbrücken, Germany

Telephone: + 49 (0) 681 / 598-0

Fax: + 49 (0) 681 / 9075

Table of Contents

1 General information

- 1.1 Notes
- 1.2 Testing laboratory
- 1.3 Details of applicant
- 1.4 Application details
- 1.5 Test item
- 1.6 Test standards

2 Technical test

- 2.1 Summary of test results
- 2.2 Test report

1 General information

1.1 Notes

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

1.2 Testing laboratory

CETECOM ICT Services GmbH

Untertürkheimer Straße 6 - 10

66117 Saarbrücken

Germany

Telephone : + 49 681 598 - 9100

Telefax : + 49 681 598 - 9075

E-mail : Michael.Berg@ict.cetecom.de

Internet : www.cetecom.de

Accredited testing laboratory

DAR-registration number : TTI-P-G-166/98-30

Accredited Bluetooth™ Test Facility (BQTF)

BLUETOOTH™ is a trademark owned by Bluetooth SIG, Inc. and licensed to CETECOM

1.3 Details of applicant

Name : Ericsson Spain SA
Street : Bilbao Technology Centre, Parque Tecnológico 700
City : SP-48160 Derio
Country : Spain
Telephone : +34 94 485 8000
Telefax : +34 94 485 8585
Contact : Mr. Aitor Uribe
Telephone : +34 94 485 8676

1.4 Application details

Date of receipt of application : 22.11.01
Date of receipt of test item : 23.11.01
Date of test : 23.-24.11.01

1.5 Test item

Type of equipment : **PCS Mobile Phone**
Type designation : GSM 900/1800/1900 Fixed Cellular Terminal Type 0130101-BV
Manufacturer : Applicant
Street :
City :
Country :
Serial number : IMEI: 004601 01 2300430 S/N: T38008508Z
Additional informations:
Frequency : 1850,2 – 1909,8 MHz
Type of modulation : 300KF2D
Number of channels : 300
Antenna : Integral antenna and socket
Power supply : 115V AC / 7,5V DC Adaptor
Output power : 29.81 dBm Peak / ERP : 27.2dBm (Burst); EIRP: 29.3dBm (Burst)
Type of equipment : Temperature range : -30°C - +60°C
FCC – ID : P5L 0130101-BV
Hardware : A
Software : CXC 112 1853 R1A13; CXC 112 1854 R1A13

1.6 Test standards: **FCC Part 24**

2 Technical test

The radiated measurements were performed vertical and horizontal over the whole frequency range. We start at 1 m high with vertical receiving antenna and rotate the dish continuously. During rotation we use the antenna lift system to vary the high from 1 to 4 m. So we find maximum radiation output. At this points we do manual remeasurements. After this we do the same measurements in horizontal position of the receiving antenna. This (horizontal and vertical) is made for all the three planes of the test sample. We use the maximum received results.

The detector function and selection of bandwidth are according ANSI C63.2-1996 item 8.2.1 and ANSI C63.4-1992 Item 4.2.

Antennas are conform with ANSI C63.2-1996 item 15.

150 kHz - 30 MHz: Quasi Peak measurement, 9kHz Bandwidth, passive loop antenna.

30 MHz - 200 MHz: Quasi Peak measurement, 120KHz Bandwidth, biconical antenna

200MHz - 1GHz: Quasi Peak measurement, 120KHz Bandwidth, log periodic antenna

1GHz: Average, RBW 1MHz, VBW 10 MHz, waveguide horn

2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

FINAL VERDICT : PASS

Technical responsibility for area of testing :


27.11.01 RSC 8411 Berg M.



Date	Section	Name	Signature
------	---------	------	-----------

Technical responsibility for area of testing :

27.11.01 RSC8412 Hausknecht D.



Date	Section	Name	Signature
------	---------	------	-----------

2.2 Testreport**TEST REPORT****Testreport no. : 2_2639-01-01/01**

POWER OUTPUT**SUBCLAUSE § 24.232****Summary:**

This paragraph contains both average , peak output powers and EIRP measurements for the mobile station.

In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

Method of Measurements:

The mobile was set up for the max. output power with pseudo random data modulation.

The power was measured with R&S Spectrum Analyzer FSIQ 26 (peak and average)

This measurements were done at 3 frequencies, 1850,2 MHz, 1880,2 MHz and 1909,8 MHz (bottom, middle and top of operational frequency range)

Limits:

Power Step	Nominal Peak Output Power (dBm)	Tolerance (dB)
0	+30	± 2

Power Measurements:**Conducted:**

Frequency (MHz)	Power Step	Peak Output Power (dBm)	Average Output Power (dBm)
1850.2	0	28.64	19.64
1880.0	0	29.42	20.42
1909.8	0	29.81	20.81
Measurement uncertainty		±0.5 dB	

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

EIRP Measurements

Description: This is the test for the maximum radiated power from the phone.

Rule Part 24.232(b) specifies that "Mobile/portable stations are limited to 2 watts e.i.r.p. peak power..." and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

Method of Measurement:

1. In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference center of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (Pin) is applied to the input of the dipole, and the power received (Pr) at the chamber's probe antenna is recorded.
2. A "reference path loss" is established as $Pin + 2.1 - Pr$.
3. The EUT is substituted for the dipole at the reference center of the chamber. The EUT is put into CW test mode and a scan is performed to obtain the radiation pattern.
4. From the radiation pattern, the coordinates where the maximum antenna gain occurs is identified.
5. The EUT is then put into pulse mode at its maximum power level (Power Step 0).
6. "Gated mode" power measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in FCC Rule 24.232 (b) and (c). The "reference path loss" from Step 1 is added to this result.
7. This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.1 dBi) and known input power (Pin).
8. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.1\text{dBi}$.

Limits:

Power Step	Burst Average EIRP (dBm)
0	<33

Power Measurements:

Radiated: Indoor antenna

Frequency (MHz)	Power Step	BURST AVERAGE (dBm)		MODULATION AVERAGE (dBm)	
		EIRP	ERP	EIRP	ERP
1850.2	0	26.5	24.4	17.8	15.4
1880.2	0	27.2	25.1	28.2	16.1
1909.8	0	27.7	25.6	18.7	16.6
Measurement uncertainty		±3 dB			

Radiated: Outdoor antenna

Frequency (MHz)	Power Step	BURST AVERAGE (dBm)		MODULATION AVERAGE (dBm)	
		EIRP	ERP	EIRP	ERP
1850.2	0	28.4	26.3	19.4	17.3
1880.2	0	29.1	27.0	20.1	18.0
1909.8	0	29.3	27.2	20.3	18.2
Measurement uncertainty		±3 dB			

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

FREQUENCY STABILITY

SUBCLAUSE § 24.235

Method of Measurement:

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the mobile station in a "call mode". This is accomplished with the use of a R&S CMD 65 DIGITAL RADIOCOMMUNICATION TESTER..

1. Measure the carrier frequency at room temperature.
2. Subject the mobile station to overnight soak at -30 C.
3. With the mobile station, powered with 115 Volts / 7,5C DC Supply, connected to the CMD 65 and in a simulated call on channel 662 (center channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
4. Repeat the above measurements at 10 C increments from -30 C to +60 C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with nominal 115 Volts. Vary supply voltage from minimum 97.75 Volts to maximum 132.25 Volts, in 12 steps remeasuring carrier frequency at each voltage. Pause for 1 1/2 hours unpowered, to allow any self heating to stabilize, before continuing.
6. Subject the mobile station to overnight soak at +60 C.
7. With the mobile station, connected to the CMD 65 and in a simulated call on channel 662 (center channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
8. Repeat the above measurements at 10 C increments from +60 C to -30 C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5 C during the measurement procedure.

Measurement Limit:

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. (~~As this transceiver is considered "Hand-carried, battery powered equipment...", Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.4 Vdc and 4.4 Vdc, with a nominal voltage of 3.6 Vdc (Li-Polymer accu). Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of + 22.2 % and - 5.4 %. For the purposes of measuring frequency stability these voltage limits are to be used.~~)

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)



AFC FREQ ERROR vs. VOLTAGE

Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)	Frequency Error (%)
97,75	73	0,0000388	0,0388
100,05	69	0,0000367	0,0367
103,50	58	0,0000308	0,0308
105,80	55	0,0000293	0,0293
109,25	51	0,0000271	0,0271
111,55	46	0,0000245	0,0245
115,00	38	0,0000202	0,0202
117,30	-2	-0,0000011	-0,0011
120,75	-33	-0,0000176	-0,0176
123,05	-51	-0,0000271	-0,0271
126,50	-61	-0,0000324	-0,0324
132,25	-67	-0,0000356	-0,0356

AFC FREQ ERROR vs. TEMPERATURE

TEMPERATURE (°C)	Frequency Error (Hz)	Frequency Error (ppm)	Frequency Error (%)
-30	37	0,0000020	0,0197
-20	95	0,0000051	0,0505
-10	138	0,0000073	0,0734
±0.0	115	0,0000061	0,0612
+10	86	0,0000046	0,0457
+20	63	0,0000034	0,0335
+30	38	0,0000020	0,0202
+40	26	0,0000014	0,0138
+50	-52	-0,0000028	-0,0277
+60	-85	-0,0000045	-0,0452

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

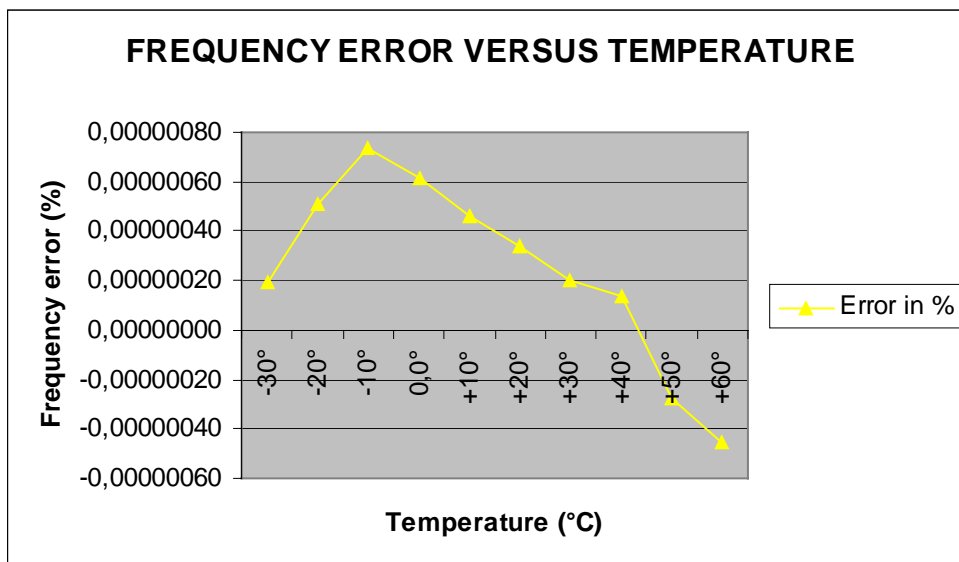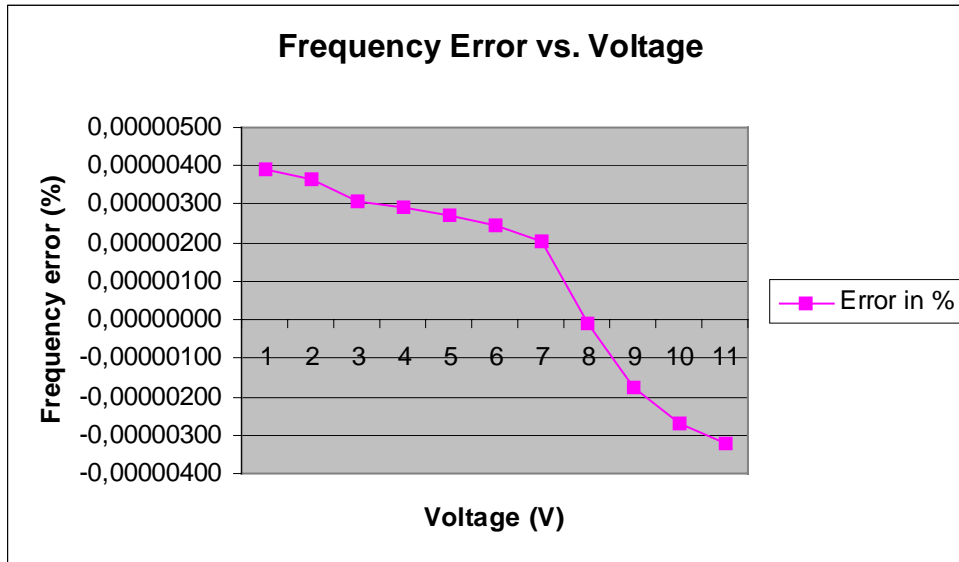

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

EMISSIONS LIMITS**§24.238****Measurement Procedure:**

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4 – 1992 requirements and is recognised by the FCC to be in compliance for a 3 and a10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. This was rounded up to 20 GHz. The resolution bandwidth is set as outlined in Part 24.238. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the USPCS band.

The final open field emission test procedure is as follows:

- a) The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- b) The antenna output was terminated in a 50 ohm load.
- c) A double ridged waveguide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- d) Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of the harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1 MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded. The equivalent power into a dipole antenna was calculated from the field intensity levels measured at 3 meters using the equation shown below:

$$P_g = E^2 4\pi d^2 / 120\pi = E^2 d^2 / 30$$

where : P = power in watts
 g = arithmetic gain of transmitting antenna over isotropic radiator.
 E = maximum field strength in volts/meter
 d = measurement distance in meter

Using a dipole gain of 1.67 or 2.2 dB and a test distance of 3 meters, this equation reduces to:

$$P(\text{dBm}) = E(\text{dBuV/m}) - 97.2\text{dB}$$

Measurement Limit:

Sec. 24.238 Emission Limits.

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43 + 10\log(P)$ dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10\log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Measurement Results:

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the USPCS band (1850.2 MHz, 1879.8 MHz and 1909.8 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the USPCS band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

RESULTS OF OPEN FIELD RADIATED TEST FOR FCC-24:

The final open field radiated levels are presented on the next pages.

As can be seen from this data, the emissions from the test item were within the specification limit.

CH 512

No	EMISSION FREQUENCY MHz	SPEC LIMIT dBuV	MEASUREMENTS			SITE			CORR FACTOR dB	COMMENTS
			ABS	dLIM dB	MODE	POL	HGT cm	AZM deg		
1	137.6	33.0	26.4	-6.6	PK	V	98	360	N/T	
2	139.2	33.0	21.8	-11.2	PK	H	332	0	N/T	
3	143.018	33.0	26.6	-6.4	QP	V	103	200	12.	
4	156.004	33.0	25.9	-7.1	QP	V	108	89	12.	
5	157.6	33.0	27.4	-5.7	PK	V	98	360	N/T	
6	168.9	33.0	24.2	-8.8	PK	V	98	360	N/T	
7	175.4	33.0	23.5	-9.5	PK	V	98	360	N/T	
8	175.9	33.0	22.0	-11.0	PK	H	332	0	N/T	

CH 662

No	EMISSION FREQUENCY MHz	SPEC LIMIT dBuV	MEASUREMENTS			SITE			CORR FACTOR dB	COMMENTS
			ABS	dLIM dB	MODE	POL	HGT cm	AZM deg		
1	137.8	33.0	26.9	-6.1	PK	V	102	0	N/T	
2	139.2	33.0	21.0	-12.0	PK	H	330	360	N/T	
3	142.989	33.0	27.1	-5.9	QP	V	103	133	12.	
4	156.016	33.0	26.0	-7.0	QP	V	108	90	12.	
5	168.9	33.0	25.0	-8.0	PK	V	102	0	N/T	
6	176.4	33.0	24.0	-9.0	PK	V	102	0	N/T	



CH 810

No	EMISSION FREQUENCY MHz	SPEC LIMIT dBuV	MEASUREMENTS			SITE			CORR FACTOR dB	COMMENTS
			ABS	dLIM dB	MODE	POL	HGT cm	AZM deg		
1	138.2	33.0	26.1	-6.9	PK	V	97	0	N/T	
2	139.0	33.0	21.8	-11.2	PK	H	332	360	N/T	
3	143.021	33.0	26.3	-6.7	QP	V	104	133	12.	
4	156.000	33.0	25.8	-7.2	QP	V	109	92	12.	
5	158.4	33.0	26.2	-6.9	PK	V	97	0	N/T	
6	160.9	33.0	25.0	-8.0	PK	V	97	0	N/T	
7	168.9	33.0	24.6	-8.4	PK	V	97	0	N/T	
8	176.2	33.0	22.7	-10.3	PK	H	332	360	N/T	
9	176.4	33.0	23.0	-10.0	PK	V	97	0	N/T	

N/T in CORR FACTOR column denotes a non-traceable signal.



REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 512 (up to 200 MHz)

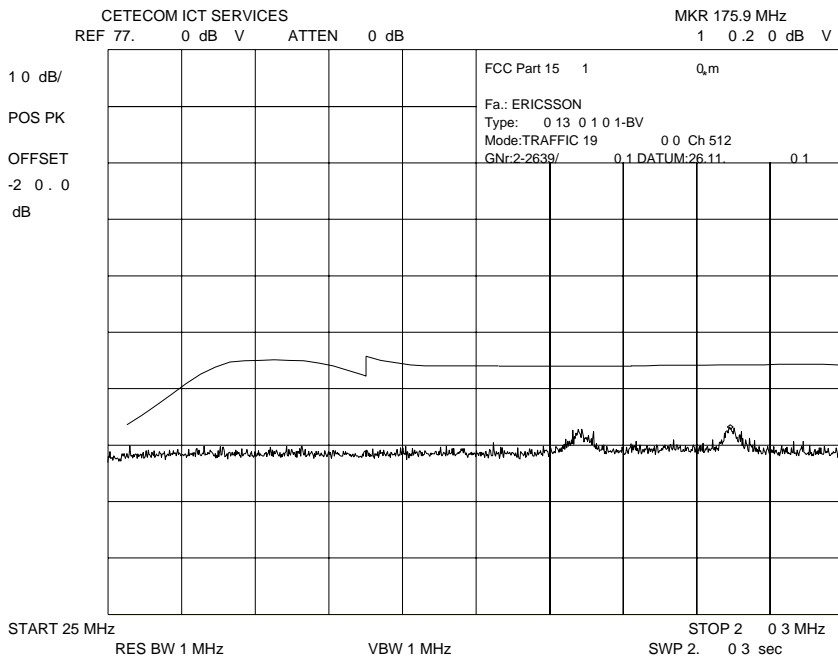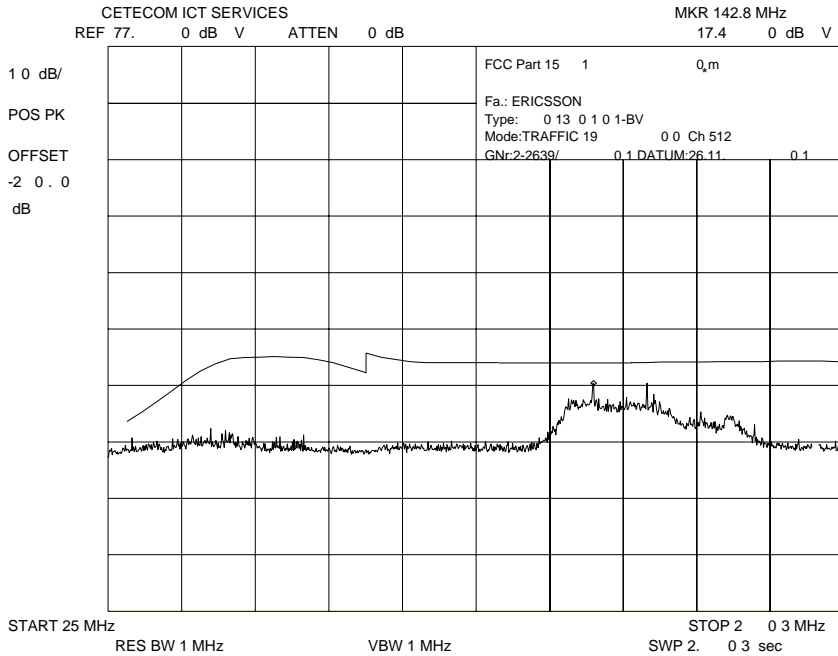



REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Channel 512 (up to 1 GHz)

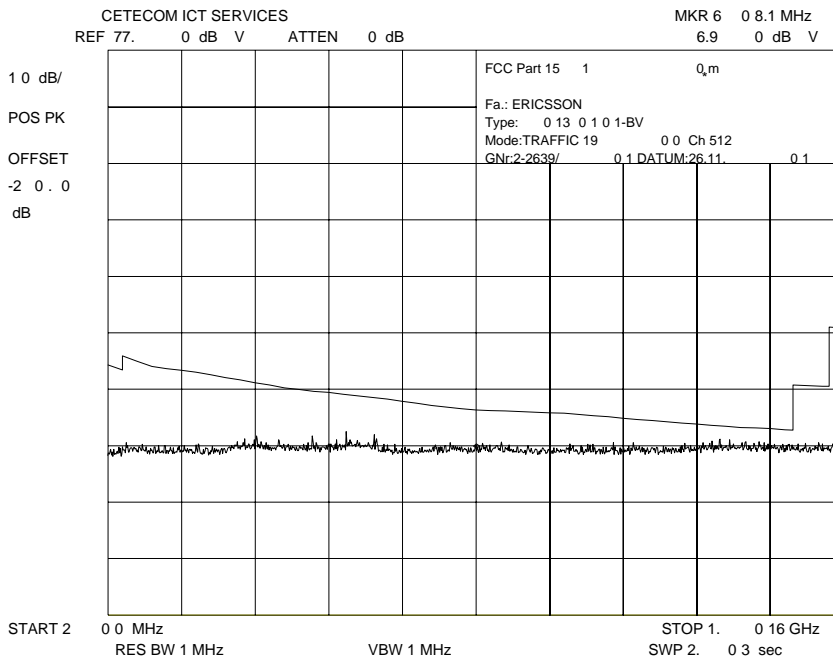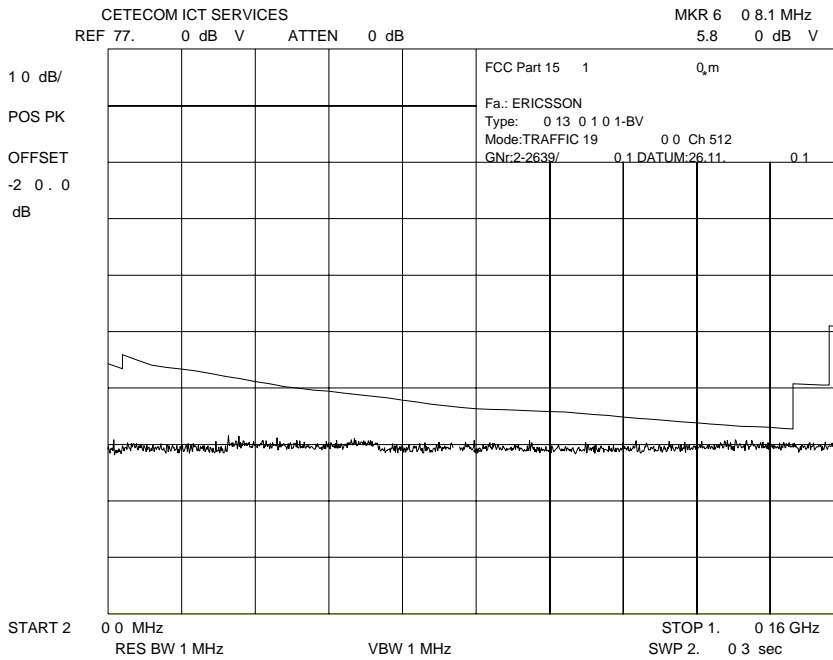



REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Channel 512 : 1 – 12 GHz (Indoor antenna)

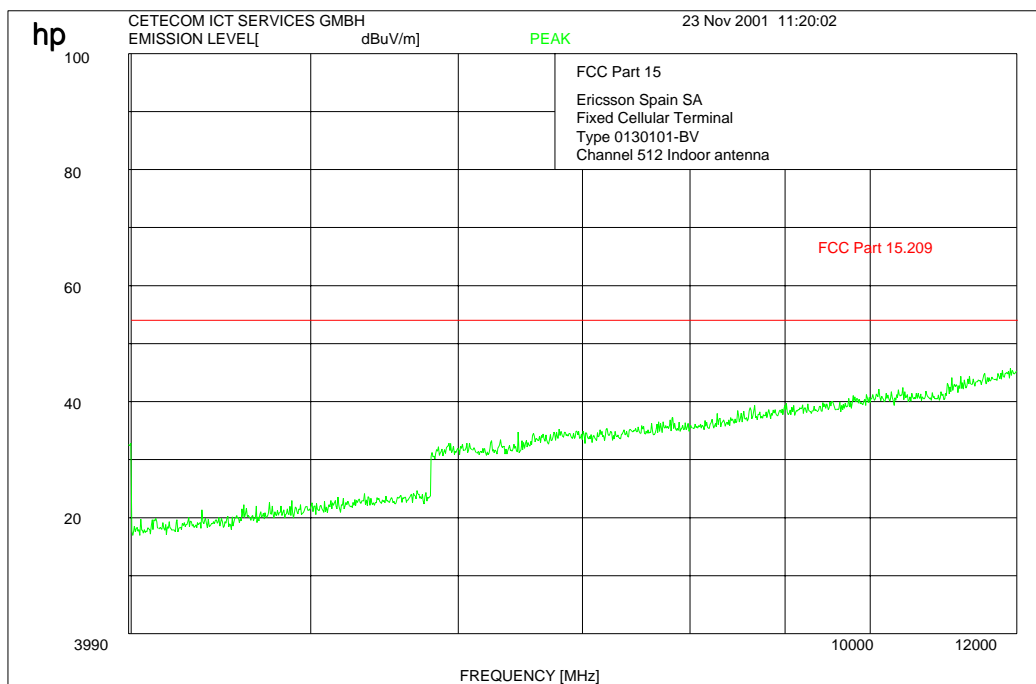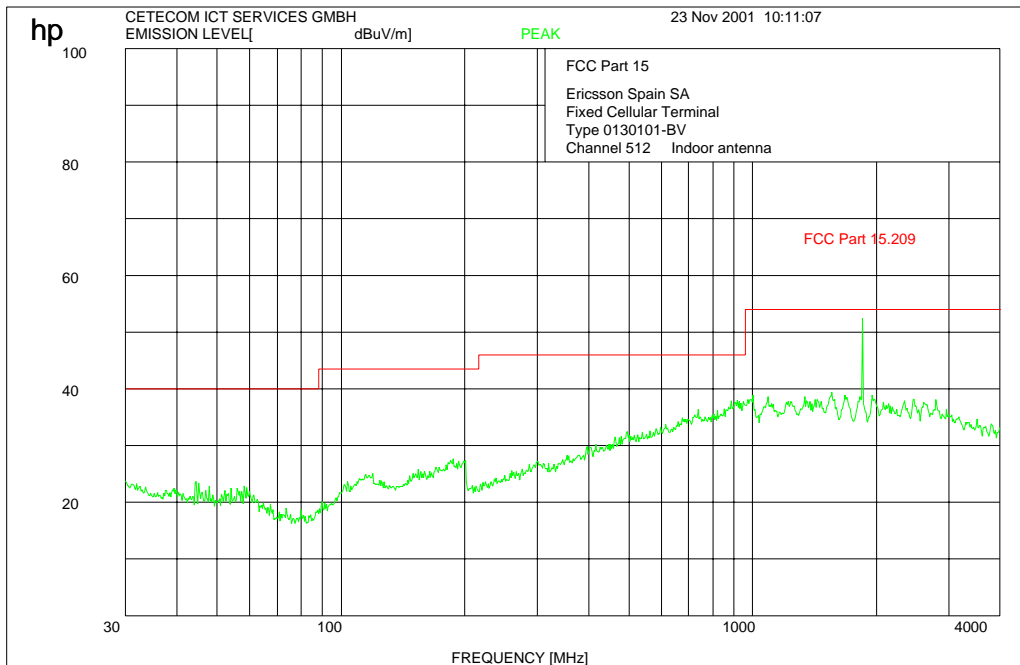

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 512 : 1 – 12 GHz (Outdoor antenna)

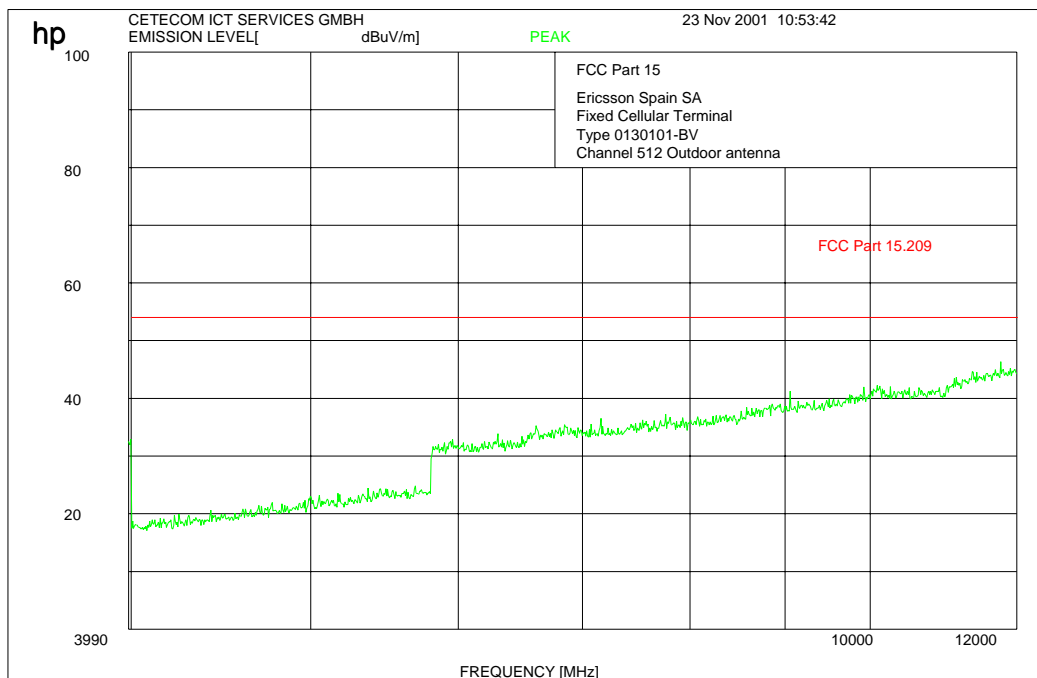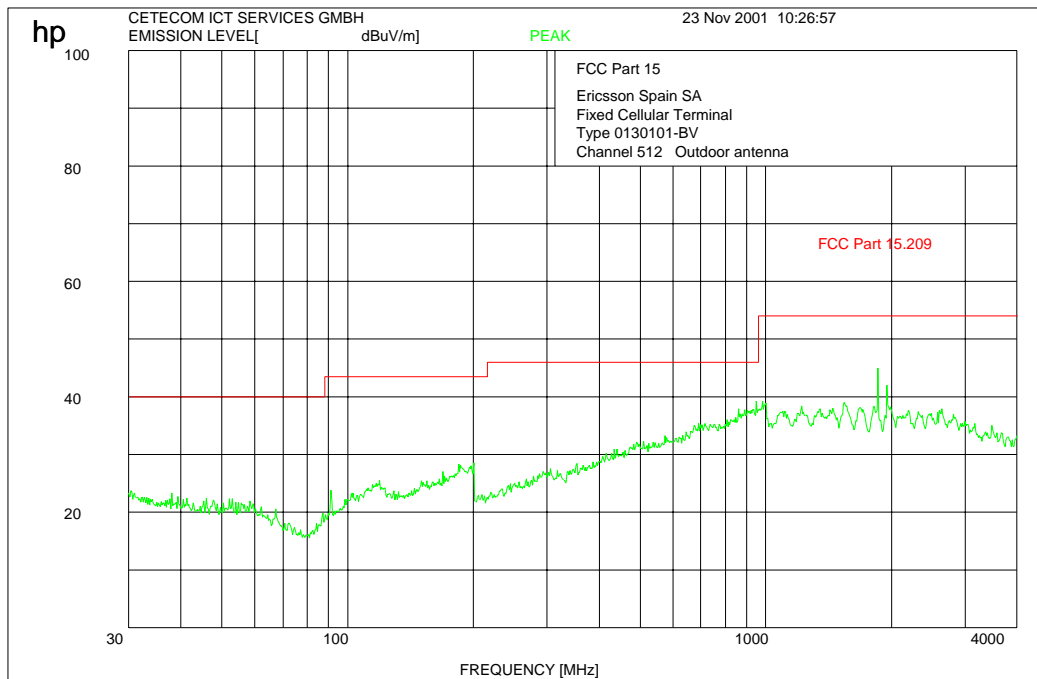


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 512 / 662 / 810 : 12 – 18 GHz Indoor antenna
This plot is valid for all three channels



Ref Lvl
87 dBμV

RBW	1 MHz	RF Att	10 dB
VBW	1 MHz	Unit	dBμV
SWT	34 ms		

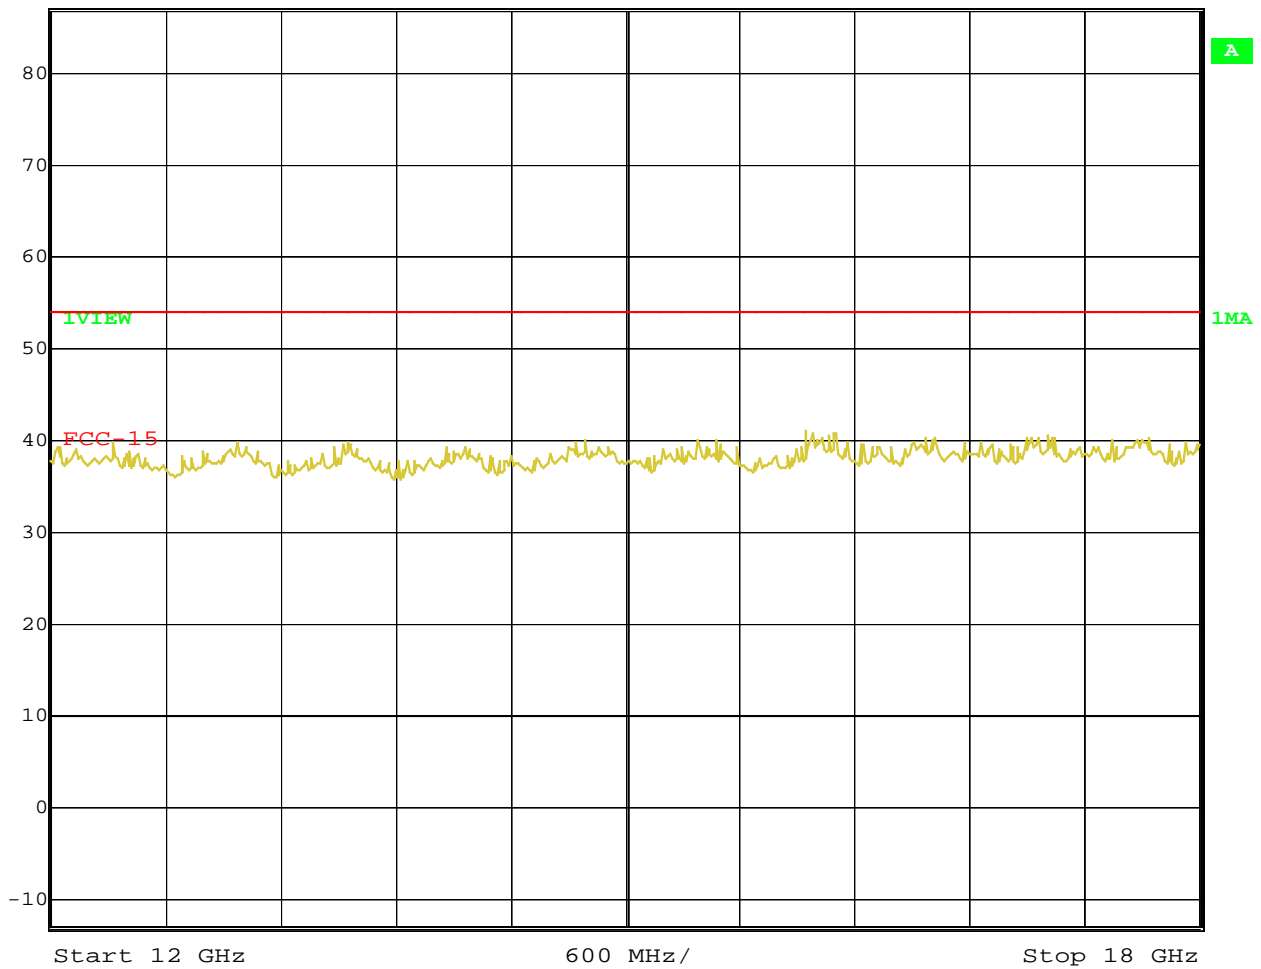


Date: 23.NOV.2001 10:58:56

Channel 512 / 662 / 810 : 18 – 25 GHz Indoor antenna
This plot is valid for all three channels



Ref Lvl
87 dB μ V

RBW	1 MHz	RF Att	10 dB
VBW	1 MHz		
SWT	40 ms	Unit	dB μ V

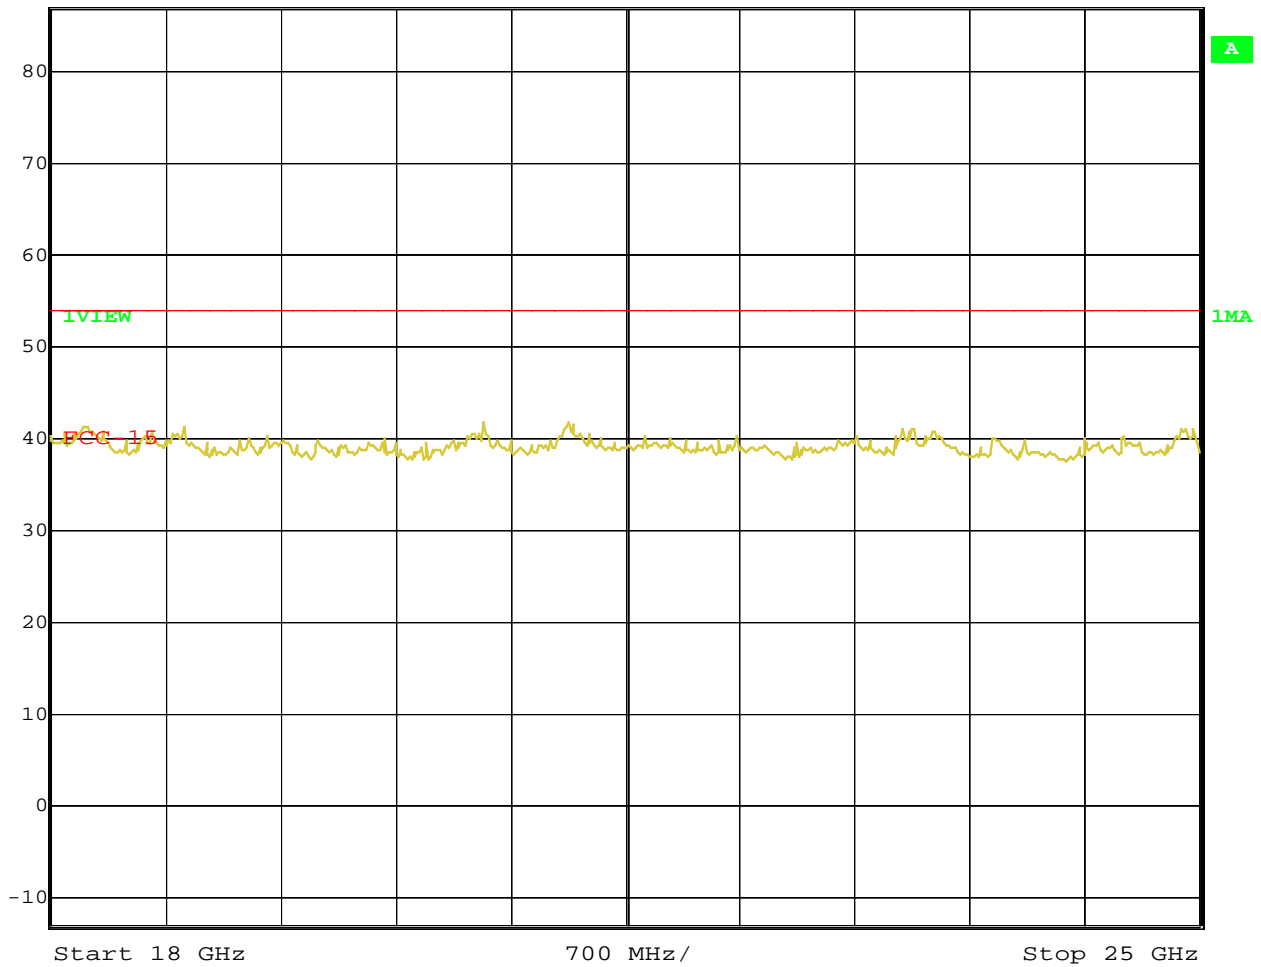


Date: 23.NOV.2001 11:00:17

Channel 512 / 662 / 810 : 12 – 18 GHz Outdoor antenna
This plot is valid for all three channels



Ref Lvl
87 dB μ V

RBW	1 MHz	RF Att	10 dB
VBW	1 MHz		
SWT	34 ms	Unit	dB μ V

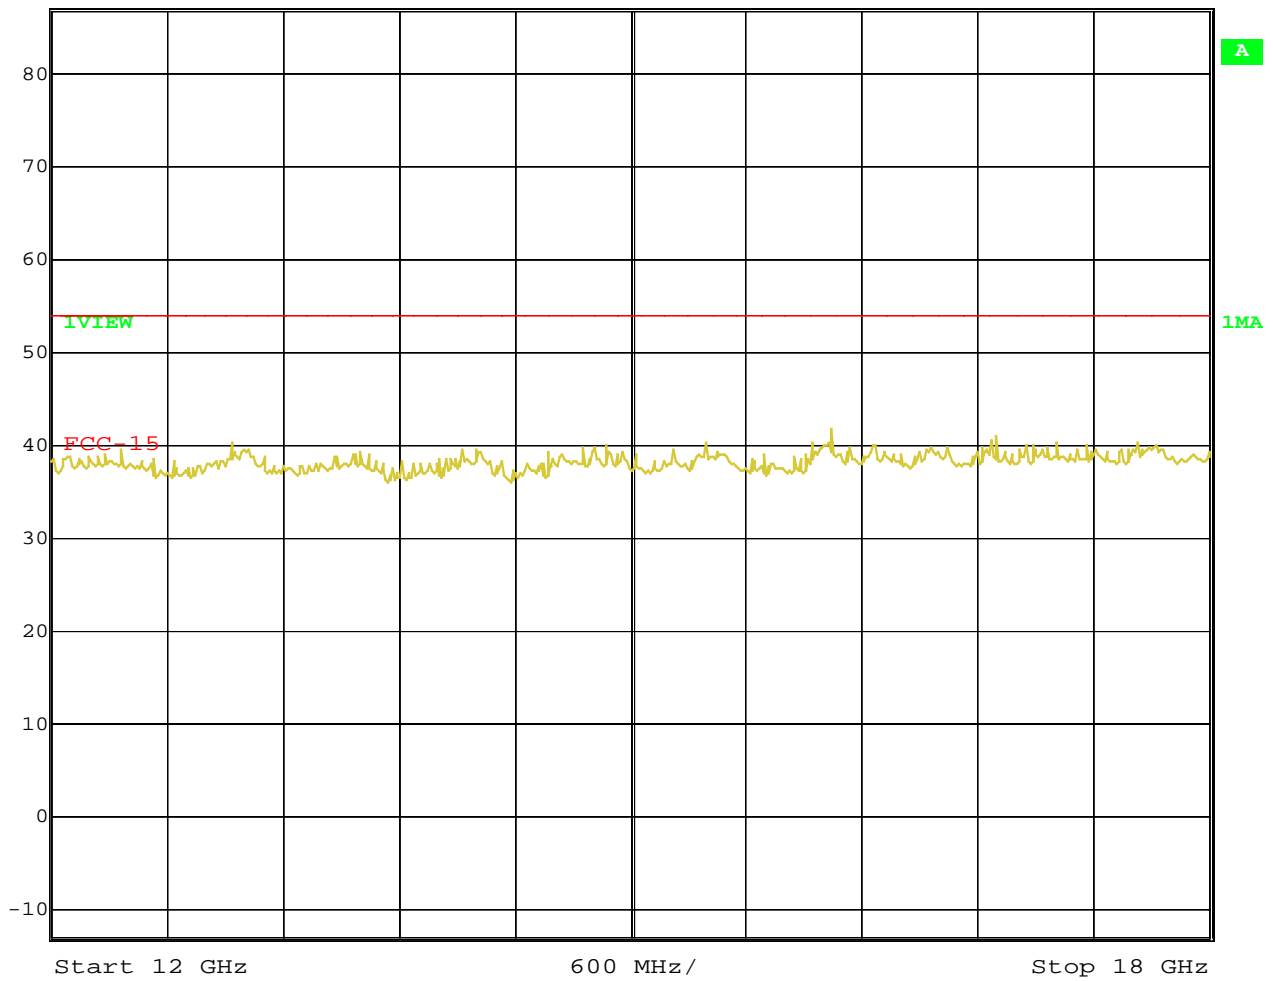


Date: 23.NOV.2001 11:03:03

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)



Channel 512 / 662 / 810 : 18 – 25 GHz Outdoor antenna
This plot is valid for all three channels

	Ref Lvl	RBW	1 MHz	RF Att	10 dB
	87 dBμV	VBW	1 MHz	Unit	dBμV
		SWT	40 ms		

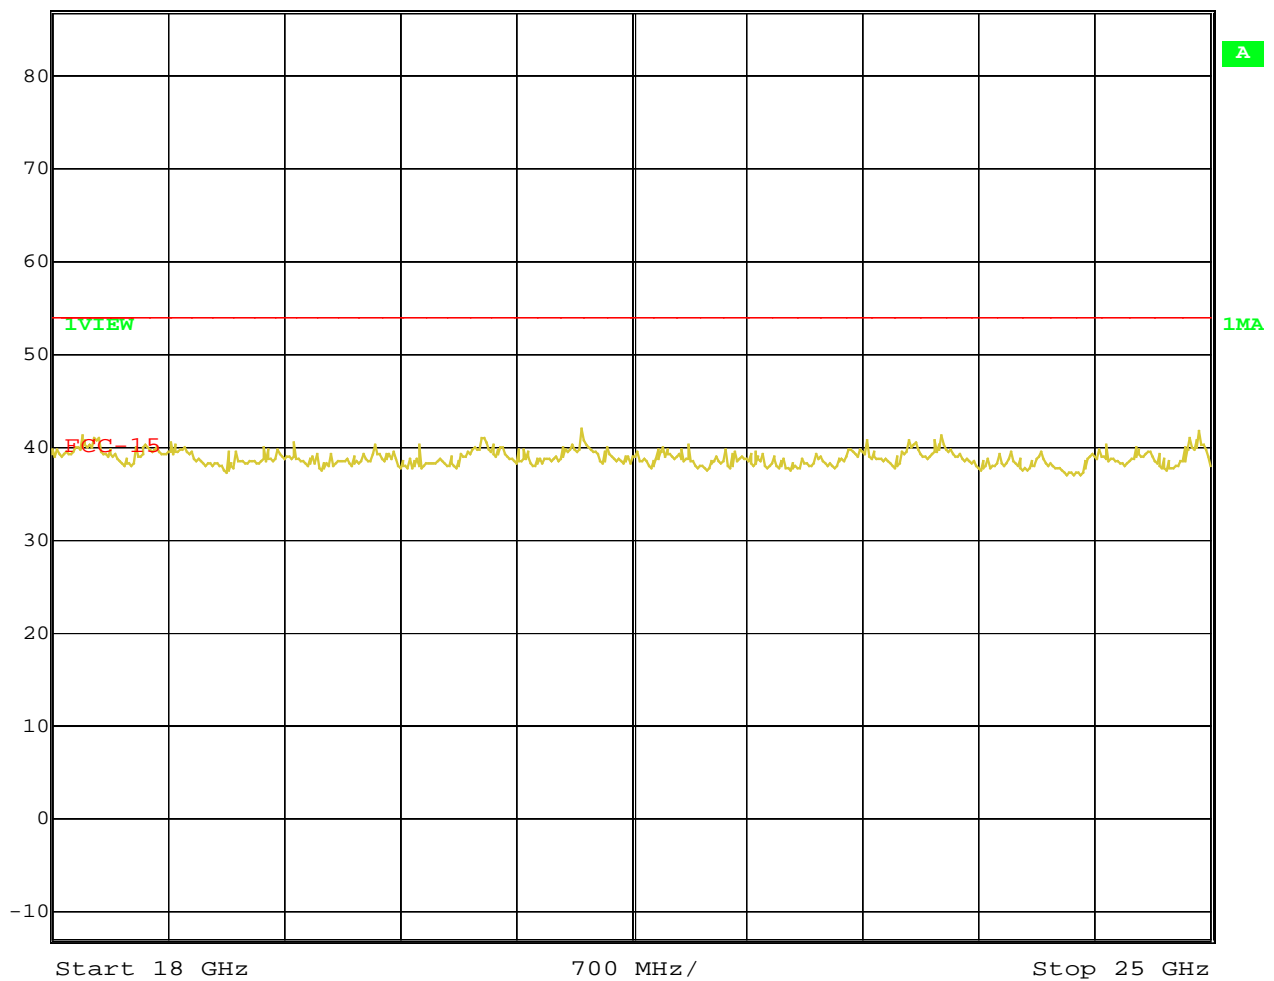



Date: 23.NOV.2001 11:02:14

Channel 662 (up to 200 MHz)

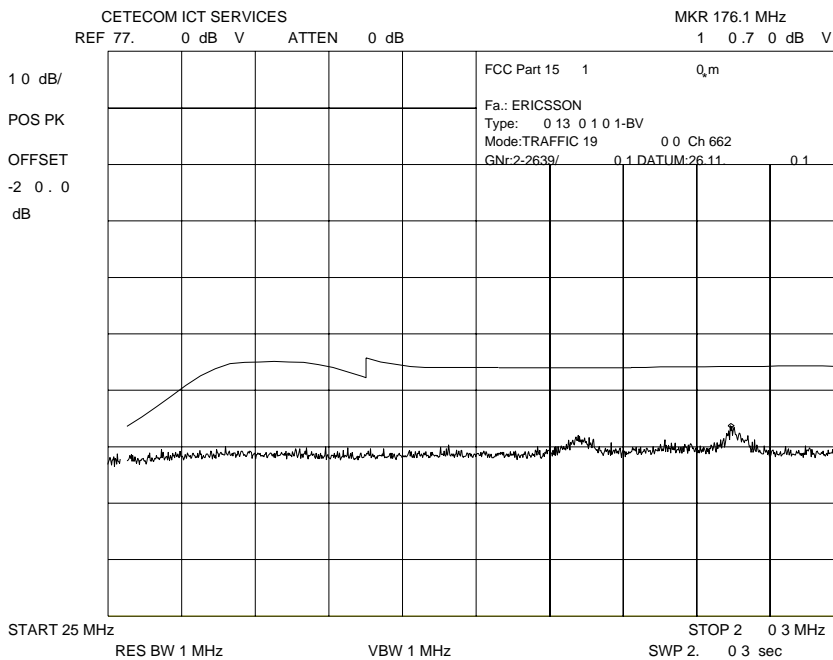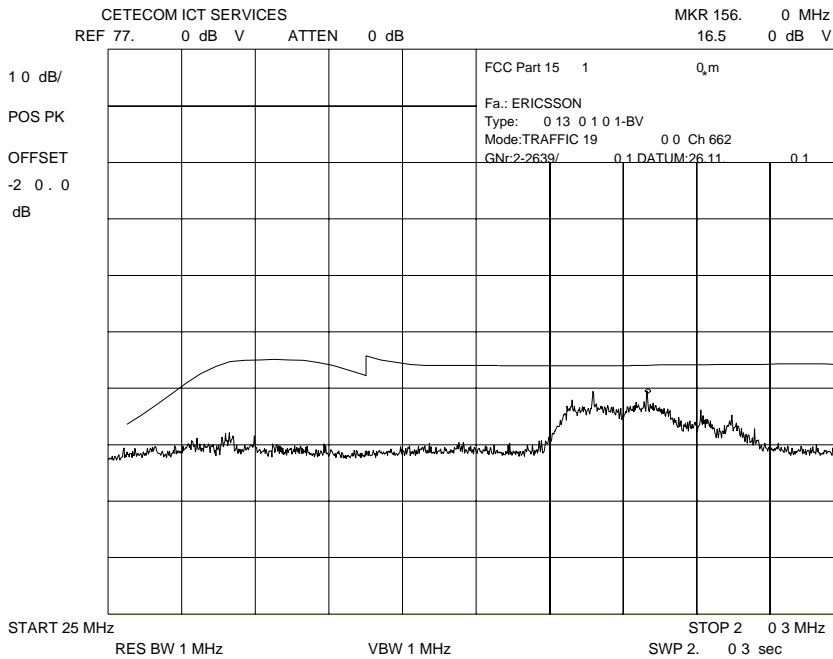



REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Channel 662 (up to 1 GHz)

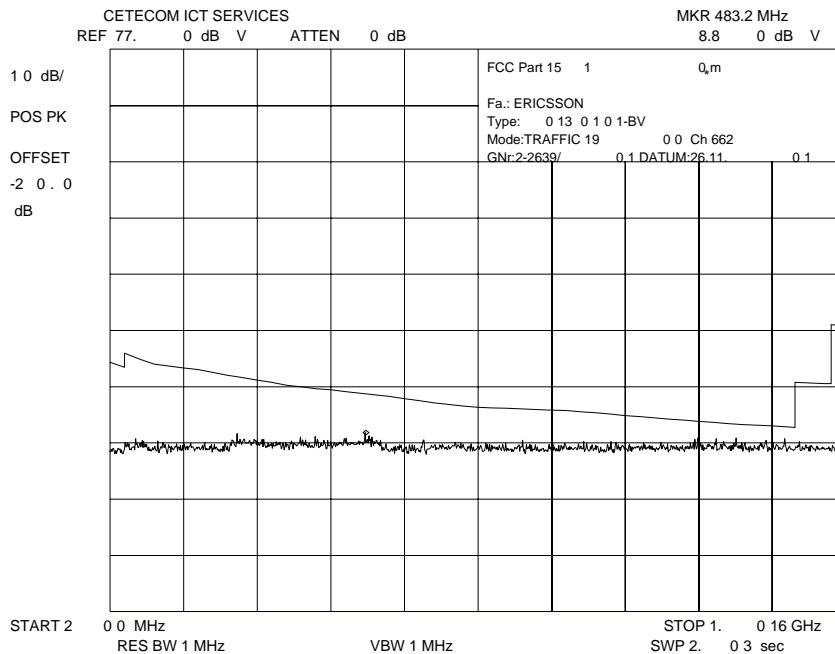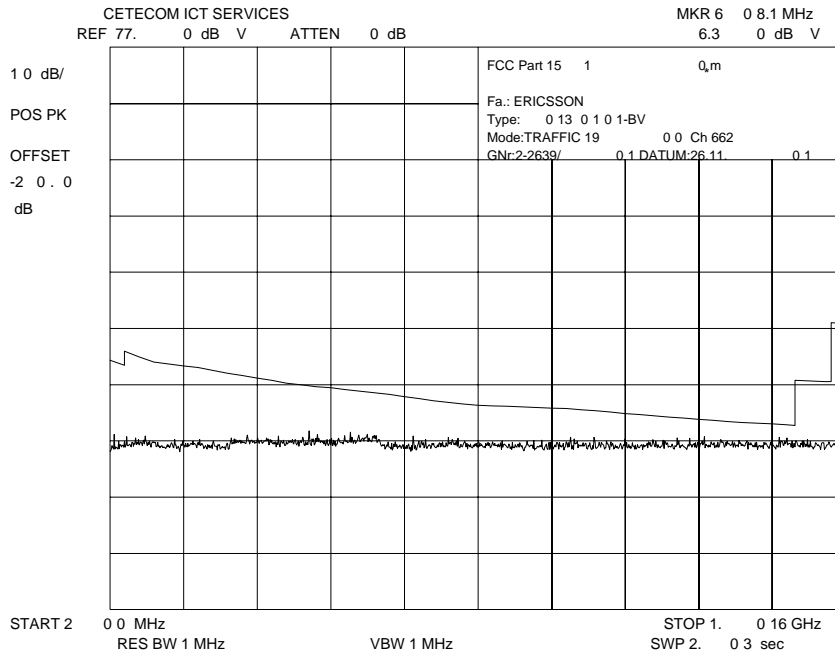



REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Channel 662 : 1 – 12 GHz (Indoor antenna)

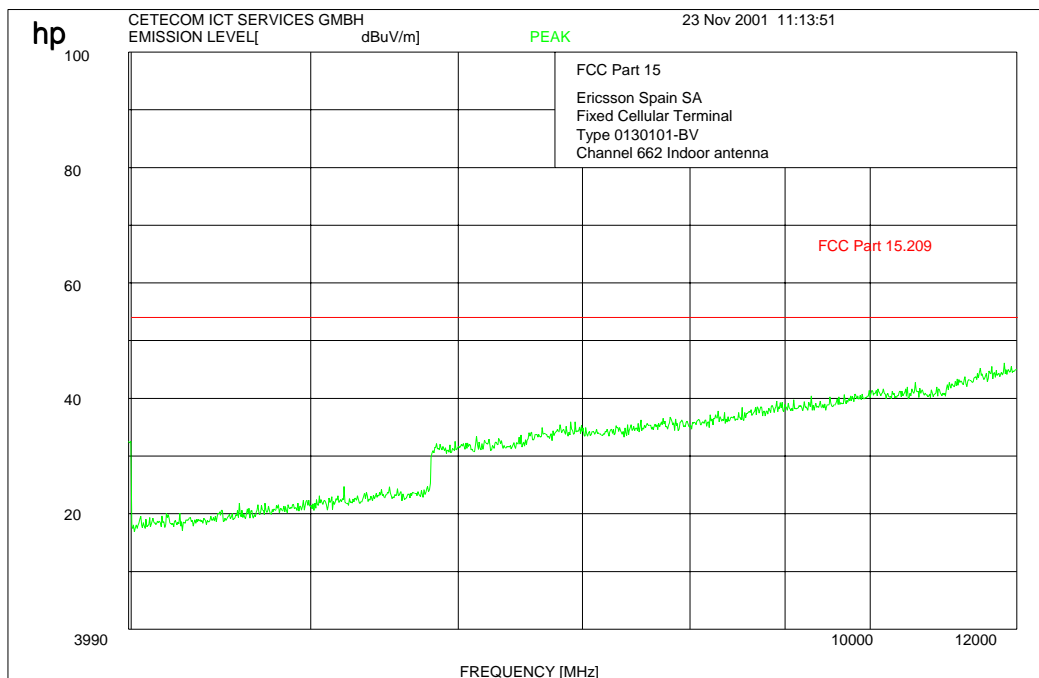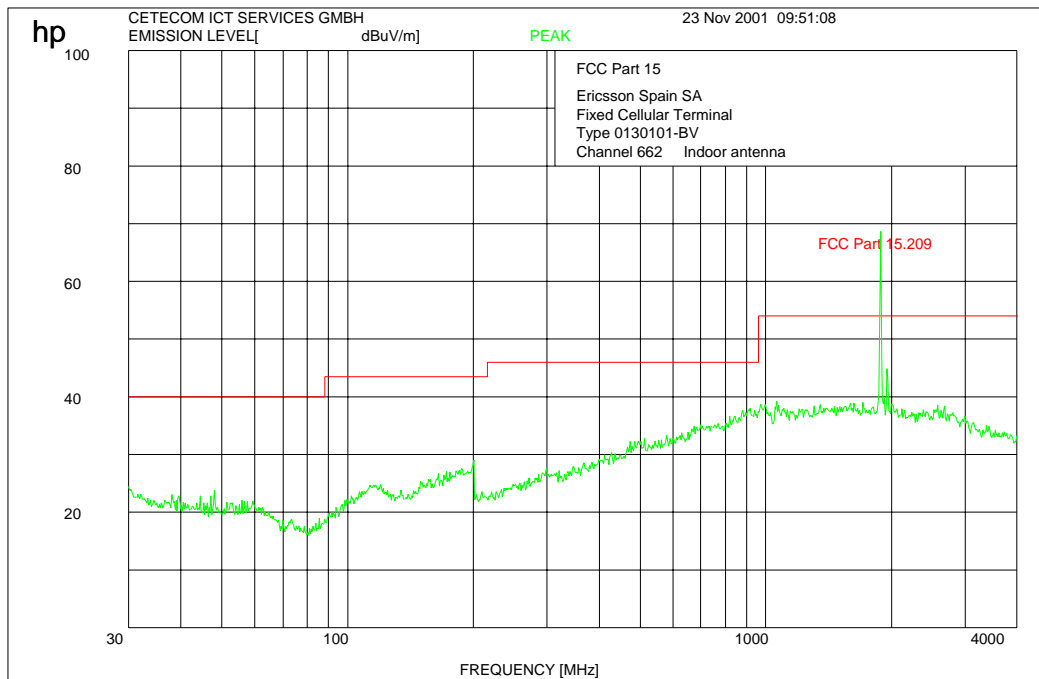



REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 662 : 1 – 12 GHz (Outdoor antenna)

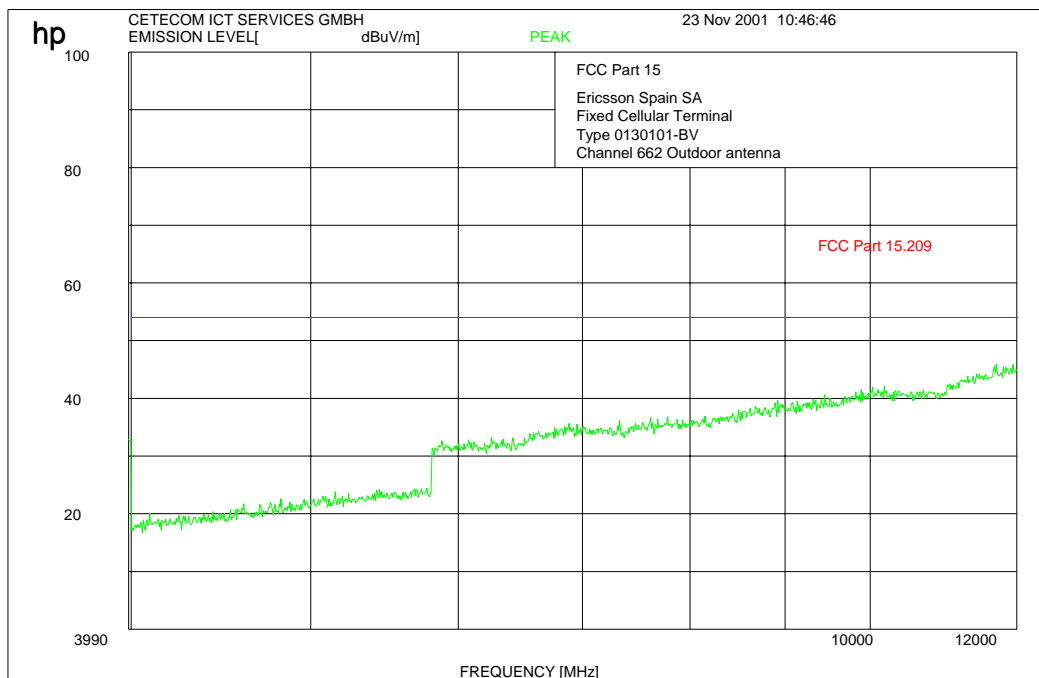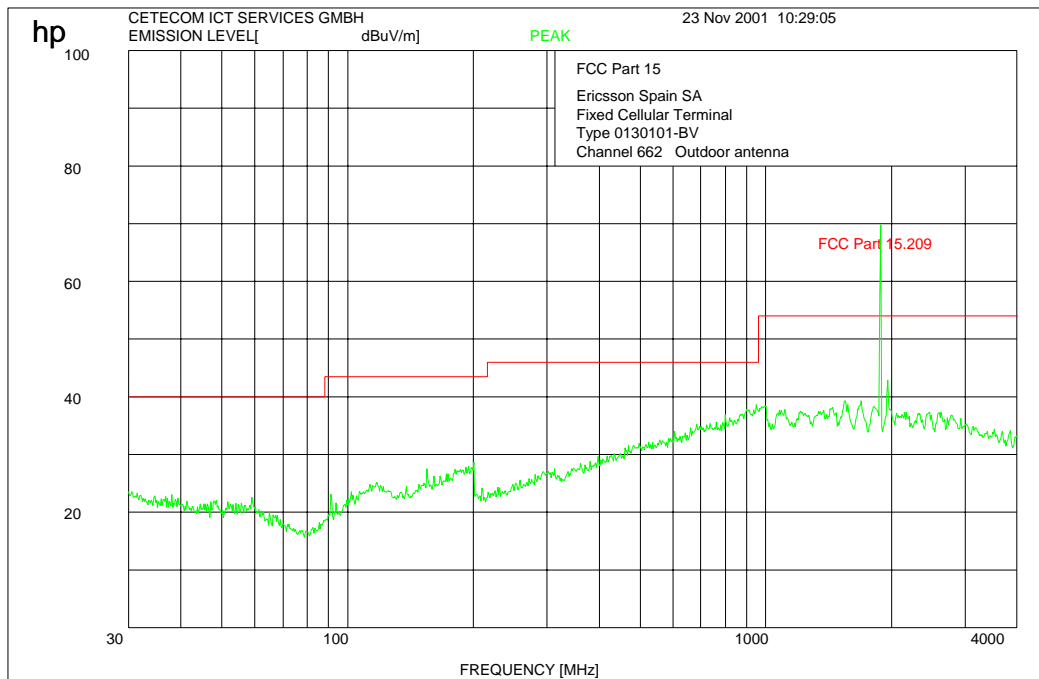



REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 810 up to 200 MHz

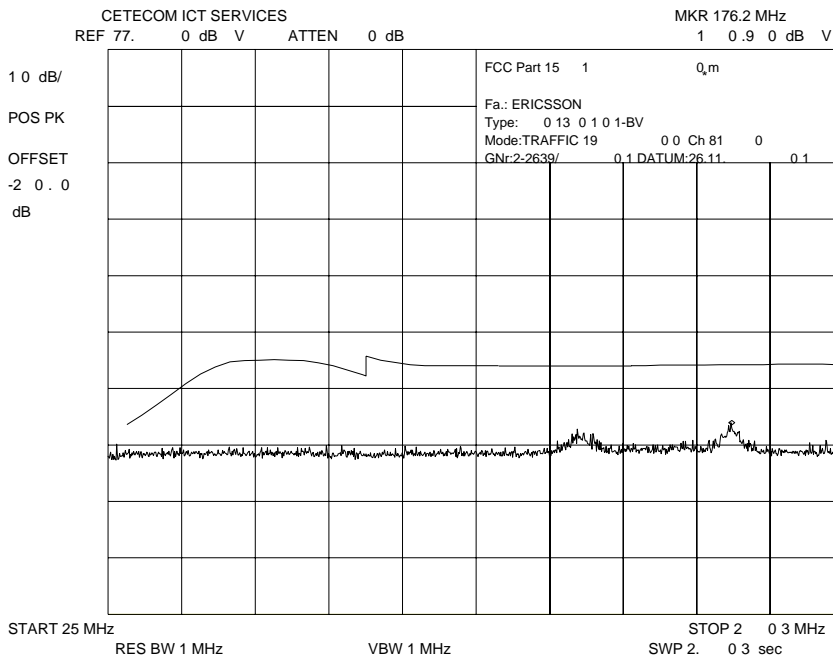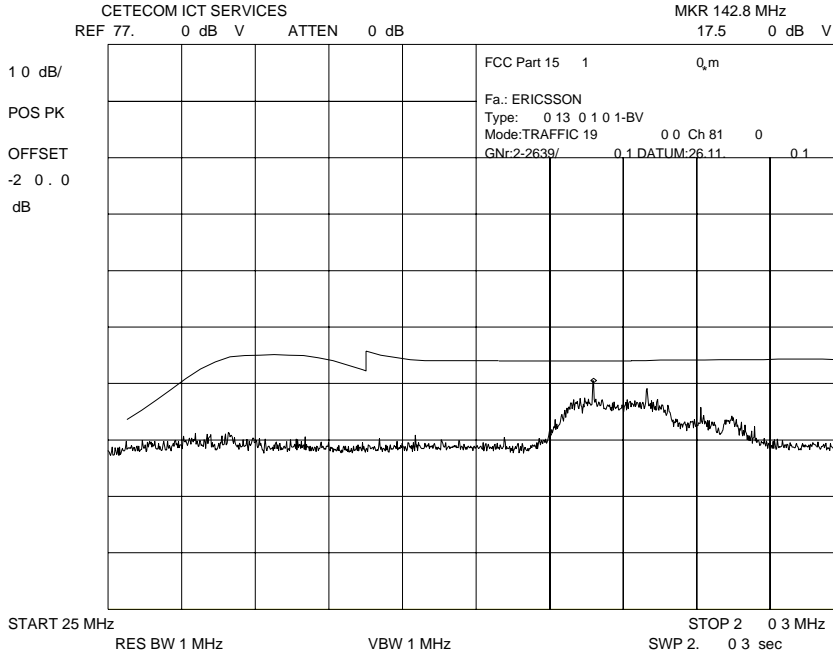



REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Channel 810 up to 1 GHz

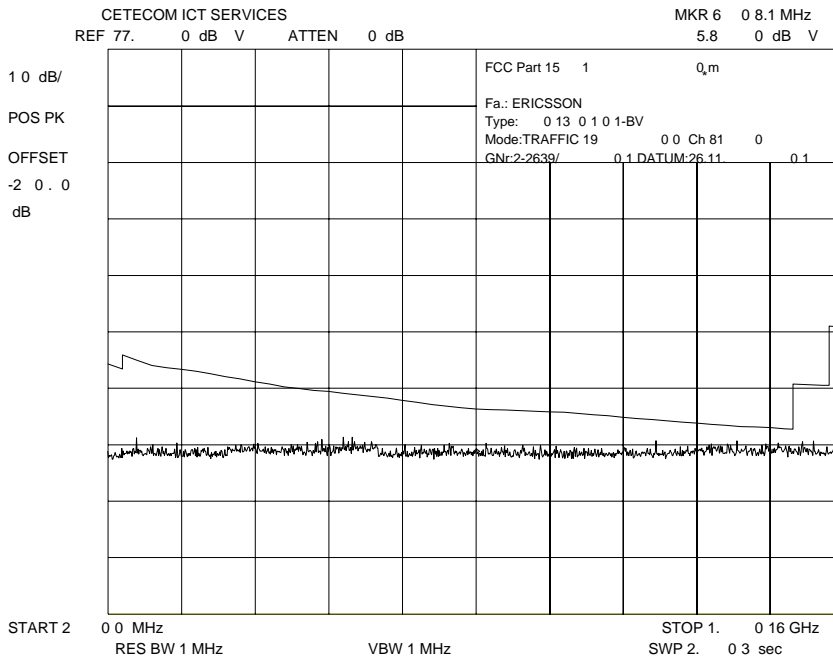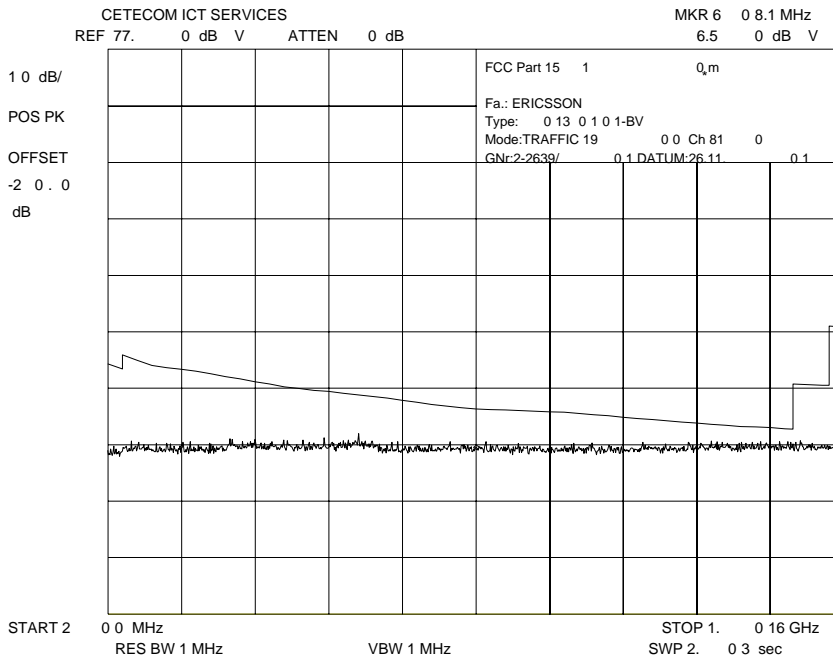



REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Channel 810 : 1 –12 GHz (Indoor antenna)

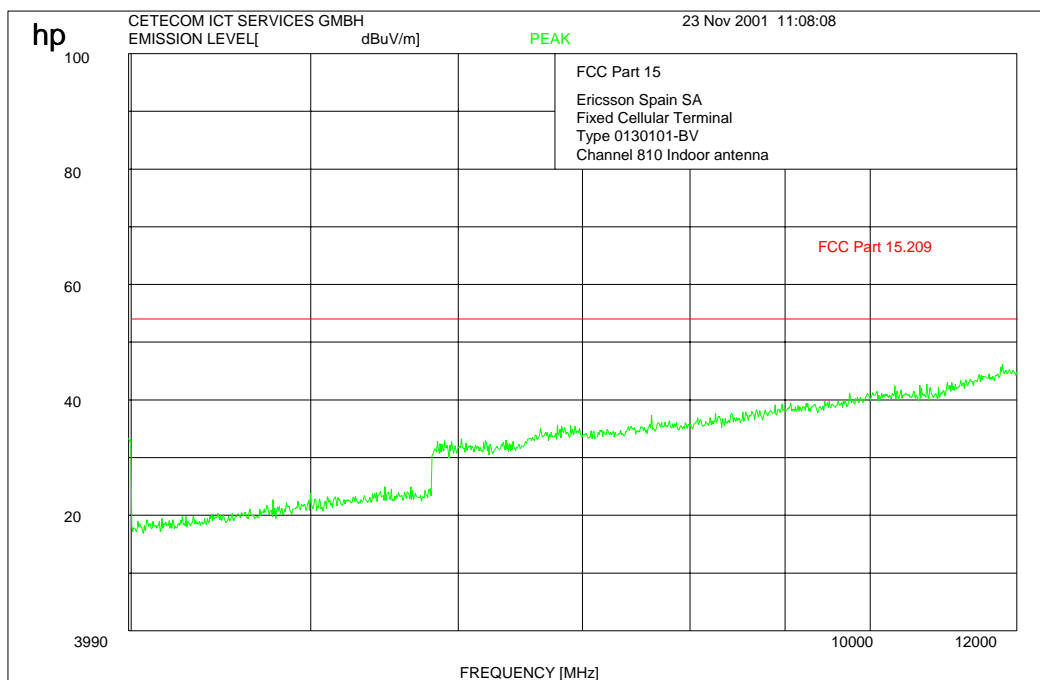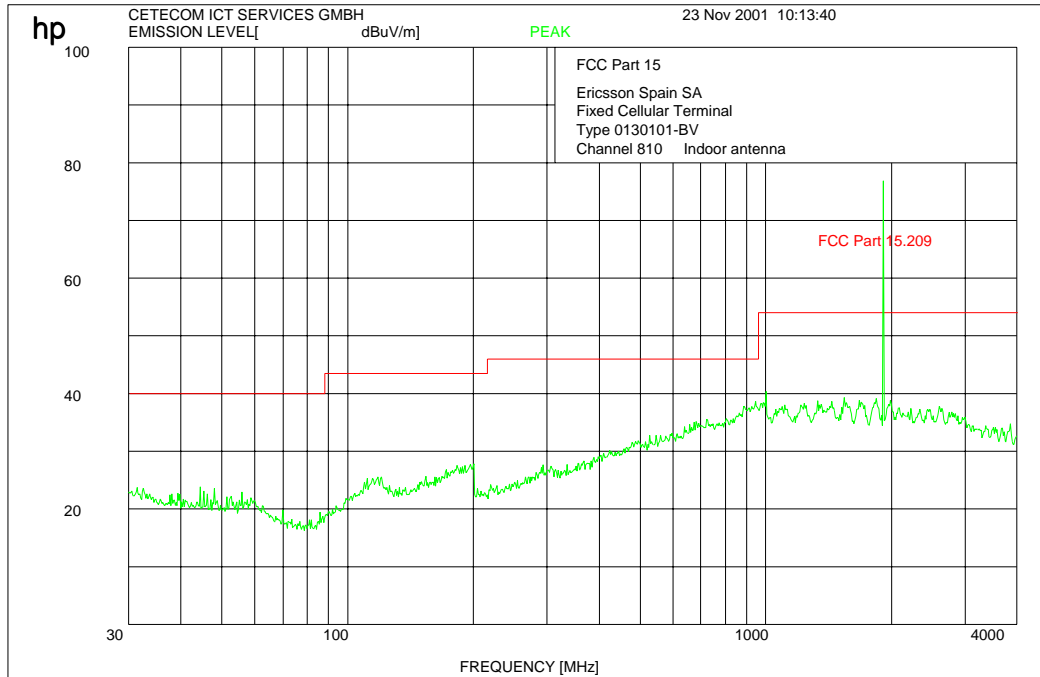



REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 810 : 1 – 12 GHz (Outdoor antenna)

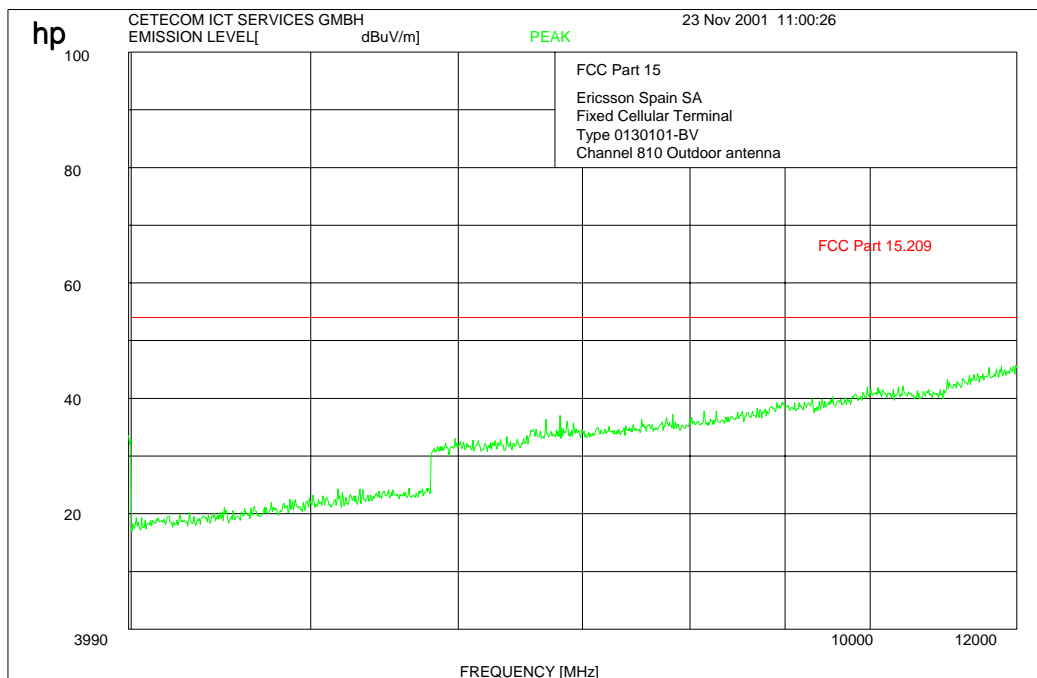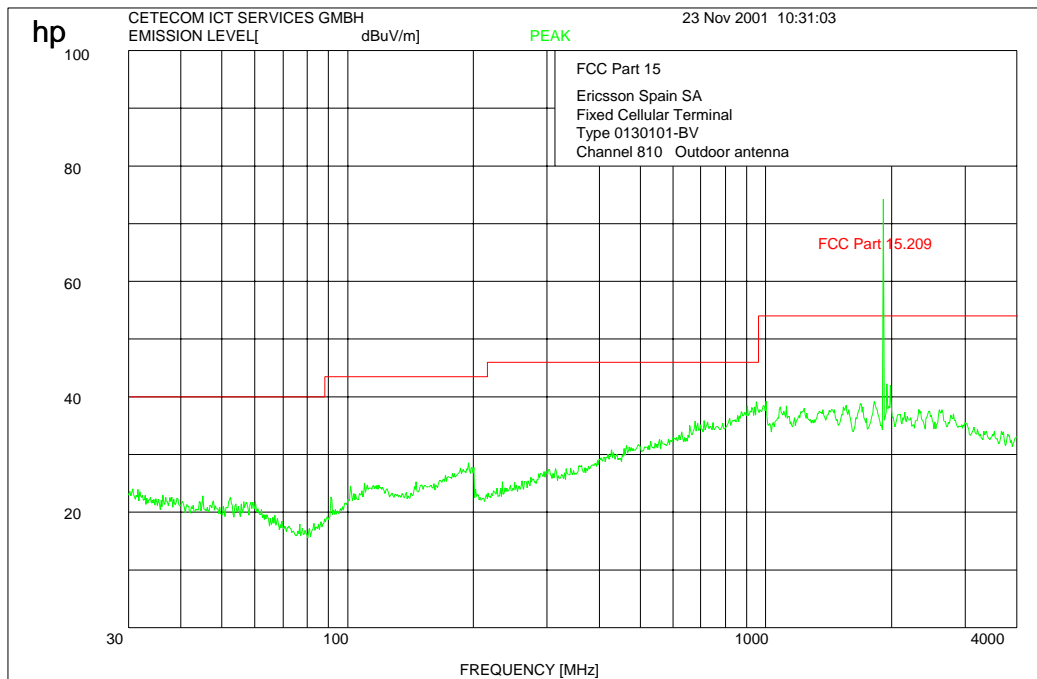



REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 661 (this is valid for all 3 channels and up to 1 GHz) Idle-Mode

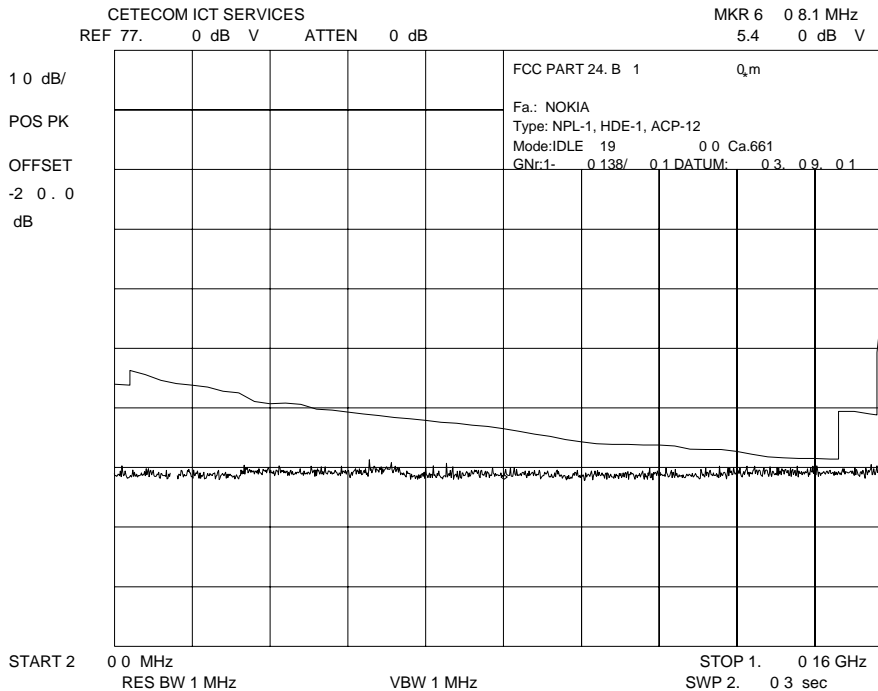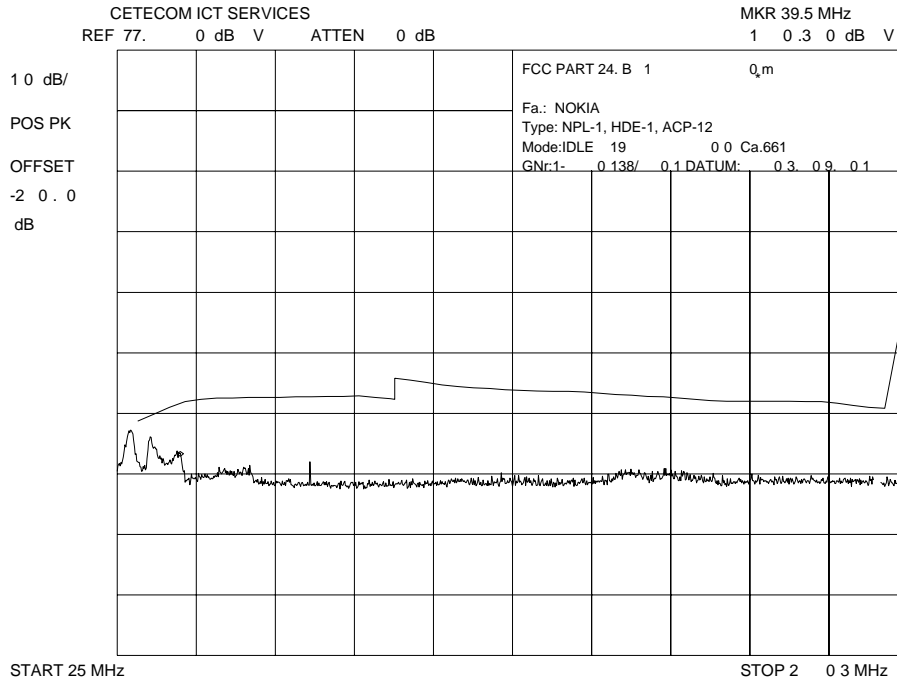



REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 661 (this is valid for all 3 channels and up to 12 GHz) (Indoor antenna) Idle-Mode

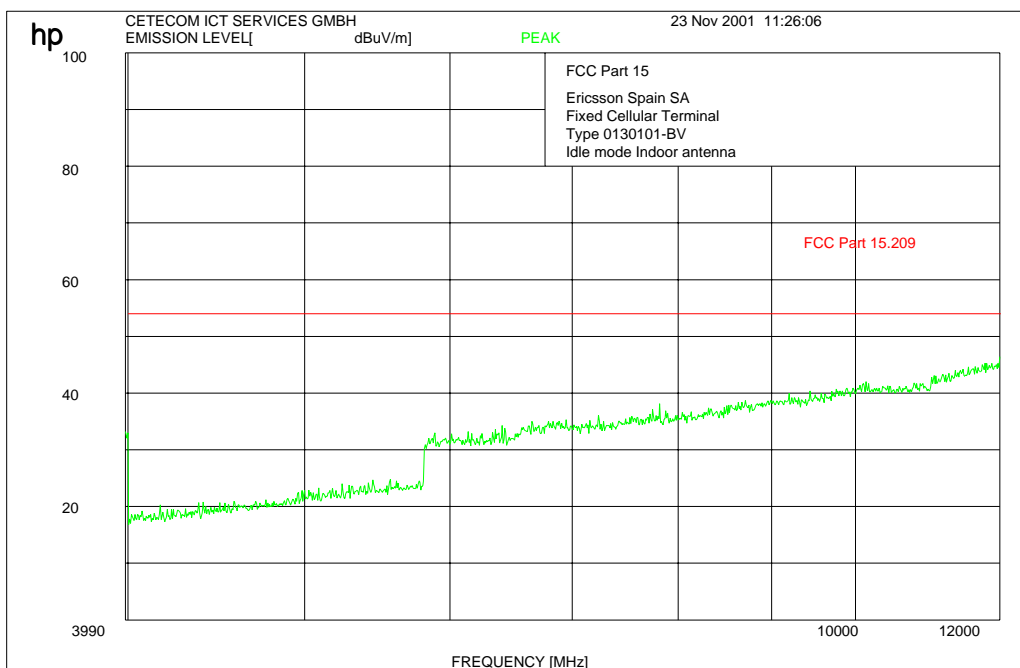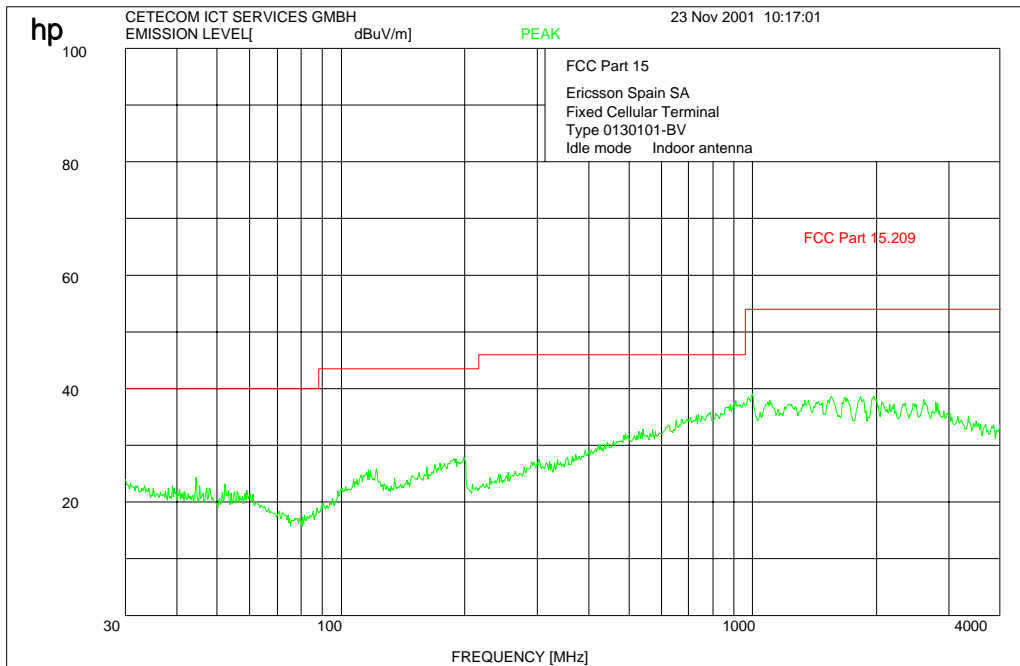

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

**Channel 661 (this is valid for all 3 channels and up to 12 GHz) (Outdoor antenna)
Idle-Mode**

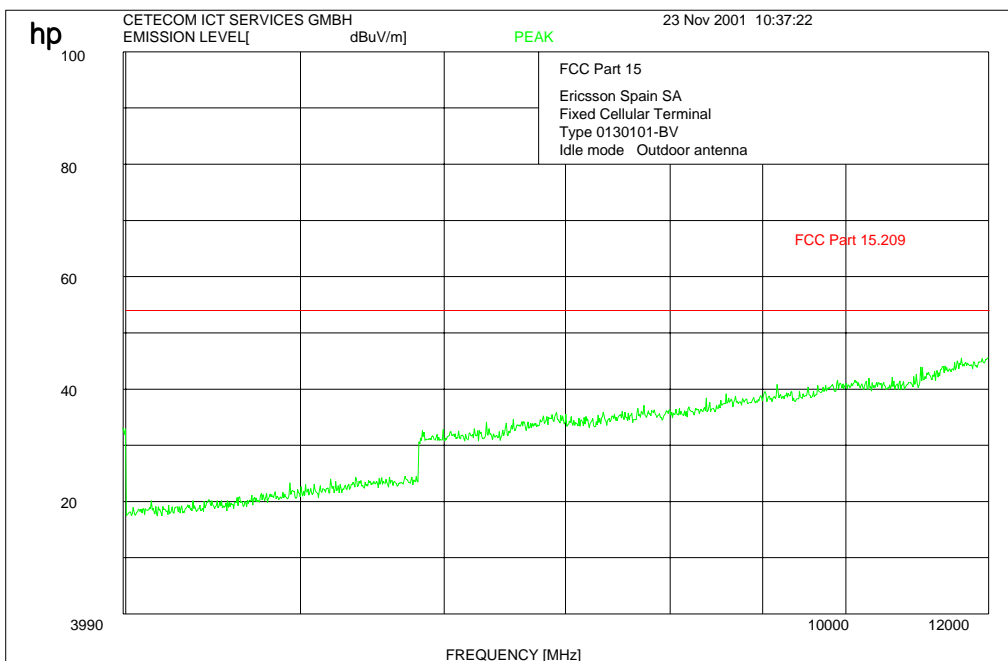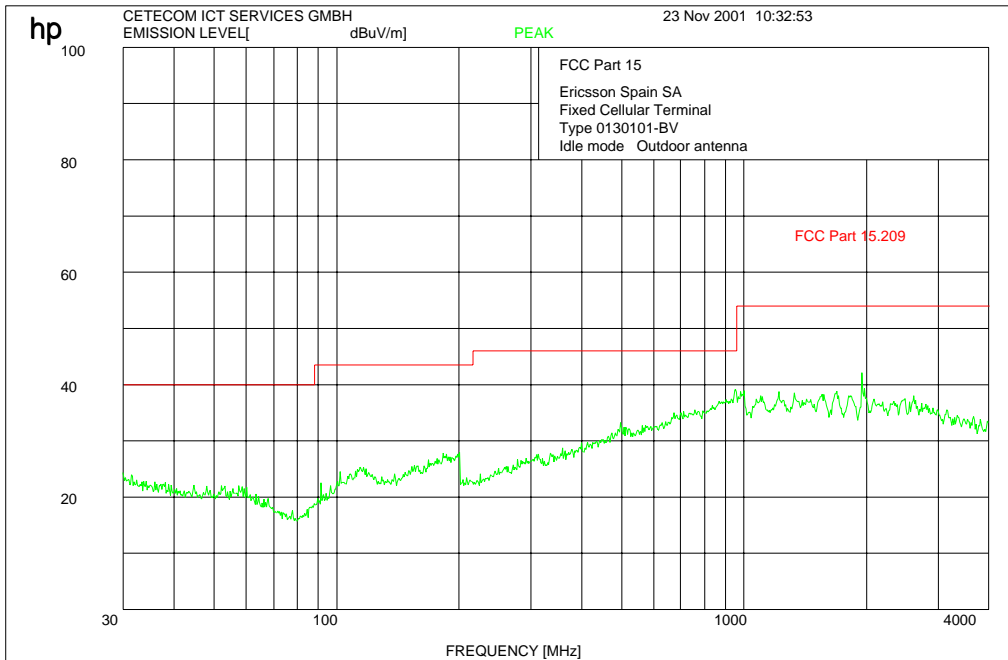


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

**Channel 661 (this is valid for all 3 channels, In- and Outdoor antenna, 12 to 18 GHz)
Idle-Mode**



Ref Lvl
87 dB μ V

RBW	1 MHz	RF Att	10 dB
VBW	1 MHz		
SWT	34 ms	Unit	dB μ V

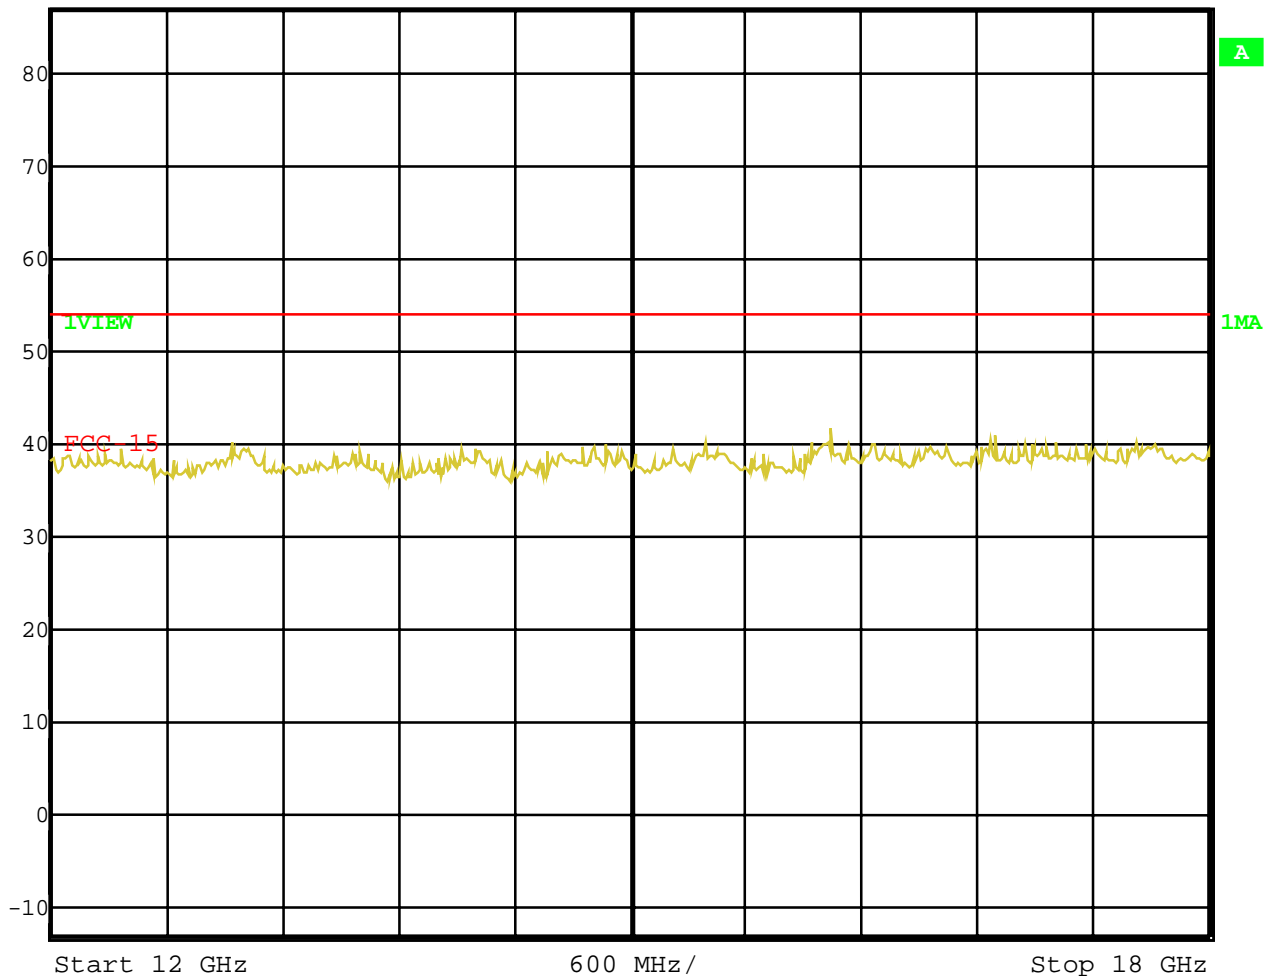

Date: 23.NOV.2001 11:07:03


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

**Channel 661 (this is valid for all 3 channels, In- and Outdoor antenna ,18 to 25 GHz)
Idle-Mode**



Ref Lvl
87 dB μ V

RBW	1 MHz	RF Att	10 dB
VBW	1 MHz		
SWT	40 ms	Unit	dB μ V

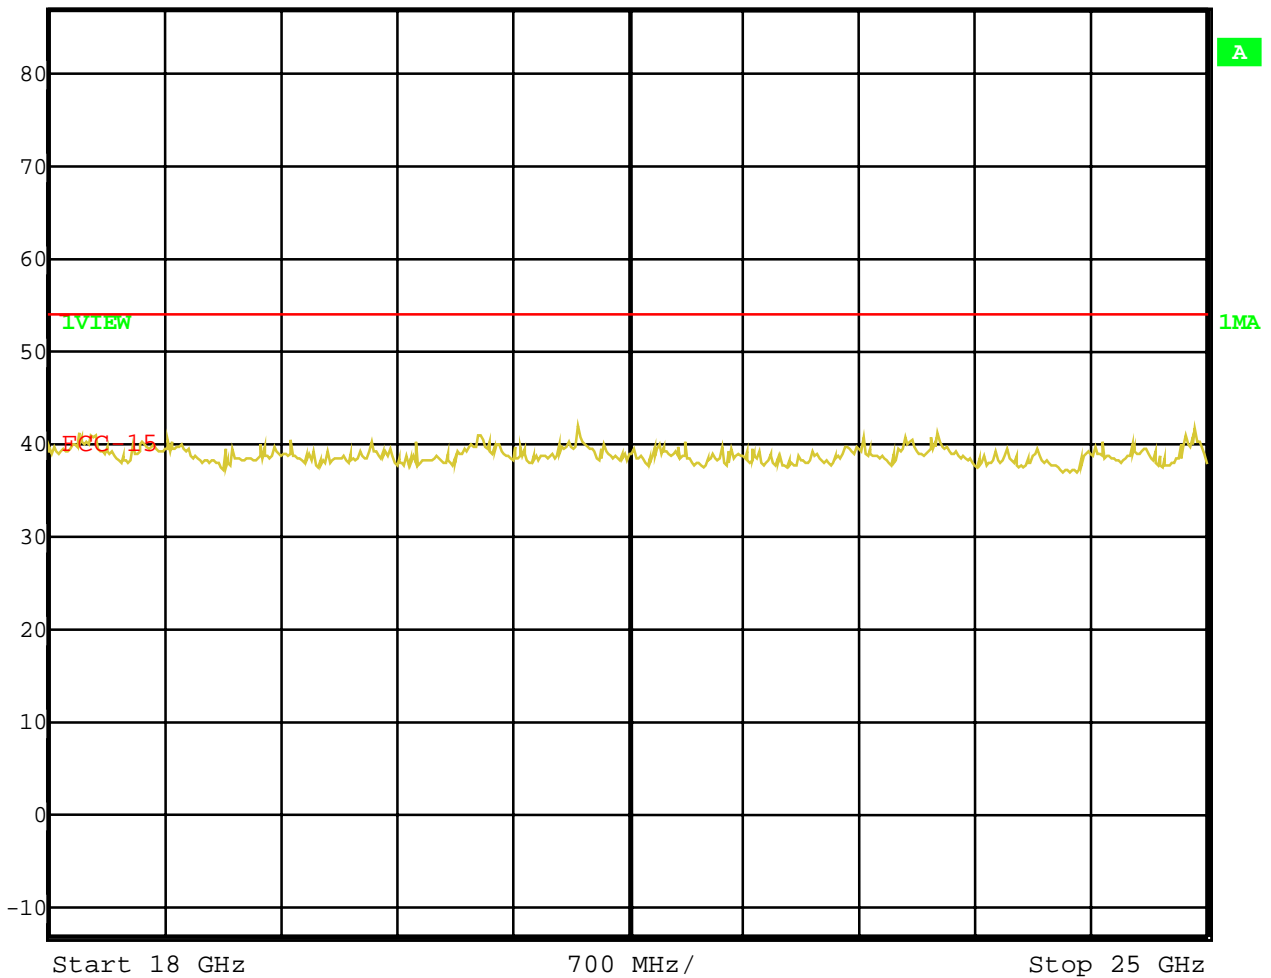

Date: 23.NOV.2001 11:08:24

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Conducted Spurious Emissions

Measurement Procedure:

The following steps outline the procedure used to measure the conducted emissions from the mobile station.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency.

For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 19.1 GHz, data taken from 10 MHz to 20 GHz.

2. Determine mobile station transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

USPCS Transmitter

Channel Frequency

512 1850.2 MHz

661 1880.0 MHz

810 1909.8 MHz

Measurement Limit:

Sec. 24.238 Emission Limits.

(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43+10\text{Log}(P)$ dB. For all power levels +30 dBm to 0


dBm, this becomes a constant specification limit of -13 dBm.

Measurements:

Channel: 512



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	30 dB
22.3 dBm	-38.01 dBm	VBW	1 MHz		
	1.84600000 GHz	SWT	5 ms	Unit	dBm

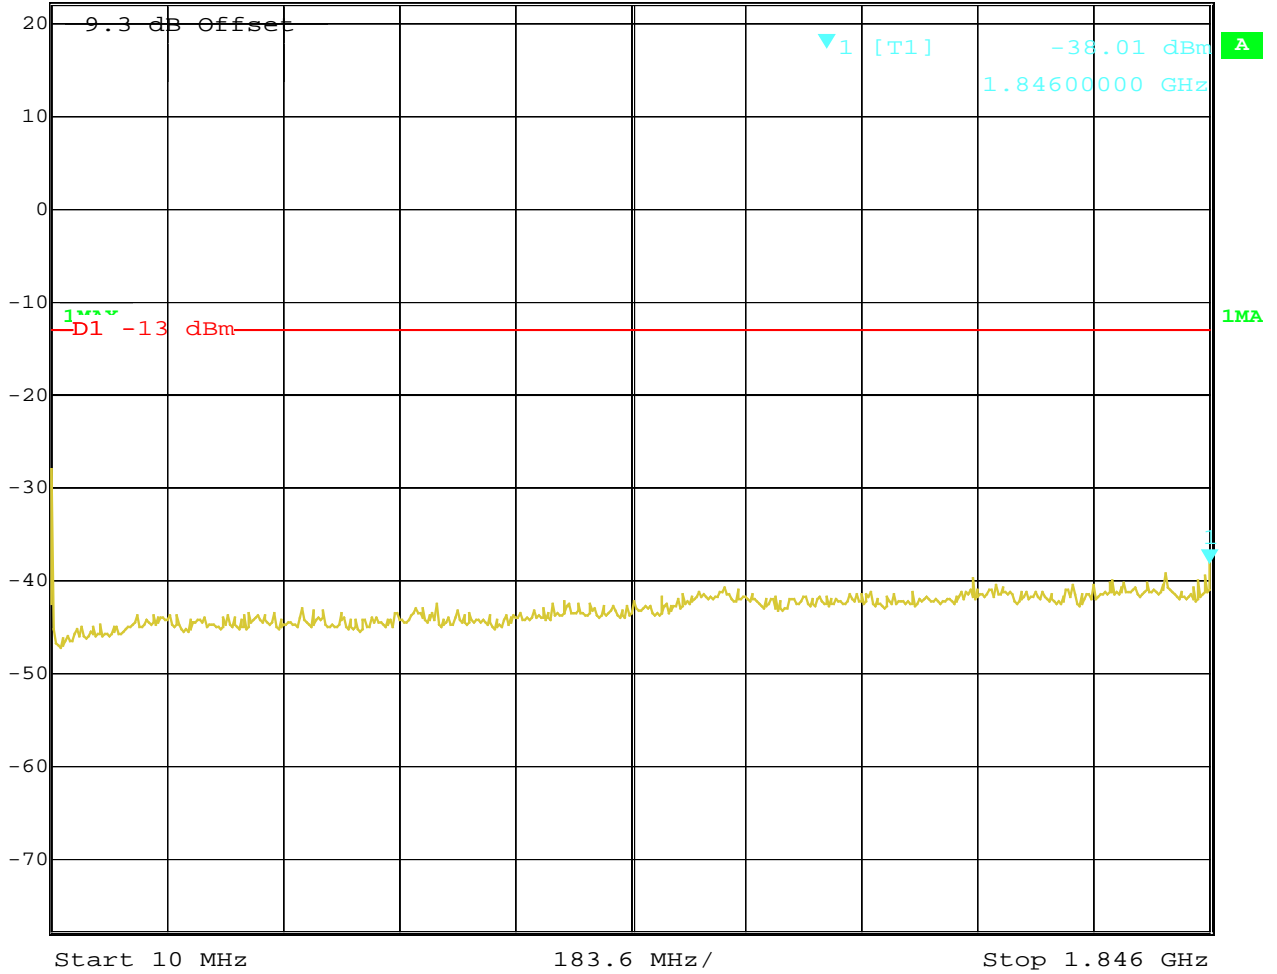


Date: 23.NOV.2001 11:17:47

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 512

	Marker 1 [T1]	RBW	3 kHz	RF Att	30 dB
	Ref Lvl	-17.42 dBm	VBW	3 kHz	
	22.3 dBm	1.85000000 GHz	SWT	840 ms	Unit

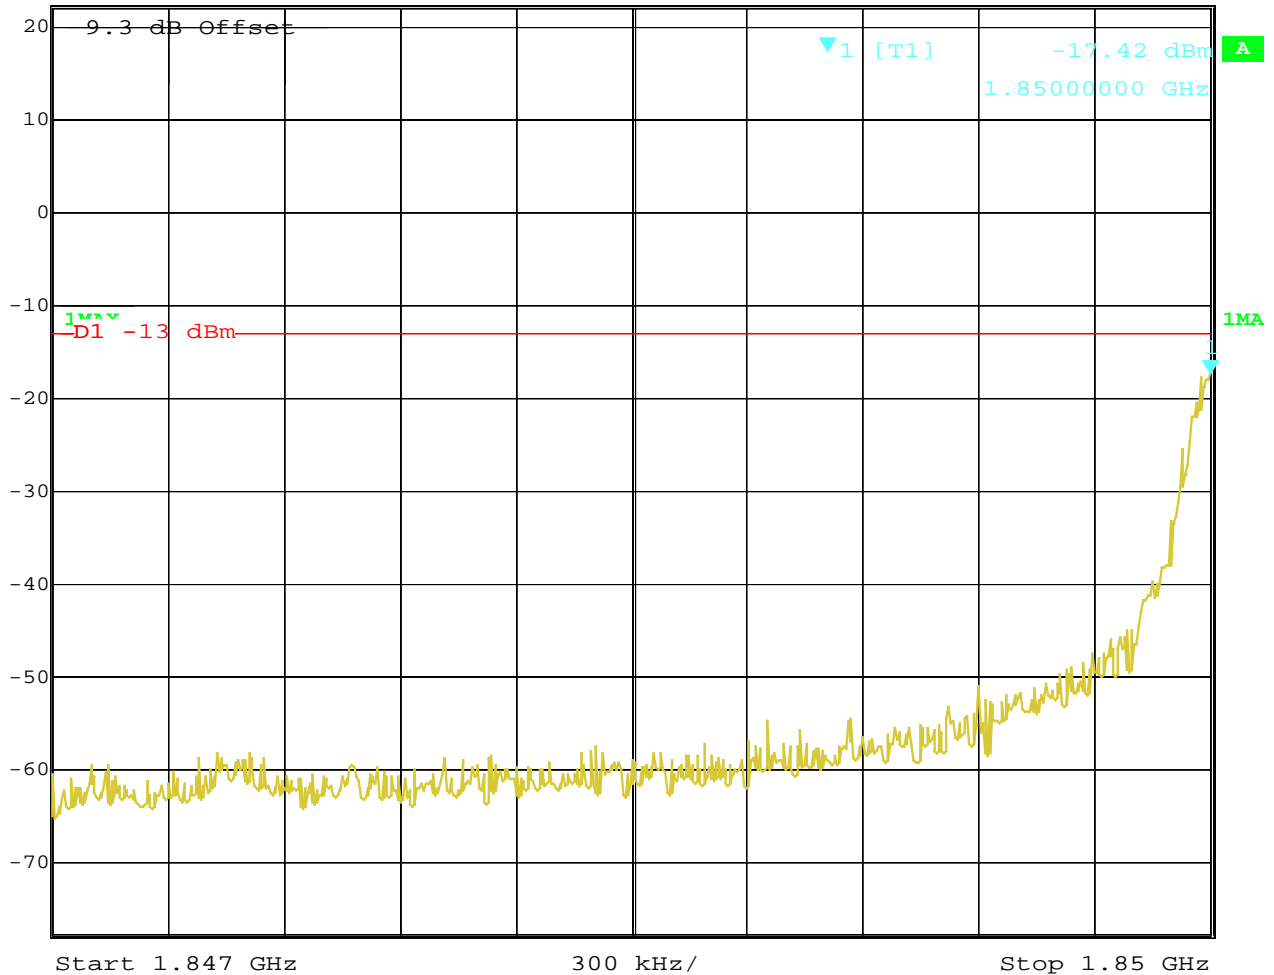

Date: 23.NOV.2001 11:19:33


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Channel 512



Ref Lvl
22.3 dBm

RBW	1 MHz	RF Att	30 dB
VBW	1 MHz		
SWT	135 ms	Unit	dBm

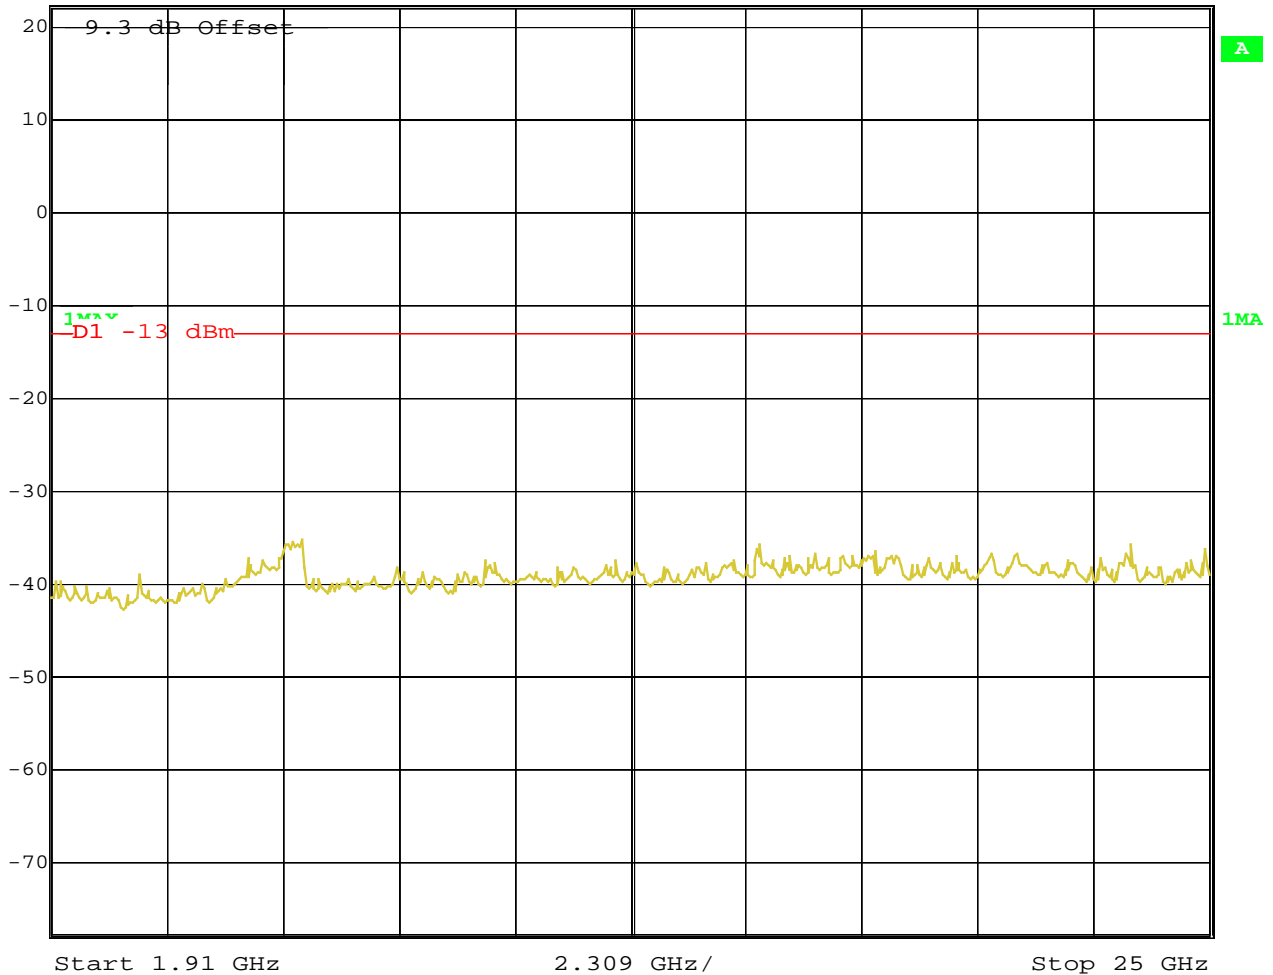

Date: 23.NOV.2001 11:21:14


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 661



Ref Lvl
22.3 dBm


RBW	1 MHz	RF Att	30 dB
VBW	1 MHz		
SWT	5 ms	Unit	dBm

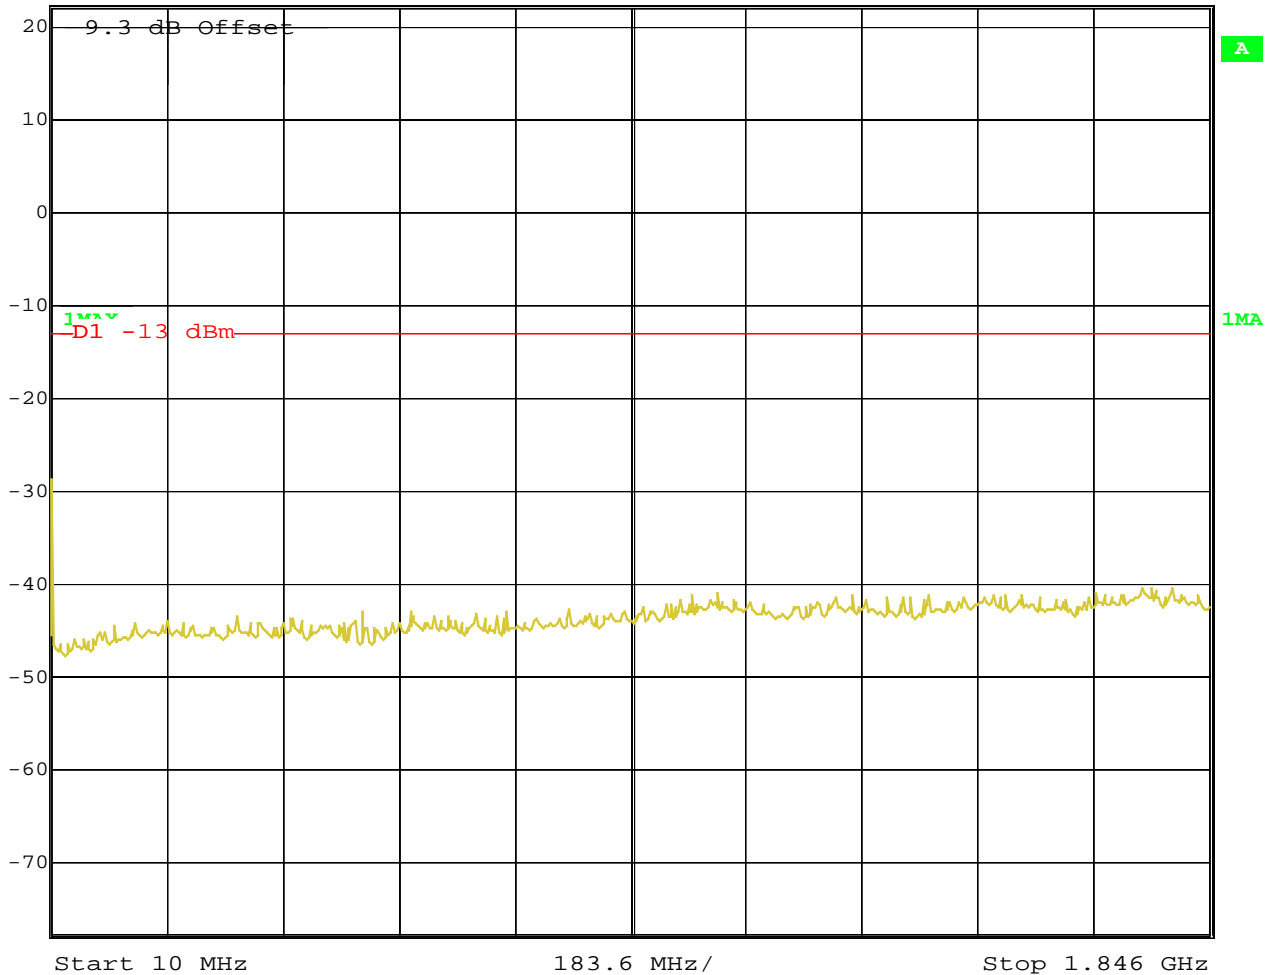


Date: 23.NOV.2001 11:22:37

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 661

	Marker 1 [T1]	RBW	1 MHz	RF Att	30 dB
	Ref Lvl	-42.03 dBm	VBW	1 MHz	
	22.3 dBm	1.91000000 GHz	SWT	135 ms	Unit

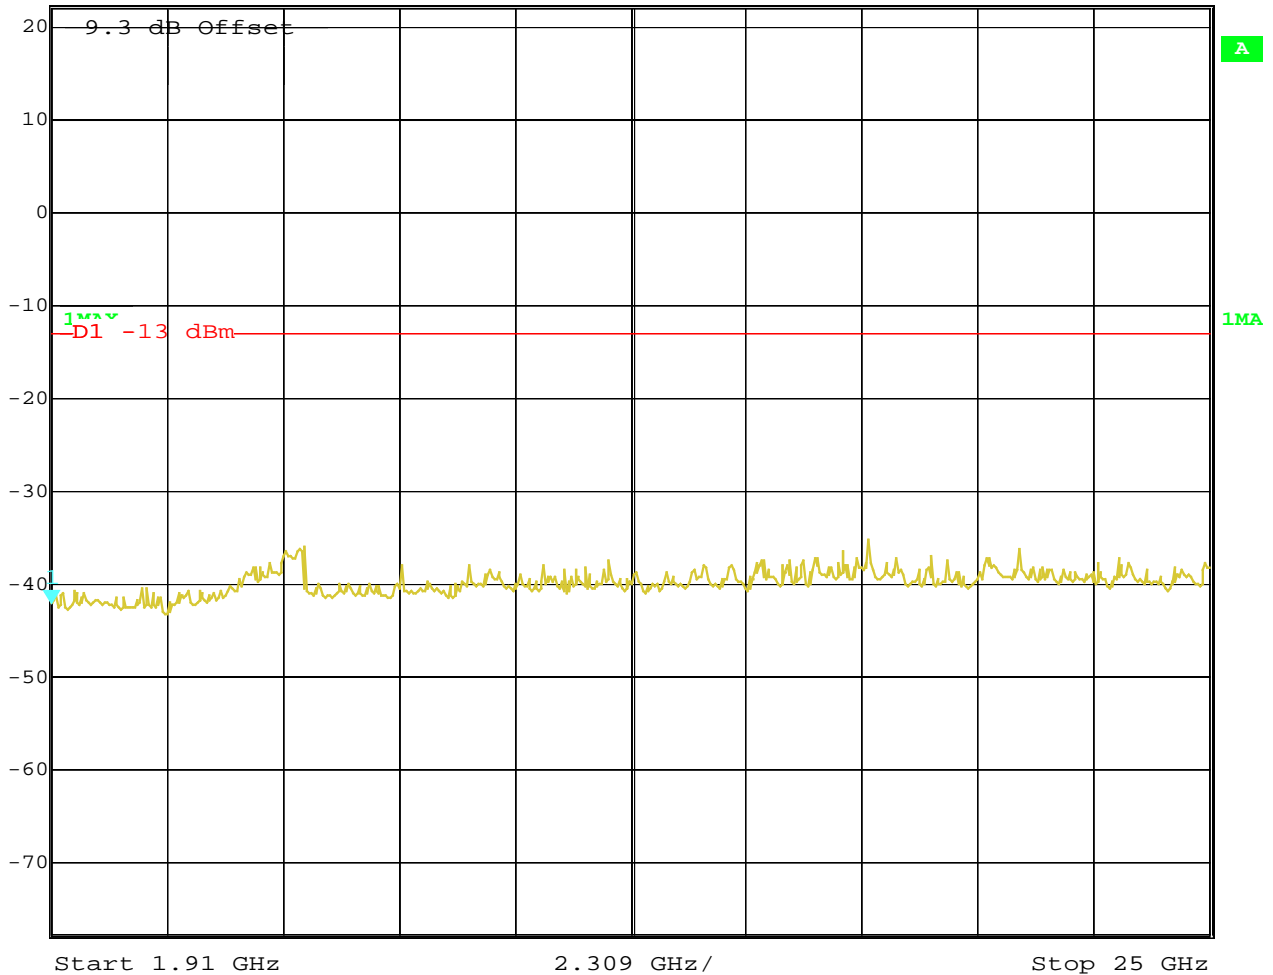


Date: 23.NOV.2001 11:22:58

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Channel 810


	Marker 1 [T1]	RBW	1 MHz	RF Att	30 dB
	Ref Lvl	-42.74 dBm	VBW	1 MHz	
	22.3 dBm	1.84600000 GHz	SWT	5 ms	Unit dBm

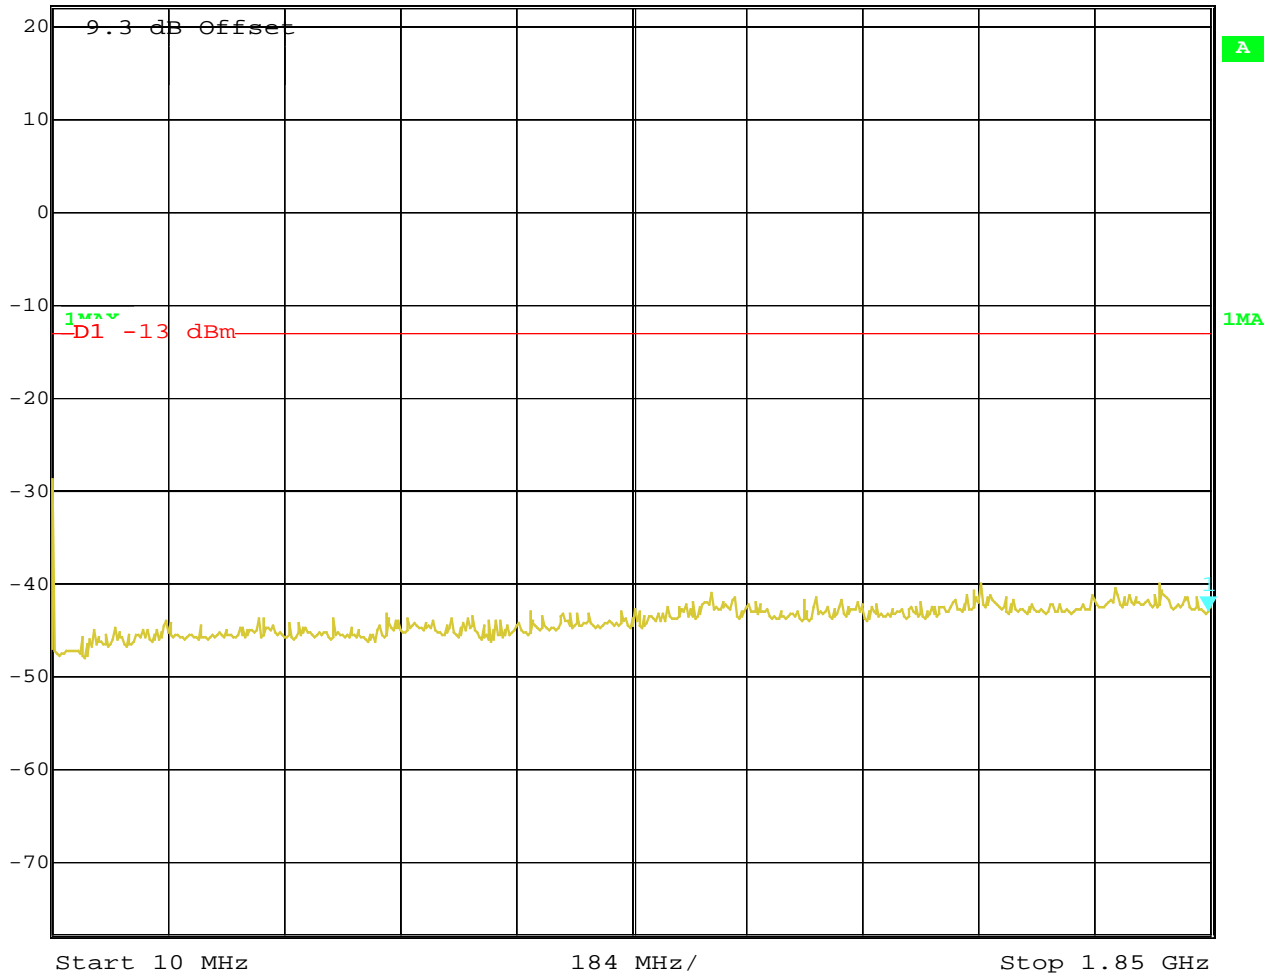

Date: 23.NOV.2001 11:24:19

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Channel 810

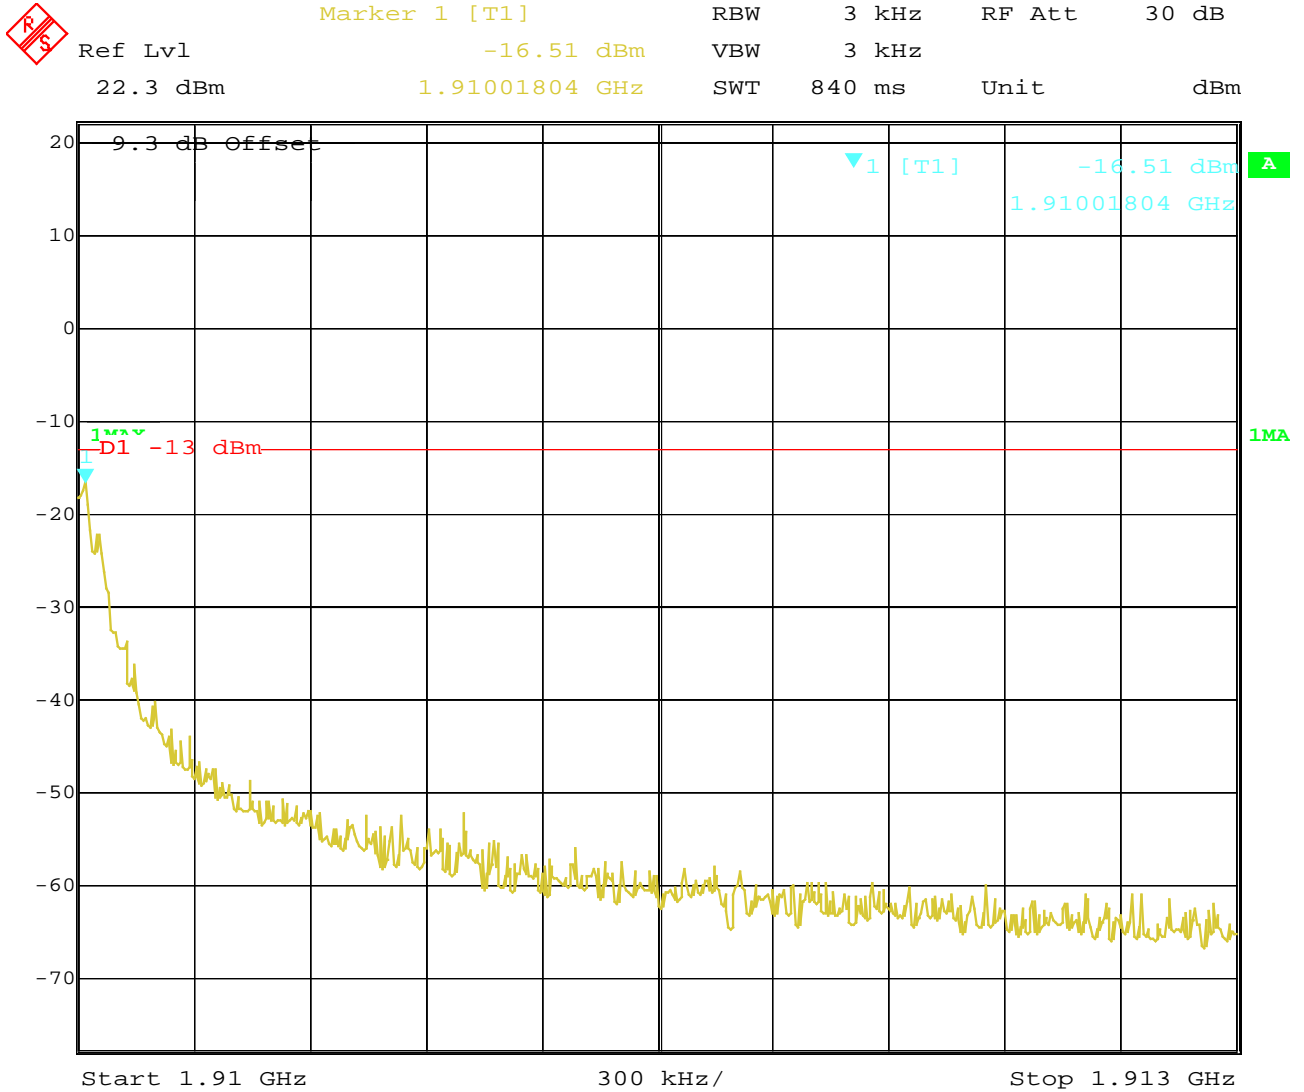


Date: 23.NOV.2001 11:25:23

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Channel 810

	Marker 1 [T1]	RBW	1 MHz	RF Att	30 dB
	Ref Lvl	-14.88 dBm	VBW	1 MHz	
	22.3 dBm	1.91300000 GHz	SWT	135 ms	Unit

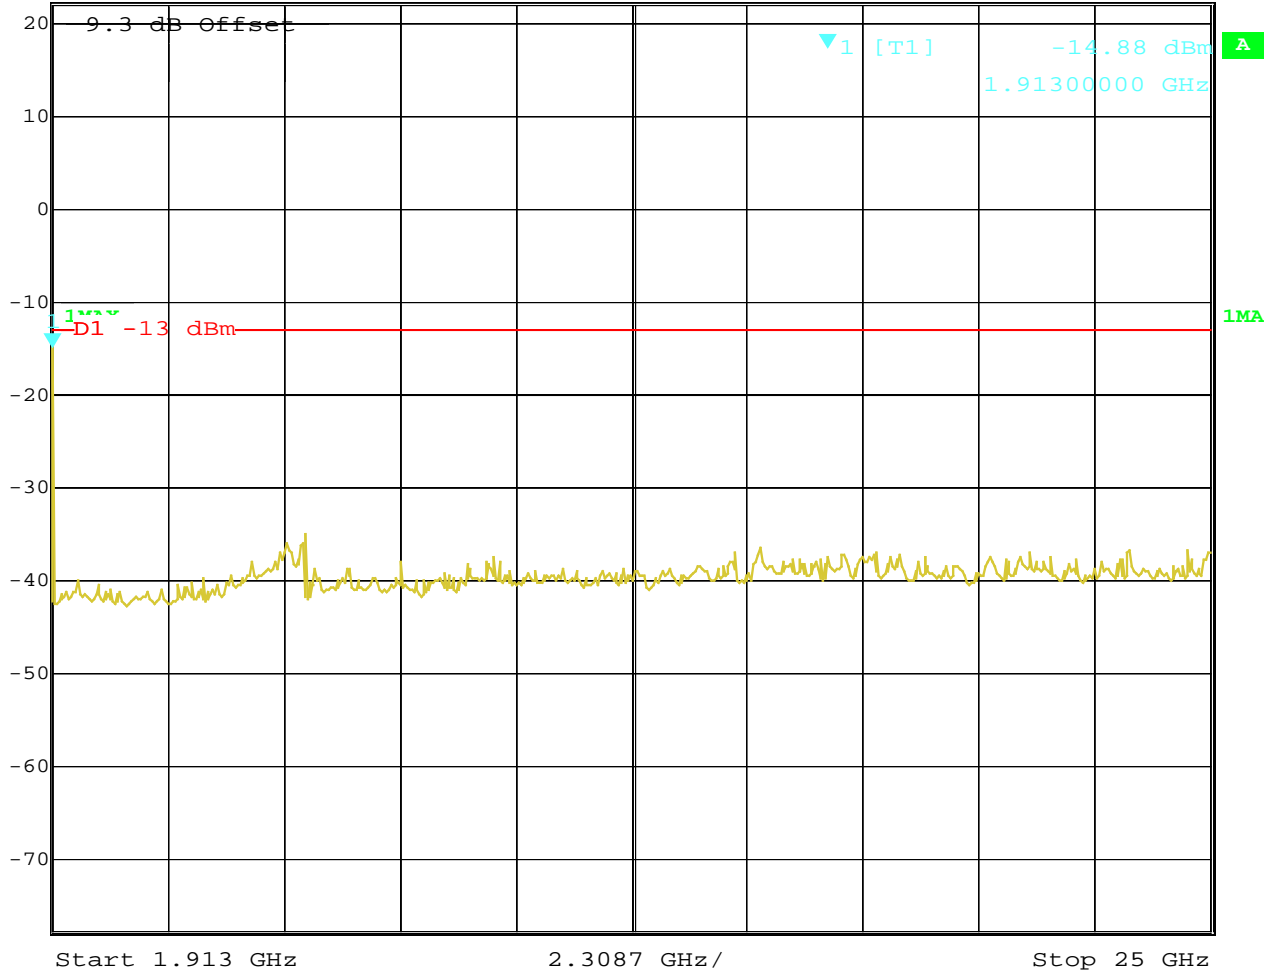

Date: 23.NOV.2001 11:25:57

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

OCCUPIED BANDWIDTH **§2.989**

Occupied Bandwidth Results


Similar to conducted emissions, occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the USPCS frequency band. Table 8.2 below lists the measured 99% power and -26dBC occupied bandwidths. Spectrum analyzer plots are included on the following pages.

Frequency	99% Occupied Bandwidth	-26 dBc Bandwidth
1850.2 MHz	294.6	322.6
1880.2 MHz	292.6	316.6
1909.2 MHz	292.6	318.6

Part 24.238 (a) requires a measurement bandwidth of at least 1% of the occupied bandwidth. For ca. 295 kHz, this equates to a resolution bandwidth of at least 2.96 kHz. For this testing, a resolution bandwidth 3.0 kHz was used.

Channel 512 99% Occupied Bandwidth

	Delta 1 [T1]	RBW	3 kHz	RF Att	30 dB
	Ref Lvl	-0.70 dB	VBW	3 kHz	
	19.6 dBm	294.58917836 kHz	SWT	280 ms	Unit dBm

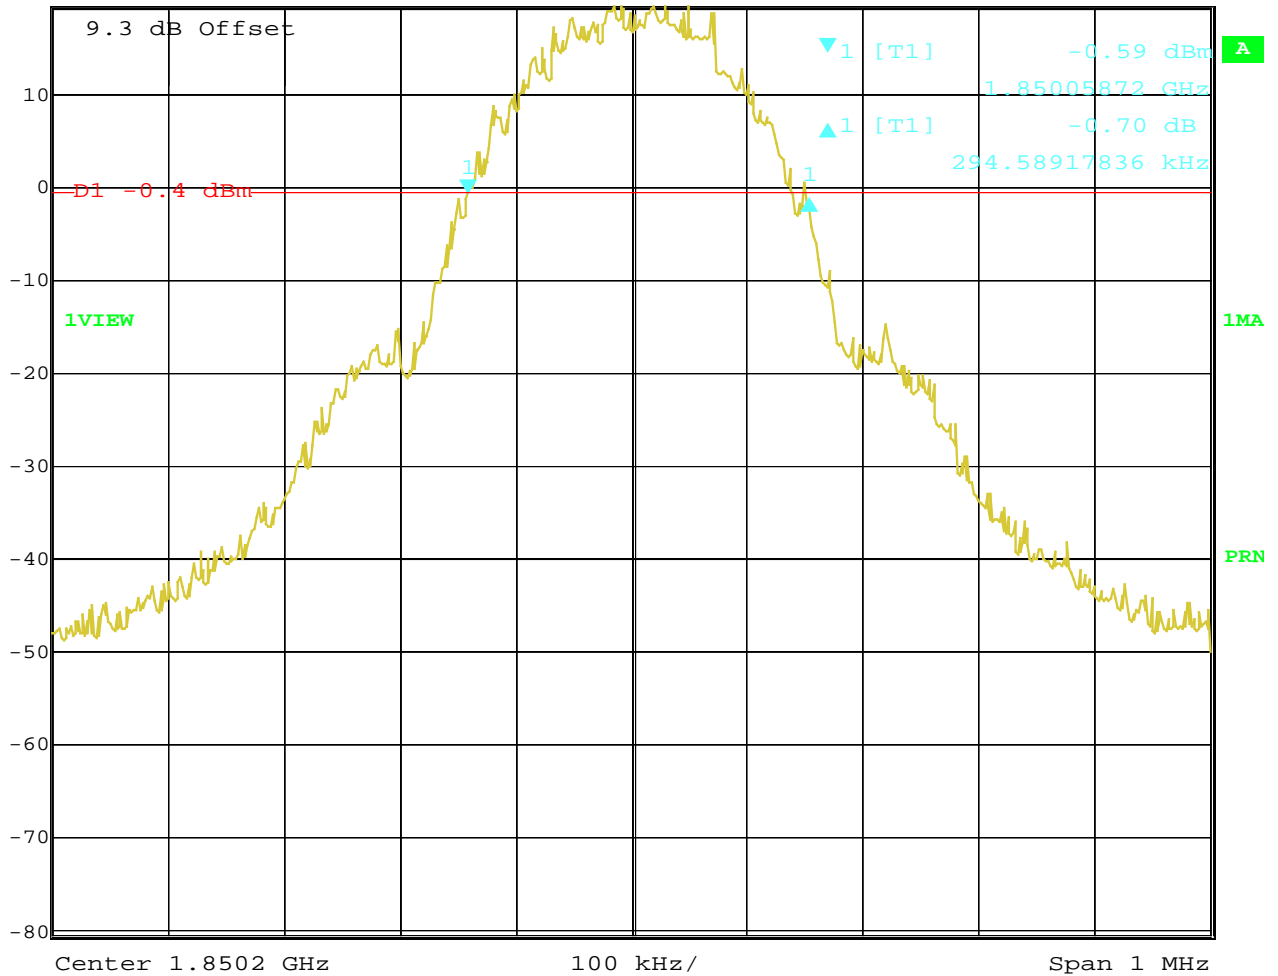


Date: 23.NOV.2001 12:07:38

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 512 -26 dBc Bandwidth


	Delta 1 [T1]	RBW	3 kHz	RF Att	30 dB
	Ref Lvl	-1.67 dB	VBW	3 kHz	
	19.6 dBm	322.64529058 kHz	SWT	280 ms	Unit

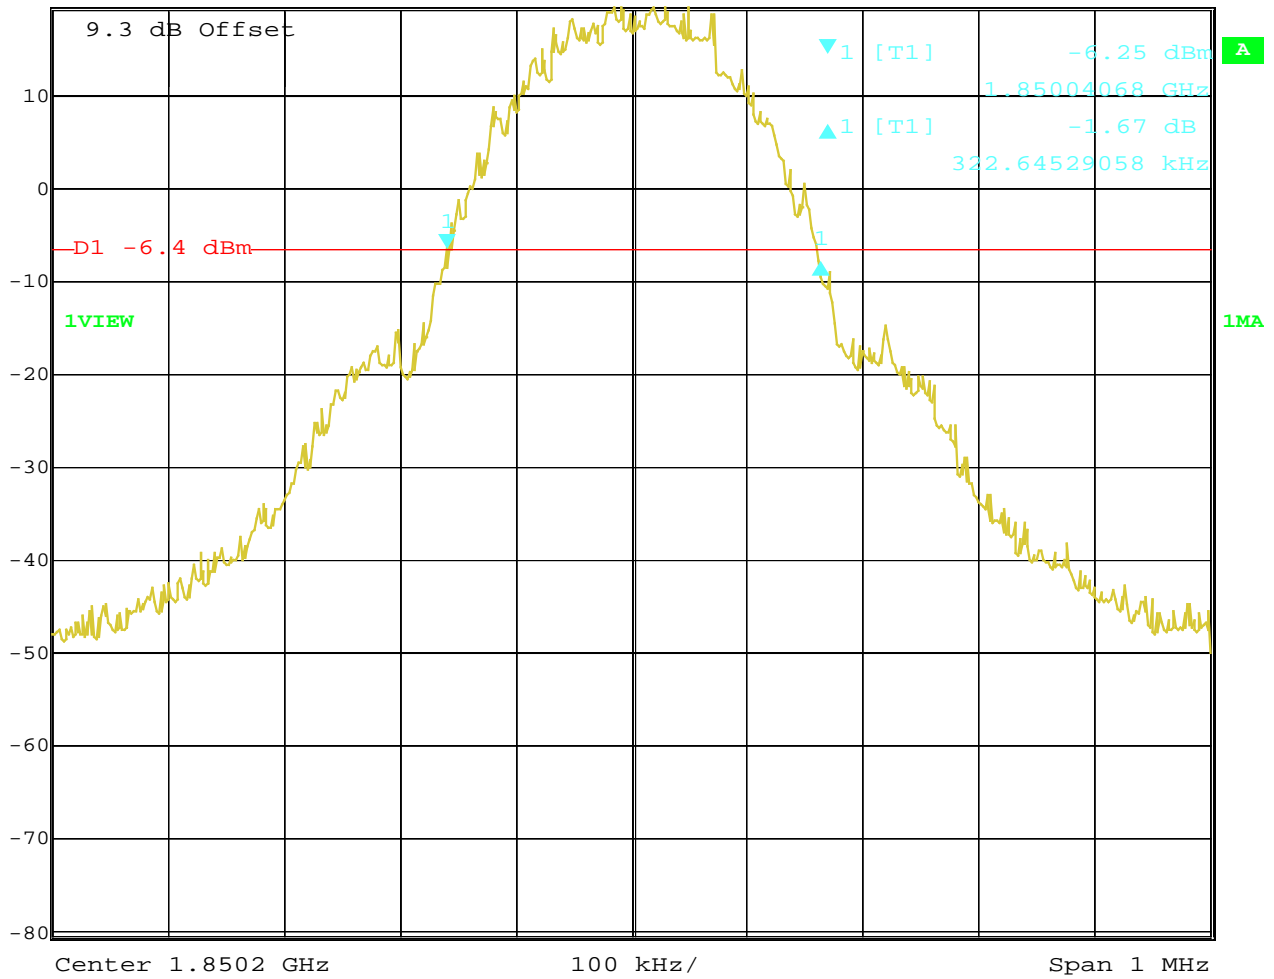

Date: 23.NOV.2001 12:08:30

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 662 99% Occupied Bandwidth

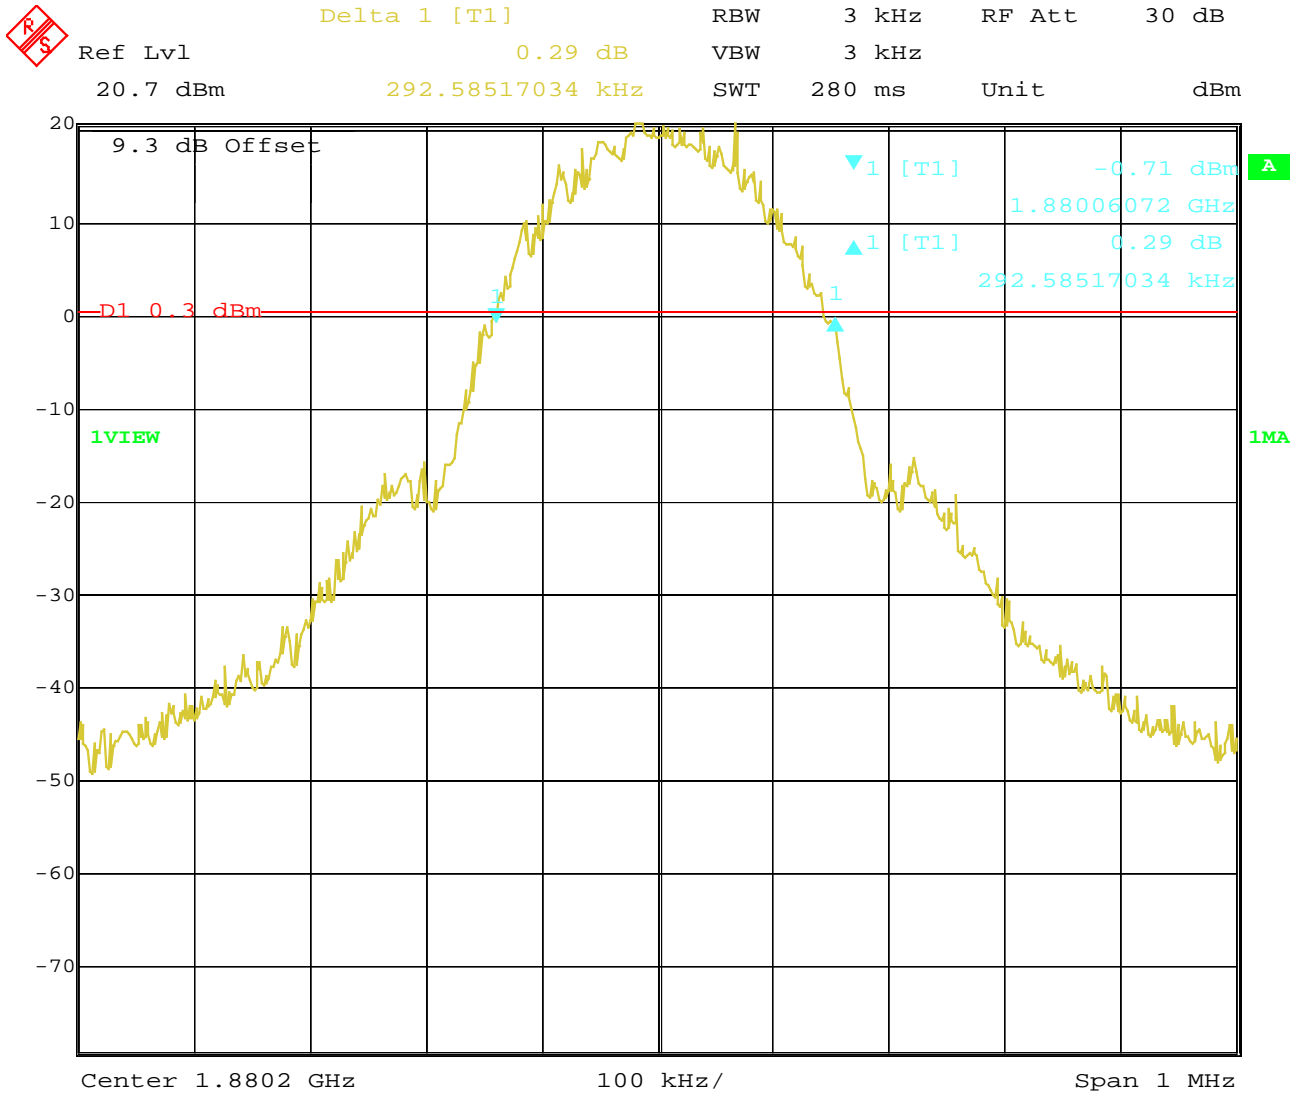


Date: 23.NOV.2001 12:12:54

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 662 -26 dBc Bandwidth


	Delta 1 [T1]	RBW	3 kHz	RF Att	30 dB
	Ref Lvl	-1.87 dB	VBW	3 kHz	
	20.7 dBm	316.63326653 kHz	SWT	280 ms	Unit dBm

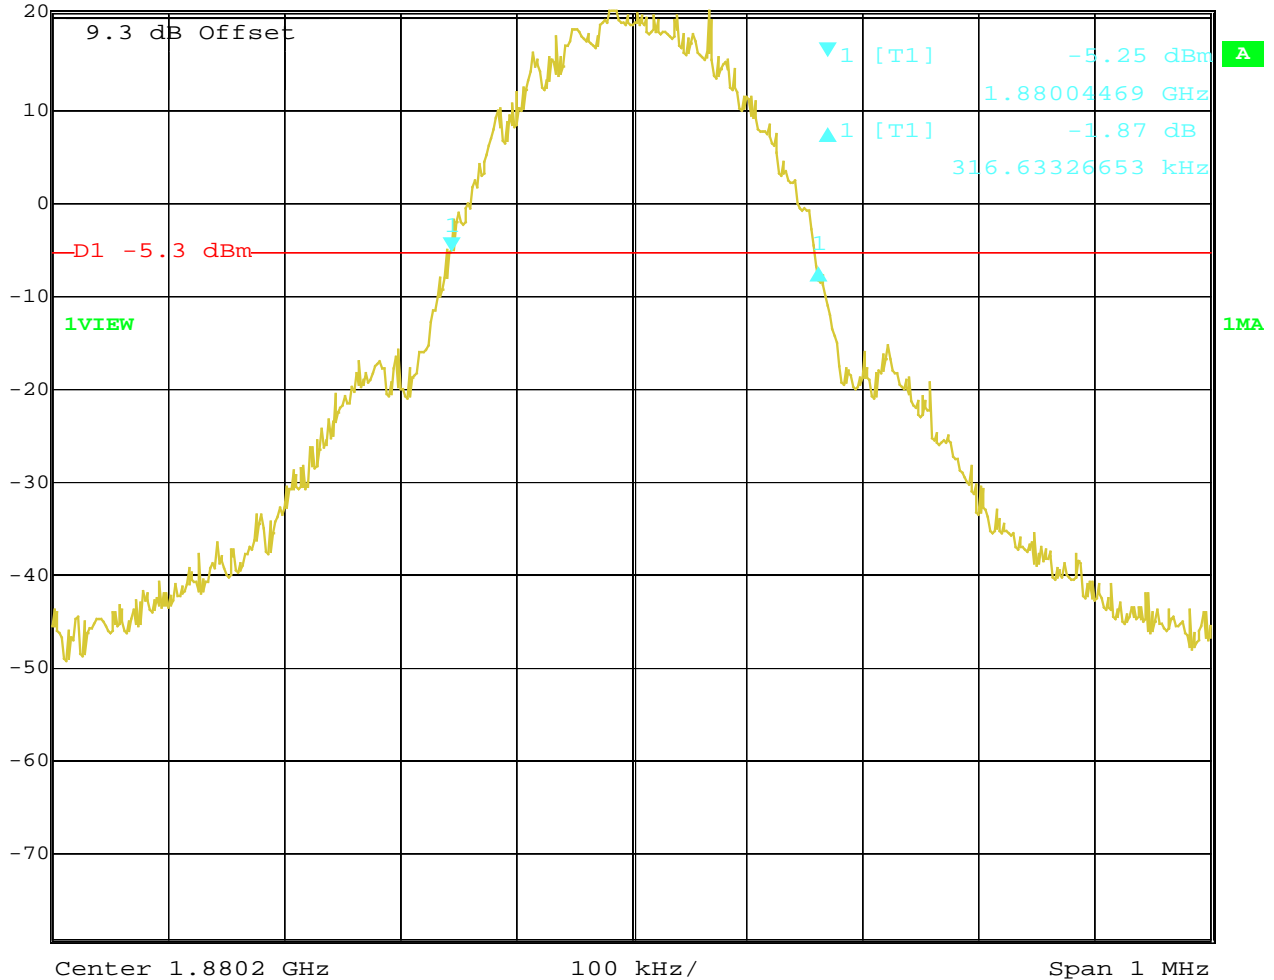

Date: 23.NOV.2001 12:13:53

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)


Channel 810 99% Occupied Bandwidth

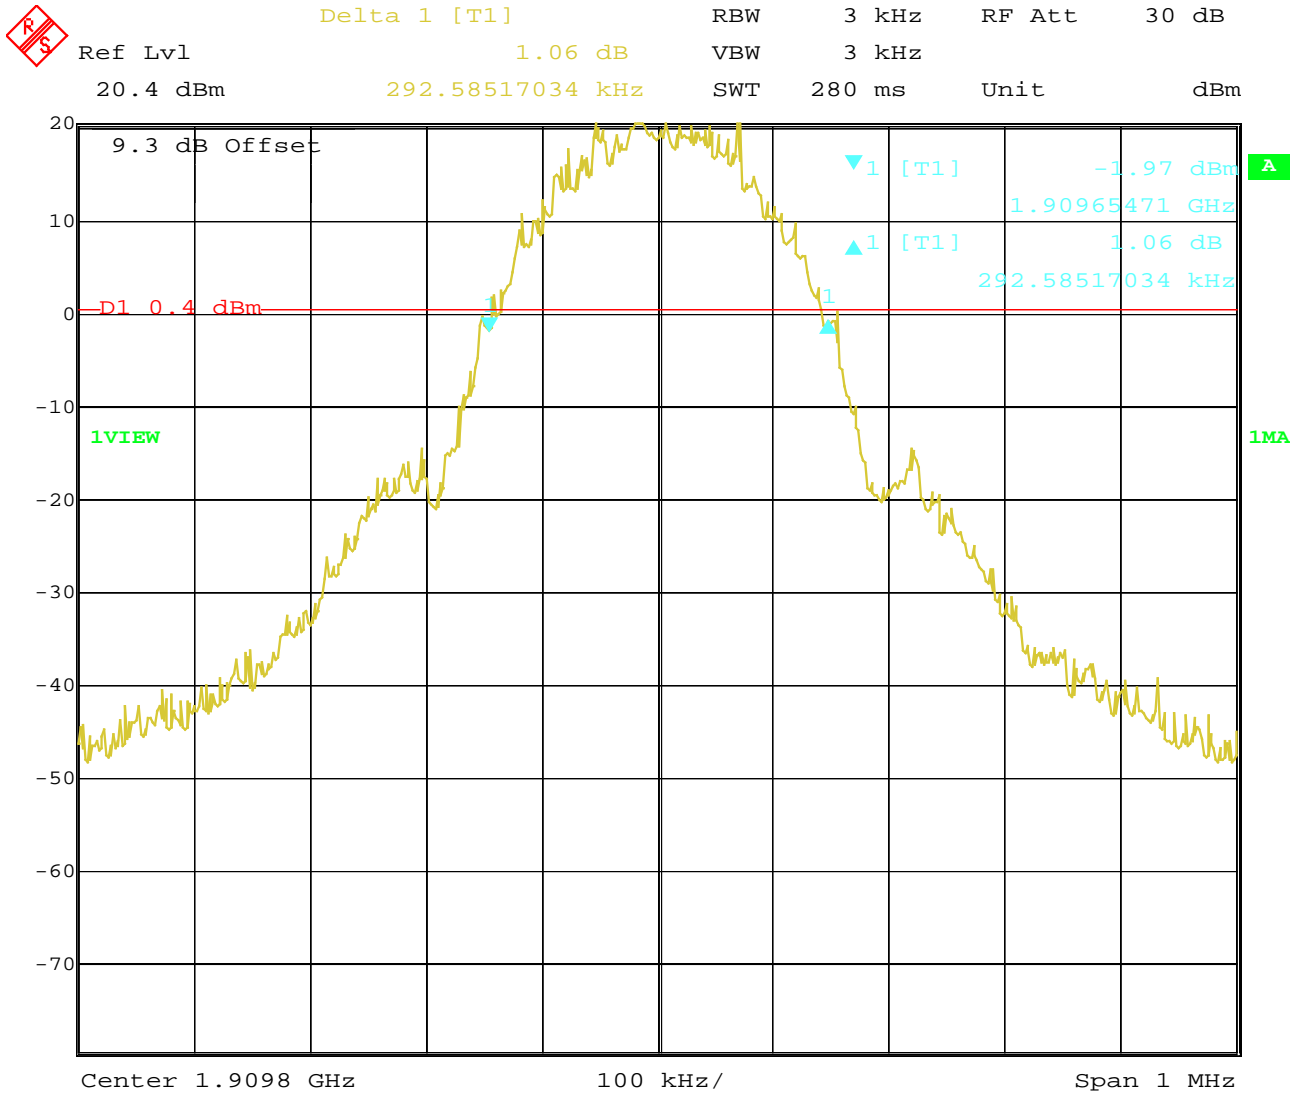

Date: 23.NOV.2001 12:18:28

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 810 -26 dBc Bandwidth

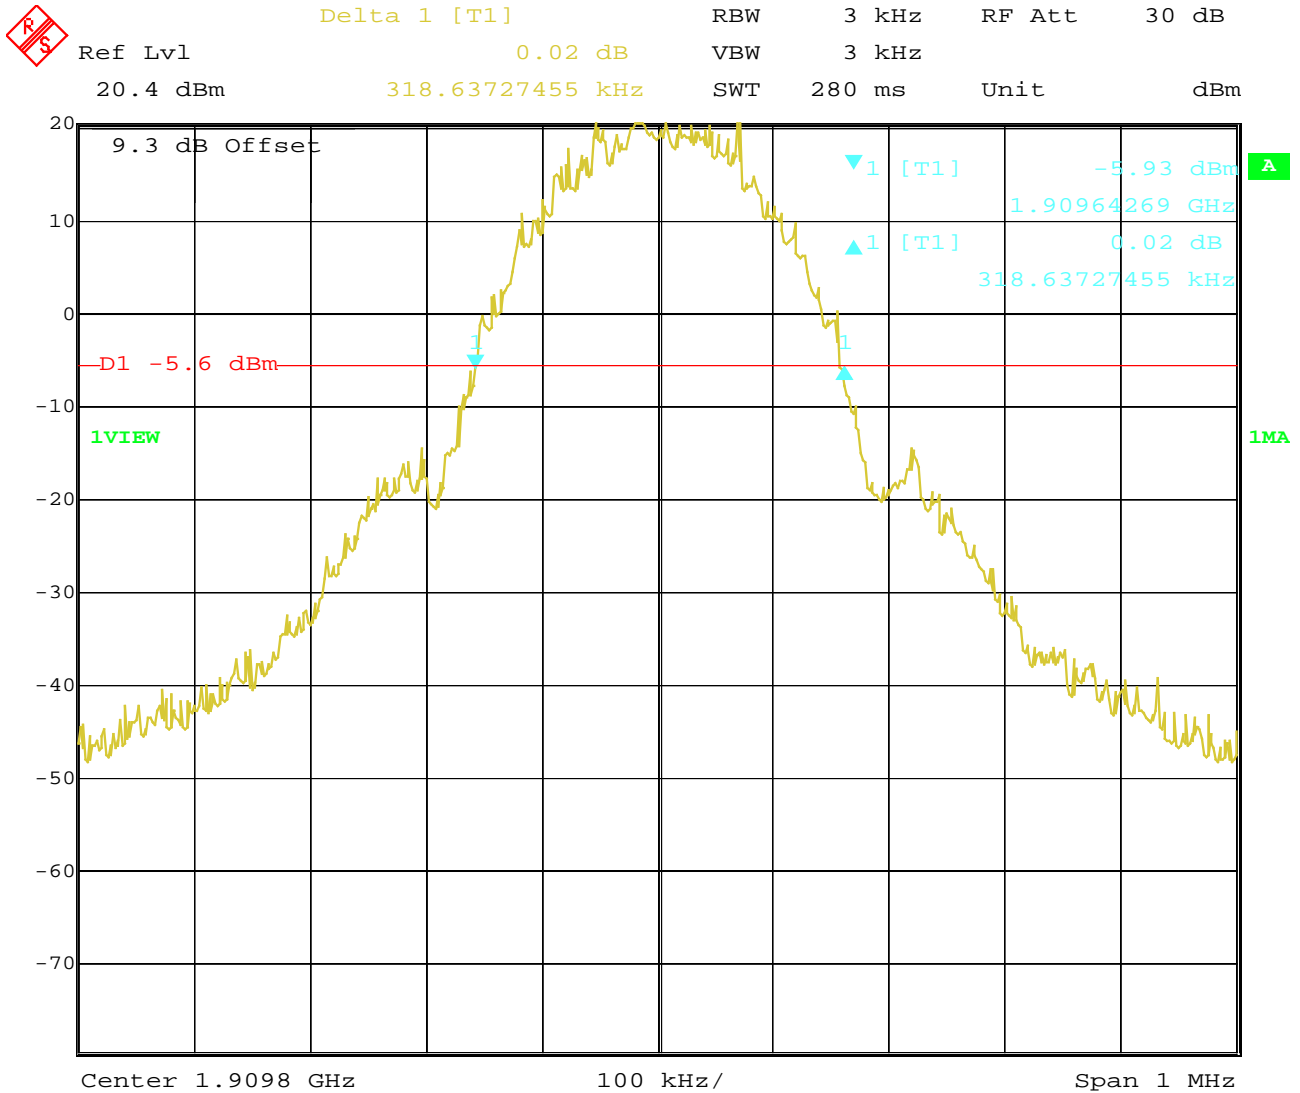

Date: 23.NOV.2001 12:17:19

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

CONDUCTED EMISSIONS


§ 15.107/207

FCC Rule 47 Part 15

Ericsson 2-2639/01
 26.11.01
 Traffic 1900 Ch 662

Conducted Emission on line

Line L1

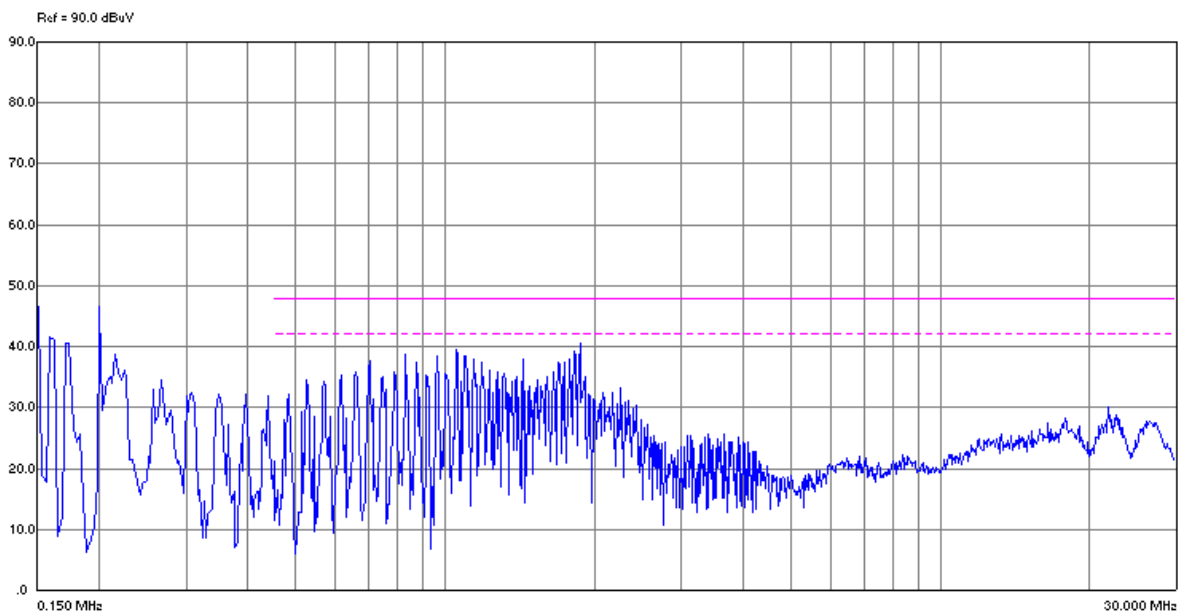

Frequency MHz	Peak dBuV	QP dBuV	Lim dBuV	QP dBuV	DelLim-QP dB	Avg dBuV	Lim dBuV	Avg dBuV	DelLim-Avg dB
0.824356	38.72	48.00	48.00	37.01	-10.99	48.00	48.00	31.68	-16.32
0.952013	38.56	48.00	48.00	38.11	-9.89	48.00	48.00	30.59	-17.41
1.039869	39.41	48.00	48.00	40.39	-7.61	48.00	48.00	33.78	-14.22
1.081602	38.43	48.00	48.00	38.87	-9.13	48.00	48.00	33.81	-14.19
1.817541	39.14	48.00	48.00	37.81	-10.19	48.00	48.00	30.58	-17.42
1.861539	40.67	48.00	48.00	39.62	-8.38	48.00	48.00	31.67	-16.33

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED


(for reference numbers see test equipment listing)

52-63

CONDUCTED EMISSIONS

§ 15.107/207

Line N

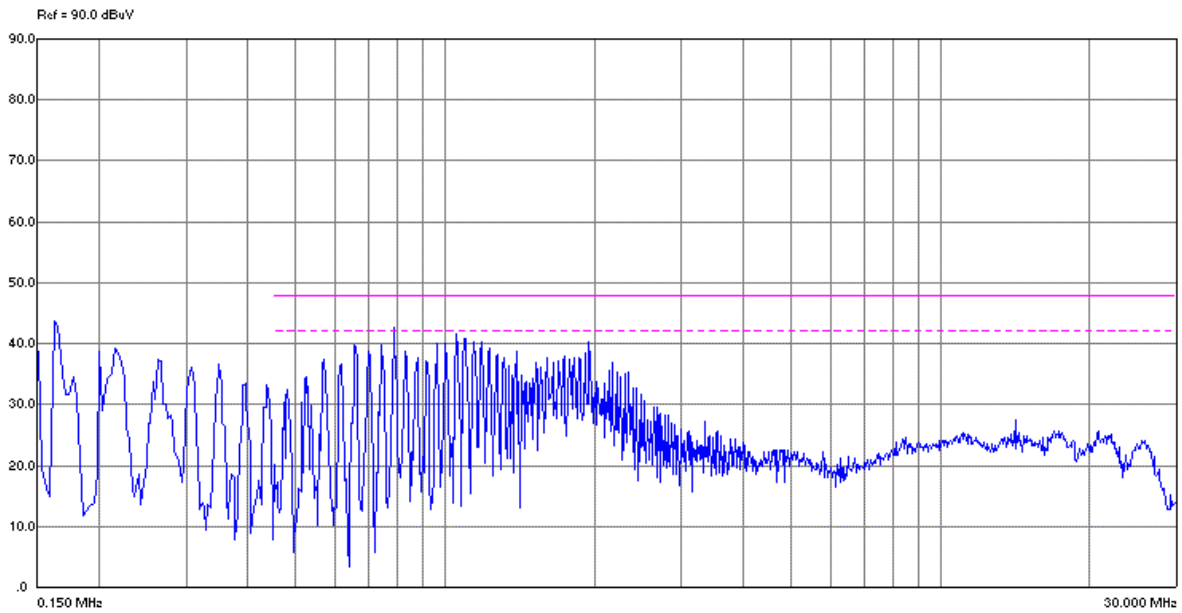

Frequency MHz	Peak dBuV	QP dBuV	Lim dBuV	QP dBuV	DelLim-QP dB	Avg dBuV	Lim dBuV	Avg dBuV	DelLim-Avg dB
0.692216	38.65	48.00	48.00	38.52	-9.48	48.00	48.00	34.74	-13.26
0.778575	42.55	48.00	48.00	38.30	-9.70	48.00	48.00	34.12	-13.88
0.821142	38.74	48.00	48.00	37.78	-10.22	48.00	48.00	32.19	-15.81
0.954244	40.14	48.00	48.00	37.92	-10.08	48.00	48.00	31.54	-16.46
1.081967	40.81	48.00	48.00	40.93	-7.07	48.00	48.00	34.68	-13.32
1.168596	40.23	48.00	48.00	39.94	-8.06	48.00	48.00	34.88	-13.12
1.216939	39.15	48.00	48.00	34.65	-13.35	48.00	48.00	28.77	-19.23
1.904363	38.41	48.00	48.00	39.95	-8.05	48.00	48.00	31.10	-16.90

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)
52-63

TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

No	Instrument/Ancillary	Type	Manufacturer	Serial No.
01	Spectrum Analyzer	8566 A	Hewlett-Packard	1925A00257
02	Analyzer Display	8566 A	Hewlett-Packard	1925A00860
03	Oscilloscope	7633	Tektronix	230054
04	Radio Communication Analyzer	CMTA 54	Rohde & Schwarz	894 043/010
05	System Power Supply	6038 A	Hewlett-Packard	2848A07027
06	Signal Generator	8111 A	Hewlett-Packard	2215G00867
07	Signal Generator	8662 A	Hewlett-Packard	2224A01012
08	Function Generator	AFGU	Rohde & Schwarz	862 480/032
09	Regulating Transformer	MPL	Erfi	91350
10	LISN	NNLA 8120	Schwarzbeck	8120331
11	Relay-Matrix	PSU	Rohde & Schwarz	893 285/020
12	Power-Meter	436 A	Hewlett-Packard	2101A12378
13	Power-Sensor	8484 A	Hewlett-Packard	2237A10156
14	Power-Sensor	8482 A	Hewlett-Packard	2237A00616
15	Modulation Meter	9008	Racal-Dana	2647
16	Frequency Counter	5340 A	Hewlett-Packard	1532A03899
17	Anechoic Chamber	---	MWB	87400/002
18	Spectrum Analyzer	85660 B	Hewlett-Packard	2747A05306
19	Analyzer Display	85662 A	Hewlett-Packard	2816A16541
20	Quasi Peak Adapter	85650 A	Hewlett-Packard	2811A01131
21	RF-Preselector	85685 A	Hewlett-Packard	2833A00768
22	Biconical Antenna	3104	Emco	3758
23	Log. Per. Antenna	3146	Emco	2130
24	Double Ridged Horn	3115	Emco	3088
25	EMI-Testreceiver	ESAI	Rohde & Schwarz	863 180/013
26	EMI-Analyzer-Display	ESAI-D	Rohde & Schwarz	862 771/008
27	Biconical Antenna	HK 116	Rohde & Schwarz	888 945/013
28	Log. Per. Antenna	HL 223	Rohde & Schwarz	825 584/002
29	Relay-Switch-Unit	RSU	Rohde & Schwarz	375 339/002
30	Highpass	HM985955	FSY Microwave	001
31	Amplifier	P42-GA29	Tron-Tech	B 23602
32	Anechoic Chamber		Frankonia	
33	Control Computer	PSM 7	Rohde & Schwarz	834 621/004
34	EMI Test Receiver	ESMI	Rohde & Schwarz	827 063/010
35	EMI Test Receiver	Display	Rohde & Schwarz	829 808/010

TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

No	Instrument/Ancillary	Type	Manufacturer	Serial No.
36	Control Computer	HD 100	Deisel	100/322/93
37	Relay Matrix	PSN	Rohde & Schwarz	829 065/003
38	Control Unit	GB 016 A2	Rohde & Schwarz	344 122/008
39	Relay Switch Unit	RSU	Rohde & Schwarz	316 790/001
40	Power Supply	6032A	Hewlett Packard	2846A04063
41	Spectrum Monitor	EZM	Rohde & Schwarz	883 720/006
42	Measuring Receiver	ESH 3	Rohde & Schwarz	890 174/002
43	Measuring Receiver	ESVP	Rohde & Schwarz	891 752/005
44	Bicon Ant. 20-300MHz	HK 116	Rohde & Schwarz	833 162/011
45	Logper Ant. 0.3-1 GHz	HL 223	Rohde & Schwarz	832 914/010
46	Amplifier 0.1-4 GHz	AFS4	Miteq Inc.	206461
47	Logper Ant. 1-18 GHz	HL 024 A2	Rohde & Schwarz	342 662/002
48	Polarisation Network	HL 024 Z1	Rohde & Schwarz	341 570/002
49	Double Ridged Horn Antenna 1-26.5 GHz	3115	EMCO	9107-3696
50	Microw. Sys. Amplifier 0.5- 26.5 GHz	8317A	Hewlett Packard	3123A00105
51	Audio Analyzer	UPD	Rohde & Schwarz	1030.7500.04
52	Controler	PSM 7	Rohde & Schwarz	883 086/026
53	DC V-Network	ESH3-Z6	Rohde & Schwarz	861 406/005
54	DC V-Network	ESH3-Z6	Rohde & Schwarz	893 689/012
55	AC 2 Phase V-Network	ESH3-Z5	Rohde & Schwarz	861 189/014
56	AC 2 Phase V-Network	ESH3-Z5	Rohde & Schwarz	894 981/019
57	AC-3 Phase V-Network	ESH2-Z5	Rohde & Schwarz	882 394/007
58	Power Supply	6032A	Rohde & Schwarz	2933A05441
59	RF-Test Receiver	ESVP.52	Rohde & Schwarz	881 487/021
60	Spectrum Monitor	EZM	Rohde & Schwarz	883 086/026
61	RF-Test Receiver	ESH3	Rohde & Schwarz	881 515/002
62	Relay Matrix	PSU	Rohde & Schwarz	882 943/029
63	Relay Matrix	PSU	Rohde & Schwarz	828 628/007
64	Spectrum Analyzer	FSIQ 26	Rohde & Schwarz	119.6001.27
65	Spectrum Analyzer	HP 8565E	Hewlett Packard	3473A00773
66				
67				
68				