

FCC Part 15C Compliance Test Report

Test Report no.:	FCC15C_RM-589V_03.doc	Date of Report:	07-Dec-2009
Number of pages:	30	Customer's Contact person:	Swapna Murala
Testing laboratory:	TCC Nokia Tampere Laboratory P.O. Box 68 Sinitaival 5 FIN-33720 TAMPERE, FINLAND Tel. +358 (0) 7180 46800 Fax. +358 (0) 7180 46880	Customer:	Nokia Corporation Beacon Hill Road Church Crookham, Hampshire United Kingdom, GU52 8DY Tel. +44 1252 611000 Fax. +44 1252 611300
FCC listing no.:	94436		
IC recognition no.:	661AK-1		
Tested devices/ accessories:	Phone RM-589V / Battery BL-5CV, AC charger AC-7ev		
FCC ID:	P7QRM-589V	IC:	4299A-RM89V
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards RSS-GEN (Issue 2, June 2007) and RSS-210 (Issue 7, June 2007). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Jari Jantunen, System Manager, EMC

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	20-Nov-2009
Testing completed	03-Dec-2009
The customer's contact person	Swapna Murala
Test Plan referred to	T:\Projects\RM-589V\TestPlan_RS\RS_testplan_RM-589V.xls
Notes	-
Document name	FCC15C_RM-589V_03.doc

1.1. EUT and Accessory Information

The EUT is a 8-band (GSM850/900/1800/1900 and WCDMA Band I/II(1900)/V(850)/VI) mobile phone with GPRS, EGPRS and Bluetooth. Bluetooth is tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-589V	004401-10-752257-1	B3.0	-	vty09w44pb2	42106
Phone	RM-589V	004401-10-752162-3	B3.0	-	vty09w44pb2	42105
Phone	RM-589V	004401-10-752165-7	B3.0	-	vty09w44pb2	42114
Battery	BL-5CV	-	-	-	-	42107
Battery	BL-5CV	-	-	-	-	42108
Battery	BL-5CV	-	-	-	-	42115
AC charger	AC-7ev	0675599409049929596010036	-	-	-	42109

1.2. Summary of Test Results

Bluetooth:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8.4 (2)	Conducted peak output power	PASSED
15.247(d)	A8.5	Band edge compliance of RF emissions	PASSED
15.247(d)	A8.5	Spurious RF conducted emissions	PASSED
15.247(d), 15.209	A8.5	Spurious radiated emissions	NP
15.207	7.2.2	AC powerline conducted emissions	PASSED
15.247(a)(1)	A8.1 (a)	20 dB bandwidth	PASSED
15.247(a)(1)	A8.1 (b)	Carrier frequency separation	PASSED
15.247(a)(1)(iii)	A8.1 (d)	Number of hopping frequencies	PASSED
15.247(a)(1)(iii)	A8.1 (d)	Time of occupancy	PASSED

PASSED

FAILED

NP

The EUT complies with the essential requirements in the standard.

The EUT does not comply with the essential requirements in the standard.


The test was not performed by the TCC Nokia Tampere Laboratory.

CONTENTS


1. Summary for FCC Part 15C Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Test setups.....	4
2.1. Conducted RF test setup	4
2.2. AC powerline conducted emissions test setup.....	4
2.3. Radiated test setup	4
3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (2))	5
3.1. Test method and limit.....	5
3.2. Bluetooth Test results	6
4. Band edge compliance of RF emissions (FCC §15.247(d), RSS-210 A8.5).....	8
4.1. Test method and limit.....	8
4.2. Bluetooth Test results	9
5. Spurious RF conducted emissions (FCC §15.247(d), RSS-A8.5).....	13
5.1. Test method and limit.....	13
5.2. Bluetooth Test results	14
6. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)	16
6.1. Test method and limit.....	16
6.2. Bluetooth Test results	17
7. 20 dB bandwidth (FCC §15.247(a)(1), RSS-210 A8.1 (a))	18
7.1. Test method and limit.....	18
7.2. Bluetooth Test results	19
8. Carrier frequency separation (FCC §15.247(a)(1), RSS-210 A8.1 (b)).....	22
8.1. Test method and limit.....	22
8.2. Bluetooth Test results	23
9. Number of hopping frequencies (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (d))	24
9.1. Test method and limit.....	24
9.2. Bluetooth Test results	25
10. Time of occupancy (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (d))	26
10.1. Test method and limit.....	26
10.2. Bluetooth test results.....	27
11. Test Equipment	29
11.1. Conducted measurements	29
11.2. Radiated measurements	29

2. Test setups


2.1. Conducted RF test setup

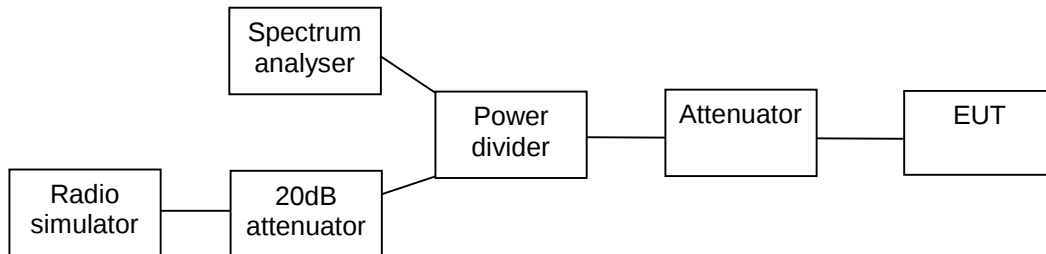

2.2. AC powerline conducted emissions test setup



2.3. Radiated test setup

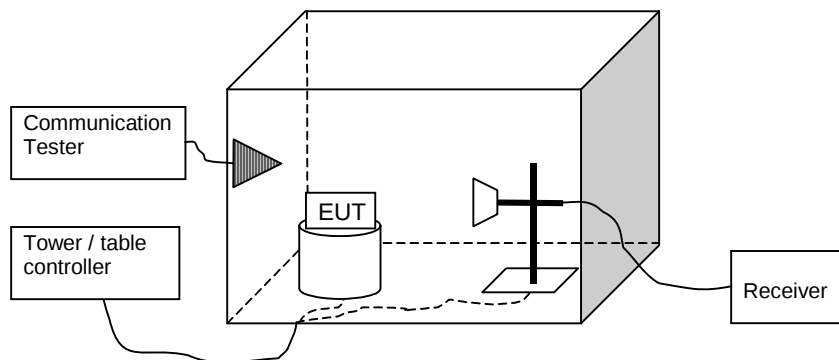

3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (2))

EUT with DUT number	RM-589V DUT 42106
Accessories with DUT numbers	BL-5CV DUT 42107
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 45 / 99.0
Date of measurements	24-Nov-2009
Measured by	Hannu Söderholm

3.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for conducted peak output power measurements


Frequency range [MHz]	Limit [W]	Limit [dBm]
2400 – 2483.5	≤ 1	≤ 30

3.2. Bluetooth Test results


3.2.1 GFSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	0.80	1.202	PASSED
40 / 2442	0.30	1.072	PASSED
78 / 2480	-0.30	0.933	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

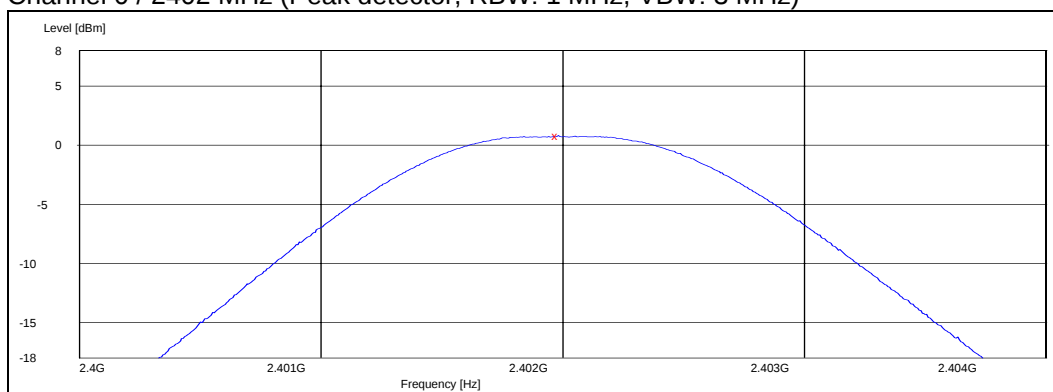

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

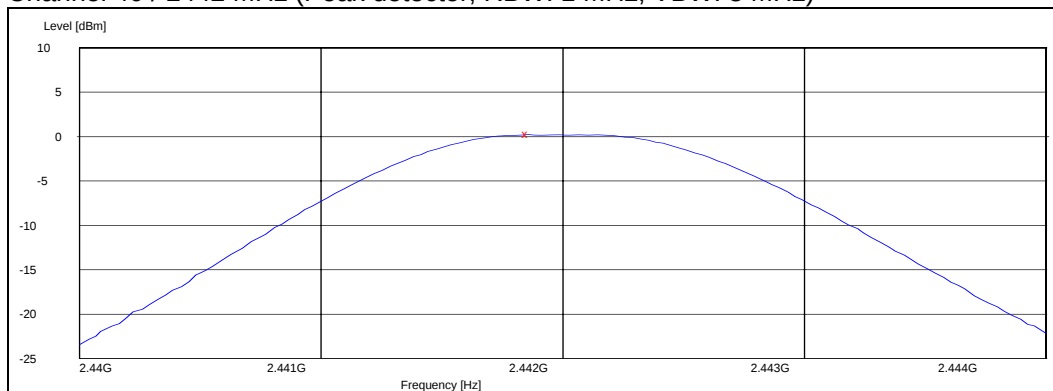


Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

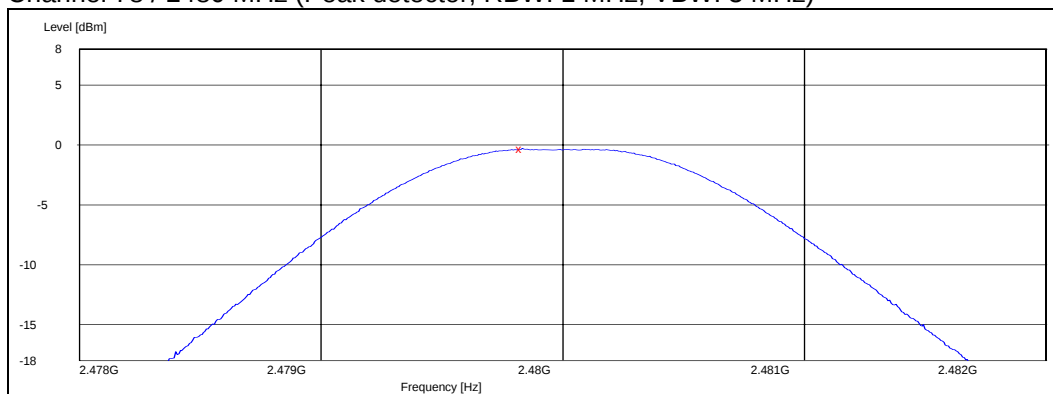


3.2.2 8DPSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	1.80	1.514	PASSED
40 / 2442	1.20	1.318	PASSED
78 / 2480	0.80	1.202	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

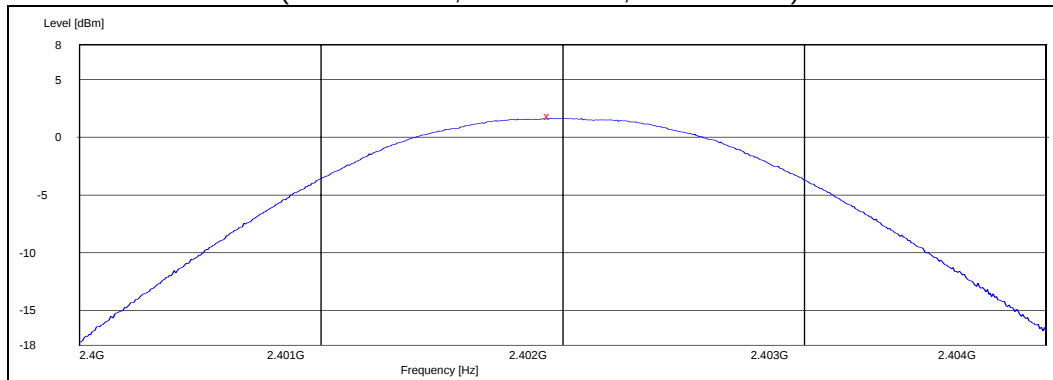

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

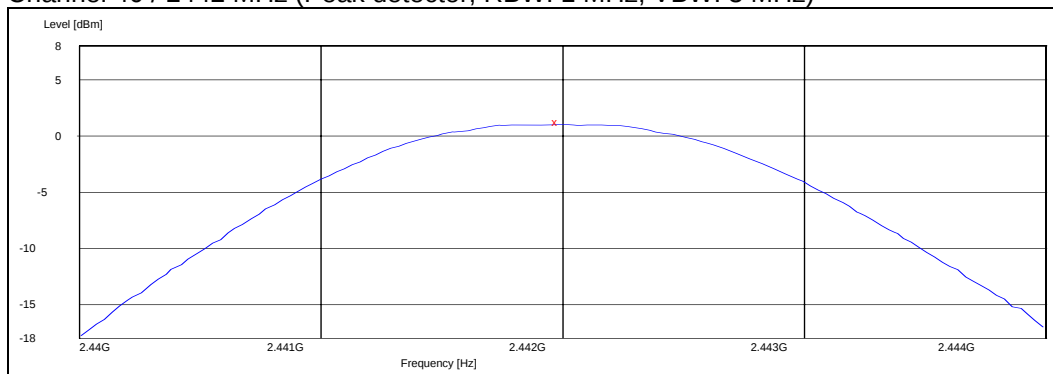

Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

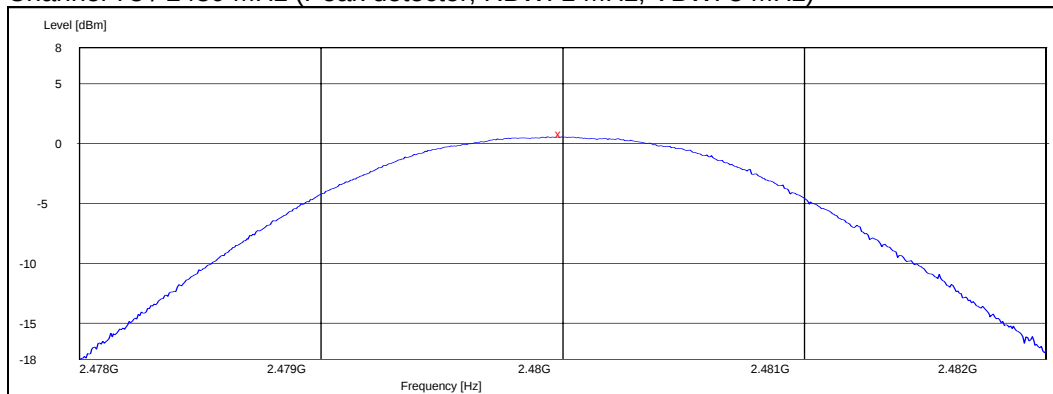

4. Band edge compliance of RF emissions (FCC §15.247(d), RSS-210 A8.5)

EUT with DUT number	RM-589V DUT 42105
Accessories with DUT numbers	BL-5CV DUT 42108
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 48 / 101.6
Date of measurements	03-Dec-2009
Measured by	Hannu Söderholm

4.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.


Limits for band edge compliance of RF emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit Average [dBμV/m]	Limit Peak [dBμV/m]
Below 2390 and above 2483.5	≤ 54	≤ 74

4.2. Bluetooth Test results


4.2.1 GFSK modulation, PRBS packet type

Channel 0 / 2402 MHz

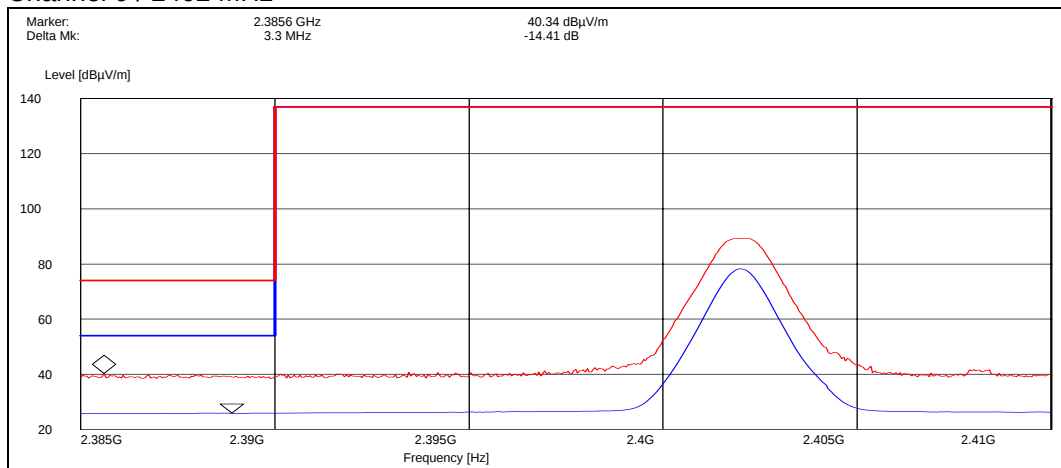


Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	40.30	PASSED
Average	25.90	PASSED

Channel 78 / 2480 MHz

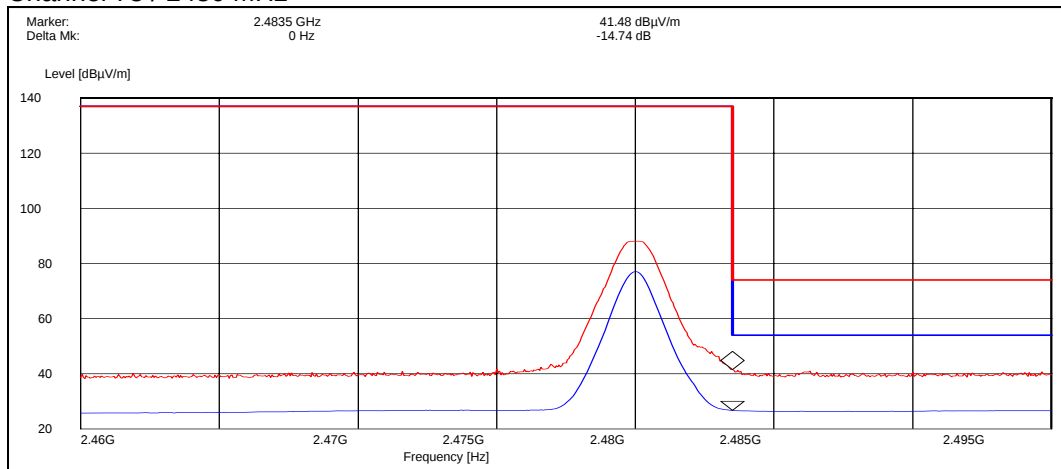


Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	41.50	PASSED
Average	26.70	PASSED

Hopping on, low end

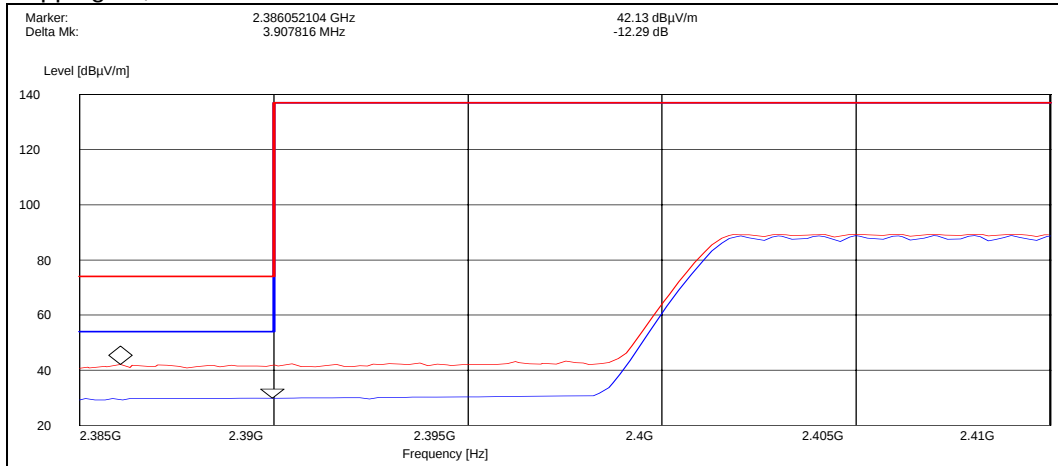

Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	42.10	PASSED
Average	29.80	PASSED


Hopping on, high end

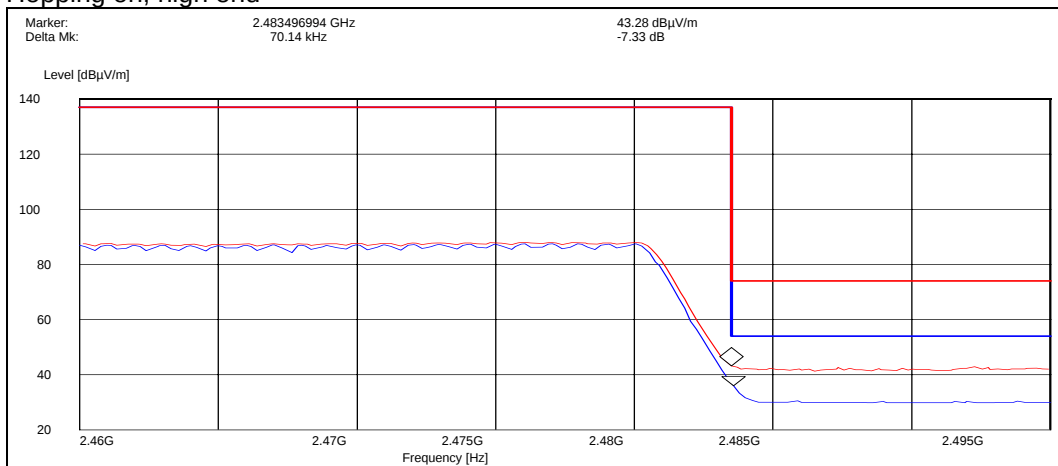

Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	43.30	PASSED
Average	36.00	PASSED


4.2.2 8DPSK modulation, PRBS packet type

Channel 0 / 2402 MHz

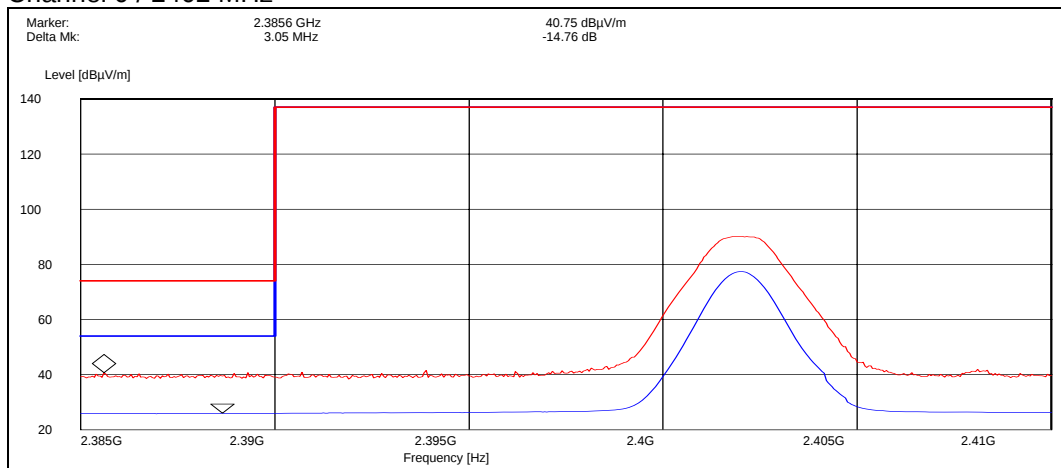


Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	40.70	PASSED
Average	26.00	PASSED

Channel 78 / 2480 MHz

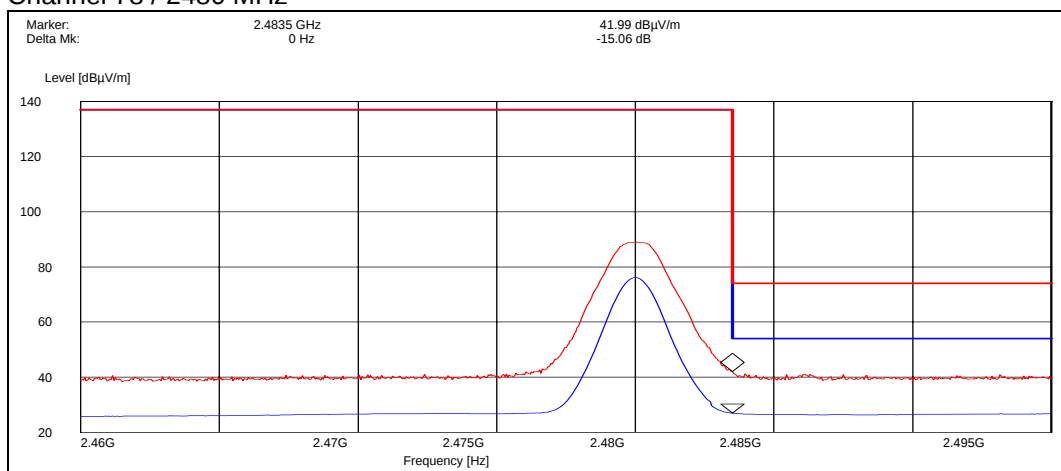


Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	42.00	PASSED
Average	26.90	PASSED

Hopping on, low end

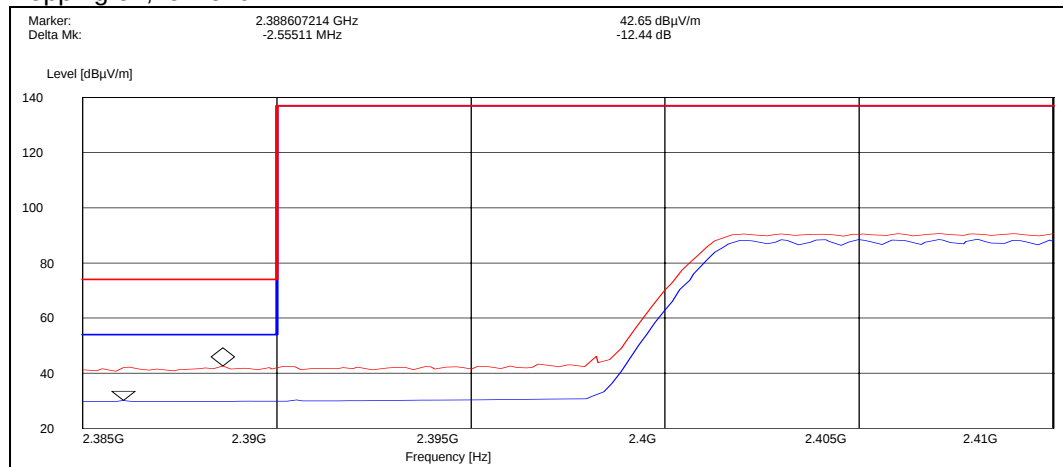

Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	42.70	PASSED
Average	30.20	PASSED

Hopping on, high end

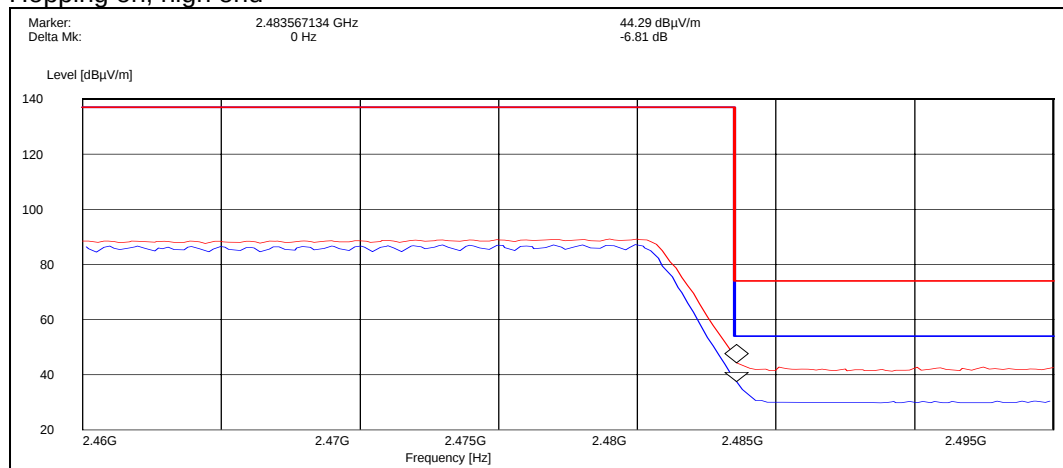

Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	44.30	PASSED
Average	37.50	PASSED

5. Spurious RF conducted emissions (FCC §15.247(d), RSS-A8.5)

EUT with DUT number	RM-589V DUT 42106
Accessories with DUT numbers	BL-5CV DUT 42107
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 45 / 99.0
Date of measurements	24-Nov-2009
Measured by	Hannu Söderholm

5.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.


Limits for spurious RF conducted emissions measurements

Frequency range [MHz]	Limit [dBc]
1 – 25000	≤ -20

5.2. Bluetooth Test results

5.2.1 GFSK modulation, PRBS packet type


Channel 0 / 2402 MHz

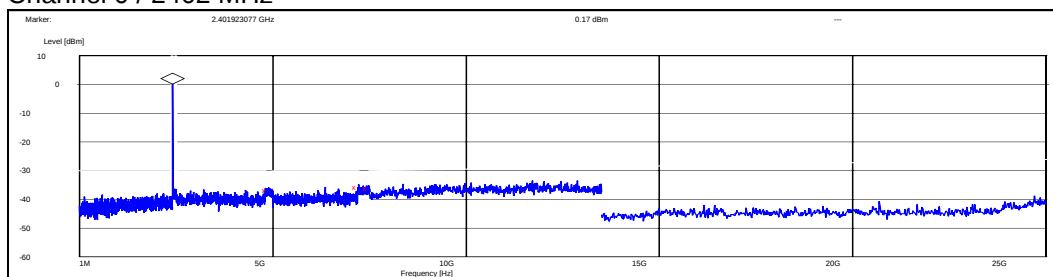

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4892.948718	-36.867225	PASSED
7215.865385	-35.967225	PASSED
7500.000000	-36.467225	PASSED


Channel 40 / 2442 MHz

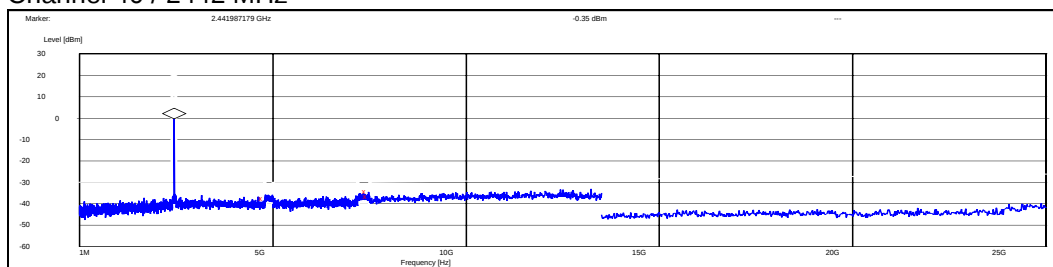

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4808.974359	-37.051911	PASSED
7472.115385	-34.051911	PASSED
7500.000000	-36.151911	PASSED

Channel 78 / 2480 MHz

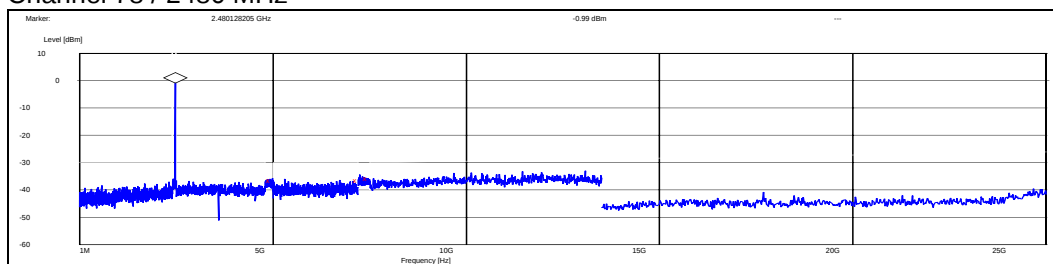


Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4996.474359	-35.606960	PASSED
7249.519231	-35.406960	PASSED
7500.000000	-34.706960	PASSED

5.2.2 8DPSK modulation, PRBS packet type


Channel 0 / 2402 MHz

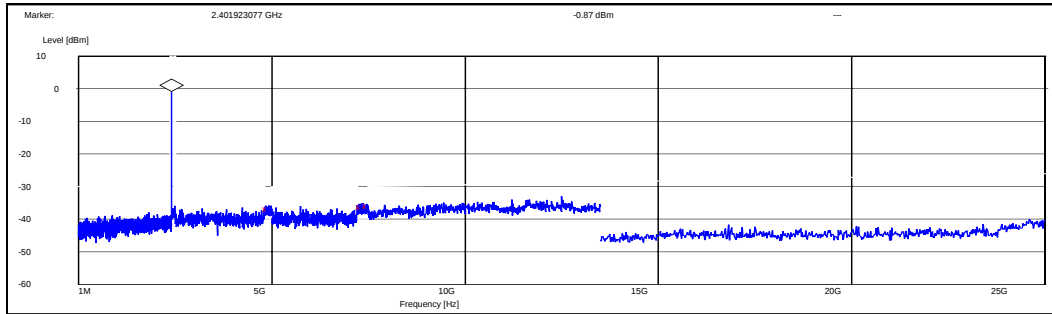

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4927.564103	-36.133961	PASSED
7337.500000	-35.233961	PASSED
7500.000000	-35.133961	PASSED


Channel 40 / 2442 MHz

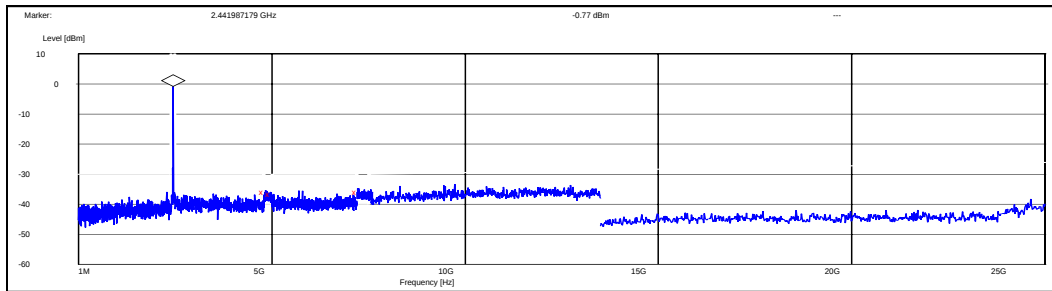

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4836.858974	-35.327716	PASSED
5000.000000	-36.027716	PASSED
7248.076923	-35.227716	PASSED

Channel 78 / 2480 MHz

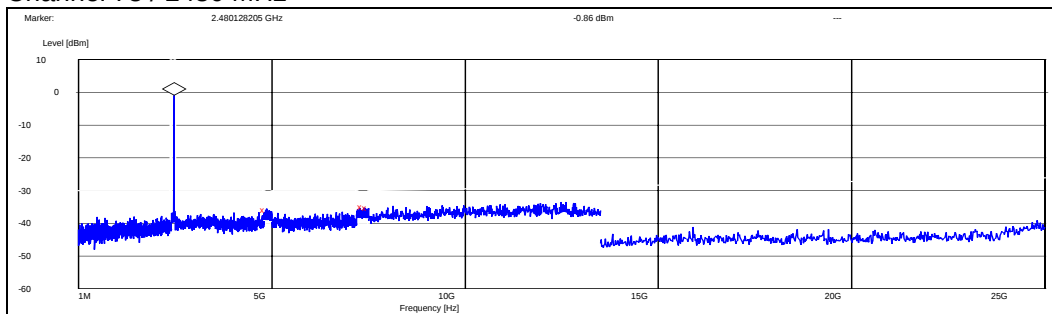

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4867.628205	-35.135072	PASSED
7388.461538	-34.335072	PASSED
7500.000000	-34.435072	PASSED

6. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)

EUT with DUT number	RM-589V DUT 42114
Accessories with DUT numbers	BL-5CV DUT 42115, AC-7ev DUT 42109
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 51 / 99.9
Date of measurements	01-Dec-2009
Measured by	Jari Jantunen

6.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-GEN as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.


CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

6.2. Bluetooth Test results

6.2.1 GFSK modulation, PRBS packet type

Channel 40 / 2442 MHz

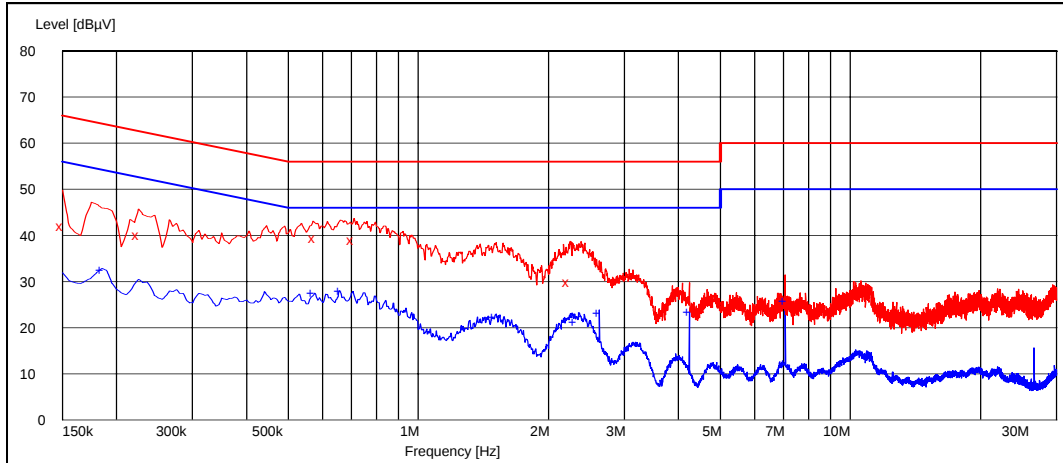

Quasi peak (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.150000	42.10	L1	PASSED
0.225000	40.20	L1	PASSED
0.575000	39.40	L1	PASSED
0.705000	39.10	L1	PASSED
2.230000	30.00	L1	PASSED

Average (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.185000	32.50	L1	PASSED
0.570000	27.40	L1	PASSED
0.660000	28.00	L1	PASSED
1.500000	22.30	L1	PASSED
2.310000	21.10	L1	PASSED
2.625000	23.30	L1	PASSED
4.240000	23.50	N	PASSED
7.065000	25.70	L1	PASSED

7. 20 dB bandwidth (FCC §15.247(a)(1), RSS-210 A8.1 (a))

EUT with DUT number	RM-589V DUT42106
Accessories with DUT numbers	BL-5CV DUT42107
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 45 / 99.0
Date of measurements	24-Nov-2009
Measured by	Hannu Söderholm

7.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for 20 dB bandwidth measurements


Limit [MHz]
N/A

7.2. Bluetooth Test results


7.2.1 GFSK modulation, PRBS packet type

Channel / f_c [MHz]	20 dB bandwidth [kHz]	Result
0 / 2402	903.846	PASSED
40 / 2442	907.051	PASSED
78 / 2480	964.744	PASSED


Channel 0 / 2402 MHz

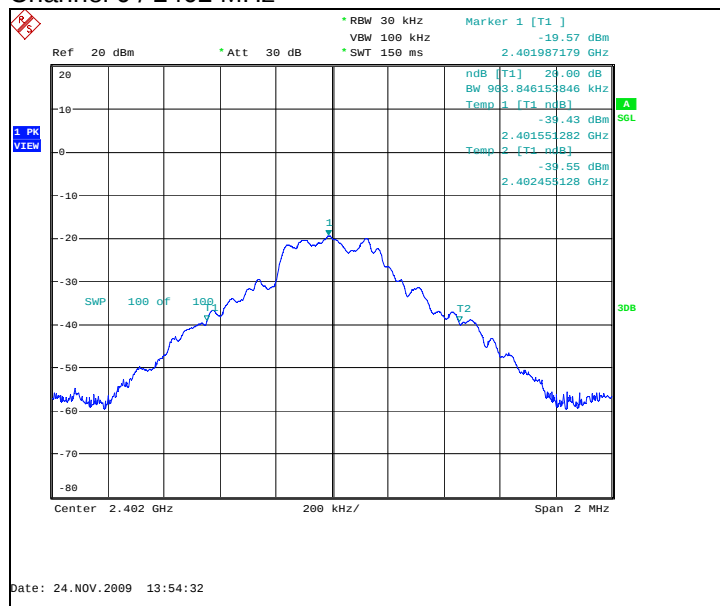

Channel 40 / 2442 MHz

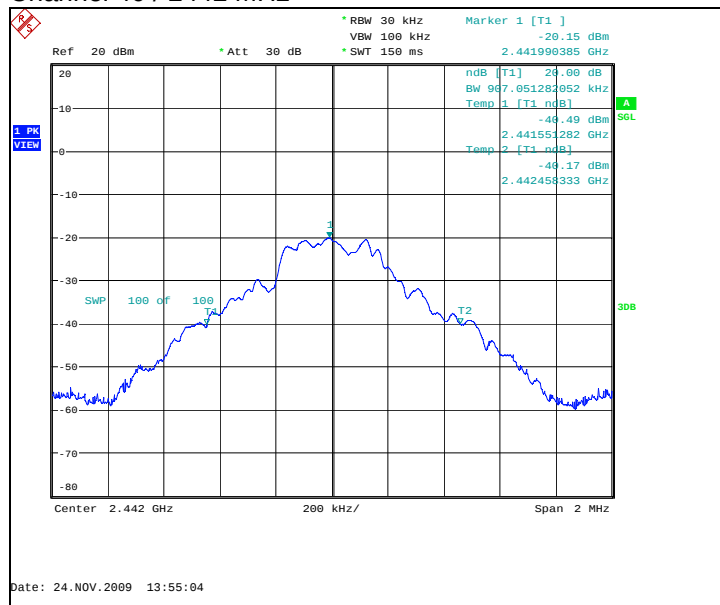


Channel 78 / 2480 MHz

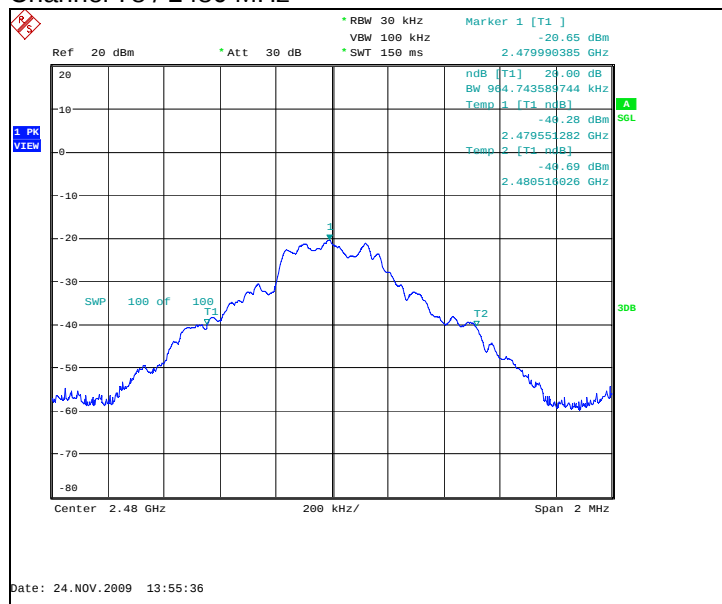


7.2.2 8DPSK modulation, PRBS packet type

Channel / f _c [MHz]	20 dB bandwidth [kHz]	Result
0 / 2402	1310.897	PASSED
40 / 2442	1326.923	PASSED
78 / 2480	1326.923	PASSED


Channel 0 / 2402 MHz

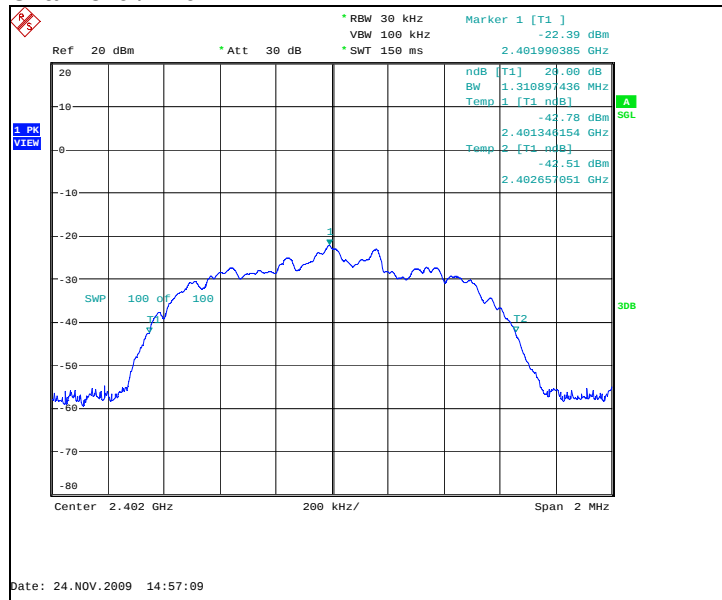

Channel 40 / 2442 MHz

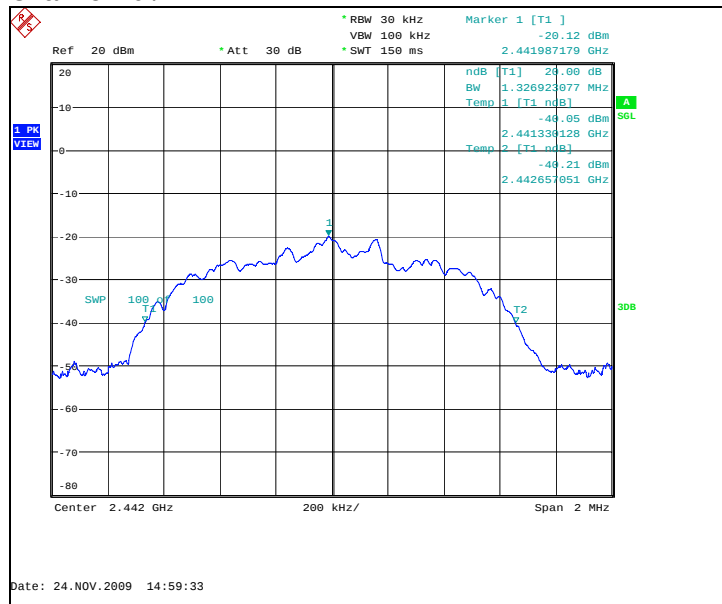

Channel 78 / 2480 MHz

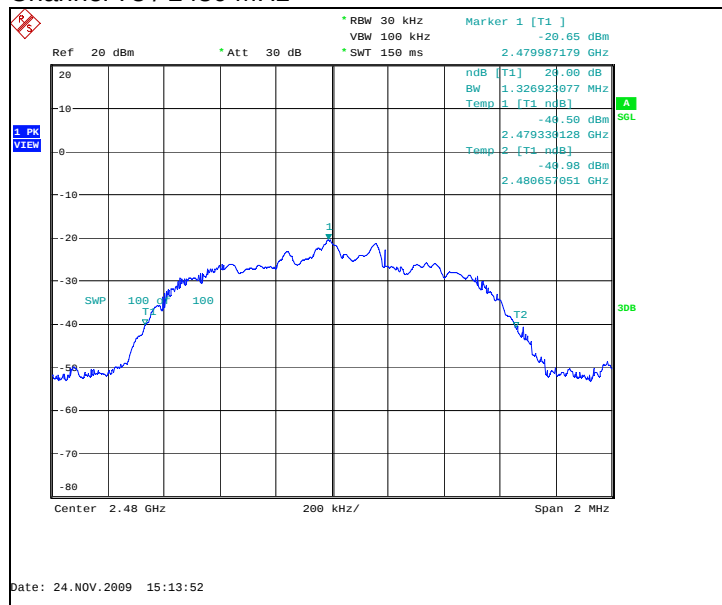

8. Carrier frequency separation (FCC §15.247(a)(1), RSS-210 A8.1 (b))

EUT with DUT number	RM-589V DUT42106
Accessories with DUT numbers	BL-5CV DUT42107
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 45 / 99.0
Date of measurements	24-Nov-2009
Measured by	Hannu Söderholm

8.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for carrier frequency separation measurements


Limit [MHz]
≥ 0.025 or $2/3$ of the 20 dB bandwidth

8.2. Bluetooth Test results

8.2.1 GFSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
985.577	PASSED


Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

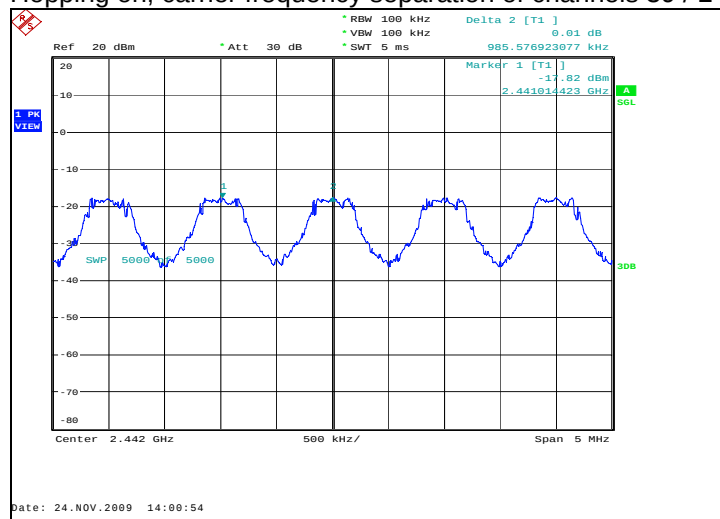

8.2.2 8DPSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
921.474	PASSED

Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

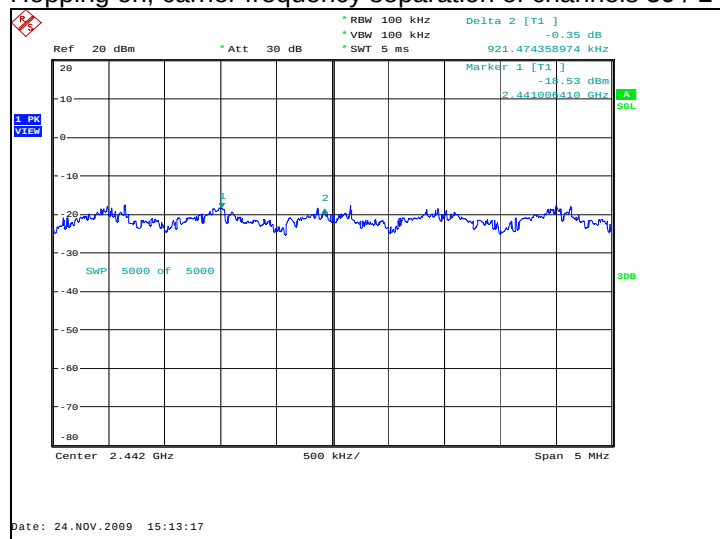

9. Number of hopping frequencies (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (d))

EUT with DUT number	RM-589V DUT42106
Accessories with DUT numbers	BL-5CV DUT42107
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 45 / 99.0
Date of measurements	24-Nov-2009
Measured by	Hannu Söderholm

9.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for number of hopping frequencies measurements


Limit [number]
≥ 15

9.2. Bluetooth Test results

9.2.1 GFSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
79	PASSED


Hopping on, number of hopping frequencies

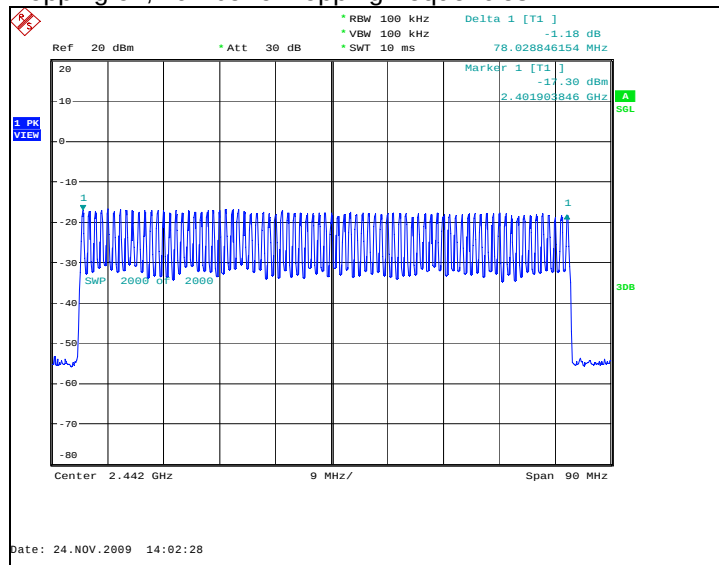

9.2.2 8DPSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
31	PASSED

Hopping on, number of hopping frequencies

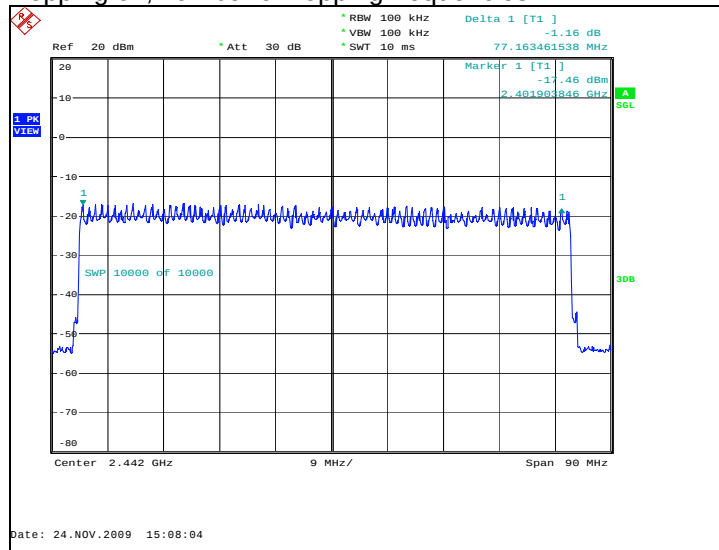

10. Time of occupancy (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (d))

EUT with DUT number	RM-589V DUT42106
Accessories with DUT numbers	BL-5CV DUT42107
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 45 / 99.0
Date of measurements	24-Nov-2009
Measured by	Hannu Söderholm

10.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210 as follows:

The total time of occupancy is get by multiplying the measured number of transmissions occurred during 31.6 second period with the duration of one transmission.

Limits for time of occupancy measurements


Limit [s]
≤ 0.4

10.2. Bluetooth test results


10.2.1 GFSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [μs]	Time of occupancy [s]	Result
97	2 917	0.282917	PASSED

Hopping on, number of transmissions, channel 40 / 2442 MHz

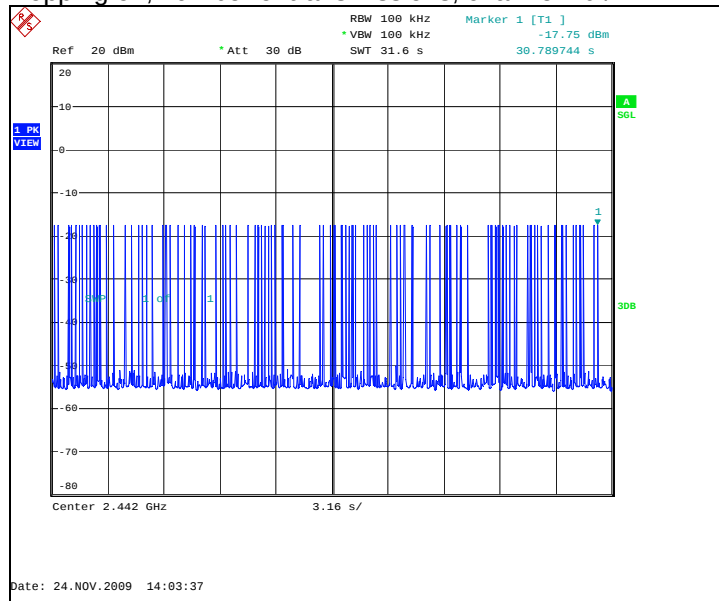


Hopping on, duration of one transmission, channel 40 / 2442 MHz

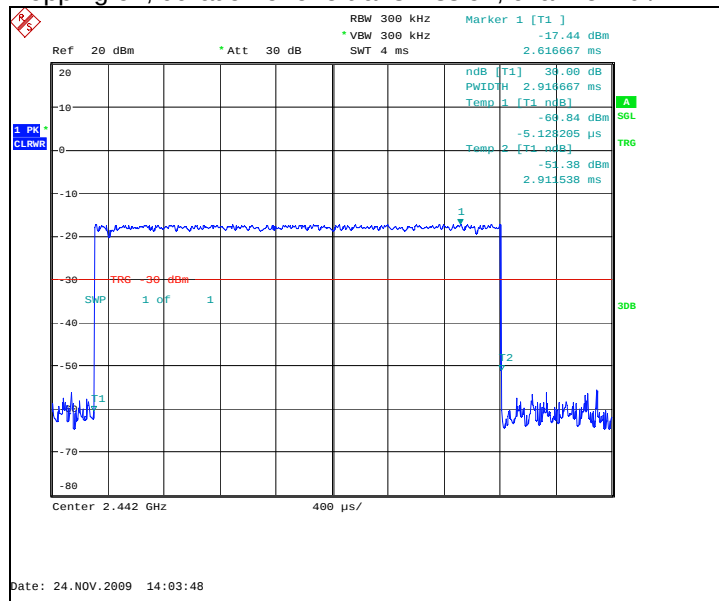


10.2.2 8DPSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [μs]	Time of occupancy [s]	Result
88	2 923	0.257231	PASSED

Hopping on, number of transmissions, channel 40 / 2442 MHz

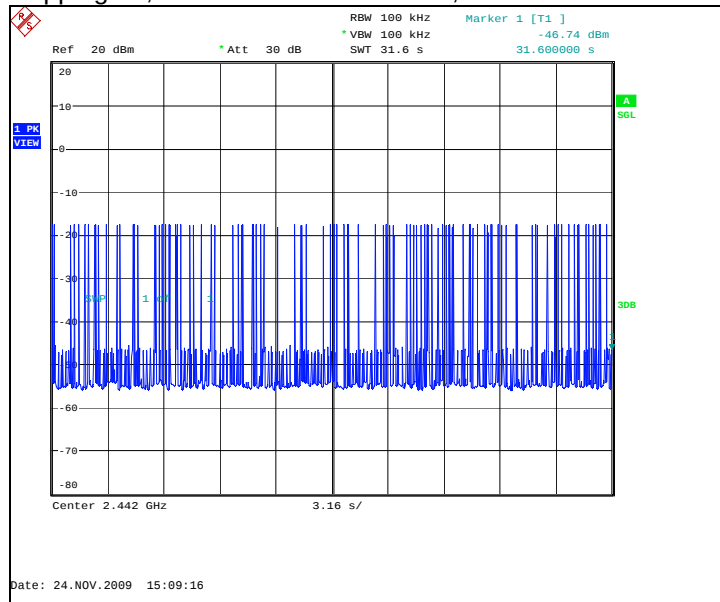

Hopping on, duration of one transmission, channel 40 / 2442 MHz

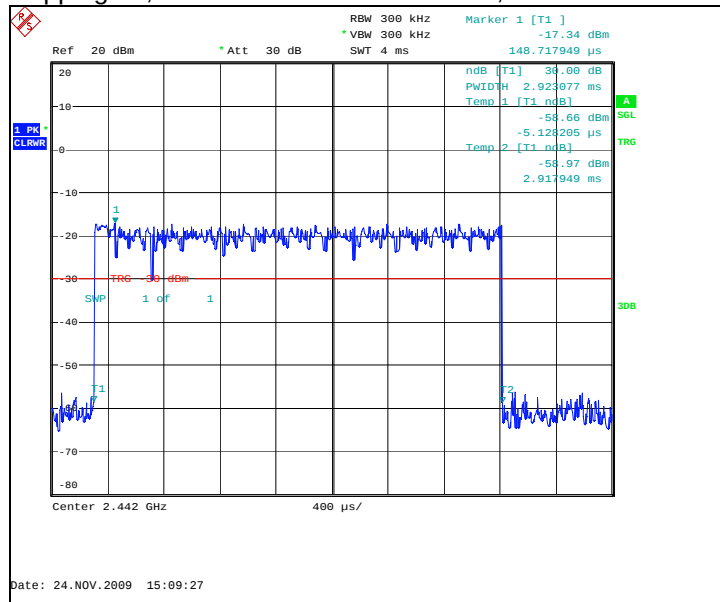

11. Test Equipment

11.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM30597	Power splitter	11667A	Agilent	22/24/27, 15C
TM37499	Power splitter	11667A	Agilent	22/24/27, 15C
TM38111	Multimeter	34401A	Agilent	22/24/27, 15C
TM38112	DC power supply	6632A	Agilent	22/24/27, 15C
TM22901	Attenuator	8496A	Agilent	22/24/27, 15C
TM30636	Artificial mains net	L2-16	PMM	15C, 15B
TM37678	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM37773	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM30600	Pulse Limiter	ESH3-Z2	R&S	15C, 15B
TM26490	LISN 50 μ H	ESH3-Z5	R&S	15C, 15B
TM37610	Spectrum analyzer	FSU	R&S	22/24/27, 15C
TM22835	Multimeter	87	Fluke	15C, 15B
TM37500	Microwave switch system	7116-MSW	Keithley	22/24/27, 15C, 15B
TM22638	Power supply	OL63743-901	Transformatic	22/24/27, 15C, 15B
	Temperature chamber	VT4002	Vötsch	22/24/27, 15C
2058	EMI Test receiver	ESPC	R&S	15C, 15B
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B
2002	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B

11.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM30599	3m semi-anechoic chamber		TDK	22/24/27, 15C, 15B
TM38845	EMI receiver	ESI 40	R&S	22/24/27, 15C, 15B
TM37498	Preamplifier	AMF-5D-020180-26-10P	MITEQ	22/24/27, 15C, 15B
TM37523	Preamplifier	AMF-4D-10M-3G-25-20P	MITEQ	22/24/27, 15C, 15B
TM37516	Biconilog antenna	HL562	R&S	22/24/27, 15C, 15B
TM26496	Double ridged waveguide antenna	3115	EMCO	22/24/27, 15C, 15B
TM39158	Horn antenna	3116	EMCO	22/24/27, 15C, 15B
TM26492	Reference dipole set	UHAP/VHAP	Schwarzbeck	22/24/27, 15C, 15B
TM37501	Dipole antenna	3125-870	EMCO	22/24/27
TM37502	Dipole antenna	3125-1880	EMCO	22/24/27
TM37773	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM38631	Signal generator	83640L	Agilent	22/24/27, 15C, 15B
TM38066	High pass filter	4HC3000/18000-3-KK	Trilithic	22/24/27, 15C, 15B
TM26511	Tunable notch filter	WRCA870	Wainwright	22/24/27
TM38215	Tunable notch filter	WRCD1850/1910-0.2/40	Wainwright	22/24/27
TM38214	Band reject filter	WRCT 2402/2480-2400/2483.5-30	Wainwright	15C
TM30642	Mast/Turntable controller	HD-100	Deisel	22/24/27, 15C, 15B
TM26500	Turntable	DS412	Deisel	22/24/27, 15C, 15B
TM38842	Antenna mast controller	2090	EMCO	22/24/27, 15C, 15B
TM38843	Antenna mast	2075	EMCO	22/24/27, 15C, 15B
TM38114	DC power supply	6632A	Agilent	22/24/27, 15C, 15B
TM38323	Preamplifier	PA-02 18-26 GHz	EMC Automation	22/24/27, 15C, 15B
TM37678	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM22638	Power supply	OL63743-901	Transformativ	22/24/27, 15C, 15B
TM23892	Yaesu controller	G-1000SDX	Yaesu	22/24/27, 15C, 15B
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B
2002	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B

