


RM-589V Test Setups



Picture 1. FCC Part 15C Radiated emissions

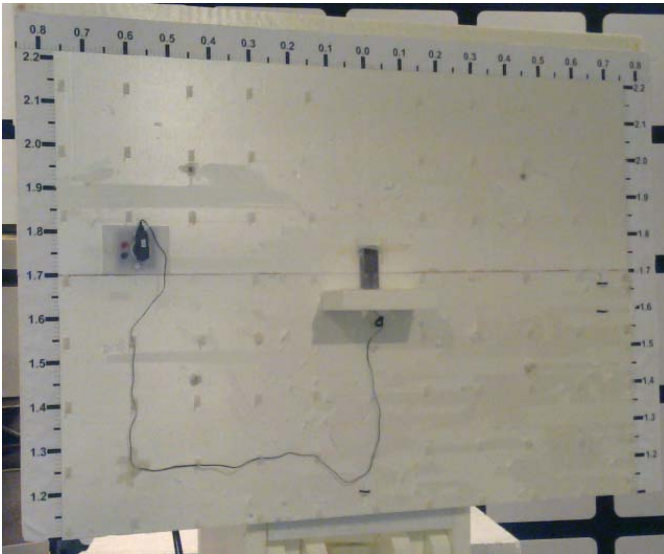

Picture 2. FCC Part 15B Radiated emissions



Picture 3. FCC Part 15C AC powerline conducted emissions

Test Setup photos for RM-589V SAR Compliance Test Report

Test report no.:	SAR_Photo_RM-589V_02	Date of report:	2009-12-09
Template version:	13.0	Number of pages:	5
Testing laboratory:	TCC Nokia Copenhagen Laboratory Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934	Client:	Vertu Ltd. Beacon Hill Road Church Crookham, Hampshire United Kingdom, GU52 8DY Tel. +44 1252 611000 Fax. +44 1252 611300
Responsible test engineer:	Jesper Nielsen	Product contact person:	Swapna Murala
Measurements made by:	Preben Runchel, Leif Klysner & Jesper Nielsen		
Tested device:	RM-589V		
FCC ID:	P7QRM-589V	IC:	4299A-RM589V
Supplement reports:	FCC_RM-589V_01		
Testing has been carried out in accordance with:	47CFR §2.1093 Radiofrequency Radiation Exposure Evaluation: Portable Devices FCC OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01) Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields RSS-102 Evaluation Procedure for Mobile and Portable Radio Transmitters with Respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields IEEE 1528 - 2003 IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Technique		
Documentation:	The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test results:	The tested device complies with the requirements in respect of all parameters subject to the test. The test results and statements relate only to the items tested. The test report shall not be reproduced except in full, without written approval of the laboratory.		

Date and signatures:

For the contents:

CONTENTS

1. SUMMARY OF SAR TEST REPORT.....	3
1.1 TEST DETAILS.....	3
1.2 PICTURE OF THE DEVICE.....	3
2. TEST POSITIONS	3
2.1 AGAINST PHANTOM HEAD	4
2.2 BODY WORN CONFIGURATION	4

1. SUMMARY OF SAR TEST REPORT

1.1 Test Details

Period of test	2009-12-03 to 2009-12-09
SN, HW and SW numbers of tested device	SN: 004401/10/752169/8, HW: B3.0, SW: vty09w44pb2, DUT: 24642
Batteries used in testing	BL-5CV, DUT: 24629, 24630, 24631, 24634
Headsets used in testing	AD-76V + WH-205, DUT: 27462 + 24619
Other accessories used in testing	-
State of sample	Prototype unit
Notes	-

1.2 Picture of the Device



2. TEST POSITIONS

2.1 Against Phantom Head

Measurements were made in “cheek” and “tilt” positions on the left hand side of the phantom.

The positions used in the measurements were according to IEEE 1528 - 2003 "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques".

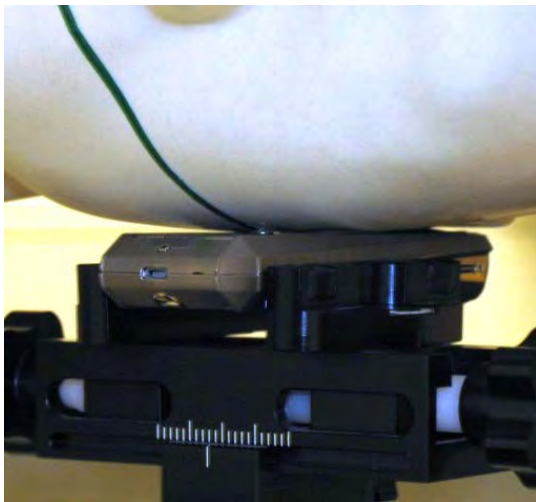


Photo of the device in “cheek” position

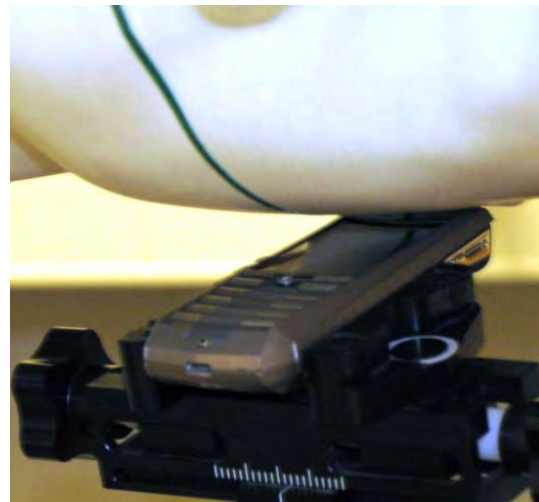


Photo of the device in “tilt” position

2.2 Body Worn Configuration

The device was placed in the SPEAG holder using the Nokia spacer and placed below the flat section of the phantom. The distance between the device and the phantom was kept at the separation distance indicated in the photo below using a separate flat spacer that was removed before the start of the measurements. The device was oriented with its back facing the phantom since this orientation gives higher results.

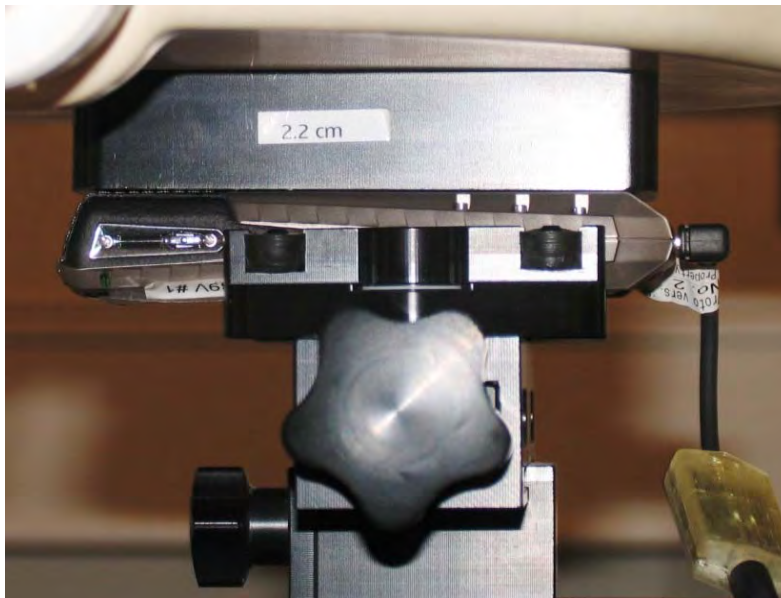


Photo of the device positioned for Body SAR measurement.
The spacer was removed for the tests.