

1 CO-LOCATION

1.1 Transmitter Radiated Unwanted Emissions

1.1.1 Transmitter Radiated Unwanted Emissions Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.


1.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

1.1.3 Test Procedures


Test Method – General Information	
<input checked="" type="checkbox"/>	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
<input checked="" type="checkbox"/>	Measurements in the frequency range 10 GHz - 18GHz are typically made at a closer distance 1m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input checked="" type="checkbox"/>	Measurements in the frequency range above 18 GHz - 25GHz are typically made at a closer distance 0.5m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle \geq 98 or duty factor].
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as FCC DA 00-0705, for spurious radiated emissions. The dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$
<input checked="" type="checkbox"/>	For unwanted emissions into non-restricted bands. Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.
<input checked="" type="checkbox"/>	For unwanted emissions into restricted bands.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). $\text{VBW} \geq 1/T$, where T is pulse time.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
<input checked="" type="checkbox"/>	For radiated measurement.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1000 MHz.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.6 for radiated emissions from above 1 GHz.

1.1.4 Test Setup

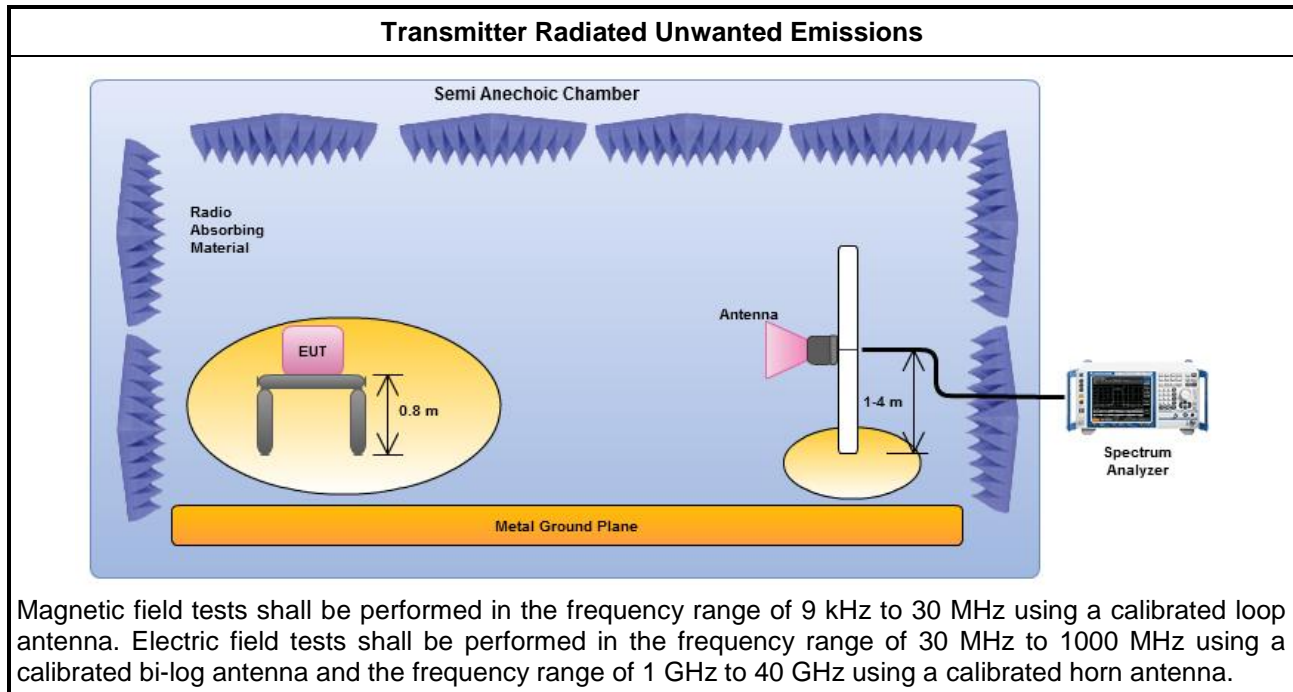


1.1.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

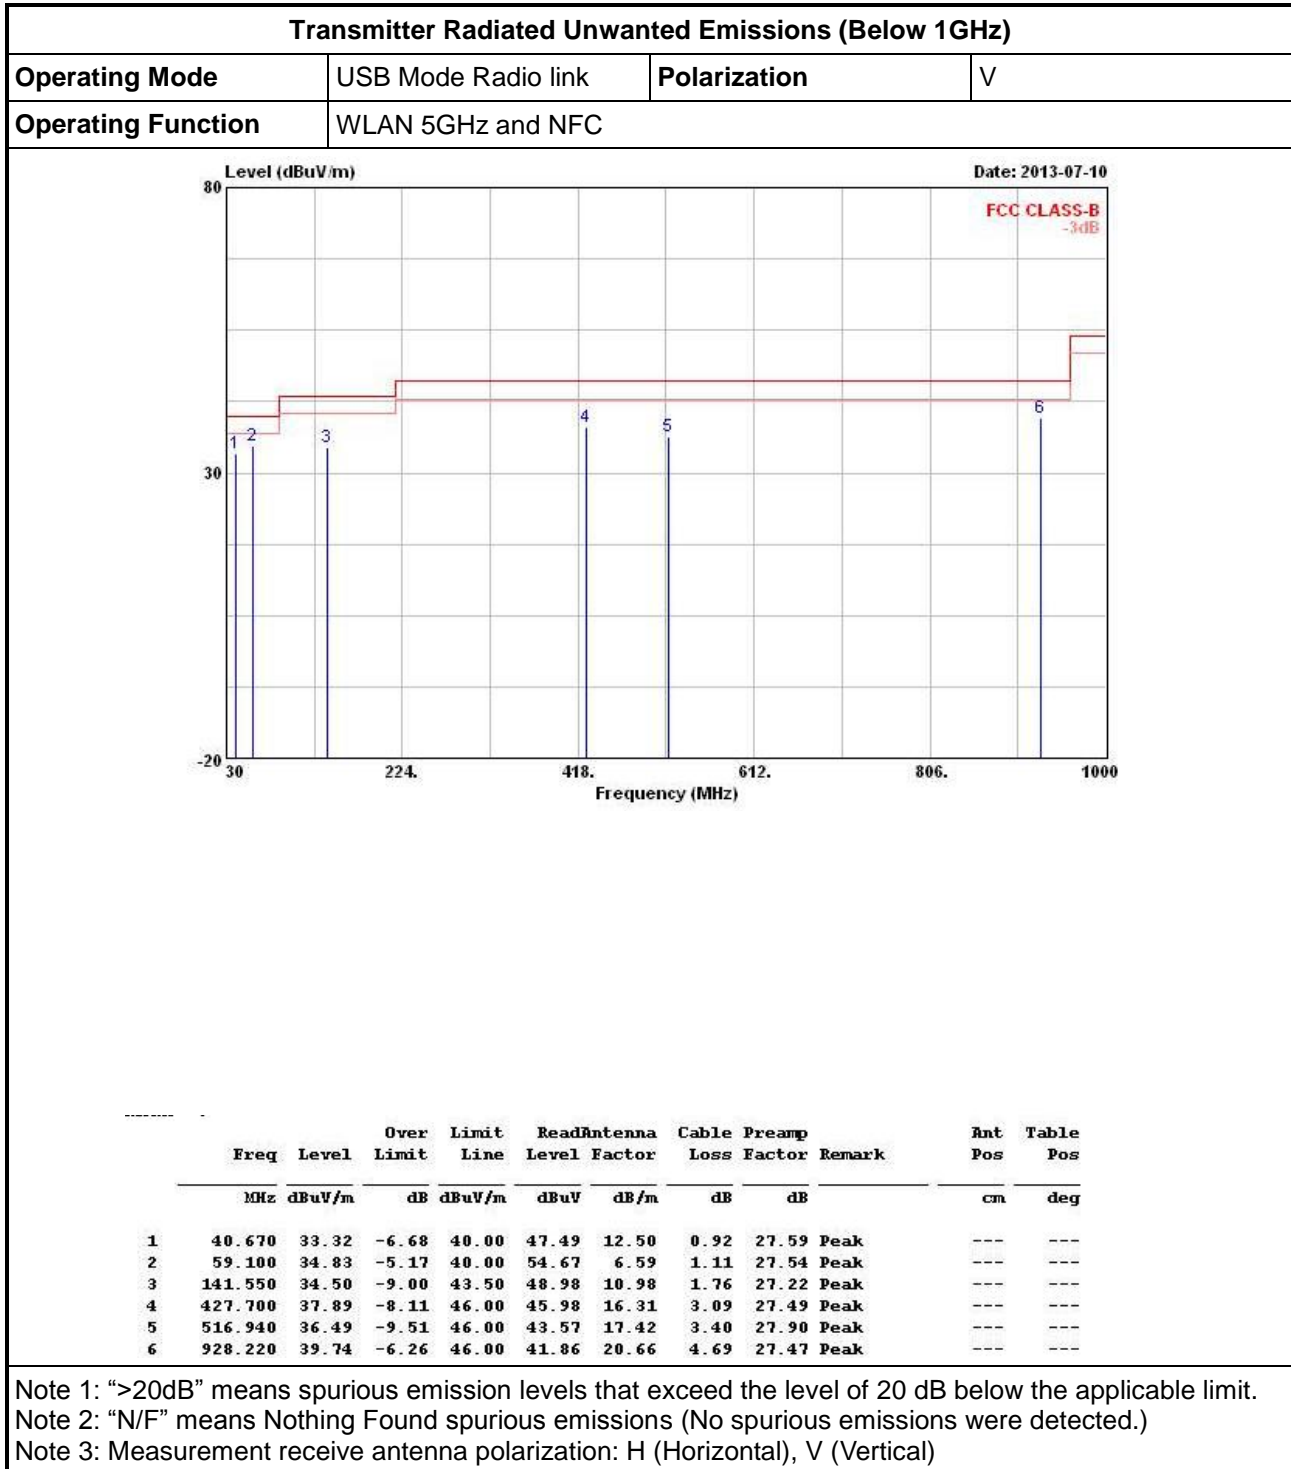1.1.6 Results of Radiated Emissions (30MHz~1GHz)


Transmitter Radiated Unwanted Emissions (Below 1GHz)

Operating Mode	USB Mode Radio link	Polarization	H
Operating Function	WLAN 5GHz and NFC		

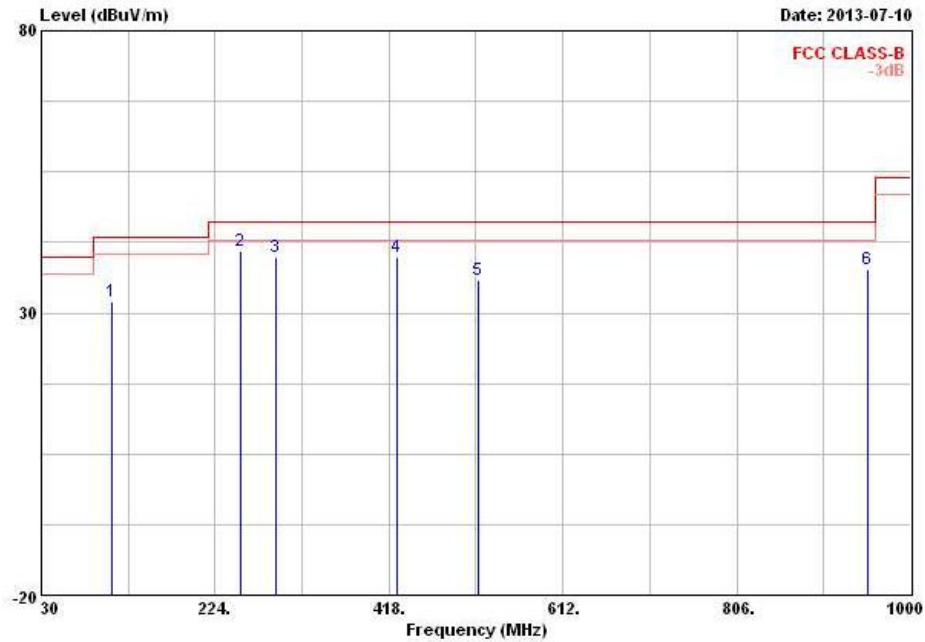

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	109.540	32.12	-11.38	43.50	45.70	12.23	1.54	27.35	Peak	---	---
2	253.100	40.90	-5.10	46.00	52.60	12.78	2.33	26.81	Peak	---	---
3	291.900	40.00	-6.00	46.00	51.08	13.07	2.53	26.68	Peak	---	---
4	427.700	39.93	-6.07	46.00	48.02	16.31	3.09	27.49	Peak	---	---
5	516.940	35.93	-10.07	46.00	43.01	17.42	3.40	27.90	Peak	---	---
6	951.500	37.81	-8.19	46.00	39.49	20.91	4.81	27.40	Peak	---	---


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Transmitter Radiated Unwanted Emissions (Below 1GHz)

Operating Mode	USB Mode Radio link	Polarization	V
Operating Function	WLAN 2.4GHz and NFC		

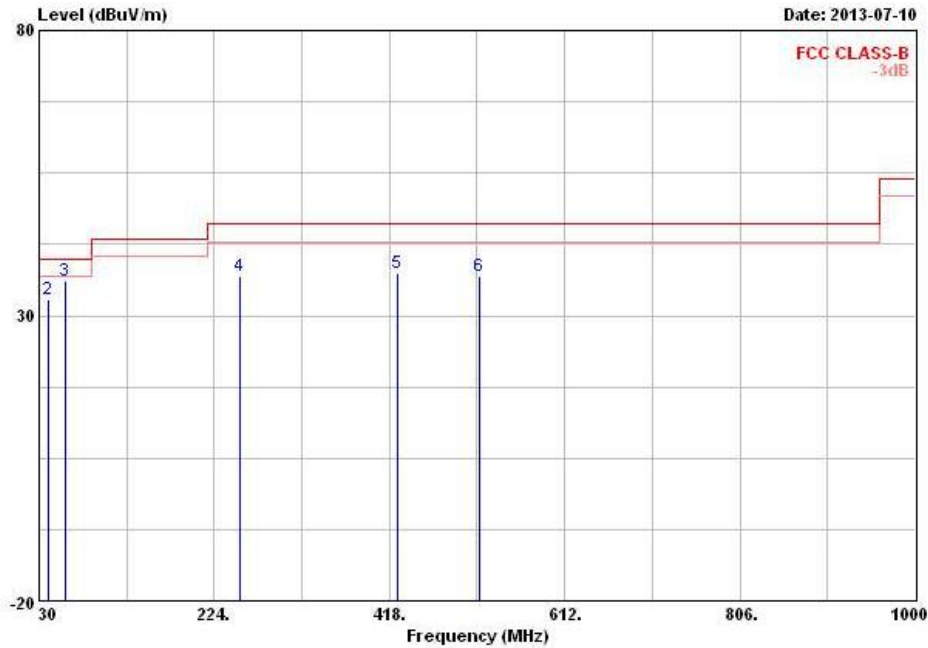

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	30.000	34.15	-5.85	40.00	42.29	18.70	0.77	27.61	Peak	---	---
2 @	40.670	32.88	-7.12	40.00	47.05	12.50	0.92	27.59	Peak	---	---
3 @	59.100	36.16	-3.84	40.00	56.00	6.59	1.11	27.54	Peak	---	---
4 @	253.100	36.82	-9.18	46.00	48.52	12.78	2.33	26.81	Peak	---	---
5 @	427.700	37.50	-8.50	46.00	45.59	16.31	3.09	27.49	Peak	---	---
6 @	516.940	36.88	-9.12	46.00	43.96	17.42	3.40	27.90	Peak	---	---


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Transmitter Radiated Unwanted Emissions (Below 1GHz)

Operating Mode	USB Mode Radio link	Polarization	H
Operating Function	WLAN 2.4GHz and NFC		

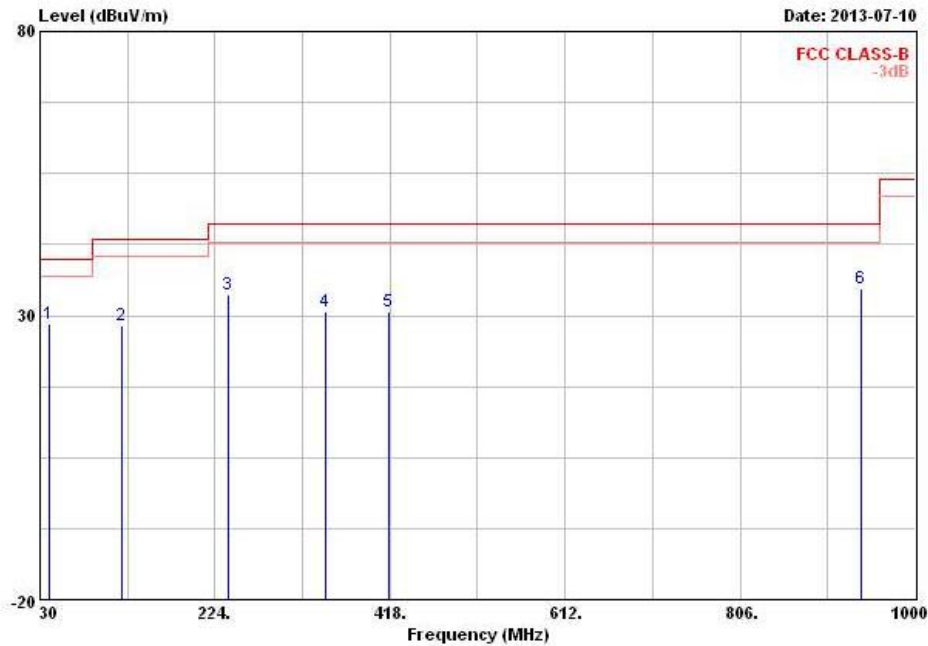

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	39.700	28.53	-11.47	40.00	42.04	13.18	0.91	27.60	Peak	---	---
2 @	121.180	28.37	-15.13	43.50	41.36	12.67	1.64	27.30	Peak	---	---
3 @	238.550	33.74	-12.26	46.00	47.11	11.24	2.26	26.87	Peak	---	---
4 @	347.190	30.78	-15.22	46.00	40.78	14.19	2.78	26.97	Peak	---	---
5 @	417.030	30.69	-15.31	46.00	38.76	16.32	3.04	27.43	Peak	---	---
6 @	939.860	34.85	-11.15	46.00	36.75	20.79	4.75	27.44	Peak	---	---


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Transmitter Radiated Unwanted Emissions (Below 1GHz)

Operating Mode	USB Mode Radio link	Polarization	V
Operating Function	Bluetooth and NFC		

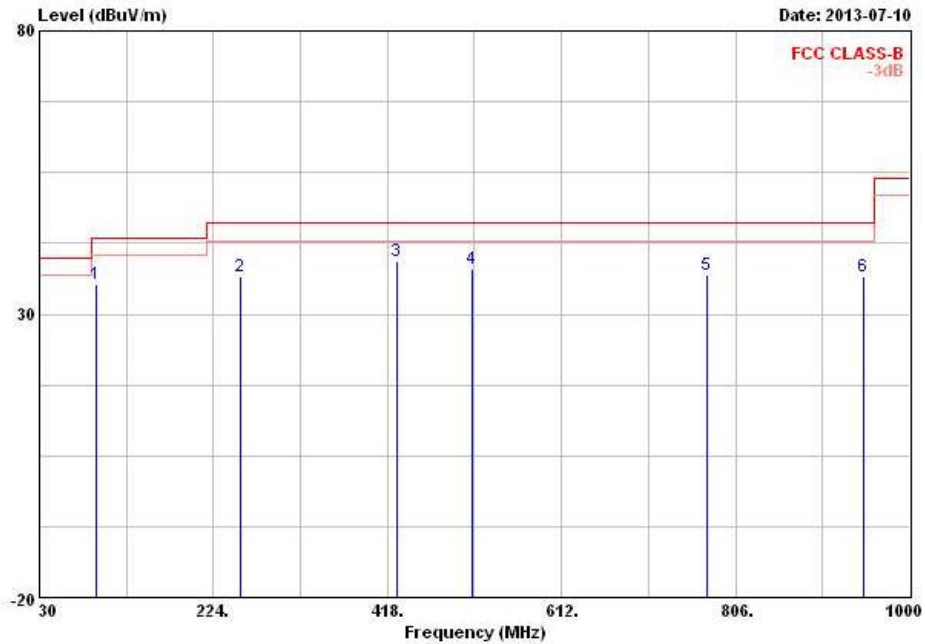

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	94.020	35.25	-8.25	43.50	51.16	10.10	1.40	27.41	Peak	---	---
2 @	254.070	36.74	-9.26	46.00	48.33	12.89	2.33	26.81	Peak	---	---
3 @	428.670	39.45	-6.55	46.00	47.55	16.30	3.09	27.49	Peak	---	---
4 @	513.060	38.02	-7.98	46.00	45.12	17.40	3.39	27.89	Peak	---	---
5 @	773.990	36.94	-9.06	46.00	40.69	19.85	4.24	27.84	Peak	---	---
6 @	948.590	36.57	-9.43	46.00	38.29	20.89	4.80	27.41	Peak	---	---


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Transmitter Radiated Unwanted Emissions (Below 1GHz)

Operating Mode	USB Mode Radio link	Polarization	H
Operating Function	Bluetooth and NFC		

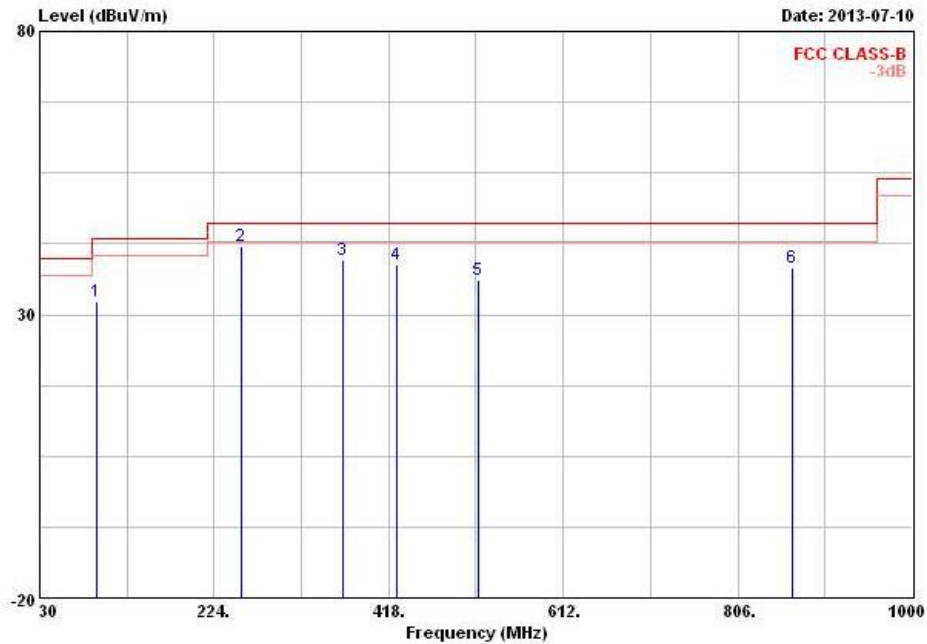


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 @	94.020	32.19	-11.31	43.50	48.10	10.10	1.40	27.41	Peak	---
2 @	254.070	42.04	-3.96	46.00	53.63	12.89	2.33	26.81	Peak	---
3 @	366.590	39.51	-6.49	46.00	49.15	14.62	2.85	27.11	Peak	---
4 @	427.700	38.71	-7.29	46.00	46.80	16.31	3.09	27.49	Peak	---
5 @	516.940	36.16	-9.84	46.00	43.24	17.42	3.40	27.90	Peak	---
6 @	866.140	38.25	-7.75	46.00	41.19	20.21	4.48	27.63	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

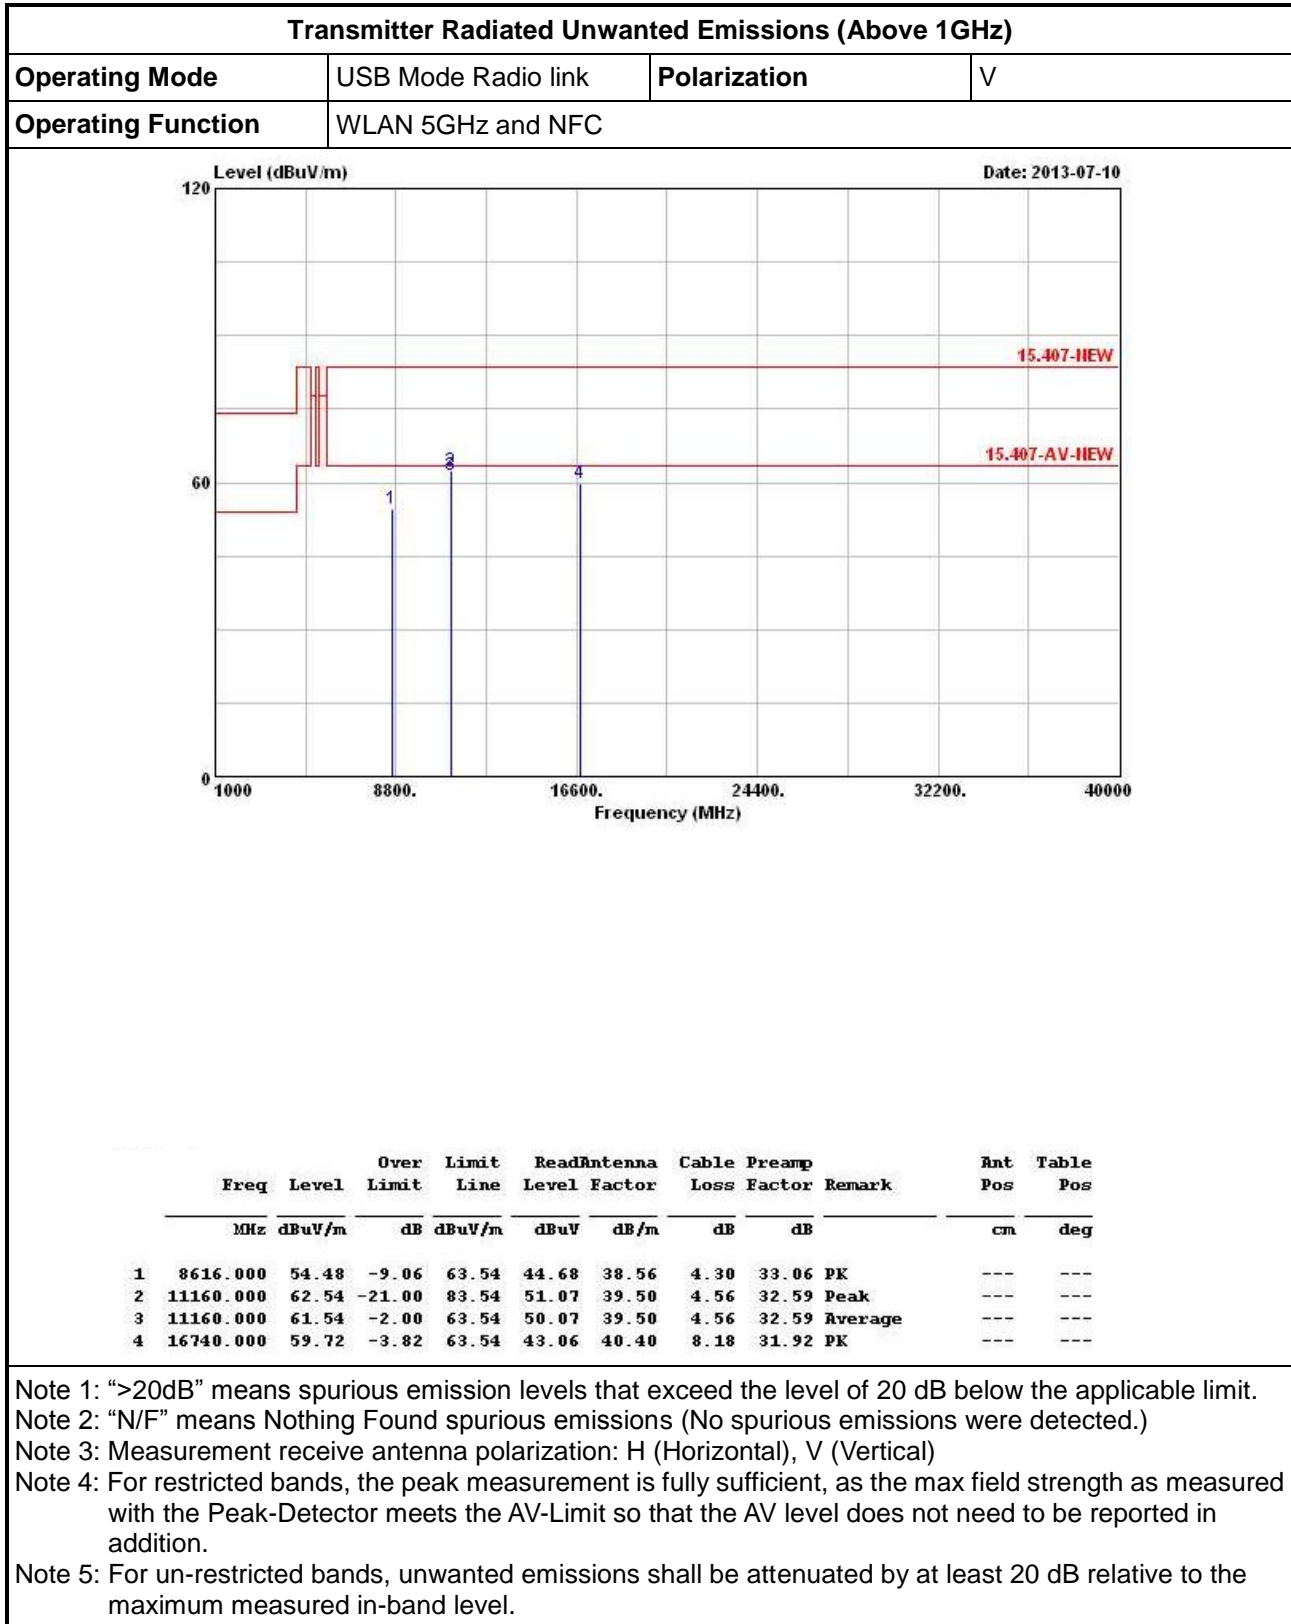1.1.7 Results for Radiated Emissions (1GHz~10th Harmonic)


Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	USB Mode Radio link	Polarization	H
Operating Function	WLAN 5GHz and NFC		

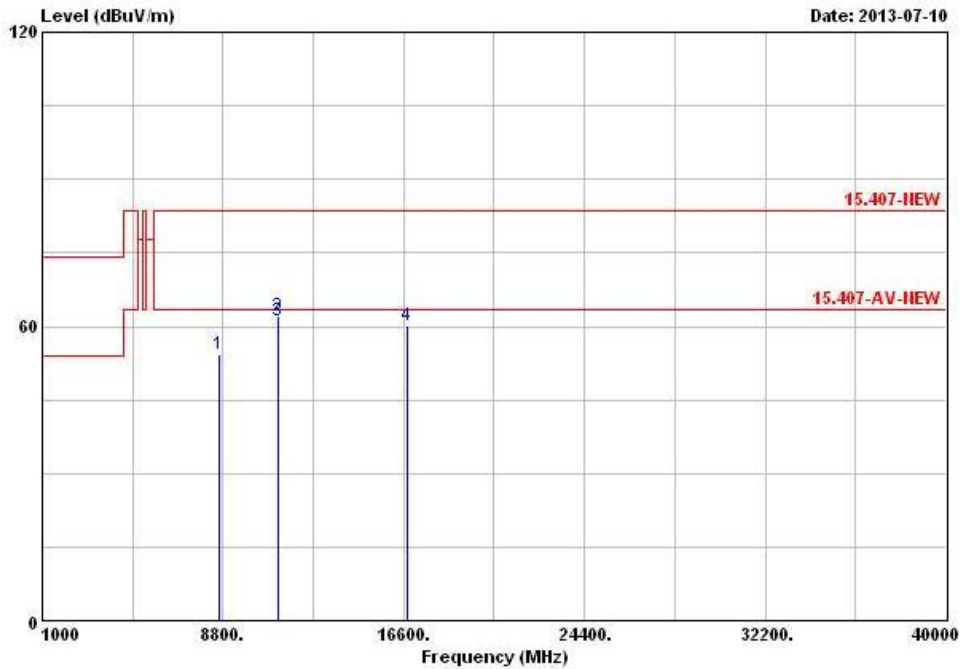

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8628.000	54.23	-9.31	63.54	44.36	38.54	4.39	33.06	PK	---	---
2	11160.000	62.06	-21.48	83.54	50.59	39.50	4.56	32.59	Peak	---	---
3	11160.000	61.06	-2.48	63.54	49.59	39.50	4.56	32.59	Average	---	---
4	16740.000	60.26	-3.28	63.54	43.60	40.40	8.18	31.92	PK	---	---


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

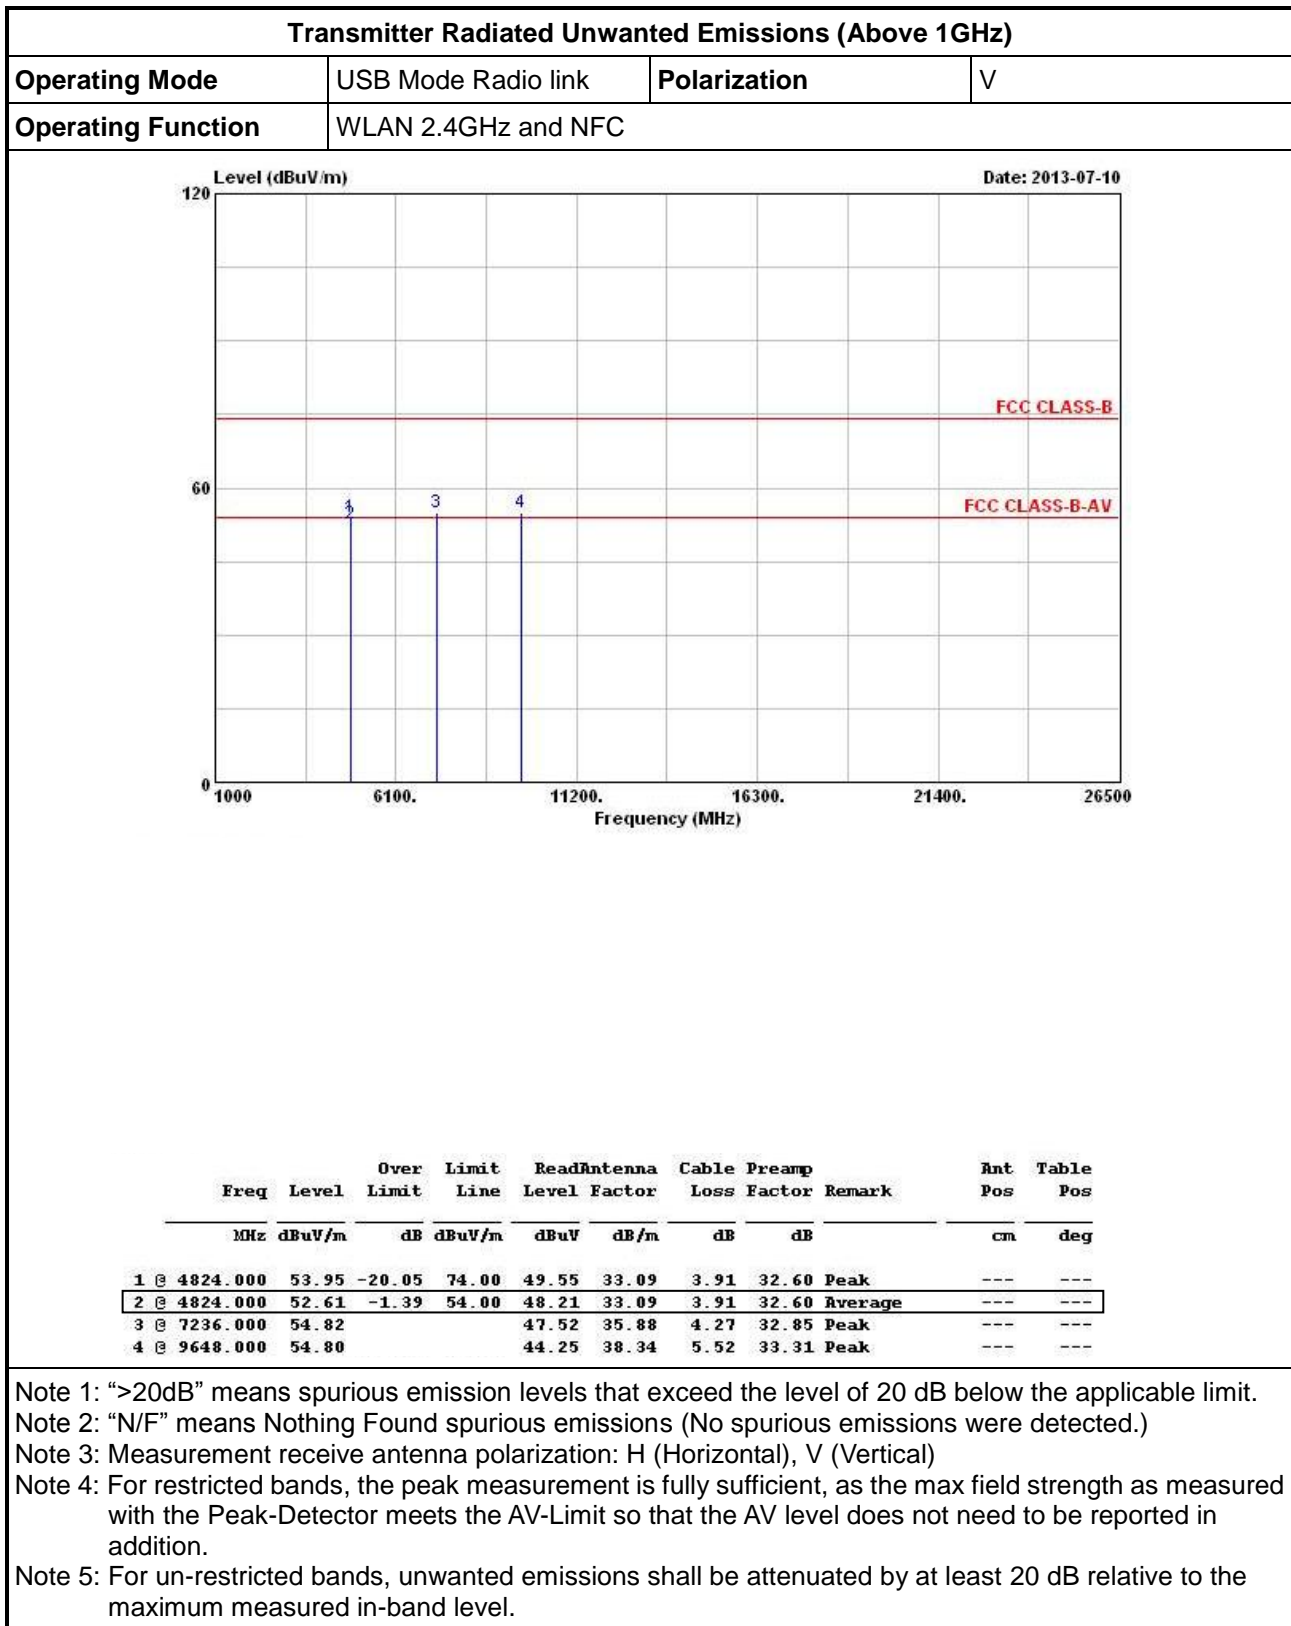

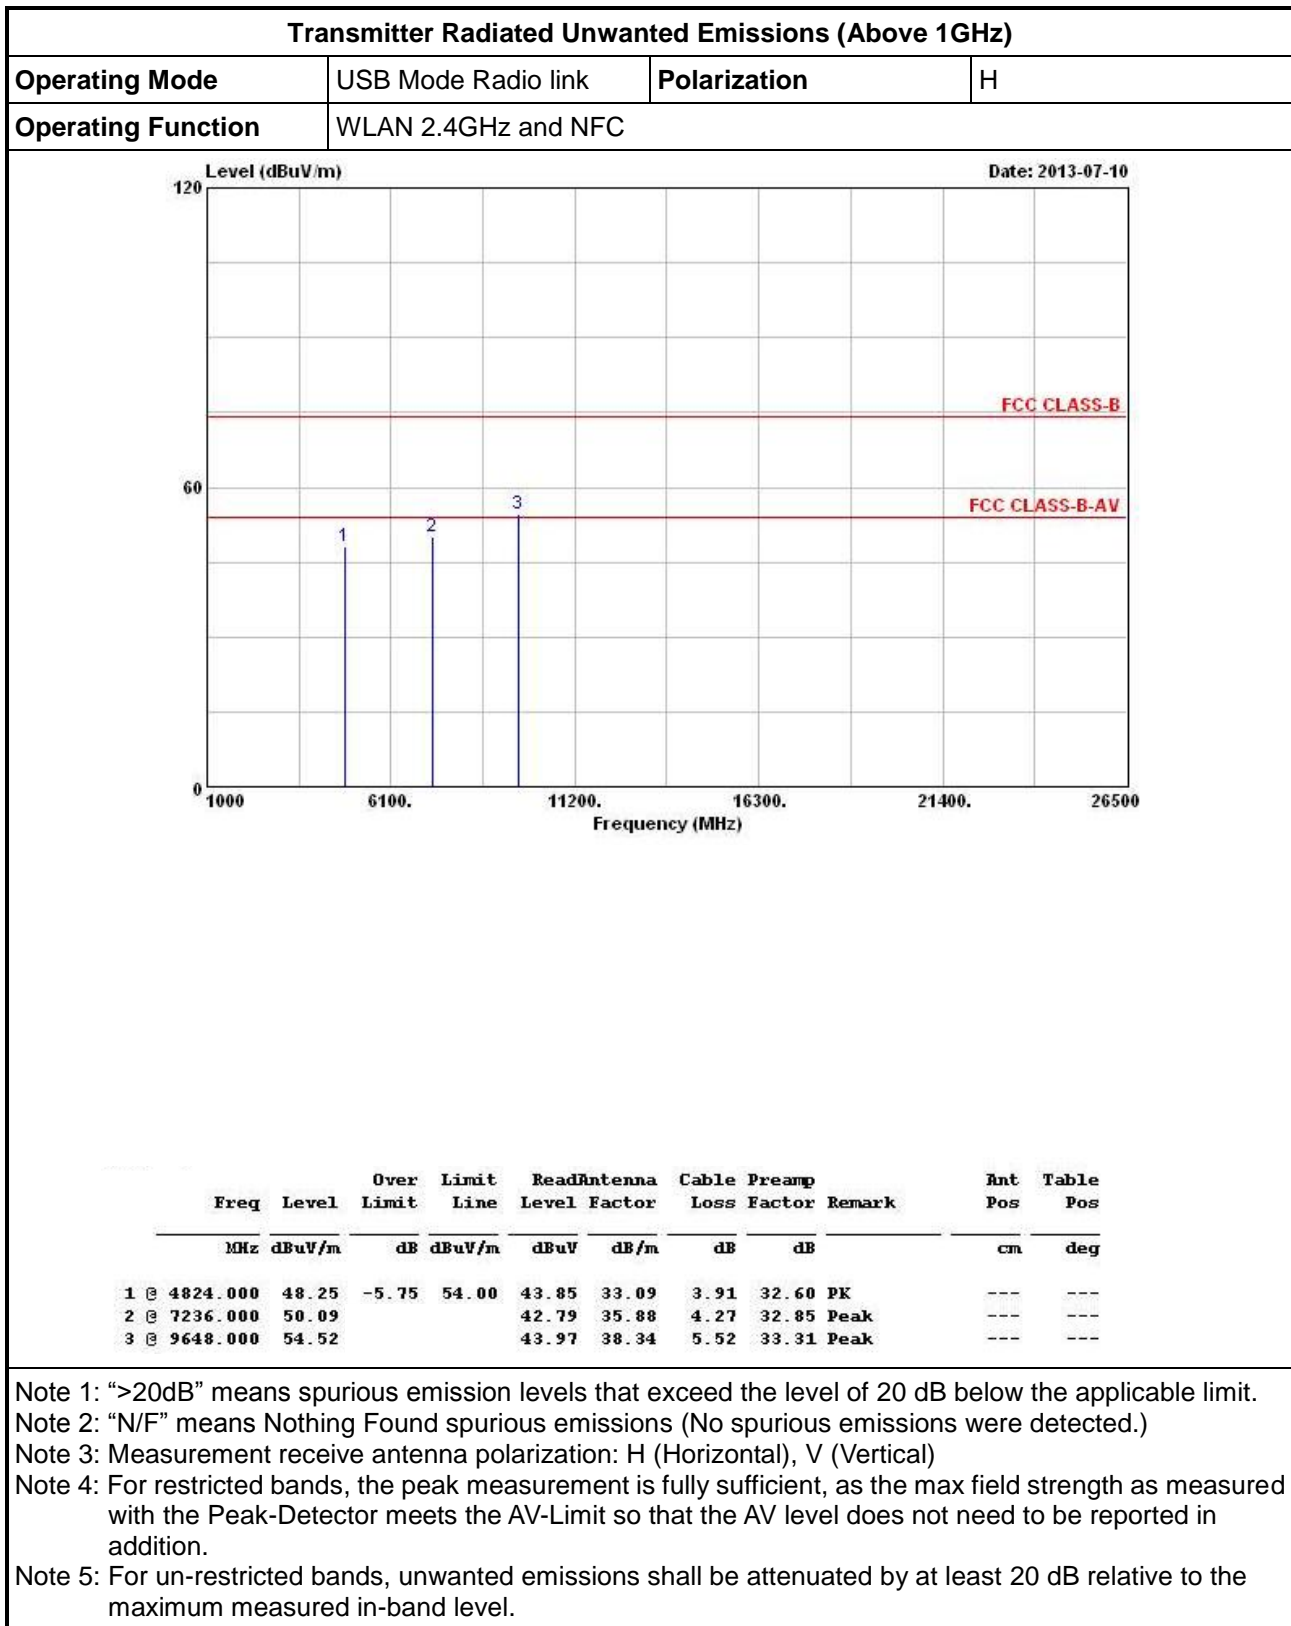

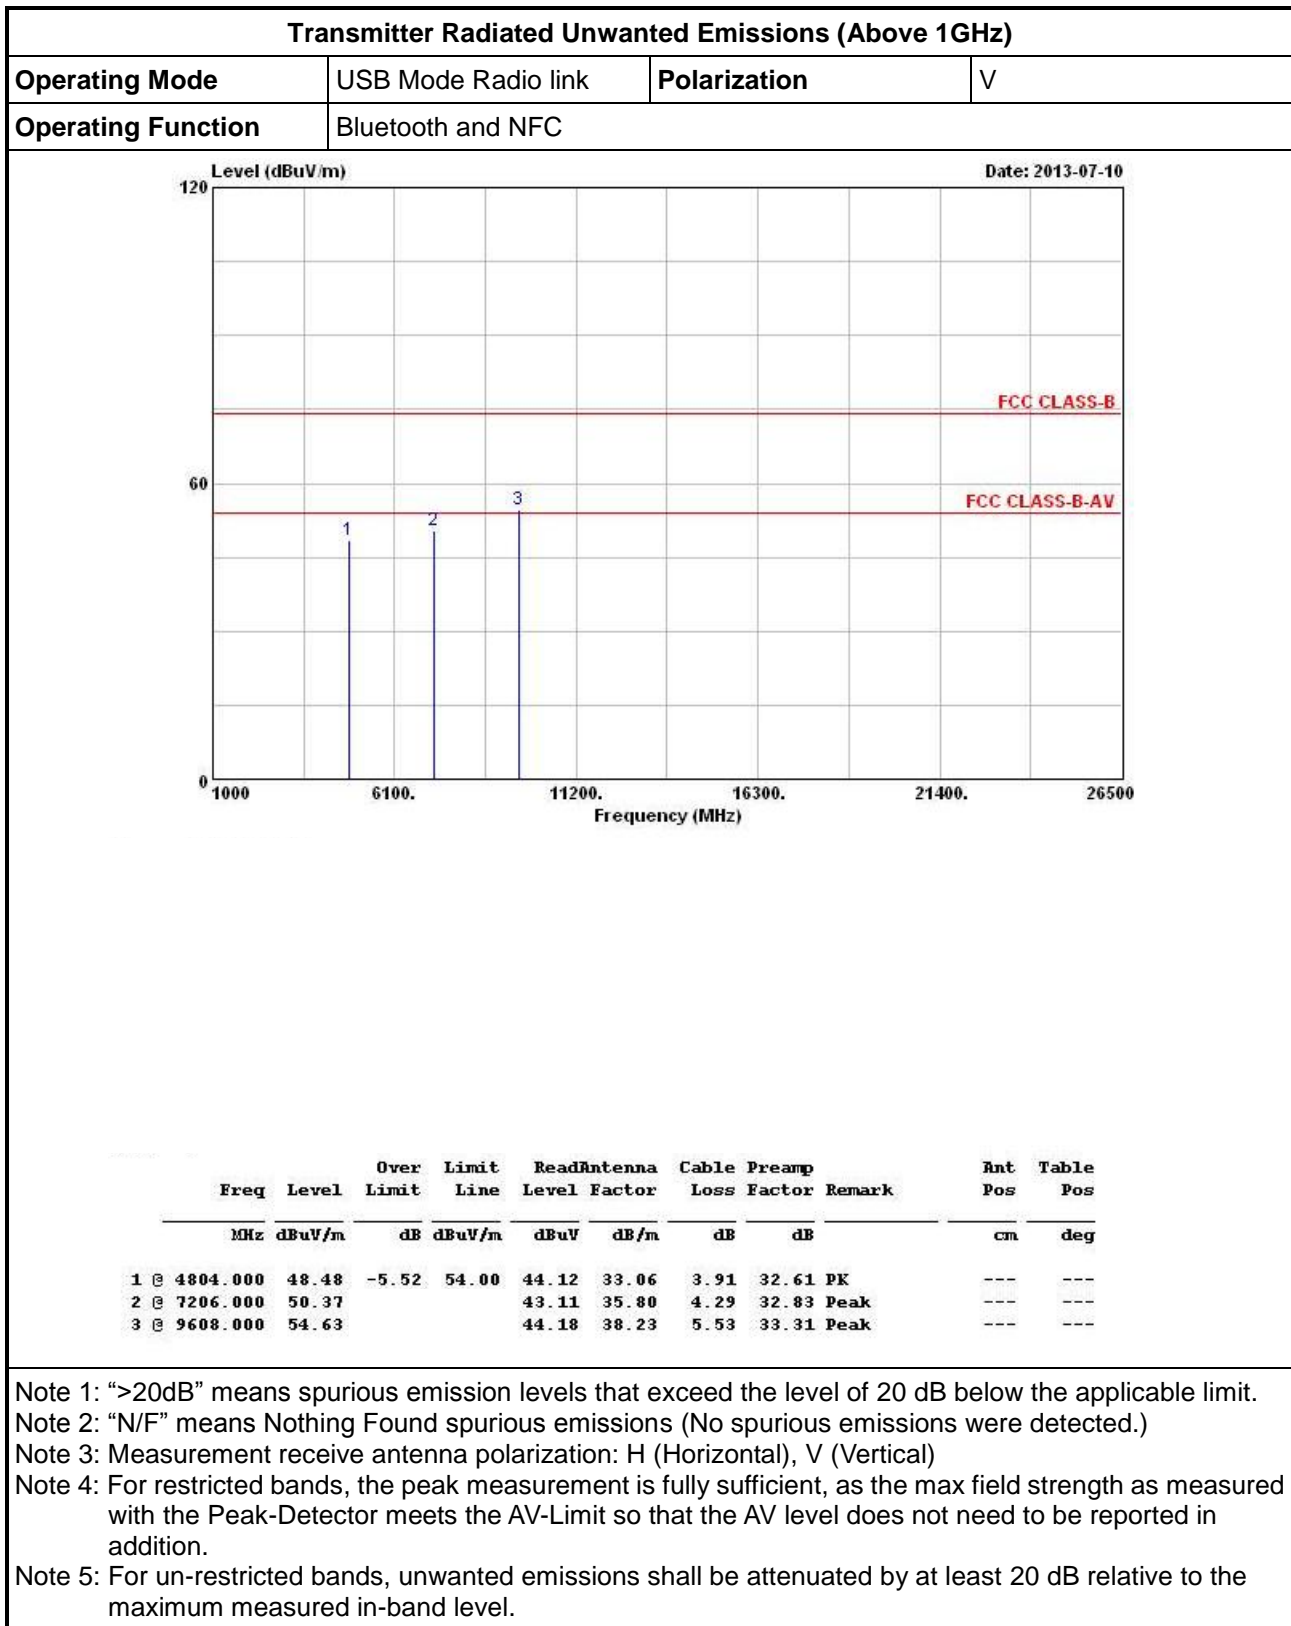

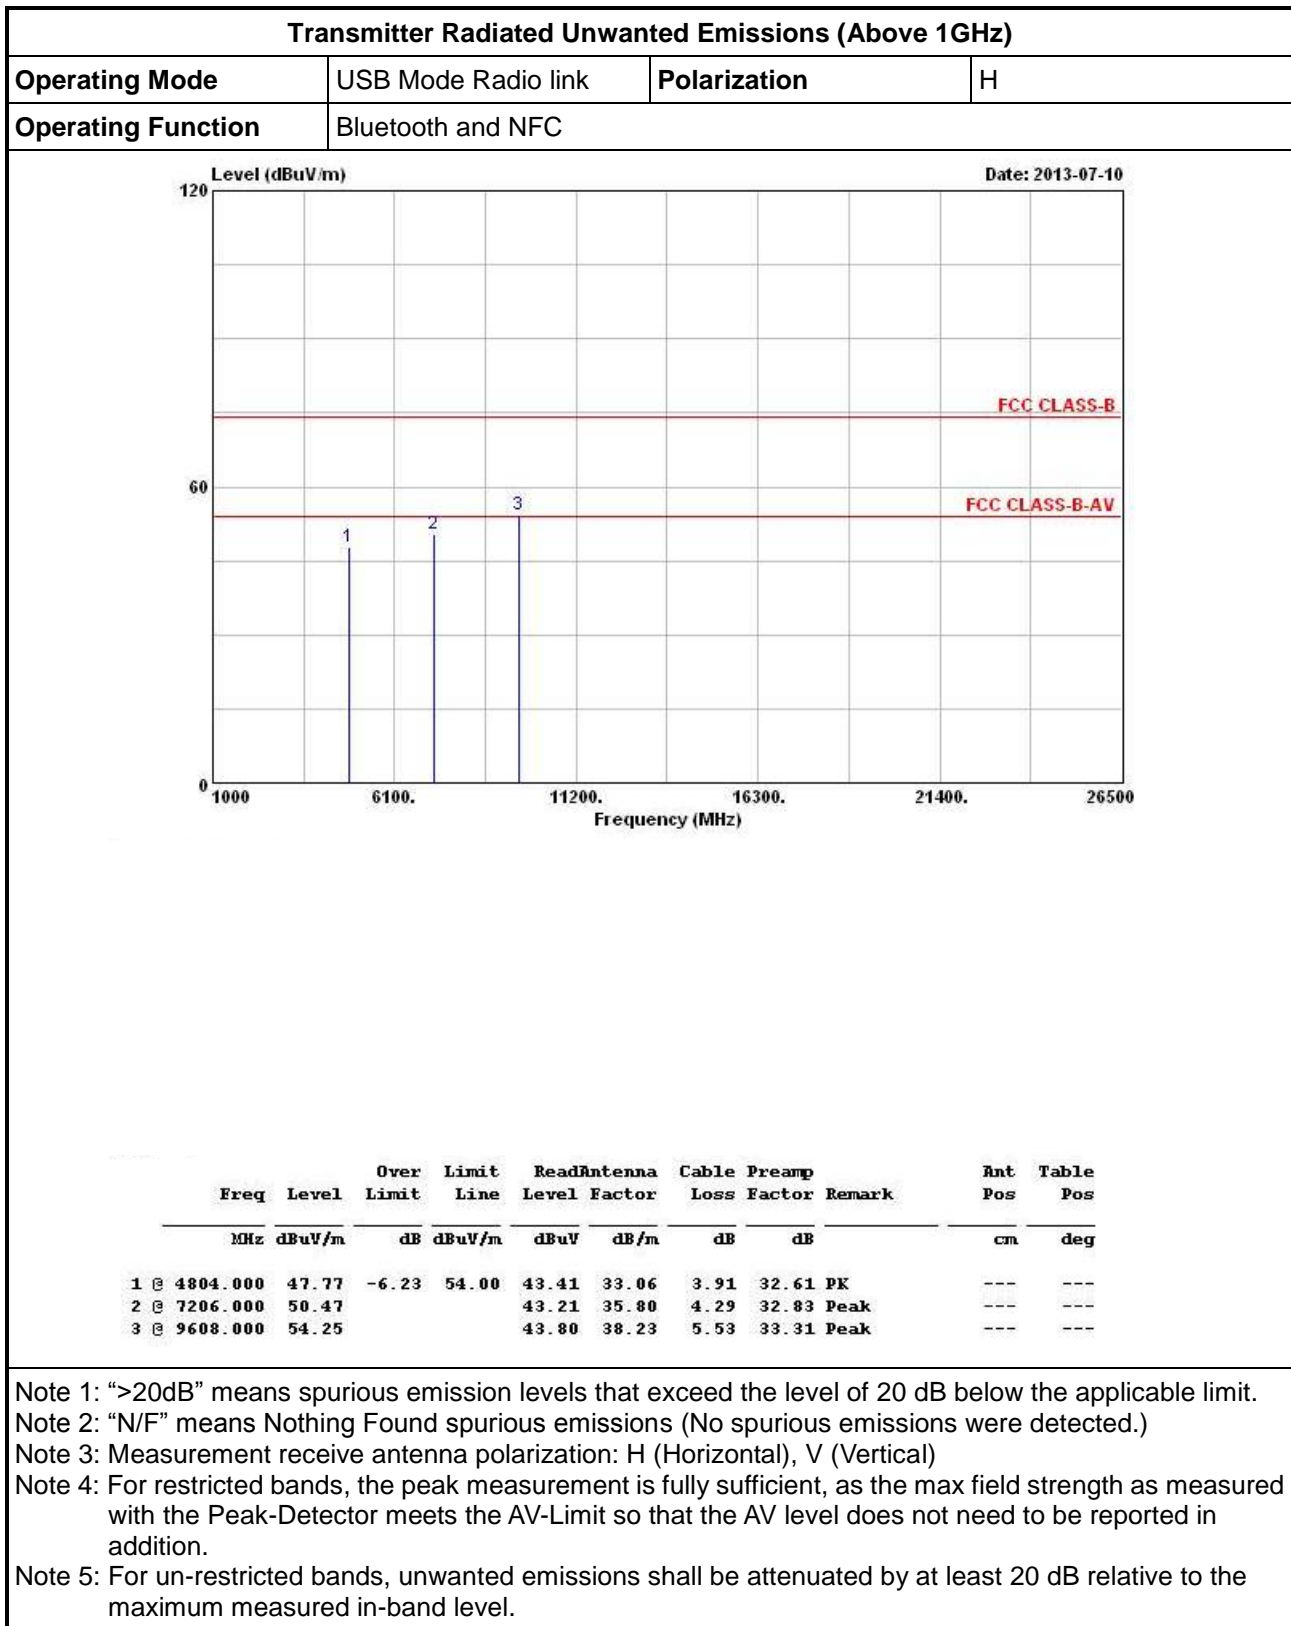

2 TEST EQUIPMENT AND CALIBRATION DATA

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz ~ 1GHz 3m	Dec. 01, 2012	Radiation (03CH03-HY)
Amplifier	HP	8447D	2944A08033	10kHz ~ 1.3GHz	May. 03, 2013	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1GHz ~ 26.5GHz	Aug. 16, 2012	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP40	100593	9kHz ~ 40GHz	Sep. 14, 2012	Radiation (03CH03-HY)
Receiver	R&S	ESU26	1302.6005.26	20Hz ~ 26.5GHz	Apr. 02, 2013	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30MHz ~ 1GHz	Sep. 22, 2012	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	May. 31, 2013	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15GHz ~ 40GHz	Jan. 08, 2013	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz ~ 1GHz	Jan. 17, 2013	Radiation (03CH03-HY)
RF Cable-high	SUHNER	SUCOFLEX 106	03CH03-HY	1GHz ~ 40GHz	Jan. 17, 2013	Radiation (03CH03-HY)
Turn Table	EM Electronics	EM Electronics	060615	0 ~ 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	MF	MF-7802	MF780208179	1 ~ 4 m	N/A	Radiation (03CH03-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Magnetic Loop Antenna	Teseq GmbH	HLA 6120	31244	0.01MHz ~ 30MHz	Dec. 02, 2012	Radiation (03CH03-HY)
Amplifier	MITEQ	AMF-6F-260400	9121372	26.5GHz ~ 40GHz	Apr. 19, 2013	Radiation (03CH03-HY)

Note: Calibration Interval of instruments listed above is two year.