

**FCC & Industry Canada Certification Test Report**  
**For the**  
**Cooper Power Systems**  
**RFN-430SL MODULE**

**FCC ID: P9X-430SL**  
**IC: 6766A-430SL**

**WLL JOB# 12971 Rev.1**  
**May 6, 2013**  
**Re-issued June 6, 2013**

Prepared for:

**Cooper Power Systems**  
**910 Clopper Rd. Ste 201S**  
**Gaithersburg, MD, 20878**

Prepared By:

**Washington Laboratories, Ltd.**  
**7560 Lindbergh Drive**  
**Gaithersburg, Maryland 20879**



**Testing Certificate AT-1448**

**FCC & Industry Canada Certification Test Report**  
**for the**  
**Cooper Power Systems**  
**RFN-430SL MODULE**  
**FCC ID: P9X-430SL**  
**IC: 6766A-430SL**

**May 6, 2013**  
**Re-issued June 6, 2013**  
WLL JOB# 12971 Rev.1

Prepared by:



Steven Dovell  
Compliance Engineer

Reviewed by:



James Ritter  
EMC Laboratory Manager

## Abstract

This report has been prepared on behalf of Cooper Power Systems to support the attached Application for Equipment Authorization. The test report and application are submitted for a Frequency Hopping Spread Spectrum Transmitter under Part 15.247 (10/2010) of the FCC Rules and Regulations and Spectrum Management and Telecommunications Policy RSS-210 issue 8 of Industry Canada. This Certification Test Report documents the test configuration and test results for the Cooper Power Systems RFN-430SL Module.

Testing was performed on an Open Area Test Site (OATS) of Washington Laboratories, Ltd, 7560 Lindbergh Drive, Gaithersburg, MD 20879. Site description and site attenuation data have been placed on file with the FCC's Sampling and Measurements Branch at the FCC laboratory in Columbia, MD. The Industry Canada OATS numbers are 3035A-1 and 3035A-2 for Washington Laboratories, Ltd. Site 1 and Site 2, respectively. Washington Laboratories, Ltd. has been accepted by the FCC and approved by ACLASS under Certificate AT-1448 as an independent FCC test laboratory.

The Cooper Power Systems RFN-430SL Module complies with the limits for a Frequency Hopping Spread Spectrum Transmitter device under FCC Part 15.247 and Industry Canada RSS-210.

At the onset of testing the EUT was called the RFN430SN. The name was later changed to RFN430SL, any references shown in plot images to the RFN430SN refer to the RFN430SL.

Revision History	Description of Change	Date
Rev 0	Initial Release	May 6,2013
Rev 1	Added missing test equipment settings for bandwidth and power measurements. Corrected missing correction factors on radiated spurious and corrected antenna model on 5dBi antenna.	June 6, 2013 SD

## Table of Contents

Abstract .....	ii
1 Introduction .....	1
1.1 Compliance Statement .....	1
1.2 Test Scope .....	1
1.3 Contract Information .....	1
1.4 Test Dates .....	1
1.5 Test and Support Personnel .....	1
1.6 Abbreviations .....	2
2 Equipment Under Test .....	3
2.1 EUT Identification & Description .....	3
2.2 Test Configuration .....	3
2.3 Testing Algorithm .....	3
2.4 Test Location .....	4
2.5 Measurements .....	4
2.5.1 References .....	4
2.6 Measurement Uncertainty .....	4
3 Test Equipment .....	6
4 Test Summary .....	7
5 Test Results .....	8
5.1 Duty Cycle Correction and Time of Occupancy .....	8
5.2 RF Power Output: (FCC Part §2.1046) .....	12
5.3 Occupied Bandwidth: (FCC Part §2.1049) .....	19
5.4 Channel Spacing and Number of Hop Channels (FCC Part §15247(a)(1)) .....	23
5.5 Conducted Spurious Emissions at Antenna Terminals (FCC Part §2.1051) .....	26
5.5.1 Band Edge Compliance .....	51
5.6 Radiated Spurious Emissions: (FCC Part §2.1053) .....	59
5.6.1 Test Procedure .....	59
5.6.2 Test Summary .....	59
5.7 Receiver Radiated Spurious Emissions: (RSS-210 sect 2.6) .....	70
5.7.1 Test Procedure .....	70
5.8 AC Conducted Emissions (FCC Part §15.207) .....	72
5.8.1 Requirements .....	72
5.8.2 Test Procedure .....	72
5.8.3 Test Data .....	73

## List of Tables

Table 1: Device Summary .....	3
Table 2: Expanded Uncertainty List .....	5
Table 3: Test Equipment List.....	6
Table 4: Test Summary Table.....	7
Table 5: Duty Cycle/time of Occupancy Results.....	8
Table 6: Spectrum Analyzer Settings .....	12
Table 7: RF Power Output .....	12
Table 8: Occupied Bandwidth Spectrum Analyzer Settings.....	19
Table 9: Occupied Bandwidth Results.....	19
Table 10: Channel Spacing and Number of Channels Results .....	23
Table 11: Conducted Spurious Spectrum Analyzer Settings.....	26
Table 12: Spectrum Analyzer Settings .....	59
Table 13: Radiated Emission Test Data: Non-Harmonics (Restricted Bands-covers all 3 antenna configurations).....	60
Table 14: Radiated Emission Test Data, Low Channel (1dbi –Integral Wire Antenna) .....	61
Table 15: Radiated Emission Test Data, Low Channel (3dbi –Phantom Antenna).....	62
Table 16: Radiated Emission Test Data, Low Channel (5dBi –Omni directional Antenna).....	63
Table 17: Radiated Emission Test Data, Center Channel (1dbi –Integral Wire Antenna) .....	64
Table 18: Radiated Emission Test Data, Center Channel (3dbi –Phantom Antenna) .....	65
Table 19: Radiated Emission Test Data, Center Channel (5dBi –Omni directional Antenna)....	66
Table 20: Radiated Emission Test Data, High Channel (1dbi –Integral Wire Antenna).....	67
Table 21: Radiated Emission Test Data, High Channel (3dbi –Phantom Antenna).....	68
Table 22: Radiated Emission Test Data, High Channel (5dBi –Omni directional Antenna) .....	69
Table 23: Spectrum Analyzer Settings .....	70
Table 24: Radiated Emission Test Data, Receiver.....	71
Table 25: Conducted Emissions Data 120VAC, Transmit On .....	73
Table 26: Conducted Emissions Data 230VAC, Transmit On .....	74

## List of Figures

Figure 1: Single Hop Plot .....	9
Figure 2: Dwell time per 100ms (Duty Cycle) .....	10
Figure 3: Time of Occupancy .....	11
Figure 4: RF Peak Power, High Power, Low Channel .....	13
Figure 5: RF Peak Power, High Power, Center Channel .....	14
Figure 6: RF Peak Power, High Power, High Channel.....	15
Figure 7: RF Peak Power, Low Power, Low Channel .....	16
Figure 8: RF Peak Power, Low Power, Center Channel.....	17
Figure 9: RF Peak Power, Low Power, High Channel .....	18
Figure 10: Occupied Bandwidth, Low Channel .....	20
Figure 11: Occupied Bandwidth, Center Channel .....	21
Figure 12: Occupied Bandwidth, High Channel.....	22
Figure 13: Channel Spacing.....	24
Figure 14: Number of Hopping Channels.....	25

Figure 15: Conducted Spurious Emissions, High Power, Low Channel 30 - 901MHz .....	27
Figure 16: Conducted Spurious Emissions, High Power, Low Channel 901 – 929MHz .....	28
Figure 17: Conducted Spurious Emissions, High Power, Low Channel 929-5000MHz .....	29
Figure 18: Conducted Spurious Emissions, High Power, Low Channel 5-10GHz .....	30
Figure 19: Conducted Spurious Emissions, High Power, Center Channel 30 - 901MHz .....	31
Figure 20: Conducted Spurious Emissions, High Power, Center Channel 901 – 929MHz .....	32
Figure 21: Conducted Spurious Emissions, High Power, Center Channel 929-5000MHz .....	33
Figure 22: Conducted Spurious Emissions, High Power, Center Channel 5-10GHz .....	34
Figure 23: Conducted Spurious Emissions, High Power, High Channel 30 - 901MHz .....	35
Figure 24: Conducted Spurious Emissions, High Power, High Channel 901 – 929MHz .....	36
Figure 25: Conducted Spurious Emissions, High Power, High Channel 929-5000MHz .....	37
Figure 26: Conducted Spurious Emissions, High Power, High Channel 5-10GHz .....	38
Figure 27: Conducted Spurious Emissions, Low Power, Low Channel 30 - 901MHz .....	39
Figure 28: Conducted Spurious Emissions, Low Power, Low Channel 901 – 929MHz .....	40
Figure 29: Conducted Spurious Emissions, Low Power, Low Channel 929-5000MHz .....	41
Figure 30: Conducted Spurious Emissions, Low Power, Low Channel 5-10GHz .....	42
Figure 31: Conducted Spurious Emissions, Low Power, Center Channel 30 - 901MHz .....	43
Figure 32: Conducted Spurious Emissions, Low Power, Center Channel 901 – 929MHz .....	44
Figure 33: Conducted Spurious Emissions, Low Power, Center Channel 929-5000MHz .....	45
Figure 34: Conducted Spurious Emissions, Low Power, Center Channel 5-10GHz .....	46
Figure 35: Conducted Spurious Emissions, Low Power, High Channel 30 - 901MHz .....	47
Figure 36: Conducted Spurious Emissions, Low Power, High Channel 901 – 929MHz .....	48
Figure 37: Conducted Spurious Emissions, Low Power, High Channel 929-5000MHz .....	49
Figure 38: Conducted Spurious Emissions, Low Power, High Channel 5-10GHz .....	50
Figure 39: Lower Band-edge, Low Channel, High Power .....	51
Figure 40: Lower Band-edge, Hopping Mode, High Power .....	52
Figure 41: Lower Band-edge, Low Channel, Low Power .....	53
Figure 42: Lower Band-edge, Hopping Mode, Low Power .....	54
Figure 43: Upper Band-edge, High Channel, High Power .....	55
Figure 44: Upper Band-edge, Hopping Mode, High Power .....	56
Figure 45: Upper Band-edge, High Channel, Low Power .....	57
Figure 46: Upper Band-edge, Hopping Mode, Low Power .....	58

## **1 Introduction**

### **1.1 Compliance Statement**

The Cooper Power Systems RFN-430SL Module complies with the limits for a Frequency Hopping Spread Spectrum Transmitter device under FCC Part 15.247 (10/2010) and Industry Canada RSS-210 issue 8.

### **1.2 Test Scope**

Tests for radiated and conducted (at antenna terminal) emissions were performed. All measurements were performed in accordance with FCC Public Notice DA-00-705 "Measurement Guidance for Frequency Hopping Spread Spectrum Systems. The measurement equipment conforms to ANSI C63.2 Specifications for Electromagnetic Noise and Field Strength Instrumentation.

### **1.3 Contract Information**

Customer:	Cooper Power Systems 910 Clopper Rd. Ste 201S Gaithersburg, MD, 20878
Purchase Order Number:	4505308062
Quotation Number:	67400A

### **1.4 Test Dates**

Testing was performed on the following date(s):	4/23/13 to 5/2/13
---	-------------------

### **1.5 Test and Support Personnel**

Washington Laboratories, LTD	Steven Dovell
Client Representative	Steve Seymour

## 1.6 Abbreviations

<b>A</b>	<b>A</b> mpere
<b>ac</b>	<b>a</b> lternating <b>c</b> urrent
<b>AM</b>	<b>A</b> mplitude <b>M</b> odulation
<b>Amps</b>	<b>A</b> mperes
<b>b/s</b>	<b>b</b> its per second
<b>BW</b>	<b>B</b> and <b>W</b> idth
<b>CE</b>	<b>C</b> onducted <b>E</b> mission
<b>cm</b>	<b>c</b> entimeter
<b>CW</b>	<b>C</b> ontinuous <b>W</b> ave
<b>dB</b>	<b>d</b> eci <b>B</b> el
<b>dc</b>	<b>d</b> irect current
<b>EMI</b>	<b>E</b> lectromagnetic <b>I</b> nterference
<b>EUT</b>	<b>E</b> quipment <b>U</b> nder <b>T</b> est
<b>FM</b>	<b>F</b> requency <b>M</b> odulation
<b>G</b>	<b>g</b> iga - prefix for $10^9$ multiplier
<b>Hz</b>	<b>H</b> ertz
<b>IF</b>	<b>I</b> ntermediate <b>F</b> requency
<b>k</b>	<b>k</b> ilo - prefix for $10^3$ multiplier
<b>LISN</b>	<b>L</b> ine <b>I</b> mpedance <b>S</b> tabilization <b>N</b> etwork
<b>M</b>	<b>M</b> ega - prefix for $10^6$ multiplier
<b>m</b>	<b>m</b> eter
<b>μ</b>	<b>m</b> icro - prefix for $10^{-6}$ multiplier
<b>NB</b>	<b>N</b> arrow <b>b</b> and
<b>QP</b>	<b>Q</b> uasi- <b>P</b> eak
<b>RE</b>	<b>R</b> adiated <b>E</b> missions
<b>RF</b>	<b>R</b> adio <b>F</b> requency
<b>rms</b>	<b>r</b> oot- <b>m</b> ean- <b>s</b> quare
<b>SN</b>	<b>S</b> erial <b>N</b> umber
<b>S/A</b>	<b>S</b> pectrum <b>A</b> nalyzer
<b>V</b>	<b>V</b> olt



## 2 Equipment Under Test

### 2.1 EUT Identification & Description

The RFN-430SL is a radio communications device designed for use in Itron Sentinel meters. It can also be used in Cooper Power Systems Gateways and Relay Nodes. The RFN-430SL provides a 915 MHz radio interface to an RF mesh network.

**Table 1: Device Summary**

ITEM	DESCRIPTION
Manufacturer:	Cooper Power Systems
FCC ID:	P9X-430SL
IC:	6766A-430SL
Model:	RFN-430SL
FCC Rule Parts:	§15.247
Industry Canada:	RSS210
Frequency Range:	902.75 – 927.25MHz
Maximum Output Power:	29.8dBm (955mW)
Modulation:	FSK
Occupied Bandwidth:	493.089kHz
Keying:	Automatic
Type of Information:	Data
Number of Channels:	50
Power Output Level	Variable from -30.2dBm (.955uW) to 29.8dBm (955mW)
Antenna Connector	MCX
Antenna Type	3 antennas: OD9-5-ANT - Omnidirectional – 5dBi Gain TRA9023NP - Antenex Phantom 902-928MHz – 3dB Gain Integral wire dipole -1 dBi
Interface Cables:	None (plug in module)
Power Source & Voltage:	120/240VAC
Emission Designator	493KFXD
Highest TX spurious Emission	321.3uV/m@3m- 7318MHz
Highest RX Spurious Emission	41.7uV/m @ 3m- 520.4MHz

### 2.2 Test Configuration

The Cooper Power Systems RFN-430SL, Equipment Under Test (EUT), was operated from a 115Vac power supply or a 5VDC power supply (bench testing). Programming commands were sent from a support laptop via a custom RS232 adaptor board to a header on the EUT module

### 2.3 Testing Algorithm

The RFN-430SL was programmed for operation from a support laptop via a custom RS232 adaptor board to a header on the EUT module. UTF TeraTermPro console program was used on the support laptop to enter commands setting the EUT to the desired channel or hopping mode.

Worst case emission levels are provided in the test results data.

## **2.4 Test Location**

All measurements herein were performed at Washington Laboratories, Ltd. test center in Gaithersburg, MD. Site description and site attenuation data have been placed on file with the FCC's Sampling and Measurements Branch at the FCC laboratory in Columbia, MD. The Industry Canada OATS numbers are 3035A-1 and 3035A-2 for Washington Laboratories, Ltd. Site 1 and Site 2, respectively. Washington Laboratories, Ltd. has been accepted by the FCC and approved by ACLASS under Certificate AT-1448 as an independent FCC test laboratory.

## **2.5 Measurements**

### **2.5.1 References**

FCC Public Notice DA 00-705, Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems

ANSI C63.2 Specifications for Electromagnetic Noise and Field Strength Instrumentation

ANSI C63.4 Methods of Measurement of Radio Noise from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

## **2.6 Measurement Uncertainty**

All results reported herein relate only to the equipment tested. The basis for uncertainty calculation uses ANSI/NCSL Z540-2-1997 with a type B evaluation of the standard uncertainty. Elements contributing to the standard uncertainty are combined using the method described in Equation 1 to arrive at the total standard uncertainty. The standard uncertainty is multiplied by the coverage factor to determine the expanded uncertainty which is generally accepted for use in commercial, industrial, and regulatory applications and when health and safety are concerned (see Equation 2). A coverage factor was selected to yield a 95% confidence in the uncertainty estimation.

### Equation 1: Standard Uncertainty

$$u_c = \pm \sqrt{\frac{a^2}{div_a^2} + \frac{b^2}{div_b^2} + \frac{c^2}{div_c^2} + \dots}$$

Where  $u_c$  = standard uncertainty

$a, b, c, \dots$  = individual uncertainty elements

$Div_{a, b, c}$  = the individual uncertainty element divisor based on the probability distribution

Divisor = 1.732 for rectangular distribution

Divisor = 2 for normal distribution

Divisor = 1.414 for trapezoid distribution

### Equation 2: Expanded Uncertainty

$$U = k u_c$$

Where  $U$  = expanded uncertainty

$k$  = coverage factor

$k \leq 2$  for 95% coverage (ANSI/NCSL Z540-2 Annex G)

$u_c$  = standard uncertainty

The measurement uncertainty complies with the maximum allowed uncertainty from CISPR 16-4-2. Measurement uncertainty is not used to adjust the measurements to determine compliance. The expanded uncertainty values for the various scopes in the WLL accreditation are provided in Table 2 below.

**Table 2: Expanded Uncertainty List**

Scope	Standard(s)	Expanded Uncertainty
Conducted Emissions	CISPR11, CISPR22, CISPR14, FCC Part 15	2.63 dB
Radiated Emissions	CISPR11, CISPR22, CISPR14, FCC Part 15	4.55 dB

### 3 Test Equipment

Table 3 shows a list of the test equipment used for measurements along with the calibration information.

**Table 3: Test Equipment List**

Test Name: <b>Bench Conducted RF Tests</b>		Test Date: : <b>4/23/13</b>	
Asset #	Manufacturer/Model	Description	Cal. Due
728	AGILENT - 8564EC	SPECTRUM ANALYZER 30HZ - 40GHZ	5/15/2013

Test Name: <b>Radiated Emissions</b>		Test Date: <b>04/24/2013</b>	
Asset #	Manufacturer/Model	Description	Cal. Due
382	SUNOL SCIENCES CORPORATION - JB1	ANTENNA BICONLOG	6/26/2014
4	ARA - DRG-118/A	ANTENNA DRG 1-18GHZ	2/20/2015
627	AGILENT - 8449B	AMPLIFIER 1-26GHZ	5/24/2013
69	HP - 85650A	ADAPTER QP	6/27/2013
802	HP - 8568B	SPECTRUM ANALYZER	5/27/2013
71	HP - 85685A	PRESELECTOR RF	6/27/2013
528	AGILENT - E4446A	ANALYZER SPECTRUM	8/30/2013
742	PENN ENGINEERING - WR284	2.2-4.15GHZ BANDPASS FILTER	5/29/2014
280	ITC - 21C-3A1	WAVEGUIDE 3.45-11.0GHZ	5/29/2014

Test Name: <b>Conducted Emissions Voltage</b>		Test Date: <b>05/02/2013</b>	
Asset #	Manufacturer/Model	Description	Cal. Due
124	SOLAR - 8012-50-R-24-BNC	LISN	6/28/2013
69	HP - 85650A	ADAPTER QP	6/27/2013
802	HP - 8568B	SPECTRUM ANALYZER	5/27/2013
Test Name: <b>Conducted Emissions Voltage</b>		Test Date: <b>05/02/2013</b>	
Asset #	Manufacturer/Model	Description	Cal. Due

## 4 Test Summary

The Table Below shows the results of testing for compliance with a Frequency Hopping System in accordance with FCC Part 15.247 10/2010 and RSS210 issue 8. Full results are shown in section 5.

**Table 4: Test Summary Table**

<b>TX Test Summary (Frequency Hopping Spread Spectrum)</b>			
<b>FCC Rule Part</b>	<b>IC Rule Part</b>	<b>Description</b>	<b>Result</b>
15.247 (a)(1)(i)	RSS-210 [A8. 1 (c)]	20dB Bandwidth	Pass
15.247 (b)(2)	RSS-210 [A8.4 (1)]	Transmit Output Power	Pass
15.247 (a)(1)	RSS-210 [A8.1 (b)]	Channel Separation	Pass
15.247 (a)(1)(i)	RSS-210 [A8. 1 (c)]	Number of Channels =50 minimum	Pass
15.247 (a)(1)(i)	RSS-210 [A8. 1 (c)]	Time of Occupancy	Pass
15.247 (d)	RSS-210 [A8. 5]	Occupied BW / Out-of-Band Emissions (Band Edge @ 20dB below)	Pass
15.205 15.209	RSS-210 Sect.2.2 RSS-Gen 7.2.2	General Field Strength Limits (Restricted Bands & RE Limits)	Pass
15.207	RSS-Gen [7.2.4]	AC Conducted Emissions	Pass
<b>RX/Digital Test Summary (Frequency Hopping Spread Spectrum)</b>			
<b>FCC Rule Part</b>	<b>IC Rule Part</b>	<b>Description</b>	<b>Result</b>
15.207	RSS-Gen [7.2.2]	AC Conducted Emissions	Pass
15.209	RSS-210 sect 2.5	General Field Strength Limits	Pass

## 5 Test Results

### 5.1 Duty Cycle Correction and Time of Occupancy

In accordance with the FCC Public Notice the average spurious radiated emissions measurements may be further adjusted using a duty cycle correction factor if the dwell time per channel of the hopping signal is less than 100 ms.

The duty cycle correction factor is calculated by:

$$20 \times \text{LOG} (\text{dwell time}/100 \text{ ms})$$

The following figure shows the plot of the dwell time for the transmitter. Based on this plot, the dwell time per hop is 19.5ms. The maximum total dwell time per 100ms is 19.5ms. This corresponds to a duty cycle correction of -14.2dB for radiated spurious emissions.

The transmitter shall have a time of occupancy for systems having a 20dB bandwidth greater than 250 kHz of no more than 0.4seconds in any 10 second period.

These tests were conducted with the RF output connected through appropriate attenuators to the input of a spectrum analyzer set to zero span mode. The unit was set to hopping mode with the spectrum analyzer set to 902.75MHz. The results are shown in the plots below.

**Table 5: Duty Cycle/time of Occupancy Results**

Test	Result	Limit	Pass/Fail
Dwell time per Hop	19.5ms	NA	NA
Dwell time per 100ms	19.5ms	NA	NA
Time of Occupancy	0.195 sec per 10 sec	0.4 sec per 10 sec	Pass


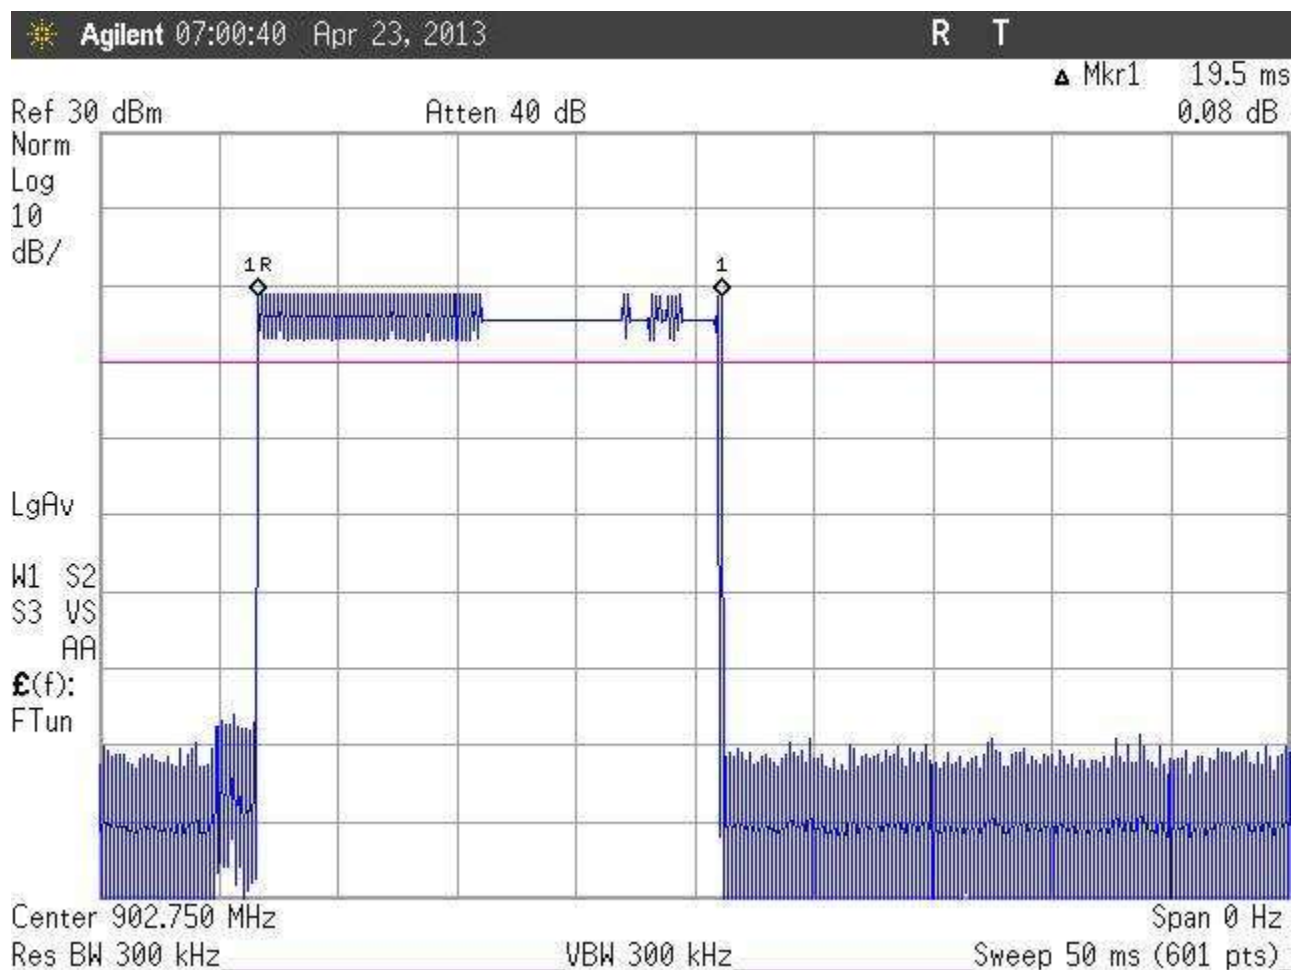


Figure 1: Single Hop Plot

Cooper Power Systems, RFN-430SL, Worst case Dwell time per 100ms for Duty Cycle Correction.

Measured = 1 pulse of 19.5ms. Duty Cycle Correction =  $20 \cdot \log(19.5\text{ms}/100\text{ms}) = -14.2\text{dB}$  correction for average radiated measurements

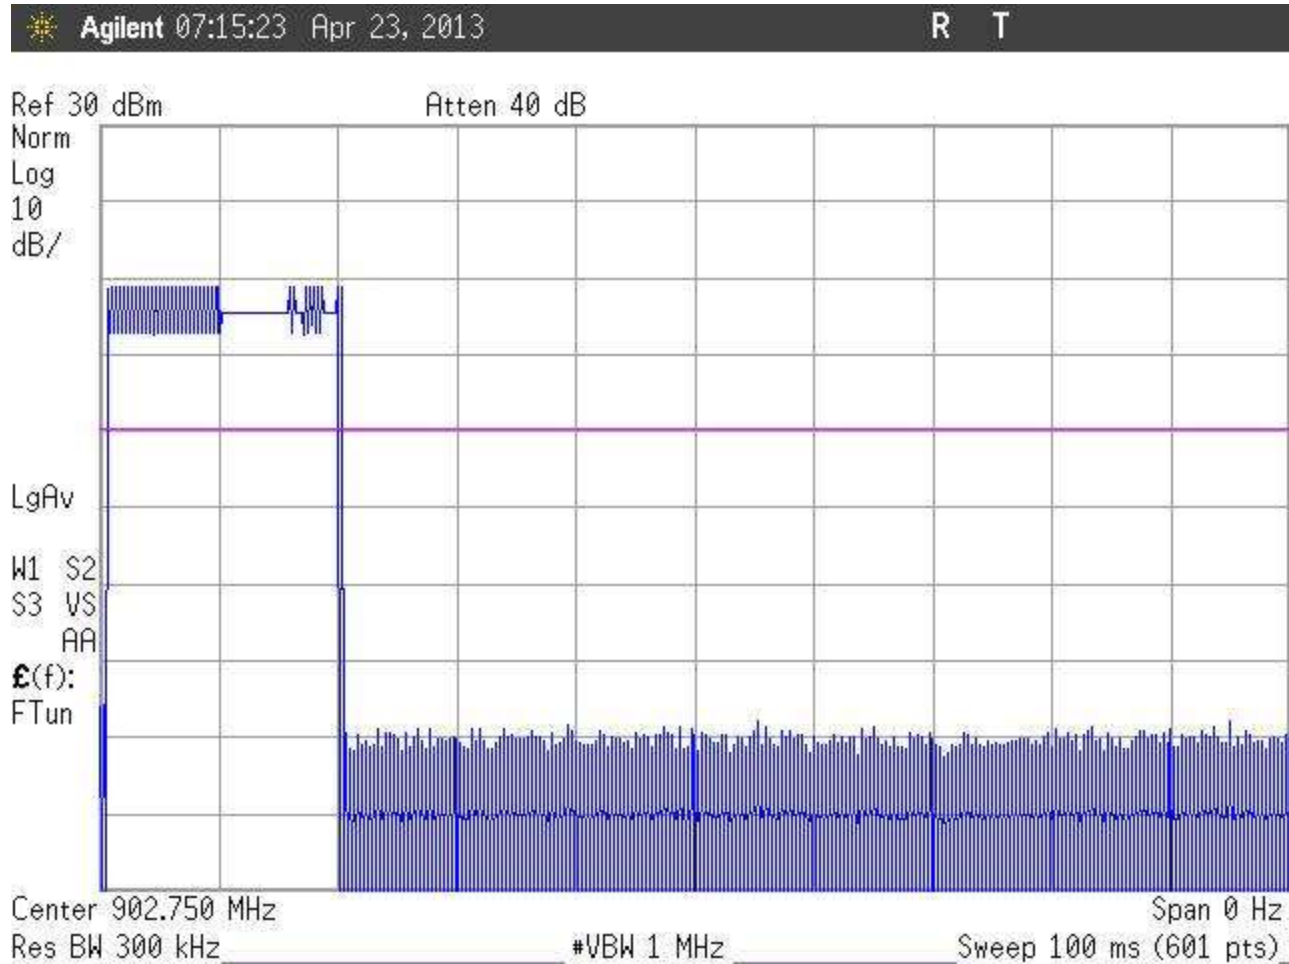


**Figure 2: Dwell time per 100ms (Duty Cycle)**



Cooper Power Systems, RFN-430SL, time of Occupancy, limit = 0.4sec per 10 sec (for systems with a Occupied Bandwidth > 250kHz).

Measured = 10 pulses of 19.5ms = 195ms per 10 seconds.

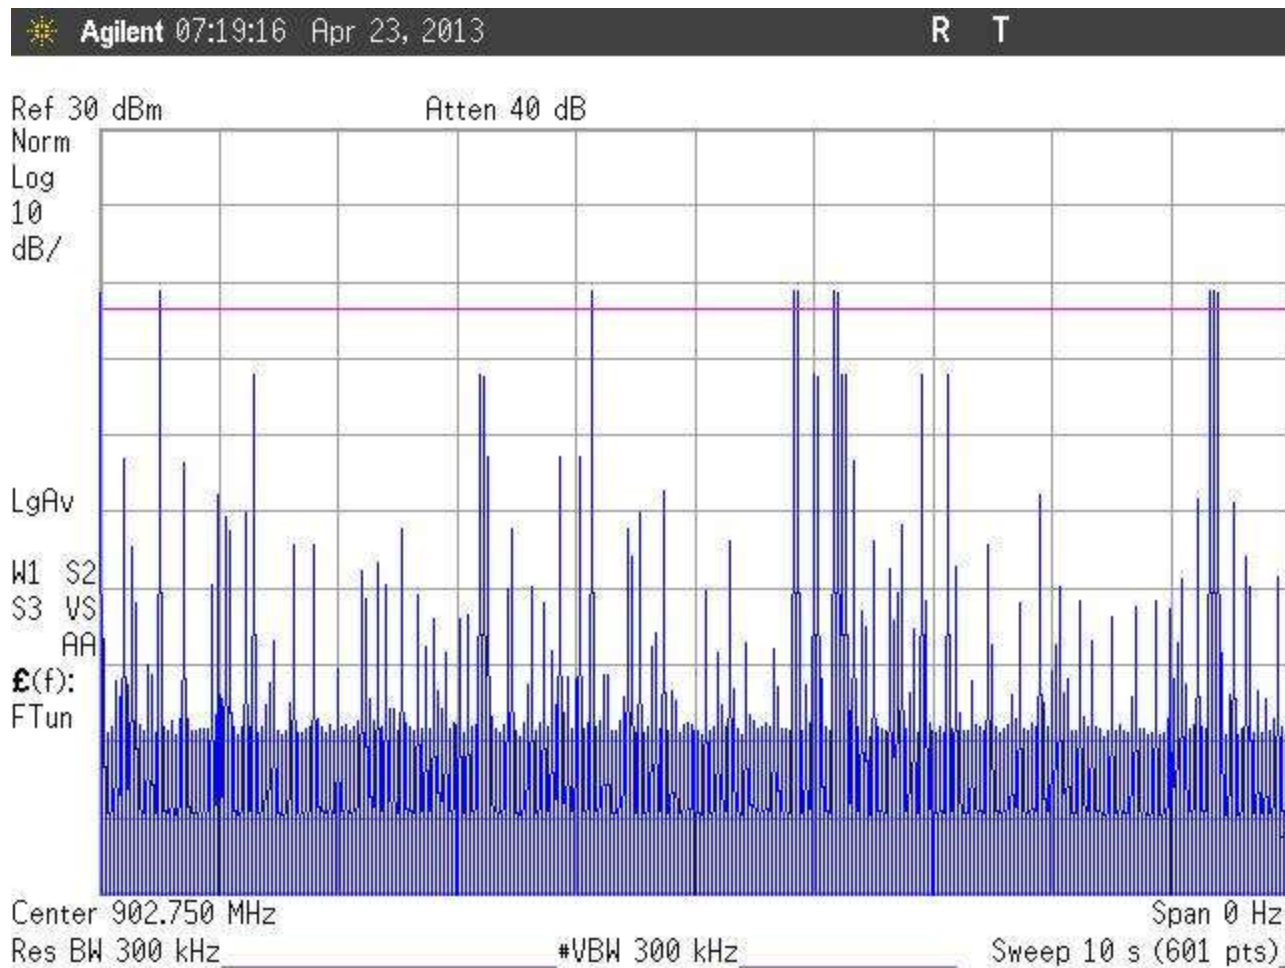

**Figure 3: Time of Occupancy**

## 5.2 RF Power Output: (FCC Part §2.1046)

To measure the output power the hopping sequence was stopped while the frequency dwelled on a low, high and Center channel. The output from the transmitter was connected to an attenuator and then to the input of the RF Spectrum Analyzer. The analyzer offset was adjusted to compensate for the attenuator and other losses in the system. The EUT has an adjustable output range. The highest and lowest power available is shown below.

**Table 6: Spectrum Analyzer Settings**

Resolution Bandwidth	Video Bandwidth
1 MHz	3 MHz

**Table 7: RF Power Output**

Frequency	Power Setting	Level (dBm)	Limit (dBm)	Pass/Fail
Low Channel: 902.75MHz	High	29.3	30	Pass
Center Channel: 914.75MHz	High	29.7	30	Pass
High Channel: 927.25MHz	High	29.8	30	Pass
Low Channel: 902.75MHz	Low	-30.2	30	Pass
Center Channel: 914.75MHz	Low	-30.2	30	Pass
High Channel: 927.25MHz	Low	-30.2	30	Pass

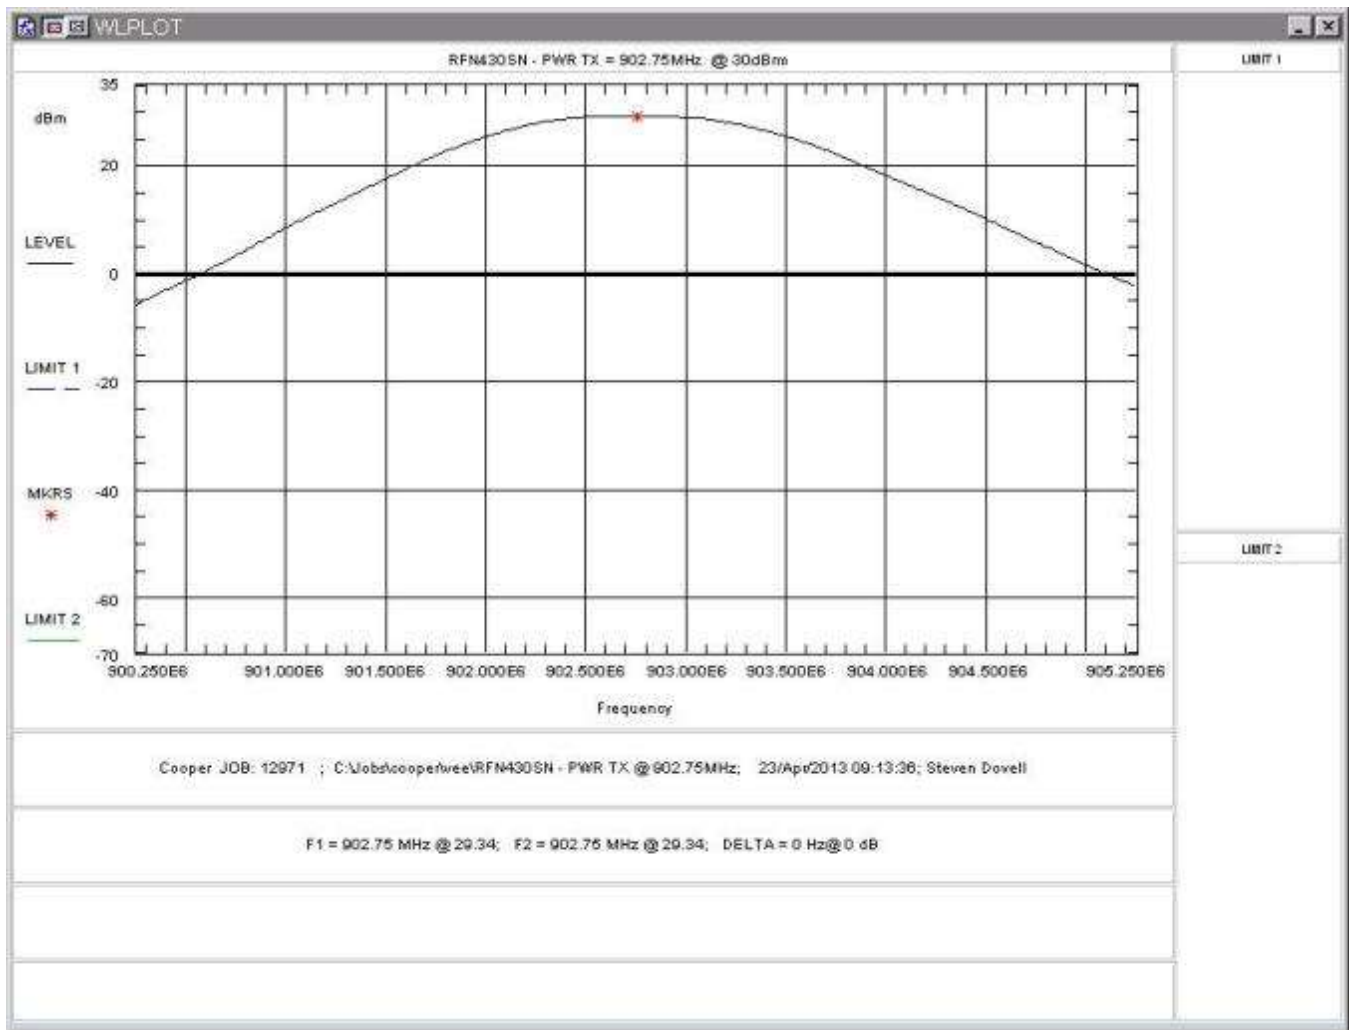


Figure 4: RF Peak Power, High Power, Low Channel

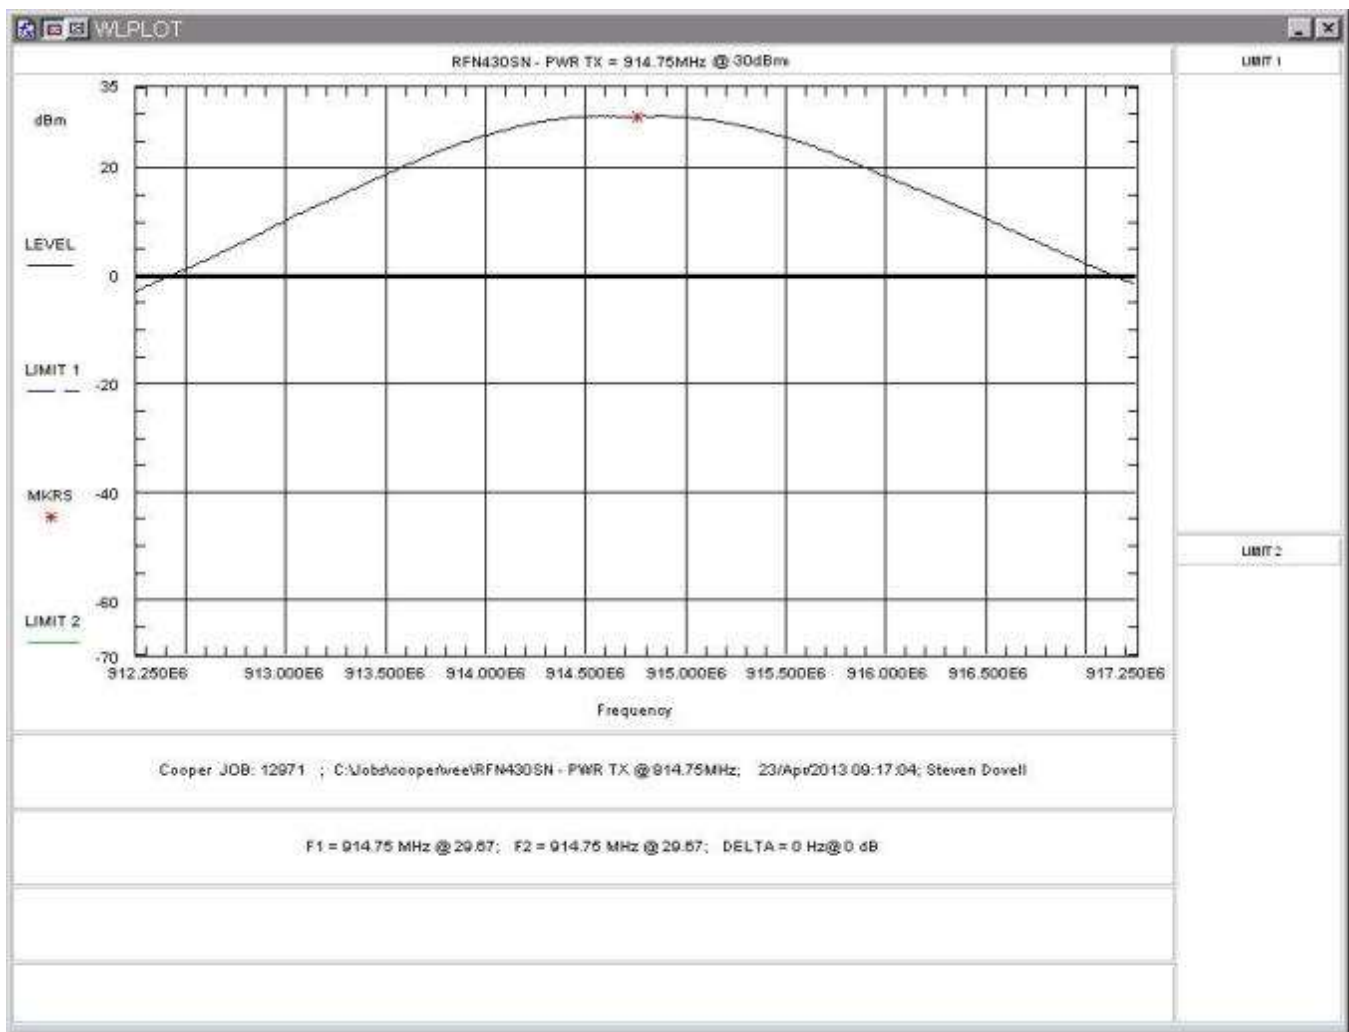


Figure 5: RF Peak Power, High Power, Center Channel

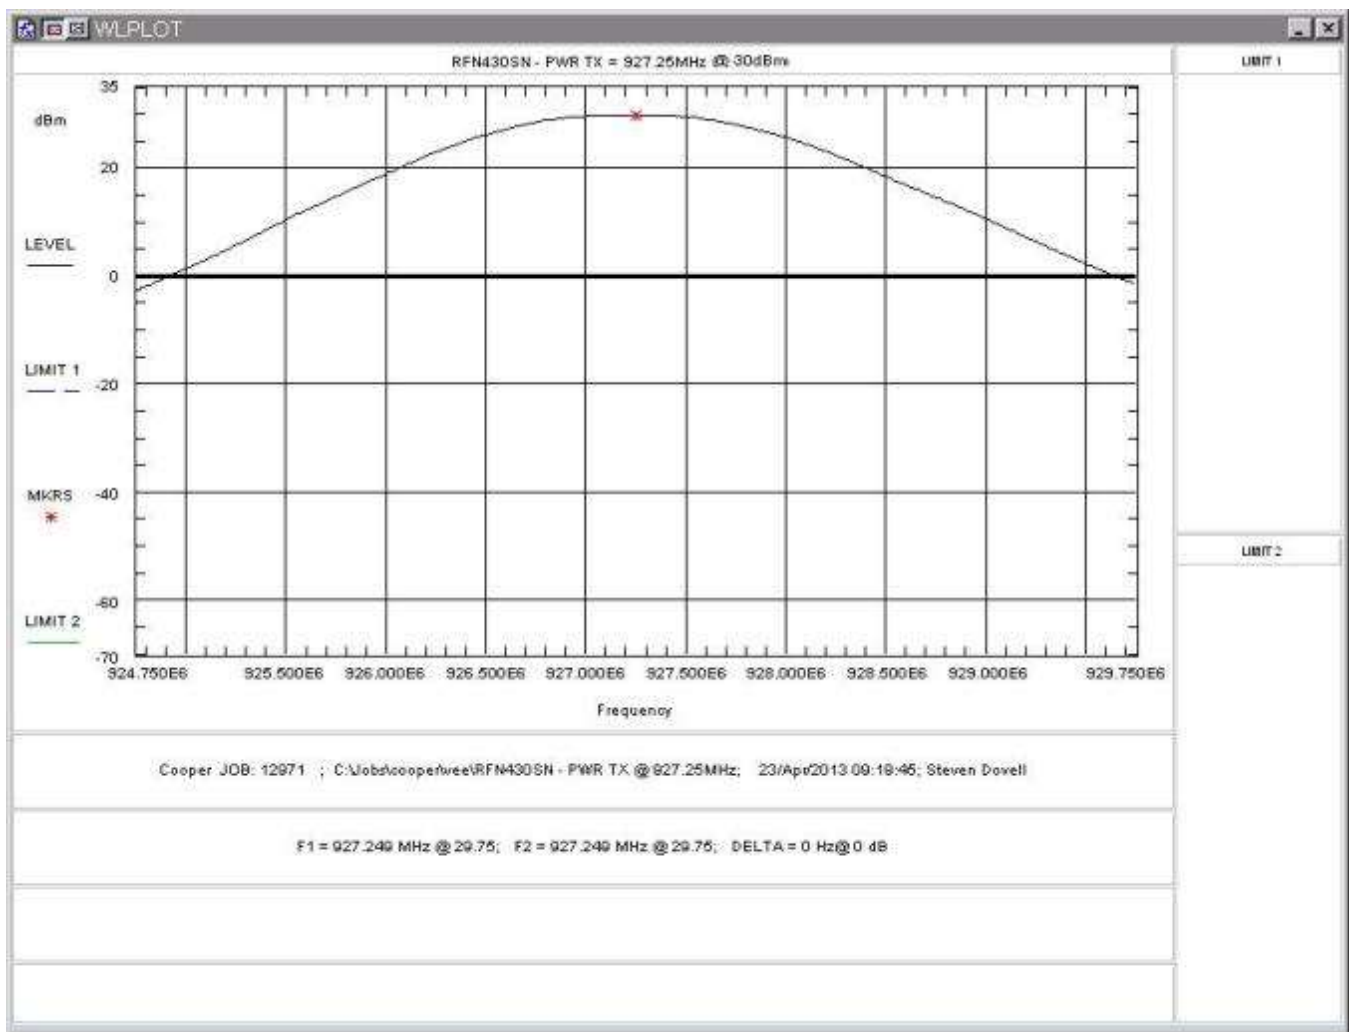


Figure 6: RF Peak Power, High Power, High Channel

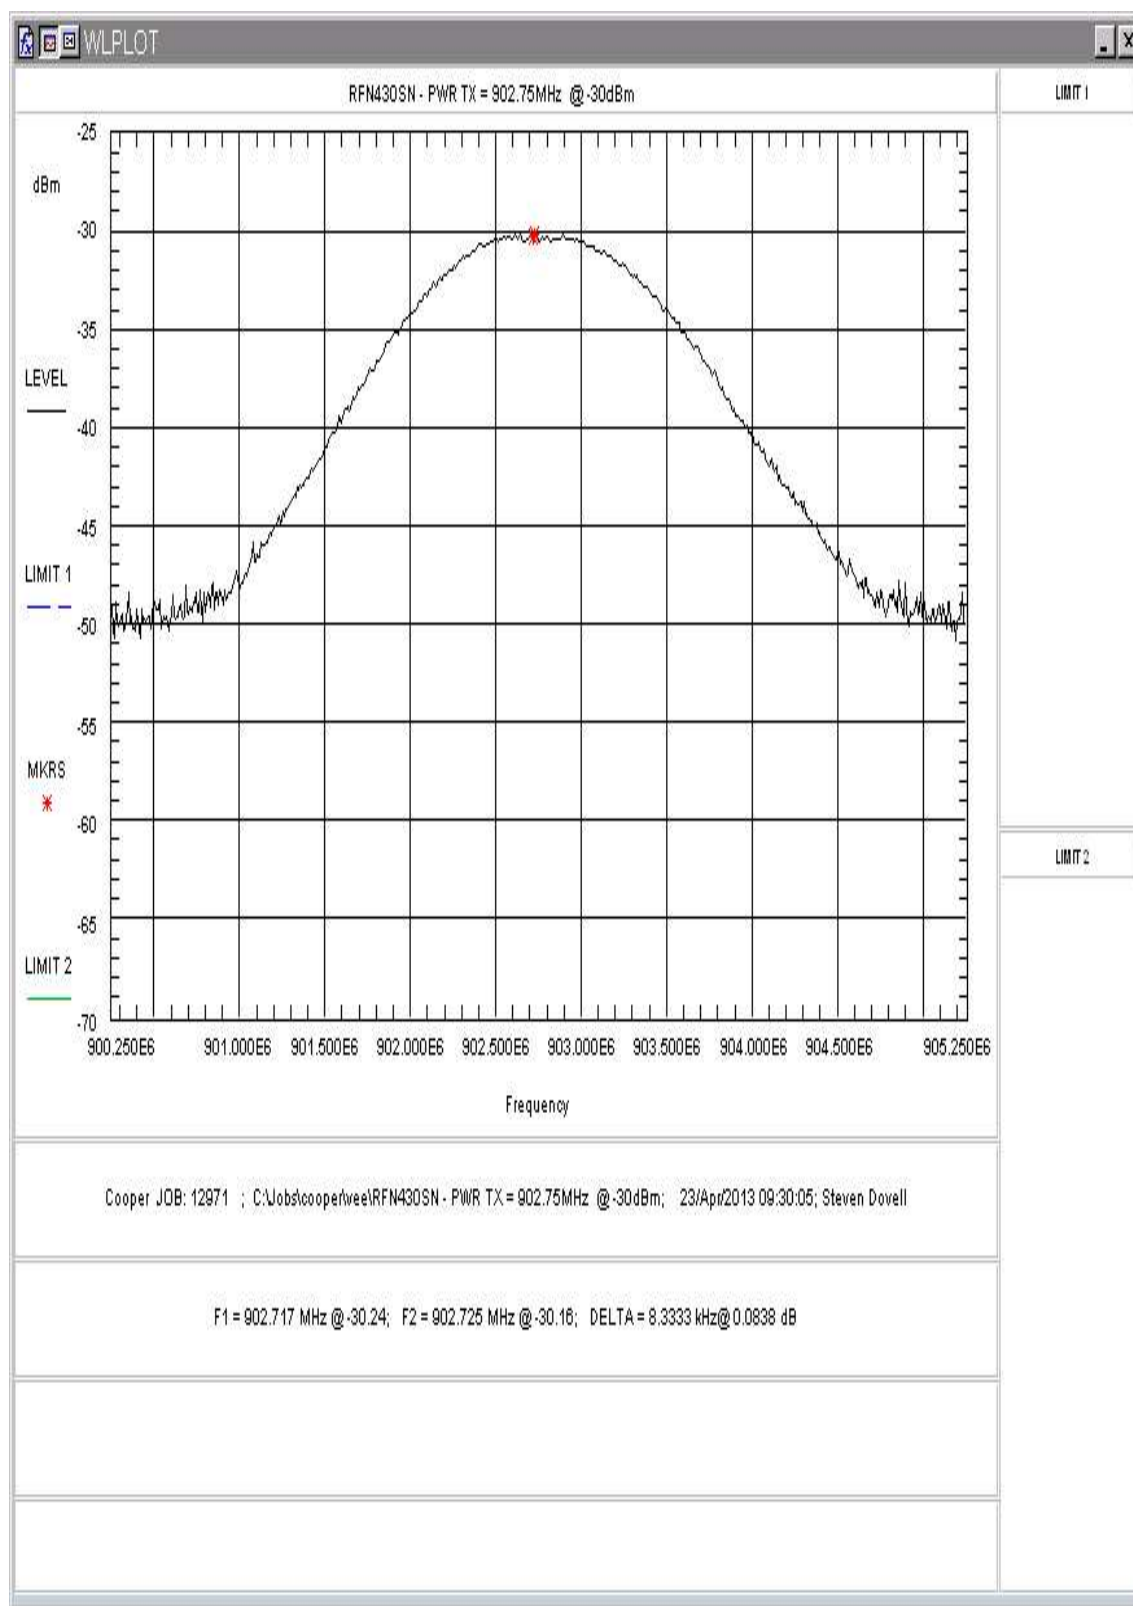


Figure 7: RF Peak Power, Low Power, Low Channel

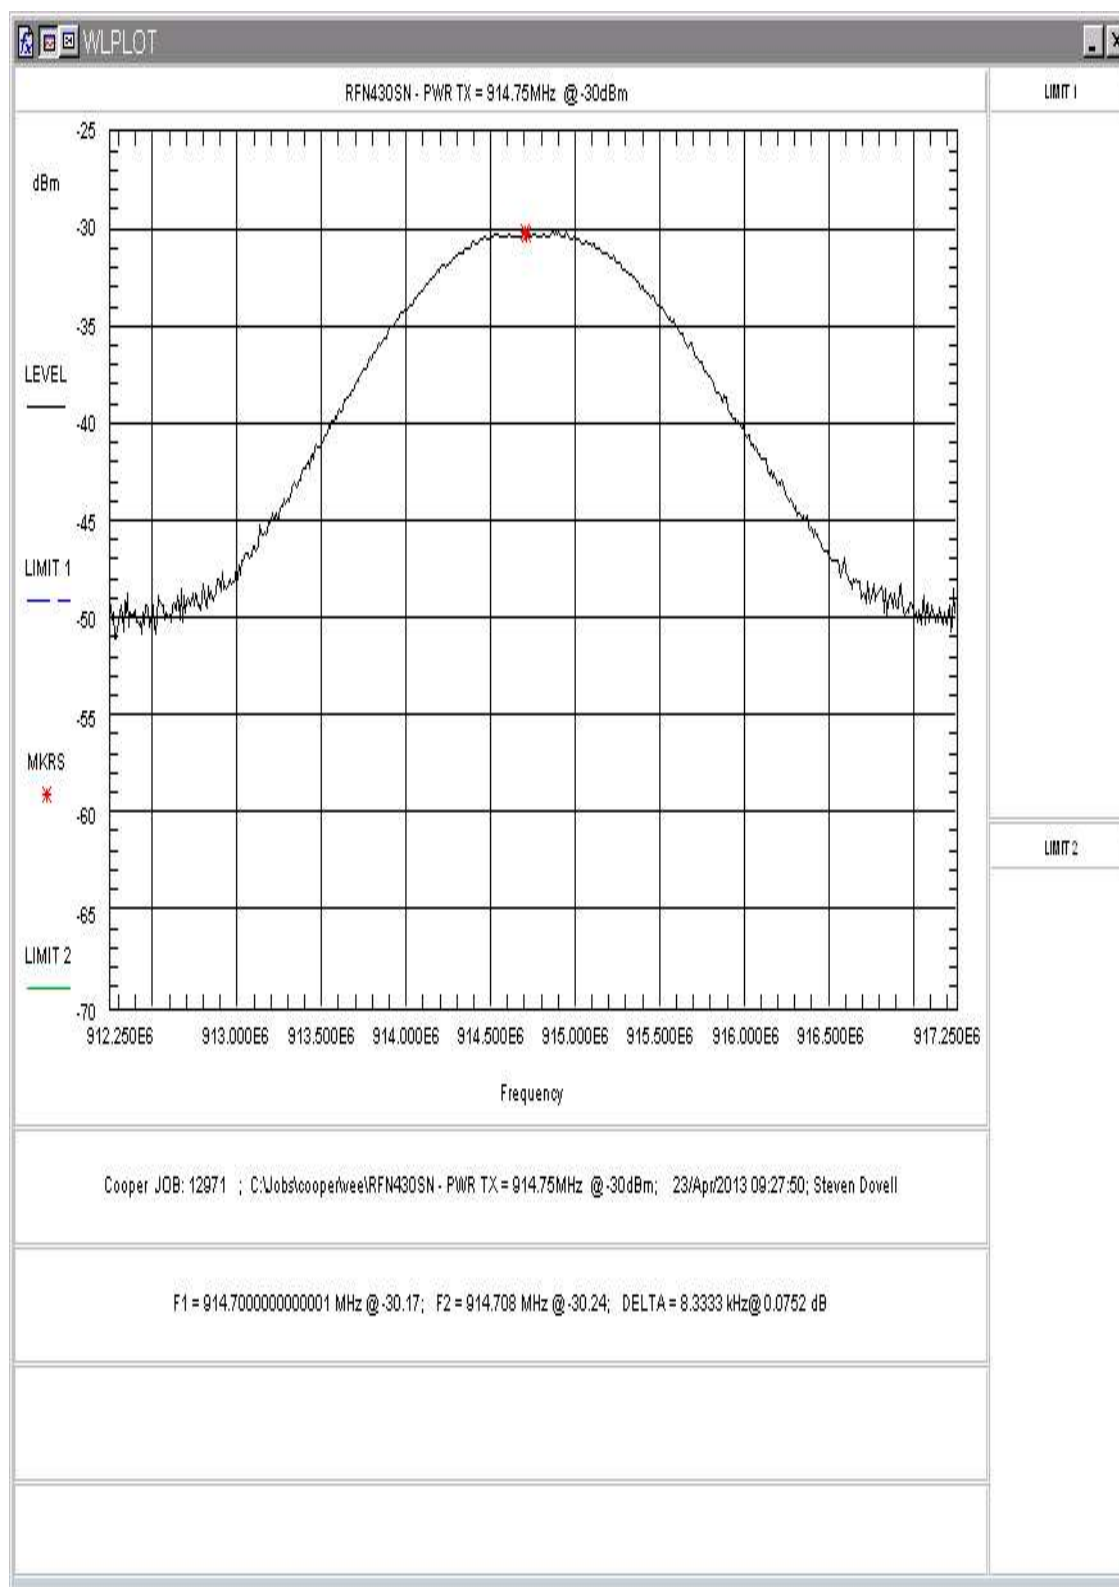


Figure 8: RF Peak Power, Low Power, Center Channel

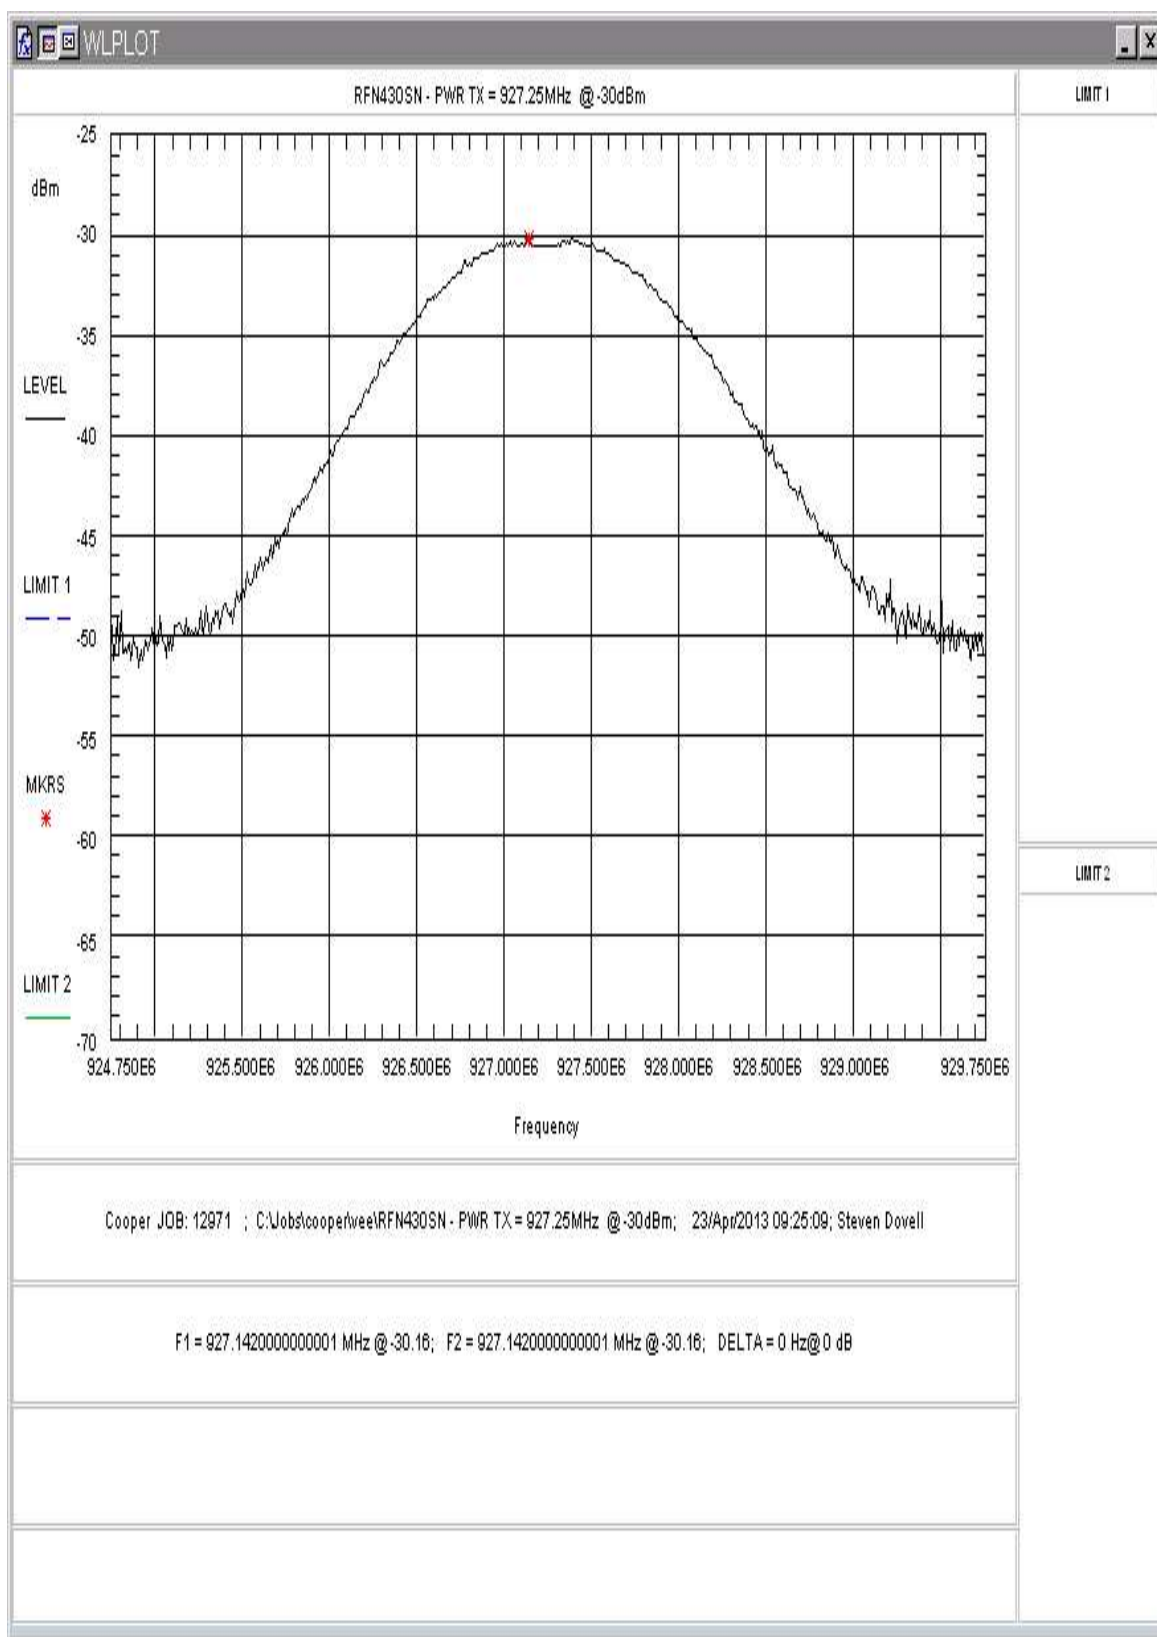


Figure 9: RF Peak Power, Low Power, High Channel



### 5.3 Occupied Bandwidth: (FCC Part §2.1049)

Occupied bandwidth was performed by coupling the output of the EUT to the input of a spectrum analyzer.

**Table 8: Occupied Bandwidth Spectrum Analyzer Settings**

Resolution Bandwidth	Video Bandwidth
10kHz	30kHz

For Frequency Hopping Spread Spectrum Systems, FCC Part 15.247 requires the maximum 20 dB bandwidth not exceed 500kHz.

At full modulation, the occupied bandwidth was measured as shown:

Table 9 provides a summary of the Occupied Bandwidth Results.

**Table 9: Occupied Bandwidth Results**

Frequency	Bandwidth (kHz)	Limit (kHz)	Pass/Fail
Low Channel: 902.75MHz	431.054	500	Pass
Center Channel: 914.75MHz	490.639	500	Pass
High Channel: 927.25MHz	493.089	500	Pass

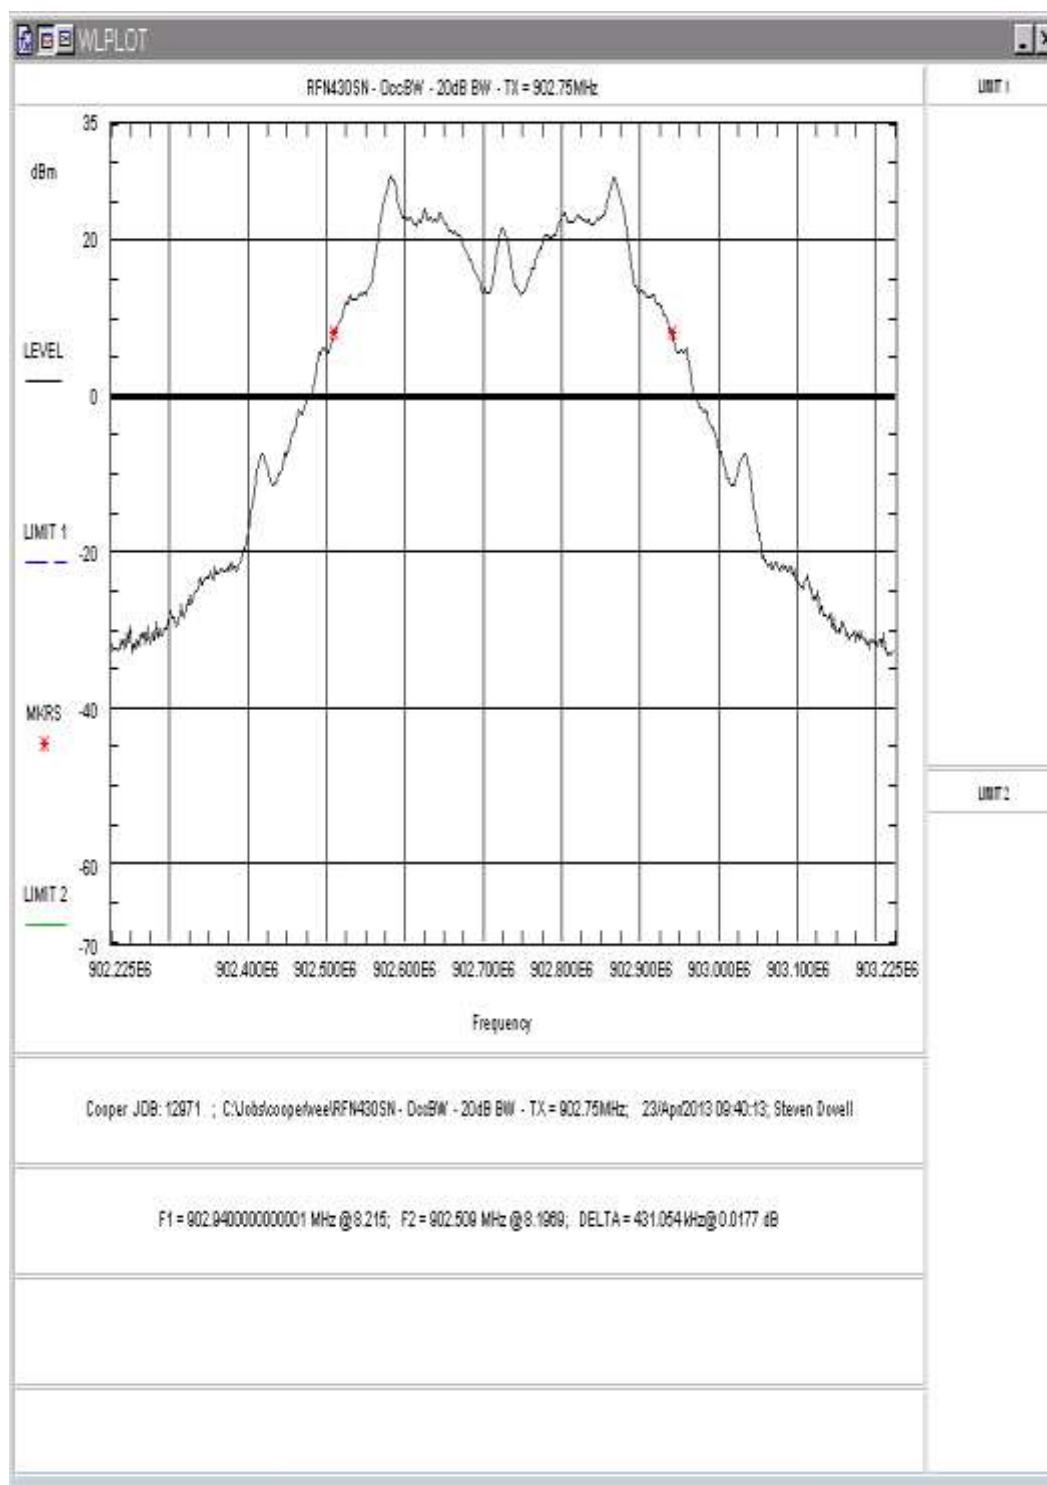


Figure 10: Occupied Bandwidth, Low Channel

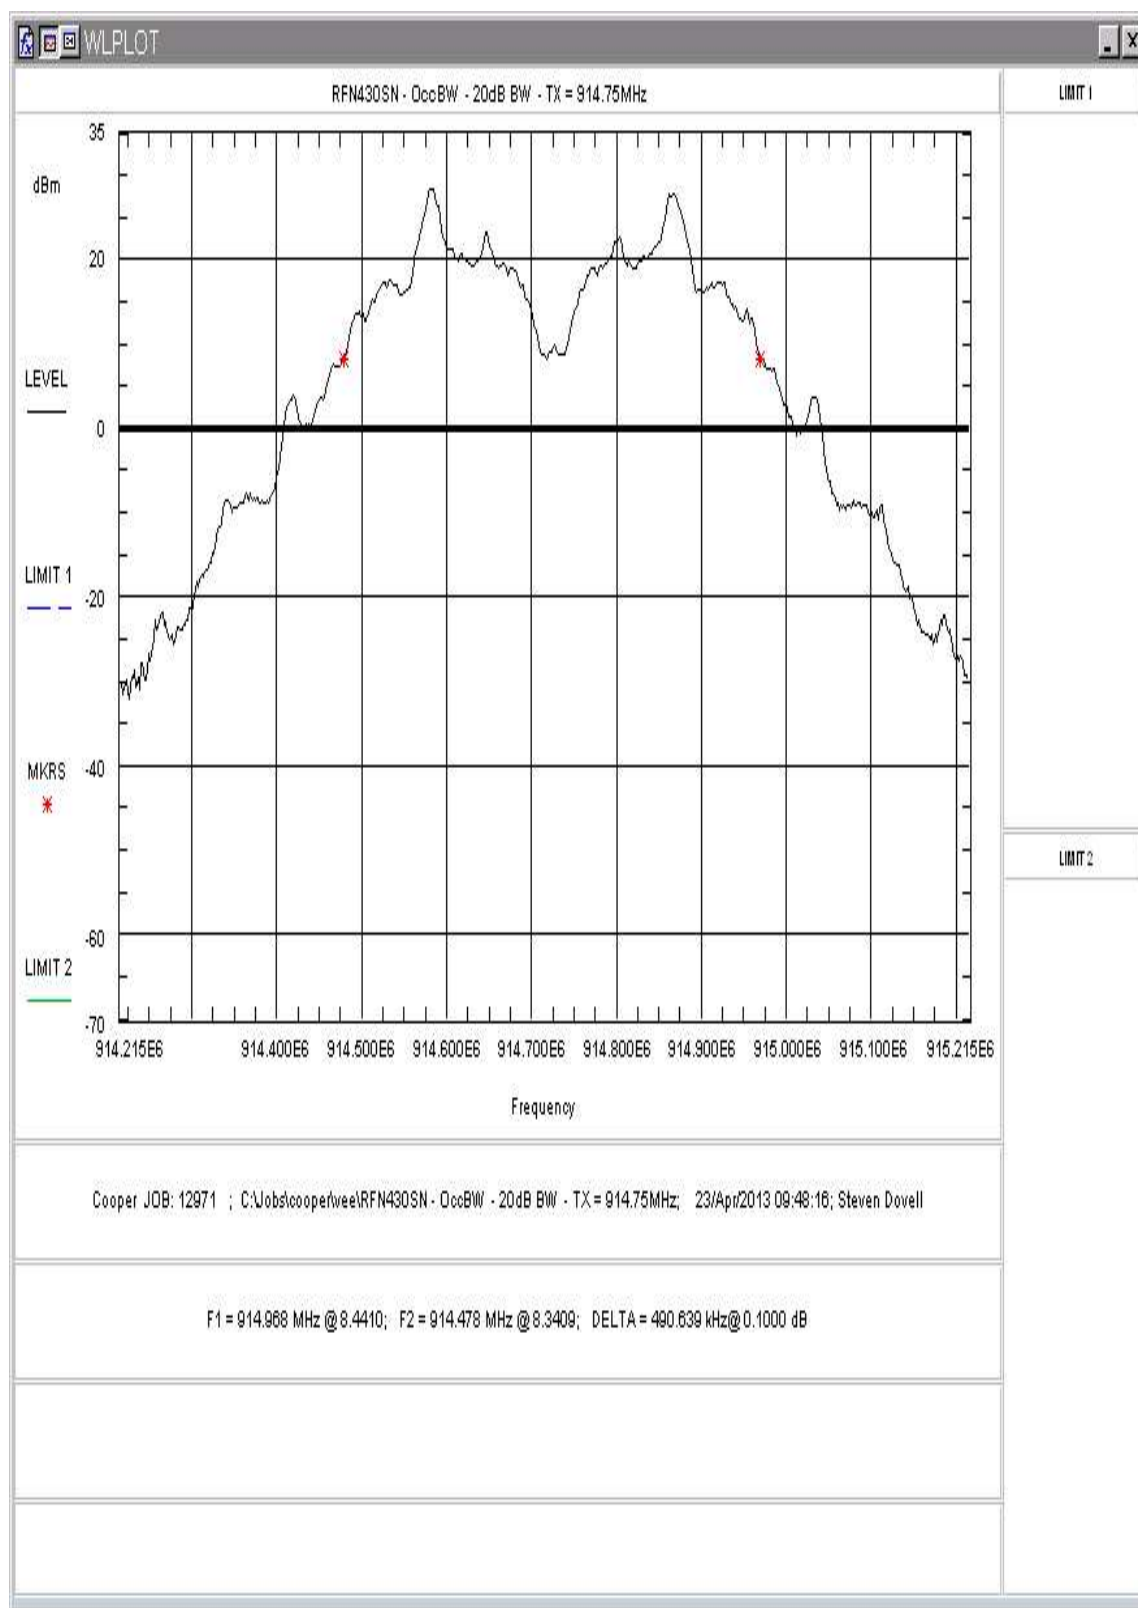


Figure 11: Occupied Bandwidth, Center Channel

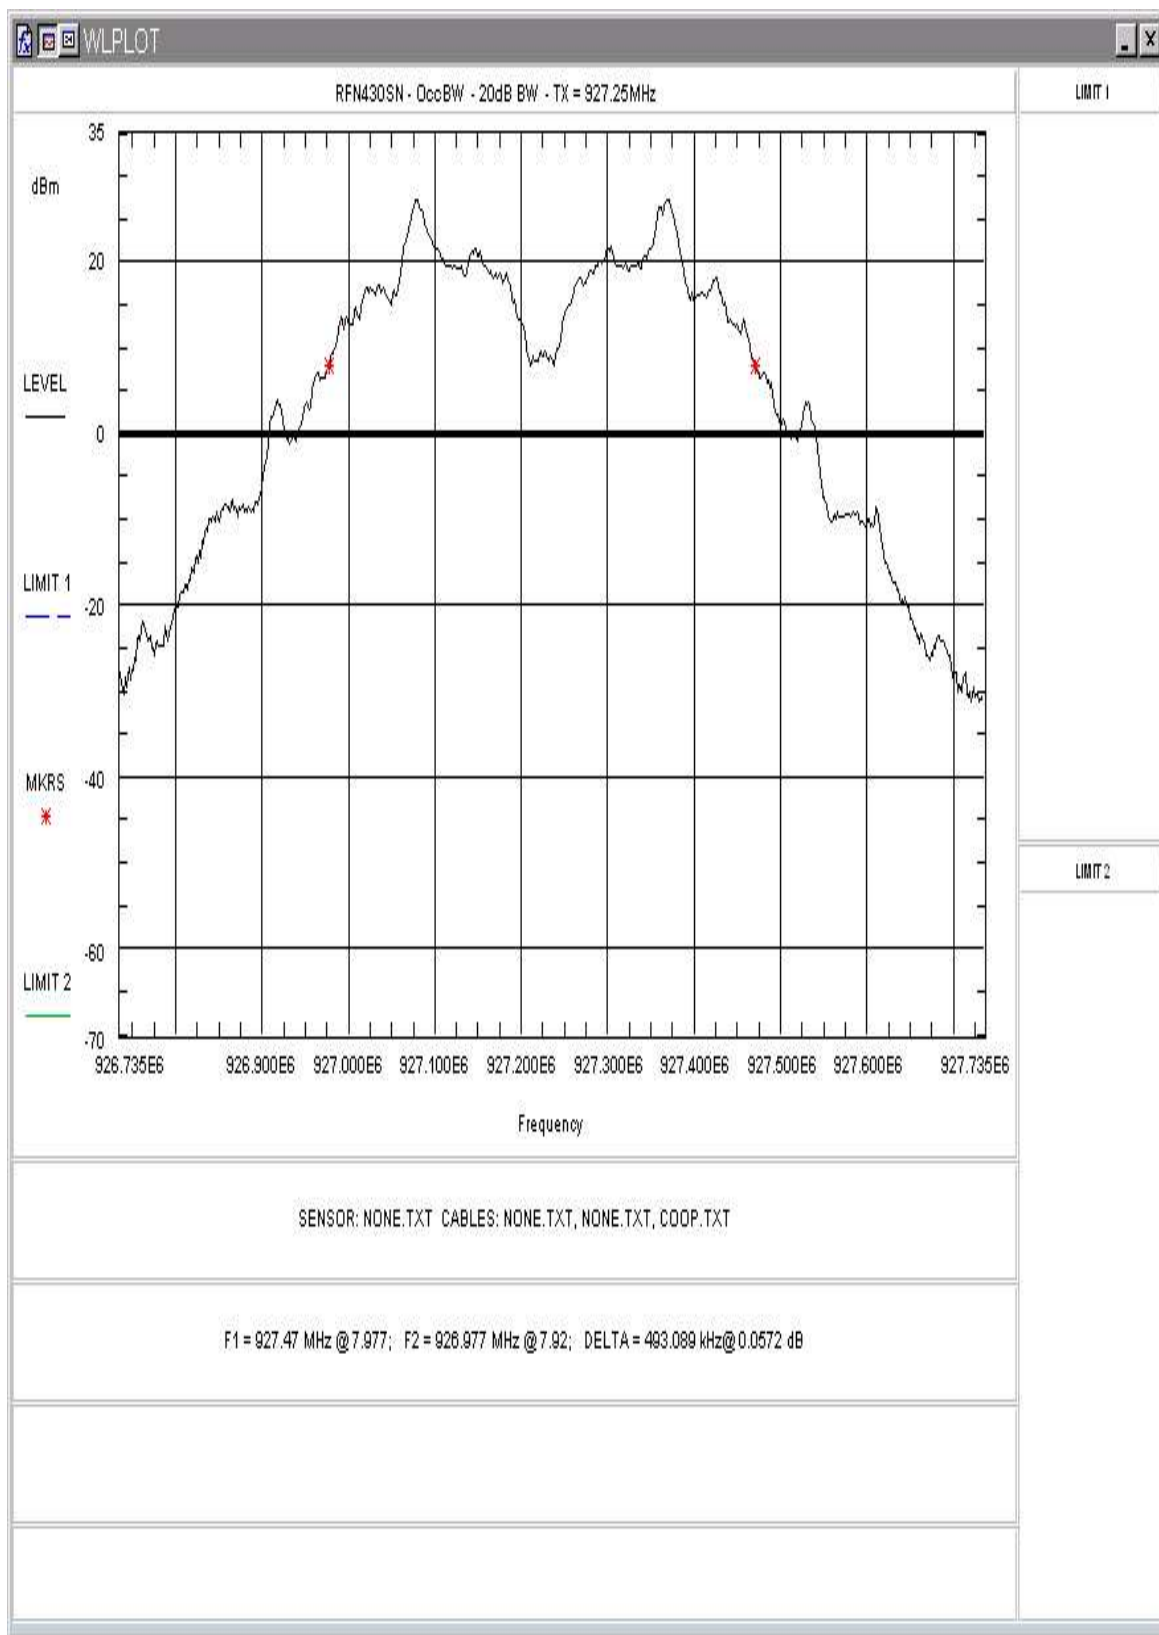


Figure 12: Occupied Bandwidth, High Channel

#### 5.4 Channel Spacing and Number of Hop Channels (FCC Part §15247(a)(1))

Per the FCC requirements, frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20 dB bandwidth, whichever is greater. The maximum 20dB bandwidth measured is 493.089kHz so the channel spacing must be more than 493.089kHz. In addition, for a 902-928MHz transmitter with an occupied bandwidth greater than 250kHz the minimum number of hopping channels shall be 25.

The EUT antenna was removed and the cable was connected directly into a spectrum analyzer through a 20 dB attenuator. An offset was programmed into the spectrum analyzer to compensate for the loss of the external attenuator. The spectrum analyzer resolution bandwidth was set to 30 kHz and the video bandwidth was set to 100 kHz. The channel spacing of 2 adjacent channels was measured using a spectrum analyzer span setting of 1MHz. Also, the number of hopping channels was measured from 902-928MHz using a RBW of 30kHz and a VBW setting of 100kHz.

The following are plots of the channel spacing and number of hopping channels data. The channel spacing was measured to be 500kHz and the number of channels used is 50.

Note: in the following plots each channel is composed of 2 distinct peaks.

**Table 10: Channel Spacing and Number of Channels Results**

Frequency	Result	Limit	Pass/Fail
Channel Spacing	500kHz	493.089kHz minimum	Pass
Number of channels	50 channels	25 channels minimum	Pass

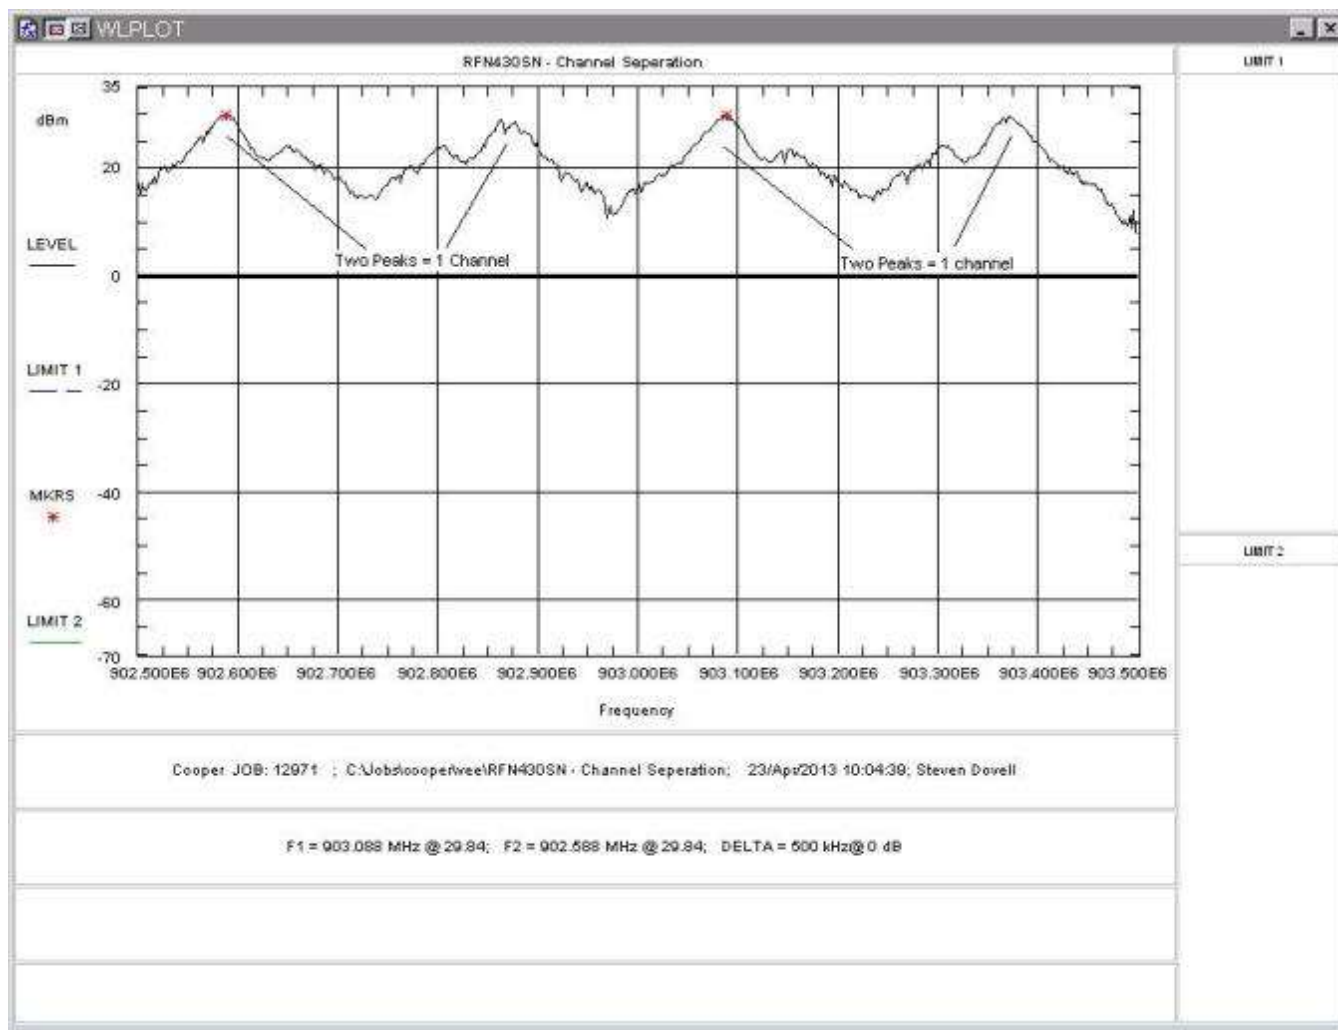


Figure 13: Channel Spacing

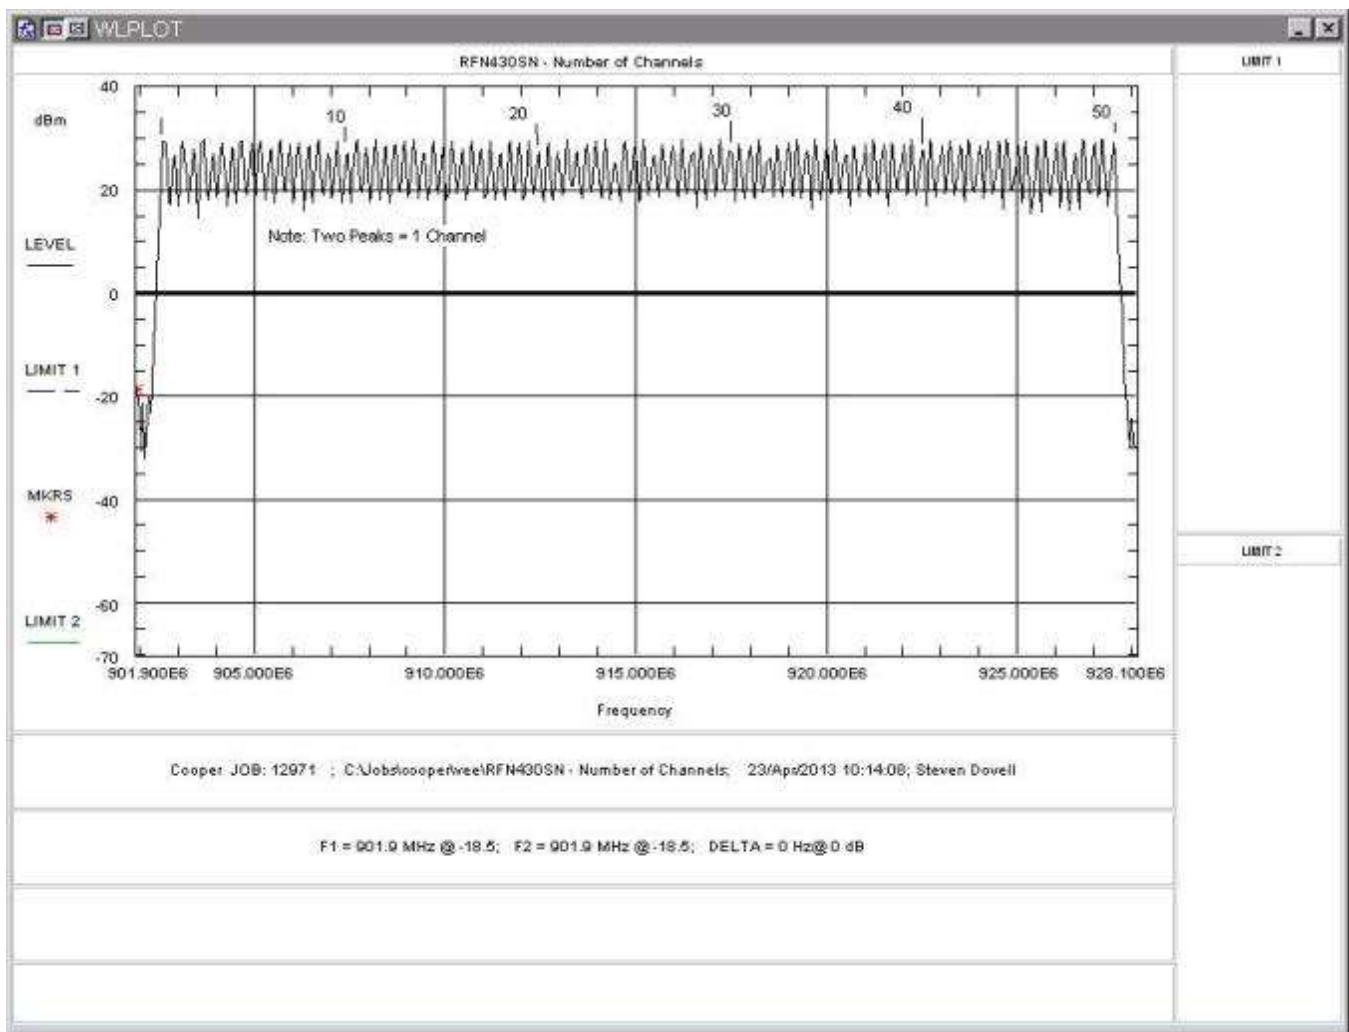


Figure 14: Number of Hopping Channels

## 5.5 Conducted Spurious Emissions at Antenna Terminals (FCC Part §2.1051)

The EUT must comply with requirements for spurious emissions at antenna terminals. Per §15.247(c) all spurious emissions in any 100 kHz bandwidth outside the frequency band in which the spread spectrum device is operating shall be attenuated 20 dB below the highest power level in a 100 kHz bandwidth within the band containing the highest level of the desired power.

The EUT antenna was removed and the cable was connected directly into a spectrum analyzer through a 20 dB attenuator. An offset was programmed into the spectrum analyzer to compensate for the loss of the external attenuator. The spectrum analyzer resolution bandwidth was set to 100 kHz and the video bandwidth was set to 1 MHz. The amplitude of the EUT carrier frequency was measured to determine the emissions limit (20 dB below the carrier frequency amplitude). The emissions outside of the allocated frequency band were then scanned from 30 MHz up to the tenth harmonic of the carrier.

The following are plots of the conducted spurious emissions data.

**Table 11: Conducted Spurious Spectrum Analyzer Settings**

Resolution Bandwidth	Video Bandwidth
100kHz	1MHz



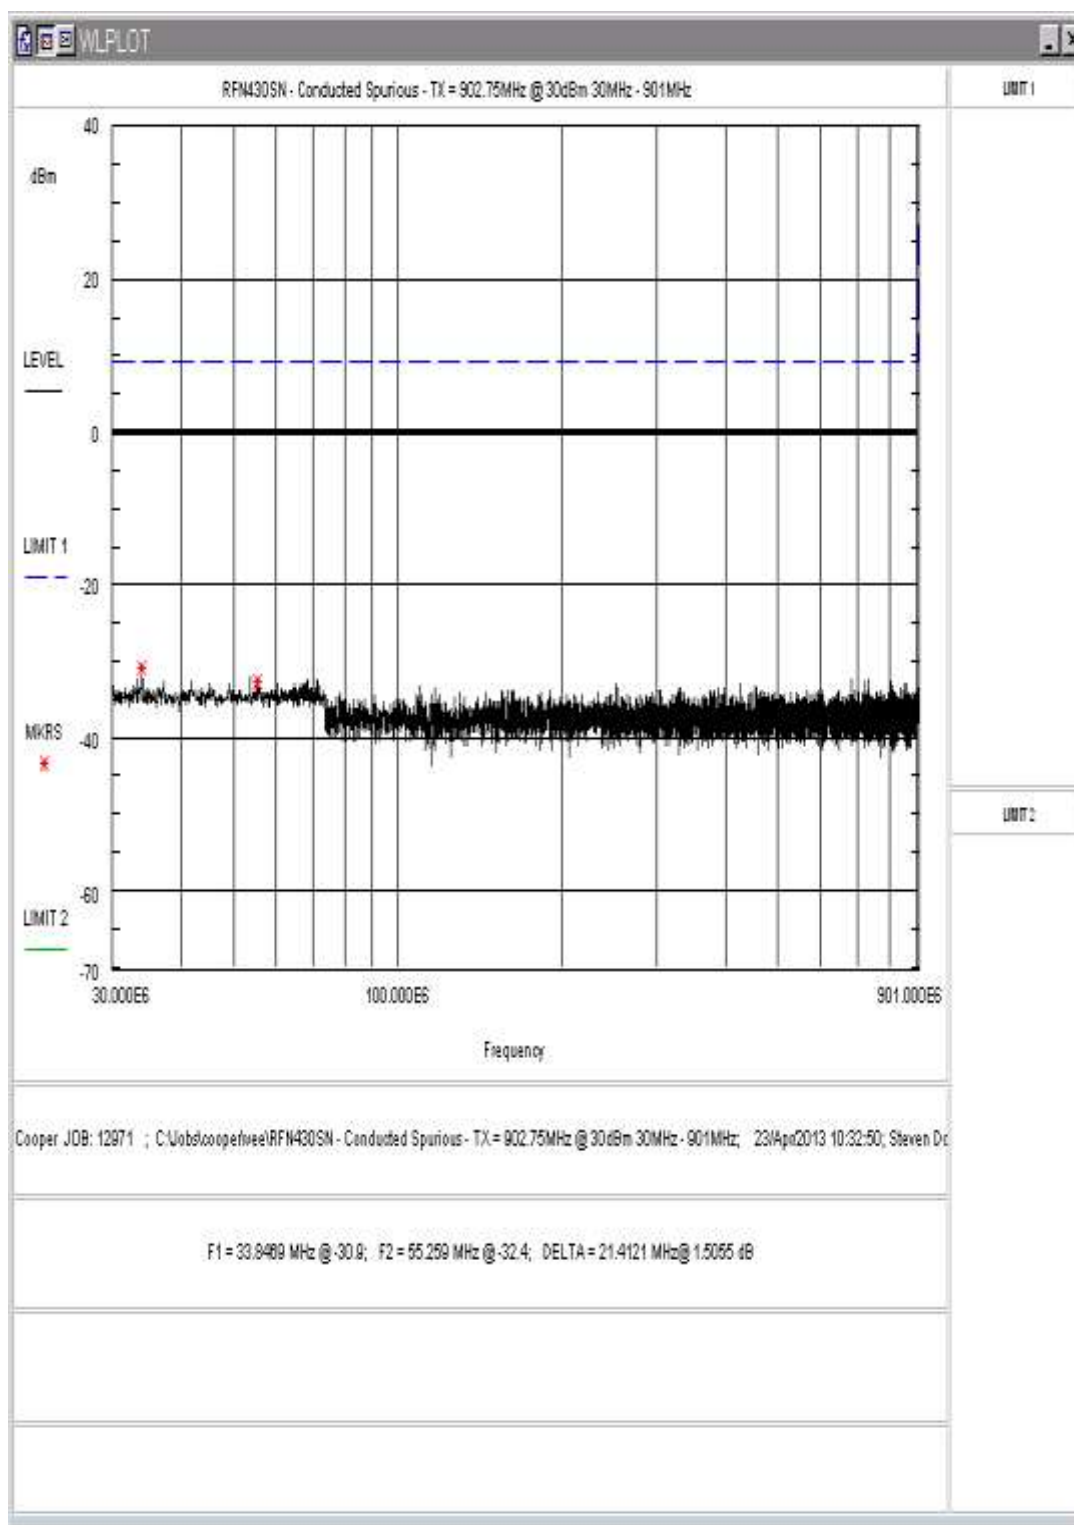


Figure 15: Conducted Spurious Emissions, High Power, Low Channel 30 - 901MHz

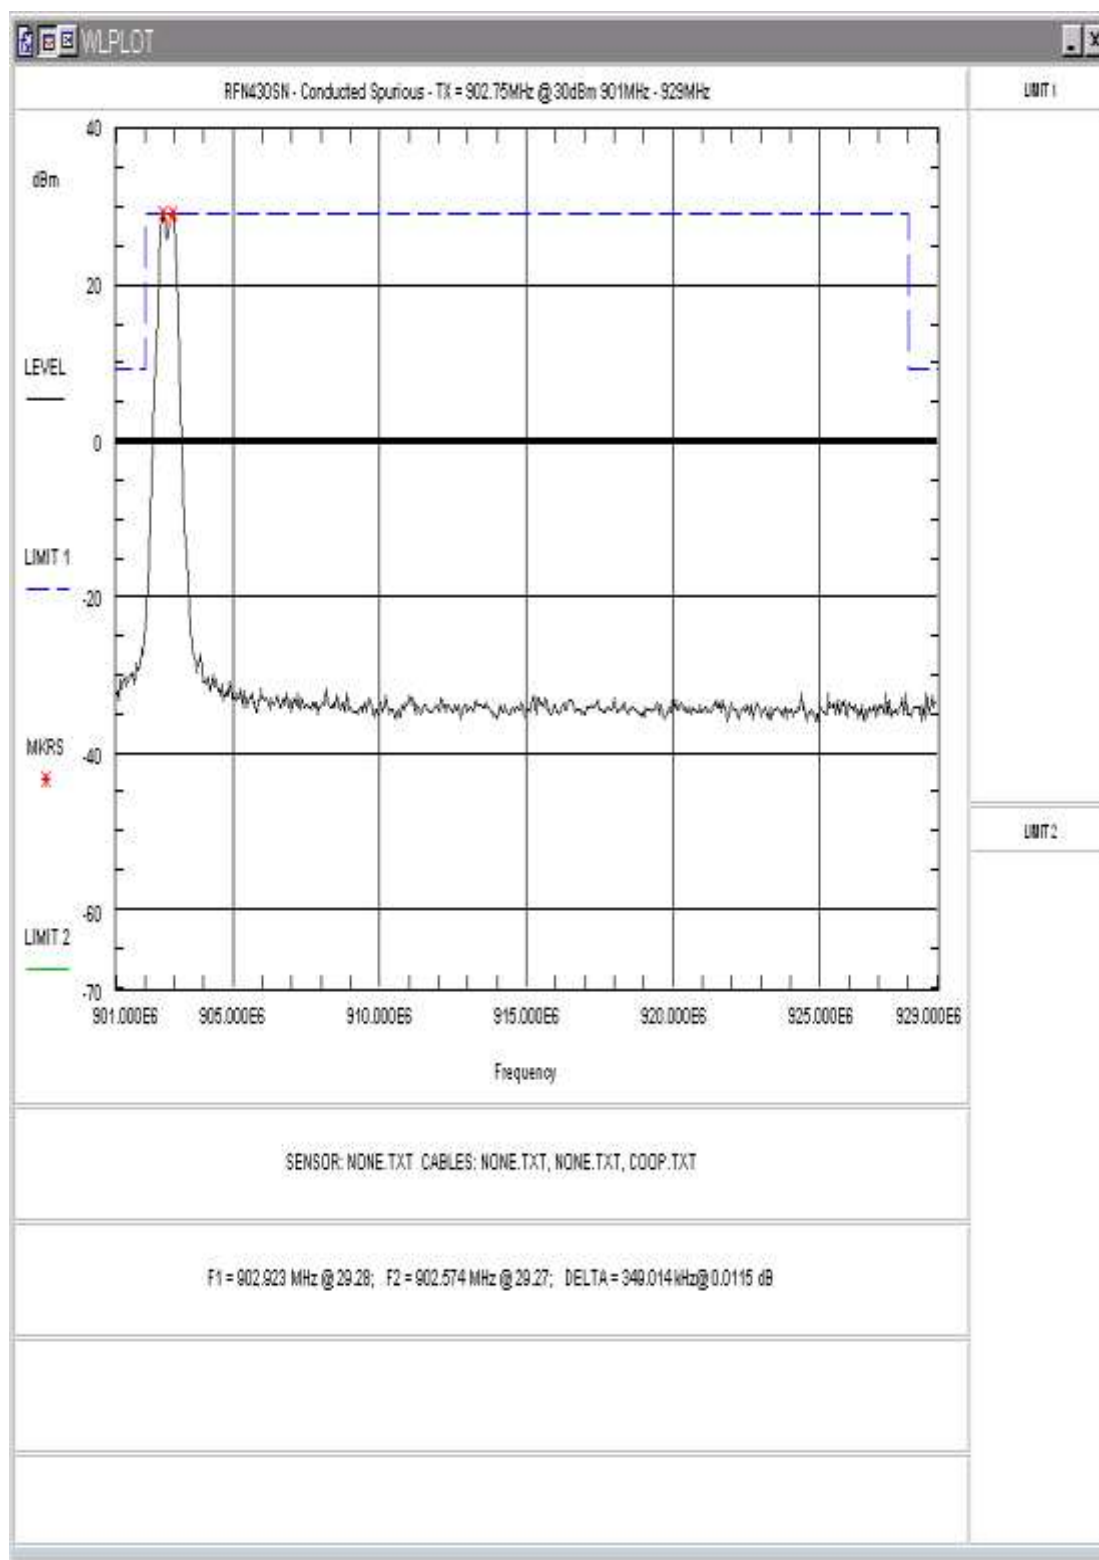


Figure 16: Conducted Spurious Emissions, High Power, Low Channel 901 – 929MHz


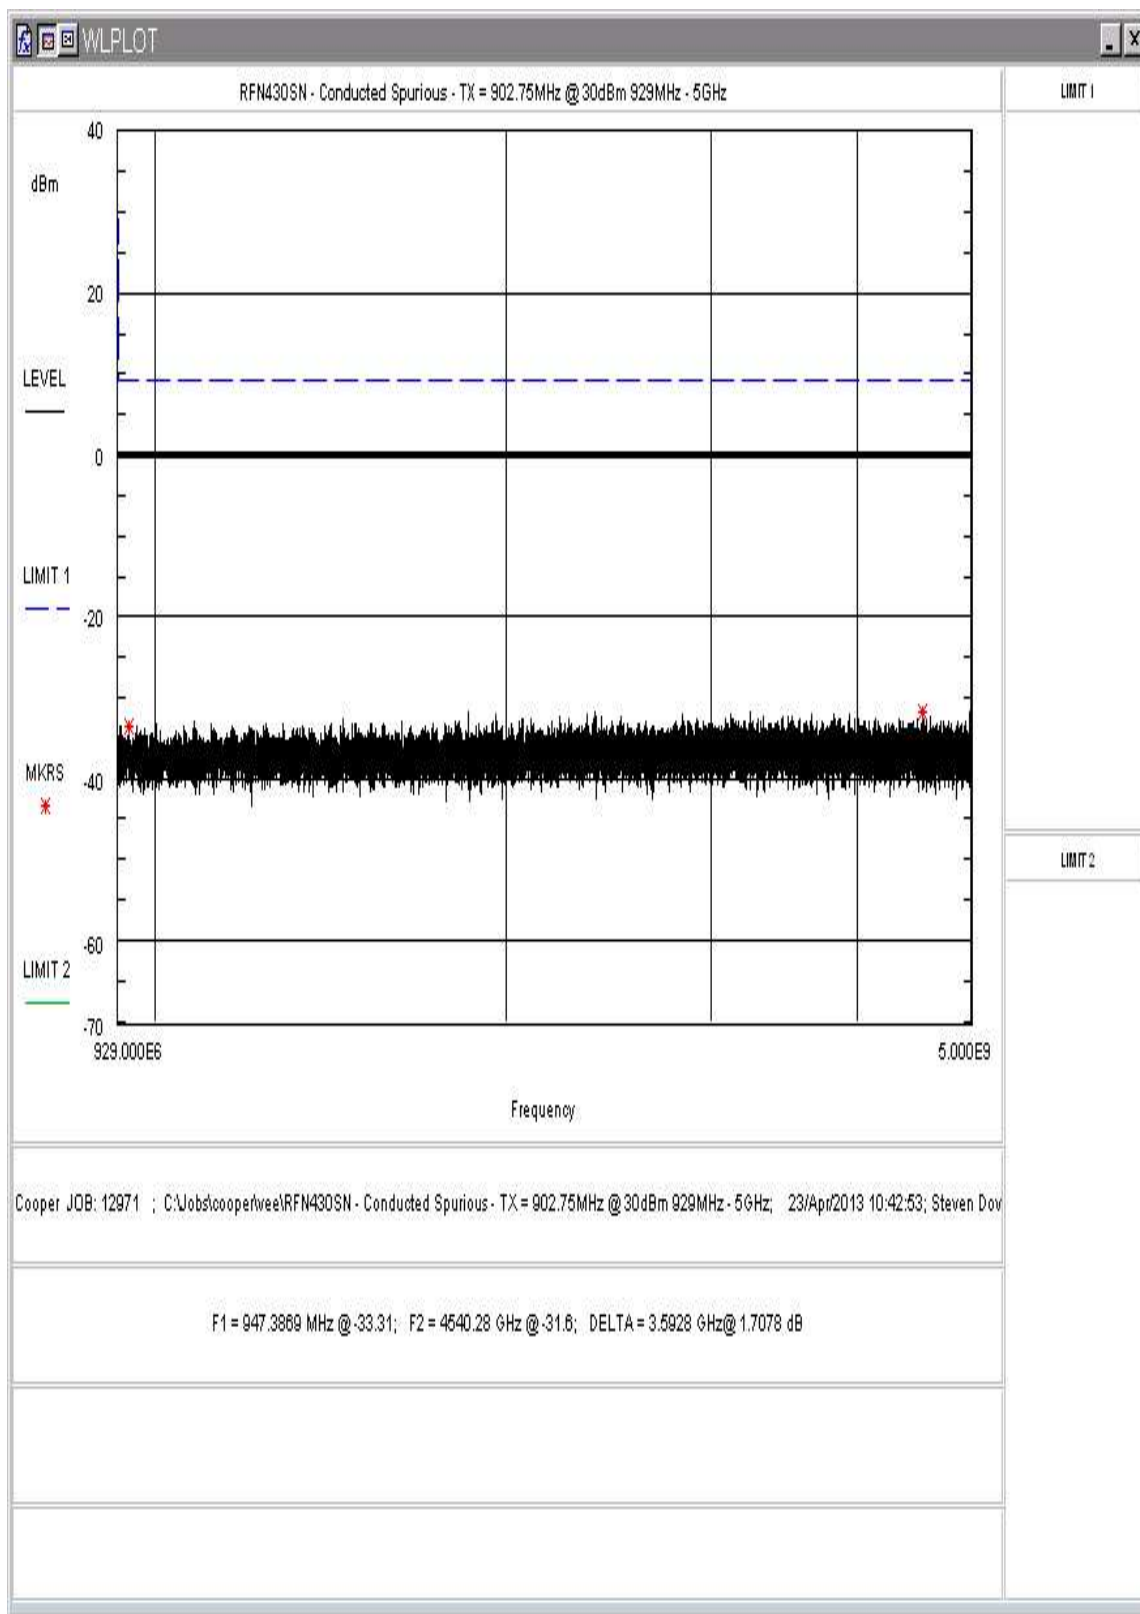


Figure 17: Conducted Spurious Emissions, High Power, Low Channel 929-5000MHz

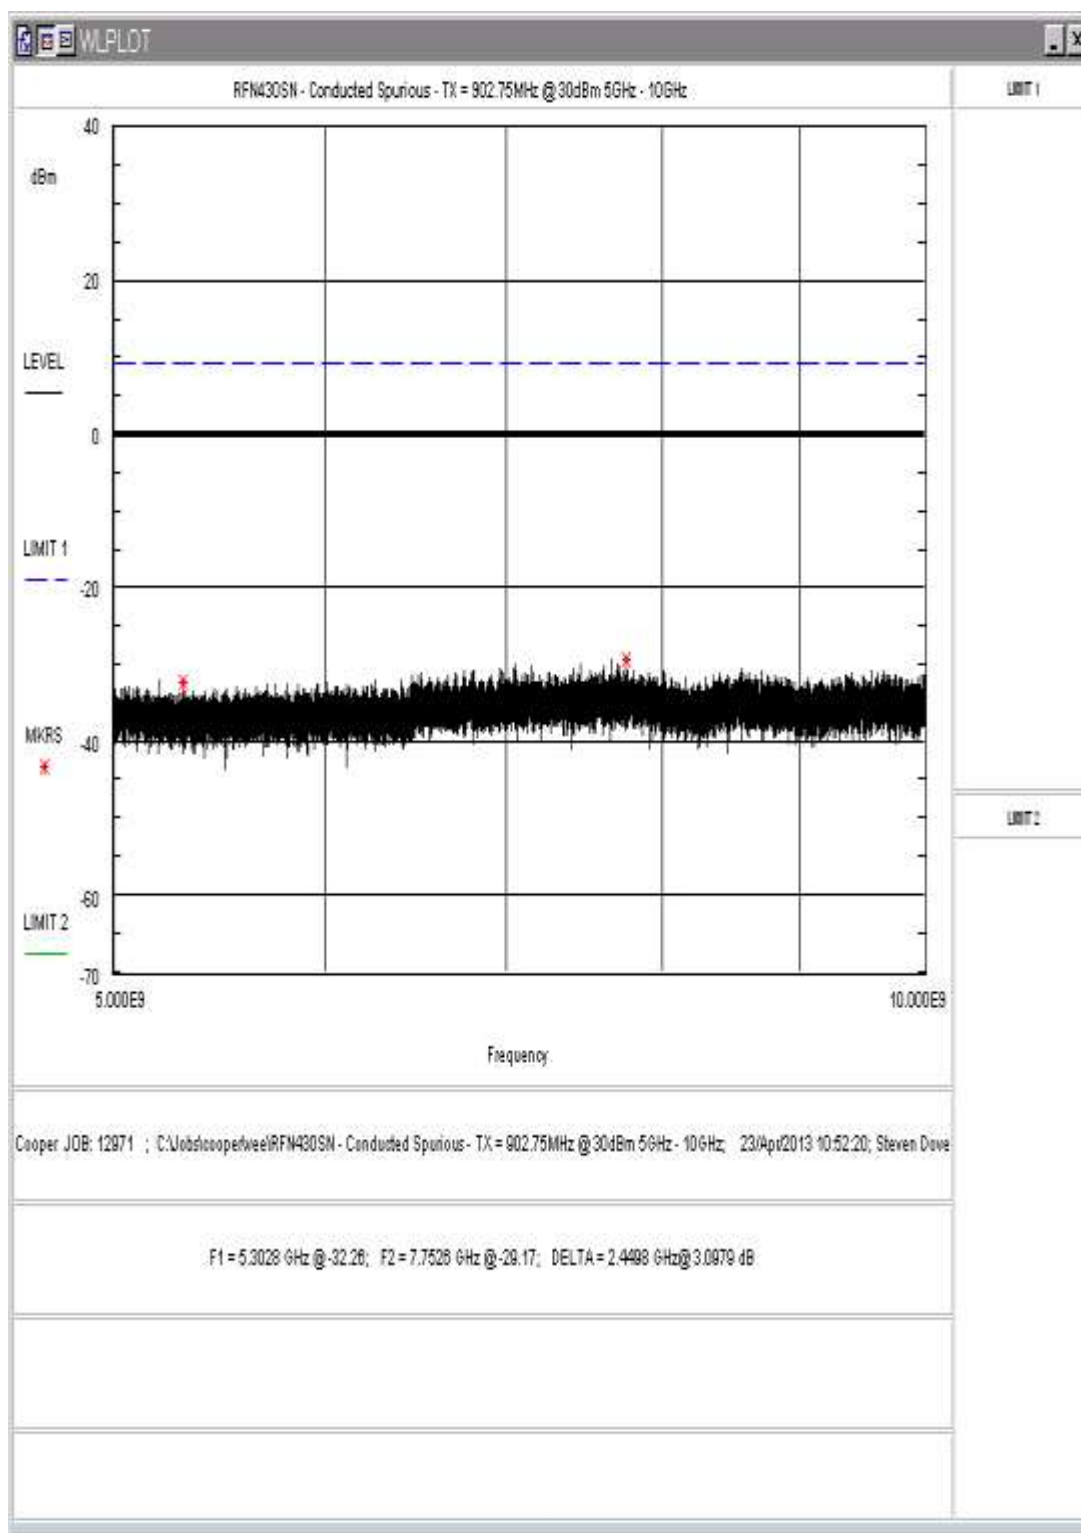

**Figure 18: Conducted Spurious Emissions, High Power, Low Channel 5-10GHz**

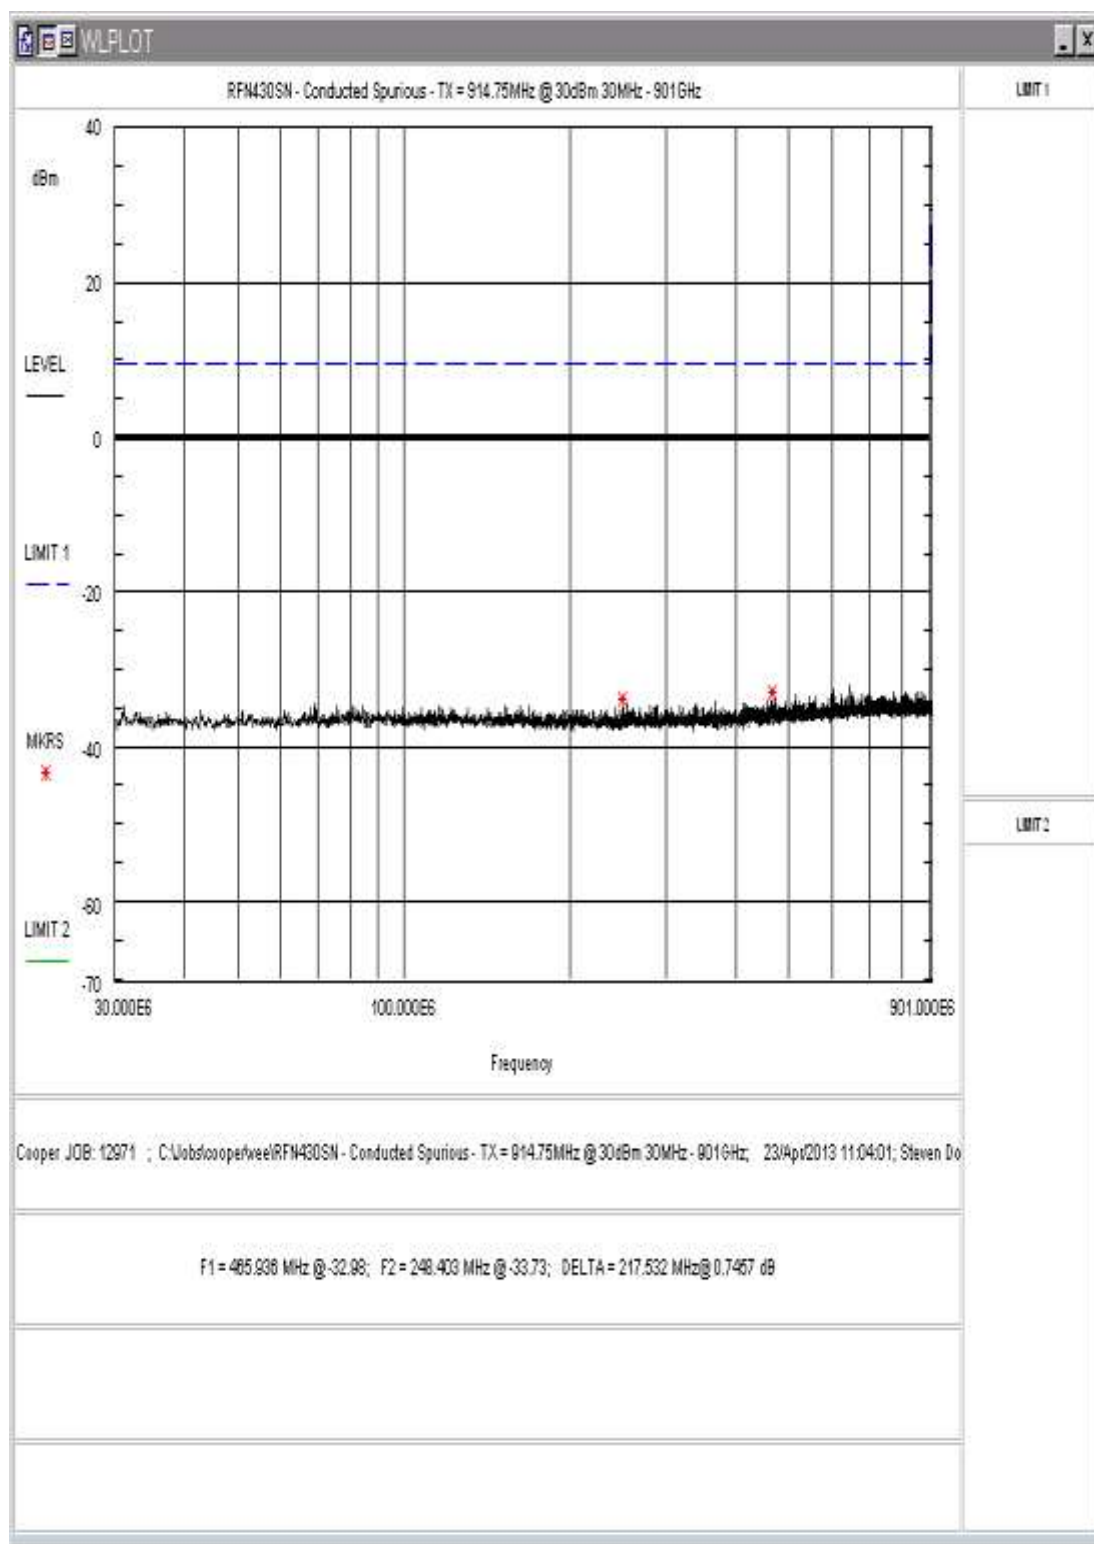


Figure 19: Conducted Spurious Emissions, High Power, Center Channel 30 - 901MHz


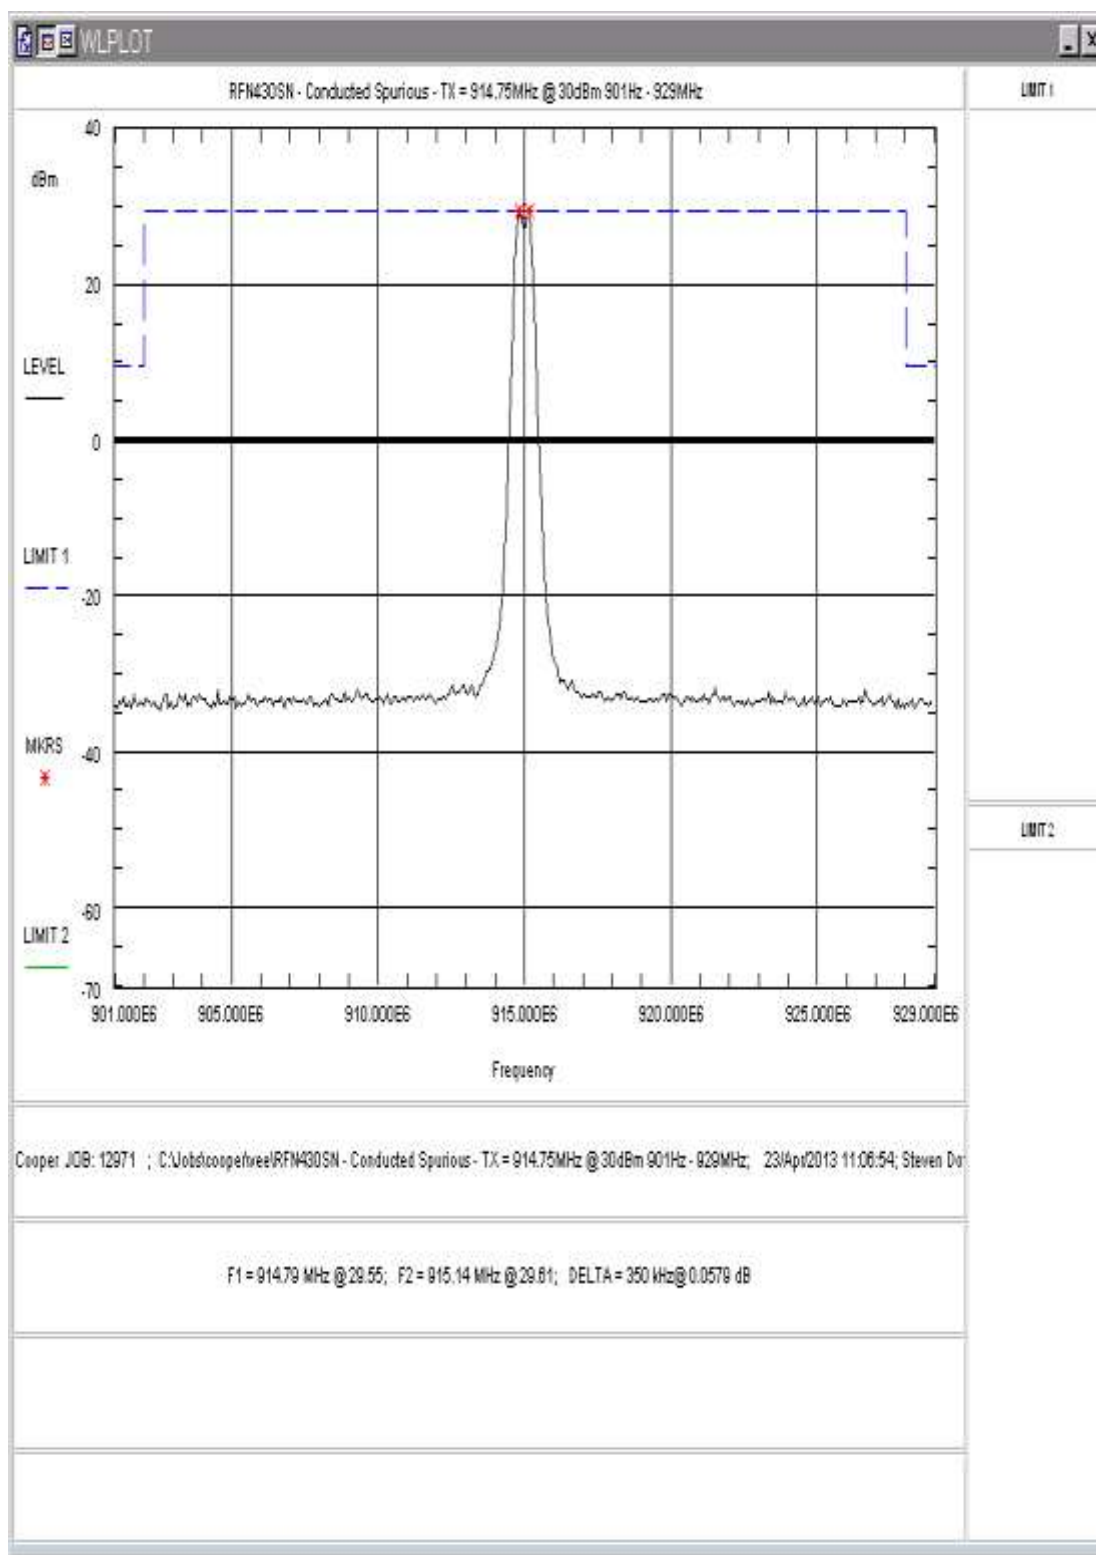


Figure 20: Conducted Spurious Emissions, High Power, Center Channel 901 – 929MHz

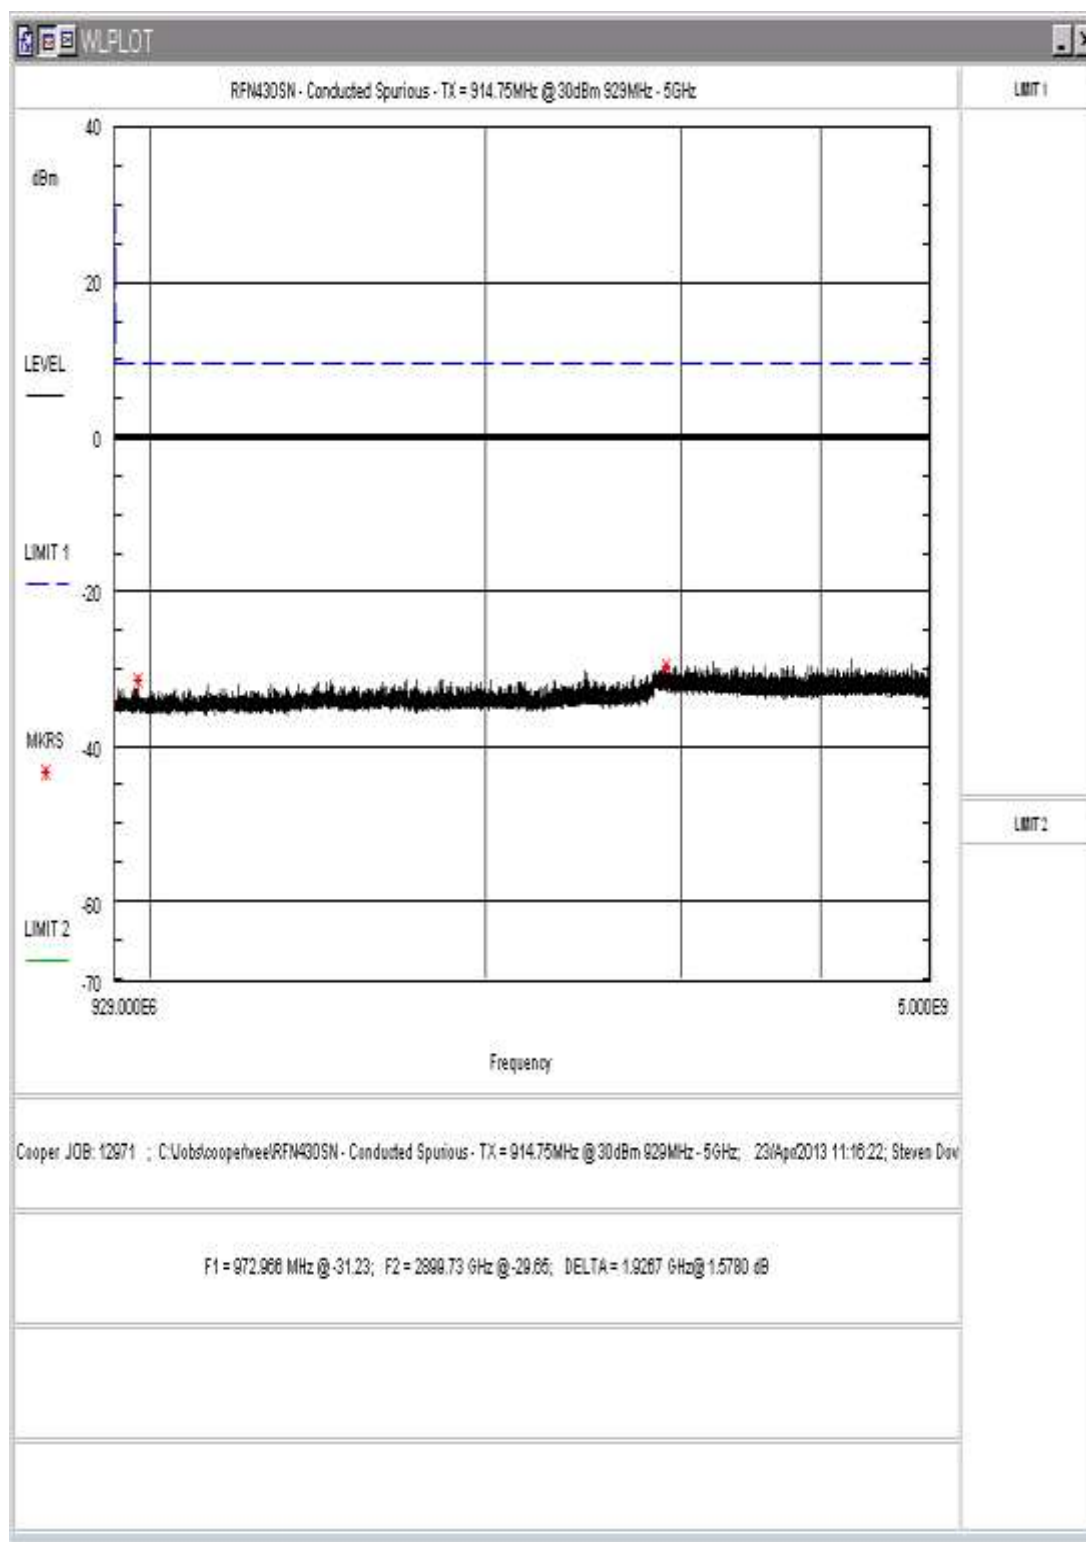

**Figure 21: Conducted Spurious Emissions, High Power, Center Channel 929-5000MHz**

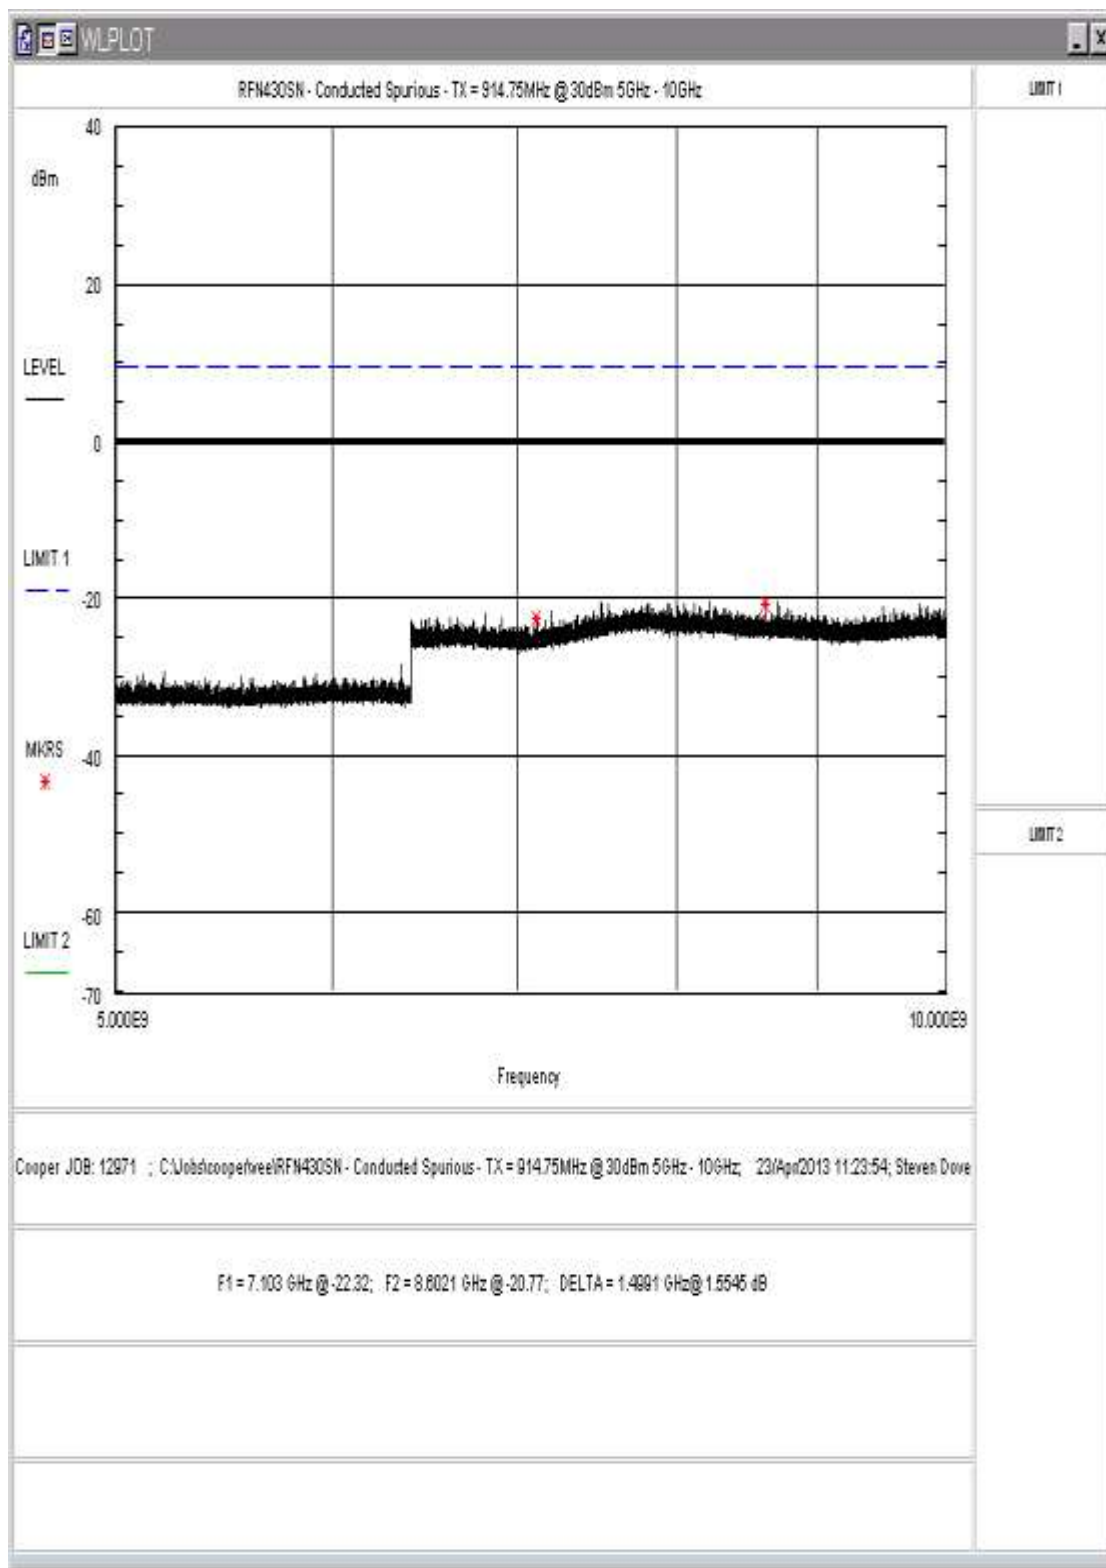


Figure 22: Conducted Spurious Emissions, High Power, Center Channel 5-10GHz



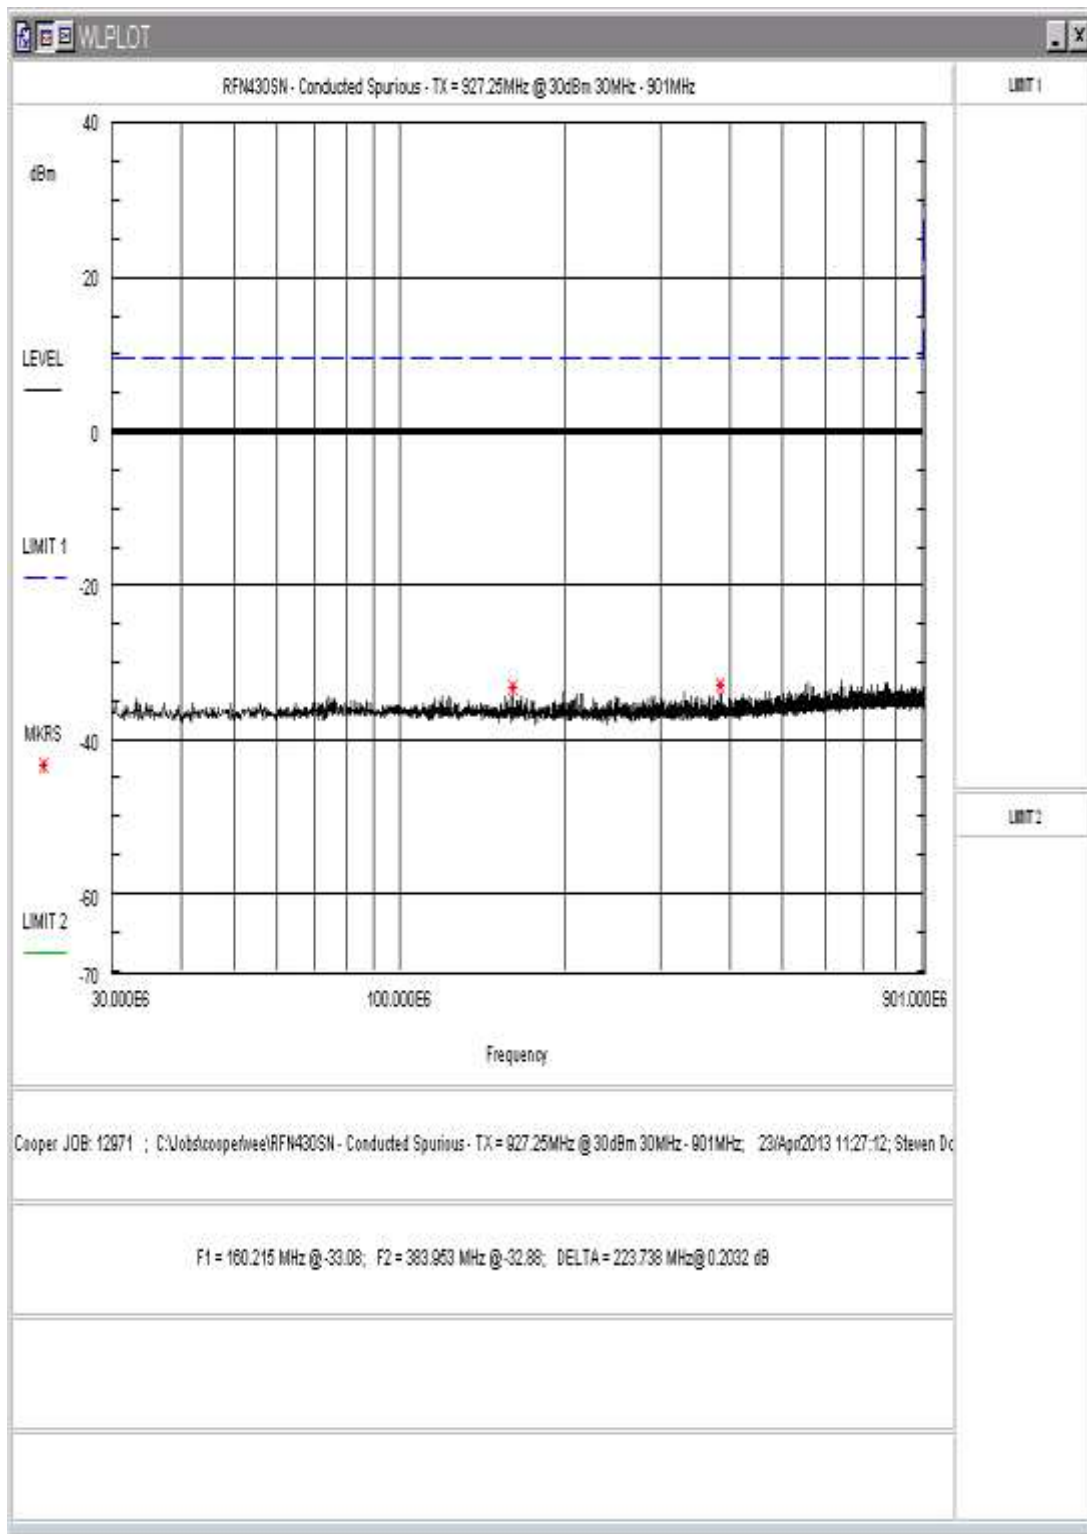


Figure 23: Conducted Spurious Emissions, High Power, High Channel 30 - 901MHz



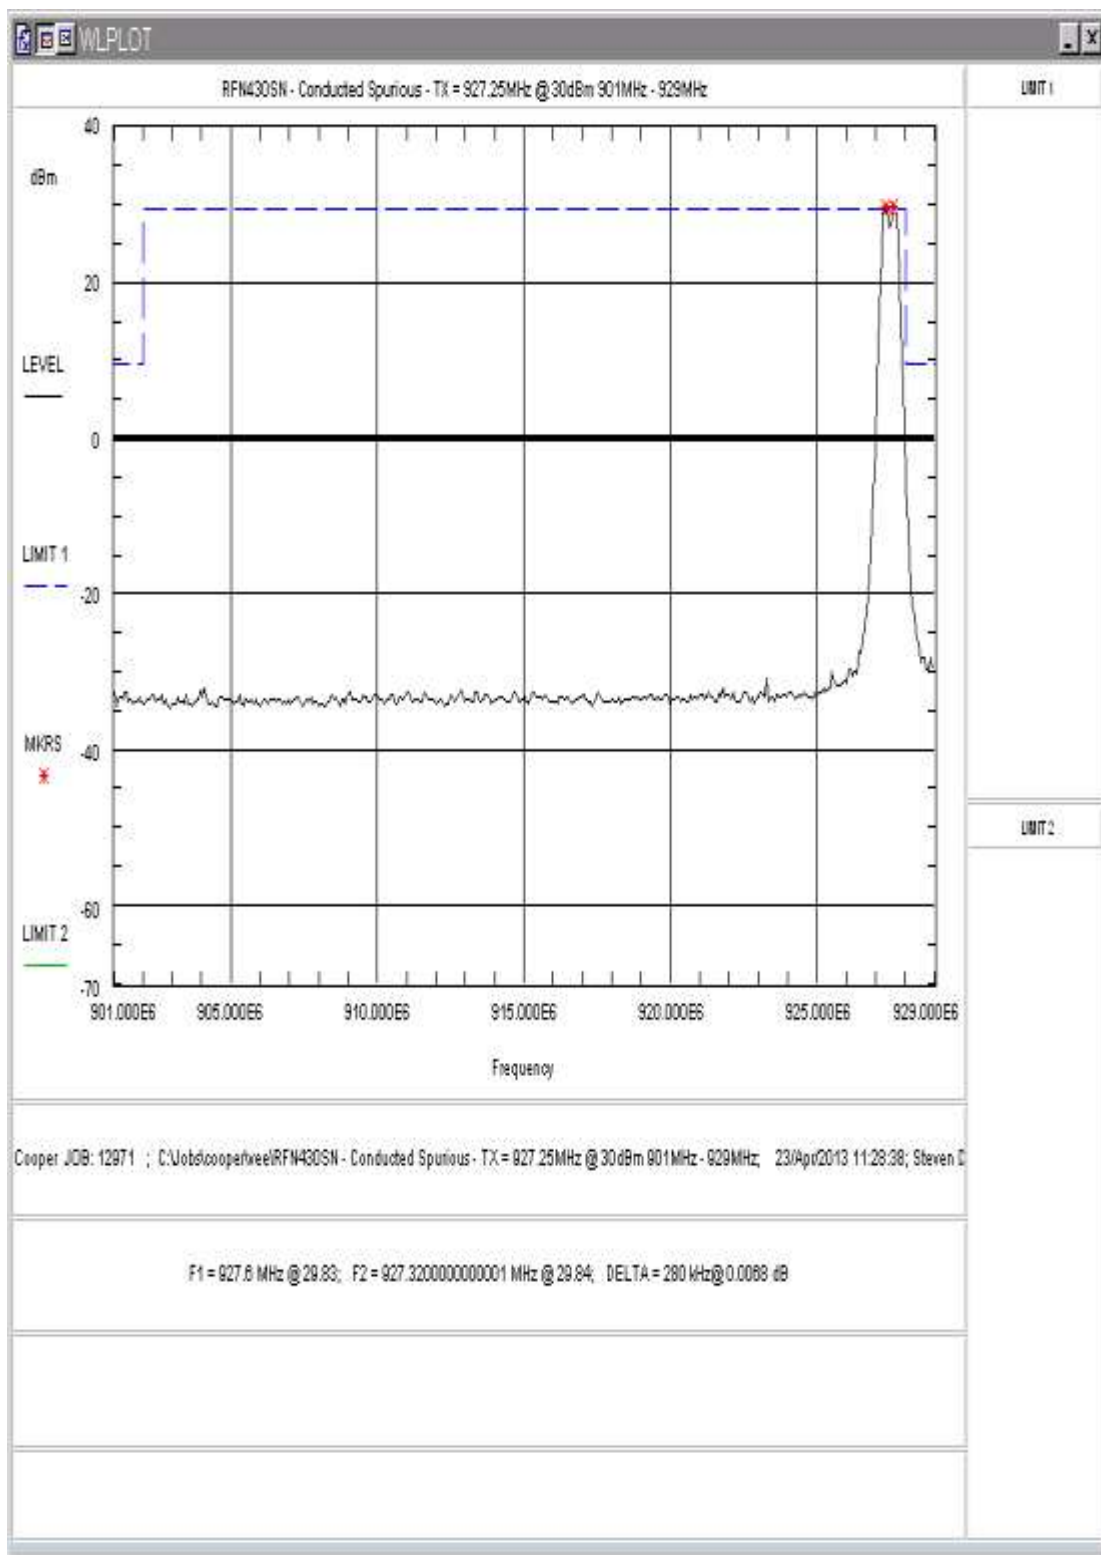


Figure 24: Conducted Spurious Emissions, High Power, High Channel 901 – 929MHz

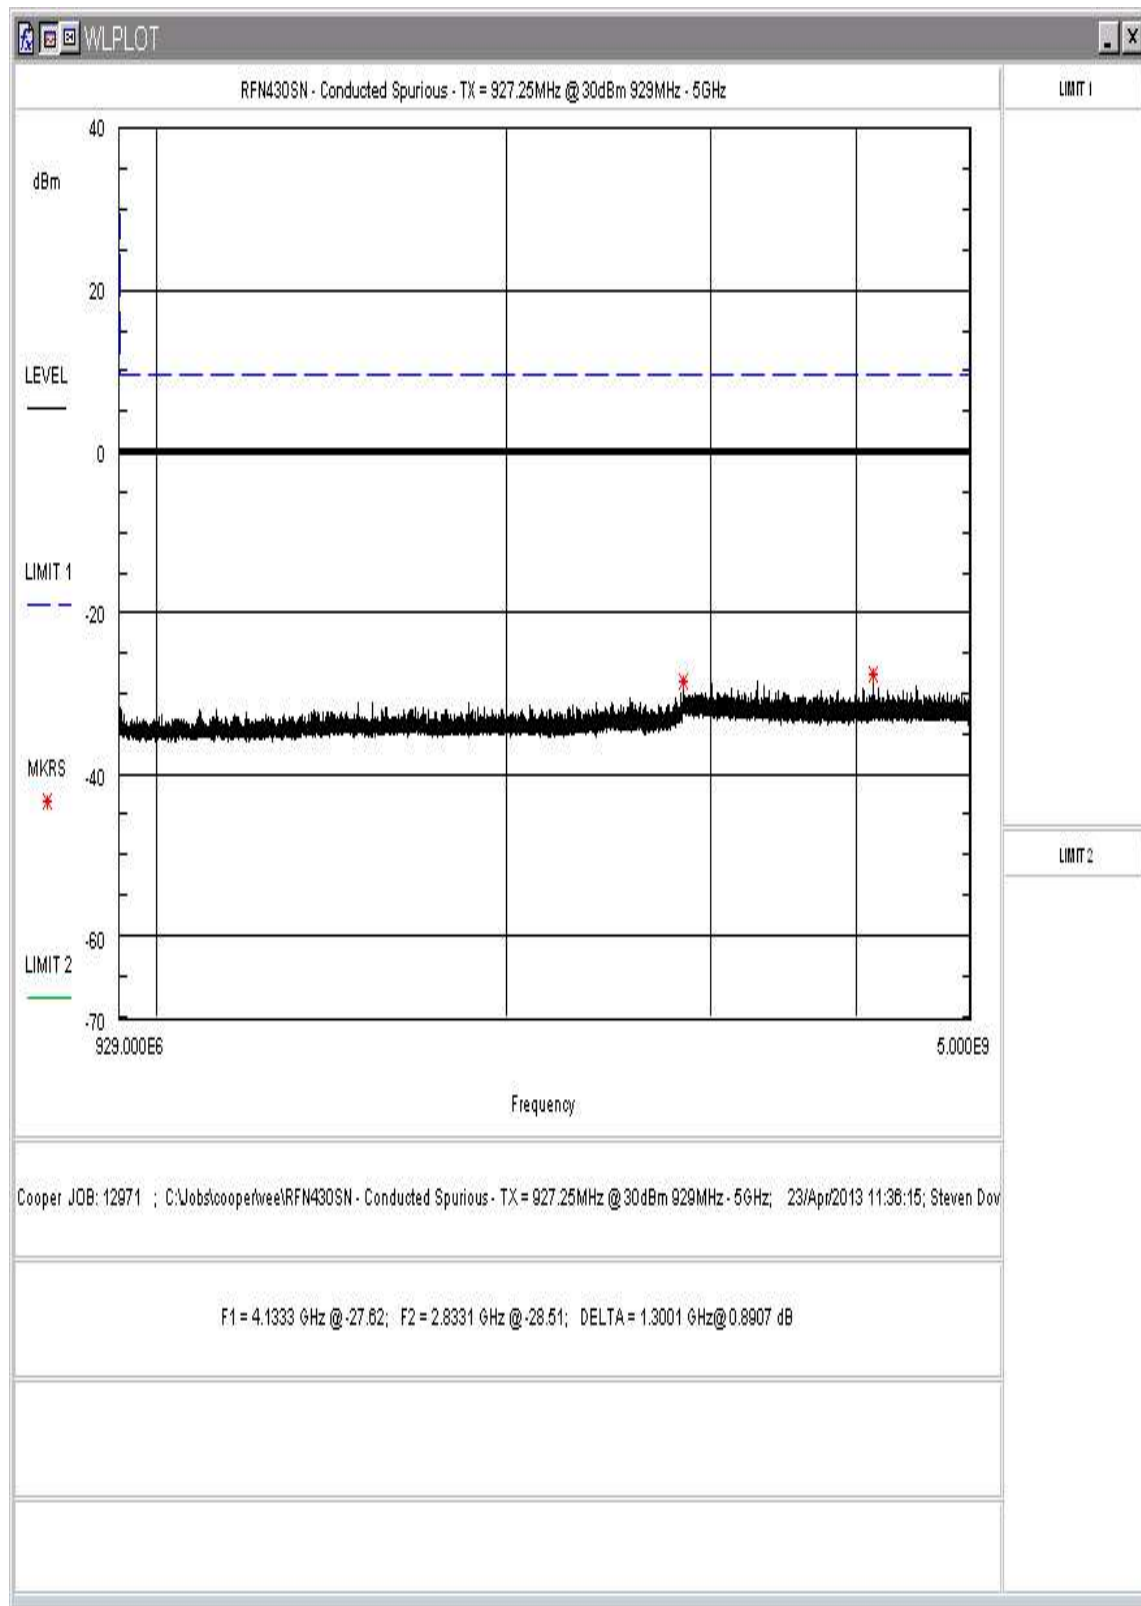

**Figure 25: Conducted Spurious Emissions, High Power, High Channel 929-5000MHz**

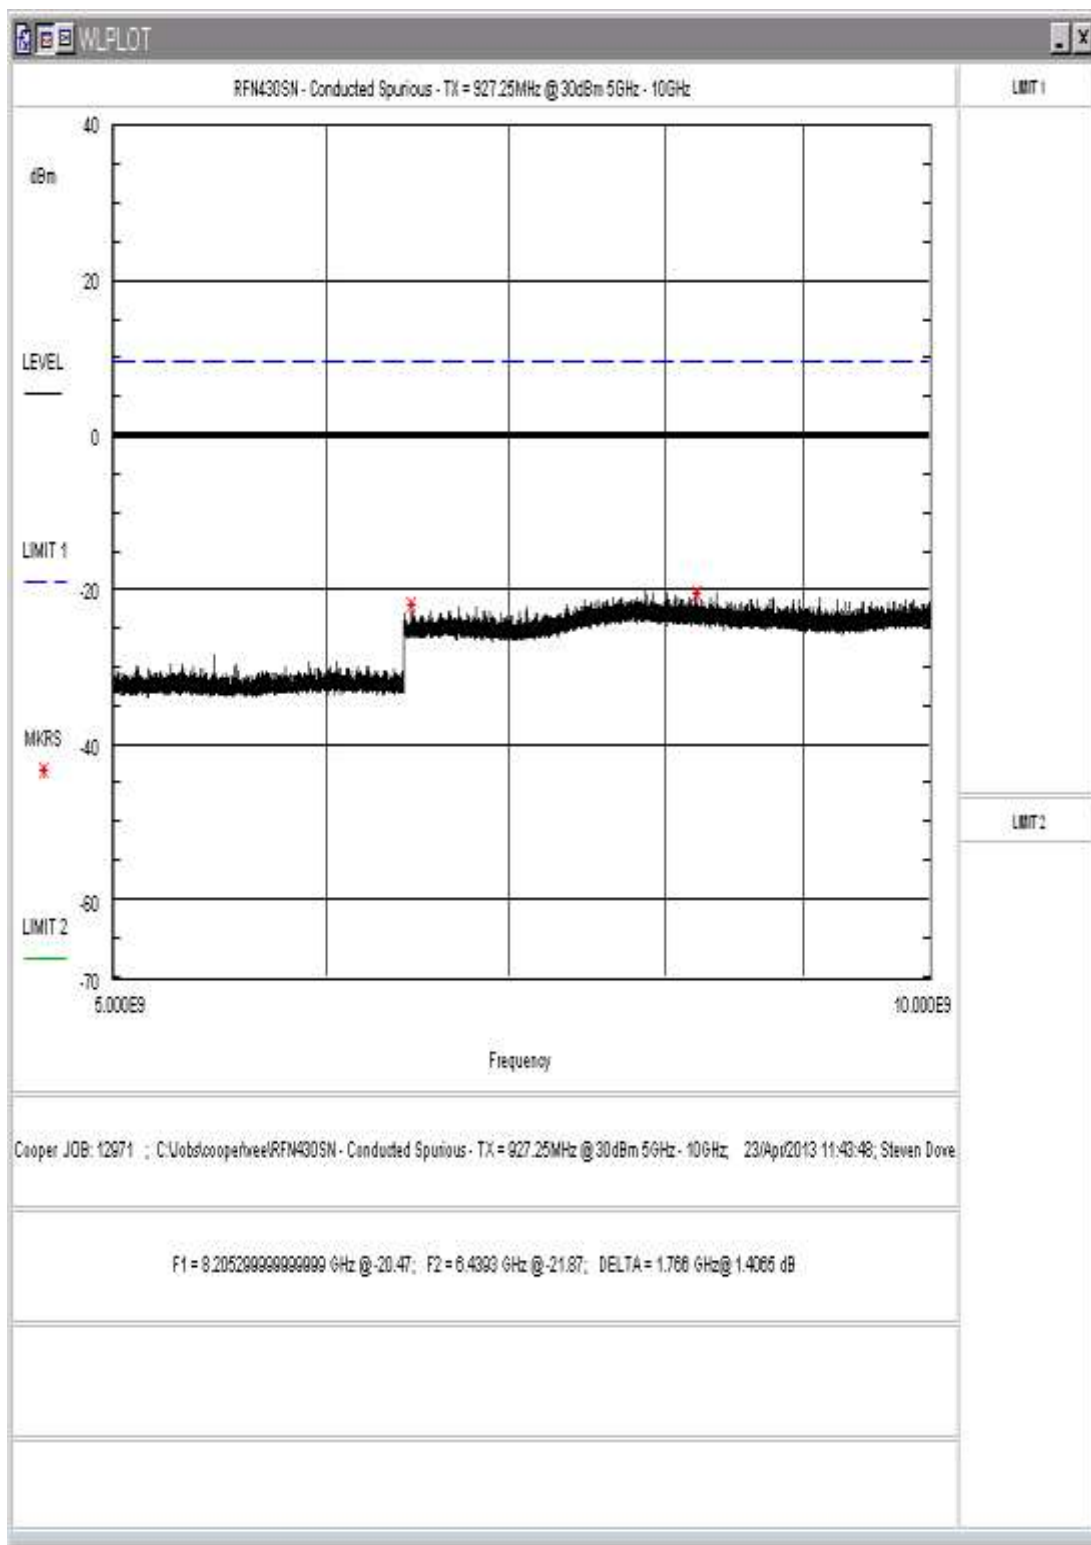

**Figure 26: Conducted Spurious Emissions, High Power, High Channel 5-10GHz**

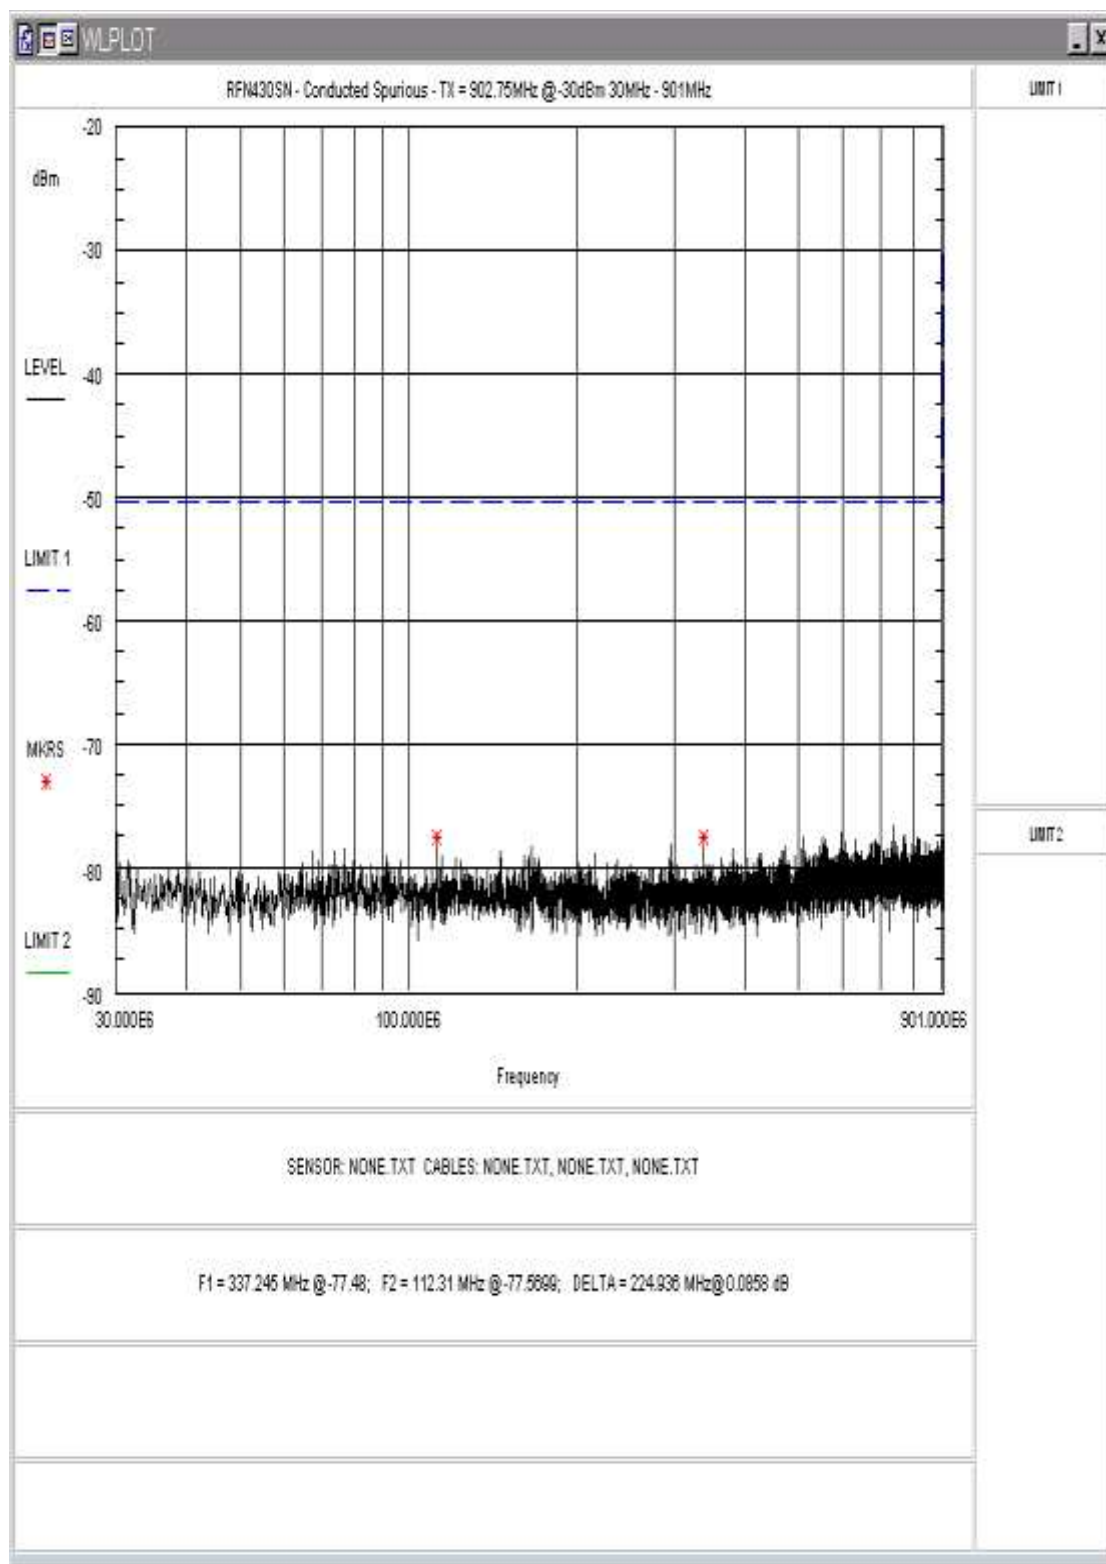


Figure 27: Conducted Spurious Emissions, Low Power, Low Channel 30 - 901MHz

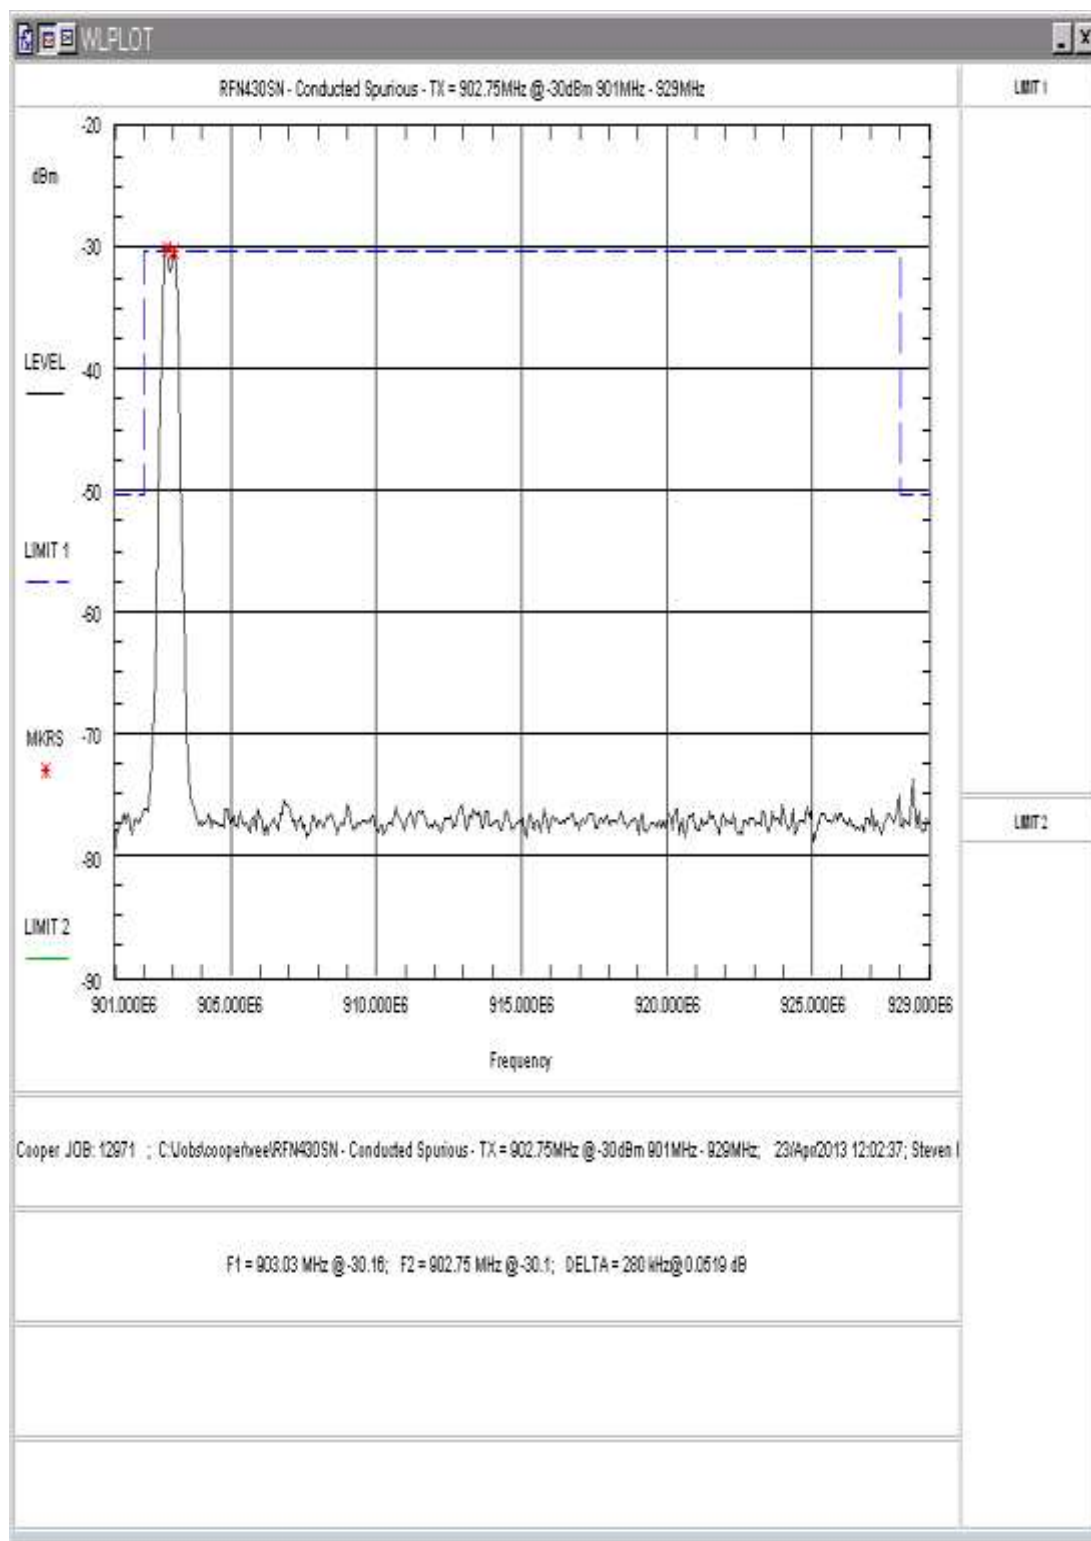


Figure 28: Conducted Spurious Emissions, Low Power, Low Channel 901 – 929MHz



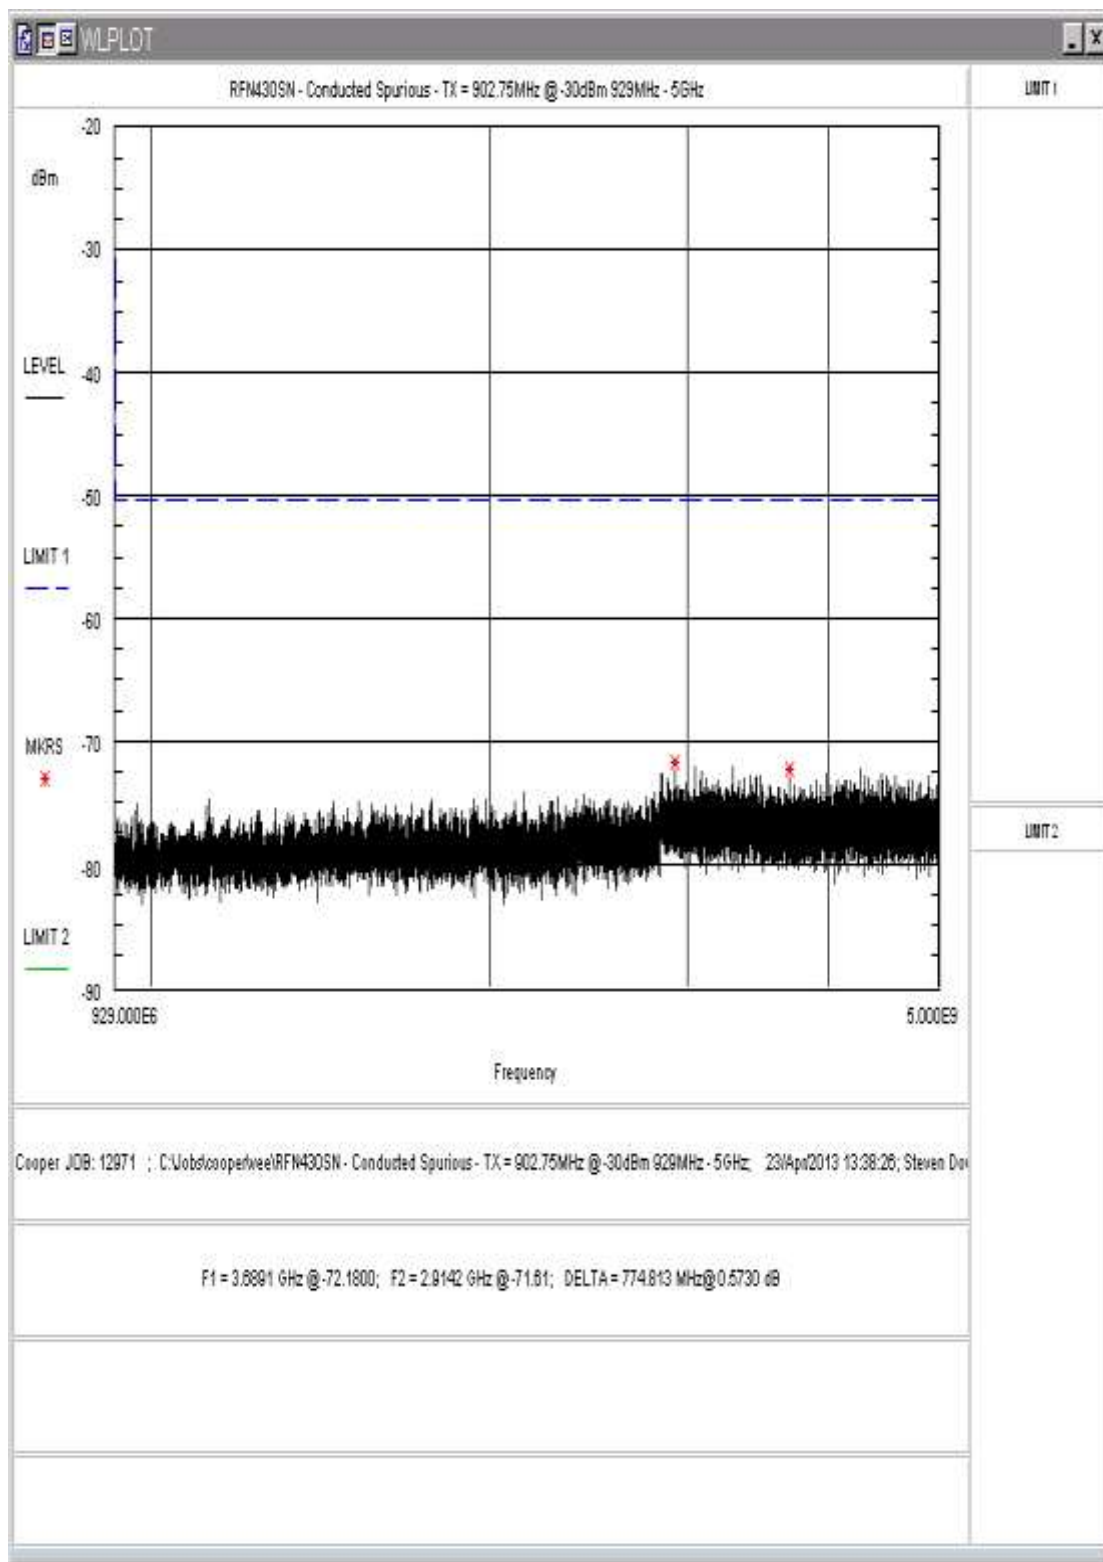


Figure 29: Conducted Spurious Emissions, Low Power, Low Channel 929-5000MHz



**Figure 30: Conducted Spurious Emissions, Low Power, Low Channel 5-10GHz**

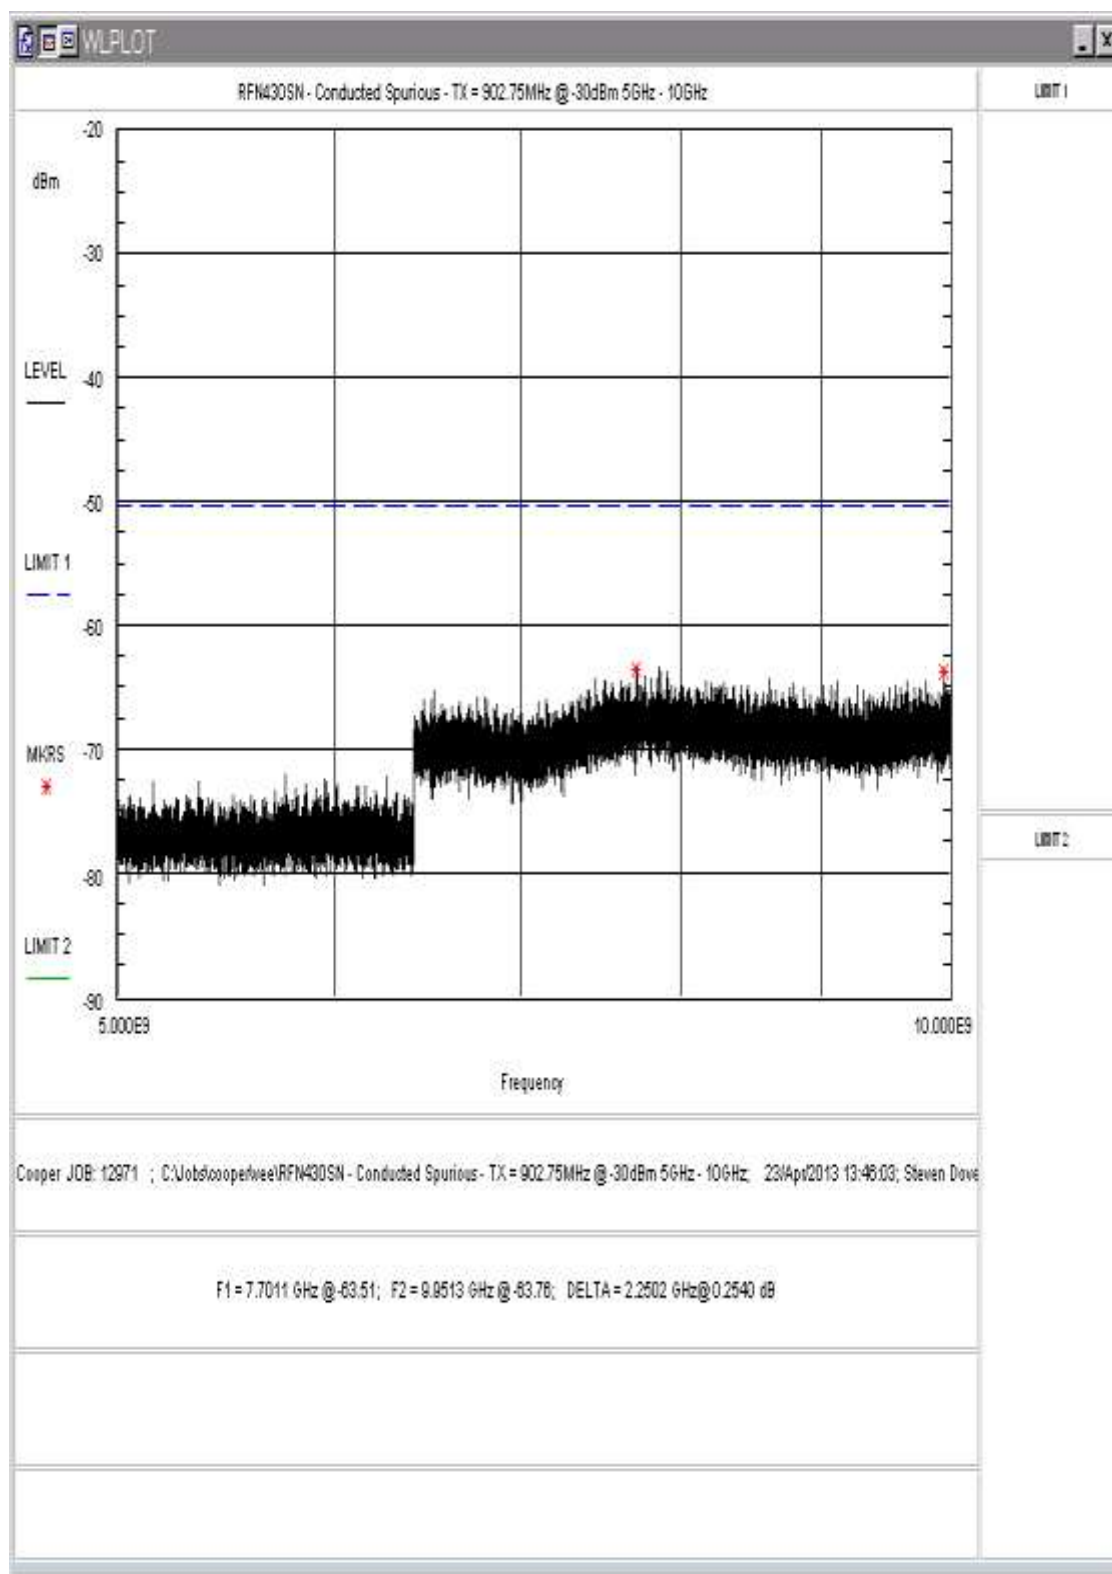

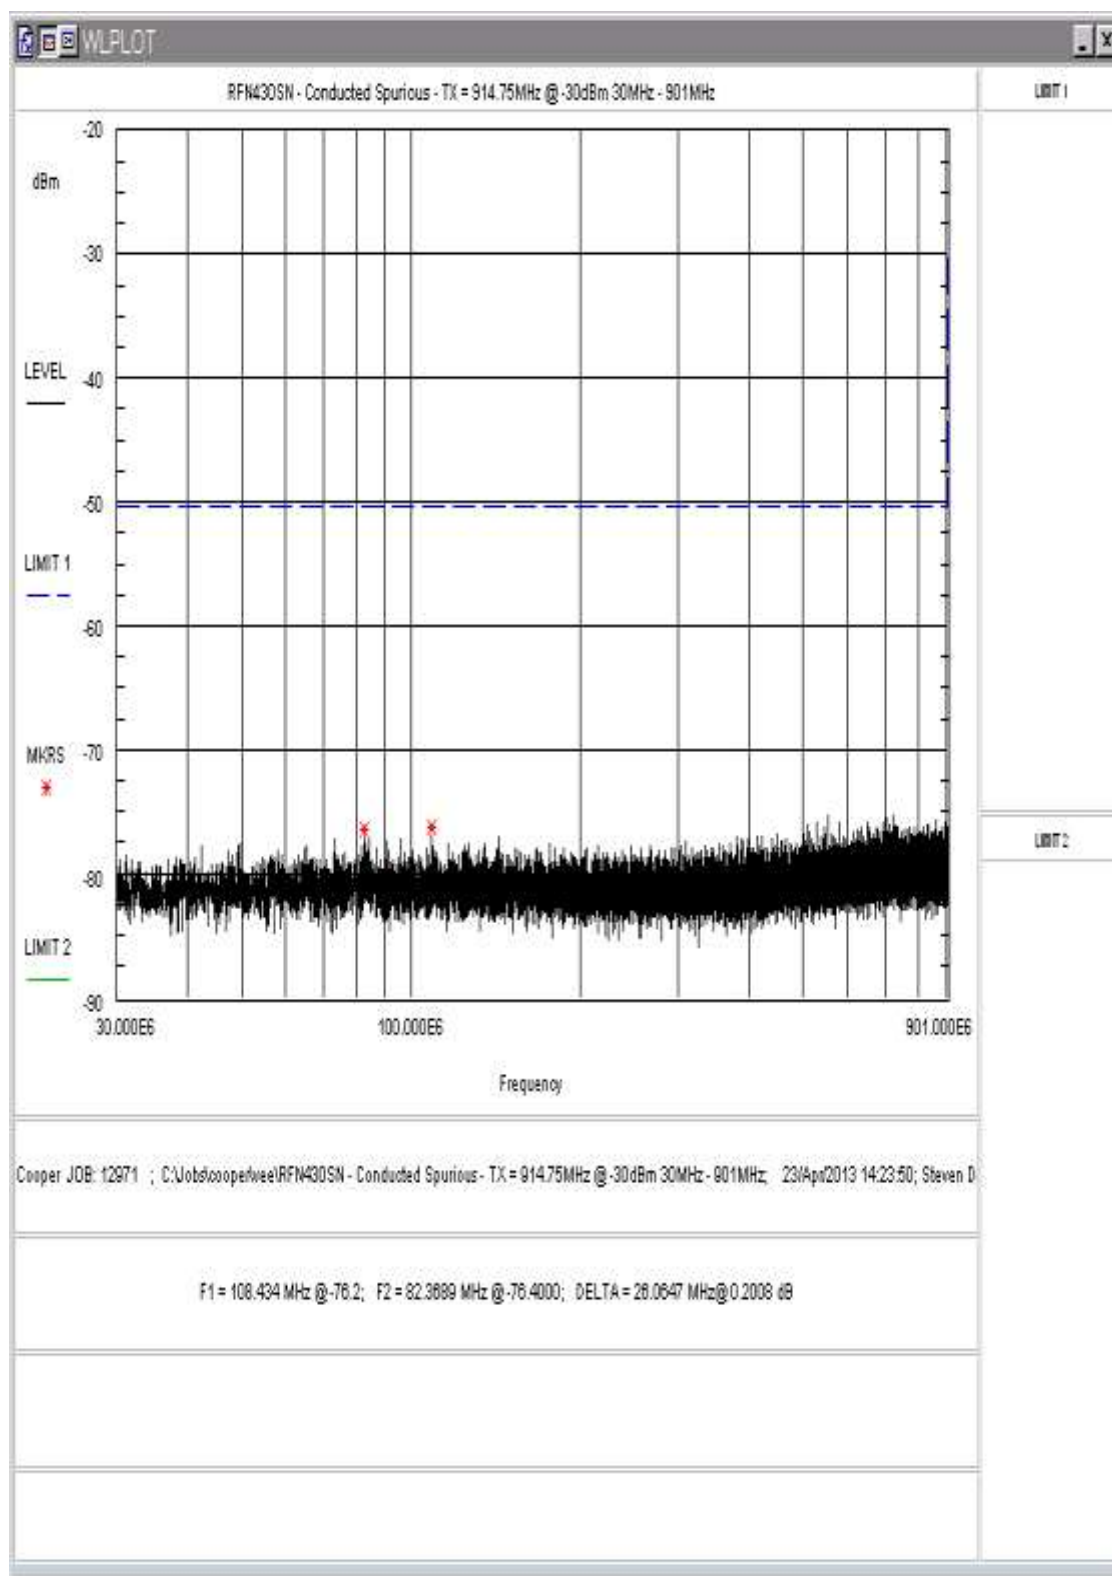

**Figure 31: Conducted Spurious Emissions, Low Power, Center Channel 30 - 901MHz**

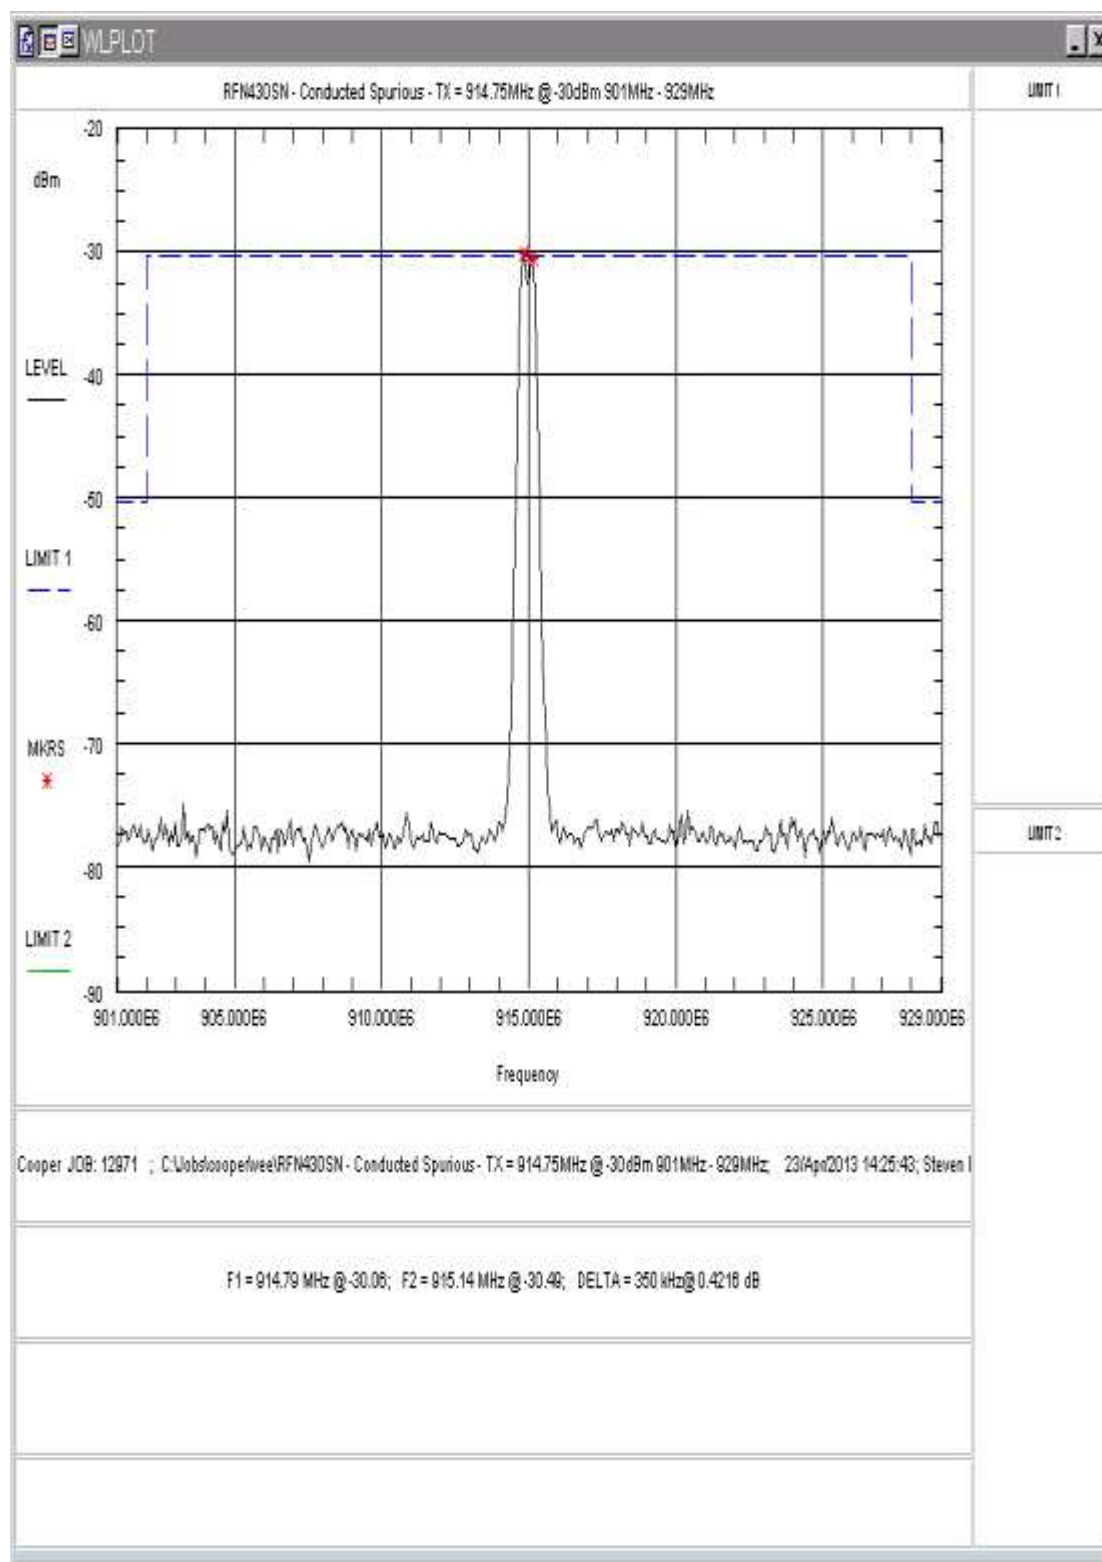


Figure 32: Conducted Spurious Emissions, Low Power, Center Channel 901 – 929MHz



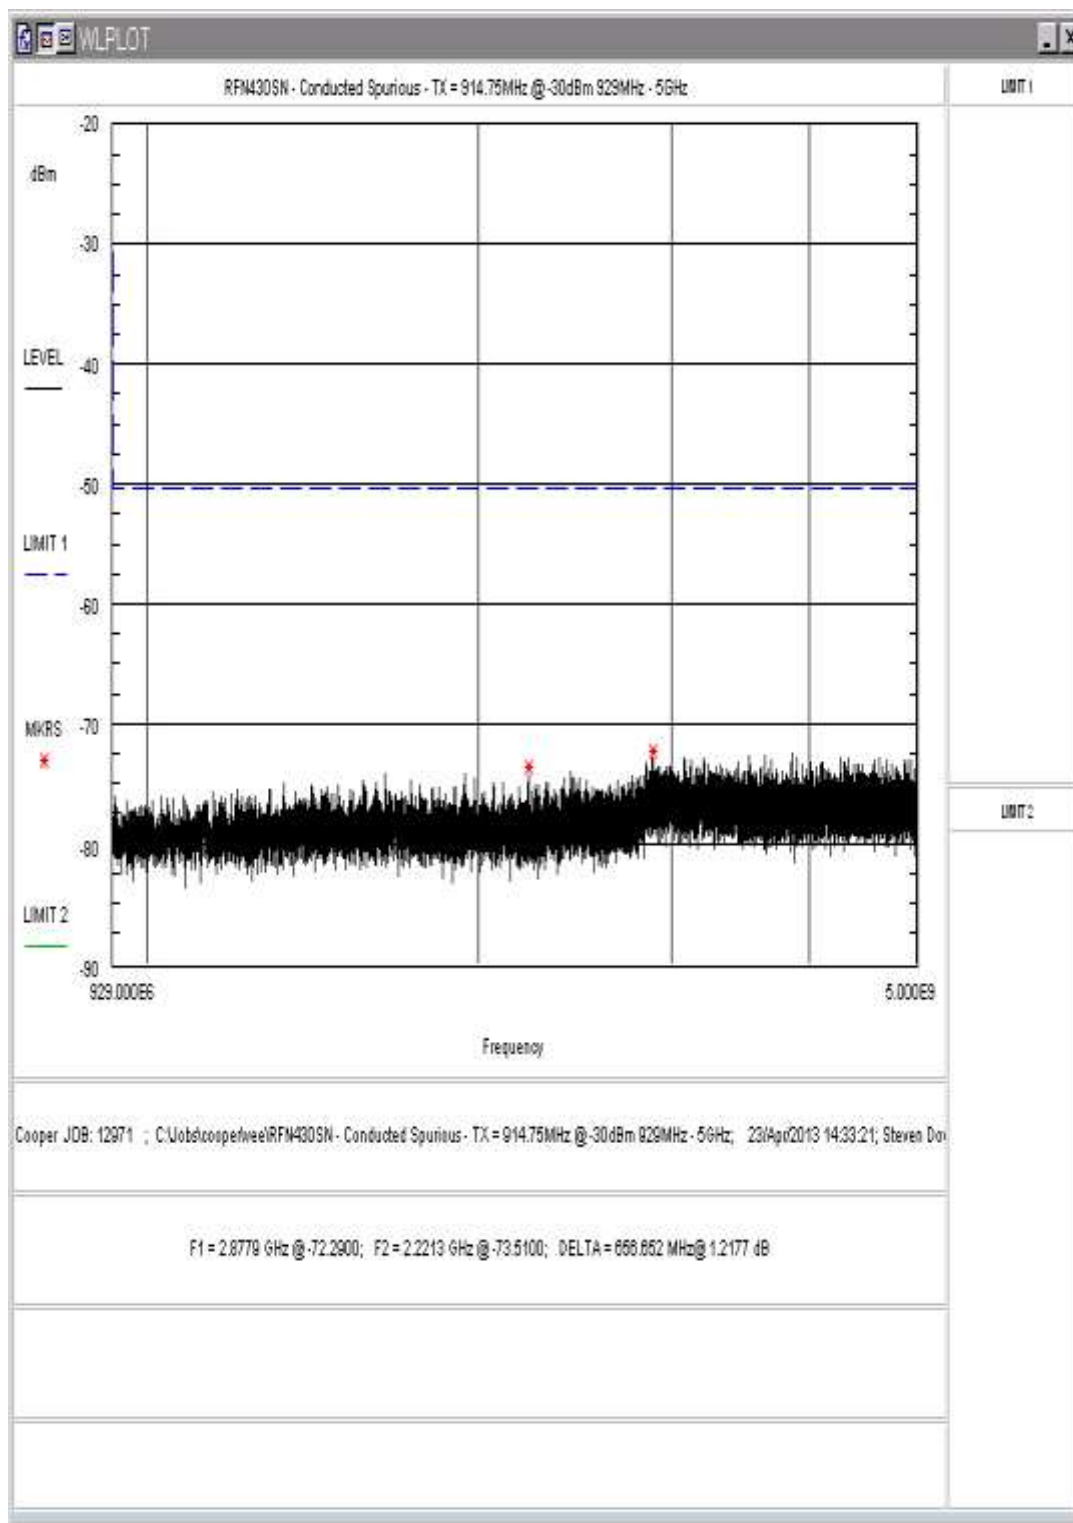


Figure 33: Conducted Spurious Emissions, Low Power, Center Channel 929-5000MHz

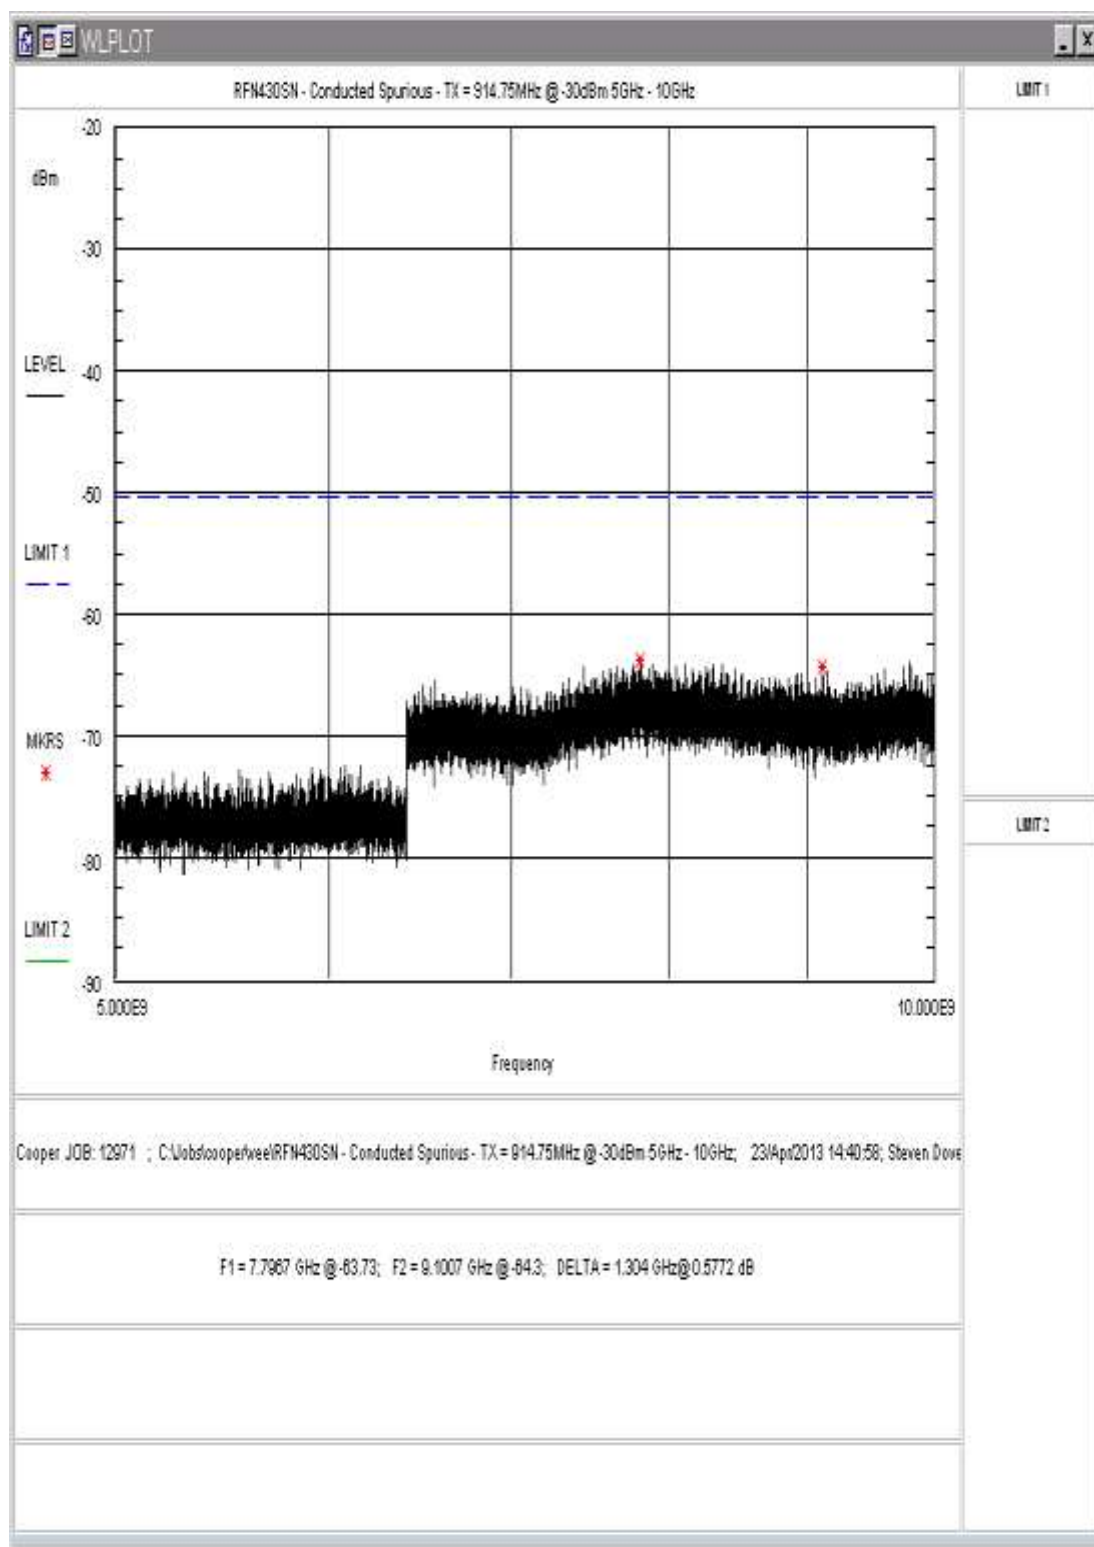

**Figure 34: Conducted Spurious Emissions, Low Power, Center Channel 5-10GHz**

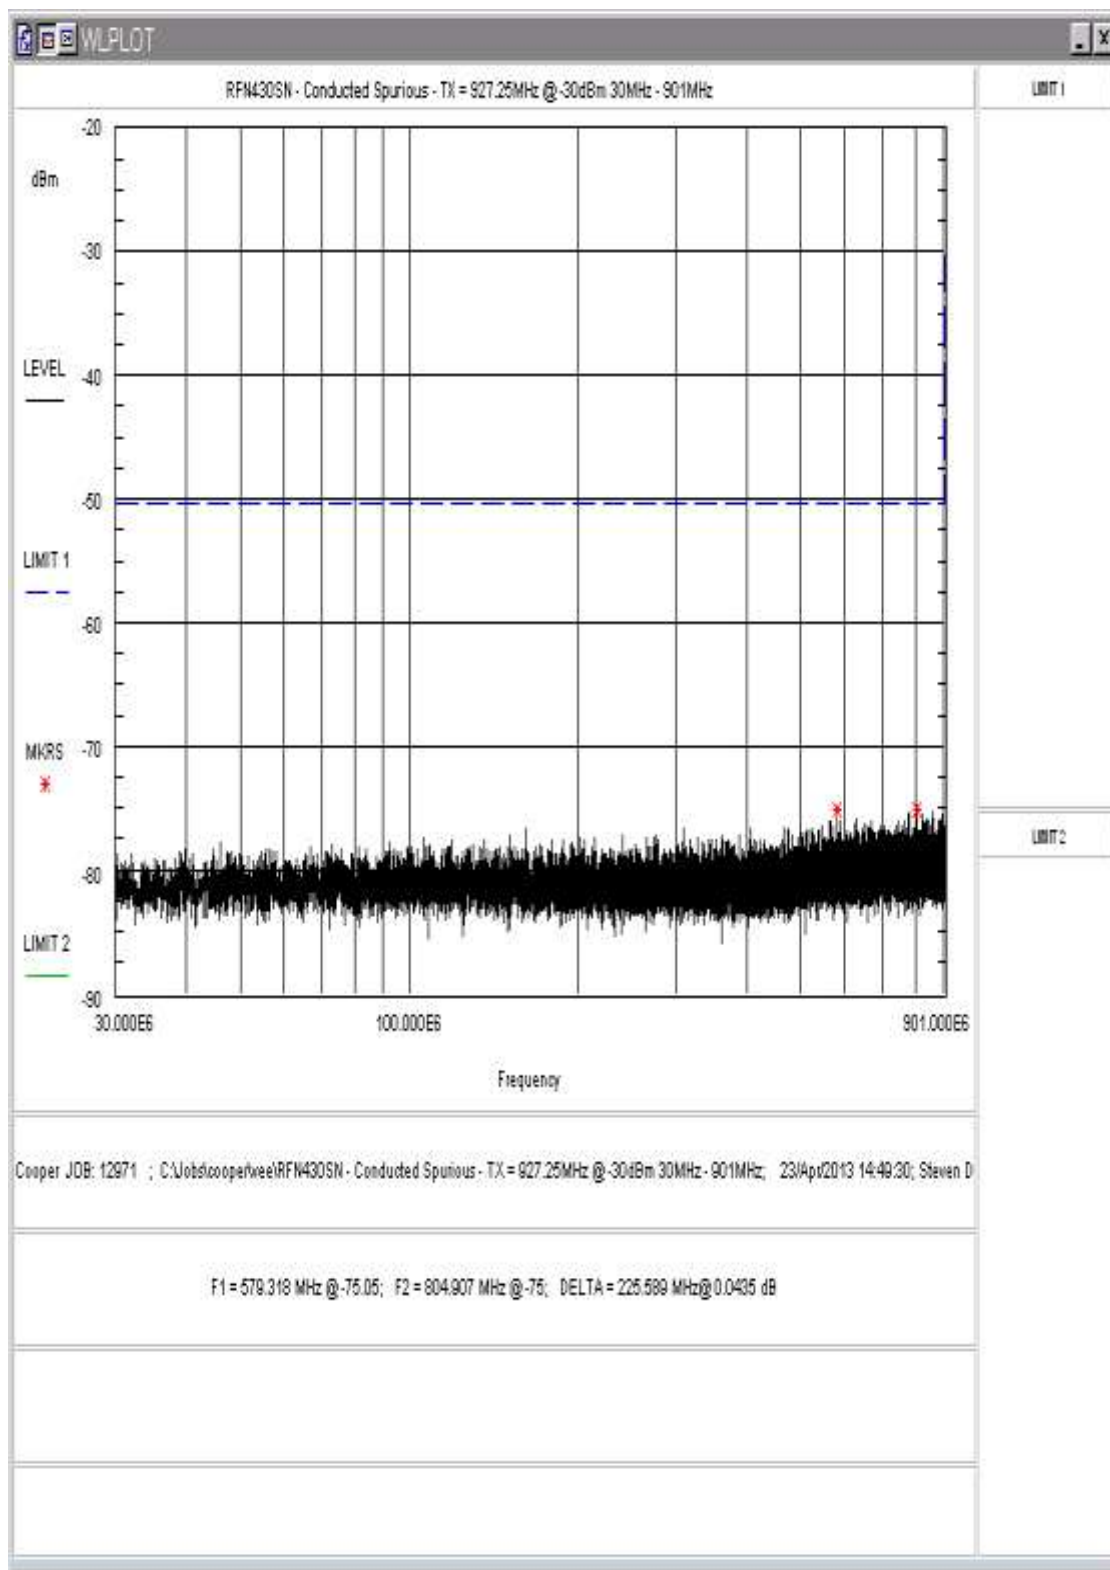

**Figure 35: Conducted Spurious Emissions, Low Power, High Channel 30 - 901MHz**

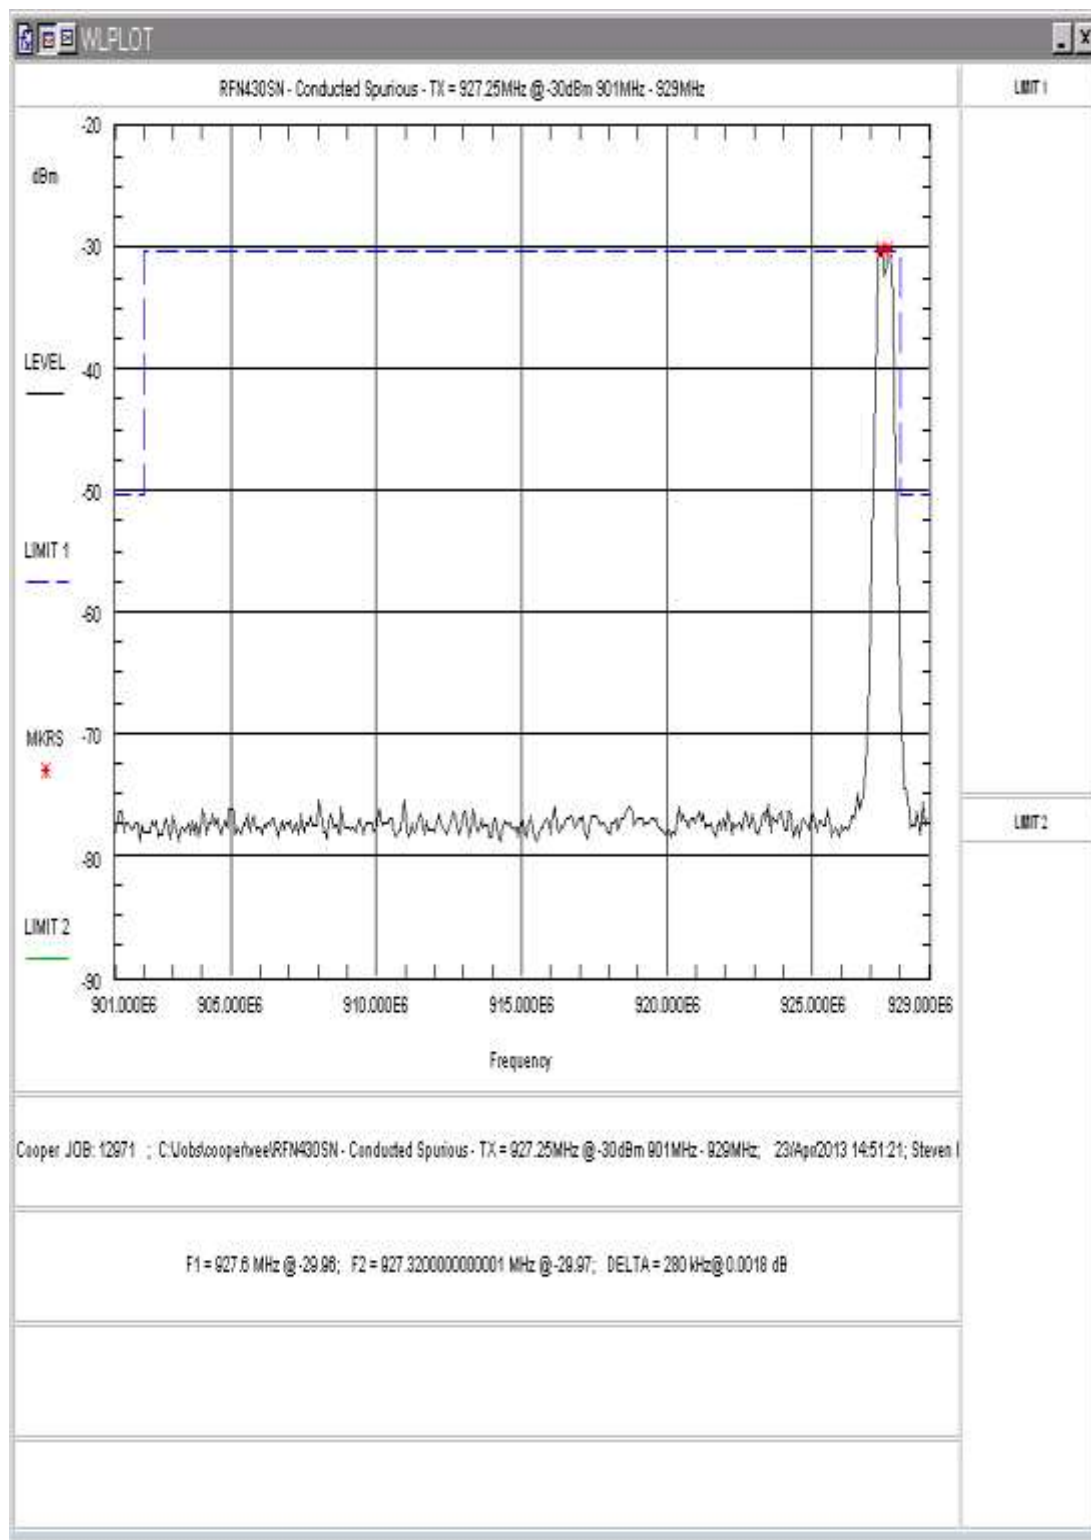


Figure 36: Conducted Spurious Emissions, Low Power, High Channel 901 – 929MHz

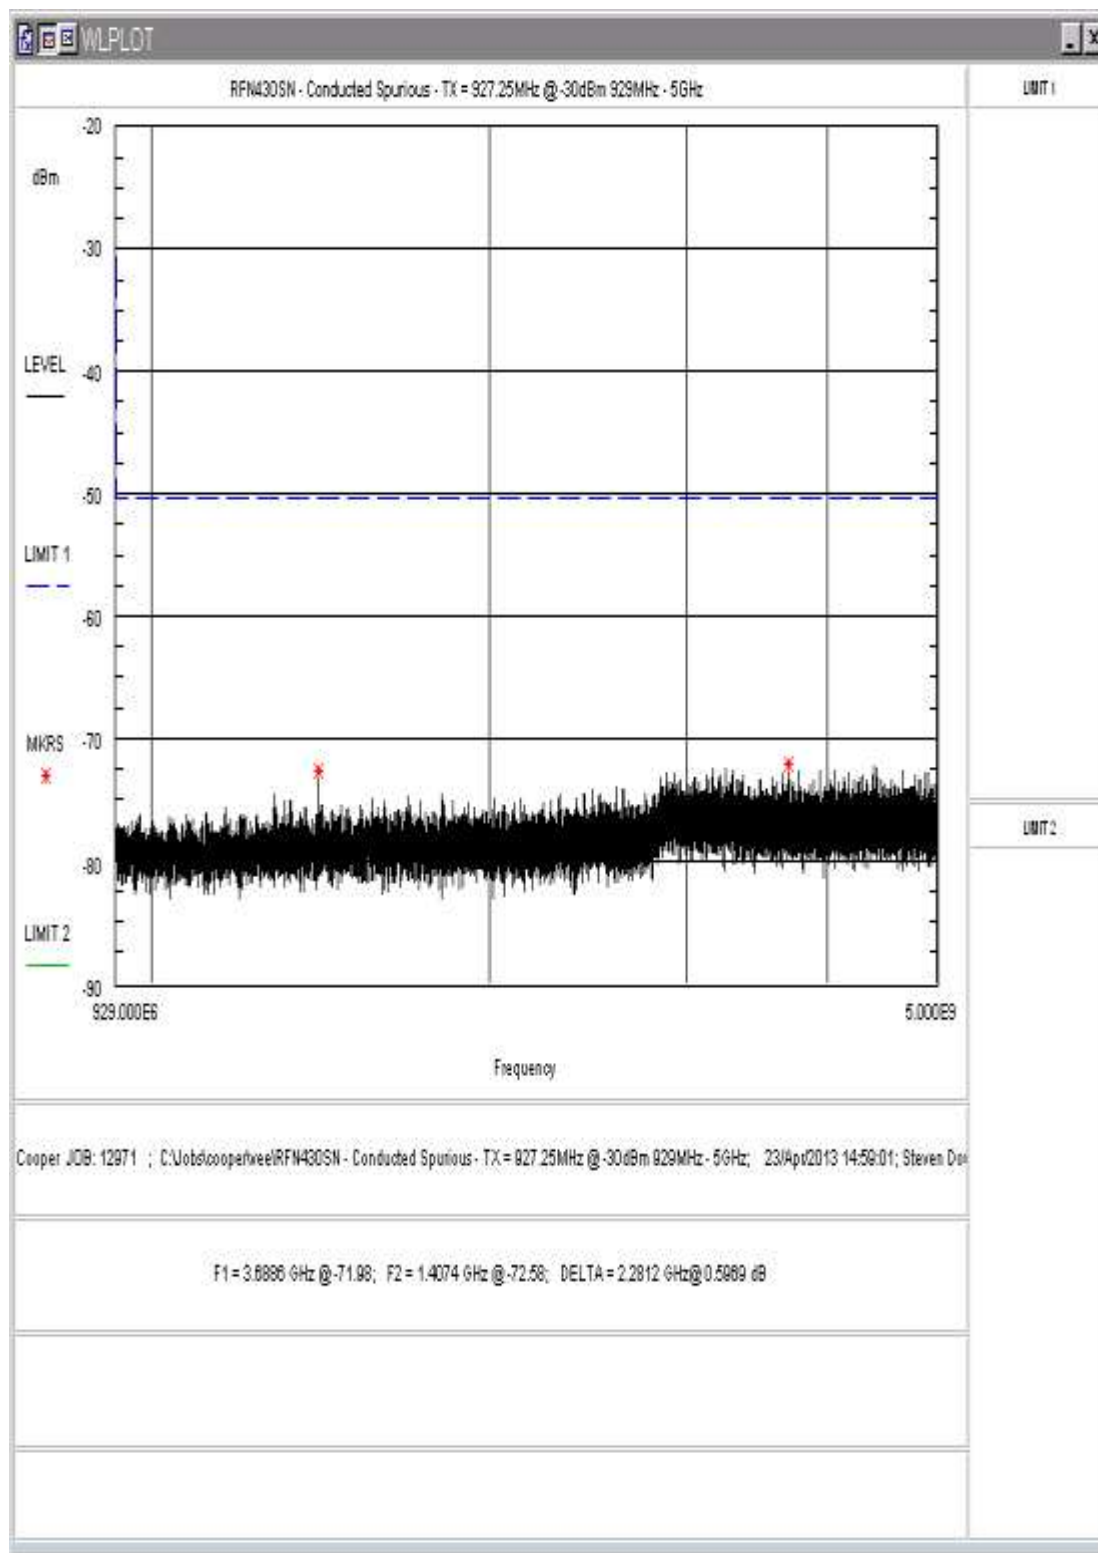


Figure 37: Conducted Spurious Emissions, Low Power, High Channel 929-5000MHz


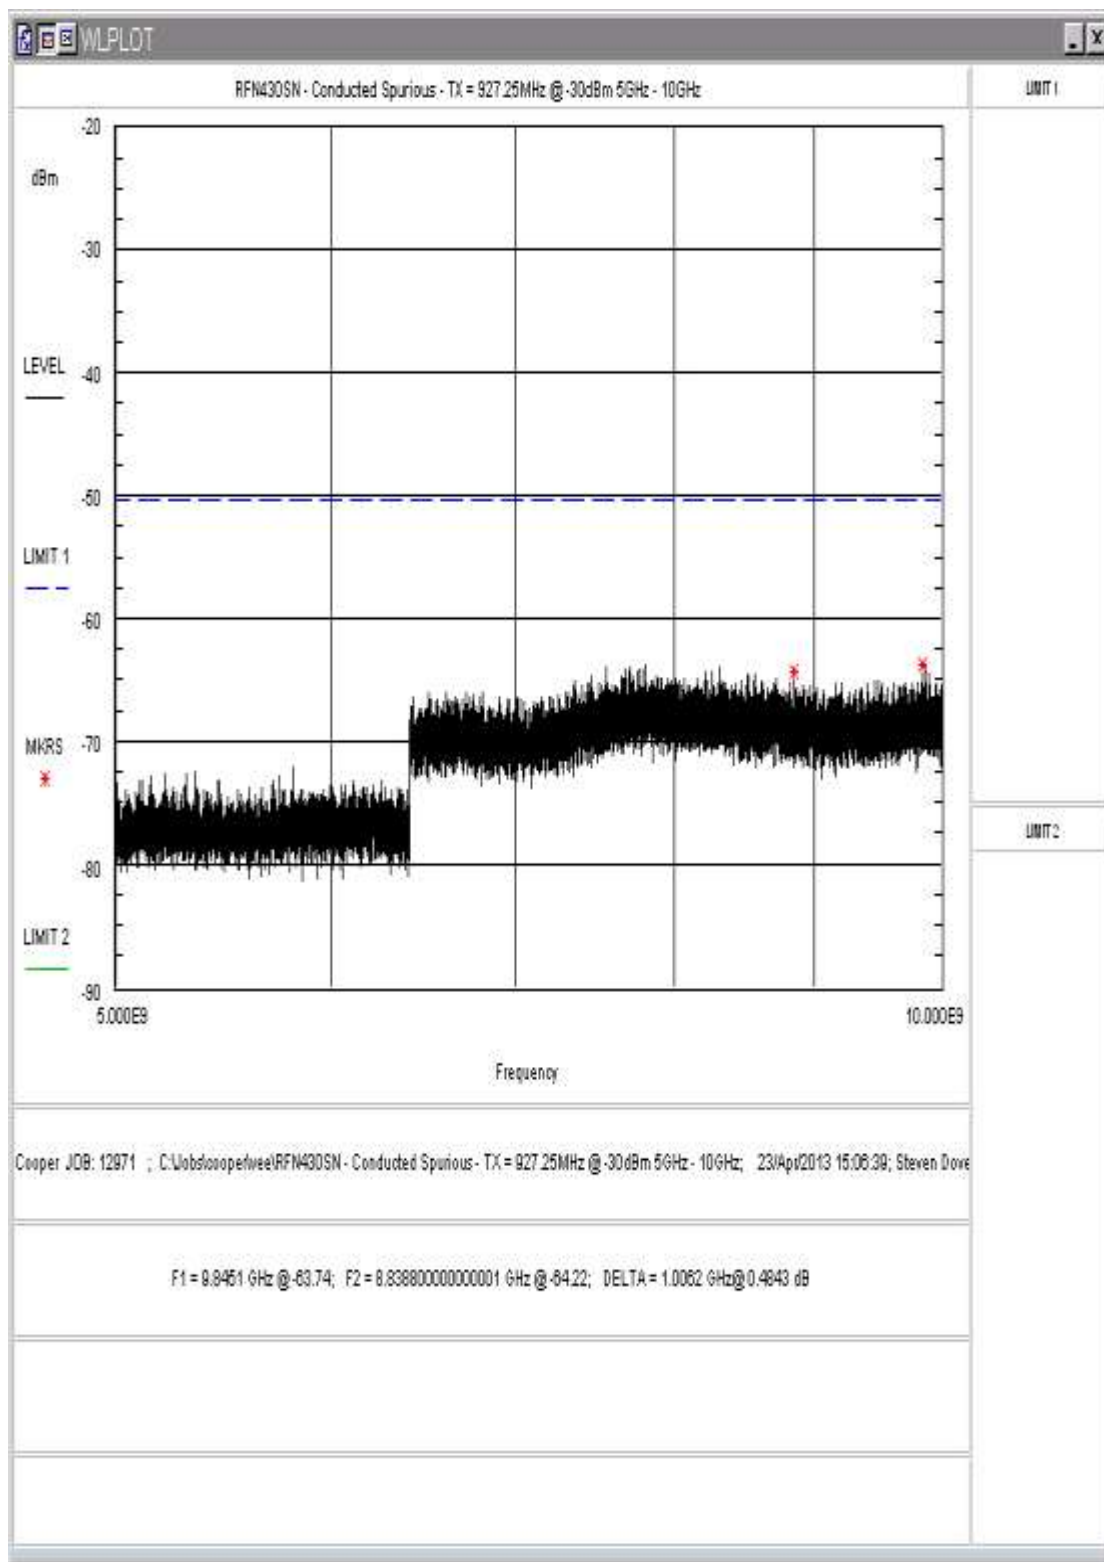


Figure 38: Conducted Spurious Emissions, Low Power, High Channel 5-10GHz



### 5.5.1 Band Edge Compliance

In accordance with FCC Public Notice DA-00-705 close-up plots of the upper and lower channels in both hopping and non-hopping modes with respect to the nearest authorized band-edges are provided below. The tests were performed in the same manner as the above conducted spurious emissions tests.

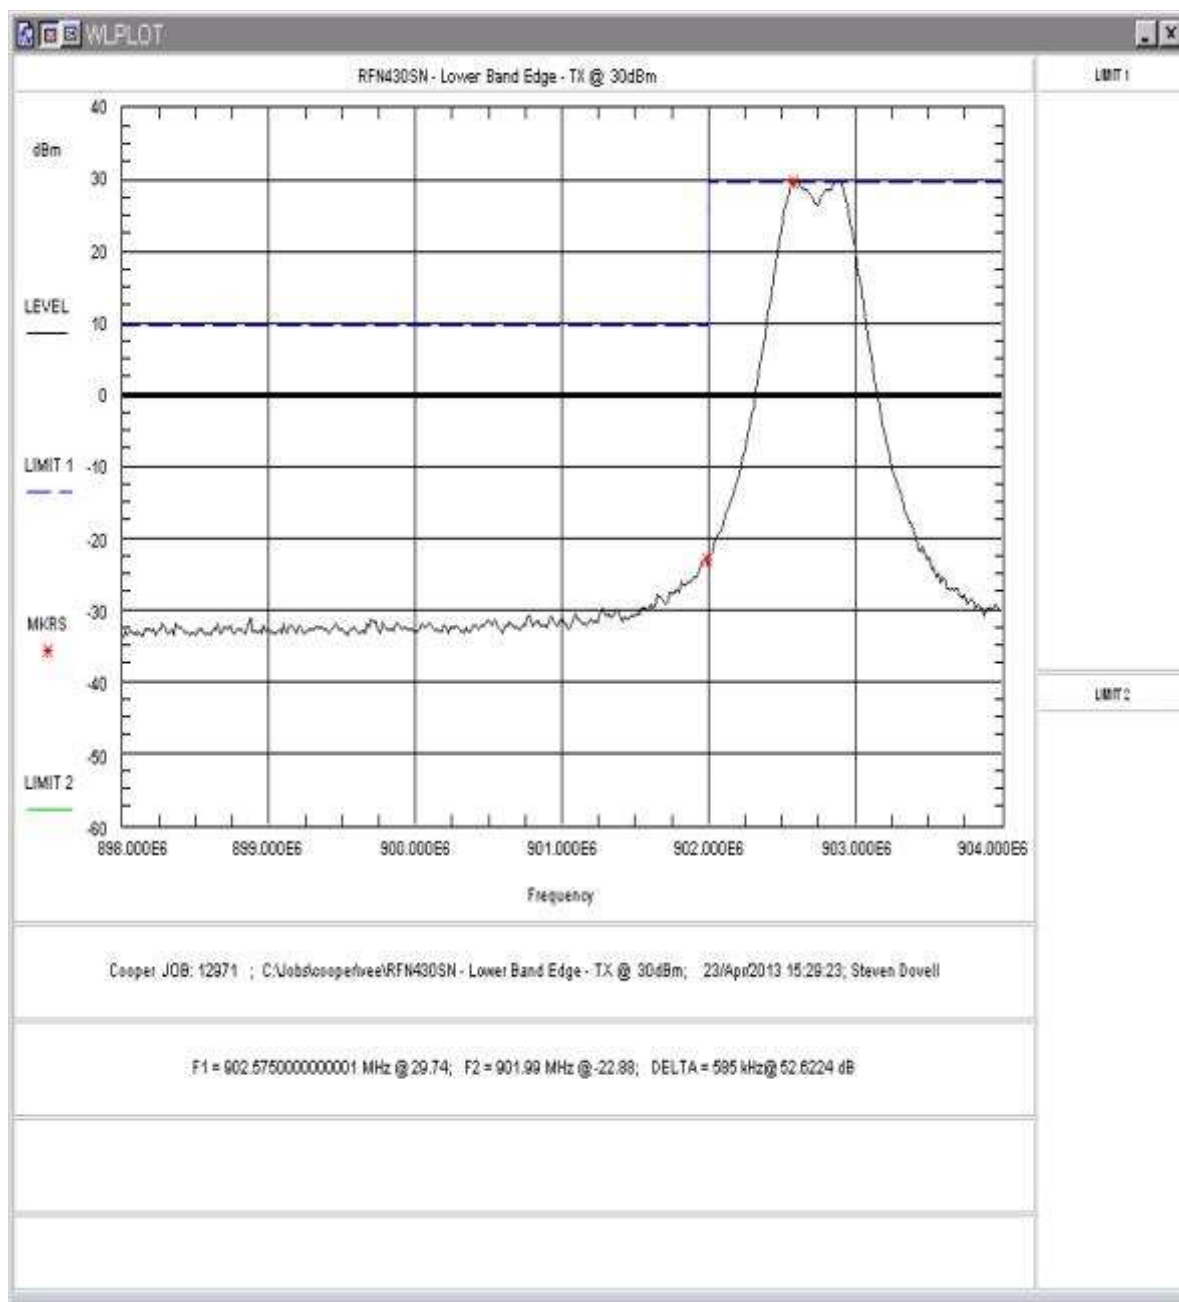

**Figure 39: Lower Band-edge, Low Channel, High Power**

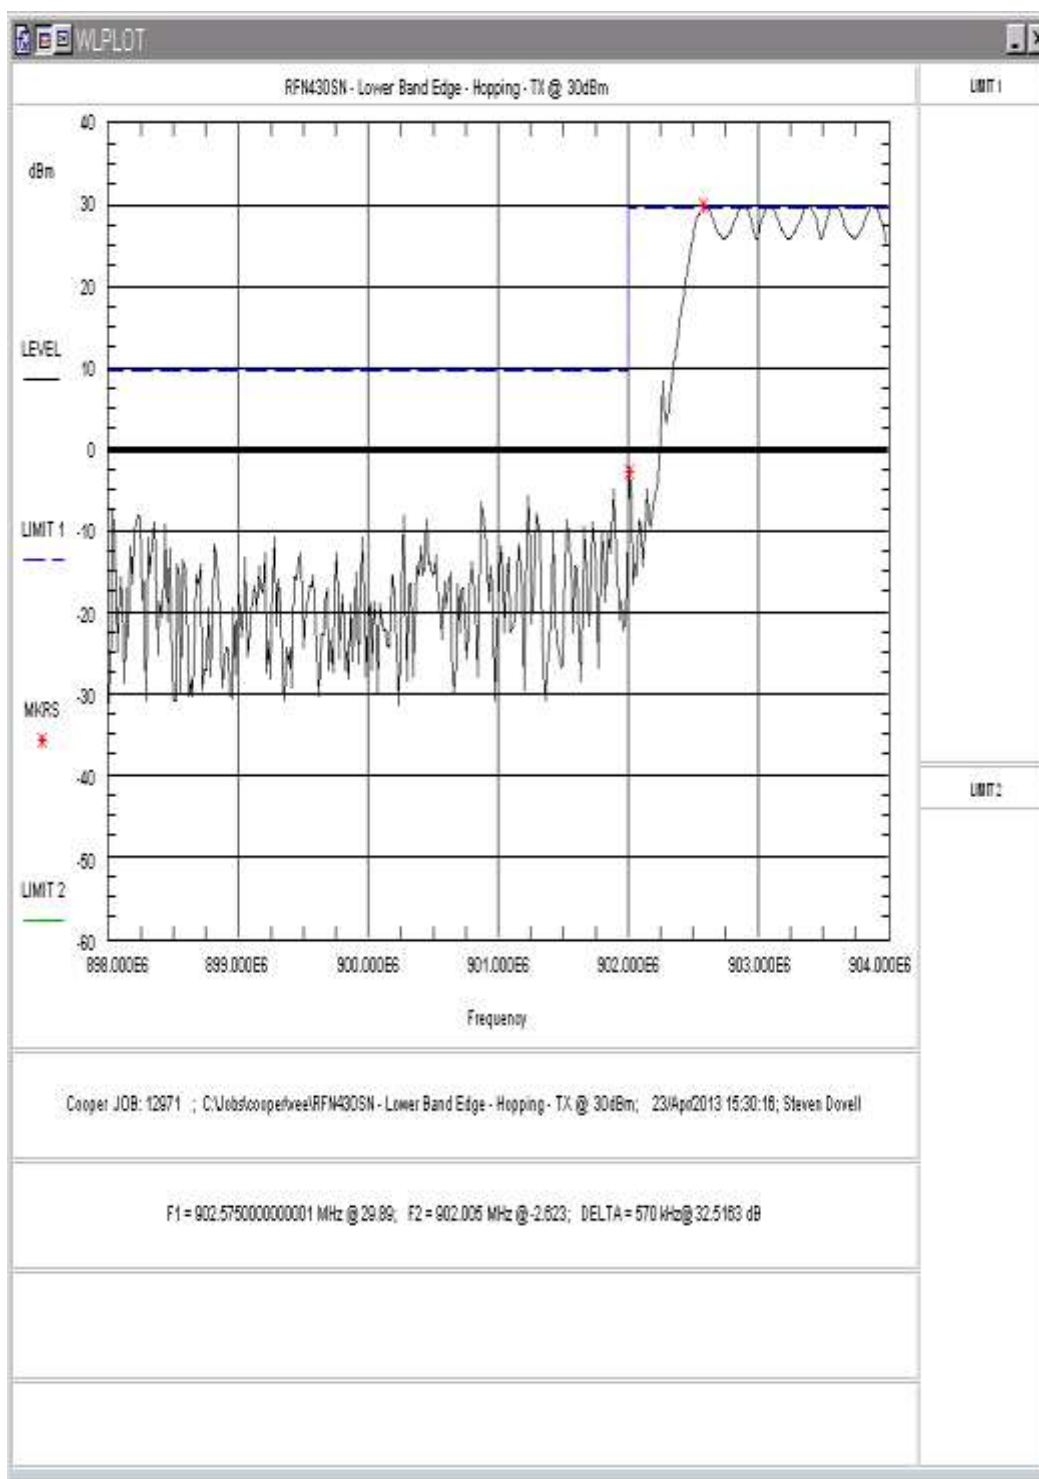


Figure 40: Lower Band-edge, Hopping Mode, High Power



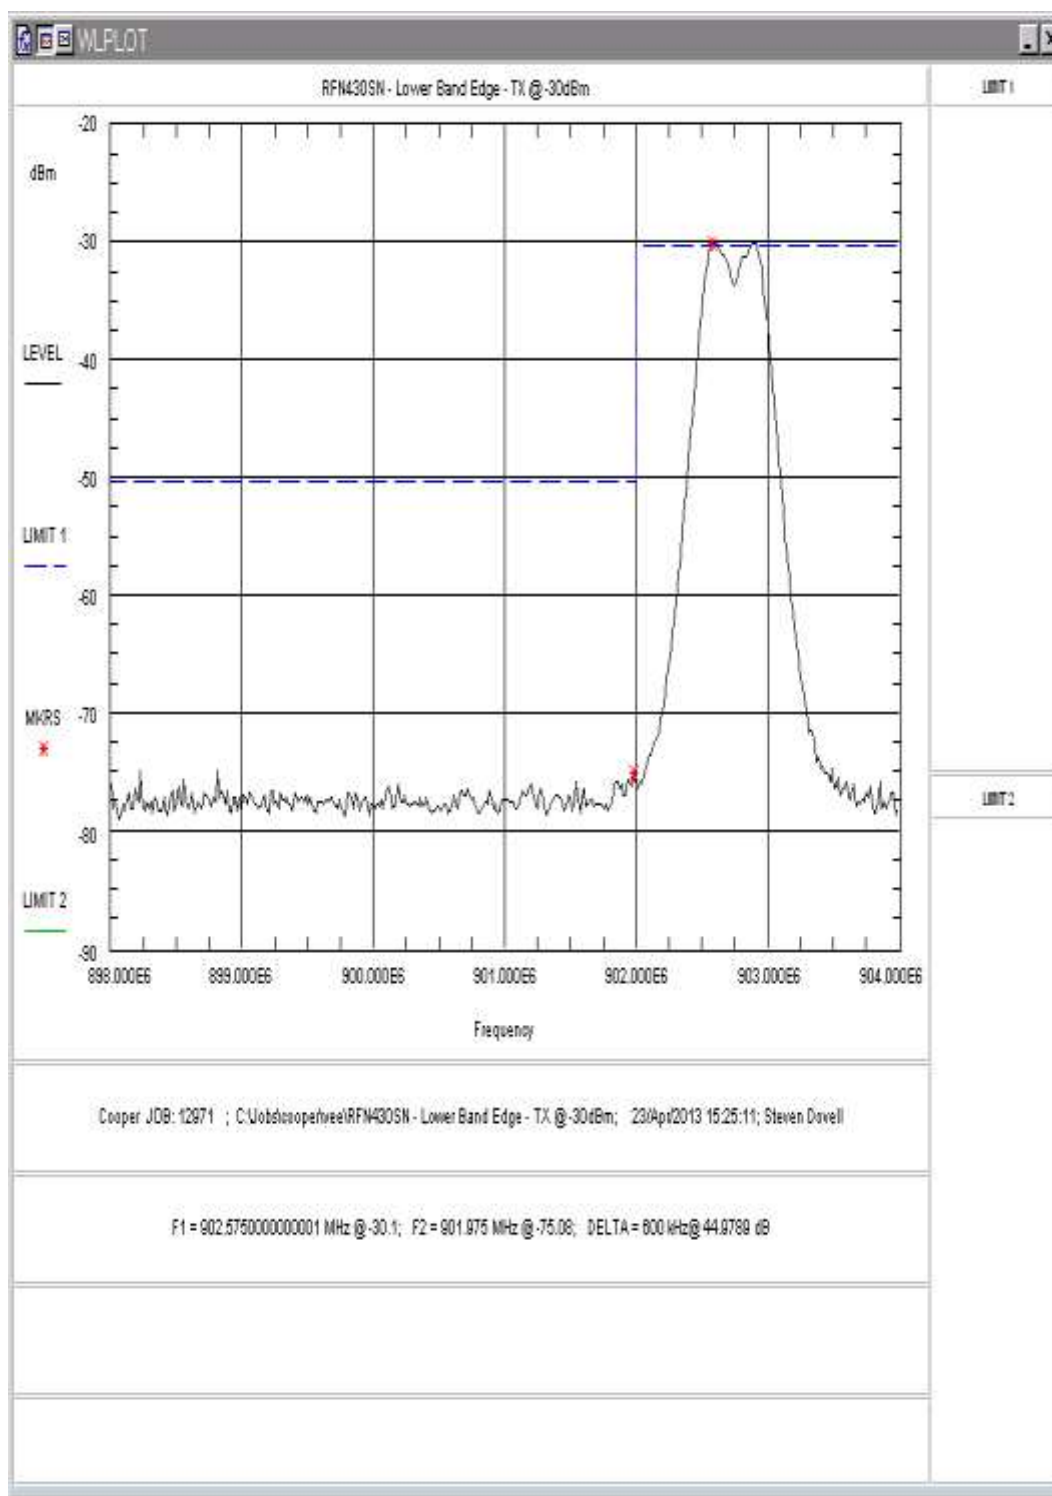



Figure 41: Lower Band-edge, Low Channel, Low Power

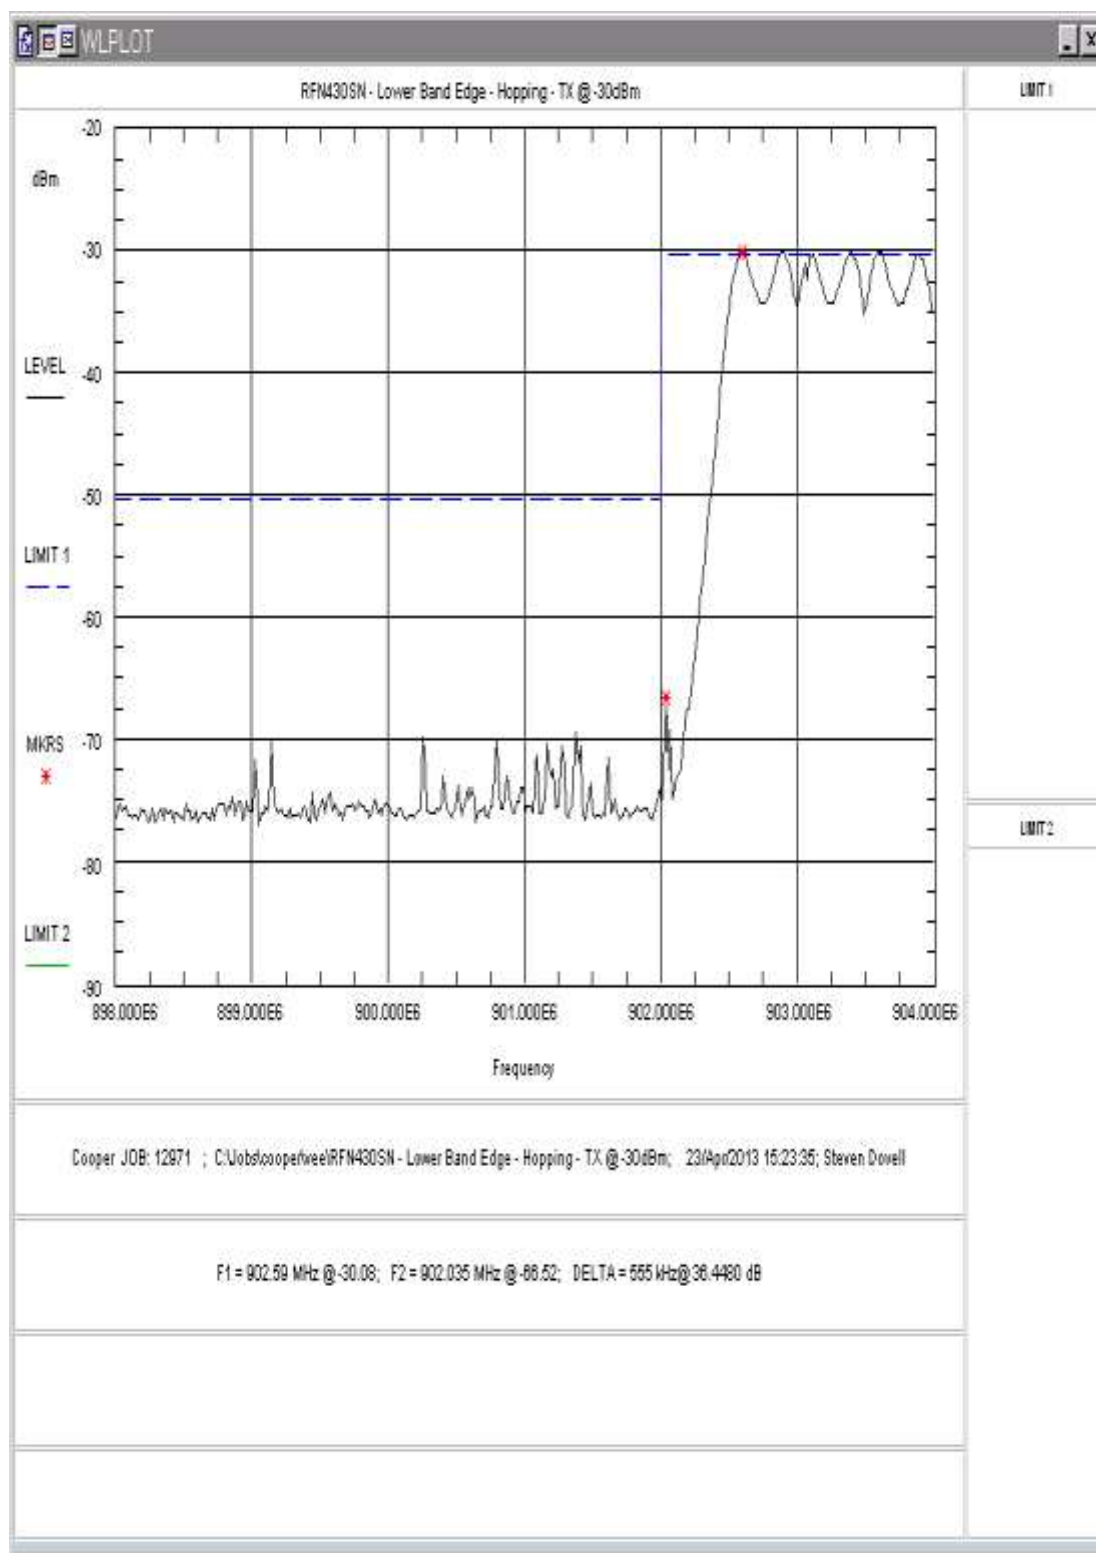

**Figure 42: Lower Band-edge, Hopping Mode, Low Power**

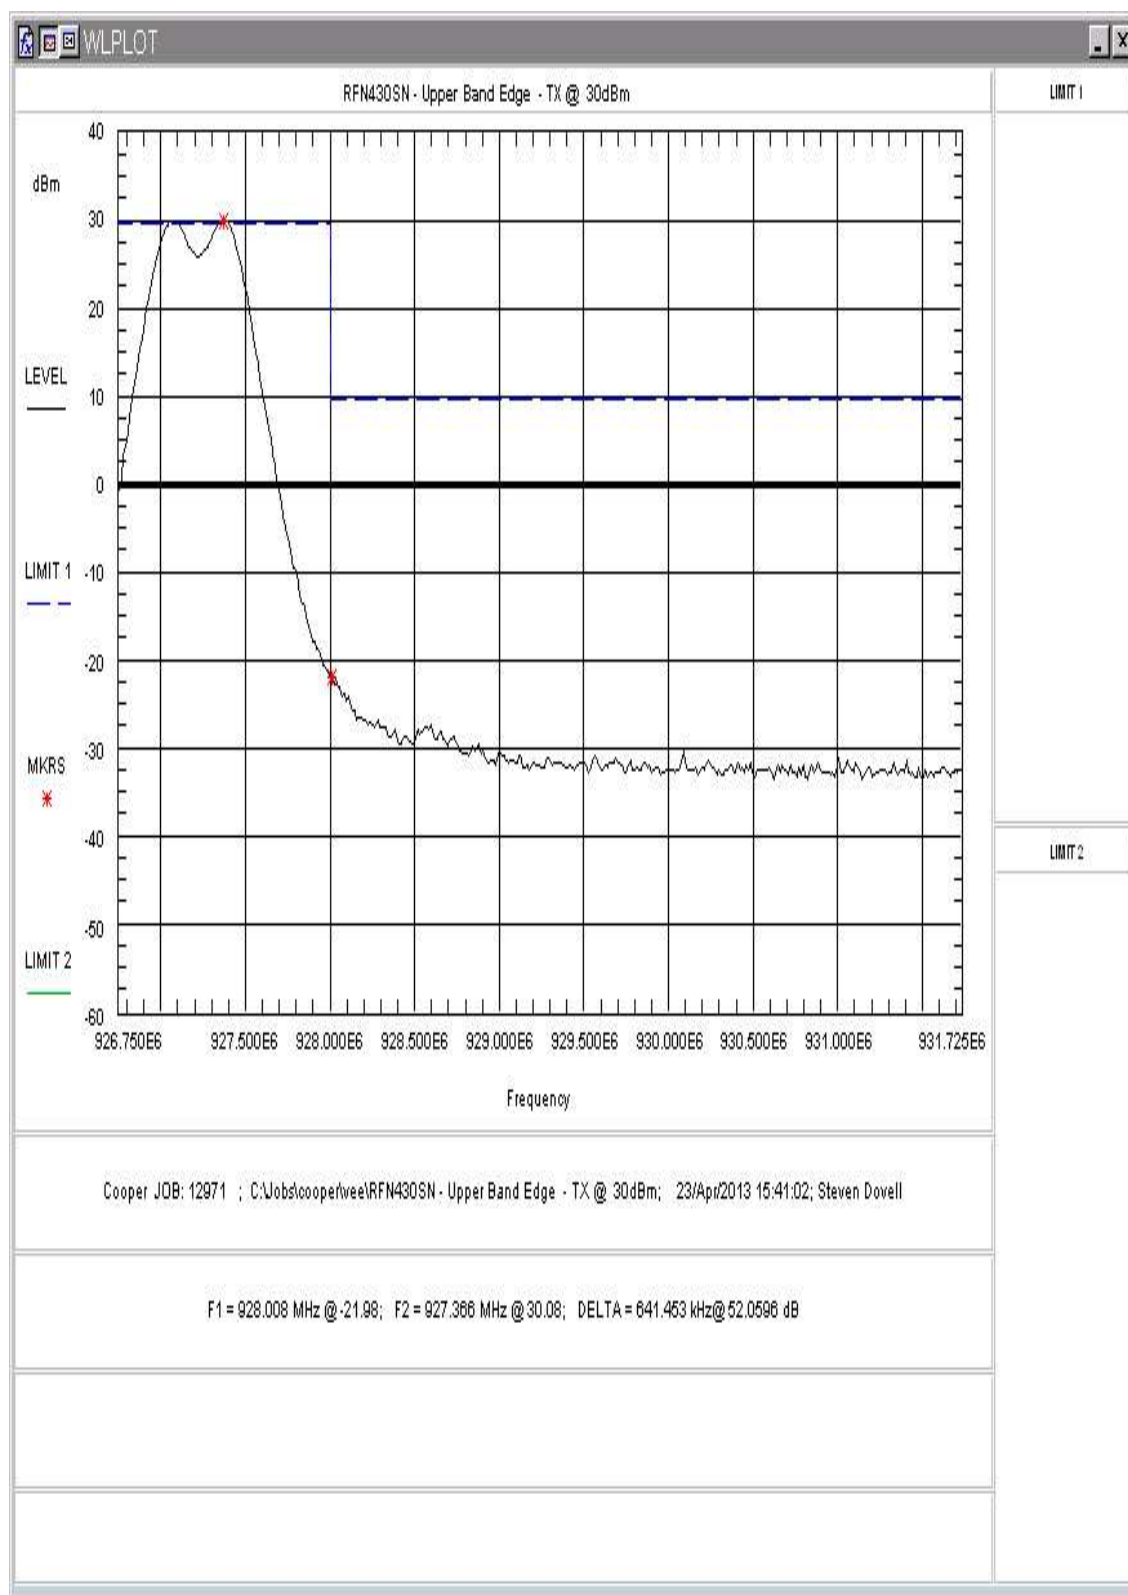

**Figure 43: Upper Band-edge, High Channel, High Power**

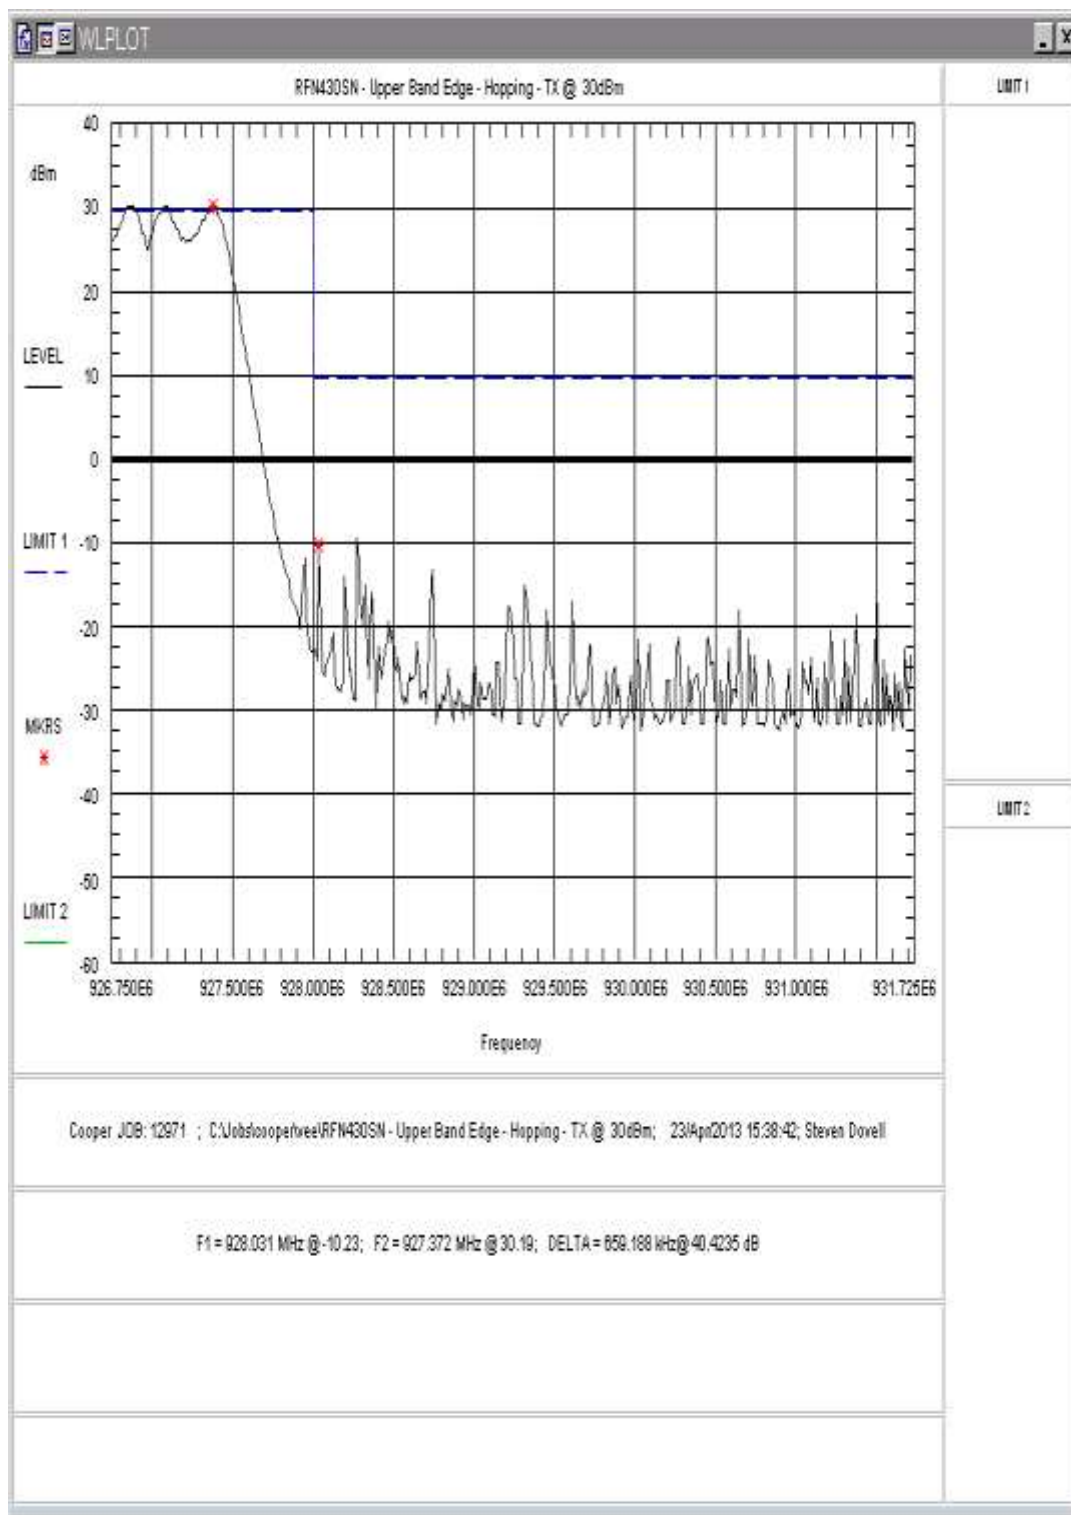

**Figure 44: Upper Band-edge, Hopping Mode, High Power**

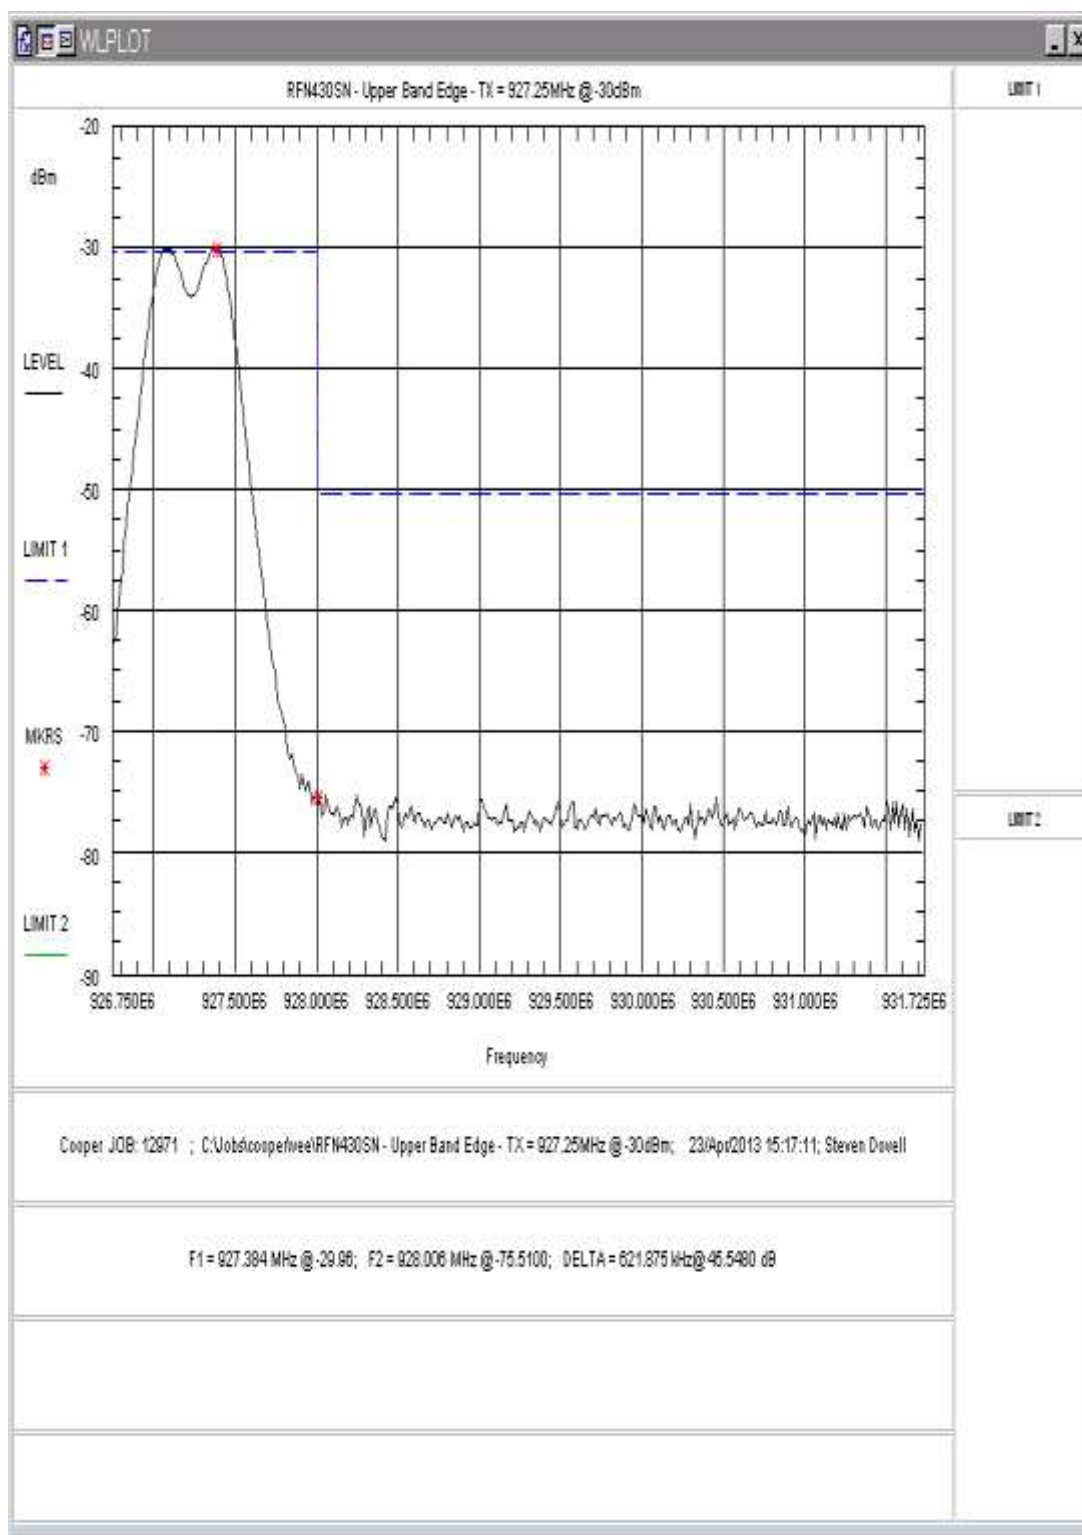


Figure 45: Upper Band-edge, High Channel, Low Power

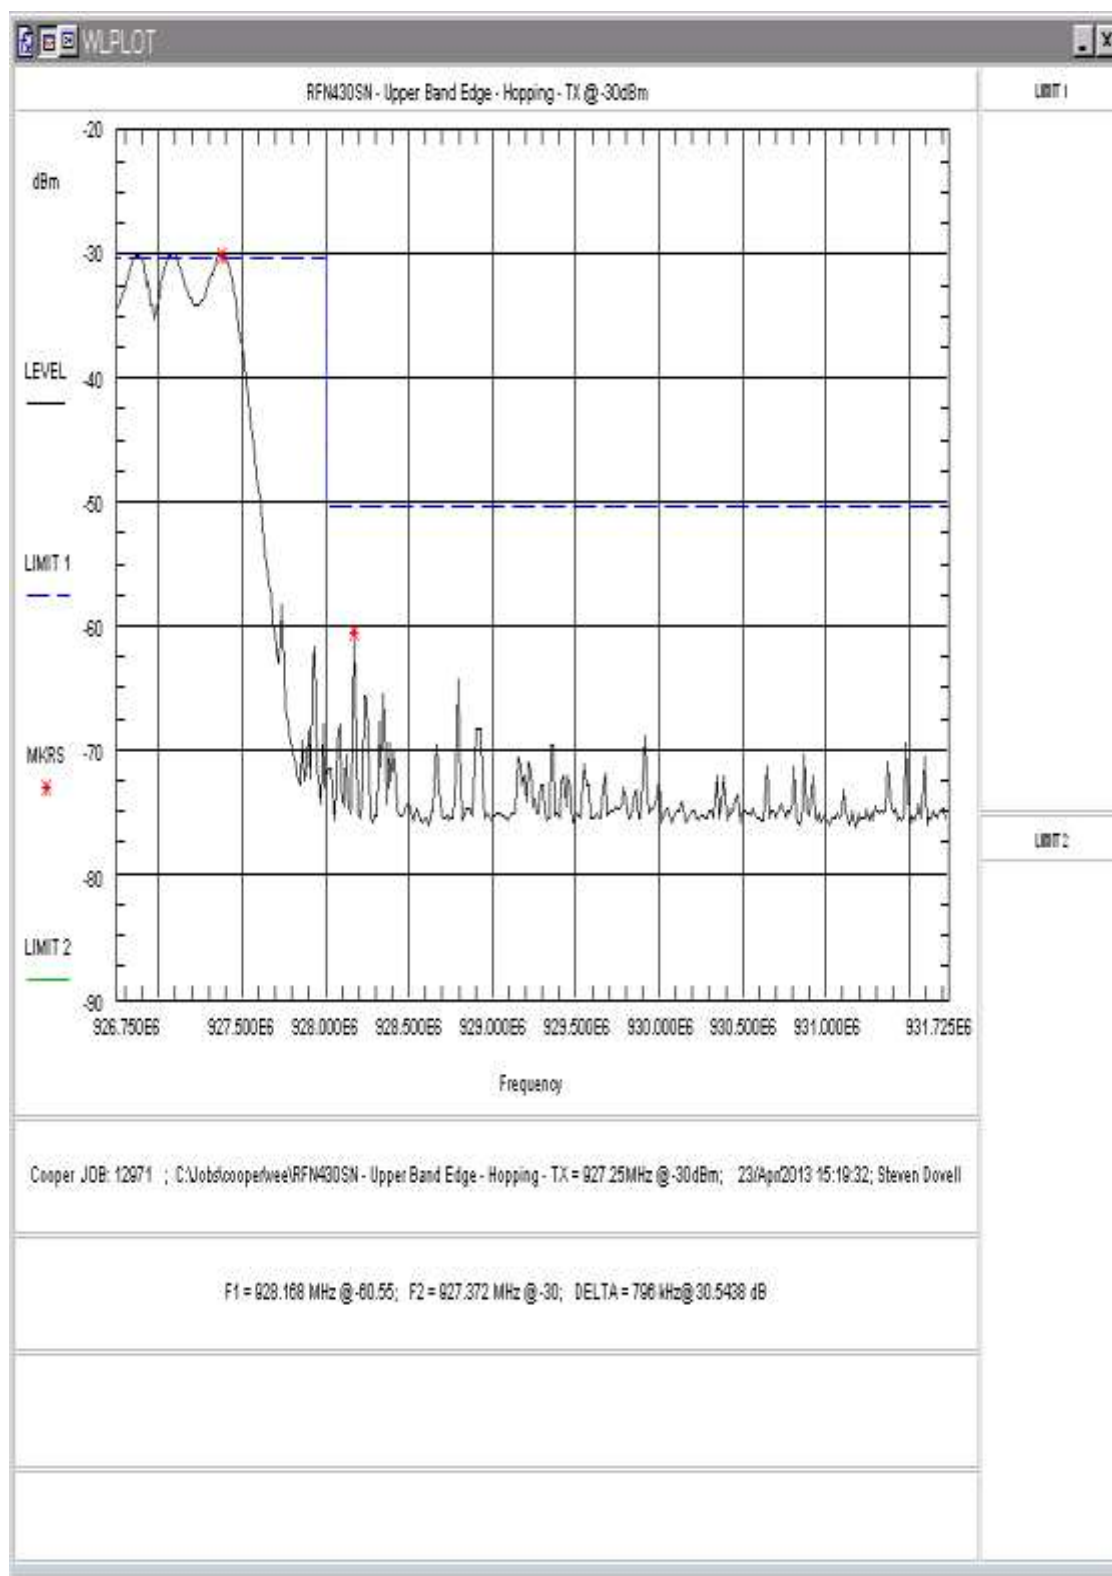


Figure 46: Upper Band-edge, Hopping Mode, Low Power



## 5.6 Radiated Spurious Emissions: (FCC Part §2.1053)

The EUT must comply with the requirements for radiated spurious emissions that fall within the restricted bands. These emissions must meet the limits specified in §15.209 and §15.35(b) for peak measurements.

### 5.6.1 Test Procedure

The EUT was placed on motorized turntable for radiated testing on a 3-meter open field test site. The emissions from the EUT were measured continuously at every azimuth by rotating the turntable. Receiving antennas were mounted on an antenna mast to determine the height of maximum emissions. The height of the antenna was varied between 1 and 4 meters. The peripherals were placed on the table in accordance with ANSI C63.4-2003. Cables were varied in position to produce maximum emissions. Both the horizontal and vertical field components were measured.

The EUT was set up to look at the lowest, highest, and center channel with hopping disabled.

The 14.2dBi duty cycle correction allowed for this radio was not used for these tests as the unit was compliant without any addition corrections.

The emissions were measured using the following resolution bandwidths:

**Table 12: Spectrum Analyzer Settings**

Frequency Range	Resolution Bandwidth	Video Bandwidth
30MHz-1000 MHz	120kHz	>100 kHz
>1000 MHz	1 MHz	<10 Hz (Avg.), 1MHz (Peak)

Average measurements above 1GHz were made with the Spectrum analyzer set to the linear mode with a Video bandwidth of 10Hz, and the resultant reading mathematically converted to dBuV. Correction factors were then applied and the resulting value was compared to the limit.

### 5.6.2 Test Summary

The EUT was compliant in all antennal configurations while testing the low, center, and high channels.

**Table 13: Radiated Emission Test Data: Non-Harmonics  
(Restricted Bands-covers all 3 antenna configurations)**

Same for all channels

Frequency (MHz)	Polarity H/V	Azimuth (Degree)	Ant. Height (m)	SA Level (dBuV)	Corr Factors (dB)	Corr. Level (uV/m)	Limit (uV/m)	Margin (dB)	Comments
110.57	V	260.00	1.00	12.10	13.0	18.0	150.0	-18.4	Peak
130.15	V	95.00	1.00	10.70	14.1	17.5	150.0	-18.7	Peak
256.63	V	270.00	1.00	9.30	13.5	13.8	200.0	-23.2	Peak
609.30	V	270.0	1.00	7.60	22.5	32.0	200.0	-15.9	Peak
960.00	V	90.00	1.00	4.70	28.6	46.3	500.0	-20.7	Peak
75.37	H	180.00	4.00	14.20	8.1	13.1	100.0	-17.7	Peak
118.83	H	180.0	4.00	13.10	14.3	23.4	150.0	-16.1	Peak
119.86	H	180.0	4.00	14.60	14.3	27.8	150.0	-14.6	Peak
257.26	H	270.00	2.50	6.40	13.6	10.0	200.0	-26.0	Peak
960.00	H	125.00	1.50	6.70	28.6	58.3	500.0	-18.7	Peak

No other non-harmonics were noted in the restricted bands

**Table 14: Radiated Emission Test Data, Low Channel  
(1dbi –Integral Wire Antenna)**

Frequency (MHz)	Polarity H/V	Azimuth (Degree)	Ant. Height (m)	SA Level (dBuV)	Corr Factors (dB)	Corr. Level (uV/m)	Limit (uV/m)	Margin (dB)	Comments
2708.25	V	125.00	2.09	56.10	-2.2	496.0	5000.0	-20.1	Peak
2708.25	V	125.00	2.09	50.00	-2.2	245.7	500.0	-6.2	Average
3611.00	V	180.00	2.20	41.58	-0.6	112.1	5000.0	-33.0	Peak
3611.00	V	180.00	2.20	33.00	-0.6	41.8	500.0	-21.6	Average
4513.75	V	185.00	2.10	44.30	1.9	204.0	5000.0	-27.8	Peak
4513.75	V	185.00	2.10	35.20	1.9	71.6	500.0	-16.9	Average
5416.50	V	90.00	3.38	46.28	4.5	345.8	5000.0	-23.2	Peak
5416.50	V	90.00	3.38	39.10	4.5	151.3	500.0	-10.4	Average
8124.75	V	180.0	3.00	43.10	9.3	415.1	5000.0	-21.6	Peak
8124.75	V	180.0	3.00	34.00	9.3	145.6	500.0	-10.7	Average
9027.50	V	180.0	3.00	41.20	10.8	399.3	5000.0	-22.0	Peak
9027.50	V	180.00	2.80	34.40	10.8	182.5	500.0	-8.8	Average
2708.25	H	270.00	2.59	55.50	-2.2	462.9	5000.0	-20.7	Peak
2708.25	H	270.00	2.59	48.20	-2.2	199.7	500.0	-8.0	Average
3611.00	H	0.00	2.50	41.32	-0.6	108.8	5000.0	-33.2	Peak
3611.00	H	0.00	2.50	34.20	-0.6	47.9	500.0	-20.4	Average
4513.75	H	180.00	2.40	43.40	1.9	183.9	5000.0	-28.7	Peak
4513.75	H	180.00	2.40	38.80	1.9	108.3	500.0	-13.3	Average
5416.50	H	180.0	3.00	44.50	4.5	281.8	5000.0	-25.0	Peak
5416.50	H	180.0	3.00	34.47	4.5	88.8	500.0	-15.0	Average
8124.75	H	180.0	3.00	44.30	9.3	476.7	5000.0	-20.4	Peak
8124.75	H	180.00	2.80	32.10	9.3	117.0	500.0	-12.6	Average
9027.50	H	190.00	2.90	43.00	10.8	491.2	5000.0	-20.2	Peak
9027.50	H	190.00	2.90	31.90	10.8	136.9	500.0	-11.3	Average

**Table 15: Radiated Emission Test Data, Low Channel  
(3dbi –Phantom Antenna)**

Frequency (MHz)	Polarity H/V	Azimuth (Degree)	Ant. Height (m)	SA Level (dBuV)	Corr Factors (dB)	Corr. Level (uV/m)	Limit (uV/m)	Margin (dB)	Comments
2708.25	V	180.00	3.85	47.03	-2.2	174.6	5000.0	-29.1	Peak
2708.25	V	180.00	3.85	45.00	-2.2	138.2	500.0	-11.2	Average
3611.00	V	270.00	3.80	40.20	-0.6	95.7	5000.0	-34.4	Peak
3611.00	V	270.00	3.80	37.97	-0.6	74.0	500.0	-16.6	Average
4513.75	V	275.00	3.90	43.69	1.9	190.2	5000.0	-28.4	Peak
4513.75	V	275.00	3.90	38.97	1.9	110.5	500.0	-13.1	Average
5416.50	V	90.00	3.38	42.45	4.5	222.5	5000.0	-27.0	Peak
5416.50	V	90.00	3.38	37.00	4.5	118.8	500.0	-12.5	Average
8124.75	V	180.0	3.00	44.50	9.3	487.8	5000.0	-20.2	Peak
8124.75	V	180.0	3.00	34.47	9.3	153.7	500.0	-10.2	Average
9027.50	V	180.0	3.00	44.30	10.8	570.5	5000.0	-18.9	Peak
9027.50	V	180.00	2.80	32.10	10.8	140.0	500.0	-11.1	Average
2708.25	H	250.00	3.35	47.00	-2.2	174.0	5000.0	-29.2	Peak
2708.25	H	250.00	3.35	42.20	-2.2	100.1	500.0	-14.0	Average
3611.00	H	200.00	3.35	41.00	-0.6	104.9	5000.0	-33.6	Peak
3611.00	H	200.00	3.35	37.50	-0.6	70.1	500.0	-17.1	Average
4513.75	H	35.00	3.43	43.35	1.9	182.9	5000.0	-28.7	Peak
4513.75	H	35.00	3.43	40.70	1.9	134.8	500.0	-11.4	Average
5416.50	H	90.0	3.38	42.04	4.5	212.3	5000.0	-27.4	Peak
5416.50	H	90.0	3.38	36.07	4.5	106.8	500.0	-13.4	Average
8124.75	H	180.0	3.45	41.38	9.3	340.6	5000.0	-23.3	Peak
8124.75	H	180.0	3.45	34.20	9.3	149.0	500.0	-10.5	Average
9027.50	H	180.0	3.60	43.40	10.8	514.4	5000.0	-19.8	Peak
9027.50	H	180.0	3.60	34.80	10.8	191.1	500.0	-8.4	Average

**Table 16: Radiated Emission Test Data, Low Channel  
(5dBi –Omni directional Antenna)**

Frequency (MHz)	Polarity H/V	Azimuth (Degree)	Ant. Height (m)	SA Level (dBuV)	Corr Factors (dB)	Corr. Level (uV/m)	Limit (uV/m)	Margin (dB)	Comments
2708.25	V	90.00	3.36	47.50	-2.2	184.3	5000.0	-28.7	Peak
2708.25	V	90.00	3.36	40.60	-2.2	83.3	500.0	-15.6	Average
3611.00	V	90.00	2.15	43.22	-0.6	135.4	5000.0	-31.3	Peak
3611.00	V	90.00	2.15	34.00	-0.6	46.9	500.0	-20.6	Average
4513.75	V	160.00	2.89	46.56	1.9	264.7	5000.0	-25.5	Peak
4513.75	V	160.00	2.89	38.28	1.9	102.0	500.0	-13.8	Average
5416.50	V	270.00	2.86	46.28	4.5	345.8	5000.0	-23.2	Peak
5416.50	V	270.00	2.86	39.10	4.5	151.3	500.0	-10.4	Average
8124.75	V	0.00	2.80	43.10	9.3	415.1	5000.0	-21.6	Peak
8124.75	V	0.00	2.80	34.00	9.3	145.6	500.0	-10.7	Average
9027.50	V	0.00	2.50	41.20	10.8	399.3	5000.0	-22.0	Peak
9027.50	V	0.00	2.50	34.40	10.8	182.5	500.0	-8.8	Average
2708.25	H	180.00	3.49	49.52	-2.2	232.5	5000.0	-26.6	Peak
2708.25	H	180.00	3.49	43.40	-2.2	114.9	500.0	-12.8	Average
3611.00	H	250.00	3.51	41.90	-0.6	116.3	5000.0	-32.7	Peak
3611.00	H	250.00	3.51	35.30	-0.6	54.4	500.0	-19.3	Average
4513.75	H	125.00	3.57	45.30	1.9	228.9	5000.0	-26.8	Peak
4513.75	H	125.00	3.57	38.14	1.9	100.4	500.0	-13.9	Average
5416.50	H	175.00	3.69	44.94	4.5	296.4	5000.0	-24.5	Peak
5416.50	H	175.00	3.69	37.00	4.5	118.8	500.0	-12.5	Average
8124.75	H	90.00	3.50	41.00	9.3	326.0	5000.0	-23.7	Peak
8124.75	H	90.00	3.50	34.40	9.3	152.5	500.0	-10.3	Average
9027.50	H	90.00	3.50	40.85	10.8	383.5	5000.0	-22.3	Peak
9027.50	H	90.00	3.50	34.80	10.8	191.1	500.0	-8.4	Average

**Table 17: Radiated Emission Test Data, Center Channel  
(1dbi –Integral Wire Antenna)**

Frequency (MHz)	Polarity H/V	Azimuth (Degree)	Ant. Height (m)	SA Level (dBuV)	Corr Factors (dB)	Corr. Level (uV/m)	Limit (uV/m)	Margin (dB)	Comments
2744.25	V	120.00	2.21	54.22	-2.2	399.9	5000.0	-21.9	Peak
2744.25	V	120.00	2.21	51.00	-2.2	276.1	500.0	-5.2	Average
3659.00	V	180.00	2.20	41.14	-0.3	110.6	5000.0	-33.1	Peak
3659.00	V	180.00	2.20	36.70	-0.3	66.4	500.0	-17.5	Average
4573.75	V	180.00	2.25	48.20	1.7	313.1	5000.0	-24.1	Peak
4573.75	V	180.00	2.25	41.00	1.7	136.7	500.0	-11.3	Average
7318.00	V	90.00	3.38	44.94	9.6	535.7	5000.0	-19.4	Peak
7318.00	V	90.00	3.38	37.00	9.6	214.7	500.0	-7.3	Average
8232.75	V	180.0	3.00	41.00	9.3	329.0	5000.0	-23.6	Peak
8232.75	V	180.0	3.00	34.40	9.3	153.9	500.0	-10.2	Average
9147.50	V	180.0	3.00	40.85	10.9	388.1	5000.0	-22.2	Peak
9147.50	V	180.00	2.80	34.80	10.9	193.4	500.0	-8.3	Average
2744.25	H	45.00	2.53	54.68	-2.2	421.7	5000.0	-21.5	Peak
2744.25	H	45.00	2.53	49.80	-2.2	240.4	500.0	-6.4	Average
3659.00	H	165.00	2.60	44.94	-0.3	171.3	5000.0	-29.3	Peak
3659.00	H	165.00	2.60	37.00	-0.3	68.7	500.0	-17.2	Average
4573.75	H	170.00	2.46	46.10	1.7	245.8	5000.0	-26.2	Peak
4573.75	H	170.00	2.46	39.50	1.7	115.0	500.0	-12.8	Average
7318.00	H	180.0	3.00	50.40	9.6	1004.4	5000.0	-13.9	Peak
7318.00	H	180.0	3.00	40.50	9.6	321.3	500.0	-3.8	Average
8232.75	H	180.0	3.00	43.40	9.3	433.8	5000.0	-21.2	Peak
8232.75	H	180.00	2.80	34.80	9.3	161.2	500.0	-9.8	Average
9147.50	H	190.00	2.90	41.38	10.9	412.5	5000.0	-21.7	Peak
9147.50	H	190.00	2.90	34.20	10.9	180.5	500.0	-8.9	Average

**Table 18: Radiated Emission Test Data, Center Channel  
(3dbi –Phantom Antenna)**

Frequency (MHz)	Polarity H/V	Azimuth (Degree)	Ant. Height (m)	SA Level (dBuV)	Corr Factors (dB)	Corr. Level (uV/m)	Limit (uV/m)	Margin (dB)	Comments
2744.25	V	45.00	3.44	46.10	-2.2	157.0	5000.0	-30.1	Peak
2744.25	V	45.00	3.44	44.00	-2.2	123.3	500.0	-12.2	Average
3659.00	V	0.00	3.00	42.82	-0.3	134.2	5000.0	-31.4	Peak
3659.00	V	0.00	3.00	34.95	-0.3	54.2	500.0	-19.3	Average
4573.75	V	10.00	2.50	48.60	1.7	327.8	5000.0	-23.7	Peak
4573.75	V	10.00	2.50	47.00	1.7	272.7	500.0	-5.3	Average
7318.00	V	90.00	3.38	42.00	9.6	381.9	5000.0	-22.3	Peak
7318.00	V	90.00	3.38	37.00	9.6	214.7	500.0	-7.3	Average
8232.75	V	180.0	3.00	44.50	9.3	492.3	5000.0	-20.1	Peak
8232.75	V	180.0	3.00	34.47	9.3	155.2	500.0	-10.2	Average
9147.50	V	180.0	3.00	44.30	10.9	577.3	5000.0	-18.8	Peak
9147.50	V	180.00	2.80	32.10	10.9	141.7	500.0	-11.0	Average
2744.25	H	175.00	3.68	46.95	-2.2	173.2	5000.0	-29.2	Peak
2744.25	H	175.00	3.68	45.50	-2.2	146.6	500.0	-10.7	Average
3659.00	H	190.00	3.60	41.46	-0.3	114.8	5000.0	-32.8	Peak
3659.00	H	190.00	3.60	36.30	-0.3	63.4	500.0	-17.9	Average
4573.75	H	15.00	3.70	47.70	1.7	295.5	5000.0	-24.6	Peak
4573.75	H	15.00	3.70	45.26	1.7	223.2	500.0	-7.0	Average
7318.00	H	90.0	3.38	42.04	9.6	383.6	5000.0	-22.3	Peak
7318.00	H	90.0	3.38	36.07	9.6	192.9	500.0	-8.3	Average
8232.75	H	180.0	3.45	41.38	9.3	343.8	5000.0	-23.3	Peak
8232.75	H	180.0	3.45	34.20	9.3	150.4	500.0	-10.4	Average
9147.50	H	180.0	3.60	43.40	10.9	520.5	5000.0	-19.7	Peak
9147.50	H	180.0	3.60	34.80	10.9	193.4	500.0	-8.3	Average

**Table 19: Radiated Emission Test Data, Center Channel  
(5dBi –Omni directional Antenna)**

Frequency (MHz)	Polarity H/V	Azimuth (Degree)	Ant. Height (m)	SA Level (dBuV)	Corr Factors (dB)	Corr. Level (uV/m)	Limit (uV/m)	Margin (dB)	Comments
2744.25	V	180.00	3.66	50.10	-2.2	248.9	5000.0	-26.1	Peak
2744.25	V	180.00	3.66	45.65	-2.2	149.1	500.0	-10.5	Average
3659.00	V	180.00	3.60	44.30	-0.3	159.2	5000.0	-29.9	Peak
3659.00	V	180.00	3.60	34.50	-0.3	51.5	500.0	-19.7	Average
4573.75	V	185.00	3.69	48.09	1.7	309.1	5000.0	-24.2	Peak
4573.75	V	185.00	3.69	44.70	1.7	209.2	500.0	-7.6	Average
7318.00	V	175.00	3.60	46.28	9.6	625.0	5000.0	-18.1	Peak
7318.00	V	175.00	3.60	36.10	9.6	193.6	500.0	-8.2	Average
8232.75	V	90.00	3.50	43.10	9.3	419.0	5000.0	-21.5	Peak
8232.75	V	90.00	3.50	34.00	9.3	147.0	500.0	-10.6	Average
9147.50	V	90.00	3.50	41.20	10.9	404.0	5000.0	-21.9	Peak
9147.50	V	90.00	3.50	34.40	10.9	184.7	500.0	-8.7	Average
2744.25	H	125.00	3.62	46.95	-2.2	173.2	5000.0	-29.2	Peak
2744.25	H	125.00	3.62	39.00	-2.2	69.3	500.0	-17.2	Average
3659.00	H	165.00	2.60	41.28	-0.3	112.4	5000.0	-33.0	Peak
3659.00	H	165.00	2.60	34.00	-0.3	48.6	500.0	-20.2	Average
4573.75	H	45.00	3.03	46.78	1.7	265.8	5000.0	-25.5	Peak
4573.75	H	45.00	3.03	40.60	1.7	130.5	500.0	-11.7	Average
7318.00	H	180.0	3.00	44.50	9.6	509.2	5000.0	-19.8	Peak
7318.00	H	180.0	3.00	34.47	9.6	160.5	500.0	-9.9	Average
8232.75	H	180.0	3.00	44.30	9.3	481.1	5000.0	-20.3	Peak
8232.75	H	180.00	2.80	32.10	9.3	118.1	500.0	-12.5	Average
9147.50	H	190.00	2.90	43.00	10.9	497.1	5000.0	-20.1	Peak
9147.50	H	190.00	2.90	31.90	10.9	138.5	500.0	-11.2	Average



**Table 20: Radiated Emission Test Data, High Channel  
(1dbi –Integral Wire Antenna)**

Frequency (MHz)	Polarity H/V	Azimuth (Degree)	Ant. Height (m)	SA Level (dBuV)	Corr Factors (dB)	Corr. Level (uV/m)	Limit (uV/m)	Margin (dB)	Comments
2781.75	V	95.00	2.21	52.76	-2.0	344.5	5000.0	-23.2	Peak
2781.75	V	95.00	2.21	47.50	-2.0	188.0	500.0	-8.5	Average
3709.00	V	355.00	2.23	42.66	0.3	140.6	5000.0	-31.0	Peak
3709.00	V	355.00	2.23	36.07	0.3	65.8	500.0	-17.6	Average
4636.25	V	190.00	2.06	53.41	2.1	593.3	5000.0	-18.5	Peak
4636.25	V	190.00	2.06	46.50	2.1	267.8	500.0	-5.4	Average
7418.00	V	95.0	2.10	40.35	9.8	323.3	5000.0	-23.8	Peak
7418.00	V	95.0	2.10	36.48	9.8	207.0	500.0	-7.7	Average
8345.25	V	90.0	2.02	42.59	10.3	442.1	5000.0	-21.1	Peak
8345.25	V	90.0	2.02	35.00	10.3	184.5	500.0	-8.7	Average
2781.75	H	0.00	1.93	54.53	-2.0	422.4	5000.0	-21.5	Peak
2781.75	H	0.00	1.93	51.00	-2.0	281.3	500.0	-5.0	Average
3709.00	H	5.00	1.90	41.60	0.3	124.4	5000.0	-32.1	Peak
3709.00	H	5.00	1.90	36.00	0.3	65.3	500.0	-17.7	Average
4636.25	H	185.00	2.10	49.36	2.1	372.2	5000.0	-22.6	Peak
4636.25	H	185.00	2.10	46.20	2.1	258.7	500.0	-5.7	Average
7418.00	H	90.0	1.79	41.20	9.8	356.5	5000.0	-22.9	Peak
7418.00	H	90.0	1.79	37.00	9.8	219.8	500.0	-7.1	Average
8345.25	H	90.0	1.80	40.01	10.3	328.5	5000.0	-23.6	Peak
8345.25	H	90.0	1.80	36.14	10.3	210.4	500.0	-7.5	Average

**Table 21: Radiated Emission Test Data, High Channel  
(3dbi –Phantom Antenna)**

Frequency (MHz)	Polarity H/V	Azimuth (Degree)	Ant. Height (m)	SA Level (dBuV)	Corr Factors (dB)	Corr. Level (uV/m)	Limit (uV/m)	Margin (dB)	Comments
2781.75	V	250.00	3.38	47.00	-2.0	177.5	5000.0	-29.0	Peak
2781.75	V	250.00	3.38	44.60	-2.0	134.6	500.0	-11.4	Average
3709.00	V	270.00	3.38	39.50	0.3	97.7	5000.0	-34.2	Peak
3709.00	V	270.00	3.38	38.50	0.3	87.1	500.0	-15.2	Average
4636.25	V	185.00	3.45	53.59	2.1	605.7	5000.0	-18.3	Peak
4636.25	V	185.00	3.45	47.90	2.1	314.6	500.0	-4.0	Average
7418.00	V	180.0	3.45	41.38	9.8	364.0	5000.0	-22.8	Peak
7418.00	V	180.0	3.45	34.20	9.8	159.2	500.0	-9.9	Average
8345.25	V	180.0	3.60	43.40	10.3	485.3	5000.0	-20.3	Peak
8345.25	V	180.0	3.60	34.80	10.3	180.3	500.0	-8.9	Average
2781.75	H	125.00	2.25	46.30	-2.0	163.7	5000.0	-29.7	Peak
2781.75	H	125.00	2.25	42.90	-2.0	110.7	500.0	-13.1	Average
3709.00	H	180.00	2.20	39.56	0.3	98.4	5000.0	-34.1	Peak
3709.00	H	180.00	2.20	34.48	0.3	54.8	500.0	-19.2	Average
4636.25	H	125.00	2.27	51.91	2.1	499.2	5000.0	-20.0	Peak
4636.25	H	125.00	2.27	45.50	2.1	238.6	500.0	-6.4	Average
7418.00	H	90.0	3.38	42.04	9.8	392.7	5000.0	-22.1	Peak
7418.00	H	90.0	3.38	36.07	9.8	197.5	500.0	-8.1	Average
8345.25	H	180.0	3.45	41.38	10.3	384.6	5000.0	-22.3	Peak
8345.25	H	180.0	3.45	34.20	10.3	168.3	500.0	-9.5	Average

**Table 22: Radiated Emission Test Data, High Channel  
(5dBi –Omni directional Antenna)**

Frequency (MHz)	Polarity H/V	Azimuth (Degree)	Ant. Height (m)	SA Level (dBuV)	Corr Factors (dB)	Corr. Level (uV/m)	Limit (uV/m)	Margin (dB)	Comments
2781.75	V	180.00	3.46	48.94	-2.0	221.9	5000.0	-27.1	Peak
2781.75	V	180.00	3.46	43.18	-2.0	114.3	500.0	-12.8	Average
3709.00	V	150.00	3.44	43.60	0.3	156.7	5000.0	-30.1	Peak
3709.00	V	150.00	3.44	35.90	0.3	64.6	500.0	-17.8	Average
4636.25	V	180.00	3.18	53.43	2.1	594.6	5000.0	-18.5	Peak
4636.25	V	180.00	3.18	45.30	2.1	233.2	500.0	-6.6	Average
7418.00	V	185.00	3.20	43.93	9.8	488.1	5000.0	-20.2	Peak
7418.00	V	185.00	3.20	37.74	9.8	239.4	500.0	-6.4	Average
8345.25	V	180.00	3.20	43.20	10.3	474.2	5000.0	-20.5	Peak
8345.25	V	180.00	3.20	33.30	10.3	151.7	500.0	-10.4	Average
2781.75	H	182.00	3.18	47.64	-2.0	191.1	5000.0	-28.4	Peak
2781.75	H	182.00	3.18	43.14	-2.0	113.8	500.0	-12.9	Average
3709.00	H	185.00	3.55	41.80	0.3	127.3	5000.0	-31.9	Peak
3709.00	H	185.00	3.55	40.52	0.3	109.9	500.0	-13.2	Average
4636.25	H	165.00	3.70	50.40	2.1	419.5	5000.0	-21.5	Peak
4636.25	H	165.00	3.70	43.50	2.1	189.6	500.0	-8.4	Average
7418.00	H	180.0	3.60	43.40	9.8	459.3	5000.0	-20.7	Peak
7418.00	H	180.0	3.60	34.80	9.8	170.6	500.0	-9.3	Average
8345.25	H	180.0	3.45	41.38	10.3	384.6	5000.0	-22.3	Peak
8345.25	H	180.0	3.45	34.20	10.3	168.3	500.0	-9.5	Average

## 5.7 Receiver Radiated Spurious Emissions: (RSS-210 sect 2.6)

The EUT must comply with the requirements for radiated spurious emissions that fall within the restricted bands. These emissions must meet the limits specified in §15.209 and §15.35(b) for peak measurements.

### 5.7.1 Test Procedure

The EUT was placed on motorized turntable for radiated testing on a 3-meter open field test site. The emissions from the EUT were measured continuously at every azimuth by rotating the turntable. Receiving antennas were mounted on an antenna mast to determine the height of maximum emissions. The height of the antenna was varied between 1 and 4 meters. The peripherals were placed on the table in accordance with ANSI C63.4-2003. Cables were varied in position to produce maximum emissions. Both the horizontal and vertical field components were measured.

The emissions were measured using the following resolution bandwidths:

**Table 23: Spectrum Analyzer Settings**

Frequency Range	Resolution Bandwidth	Video Bandwidth
30MHz-1000 MHz	120kHz	>100 kHz
>1000 MHz	1 MHz	10 Hz (Avg.), 1MHz (Peak)

Average measurements above 1GHz were made with the Spectrum analyzer set to the linear mode with a Video bandwidth of 10Hz, and the resultant reading mathematically converted to dBuV. Correction factors were then applied and the resulting value was compared to the limit.

**Table 24: Radiated Emission Test Data, Receiver**

Frequency (MHz)	Polarity H/V	Azimuth (Degree)	Ant. Height (m)	SA Level (dBuV)	Corr Factors (dB)	Corr. Level (uV/m)	Limit (uV/m)	Margin (dB)
51.98	V	0.00	1.00	9.60	7.3	7.0	100.0	-23.1
61.43	V	275.00	1.00	9.50	7.4	7.0	100.0	-23.1
79.42	V	185.00	1.00	14.90	7.9	13.8	100.0	-17.2
87.20	V	90.00	1.00	17.70	7.9	19.1	100.0	-14.4
110.57	V	260.00	1.00	12.10	13.0	18.0	150.0	-18.4
130.15	V	95.00	1.00	10.70	14.1	17.5	150.0	-18.7
195.25	V	90.00	1.00	11.90	12.4	16.4	150.0	-19.2
256.63	V	270.00	1.00	9.30	13.5	13.8	200.0	-23.2
299.82	V	0.0	2.50	8.00	15.8	15.5	200.0	-22.2
609.30	V	270.0	1.00	7.60	22.5	32.0	200.0	-15.9
650.82	V	45.0	1.00	11.40	23.7	57.1	200.0	-10.9
960.00	V	90.00	1.00	4.70	28.6	46.3	500.0	-20.7
50.00	H	90.00	4.00	6.20	7.8	5.0	100.0	-26.0
57.20	H	5.00	4.00	11.60	7.1	8.6	100.0	-21.3
61.44	H	200.00	4.00	7.20	7.4	5.4	100.0	-25.4
75.37	H	180.00	4.00	14.20	8.1	13.1	100.0	-17.7
77.98	H	180.00	4.00	15.50	8.0	15.0	100.0	-16.5
80.88	H	180.00	4.00	14.90	7.8	13.7	100.0	-17.3
118.83	H	180.0	4.00	13.10	14.3	23.4	150.0	-16.1
119.86	H	180.0	4.00	14.60	14.3	27.8	150.0	-14.6
195.25	H	265.0	3.00	10.90	12.4	14.6	150.0	-20.2
257.26	H	270.00	2.50	6.40	13.6	10.0	200.0	-26.0
287.97	H	90.00	1.75	12.60	15.8	26.2	200.0	-17.6
300.00	H	90.00	1.50	11.90	15.8	24.4	200.0	-18.3
320.00	H	90.00	1.50	14.50	16.5	35.4	200.0	-15.0
501.11	H	270.00	2.00	8.70	21.0	30.5	200.0	-16.3
520.64	H	270.00	1.75	10.90	21.5	41.7	200.0	-13.6
960.00	H	125.00	1.50	6.70	28.6	58.3	500.0	-18.7

No frequencies noted above 1GHz

## 5.8 AC Conducted Emissions (FCC Part §15.207)

### 5.8.1 Requirements

Test Arrangement: Table Top

Compliance Standard: FCC Class B

FCC Compliance Limits		
Frequency	Quasi-peak	Average
0.15 - 0.5MHz	66 to 56dB $\mu$ V	56 to 46dB $\mu$ V
0.5 - 5MHz	56dB $\mu$ V	46dB $\mu$ V
5 - 30MHz	60dB $\mu$ V	50dB $\mu$ V

### 5.8.2 Test Procedure

The EUT was placed on an 80 cm high 1 X 1.5 m non-conductive table above a ground plane. Power to the EUT was provided through a Solar Corporation 50  $\Omega$ /50  $\mu$ H Line Impedance Stabilization Network bonded to a 3 X 2 meter ground plane. The LISN has its AC input supplied from a filtered AC power source. Power was supplied to the peripherals through a second LISN. The peripherals were placed on the table in accordance with ANSI C63.4-2003. Power and data cables were moved about to obtain maximum emissions.

The 50  $\Omega$  output of the LISN was connected to the input of the spectrum analyzer and the emissions in the frequency range of 150 kHz to 30 MHz were measured. The detector function was set to quasi-peak, peak, or average as appropriate, and the resolution bandwidth during testing was at least 9 kHz, with all post-detector filtering no less than 10 times the resolution bandwidth. For average measurements the post-detector filter was set to 10 Hz.

At frequencies where quasi-peak or peak measurements comply with the average limit, no average measurements need be performed.

At frequencies where quasi-peak or peak measurements comply with the average limit, no average measurements need be performed. The Conducted emissions level to be compared to the FCC limit is calculated as shown in the following example.

Example:

Spectrum Analyzer Voltage: VdB $\mu$ V

LISN Correction Factor: LISN dB

Cable Correction Factor: CF dB

Electric Field: EdB $\mu$ V = V dB $\mu$ V + LISN dB + CF dB

### 5.8.3 Test Data

The EUT complied with the Class B Conducted Emissions requirements. This system runs off of 120VAC or 230VAC. The following tables provide the test results for phase and neutral line power line conducted emissions.

Conducted Emissions was tested with the radio in the “transmit on” state.

**Table 25: Conducted Emissions Data 120VAC, Transmit On**

#### NEUTRAL

Frequency (MHz)	Level QP (dBμV)	Level AVG (dBμV)	Cable Loss (dB)	LISN Corr (dB)	Level QP Corr (dBμV)	Level Corr Avg (dBμV)	Limit QP (dBμV)	Limit AVG (dBμV)	Margin QP (dB)	Margin AVG (dB)
0.265	48.0	26.9	10.1	0.5	58.6	37.5	61.3	51.3	-2.7	-13.8
0.397	41.3	12.1	10.1	0.5	51.9	22.7	57.9	47.9	-6.1	-25.3
0.533	39.1	14.0	10.1	0.4	49.6	24.5	56.0	46.0	-6.4	-21.5
0.789	31.1	8.3	10.1	0.4	41.6	18.8	56.0	46.0	-14.4	-27.2
4.630	18.4	6.2	10.7	0.9	30.0	17.8	56.0	46.0	-26.0	-28.2
20.990	18.2	2.2	11.7	1.3	31.2	15.2	60.0	50.0	-28.8	-34.8

#### Phase

Frequency (MHz)	Level QP (dBμV)	Level AVG (dBμV)	Cable Loss (dB)	LISN Corr (dB)	Level QP Corr (dBμV)	Level Corr Avg (dBμV)	Limit QP (dBμV)	Limit AVG (dBμV)	Margin QP (dB)	Margin AVG (dB)
0.150	44.1	14.7	10.1	0.5	54.7	25.3	66.0	56.0	-11.3	-30.7
0.257	41.0	21.4	10.1	0.4	51.5	31.9	61.5	51.5	-10.0	-19.6
0.522	37.1	14.7	10.1	0.2	47.4	25.0	56.0	46.0	-8.6	-21.0
0.925	28.8	12.6	10.1	0.3	39.2	23.0	56.0	46.0	-16.8	-23.0
1.314	23.1	12.6	10.2	0.4	33.8	23.3	56.0	46.0	-22.2	-22.7
20.720	22.3	7.7	11.7	1.2	35.2	20.6	60.0	50.0	-24.8	-29.4

**Table 26: Conducted Emissions Data 230VAC, Transmit On**

NEUTRAL

Frequency (MHz)	Level QP (dBµV)	Level AVG (dBµV)	Cable Loss (dB)	LISN Corr (dB)	Level QP Corr (dBµV)	Level Corr Avg (dBµV)	Limit QP (dBµV)	Limit AVG (dBµV)	Margin QP (dB)	Margin AVG (dB)
0.265	44.0	24.8	10.1	0.5	54.6	35.4	61.3	51.3	-6.7	-15.9
0.397	42.0	10.1	10.1	0.5	52.6	20.7	57.9	47.9	-5.4	-27.3
0.533	37.5	13.2	10.1	0.4	48.0	23.7	56.0	46.0	-8.0	-22.3
0.789	29.3	8.5	10.1	0.4	39.8	19.0	56.0	46.0	-16.2	-27.0
4.630	16.4	6.5	10.7	0.9	28.0	18.1	56.0	46.0	-28.0	-27.9
20.990	18.2	2.3	11.7	1.3	31.2	15.3	60.0	50.0	-28.8	-34.7

Phase

Frequency (MHz)	Level QP (dBµV)	Level AVG (dBµV)	Cable Loss (dB)	LISN Corr (dB)	Level QP Corr (dBµV)	Level Corr Avg (dBµV)	Limit QP (dBµV)	Limit AVG (dBµV)	Margin QP (dB)	Margin AVG (dB)
0.150	43.2	13.2	10.1	0.5	53.8	23.8	66.0	56.0	-12.2	-32.2
0.257	39.5	20.4	10.1	0.4	50.0	30.9	61.5	51.5	-11.5	-20.6
0.522	35.4	12.6	10.1	0.2	45.7	22.9	56.0	46.0	-10.3	-23.1
0.925	26.4	10.2	10.1	0.3	36.8	20.6	56.0	46.0	-19.2	-25.4
1.314	22.1	12.0	10.2	0.4	32.8	22.7	56.0	46.0	-23.2	-23.3
20.720	22.0	7.2	11.7	1.2	34.9	20.1	60.0	50.0	-25.1	-29.9