

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan

District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594 Report No.: SZEM120800482601

Email: ee.shenzhen@sgs.com Page: 1 of 43

FCC REPORT

Application No: SZEM1208004826RF

Applicant: Wahoo Fitness LLC

Manufacturer:iDT Technology LimitedFactory:iDT Technology LimitedProduct Name:Weight scale with BLE

Model No.(EUT): WF100

FCC ID: PADWF100

Standards: 47 CFR Part 15, Subpart C (2011)

Date of Receipt: 2012-08-24

Date of Test: 2012-09-03 to 2012-09-04

Date of Issue: 2012-10-25

Test Result: PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM120800482601

Page: 2 of 43

2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 2009	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	KDB558074 D01	PASS
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	KDB558074 D01	PASS
Power Spectral Density	wer Spectral Density 47 CFR Part 15, Subpart C Section 15.247 (e) KDB558		PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15, Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10 (2009)	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	KDB558074 D01	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	KDB558074 D01	PASS
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2009	PASS
Band Edge (Radiated Emission)	ANSI C63 10 2009		PASS



Report No.: SZEM120800482601

Page: 3 of 43

3 Contents

			Page
1	C	OVER PAGE	1
2	. TE	EST SUMMARY	2
3		ONTENTS	
4		ENERAL INFORMATION	
	4.1	CLIENT INFORMATION	Λ
	4.2	GENERAL DESCRIPTION OF EUT	
	4.3	TEST ENVIRONMENT	
	4.4	DESCRIPTION OF SUPPORT UNITS	
	4.5	TEST LOCATION	
	4.6	TEST FACILITY	
	4.7	DEVIATION FROM STANDARDS	
	4.8	ABNORMALITIES FROM STANDARD CONDITIONS	7
	4.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
	4.10	TEST INSTRUMENTS LIST.	8
5	TE	EST RESULTS AND MEASUREMENT DATA	10
	5.1	Antenna Requirement	10
	5.2	CONDUCTED PEAK OUTPUT POWER	
	5.3	6DB OCCUPY BANDWIDTH	
	5.4	POWER SPECTRAL DENSITY	
	5.5	BAND-EDGE FOR RF CONDUCTED EMISSIONS	20
	5.6	Spurious RF Conducted Emissions	
	5.7	PSEUDORANDOM FREQUENCY HOPPING SEQUENCE	25
	5.8	RADIATED SPURIOUS EMISSION	26
	5.	8.1 Spurious Emissions	26
	5.9	BAND EDGE (RADIATED EMISSION)	34-43



Report No.: SZEM120800482601

Page: 4 of 43

4 General Information

4.1 Client Information

Applicant:	Wahoo Fitness LLC
Address of Applicant:	141 West Wieuca Road #104B Atlanta Georgia United States
Manufacturer:	iDT Technology Limited
Address of Manufacturer:	Block C, 9/F., Kaiser Estate, Phase 1, 41 Man YueStreet, Hunghom, Hong Kong.
Factory:	iDT Technology Limited
Address of Factory:	Chentian Industrial Estate Xixiang, BaoAn, Shenzhen, P.R.C.

4.2 General Description of EUT

Weight scale with BLE
WF100
Wahoo
2402MHz~2480MHz
4.0
Frequency Hopping Spread Spectrum(FHSS)
GFSK
40
Adaptive Frequency Hopping systems
Portable production
N/A
nrfgostudio
Integral
-1.0dBi
3.0V DC (1.5V x 2 "AAA" Size Batteries)
3.0V



Report No.: SZEM120800482601

Page: 5 of 43

Operation F	Operation Frequency each of channel						
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz
3	2406MHz	13	2426MHz	23	2446MHz	33	2466MHz
4	2408MHz	14	2428MHz	24	2448MHz	34	2468MHz
5	2410MHz	15	2430MHz	25	2450MHz	35	2470MHz
6	2412MHz	16	2432MHz	26	2452MHz	36	2472MHz
7	2414MHz	17	2434MHz	27	2454MHz	37	2474MHz
8	2416MHz	18	2436MHz	28	2456MHz	38	2476MHz
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2440MHz
The Highest channel	2480MHz



Report No.: SZEM120800482601

Page: 6 of 43

4.3 Test Environment

Operating Environment:		
Temperature:	26.0 °C	
Humidity:	56 % RH	
Atmospheric Pressure:	1002mbar	

4.4 Description of Support Units

The EUT has been tested independent unit.

4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.



Report No.: SZEM120800482601

Page: 7 of 43

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

VCCI

The 3m Semi-anechoic chamber, Full-anechoic Chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197, G-416, T-1153 and C-2383 respectively.

• FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

Industry Canada (IC)

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1.

4.7 Deviation from Standards

None.

4.8 Abnormalities from Standard Conditions

None.

4.9 Other Information Requested by the Customer

None.



Report No.: SZEM120800482601

Page: 8 of 43

4.10 Test Instruments List

RE i	RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)	
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2013-06-10	
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2013-05-17	
3	EMI Test software	AUDIX	E3	SEL0050	N/A	
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2012-10-29	
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2012-10-29	
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2012-10-29	
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2013-05-17	
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2012-11-26	
9	Coaxial cable	SGS	N/A	SEL0027	2013-05-59	
10	Coaxial cable	SGS	N/A	SEL0189	2013-05-29	
11	Coaxial cable	SGS	N/A	SEL0121	2013-05-29	
12	Coaxial cable	SGS	N/A	SEL0178	2013-05-29	
13	Band filter	Amindeon	82346	SEL0094	2013-05-17	
14	Barometer	Chang Chun	DYM3	SEL0088	2013-05-24	
15	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2012-10-23	
16	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2012-10-27	
17	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2013-05-17	
18	Signal Generator	Rohde & Schwarz	SMY01	SEL0155	2012-10-23	
19	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2013-06-04	



Report No.: SZEM120800482601

Page: 9 of 43

RF c	RF connected test						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd))		
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2012-10-23		
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2012-10-27		
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2012-10-23		
4	Coaxial cable	SGS	N/A	SEL0178	2013-05-29		
5	Coaxial cable	SGS	N/A	SEL0179	2013-05-29		
6	Barometer	ChangChun	DYM3	SEL0088	2013-05-24		
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2013-05-17		
8	Band filter	amideon	82346	SEL0094	2013-05-17		
9	POWER METER	R&S	NRVS	SEL0144	2012-10-23		
10	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2013-05-17		
11	Power Divider(splitter)	Agilent Technologies	11636B	SEL0130	2012-11-29		



Report No.: SZEM120800482601

Page: 10 of 43

5 Test results and Measurement Data

5.1 Antenna Requirement

Standard requirement: 47 CFR Part 15C Section 15.203 /247(c)

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is -1.0 dBi.

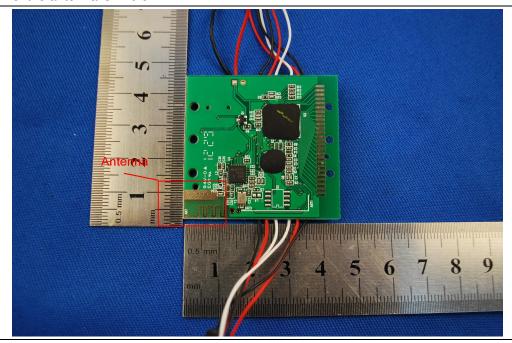






Report No.: SZEM120800482601

Page: 11 of 43

5.2 Conducted Peak Output Power

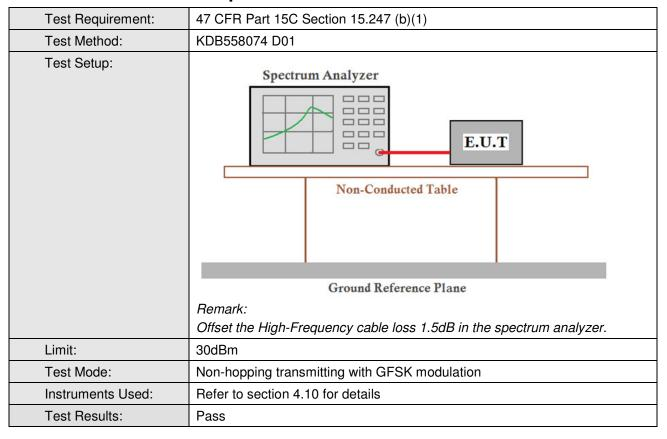

Measurement Data

GFSK mode				
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result	
Lowest	1.15	30.00	Pass	
Middle	1.76	30.00	Pass	
Highest	1.69	30.00	Pass	




Report No.: SZEM120800482601


Page: 12 of 43

Test plot as follows:

Test mode: GFSK Test channel: Lowest

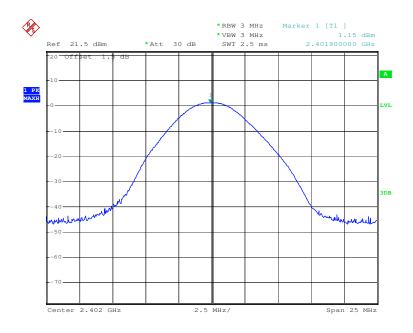



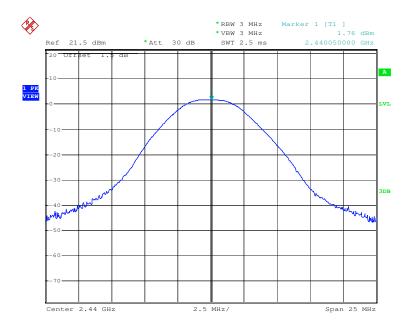




Report No.: SZEM120800482601

Page: 13 of 43

Test mode: GFSK Test channel: Highest

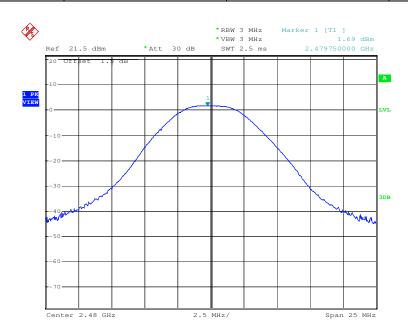




Report No.: SZEM120800482601

Page: 14 of 43

5.3 6dB Occupy Bandwidth

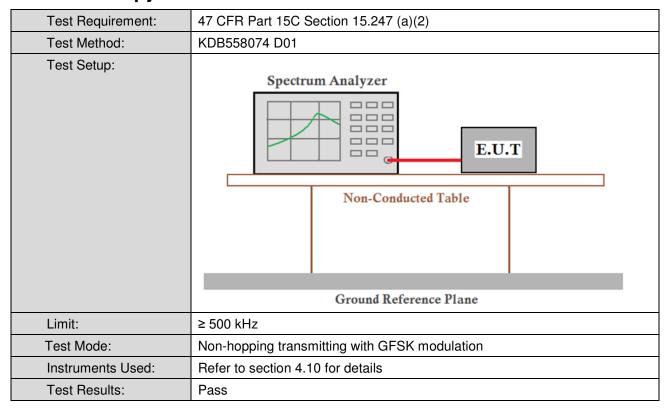

Measurement Data

Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result
Lowest	0.666	≥500	Pass
Middle	0.684	≥500	Pass
Highest	0.768	≥500	Pass




Report No.: SZEM120800482601


Page: 15 of 43

Test plot as follows:

Test mode: GFSK Test channel: Lowest

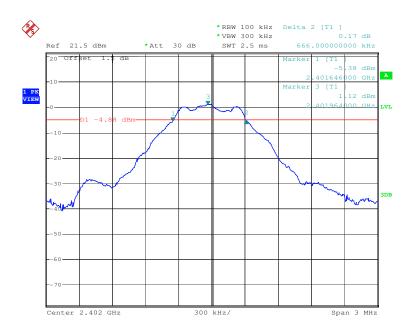



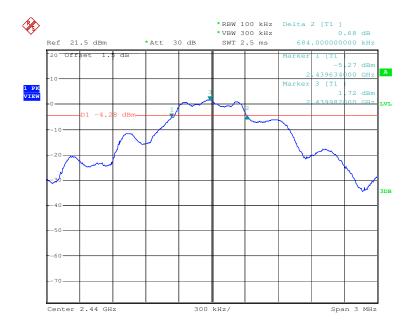




Report No.: SZEM120800482601

Page: 16 of 43

Test mode: GFSK Test channel: Highest

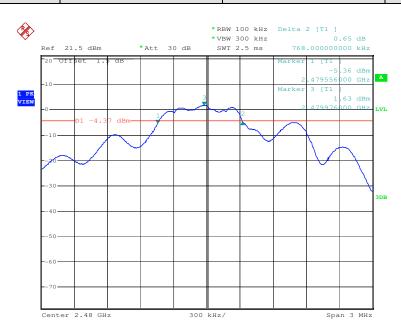




Report No.: SZEM120800482601

Page: 17 of 43

5.4 Power Spectral Density

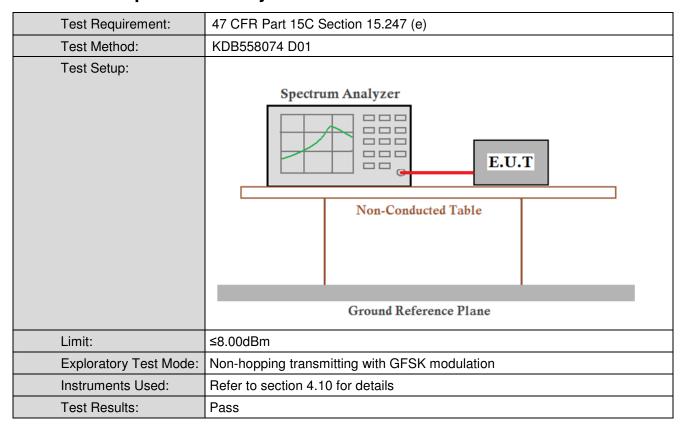

Measurement Data

GFSK mode					
Test channel	Power Spectral Density (dBm)	Limit (dBm)	Result		
Lowest	-13.99	≤8.00	Pass		
Middle	-13.53	≤8.00	Pass		
Highest	-13.55	≤8.00	Pass		

Remark:

Power Spectral Density=Power + BWCF BWCF=10log(3kHz/100kHz)=-15.2dB




Report No.: SZEM120800482601


Page: 18 of 43

Test plot as follows:

Test mode:	GFSK	Test channel:	Lowest
Tool mode.	ai oit	i cot chamici.	LOWCOL

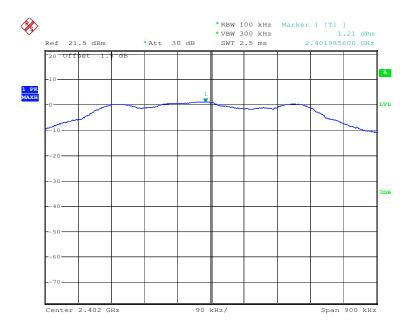

Test mode: GFSK Test channel: Middle

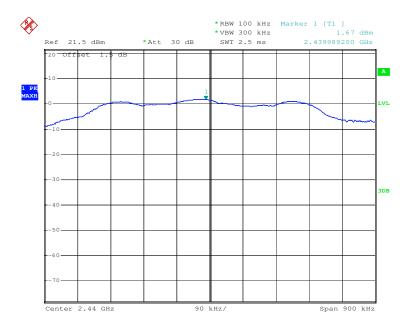




Report No.: SZEM120800482601

Page: 19 of 43

Test mode: GFSK Test channel: Highest

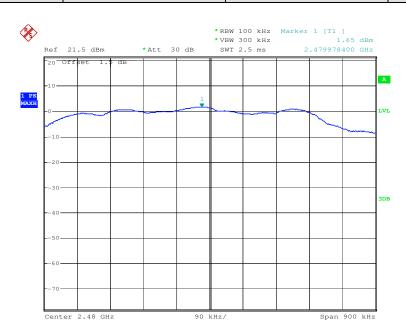




Report No.: SZEM120800482601

Page: 20 of 43

5.5 Band-edge for RF Conducted Emissions

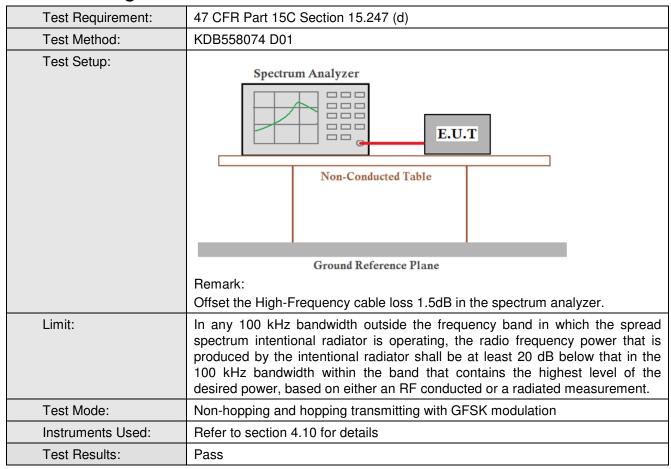






Report No.: SZEM120800482601


Page: 21 of 43

Test plot as follows:

Test mode: GFSK Test channel: Lowest

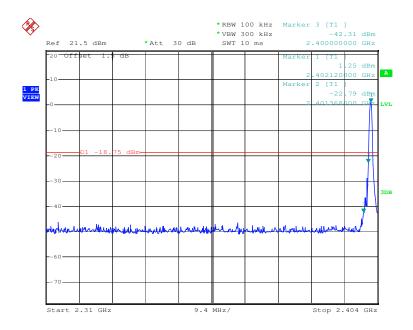

Test mode: GFSK Test channel: Highest

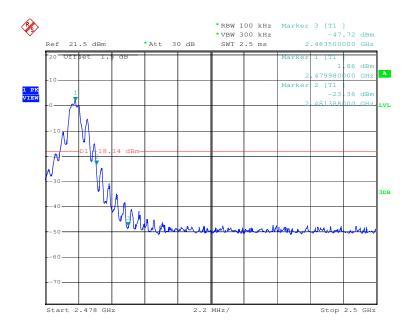



Report No.: SZEM120800482601

Page: 22 of 43

5.6 Spurious RF Conducted Emissions


Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	KDB558074 D01
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark:
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Mode:	Non-hopping transmitting with GFSK modulation
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass




Report No.: SZEM120800482601

Page: 23 of 43

Test mode: GFSK Test channel: Lowest

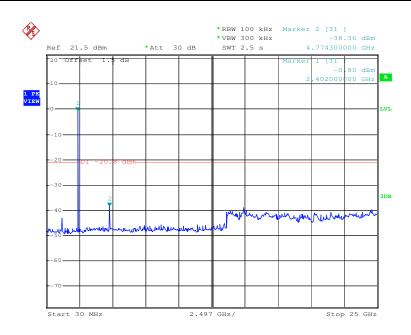

Test mode: GFSK Test channel: Middle

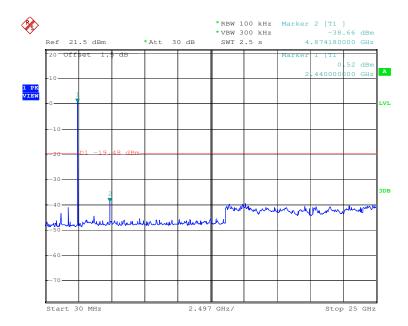




Report No.: SZEM120800482601

Page: 24 of 43

Test mode: GFSK Test channel: Highest

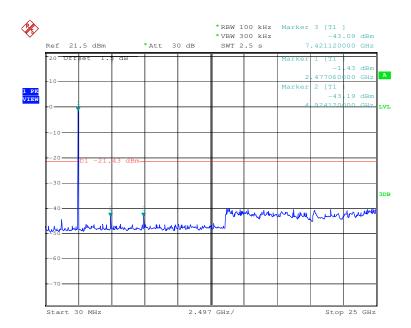



Report No.: SZEM120800482601

Page: 25 of 43

5.7 Pseudorandom Frequency Hopping Sequence


Test Requirement: 47 CFR Part 15C Section 15.247 (a)(1) requirement:

The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- · Number of shift register stages: 9
- Length of pseudo-random sequence: 29 -1 = 511 bits
- Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:



Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.



Report No.: SZEM120800482601

Page: 26 of 43


5.8 Radiated Spurious Emission

5.8.1 Spurious Emiss	sions									
Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205									
Test Method:	ANSI C63.10 2009									
Test Site:	Measurement Distance	: 3n	n (Semi-Anech	noic Cham	ber)					
Receiver Setup:	Frequency		Detector	RBW	VBW	Remark				
	0.009MHz-0.090MH	z	Peak	10kHz	z 30kHz	Peak				
	0.009MHz-0.090MH	z	Average	10kHz	z 30kHz	Average				
	0.090MHz-0.110MH	z	Quasi-peak	10kHz	z 30kHz	Quasi-peak				
	0.110MHz-0.490MH	z	Peak	10kHz	z 30kHz	Peak				
	0.110MHz-0.490MH	z	Average	10kHz	z 30kHz	Average				
	0.490MHz -30MHz		Quasi-peak	10kHz	z 30kHz	Quasi-peak				
	30MHz-1GHz		Quasi-peak	100 kH	Iz 300kHz	Quasi-peak				
	Above 1GHz		Peak	1MHz	3MHz	Peak				
	Above 1GHz		Peak	1MHz	10Hz	Average				
Limit:	Frequency		eld strength crovolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)				
	0.009MHz-0.490MHz	2	400/F(kHz)	-	-	300				
	0.490MHz-1.705MHz	24	4000/F(kHz)	-	-	30				
	1.705MHz-30MHz		30	-	-	30				
	30MHz-88MHz		100	40.0	Quasi-peak	3				
	88MHz-216MHz		150	43.5	Quasi-peak	3				
	216MHz-960MHz		200	46.0	Quasi-peak	3				
	960MHz-1GHz		500	54.0	Quasi-peak	3				
	Above 1GHz		500	54.0	Average	3				
	Note: 15.35(b), frequency emissions is limit applicable to the epeak emission level rad	20c quip	dB above the oment under to	maximum est. This p	permitted ave	erage emission				
Test Setup:			· · · · · · · · · · · · · · · · · · ·							



Report No.: SZEM120800482601

Page: 27 of 43



Antenna Tower

Antenna Tower

Ground Reference Plane

Test Receiver

Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz




Figure 3. Above 1 GHz

Test Procedure:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.



Report No.: SZEM120800482601

Page: 28 of 43


	g. Test the EUT in the lowest channel (2402MHz),the middle channel (2440MHz),the Highest channel (2480MHz)
	h. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.
	i. Repeat above procedures until all frequencies measured was complete.
Test Mode:	Non-hopping transmitting mode with GFSK modulation
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass



Report No.: SZEM120800482601

Page: 29 of 43

Radiated Emission below 1GHz						
30MHz~1GHz (QP)						
Test mode:	Transmitting	Vertical				

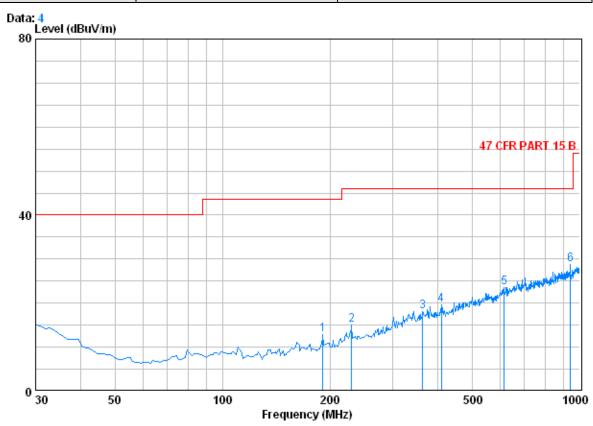

Condition : 47 CFR PART 15 B 3m 3142C VERTICAL

Job No. : 4826RF Mode : Tx


		Cablei	lntenna	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	191.020	1.39	10.11	26.73	28.02	12.78	43.50	-30.72
2	229.820	1.57	11.64	26.59	28.38	15.00	46.00	-31.00
3	362.710	2.10	15.72	26.89	27.18	18.11	46.00	-27.89
4	409.270	2.24	16.34	27.19	28.13	19.52	46.00	-26.48
5	613.940	2.73	20.18	27.52	28.22	23.61	46.00	-22.39
6 0	940.830	3.64	23.30	26.58	28.45	28.81	46.00	-17.19



Report No.: SZEM120800482601

Page: 30 of 43


Test mode:	Transmitting	Horizontal
10011110001	i ranoming	1 10112011tal

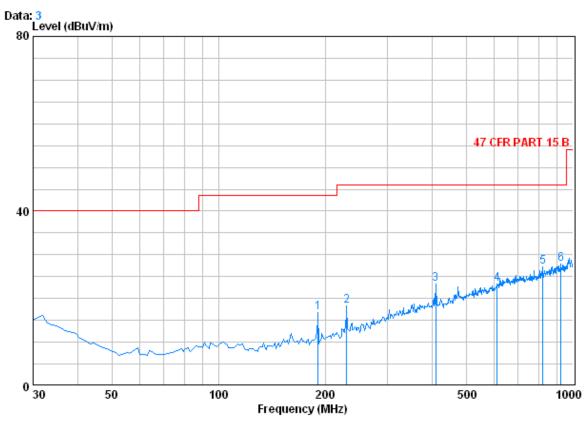

Condition : 47 CFR PART 15 B 3m 3142C HORIZONTAL

Job No. : 4826RF Mode : Tx

		CableA	ntenna	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	\mathtt{MHz}	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	191.020	1.39	10.11	26.73	31.98	16.74	43.50	-26.76
2	229.820	1.57	11.64	26.59	31.63	18.25	46.00	-27.75
3	409.270	2.24	16.34	27.19	31.86	23.25	46.00	-22.75
4	610.060	2.72	20.05	27.53	28.01	23.26	46.00	-22.74
5	820.550	3.30	22.33	27.20	28.78	27.20	46.00	-18.80
6	924.340	3.63	23.30	26.64	27.57	27.85	46.00	-18.15

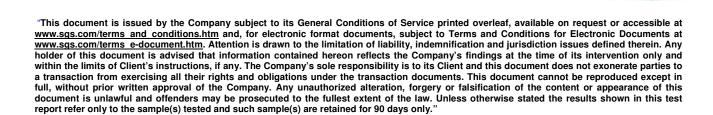



Report No.: SZEM120800482601

Page: 31 of 43

Transmitter Emission above 1GHz **GFSK** Test mode: Test channel: Lowest Remark: Peak Cable Antenna Preamp Over Read Limit Line Frequency Level Loss Factor Factor Level Limit Polarization (dBuV/m) (MHz) (dBuV/m) (dB) (dB/m) (dB) (dBuV) (dB) 1257.465 2.36 27.67 74 -27.94 39.25 55.28 46.06 Vertical 3700.260 3.91 33.45 40.81 47.16 74 -26.84 Vertical 50.61 4804.000 4.69 34.70 54.47 52.23 74 -21.77 Vertical 41.63 74 5.77 35.88 51.91 -22.09 Vertical 7206.000 39.87 50.13 9608.000 5.99 37.30 37.80 51.04 56.53 74 -17.47 Vertical 74 11486.410 6.34 38.40 38.06 48.92 55.60 -18.40 Vertical 1185.958 2.32 27.54 39.22 54.60 45.24 74 -28.76 Horizontal 3598.087 3.82 33.32 40.74 50.19 46.59 74 -27.41 Horizontal 74 4.69 34.70 56.05 53.81 -20.19Horizontal 4804.000 41.63 74 7206.000 5.77 35.88 39.87 54.05 55.83 -18.17 Horizontal 74 7961.425 6.21 36.00 53.65 -20.35 Horizontal 39.23 50.67 5.99 74 37.30 37.80 51.51 57.00 -17.00 Horizontal 9608.000

Test mode:	GI	FSK	Test c	hannel:	Lowest	Rema	rk:	Average
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1185.958	2.32	27.54	39.22	46.91	37.55	54	-16.45	Vertical
3598.087	3.82	33.32	40.74	42.39	38.79	54	-15.21	Vertical
4804.000	4.69	34.70	41.63	50.20	47.96	54	-6.04	Vertical
7206.000	5.77	35.88	39.87	45.16	46.94	54	-7.06	Vertical
7961.425	6.21	36.00	39.23	43.19	46.17	54	-7.83	Vertical
9608.000	5.99	37.30	37.80	42.64	48.13	54	-5.87	Vertical
1257.465	2.36	27.67	39.25	43.18	33.96	54	-20.04	Horizontal
3700.260	3.91	33.45	40.81	42.19	38.74	54	-15.26	Horizontal
4804.000	4.69	34.70	41.63	49.37	47.13	54	-6.87	Horizontal
7206.000	5.77	35.88	39.87	42.06	43.84	54	-10.16	Horizontal
9608.000	5.99	37.30	37.80	40.32	45.81	54	-8.19	Horizontal
11486.410	6.34	38.40	38.06	39.61	46.29	54	-7.71	Horizontal



Report No.: SZEM120800482601

Page: 32 of 43

Test mode:	est mode:		Test channel:		nnel: Middle		mark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line	l limit	Polarization
1464.963	2.49	28.04	39.33	56.87	48.07	74	-25.93	Vertical
3598.087	3.82	33.32	40.74	51.07	47.47	74	-26.53	Vertical
4880.000	4.72	34.59	41.68	62.57	60.20	74	-13.80	Vertical
7320.000	5.92	35.93	39.77	53.09	55.17	74	-18.83	Vertical
10243.220	6.03	38.00	37.54	48.07	54.56	74	-19.44	Vertical
12334.980	6.55	39.24	38.42	49.22	56.59	74	-17.41	Vertical
1464.963	2.49	28.04	39.33	55.19	46.39	74	-27.61	Horizontal
3003.173	3.32	33.40	40.30	49.45	45.87	74	-28.13	Horizontal
4880.000	4.72	34.59	41.68	63.14	60.77	74	-13.23	Horizontal
7319.964	5.92	35.93	39.77	54.38	56.46	74	-17.54	Horizontal
10139.450	6.01	37.88	37.51	48.29	54.67	74	-19.33	Horizontal
11692.920	6.39	38.59	38.15	48.95	55.78	74	-18.22	Horizontal

Test mode:		GFSK	Tes	t channel:	Middle	Rem	nark:	Average
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1464.963	2.49	28.04	39.33	43.17	34.37	54	-19.63	Vertical
3598.087	3.82	33.32	40.74	42.19	38.59	54	-15.41	Vertical
4880.000	4.72	34.59	41.68	52.07	49.70	54	-4.30	Vertical
7320.000	5.92	35.93	39.77	43.45	45.53	54	-8.47	Vertical
10243.220	6.03	38.00	37.54	39.61	46.10	54	-7.90	Vertical
12334.980	6.55	39.24	38.42	36.55	43.92	54	-10.08	Vertical
1464.963	2.49	28.04	39.33	43.18	34.38	54	-19.62	Horizontal
3003.173	3.32	33.40	40.30	39.75	36.17	54	-17.83	Horizontal
4880.000	4.72	34.59	41.68	53.30	50.93	54	-3.07	Horizontal
7320.000	5.92	35.93	39.77	46.32	48.40	54	-5.60	Horizontal
10139.450	6.01	37.88	37.51	36.19	42.57	54	-11.43	Horizontal
11692.920	6.39	38.59	38.15	37.46	44.29	54	-9.71	Horizontal



Report No.: SZEM120800482601

Page: 33 of 43

Test mode:		GFSK	Tes	t channel:	Highest	Remark:		Highest Re		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line	I I imit	Polarization		
1257.465	3.68	27.67	39.25	54.47	46.57	74	-27.43	Vertical		
1406.496	3.81	27.94	39.31	54.04	46.48	74	-27.52	Vertical		
3112.129	5.22	33.36	40.38	49.94	48.14	74	-25.86	Vertical		
4960.000	7.53	34.46	41.74	53.74	53.99	74	-20.01	Vertical		
7440.000	9.01	35.98	39.67	50.11	55.43	74	-18.57	Vertical		
11027.980	10.59	38.49	37.88	48.30	59.50	74	-14.50	Vertical		
1464.963	3.86	28.04	39.33	53.32	45.89	74	-28.11	Horizontal		
3634.910	5.95	33.37	40.77	48.80	47.35	74	-26.65	Horizontal		
4960.000	7.53	34.46	41.74	54.96	55.21	74	-18.79	Horizontal		
7440.000	9.01	35.98	39.67	49.59	54.91	74	-19.09	Horizontal		
10480.590	10.19	38.28	37.65	47.35	58.17	74	-15.83	Horizontal		
12055.600	11.31	38.95	38.30	48.47	60.43	74	-13.57	Horizontal		

Test mode:		GFSK Test channel: Highest Rem		nark:	Average			
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1257.465	3.68	27.67	39.25	46.92	39.02	54	-14.98	Vertical
1406.496	3.81	27.94	39.31	42.18	34.62	54	-19.38	Vertical
3112.129	5.22	33.36	40.38	35.61	33.81	54	-20.19	Vertical
4960.000	7.53	34.46	41.74	49.48	49.73	54	-4.27	Vertical
7440.000	9.01	35.98	39.67	39.46	44.78	54	-9.22	Vertical
11027.980	10.59	38.49	37.88	36.72	47.92	54	-6.08	Vertical
1464.963	3.86	28.04	39.33	42.18	34.75	54	-19.25	Horizontal
3634.910	5.95	33.37	40.77	36.75	35.30	54	-18.70	Horizontal
4960.000	7.53	34.46	41.74	50.63	50.88	54	-3.12	Horizontal
7440.000	9.01	35.98	39.67	36.71	42.03	54	-11.97	Horizontal
10480.590	10.19	38.28	37.65	32.65	43.47	54	-10.53	Horizontal
12055.600	11.31	38.95	38.30	34.96	46.92	54	-7.08	Horizontal

Remark

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
 - Final Test Level =Receiver Reading + Antenna Factor + Cable Factor Preamplifier Factor
- 2) The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.




Report No.: SZEM120800482601

Page: 34 of 43

5.9 Band edge (Radiated Emission)

Test Requirement:	47 CFR Part 15C Section 15	5.209 and 15.205	
Test Method:	ANSI C63.10 2009		
Test Site:	Measurement Distance: 3m	(Semi-Anechoic Chambe	r)
Limit:	Frequency	Limit (dBuV/m @3m)	Remark
	30MHz-88MHz	40.0	Quasi-peak Value
	88MHz-216MHz	43.5	Quasi-peak Value
	216MHz-960MHz	46.0	Quasi-peak Value
	960MHz-1GHz	54.0	Quasi-peak Value
	Above 1GHz	54.0	Average Value
	Above IGHZ	74.0	Peak Value
		•	
Test Setup:			






Figure 1. 30MHz to 1GHz

Figure 2. Above 1 GHz

Test Procedure:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot.



Report No.: SZEM120800482601

Page: 35 of 43

	Repeat for each power and modulation for lowest and highest channel g. Test the EUT in the lowest channel, the Highest channel h. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report. i. Repeat above procedures until all frequencies measured was complete.
Test Mode:	Non-hopping transmitting mode with GFSK modulation
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass




Report No.: SZEM120800482601

Page: 36 of 43

Test plot as follows:

Band edge (Radiate	Band edge (Radiated Emission)								
Test mode:	GFSK	Test channel:	Lowest	Remark:	Peak	Vertical			

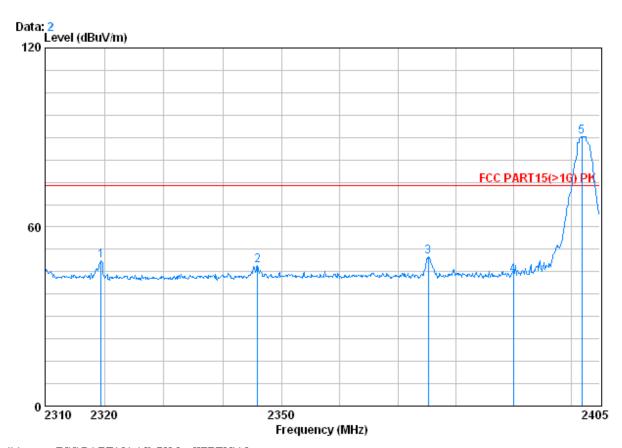

Condition : FCC PART15(>1G) PK 3m VERTICAL

Job No. : 4826RF

Mode : 2402 bandedge


		Frea		Antenna	Preamp Factor	Read		Limit	Over
		rreq	LUSS	ractor	ractor	rever	rever	Line	LIMIC
		MHz	dB	dB/m	dB	dBuV	$\overline{\text{dBuV/m}}$	dBuV/m	dB
1		2319.405	2.96	32.39	39.79	53.11	48.66	74.00	-25.34
2		2345.910	2.96	32.42	39.82	51.56	47.12	74.00	-26.88
3		2375.265	2.98	32.48	39.84	54.47	50.09	74.00	-23.91
4		2390.000	2.98	32.51	39.85	48.03	43.68	74.00	-30.32
5	X	2401.865	2.98	32.51	39.86	94.68	90.31	74.00	16.31



Report No.: SZEM120800482601

Page: 37 of 43

Test mode:	GFSK	Test channel:	Lowest	Remark:	Peak	Horizontal
Tool Ilload.	GI OIX	i oot onamion.		i tomant.	1 Ouit	i ionzontai

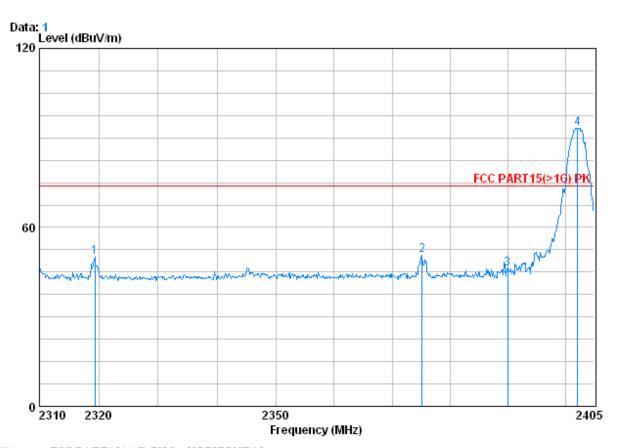

Condition : FCC PART15(>1G) PK 3m HORIZONTAL

Job No. : 4826RF

Mode : 2402 bandedge


			Cablei	Antenna	Preamp	Read		Limit	Over
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1		2319.310	2.96	32.39	39.79	54.38	49.93	74.00	-24.07
2		2375.170	2.98	32.48	39.84	55.08	50.70	74.00	-23.30
3		2390.000	2.98	32.51	39.85	50.60	46.24	74.00	-27.76
4	X	2402.150	2.98	32.51	39.86	97.62	93.26	74.00	19.26



Report No.: SZEM120800482601

Page: 38 of 43

Test mode:	GFSK	Test channel:	Lowest	Remark:	Average	Vertical
Tool Illoud.	ai oi c	i cot oriaririor.	LOWCSI	i tomant.	rivolago	VCItiOai

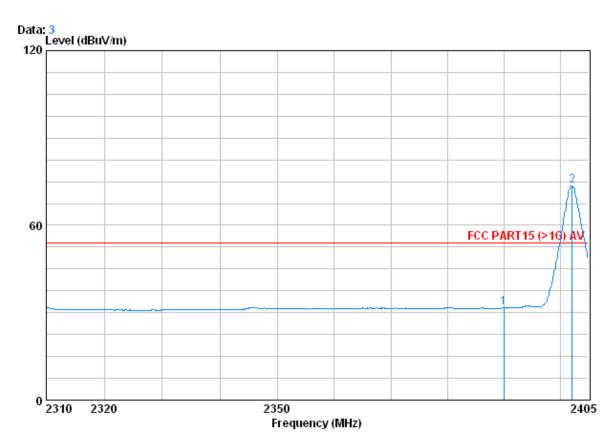

Condition : FCC PART15 (>1G) AV 3m VERTICAL

Job No. : 4826RF

Mode : 2402 bandedge


			Cablei	Antenna	Preamp	Read		Limit	Over
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1		2390.000	2.98	32.51	39.85	35.98	31.62	54.00	-22.38
2	X	2402.150	2.98	32.51	39.86	77.97	73.60	54.00	19.60



Report No.: SZEM120800482601

Page: 39 of 43

Test mode: GFSK Test channel: Lowest Remark: Average	Test mode:	GFSK	Test channel:	Lowest	Remark:	Average	Horizontal
--	------------	------	---------------	--------	---------	---------	------------

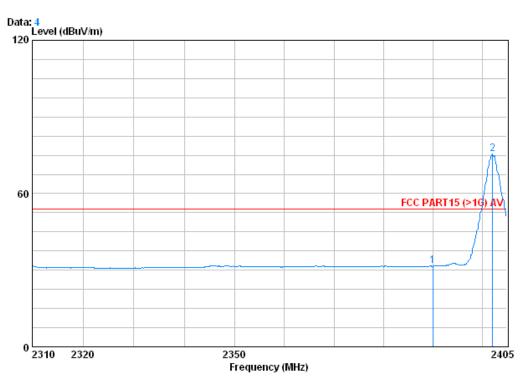

Condition : FCC PART15 (>1G) AV 3m HORIZONTAL

Job No. : 4826RF Mode : 2402 bandedge


	Freq				Read Level Level				
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	2.98	32.51	39.85	35.93	31.58	54.00	-22.42	
2 0	2402.150	2.98	32.51	39.86	79.76	75.39	54.00	21.39	



Report No.: SZEM120800482601

Page: 40 of 43

Test mode:	GFSK	Test channel:	Highest	Remark:	Peak	Vertical
			9			

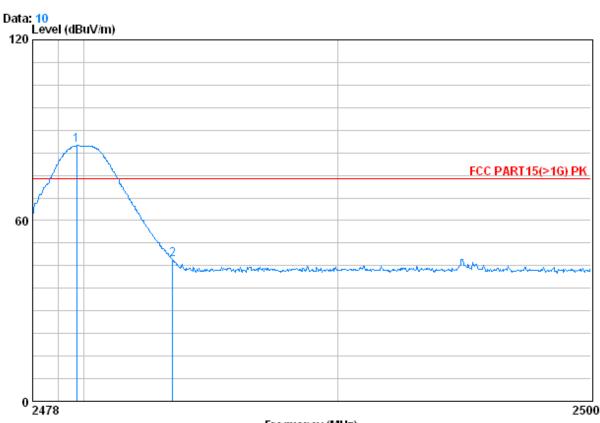

Frequency (MHz)

Condition : FCC PART15(>1G) PK 3m VERTICAL

Job No. : 4826RF

Mode : 2480 bandedge

		Cable	Antenna	Preamp	Read		Limit	Over	
	Freq	Freq Loss Factor		Factor Level		Level Line		Limit	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 X	2479.738	3.03	32.67	39.92	89.10	84.88	74.00	10.88	
2	2483.500	3.03	32.67	39.92	51.42	47.20	74.00	-26.80	






Report No.: SZEM120800482601

Page: 41 of 43

Test mode:	GFSK	Test channel:	Highest	Remark:	Peak	Horizontal
Tool Illoud.	ai oit	i cot oriaririor.	riigiicat	i tomant.	i can	Honzontai

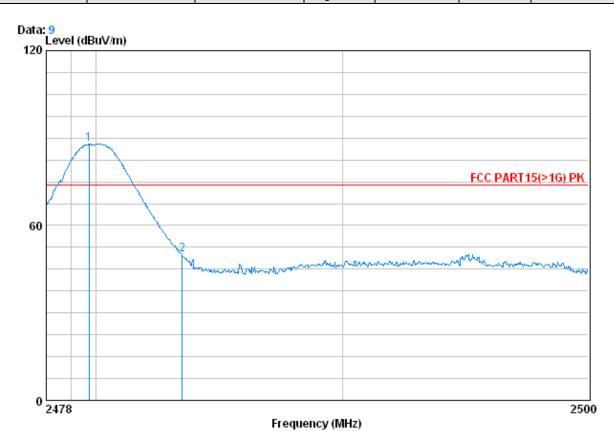

Condition : FCC PART15(>1G) PK 3m HORIZONTAL

Job No. : 4826RF

Mode : 2480 bandedge


	Freq			Preamp Factor			Limit Line	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 X	2479.738 2483.500			39.92 39.92				



Report No.: SZEM120800482601

Page: 42 of 43

Test mode:	GFSK	Test channel:	Highest	Remark:	Average	Vertical

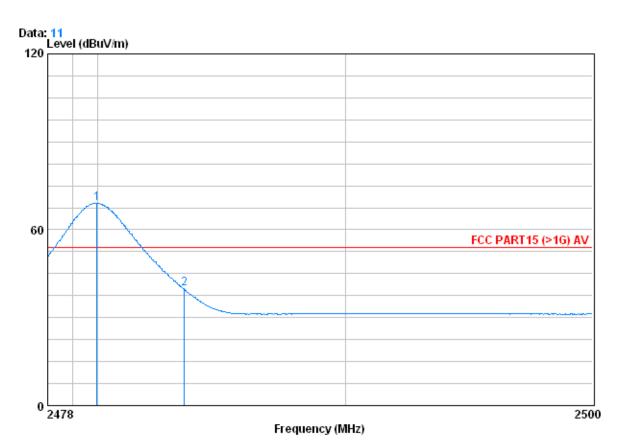

Condition : FCC PART15 (>1G) AV 3m VERTICAL

Job No. : 4826RF

Mode : 2480 bandedge


		Freq	CableAntenna Loss Factor		•					
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	X	2479.980	3.03	32.67	39.92	73.32	69.10	54.00	15.10	
2		2483.500	3.03	32.67	39.92	43.95	39.73	54.00	-14.27	



Report No.: SZEM120800482601

Page: 43 of 43

Test mode:	GFSK	Test channel:	Highest	Remark:	Average	Horizontal
Tool Illoud.	ai oit	i cot oriaririor.	riigiicat	i tomant.	rivolago	i ionzontai

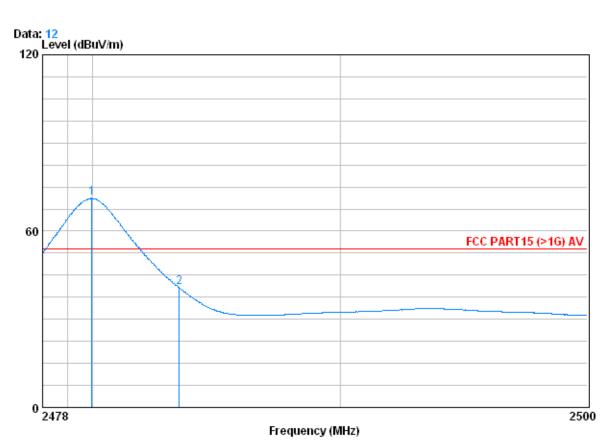

Condition : FCC PART15 (>1G) AV 3m HORIZONTAL

Job No. : 4826RF

Mode : 2480 bandedge

		Cable	Antenna	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
2	2479.980	3.03	32.67	39.92	75.38	71.16	54.00	17.16
2	2483.500	3.03	32.67	39.92	45.00	40.78	54.00	-13.22

Note:

1 @ 2

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor