



FCC Part 15.247

TEST REPORT

For

CC&C Technologies, Inc.

8F, No.150, Jian Yi Rd, Zhonghe District, New Taipei City, 235, Taiwan

FCC ID: PANBM52840

Report Type: Original Report	Product Type: BT5.0 Module
Report Producer: Kaylee Chiang	<i>Kaylee Chiang</i>
Report Number: RTWB171220001-00A	
Report Date: 2018-02-26	
Reviewed By: Jerry Chang	<i>Jerry Chang</i>
Bay Area Compliance Laboratories Corp.(Taiwan) 70, Lane 169, Sec. 2, Datong Road, Xizhi Dist., New Taipei City 22183, Taiwan, R.O.C. Tel: +886 (2) 2647 6898 Fax: +886 (2) 2647 6895 www.bacl.com.tw	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Taiwan)

REVISION HISTORY

Revision	No.	Report Number	Issue Date	Description	Author/ Revised by
1.0	RTWB171220001	RTWB171220001-00A	2018.02.26	Original Report	Kaylee

TABLE OF CONTENTS

1	GENERAL INFORMATION.....	5
1.1	PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2	OBJECTIVE.....	5
1.3	RELATED SUBMITTAL(S)/GRANT(S)	6
1.4	TEST METHODOLOGY	6
1.5	TEST FACILITY	6
2	SYSTEM TEST CONFIGURATION.....	7
2.1	DESCRIPTION OF TEST CONFIGURATION	7
2.2	EQUIPMENT MODIFICATIONS	7
2.3	EUT EXERCISE SOFTWARE.....	7
2.4	SUPPORT EQUIPMENT LIST AND DETAILS	7
2.5	EXTERNAL CABLE LIST AND DETAILS	7
2.6	BLOCK DIAGRAM OF TEST SETUP.....	8
2.7	DUTY CYCLE	10
3	SUMMARY OF TEST RESULTS	12
4	FCC §15.247(I) & 2.1093 - RF EXPOSURE	13
4.1	APPLICABLE STANDARD	13
4.2	RF EXPOSURE EVALUATION RESULT	13
5	FCC §15.203 – ANTENNA REQUIREMENTS.....	14
5.1	APPLICABLE STANDARD	14
5.2	ANTENNA LIST AND DETAILS	14
6	FCC §15.207 - AC LINE CONDUCTED EMISSIONS.....	15
6.1	APPLICABLE STANDARD	15
6.2	MEASUREMENT UNCERTAINTY	15
6.3	EUT SETUP.....	15
6.4	EMI TEST RECEIVER SETUP	16
6.5	TEST PROCEDURE	16
6.6	CORRECTED FACTOR & MARGIN CALCULATION	16
6.7	TEST EQUIPMENT LIST AND DETAILS	16
6.8	TEST ENVIRONMENTAL CONDITIONS.....	17
6.9	TEST RESULTS	17
7	FCC §15.209, §15.205, §15.247(D) – SPURIOUS EMISSIONS.....	20
7.1	APPLICABLE STANDARD	20
7.2	MEASUREMENT UNCERTAINTY	21
7.3	EUT SETUP.....	21
7.4	EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	22
7.5	TEST PROCEDURE	22
7.6	CORRECTED FACTOR & MARGIN CALCULATION	23
7.7	TEST RESULTS SUMMARY	23
7.8	TEST EQUIPMENT LIST AND DETAILS	24
7.9	TEST ENVIRONMENTAL CONDITIONS.....	24
7.10	TEST RESULTS	25
8	FCC §15.247(A)(2) – 6 DB EMISSION BANDWIDTH.....	37
8.1	APPLICABLE STANDARD	37
8.2	TEST PROCEDURE	37
8.3	TEST EQUIPMENT LIST AND DETAILS	37
8.4	TEST ENVIRONMENTAL CONDITIONS.....	37
8.5	TEST RESULTS	38
9	FCC §15.247(B)(3) – MAXIMUM OUTPUT POWER.....	42

9.1	APPLICABLE STANDARD	42
9.2	TEST PROCEDURE	42
9.3	TEST EQUIPMENT LIST AND DETAILS	42
9.4	TEST ENVIRONMENTAL CONDITIONS.....	43
9.5	TEST RESULTS	43
10	FCC §15.247(D) – 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE	44
10.1	APPLICABLE STANDARD	44
10.2	TEST PROCEDURE	44
10.3	TEST EQUIPMENT LIST AND DETAILS	44
10.4	TEST ENVIRONMENTAL CONDITIONS.....	44
10.5	TEST RESULTS	45
11	FCC §15.247(E) – POWER SPECTRAL DENSITY.....	48
11.1	APPLICABLE STANDARD	48
11.2	TEST PROCEDURE	48
11.3	TEST EQUIPMENT LIST AND DETAILS	48
11.4	TEST ENVIRONMENTAL CONDITIONS.....	48
11.5	TEST RESULTS	49

1 General Information

1.1 Product Description for Equipment Under Test (EUT)

Applicant:	CC&C Technologies, Inc. 8F, No.150, Jian Yi Rd, Zhonghe District, New Taipei City, 235, Taiwan
Manufacturer:	Kunshan CC&C Technologies, Co., LTD. No.9 Building, 3rd Main Street, Kunshan Free Trade Zone, JiangSu, China
Product:	BT5.0 Module
Model:	BM-52840
Trade Name:	CC&C
Frequency Range:	2402-2480 MHz
Transmit Power:	BLE Mode (1M): 5.92dBm BLE Mode (2M): 5.94dBm
Modulation Technique:	BLE Mode: GFSK
Transmit Data Rate:	BLE Mode: 1 Mbps BLE Mode: 2 Mbps
Number of Channels:	BLE Mode: 40 Channels
Antenna Specification:	Chip Antenna/Gain: 0 dBi
Voltage Range:	5Vdc
Date of Test:	Feb. 01, 2018 ~ Feb. 26, 2018

**All measurement and test data in this report was gathered from production sample serial number: 171220001 (Assigned by BACL, Taiwan). The EUT supplied by the applicant was received on 2017-12-20.*

1.2 Objective

This report is prepared on behalf of *CC&C Technologies, Inc.* in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communication Commission's rules.

The objective is to determine compliance with FCC Part 15.247 rules for Output Power, Antenna Requirements, 6 dB Bandwidth, Power spectral density, 100 kHz Bandwidth of Band Edges Measurement, Conducted and Radiated Spurious Emissions.

1.3 Related Submittal(s)/Grant(s)

N/A

1.4 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

KDB 558074 D01 DTS Meas Guidance v04

1.5 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Taiwan) to collect test data is located on
70, Lane 169, Sec. 2, Datong Road, Xizhi Dist., New Taipei City 22183, Taiwan, R.O.C.
68-3, Lane 169, Sec. 2, Datong Road, Xizhi Dist., New Taipei City 22183, Taiwan, R.O.C.

Bay Area Compliance Laboratories Corp. (Taiwan) Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 3180) and the FCC designation No.TW3180 under the Mutual Recognition Agreement (MRA) in FCC Test. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.10.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 974454. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

2 System Test Configuration

2.1 Description of Test Configuration

For BLE mode, there are totally 40 channels.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2402	21	2442
2	2404	--	--
3	2406	--	--
4	2408	38	2476
--	--	39	2478
20	2440	40	2480

EUT was tested with Channel 1, 20 and 40.

2.2 Equipment Modifications

No modification was made to the EUT

2.3 EUT Exercise Software

Used "hypertrm.exe" software.

Test Software Version		Engineering Mode		
Test Frequency		Low	Mid	High
Power Level Setting	BLE Mode(1M)	0	0	0
	BLE Mode(2M)	0	0	0

2.4 Support Equipment List and Details

Description	Manufacturer	Model Number	BSMI	FCC ID / DOC	S/N
NB	DELL	E6410	N/A	PD98260NGU	10912240367

2.5 External Cable List and Details


Cable Description	Length (m)	From	To
Mini USB Cable	1.5	NB	EUT

2.6 Block Diagram of Test Setup


See test photographs attached in Exhibit A for the actual connections between EUT and support equipment.

Radiation


Below 1GHz:

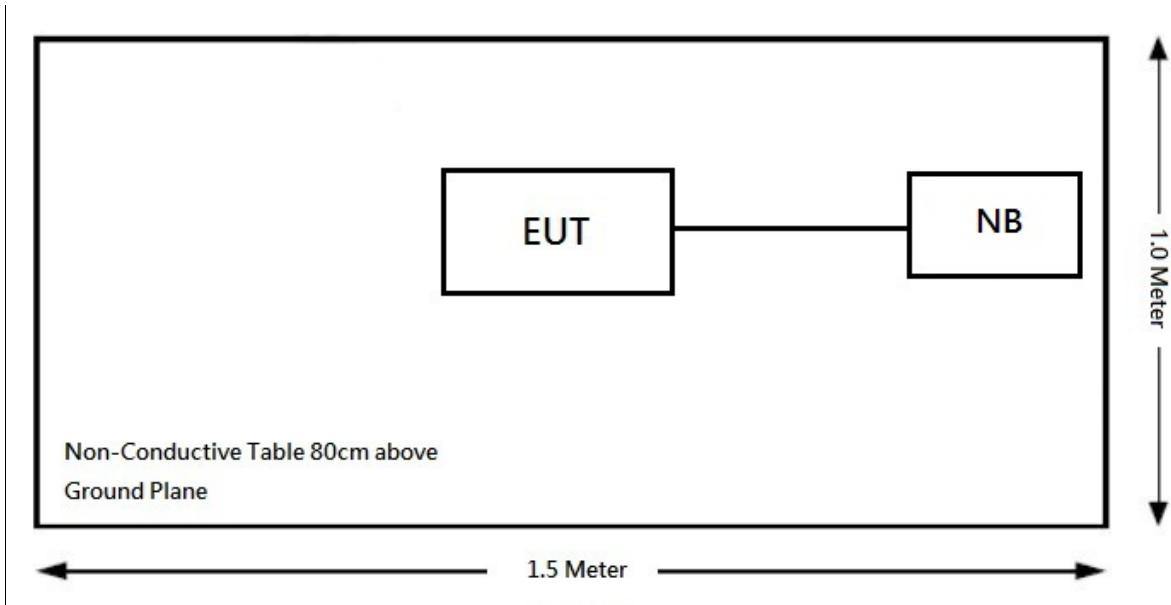

Above 1GHz:

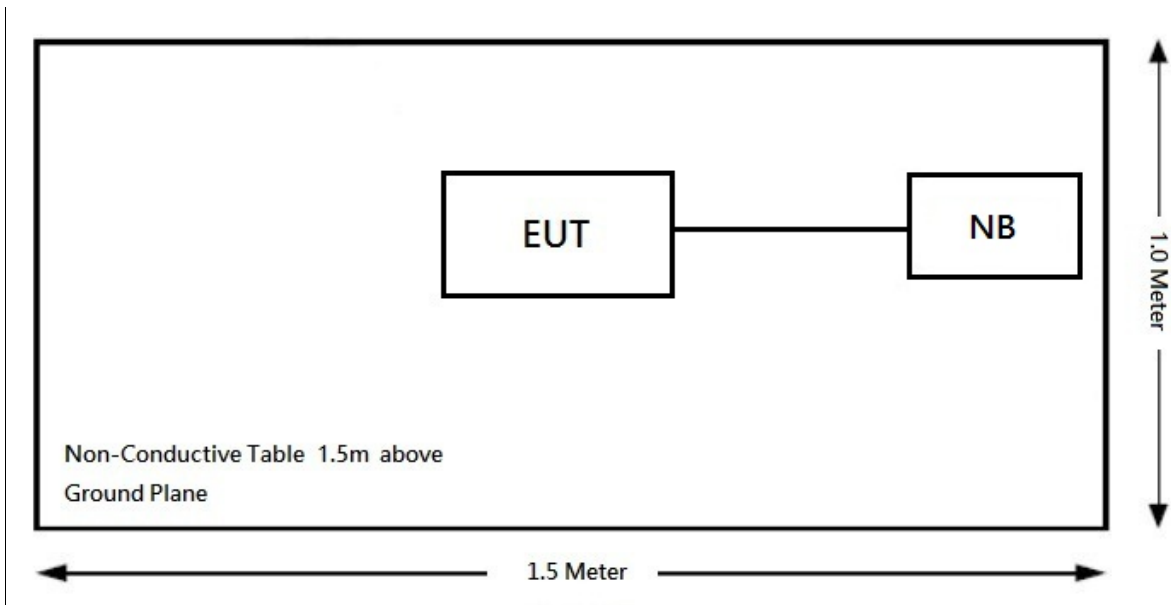

Conduction:

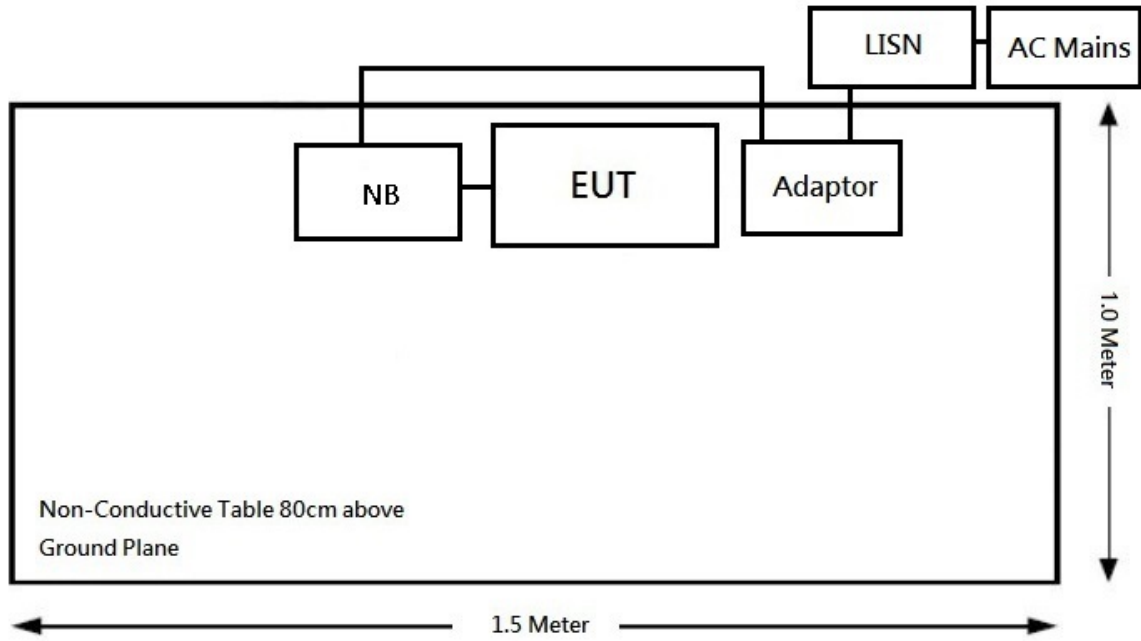

2.7 Duty Cycle

According to KDB 558074 D01 DTS Meas Guidance v04 section 6.0:


All measurements are to be performed with the EUT transmitting at 100% duty cycle at its maximum power control level; however, if 100% duty cycle cannot be achieved, measurements of duty cycle, x, and maximum power transmission duration, T, are required for each tested mode of operation.

Radio Mode	On Time (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)
BLE (1M)	1.058	1.178	89	0.51
BLE (2M)	1.055	1.179	89	0.51

Note: Duty Cycle Correction Factor = $10 \cdot \log(1/\text{duty cycle})$


Please refer to the following plots.

BLE Mode (1M)

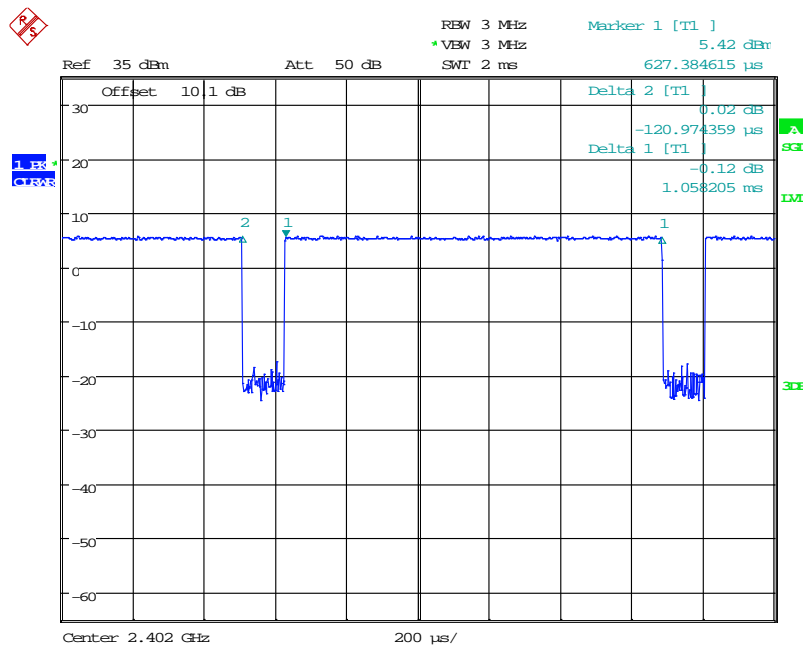

Date: 12.FEB.2018 15:15:59

BLE Mode (2M)

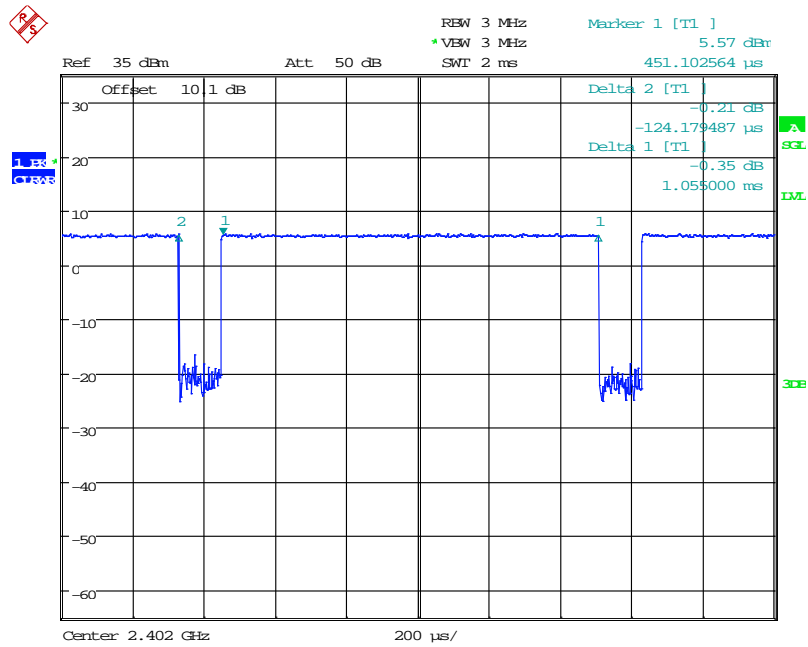

Date: 12.FEB.2018 15:17:41

3 Summary of Test Results

FCC Rules	Description of Test	Result
§15.247(i), §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247(a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Peak Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

4 FCC §15.247(i) & 2.1093 - RF Exposure

4.1 Applicable Standard

According to FCC §15.247(i)

Systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission’s guideline.

According to KDB 447498 D01 General RF Exposure Guidance, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances

≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot$

$[\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

1. f(GHz) is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

4.2 RF Exposure Evaluation Result

FCC

Worse case:

SAR evaluation:

Mode	Frequency (MHz)	Tunp-up Power		Evaluation Distance (mm)	SAR Excluion Result	Extremity SAR Exclusion Limit (1g SAR)
		(dBm)	(mW)			
BLE	2480	6.0	3.981	5	1.3	3

Result: SAR test is exempted.

5 FCC §15.203 – Antenna Requirements

5.1 Applicable Standard

According to § 15.203,

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna does not exceed 6 dBi

5.2 Antenna List and Details

Manufacturer	Antenna Type	Antenna Gain	Result
GainForce Technology Co.,Ltd	Chip Antenna	0 dBi	Compliance

The EUT has an internal antenna arrangement, which was permanently attached, fulfill the requirement of this section.

6 FCC §15.207 - AC Line Conducted Emissions

6.1 Applicable Standard

FCC §15.207


6.2 Measurement Uncertainty

Input quantities to be considered for conducted disturbance measurements maybe receiver reading, attenuation of the connection between LISN/ISN and receiver, LISN/ISN voltage division factor, LISN/ISN VDF frequency interpolation and receiver related input quantities, etc.

Based on CISPR 16-4-2:2011, the expended combined standard uncertainty of conducted disturbance test at Bay Area Compliance Laboratories Corp. (Taiwan) is shown as below. And the uncertainty will not be taken into consideration for the test data recorded in the report

Port	Expanded Measurement uncertainty
AC Mains	4.64 dB (k=2, 95% level of confidence)

6.3 EUT Setup

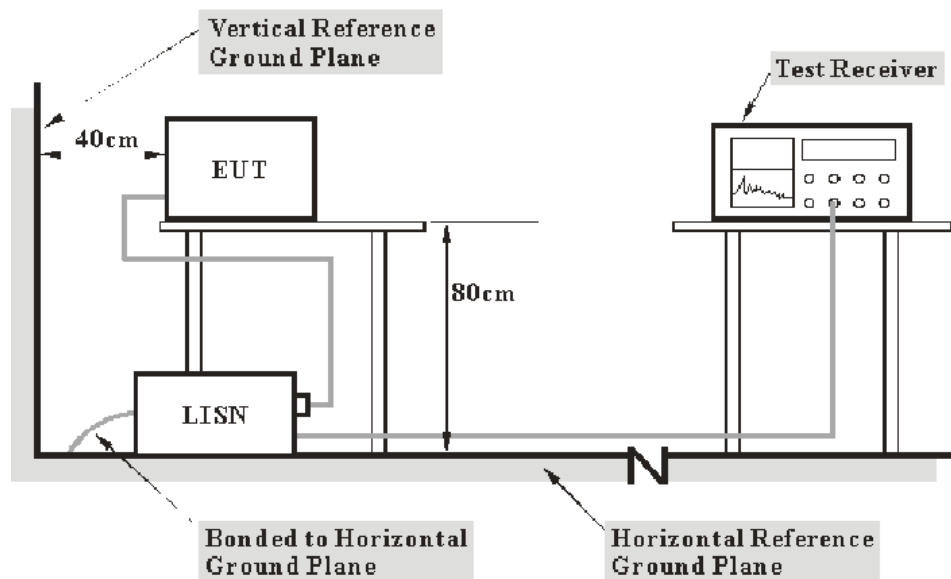

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

6.4 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz. During the conducted emission test, the EMI test receiver was set with the following configurations

Frequency Range	Receiver RBW
150 kHz - 30 MHz	9 kHz

6.5 Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN. Maximizing procedure was performed on the six (6) highest emissions of the EUT. All data was recorded in the Quasi-peak and average detection mode.

6.6 Corrected Factor & Margin Calculation

The factor is calculated by adding LISN/ISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “Over Limit” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over limit of -7 dB means the emission is 7 dB below the limit. The equation for Over Limit calculation is as follows:

$$\text{Over Limit} = \text{Level} - \text{Limit Line}$$

6.7 Test Equipment List and Details

Manufacturers	Descriptions	Models	Serial Numbers	Calibration Date	Calibration Due Date
LISN	Rohde & Schwarz	ENV216	101248	2017/07/20	2018/07/19
EMI Test Receiver	Rohde & Schwarz	ESR7	101419	2017/11/06	2018/11/05
Pulse Limiter	Rohde & Schwarz	ESH3Z2	TXZEM025	2017/08/10	2018/08/09
RF Cable	EMEC	EM-CB5D	001	2017/07/10	2018/07/09
Software	AUDIX	E3	V9.150826k	N.C.R	N.C.R

* **Statement of Traceability:** BACL Corp. attests that all calibrations have been performed according to TAF requirements, traceable to the ETC.

6.8 Test Environmental Conditions

Temperature:	25 °C
Relative Humidity:	58 %
ATM Pressure:	1010 hPa

The testing was performed by Tom Hsu on 2018-02-01.

6.9 Test Results


Please refer to the following plots and tables.

Test mode: Transmitting

Main: AC 120V/60 Hz, Line



倍科檢驗科技有限公司 Bay Area Compliance Labs Corp.

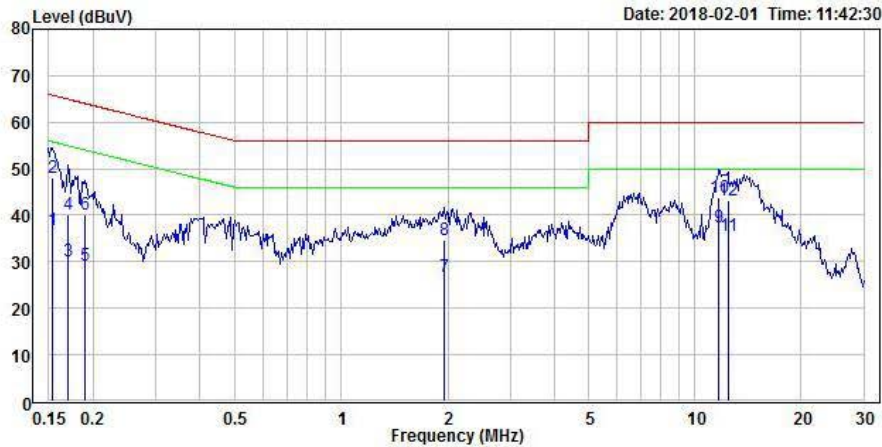

Condition: Line

EUT :

Model :

Note :


Power : 110V/60Hz

	Freq	Level	Limit	Over	Read		
	MHz	dBuV	Line	Limit	Factor	Level	Remark
			dBuV	dB	dB	dBuV	Pol/Phase
1	0.154	36.87	55.80	-18.93	19.50	17.37	Average Line
2	0.154	48.06	65.80	-17.74	19.50	28.56	QP Line
3	0.170	30.23	54.94	-24.71	19.50	10.73	Average Line
4	0.170	40.12	64.94	-24.82	19.50	20.62	QP Line
5	0.189	29.11	54.08	-24.97	19.50	9.61	Average Line
6	0.189	40.20	64.08	-23.88	19.50	20.70	QP Line
7	1.951	26.92	46.00	-19.08	19.58	7.34	Average Line
8	1.951	34.72	56.00	-21.28	19.58	15.14	QP Line
9	11.717	37.42	50.00	-12.58	19.77	17.65	Average Line
10	11.717	43.77	60.00	-16.23	19.77	24.00	QP Line
11	12.389	35.48	50.00	-14.52	19.79	15.69	Average Line
12	12.389	43.06	60.00	-16.94	19.79	23.27	QP Line

Main: AC 120V/60 Hz, Neutral



倍科檢驗科技有限公司 Bay Area Compliance Labs Corp.

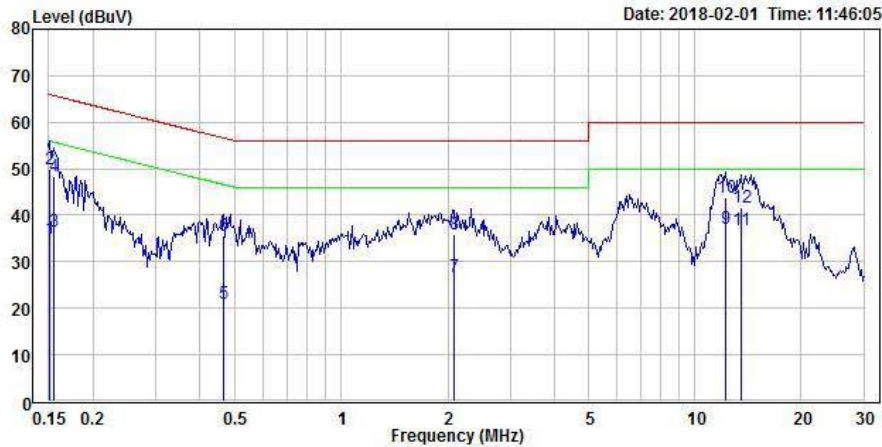

Condition: Neutral

EUT :
 Model :
 Note :
 Power : 110V/60Hz

	Freq	Level	Limit	Over	Read	Remark	Pol/Phase
	MHz	dBuV	Line	Limit	Factor	Level	
			dBuV	dB	dB	dBuV	
1	0.151	34.87	55.93	-21.06	19.63	15.24	Average Neutral
2	0.151	49.82	65.93	-16.11	19.63	30.19	QP Neutral
3	0.155	36.52	55.74	-19.22	19.63	16.89	Average Neutral
4	0.155	48.41	65.74	-17.33	19.63	28.78	QP Neutral
5	0.465	21.09	46.60	-25.51	19.64	1.45	Average Neutral
6	0.465	35.55	56.60	-21.05	19.64	15.91	QP Neutral
7	2.079	26.88	46.00	-19.12	19.72	7.16	Average Neutral
8	2.079	35.90	56.00	-20.10	19.72	16.18	QP Neutral
9	12.193	37.26	50.00	-12.74	19.93	17.33	Average Neutral
10	12.193	43.68	60.00	-16.32	19.93	23.75	QP Neutral
11	13.524	36.82	50.00	-13.18	19.96	16.86	Average Neutral
12	13.524	41.72	60.00	-18.28	19.96	21.76	QP Neutral

7 FCC §15.209, §15.205, §15.247(d) – Spurious Emissions

7.1 Applicable Standard

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz.

As Per FCC §15.205(a) except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	960 – 1240	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	1300 – 1427	5.35 – 5.46
2.1735 – 2.1905	25.5 – 25.67	1435 – 1626.5	7.25 – 7.75
4.125 – 4.128	37.5 – 38.25	1645.5 – 1646.5	8.025 – 8.5
4.17725 – 4.17775	73 – 74.6	1660 – 1710	9.0 – 9.2
4.20725 – 4.20775	74.8 – 75.2	1718.8 – 1722.2	9.3 – 9.5
6.215 – 6.218	108 – 121.94	2200 – 2300	10.6 – 12.7
6.26775 – 6.26825	123 – 138	2310 – 2390	13.25 – 13.4
6.31175 – 6.31225	149.9 – 150.05	2483.5 – 2500	14.47 – 14.5
8.291 – 8.294	156.52475 – 156.52525	2690 – 2900	15.35 – 16.2
8.362 – 8.366	156.7 – 156.9	3260 – 3267	17.7 – 21.4
8.37625 – 8.38675	162.0125 – 167.17	3.332 – 3.339	22.01 – 23.12
8.41425 – 8.41475	167.72 – 173.2	3 3458 – 3 358	23.6 – 24.0
12.29 – 12.293	240 – 285	3.600 – 4.400	31.2 – 31.8
12.51975 – 12.52025	322 – 335.4		36.43 – 36.5
12.57675 – 12.57725	399.9 – 410		Above 38.6
13.36 – 13.41	608 – 614		

As per FCC §15.209(a): Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

As per FCC §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.2 Measurement Uncertainty


All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-2:2011, the expended combined standard uncertainty of radiation emissions at Bay Area Compliance Laboratories Corp. (Taiwan) is shown in below table. And the uncertainty will not be taken into consideration for the test data recorded in the report.


Frequency	Measurement uncertainty
30 MHz~200 MHz	3.76 dB (k=2, 95% level of confidence)
200 MHz~1 GHz	4.12 dB (k=2, 95% level of confidence)
1 GHz~6 GHz	4.84 dB (k=2, 95% level of confidence)
6 GHz~18 GHz	5.16 dB (k=2, 95% level of confidence)
18 GHz~26 GHz	4.84 dB (k=2, 95% level of confidence)
26 GHz~40 GHz	4.30 dB (k=2, 95% level of confidence)

7.3 EUT Setup

Blow 1 GHz:

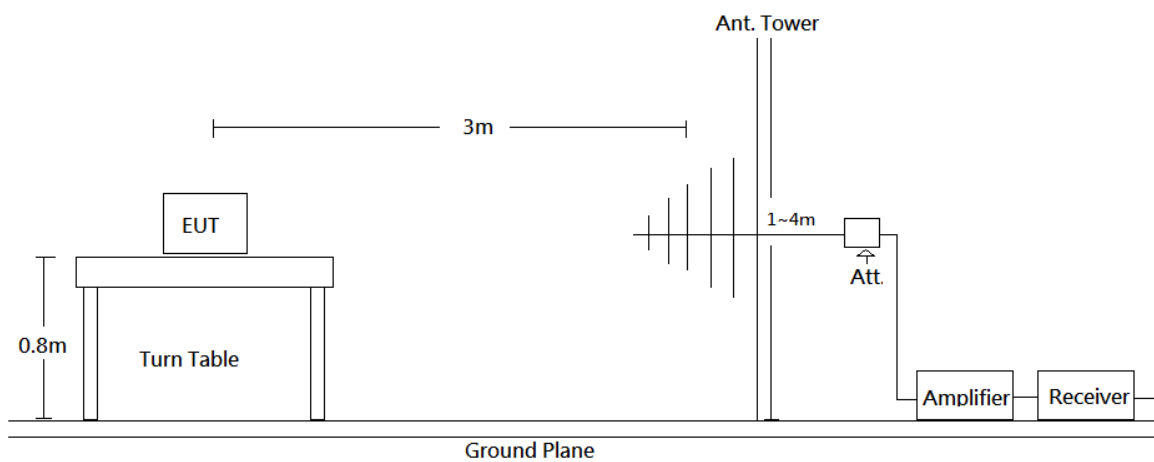

Above 1 GHz:

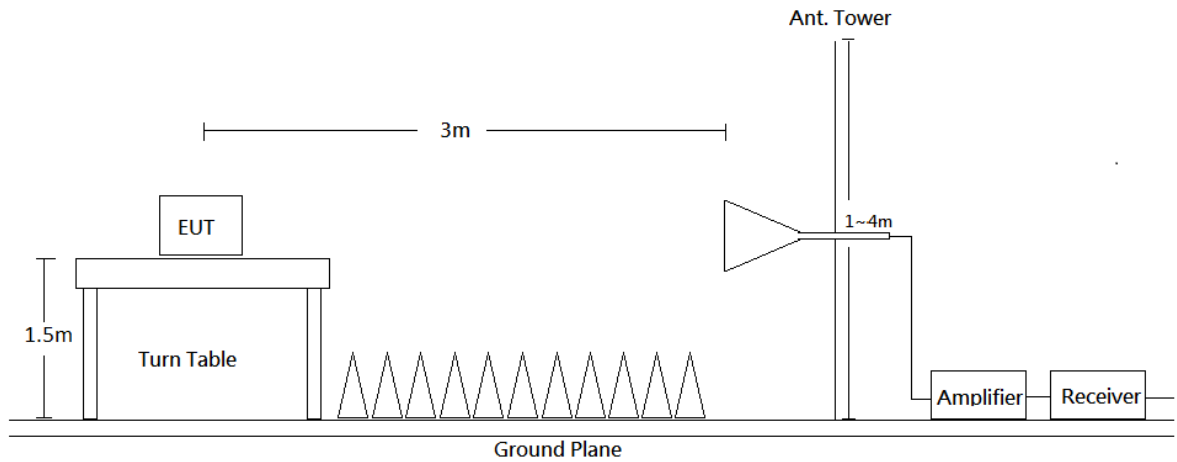

Radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC Part 15.209 and FCC 15.247 Limits.

7.4 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 26.5 GHz. During the radiated emission test, the EMI test receiver for below 1GHz and spectrum analyzer for above 1GHz was set with the following configurations measurement method 6.3 in ANSI C63.10.

Frequency Range	RBW	VBW	Detector	Duty cycle	Measurement method
30-1000 MHz	120 kHz	/	QP		QP
Above 1 GHz	1 MHz	3 MHz	PK		PK
	1 MHz	3 MHz	RMS	>98%	Ave
	1 MHz	1/T	PK	<98%	Ave

7.5 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detector mode from 30 MHz to 1 GHz and PK and average detector modes for frequencies above 1 GHz.

7.6 Corrected Factor & Margin Calculation

The Correct Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Correct Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Result} - \text{Limit}$$

7.7 Test Results Summary

According to the data in the following table, the EUT complied with the FCC §15.209 Limit. Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U(L_m) \leq L_{lim} + U_{cispr}$$

In BA CL, $U(L_m)$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

7.8 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due Date
966A Room					
Bilog Antenna	Sunol & Mini-Circuits	JB6/UNAT-6+	A050115/1554_2_01	2017/12/20	2018/12/19
Horn Antenna	EMCO	3115	9311-4158	2017/05/24	2018/05/23
Horn Antenna	ETS-Lindgren	3116	62638	2017/09/13	2018/09/12
Preamplifier	Sonoma	310N	130602	2017/07/03	2018/07/02
Preamplifier	EMEC	EM01G18G	60697	2017/04/14	2018/04/13
Preamplifier	EMEC	EM18G40G	060656	2018/01/15	2019/01/14
EMI Test Receiver	Rohde & Schwarz	ESR7	101419	2017/11/06	2018/11/05
Spectrum Analyzer	Rohde & Schwarz	FSV40	101203	2017/07/13	2018/07/12
Microflex Cable	UTIFLEX	UFB311A-Q-1440-300300	220490-006	2017/10/31	2018/10/30
Microflex Cable	UTIFLEX	UFA210A-1-3149-300300	MFR64639 226389-001	2017/11/10	2018/11/09
Microflex Cable	ROSNOL	K1K50-UP0264-K1K50-450CM	160309-1	2017/03/14	2018/03/13
Microflex Cable	ROSNOL	K1K50-UP0264-K1K50-80CM	160309-2	2018/01/17	2019/01/16
Turn Table	Champro	TT-2000	060772-T	N.C.R	N.C.R
Antenna Tower	Champro	AM-BS-4500-B	060772-A	N.C.R	N.C.R
Controller	Champro	EM1000	60772	N.C.R	N.C.R
Software	Farad	EZ EMC	BACL-03A1	N.C.R	N.C.R
Conducted Room					
Spectrum Analyzer	Rohde & Schwarz	FSU26	200268	2017/05/08	2018/05/07
Attenuator	MINI-CIRCUITS	BW-S10W5+	N/A	2017/03/16	2018/03/15
Cable	WOKEN	SFL402	S02-160323-07	2017/02/22	2018/02/21

***Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Taiwan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

7.9 Test Environmental Conditions

Temperature:	25° C
Relative Humidity:	58 %
ATM Pressure:	1010 hPa

The testing was performed by Tom Hsu on 2018-02-05 ~ 2018-02-12.


7.10 Test Results

Test Mode: Transmitting


BLE Mode (1M)

Horizontal (worst case is BLE mode low channel)


30MHz-1GHz:

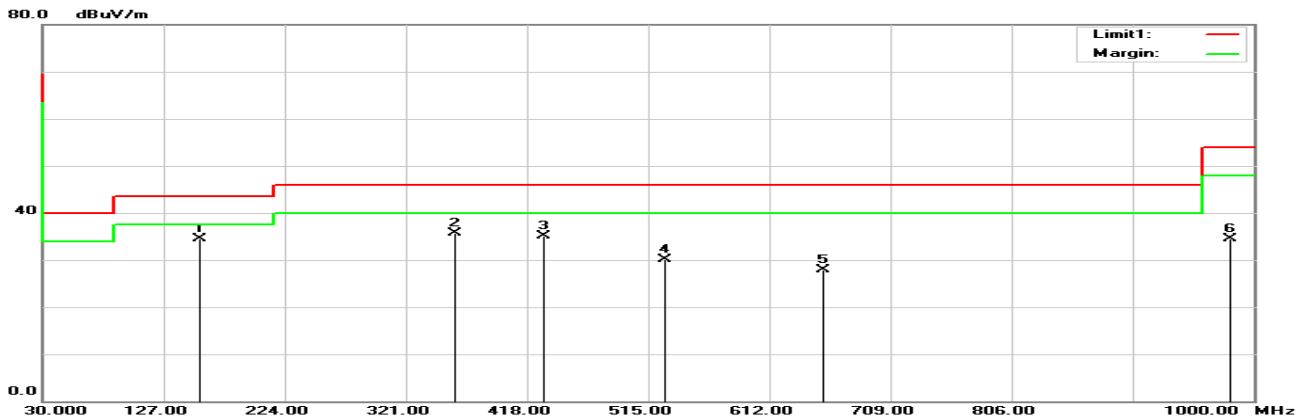

1GHz-18GHz:

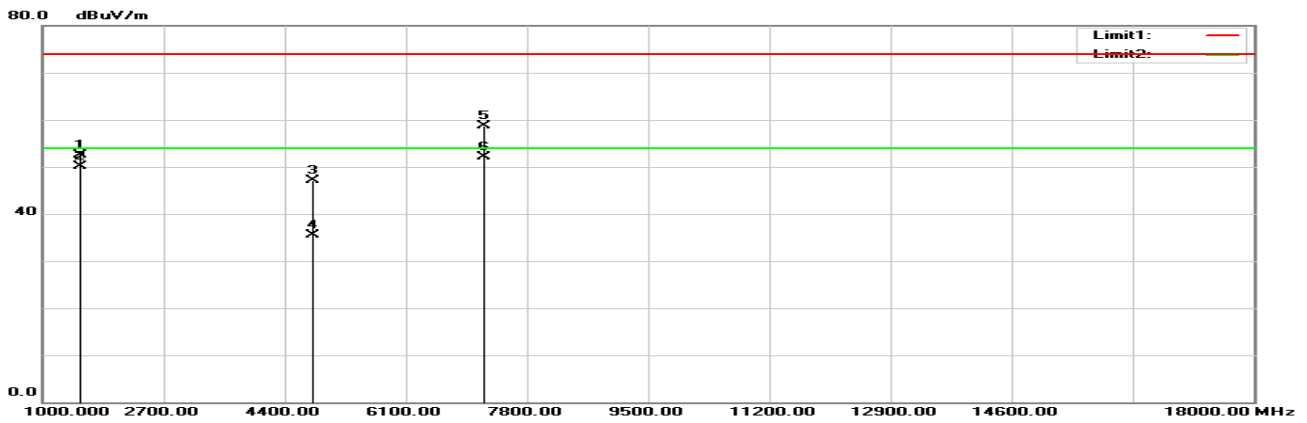


18GHz-26.5GHz:

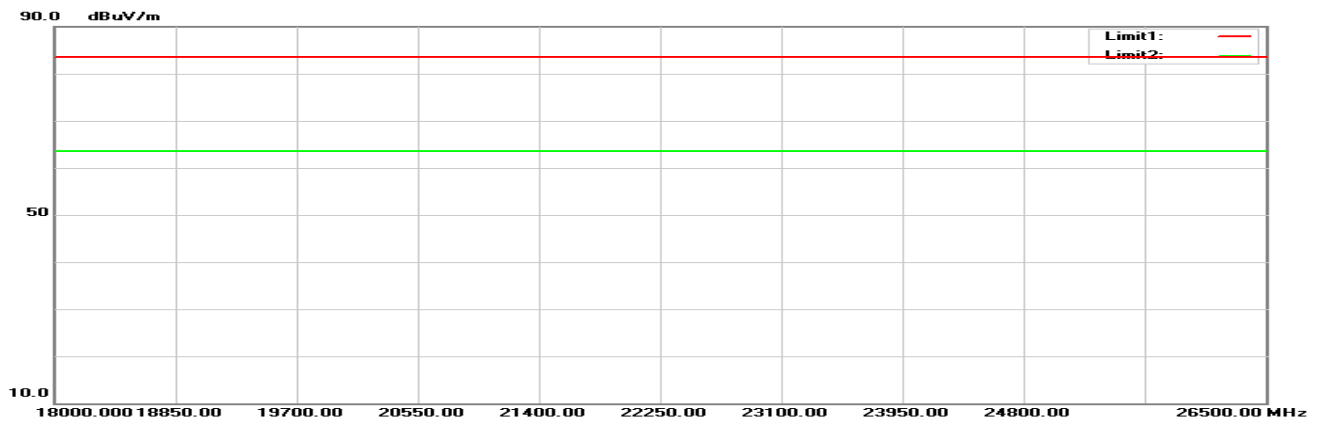


Vertical (worst case is BLE mode high channel)


30MHz-1GHz:

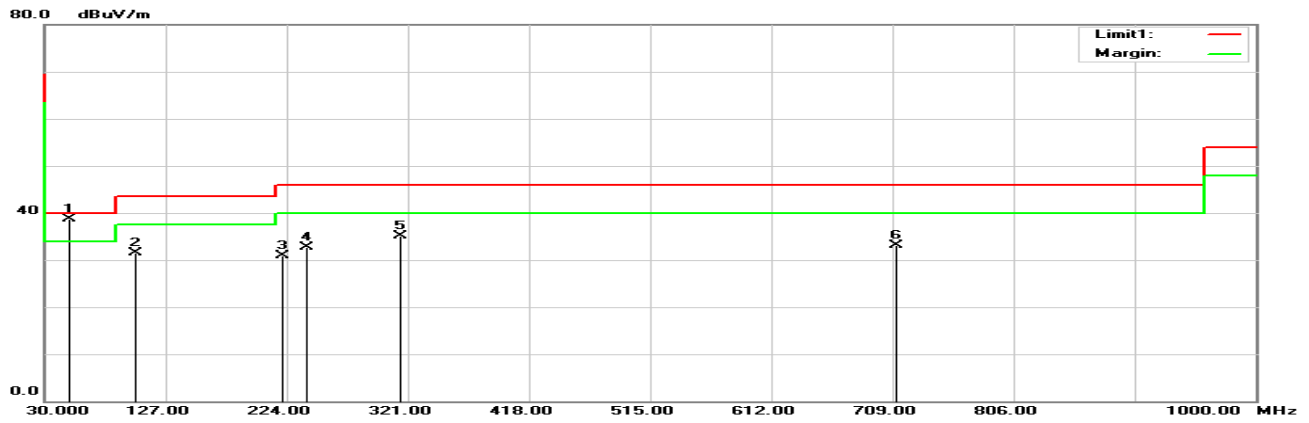

1GHz-18GHz:

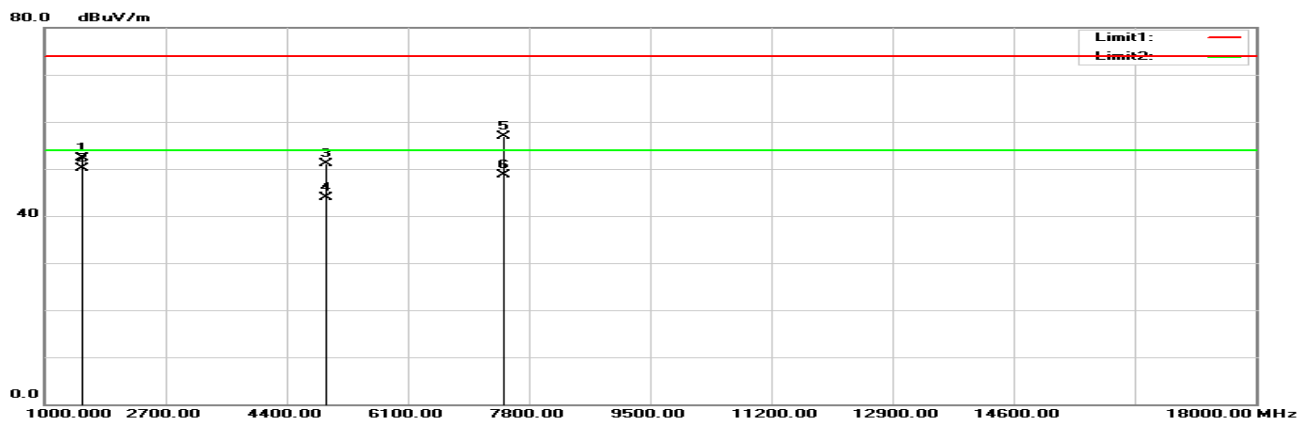

18GHz-26.5GHz:

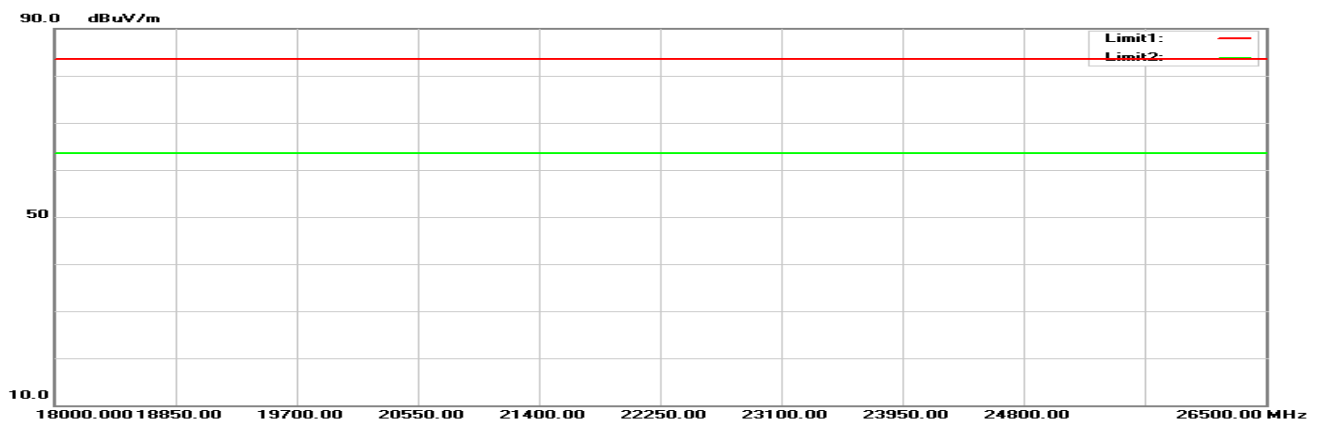

Horizontal

Frequency (MHz)	Reading (dB μ V)	Correct Factor(dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
BLE Low Channel								
156.1000	45.69	-11.16	34.53	43.50	-8.97	100	4	QP
359.8000	44.04	-8.41	35.63	46.00	-10.37	100	163	QP
431.5800	42.00	-6.95	35.05	46.00	-10.95	100	53	QP
528.5800	35.45	-5.28	30.17	46.00	-15.83	100	49	QP
654.6800	31.34	-3.39	27.95	46.00	-18.05	100	154	QP
980.6000	31.44	3.02	34.46	54.00	-19.54	100	236	QP
1536.000	60.83	-8.30	52.53	74.00	-21.47	135	6	peak
1536.000	58.38	-8.30	50.08	54.00	-3.92	135	6	AVG
2337.645	65.12	-5.00	60.12	74.00	-13.88	100	312	peak
2337.645	52.69	-5.00	47.69	54.00	-6.31	100	312	AVG
2390.000	64.56	-4.89	59.67	74.00	-14.33	100	356	peak
2390.000	50.42	-4.89	45.53	54.00	-8.47	100	356	AVG
2402.000	106.88	-4.86	102.02	N/A	N/A	100	334	peak
2402.000	106.34	-4.86	101.48	N/A	N/A	100	334	AVG
4804.000	46.22	0.98	47.20	74.00	-26.80	100	289	peak
4804.000	34.50	0.98	35.48	54.00	-18.52	100	289	AVG
7206.000	52.22	6.56	58.78	74.00	-15.22	100	92	peak
7205.000	45.63	6.56	52.19	54.00	-1.81	100	92	AVG
BLE Mid Channel								
51.3400	47.73	-16.34	31.39	40.00	-8.61	100	118	QP
156.1000	46.72	-11.16	35.56	43.50	-7.94	100	8	QP
239.5200	44.07	-12.05	32.02	46.00	-13.98	100	66	QP
359.8000	43.21	-8.41	34.80	46.00	-11.20	100	151	QP
431.5800	42.27	-6.95	35.32	46.00	-10.68	100	52	QP
887.4800	31.84	0.81	32.65	46.00	-13.35	100	203	QP
1536.000	60.17	-8.30	51.87	74.00	-22.13	211	3	peak
1536.000	58.31	-8.30	50.01	54.00	-3.99	211	3	AVG
2440.000	107.43	-4.78	102.65	N/A	N/A	153	331	peak
2440.000	106.76	-4.78	101.98	N/A	N/A	153	331	AVG
4880.000	49.14	1.24	50.38	74.00	-23.62	103	341	peak
4880.000	42.04	1.24	43.28	54.00	-10.72	103	341	AVG
7320.000	51.01	7.01	58.02	74.00	-15.98	105	85	peak
7320.000	43.97	7.01	50.98	54.00	-3.02	105	85	AVG
BLE High Channel								
50.3700	53.42	-16.23	37.19	40.00	-2.81	100	300	QP
104.6900	50.84	-13.25	37.59	43.50	-5.91	100	252	QP
167.7400	50.86	-11.95	38.91	43.50	-4.59	100	206	QP
239.5200	54.63	-12.05	42.58	46.00	-3.42	100	235	QP
431.5800	41.02	-6.95	34.07	46.00	-11.93	100	209	QP
821.5200	31.49	-0.25	31.24	46.00	-14.76	100	85	QP
1536.000	60.53	-8.30	52.23	74.00	-21.77	131	5	peak
1536.000	58.49	-8.30	50.19	54.00	-3.81	131	5	AVG
2480.000	107.48	-4.68	102.80	N/A	N/A	161	332	peak
2480.000	106.90	-4.68	102.22	N/A	N/A	161	332	AVG
2483.500	65.11	-4.69	60.42	74.00	-13.58	100	324	peak
2483.500	50.18	-4.69	45.49	54.00	-8.51	100	324	AVG
4960.000	47.37	1.51	48.88	74.00	-25.12	100	348	peak
4960.000	38.70	1.51	40.21	54.00	-13.79	100	348	AVG
7440.000	50.68	7.49	58.17	74.00	-15.83	100	301	peak
7440.000	42.78	7.49	50.27	54.00	-3.73	100	301	AVG

Result = Reading + Correct Factor; Margin = Result - Limit; Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain
 Spurious emissions more than 20 dB below the limit were not reported.

Vertical


Frequency (MHz)	Reading (dB μV)	Correct Factor(dB/m)	Result (dB μV/m)	Limit (dB μV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
BLE Low Channel								
50.3700	49.10	-16.23	32.87	40.00	-7.13	100	56	QP
359.8000	37.84	-8.41	29.43	46.00	-16.57	100	346	QP
431.5800	34.29	-6.95	27.34	46.00	-18.66	100	321	QP
639.1600	33.94	-3.62	30.32	46.00	-15.68	100	33	QP
787.5700	31.62	-0.96	30.66	46.00	-15.34	100	211	QP
980.6000	29.87	3.02	32.89	54.00	-21.11	100	106	QP
1536.000	61.71	-8.30	53.41	74.00	-20.59	191	359	peak
1536.000	59.51	-8.30	51.21	54.00	-2.79	191	359	AVG
2338.025	65.71	-5.00	60.71	74.00	-13.29	128	239	peak
2338.025	56.33	-5.00	51.33	54.00	-2.67	128	239	AVG
2390.000	64.87	-4.89	59.98	74.00	-14.02	100	278	peak
2390.000	51.17	-4.89	46.28	54.00	-7.72	100	278	AVG
2402.000	109.27	-4.86	104.41	N/A	N/A	128	302	peak
2402.000	108.67	-4.86	103.81	N/A	N/A	128	302	AVG
4804.000	48.20	0.98	49.18	74.00	-24.82	106	291	peak
4804.000	37.57	0.98	38.55	54.00	-15.45	106	291	AVG
7206.000	52.05	6.56	58.61	74.00	-15.39	277	24	peak
7206.000	45.10	6.56	51.66	54.00	-2.34	277	24	AVG
BLE Mid Channel								
50.3700	53.94	-16.23	37.71	40.00	-2.29	100	241	QP
102.7500	46.42	-13.80	32.62	43.50	-10.88	100	323	QP
239.5200	43.99	-12.05	31.94	46.00	-14.06	100	268	QP
315.1800	44.78	-9.43	35.35	46.00	-10.65	100	53	QP
516.9400	34.61	-5.43	29.18	46.00	-16.82	100	338	QP
732.2800	34.31	-2.34	31.97	46.00	-14.03	100	46	QP
1536.000	60.80	-8.30	52.50	74.00	-21.50	220	3	peak
1536.000	58.83	-8.30	50.53	54.00	-3.47	220	3	AVG
2440.000	109.12	-4.78	104.34	N/A	N/A	115	299	peak
2440.000	108.53	-4.78	103.75	N/A	N/A	115	299	AVG
4880.000	50.37	1.24	51.61	74.00	-22.39	119	301	peak
4880.000	44.65	1.24	45.89	54.00	-8.11	119	301	AVG
7320.000	49.87	7.01	56.88	74.00	-17.12	104	228	peak
7320.000	42.40	7.01	49.41	54.00	-4.59	104	228	AVG
BLE High Channel								
50.3700	54.86	-16.23	38.63	40.00	-1.37	100	220	QP
102.7500	45.30	-13.80	31.50	43.50	-12.00	100	309	QP
221.0900	43.36	-12.38	30.98	46.00	-15.02	100	3	QP
239.5200	44.78	-12.05	32.73	46.00	-13.27	100	261	QP
315.1800	44.60	-9.43	35.17	46.00	-10.83	100	18	QP
711.9100	35.79	-2.59	33.20	46.00	-12.80	100	106	QP
1536.000	60.57	-8.30	52.27	74.00	-21.73	217	5	peak
1536.000	58.49	-8.30	50.19	54.00	-3.81	217	5	AVG
2480.000	109.37	-4.68	104.69	N/A	N/A	124	302	peak
2480.000	108.68	-4.68	104.00	N/A	N/A	124	302	AVG
2483.500	66.60	-4.69	61.91	74.00	-12.09	100	273	peak
2483.500	50.81	-4.69	46.12	54.00	-7.88	100	273	AVG
4960.000	49.50	1.51	51.01	74.00	-22.99	116	305	peak
4960.000	42.38	1.51	43.89	54.00	-10.11	116	305	AVG
7440.000	49.36	7.49	56.85	74.00	-17.15	100	231	peak
7440.000	41.29	7.49	48.78	54.00	-5.22	100	231	AVG

Result = Reading + Correct Factor; Margin = Result - Limit; Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain
 Spurious emissions more than 20 dB below the limit were not reported.


BLE Mode (2M)

Horizontal (worst case is BLE mode low channel)


30MHz-1GHz:

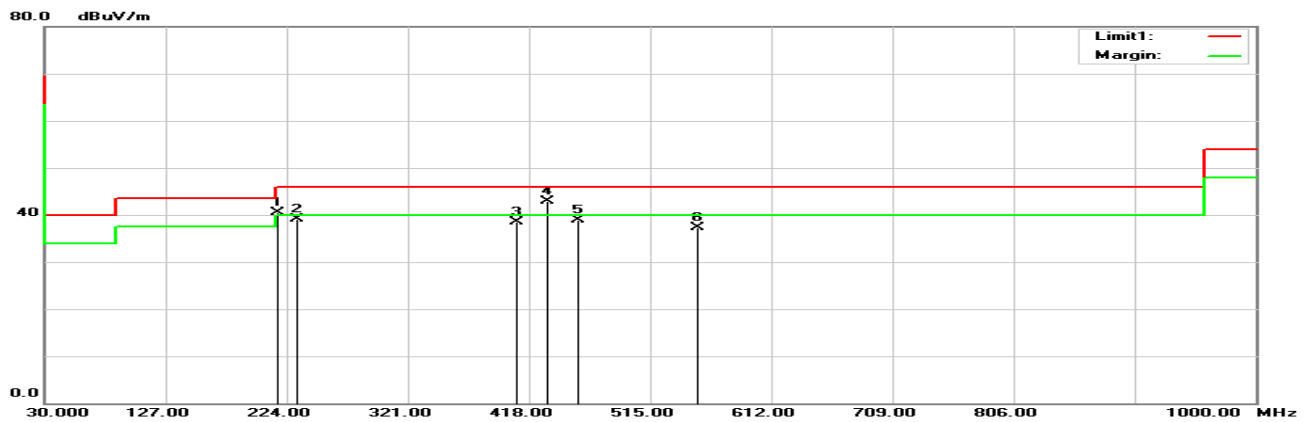

1GHz-18GHz:

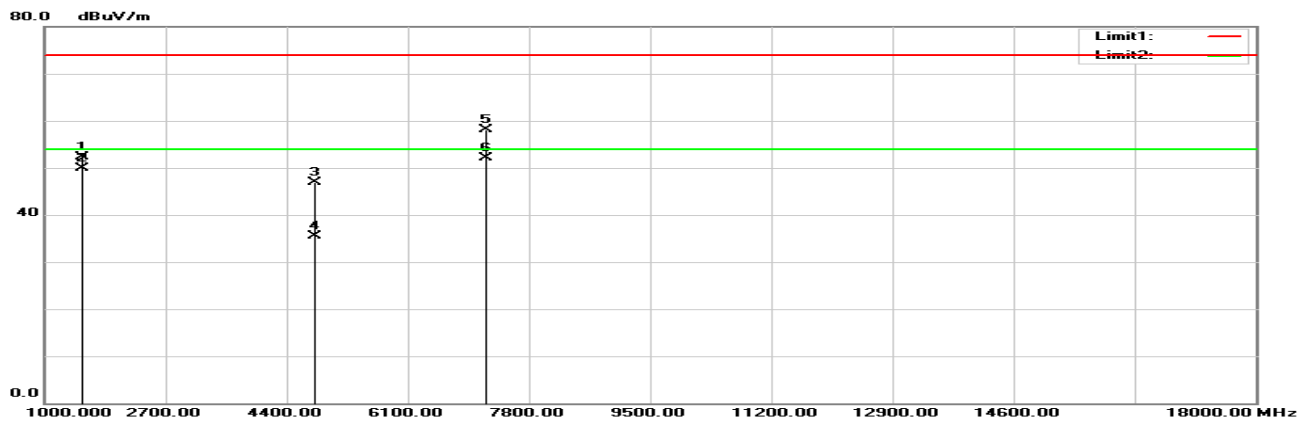


18GHz-26.5GHz:

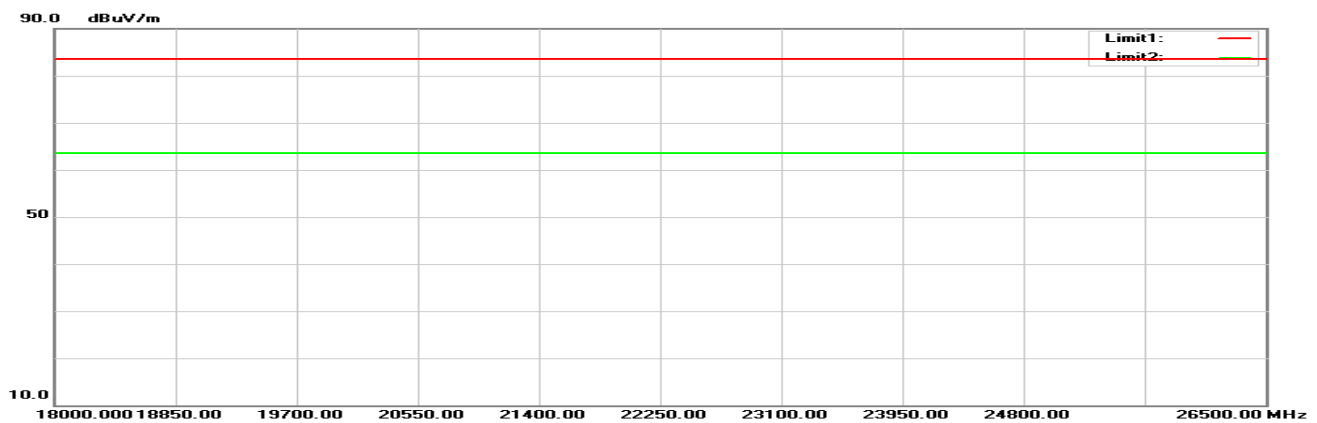


Vertical (worst case is BLE mode low channel)


30MHz-1GHz:

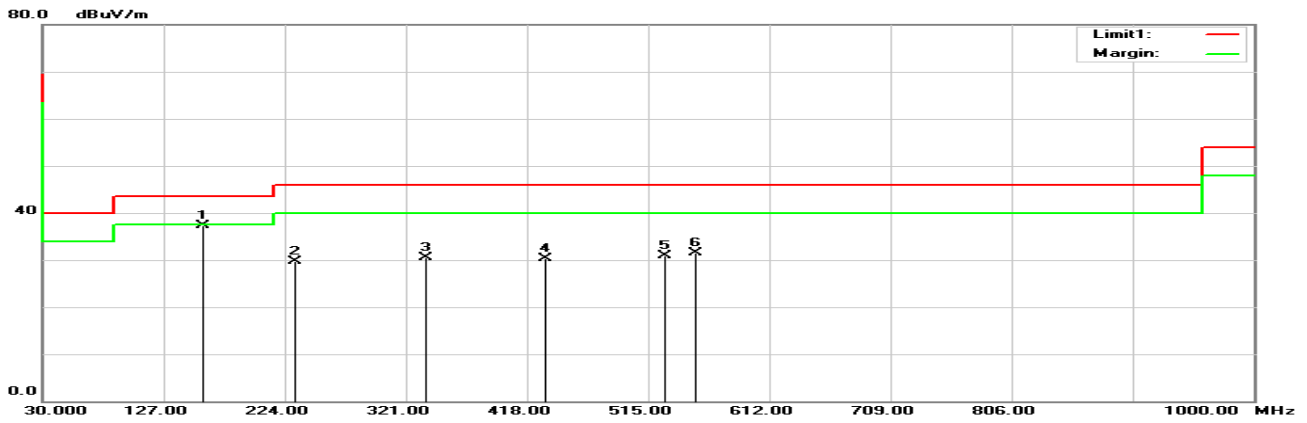

1GHz-18GHz:

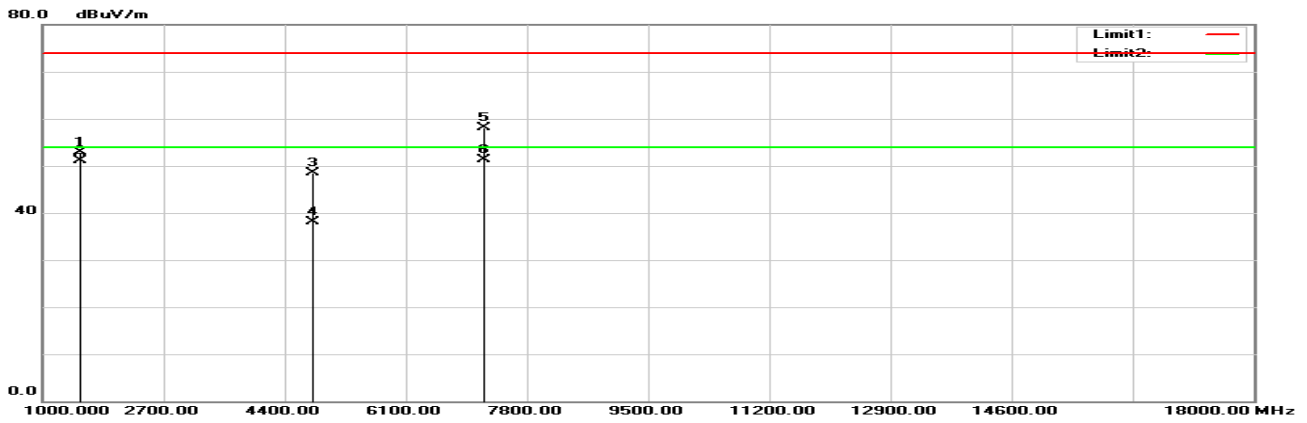

18GHz-26.5GHz:

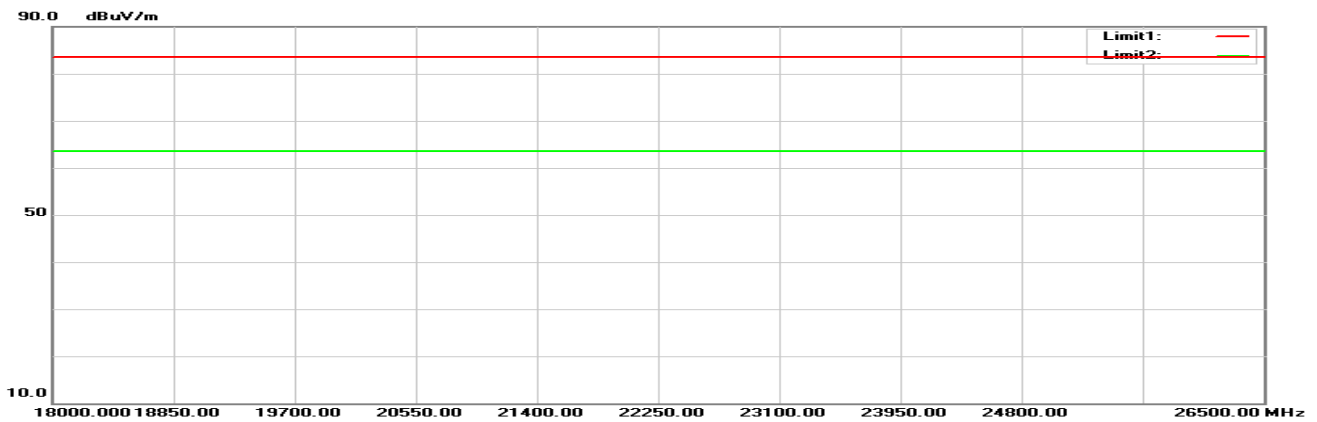

Horizontal

Frequency (MHz)	Reading (dB μ V)	Correct Factor(dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Degree ($^{\circ}$)	Remark
BLE Low Channel								
216.2400	53.30	-12.88	40.42	46.00	-5.58	100	73	QP
231.7600	51.32	-12.30	39.02	46.00	-6.98	100	90	QP
408.3000	46.11	-7.58	38.53	46.00	-7.47	100	277	QP
432.5500	49.98	-7.00	42.98	46.00	-3.02	100	294	QP
456.8000	45.36	-6.46	38.90	46.00	-7.10	100	294	QP
552.8300	42.19	-4.94	37.25	46.00	-8.75	100	75	QP
1536.000	60.54	-8.30	52.24	74.00	-21.76	130	8	peak
1536.000	58.22	-8.30	49.92	54.00	-4.08	130	8	AVG
2337.835	65.28	-5.00	60.28	74.00	-13.72	100	360	peak
2337.835	52.68	-5.00	47.68	54.00	-6.32	100	360	AVG
2390.000	64.15	-4.89	59.26	74.00	-14.74	100	103	peak
2390.000	50.36	-4.89	45.47	54.00	-8.53	100	103	AVG
2402.000	105.77	-4.86	100.91	N/A	N/A	100	333	peak
2402.000	105.36	-4.86	100.50	N/A	N/A	100	333	AVG
4804.000	45.83	0.98	46.81	74.00	-27.19	100	281	peak
4804.000	34.46	0.98	35.44	54.00	-18.56	100	281	AVG
7206.000	51.46	6.56	58.02	74.00	-15.98	100	90	peak
7206.000	45.55	6.56	52.11	54.00	-1.89	100	90	AVG
BLE Mid Channel								
157.0700	48.08	-11.31	36.77	43.50	-6.73	100	23	QP
231.7600	52.70	-12.30	40.40	46.00	-5.60	100	62	QP
336.5200	44.70	-9.11	35.59	46.00	-10.41	100	312	QP
408.3000	45.16	-7.58	37.58	46.00	-8.42	100	245	QP
528.5800	40.23	-5.32	34.91	46.00	-11.09	100	136	QP
552.8300	41.05	-4.94	36.11	46.00	-9.89	100	55	QP
1536.000	60.15	-8.30	51.85	74.00	-22.15	215	1	peak
1536.000	58.22	-8.30	49.92	54.00	-4.08	215	1	AVG
2440.000	106.41	-4.78	101.63	N/A	N/A	155	333	peak
2440.000	105.77	-4.78	100.99	N/A	N/A	155	333	AVG
4880.000	48.62	1.24	49.86	74.00	-24.14	100	344	peak
4880.000	41.77	1.24	43.01	54.00	-10.99	100	344	AVG
7320.000	50.48	7.01	57.49	74.00	-16.51	100	81	peak
7320.000	43.57	7.01	50.58	54.00	-3.42	105	81	AVG
BLE High Channel								
216.2400	55.10	-12.88	42.22	46.00	-3.78	100	152	QP
232.7300	52.49	-12.27	40.22	46.00	-5.78	100	63	QP
336.5200	44.45	-9.11	35.34	46.00	-10.66	100	312	QP
408.3000	47.03	-7.58	39.45	46.00	-6.55	100	244	QP
456.8000	44.76	-6.46	38.30	46.00	-7.70	100	178	QP
552.8300	41.45	-4.94	36.51	46.00	-9.49	100	91	QP
1536.000	60.22	-8.30	51.92	74.00	-22.08	135	2	peak
1536.000	58.37	-8.30	50.07	54.00	-3.93	135	2	AVG
2480.000	106.54	-4.68	101.86	N/A	N/A	155	333	peak
2480.000	105.92	-4.68	101.24	N/A	N/A	155	333	AVG
2483.500	65.07	-4.69	60.38	74.00	-13.62	100	84	peak
2483.500	50.12	-4.69	45.43	74.00	-28.57	100	84	AVG
4960.000	46.89	1.51	48.40	74.00	-25.60	100	344	peak
4960.000	38.57	1.51	40.08	54.00	-13.92	100	344	AVG
7440.000	50.13	7.49	57.62	74.00	-16.38	100	305	peak
7440.000	42.49	7.49	49.98	54.00	-4.02	100	305	AVG

Result = Reading + Correct Factor; Margin = Result - Limit; Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain
 Spurious emissions more than 20 dB below the limit were not reported.

Vertical


Frequency (MHz)	Reading (dB μ V)	Correct Factor(dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Degree ($^{\circ}$)	Remark
BLE Low Channel								
158.0400	48.71	-11.31	37.40	43.50	-6.10	100	92	QP
231.7600	42.09	-12.30	29.79	46.00	-16.21	100	42	QP
336.5200	39.62	-9.11	30.51	46.00	-15.49	100	70	QP
432.5500	37.31	-7.00	30.31	46.00	-15.69	100	82	QP
528.5800	36.20	-5.32	30.88	46.00	-15.12	100	117	QP
552.8300	36.48	-4.94	31.54	46.00	-14.46	100	120	QP
1536.000	61.21	-8.30	52.91	74.00	-21.09	185	355	peak
1536.000	59.33	-8.30	51.03	54.00	-2.97	185	355	AVG
2390.000	64.45	-4.89	59.56	74.00	-14.44	100	318	peak
2390.000	51.15	-4.89	46.26	54.00	-7.74	100	318	AVG
2402.000	108.48	-4.86	103.62	N/A	N/A	124	302	peak
2402.000	107.98	-4.86	103.12	N/A	N/A	124	302	AVG
2338.405	65.73	-5.00	60.73	74.00	-13.27	124	257	peak
2338.405	56.34	-5.00	51.34	54.00	-2.66	124	257	AVG
4804.000	47.52	0.98	48.50	74.00	-25.50	100	295	peak
4804.000	37.13	0.98	38.11	54.00	-15.89	100	295	AVG
7206.000	51.49	6.56	58.05	74.00	-15.95	270	20	peak
7206.000	44.76	6.56	51.32	54.00	-2.68	270	20	AVG
BLE Mid Channel								
158.0400	48.60	-11.31	37.29	43.50	-6.21	100	131	QP
216.2400	43.07	-12.88	30.19	46.00	-15.81	100	47	QP
246.3100	41.16	-12.08	29.08	46.00	-16.92	100	337	QP
336.5200	39.80	-9.11	30.69	46.00	-15.31	100	256	QP
432.5500	37.80	-7.00	30.80	46.00	-15.20	100	95	QP
552.8300	37.36	-4.94	32.42	46.00	-13.58	100	141	QP
1536.000	60.42	-8.30	52.12	74.00	-21.88	117	5	peak
1536.000	58.71	-8.30	50.41	54.00	-3.59	117	5	AVG
2440.000	108.62	-4.78	103.84	N/A	N/A	130	300	peak
2440.000	107.99	-4.78	103.21	N/A	N/A	130	300	AVG
4880.000	50.12	1.24	51.36	74.00	-22.64	121	305	peak
4880.000	44.47	1.24	45.71	54.00	-8.29	121	305	AVG
7320.000	49.26	7.01	56.27	74.00	-17.73	105	232	peak
7320.000	42.21	7.01	49.22	54.00	-4.78	105	232	AVG
BLE High Channel								
162.8900	47.51	-11.63	35.88	43.50	-7.62	100	33	QP
232.7300	43.32	-12.27	31.05	46.00	-14.95	100	266	QP
334.5800	37.50	-9.15	28.35	46.00	-17.65	100	117	QP
408.3000	34.89	-7.58	27.31	46.00	-18.69	100	26	QP
432.5500	37.05	-7.00	30.05	46.00	-15.95	100	343	QP
552.8300	36.73	-4.94	31.79	46.00	-14.21	100	174	QP
1536.000	60.11	-8.30	51.81	74.00	-22.19	215	3	peak
1536.000	58.26	-8.30	49.96	54.00	-4.04	215	3	AVG
2480.000	108.69	-4.68	104.01	N/A	N/A	121	302	peak
2480.000	107.74	-4.68	103.06	N/A	N/A	121	302	AVG
2483.500	65.94	-4.69	61.25	74.00	-12.75	100	225	peak
2483.500	50.76	-4.69	46.07	54.00	-7.93	100	225	AVG
4960.000	48.95	1.51	50.46	74.00	-23.54	119	303	peak
4960.000	42.04	1.51	43.55	54.00	-10.45	119	303	AVG
7440.000	48.66	7.49	56.15	74.00	-17.85	100	236	peak
7440.000	40.97	7.49	48.46	54.00	-5.54	100	236	AVG

Result = Reading + Correct Factor; Margin = Result - Limit; Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain
 Spurious emissions more than 20 dB below the limit were not reported.


Conducted Spurious Emissions:

Channel	Frequency (MHz)	Delta Peak to Band Emission (dBc)	Limit (dBc)	RESULT
BLE Mode (1M)				
Low	2402	42.42	≥ 20	PASS
Mid	2440	41.32	≥ 20	PASS
High	2480	42.59	≥ 20	PASS
BLE Mode (2M)				
Low	2402	42.69	≥ 20	PASS
Mid	2440	42.12	≥ 20	PASS
High	2480	43.26	≥ 20	PASS

**BLE Mode (1M)
Low Channel**

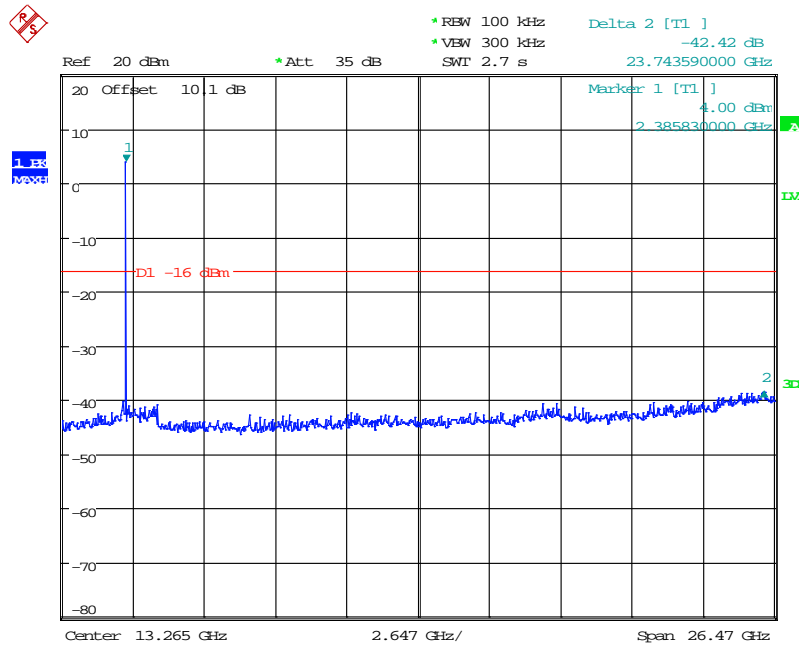


Middle Channel

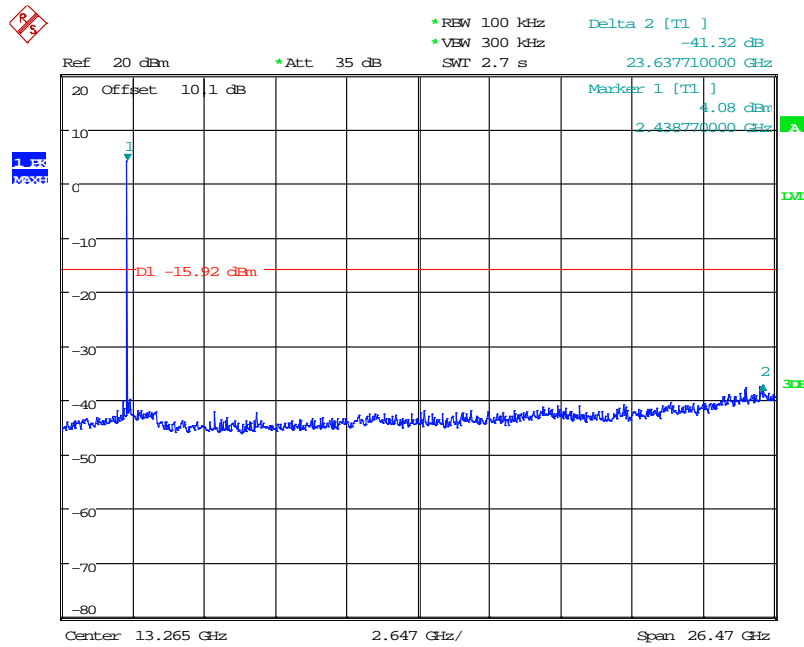


Date: 12.FEB.2018 15:30:55

High Channel

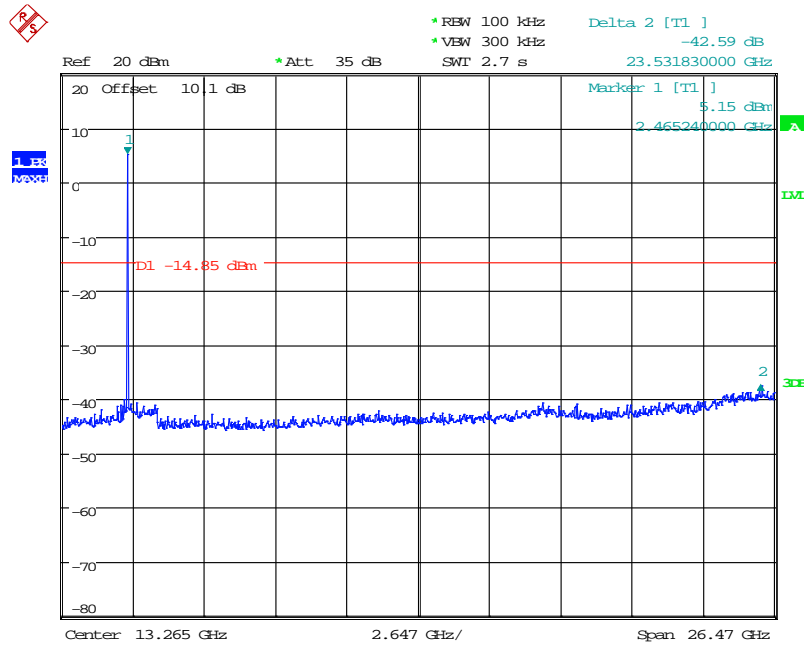


Date: 12.FEB.2018 15:32:20

BLE Mode (2M) Low Channel

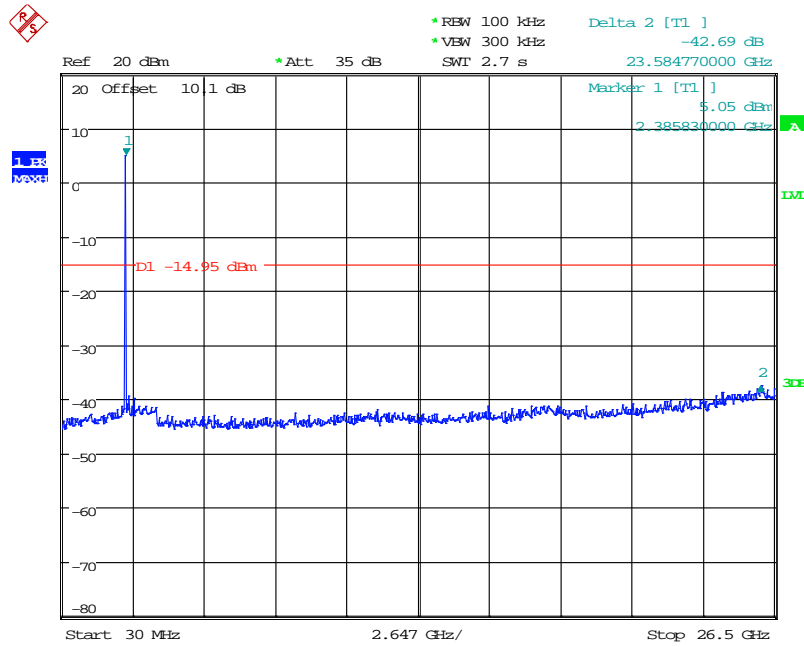


Date: 12.FEB.2018 15:34:38

Middle Channel

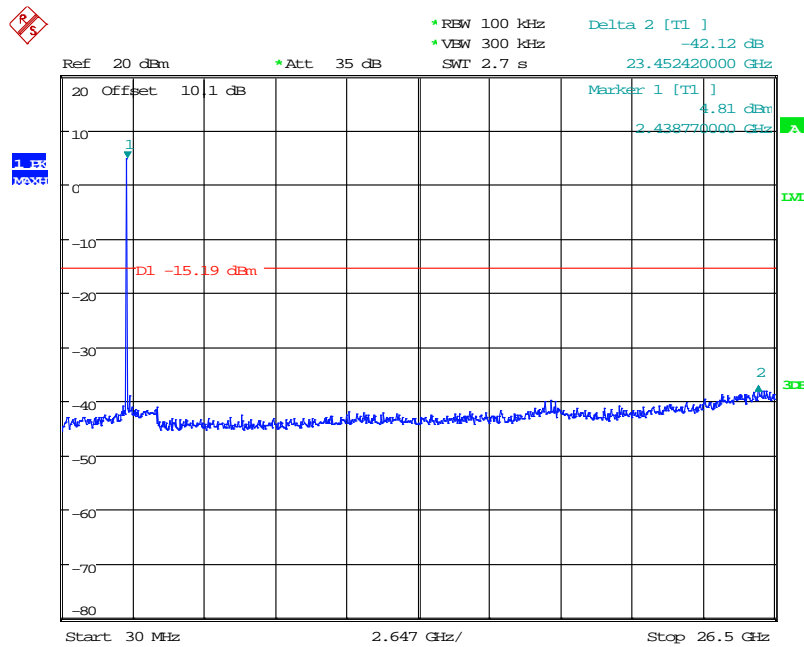

Date: 12.FEB.2018 15:37:38

High Channel

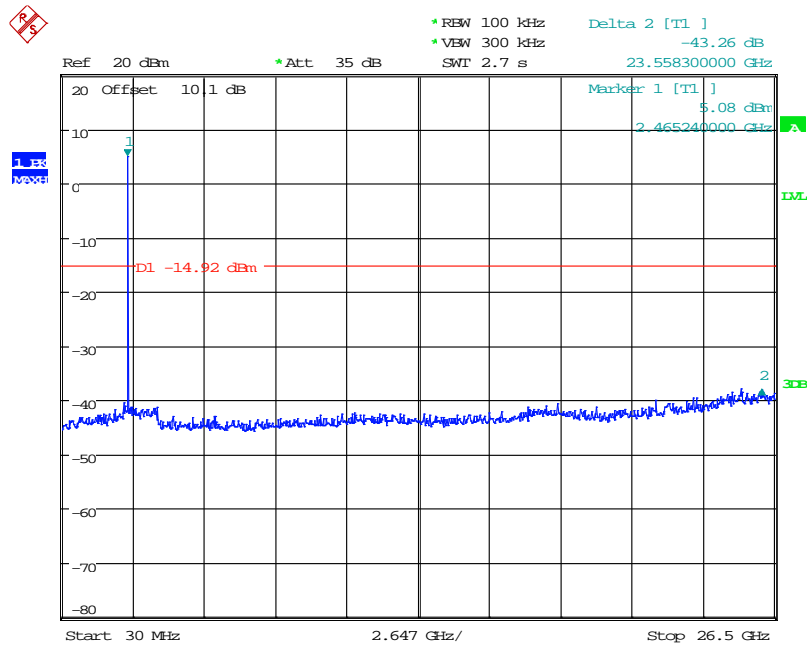

Date: 12.FEB.2018 15:39:08

8 FCC §15.247(a)(2) – 6 dB Emission Bandwidth

8.1 Applicable Standard

According to FCC §15.247(a) (2).

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

8.2 Test Procedure

According to ANSI C63.10-2013

6 dB Emission Bandwidth

The steps for the first option are as follows:

- a) Set RBW = 100 kHz.
- b) Set the VBW $\geq [3 \times \text{RBW}]$.
- c) Detector = peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

8.3 Test Equipment List and Details

Descriptions	Manufacturers	Models	Serial Numbers	Calibration Date	Calibration Due Date
Spectrum Analyzer	Rohde & Schwarz	FSU26	200268	2017/05/08	2018/05/07
Attenuator	MINI-CIRCUITS	BW-S10W5+	N/A	2017/03/16	2018/03/15
Cable	WOKEN	SFL402	S02-160323-07	2017/02/22	2018/02/21

***Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Taiwan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

8.4 Test Environmental Conditions

Temperature:	26° C
Relative Humidity:	58 %
ATM Pressure:	1010 hPa


The testing was performed by Tom Hsu on 2018-02-12.

8.5 Test Results

Channel	Frequency (MHz)	6 dB OBW (MHz)	Limit (kHz)	Result
BLE Mode (1M)				
Low	2402	0.68	>500	Compliance
Middle	2440	0.71	>500	Compliance
High	2480	0.71	>500	Compliance
BLE Mode (2M)				
Low	2402	0.90	>500	Compliance
Middle	2440	0.80	>500	Compliance
High	2480	0.87	>500	Compliance


Please refer to the following plots

BLE Mode (1M) Low Channel

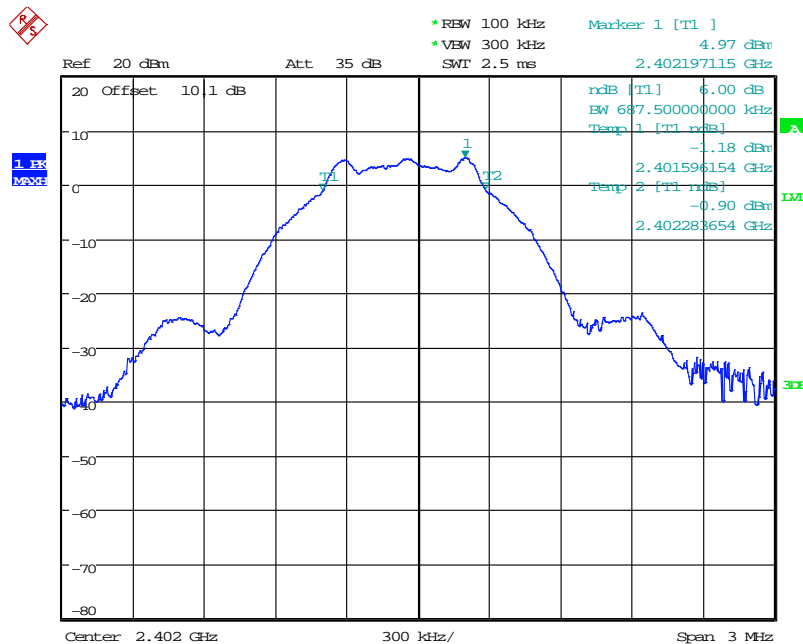


Date: 12.FEB.2018 14:45:31

Middle Channel

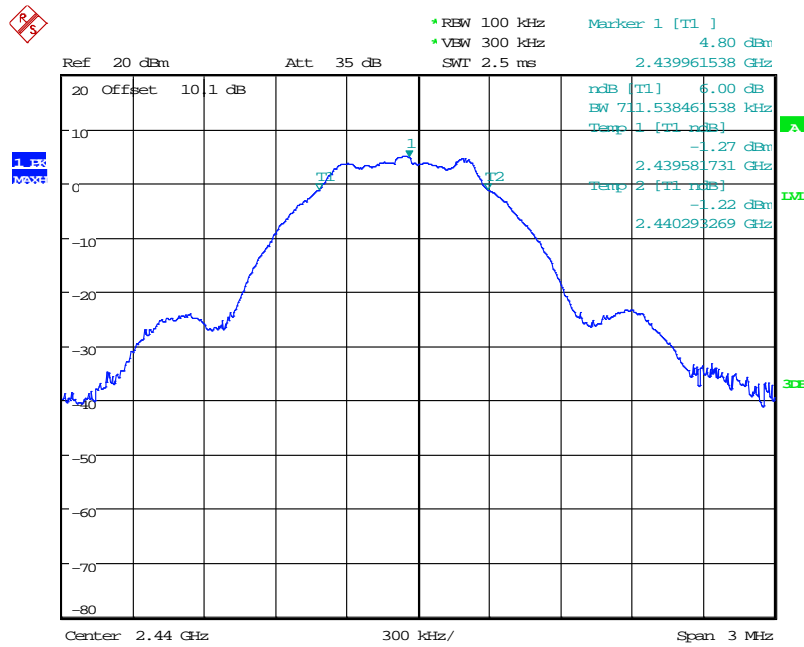


Date: 12.FEB.2018 14:48:35

High Channel

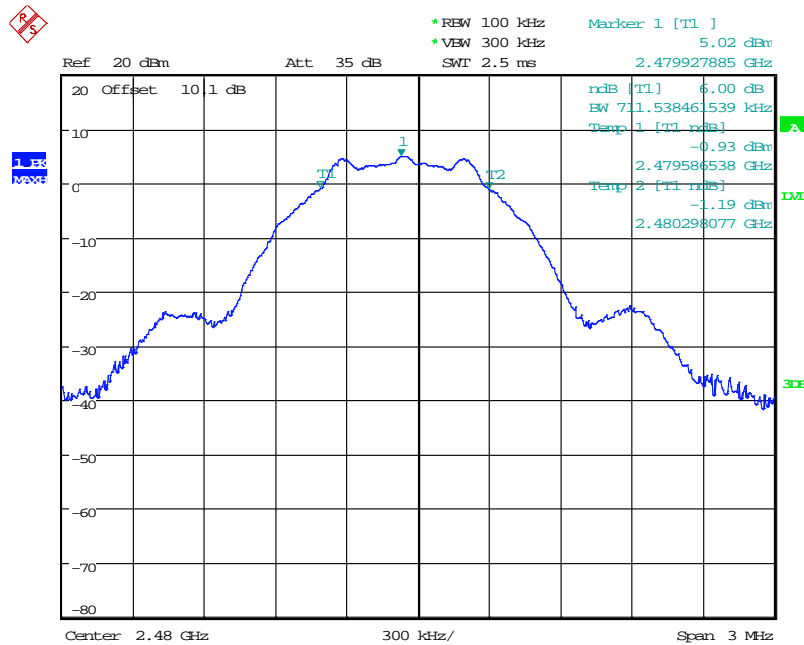


Date: 12.FEB.2018 14:50:31

BLE Mode (2M) Low Channel

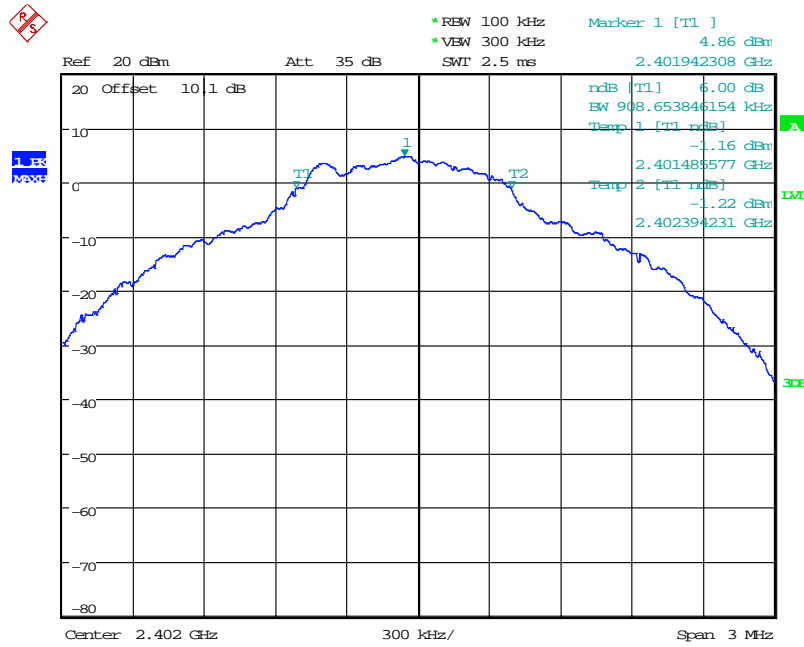


Date: 12.FEB.2018 15:03:59

Middle Channel

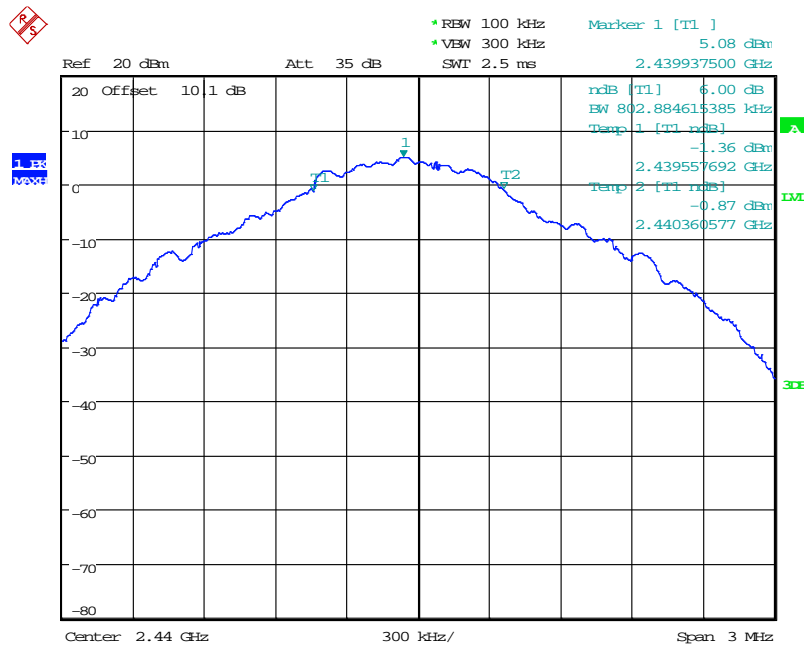

Date: 12.FEB.2018 15:06:12

High Channel

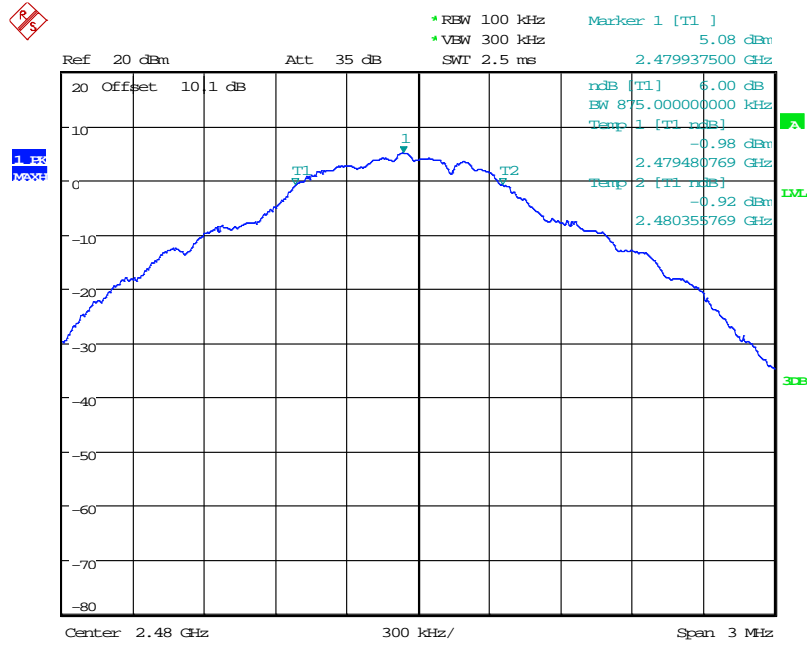

Date: 12.FEB.2018 15:08:06

9 FCC §15.247(b)(3) – Maximum Output Power

9.1 Applicable Standard

According to FCC §15.247(b) (3).

Systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

9.2 Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to measuring equipment.



9.3 Test Equipment List and Details

Descriptions	Manufacturers	Models	Serial Numbers	Calibration Date	Calibration Due Date
Power Sensor	KEYSIGHT	U2021XA	MY54080018	2017/03/21	2018/03/20
Cable	WOKEN	SFL402	S02-160323-07	2017/02/22	2018/02/21

***Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Taiwan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

9.4 Test Environmental Conditions

Temperature:	26° C
Relative Humidity:	58 %
ATM Pressure:	1010 hPa

The testing was performed by Tom Hsu on 2018-02-12.

9.5 Test Results

Channel	Frequency	Maximum peak Conducted Output Power		Limit	Result
	(MHz)	(dBm)	(W)	(W)	
BLE Mode (1M)					
Low	2402	5.82	0.0038	1	Compliance
Middle	2440	5.92	0.0039	1	Compliance
High	2480	5.81	0.0038	1	Compliance
BLE Mode (2M)					
Low	2402	5.75	0.0038	1	Compliance
Middle	2440	5.94	0.0039	1	Compliance
High	2480	5.79	0.0038	1	Compliance

10 FCC §15.247(d) – 100 kHz Bandwidth of Frequency Band Edge

10.1 Applicable Standard

According to FCC §15.247(d).

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

10.2 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

10.3 Test Equipment List and Details

Descriptions	Manufacturers	Models	Serial Numbers	Calibration Date	Calibration Due Date
Spectrum Analyzer	Rohde & Schwarz	FSU26	200268	2017/05/08	2018/05/07
Attenuator	MINI-CIRCUITS	BW-S10W5+	N/A	2017/03/16	2018/03/15
Cable	WOKEN	SFL402	S02-160323-07	2017/02/22	2018/02/21

***Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Taiwan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

10.4 Test Environmental Conditions

Temperature:	26° C
Relative Humidity:	58 %
ATM Pressure:	1010 hPa


The testing was performed by Tom Hsu on 2018-02-12.

10.5 Test Results

Channel	Frequency (MHz)	Delta Peak to Band Emission (dBe)	Limit (dBe)	RESULT
BLE Mode (1M)				
Low	2402	46.10	≥ 20	PASS
High	2480	46.67	≥ 20	PASS
BLE Mode (2M)				
Low	2402	38.24	≥ 20	PASS
High	2480	46.54	≥ 20	PASS


Please refer to the following plots

**BLE Mode (1M)
Band Edge, Left Side**

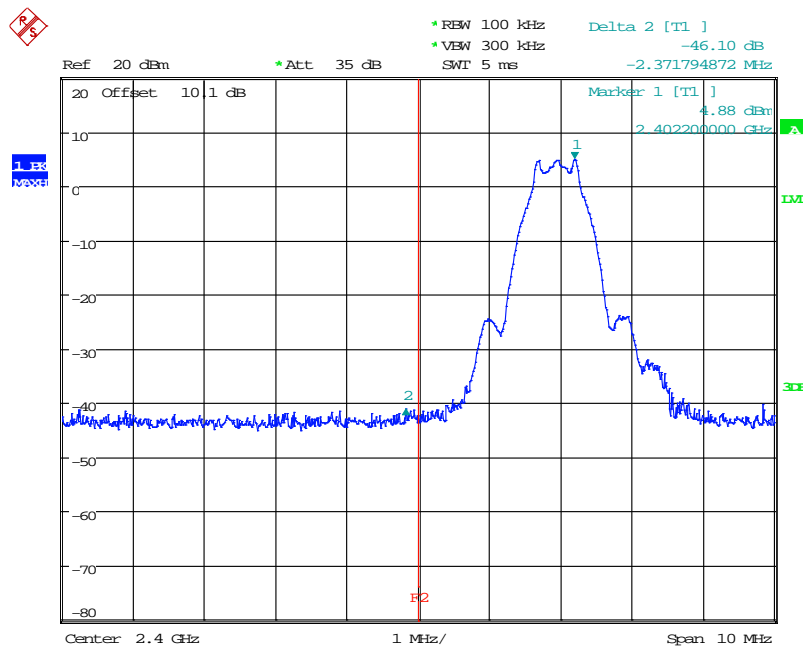


Date: 12.FEB.2018 15:24:05

Band Edge, Right Side

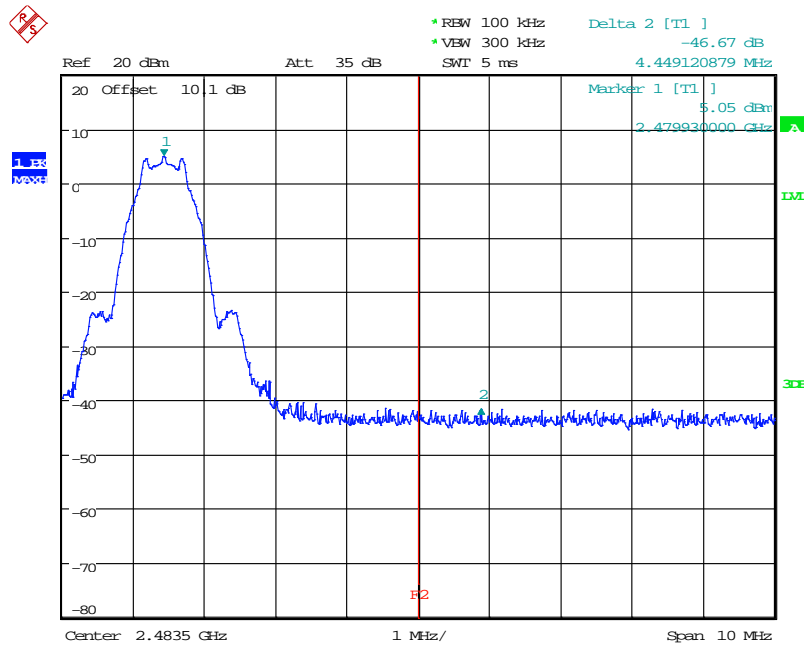


Date: 12.FEB.2018 14:51:18

BLE Mode (2M) Band Edge, Left Side

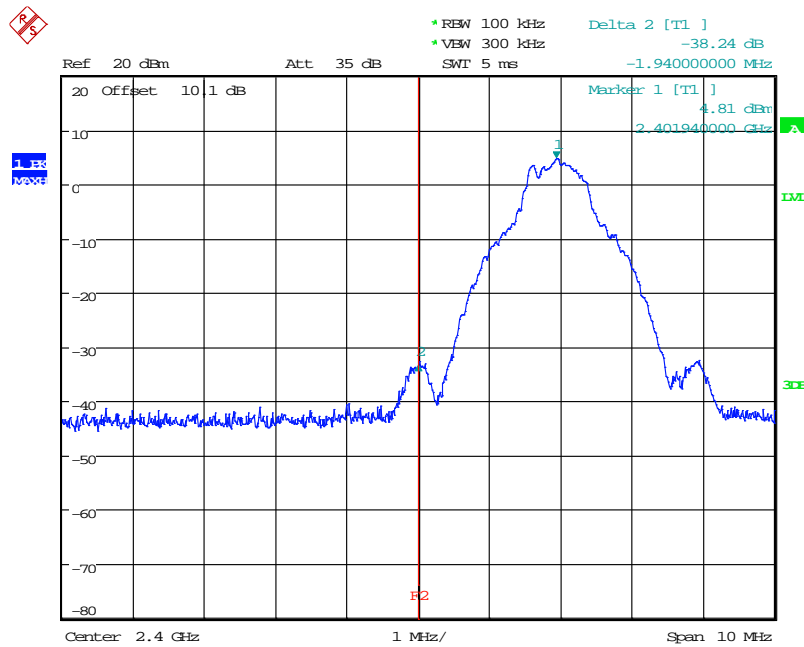

Date: 12.FEB.2018 15:04:46

Band Edge, Right Side

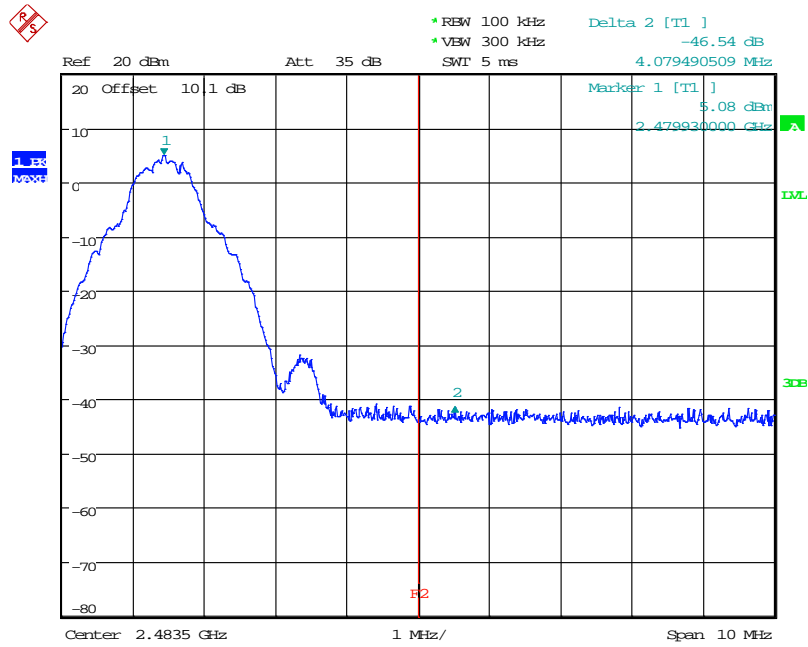

Date: 12.FEB.2018 15:08:53

11 FCC §15.247(e) – Power Spectral Density

11.1 Applicable Standard

According to FCC §15.247(e).

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

11.2 Test Procedure

According to ANSI C63.10-2013

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq [3 \times \text{RBW}]$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat

11.3 Test Equipment List and Details

Descriptions	Manufacturers	Models	Serial Numbers	Calibration Date	Calibration Due Date
Spectrum Analyzer	Rohde & Schwarz	FSU26	200268	2017/05/08	2018/05/07
Attenuator	MINI-CIRCUITS	BW-S10W5+	N/A	2017/03/16	2018/03/15
Cable	WOKEN	SFL402	S02-160323-07	2017/02/22	2018/02/21

***Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Taiwan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

11.4 Test Environmental Conditions

Temperature:	26° C
Relative Humidity:	58 %
ATM Pressure:	1010 hPa


The testing was performed by Tom Hsu on 2018-02-12.

11.5 Test Results

Channel	Frequency (MHz)	PPSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Result
BLE Mode (1M)				
Low	2402	-8.35	8	Compliance
Middle	2440	-8.53	8	Compliance
High	2480	-6.45	8	Compliance
BLE Mode (2M)				
Low	2402	-8.55	8	Compliance
Middle	2440	-7.91	8	Compliance
High	2480	-8.24	8	Compliance


Please refer to the following plots

BLE Mode (1M) Low Channel

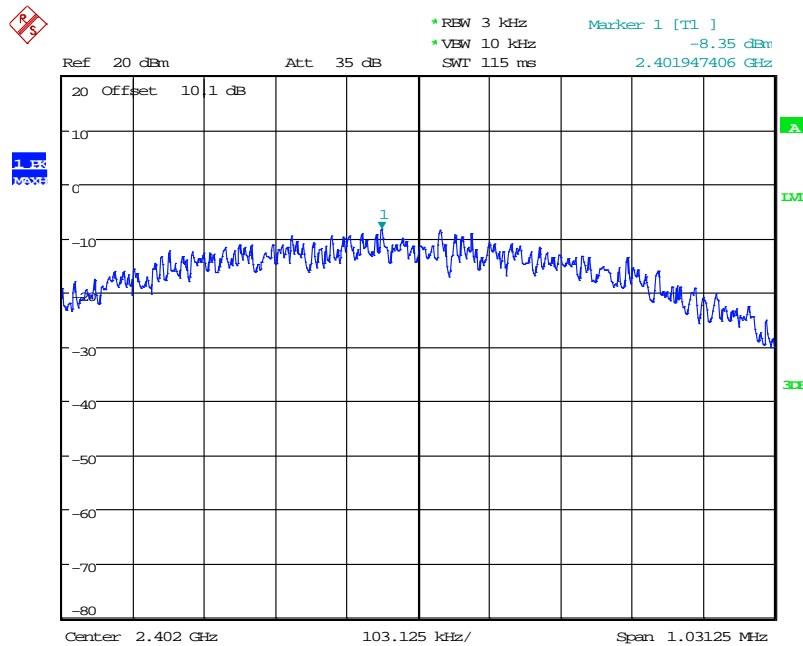


Date: 12.FEB.2018 14:45:52

Middle Channel

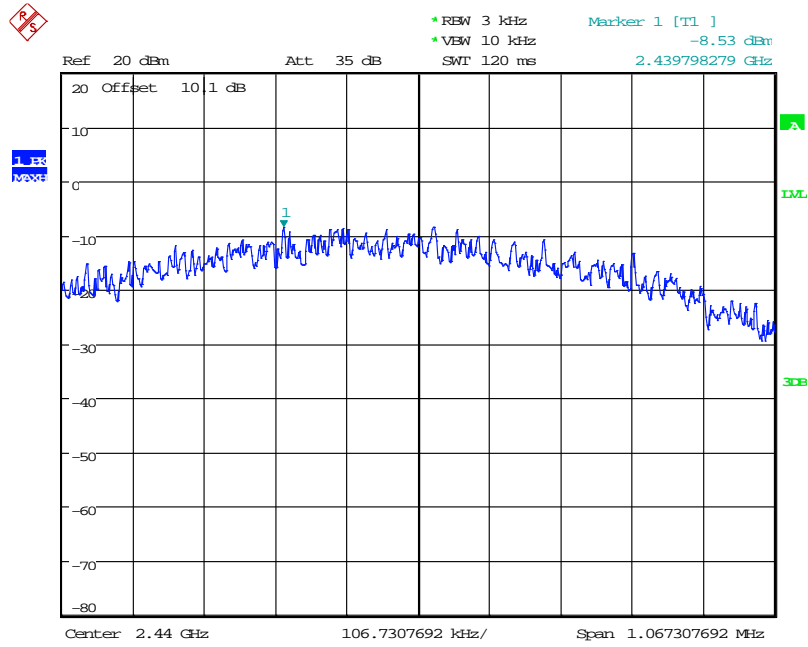

Date: 12.FEB.2018 14:48:56


High Channel

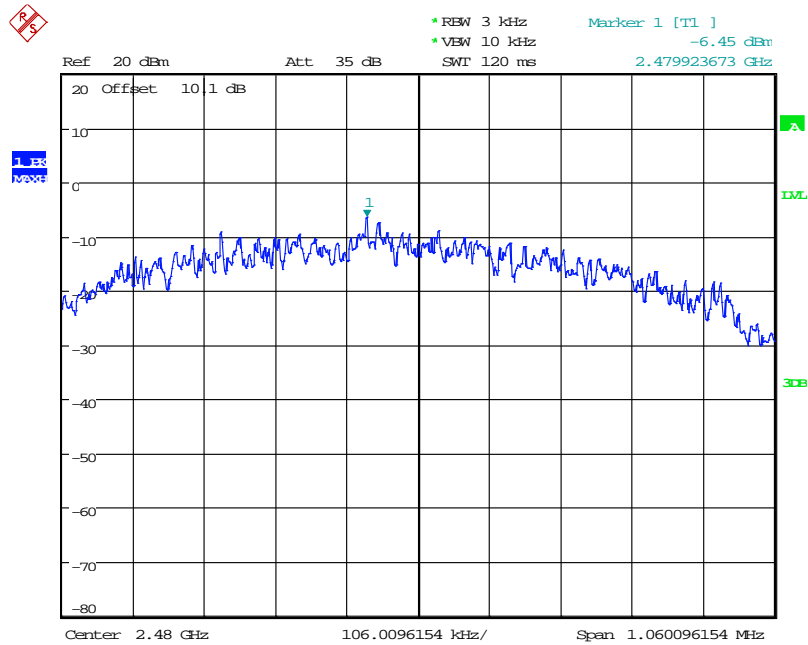

Date: 12.FEB.2018 14:50:52


BLE Mode (2M)

Low Channel

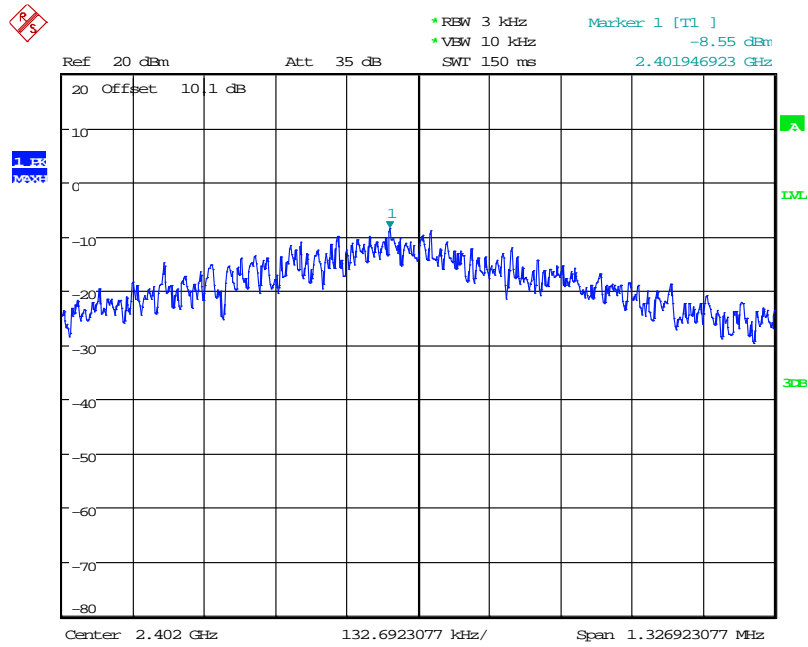


Date: 12.FEB.2018 15:04:21

Middle Channel

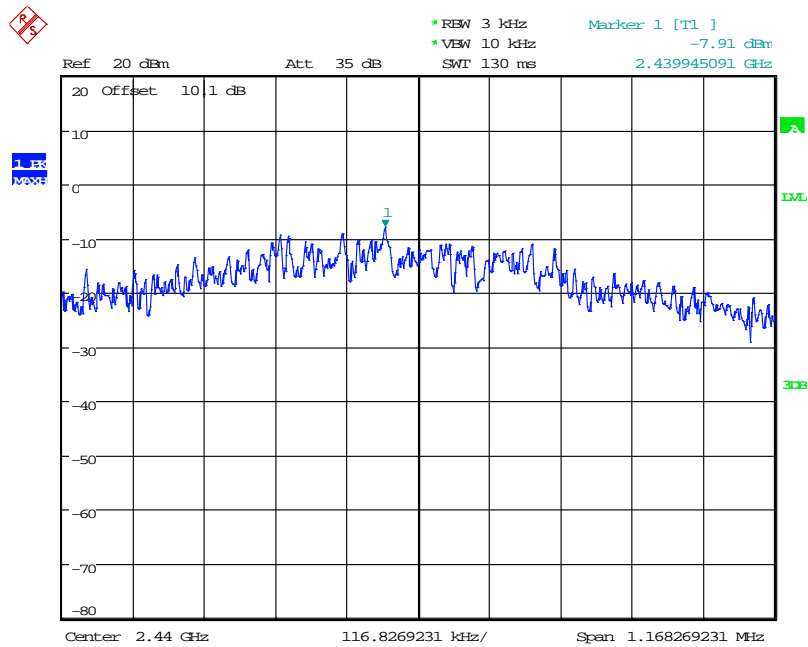

Date: 12.FEB.2018 15:06:33

High Channel

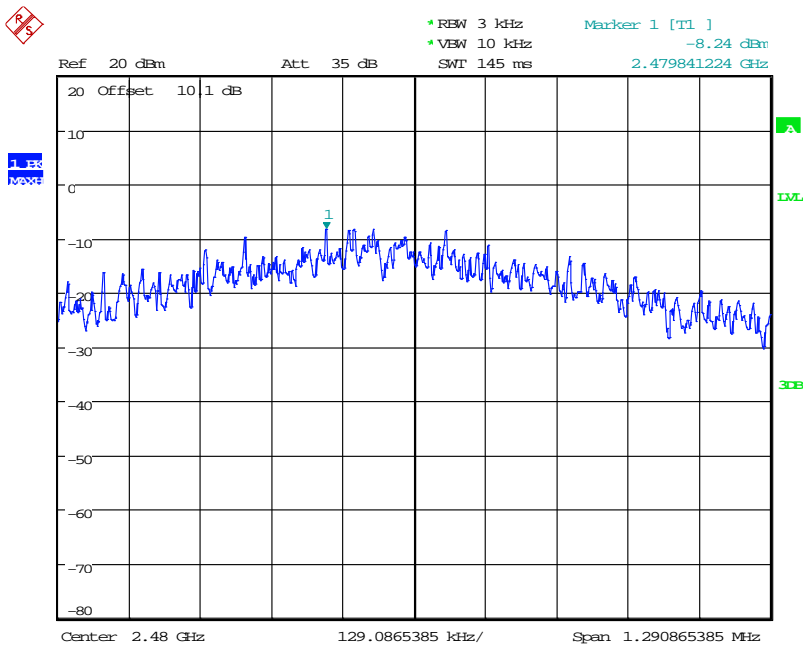

Date: 12.FEB.2018 15:08:28

***** END OF REPORT *****