

FCC 47 CFR PART 15 SUBPART C TEST REPORT

For

Product Name: WLAN and BT Combo Dongle

Brand Name: CC&C

Model No.: CL-8723BU

Series Model:N/A

FCC ID: PANCL8723BU

Test Report Number:

C151023R01-RPB

Issued for

CC&C Technologies,Inc.

8F,No.150,Jian Yi Rd,Zhonghe District,New Taipei City,235,Taiwan

Issued by

Compliance Certification Services Inc.

Kun shan Laboratory

**No.10 Weiye Rd., Innovation park, Eco&Tec,
Development Zone, Kunshan City, Jiangsu, China**

TEL: 86-512-57355888

FAX: 86-512-57370818



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by A2LA or any government agencies. The test results in the report only apply to the tested sample.

TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION	4
2. EUT DESCRIPTION	5
3. TEST METHODOLOGY	6
3.1 EUT CONFIGURATION.....	6
3.2 EXERCISEEUT.....	6
3.3 GENERAL TEST PROCEDURES.....	6
3.4 TEST MODE.....	7
3.5 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....	8
4. INSTRUMENT CALIBRATION	9
5. FACILITIES AND ACCREDITATIONS.....	9
5.1 FACILITIES.....	9
5.2 EQUIPMENT.....	9
5.3 LABORATORY ACCREDITATIONS AND LISTING	9
5.4 TABLE OF ACCREDITATIONS	10
5.5 LIST OF MEASURING EQUIPMENT	11
5.6 SETUP CONFIGURATION	12
5.7 SUPPORT EQUIPMENT	12
6. FCC PART 15.247 REQUIREMENTS	13
6.1 PEAK POWER.....	13
6.2 20DB BANDWIDTH MEASUREMENT	15
6.3 HOPPING CHANNEL SEPARATION.....	20
6.4 NUMBER OF HOPPING FREQUENCY	23
6.5 TIME OF OCCUPANCY (DWELL TIME)	26
6.6 CONDUCTED BAND EDGES MEASUREMENT	31
6.7 CONDUCTED SPURIOUS EMISSION MEASUREMENT	37
6.8 RADIATED BAND EDGE AND SPURIOUS EMISSION MEASUREMENT	44
6.9 POWERLINE CONDUCTED EMISSIONS	60

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result
3.1	15.247(a)(1)	Number of Channels	≥ 15Channels	Pass
3.2	15.247(a)(1)	Hopping Channel Separation	≥2/3 of 20dB BW	Pass
3.3	15.247(a)(1)	Dwell Time of Each Channel	≤0.4sec in 31.6sec period	Pass
3.4	15.247(a)(1)	20dB Bandwidth	NA	Pass
3.5	15.247(b) (1)	Peak Output Power	≤125mW	Pass
3.6	15.247(d)	Conducted Band Edges and Spurious Emission	≤ 20dBc	Pass
3.7	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) &15.247(d)	Pass
3.8	15.207	AC Conducted Emission	15.207(a)	Pass
3.9	15.203 &15.247(b)	Antenna Requirement	N/A	Pass

1. TEST RESULT CERTIFICATION

Product Name:	WLAN and BT Combo Dongle
Trade Name:	CC&C
Model Name:	CL-8723BU
Series Model:	N/A
Applicant Discrepancy:	Initial
Device Category:	Portable Device
Date of Test:	October 31, 2015~December 12, 2015
Applicant:	CC&C Technologies,Inc. 8F,No.150,Jian Yi Rd,Zhonghe District,New Taipei City,235,Taiwan
Manufacturer:	Kunshan CC&C Technologies,Co.,Ltd. No.9 Building,3rd Main Street,Kunshan Free Trade Zone,Jiangsu Province,P.R.China
Application Type:	Certification


APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Tested by:

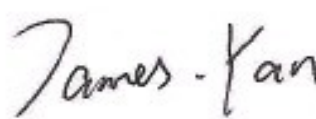Jeff.Fang
RF Manager
Compliance Certification Services Inc.

James.yan
Test Engineer
Compliance Certification Services Inc.

2. EUT DESCRIPTION

Product Name:	WLAN and BT Combo Dongle
Brand Name:	CC&C
Model Name:	CL-8723BU
Series Model:	N/A
Model Discrepancy:	N/A
Power Adapter Power Rating :	DC 5.0V
Frequency Range :	Bluetooth:2402 ~ 2480 MHz
Transmit Power :	Bluetooth:8.52dBm
Modulation Technique :	Bluetooth: FHSS
Transmit Data Rate :	Bluetooth: GFSK(1 Mbps), $\pi/4$ -DQPSK(2 Mbps),8-DPSK(3 Mbps)
Number of Channels :	Bluetooth: 79 Channels
Antenna Specification:	chip Antenna Gain 0.5 dBi

Remark:

- 1.The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
- 2.This submittal(s) (test report) is intended for **FCC ID: PANCL8723BU** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 ,15.247.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EXERCISEEUT

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.10 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

Under 1GHz

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.10.

Above 1GHz

The EUT is placed on a turn table, which is 1.5 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.10.

3.4 TEST Mode

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Antenna
Peak Output Power	GFSK	1 Mbps	0/39/78	1
	8DPSK	3 Mbps		
Hopping Channel Bandwidth	GFSK	1 Mbps	0/39/78	1
	8DPSK	3 Mbps		
Hopping Channel Separation	GFSK	1 Mbps	38-39	1
	8DPSK	3 Mbps		
Number of Hopping Frequency	GFSK	1 Mbps	0-78	1
	8DPSK	3 Mbps		
Dwell Time	DH1/DH3/DH5	1 Mbps	39	1
	3DH1/3DH3/3DH5	3 Mbps		
Spurious Emission	GFSK	1 Mbps	0/39/78	1
	8DPSK	3 Mbps		
Band Edge Emissions	GFSK	1 Mbps	0/78	1
	8DPSK	3 Mbps		
Radiated Emissions Below 1GHz	GFSK	1 Mbps	78	1
Radiated Emissions Above 1GHz	GFSK	1 Mbps	0/39/78	1
	8DPSK	3 Mbps		
AC Power Conducted Emissions	CTX	-	-	-

Remark: For radiated test cases below 1 GHz, the worst mode data rate channel 78 of 1Mbps was reported only, because this data rate has the highest RF output power at preliminary tests.

3.5 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.0900 - 0.1100	16.420 - 16.423	399.9 - 410.0	4.50 - 5.15
0.4950 - 0.505 ⁽¹⁾	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960.0 - 1240	7.25 - 7.75
4.1250 - 4.1280	25.50 - 25.67	1300 - 1427	8.025 - 8.500
4.17725 - 4.17775	37.50 - 38.25	1435.0 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73.0 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.2150 - 6.2180	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108.00 - 121.94	1718.8 - 1722.2	13.25 - 13.40
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.50
8.2910 - 8.2940	149.90 - 150.05	2310 - 2390	15.35 - 16.20
8.3620 - 8.3660	156.52475 - 156.52525	2483.5 - 2500.0	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.1700	3260 - 3267	23.6 - 24.0
12.2900 - 12.2930	167.72 - 173.20	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345 - 3358	36.43 - 36.5 ⁽²⁾
12.57675 - 12.57725	322.0 - 335.4	3600 - 4400	
13.3600 - 13.4100			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards. facilities and accreditations

5. FACILITIES AND ACCREDITATIONS

5.1 FACILTIES

All measurement facilities used to collect the measurement data are located at CCS China Kunshan Lab at 10#Weiye Rd, Innovation Park Eco. & Tec. Development Zone Kunshan city JiangSu, (215300), CHINA.

The sites are constructed in conformance with the requirements of ANSI C63.10 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 LABORATORY ACCREDITATIONS AND LISTING

The test facilities used to perform radiated and conducted emissions tests are accredited by American Association for Laboratory Accreditation Program for the specific scope accreditation under Lab Code: 200581-0 to perform Electromagnetic Interference tests according to FCC Part 15 or 18 requirements. In addition, the test facilities are listed with Federal Communication Commission, Laboratory Division, 424105 for 10m chamber, 238958 for 3m chamber .

5.4 TABLE OF ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

Taiwan	TAF
USA	A2LA

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

Canada	Industry Canada
Japan	VCCI
Taiwan	BSMI
USA	FCC

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsrf.com>

5.5 LIST OF MEASURING EQUIPMENT

Conducted Emissions Test Site					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Data	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY44020154	2015-4-9	2016-4-8
DETECTOR NEGATIVE	Agilent	8473B	MY42240176	2015-5-11	2016-5-10
OSCILLOSCOPE	Agilent	DSO6104A	MY44002585	2015-3-16	2016-3-15
Power meter	Anritsu	ML2495A	1445010	2015-04-24	2016-04-23
Power sensor	Anritsu	MA2411B	1339220	2015-04-24	2016-04-23
Power SPLITTER	Mini-Circuits	ZN2PD-9G	SF078500430	N.C.R	N.C.R
DC Power Supply	AGILENT	E3632A	MY50340053	N.C.R	N.C.R
Temp. / Humidity Chamber	TERCHY	MHK-120AK	X30109	2015-1-22	2016-1-21
Test Software			EZ-EMC		

977 Chamber					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Data	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY44020154	2015-4-9	2016-4-8
EMI Test Receiver	R&S	ESCI	101378	2015-1-22	2016-1-21
Pre-Amplifier	MINI	ZFL-1000VH2	d041703	2015-1-22	2016-1-21
Pre-Amplifier	Miteq	JS41-00101800-32-10P	1675713	2015-1-22	2016-1-21
Bilog Antenna	Sunol	JB1	A062604	2015-3-6	2016-3-5
Horn-antenna	SCHWARZBECK	BBHA9120D	D:266	2015-3-7	2016-3-6
Turn Table	CT	CT123	4165	N.C.R	N.C.R
Antenna Tower	CT	CTERG23	3256	N.C.R	N.C.R
Controller	CT	CT100	95637	N.C.R	N.C.R
Test Software			EZ-EMC		

Conducted Emission					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Data	Calibration Due
EMI TEST RECEIVER	R&S	ESCI	100781	2015-3-16	2016-3-15
V (V-LISN)	SCHWARZBECK	NNLK 8129	8129-143	N.C.R	N.C.R
LISN (EUT)	FCC	FCC-LISN-50/ 250-50-2-02	05012	2015-3-16	2016-3-15
Pulse LIMITER	R&S	ESH3-Z2	100524	2015-9-24	2016-9-23
Test Software			EZ-EMC		

Remark: Each piece of equipment is scheduled for calibration once a year.

5.6 SETUP CONFIGURATION

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

5.7 SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	Series No.	FCC ID
	Notebook	DELL	E5430	CN8YYW1	N/A

Remark:

- 1.All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2.Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

6. FCC PART 15.247 REQUIREMENTS

6.1 PEAK POWER


Limit

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
2. According to §15.247(b)(1), For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.
3. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
4. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration

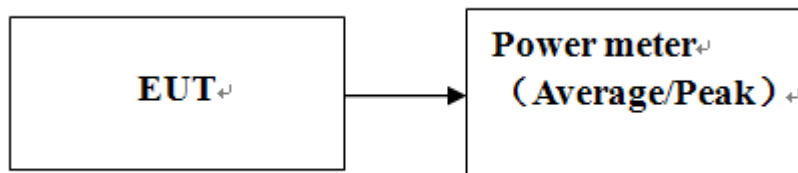

Test Procedure

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r03.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

Test Results

No non-compliance noted

Test RESULTS

1M GFSK Modulation mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (mW)	Limit (mW)	Result
Low	2402	7.39	5.483	125	PASS
Mid	2441	7.35	5.433		PASS
High	2480	7.21	5.260		PASS

3M 8-DPSK Modulation mode


Channel	Frequency (MHz)	Output Power (dBm)	Output Power (mW)	Limit (mW)	Result
Low	2402	8.40	6.918	125	PASS
Mid	2441	8.52	7.112		PASS
High	2480	8.45	6.998		PASS

6.2 20DB BANDWIDTH MEASUREMENT

Limit

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Configuration



Test Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 30kHz, VBW = 300kHz, Span = 3MHz, Sweep = auto.
4. Max hold, mark 2 peaks of hopping channel and record the 2 peaks frequency.

Test Results of Bandwidth

No non-compliance noted

Operation Mode:	1 Mbps	Test Date:	October 31, 2015
Temperature:	24°C	Tested by:	James.Yan

Channel	Frequency (MHz)	Bandwidth (B) (MHz)
00	2402	1.055
39	2441	1.045
78	2480	1.050

Operation Mode:	3 Mbps	Test Date:	October 31, 2015
Temperature:	24°C	Tested by:	James.Yan

Channel	Frequency (MHz)	Bandwidth (B) (MHz)
00	2402	1.365
39	2441	1.375
78	2480	1.375


Test Plot

1M Channel 00

Agilent

R T

▲ Mkr1 1.055 MHz
-0.26 dB

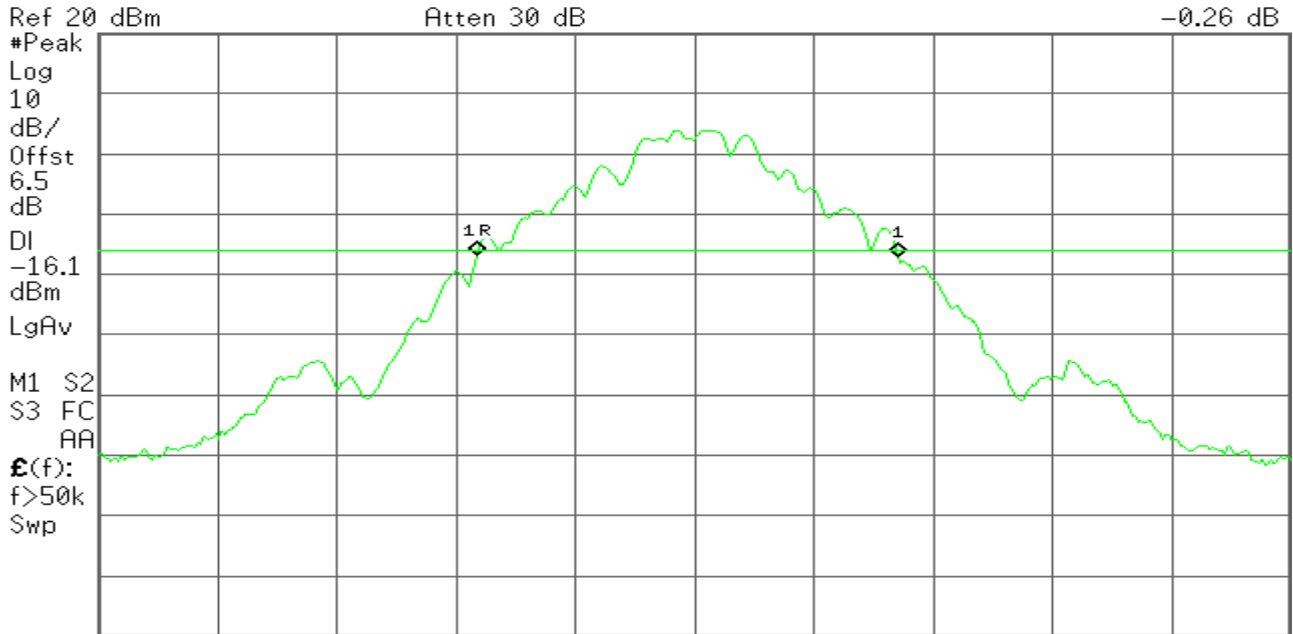


Center 2.402 000 GHz Span 3 MHz
#Res BW 30 kHz #VBW 300 kHz Sweep 3.08 ms (601 pts)

1M Channel 39

Agilent

R T

▲ Mkr1 1.050 MHz
-0.07 dB

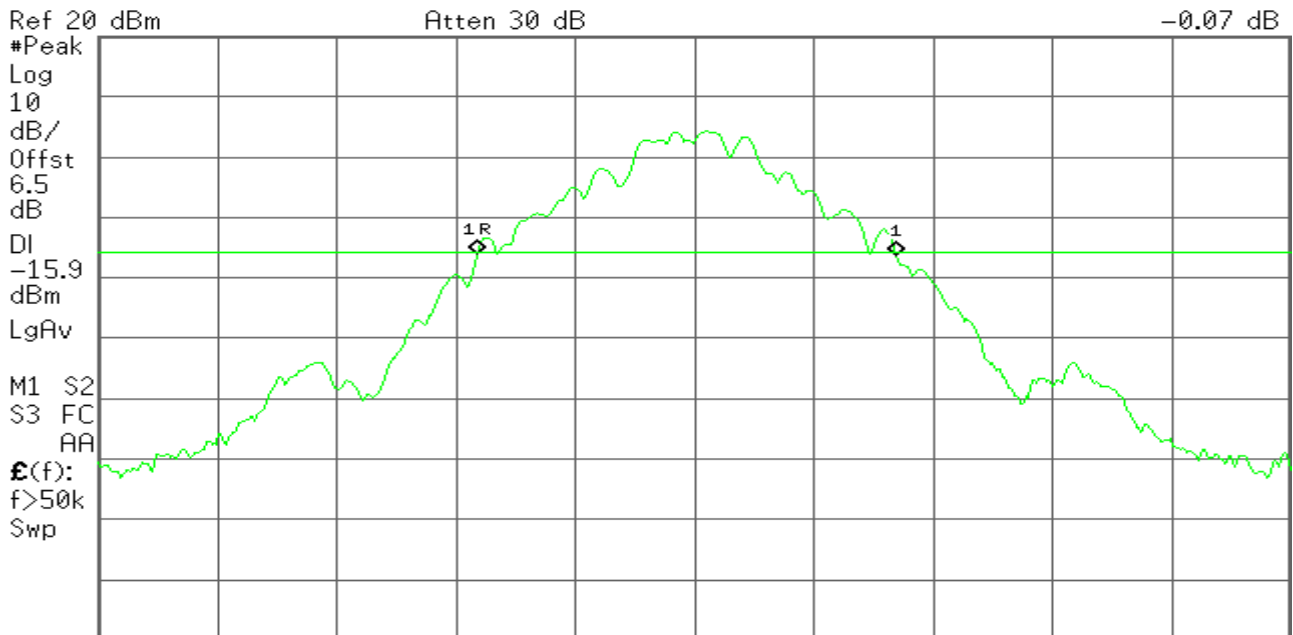


Center 2.480 000 GHz Span 3 MHz
#Res BW 30 kHz #VBW 300 kHz Sweep 3.08 ms (601 pts)

1M Channel 78

Agilent

R T

▲ Mkr1 910 kHz
0.61 dB

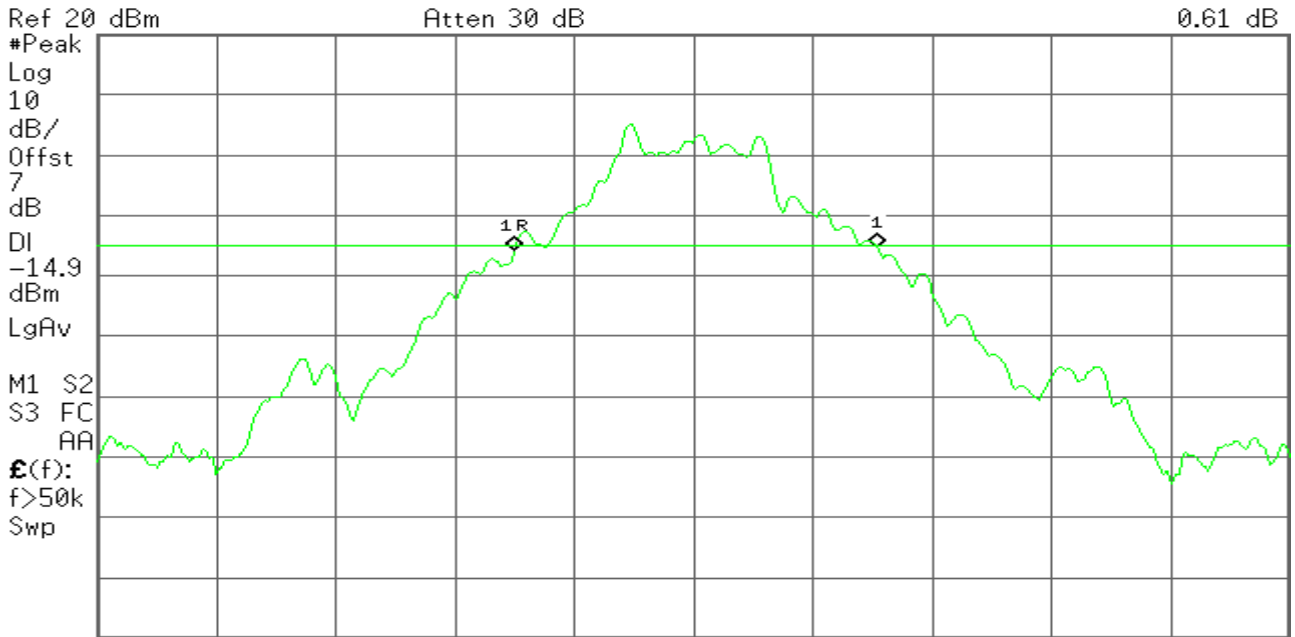


Center 2.480 000 GHz Span 3 MHz
#Res BW 30 kHz #VBW 300 kHz Sweep 3.08 ms (601 pts)

3M Channel 00

Agilent

R T

▲ Mkr1 1.365 MHz
0.15 dB

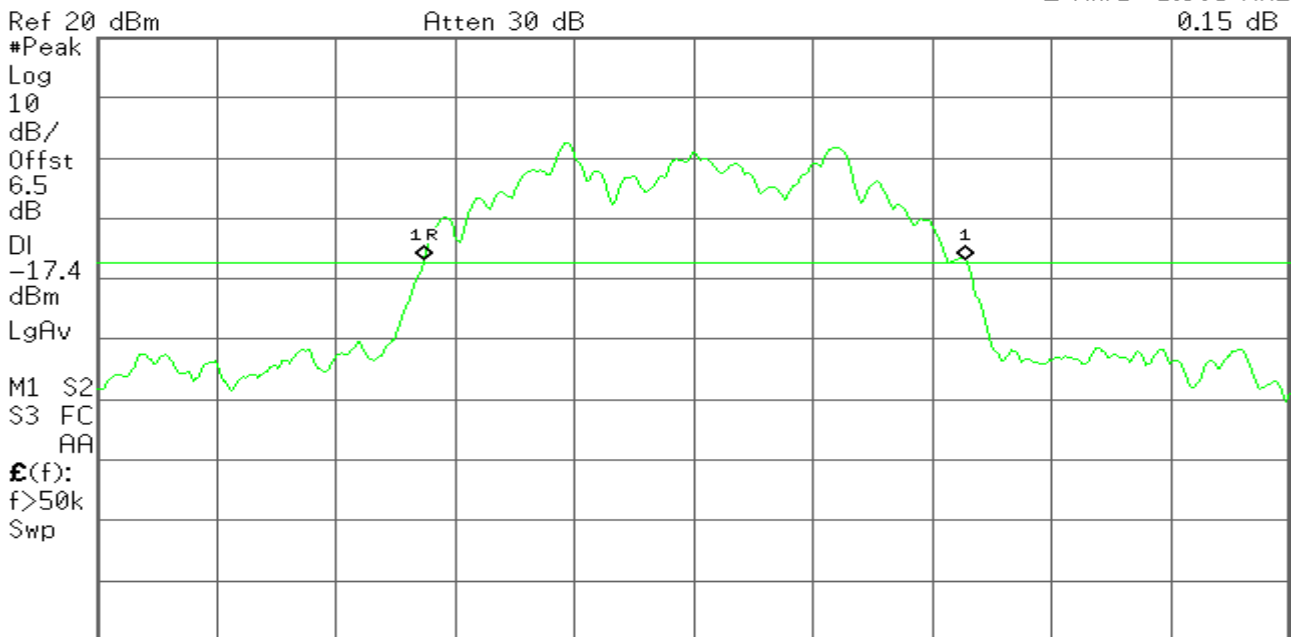


Center 2.402 000 GHz Span 3 MHz
#Res BW 30 kHz #VBW 300 kHz Sweep 3.08 ms (601 pts)

3M Channel 39

Agilent

R T

▲ Mkr1 1.375 MHz
0.16 dB

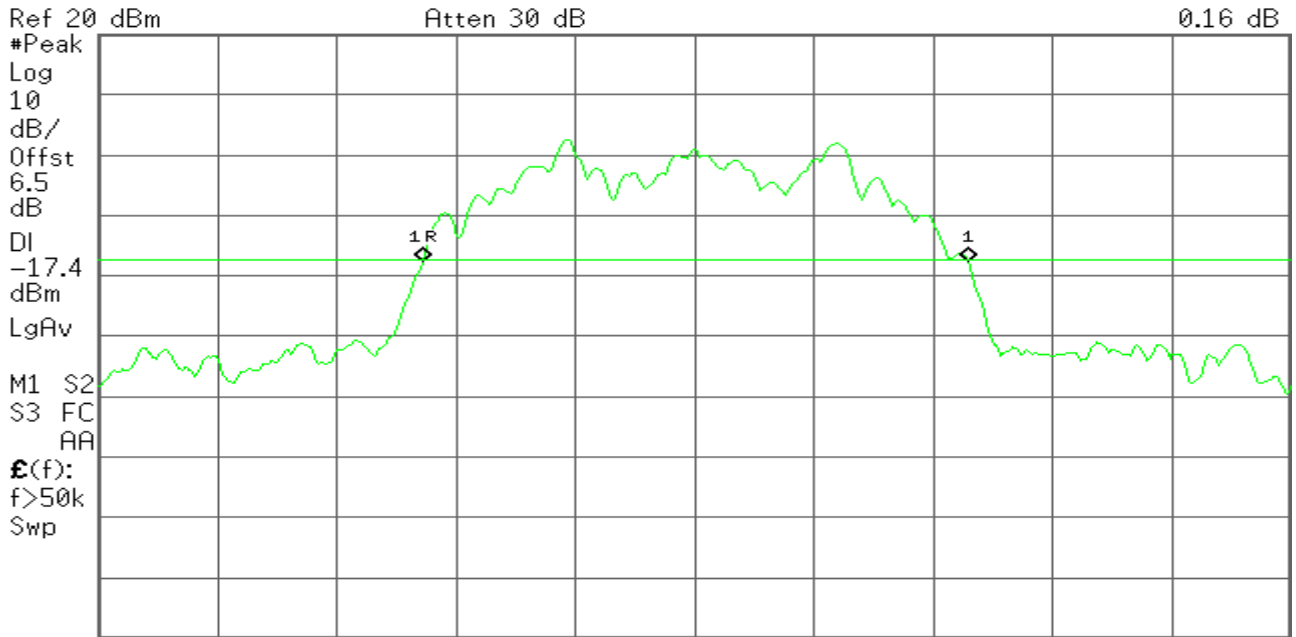

Center 2.441 000 GHz

Span 3 MHz

#Res BW 30 kHz

#VBW 300 kHz


Sweep 3.08 ms (601 pts)

3M Channel 78

Agilent

R T

▲ Mkr1 1.375 MHz
0.33 dB

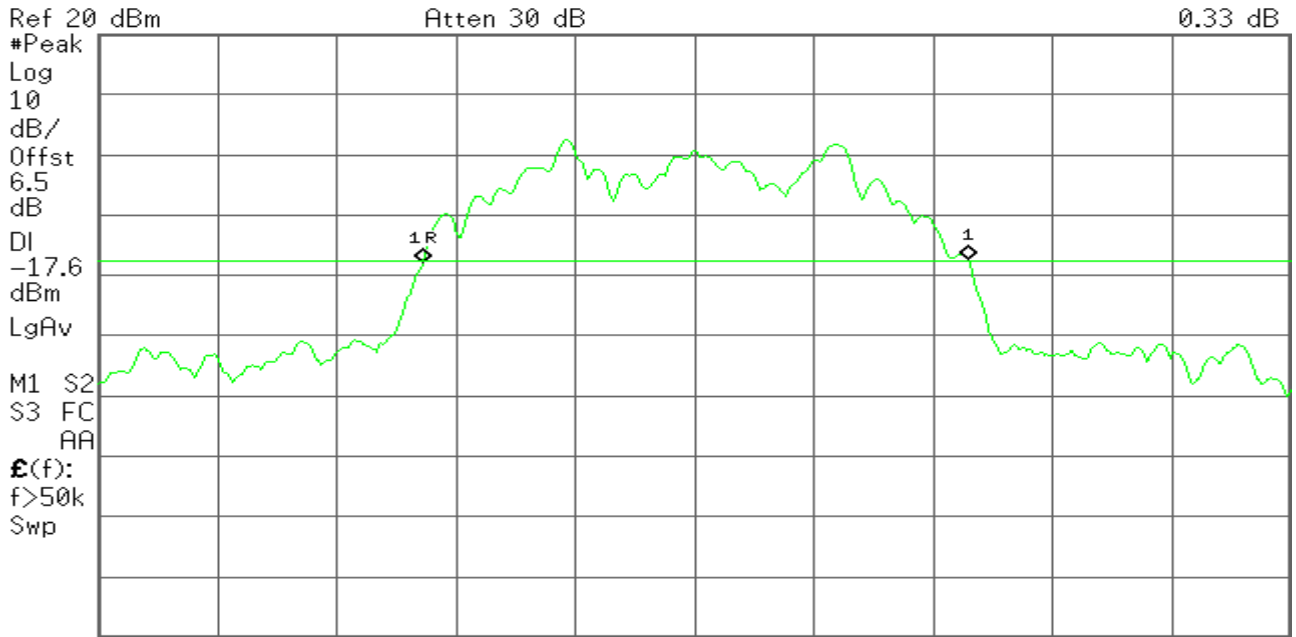

Center 2.480 000 GHz

Span 3 MHz

#Res BW 30 kHz

#VBW 300 kHz


Sweep 3.08 ms (601 pts)

6.3 HOPPING CHANNEL SEPARATION

LIMIT

According to §15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = middle of hopping channel.
4. Set the spectrum analyzer as RBW = 30kHz, VBW = 100kHz, Span = 3MHz, Sweep = auto.
5. Max hold, mark 2 peaks of hopping channel and record the 2 peaks frequency.

TEST RESULTS

No non-compliance noted


Operation Mode:	1 Mbps	Test Date:	October 31, 2015
Temperature:	24°C	Tested by:	James.Yan

Channel	Frequency	Separation	(2/3 of 20dB BW)	Result
	(MHz)	(MHz)	Limits (MHz)	
39~40	2441~2442	1.000	0.7033	Pass


Operation Mode:	3 Mbps	Test Date:	October 31, 2015
Temperature:	24°C	Tested by:	James.Yan

Channel	Frequency	Separation	(2/3 of 20dB BW)	Result
	(MHz)	(MHz)	Limits (MHz)	
39~40	2441~2442	1.000	0.9167	Pass

1M Channel Separation Plot on Channel 39-40

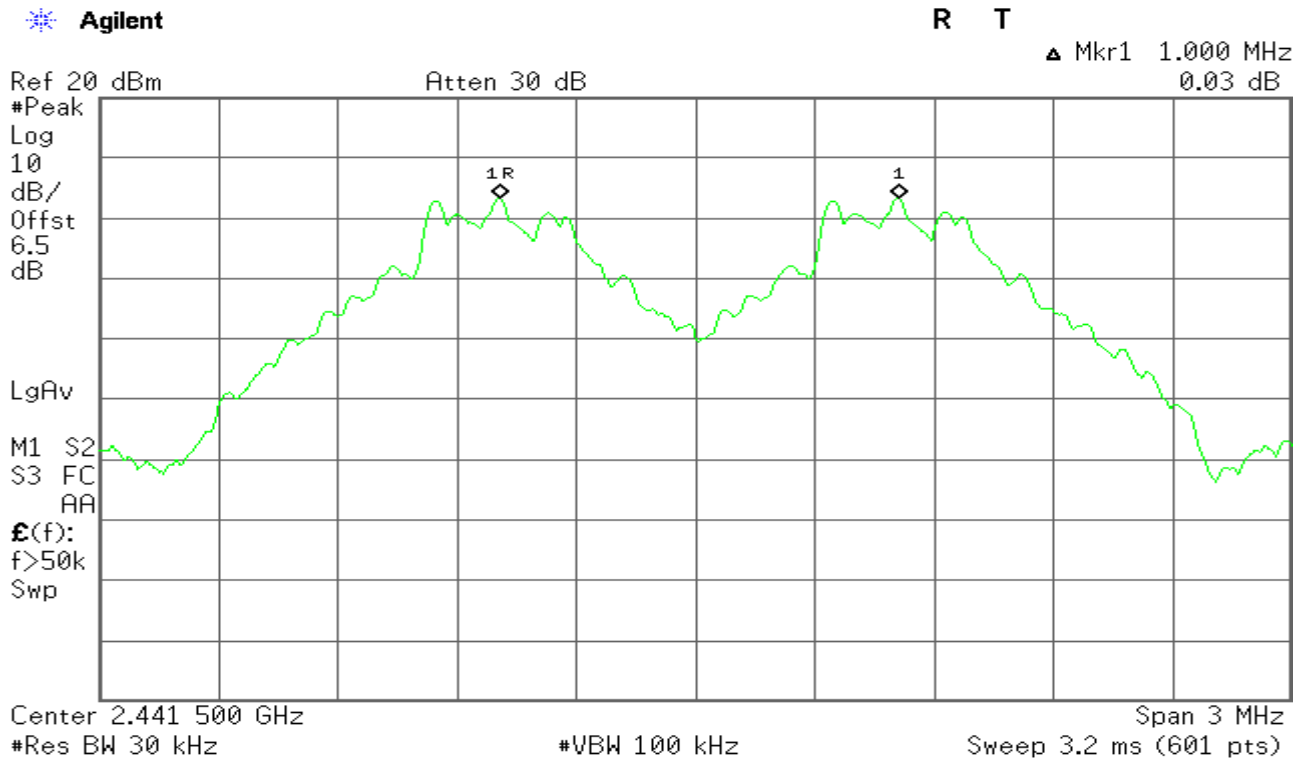

3M Channel Separation Plot on Channel 39-40

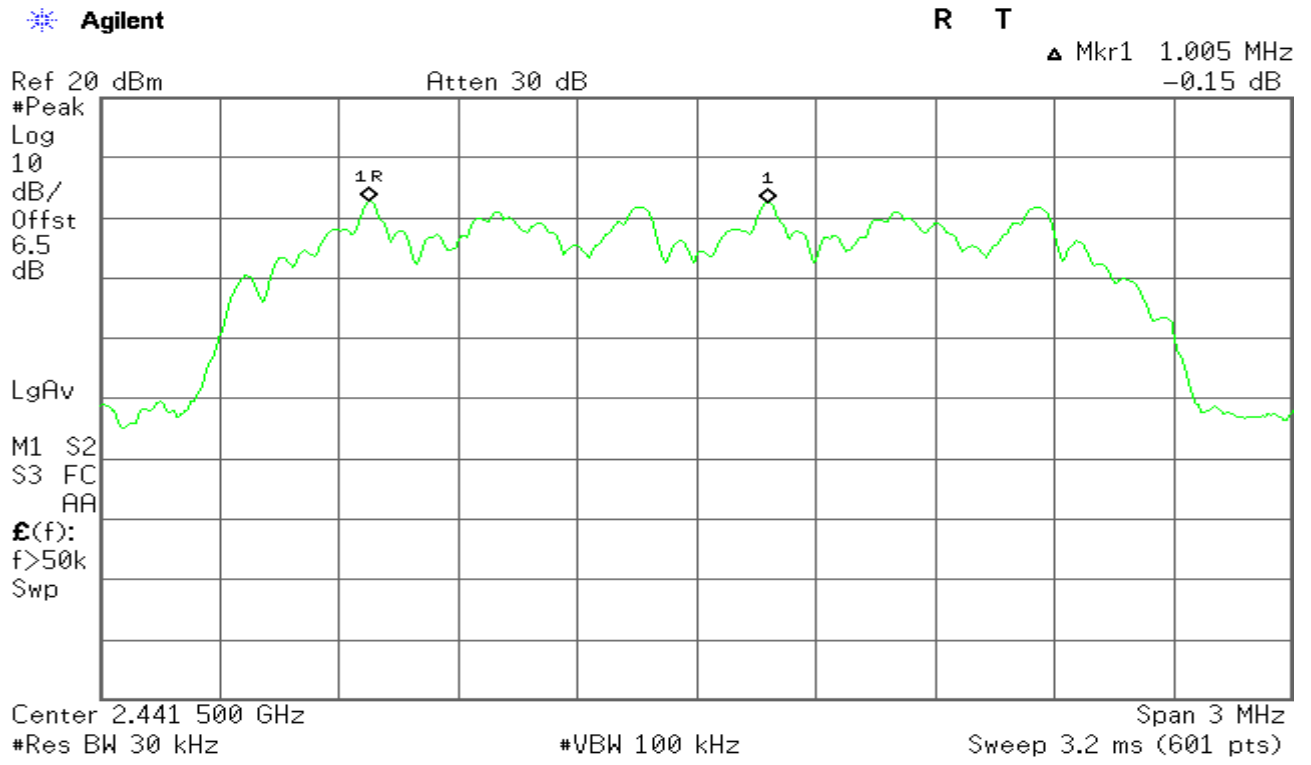


6.4 NUMBER OF HOPPING FREQUENCY

LIMIT

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set spectrum analyzer Start=2400MHz, Stop = 2441.5MHz, Sweep = auto and Start=2441.5MHz, Stop = 2483.5MHz, Sweep = auto.
4. Set the spectrum analyzer as RBW, VBW=1MHz.
5. Max hold, view and count how many channel in the band.

TEST RESULTS

No non-compliance noted

Test Data

Operation Mode:	1 Mbps	Test Date:	October 31, 2015
Temperature:	24°C	Tested by:	James.Yan

Result (No. of CH)	Limit (No. of CH)	Result
79	>15	PASS

Operation Mode:	3 Mbps	Test Date:	October 31, 2015
Temperature:	24°C	Tested by:	James.Yan


Result (No. of CH)	Limit (No. of CH)	Result
79	>15	PASS

Test Plot:1M

Channel Number 2.4 GHz – 2.441.5 GHz

Agilent


R T

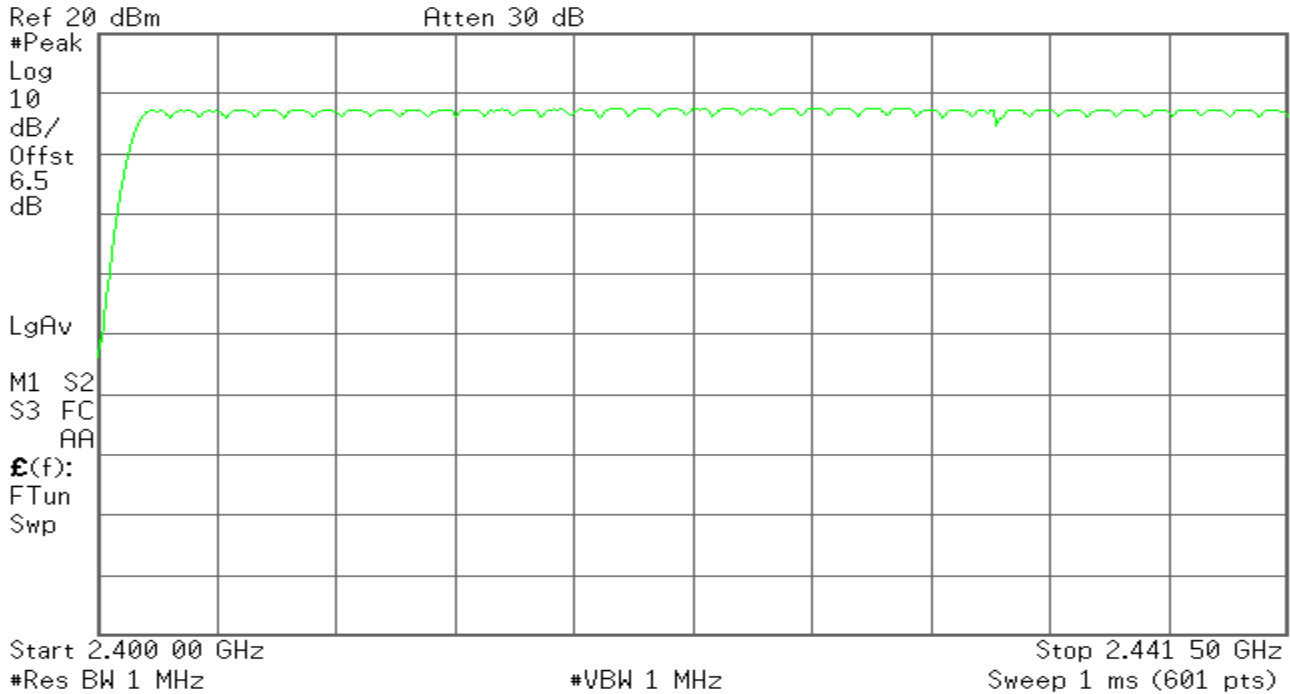

Channel Number 2.441.5 GHz – 2.4835 GHz

Agilent

R T

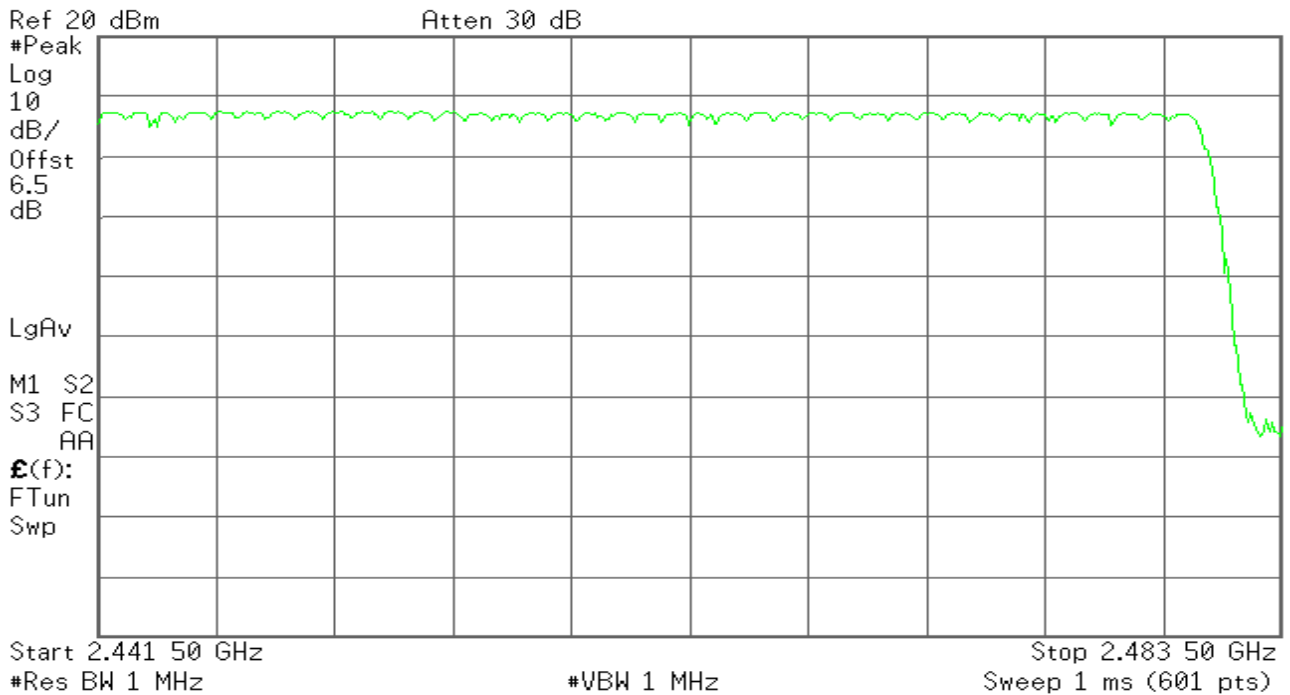


6.5 TIME OF OCCUPANCY (DWELL TIME)

LIMIT

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.
5. Repeat above procedures until all frequency measured were complete.

TEST RESULTS

No non-compliance noted

Test Data

1M

DH 1

$0.356 * (1600/2)/79 * 31.6 = 113.92(\text{ms})$

Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
0.356	113.92	31.60	400	PASS

DH 3

$1.617 * (1600/4)/79 * 31.6 = 258.72 (\text{ms})$

Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
1.617	258.72	31.60	400	PASS

DH 5

$2.867 * (1600/6)/79 * 31.6 = 305.81 (\text{ms})$

Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
2.867	305.81	31.60	400	PASS

3M

DH 1

$0.3833 * (1600/2)/79 * 31.6 = 122.656 \text{ (ms)}$

Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
0.3833	122.656	31.60	400	PASS

DH 3

$1.633 * (1600/4)/79 * 31.6 = 261.280 \text{ (ms)}$

Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
1.633	261.280	31.60	400	PASS

DH 5

$2.884 * (1600/6)/79 * 31.6 = 307.627 \text{ (ms)}$


Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
2.884	307.627	31.60	400	PASS

1M-DH1

Agilent

R T

Mkr3 947.3 μ s
-4.53 dBm

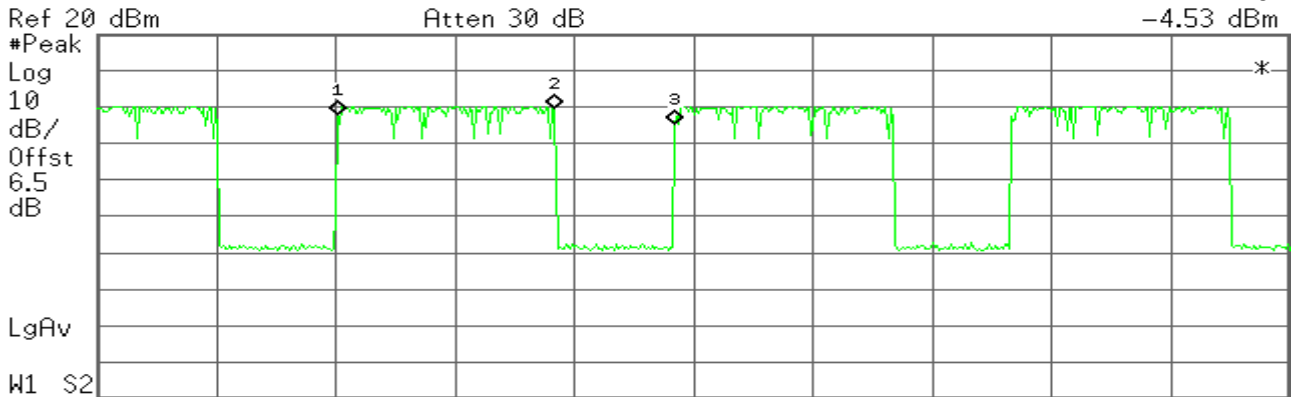

Center 2.441 000 GHz Span 0 Hz
Res BW 1 MHz #VBW 1 MHz Sweep 1.96 ms (601 pts)


Marker	Trace	Type	X Axis	Amplitude
1	(1)	Time	395.3 μ s	-2.27 dBm
2	(1)	Time	751.3 μ s	-0.45 dBm
3	(1)	Time	947.3 μ s	-4.53 dBm

1M-DH3

Agilent

R T

Mkr1 1.975 ms
0.47 dBm

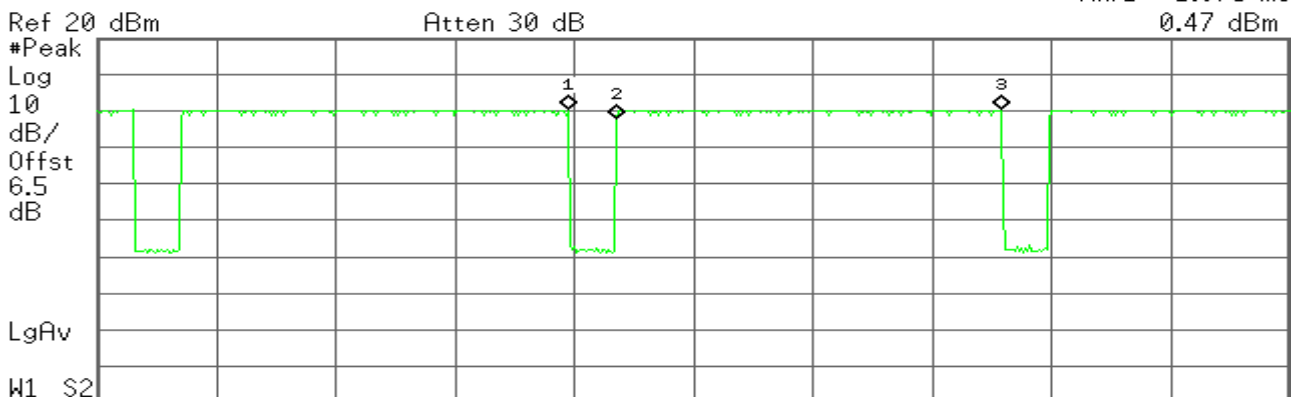

Center 2.441 000 GHz Span 0 Hz
Res BW 1 MHz #VBW 1 MHz Sweep 5 ms (601 pts)


Marker	Trace	Type	X Axis	Amplitude
1	(1)	Time	1.975 ms	0.47 dBm
2	(1)	Time	2.175 ms	-2.12 dBm
3	(1)	Time	3.792 ms	0.48 dBm

1M-DH5

Agilent

R T

Mkr3 7.833 ms
0.24 dBm

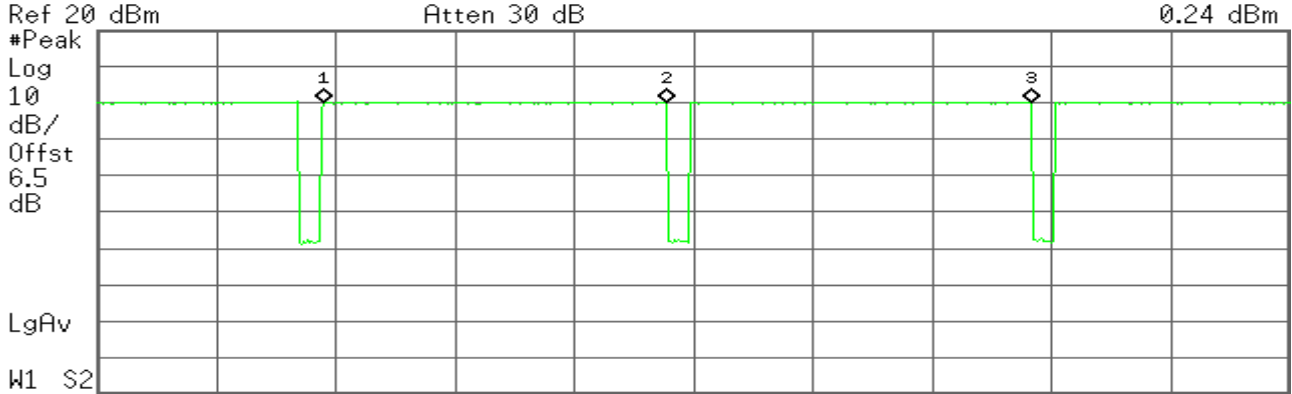

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Time	1.9 ms	0.04 dBm
2	(1)	Time	4.767 ms	0.29 dBm
3	(1)	Time	7.833 ms	0.24 dBm

3M-DH1

Agilent

R T

Mkr3 1.05 ms
0.56 dBm




Marker	Trace	Type	X Axis	Amplitude
1	(1)	Time	466.7 μs	-3.36 dBm
2	(1)	Time	666.7 μs	-2.06 dBm
3	(1)	Time	1.05 ms	0.56 dBm

3M-DH3

Agilent

R T

Mkr1 1.267 ms
-1.98 dBm

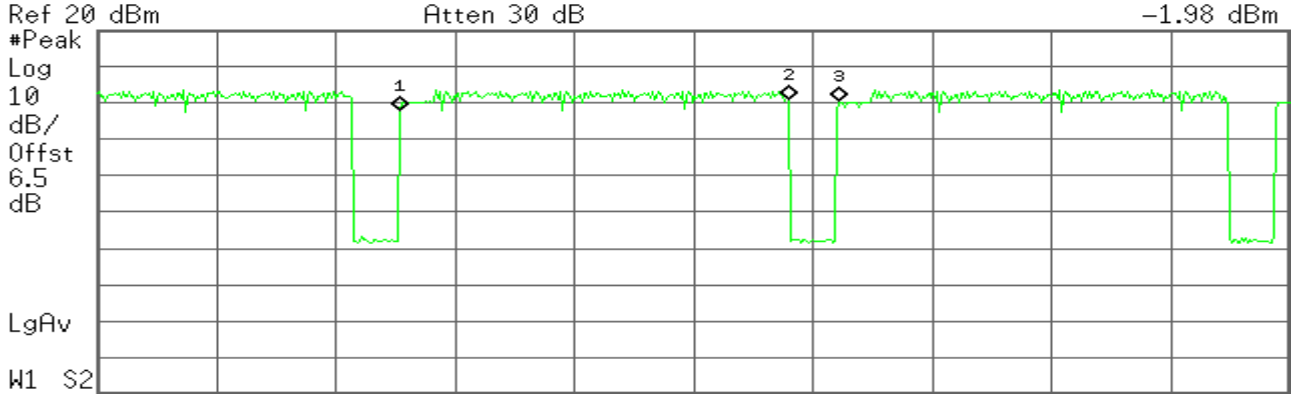


Marker	Trace	Type	X Axis	Amplitude
1	(1)	Time	1.267 ms	-1.98 dBm
2	(1)	Time	2.9 ms	1.04 dBm
3	(1)	Time	3.108 ms	0.32 dBm

3M-DH5

Agilent

R T

Mkr2 5.583 ms
0.09 dBm

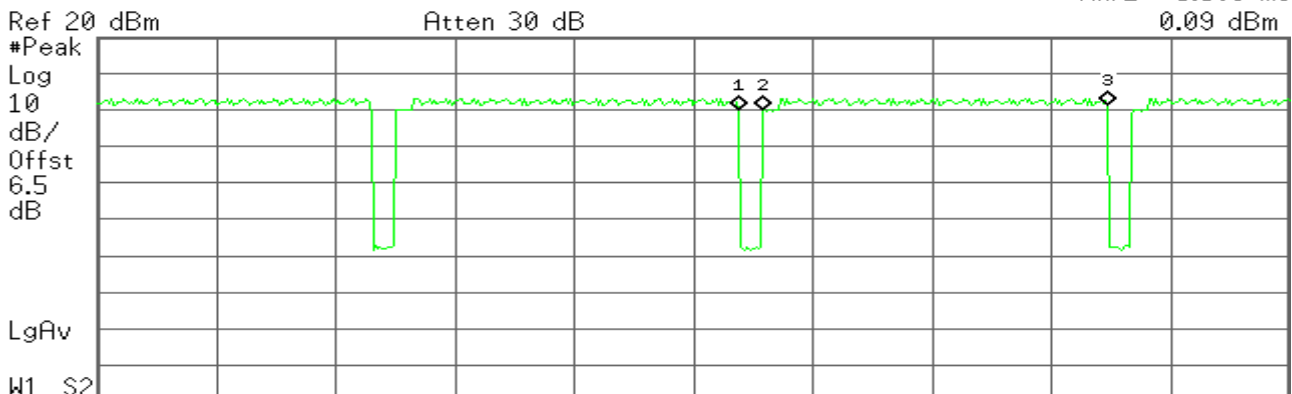


Marker	Trace	Type	X Axis	Amplitude
1	(1)	Time	5.383 ms	0.04 dBm
2	(1)	Time	5.583 ms	0.09 dBm
3	(1)	Time	8.467 ms	1.49 dBm

6.6 Conducted Band Edges Measurement

LIMIT

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

Test Configuration



TEST PROCEDURE

1. The testing follows the guidelines in Band-edge Compliance of RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100kHz ($\geq 1\%$ span=10MHz), VBW = 300kHz (≥ 3 RBW). Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.


TEST RESULTS

No non-compliance noted

Test Result of Conducted Band Edges

Operation Mode:	1 Mbps	Test Date:	October 31, 2015
Test Channel:	00 and 78	Tested by:	James.Yan
Humidity:	52 % RH	Temperature:	24°C

Low Band Edge Plot on Channel 00

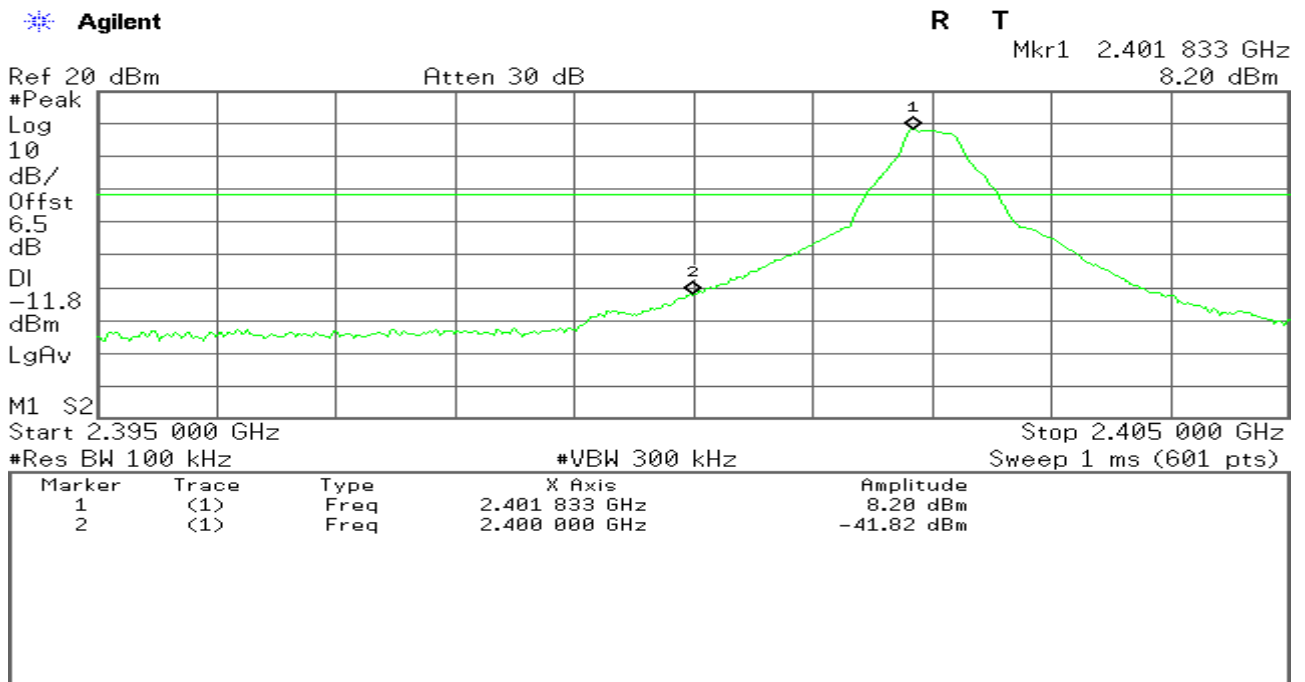


High Band Edge Plot on Channel 78

Agilent

R T

Mkr1 2.479 85 GHz
8.76 dBm

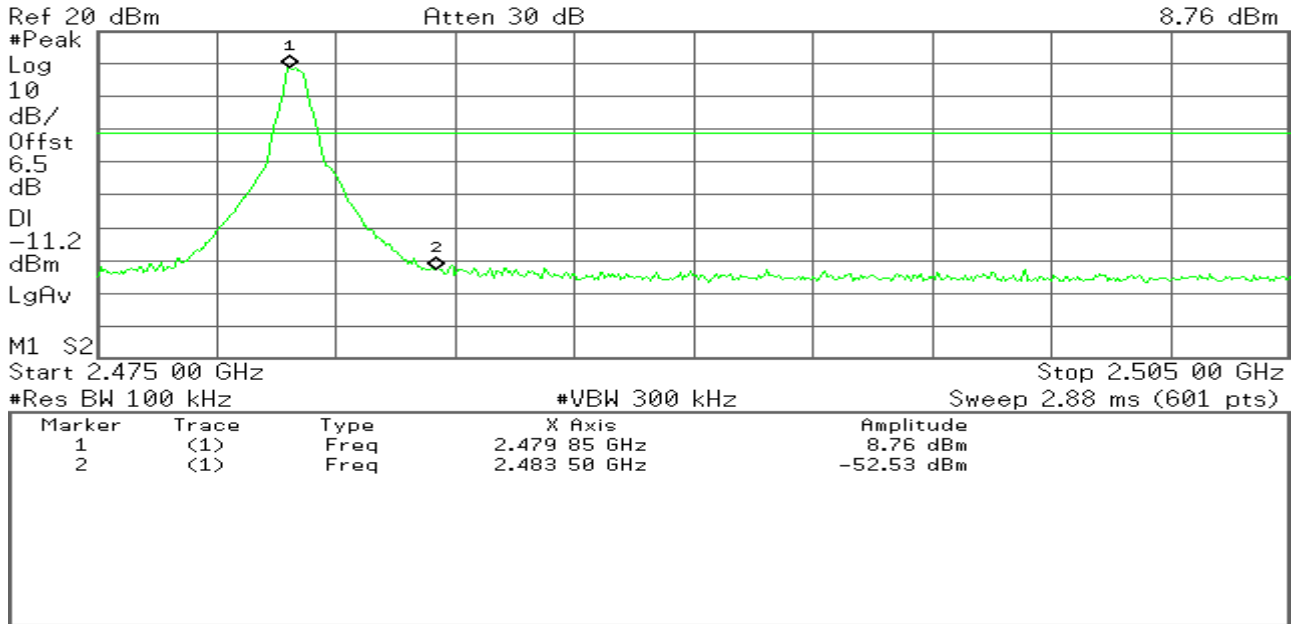


Operation Mode:	3 Mbps	Test Date:	October 31, 2015
Test Channel:	00 and 78	Tested by:	James.Yan
Humidity:	52 % RH	Temperature:	24°C

Low Band Edge Plot on Channel 00

Agilent

R T

Mkr2 2.400 000 GHz
-41.91 dBm

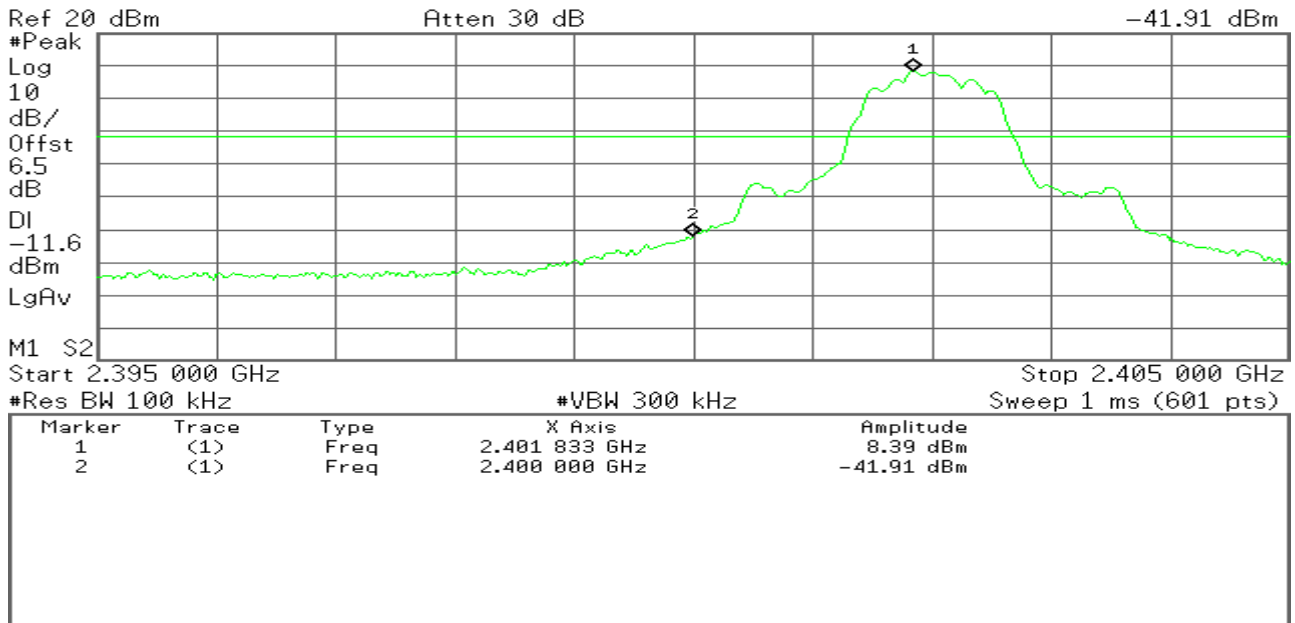


High Band Edge Plot on Channel 78

Agilent

R T

Mkr2 2.483 50 GHz
-52.42 dBm

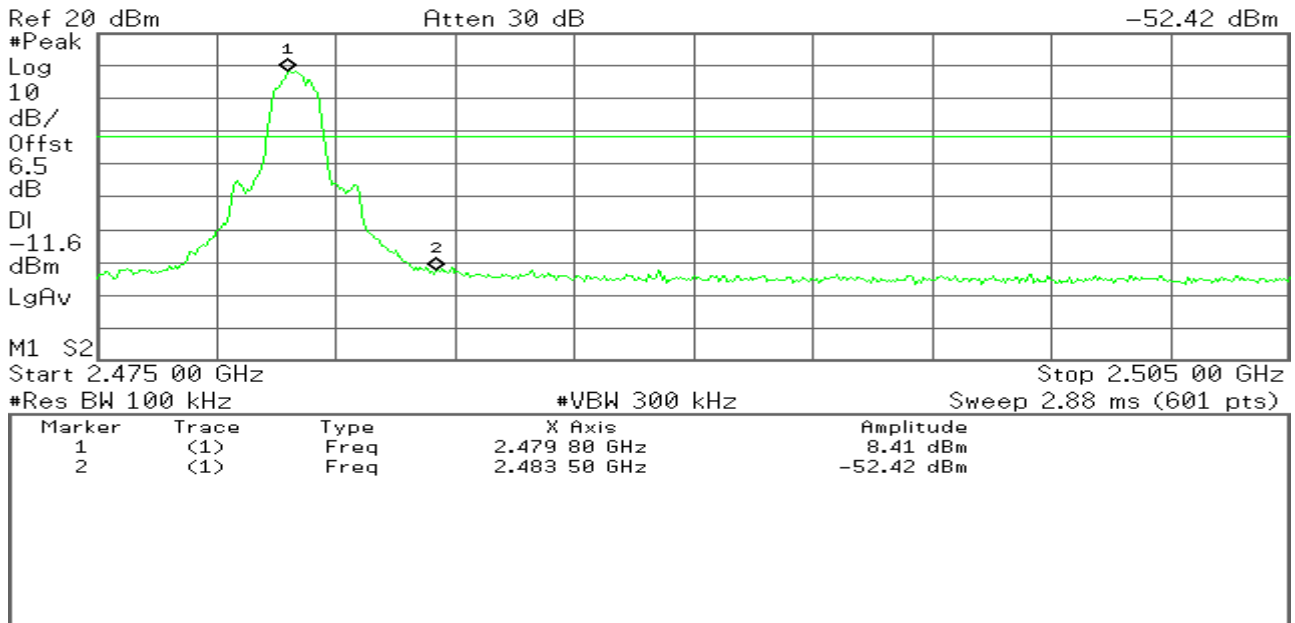

Test Result of Conducted Hopping Mode Band Edges


Operation Mode:	1 Mbps	Test Date:	October 31, 2015
Humidity:	52 % RH	Temperature:	24°C

1Mbps Hopping Mode Low Band Edge Plot

Agilent

R T

Mkr1 2.401 833 GHz
8.26 dBm

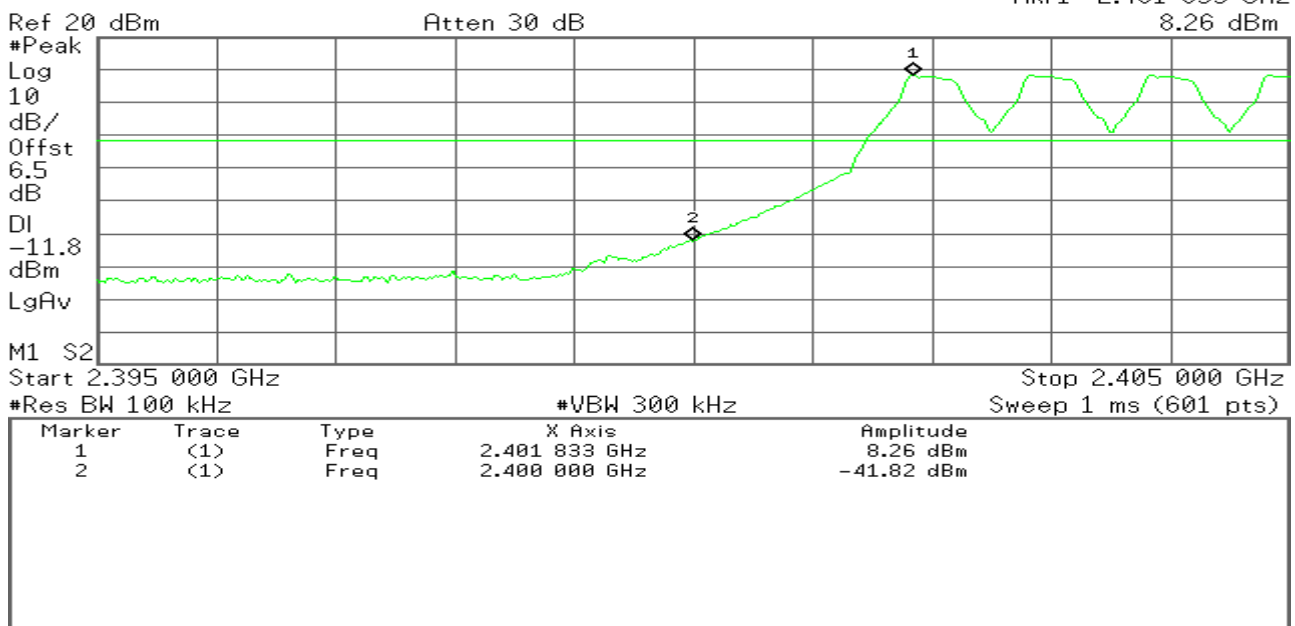


1Mbps Hopping Mode High Band Edge Plot

Agilent

R T

Mkr1 2.476 85 GHz
8.66 dBm

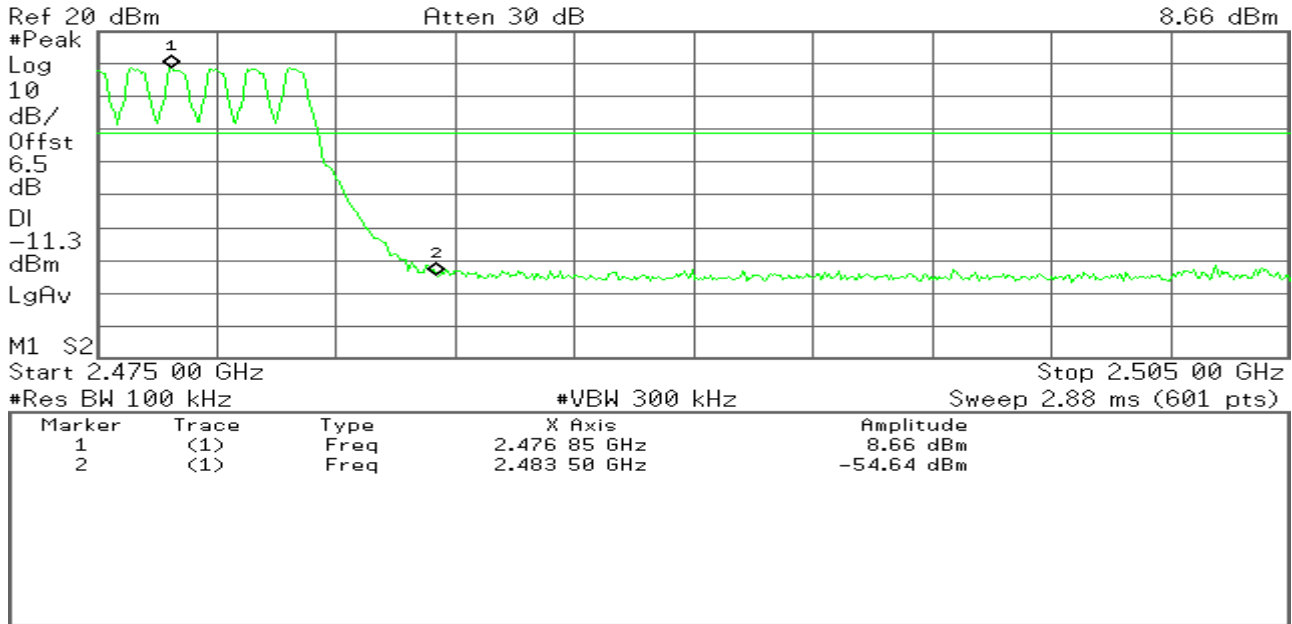


Operation Mode:	3 Mbps	Test Date:	October 31, 2015
Humidity:	52 % RH	Temperature:	24°C

3Mbps Hopping Mode Low Band Edge Plot

Agilent

R T

Mkr1 2.401 833 GHz
8.40 dBm

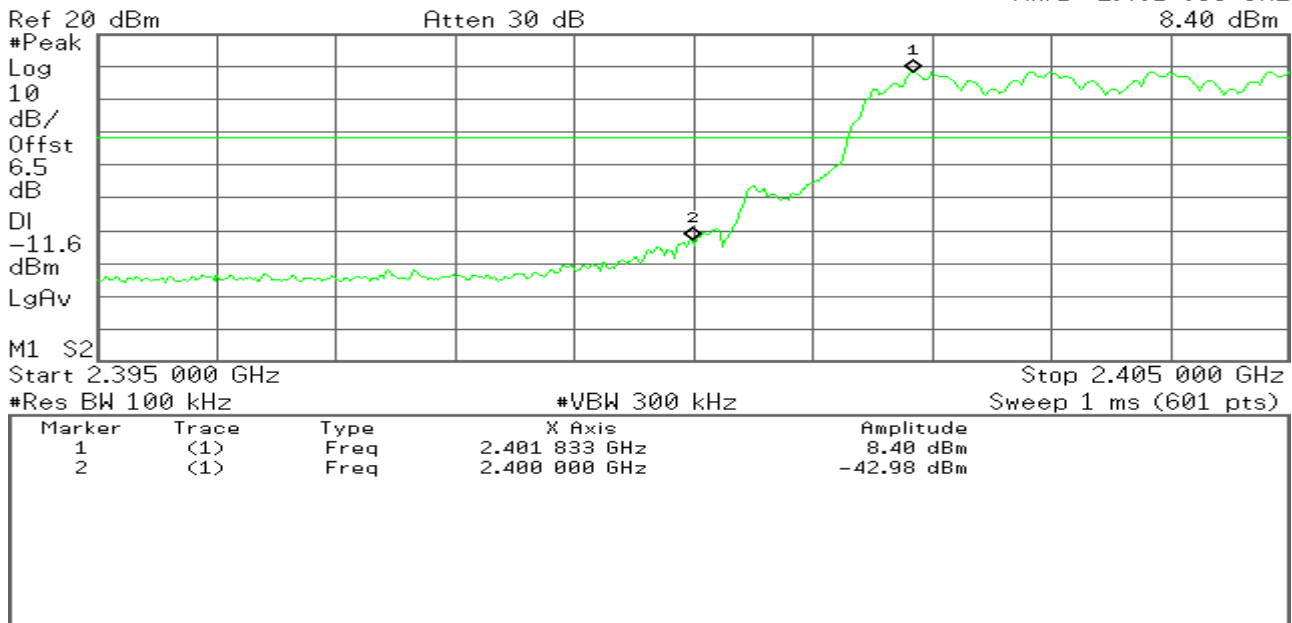


3Mbps Hopping Mode High Band Edge Plot

Agilent

R T

Mkr2 2.483 50 GHz
-51.91 dBm

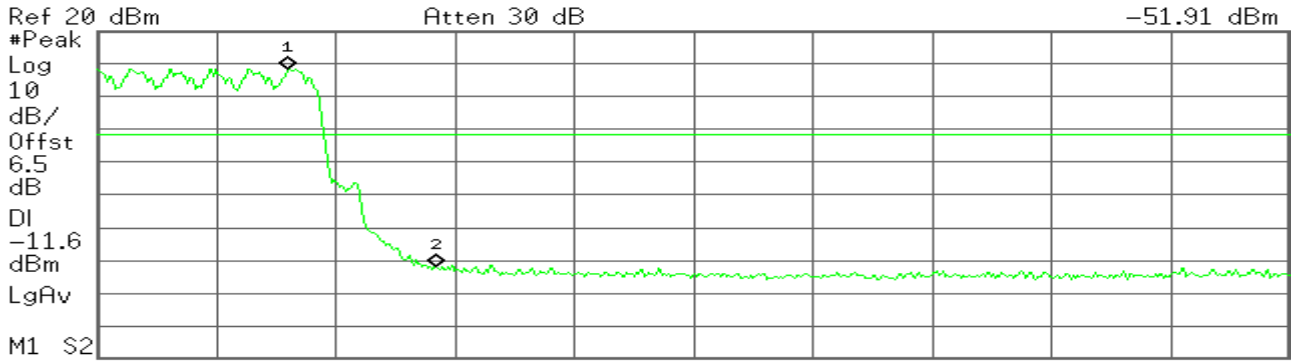

Start 2.475 00 GHz

Stop 2.505 00 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 2.88 ms (601 pts)


Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.479 80 GHz	8.41 dBm
2	(1)	Freq	2.483 50 GHz	-51.91 dBm

6.7 Conducted Spurious Emission Measurement

LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Test Configuration



TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 KHz. The video bandwidth is set to 300 KHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.


TEST RESULTS

No non-compliance noted

Operation Mode:	1 Mbps	Test Date:	October 31, 2015
Test Channel:	00	Tested by:	James.Yan
Humidity:	52 % RH	Temperature:	24°C


Agilent

R T

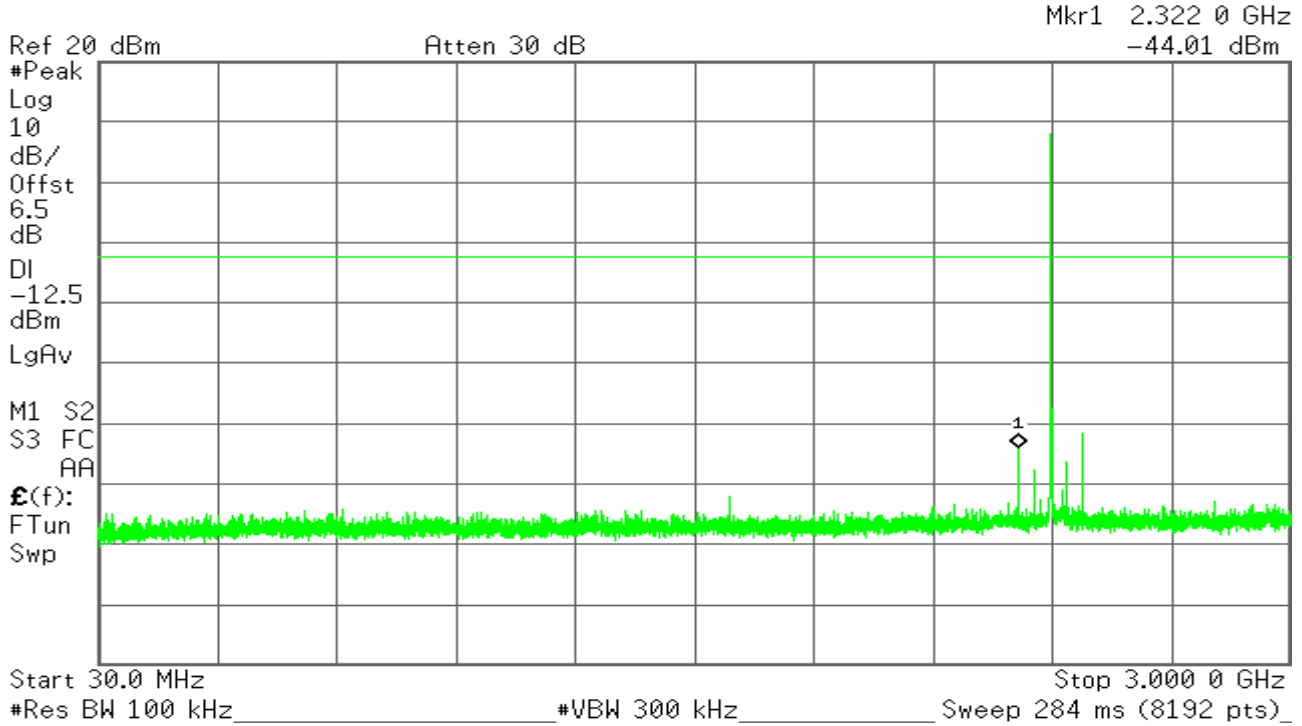

Agilent

R T

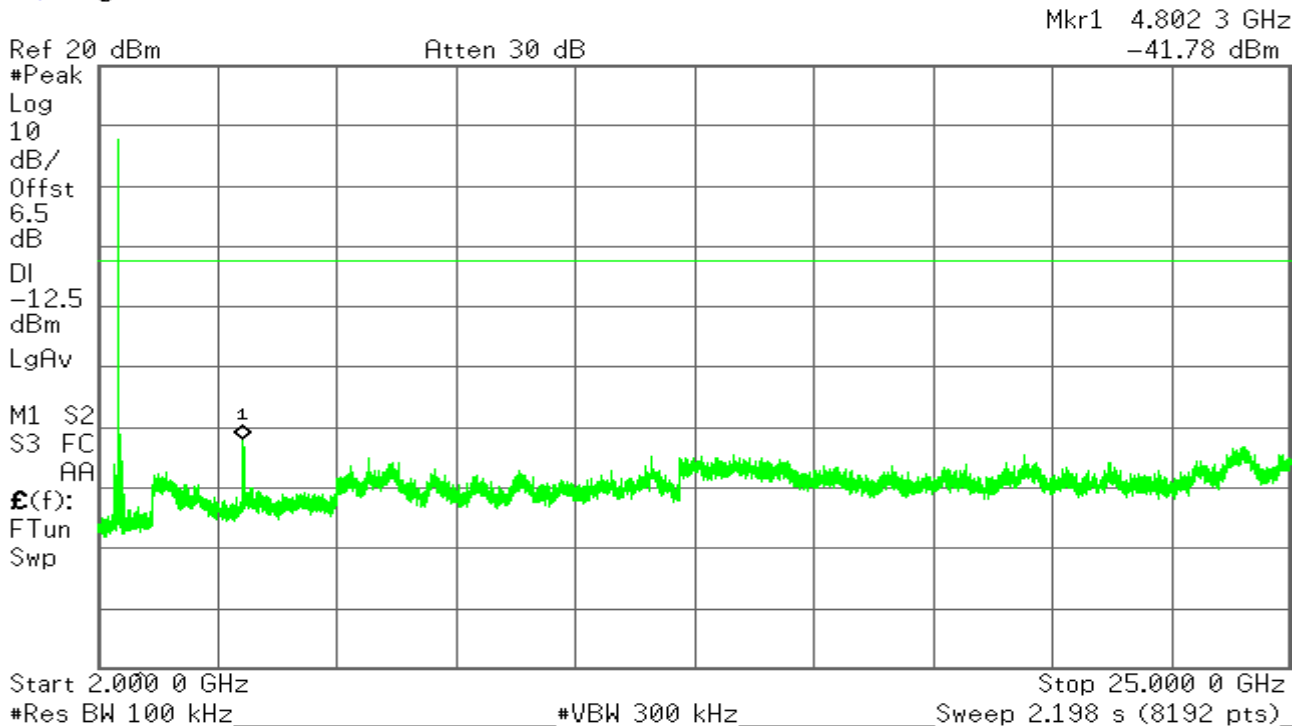

Operation Mode:	1 Mbps	Test Date:	October 31, 2015
Test Channel:	39	Tested by:	James.Yan
Humidity:	52 % RH	Temperature:	24°C


Agilent

R T



Agilent

R T

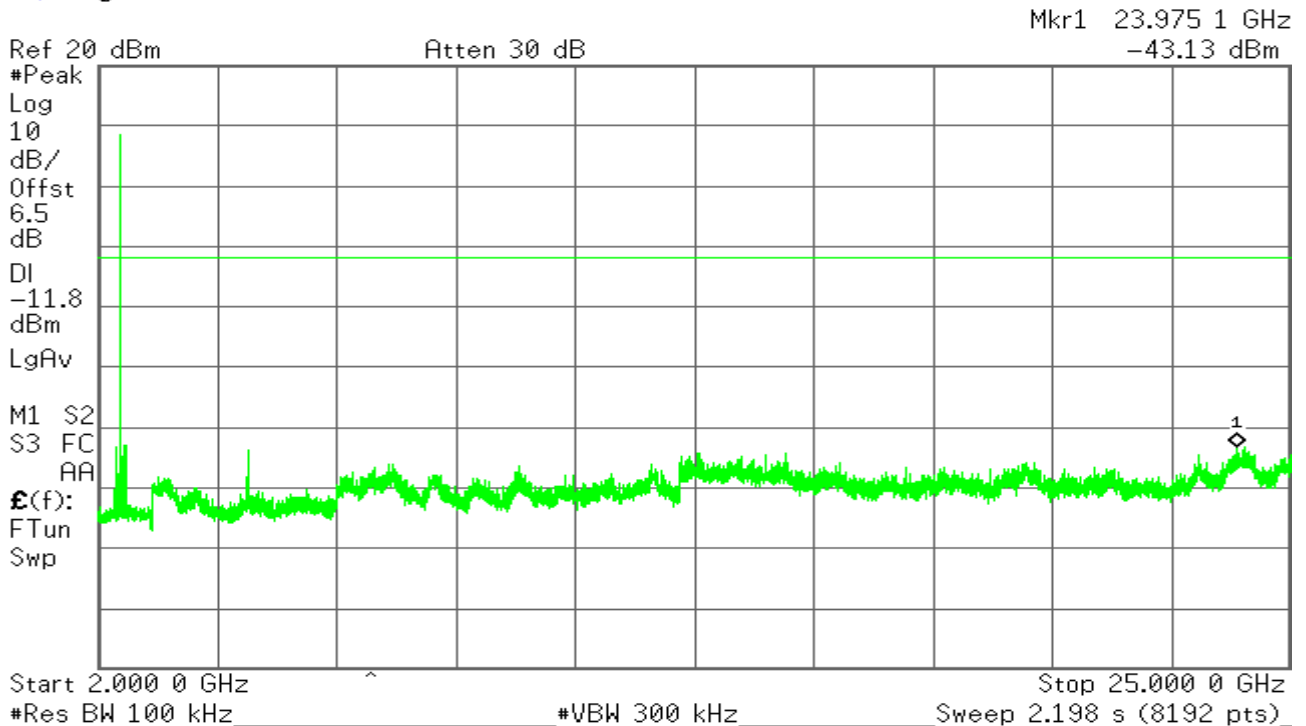


Operation Mode:	1 Mbps	Test Date:	October 31, 2015
Test Channel:	78	Tested by:	James.Yan
Humidity:	52 % RH	Temperature:	24°C

Agilent

R T


Mkr1 2.559 8 GHz
-43.30 dBm

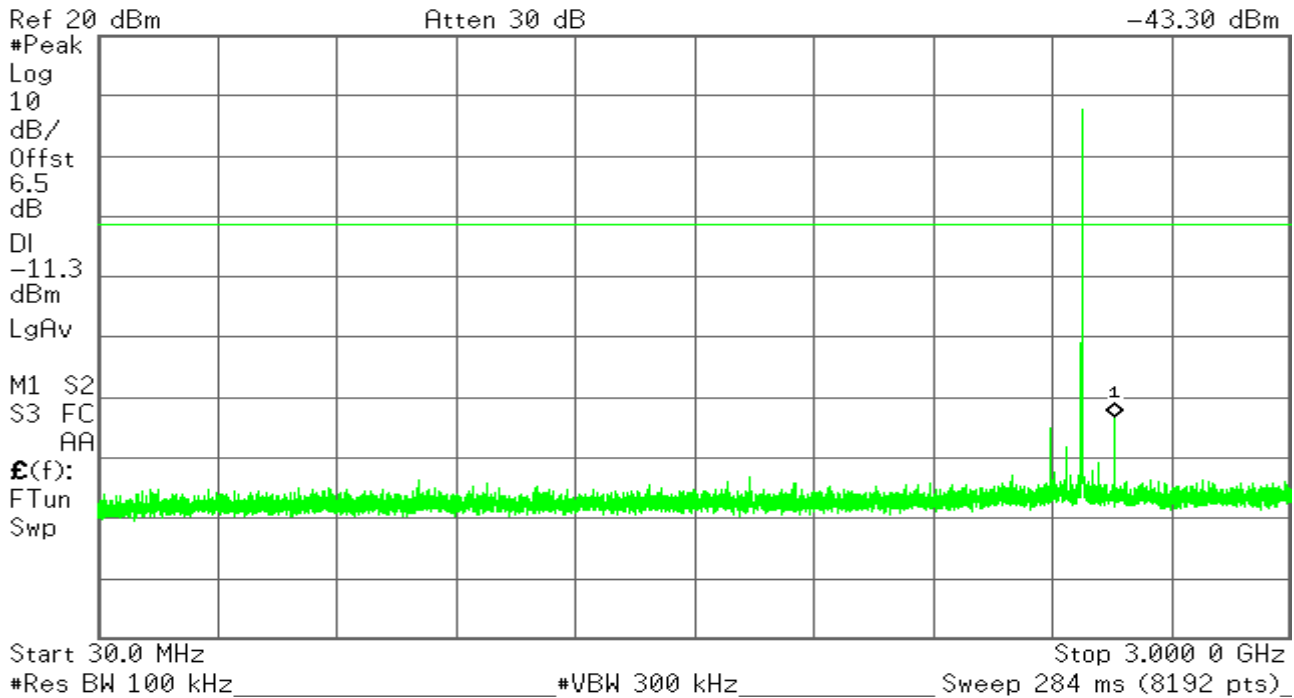

Agilent

R T


Mkr1 24.095 8 GHz
-41.31 dBm

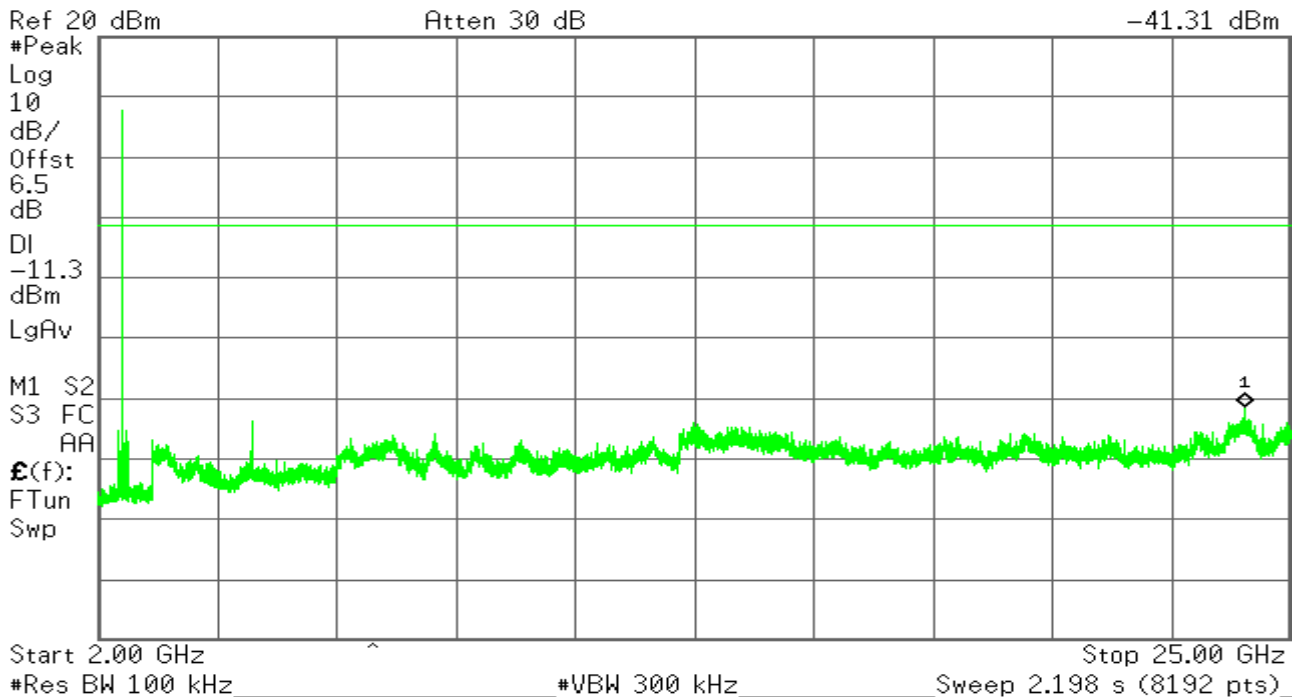

Operation Mode:	3 Mbps	Test Date:	October 31, 2015
Test Channel:	39	Tested by:	James.Yan
Humidity:	52 % RH	Temperature:	24°C


Agilent

R T

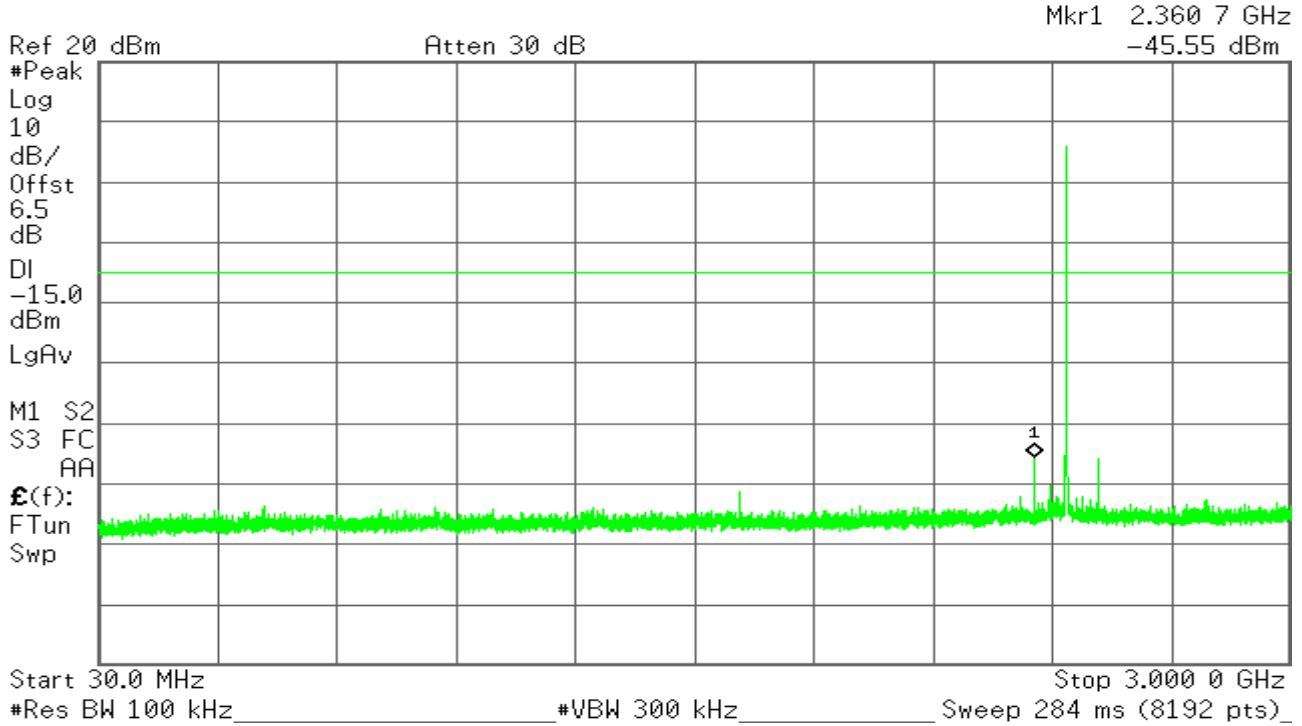

Agilent

R T

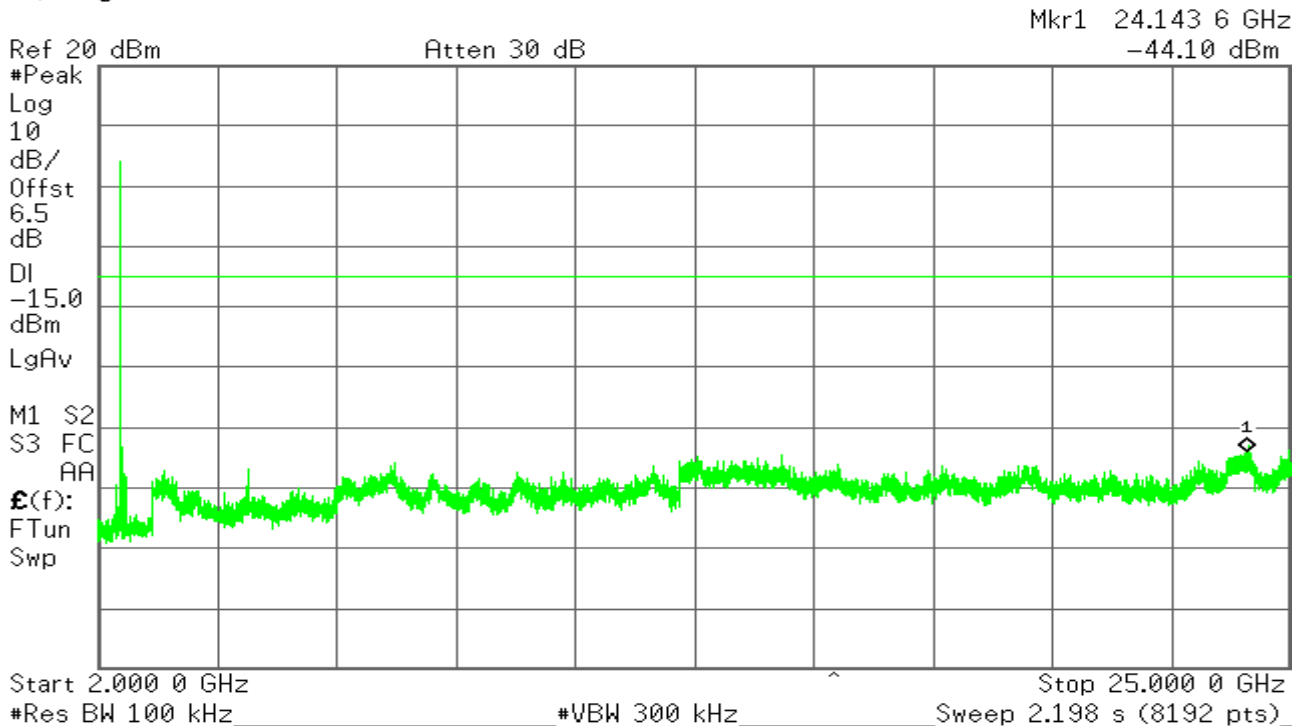


Operation Mode:	3 Mbps	Test Date:	October 31, 2015
Test Channel:	78	Tested by:	James.Yan
Humidity:	52 % RH	Temperature:	24°C

Agilent

R T


Mkr1 2.399 9 GHz
-47.50 dBm

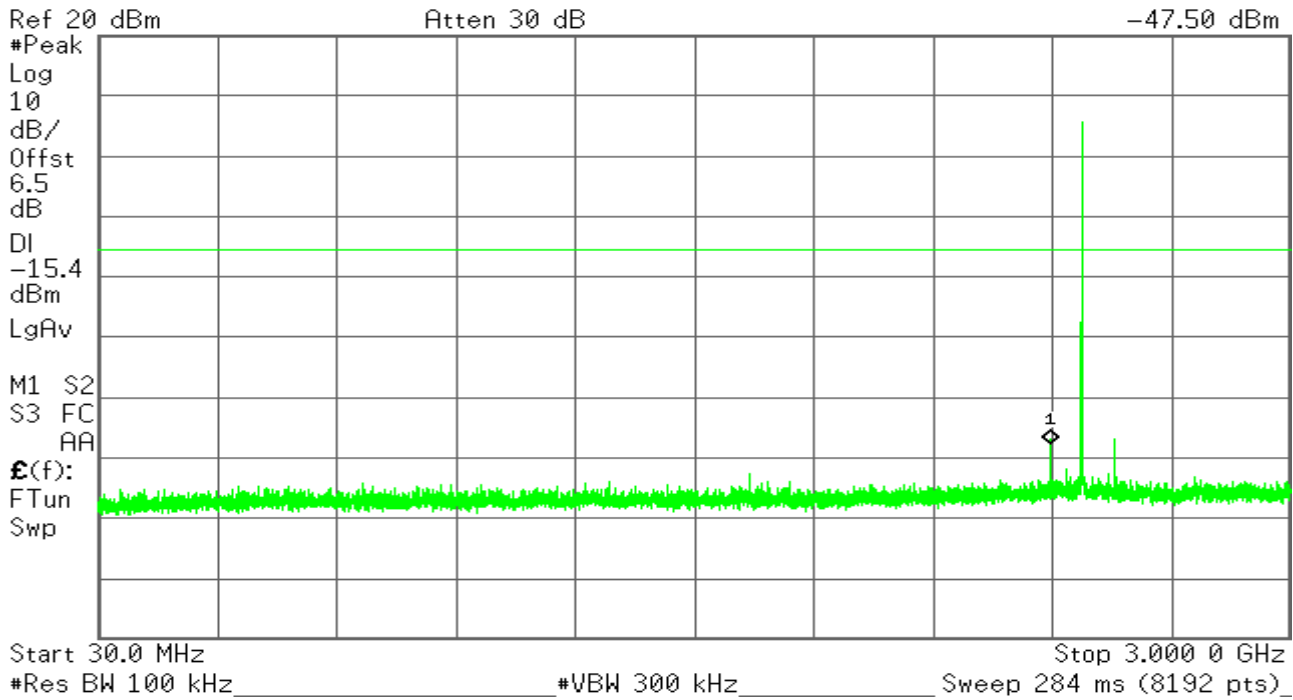

Agilent

R T

Mkr1 24.121 1 GHz
-43.66 dBm

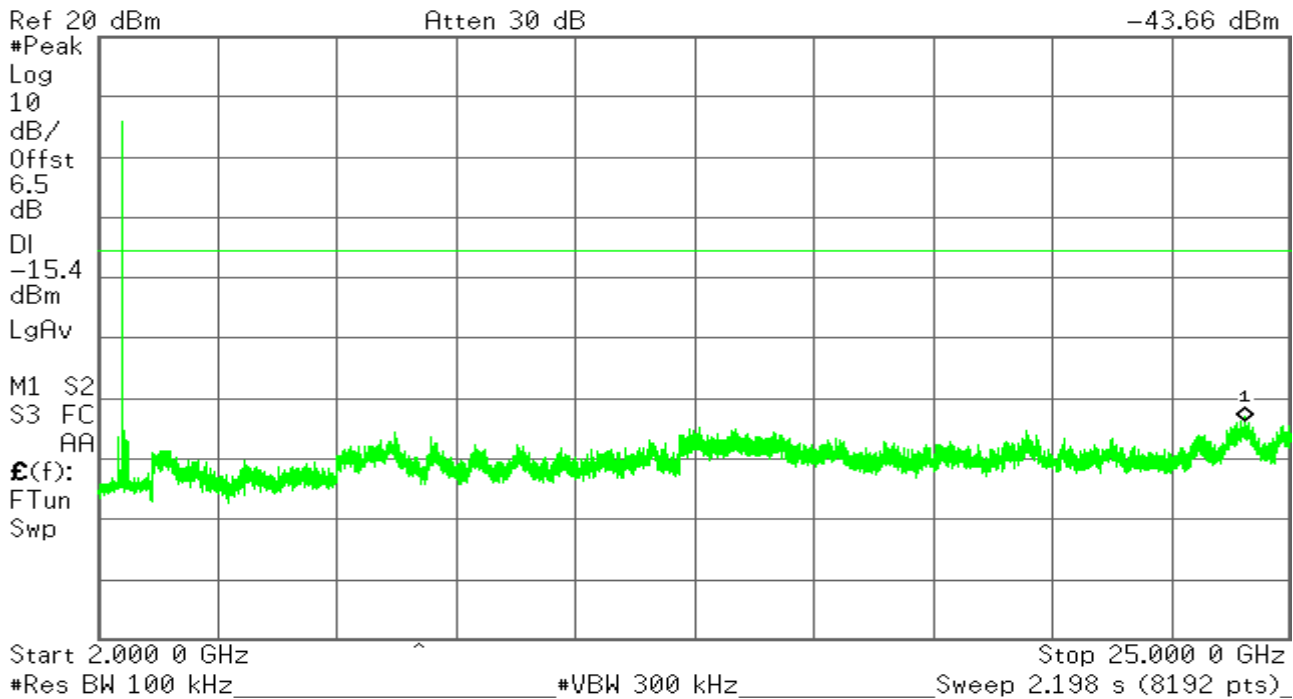

6.8 Radiated Band Edge and Spurious Emission Measurement

LIMIT

1. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3


Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the above emission table, the tighter limit applies at the band edges.


Frequency (Hz)	Field Strength ($\mu\text{V/m}$ at 3-meter)	Field Strength (dB $\mu\text{V/m}$ at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Test Configuration


Below 30MHz

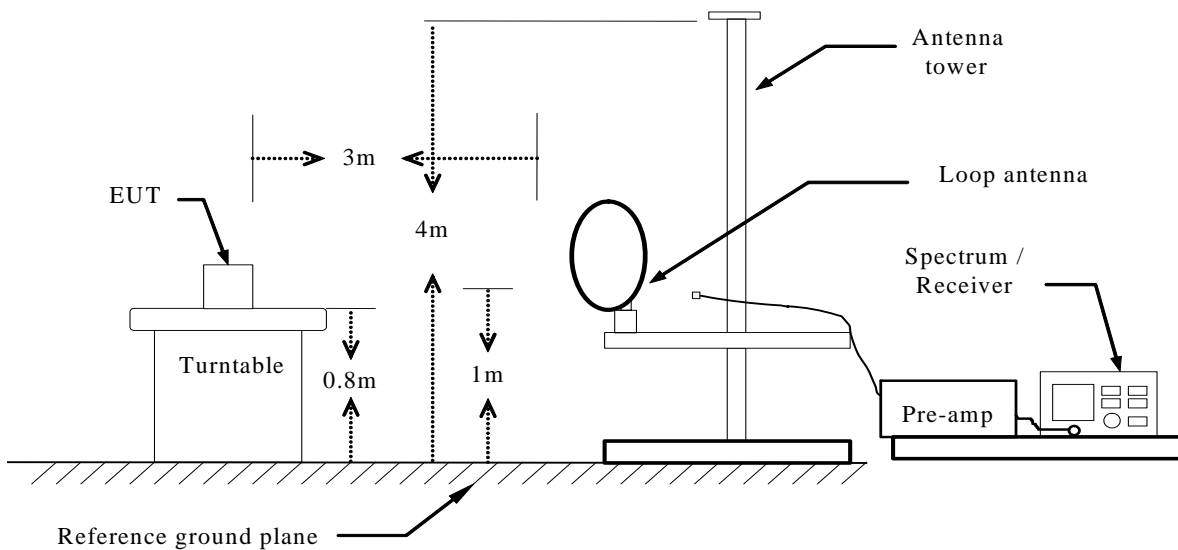

Below 1 GHz

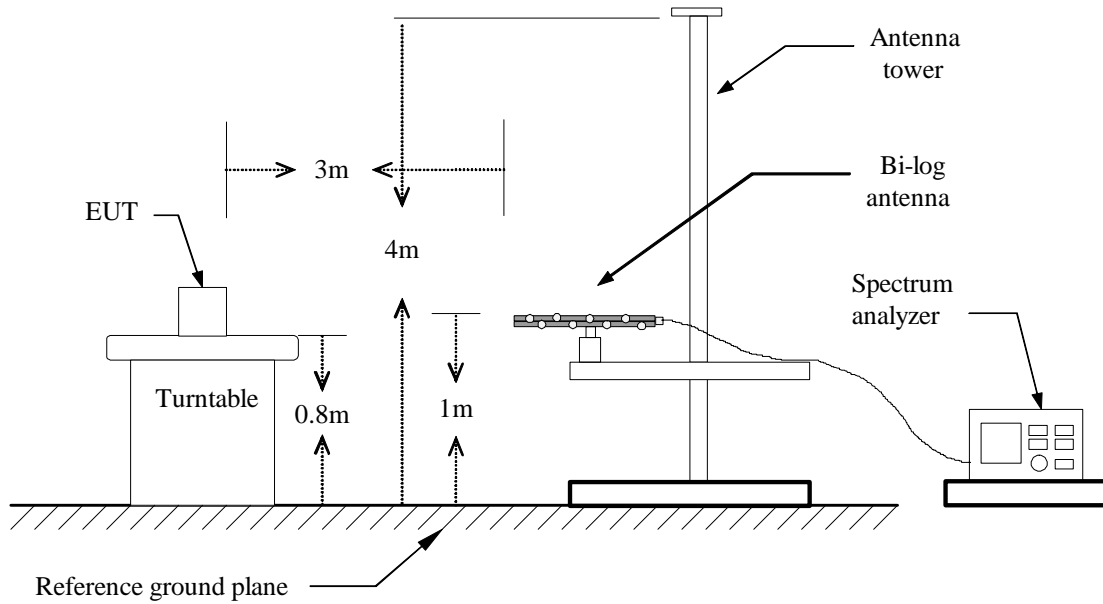


Above 1 GHz

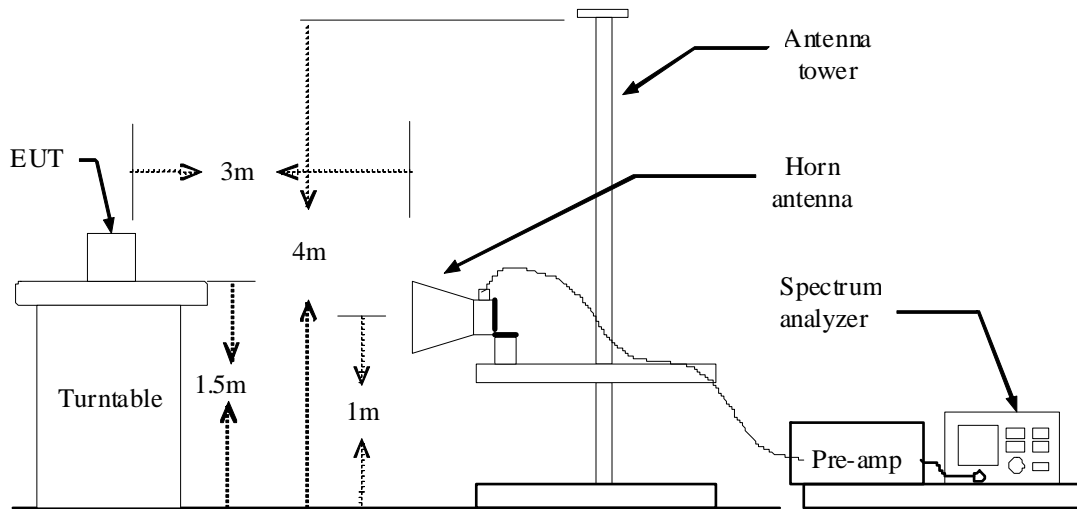

TEST PROCEDURE


1. The EUT is placed on a turntable above ground plane, which is 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:
Below 1GHz:
RBW=100kHz / VBW=300kHz / Sweep=AUTO
Above 1GHz:
(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.

RESTRICTED BANDEDGE (1Mbps, Low Channel, Horizontal)

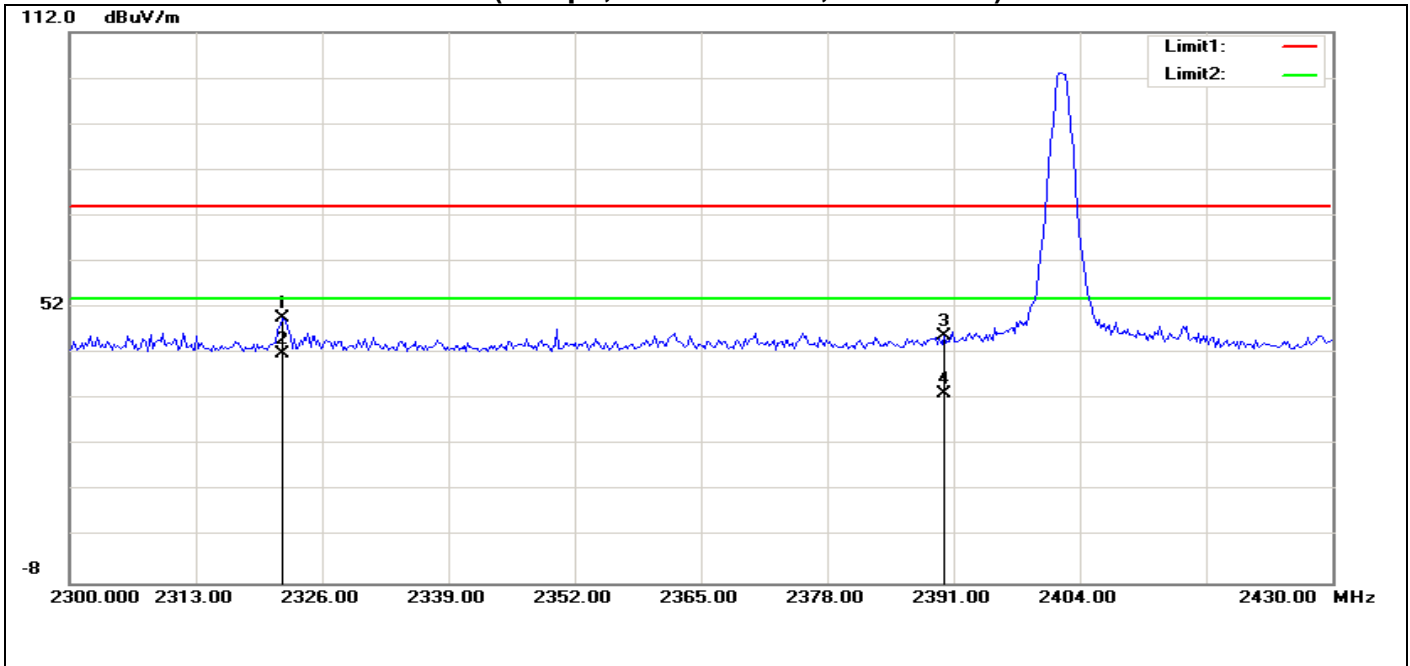


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2321.875	53.72	-3.95	49.77	74.00	-24.23	100	5	peak
2	2321.875	45.91	-3.95	41.96	54.00	-12.04	100	5	AVG
3	2390.000	49.48	-3.78	45.70	74.00	-28.30	100	229	peak
4	2390.000	37.13	-3.78	33.35	54.00	-20.65	100	229	AVG

RESTRICTED BANDEDGE (1Mbps, Low Channel, Vertical)

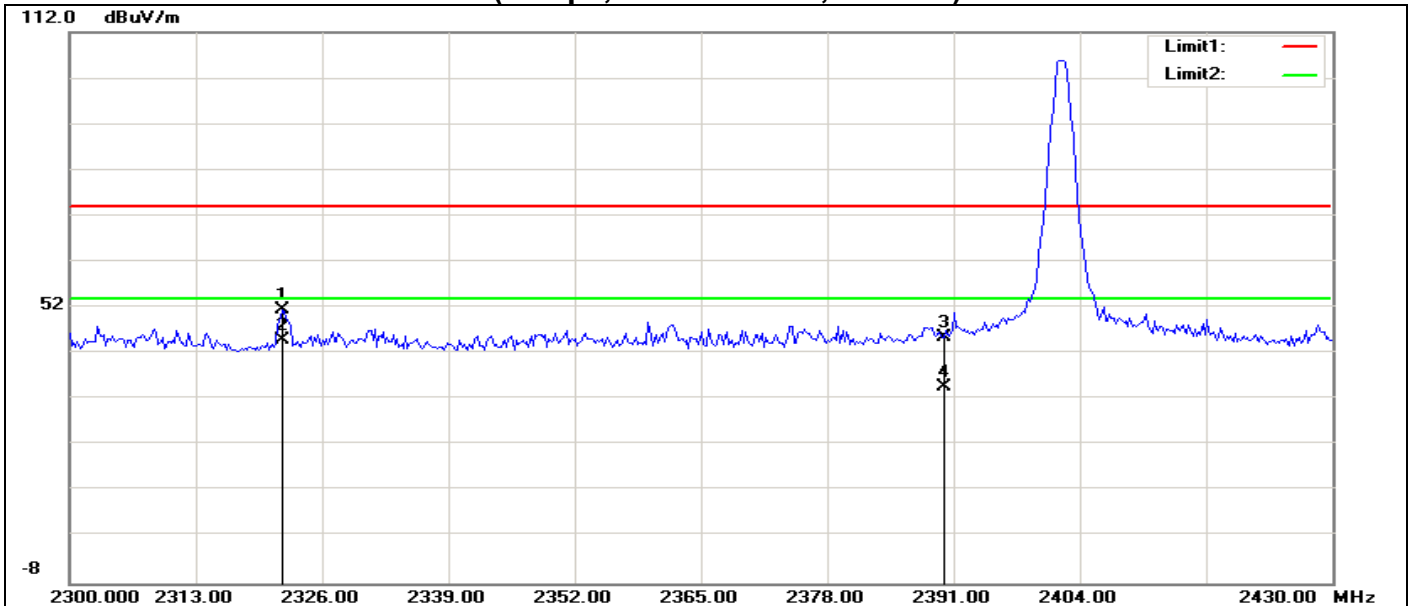


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2321.875	55.56	-3.95	51.61	74.00	-22.39	100	269	peak
2	2321.875	48.77	-3.95	44.82	54.00	-9.18	100	269	AVG
3	2390.000	49.45	-3.78	45.67	74.00	-28.33	100	289	peak
4	2390.000	38.43	-3.78	34.65	54.00	-19.35	100	289	AVG

RESTRICTED BANDEDGE (1Mbps Mode, High Channel, Horizontal)

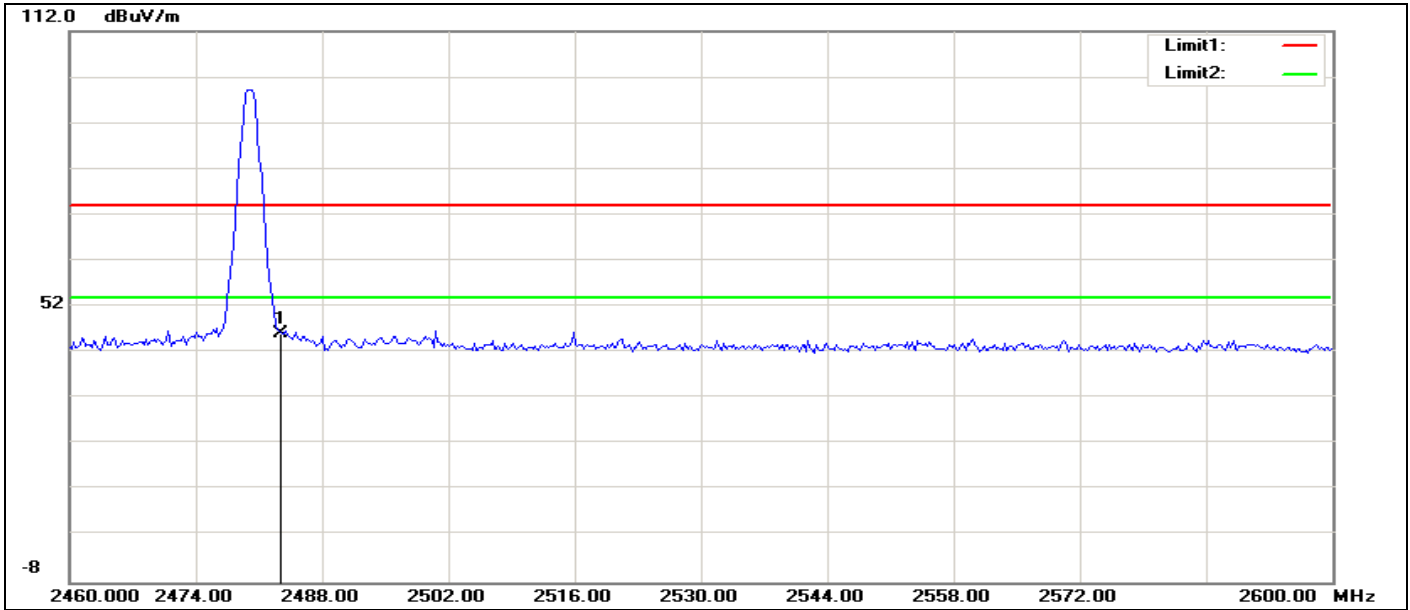


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	49.64	-3.56	46.08	74.00	-27.92	100	351	peak

RESTRICTED BANDEDGE (1Mbps, High Channel, Vertical)

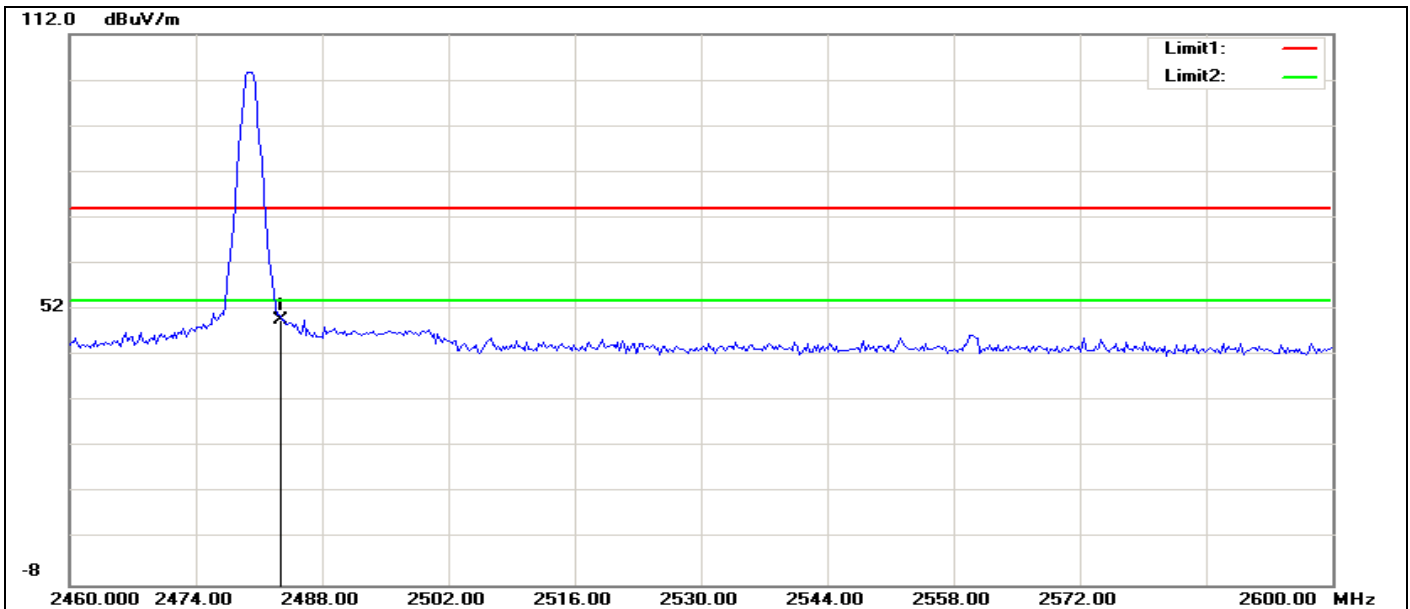


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	53.32	-3.56	49.76	74.00	-24.24	100	275	peak

RESTRICTED BANDEDGE (3Mbps, Low Channel, Horizontal)

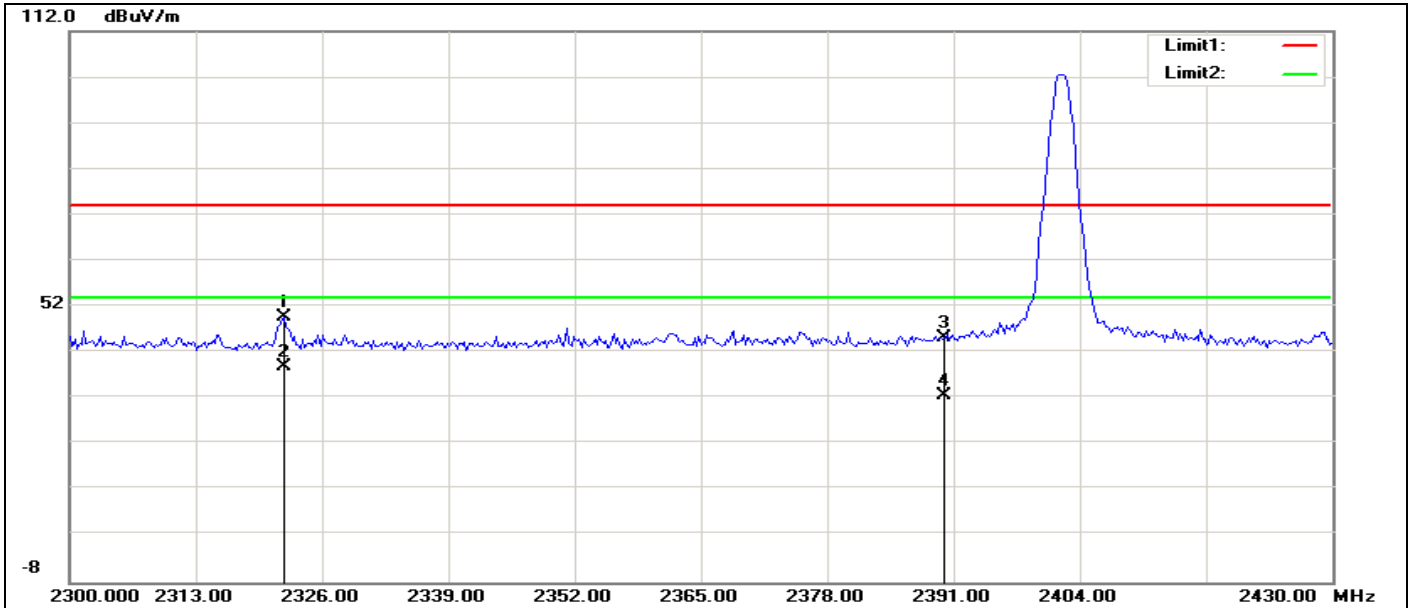


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2322.083	53.65	-3.95	49.70	74.00	-24.30	100	229	peak
2	2322.083	42.87	-3.95	38.92	54.00	-15.08	100	229	AVG
3	2390.000	49.07	-3.78	45.29	74.00	-28.71	100	360	peak
4	2390.000	36.46	-3.78	32.68	54.00	-21.32	100	360	AVG

RESTRICTED BANDEDGE (3Mbps, Low Channel, Vertical)

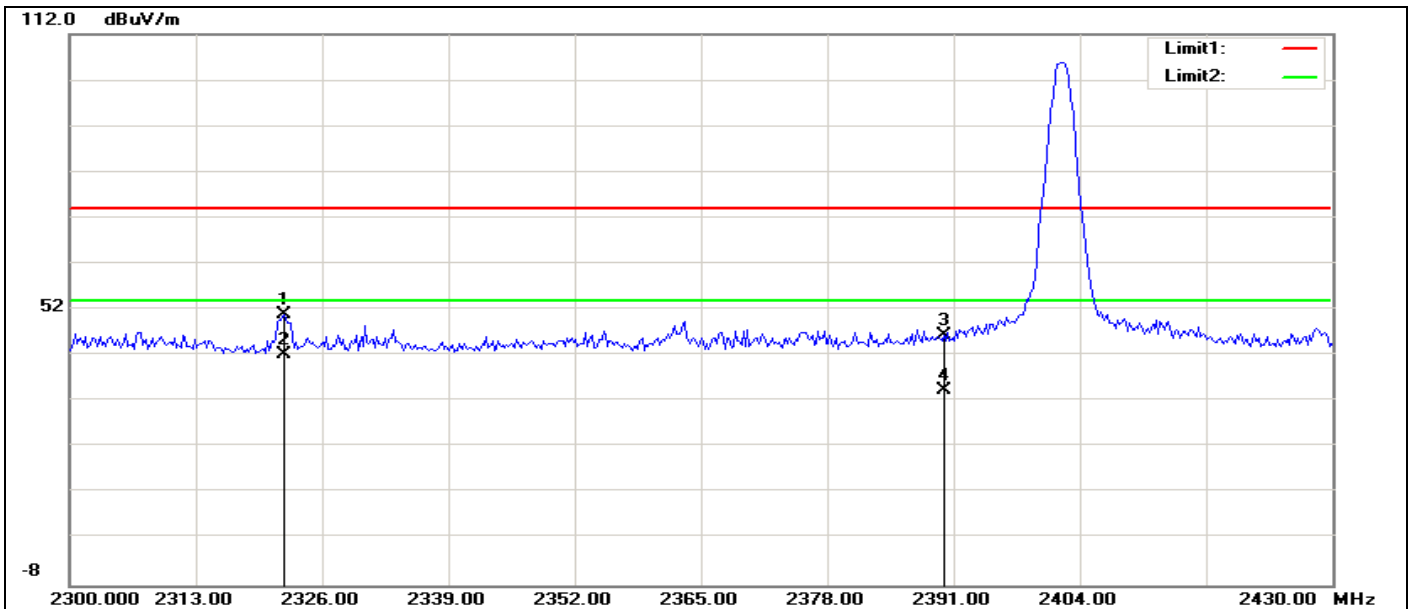


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2322.083	54.88	-3.95	50.93	74.00	-23.07	100	270	peak
2	2322.083	46.23	-3.95	42.28	54.00	-11.72	100	270	AVG
3	2390.000	50.29	-3.78	46.51	74.00	-27.49	100	290	peak
4	2390.000	38.31	-3.78	34.53	54.00	-19.47	100	290	AVG

RESTRICTED BANDEDGE (3Mbps, High Channel, Horizontal)

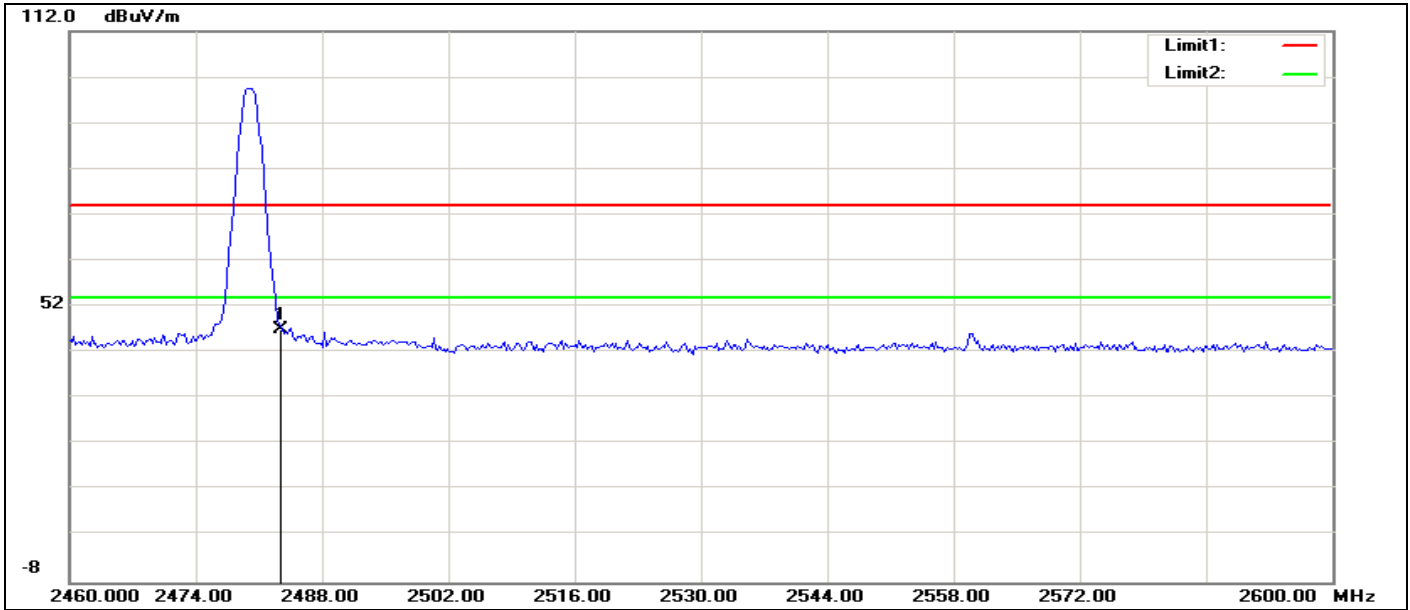


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	50.67	-3.56	47.11	74.00	-26.89	100	232	peak

RESTRICTED BANDEDGE (3Mbps, High Channel, Vertical)

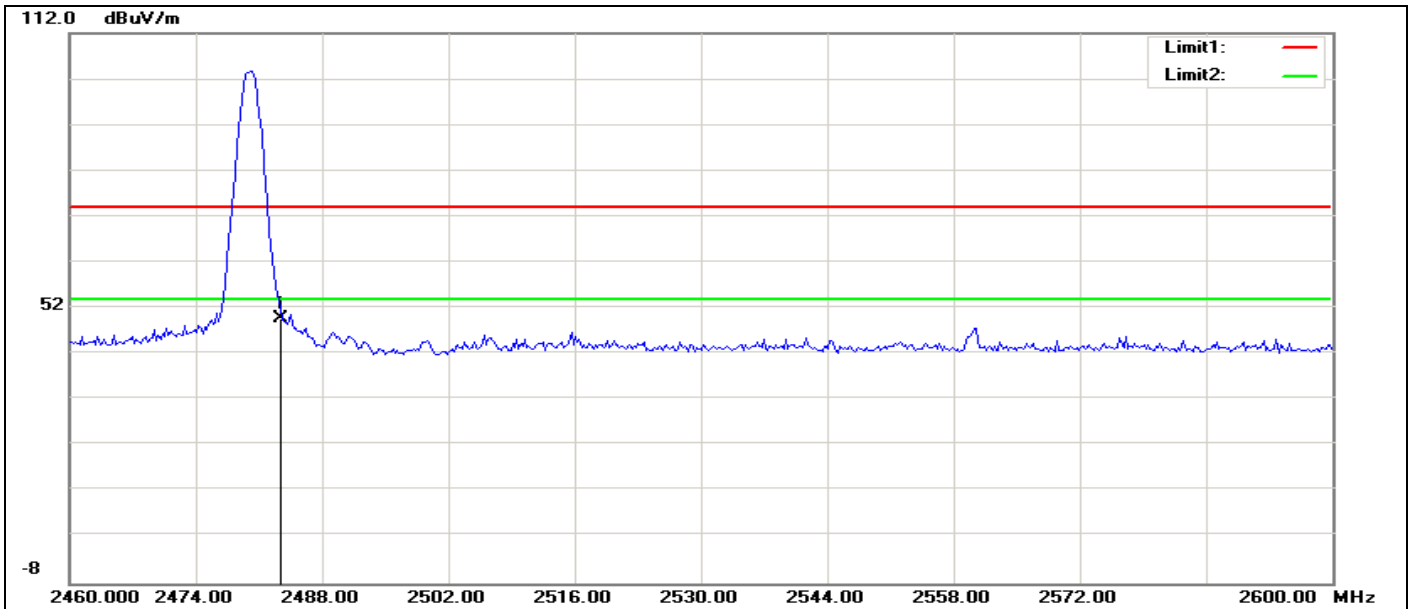


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	53.36	-3.56	49.80	74.00	-24.20	100	273	peak

RESTRICTED BANDEDGE (1Mbps, Low Channel, Horizontal,hopping)

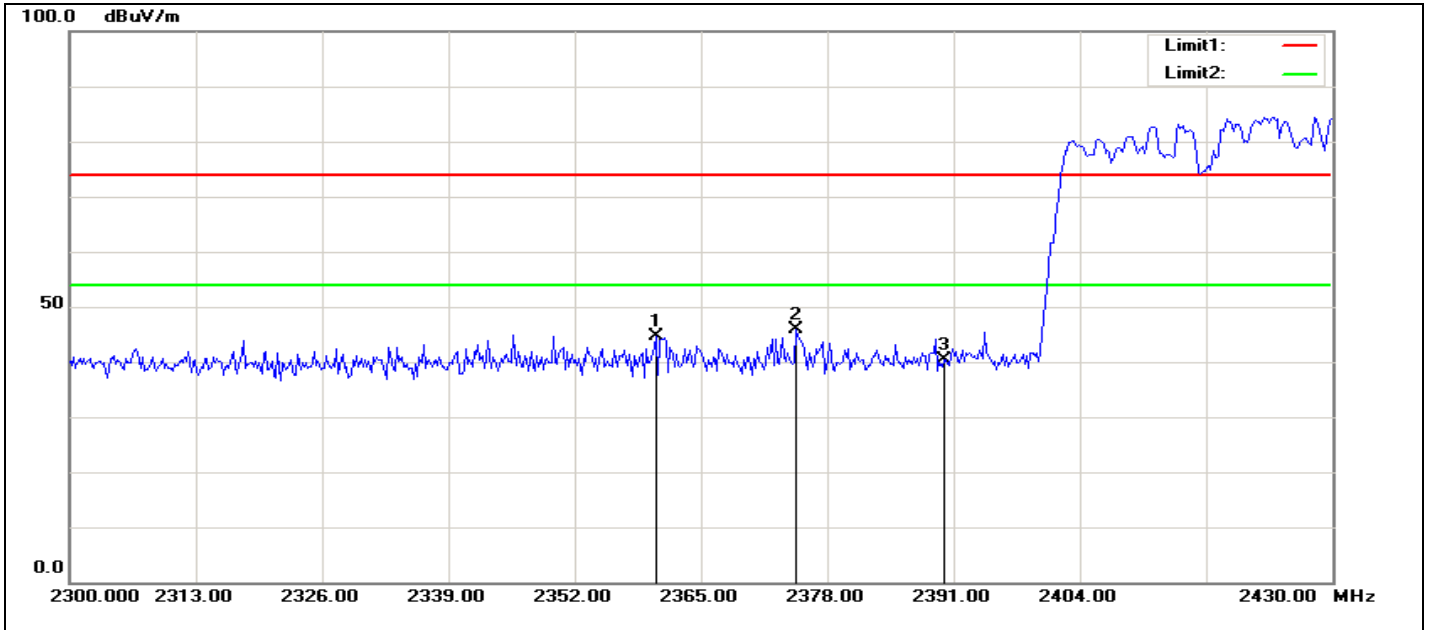


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2360.417	48.33	-3.81	44.52	74.00	-29.48	100	259	peak
2	2374.792	49.78	-3.82	45.96	74.00	-28.04	100	271	peak
3	2390.000	44.23	-3.78	40.45	74.00	-33.55	100	237	peak

RESTRICTED BANDEDGE (1Mbps, Low Channel, Vertical,hopping)

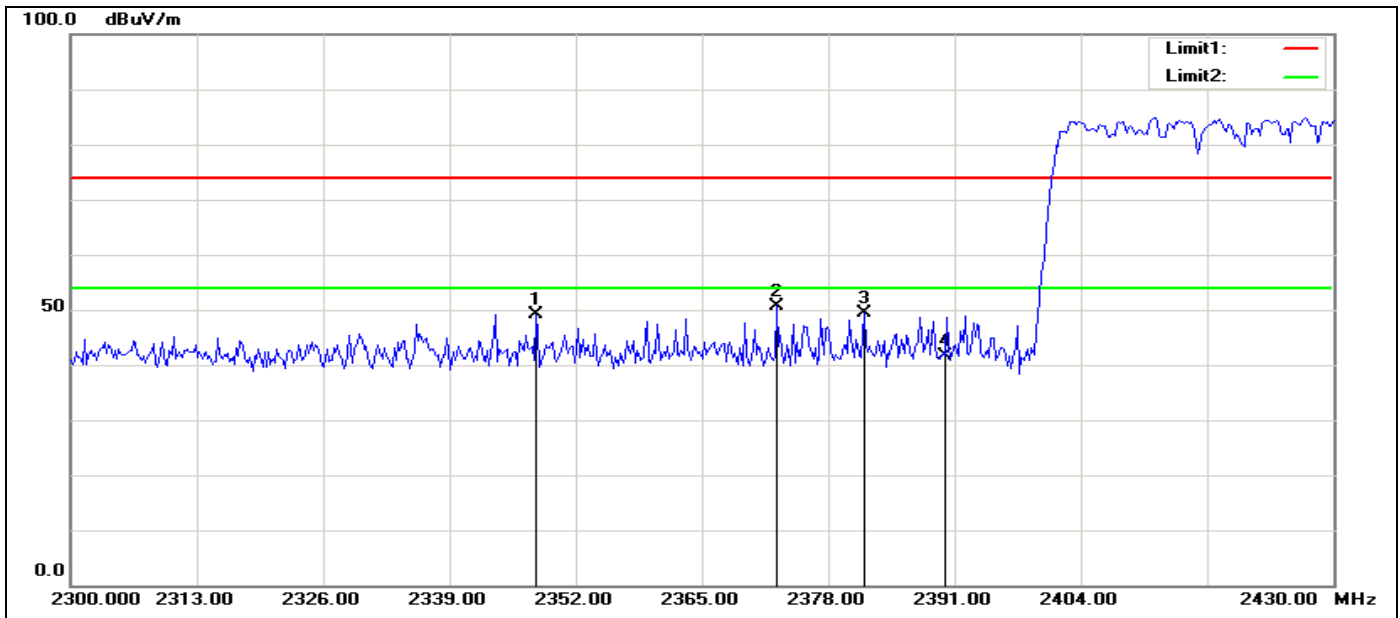


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2347.917	52.99	-3.90	49.09	74.00	-24.91	100	14	peak
2	2372.708	54.53	-3.83	50.70	74.00	-23.30	100	360	peak
3	2381.667	53.11	-3.81	49.30	74.00	-24.70	100	14	peak
4	2390.000	45.43	-3.78	41.65	74.00	-32.35	100	13	peak

RESTRICTED BANDEDGE (1Mbps Mode, High Channel, Horizontal,hopping)

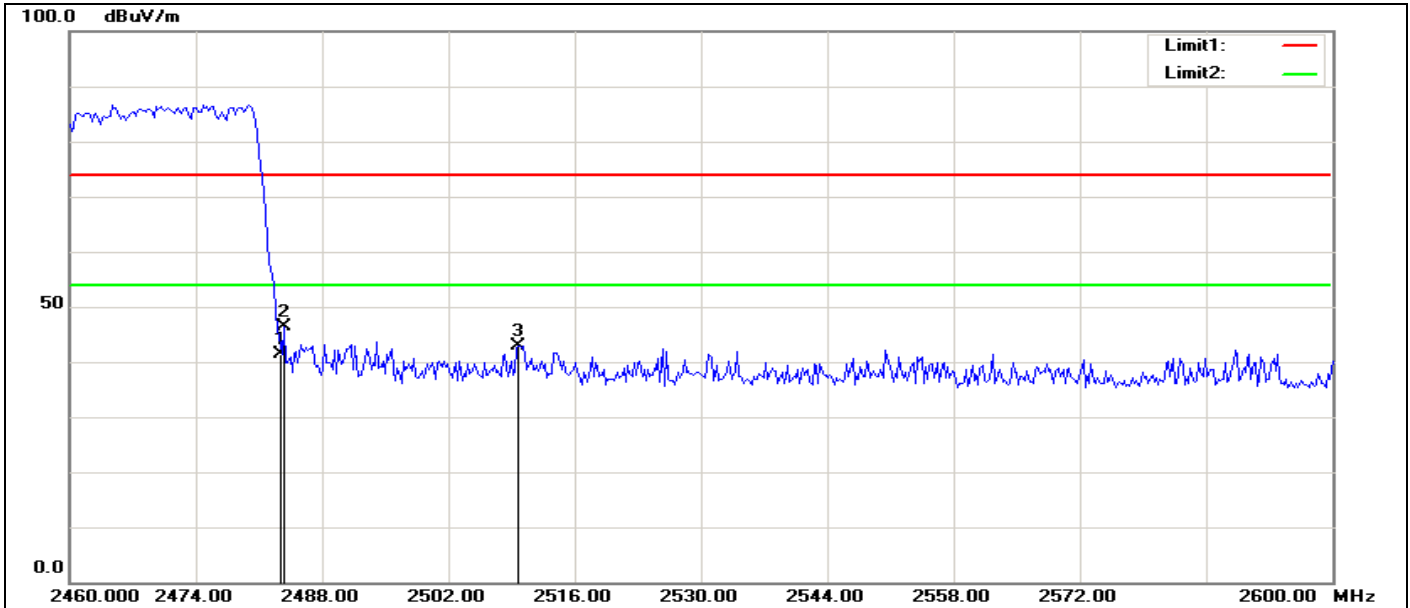


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	44.97	-3.56	41.41	74.00	-32.59	100	109	peak
2	2483.782	49.96	-3.57	46.39	74.00	-27.61	100	110	peak
3	2509.808	46.55	-3.60	42.95	74.00	-31.05	100	139	peak

RESTRICTED BANDEDGE (1Mbps, High Channel, Vertical,hopping)

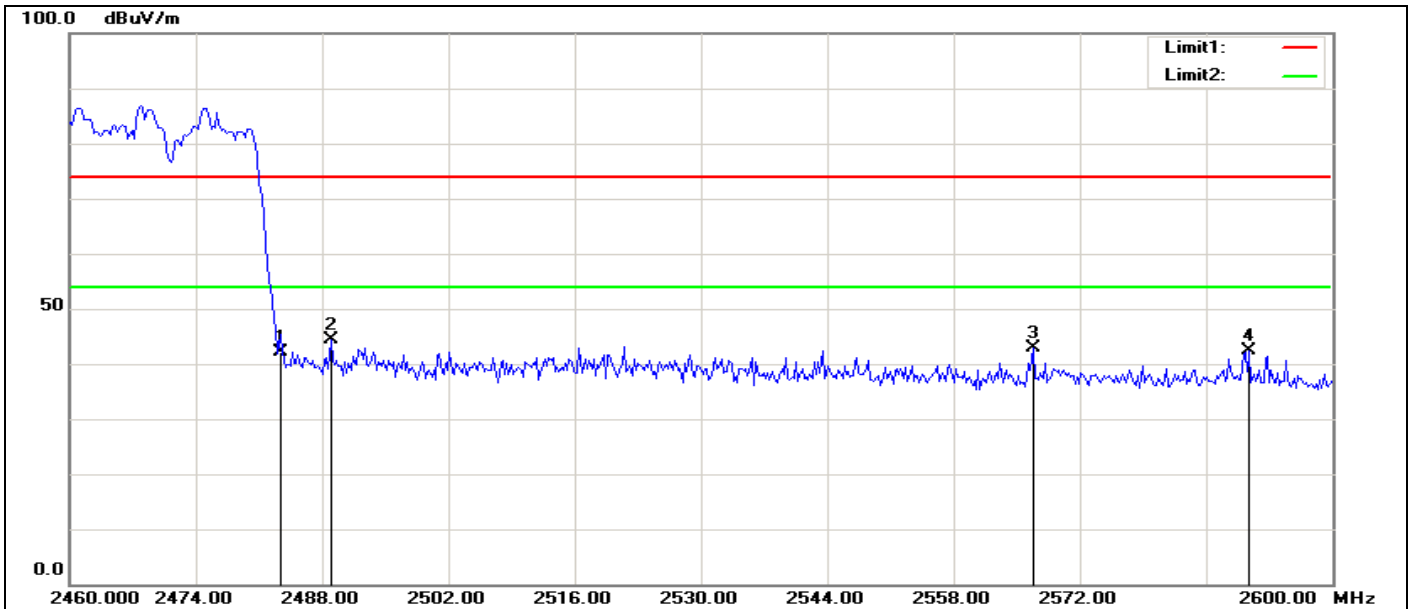


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	45.65	-3.56	42.09	74.00	-31.91	100	182	peak
2	2488.942	47.85	-3.58	44.27	74.00	-29.73	100	288	peak
3	2566.795	46.53	-3.65	42.88	74.00	-31.12	100	287	peak
4	2590.801	46.02	-3.68	42.34	74.00	-31.66	100	95	peak

RESTRICTED BANDEDGE (3Mbps, Low Channel, Horizontal,hopping)

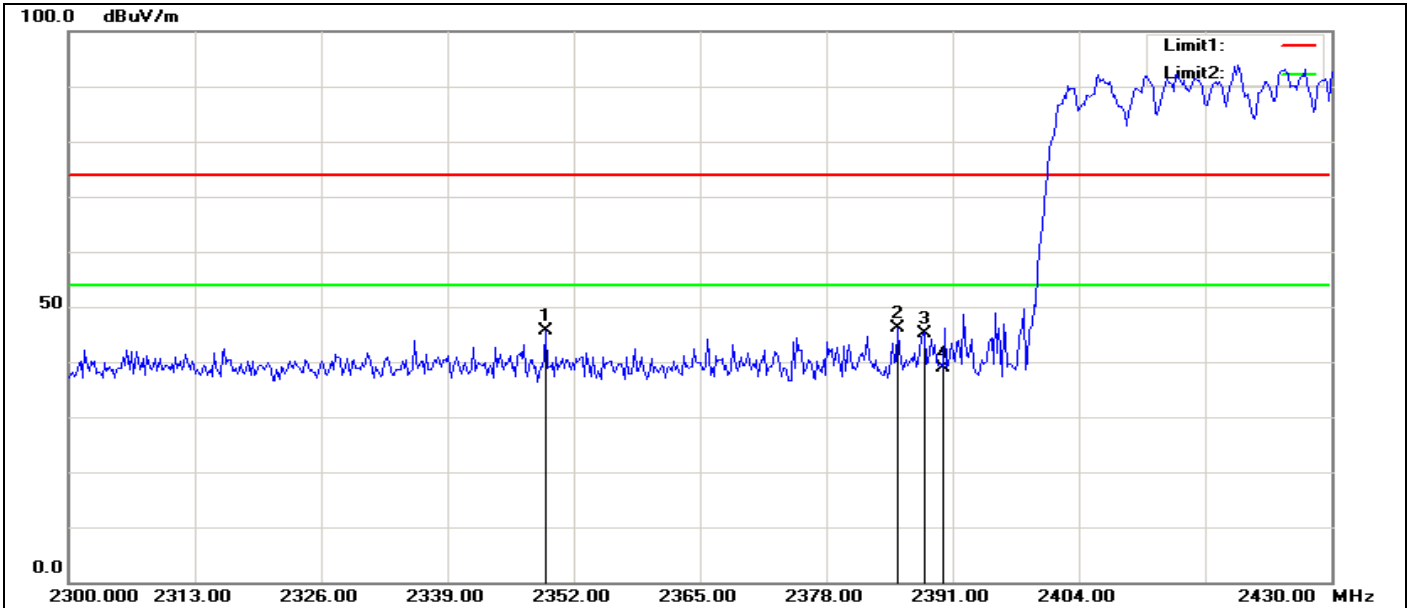


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2349.167	49.51	-3.90	45.61	74.00	-28.39	100	222	peak
2	2385.417	50.00	-3.80	46.20	74.00	-27.80	100	217	peak
3	2388.125	49.04	-3.79	45.25	74.00	-28.75	100	218	peak
4	2390.000	42.59	-3.78	38.81	74.00	-35.19	100	140	peak

RESTRICTED BANDEDGE (3Mbps, Low Channel, Vertical,hopping)

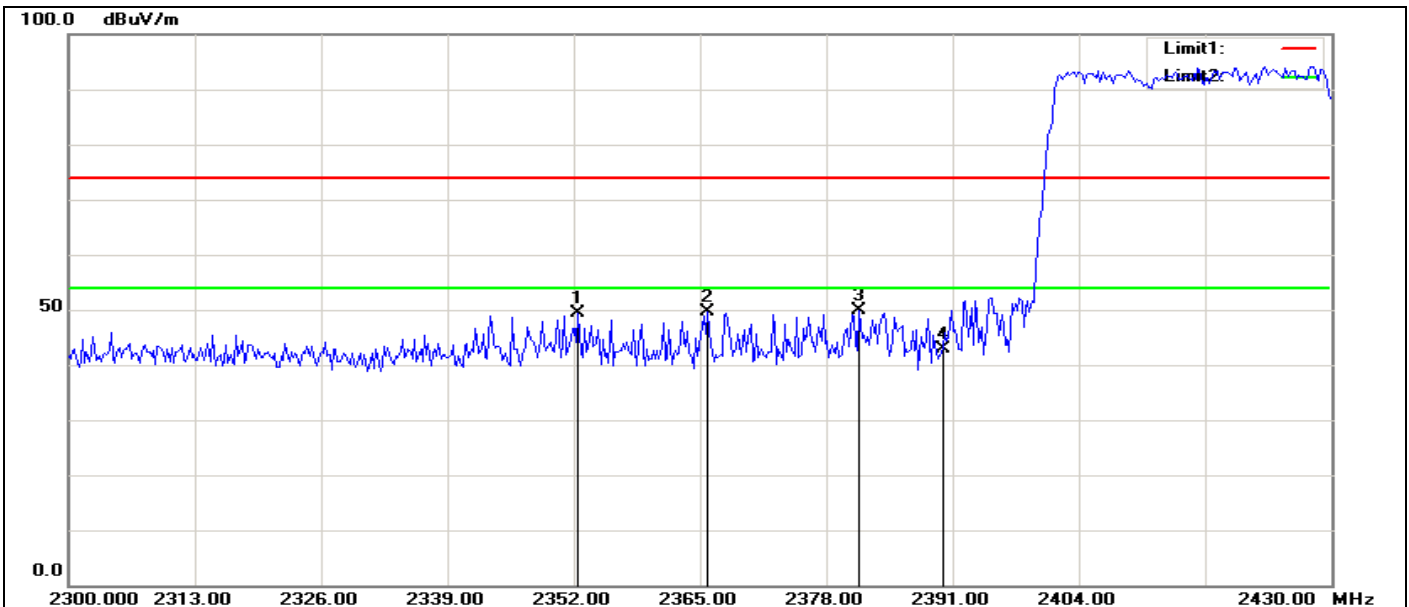


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2352.500	53.18	-3.88	49.30	74.00	-24.70	100	14	peak
2	2365.833	53.37	-3.86	49.51	74.00	-24.49	100	14	peak
3	2381.458	53.66	-3.81	49.85	74.00	-24.15	100	14	peak
4	2390.000	46.57	-3.78	42.79	74.00	-31.21	100	183	peak

RESTRICTED BANDEDGE (3Mbps, High Channel, Horizontal,hopping)

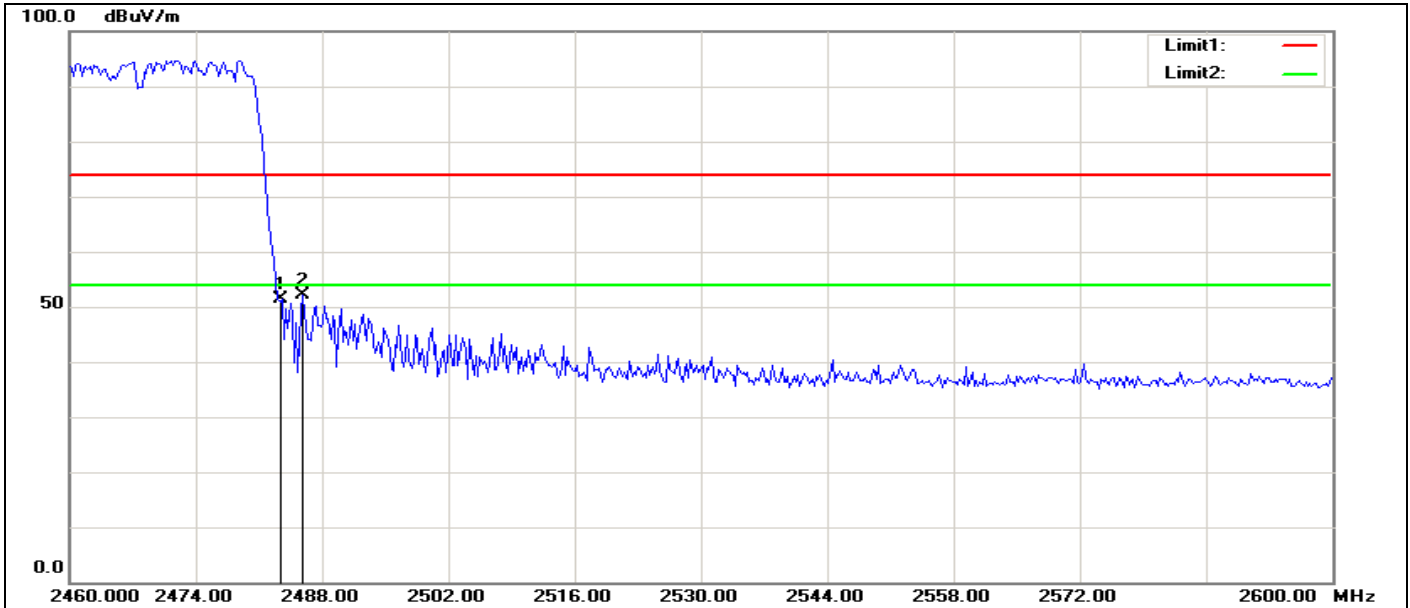

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	55.04	-3.56	51.48	74.00	-22.52	100	0	peak
2	2485.801	55.67	-3.56	52.11	74.00	-21.89	100	1	peak

RESTRICTED BANDEDGE (3Mbps, High Channel, Vertical)

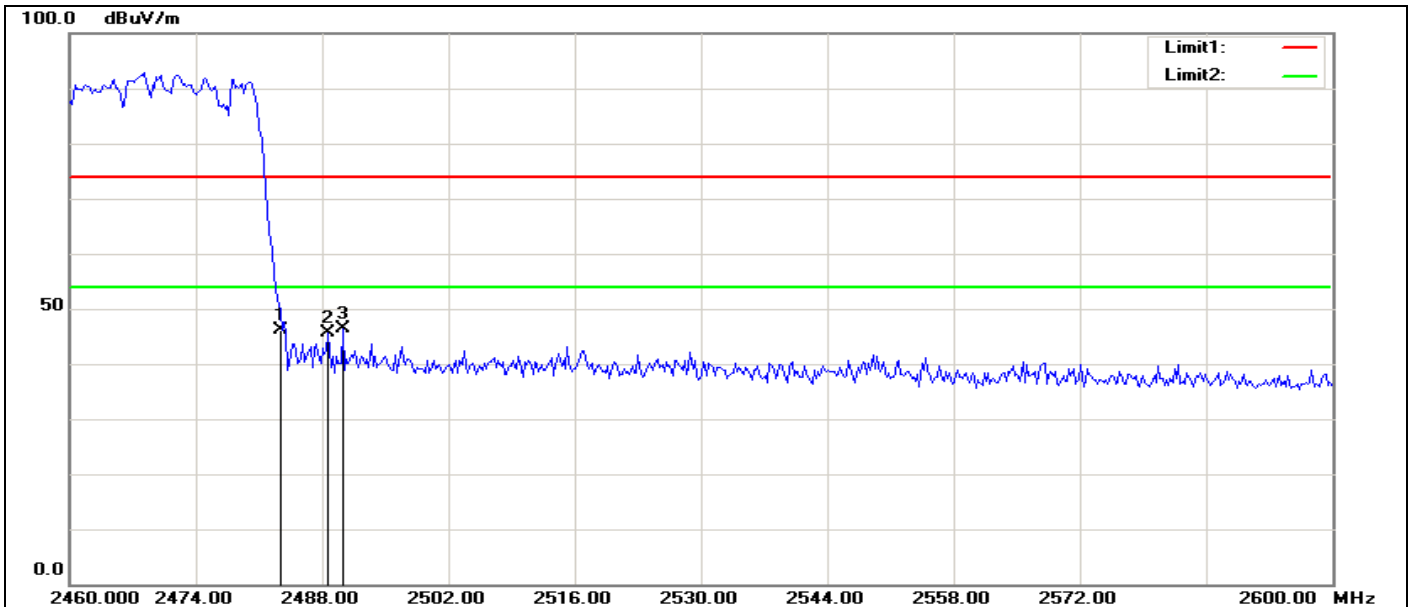

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	49.67	-3.56	46.11	74.00	-27.89	100	344	peak
2	2488.718	49.25	-3.58	45.67	74.00	-28.33	100	341	peak
3	2490.289	49.99	-3.58	46.41	74.00	-27.59	100	346	peak

TEST RESULT OF RADIATED EMISSION

30MHz-1GHz

Operation Mode:	1 Mbps	Test Date:	October 30, 2015
Test Channel:	CH78	Tested by:	James.Yan
Temperature:	25°C	Polarity:	Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
30.0000	V	15.72	19.61	35.33	40.00	-4.67	Peak
139.6100	V	18.72	13.85	32.57	43.50	-10.93	Peak
243.4000	V	21.78	12.92	34.70	46.00	-11.30	Peak
278.3200	V	22.10	14.35	36.45	46.00	-9.55	Peak
385.0200	V	19.52	18.90	38.42	46.00	-7.58	Peak
419.9400	V	17.05	19.05	36.10	46.00	-9.90	Peak
174.5300	H	20.31	12.81	33.12	43.50	-10.38	Peak
209.4500	H	23.55	12.04	35.59	43.50	-7.91	Peak
243.4000	H	26.99	12.92	39.91	46.00	-6.09	Peak
278.3200	H	26.86	14.35	41.21	46.00	-4.79	Peak
385.0200	H	18.09	18.90	36.99	46.00	-9.01	Peak
697.3600	H	15.18	24.09	39.27	46.00	-6.73	Peak

Notes:

1. Measurements above show only up to maximum emissions noted, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
2. Radiated emissions measured in frequency range from 9 KHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.

Above 1 GHz

Operation Mode:	1 Mbps	Test Date:	October 30, 2015
Test Channel:	CH00	Tested by:	James.Yan
Temperature:	25°C	Polarity:	Ver. / Hor.

Horizontal

No.	Frequency (MHz)	Reading (dBUV)	Correct Factor(dB/m)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4786.859	43.63	3.61	47.24	74.00	-26.76	100	360	peak
2	7375.000	41.47	9.62	51.09	74.00	-22.91	100	62	peak
N/A									

Vertical

No.	Frequency (MHz)	Reading (dBUV)	Correct Factor(dB/m)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4868.590	42.71	3.94	46.65	74.00	-27.35	100	2	peak
2	7184.295	40.86	9.15	50.01	74.00	-23.99	100	269	peak
N/A									

Operation Mode:	1 Mbps	Test Date:	October 30, 2015
Test Channel:	CH39	Tested by:	James.Yan
Temperature:	25°C	Polarity:	Ver. / Hor.

Horizontal

No.	Frequency (MHz)	Reading (dBUV)	Correct Factor(dB/m)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4923.077	43.14	4.16	47.30	74.00	-26.70	100	278	peak
2	7320.513	42.97	9.48	52.45	74.00	-21.55	100	7	peak
N/A									

Vertical

No.	Frequency (MHz)	Reading (dBUV)	Correct Factor(dB/m)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4977.564	47.68	4.38	52.06	74.00	-21.94	100	256	peak
2	7129.808	42.08	9.01	51.09	74.00	-22.91	100	166	peak
N/A									

Operation Mode:	1 Mbps	Test Date:	October 30, 2015
Test Channel:	CH78	Tested by:	James.Yan
Temperature:	25°C	Polarity:	Ver. / Hor.

Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4977.564	43.90	4.38	48.28	74.00	-25.72	100	247	peak
2	7293.269	41.35	9.42	50.77	74.00	-23.23	100	325	peak
N/A									

Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4868.590	44.16	3.94	48.10	74.00	-25.90	100	80	peak
2	7211.538	41.85	9.21	51.06	74.00	-22.94	100	317	peak
N/A									

Operation Mode:	3 Mbps	Test Date:	October 30, 2015
Test Channel:	CH00	Tested by:	James.Yan
Temperature:	25°C	Polarity:	Ver. / Hor.

Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4977.564	43.70	4.38	48.08	74.00	-25.92	100	279	peak
2	7238.782	40.86	9.28	50.14	74.00	-23.86	100	22	peak
N/A									

Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5004.808	46.34	4.48	50.82	74.00	-23.18	100	171	peak
2	7211.538	42.05	9.21	51.26	74.00	-22.74	100	165	peak
N/A									

Operation Mode:	3 Mbps	Test Date:	October 30, 2015
Test Channel:	CH39	Tested by:	James.Yan
Temperature:	25°C	Polarity:	Ver. / Hor.

Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5032.051	42.65	4.57	47.22	74.00	-26.78	100	356	peak
2	7238.782	41.02	9.28	50.30	74.00	-23.70	100	135	peak
N/A									

Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4977.564	45.85	4.38	50.23	74.00	-23.77	100	255	peak
2	7266.026	41.80	9.35	51.15	74.00	-22.85	100	133	peak
N/A									

Operation Mode:	3 Mbps	Test Date:	October 30, 2015
Test Channel:	CH78	Tested by:	James.Yan
Temperature:	25°C	Polarity:	Ver. / Hor.

Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4841.346	43.43	3.83	47.26	74.00	-26.74	100	359	peak
2	7157.051	41.43	9.08	50.51	74.00	-23.49	100	230	peak
N/A									

Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4977.564	46.04	4.38	50.42	74.00	-23.58	100	257	peak
2	7102.564	42.16	8.94	51.10	74.00	-22.90	100	336	peak
N/A									

Remark:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
3. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.*
4. *Spectrum setting:*
 - a. *Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.*
 - b. *AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto.*

6.9 POWERLINE CONDUCTED EMISSIONS


LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dBµV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

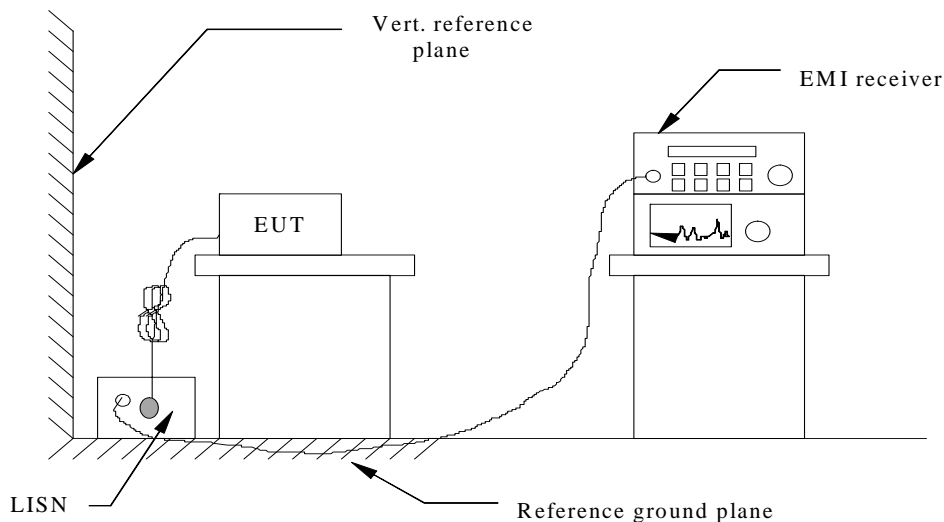

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.


TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Test Data

Job No.:	C151023R01-RPB	Date:	2015-11-01
Model:	CL-8723BU	Time:	PM 01:40:22
Standard:	FCC Class B	Temp.(C)/Hum.(%):	22(C)/48%
Test item:	Conduction test	Test By:	James.Yan
Line:	L1	Test Voltage:	AC 120V/60Hz
Model:		Description:	


L1

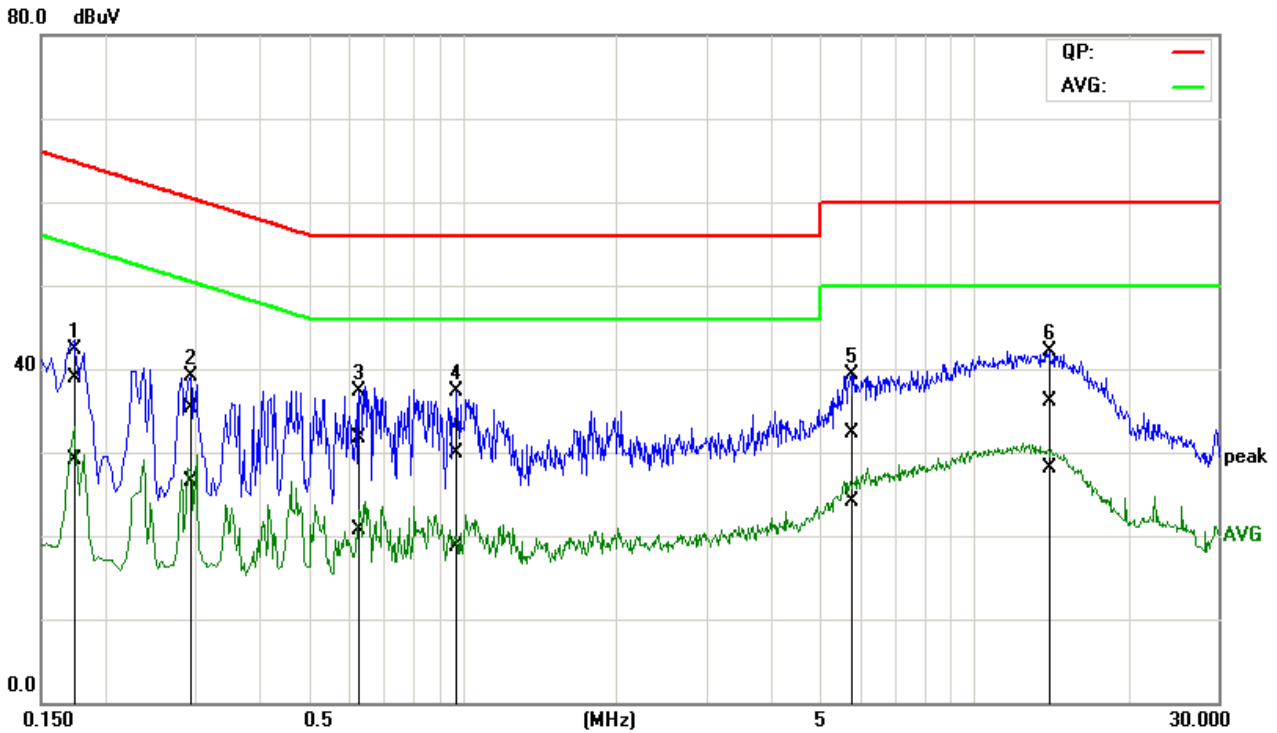

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1	0.1765	19.16	9.35	19.70	38.86	29.05	64.64	54.65	-25.78	-25.60	Pass
2	0.2902	15.65	6.88	19.67	35.32	26.55	60.52	50.52	-25.20	-23.97	Pass
3	0.6332	11.87	0.88	19.83	31.70	20.71	56.00	46.00	-24.30	-25.29	Pass
4	0.9771	10.08	-1.18	19.84	29.92	18.66	56.00	46.00	-26.08	-27.34	Pass
5	5.6936	11.95	3.80	20.37	32.32	24.17	60.00	50.00	-27.68	-25.83	Pass
6*	14.0870	15.21	7.24	20.83	36.04	28.07	60.00	50.00	-23.96	-21.93	Pass

Note: 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).

Job No.:	C151023R01-RPB	Date:	2015-11-01
Model:	CL-8723BU	Time:	PM 01:46:25
Standard:	FCC Class B	Temp.(C)/Hum.(%):	22(C)/48%
Test item:	Conduction test	Test By:	James.Yan
Line:	L2	Test Voltage:	AC 120V/60Hz
Model:		Description:	

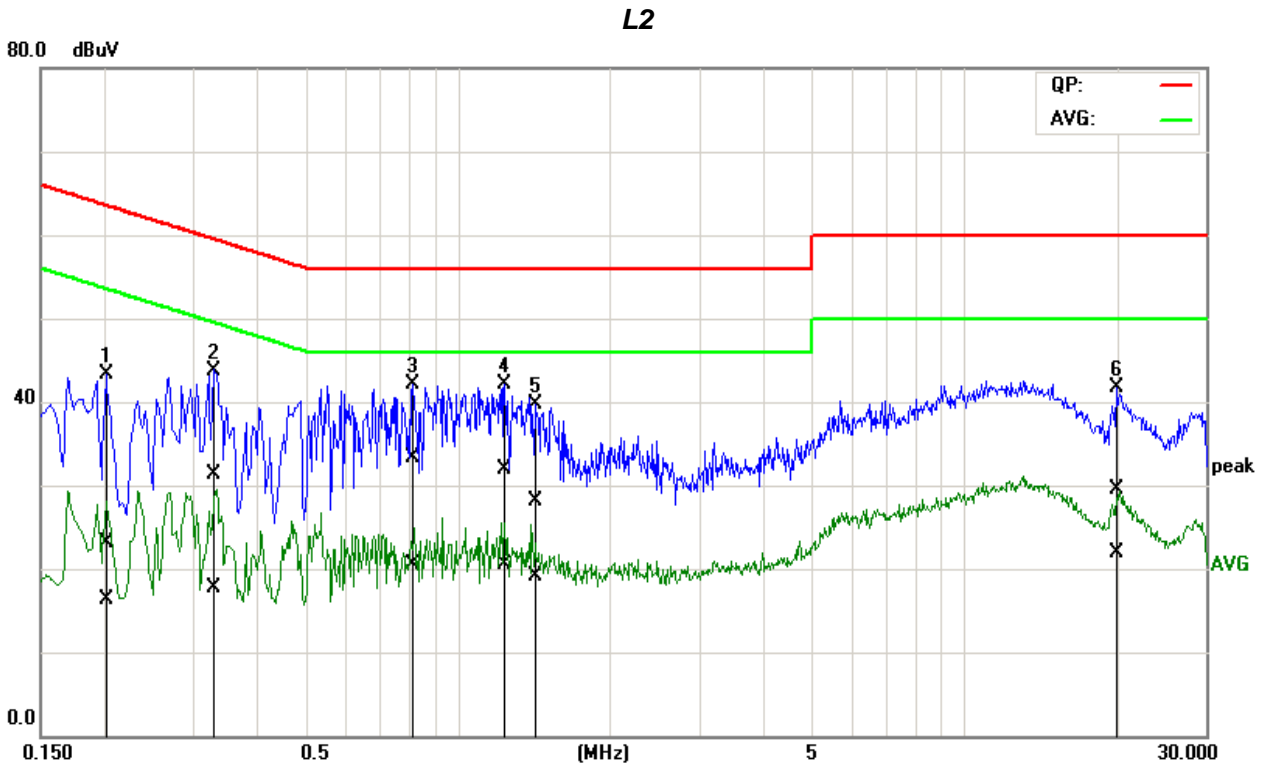

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1	0.2004	3.56	-3.27	19.64	23.20	16.37	63.59	53.59	-40.39	-37.22	Pass
2	0.3338	11.52	-1.98	19.73	31.25	17.75	59.35	49.36	-28.10	-31.61	Pass
3*	0.8106	13.57	0.60	19.83	33.40	20.43	56.00	46.00	-22.60	-25.57	Pass
4	1.2397	12.10	0.71	19.86	31.96	20.57	56.00	46.00	-24.04	-25.43	Pass
5	1.4077	8.15	-0.74	19.88	28.03	19.14	56.00	46.00	-27.97	-26.86	Pass
6	20.0384	8.33	0.79	21.09	29.42	21.88	60.00	50.00	-30.58	-28.12	Pass

Note: 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).

Remark:

- The measuring frequencies range between 0.15 MHz and 30 MHz.
- The emissions measured in the frequency range between 0.15 MHz and 30MHz were made with an instrument using Quasi-peak detector and Average detector.
- "—" denotes the emission level was or more than 2dB below the Average limit, and no re-check was made.
- The IF bandwidth of SPA between 0.15MHz and 30MHz was 10KHz. The IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9kHz.

END OF REPORT