

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT
INTENTIONAL RADIATOR CERTIFICATION TO
FCC PART 15 SUBPART C AND CANADIAN RSS 210 ISSUE 8 REQUIREMENT**

OF

USB Car Charger with Bluetooth Hands Free

MODEL No.: IPU-IAB, IPU-IAB-11, IPU-IAB-13

BRAND NAME: XtremeMac

FCC ID: PB4-IPUIAB11

IC ID: 6900A-IPUIAB11

REPORT NO: ES110228106F

ISSUE DATE: March 31, 2011

Prepared for

Imation Corp.

1 Imation Way, Oakdale Minnesota 55128-3414 United States

Prepared by

SHENZHEN EMTEK CO., LTD.

**Bldg 69, Majialong Industry Zone, Nanshan District,
Shenzhen, Guangdong, China**

TEL: 86-755-26954280

FAX: 86-755-26954282

VERIFICATION OF COMPLIANCE

Applicant:	Imation Corp. 1 Imation Way, Oakdale Minnesota 55128-3414 United States
Manufacturer:	CCA Electronic Factory Building 120-121st, Pinghuan Industrial City, Pingshan Town, Longgang District, Shenzhen, Guangdong, China 518118
Product Description:	USB Car Charger with Bluetooth Hands Free
Brand Name:	XtremeMac
Model Number:	IPU-IAB, IPU-IAB-11, IPU-IAB-13 (Note: all the modes are the same, except their model number are different. We take IPU-IAB-11 for test.)
Serial Number:	N/A
File Number:	ES110228106F
Date of Test:	March 1, 2011 to March 28, 2011

We hereby certify that:


The above equipment was tested by SHENZHEN EMTEK CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009), RSS GEN Issue 2 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247 and RSS 210 Issue 8.

The test results of this report relate only to the tested sample identified in this report.

Date of Test :

March 1, 2011 to March 28, 2011

Prepared by :



(Engineer)

Reviewer :



(Quality Manager)

Approve & Authorized Signer :



(Manager)

Table of Contents

1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION.....	5
1.2 RELATED SUBMITTAL(S) / GRANT (S)	5
1.3 TEST METHODOLOGY.....	5
1.4 SPECIAL ACCESSORIES	5
1.5 EQUIPMENT MODIFICATIONS	5
1.6 TEST FACILITY	6
2. SYSTEM TEST CONFIGURATION	7
2.1 EUT CONFIGURATION	7
2.2 EUT EXERCISE	7
2.3 TEST PROCEDURE	7
2.4 LIMITATION	8
2.5 CONFIGURATION OF TESTED SYSTEM.....	10
2.6 EQUIPMENT USED IN TESTED SYSTEM.....	11
2.7 DESCRIPTION OF TEST MODES	11
3. SUMMARY OF TEST RESULTS	12
4. RADIATED EMISSION TEST	13
4.1 MEASUREMENT PROCEDURE.....	13
4.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	13
4.3 MEASUREMENT EQUIPMENT USED	14
4.4 RADIATED EMISSION LIMIT.....	14
4.5 MEASUREMENT RESULT.....	15
4.6 RADIATED MEASUREMENT PHOTOS	20
5. CHANNEL SEPARATION TEST	21
5.1 MEASUREMENT PROCEDURE.....	21
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	21
5.3 MEASUREMENT EQUIPMENT USED	21
5.4 MEASUREMENT RESULTS.....	21
6. BANDWIDTH TEST.....	24
6.1 MEASUREMENT PROCEDURE.....	24
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	24
6.3 MEASUREMENT EQUIPMENT USED	24
6.4 MEASUREMENT RESULTS.....	24
7. QUANTITY OF HOPPING CHANNEL TEST.....	29
7.1 MEASUREMENT PROCEDURE.....	29
7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	29

7.3	MEASUREMENT EQUIPMENT USED	29
7.4	MEASUREMENT RESULTS	29
8.	TIME OF OCCUPANCY (DWELL TIME) TEST	30
8.1	MEASUREMENT PROCEDURE.....	30
8.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	30
8.3	MEASUREMENT EQUIPMENT USED	30
8.4	MEASUREMENT RESULTS	30
9.	MAXIMUM PEAK OUTPUT POWER TEST.....	33
9.1	MEASUREMENT PROCEDURE.....	33
9.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	33
9.3	MEASUREMENT EQUIPMENT USED	33
9.4	MEASUREMENT RESULTS.....	33
10.	BAND EDGE TEST.....	34
10.1	MEASUREMENT PROCEDURE.....	34
10.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	34
10.3	MEASUREMENT EQUIPMENT USED	34
10.4	MEASUREMENT RESULTS	34
11.	ANTENNA PORT EMISSION.....	35
11.1	TEST EQUIPMENT	35
11.2	MEASURING INSTRUMENTS AND SETTING.....	35
11.3	TEST PROCEDURES	35
11.4	BLOCK DIAGRAM OF TEST SETUP	35
11.5	TEST RESULT	35
12.	ANTENNA APPLICATION.....	38
12.1	ANTENNA REQUIREMENT	38
12.2	RESULT	38

1. General Information

1.1 Product Description

The Imation Corp.

Model: IPU-IAB-11 (referred to as the EUT in this report) The EUT is an short range, lower power, USB Car Charger with Bluetooth Hands Free designed as an Device. It is designed by way of utilizing the GFSK, DQPSK and 8DPSK modulation achieves the system operating.

A major technical descriptions of EUT is described as following:

A). Operation Frequency: 2402-2480MHz

B). Modulation: GFSK, DQPSK, 8DPSK

(All the modulation modes were tested and the data of the worst modes (8DPSK) are attached within report.)

C). Number of Channel: 79

D). Channel space: 1MHz

E). Rated RF Output Power: 1.22dBm

F). BIT Rate of Transmission: 1Mbps, 2Mbps, 3Mbps

G). Antenna Type: PCB antenna

H). Antenna Gain: 0dBi

I). Power Supply: Input: DC 12V, 1A; Output: DC 5V, 2.1A

1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: PB4-IPUIAB11, IC ID: 6900A-IPUIAB11 filing to comply with Section 15.247 of the FCC Part 15 Subpart C Rules and Canadian RSS 210 Issue 8.0.

1.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2009) and in RSS GEN. Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4 Special Accessories

Not available for this EUT intended for grant.

1.5 Equipment Modifications

Not available for this EUT intended for grant.

1.6 Test Facility

Site Description

EMC Lab.

: Accredited by CNAS, 2010.10.29
The certificate is valid until 2013.10.28
The Laboratory has been assessed and proved to be in compliance with CNAS/CL01:2006(identical to ISO/IEC17025: 2005)
The Certificate Registration Number is L2291

Accredited by TUV Rheinland Shenzhen 2010.5.25
The Laboratory has been assessed according to the requirements ISO/IEC 17025

Accredited by FCC, October 28, 2010
The Certificate Registration Number is 406365.

Accredited by Industry Canada, March 5, 2010
The Certificate Registration Number is 46405-4480.

Name of Firm

Site Location

: SHENZHEN EMTEK CO., LTD
: Bldg 69, Majialong Industry Zone,
Nanshan District, Shenzhen, Guangdong, China

2. System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The Tx frequency was fixed which was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Radiated Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4-2009 and RSS GEN.

2.4 Limitation

(1) Channel Separation Test

FCC Part 15, Subpart C Section 15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB Bandwidth of the hopping channel, whichever is greater.

Frequency Range (MHz)	Limit(kHz)
902-928	>25kHz
2400-2483.5	>25kHz
5725-5850	>25kHz

(2) 20dB Bandwidth

Frequency Range(MHz)	Quantity of Hopping Channel	Limit(kHz)			
		50	25	15	75
902-928		<250	>250	NA	NA
2400-2483.5		NA	NA	>1000	<1000

(3) Quantity of Hopping Channel

FCC Part 15, Subpart C Section 15.247

Frequency Range (MHz)	Limit(Quantity of Hopping Channel)			
	20dB bandwidth <250kHz	20dB bandwidth >250kHz	20dB bandwidth <1MHz	20dB bandwidth >1MHz
902-928	50	25	NA	NA
2400-2483.5	NA	NA	75	15
5725-5850	NA	NA	75	NA

(4) Time of Occupancy(Dwell Time)

FCC Part 15, Subpart C Section 15.247

Frequency Range (MHz)	LIMIT(rms)		
	20dB bandwidth <250kHz(50Channel)	20dB bandwidth >250kHz(25Channel)	20dB bandwidth <1MHz(75Channel)
902-928	400(20S)	400(10S)	NA
2400-2483.5	NA	NA	400(30S)
5725-5850	NA	NA	400(30S)

Note: The “()”is all channel’s average time of occupancy.

(5) Maximum Peak Output Power

FCC Part 15, Subpart C Section 15.247

Frequency Range (MHz)	Quantity of Hopping Channel	LIMIT(W)			
		50	25	15	75
902-928		1(30dBm)	0.125(21dBm)	NA	NA
2400-2483.5		NA	NA	0.125(21dBm)	1(30dBm)
5725-5850		NA	NA	NA	1(30dBm)

(6) Band edge

FCC Part15, Subpart C Section 15.247, In any 100kHz bandwidth outside the frequency band in with the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, attenuation below the general limits specified in section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a).

Operating Frequency Range(MHz)	Spurious emission frequency	Peak power ration to emission(dBc)	Limit Emission level(dBuV/m)
902-928	<902	>20	NA
	>928	>20	NA
	960-1240	NA	54
2400-2483.5	<2400	>20	NA
	>2483.5-2500	NA	54
5725-5850	<5350-5460	NA	54
	<5725	>20	NA
	>5850	>20	NA

(7) Radiated Emission

FCC Part 15, Subpart C Section 15.209 limit of radiated emission for frequency below 1000GHz. The emissions from an intentional radiator shall not exceed the field strength level specified in the following table:

Frequency (MHz)	Field strength $\mu\text{V/m}$	Distance(m)	Field strength at 3m $\text{dB}\mu\text{V/m}$
30-88	100	3	40
88-216	150	3	43.5
216-960	200	3	46
Above 960	500	3	54

Remark: 1. Emission level in $\text{dB}\mu\text{V/m} = 20 \log (\mu\text{V/m})$

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

FCC Part 15, Section 15.35(b) limit of radiated emission for frequency above 1000MHz

Frequency(MHz)	Class A($\text{dB}\mu\text{V/m}$)(at 3m)		Class B($\text{dB}\mu\text{V/m}$)(at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80.0	60.0	74.0	54.0

FCC Part 15, Subpart C Section 15.249 The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Frequency(MHz)	Filed Strength of Fundamental(at 3m)		Filed Strength of Harmonics(at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
902-928	114	94	74.0	54.0
2400-2483.5	114	94	74.0	54.0
5725-5875	114	94	74.0	54.0
24000-24250	128	108	88.0	68.0

2.5 Configuration of Tested System**Fig. 2-1 Configuration of Tested System**

2.6 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
1.	USB Car Charger with Bluetooth Hands Free	XtremeMac	IPU-IAB-11	PB4-IPUIAB11	N/A	<i>EUT</i>
2.	Notebook	Lenovo	20020	N/A	EB16076441	

Note:

- (1) Unless otherwise denoted as EUT in 『Remark』 column, device(s) used in tested system is a support equipment.

2.7 Description of Test Modes

The EUT (USB Car Charger with Bluetooth Hands Free) has been tested under normal operating condition.

This EUT is a FHSS system, we use blue test to control the EUT with parallel port, Let EUT hopping on and transmit at every channel with highest power, Only output power use conducted method, others are using radiated method. After sirfdemo330R1 send the command to EUT, it can be removed, and the EUT keep hopping. 79 Channels are provided by EUT. The 3 channels of lower, medium and higher were chosen for best.

Channel	Frequency(MHz)
1	2402
40	2441
79	2480

3. Summary of Test Results

FCC Rules	IC Rules	Description Of Test	Result
§15.247(a)(1)	RSS 210 A8.1(2)	Channel Separation Test	Compliant
§15.247(a)(1)	--	20dB Bandwidth	Compliant
--	RSS 210 A8.1(1)	99%dB Bandwidth	Compliant
§15.247(a)(1)(iii)	RSS 210 A8.1(4)	Quantity of Hopping Channel	Compliant
§15.247(a)(1)(iii)	RSS 210 A8.1(4)	Time of Occupancy (Dwell Time)	Compliant
§15.247(b)	RSS 210 A8.4	Max Peak Output Power Test	Compliant
§15.247(d)	RSS 210 A8.5	Band Edge Test	Compliant
§15.247(d), §15.209	RSS 210 A8.5	Radiated Emission	Compliant
§15.203	--	Antenna Requirement	Compliant
§15.109	RSS GEN 7.2.3 Table 1	Receiver Spurious Emissions	Compliant


4. Radiated Emission Test

4.1 Measurement Procedure


1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measured was complete.

4.2 Test SET-UP (Block Diagram of Configuration)


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

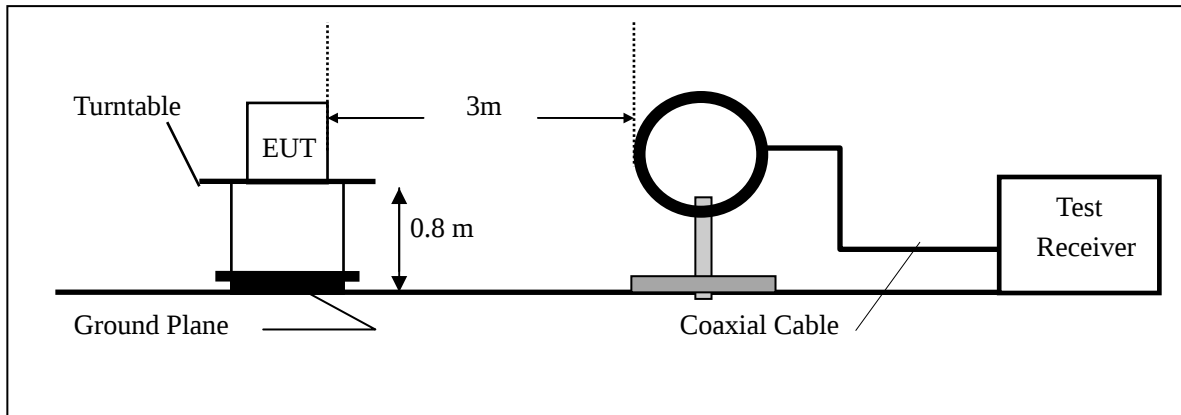

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

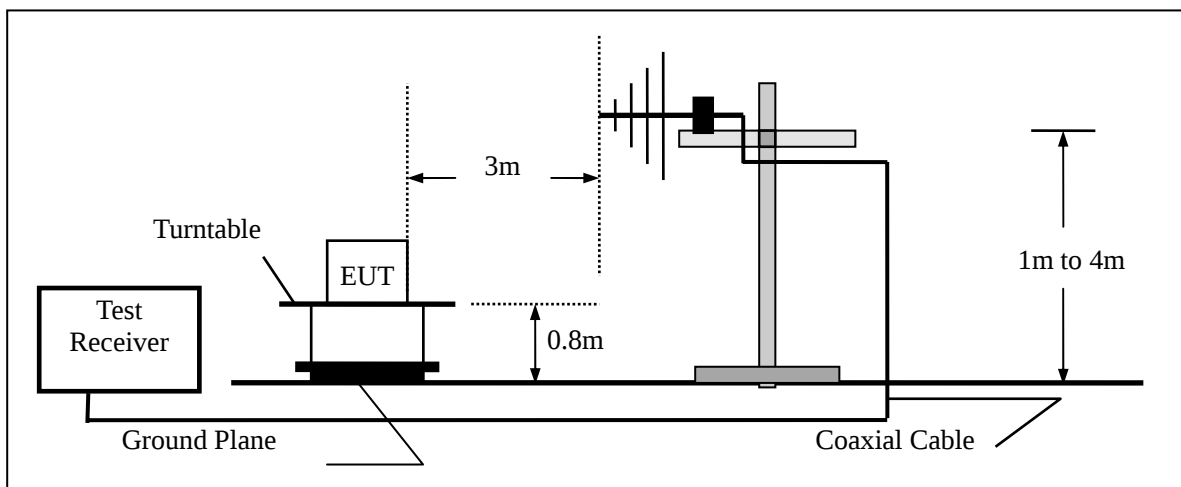

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

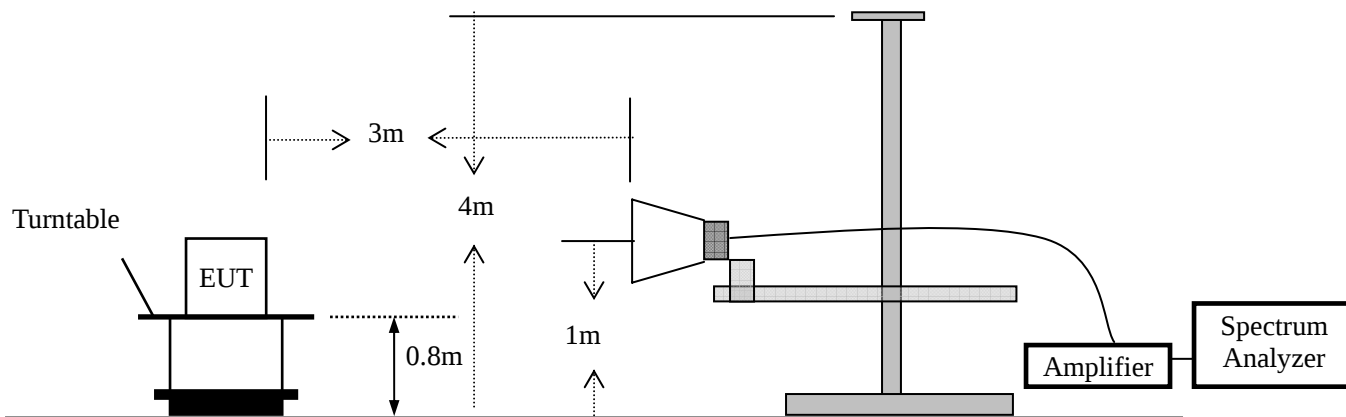

4.3 Measurement Equipment Used

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSP7	839511/010	05/29/2010	05/29/2011
Spectrum Analyzer	HP	E4407B	839840481	05/29/2010	05/29/2011
EMI Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/29/2010	05/29/2011
Pre-Amplifier	HP	8447D	2944A07999	05/29/2010	05/29/2011
Bilog Antenna	Schwarzbeck	VULB9163	142	05/29/2010	05/29/2011
Loop Antenna	ARA	PLA-1030/B	1029	05/29/2010	05/29/2011
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	05/29/2010	05/29/2011
Horn Antenna	Schwarzbeck	BBHA 9120	D143	05/29/2010	05/29/2011

4.4 Radiated Emission Limit

FCC Class B Limit at 3m:

Frequency MHz	Distance Meter	Field Strength uV/m	Field Strength dBuV/m
30~88	3	100	40.0
88~216	3	150	43.5
216~960	3	200	46.0
Above 960	3	500	54.0

Note: The frequencies above 1000MHz, as measured using instrumentation with a peak detector function was corresponding to 20dB above maximum permitted average limit.

4.5 Measurement Result

TX mode:

Operation Mode: 2402MHz Test Date : 03/25/2011
 Frequency Range: 30~1000MHz Temperature : 28
 Test Result: PASS Humidity : 65 %
 Measured Distance: 3m Test By: KL

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV)	Limit 3m (dBuV/m)	Margin (dB)	Note
30	V	26.63	40	-13.37	PK
143.4	V	28.12	43.5	-15.38	PK
191.66	V	28.58	43.5	-14.92	PK
432.61	V	28.28	46	-17.72	PK
493.23	V	30.59	46	-15.41	PK
692.21	V	35.19	46	-10.81	PK
67.3	H	24.98	40	-15.02	PK
143.47	H	25.89	43.5	-17.61	PK
288.04	H	33.07	46	-12.93	PK
483.25	H	31.17	46	-14.83	PK
692.28	H	32.68	46	-13.32	PK
892.06	H	34.28	46	-11.72	PK

Operation Mode: 2441MHz Test Date : 03/25/2011
 Frequency Range: 30~1000MHz Temperature : 28
 Test Result: PASS Humidity : 65 %
 Measured Distance: 3m Test By: KL

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV)	Limit 3m (dBuV/m)	Margin (dB)	Note
30.17	V	25.58	40	-14.42	PK
143.66	V	27.49	43.5	-16.01	PK
192.44	V	27.37	43.5	-16.13	PK
431.9	V	29.06	46	-16.94	PK
494.88	V	29.93	46	-16.07	PK
692.38	V	35.31	46	-10.69	PK
68.37	H	23.64	40	-16.36	PK
145.08	H	24.26	43.5	-19.24	PK
288.4	H	32.72	46	-13.28	PK
484.28	H	30.06	46	-15.94	PK
693.39	H	30.52	46	-15.48	PK
892.81	H	32.65	46	-13.35	PK

Operation Mode: 2480MHz Test Date : 03/25/2011
 Frequency Range: 30~1000MHz Temperature : 28
 Test Result: PASS Humidity : 65 %
 Measured Distance: 3m Test By: KL

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV)	Limit 3m (dBuV/m)	Margin (dB)	Note
30.15	V	25.46	40	-14.54	PK
143.56	V	28.62	43.5	-14.88	PK
192.71	V	27.95	43.5	-15.55	PK
431.88	V	29.06	46	-16.94	PK
493.92	V	30.7	46	-15.3	PK
692.08	V	35.31	46	-10.69	PK
68.42	H	25.1	40	-14.9	PK
145.1	H	26.12	43.5	-17.38	PK
288.41	H	32.72	46	-13.28	PK
484.33	H	29.93	46	-16.07	PK
693.51	H	32.51	46	-13.49	PK
893.84	H	32.65	46	-13.35	PK

- Note:**
- (1) All Readings are Peak Value.
 - (2) Emission Level= Reading Level+Probe Factor +Cable Loss
 - (3) The average measurement was not performed when the peak measured data under the limit of average detection.
 - (4) All the x/y/z orientation has been investigated, and only worst case is presented in this report.

TX mode:

Operation Mode: CH1: 2402MHz Test Date : 03/25/2011
 Frequency Range: 1-25GHz Temperature : 28
 Test Result: PASS Humidity : 65 %
 Measured Distance: 3m Test By: Andy

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4830.12	V	57.76	45.04	74	54	-16.24	-8.96
4926.28	V	57.49	44.37	74	54	-16.51	-9.63
7346.15	V	56.92	43.96	74	54	-17.08	-10.04
--	V	--	--	--	--	--	--
4830.25	H	58.86	44.48	74	54	-15.14	-9.52
4928.33	H	58.54	44.06	74	54	-15.46	-9.94
7346.15	H	58.82	43.7	74	54	-15.18	-10.3

Operation Mode: CH40: 2441MHz Test Date : 03/25/2011
 Frequency Range: 1-25GHz Temperature : 28
 Test Result: PASS Humidity : 65 %
 Measured Distance: 3m Test By: Andy

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4846.17	V	58.04	43.8	74	54	-15.96	-10.2
4943.31	V	56.22	41.69	74	54	-17.78	-12.31
7358.66	V	57.73	44.08	74	54	-16.27	-9.92
--	V	--	--	--	--	--	--
4843.27	H	58.3	45.1	74	54	-15.7	-8.9
4942.64	H	58.79	46.44	74	54	-15.21	-7.56
7364.81	H	57.55	43.62	74	54	-16.45	-10.38
--	H	--	--	--	--	--	--

Operation Mode: CH79: 2480MHz Test Date : 03/25/2011
 Frequency Range: 1-25GHz Temperature : 28
 Test Result: PASS Humidity : 65 %
 Measured Distance: 3m Test By: Andy

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4846.39	V	56.82	44.05	74	54	-17.18	-9.95
4943.75	V	57.19	45.45	74	54	-16.81	-8.55
7358.63	V	57.25	44.45	74	54	-16.75	-9.55
--	V	--	--	--	--	--	--
4844.91	H	57.77	44.48	74	54	-16.23	-9.52
4940.99	H	57.45	44.25	74	54	-16.55	-9.75
7359.5	H	58.35	46.17	74	54	-15.65	-7.83

- Note:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level+Probe Factor +Cable Loss
 - (3) Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
 - (4) All the x/y/z orientation has been investigated, and only worst case is presented in this report.

RX Mode:

Operation Mode: RX Test Date : 03/25/2011
 Frequency Range: 30~1000MHz Temperature : 28
 Test Result: PASS Humidity : 65 %
 Measured Distance: 3m Test By: WOLF



Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV)	Limit 3m (dBuV/m)	Over (dB)	Note
33.109	V	34.53	40	-5.47	PK
37.7724	V	34.47	40	-5.53	PK
62.6442	V	33.19	40	-6.81	PK
93.734	V	32.54	43.5	-10.96	PK
129.4871	V	40.45	43.5	-3.05	PK
406.186	V	42.46	46	-3.54	PK
73.5256	H	32.17	40	-7.83	PK
194.7756	H	27.1	43.5	-16.4	PK
232.0833	H	29.02	46	-16.98	PK
260.0641	H	35.38	46	-10.62	PK
404.6314	H	40.82	46	-5.18	PK
446.6026	H	36.45	46	-9.55	PK

Operation Mode: RX Test Date : 03/25/2011
 Frequency Range: 1-25GHz Temperature : 28
 Test Result: PASS Humidity : 65 %
 Measured Distance: 3m Test By: WOLF

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
11052.88	V	56.75	44.18	74	54	-17.25	-9.82
14512.82	V	51.21	38.97	74	54	-22.79	-15.03
180000	V	54.78	39.55	74	54	-29.22	-14.45
--	V	--	--	--	--	--	--
--	V	--	--	--	--	--	--
10371.79	H	56.96	44.57	74	54	-17.04	-9.43
14594.55	H	50.87	38.96	74	54	-23.13	-15.04
18000	H	55.20	36.35	74	54	-18.8	-17.65

- Note:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level+Probe Factor +Cable Loss
 - (3) Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

4.6 Radiated Measurement Photos

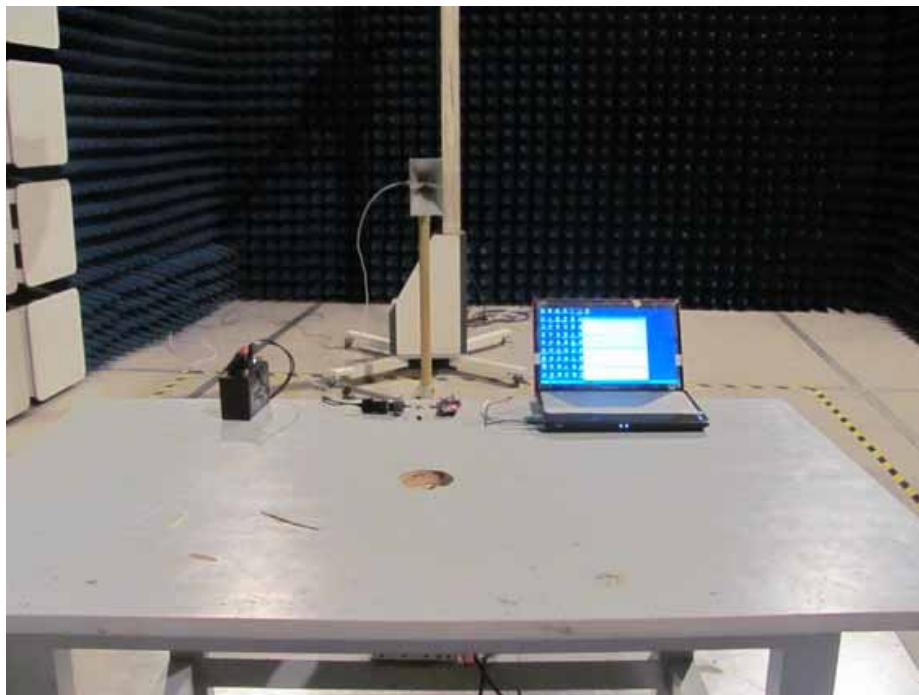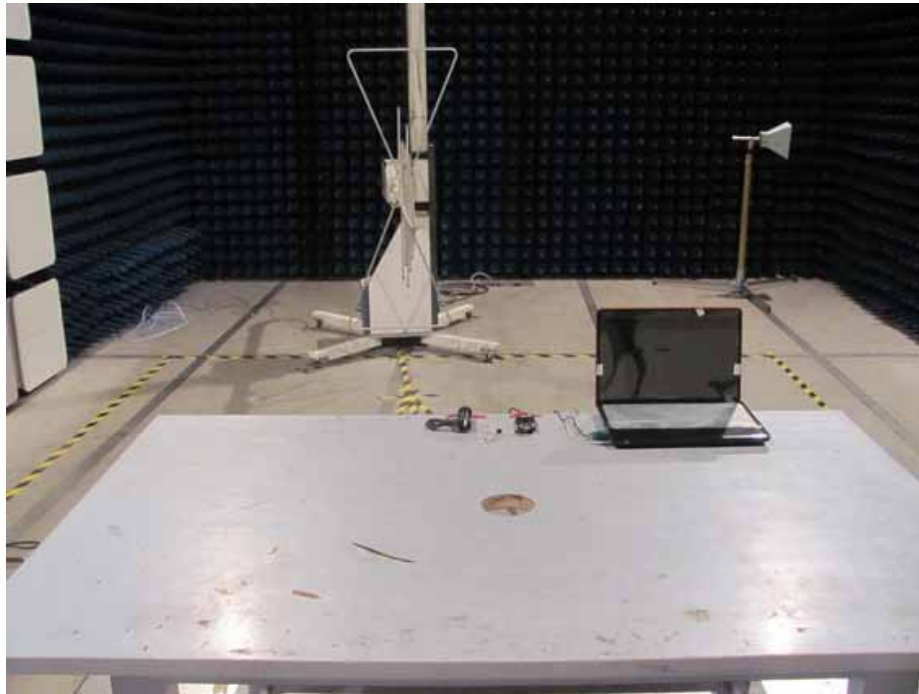


5. Channel Separation Test

5.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

5.2 Test SET-UP (Block Diagram of Configuration)



5.3 Measurement Equipment Used

Same as 4.3 Radiated Emission Measurement.



5.4 Measurement Results


Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	03/25/2011
Test By:	Andy	Temperature :	28
Test Result:	PASS	Humidity :	65 %

Channel number	Channel frequency (MHz)	Separation Read Value (kHz)	Separation Limit 2/3 20dB Down BW(kHz)
1	2402	1000.00	>733 kHz
40	2441	1000.00	>742 kHz
79	2480	1000.00	>725 kHz

NOTE: For two-third of the 20dB bandwidth (page 24) is greater than 25kHz. So the limit of Separation Limit is just as the above table.

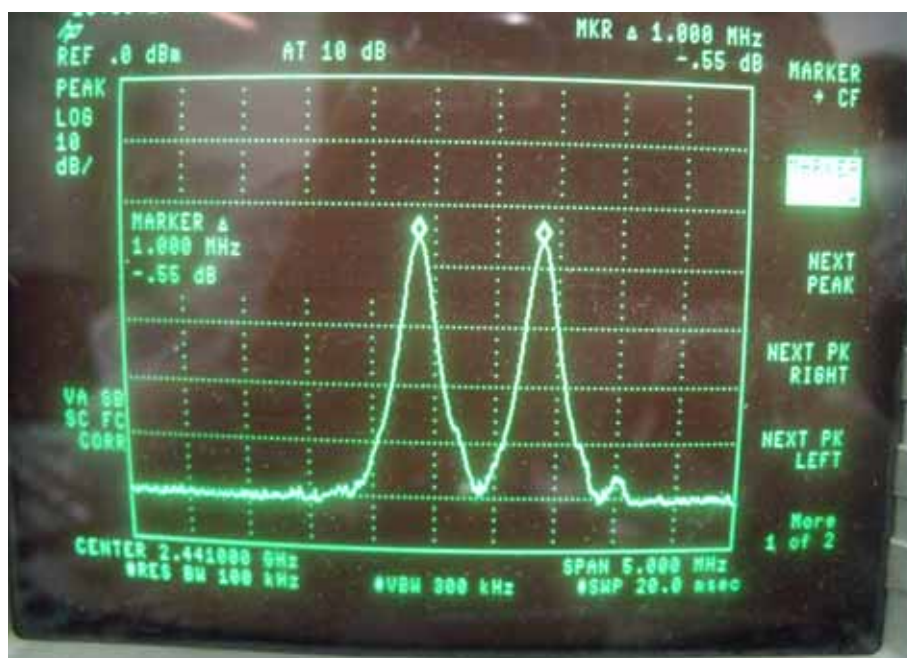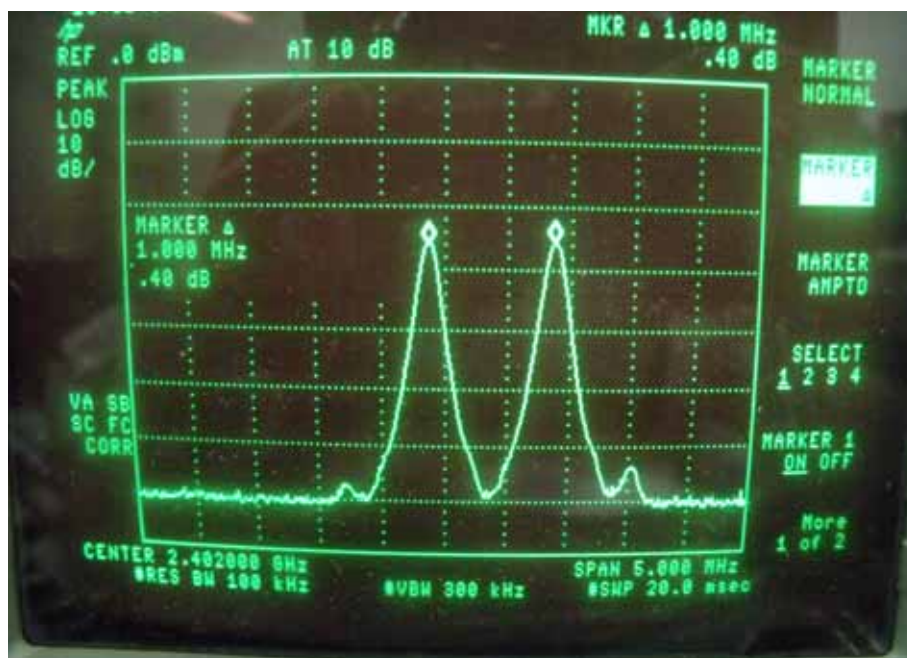

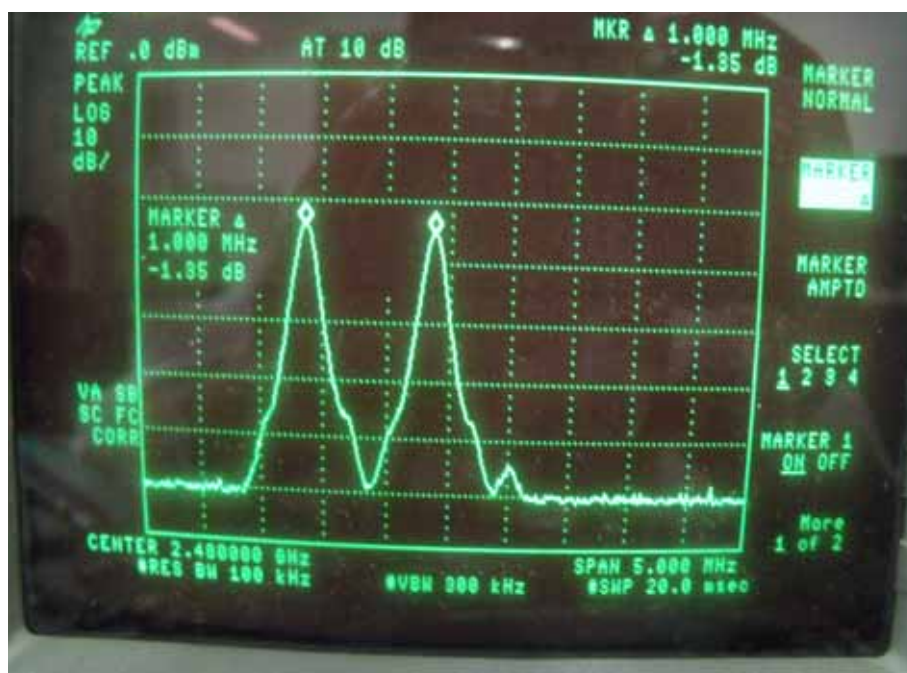


6. Bandwidth Test

6.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

6.2 Test SET-UP (Block Diagram of Configuration)



6.3 Measurement Equipment Used

Same as 4.3 Radiated Emission Measurement.



6.4 Measurement Results


6.4.1. 20dB Bandwidth test data Chart:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date:	03/25/2011
Test By:	Andy	Temperature:	28
Test Result:	PASS	Humidity:	65 %

Channel number	Channel frequency (MHz)	20dB Down BW(kHz)
1	2402	1100
40	2441	1113
79	2480	1088

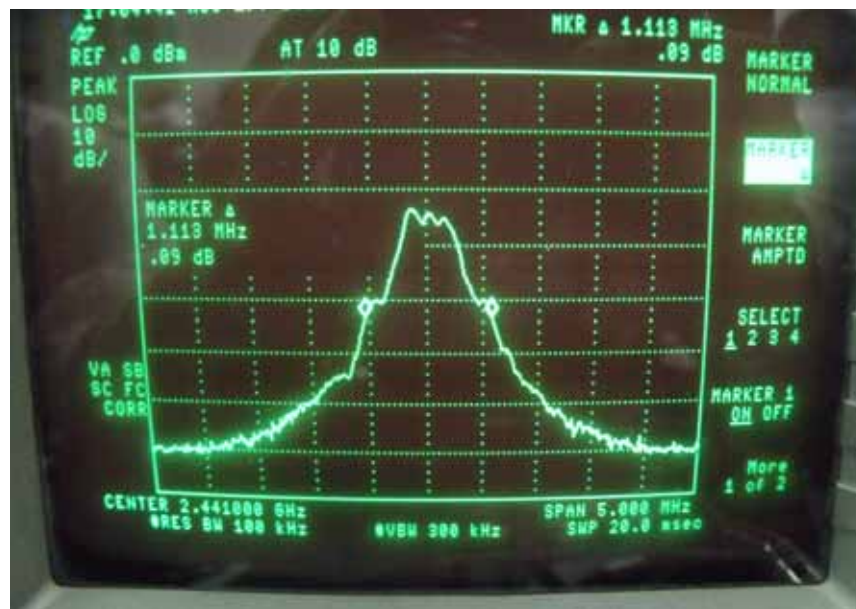
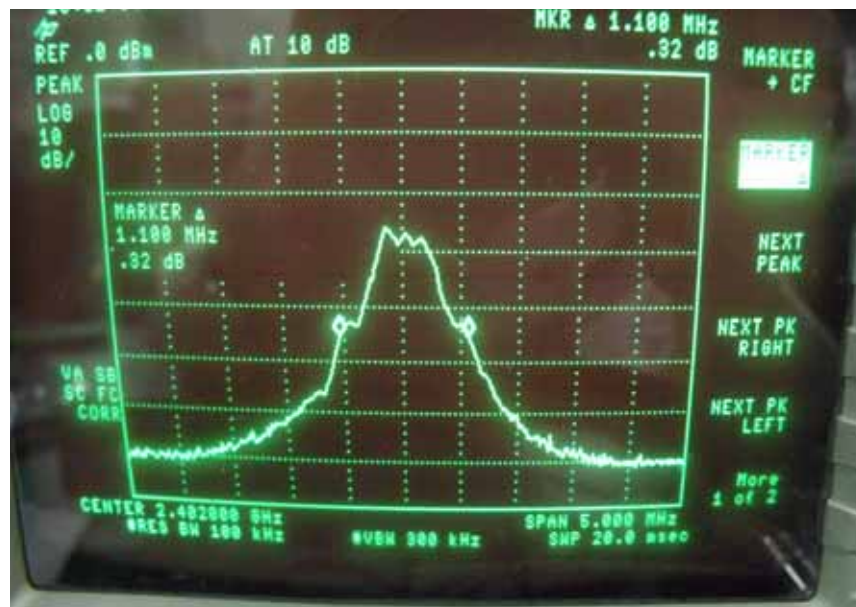


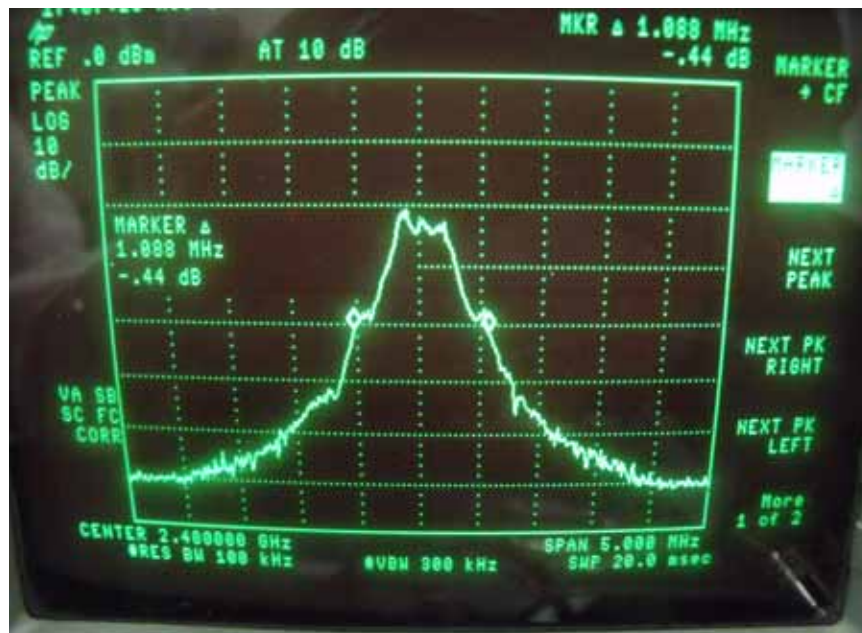


6.4.2. 99% Bandwidth test data Chart:
Refer to attached data chart.

Spectrum Detector:	PK	Test Date:	03/25/2011
Test By:	Andy	Temperature:	28
Test Result:	PASS	Humidity:	65 %

Channel number	Channel frequency (MHz)	99% Down BW(kHz)
1	2402	950
40	2441	925
79	2480	950

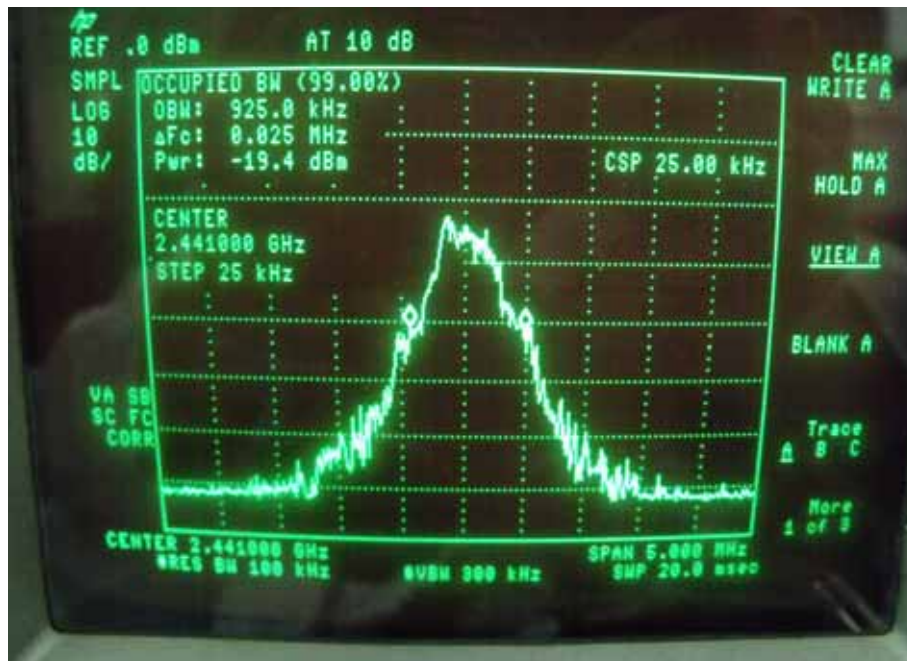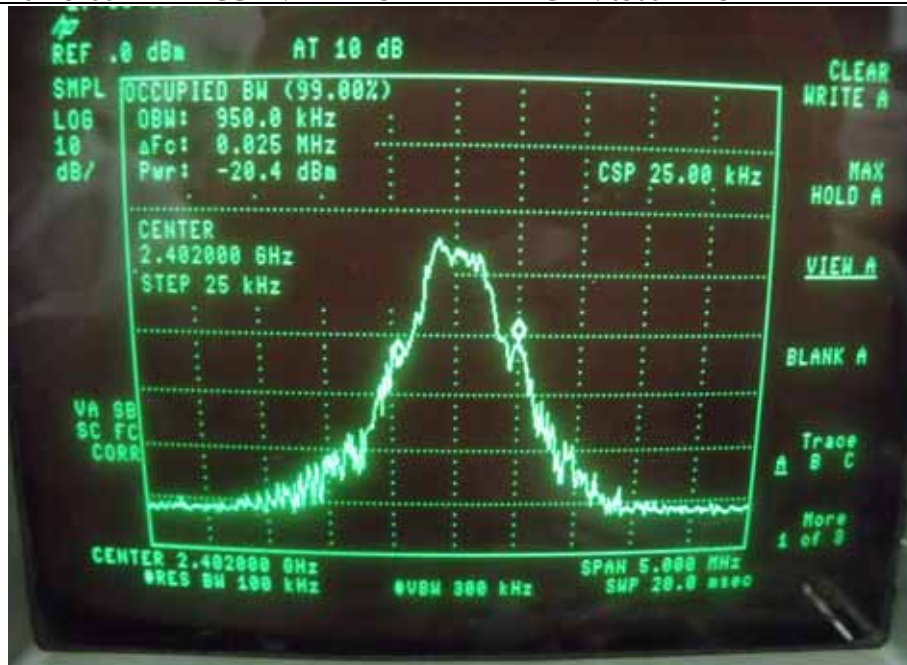

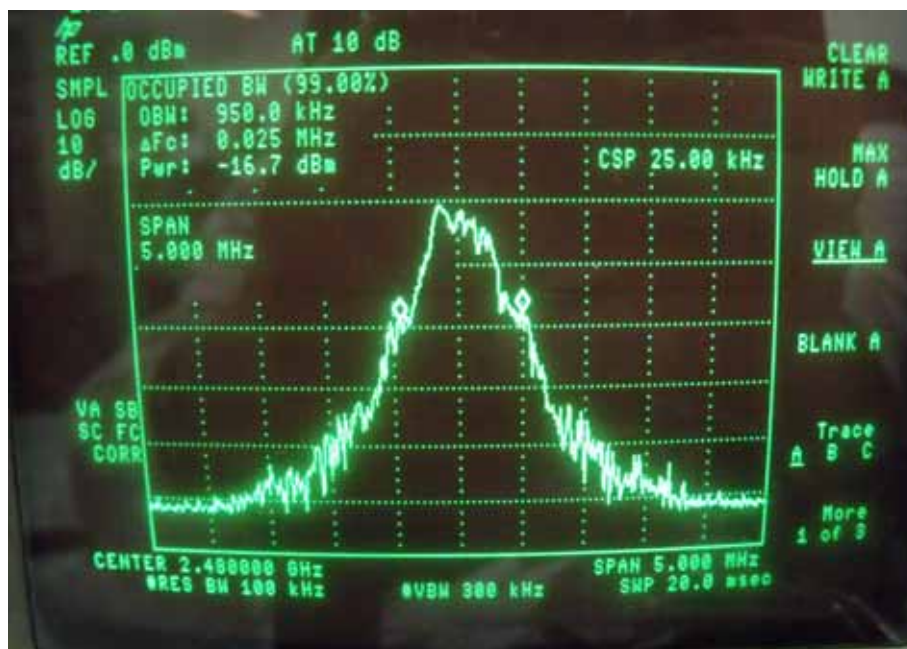


7. Quantity of Hopping Channel Test

7.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

7.2 Test SET-UP (Block Diagram of Configuration)



7.3 Measurement Equipment Used


Same as 4.3 Radiated Emission Measurement.

7.4 Measurement Results

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	03/25/2011
Test By:	Andy	Temperature :	28
Test Result:	PASS	Humidity :	65 %

Hopping Channel Frequency Range	Quantity of Hopping Channel	Quantity of Hopping Channel
2402-2480	79	79

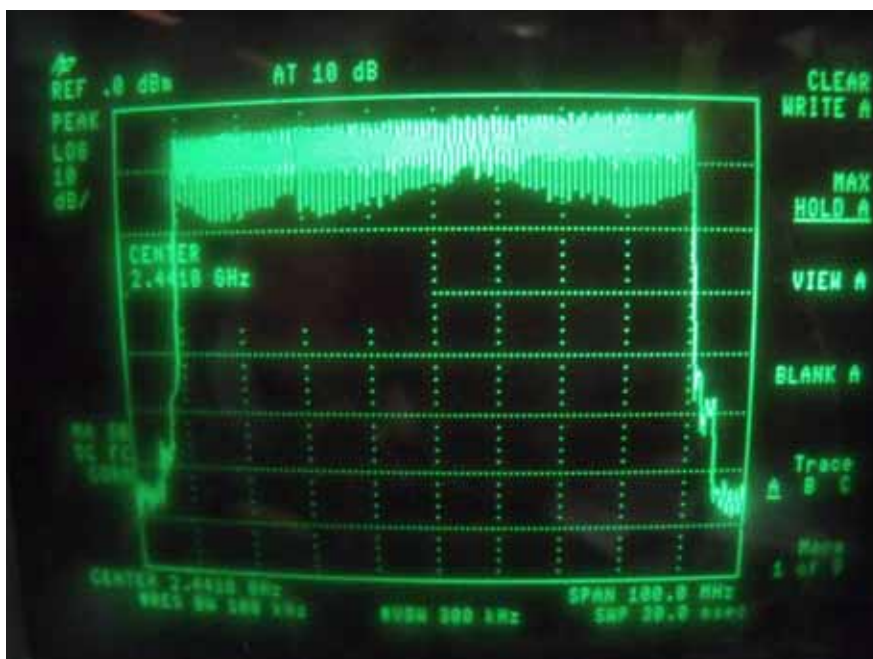


8. Time of Occupancy (Dwell Time) Test

8.1 Measurement Procedure

- Check the calibration of the measuring instrument(SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- Repeat above procedures until all different time-slot modes have been completed.

8.2 Test SET-UP (Block Diagram of Configuration)



8.3 Measurement Equipment Used

Same as 4.3 Radiated Emission Measurement.


8.4 Measurement Results

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	03/25/2011
Test By:	Andy	Temperature :	28
Test Result:	PASS	Humidity :	65 %

mode	Number of transmission in a 31.6(79 Hopping*0.4)	Length of transmissions time(msec)	Result (msec)	Limit (msec)
DH1	51(times/5 sec)*6.32=322.32 times	0.435	140.2092	400
DH3	26(times/5 sec)*6.32=164.32 times	1.616	265.5411	400
DH5	15(times/5 sec)*6.32=94.80 times	2.717	257.5716	400

DH1

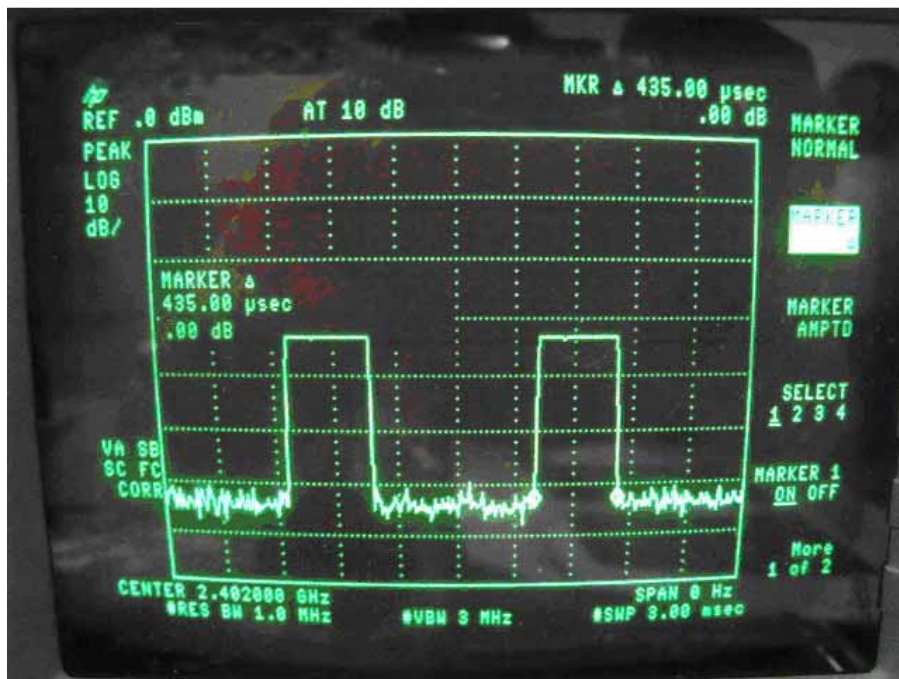

DH3



DH5




9. Maximum Peak Output Power Test

9.1 Measurement Procedure

- Check the calibration of the measuring instrument(SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- The center frequency of the spectrum analyzer is set to the fundamental frequency and using proper RBW and VBW setting.
- Measure the captured power within the band and recording the plot.
- Repeat above procedures until all frequencies required were complete.

9.2 Test SET-UP (Block Diagram of Configuration)

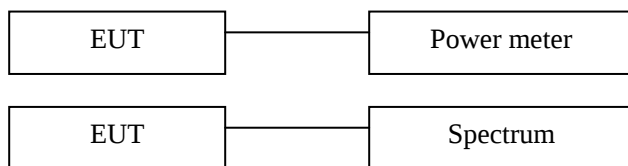

9.3 Measurement Equipment Used

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSP7	839511/010	05/29/2010	05/29/2011
Power meter	Boonton	4232A	29001	05/29/2010	05/29/2011
Power sensor	Boonton	51011-EMC	31184	05/29/2010	05/29/2011

9.4 Measurement Results

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	03/25/2011
Test By:	Andy	Temperature :	28
Test Result:	PASS	Humidity :	65 %

Channel number	Channel Frequency (MHz)	Peak Power output(dBm)	Peak Power output(mW)	Peak Power Limit(mW)	Pass/Fail
1	2402.00	1.08	1.28	125	PASS
40	2441.00	1.22	1.32	125	PASS
79	2480.00	1.19	1.31	125	PASS

10. Band Edge Test

10.1 Measurement Procedure

1. The EUT was Operating in hopping mode or could be controlled its channel. Printed out test result from the spectrum by hard copy function.
2. The EUT was placed on a turn table which is 0.8m above ground plane.
3. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
4. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
5. Repeat above procedures until all frequency measured were complete.

10.2 Test SET-UP (Block Diagram of Configuration)

As 4.2 Test set up (B) and (C)

10.3 Measurement Equipment Used

Same as 4.3 Radiated Emission Measurement.

10.4 Measurement Results

Spectrum Detector: PK/AV Test Date : 03/25/2011
 Test By: Andy Temperature : 28
 Test channel: `1 Humidity : 65 %

Frequency (MHz)	Polarity	Level (dBuV/m)		Limited (dBuV/m)	
		PK	AV	PK	AV
2385.56	H	48.69	35.28	74	54
2384.78	V	49.87	36.12	74	54

Spectrum Detector: PK/AV Test Date : 03/25/2011
 Test By: Andy Temperature : 28
 Test channel: 79 Humidity : 65 %

Frequency (MHz)	Polarity	Level (dBuV/m)		Limited (dBuV/m)	
		PK	AV	PK	AV
2484.35	H	51.05	38.53	74	54
2483.63	V	50.46	37.34	74	54

11. Antenna Port Emission

11.1 Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	05/29/2010	05/29/2011

11.2 Measuring Instruments and setting


The following table is the setting of spectrum analyzer.

Spectrum analyzer	Setting
Attenuation	Auto
RB	100kHz
VB	300kHz
Detector	Peak
Trace	Max hold

11.3 Test Procedures



The conducted spurious emissions were measured conducted using a spectrum analyzer at low, mid, and hi channels, The limit was determined by attenuation 20dB of the RF peak power output.


11.4 Block Diagram of Test setup



11.5 Test Result

PASS.

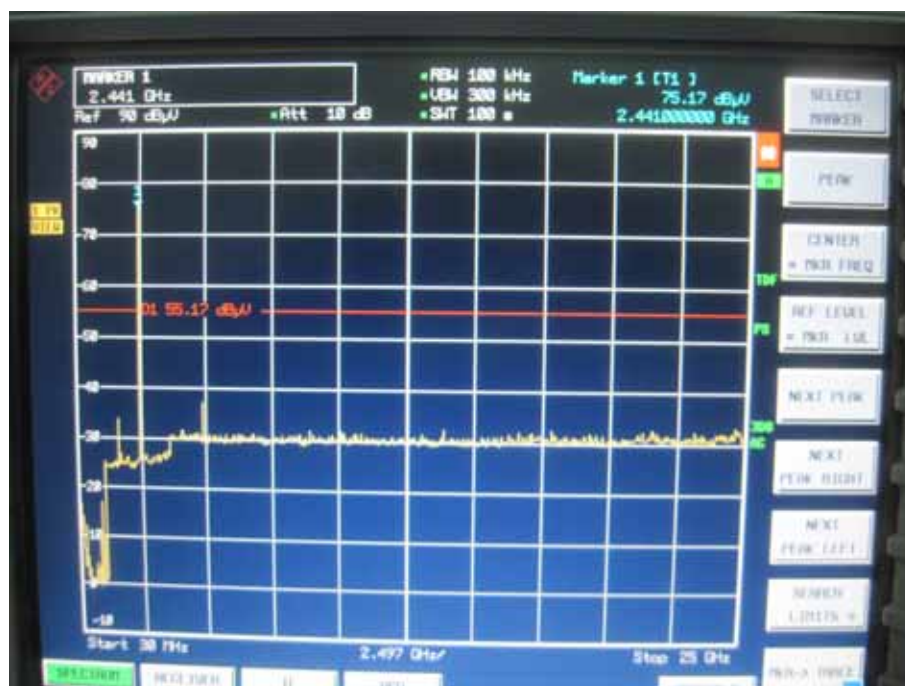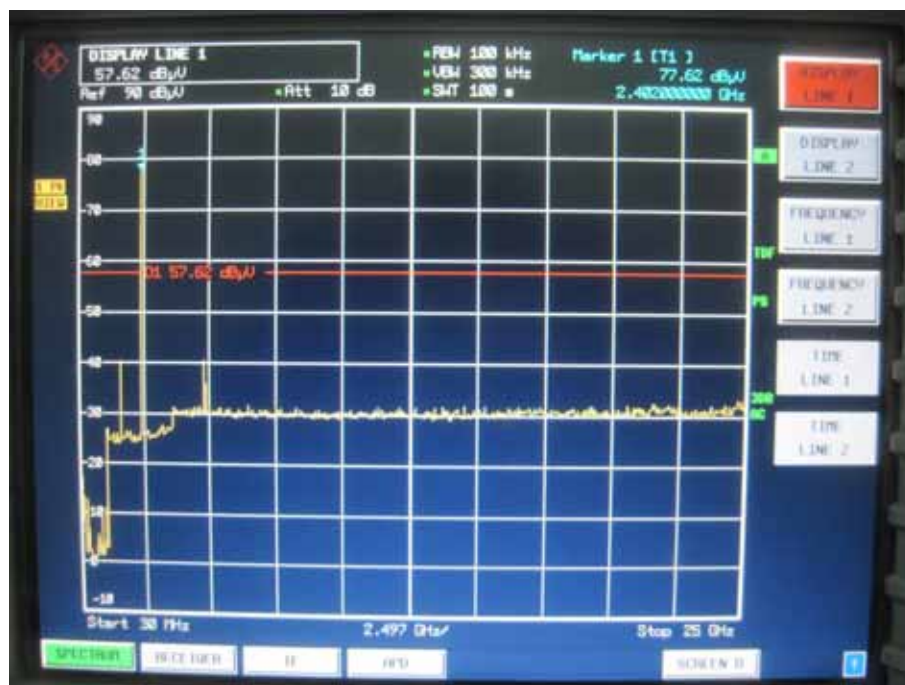

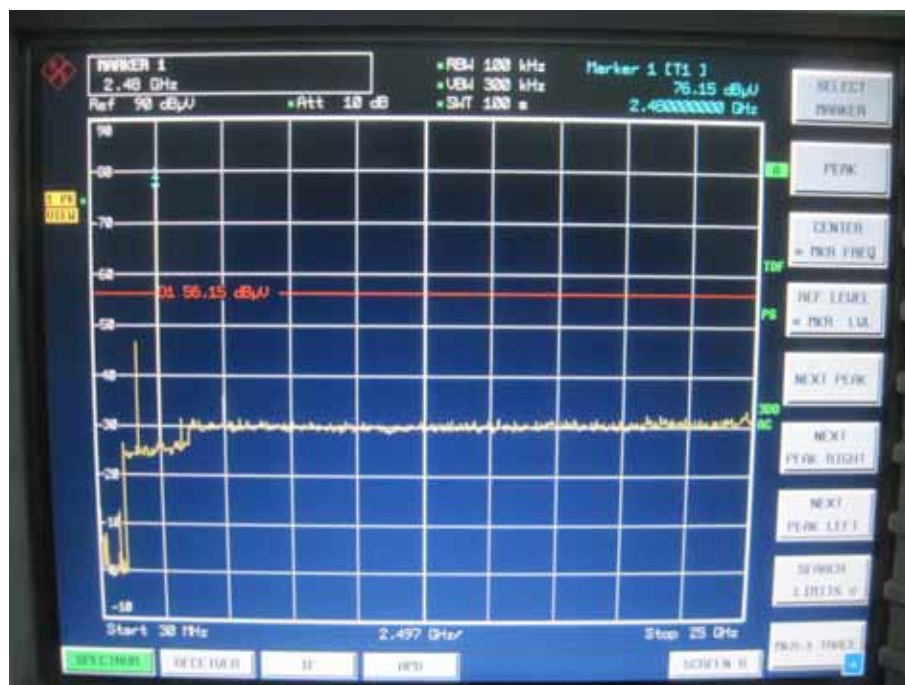

12. Antenna Application

12.1 Antenna requirement

The EUT'S antenna is met the requirement of FCC part 15C section 15.203 and 15.240.

FCC part 15C section 15.247 requirements:

Systems operating in the 2402-2480MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

12.2 Result

The EUT's antenna used a chip antenna and integrated on PCB, The antenna's gain is 0dBi and meets the requirement.