



# 規格承認書

## Specification for Approval

客 戶： 永 洋  
 Customer  
 品 名： 2.4GHz 4 . 0 4dBi ANTENNA BLACK


Part name  
 料 號： GY112HT467-010  
 Part No.  
 客戶料號： 11320Y11008B1  
 Customer Part No.  
 Rev.(版本): 01

客戶承認印 CUS TOMER APPROVED BY			
APPROVAL CHIEF		SUPERVISOR	
			
Approval No.			
Model			
Part No.			

CHIEF SALES		R&D	DESIGN
Andy	Teri Tseng	Tammy	Jerry
Date: 2011/03/01		Date: 2011/03/01	
<b>驊 陸 科 技 股 份 有 限 公 司</b> <b>WIESON TECHNOLOGIES CO., LTD.</b>			


**RoHS Compliant**

REV	DATE	DESCRIPTION	NAME
01	11.02.15	NEW RELEASE	

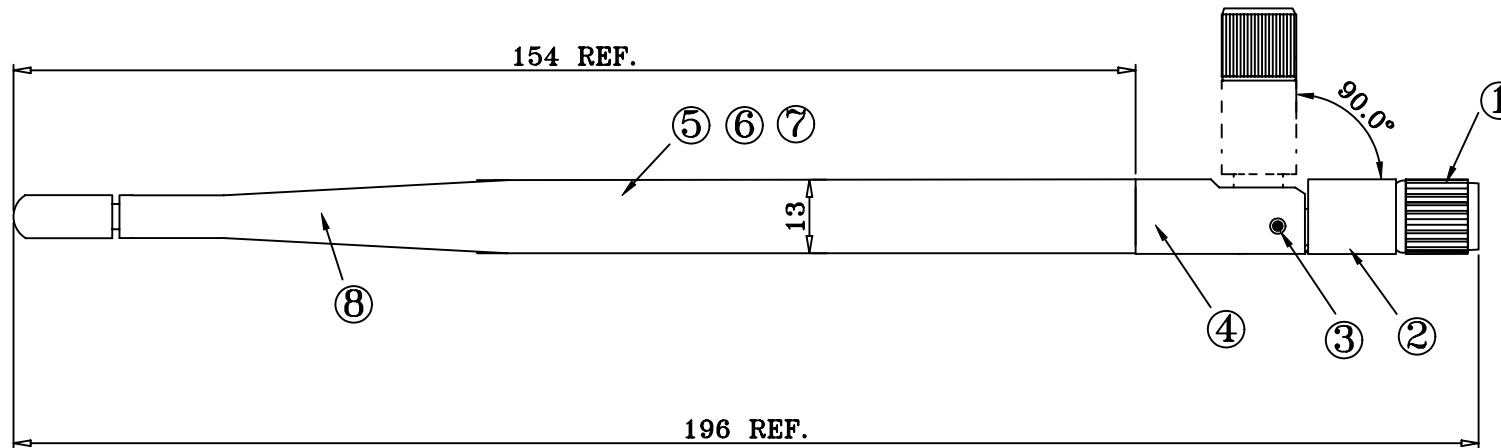

**NOTES:**

1. Frequency : 2.4 ~ 2.5GHz
2. VSWR : 2.0 MAX.
3. Gain : 5.0 dBi TYP.
4. IMPEDANCE : 50 Ohm

⑧	COVER	COVER , BLACK	1	 PART NO.: <b>GY112HT467-010</b>			
⑦	COIL	COIL	1				
⑥	CABLE	RG-316B/U COAXIAL CABLE , ORANGE JACKET	1				
⑤	COPPER TUBE	COPPER TUBE	1				
④	BASE-1	BASE-1 , BLACK	1	TITLE: <b>2.4GHz High Gain Antenna</b>			
③	FIXED PIN	FIXED PIN , BLACK	2	DRAWN BY	WEN (WST)	DRAWING NO.	WSCS065017
②	BASE-2	BASE-2 , BLACK	1	CHECKED BY		DRAWING SIZE	A3
①	CONNECTOR	SMA MALE REVERSE POLARITY , BODY BLACK PLASTIC	1	APPROVED BY		UNIT	mm
NO.	ITEM	DESCRIPTION	QTY	SORTING NO.	WSC	PAGE	1 OF 1

## 1. Scope

This specification covers FEP insulated High-Frequency coaxial cable for internal wiring of electronic equipment.


USE:Internal wiring of Class 2 Circuits of Electronic Equipment.

## 2. Construction :

Item	Unit	Spec. Value
Inner Conductor	Material	---
	construction	No./mm
	Dia.(approx)	mm
Insulation	Material	---
	Nom. Thickness	mm
	Dia.(approx)	mm
	Color	---
Outer Conductor	Type	---
	Material	---
	Coverage	%
	Dia.(approx)	mm
Jacket	Material	---
	Nom. Thickness	mm
	Color	---
	Dia	mm

## 3. Characteristics :

Test Item	Unit	Specified Value	Note
Appearance	-	Faultless in visible	-
Rating voltage	V	2000	-
Inner conductor resistance(at 20℃)	$\Omega$ /km	Max.597	At 20℃
Insulation resistance 1> (at 20℃)	M $\Omega$ -km	Min.1500	At 20℃
Dielectric strength		No breakdown at AC 1.5kV for 1min	Outer conductor to inner conductor
Capacitance	pF/m	Nom.98	At 1KHz
Characteristic impedance (at D-TDR)	$\Omega$	50±2	TDR method
Attenuation(Non Connect)	dB/m	0.29	100 MHz
		0.58	400GHz
		0.93	1000GHz
		1.27	1800GHz
		1.45	2400GHz
		2.14	5000GHz

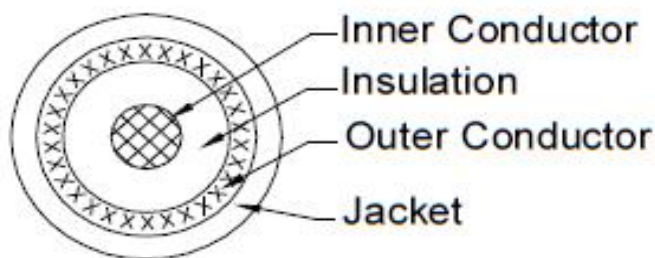

Cross-section of cable

## 4. Packing

Upon your request.



## I. SUMMARY :

This report to account for the measurement setup and result of the Antenna.

1. The measurement setup includes s-parameter, pattern, and gain measurement.
2. The measured data for Antenna are presented and analysis.

## II. S-PARAMETER MEASUREMENT :

### A. Reflection coefficient :

(a) Instrument : Network Analyzer.

(b) Setup :

- (1) Calibrate the Network Analyzer by one port calibration using O.S.L. calibration kits.
- (2) Connect the antenna under test to the Network Analyzer.
- (3) Measure the S11(reflection coefficient) shown in Fig. 1.
- (4) Generally, the S11 is less than  $-10\text{dB}$  to ensure the 90% power into antenna and only less than 10% power back to system.

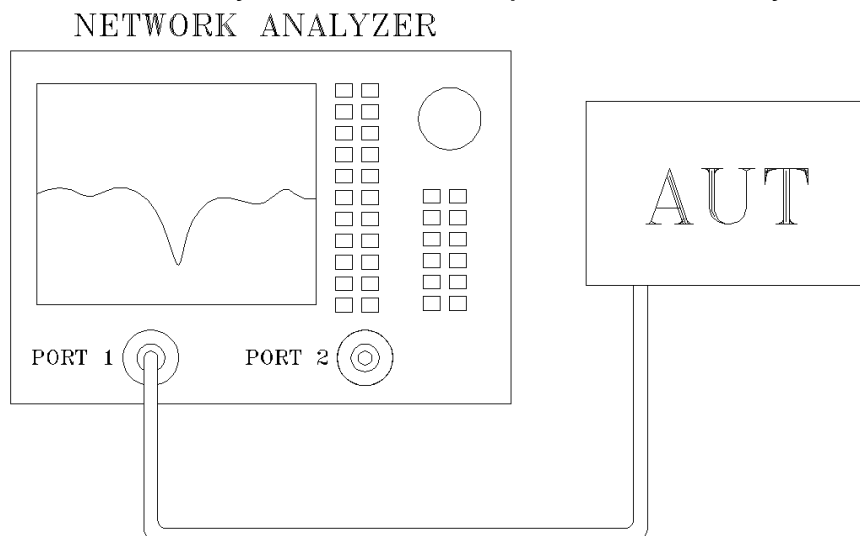



Fig.1 Antenna measured in Network Analyzer



### III. S-PARAMETER TEST RESULT :

#### Antenna VSWR

Sample \ Frequency	2400 MHz	2450 MHz	2500 MHz
1	1.9102	1.7576	1.447

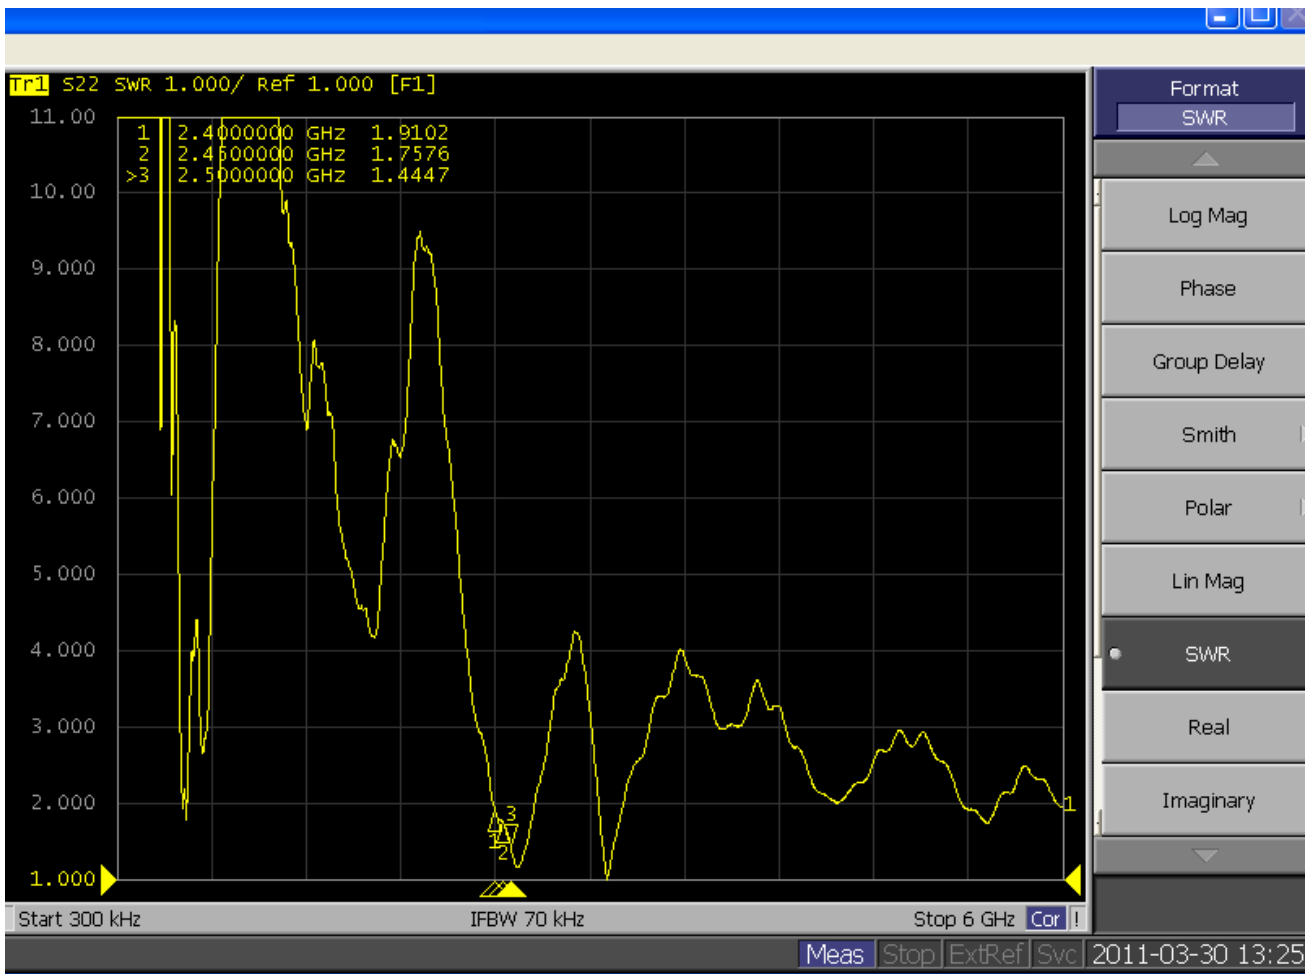




# WIESON TECHNOLOGIES CO., LTD.

## MEASUREMENT AND PERFORMANCE

PAGE : 3/9

### Antenna Log Mag

Sample	Frequency	2400 MHz	2450 MHz	2500 MHz
1		-10.326	-10.993	-14.159

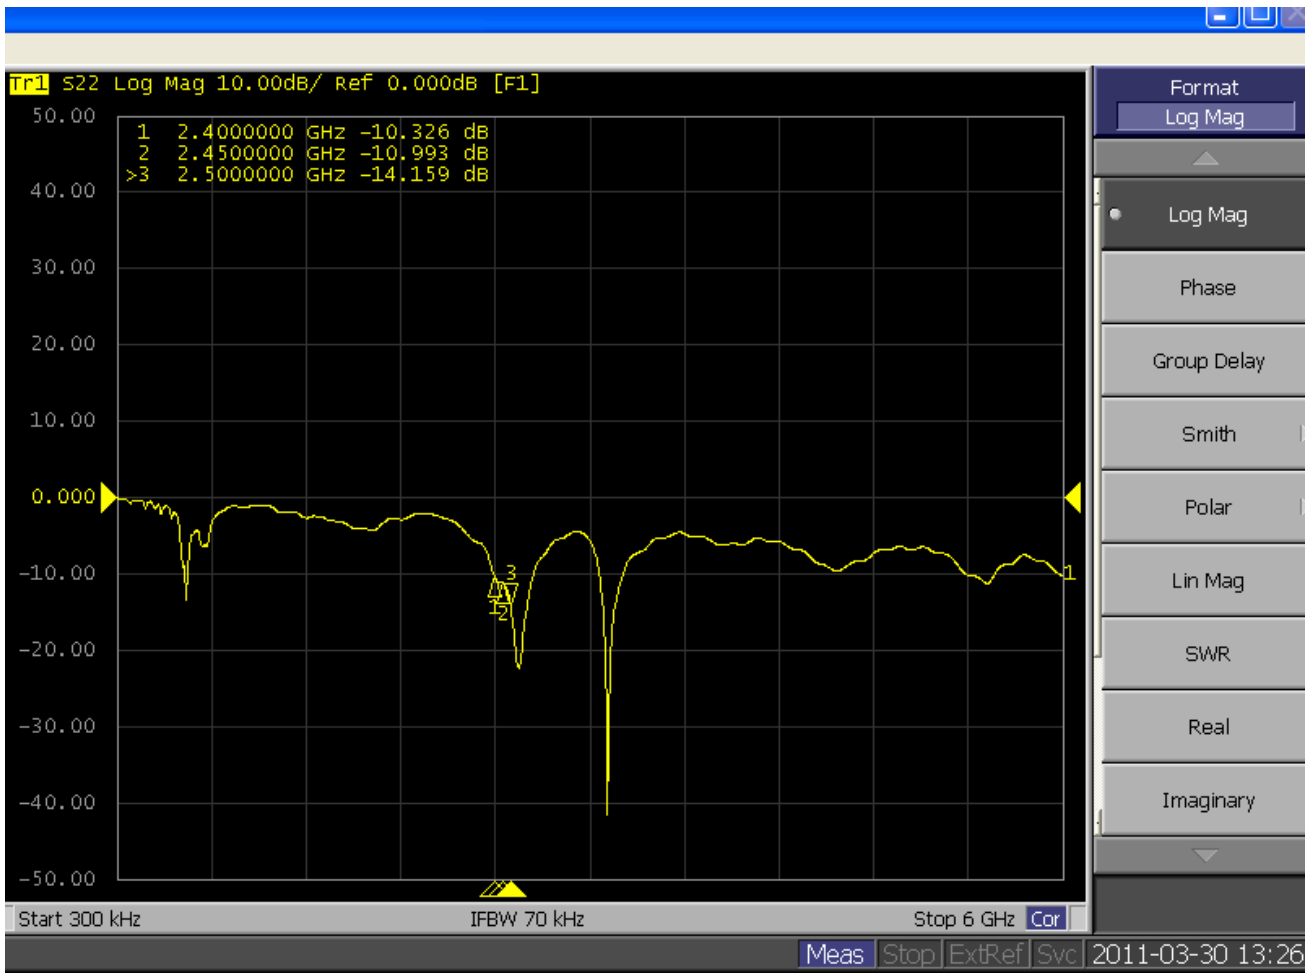




### IV. THE TEST INFORMATION IN ANECHOIC CHAMBER

#### A. Scope

This statement of work defines the requirements of a far-field antenna measurement range, which includes

- (1) One 325 cm (W) x 285 cm (H) x 640 cm (L) Antenna Measurement Anechoic Chamber, detailed requirements refer section 2.0 .
- (2) One Far-field Antenna Measurement System with spinning linear CP measurement capabilities, detailed requirement refer section 3.0 .
- (3) One broad-band transmitted antenna, detailed requirements refer section 8.0 .
- (4) Three NRL-4433 standard gain antennas, detailed requirements refer section 9.0 .

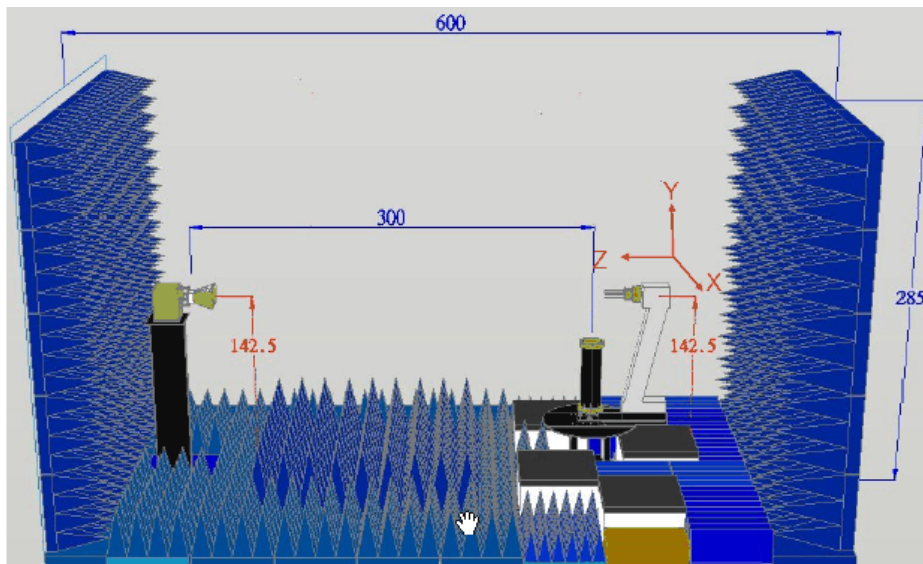

#### B. Antenna Measurement Anechoic Chamber

Fully anechoic chamber with dimension 325 cm in width, 285 cm in height and 640 cm in length. The quiet zone of this Chamber shall be greater than



# WIESON TECHNOLOGIES CO., LTD.

## MEASUREMENT AND PERFORMANCE

PAGE :5/9

70 cm @ 0.9 GHz, 50 cm @1.8 GHz, 44 cm @2.4 GHz, 28 cm @5.8 GHz, 16 cm @18 GHz. Contractor should be aware of this anechoic chamber is going to be used for performing far-field antenna measurement.

### C. Electrical specifications

Frequency Range: 800 MHz to 18 GHz,

Quiet zone size: >70 cm @ 0.9 GHz, >50 cm @1.8 GHz, >44 cm @2.4 GHz,

>28 cm @5.8 GHz, >16 cm @18 GHz.

Quiet zone ripple: < +/- 0.5 dB @1.5~2.4 GHz, < +/- 0.25 dB @2.4~18GHz

Field Probing Frequency	Peak-to-Peak Amplitude Ripple (within specified Quiet Zone Area)	Quiet Zone Size (cm)	Compliant
0.9 GHz	< 0.8 dB	70	Yes
1.575 GHz	< 0.6 dB	55	Yes
1.8 GHz	< 0.5 dB	50	Yes
2.45 GHz	< 0.4 dB	44	Yes
4.8 GHz	< 0.3 dB	31	Yes
5.8 GHz	< 0.3 dB	28	Yes





### **D. Absorbers**

We shall design and install proper absorbers on the inner walls of the chamber to guarantee the electrical specifications . However, the absorbers height shall be no less than 24" which enables the space in the chamber to be around 203 cm (W) x 163 cm (H) x 533 cm (L). All the absorber used shall meet NRL-8093 fire retardant regulations

### **E. Far-field Antenna Measurement System**

We shall supply all the hardware and software which are capable of characterizing antenna radiation patterns from 30 KHz to 6 GHz or 18GHz using the existed Agilent 5230A PNA-L or Agilent 8753ES Vector Network Analyzer. The system shall be able to automatically measure and plot single axis amplitude and phase antenna patterns in either Cartesian or polar formats.

### **F. Far-field measurement software**

The software consists of the control or data acquisition software and the data plotting software.

(1) The data acquisition software shall at least be capable of the following functions:

- \*measuring single frequency per cut - single axis (azimuth); system can automatically switch frequency at the end of a scan.
- \*measuring data in Uni-direction or bi-direction
- \*measuring data at least with azimuth 360 degrees. (+/- 180 degrees or 0-360 degrees)
- \*real time plot in Cartesian or polar format
- \*screen shows real time angle position



# WIESON TECHNOLOGIES CO., LTD.

## MEASUREMENT AND PERFORMANCE

PAGE :7/9

- \*system automatically calculates S/N ratio level based on measured signal fluctuation
- \*function to set positioner zero position
- \*operator can set data taking velocity and data sampling interval
- \*entry to allow positioner offset to any angle

(2) The data plotting software shall at least be capable of the following functions:

- \*Editing plot data
- \*plotting data in Cartesian, Polar or delimited ASCII output with header information
- \*plotting data in linear or dB scales
- \*normalizing data to peak (dB), standard gain reference (dBi), or no normalization
- \*overlying data, (drag and drop capability is preferable)
- \*outputting data to any Windows supported printers

### **G. Broadband Transmitted antenna**



We shall provide a linear-polarized broadband antenna with the specifications better than those listed hereafter in this article,  
Frequency: 1-18 GHz, Gain: >12 dBi @10 GHz, VSWR:<2,0:1, Front to Back Ratio > 20 dB

### **H. NRL4433 Standard Gain Horns**

We shall provide one WR-430, WR-187 one DRH0118 standard gain horns which meets the specifications of NRL-4433 report. The operating frequency of WR-430 standard gain horn is from 1.7 to 2.6 GHz, and WR-187 from 3.95 to 5.85 GHz, and DRH-0118 from 0.8 to 18GHz. We shall also provide NRL-4433 theoretical gain curves and tables for the standard gain horns.



**V. CHAMBER TEST PICTURE**

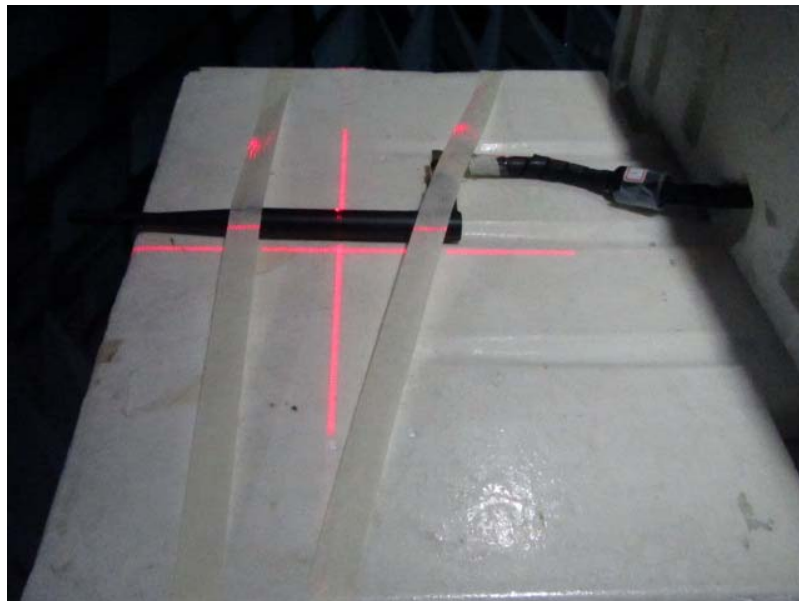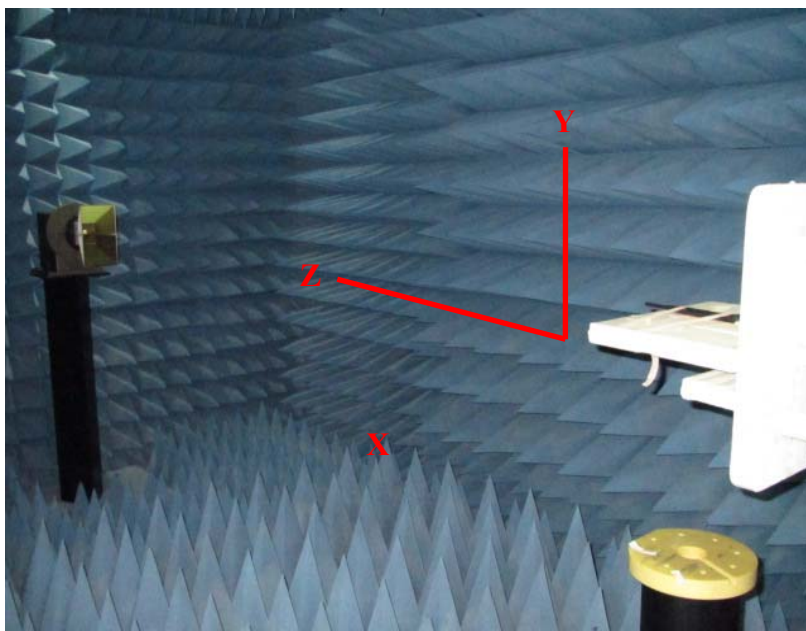





**VI. CHAMBER TEST RESULT**

Frequency (MHz)	Peak gain (dBi)	Avg. gain (dBi)	Efficiency (%)
2400	2.26	-2.33	56
2450	3.38	-1.64	69
2500	4.04	-1.86	72

**2400MHz**

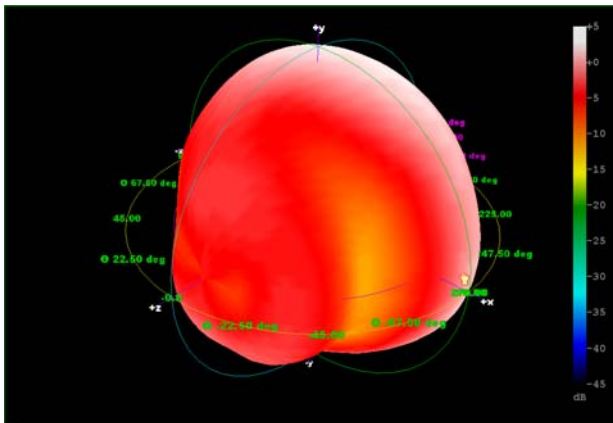

**2450MHz**

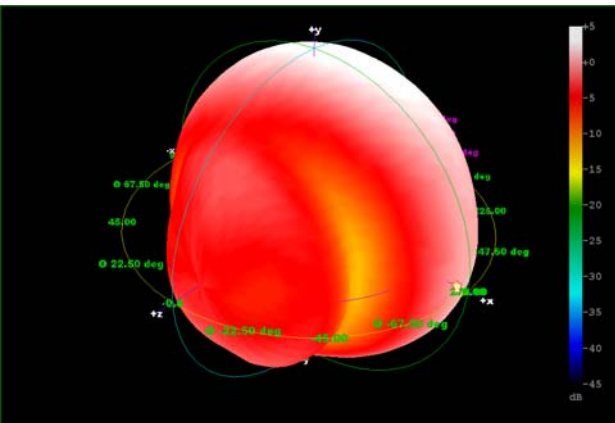

**2500MHz**

