

EMC TEST REPORT

No. SH12070504-002

Applicant : Ingersoll-Rand (China) Investment Co., Ltd.
10F Tower B City Center of Shanghai 100 Zun Yi
Road, Shanghai 200051 China

Manufacturer : Ingersoll-Rand (China) Investment Co., Ltd.
10F Tower B City Center of Shanghai 100 Zun Yi
Road, Shanghai 200051 China

Equipment : Card Reader

Type/Model : SXG6701K

SUMMARY

The equipment complies with the requirements according to the following standard(s):


47CFR Part 15 (2010): Radio Frequency Devices

ANSI C63.4 (2009): American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

ANSI C63.10 (2009): American National Standard for Testing Unlicensed Wireless Devices


Date of issue: Aug 28, 2012

Prepared by:

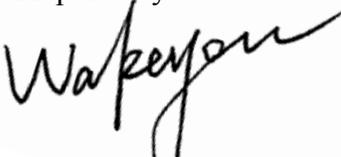

Wakeyou Wang (*Project Engineer*)

Reviewed by:

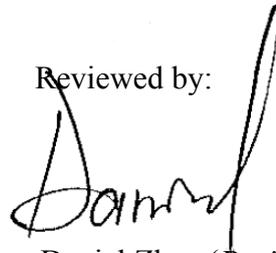

Daniel Zhao (*Reviewer*)



Description of Test Facility

Name: Intertek Testing Services Limited Shanghai
Address: Building No.86, 1198 Qinzhou Road(North), Shanghai 200233, P.R. China

FCC Registration Number: 236597
IC Assigned Code: 2042B-1

Name of contact: Steve Li
Tel: +86 21 64956565 ext. 214
Fax: +86 21 54262335 ext. 214

Content

SUMMARY	1
DESCRIPTION OF TEST FACILITY	2
1. GENERAL INFORMATION	4
1.1 Applicant Information.....	4
1.2 Identification of the EUT	4
1.3 Technical specification	5
1.4 Mode of operation during the test / Test peripherals used.....	5
2. TEST SPECIFICATION	6
2.1 Instrument list	6
2.2 Test Standard	6
3. FUNDAMENTAL & SPURIOUS EMISSION	8
3.1 Test limit	8
3.2 Test Configuration	8
3.3 Test procedure and test setup.....	9
3.4 Test protocol	10
4. POWER LINE CONDUCTED EMISSION	19
4.1 Limit.....	19
4.2 Test configuration	19
4.3 Test procedure and test set up	20
4.4 Test protocol	21



1. General Information

1.1 Applicant Information

Applicant: Ingersoll-Rand (China) Investment Co., Ltd.
10F Tower B City Center of Shanghai 100 Zun Yi Road,
Shanghai 200051 China

Name of contact: Jessica Gu
Tel: +86-21-22081471
Fax: +86-21-62371991

Manufacturer: Ingersoll-Rand (China) Investment Co., Ltd.
10F Tower B City Center of Shanghai 100 Zun Yi Road,
Shanghai 200051 China

Date of sample receipt: July 9, 2012
Date of test: July 9, 2012 ~ Aug 1, 2012

1.2 Identification of the EUT

Equipment: Card Reader
Type/model: SXG6701K
FCC ID: PCRSXG6701K
IC: /

1.3 Technical specification

Operation Frequency Band:	125kHz - 125kHz
Modulation:	ASK
Antenna Designation:	Integral antenna, non-user removable.
Rating:	DC 8V -16V powered by AC/DC adapter with Input AC 100-240V, 50/60Hz
Description of EUT:	There is one model only. The EUT is a RFID device.
Channel Description:	The EUT contains of two channels, namely 125kHz and 13.56MHz. In this report, only the former channel was assessed.

1.4 Mode of operation during the test / Test peripherals used

Within this test report, EUT was tested with modulation and tested under its rating voltage and frequency.

The EUT is wall installed device, it was set up as its normal use.



2. Test Specification

2.1 Instrument list

Instruments.	EC no.	Model	Valid until date
Shielded room	EC 2838	GB88	2014-1-11
EMI test receiver	EC 2107	ESCS 30	2012-10-20
A.M.N.	EC 3119	ESH2-Z5	2013-1-8
Shielded room	EC 2839	GB88	2014-1-11
Log-periodical antenna	EC 3044-7	AT1080	2013-5-21
Semi anechoic chamber	EC 3048	-	2013-5-12
EMI test receiver	EC 3045	ESIB26	2012-10-20
Broadband antenna	EC 4206	CBL 6112D	2013-5-15
Loop Antenna	/	FMZB 1516	2012-11-28
Temperature Camber	EC4315	SETH-E	2013-4-9

2.2 Test Standard

47CFR Part 15 (2010)
ANSI C63.4 (2009)
ANSI C63.10 (2009)

2.3 Test Summary

This report applies to tested sample only. This report shall not be reproduced in part without written approval of Intertek Testing Service Shanghai Limited.

TEST ITEM	FCC REFERANCE	RESULT
Fundamental & Spurious emission	15.205 & 15.209	Pass
Power line conducted emission	15.207	Pass

3. Fundamental & Spurious Emission


Test result: **PASS**

3.1 Test limit

The emission shall test through the 10th harmonic or to 40GHz, whichever is lower. For frequencies fall within §15.205, it should comply with the radiated emission limits specified in §15.209(a) showed as below:

Frequency (MHz)	Field Strength (dBuV/m)	Measurement Distance (m)
0.009 - 0.490	147.6-20lg (F _{kHz})	3
0.490 - 1.705	127.6-20lg (F _{kHz})	3
1.705 - 30.0	69.5	3
30 - 88	40.0	3
88 - 216	43.5	3
216 - 960	46.0	3
Above 960	54.0	3

3.2 Test Configuration

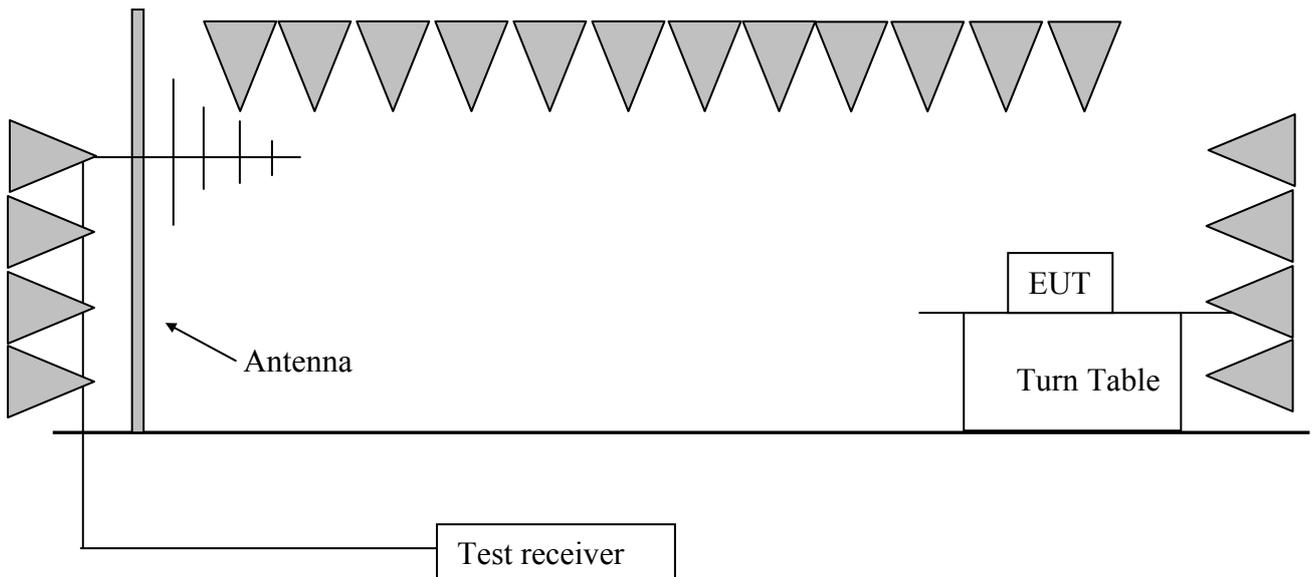

3.3 Test procedure and test setup

The measurement was applied in a 3m semi-anechoic chamber.

For emission test lower than 30MHz, The center of the loop antenna shall be 1 m above the horizontal metal ground plane. The turn table rotated 360 degrees to determine the position of the maximum emission level.

Both X, Y and Z polarities of the loop antenna were assessed and the highest reading was listed in this report.

For emission test higher than 30MHz, the EUT and simulators were placed on a 0.8m high turntable above the horizontal metal ground plane. The turn table rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on an antenna mast. The antenna moved up and down between from 1 meter to 4 meters to find out the maximum emission level. Both horizontal and vertical polarities of the receiving antenna were assessed and the higher reading was listed in this report.

The radiated emission was measured using the test receiver with the resolutions bandwidth set as:

RBW = 300Hz, VBW = 1kHz (9kHz~0.15MHz)

RBW = 10kHz, VBW = 30kHz (0.15MHz~30MHz)

RBW = 100kHz, VBW = 300kHz (30MHz~1000MHz)


3.4 Test protocol

Antenna	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin	Detector
Y	0.0096	19.30	69.00	128.00	59.00	PK
Y	0.015	20.00	70.70	124.10	53.40	PK
Y	0.018	20.20	68.60	122.50	53.90	PK
X	0.042	20.20	61.40	115.10	53.70	PK
Y	0.074	19.90	49.80	110.20	60.40	PK
X	0.084	19.80	43.50	109.10	65.60	PK
Z	0.090	19.70	39.90	108.50	68.60	PK
X	0.125	19.80	93.10	105.70	12.60	PK
X	0.20	20.20	68.20	101.60	33.40	PK
V	30.00	20.80	31.80	40.00	8.20	PK
H	162.18	13.20	35.90	43.50	7.60	PK
H	379.90	17.60	37.10	46.00	8.90	PK
V	570.40	20.70	35.40	46.00	10.60	PK
H	801.72	23.10	34.60	46.00	11.40	PK


- Remark: 1. Correct Factor = Antenna Factor + Cable Loss
 2. Corrected Reading = Original Receiver Reading + Correct Factor
 3. Margin = limit - Corrected Reading

Example: Assuming Antenna Factor = 20.20dB/m, Cable Loss = 2.00dB,
 Original Receiver Reading = 10.00dBuV, limit = 40.00dBuV/m.
 Then Correct Factor = 20.20 + 2.00 = 22.20dB/m; Corrected Reading = 10dBuV +
 22.20dB/m = 32.20dBuV/m; Margin = 40.00dBuV/m - 32.20dBuV/m = 7.80dB.


X axis, 9kHz – 0.15MHz

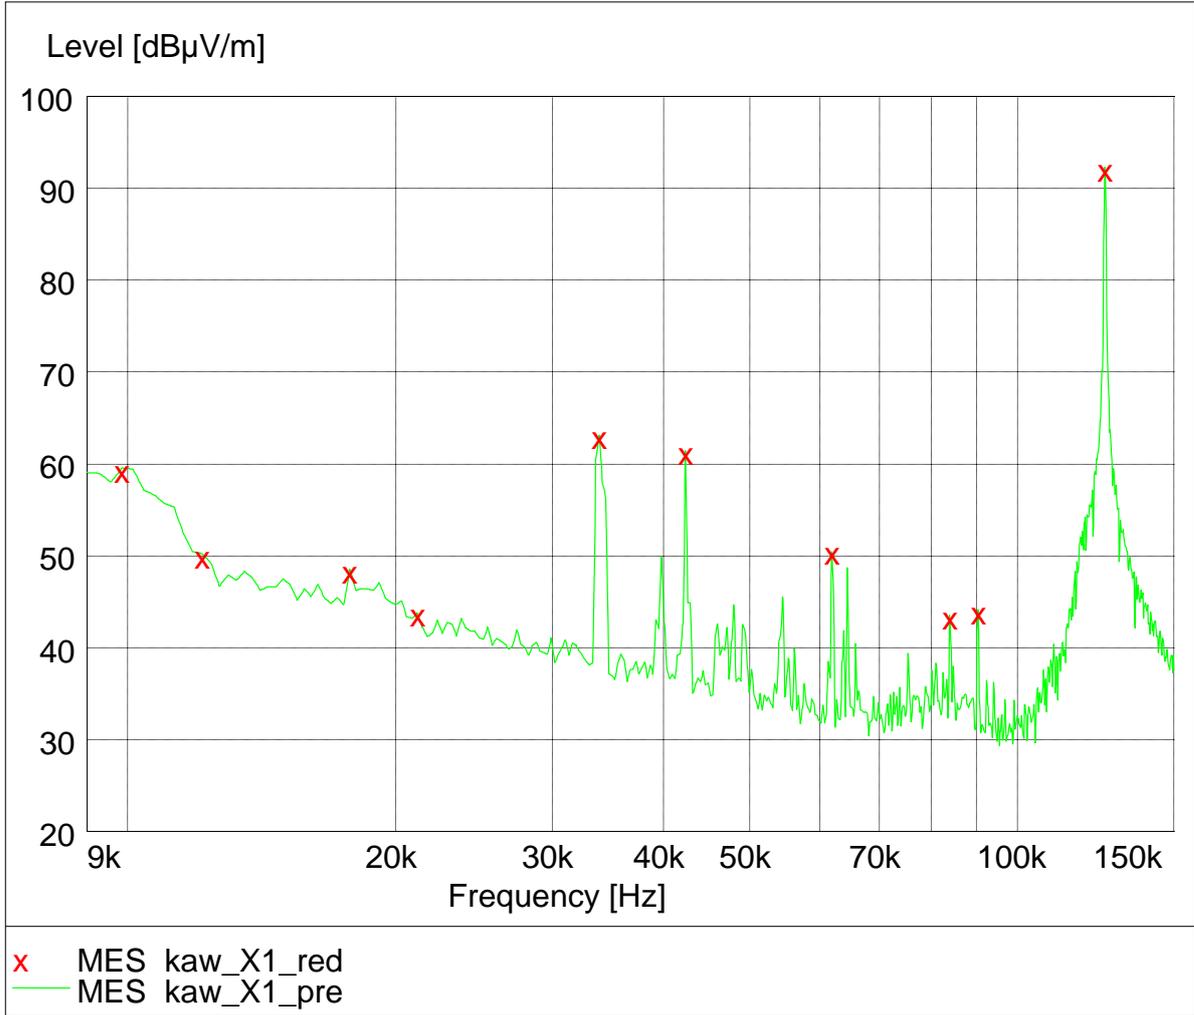


Y axis, 9kHz – 0.15MHz

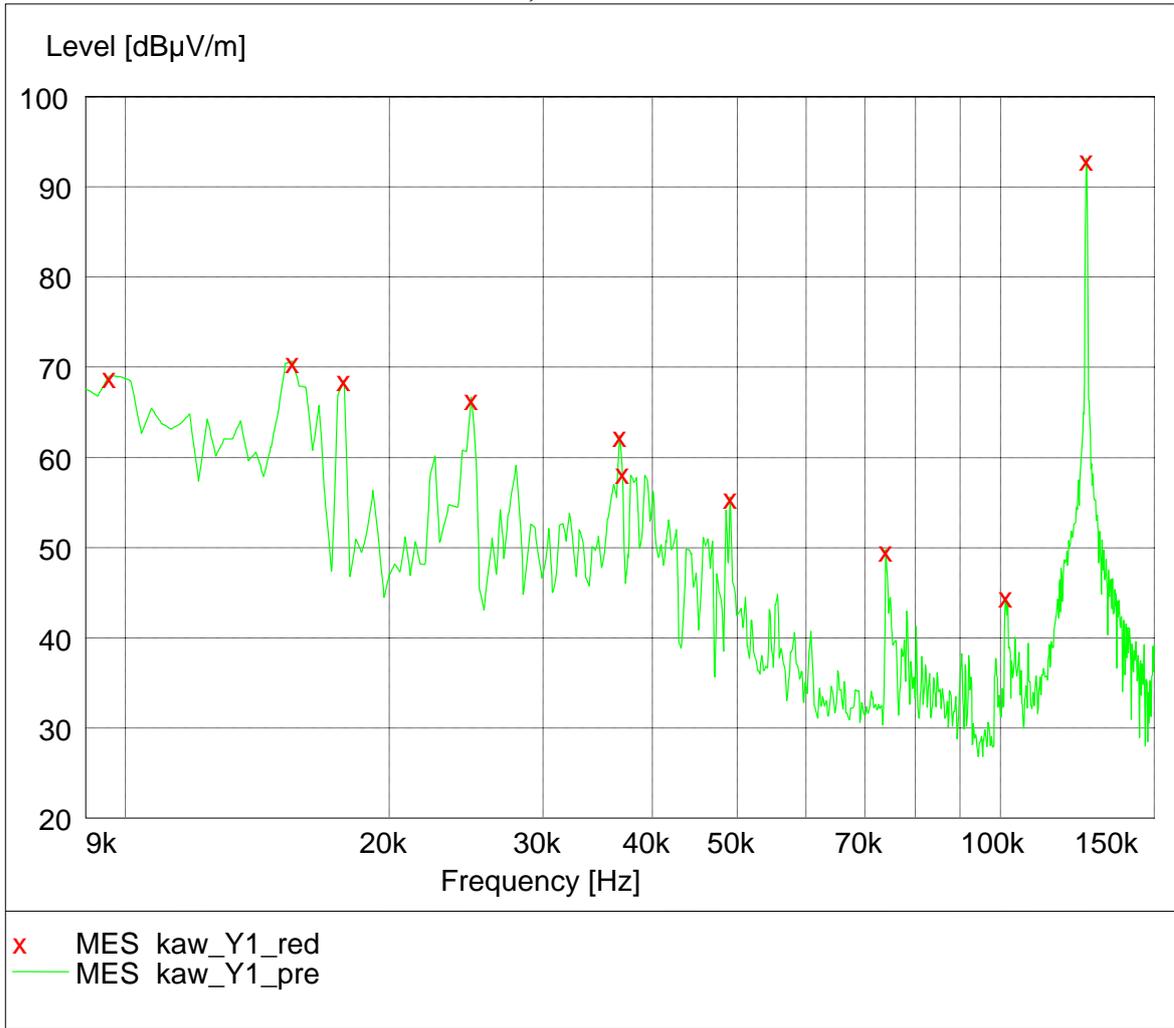


Z axis, 9kHz – 0.15MHz

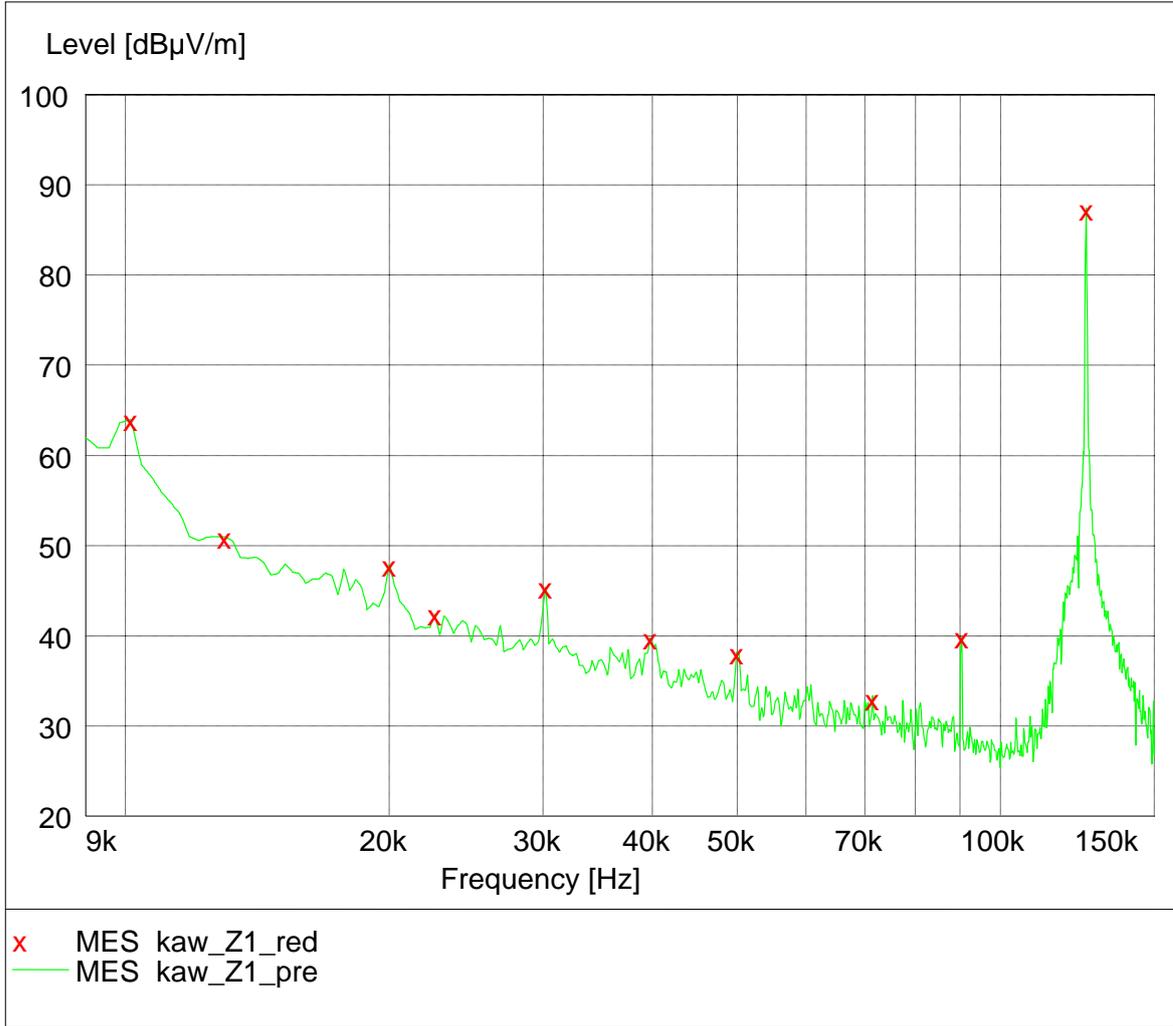


X axis, 0.15MHz - 30MHz

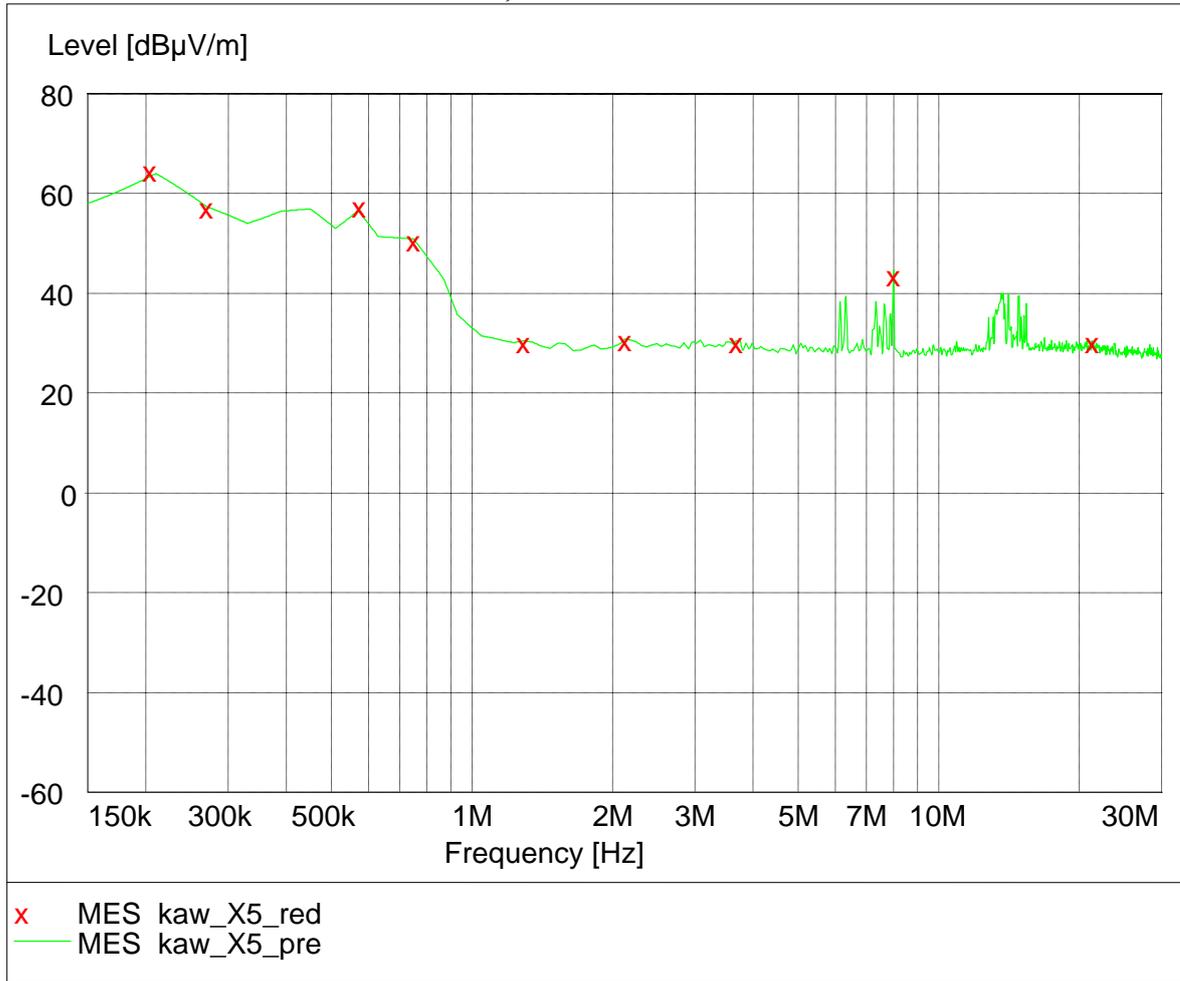


Y axis, 0.15MHz - 30MHz

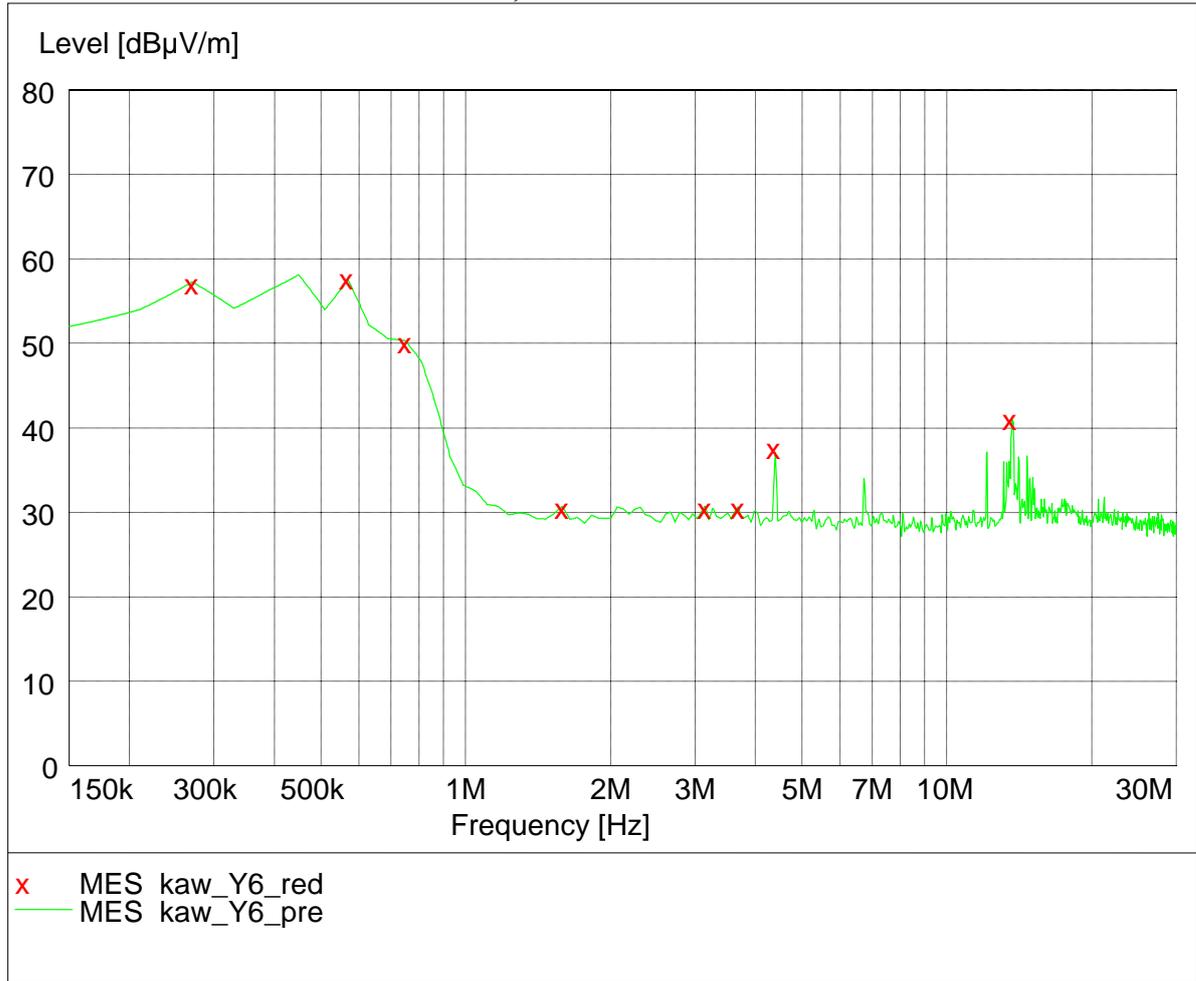


Z axis, 0.15MHz - 30MHz

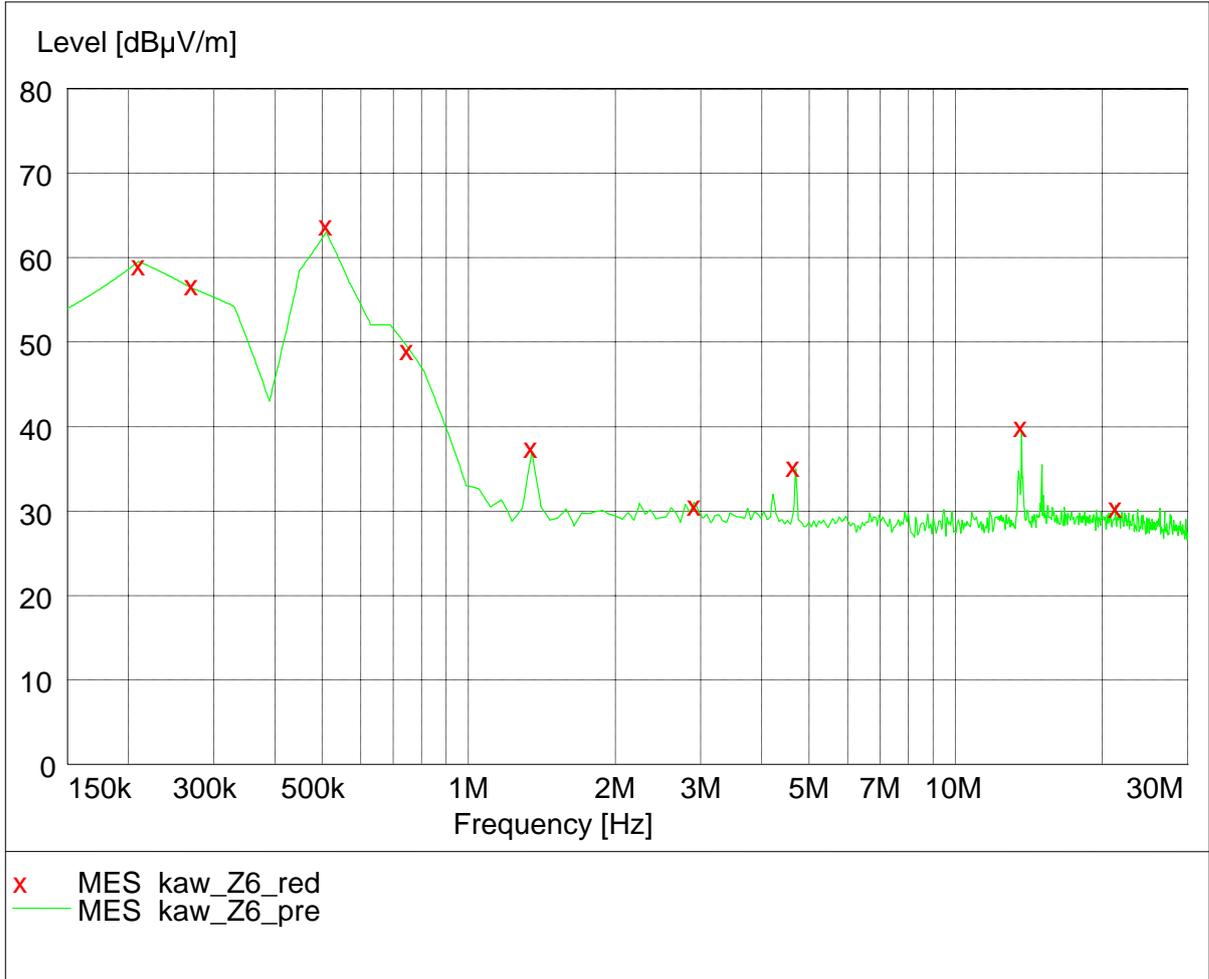

Horizontal

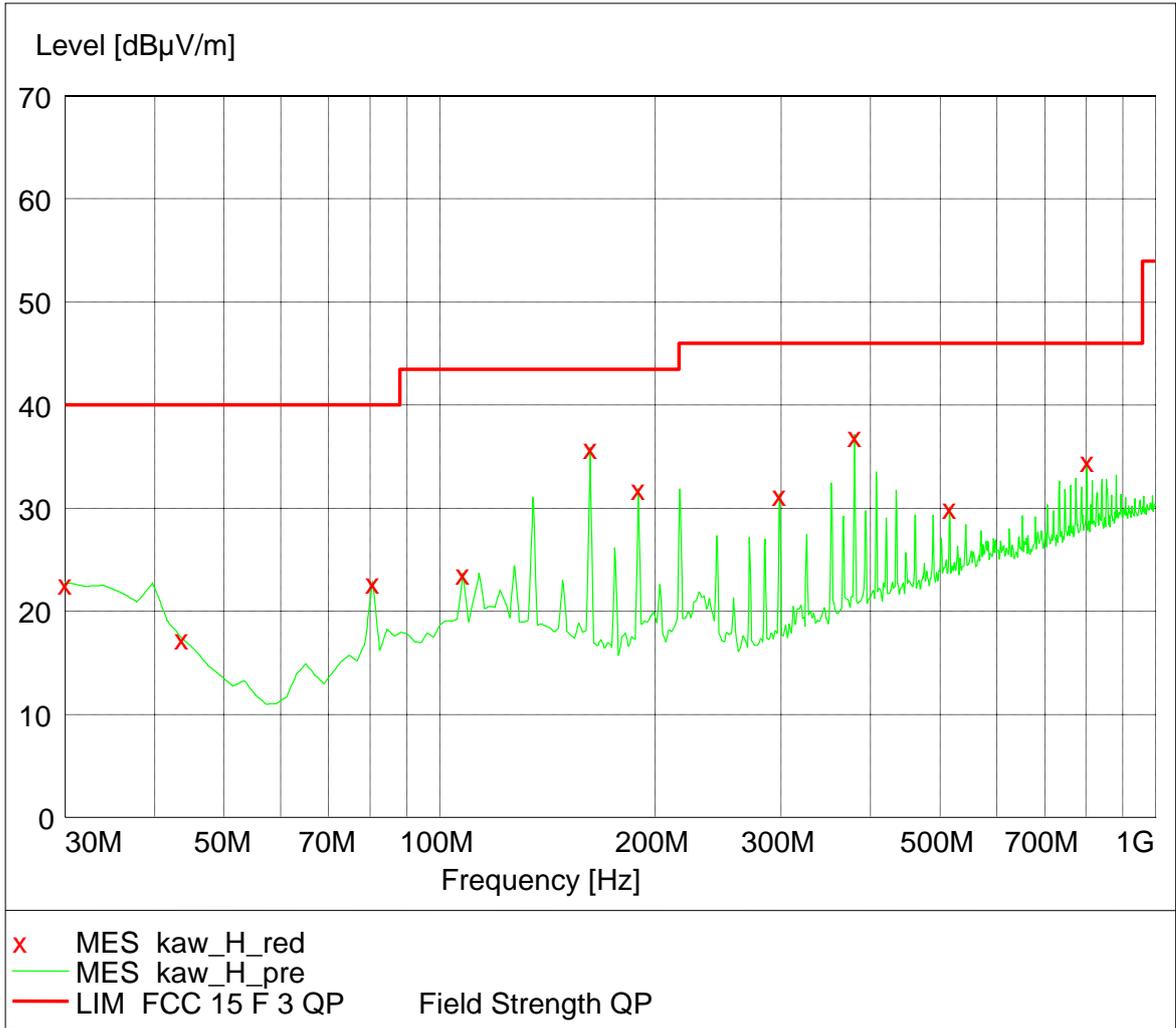

Vertical

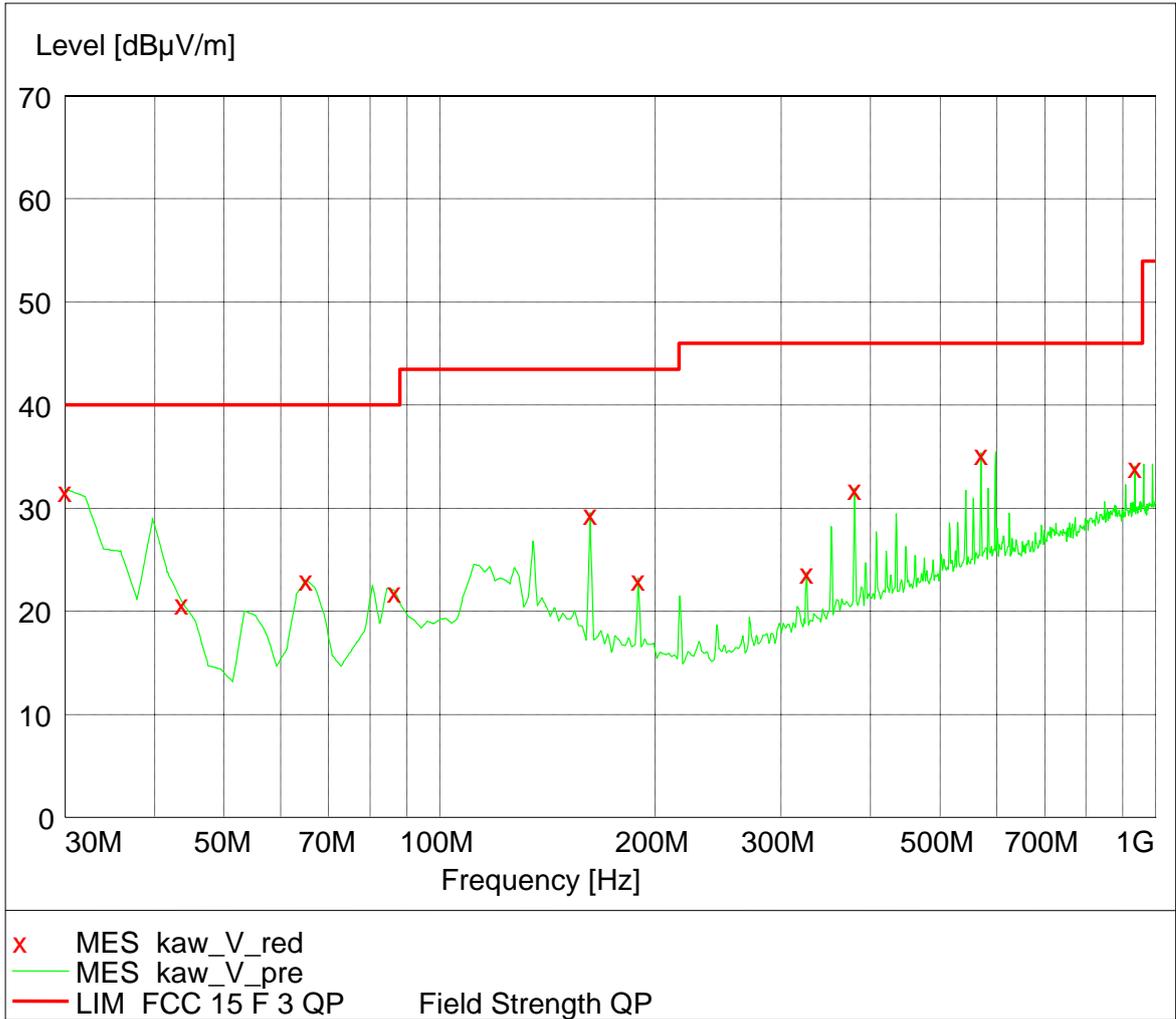

4. Power line conducted emission


Test result: Pass

4.1 Limit

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

4.2 Test configuration

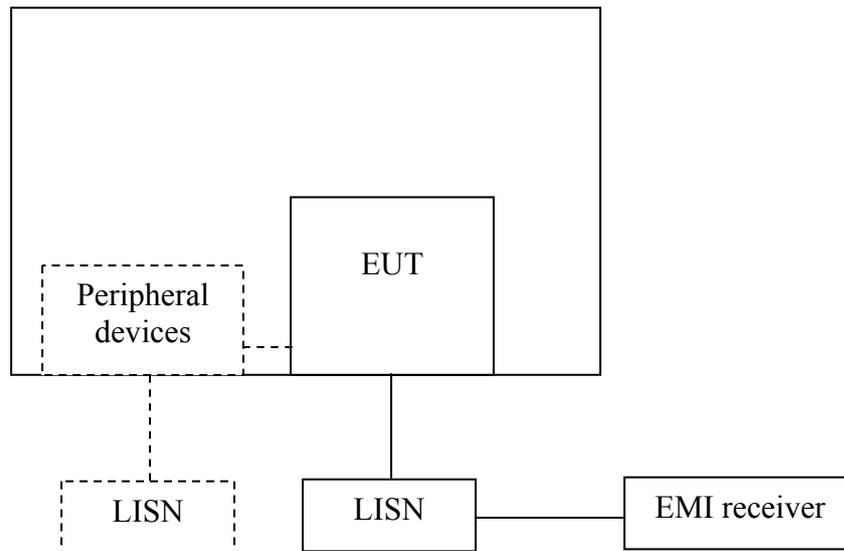

For table top equipment, wooden support is 0.8m height table


For floor standing equipment, wooden support is 0.1m height rack.

4.3 Test procedure and test set up

The EUT are connected to the main power through a line impedance stabilization network (LISN). This provides a $50\Omega/50\mu\text{H}$ coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a $50\Omega/50\mu\text{H}$ coupling impedance with 50Ω termination.

Both sides (Line and Neutral) of AC line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4 on conducted measurement. The bandwidth of the test receiver is set at 9 kHz.

4.4 Test protocol

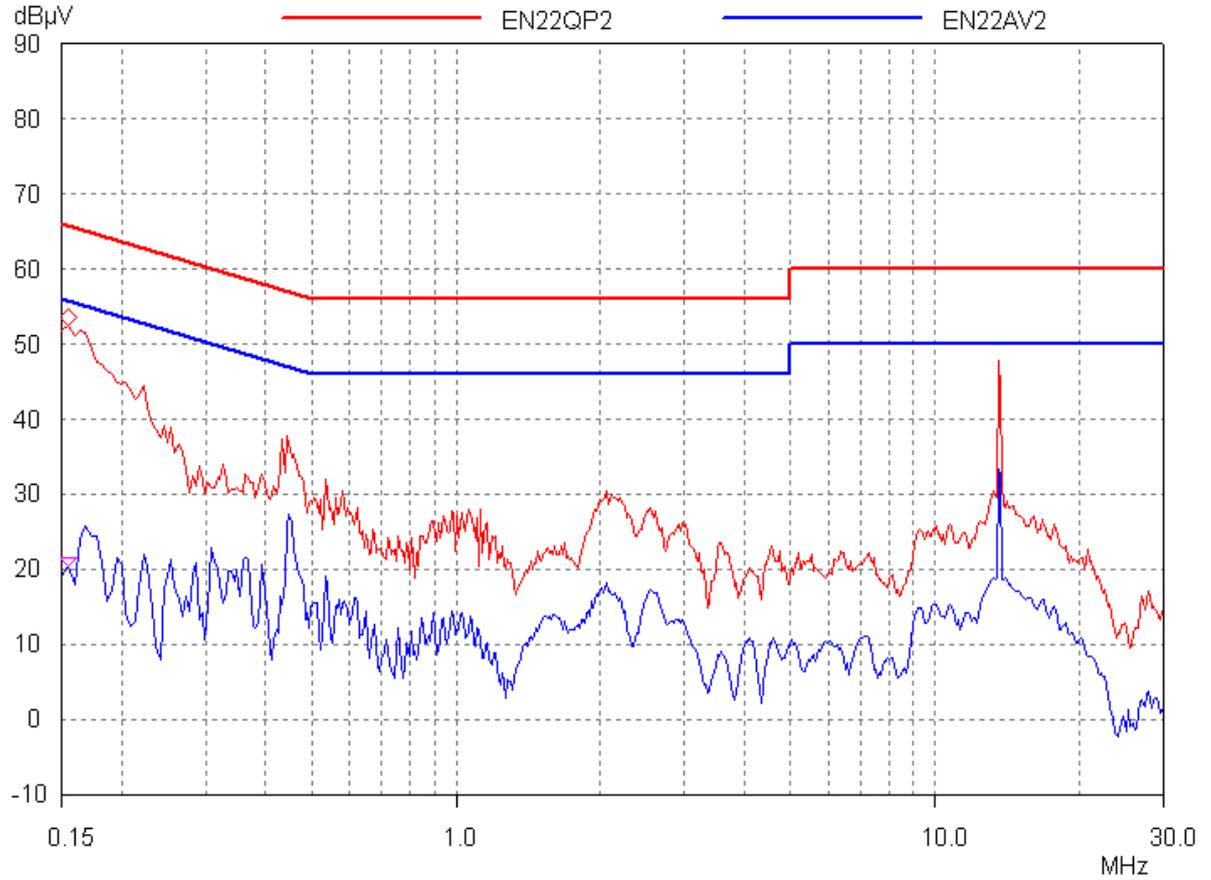

Frequency (MHz)	Correct Factor (dB)	Corrected Reading (dBuV)		Limit (dBuV)		Margin (dB)	
		QP	AV	QP	AV	QP	AV
0.18 (N)	3.00	30.42	13.56	64.42	54.42	34.00	40.86
0.55 (N)	3.00	35.46	20.45	56.00	46.00	20.54	25.55
0.72 (L)	3.00	33.30	17.66	56.00	46.00	22.70	28.34
1.08 (N)	3.00	30.17	17.06	56.00	46.00	25.83	28.94
2.81 (N)	3.00	26.58	14.06	56.00	46.00	29.42	31.94
13.56 (L)	3.00	51.53	36.85	60.00	50.00	8.47	13.15

Remark: 1. Correction Factor (dB) = LISN Factor (dB) + Cable Loss (dB).
 2. Margin (dB) = Limit - Corrected Reading.