



TESTING LABORATORY  
CERTIFICATE#4323.01



## FCC PART 15.249

### TEST REPORT

For

## OKIN Refined Electric Technology Co., Ltd

Plant 4, No. 410, Xinyonglian Road, Wangjiangjing Development Zone,  
Jiaxing, Zhejiang, China

**FCC ID: PCU-CB3342**

<b>Report Type:</b> Original Report	<b>Product Type:</b> CONTROL BOX
<b>Test Engineer:</b> Winnie Yang	<i>Winnie Yang</i>
<b>Report Number:</b> RSHA190226002-00A	
<b>Report Date:</b> 2019-04-10	
<b>Reviewed By:</b> Oscar Ye RF Leader	<i>Oscar Ye</i>
<b>Test Laboratory:</b> Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road,Kunshan,Jiangsu province,China Tel: +86-0512-86175000 Fax: +86-0512-88934268 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>	

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

**TABLE OF CONTENTS**

**GENERAL INFORMATION.....3**

    PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....3

    OBJECTIVE.....3

    RELATED SUBMITTAL(S)/GRANT(S).....3

    TEST METHODOLOGY.....3

    MEASUREMENT UNCERTAINTY.....4

    TEST FACILITY.....4

**SYSTEM TEST CONFIGURATION.....5**

    JUSTIFICATION.....5

    EUT EXERCISE SOFTWARE.....5

    SUPPORT EQUIPMENT LIST AND DETAILS.....5

    EXTERNAL I/O CABLE.....6

    BLOCK DIAGRAM OF TEST SETUP.....6

**SUMMARY OF TEST RESULTS.....9**

**TEST EQUIPMENT LIST.....10**

**FCC§15.203 - ANTENNA REQUIREMENT.....11**

    APPLICABLE STANDARD.....11

    ANTENNA CONNECTOR CONSTRUCTION.....11

**FCC §15.207 (A) – AC LINE CONDUCTED EMISSIONS.....12**

    APPLICABLE STANDARD.....12

    EUT SETUP.....12

    EMI TEST RECEIVER SETUP.....12

    TEST PROCEDURE.....12

    CORRECTED FACTOR & MARGIN CALCULATION.....13

    TEST RESULTS SUMMARY.....13

    TEST DATA.....13

**FCC§15.205, §15.209&§15.249- RADIATED EMISSIONS& OUT OF BAND EMISSION.....16**

    APPLICABLE STANDARD.....16

    EUT SETUP.....16

    TEST EQUIPMENT SETUP.....17

    TEST PROCEDURE.....17

    CORRECTED AMPLITUDE & MARGIN CALCULATION.....18

    TEST RESULTS SUMMARY.....18

    TEST DATA.....18

**FCC §15.215(C) – 20 DB BANDWIDTH TESTING.....25**

    APPLICABLE STANDARD.....25

    TEST PROCEDURE.....25

    TEST DATA.....25

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

Applicant	OKIN Refined Electric Technology Co., Ltd
Tested Model	CB3342
Product Type:	CONTROL BOX
Dimension:	177.10mm(L)*100.44mm(W) *37.07mm(H)
Power Supply:	DC 29V

*All measurement and test data in this report was gathered from production sample serial number: RSHA190226002. (Assigned by BACL, Kunshan). The EUT was received on 2019-02-26*

### Objective

This type approval report is prepared on behalf of OKIN Refined Electric Technology Co., Ltd in accordance with Part 2-Subpart J, and Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.249 rules.

### Related Submittal(s)/Grant(s)

FCC Part 15.247 DTS Submittal with FCC ID: PCU-CB3342.  
FCC Part 15.249 DXX Grant with FCC ID: WKZRF360BD.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Lab Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

**Measurement Uncertainty**

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19 dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

**Test Facility**

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 558074 D01. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

## SYSTEM TEST CONFIGURATION

### Justification

Channel list:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2403	40	2442
2	2404	...	...
...	...	...	...
38	2440	77	2479
39	2441	78	2480

EUT was tested with Channel 1, 40 and 78.

### EUT Exercise Software

RF test tool: UartAssist.exe

### Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
OKIN	Switching Power Supply	09-290018	P17040777003779
OKIN	Resistance1	/	/
OKIN	Resistance2	CH-RX24	/
DELL	Notebook	GX620	D65874152
OKIN	Handle	/	/
OKIN	Motor1	JLDQ.9.001.130B	2018090500517
OKIN	Motor2	JLDQ.9.001.130B	2018090500957
OKIN	DELTA DRIVE1	DZ-SW-315-80-120-B1-24	Q18120600002
OKIN	DELTA DRIVE2	DZ-SW-260-60-B1-24	Q181206 00001
OKIN	DELTA DRIVE3	DZ-SW-315-62-110-B1-24	Q181206 00001
OKIN	DELTA DRIVE4	MLZ-315-120	Q181206 0002
DELL	Adapter	LA65NS0-00	DF263
OKIN	USB lamp	/	/

**External I/O Cable**


Cable Description	Length (m)	From Port	To				
Cable	0.1	EUT	Resistance1				
Cable	0.1	EUT	Resistance2				
Cable	0.3	EUT	Switching Power Supply				
Cable	0.2	EUT	Notebook				
Cable	0.4	EUT	Handle				
able	0.5	EUT	Motor1				
Cable	0.6	EUT	Motor2				
Cable	0.6	EUT	DRIVE1				
Cable	0.7	EUT	DRIVE2				
Cable	0.9	EUT	DRIVE3				
Cable	0.9	EUT	DRIVE4 </tr <tr> <td>Cable</td> <td>0.8</td> <td>Notebook</td> <td>Adapter</td> </tr>	Cable	0.8	Notebook	Adapter
Cable	0.8	Notebook	Adapter				

**Block Diagram of Test Setup**

For Conducted Emissions:

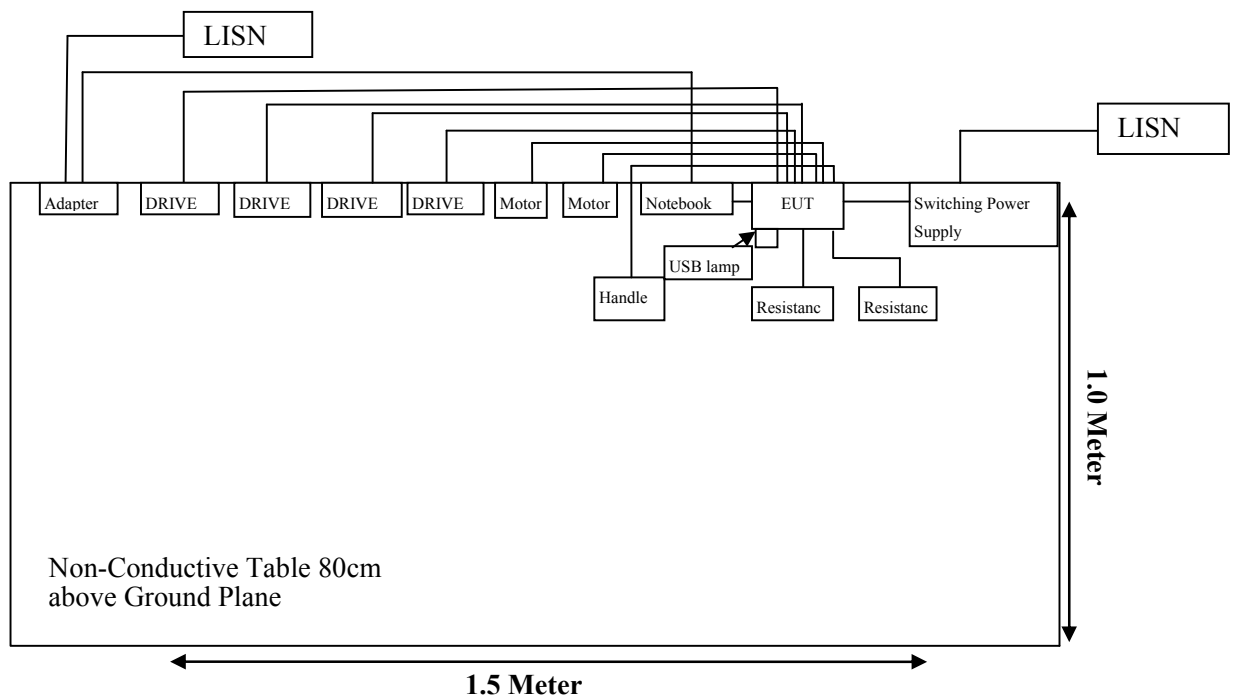


For Radiated Emissions(Below 1GHz):

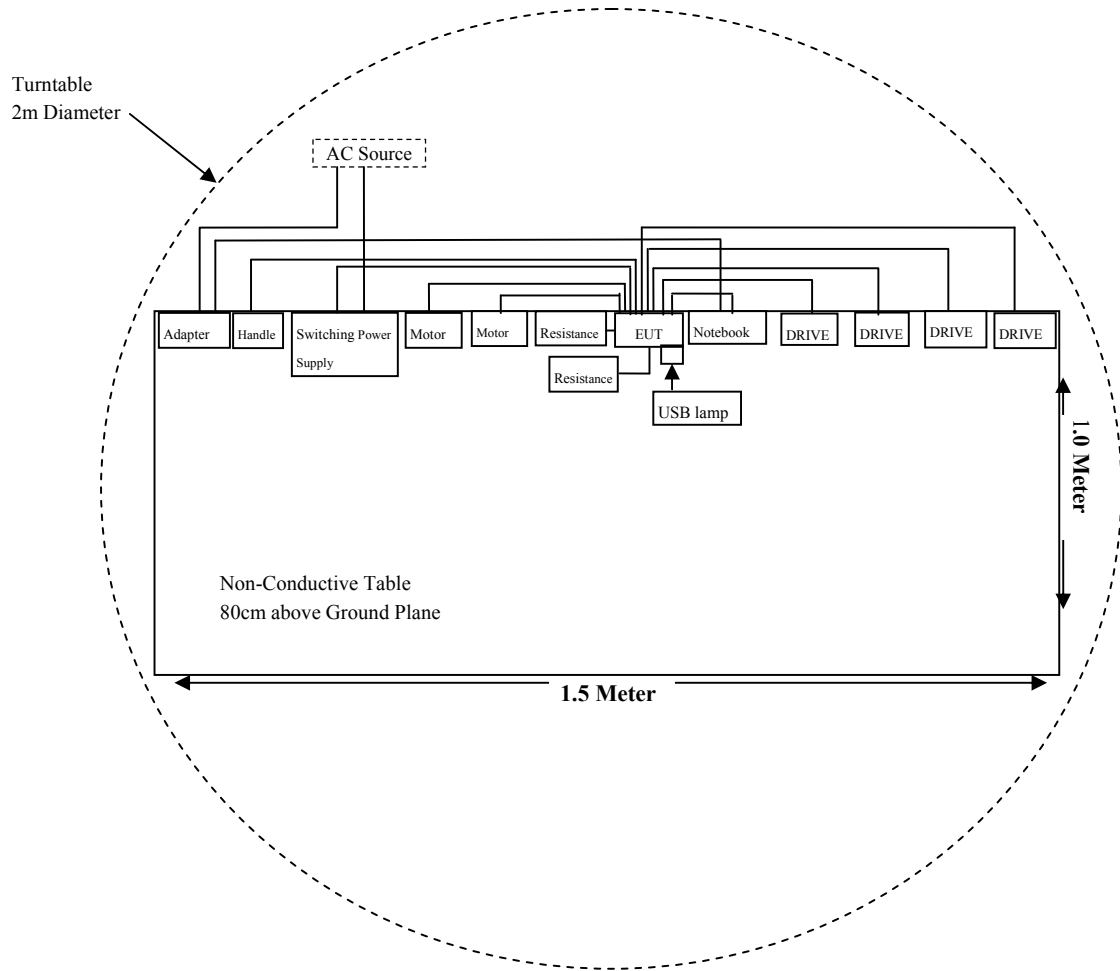

For Radiated Emissions(Above 1GHz)

Turntable  
2m Diameter

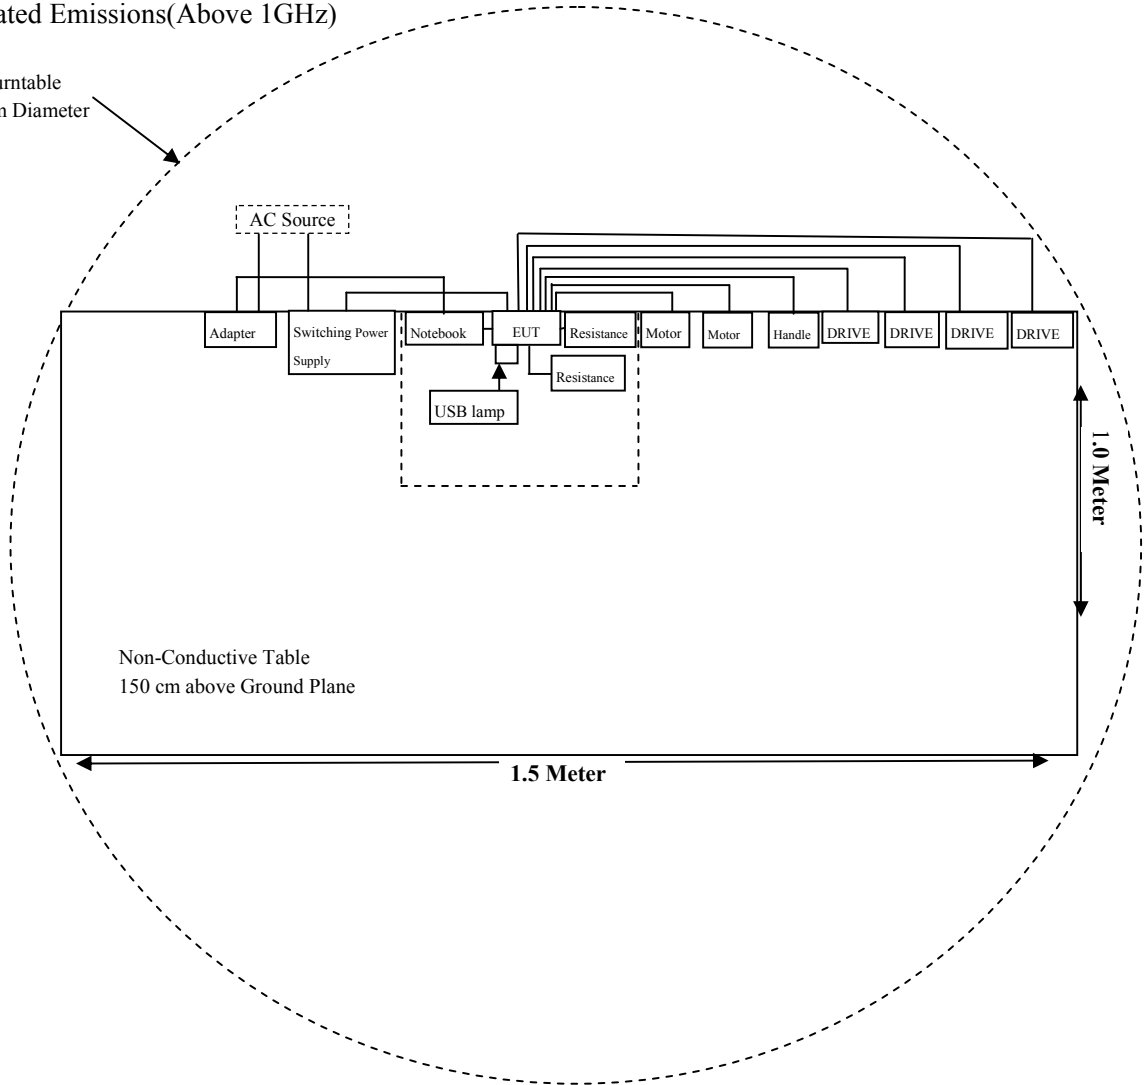



**SUMMARY OF TEST RESULTS**

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Result</b>
§15.203	Antenna Requirement	Compliant
§15.207(a)	Conduction Emissions	Compliant
15.205, §15.209, §15.249	Radiated Emissions& Out of Band Emission	Compliant
§15.215 (c)	20 dB Bandwidth	Compliant

**TEST EQUIPMENT LIST**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
<b>Radiated Emission Test (Chamber 1#)</b>					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2018-11-30	2019-11-29
Sunol Sciences	Broadband Antenna	JB3	A090413-1	2016-12-26	2019-12-25
Sonoma Instrument	Pre-amplifier	310N	171205	2018-08-14	2019-08-13
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-8	008	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2018-08-15	2019-08-14
<b>Radiated Emission Test (Chamber 2#)</b>					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2018-08-27	2019-08-26
ETS-LINDGREN	Horn Antenna	3115	9207-3900	2017-07-15	2020-07-14
ETS-LINDGREN	Horn Antenna	3116	00084159	2016-12-12	2019-12-11
A.H.Systems, inc	Amplifier	2641-1	491	2019-02-20	2020-02-19
EM Electronics Corporation	Amplifier	EM18G40G	060726	2018-03-22	2019-03-21
MICRO-TRONICS	Notch filter	BRM50702	/	2018-08-05	2019-08-04
Narda	Attenuator/10dB	10dB	/	2018-08-15	2019-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-6	006	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-11	011	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2018-08-15	2019-08-14
<b>RF Conducted Test</b>					
Rohde & Schwarz	Signal Analyzer	FSIQ26	836131/009	2018-11-30	2019-11-29
Narda	Attenuator	10dB	010	2018-08-15	2019-08-14
OKIN	RF Cable	OKINC01	C01	Each Time	/
<b>Conducted Emission Test</b>					
Rohde & Schwarz	EMI Test Receiver	ESCS30	834115/007	2018-11-30	2019-11-29
Rohde & Schwarz	LISN	ENV216	3560655016	2018-11-30	2019-11-29
Rohde & Schwarz	LISN	ESH3-Z5	862770/011	2018-11-30	2019-11-29
BACL	Auto test Software	BACL-EMC	CE001	/	/
Narda	Attenuator/6dB	10690812-2	26850-6	2019-01-10	2020-01-09
MICRO-COAX	Coaxial Cable	Cable-15	015	2018-08-15	2019-08-14

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

---

## **FCC§15.203 - ANTENNA REQUIREMENT**

---

### **Applicable Standard**

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used.

### **Antenna Connector Construction**

The EUT has an on-board PCB antenna and antenna gain is 0dBi, which was permanently attached, fulfill the requirement of this section, please refer to the EUT photos.


**Result:** Compliant.

**FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS**

**Applicable Standard**

FCC§15.207

**EUT Setup**

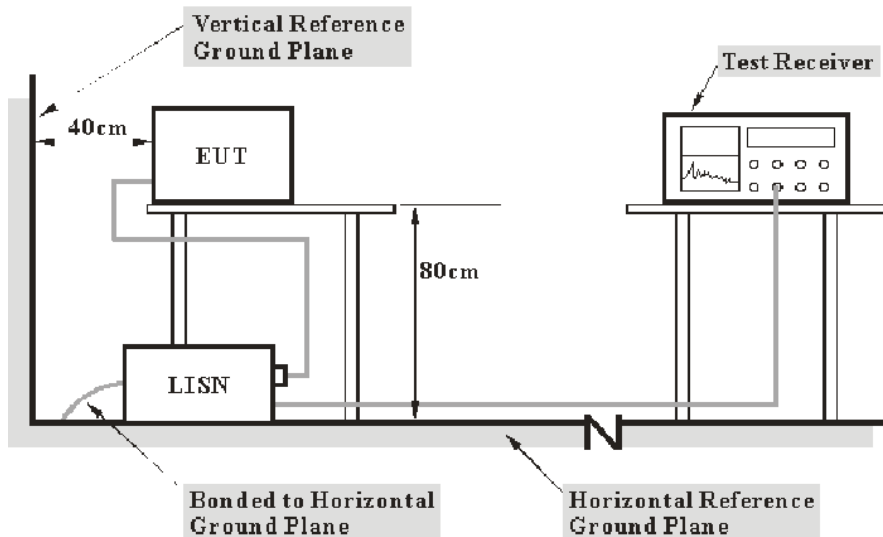

- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

**EMI Test Receiver Setup**

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

**Test Procedure**

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

## Corrected Factor & Margin Calculation

The Corrected Factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Corrected Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V)} - \text{Corrected Amplitude (dB}\mu\text{V)}$$

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

### Test Data

#### Environmental Conditions


<b>Temperature:</b>	25.0°C
<b>Relative Humidity:</b>	48 %
<b>ATM Pressure:</b>	101.2 kPa

*The testing was performed by Winnie Yang on 2019-03-05*

**Test Result:** Compliant.


*EUT operation mode: Transmitting in low channel. (Worst case)*

AC 120V/60Hz, Line

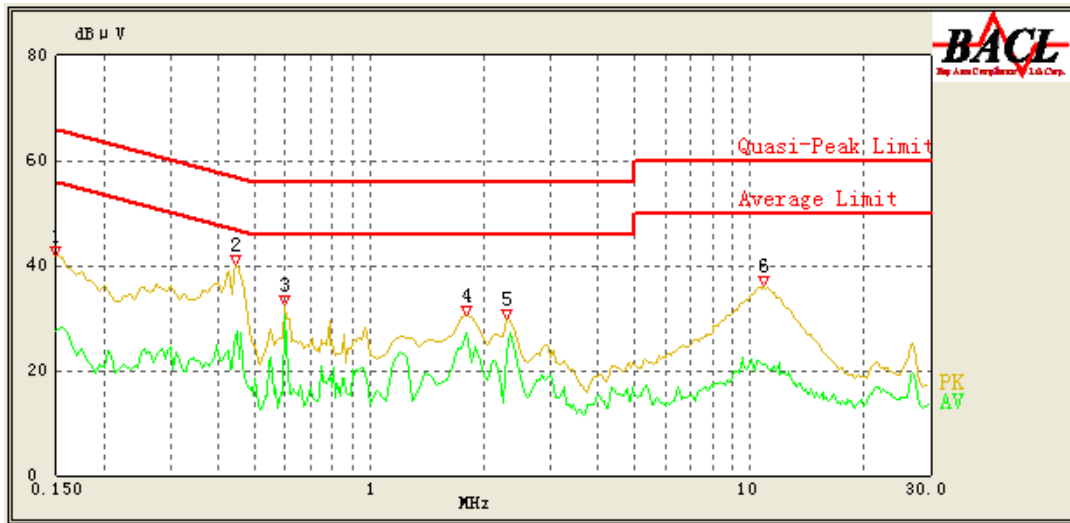

Frequency (MHz)	Corrected Amplitude (dBμV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Comment
0.150	41.68	QP	9.000	L	16.06	66.00	24.32	Compliant
0.150	27.38	AV	9.000	L	16.06	56.00	28.62	Compliant
0.445	40.15	QP	9.000	L	16.07	56.97	16.82	Compliant
0.445	27.59	AV	9.000	L	16.07	46.97	19.38	Compliant
0.600	32.65	QP	9.000	L	16.01	56.00	23.35	Compliant
0.600	30.53	AV	9.000	L	16.01	46.00	15.47	Compliant
1.800	30.57	QP	9.000	L	15.86	56.00	25.43	Compliant
1.800	27.08	AV	9.000	L	15.86	46.00	18.92	Compliant
2.300	29.72	QP	9.000	L	15.85	56.00	26.28	Compliant
2.300	23.35	AV	9.000	L	15.85	46.00	22.65	Compliant
10.900	36.09	QP	9.000	L	16.09	60.00	23.91	Compliant
10.900	21.08	AV	9.000	L	16.09	50.00	28.92	Compliant

AC 120V/60Hz, Neutral

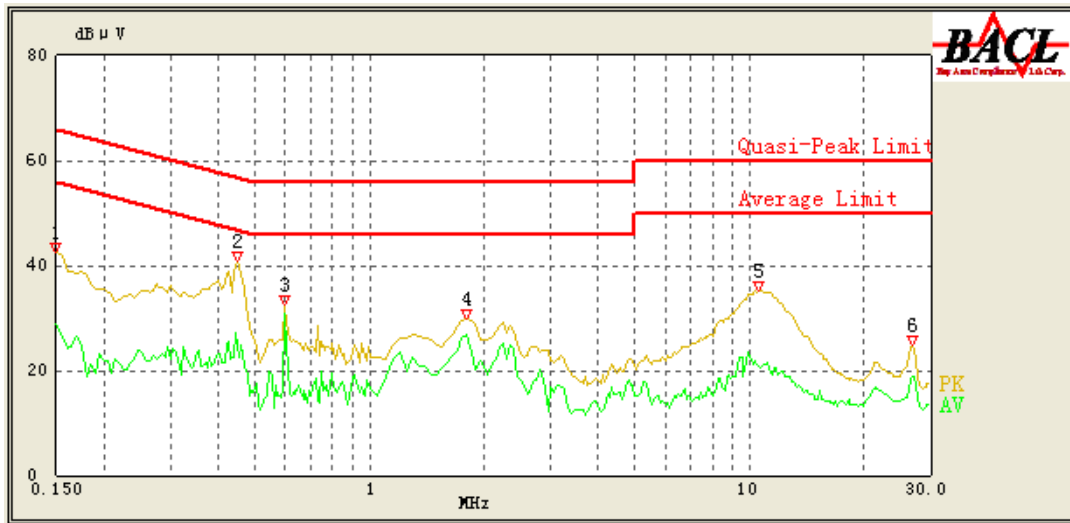

Frequency (MHz)	Corrected Amplitude (dBµV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBµV)	Margin (dB)	Comment
0.150	42.45	QP	9.000	N	16.06	66.00	23.55	Compliant
0.150	28.73	AV	9.000	N	16.06	56.00	27.27	Compliant
0.445	40.72	QP	9.000	N	16.10	56.97	16.25	Compliant
0.445	27.08	AV	9.000	N	16.10	46.97	19.89	Compliant
0.600	32.57	QP	9.000	N	16.05	56.00	23.43	Compliant
0.600	30.70	AV	9.000	N	16.05	46.00	15.30	Compliant
1.800	29.85	QP	9.000	N	15.92	56.00	26.15	Compliant
1.800	26.94	AV	9.000	N	15.92	46.00	19.06	Compliant
10.650	35.25	QP	9.000	N	15.99	60.00	24.75	Compliant
10.650	20.49	AV	9.000	N	15.99	50.00	29.51	Compliant
26.700	24.76	QP	9.000	N	16.27	60.00	35.24	Compliant
26.700	18.87	AV	9.000	N	16.27	50.00	31.13	Compliant

Note:

- 1) Corrected Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)
- 2) Margin (dB) = Limit (dBµV) – Corrected Amplitude (dBµV)

## FCC§15.205, §15.209&§15.249- RADIATED EMISSIONS& OUT OF BAND EMISSION

### Applicable Standard

As per FCC§15.249 (a), except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:


Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0–24.25 GHz	250	2500

As per FCC§15.249 (c), Field strength limits are specified at a distance of 3 meters.

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.


### EUT Setup

Below 1 GHz:

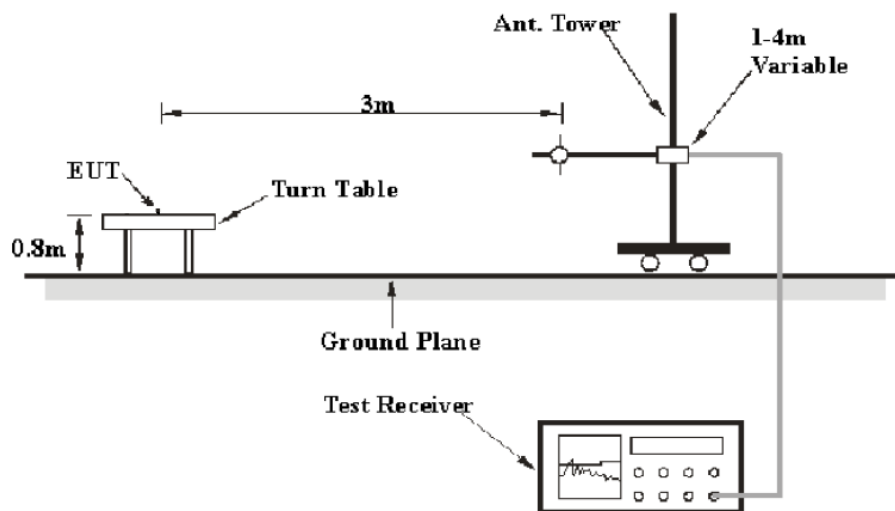



Above 1 GHz:

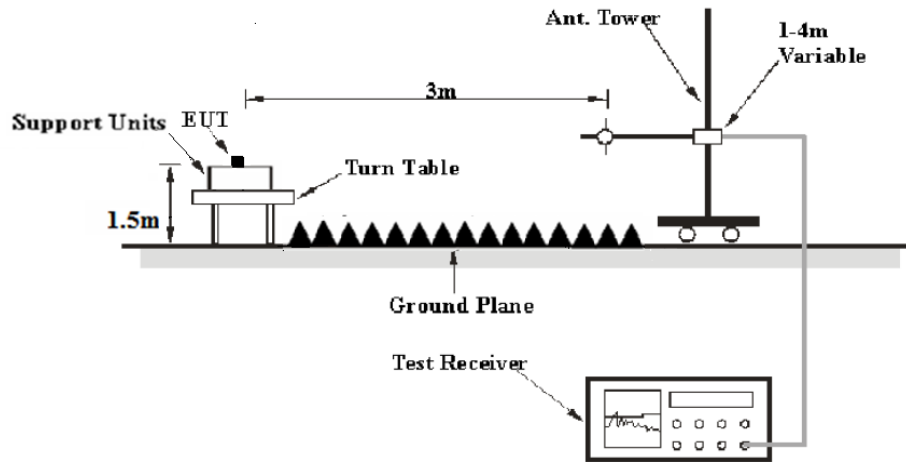

The radiated emission and out of band emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209/15.205 and FCC 15.249 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

**Test Equipment Setup**

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver Setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1GHz	1MHz	3 MHz	/	PK
	1MHz	3 MHz	/	Ave

**Test Procedure**

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude (dB}\mu\text{V /m)} = \text{Meter Reading (dB}\mu\text{V)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V/m)} - \text{Corrected Amplitude (dB}\mu\text{V /m)}$$

## Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15.209 &15.205 & 15.249.

### Test Data

#### Environmental Conditions


<b>Temperature:</b>	24.2°C
<b>Relative Humidity:</b>	50%
<b>ATM Pressure:</b>	101.3kPa

*The testing was performed by Winnie Yang on 2019-03-10  
Test Mode: Transmitting*

**Spurious Emission Test:**

**30MHz-1GHz**

*(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case low channel of operation in X-axis of orientation was recorded)*

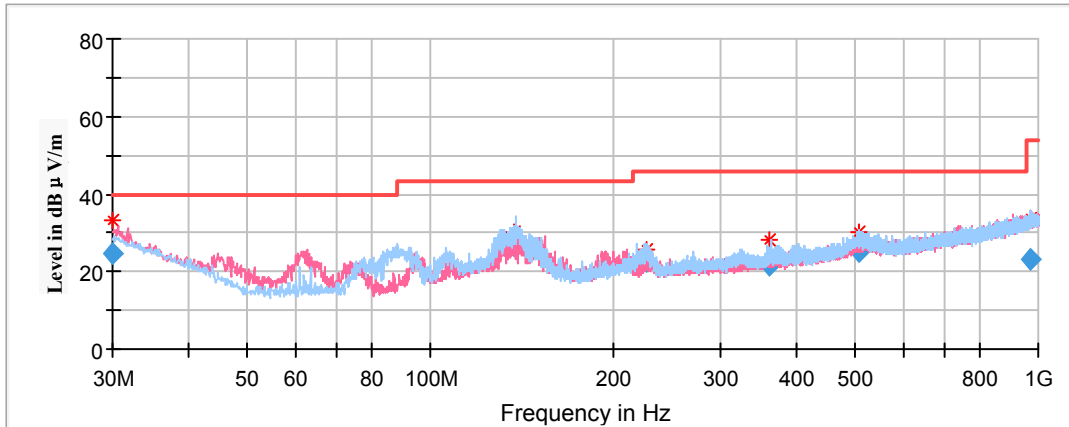

Frequency (MHz)	Corrected Amplitude Quasi-peak (dBμV/m)	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
		Height (cm)	Polar (H/V)				
30.011289	24.58	101.0	V	278.0	-3.9	40.00	15.42
136.915600	26.75	199.0	H	329.0	-11.8	43.50	16.75
226.884950	22.64	199.0	H	298.0	-12.2	46.00	23.36
361.880850	21.64	101.0	H	301.0	-9.0	46.00	24.36
506.516550	25.14	199.0	H	272.0	-6.1	46.00	20.86
967.504950	22.90	101.0	H	74.0	1.6	54.00	31.10

**1GHz-18GHz**


(Pre-scan in the X,Y and Z axes of orientation, the worst case X-axis of orientation was recorded.)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)  
 Corrected Amplitude (dBμV /m) = Corrected Factor (dB/m) + Reading (dBμV)  
 Margin (dB) = Limit (dBμV/m) – Corrected Amplitude (dBμV /m)

**Low Channel: 2403MHz**


Full Spectrum

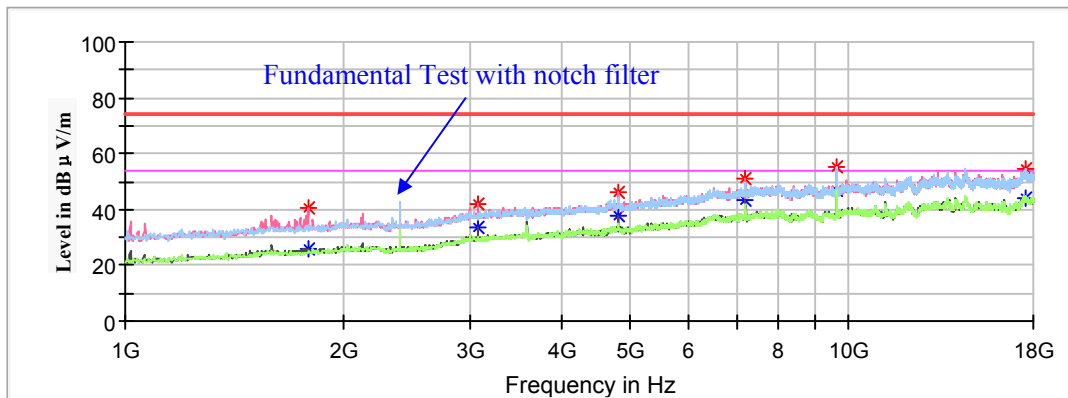

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1788.800000	---	25.95	150.0	V	197.0	-9.0	54.00	28.05
1788.800000	40.69	---	150.0	V	197.0	-9.0	74.00	33.31
3070.600000	---	33.40	200.0	V	109.0	-4.3	54.00	20.60
3070.600000	42.26	---	200.0	V	109.0	-4.3	74.00	31.74
4806.000000	---	37.77	200.0	V	179.0	-0.6	54.00	16.23
4806.000000	46.08	---	200.0	V	179.0	-0.6	74.00	27.92
7209.000000	---	43.44	100.0	V	244.0	5.7	54.00	10.56
7209.000000	50.94	---	100.0	V	244.0	5.7	74.00	23.06
9612.200000	---	47.14	100.0	H	329.0	7.8	54.00	6.86
9612.200000	55.15	---	100.0	H	329.0	7.8	74.00	18.85
17510.400000	---	43.74	200.0	H	31.0	14.3	54.00	10.26
17510.400000	54.40	---	200.0	H	31.0	14.3	74.00	19.60

**Middle Channel: 2442MHz**


Full Spectrum

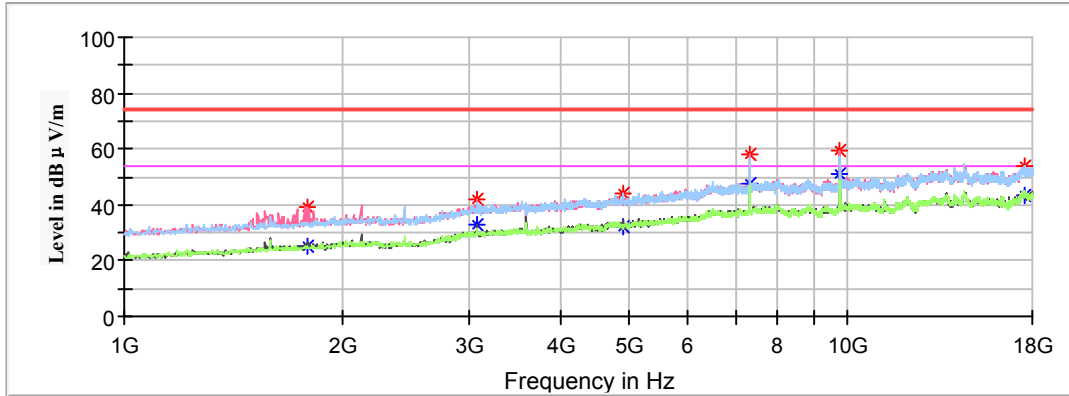

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1788.800000	---	25.51	100.0	V	195.0	-9.0	54.00	28.49
1788.800000	39.27	---	100.0	V	195.0	-9.0	74.00	34.73
3070.600000	---	33.04	200.0	V	108.0	-4.3	54.00	20.96
3070.600000	42.20	---	200.0	V	108.0	-4.3	74.00	31.80
4884.000000	---	32.18	100.0	H	235.0	-0.4	54.00	21.82
4884.000000	44.16	---	100.0	H	235.0	-0.4	74.00	29.84
7326.000000	---	47.26	150.0	V	269.0	5.9	54.00	6.74
7326.000000	58.23	---	150.0	V	269.0	5.9	74.00	15.77
9768.600000	---	51.08	100.0	V	332.0	8.0	54.00	2.92
9768.600000	59.53	---	100.0	V	332.0	8.0	74.00	14.47
17609.000000	---	43.57	150.0	H	236.0	14.1	54.00	10.43
17609.000000	53.71	---	150.0	H	236.0	14.1	74.00	20.29

**High Channel: 2480MHz**

Full Spectrum

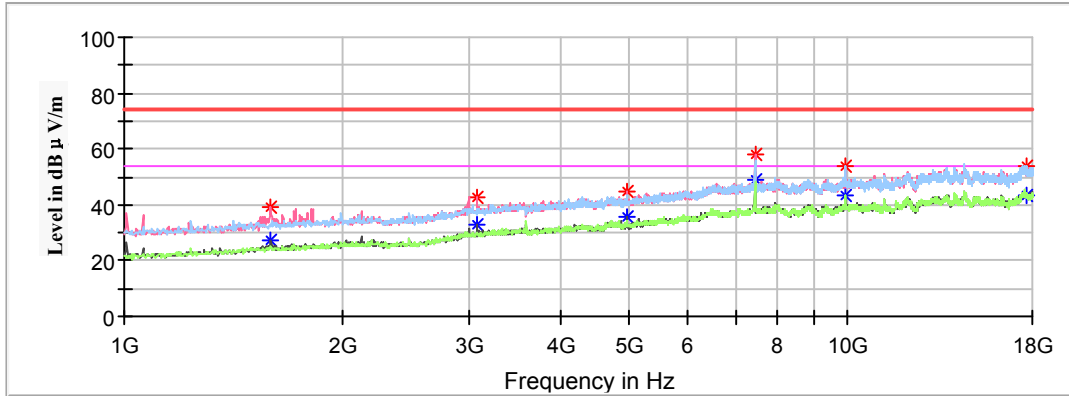


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1591.600000	---	27.56	200.0	V	103.0	-9.6	54.00	26.44
1591.600000	39.21	---	200.0	V	103.0	-9.6	74.00	34.79
3070.600000	---	33.15	200.0	V	103.0	-4.3	54.00	20.85
3070.600000	42.60	---	200.0	V	103.0	-4.3	74.00	31.40
4960 000000	---	35.89	200.0	V	151.0	-0.3	54.00	18.11
4960 000000	44.92	---	200.0	V	151.0	-0.3	74.00	29.08
7440 000000	---	48.85	200.0	V	163.0	6.0	54.00	5.15
7440 000000	57.79	---	200.0	V	163.0	6.0	74.00	16.21
9918.200000	---	43.50	150.0	H	314.0	8.1	54.00	10.50
9918.200000	53.93	---	150.0	H	314.0	8.1	74.00	20.07
17663.400000	---	43.48	200.0	H	171.0	14.0	54.00	10.52
17663.400000	54.16	---	200.0	H	171.0	14.0	74.00	19.84

**18GHz-25GHz**


(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case low channel of operation in X-axis of orientation was recorded)

**Horizontal**

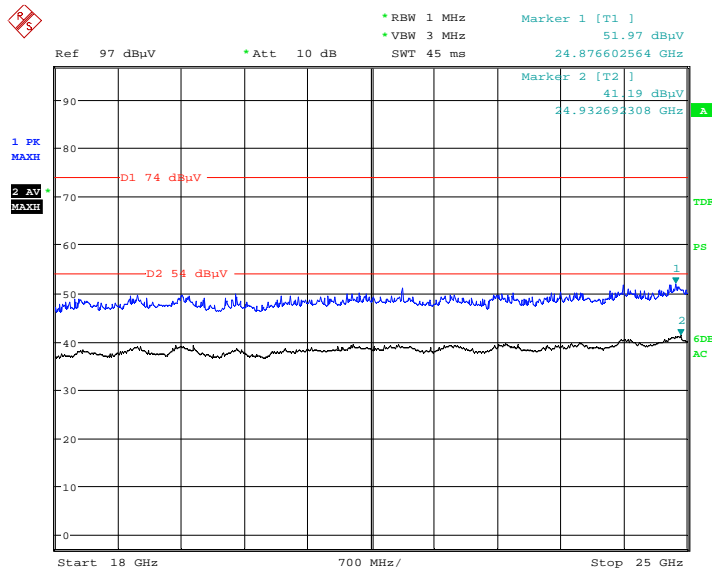

Date: 10.MAR.2019 13:01:33

**Vertical**

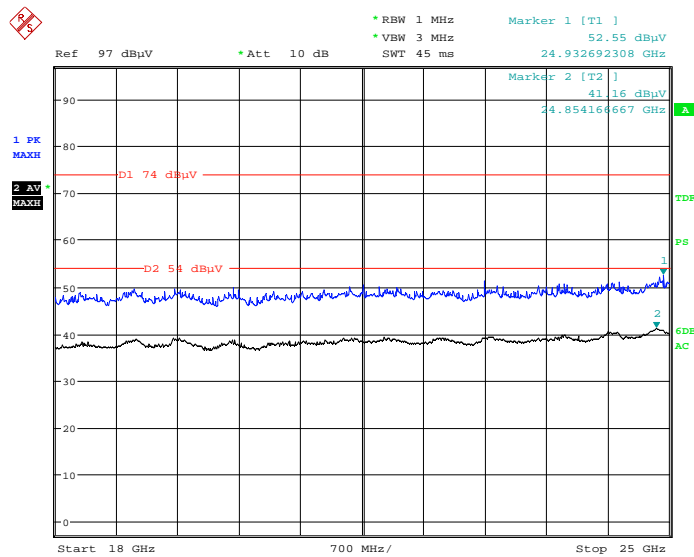

Date: 10.MAR.2019 13:32:24

**Fundamental Test & Restricted Bands Emissions Test:**

(Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded.)

Note:

1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)

Corrected Amplitude (dBµV /m) = Corrected Factor (dB/m) + Reading (dBµV)

Margin (dB) = Limit (dBµV/m) – Corrected Amplitude (dBµV /m)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
<b>Low Channel: 2403MHz</b>								
2403.000000	93.64	---	150.0	V	68.0	6.1	114.00	20.36
2403.000000	---	93.09	150.0	V	68.0	6.1	94.00	0.91
2403.000000	92.89	---	100.0	H	76.0	6.1	114.00	21.11
2403.000000	---	92.34	100.0	H	76.0	6.1	94.00	1.66
2400.000000	51.99	---	150.0	V	314.0	6.1	74.00	22.01
2400.000000	---	38.84	150.0	V	314.0	6.1	54.00	15.16
<b>Middle Channel: 2442MHz</b>								
2442.000000	92.75	---	200.0	H	335.0	6.2	114.00	21.25
2442.000000	---	92.20	200.0	H	335.0	6.2	94.00	1.80
2442.000000	91.89	---	100.0	V	306.0	6.2	114.00	22.11
2442.000000	---	91.34	100.0	V	306.0	6.2	94.00	2.66
<b>High Channel: 2480MHz</b>								
2480.000000	91.80	---	250.0	V	44.0	6.3	114.00	22.20
2480.000000	---	91.21	250.0	V	44.0	6.3	94.00	2.79
2480.000000	90.89	---	200.0	H	44.0	6.3	114.00	23.11
2480.000000	---	90.34	200.0	H	44.0	6.3	94.00	3.66
2483.500000	50.09	---	150.0	H	79.0	6.3	74.00	23.91
2483.500000	---	37.68	150.0	H	79.0	6.3	54.00	16.32



## **FCC §15.215(c) – 20 dB BANDWIDTH TESTING**

### **Applicable Standard**

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

### **Test Procedure**

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

### **Test Data**

#### **Environmental Conditions**

<b>Temperature:</b>	24.4°C
<b>Relative Humidity:</b>	50%
<b>ATM Pressure:</b>	101.3kPa


*The testing was performed by Winnie Yang g on 2019-03-02*

**Test Result:** Compliant.


Test Mode: Transmitting

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
Low	2403	1.251
Middle	2442	1.257
High	2480	1.244


Low Channel

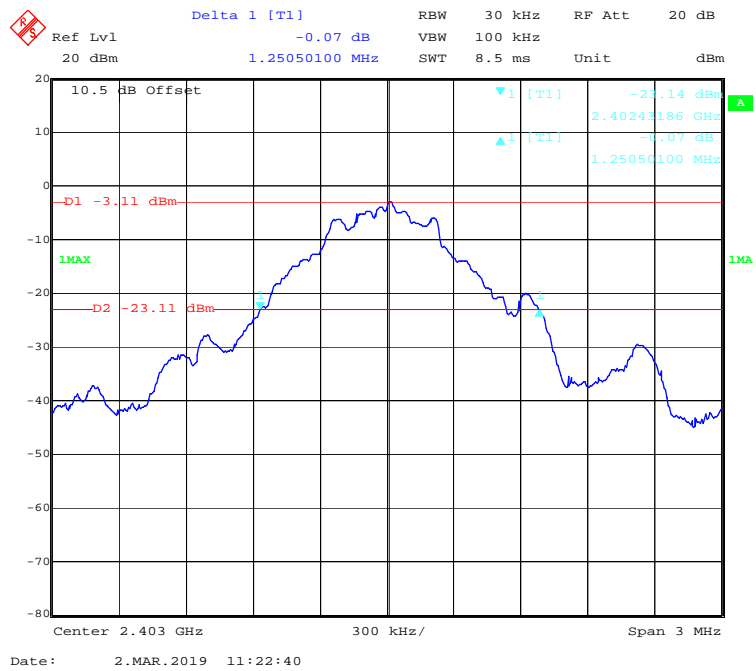

### Middle Channel

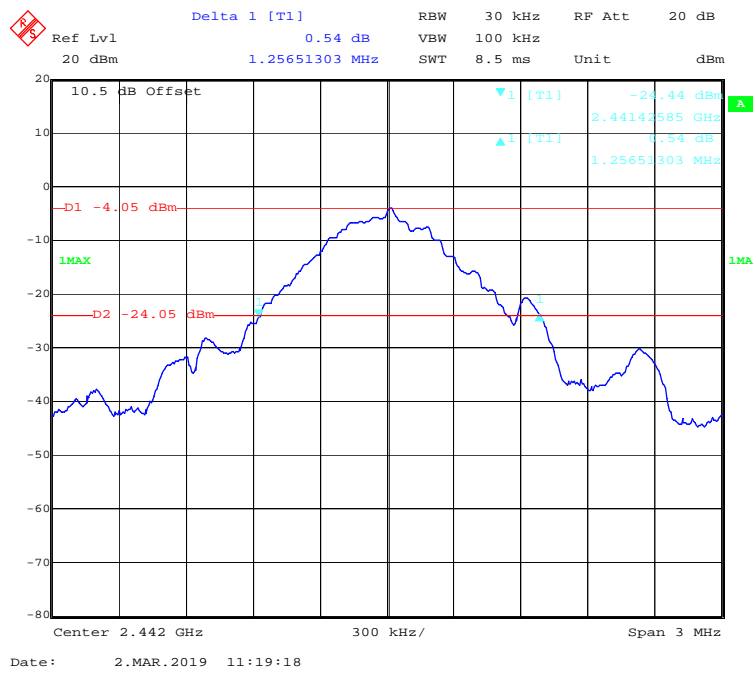

### High Channel

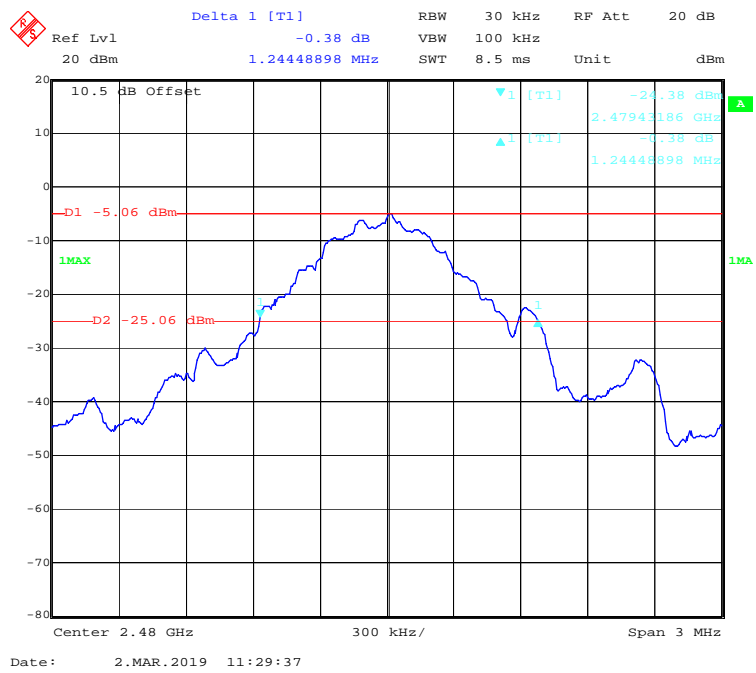

\*\*\*\*\* END OF REPORT \*\*\*\*\*