

FCC PART 15.247

TEST REPORT

For

OKIN Refined Electric Technology Co., Ltd.

Plant 4, No. 410, Xinyonglian Road, Wangjiangjing Development Zone, Jiaxing, Zhejiang, China

FCC ID: PCU-JLDP05052

| | |
|---|--|
| Report Type: Original Report | Product Type: BT Control Box |
| Test Engineer: Edison Hu | <i>Edison.hu</i> |
| Report Number: RSHA170906005-00B | |
| Report Date: 2017-10-26 | |
| Reviewed By: Oscar Ye RF Leader | <i>Oscar.Ye</i> |
| Prepared By: | Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road,Kunshan,Jiangsu province,China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn |

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....4

 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)4

 OBJECTIVE4

 RELATED SUBMITTAL(S)/GRANT(S).....4

 TEST METHODOLOGY4

 MEASUREMENT UNCERTAINTY5

 TEST FACILITY5

SYSTEM TEST CONFIGURATION.....6

 DESCRIPTION OF TEST CONFIGURATION6

 EQUIPMENT MODIFICATIONS6

 EUT EXERCISE SOFTWARE6

 SUPPORT EQUIPMENT LIST AND DETAILS7

 EXTERNAL I/O CABLE.....7

 BLOCK DIAGRAM OF TEST SETUP7

SUMMARY OF TEST RESULTS9

TEST EQUIPMENT LIST10

FCC§15.247 (i), §1.1310& §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE).....11

 APPLICABLE STANDARD11

FCC §15.203 - ANTENNA REQUIREMENT.....12

 APPLICABLE STANDARD12

 ANTENNA CONNECTOR CONSTRUCTION12

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS13

 APPLICABLE STANDARD13

 EUT SETUP.....13

 EMI TEST RECEIVER SETUP.....13

 TEST PROCEDURE13

 CORRECTED FACTOR & MARGIN CALCULATION14

 TEST RESULTS SUMMARY14

 TEST DATA14

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....17

 APPLICABLE STANDARD17

 EUT SETUP17

 EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP18

 TEST PROCEDURE18

 CORRECTED AMPLITUDE & MARGIN CALCULATION18

 TEST RESULTS SUMMARY18

 TEST DATA19

FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....23

 APPLICABLE STANDARD23

 TEST PROCEDURE23

 TEST DATA23

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....26

 APPLICABLE STANDARD26

 TEST PROCEDURE26

 TEST DATA26

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....29

| | |
|--|-----------|
| APPLICABLE STANDARD | 29 |
| TEST PROCEDURE | 29 |
| TEST DATA | 29 |
| FCC §15.247(e) - POWER SPECTRAL DENSITY | 31 |
| APPLICABLE STANDARD | 31 |
| TEST PROCEDURE | 31 |
| TEST DATA | 31 |

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

| | |
|--------------|--|
| Applicant | OKIN Refined Electric Technology Co., Ltd. |
| Tested Model | JLDP.05.052.000 |
| Product Type | BT Control Box |
| Dimension | 188 mm(L)×130 mm(W)×50 mm(H) |
| Power Supply | DC 29V |

**All measurement and test data in this report was gathered from production sample serial number: 20170906005. (Assigned by the BACL. The EUT supplied by the applicant was received on 2017-09-06)*

Objective

This report is prepared on behalf of OKIN Refined Electric Technology Co., Ltd. in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

N/A

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and FCC KDB558074 D01 DTS Meas Guidance v04.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

| Item | | Uncertainty |
|------------------------------------|-------------|-------------|
| AC Power Lines Conducted Emissions | | 3.19 dB |
| RF conducted test with spectrum | | 0.9dB |
| RF Output Power with Power meter | | 0.5dB |
| Radiated emission | 30MHz~1GHz | 6.11dB |
| | 1GHz~6GHz | 4.45dB |
| | 6GHz~18GHz | 5.23dB |
| | 18GHz~40GHz | 4.88dB |
| Occupied Bandwidth | | 0.5kHz |
| Temperature | | 1.0°C |
| Humidity | | 6% |

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road,Kunshan,Jiangsu province,China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 815570. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

Channel list for BLE mode:

| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|
| 0 | 2402 | 20 | 2442 |
| 1 | 2404 | ... | ... |
| ... | ... | ... | ... |
| ... | ... | 38 | 2478 |
| 19 | 2440 | 39 | 2480 |

EUT was tested with channel 0, 19 and 39.

Equipment Modifications

No modification was made to the EUT tested.


EUT Exercise Software

No software was used during test.

BLE : Power level: 0

Duty Cycle:

Middle Channel

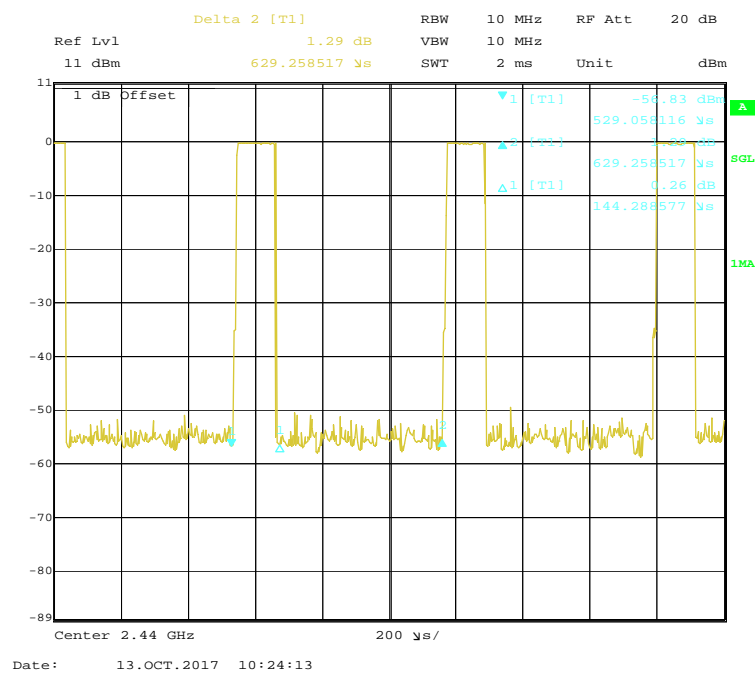

| Band | Duty Cycle (%) | T(us) | 1/T(kHz) | VBW Setting | 10log(1/x) |
|------|----------------|-------|----------|-------------|------------|
| BLE | 22.89 | 144 | 6.94 | 10kHz | 6.40 |

Support Equipment List and Details


| Manufacturer | Description | Model | Serial Number |
|--------------|---|---------|----------------|
| OKIN | Motor1 | JLDQ-12 | Q1709273600226 |
| OKIN | Motor2 | JLDQ-10 | Q1707383100415 |
| OKIN | Motor3 | JLDQ-14 | Q1707413200443 |
| OKIN | Adapter Input: AC100-240 V 50/60Hz 2.0A Output: 29V, 1.8A | SW-4052 | / |
| OKIN | Emergency Switch | JLDK-17 | / |
| OKIN | Cup Light | JLDP-14 | / |
| OKIN | Light Belt | / | / |

External I/O Cable


| Cable Description | Length (m) | From Port | To |
|-------------------|------------|-----------|------------------|
| Connecting Line | 1.8 | EUT | Cup Light |
| Power Cable | 0.8 | EUT | Motor1 |
| Power Cable | 1.5 | EUT | Emergency Switch |
| Power Cable | 1.0 | Motor1 | Adapter |

Block Diagram of Test Setup


For Conducted Emissions:

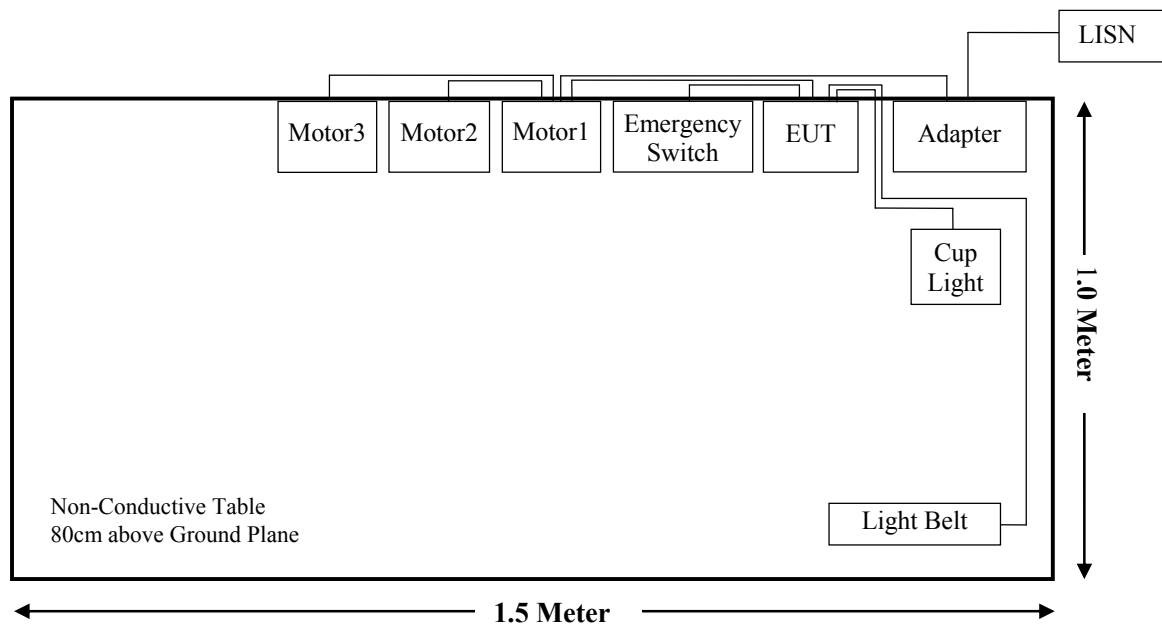

For Radiated Emissions(Below 1GHz):

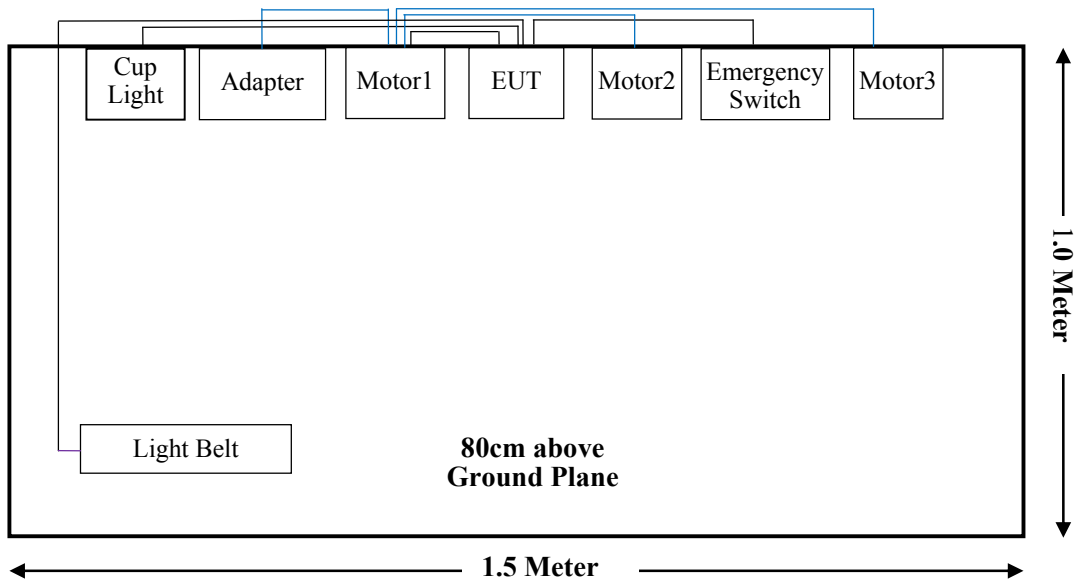

For Radiated Emissions(Above 1GHz):

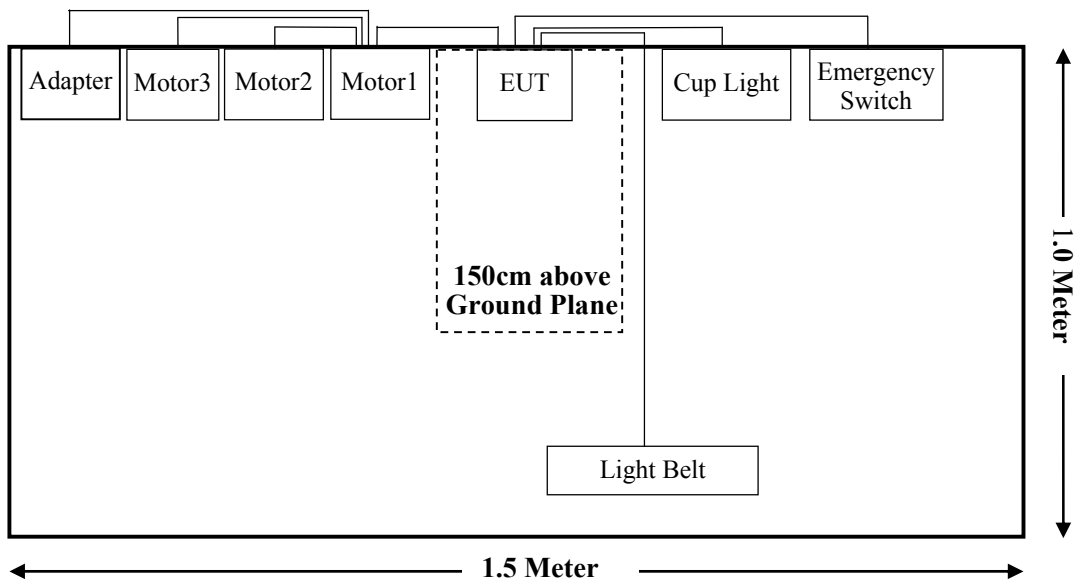

SUMMARY OF TEST RESULTS

| FCC Rules | Description of Test | Result |
|---------------------------------------|--|---------------|
| §15.247 (i), §1.1307 (b) (1)& §2.1091 | Maximum Permissible Exposure (MPE) | Compliance |
| §15.203 | Antenna Requirement | Compliance |
| §15.207 (a) | AC Line Conducted Emissions | Compliance |
| §15.247(d) | Spurious Emissions at Antenna Port | Compliance |
| §15.205, §15.209, §15.247(d) | Spurious Emissions | Compliance |
| §15.247 (a)(2) | 6 dB Emission Bandwidth | Compliance |
| §15.247(b)(3) | Maximum Conducted Output Power | Compliance |
| §15.247(d) | 100 kHz Bandwidth of Frequency Band Edge | Compliance |
| §15.247(e) | Power Spectral Density | Compliance |

TEST EQUIPMENT LIST

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|--|--------------------|-----------------|---------------|------------------|----------------------|
| Radiated Emission Test (Chamber 1#) | | | | | |
| Rohde & Schwarz | EMI Test Receiver | ESCI | 100195 | 2016-11-25 | 2017-11-24 |
| Sunol Sciences | Broadband Antenna | JB3 | A040914-2 | 2016-01-09 | 2019-01-08 |
| Sonoma Instrument | Pre-amplifier | 310N | 171205 | 2017-08-15 | 2018-08-14 |
| Rohde & Schwarz | Auto test Software | EMC32 | 100361 | / | / |
| MICRO-COAX | Coaxial Cable | Cable-8 | 008 | 2017-08-15 | 2018-08-14 |
| MICRO-COAX | Coaxial Cable | Cable-9 | 009 | 2017-08-15 | 2018-08-14 |
| MICRO-COAX | Coaxial Cable | Cable-10 | 010 | 2017-08-15 | 2018-08-14 |
| Radiated Emission Test (Chamber 2#) | | | | | |
| Rohde & Schwarz | EMI Test Receiver | ESU40 | 100207 | 2017-08-27 | 2018-08-26 |
| ETS-LINDGREN | Horn Antenna | 3115 | 6229 | 2016-01-11 | 2019-01-10 |
| ETS-LINDGREN | Horn Antenna | 3116 | 00084159 | 2016-10-18 | 2019-10-17 |
| Narda | Pre-amplifier | AFS42-00101800 | 2001270 | 2016-12-12 | 2017-12-11 |
| Heatsink Required | Amplifier | QLW-18405536-J0 | 15964001009 | 2016-12-12 | 2017-12-11 |
| Rohde & Schwarz | Auto test Software | EMC32 | 100361 | / | / |
| MICRO-COAX | Coaxial Cable | Cable-6 | 006 | 2017-08-15 | 2018-08-14 |
| MICRO-COAX | Coaxial Cable | Cable-11 | 011 | 2017-08-15 | 2018-08-14 |
| MICRO-COAX | Coaxial Cable | Cable-12 | 012 | 2017-08-15 | 2018-08-14 |
| MICRO-COAX | Coaxial Cable | Cable-13 | 013 | 2017-08-15 | 2018-08-14 |
| RF Conducted Test | | | | | |
| Rohde & Schwarz | Signal Analyzer | FSIQ26 | 836131/009 | 2017-09-21 | 2018-09-20 |
| OKIN | RF Cable | N/A | N/A | 2017-10-13 | 2018-10-12 |
| Conducted Emission Test | | | | | |
| Rohde & Schwarz | EMI Test Receiver | ESCI | 100195 | 2016-11-25 | 2017-11-24 |
| Rohde & Schwarz | LISN | ESH3-Z5 | 862770/011 | 2017-10-10 | 2018-10-09 |
| Rohde & Schwarz | LISN | ENV216 | 3560655016 | 2016-11-25 | 2017-11-24 |
| BACL | BACL-EMC | V1.0 | CE001 | / | / |
| Narda | Attenuator/6dB | 10690812-2 | 26850-6 | 2017-01-10 | 2018-01-09 |
| MICRO-COAX | Coaxial Cable | Cable-15 | 015 | 2017-08-15 | 2018-08-14 |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.247 (i), §1.1310& §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247(i)and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission’s guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

| (B) Limits for General Population/Uncontrolled Exposure | | | | |
|--|--------------------------------------|--------------------------------------|--|---------------------------------|
| Frequency Range (MHz) | Electric Field Strength (V/m) | Magnetic Field Strength (A/m) | Power Density (mW/cm²) | Averaging Time (minutes) |
| 0.3-1.34 | 614 | 1.63 | *(100) | 30 |
| 1.34-30 | 824/f | 2.19/f | *(180/f ²) | 30 |
| 30-300 | 27.5 | 0.073 | 0.2 | 30 |
| 300-1500 | / | | f/1500 | 30 |
| 1500-100,000 | / | | 1.0 | 30 |

f = frequency in MHz; * = Plane-wave equivalent power density; According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4 \pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

| Mode | Frequency Range (MHz) | Antenna Gain | | Target Output Power | | Evaluation Distance (cm) | Power Density (mW/cm²) | MPE Limit (mW/cm²) |
|-------------|------------------------------|---------------------|------------------|----------------------------|-------------|---------------------------------|--|--------------------------------------|
| | | (dBi) | (numeric) | (dBm) | (mW) | | | |
| BLE | 2402-2480 | 1.00 | 1.26 | -0.5 | 0.89 | 20 | 0.0002 | 1.0 |

Note: For the above target output power is declared by the manufacturer.

Result: The device meet FCC MPE at 20 cm distance.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
 - b. Antenna must use a unique type of connector to attach to the EUT.
- Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has a PCB antenna arrangement for BLE, which the antenna gain is 1dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

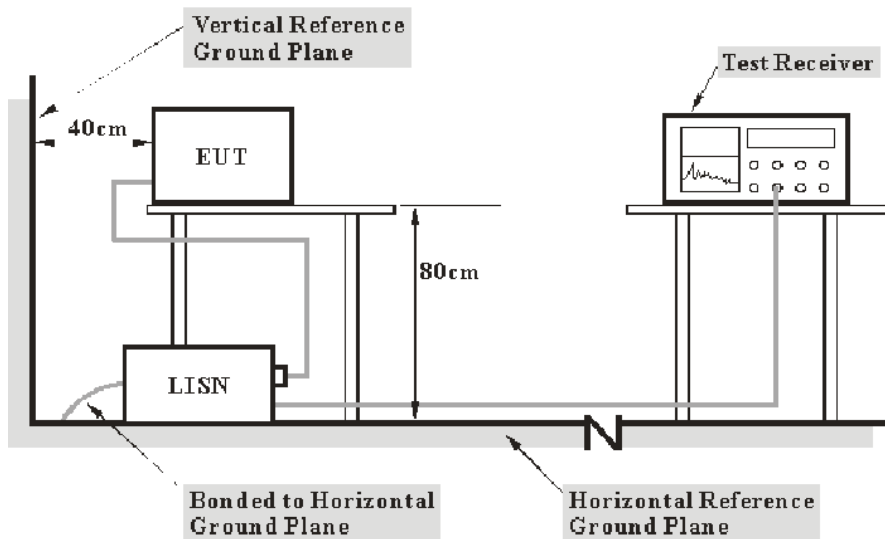

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

| Frequency Range | IF B/W |
|------------------|--------|
| 150 kHz – 30 MHz | 9 kHz |

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Reading}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data


Environmental Conditions

| | |
|---------------------------|-----------|
| Temperature: | 20.2 °C |
| Relative Humidity: | 55 % |
| ATM Pressure: | 101.3 kPa |

The testing was performed by Edison Hu on 2017-10-17.


EUT operation mode: Transmitting in low channel (Worst case)

AC 120V/60 Hz, Line

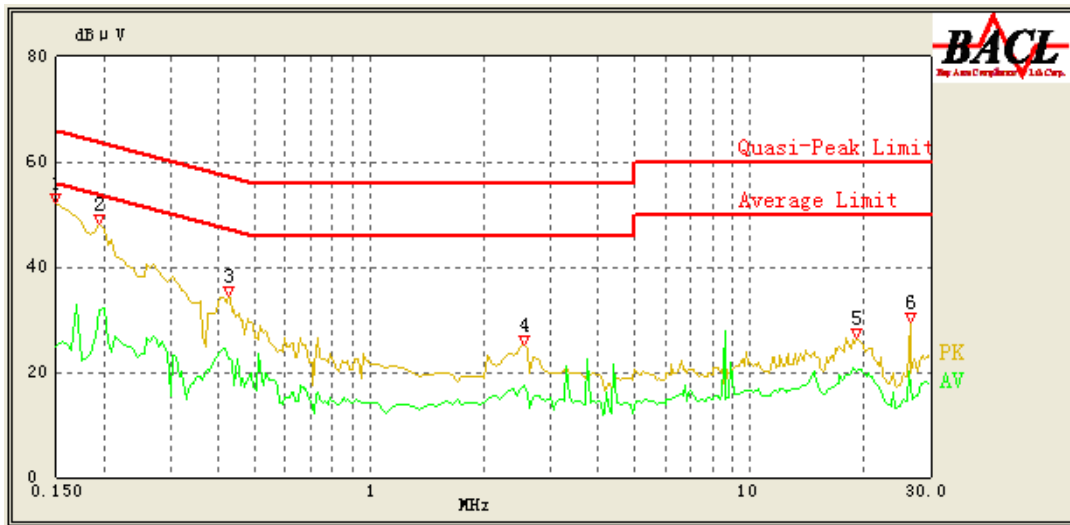

| Frequency (MHz) | Reading (dBμV) | Detector (PK/AV/QP) | Bandwidth (kHz) | Line | Corr. (dB) | Limit (dBμV) | Margin (dB) | Comment |
|-----------------|----------------|---------------------|-----------------|------|------------|--------------|-------------|------------|
| 0.150 | 52.05 | QP | 9.000 | L1 | 16.06 | 66.00 | 13.95 | Compliance |
| 0.150 | 24.84 | AV | 9.000 | L1 | 16.06 | 56.00 | 31.16 | Compliance |
| 0.195 | 48.13 | QP | 9.000 | L1 | 16.05 | 64.71 | 16.58 | Compliance |
| 0.195 | 31.92 | AV | 9.000 | L1 | 16.05 | 54.71 | 22.79 | Compliance |
| 0.425 | 34.40 | QP | 9.000 | L1 | 16.10 | 58.14 | 23.74 | Compliance |
| 0.425 | 22.41 | AV | 9.000 | L1 | 16.10 | 48.14 | 25.73 | Compliance |
| 2.550 | 25.13 | QP | 9.000 | L1 | 15.90 | 56.00 | 30.87 | Compliance |
| 2.550 | 17.38 | AV | 9.000 | L1 | 15.90 | 46.00 | 28.62 | Compliance |
| 19.150 | 26.54 | QP | 9.000 | L1 | 16.13 | 60.00 | 33.46 | Compliance |
| 19.200 | 20.09 | AV | 9.000 | L1 | 16.14 | 50.00 | 29.91 | Compliance |
| 26.550 | 29.57 | QP | 9.000 | L1 | 16.27 | 60.00 | 30.43 | Compliance |
| 26.350 | 20.14 | AV | 9.000 | L1 | 16.27 | 50.00 | 29.86 | Compliance |

AC 120V/60 Hz, Neutral

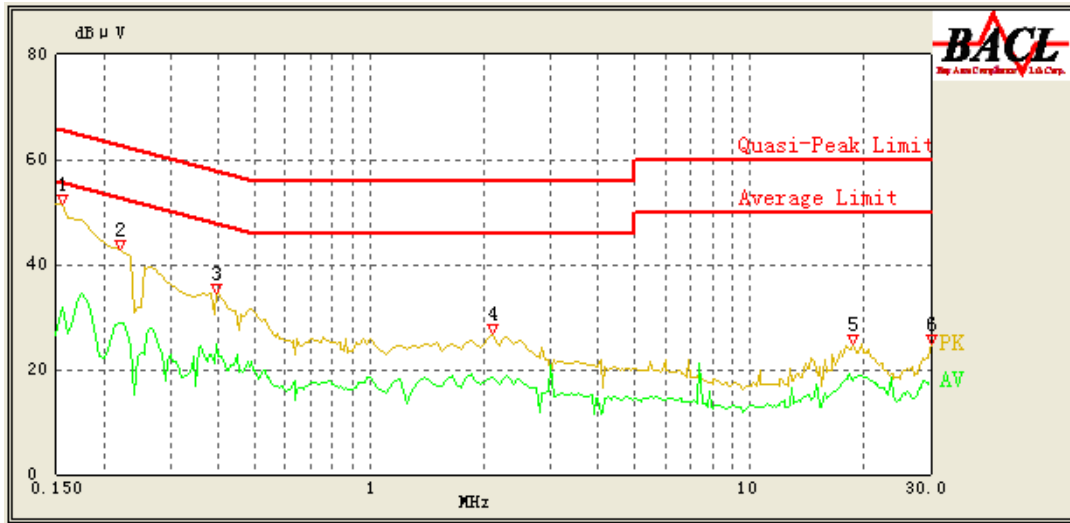

| Frequency (MHz) | Reading (dBμV) | Detector (PK/AV/QP) | Bandwidth (kHz) | Line | Corr. (dB) | Limit (dBμV) | Margin (dB) | Comment |
|-----------------|----------------|---------------------|-----------------|------|------------|--------------|-------------|------------|
| 0.155 | 51.45 | QP | 9.000 | N | 16.06 | 65.86 | 14.41 | Compliance |
| 0.155 | 31.73 | AV | 9.000 | N | 16.06 | 55.86 | 24.13 | Compliance |
| 0.220 | 42.79 | QP | 9.000 | N | 16.05 | 64.00 | 21.21 | Compliance |
| 0.220 | 28.73 | AV | 9.000 | N | 16.05 | 54.00 | 25.27 | Compliance |
| 0.395 | 34.63 | QP | 9.000 | N | 16.09 | 59.00 | 24.37 | Compliance |
| 0.395 | 24.79 | AV | 9.000 | N | 16.09 | 49.00 | 24.21 | Compliance |
| 2.100 | 26.88 | QP | 9.000 | N | 15.91 | 56.00 | 29.12 | Compliance |
| 2.100 | 18.64 | AV | 9.000 | N | 15.91 | 46.00 | 27.36 | Compliance |
| 18.750 | 24.88 | QP | 9.000 | N | 16.12 | 60.00 | 35.12 | Compliance |
| 18.750 | 17.90 | AV | 9.000 | N | 16.12 | 50.00 | 32.10 | Compliance |
| 30.000 | 24.77 | QP | 9.000 | N | 16.34 | 60.00 | 35.23 | Compliance |
| 29.750 | 17.74 | AV | 9.000 | N | 16.34 | 50.00 | 32.26 | Compliance |

Note:

- 1) Corr.=LISN VDF (Voltage Division Factor) + Cable Loss
- 2) Margin = Limit – Reading


FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1 GHz:

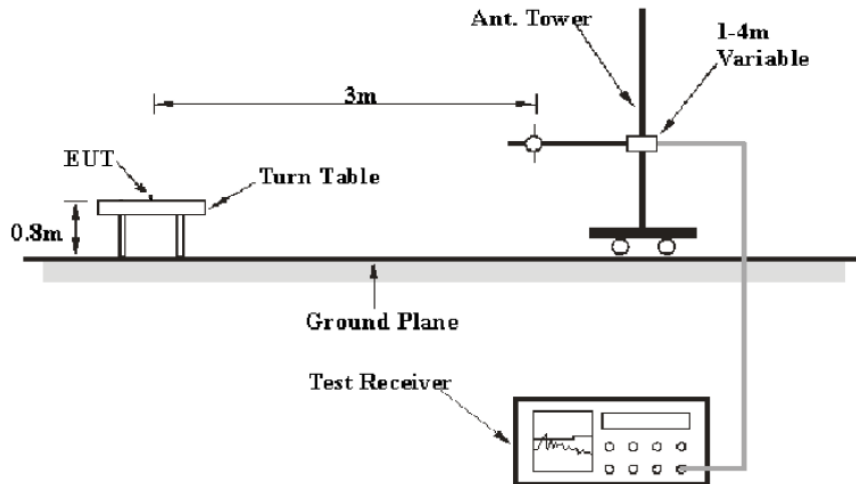

Above 1GHz:

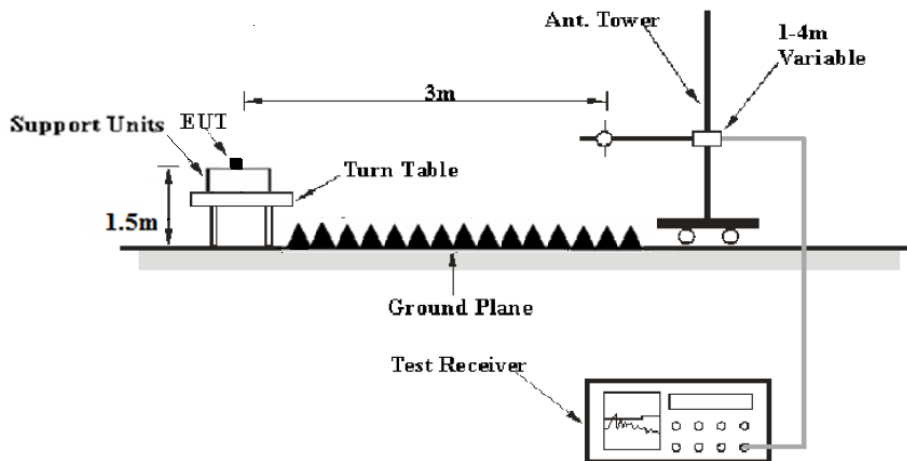

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

| Frequency Range | RBW | Video B/W | IF B/W | Detector |
|-------------------|---------|-----------|---------|----------|
| 30 MHz – 1000 MHz | 120 kHz | 300 kHz | 120 kHz | QP |

| Frequency Range | Item | RBW | Video B/W | Duty cycle | Detector |
|-----------------|----------|------|-----------|------------|----------|
| 1GHz – 25GHz | PK Value | 1MHz | 3 MHz | Any | PK |
| | AV Value | 1MHz | 10 Hz | >98% | PK |
| | | 1MHz | 1/T | <98% | |

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak detection mode for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Test Data

Environmental Conditions

| | |
|---------------------------|----------|
| Temperature: | 24.1 °C |
| Relative Humidity: | 54 % |
| ATM Pressure: | 101.2kPa |

The testing was performed by Edison Hu on 2017-10-13&2017-10-26.

EUT operation mode: Transmitting (Scan with X-Axis, Y-Axis and Z-Axis position, the worst case was recorded)

30MHz-25GHz


| Frequency (MHz) | Receiver | | Turntable Degree | Rx Antenna | | Corrected Factor (dB) | Corrected Amplitude (dBµV/m) | FCC Part 15.247/205/209 | |
|------------------------|----------------|-----------------------|------------------|-------------|-------------|-----------------------|------------------------------|-------------------------|-------------|
| | Reading (dBµV) | Detector (PK/QP/Ave.) | | Height (cm) | Polar (H/V) | | | Limit (dBµV/m) | Margin (dB) |
| Low Channel (2402 MHz) | | | | | | | | | |
| 72.00 | 44.31 | QP | 282 | 214 | V | -17.12 | 27.19 | 40.00 | 12.81 |
| 2402.00 | 101.22 | PK | 107 | 128 | V | -4.93 | 96.29 | / | / |
| 2402.00 | 91.67 | Ave | 107 | 128 | V | -4.93 | 86.74 | / | / |
| 2402.00 | 99.96 | PK | 68 | 183 | H | -4.93 | 95.03 | / | / |
| 2402.00 | 90.19 | Ave | 68 | 183 | H | -4.93 | 85.26 | / | / |
| 2390.00 | 62.12 | PK | 123 | 179 | V | -4.96 | 57.16 | 74.00 | 16.84 |
| 2390.00 | 50.20 | Ave | 123 | 179 | V | -4.96 | 45.24 | 54.00 | 8.76 |
| 1201.50 | 52.11 | PK | 246 | 161 | H | -10.23 | 41.88 | 74.00 | 32.12 |
| 1201.50 | 41.08 | Ave | 246 | 161 | H | -10.23 | 30.85 | 54.00 | 23.15 |
| 1360.50 | 50.53 | PK | 233 | 156 | H | -9.04 | 41.49 | 74.00 | 32.51 |
| 1360.50 | 40.61 | Ave | 233 | 156 | H | -9.04 | 31.57 | 54.00 | 22.43 |
| 4804.00 | 54.22 | PK | 132 | 247 | V | 2.47 | 56.69 | 74.00 | 17.31 |
| 4804.00 | 44.83 | Ave | 132 | 247 | V | 2.47 | 47.3 | 54.00 | 6.70 |
| 7206.00 | 42.91 | PK | 171 | 175 | V | 9.79 | 52.7 | 74.00 | 21.3 |
| 7206.00 | 29.97 | Ave | 171 | 175 | V | 9.79 | 39.76 | 54.00 | 14.24 |

| Frequency (MHz) | Receiver | | Turntable Degree | Rx Antenna | | Corrected Factor (dB) | Corrected Amplitude (dBµV/m) | FCC Part 15.247/205/209 | |
|---------------------------|----------------|-----------------------|------------------|-------------|-------------|-----------------------|------------------------------|-------------------------|-------------|
| | Reading (dBµV) | Detector (PK/QP/Ave.) | | Height (cm) | Polar (H/V) | | | Limit (dBµV/m) | Margin (dB) |
| Middle Channel (2440 MHz) | | | | | | | | | |
| 72.00 | 45.12 | QP | 357 | 176 | V | -17.12 | 28.00 | 40.00 | 12.00 |
| 2440.00 | 99.95 | PK | 104 | 213 | V | -4.83 | 95.12 | / | / |
| 2440.00 | 89.97 | Ave | 104 | 213 | V | -4.83 | 85.14 | / | / |
| 2440.00 | 99.35 | PK | 321 | 119 | H | -4.83 | 94.52 | / | / |
| 2440.00 | 89.73 | Ave | 321 | 119 | H | -4.83 | 84.9 | / | / |
| 1201.50 | 43.13 | PK | 327 | 130 | H | -10.23 | 32.90 | 74.00 | 41.10 |
| 1201.50 | 30.54 | Ave | 327 | 130 | V | -10.23 | 20.31 | 54.00 | 33.69 |
| 3060.00 | 44.12 | PK | 176 | 190 | H | -1.91 | 42.21 | 74.00 | 31.79 |
| 3060.00 | 30.66 | Ave | 176 | 190 | V | -1.91 | 28.75 | 54.00 | 25.25 |
| 4880.00 | 54.48 | PK | 274 | 179 | V | 2.64 | 57.12 | 74.00 | 16.88 |
| 4880.00 | 48.12 | Ave | 274 | 179 | V | 2.64 | 50.76 | 54.00 | 3.24 |
| 6470.00 | 44.17 | PK | 99 | 191 | H | 8.12 | 52.29 | 74.00 | 21.71 |
| 6470.00 | 30.62 | Ave | 99 | 191 | H | 8.12 | 38.74 | 54.00 | 15.26 |
| 7320.00 | 42.56 | PK | 181 | 108 | V | 9.96 | 52.52 | 74.00 | 21.48 |
| 7320.00 | 30.18 | Ave | 181 | 108 | V | 9.96 | 40.14 | 54.00 | 13.86 |


| Frequency (MHz) | Receiver | | Turntable Degree | Rx Antenna | | Corrected Factor (dB) | Corrected Amplitude (dBµV/m) | FCC Part 15.247/205/209 | |
|------------------------|----------------|-----------------------|------------------|-------------|-------------|-----------------------|------------------------------|-------------------------|-------------|
| | Reading (dBµV) | Detector (PK/QP/Ave.) | | Height (cm) | Polar (H/V) | | | Limit (dBµV/m) | Margin (dB) |
| High Channel (2480MHz) | | | | | | | | | |
| 72.00 | 45.01 | QP | 228 | 205 | V | -17.12 | 27.89 | 40.00 | 12.11 |
| 2480.00 | 99.31 | PK | 310 | 204 | V | -4.72 | 94.59 | / | / |
| 2480.00 | 89.7 | Ave | 310 | 204 | V | -4.72 | 84.98 | / | / |
| 2480.00 | 98.16 | PK | 309 | 181 | H | -4.72 | 93.44 | / | / |
| 2480.00 | 87.8 | Ave | 309 | 181 | H | -4.72 | 83.08 | / | / |
| 2483.50 | 69.01 | PK | 213 | 216 | V | -4.71 | 64.30 | 74.00 | 9.70 |
| 2483.50 | 55.03 | Ave | 213 | 216 | V | -4.71 | 50.32 | 54.00 | 3.68 |
| 2562.00 | 54.12 | PK | 57 | 171 | H | -4.34 | 49.78 | 74.00 | 24.22 |
| 2562.00 | 32.66 | Ave | 57 | 171 | V | -4.34 | 28.32 | 54.00 | 25.68 |
| 4960.00 | 54.28 | PK | 2 | 215 | V | 2.82 | 57.1 | 74.00 | 16.90 |
| 4960.00 | 47.91 | Ave | 2 | 215 | V | 2.82 | 50.73 | 54.00 | 3.27 |
| 6470.00 | 44.12 | PK | 65 | 113 | H | 8.12 | 52.24 | 74.00 | 21.76 |
| 6470.00 | 30.68 | Ave | 65 | 113 | H | 8.12 | 38.8 | 54.00 | 15.20 |
| 7440.00 | 42.82 | PK | 84 | 179 | V | 10.14 | 52.96 | 74.00 | 21.04 |
| 7440.00 | 31.12 | Ave | 84 | 179 | V | 10.14 | 41.26 | 54.00 | 12.74 |

Conducted Spurious Emissions at Antenna Port


Low Channel

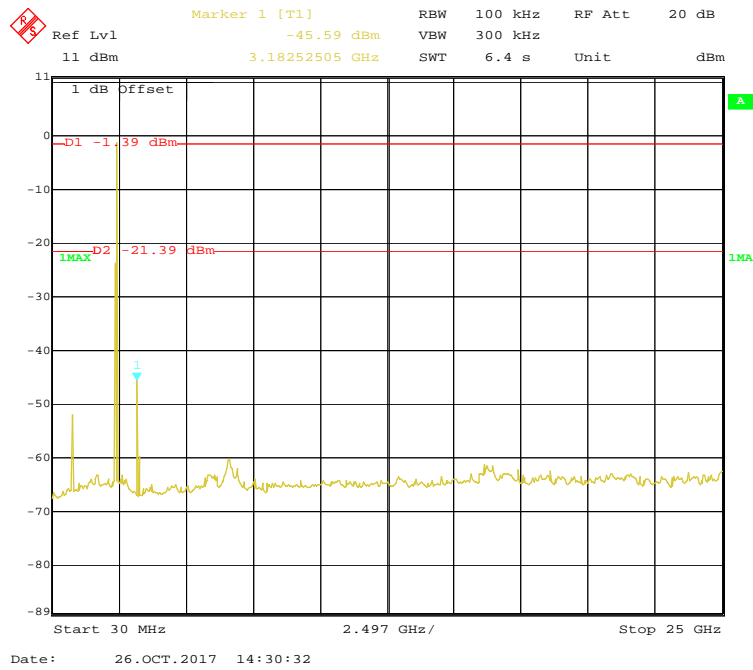

Middle Channel

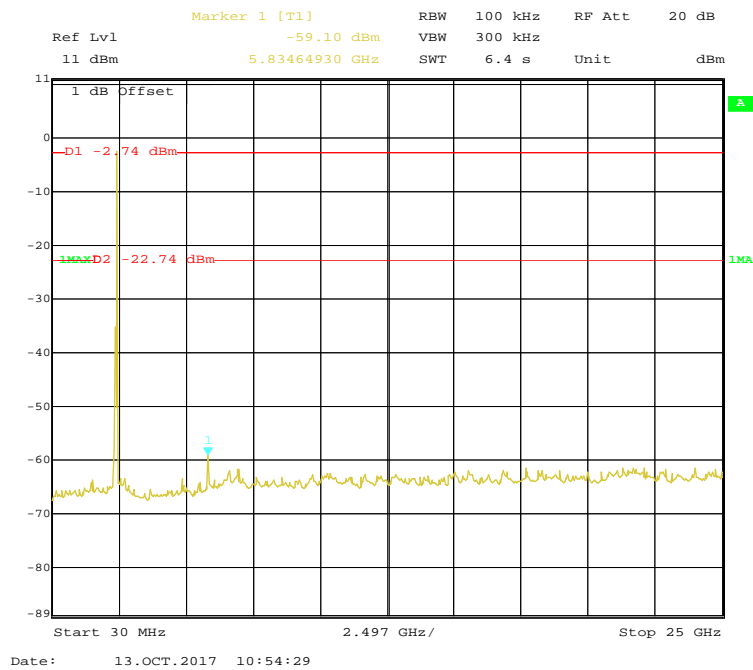

High Channel

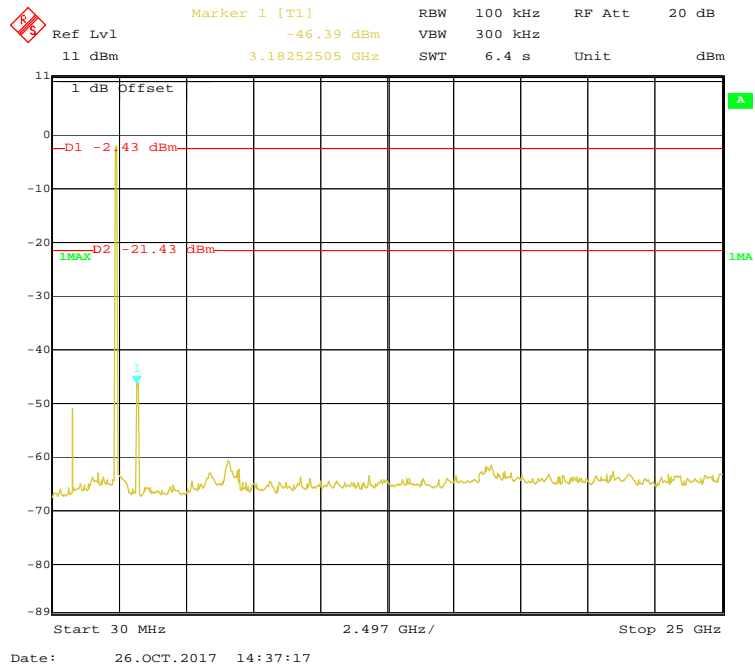


FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH

Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Data

Environmental Conditions

| | |
|---------------------------|-----------|
| Temperature: | 24 °C |
| Relative Humidity: | 55 % |
| ATM Pressure: | 101.0 kPa |


The testing was performed by Edison Hu on 2017-10-13.

Test Result: Pass.


EUT operation mode: Transmitting

| Channel | Frequency (MHz) | 6 dB Emission Bandwidth (MHz) | Limit (MHz) |
|---------|-----------------|-------------------------------|-------------|
| Low | 2402 | 0.727 | ≥ 0.5 |
| Middle | 2440 | 0.721 | ≥ 0.5 |
| High | 2480 | 0.721 | ≥ 0.5 |


Low Channel

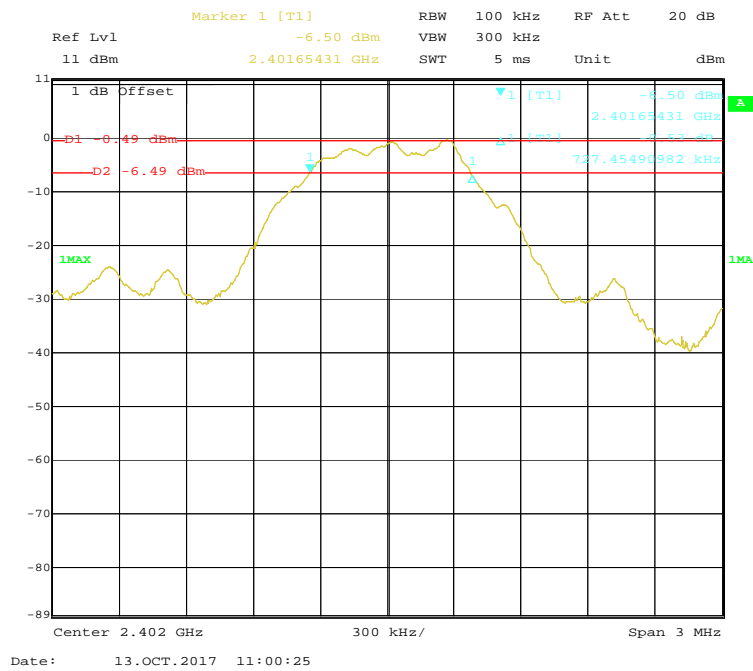

Middle Channel

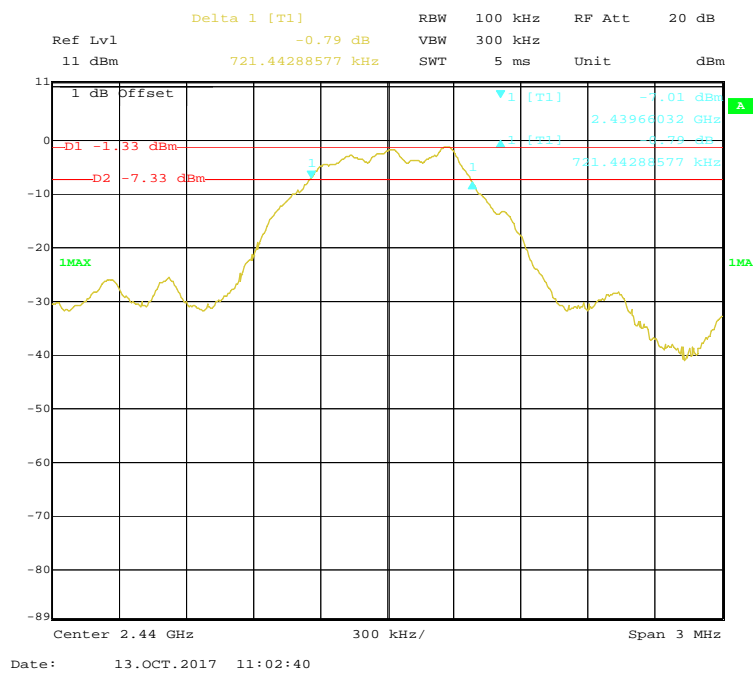

High Channel

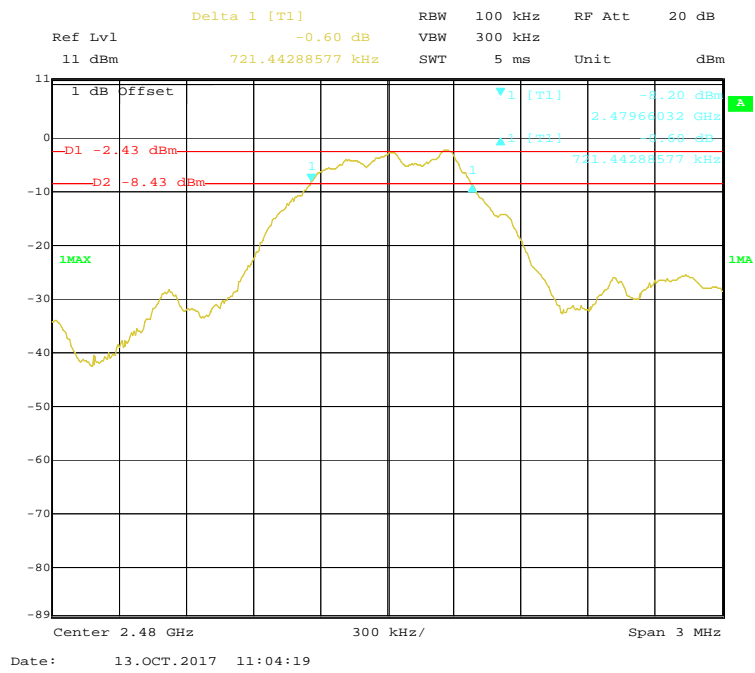

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Set the RBW \geq DTS bandwidth.
2. Set VBW \geq 3 x RBW.
3. Set span \geq 3 x RBW
4. Sweep time = auto couple.
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use peak marker function to determine the peak amplitude level.



Test Data

Environmental Conditions


| | |
|---------------------------|-----------|
| Temperature: | 23.8°C |
| Relative Humidity: | 54 % |
| ATM Pressure: | 101.2 kPa |

The testing was performed by Edison Hu on 2017-10-13.


EUT operation mode: Transmitting

| Channel | Frequency (MHz) | Max Conducted Peak Output Power (dBm) | Limit (dBm) | Result |
|---------|-----------------|---------------------------------------|-------------|--------|
| Low | 2402 | -0.56 | 30 | Pass |
| Middle | 2440 | -1.37 | 30 | Pass |
| High | 2480 | -2.35 | 30 | Pass |


Low Channel

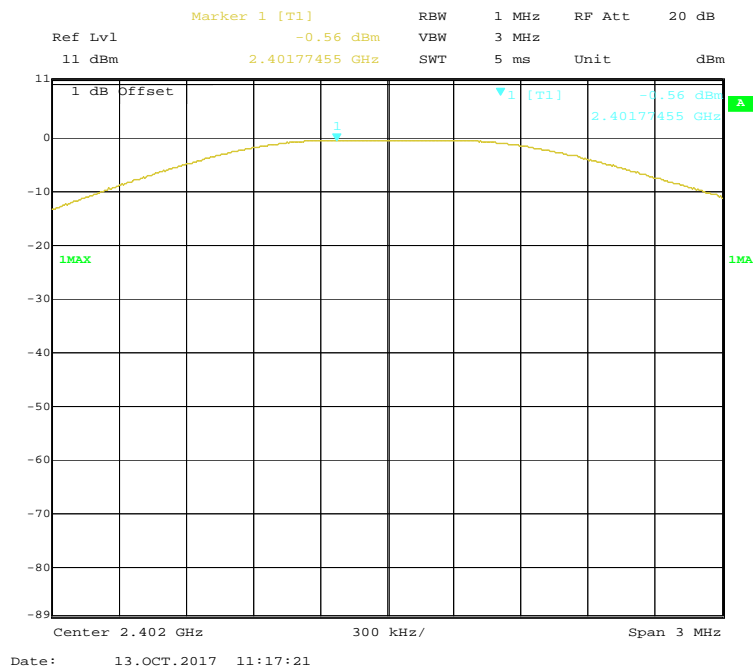

Middle Channel

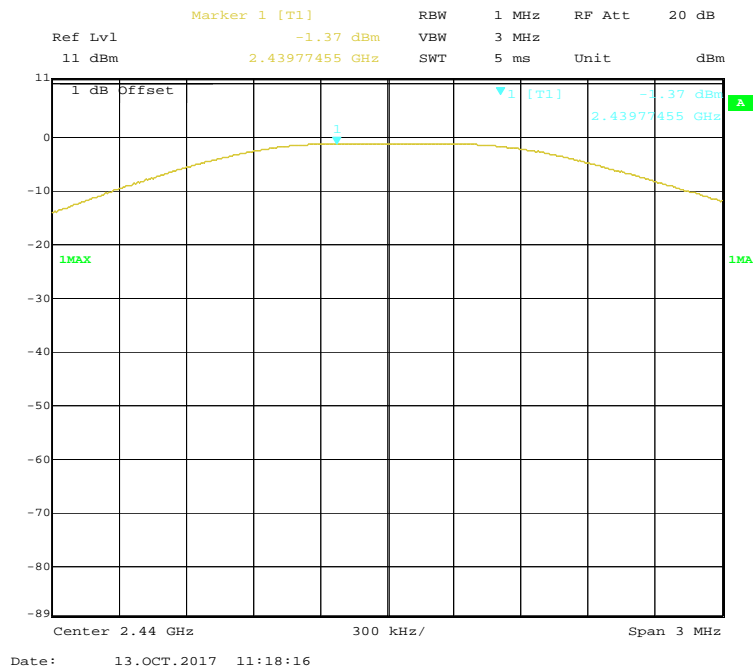

High Channel

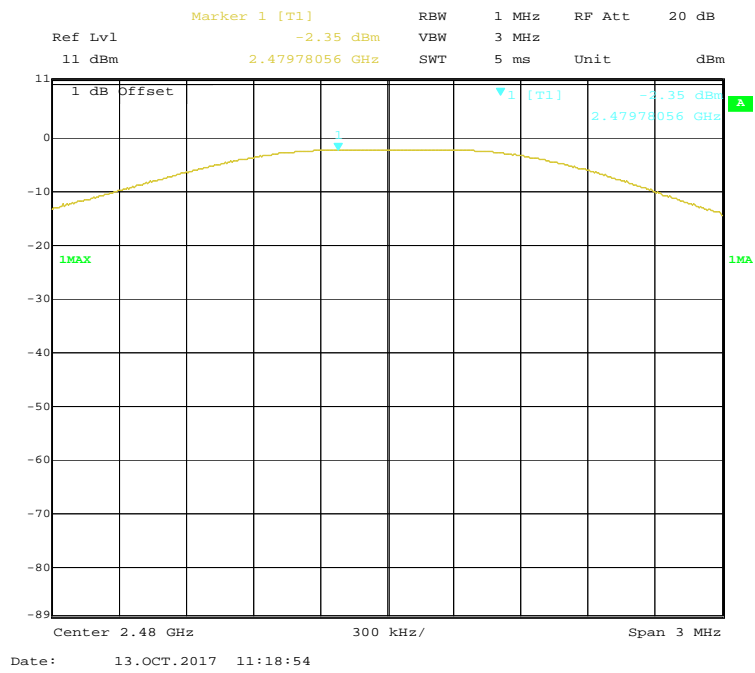

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions


| | |
|---------------------------|-----------|
| Temperature: | 24.3 °C |
| Relative Humidity: | 55 % |
| ATM Pressure: | 101.3 kPa |

The testing was performed by Edison Hu on 2017-10-13.


Test Result: *Compliance*

Band Edge

Left Side

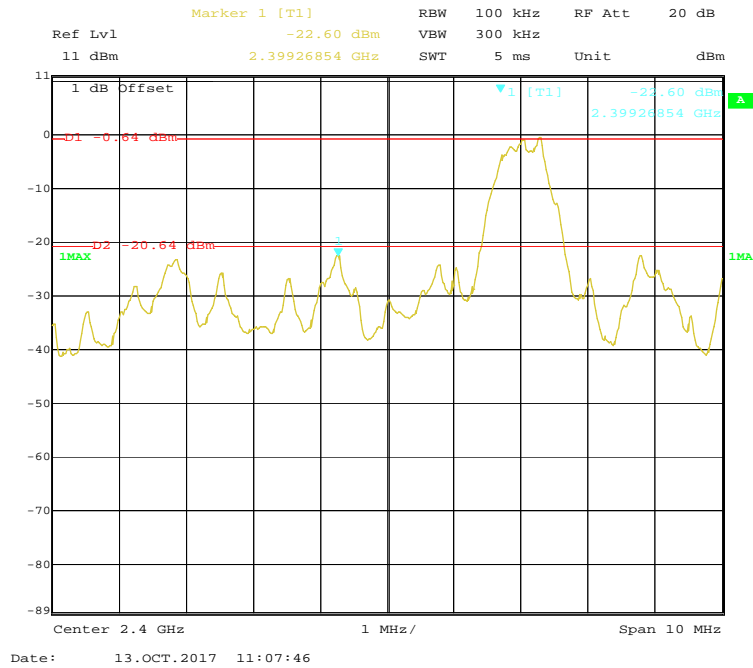

Right Side

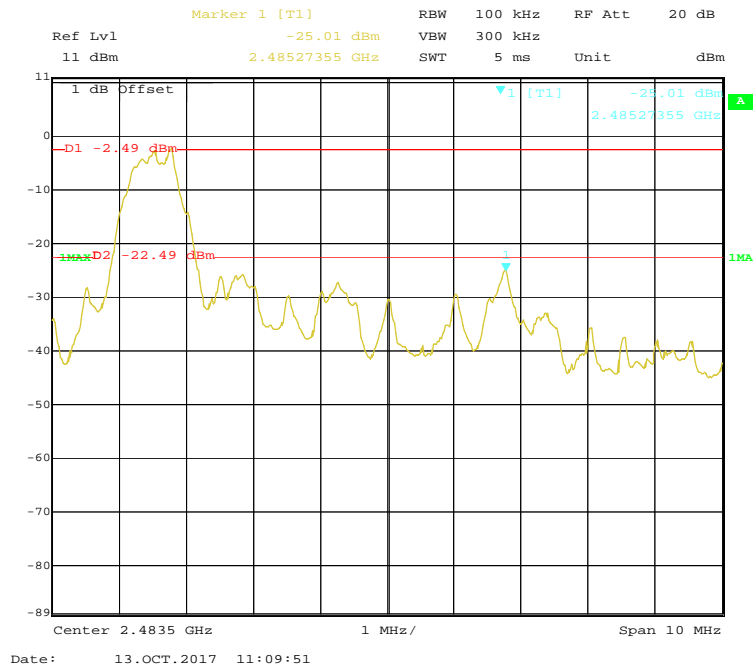

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to KDB558074 D01 DTS Meas Guidance v04.

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
3. Set the VBW $\geq 3 \times \text{RBW}$.
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Data

Environmental Conditions

| | |
|---------------------------|-----------|
| Temperature: | 24.1 °C |
| Relative Humidity: | 54 % |
| ATM Pressure: | 101.3 kPa |


The testing was performed by Edison Hu on 2017-10-13.

EUT operation mode: Transmitting


Test Result: Pass

| Channel | Frequency (MHz) | PSD (dBm/3kHz) | Limit (dBm/3kHz) |
|----------------|------------------------|-----------------------|-------------------------|
| Low | 2402 | -16.99 | ≤ 8 |
| Middle | 2440 | -17.83 | ≤ 8 |
| High | 2480 | -18.77 | ≤ 8 |


Low Channel

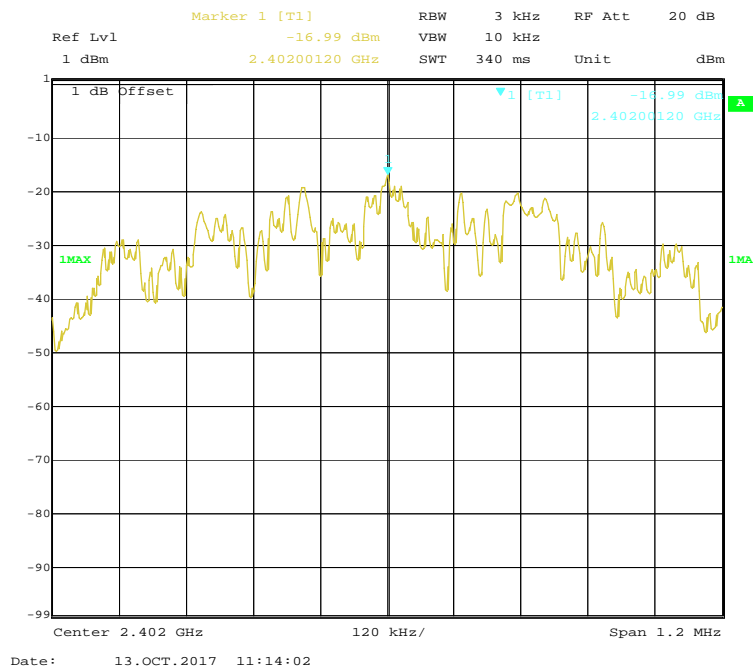

Middle Channel

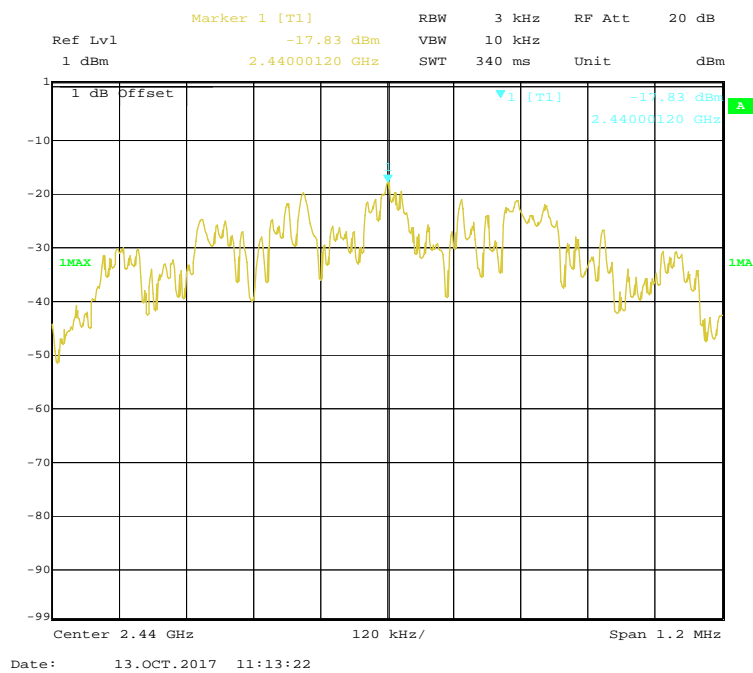

High Channel

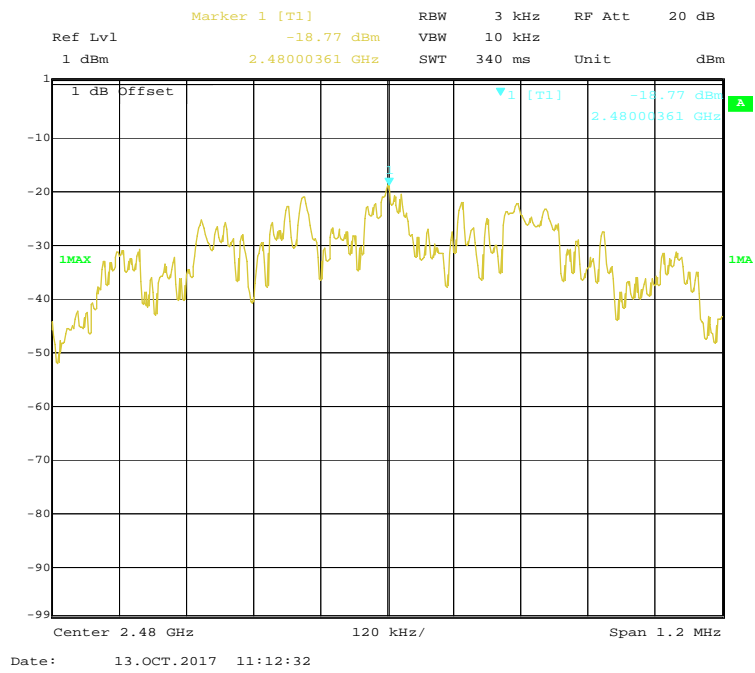

***** END OF REPORT *****