

## FCC Test Report

**Report No.:** RFBHJS-WTW-P21030983

**FCC ID:** PD5-LM-WESA04FR

**Test Model:** LM-WESA0440A

**Received Date:** Mar. 26, 2021

**Test Date:** Apr. 13 ~ Apr. 29, 2021

**Issued Date:** May 20, 2021

**Applicant:** Delta Electronics, Inc.

**Address:** 31-1 Shien Pan Rd., Kuei San Industrial Zone, Taoyuan City, 333 Taiwan

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Lin Kou Laboratories

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**Test Location:** No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City  
33383, Taiwan

**FCC Registration /  
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

## Table of Contents

<b>Release Control Record</b> .....	<b>4</b>
<b>1 Certificate of Conformity</b> .....	<b>5</b>
<b>2 Summary of Test Results</b> .....	<b>6</b>
2.1 Measurement Uncertainty .....	6
2.2 Modification Record .....	6
<b>3 General Information</b> .....	<b>7</b>
3.1 General Description of EUT .....	7
3.2 Description of Test Modes .....	9
3.2.1 Test Mode Applicability and Tested Channel Detail .....	10
3.3 Duty Cycle of Test Signal .....	12
3.4 Description of Support Units .....	13
3.4.1 Configuration of System under Test .....	13
3.5 General Description of Applied Standards and References .....	14
<b>4 Test Types and Results</b> .....	<b>15</b>
4.1 Radiated Emission and Bandedge Measurement .....	15
4.1.1 Limits of Radiated Emission and Bandedge Measurement .....	15
4.1.2 Test Instruments .....	16
4.1.3 Test Procedures .....	17
4.1.4 Deviation from Test Standard .....	18
4.1.5 Test Set Up .....	18
4.1.6 EUT Operating Conditions .....	19
4.1.7 Test Results .....	20
4.2 Conducted Emission Measurement .....	36
4.2.1 Limits of Conducted Emission Measurement .....	36
4.2.2 Test Instruments .....	36
4.2.3 Test Procedures .....	37
4.2.4 Deviation from Test Standard .....	37
4.2.5 Test Setup .....	37
4.2.6 EUT Operating Conditions .....	37
4.2.7 Test Results .....	38
4.3 6 dB Bandwidth Measurement .....	42
4.3.1 Limits of 6 dB Bandwidth Measurement .....	42
4.3.2 Test Setup .....	42
4.3.3 Test Instruments .....	42
4.3.4 Test Procedure .....	42
4.3.5 Deviation from Test Standard .....	42
4.3.6 EUT Operating Conditions .....	42
4.3.7 Test Results .....	43
4.4 Occupied Bandwidth Measurement .....	45
4.4.1 Test Setup .....	45
4.4.2 Test Instruments .....	45
4.4.3 Test Procedure .....	45
4.4.4 Deviation from Test Standard .....	45
4.4.5 EUT Operating Conditions .....	45
4.4.6 Test Results .....	46
4.5 Conducted Output Power Measurement .....	48
4.5.1 Limits of Conducted Output Power Measurement .....	48
4.5.2 Test Setup .....	48
4.5.3 Test Instruments .....	48
4.5.4 Test Procedures .....	48
4.5.5 Deviation from Test Standard .....	48
4.5.6 EUT Operating Conditions .....	48
4.5.7 Test Results .....	49

4.6	Power Spectral Density Measurement .....	51
4.6.1	Limits of Power Spectral Density Measurement.....	51
4.6.2	Test Setup.....	51
4.6.3	Test Instruments .....	51
4.6.4	Test Procedure .....	51
4.6.5	Deviation from Test Standard .....	52
4.6.6	EUT Operating Condition .....	52
4.6.7	Test Results .....	53
4.7	Conducted Out of Band Emission Measurement .....	56
4.7.1	Limits of Conducted Out of Band Emission Measurement.....	56
4.7.2	Test Setup.....	56
4.7.3	Test Instruments .....	56
4.7.4	Test Procedure .....	56
4.7.5	Deviation from Test Standard .....	56
4.7.6	EUT Operating Condition .....	56
4.7.7	Test Results .....	57
<b>5</b>	<b>Pictures of Test Arrangements.....</b>	<b>73</b>
	<b>Annex A- Band Edge Measurement .....</b>	<b>74</b>
	<b>Appendix – Information of the Testing Laboratories .....</b>	<b>78</b>

### Release Control Record

Issue No.	Description	Date Issued
RFBHJS-WTW-P21030983	Original Release	May 20, 2021

## 1 Certificate of Conformity

**Product:** 802.11 b/g/n/ac WIFI AP

**Test Model:** LM-WESA0440A

**Sample Status:** Engineering Sample


**Applicant:** Delta Electronics, Inc.

**Test Date:** Apr. 13 ~ Apr. 29, 2021

**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.247)  
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

**Prepared by :** , **Date:** May 20, 2021  
Gina Liu / Specialist

**Approved by :** , **Date:** May 20, 2021  
Dylan Chiou / Senior Project Engineer

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -10.38 dB at 0.28527 MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -0.60 dB at 2390.00 MHz.
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.247(a)(2)	6 dB Bandwidth	Pass	Meet the requirement of limit.
---	Occupied Bandwidth Measurement	Pass	Reference only
15.247(b)	Conducted power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is I-PEX not a standard connector.

Note:

- For 2.4G band compliance with rule 15.247(d) of the band-edge items, the test plots were recorded in Annex A. Test Procedures refer to report 4.1.3.
- Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150 kHz ~ 30 MHz	2.79 dB
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	3.04 dB
	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

<b>Product</b>	802.11 b/g/n/ac WIFI AP
<b>Test Model</b>	LM-WESA0440A
<b>Status of EUT</b>	Engineering Sample
<b>Power Supply Rating</b>	12Vdc from adapter 42.5Vdc-57Vdc from PoE
<b>Modulation Type</b>	CCK, DQPSK, DBPSK for DSSS 256QAM, 64QAM, 16QAM, QPSK, BPSK for OFDM
<b>Modulation Technology</b>	DSSS, OFDM
<b>Transfer Rate</b>	802.11b: 11.0 / 5.5 / 2.0 / 1.0 Mbps 802.11g: 54.0 / 48.0 / 36.0 / 24.0 / 18.0 / 12.0 / 9.0 / 6.0 Mbps 802.11n: up to 600.0 Mbps
<b>Operating Frequency</b>	2412 ~ 2462 MHz
<b>Number of Channel</b>	11 for 802.11b, 802.11g, 802.11n (HT20) 7 for 802.11n (HT40)
<b>Output Power</b>	CDD Mode:860.299 mW Beamforming Mode: 428.801 mW
<b>Antenna Type</b>	Refer to Note as below
<b>Antenna Connector</b>	Refer to Note as below
<b>Accessory Device</b>	NA
<b>Data Cable Supplied</b>	NA

Note:

1. The EUT incorporates a MIMO function. Physically, the EUT provides 4 completed transmitters and 4 receivers.

Band	Modulation Mode	Beamforming Mode	TX Function
2.4GHz	802.11b	Not Support	4TX
	802.11g	Not Support	4TX
	802.11n (HT20)	Support (CDD / Nss=1 / Nss=2)	4TX
	802.11n (HT40)	Support (CDD / Nss=1 / Nss=2)	4TX
5GHz	802.11a	Not Support	4TX
	802.11n (HT20)	Support (CDD / Nss=1 / Nss=2)	4TX
	802.11n (HT40)	Support (CDD / Nss=1 / Nss=2)	4TX
	802.11ac (VHT80)	Support (CDD / Nss=1 / Nss=2)	4TX
	802.11ac (VHT80+VHT80)	Support (CDD / Nss=1)	2TX+2TX

\* For 802.11a/b/g, the EUT doesn't support Beamforming mode.

\* The modulation and bandwidth are similar for 802.11n mode for 20MHz / 40MHz and 802.11ac mode for V20MHz / V40MHz, therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)

\* For 5GHz band 802.11n and 802.11ac, after pre-tested two modes (with beamforming mode Nss=1 / 2 and CDD mode) found CDD mode was the worst, therefore chosen for final test for radiated emission and power line conducted emission test and presented in the test report.

2. The EUT uses following antennas.

<b>Antenna Type</b>	PCB PIFA							
<b>Antenna Connector</b>	I-PEX							
<b>Antenna Gain (dBi)</b>								
	<b>2400</b>	<b>2450</b>	<b>2500</b>	<b>5150</b>	<b>5320</b>	<b>5550</b>	<b>5700</b>	<b>5850</b>
Ant. 1	3.22	3.62	3.56	3.17	3.32	3.47	3.39	3.77
Ant. 2	3.45	3.48	3.32	3.01	3.18	3.31	3.52	3.70
Ant. 3	3.15	3.38	3.08	2.97	2.91	3.36	3.55	3.68
Ant. 4	3.01	3.23	3.15	2.86	3.10	3.39	3.34	3.71

3. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.
4. The EUT uses following adapter & PoE.

<b>Adapter (Support unit)</b>	
<b>Brand</b>	NETGEAR
<b>Model</b>	2ABL030F2 AU
<b>Input Power</b>	220-240Vac~50/60Hz 1.0A
<b>Output Power</b>	12.0Vdc / 2.5A
<b>Power Line</b>	1.8m DC cable without core attached on adapter

<b>PoE (Support unit)</b>	
<b>Brand</b>	PowerDsine
<b>Model</b>	PD-3501G/AC
<b>Input Power</b>	100-240Vac~,50/60Hz, 0.5A
<b>Output Power</b>	48Vdc, 0.35A

5. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.



### 3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437		

7 channels are provided for 802.11n (HT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	7	2442
4	2427	8	2447
5	2432	9	2452
6	2437		

### 3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable To				Description
	RE $\geq$ 1G	RE<1G	PLC	APCM	
A	√	√	√	√	Power from adapter
B	-	√	√	-	Power from PoE

Where **RE $\geq$ 1G**: Radiated Emission above 1 GHz      **RE<1G**: Radiated Emission below 1 GHz  
**PLC**: Power Line Conducted Emission      **APCM**: Antenna Port Conducted Measurement

**NOTE:** The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Z-plane**.  
**NOTE:** "-" means no effect.

#### **Radiated Emission Test (Above 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

#### **Radiated Emission Test (Below 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A, B	802.11g	1 to 11	1	OFDM	BPSK	6.0

#### **Power Line Conducted Emission Test:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A, B	802.11g	1 to 11	1	OFDM	BPSK	6.0

### **Bandedge Measurement:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11b	1 to 11	1, 11	DSSS	DBPSK	1.0
	802.11g	1 to 11	1, 11	OFDM	BPSK	6.0
	802.11n (HT20)	1 to 11	1, 11	OFDM	BPSK	6.5
	802.11n (HT40)	3 to 9	3, 9	OFDM	BPSK	13.5

### **Antenna Port Conducted Measurement:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

### **Test Condition:**

Applicable To	Environmental Conditions	Input Power	Tested by
RE $\geq$ 1G	22 deg. C, 68 % RH	120 Vac, 60 Hz	Edison Lee
RE<1G	23 deg. C, 66 % RH	120 Vac, 60 Hz	Titan Hsu
PLC	24 deg. C, 69 % RH	120 Vac, 60 Hz	Edison Lee
APCM	25 deg. C, 60 % RH	120 Vac, 60 Hz	Ivan Tseng

### 3.3 Duty Cycle of Test Signal

**802.11b:** Duty cycle =  $12.275/12.425 = 0.988$ , Duty cycle of test signal is  $\geq 98\%$ , duty factor is not required.  
 Duty cycle of test signal is  $< 98\%$ , duty factor shall be considered.

**802.11g:** Duty cycle =  $2.045/2.14 = 0.956$ , Duty factor =  $10 * \log(1/0.956) = 0.20$

**802.11n (HT20):** Duty cycle =  $4.963/5.075 = 0.978$ , Duty factor =  $10 * \log(1/0.978) = 0.10$

**802.11n (HT40):** Duty cycle =  $2.43/2.555 = 0.951$ , Duty factor =  $10 * \log(1/0.951) = 0.22$



### 3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Notebook	DELL	E5410	6RP2YM1	FCC DoC Approved	-
B.	Load	N/A	N/A	N/A	N/A	-
C.	PoE	ZyXEL	PoE12-HP	N/A	N/A	Provided by client
D.	Adapter	DELTA	ADP-30HW B	N/A	N/A	Provided by client


Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item A acted as a communication partner to transfer data.


ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RJ45 cable	1	10	N	0	-
2.	RJ45 cable	4	1.5	N	0	-
3.	RJ45 cable	1	1.8	N	0	-

#### 3.4.1 Configuration of System under Test

Test Mode A

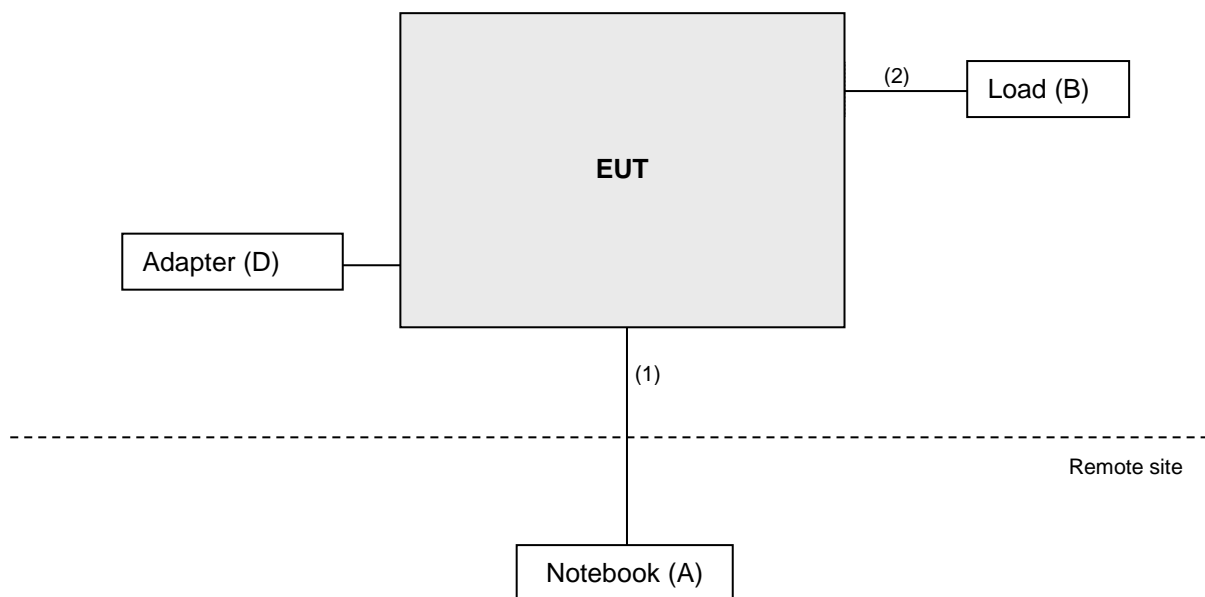

Test Mode B

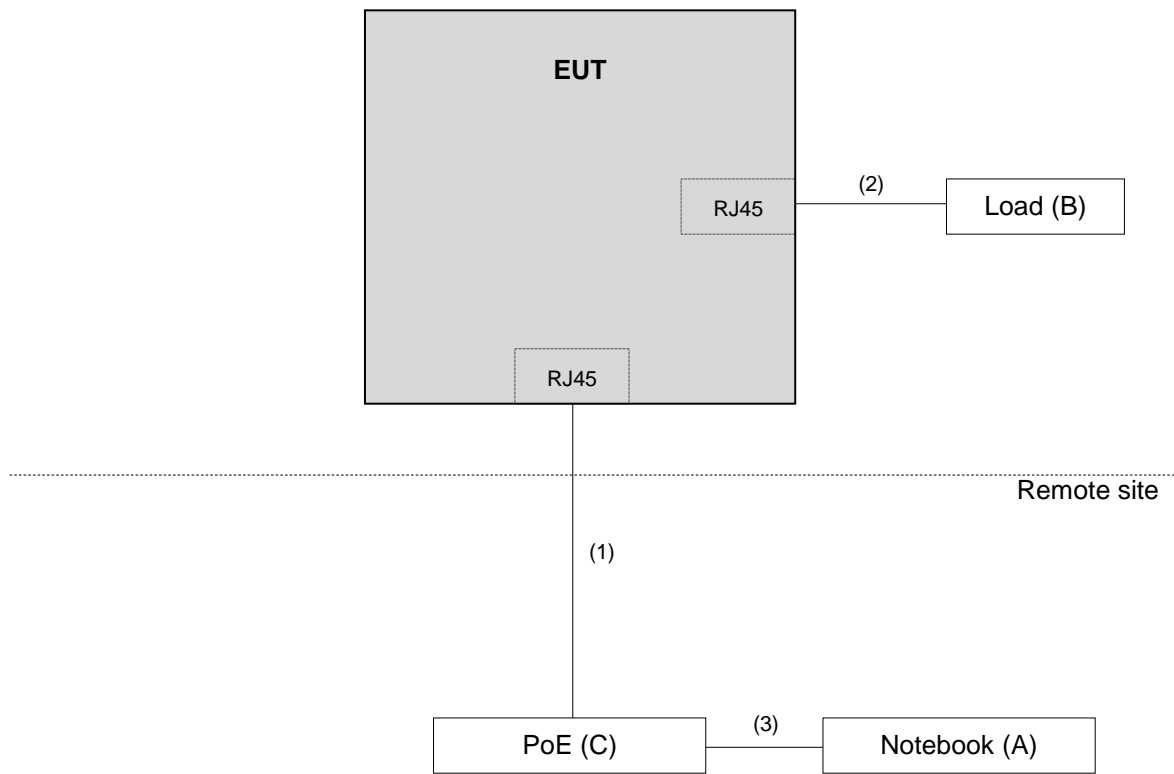

### 3.5 General Description of Applied Standards and References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

**Test Standard:**

**FCC Part 15, Subpart C (15.247)**

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

**References Test Guidance:**

**KDB 558074 D01 Meas Guidance v05r02**

**KDB 662911 D01 Multiple Transmitter Output v02r01**

All test items have been performed as a reference to the above KDB test guidance.

## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

## 4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver ROHDE & SCHWARZ	ESR3	102579	Jul. 07, 2020	Jul. 06, 2021
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100269	Jun. 09, 2020	Jun. 08, 2021
BILOG Antenna SCHWARZBECK	VULB9168	9168-171	Nov. 04, 2020	Nov. 03, 2021
HORN Antenna SCHWARZBECK	9120D	209	Nov. 22, 2020	Nov. 21, 2021
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Nov. 22, 2020	Nov. 21, 2021
Loop Antenna EMCI	EM-6879	269	Sep. 17, 2020	Sep. 16, 2021
Preamplifier Agilent (Below 1GHz)	8447D	2944A10738	Aug. 16, 2020	Aug. 15, 2021
Preamplifier Agilent (Above 1GHz)	8449B	3008A02465	Mar. 22, 2021	Mar. 21, 2022
RF Coaxial Cable WOKEN With 5dB PAD	8D-FB	Cable-CH3-01	Aug. 16, 2020	Aug. 15, 2021
RF signal cable HUBER+SUHNER	SUCOFLEX 104	Cable-CH3-03 (223653/4)	Aug. 16, 2020	Aug. 15, 2021
RF signal cable HUBER+SUHNER& EMCI	SUCOFLEX 104&EMC104-SM- SM-8000	Cable-CH3-03 (309224+170907)	Aug. 16, 2020	Aug. 15, 2021
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller BV ADT	AT100	AT93021702	NA	NA
Turn Table BV ADT	TT100	TT93021702	NA	NA
Turn Table Controller BV ADT	SC100	SC93021702	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Pre-amplifier (18GHz-40GHz) EMC	EMC184045B	980175	Sep. 04, 2020	Sep. 03, 2021
USB Wideband Power Sensor KEYSIGHT	U2021XA	MY55050005/MY55 190004/MY551900 07/MY55210005	Jul. 13, 2020	Jul. 12, 2021

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 3.



#### 4.1.3 Test Procedures

##### **For Radiated Emission below 30 MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

##### **Note:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30 MHz.

##### **For Radiated Emission above 30 MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30 MHz ~ 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

##### **Note:**


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) or Peak detection (PK) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98 %) or 10 Hz (Duty cycle  $\geq 98$  %) for Average detection (AV) at frequency above 1 GHz.  
(11b: RBW = 1 MHz, VBW = 10 Hz ; 11g: RBW = 1 MHz, VBW = 1 kHz ;  
11n (HT20): RBW = 1 MHz, VBW = 1 kHz ; 11n (HT40): RBW = 1 MHz, VBW = 1 kHz)
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Set Up


<Radiated Emission below 30 MHz>

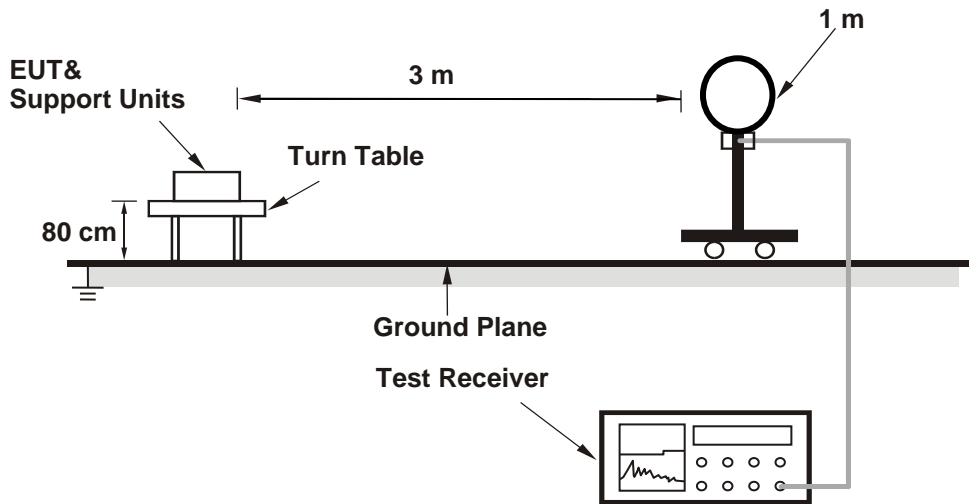

<Radiated Emission 30 MHz to 1 GHz>

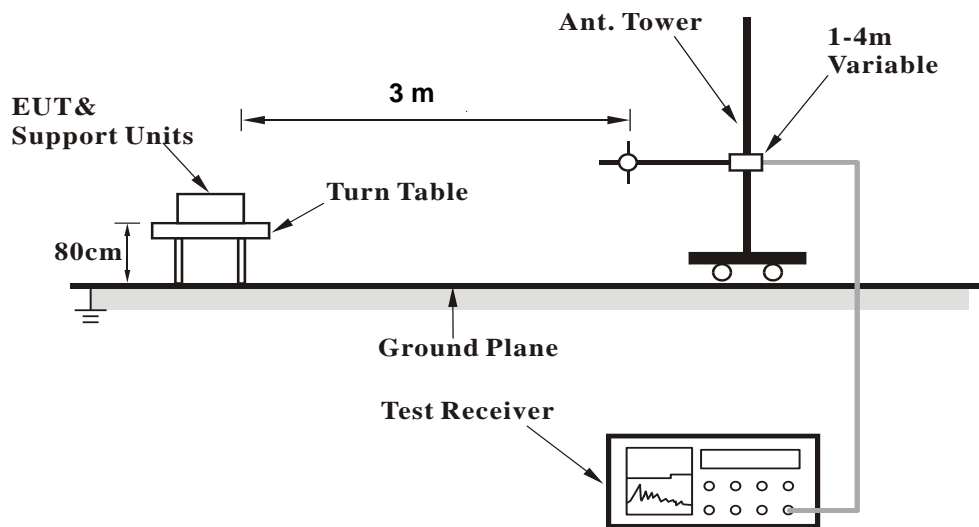

**<Radiated Emission above 1 GHz>**

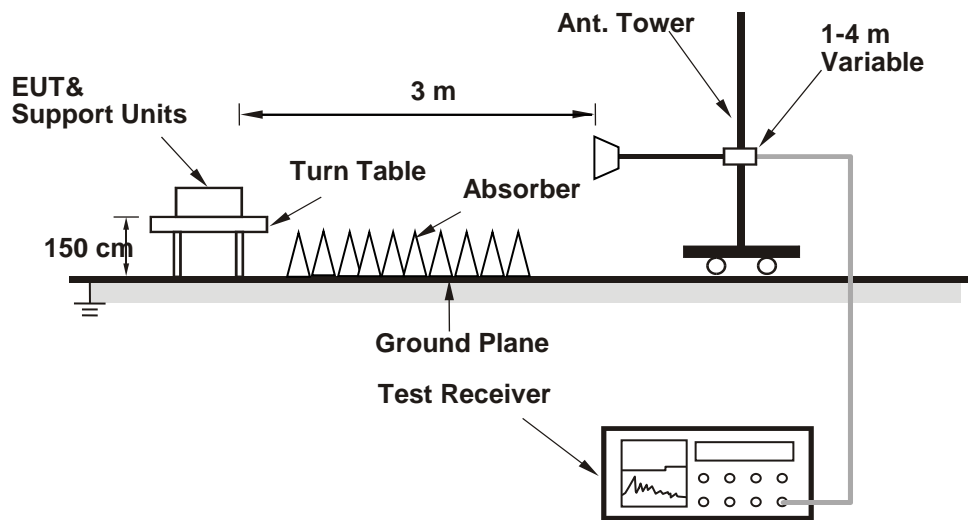

For the actual test configuration, please refer to the attached file (Test Setup Photo).

**4.1.6 EUT Operating Conditions**

- a. Placed the EUT on a testing table.
- b. Use the software to control the EUT under transmission condition continuously at specific channel frequency.

#### 4.1.7 Test Results

#### Above 1 GHz Data :

#### ABOVE 1GHz DATA

<b>RF Mode</b>	TX 802.11b	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1GHz ~ 25GHz	<b>Detector Function</b>	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	63.2 PK	74.0	-10.8	2.35 H	3	28.8	34.4
2	2390.00	53.4 AV	54.0	-0.6	2.35 H	3	19.0	34.4
3	*2412.00	119.9 PK			2.35 H	3	85.6	34.3
4	*2412.00	117.4 AV			2.35 H	3	83.1	34.3
5	4824.00	48.7 PK	74.0	-25.3	1.60 H	181	42.3	6.4
6	4824.00	40.2 AV	54.0	-13.8	1.60 H	181	33.8	6.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	63.3 PK	74.0	-10.7	1.53 V	33	28.9	34.4
2	2390.00	53.0 AV	54.0	-1.0	1.53 V	33	18.6	34.4
3	*2412.00	118.8 PK			1.53 V	33	84.5	34.3
4	*2412.00	116.4 AV			1.53 V	33	82.1	34.3
5	4824.00	48.6 PK	74.0	-25.4	1.54 V	144	42.2	6.4
6	4824.00	40.1 AV	54.0	-13.9	1.54 V	144	33.7	6.4

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

<b>RF Mode</b>	TX 802.11b	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1GHz ~ 25GHz	<b>Detector Function</b>	Peak (PK) Average (AV)

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	120.3 PK			2.03 H	349	86.0	34.3
2	*2437.00	117.9 AV			2.03 H	349	83.6	34.3
3	4874.00	49.3 PK	74.0	-24.7	1.66 H	183	43.5	5.8
4	4874.00	42.6 AV	54.0	-11.4	1.66 H	183	36.8	5.8

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	119.3 PK			1.47 V	42	85.0	34.3
2	*2437.00	116.7 AV			1.47 V	42	82.4	34.3
3	4874.00	49.8 PK	74.0	-24.2	1.24 V	136	44.0	5.8
4	4874.00	42.6 AV	54.0	-11.4	1.24 V	136	36.8	5.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

<b>RF Mode</b>	TX 802.11b	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1GHz ~ 25GHz	<b>Detector Function</b>	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	119.3 PK			1.78 H	349	84.9	34.4
2	*2462.00	116.4 AV			1.78 H	349	82.0	34.4
3	2483.50	62.9 PK	74.0	-11.1	1.78 H	349	28.5	34.4
4	2483.50	52.4 AV	54.0	-1.6	1.78 H	349	18.0	34.4
5	4924.00	48.3 PK	74.0	-25.7	1.66 H	187	42.6	5.7
6	4924.00	39.8 AV	54.0	-14.2	1.66 H	187	34.1	5.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	119.0 PK			2.18 V	56	84.6	34.4
2	*2462.00	116.5 AV			2.18 V	56	82.1	34.4
3	2483.50	62.4 PK	74.0	-11.6	2.18 V	56	28.0	34.4
4	2483.50	52.6 AV	54.0	-1.4	2.18 V	56	18.2	34.4
5	4924.00	48.8 PK	74.0	-25.2	1.24 V	136	43.1	5.7
6	4924.00	41.8 AV	54.0	-12.2	1.24 V	136	36.1	5.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

<b>RF Mode</b>	TX 802.11g	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1GHz ~ 25GHz	<b>Detector Function</b>	Peak (PK) Average (AV)

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.8 PK	74.0	-8.2	1.42 H	350	31.4	34.4
2	2390.00	52.5 AV	54.0	-1.5	1.42 H	350	18.1	34.4
3	*2412.00	118.2 PK			1.42 H	350	83.9	34.3
4	*2412.00	108.3 AV			1.42 H	350	74.0	34.3
5	4824.00	47.0 PK	74.0	-27.0	1.83 H	166	40.6	6.4
6	4824.00	35.0 AV	54.0	-19.0	1.83 H	166	28.6	6.4

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.8 PK	74.0	-7.2	1.98 V	42	32.4	34.4
<b>2</b>	<b>2390.00</b>	<b>53.4 AV</b>	<b>54.0</b>	<b>-0.6</b>	<b>1.98 V</b>	<b>42</b>	<b>19.0</b>	<b>34.4</b>
3	*2412.00	117.2 PK			1.98 V	42	82.9	34.3
4	*2412.00	107.3 AV			1.98 V	42	73.0	34.3
5	4824.00	47.4 PK	74.0	-26.6	1.22 V	138	41.0	6.4
6	4824.00	35.0 AV	54.0	-19.0	1.22 V	138	28.6	6.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

<b>RF Mode</b>	TX 802.11g	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1GHz ~ 25GHz	<b>Detector Function</b>	Peak (PK) Average (AV)

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	121.6 PK			2.00 H	353	87.3	34.3
2	*2437.00	111.3 AV			2.00 H	353	77.0	34.3
3	4874.00	46.7 PK	74.0	-27.3	1.70 H	199	40.9	5.8
4	4874.00	33.8 AV	54.0	-20.2	1.70 H	199	28.0	5.8

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	121.2 PK			1.89 V	45	86.9	34.3
2	*2437.00	111.3 AV			1.89 V	45	77.0	34.3
3	4874.00	46.3 PK	74.0	-27.7	1.33 V	150	40.5	5.8
4	4874.00	34.8 AV	54.0	-19.2	1.33 V	150	29.0	5.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.



<b>RF Mode</b>	TX 802.11g	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1GHz ~ 25GHz	<b>Detector Function</b>	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	118.9 PK			1.96 H	352	84.5	34.4
2	*2462.00	108.8 AV			1.96 H	352	74.4	34.4
3	2483.50	62.8 PK	74.0	-11.2	1.96 H	352	28.4	34.4
4	2483.50	51.3 AV	54.0	-2.7	1.96 H	352	16.9	34.4
5	4924.00	46.9 PK	74.0	-27.1	1.69 H	194	41.2	5.7
6	4924.00	33.3 AV	54.0	-20.7	1.69 H	194	27.6	5.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	118.5 PK			1.88 V	46	84.1	34.4
2	*2462.00	108.9 AV			1.88 V	46	74.5	34.4
3	2483.50	65.6 PK	74.0	-8.4	1.88 V	46	31.2	34.4
4	2483.50	52.8 AV	54.0	-1.2	1.88 V	46	18.4	34.4
5	4924.00	46.8 PK	74.0	-27.2	1.22 V	148	41.1	5.7
6	4924.00	34.0 AV	54.0	-20.0	1.22 V	148	28.3	5.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

<b>RF Mode</b>	TX 802.11n (HT20)	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1GHz ~ 25GHz	<b>Detector Function</b>	Peak (PK) Average (AV)

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	63.7 PK	74.0	-10.3	1.66 H	344	29.3	34.4
2	2390.00	50.4 AV	54.0	-3.6	1.66 H	344	16.0	34.4
3	*2412.00	118.9 PK			1.66 H	344	84.6	34.3
4	*2412.00	108.1 AV			1.66 H	344	73.8	34.3
5	4824.00	47.8 PK	74.0	-26.2	1.77 H	201	41.4	6.4
6	4824.00	34.5 AV	54.0	-19.5	1.77 H	201	28.1	6.4

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.4 PK	74.0	-8.6	1.81 V	33	31.0	34.4
2	2390.00	52.9 AV	54.0	-1.1	1.81 V	33	18.5	34.4
3	*2412.00	115.8 PK			1.81 V	33	81.5	34.3
4	*2412.00	105.3 AV			1.81 V	33	71.0	34.3
5	4824.00	47.3 PK	74.0	-26.7	1.27 V	145	40.9	6.4
6	4824.00	34.5 AV	54.0	-19.5	1.27 V	145	28.1	6.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

<b>RF Mode</b>	TX 802.11n (HT20)	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1GHz ~ 25GHz	<b>Detector Function</b>	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	121.8 PK			1.77 H	350	87.5	34.3
2	*2437.00	111.3 AV			1.77 H	350	77.0	34.3
3	4874.00	46.1 PK	74.0	-27.9	1.59 H	190	40.3	5.8
4	4874.00	34.0 AV	54.0	-20.0	1.59 H	190	28.2	5.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	121.2 PK			1.82 V	37	86.9	34.3
2	*2437.00	110.8 AV			1.82 V	37	76.5	34.3
3	4874.00	46.4 PK	74.0	-27.6	1.30 V	142	40.6	5.8
4	4874.00	33.7 AV	54.0	-20.3	1.30 V	142	27.9	5.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

<b>RF Mode</b>	TX 802.11n (HT20)	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1GHz ~ 25GHz	<b>Detector Function</b>	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	119.4 PK			2.00 H	342	85.0	34.4
2	*2462.00	108.9 AV			2.00 H	342	74.5	34.4
3	2483.50	64.4 PK	74.0	-9.6	2.00 H	342	30.0	34.4
4	2483.50	51.4 AV	54.0	-2.6	2.00 H	342	17.0	34.4
5	4924.00	47.7 PK	74.0	-26.3	1.67 H	186	42.0	5.7
6	4924.00	33.6 AV	54.0	-20.4	1.67 H	186	27.9	5.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	118.5 PK			2.16 V	40	84.1	34.4
2	*2462.00	108.2 AV			2.16 V	40	73.8	34.4
3	2483.50	68.2 PK	74.0	-5.8	2.16 V	40	33.8	34.4
4	2483.50	53.1 AV	54.0	-0.9	2.16 V	40	18.7	34.4
5	4924.00	46.8 PK	74.0	-27.2	1.44 V	158	41.1	5.7
6	4924.00	33.8 AV	54.0	-20.2	1.44 V	158	28.1	5.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

<b>RF Mode</b>	TX 802.11n (HT40)	<b>Channel</b>	CH 3 : 2422 MHz
<b>Frequency Range</b>	1GHz ~ 25GHz	<b>Detector Function</b>	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.2 PK	74.0	-7.8	1.80 H	353	31.8	34.4
2	2390.00	53.1 AV	54.0	-0.9	1.80 H	353	18.7	34.4
3	*2422.00	111.9 PK			1.80 H	353	77.6	34.3
4	*2422.00	101.7 AV			1.80 H	353	67.4	34.3
5	4844.00	47.2 PK	74.0	-26.8	1.71 H	193	41.1	6.1
6	4844.00	34.3 AV	54.0	-19.7	1.71 H	193	28.2	6.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.8 PK	74.0	-8.2	1.95 V	33	31.4	34.4
2	2390.00	52.5 AV	54.0	-1.5	1.95 V	33	18.1	34.4
3	*2422.00	109.8 PK			1.95 V	33	75.5	34.3
4	*2422.00	100.7 AV			1.95 V	33	66.4	34.3
5	4844.00	47.3 PK	74.0	-26.7	1.23 V	144	41.2	6.1
6	4844.00	33.8 AV	54.0	-20.2	1.23 V	144	27.7	6.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

<b>RF Mode</b>	TX 802.11n (HT40)	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1GHz ~ 25GHz	<b>Detector Function</b>	Peak (PK) Average (AV)

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	63.6 PK	74.0	-10.4	1.83 H	347	29.2	34.4
2	2390.00	50.8 AV	54.0	-3.2	1.83 H	347	16.4	34.4
3	*2437.00	113.9 PK			1.83 H	347	79.6	34.3
4	*2437.00	104.3 AV			1.83 H	347	70.0	34.3
5	4874.00	46.6 PK	74.0	-27.4	1.56 H	192	40.8	5.8
6	4874.00	33.7 AV	54.0	-20.3	1.56 H	192	27.9	5.8

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.2 PK	74.0	-7.8	1.25 V	49	31.8	34.4
2	2390.00	52.6 AV	54.0	-1.4	1.25 V	49	18.2	34.4
3	*2437.00	113.0 PK			1.25 V	49	78.7	34.3
4	*2437.00	103.3 AV			1.25 V	49	69.0	34.3
5	4874.00	47.1 PK	74.0	-26.9	1.31 V	159	41.3	5.8
6	4874.00	33.7 AV	54.0	-20.3	1.31 V	159	27.9	5.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

<b>RF Mode</b>	TX 802.11n (HT40)	<b>Channel</b>	CH 9 : 2452 MHz
<b>Frequency Range</b>	1GHz ~ 25GHz	<b>Detector Function</b>	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	113.5 PK			1.80 H	345	79.2	34.3
2	*2452.00	103.7 AV			1.80 H	345	69.4	34.3
3	2483.50	65.6 PK	74.0	-8.4	1.80 H	345	31.2	34.4
4	2483.50	52.7 AV	54.0	-1.3	1.80 H	345	18.3	34.4
5	4904.00	46.9 PK	74.0	-27.1	1.67 H	189	41.3	5.6
6	4904.00	33.3 AV	54.0	-20.7	1.67 H	189	27.7	5.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	111.7 PK			1.53 V	35	77.4	34.3
2	*2452.00	102.7 AV			1.53 V	35	68.4	34.3
3	2483.50	65.8 PK	74.0	-8.2	1.53 V	35	31.4	34.4
4	2483.50	53.2 AV	54.0	-0.8	1.53 V	35	18.8	34.4
5	4904.00	46.4 PK	74.0	-27.6	1.36 V	159	40.8	5.6
6	4904.00	33.5 AV	54.0	-20.5	1.36 V	159	27.9	5.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

**9 kHz ~ 1 GHz Worst-Case Data:**


**Mode A**

<b>RF Mode</b>	TX 802.11g	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	30MHz ~ 1GHz	<b>Detector Function</b>	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	49.68	26.0 QP	40.0	-14.0	1.99 H	33	35.1	-9.1
2	124.19	27.0 QP	43.5	-16.5	1.49 H	241	37.6	-10.6
3	278.87	42.4 QP	46.0	-3.6	1.00 H	193	49.4	-7.0
4	315.38	33.4 QP	46.0	-12.6	1.00 H	133	39.6	-6.2
5	374.42	31.3 QP	46.0	-14.7	1.00 H	175	36.4	-5.1
6	624.65	34.2 QP	46.0	-11.8	1.00 H	166	33.4	0.8

**Remarks:**

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

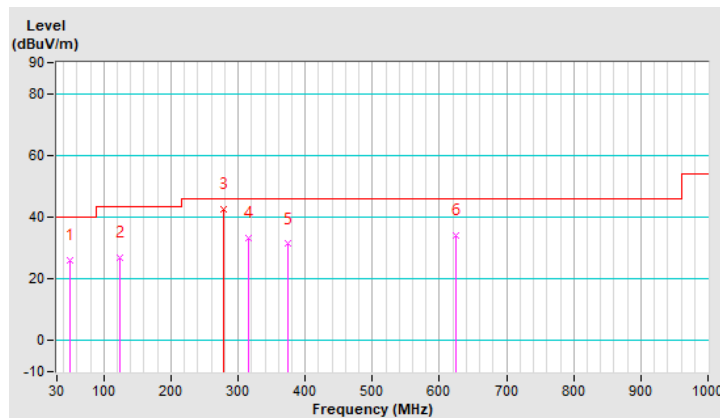




RF Mode	TX 802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	30MHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	104.51	25.4 QP	43.5	-18.1	1.00 V	147	37.9	-12.5
2	278.67	40.2 QP	46.0	-5.8	1.48 V	13	47.2	-7.0
3	309.75	34.6 QP	46.0	-11.4	1.00 V	147	41.0	-6.4
4	354.74	35.8 QP	46.0	-10.2	1.49 V	14	41.3	-5.5
5	624.65	30.9 QP	46.0	-15.1	1.49 V	126	30.1	0.8
6	725.87	31.7 QP	46.0	-14.3	1.00 V	285	29.2	2.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

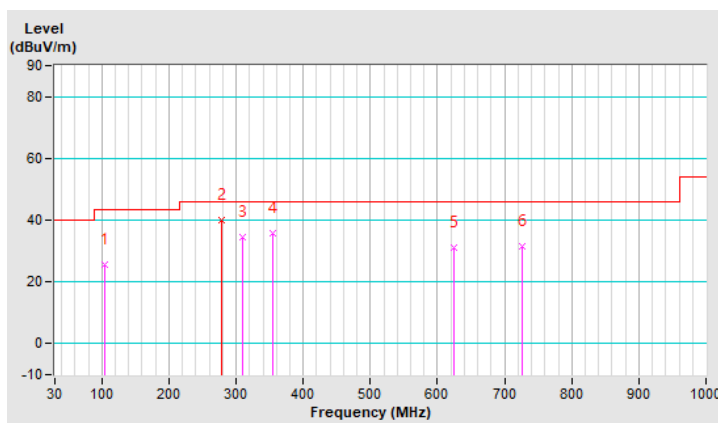


**Mode B**

<b>RF Mode</b>	TX 802.11g	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	30MHz ~ 1GHz	<b>Detector Function</b>	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	124.19	34.3 QP	43.5	-9.2	1.49 H	220	44.9	-10.6
2	280.20	42.9 QP	46.0	-3.1	1.00 H	198	49.8	-6.9
3	374.42	31.9 QP	46.0	-14.1	1.99 H	185	37.0	-5.1
4	624.65	35.9 QP	46.0	-10.1	1.00 H	116	35.1	0.8
5	749.77	33.8 QP	46.0	-12.2	1.99 H	152	30.5	3.3
6	874.88	35.7 QP	46.0	-10.3	1.49 H	225	30.1	5.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

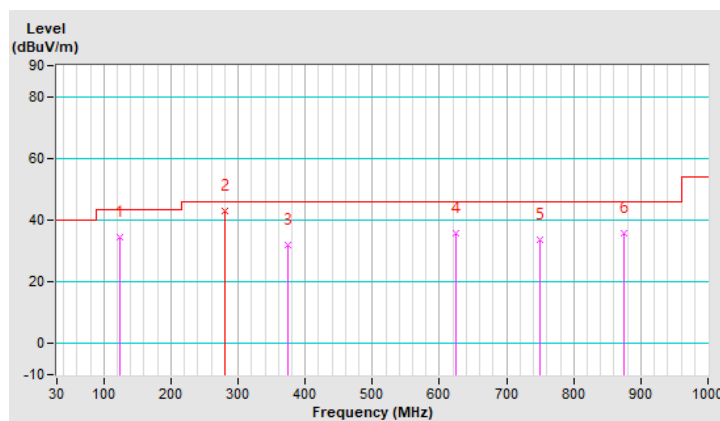


<b>RF Mode</b>	TX 802.11g	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	30MHz ~ 1GHz	<b>Detector Function</b>	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	31.16	32.8 QP	40.0	-7.2	1.00 V	189	43.9	-11.1
2	103.10	35.0 QP	43.5	-8.5	1.00 V	85	47.7	-12.7
3	281.23	41.2 QP	46.0	-4.8	1.48 V	261	48.1	-6.9
4	350.52	37.4 QP	46.0	-8.6	1.49 V	357	43.0	-5.6
5	624.65	33.4 QP	46.0	-12.6	1.49 V	135	32.6	0.8
6	746.96	36.2 QP	46.0	-9.8	1.49 V	159	33.0	3.2

**Remarks:**

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

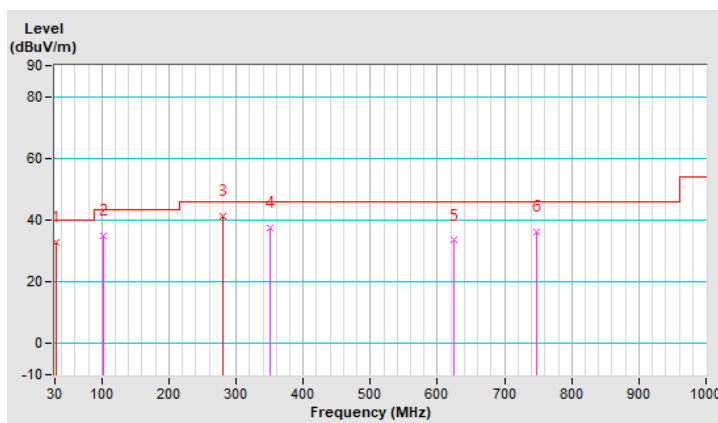

## 4.2 Conducted Emission Measurement

### 4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

- Note: 1. The lower limit shall apply at the transition frequencies.  
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

### 4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver ROHDE & SCHWARZ	ESCI	100613	Dec. 04, 2020	Dec. 03, 2021
RF signal cable (with 10dB PAD) Woken	5D-FB	Cable-cond1-01	Jan. 16, 2021	Jan. 15, 2022
LISN/AMN ROHDE & SCHWARZ (EUT)	ENV216	101826	Feb. 25, 2021	Feb. 24, 2022
LISN/AMN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Aug. 28, 2020	Aug. 27, 2021
Software ADT	BV ADT_Cond_ V7.3.7.4	NA	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
 2. The test was performed in HwaYa Shielded Room 1 (Conduction 1).  
 3. The VCCI Site Registration No. is C-12040.

#### 4.2.3 Test Procedures


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50 uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

**Note:** The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz – 30 MHz.

#### 4.2.4 Deviation from Test Standard

No deviation.

#### 4.2.5 Test Setup

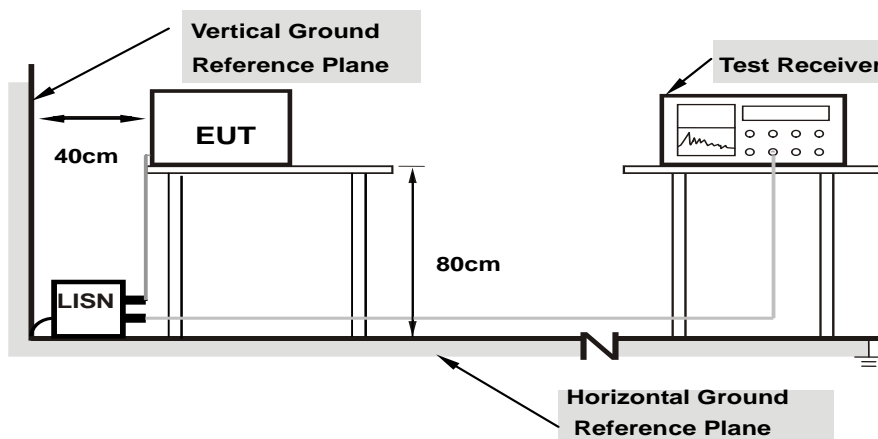

**Note:** 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.6 EUT Operating Conditions

- a. Placed the EUT on a testing table.
- b. Use the software to control the EUT under transmission condition continuously at specific channel frequency.

#### 4.2.7 Test Results


##### Mode A

<b>Frequency Range</b>	150kHz ~ 30MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9kHz
<b>Input Power</b>	120Vac, 60Hz	<b>Environmental Conditions</b>	24°C, 69%RH
<b>Tested by</b>	Edison Lee	<b>Test Date</b>	2021/4/17

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.75	40.05	26.64	49.80	36.39	66.00	56.00	-16.20	-19.61
2	0.17400	9.76	35.01	24.01	44.77	33.77	64.77	54.77	-20.00	-21.00
3	0.21800	9.78	30.37	18.34	40.15	28.12	62.89	52.89	-22.74	-24.77
<b>4</b>	<b>0.28527</b>	<b>9.80</b>	<b>37.17</b>	<b>30.48</b>	<b>46.97</b>	<b>40.28</b>	<b>60.66</b>	<b>50.66</b>	<b>-13.69</b>	<b>-10.38</b>
5	6.25800	10.01	10.72	2.96	20.73	12.97	60.00	50.00	-39.27	-37.03
6	10.73000	10.06	6.16	0.89	16.22	10.95	60.00	50.00	-43.78	-39.05

##### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

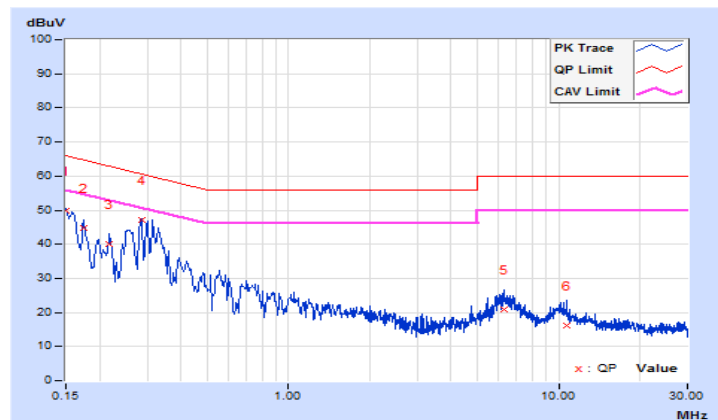


<b>Frequency Range</b>	150kHz ~ 30MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9kHz
<b>Input Power</b>	120Vac, 60Hz	<b>Environmental Conditions</b>	24°C, 69%RH
<b>Tested by</b>	Edison Lee	<b>Test Date</b>	2021/4/17

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15400	9.81	34.25	25.23	44.06	35.04	65.78	55.78	-21.72	-20.74
2	0.17400	9.82	35.18	24.86	45.00	34.68	64.77	54.77	-19.77	-20.09
3	0.31400	9.87	35.55	29.21	45.42	39.08	59.86	49.86	-14.44	-10.78
4	0.64200	9.92	10.21	3.37	20.13	13.29	56.00	46.00	-35.87	-32.71
5	6.08600	10.07	10.97	2.80	21.04	12.87	60.00	50.00	-38.96	-37.13
6	10.60600	10.15	9.68	5.14	19.83	15.29	60.00	50.00	-40.17	-34.71

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

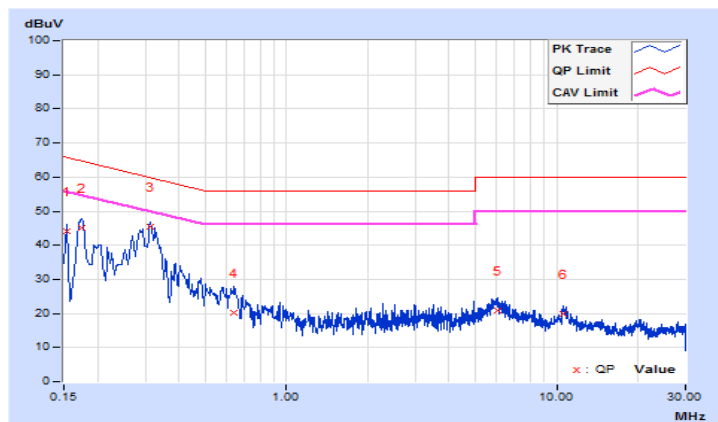


**Mode B**

<b>Frequency Range</b>	150kHz ~ 30MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9kHz
<b>Input Power</b>	120Vac, 60Hz	<b>Environmental Conditions</b>	24°C, 69%RH
<b>Tested by</b>	Edison Lee	<b>Test Date</b>	2021/4/17

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17000	9.71	22.10	8.26	31.81	17.97	64.96	54.96	-33.15	-36.99
2	0.26200	9.72	13.76	4.03	23.48	13.75	61.37	51.37	-37.89	-37.62
3	0.52153	9.74	18.64	12.94	28.38	22.68	56.00	46.00	-27.62	-23.32
4	5.87000	9.81	11.70	4.96	21.51	14.77	60.00	50.00	-38.49	-35.23
5	20.25800	9.82	15.07	11.64	24.89	21.46	60.00	50.00	-35.11	-28.54
6	25.13400	9.80	17.05	9.18	26.85	18.98	60.00	50.00	-33.15	-31.02

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

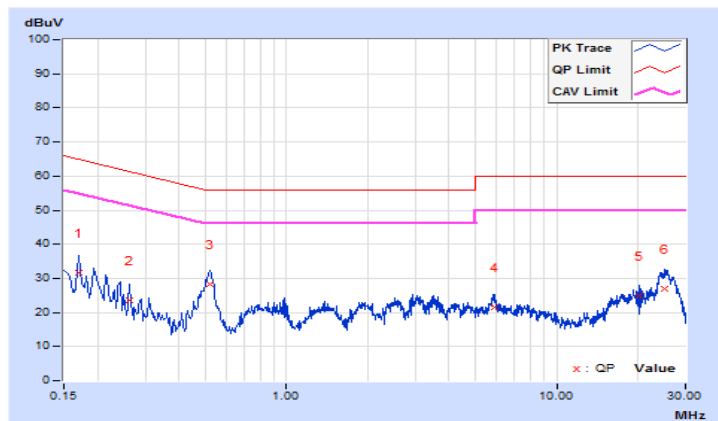




<b>Frequency Range</b>	150kHz ~ 30MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9kHz
<b>Input Power</b>	120Vac, 60Hz	<b>Environmental Conditions</b>	24°C, 69%RH
<b>Tested by</b>	Edison Lee	<b>Test Date</b>	2021/4/17

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16105	9.77	21.95	8.73	31.72	18.50	65.41	55.41	-33.69	-36.91
2	0.18200	9.77	17.08	4.02	26.85	13.79	64.39	54.39	-37.54	-40.60
3	0.51400	9.80	17.97	12.93	27.77	22.73	56.00	46.00	-28.23	-23.27
4	5.87800	9.88	11.33	4.89	21.21	14.77	60.00	50.00	-38.79	-35.23
5	20.25800	9.99	19.01	16.28	29.00	26.27	60.00	50.00	-31.00	-23.73
6	25.51000	9.99	17.98	9.63	27.97	19.62	60.00	50.00	-32.03	-30.38

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

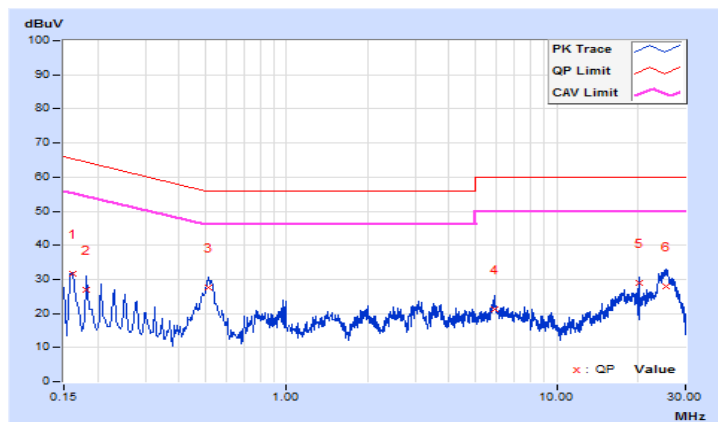


### 4.3 6 dB Bandwidth Measurement

#### 4.3.1 Limits of 6 dB Bandwidth Measurement

The minimum of 6 dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 Test Setup



#### 4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

#### 4.3.4 Test Procedure

- Set resolution bandwidth (RBW) = 100 kHz
- Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

#### 4.3.5 Deviation from Test Standard

No deviation.

#### 4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

## 4.3.7 Test Results

## 802.11b

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
1	2412	7.13	7.14	8.14	8.10	0.5	Pass
6	2437	8.12	8.10	8.13	8.12	0.5	Pass
11	2462	8.12	8.14	8.12	7.59	0.5	Pass

## 802.11g

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
1	2412	15.50	15.50	15.52	15.53	0.5	Pass
6	2437	15.46	15.47	15.51	15.73	0.5	Pass
11	2462	16.39	16.41	16.40	16.39	0.5	Pass

## 802.11n (HT20)


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
1	2412	15.76	15.78	15.80	15.75	0.5	Pass
6	2437	15.74	15.74	15.74	15.70	0.5	Pass
11	2462	17.62	17.61	17.63	17.61	0.5	Pass

## 802.11n (HT40)


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
3	2422	35.09	35.24	35.22	35.08	0.5	Pass
6	2437	35.18	33.95	35.10	35.21	0.5	Pass
9	2452	35.26	34.24	35.16	35.10	0.5	Pass

### Spectrum Plot of Worst Value


#### 802.11b

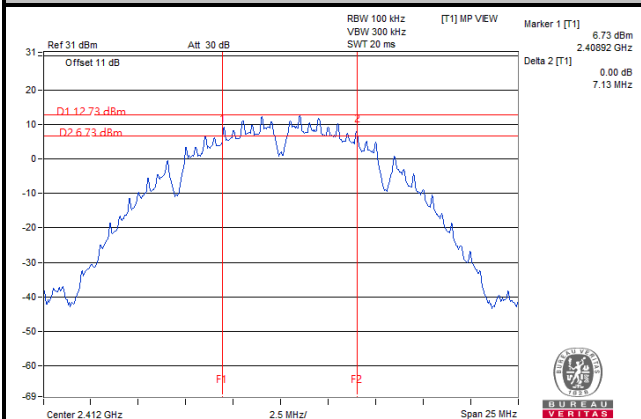


#### 802.11g

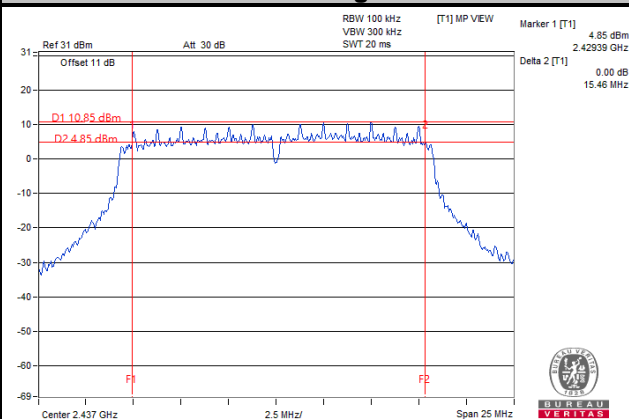

#### 802.11n (HT20)

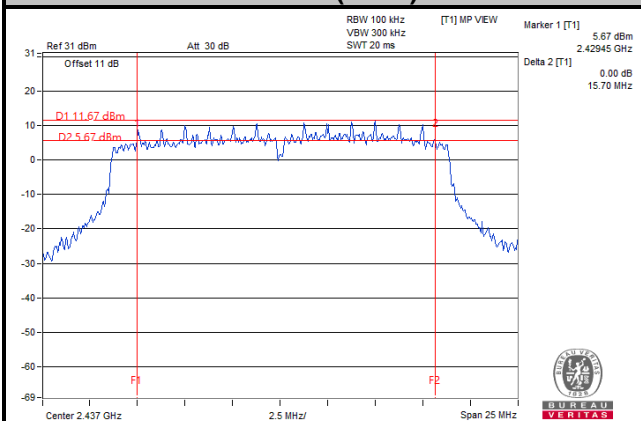


#### 802.11n (HT40)

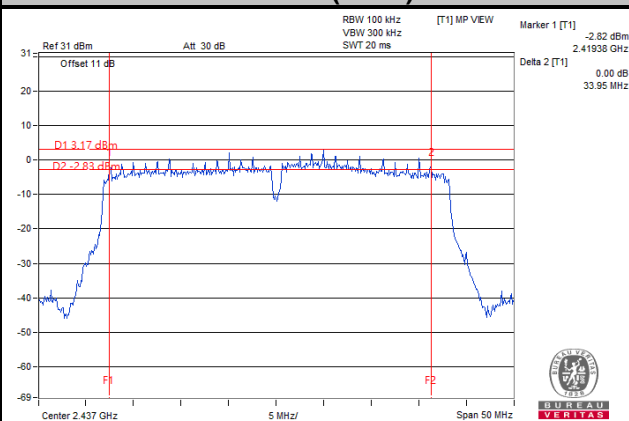

## 4.4 Occupied Bandwidth Measurement

### 4.4.1 Test Setup



### 4.4.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.4.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1 % to 5 % of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to sampling. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

### 4.4.4 Deviation from Test Standard

No deviation.

### 4.4.5 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

## 4.4.6 Test Results

## 802.11b

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)				Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3	
1	2412	12.69	12.69	12.95	13.04	Pass
6	2437	13.56	13.20	13.80	13.80	Pass
11	2462	13.20	13.08	12.72	13.08	Pass

## 802.11g

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)				Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3	
1	2412	16.32	16.32	16.32	16.32	Pass
6	2437	16.32	16.44	16.44	16.32	Pass
11	2462	16.56	16.56	16.44	16.56	Pass

## 802.11n (HT20)


Channel	Frequency (MHz)	Occupied Bandwidth (MHz)				Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3	
1	2412	17.52	17.52	17.52	17.52	Pass
6	2437	17.52	17.52	17.52	17.52	Pass
11	2462	17.64	17.64	17.64	17.64	Pass

## 802.11n (HT40)


Channel	Frequency (MHz)	Occupied Bandwidth (MHz)				Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3	
3	2422	36.00	36.00	36.00	36.00	Pass
6	2437	36.00	36.00	36.00	36.00	Pass
9	2452	36.00	36.00	36.00	36.00	Pass

### Spectrum Plot of Worst Value


**802.11b**

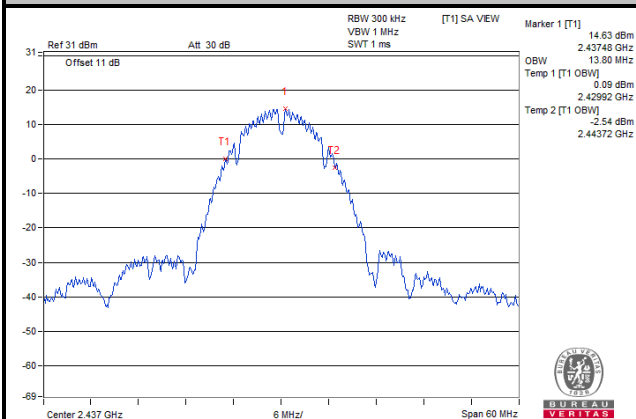


**802.11g**

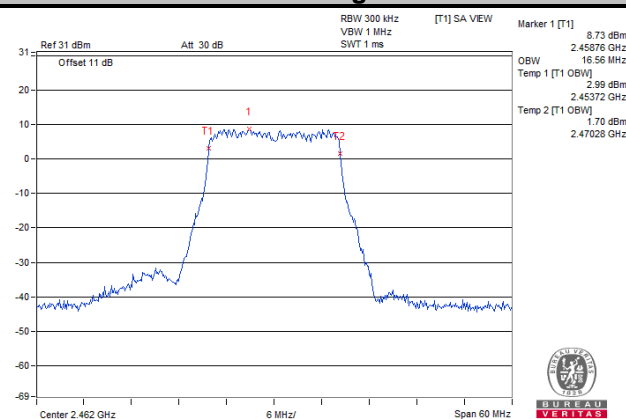

**802.11n (HT20)**

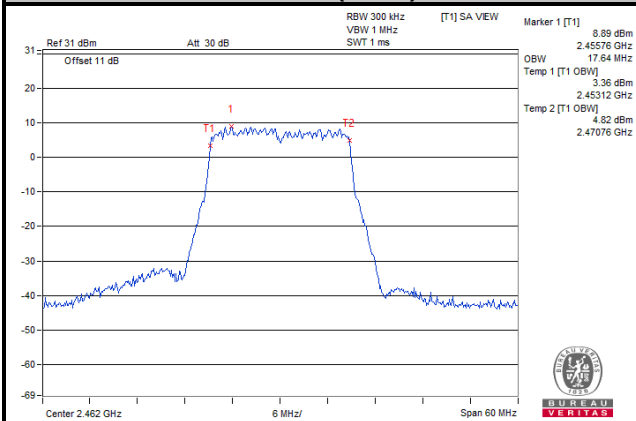

**802.11n (HT40)**

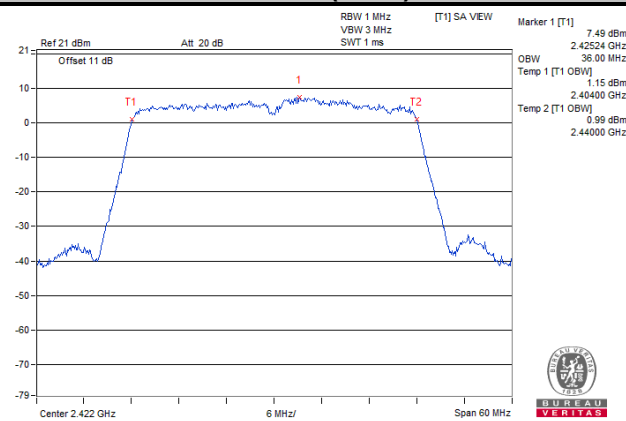

## 4.5 Conducted Output Power Measurement

### 4.5.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30 dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for NANT  $\leq$  4;

Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq$  40 MHz for any NANT;

Array Gain =  $5 \log(\text{NANT}/\text{NSS})$  dB or 3 dB, whichever is less for 20 MHz channel widths with NANT  $\geq$  5.

For power measurements on all other devices: Array Gain =  $10 \log(\text{NANT}/\text{NSS})$  dB.

### 4.5.2 Test Setup



### 4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.5.4 Test Procedures

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

### 4.5.5 Deviation from Test Standard

No deviation.

### 4.5.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



## 4.5.7 Test Results

## CDD Mode

## 802.11b

Channel	Frequency (MHz)	Peak Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	21.22	21.08	21.41	21.38	536.428	27.30	30	Pass
6	2437	23.55	22.81	23.59	23.31	860.299	29.35	30	Pass
11	2462	21.41	21.32	21.25	21.34	543.372	27.35	30	Pass

## 802.11g

Channel	Frequency (MHz)	Peak Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	18.11	18.02	18.04	17.99	254.731	24.06	30	Pass
6	2437	22.21	22.85	22.53	22.57	718.872	28.57	30	Pass
11	2462	19.37	18.94	19.44	18.69	326.703	25.14	30	Pass

## 802.11n (HT20)

Channel	Frequency (MHz)	Peak Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	17.44	17.48	17.56	17.29	222.034	23.46	30	Pass
6	2437	22.37	22.08	22.33	22.42	679.603	28.32	30	Pass
11	2462	19.41	19.08	19.47	19.32	342.225	25.34	30	Pass

## 802.11n (HT40)

Channel	Frequency (MHz)	Peak Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
3	2422	14.57	14.22	14.92	14.53	114.491	20.59	30	Pass
6	2437	17.58	17.41	17.62	17.66	228.514	23.59	30	Pass
9	2452	15.69	15.34	15.65	15.42	142.828	21.55	30	Pass

### Beamforming Mode

#### 802.11n (HT20)

Channel	Frequency (MHz)	Peak Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	17.44	17.48	17.56	17.29	222.034	23.46	26.55	Pass
6	2437	20.37	20.08	20.33	20.42	428.801	26.32	26.55	Pass
11	2462	19.41	19.08	19.47	19.32	342.225	25.34	26.55	Pass

\* Directional gain =  $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 9.45\text{dBi} > 6\text{dBi}$ , so the power limit shall be reduced to  $30 - (9.45 - 6) = 26.55\text{dBm}$ .

#### 802.11n (HT40)

Channel	Frequency (MHz)	Peak Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
3	2422	14.57	14.22	14.92	14.53	114.491	20.59	26.55	Pass
6	2437	17.58	17.41	17.62	17.66	228.514	23.59	26.55	Pass
9	2452	15.69	15.34	15.65	15.42	142.828	21.55	26.55	Pass


\* Directional gain =  $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 9.45\text{dBi} > 6\text{dBi}$ , so the power limit shall be reduced to  $30 - (9.45 - 6) = 26.55\text{dBm}$ .

## 4.6 Power Spectral Density Measurement

### 4.6.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 4.6.2 Test Setup



### 4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.6.4 Test Procedure

For Average Power (Duty cycle  $\geq 98\%$ )

- a. Set instrument center frequency to DTS channel center frequency.
- b. Set span to at least 1.5 times the OBW.
- c. Set RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d. Set VBW  $\geq 3 \times \text{RBW}$ .
- e. Detector = power averaging (RMS) or sample detector (when RMS not available).
- f. Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span}/\text{RBW}$ .
- g. Sweep time = auto couple.
- h. Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i. Use the peak marker function to determine the maximum amplitude level.

For Average Power (Duty cycle  $< 98\%$ )

- a. Measure the duty cycle (x).
- b. Set instrument center frequency to DTS channel center frequency.
- c. Set span to at least 1.5 times the OBW.
- d. Set RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- e. Set VBW  $\geq 3 \times \text{RBW}$ .
- f. Detector = power averaging (RMS) or sample detector (when RMS not available).
- g. Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span}/\text{RBW}$ .
- h. Sweep time = auto couple.
- i. Do not use sweep triggering. Allow sweep to "free run".
- j. Employ trace averaging (RMS) mode over a minimum of 100 traces.
- k. Use the peak marker function to determine the maximum amplitude level.
- l. Add  $10 \log (1/x)$ , where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.

#### 4.6.5 Deviation from Test Standard

No deviation.

#### 4.6.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.6.7 Test Results

##### 802.11b

TX chain	Channel	Freq. (MHz)	PSD (dBm)	10 log (N=4) dB	Total PSD (dBm)	Limit (dBm)	Pass/Fail
0	1	2412	-12.08	6.02	-6.06	4.55	Pass
	6	2437	-10.24	6.02	-4.22	4.55	Pass
	11	2462	-13.45	6.02	-7.43	4.55	Pass
1	1	2412	-12.67	6.02	-6.65	4.55	Pass
	6	2437	-10.92	6.02	-4.9	4.55	Pass
	11	2462	-13.52	6.02	-7.5	4.55	Pass
2	1	2412	-12.16	6.02	-6.14	4.55	Pass
	6	2437	-10.5	6.02	-4.48	4.55	Pass
	11	2462	-12.91	6.02	-6.89	4.55	Pass
3	1	2412	-12.58	6.02	-6.56	4.55	Pass
	6	2437	-10.24	6.02	-4.22	4.55	Pass
	11	2462	-13.45	6.02	-7.43	4.55	Pass

**NOTE:**

1. Directional gain =  $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 9.45\text{dBi} > 6\text{dBi}$ , so the power density limit shall be reduced to  $8 - (9.45 - 6) = 4.55\text{dBm}$ .
2. Method 2) c) of power density measurement of KDB 662911 is using for calculating total power density.

##### 802.11g

TX chain	Channel	Freq. (MHz)	PSD (dBm)	10 log (N=4) dB	Duty Factor	Total PSD with Duty Factor (dBm)	Limit (dBm)	Pass/Fail
0	1	2412	-19.14	6.02	0.2	-12.92	4.55	Pass
	6	2437	-14.78	6.02	0.2	-8.56	4.55	Pass
	11	2462	-19.09	6.02	0.2	-12.87	4.55	Pass
1	1	2412	-19	6.02	0.2	-12.78	4.55	Pass
	6	2437	-14.34	6.02	0.2	-8.12	4.55	Pass
	11	2462	-19.15	6.02	0.2	-12.93	4.55	Pass
2	1	2412	-19.06	6.02	0.2	-12.84	4.55	Pass
	6	2437	-14.79	6.02	0.2	-8.57	4.55	Pass
	11	2462	-18.99	6.02	0.2	-12.77	4.55	Pass
3	1	2412	-19.45	6.02	0.2	-13.23	4.55	Pass
	6	2437	-14.78	6.02	0.2	-8.56	4.55	Pass
	11	2462	-19.09	6.02	0.2	-12.87	4.55	Pass

**NOTE:**

1. Directional gain =  $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 9.45\text{dBi} > 6\text{dBi}$ , so the power density limit shall be reduced to  $8 - (9.45 - 6) = 4.55\text{dBm}$ .
2. Method 2) c) of power density measurement of KDB 662911 is using for calculating total power density.

### 802.11n (HT20)

TX chain	Channel	Freq. (MHz)	PSD (dBm)	10 log (N=4) dB	Duty Factor	Total PSD with Duty Factor (dBm)	Limit (dBm)	Pass/Fail
0	1	2412	-19.6	6.02	0.1	-13.48	4.55	Pass
	6	2437	-14.46	6.02	0.1	-8.34	4.55	Pass
	11	2462	-19.2	6.02	0.1	-13.08	4.55	Pass
1	1	2412	-19.47	6.02	0.1	-13.35	4.55	Pass
	6	2437	-14.58	6.02	0.1	-8.46	4.55	Pass
	11	2462	-19.44	6.02	0.1	-13.32	4.55	Pass
2	1	2412	-19.48	6.02	0.1	-13.36	4.55	Pass
	6	2437	-14.66	6.02	0.1	-8.54	4.55	Pass
	11	2462	-18.33	6.02	0.1	-12.21	4.55	Pass
3	1	2412	-20.29	6.02	0.1	-14.17	4.55	Pass
	6	2437	-14.46	6.02	0.1	-8.34	4.55	Pass
	11	2462	-19.2	6.02	0.1	-13.08	4.55	Pass

**NOTE:**

1. Directional gain =  $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 9.45\text{dBi} > 6\text{dBi}$ , so the power density limit shall be reduced to  $8 - (9.45 - 6) = 4.55\text{dBm}$ .
2. Method 2) c) of power density measurement of KDB 662911 is using for calculating total power density.

### 802.11n (HT40)


TX chain	Channel	Freq. (MHz)	PSD (dBm)	10 log (N=4) dB	Duty Factor	Total PSD with Duty Factor (dBm)	Limit (dBm)	Pass/Fail
0	3	2422	-27.13	6.02	0.22	-20.89	4.55	Pass
	6	2437	-23.05	6.02	0.22	-16.81	4.55	Pass
	9	2452	-24.2	6.02	0.22	-17.96	4.55	Pass
1	3	2422	-27.23	6.02	0.22	-20.99	4.55	Pass
	6	2437	-23.64	6.02	0.22	-17.4	4.55	Pass
	9	2452	-24.78	6.02	0.22	-18.54	4.55	Pass
2	3	2422	-26.2	6.02	0.22	-19.96	4.55	Pass
	6	2437	-23.06	6.02	0.22	-16.82	4.55	Pass
	9	2452	-24.57	6.02	0.22	-18.33	4.55	Pass
3	3	2422	-26.72	6.02	0.22	-20.48	4.55	Pass
	6	2437	-23.05	6.02	0.22	-16.81	4.55	Pass
	9	2452	-24.2	6.02	0.22	-17.96	4.55	Pass

**NOTE:**


1. Directional gain =  $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/4] = 9.45\text{dBi} > 6\text{dBi}$ , so the power density limit shall be reduced to  $8 - (9.45 - 6) = 4.55\text{dBm}$ .
2. Method 2) c) of power density measurement of KDB 662911 is using for calculating total power density.

### Spectrum Plot of Worst Value


#### 802.11b

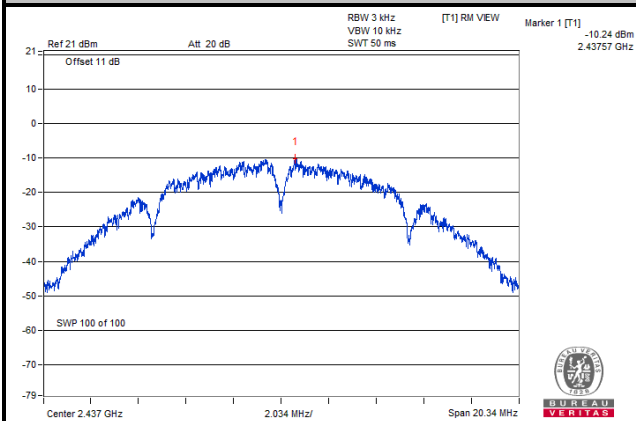


#### 802.11g

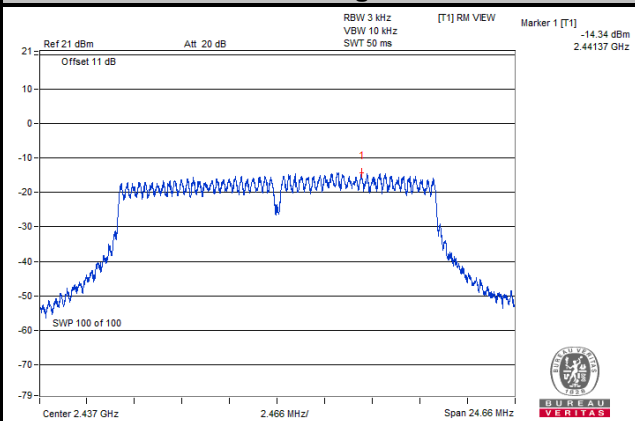

#### 802.11n (HT20)

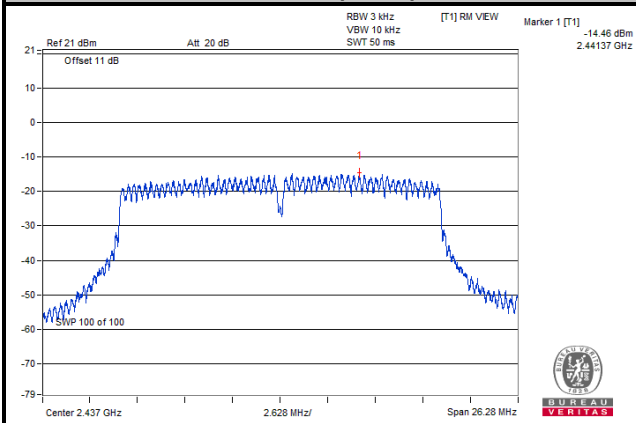

#### 802.11n (HT40)

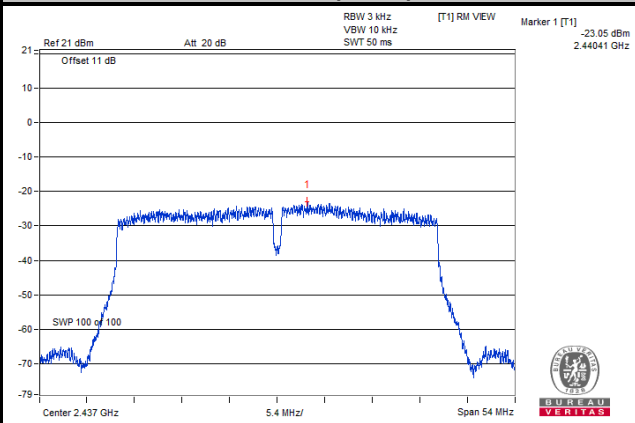


## 4.7 Conducted Out of Band Emission Measurement

### 4.7.1 Limits of Conducted Out of Band Emission Measurement

Below -30 dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth).

### 4.7.2 Test Setup



### 4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.7.4 Test Procedure

#### MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

#### MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

### 4.7.5 Deviation from Test Standard

No deviation.

### 4.7.6 EUT Operating Condition


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



### 4.7.7 Test Results



The spectrum plots are attached on the following images. D1 line indicates the highest level, and D2 line indicates the 30 dB offset below D1. It shows compliance with the requirement.

#### 802.11b CHAIN 0


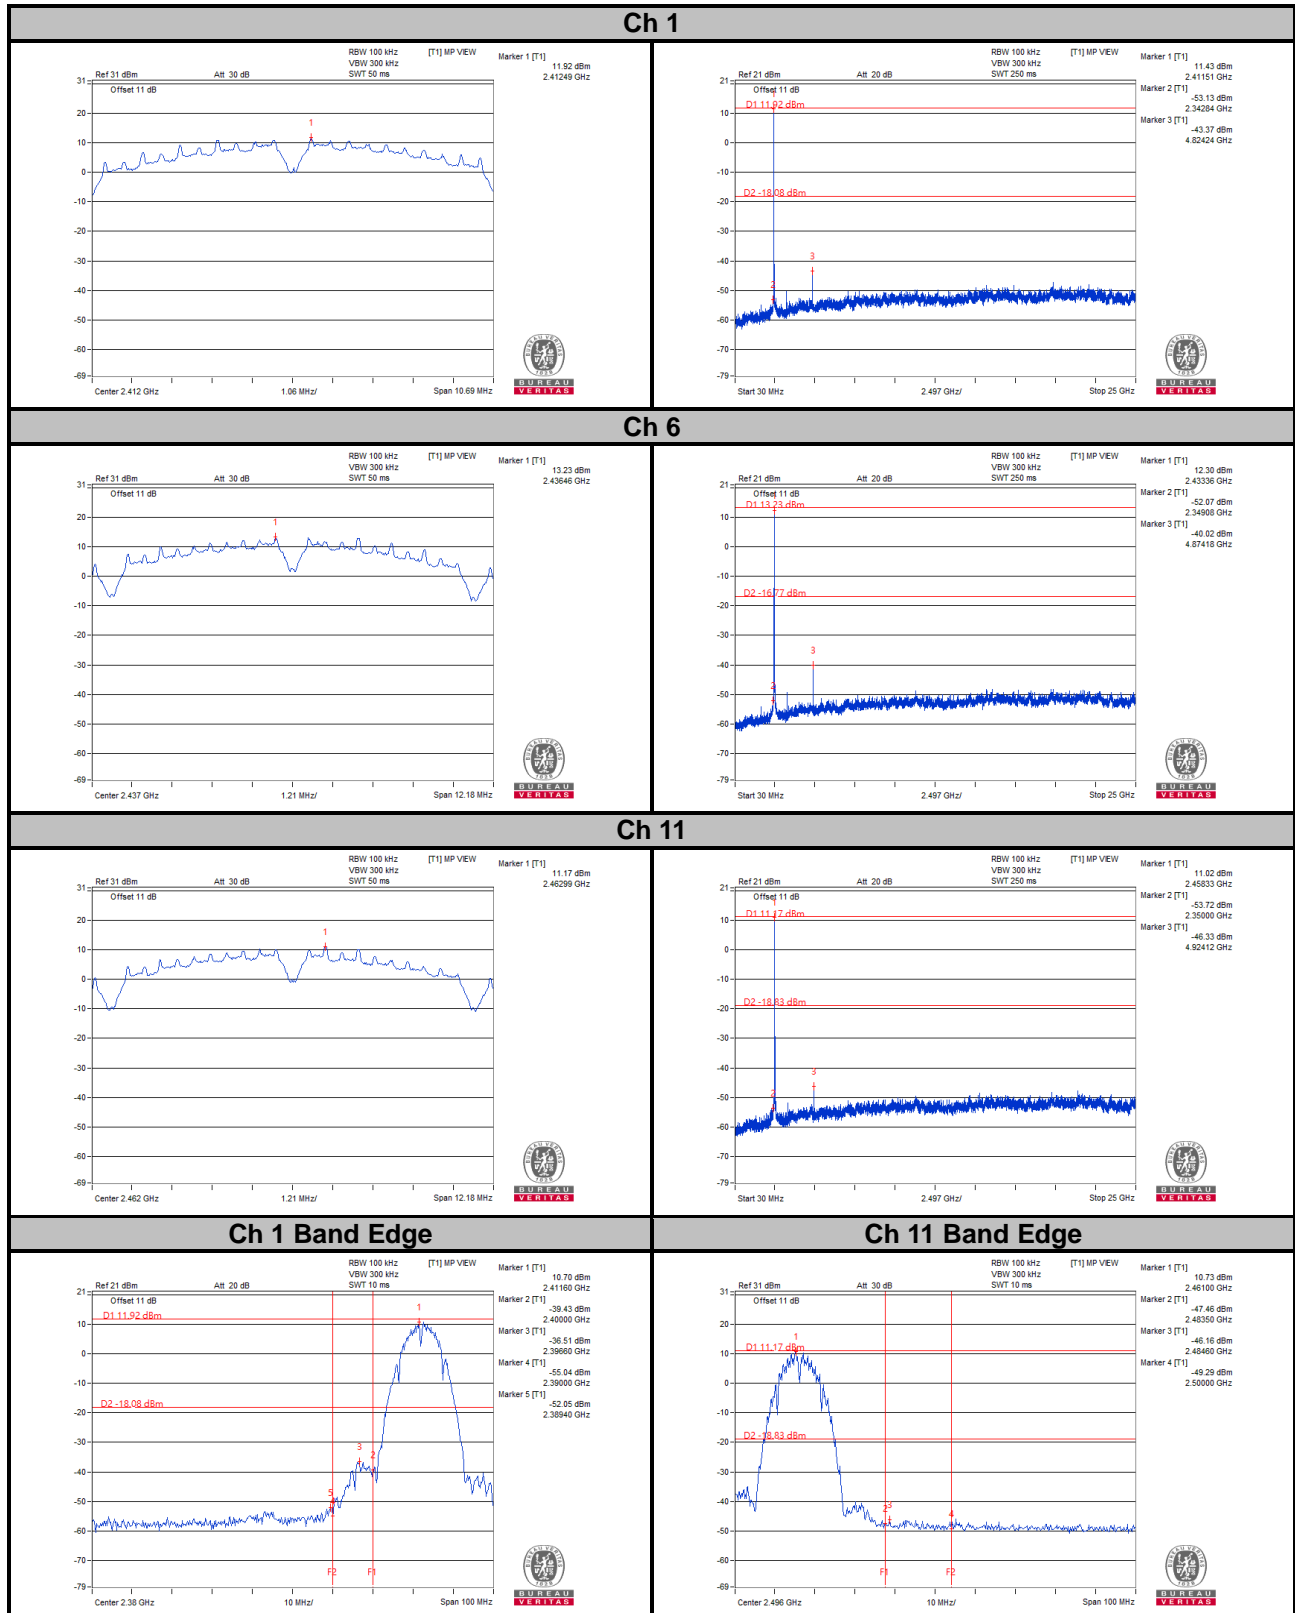


CHAIN 1



Ch 1

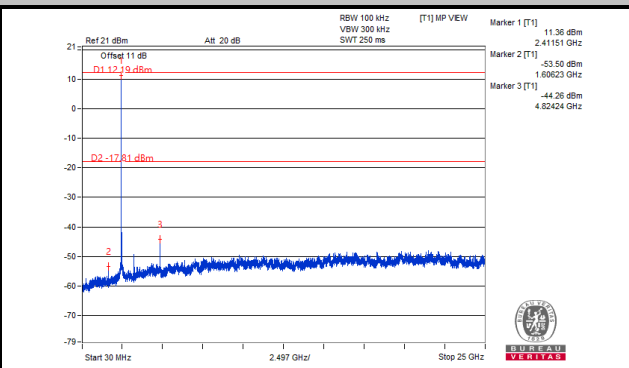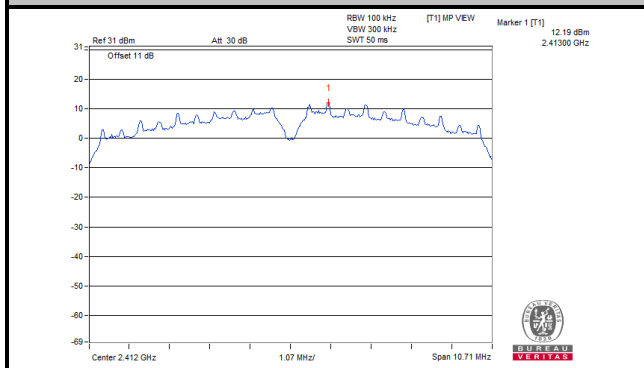


Ch 6

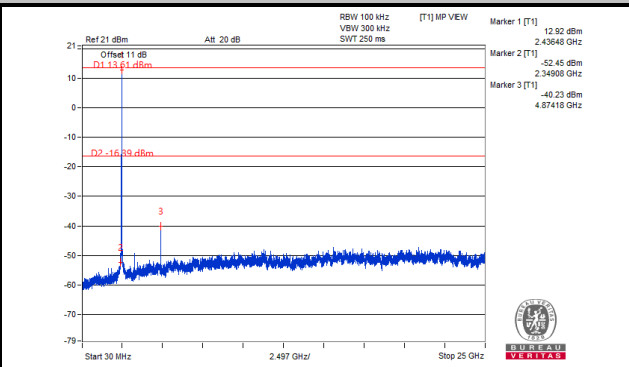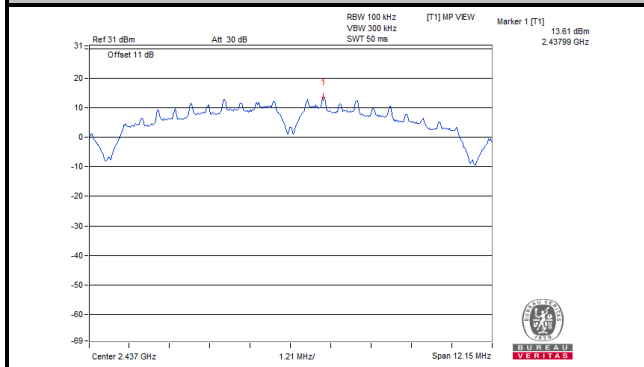


Ch 11

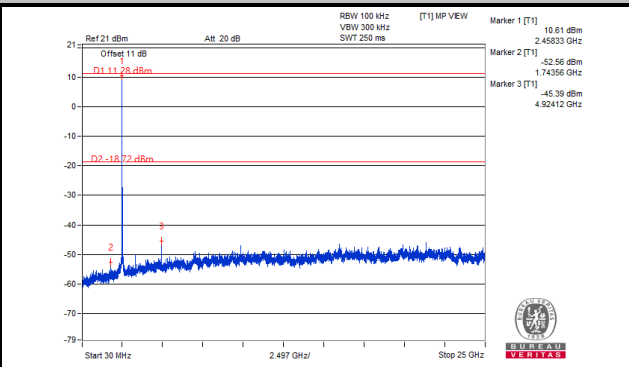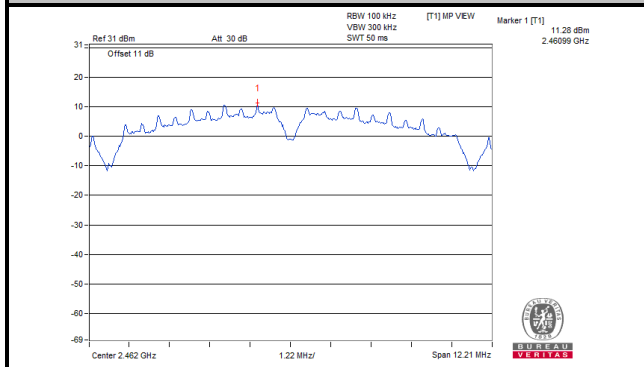

Ch 1 Band Edge


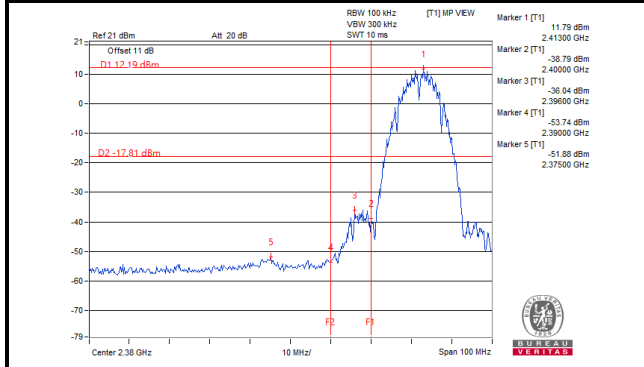


Ch 11 Band Edge


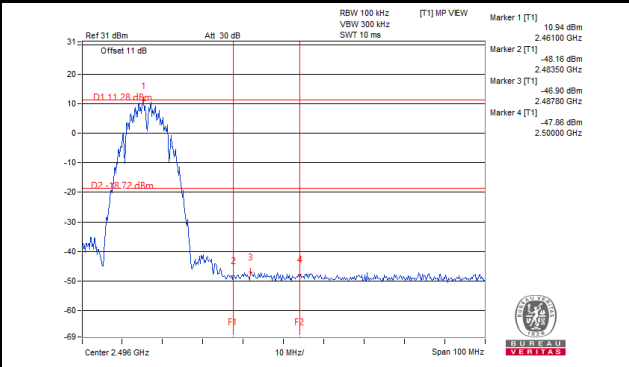


# CHAIN 2



## Ch 1

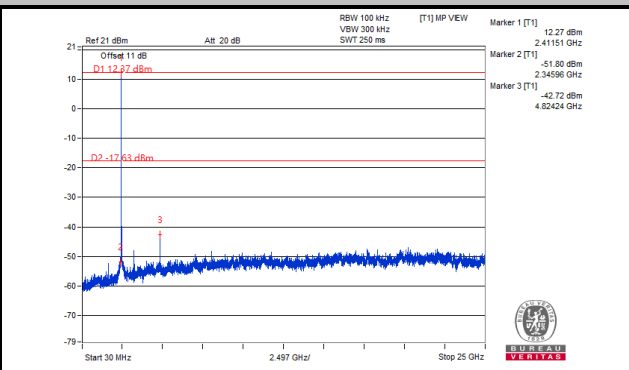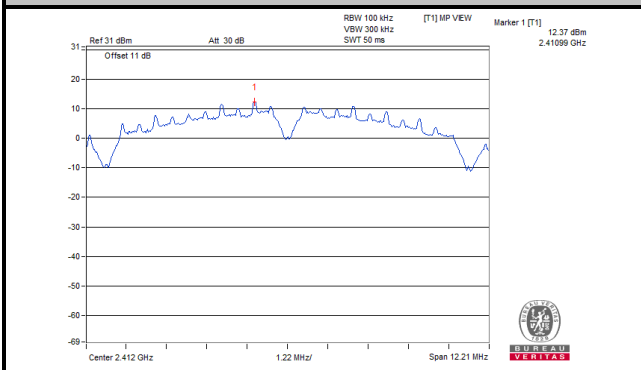


## Ch 6

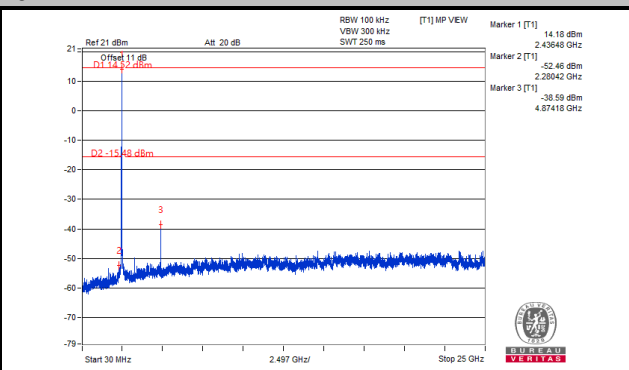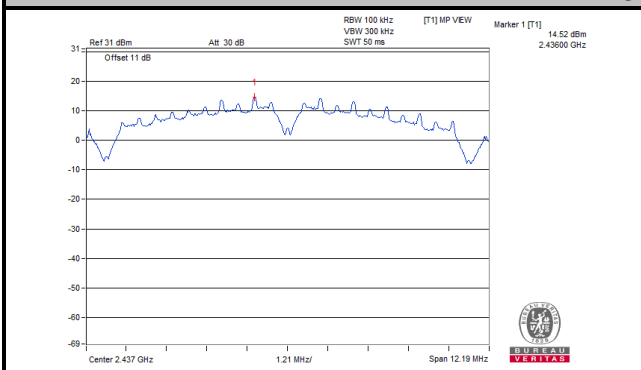


## Ch 11

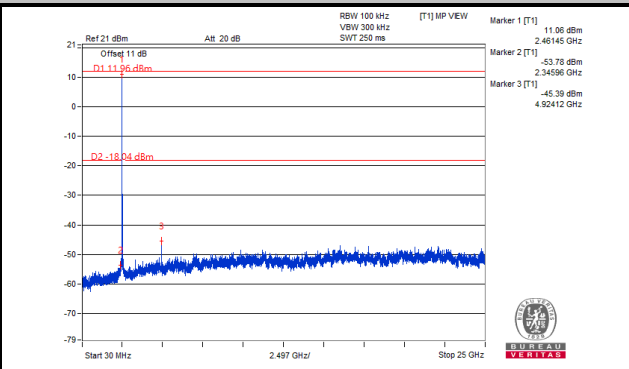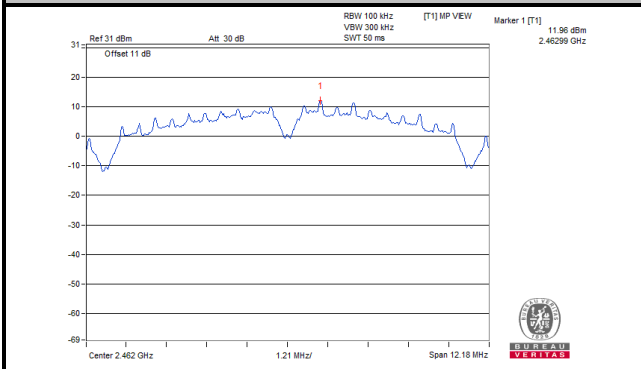

## Ch 1 Band Edge


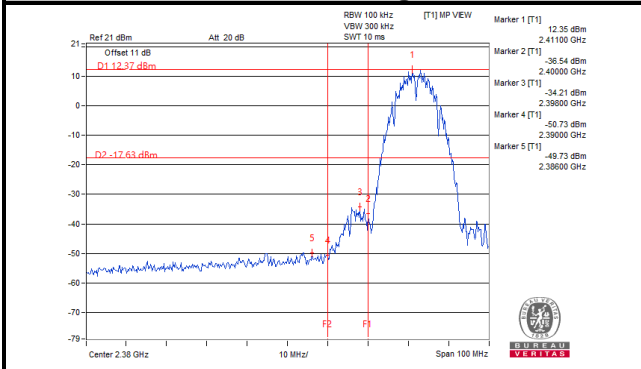


## Ch 11 Band Edge


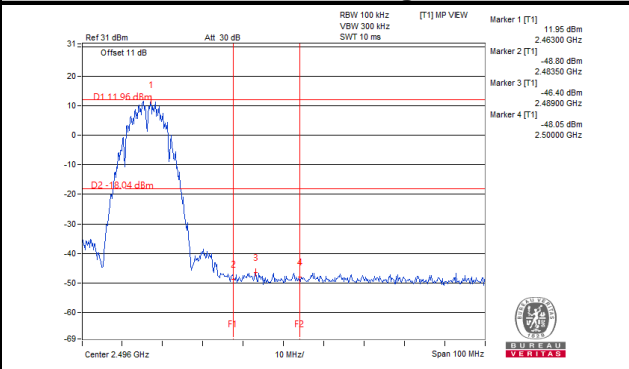


### CHAIN 3



#### Ch 1

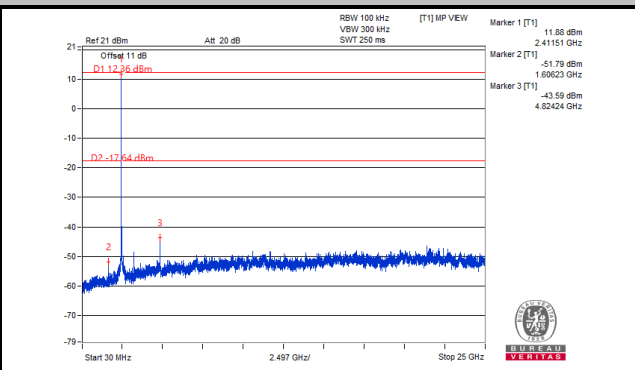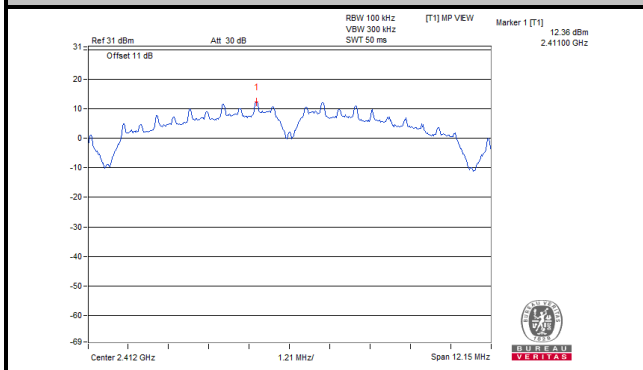


#### Ch 6

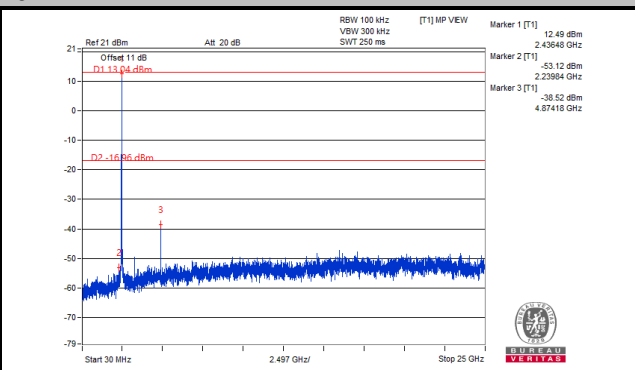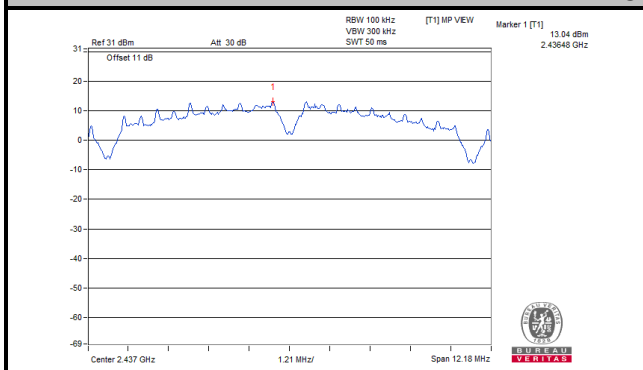


#### Ch 11

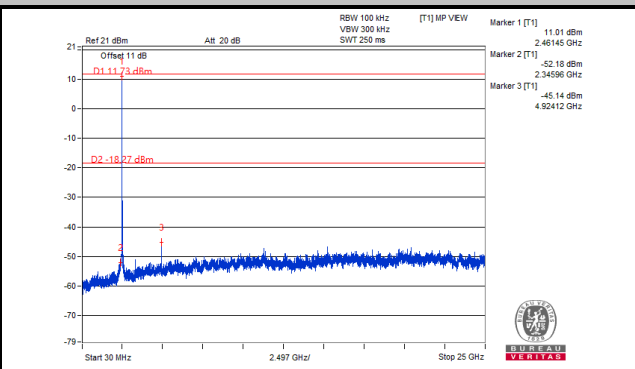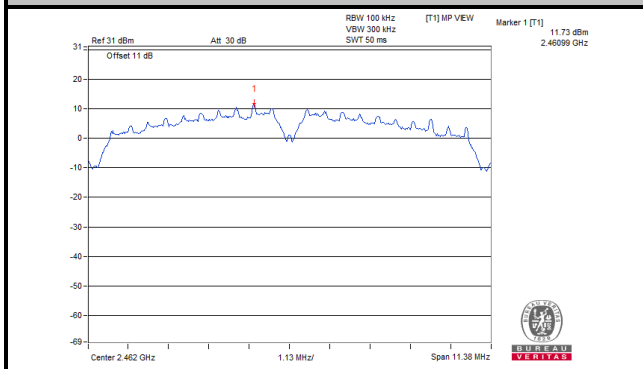

#### Ch 1 Band Edge


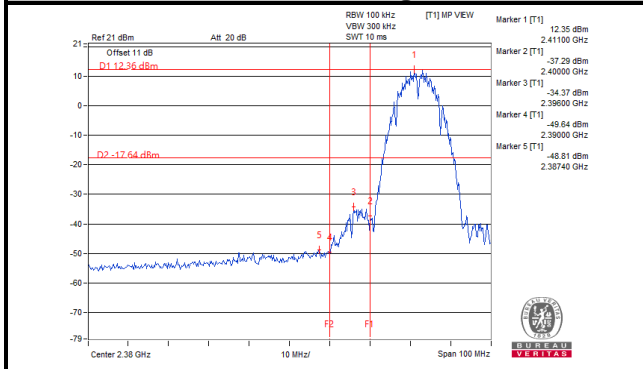


#### Ch 11 Band Edge


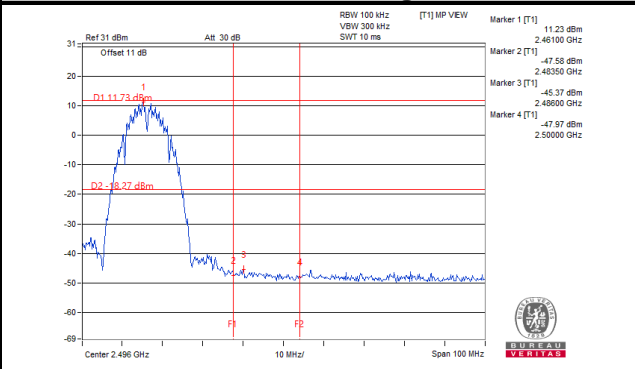


802.11g  
CHAIN 0



Ch 1

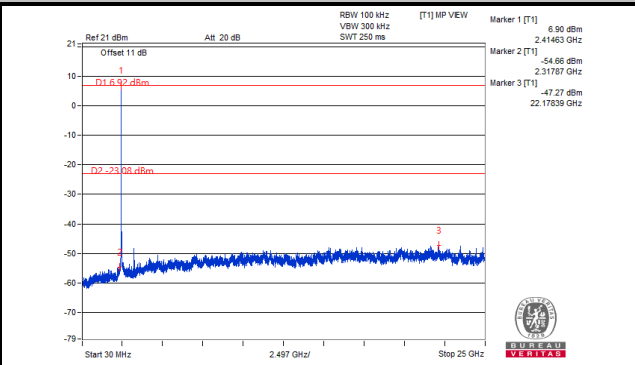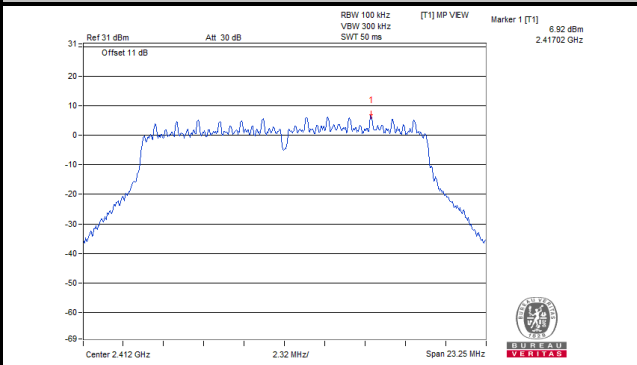


Ch 6

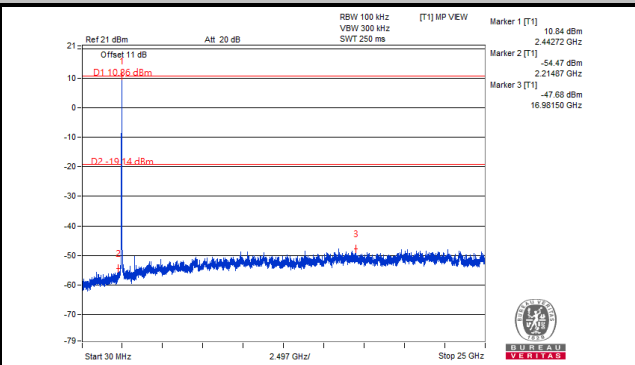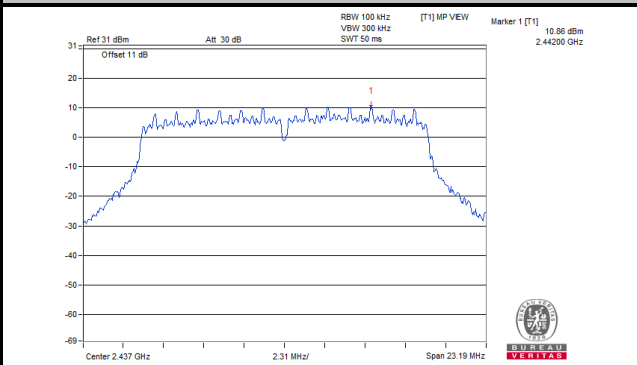


Ch 11

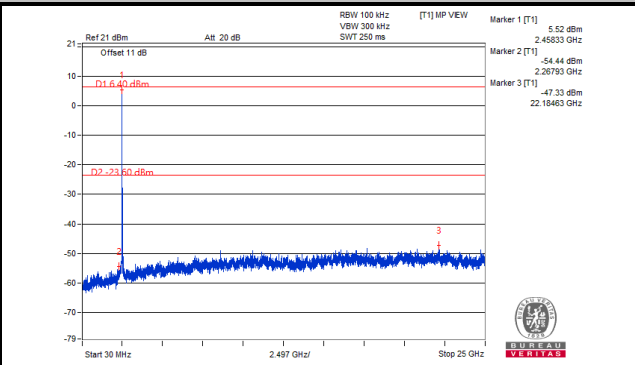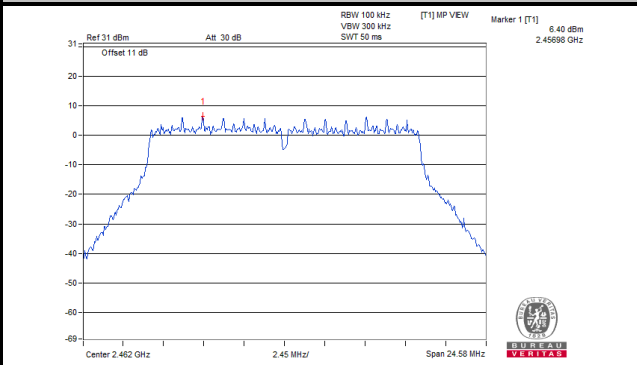

Ch 1 Band Edge


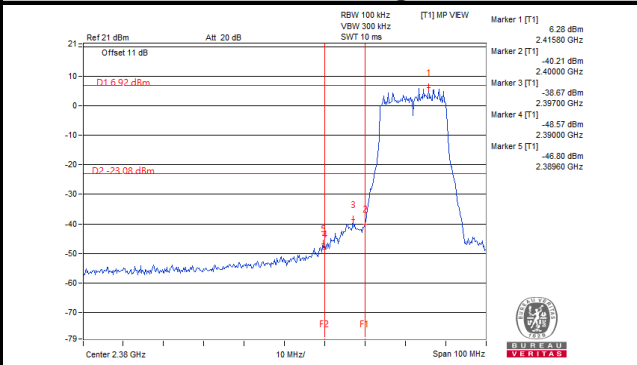


Ch 11 Band Edge


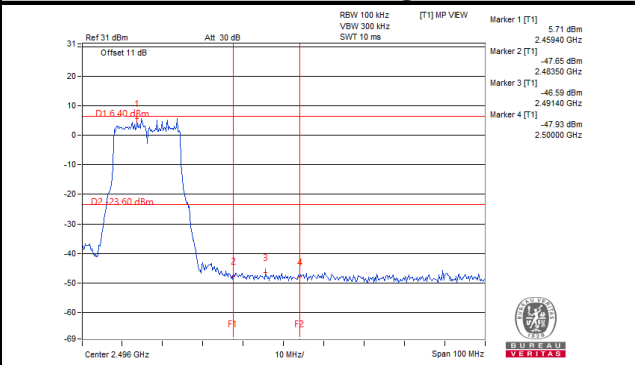


# CHAIN 1



## Ch 1

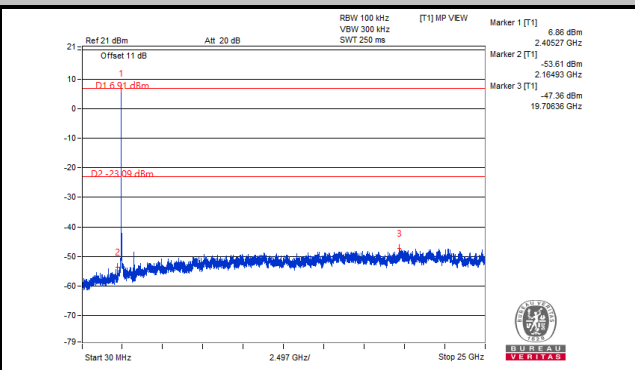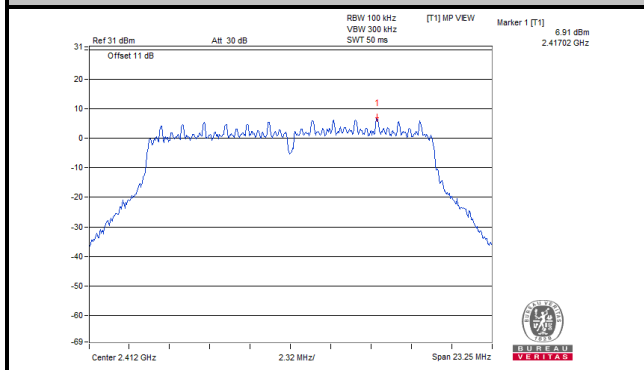


## Ch 6

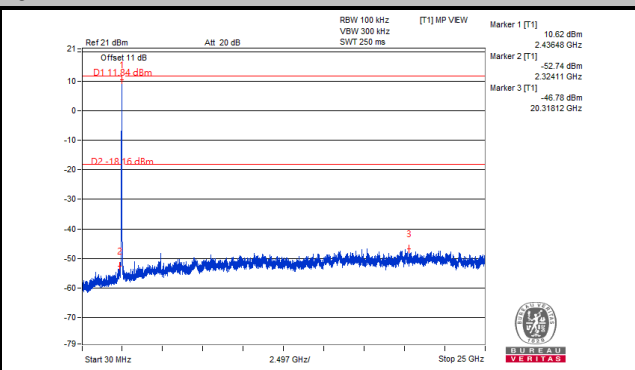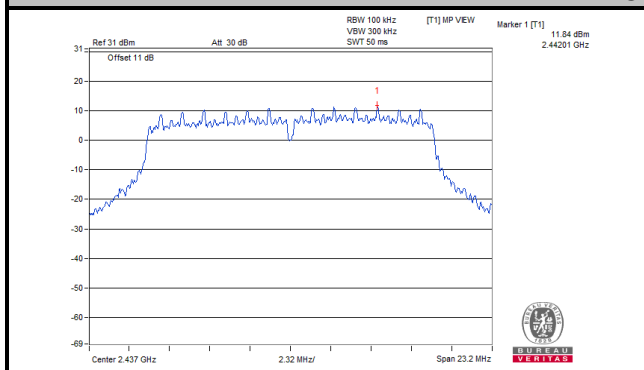


## Ch 11

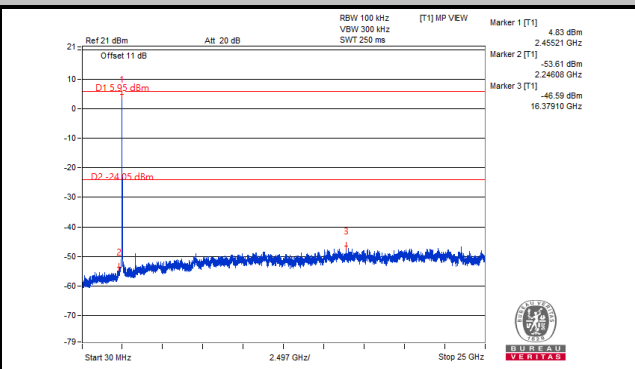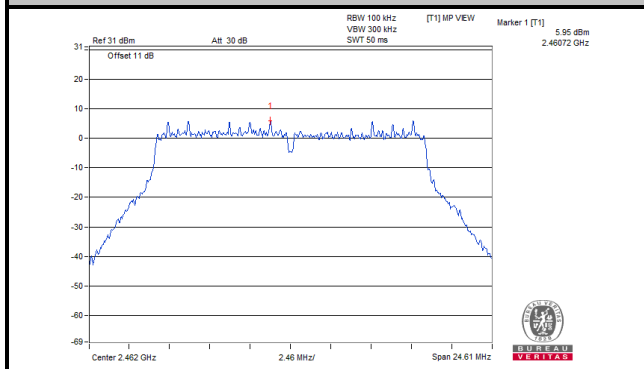

## Ch 1 Band Edge


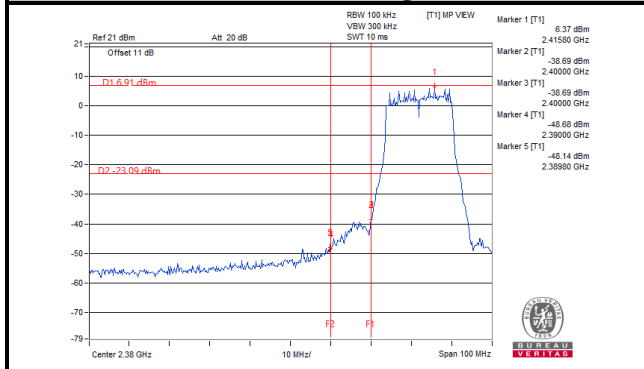


## Ch 11 Band Edge


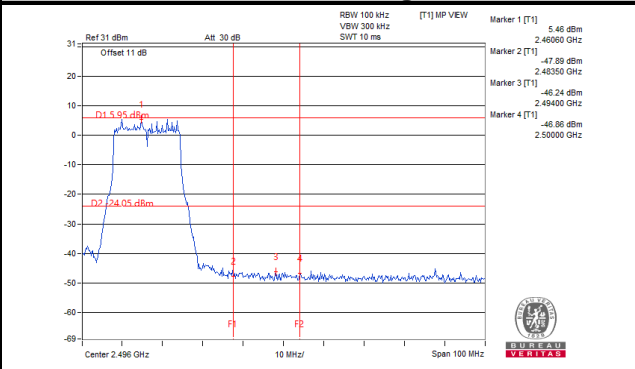


CHAIN 2



Ch 1

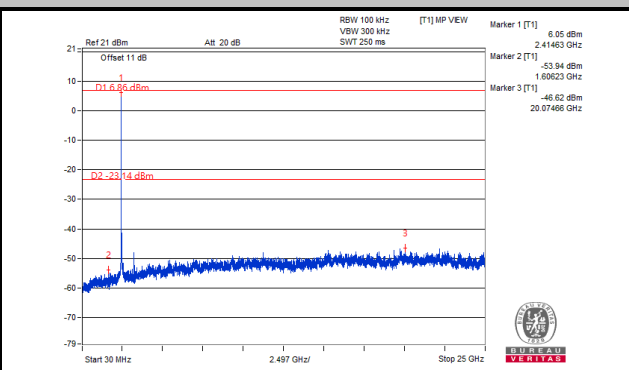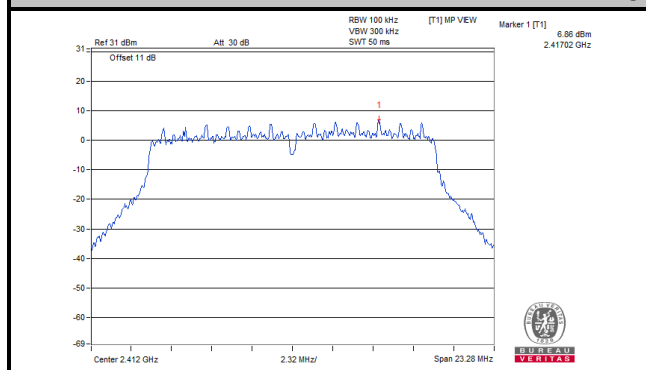


Ch 6

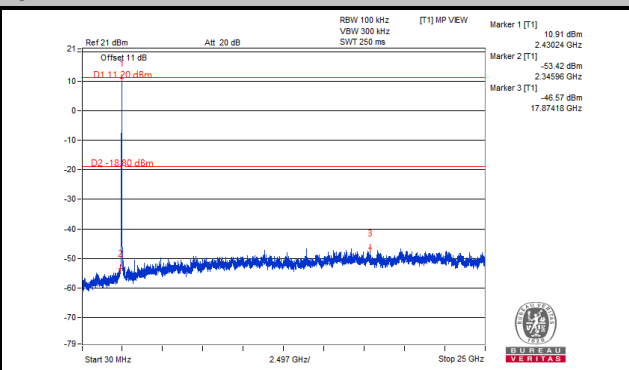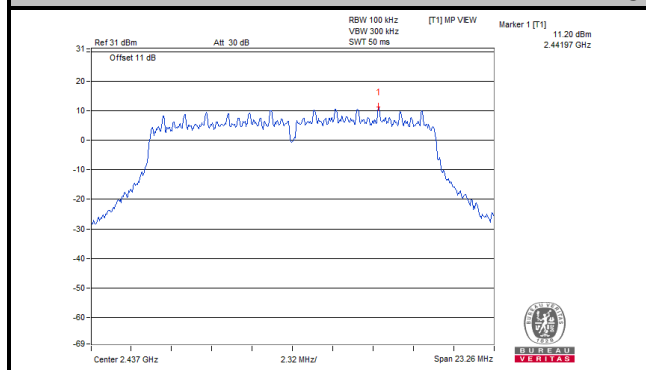


Ch 11

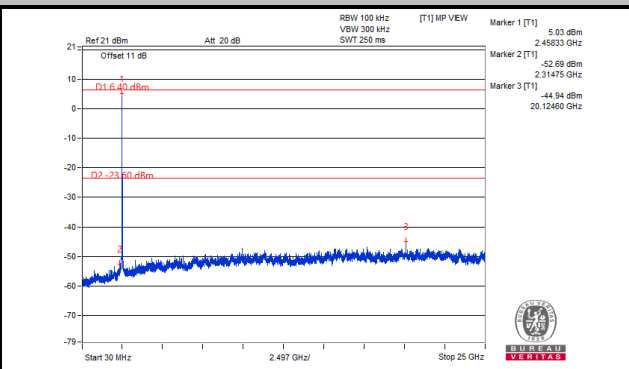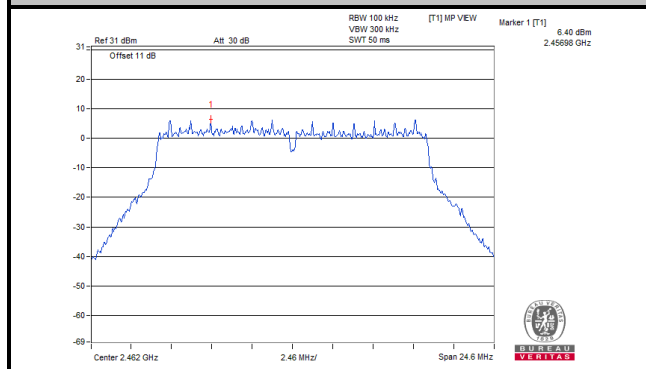

Ch 1 Band Edge


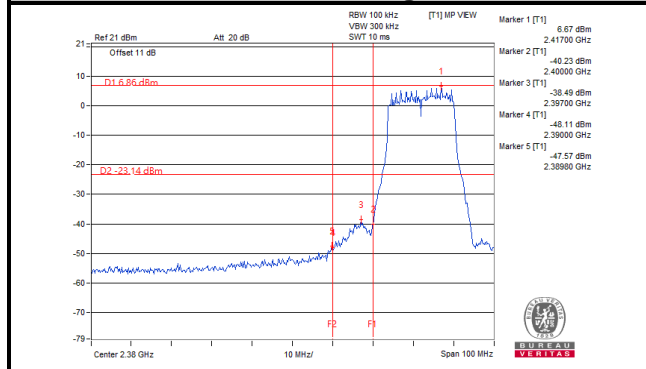


Ch 11 Band Edge


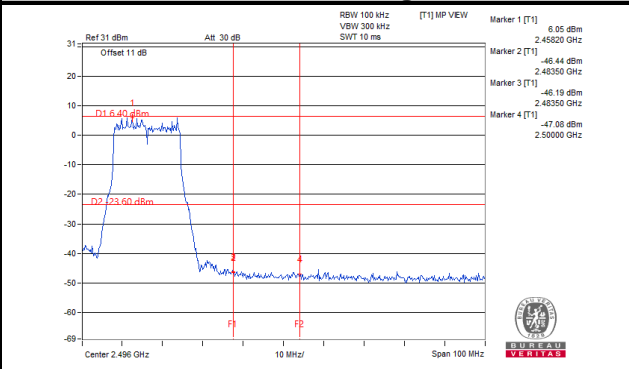


### CHAIN 3



#### Ch 1

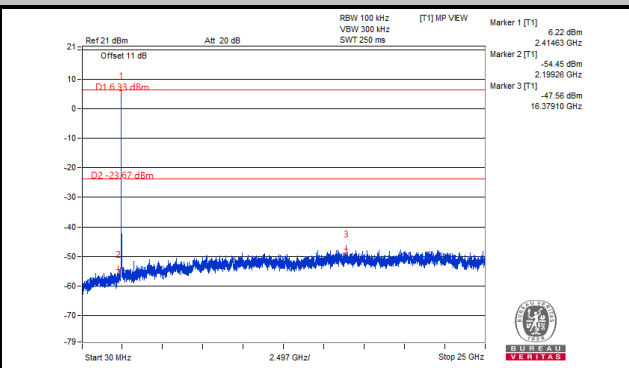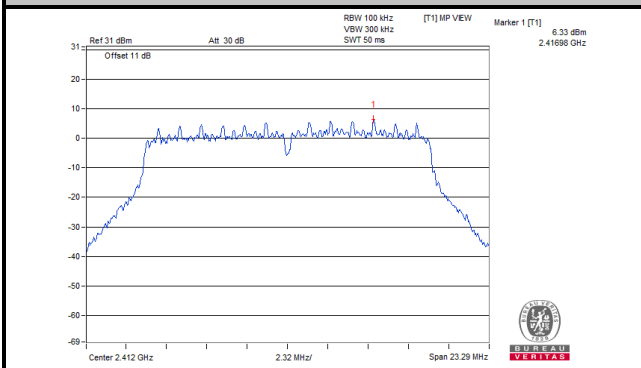


#### Ch 6

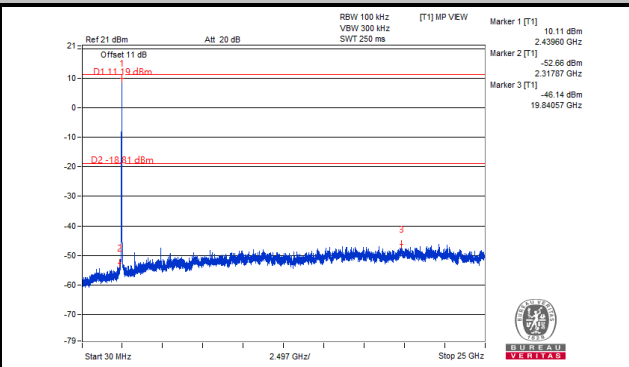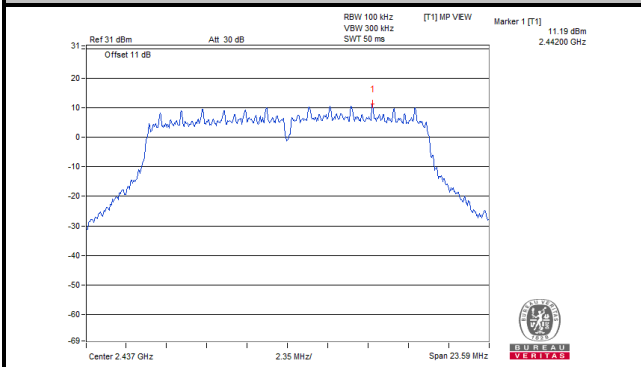


#### Ch 11

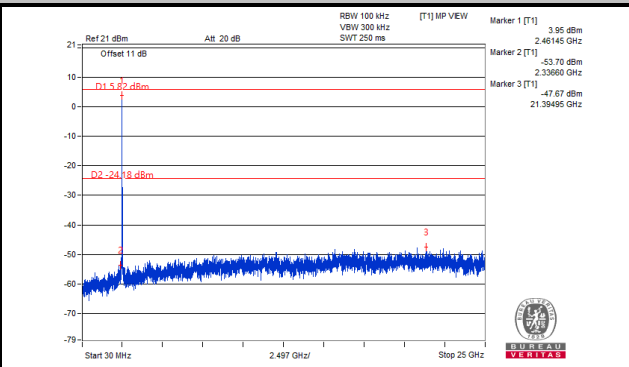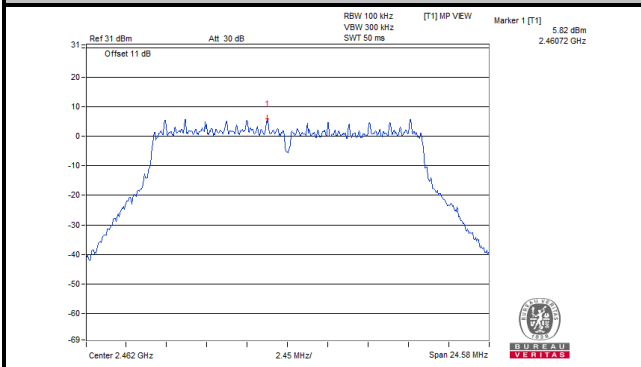

#### Ch 1 Band Edge

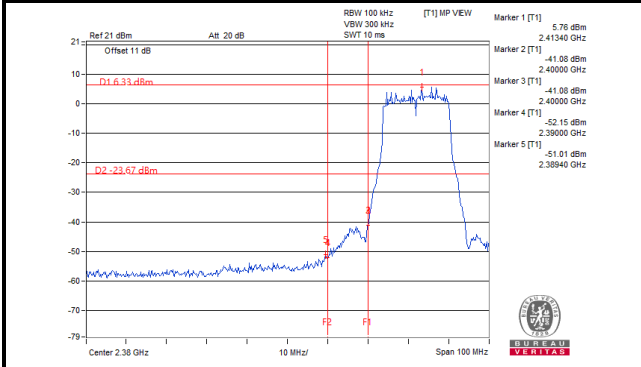



#### Ch 11 Band Edge

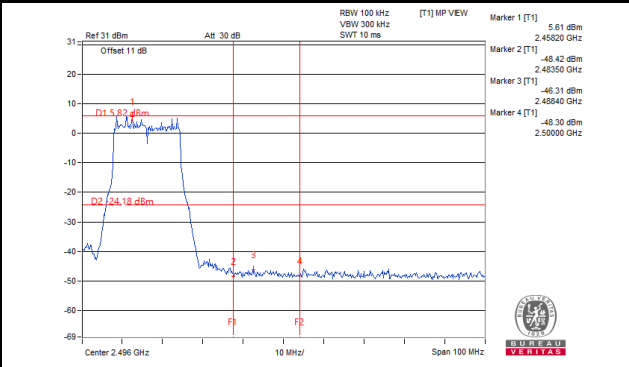





802.11n (HT20)  
CHAIN 0



Ch 1

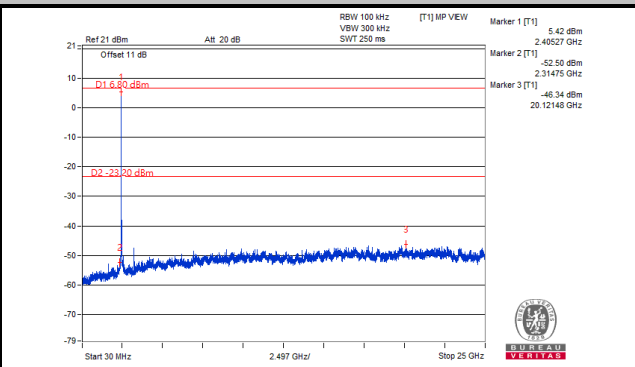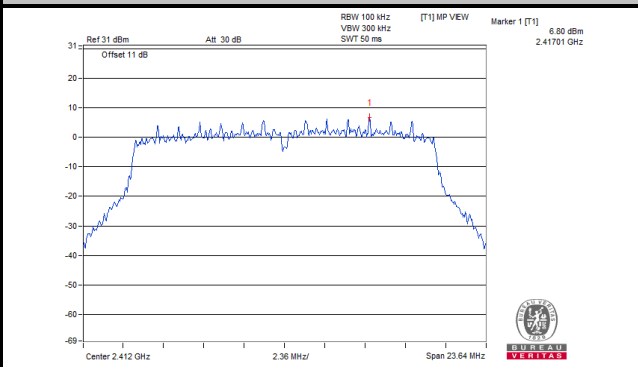


Ch 6

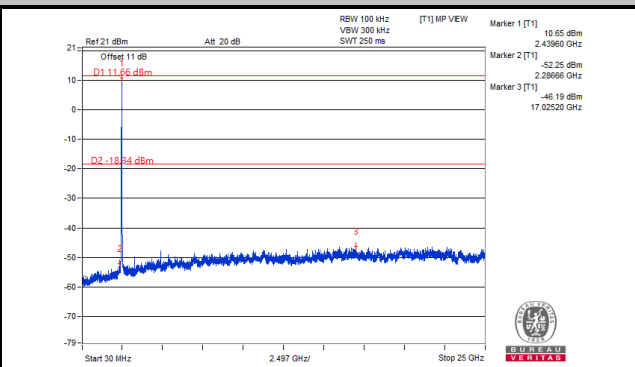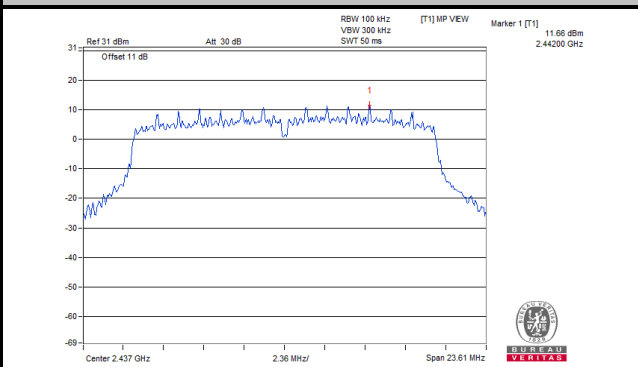


Ch 11

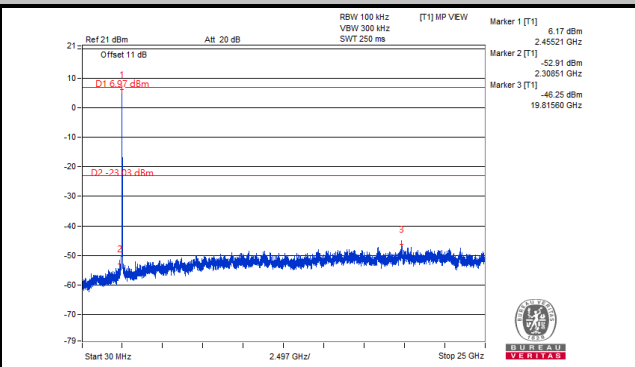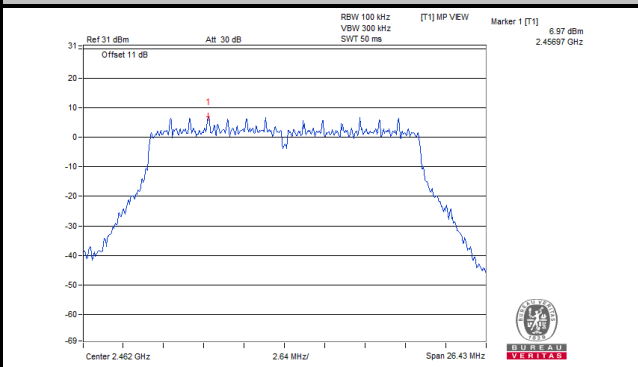

Ch 1 Band Edge


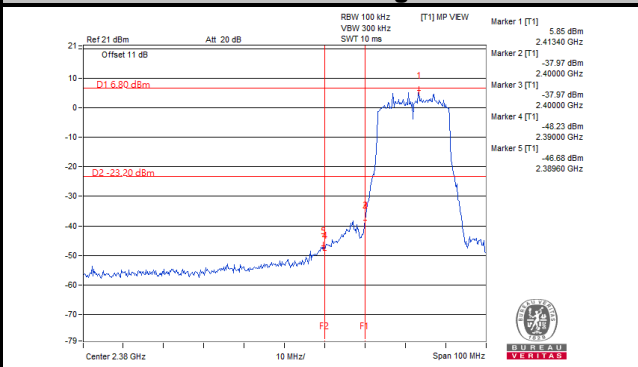


Ch 11 Band Edge


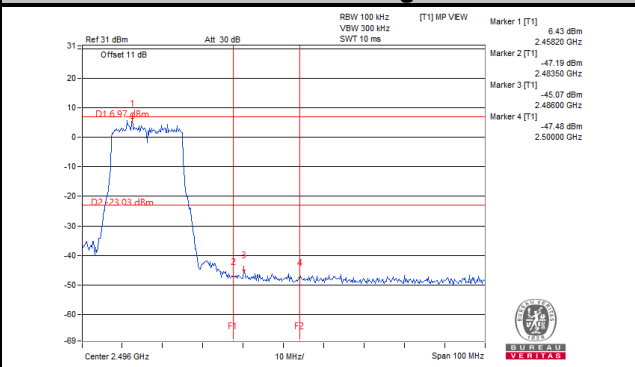


CHAIN 1



Ch 1

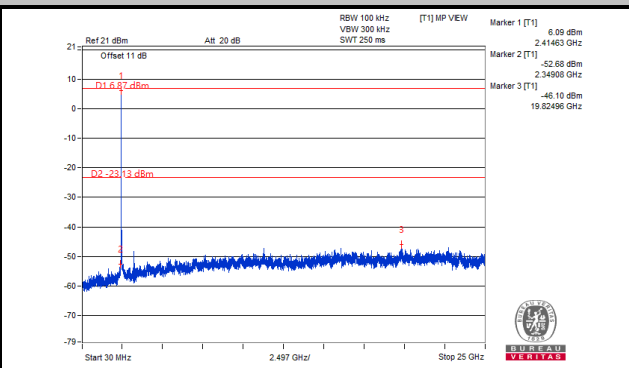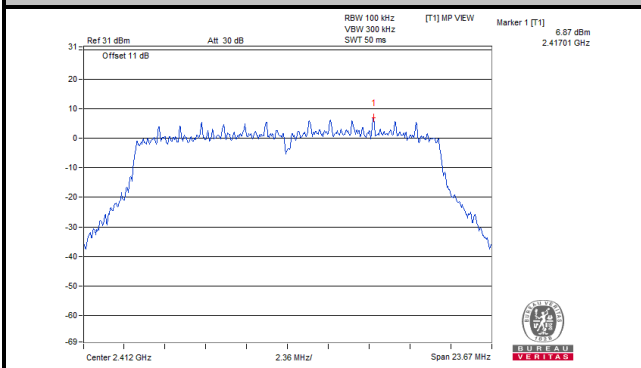


Ch 6

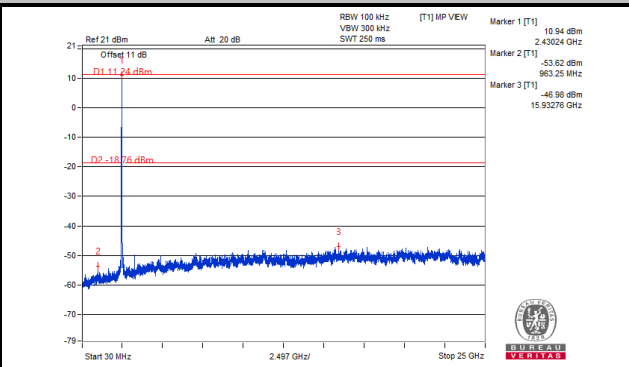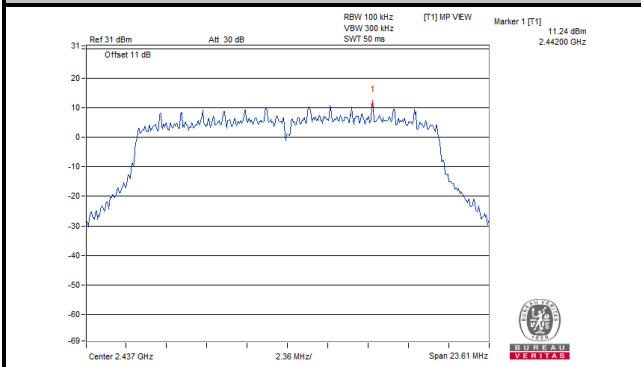


Ch 11

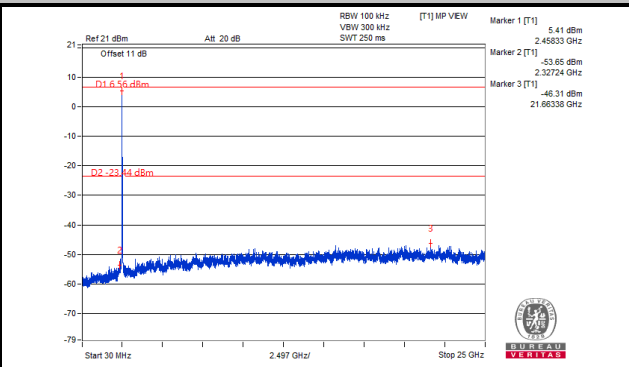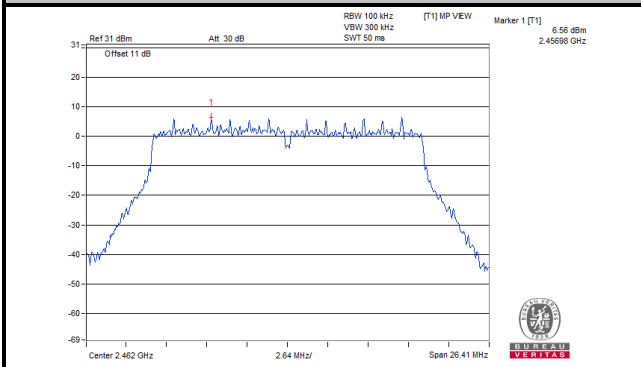

Ch 1 Band Edge


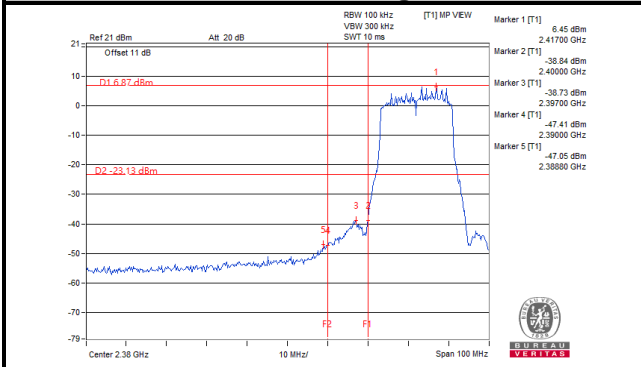


Ch 11 Band Edge


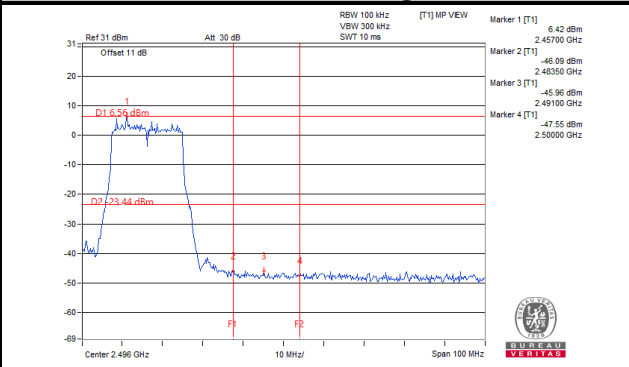


CHAIN 2



Ch 1

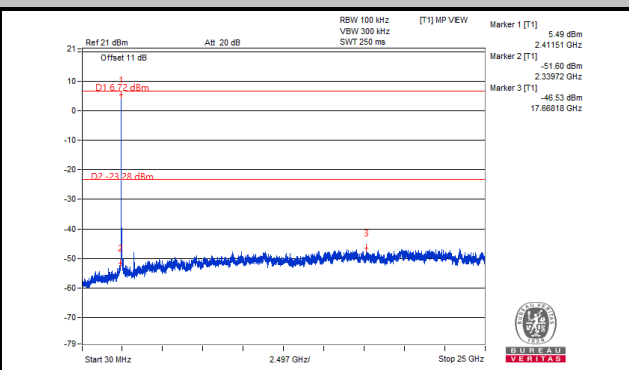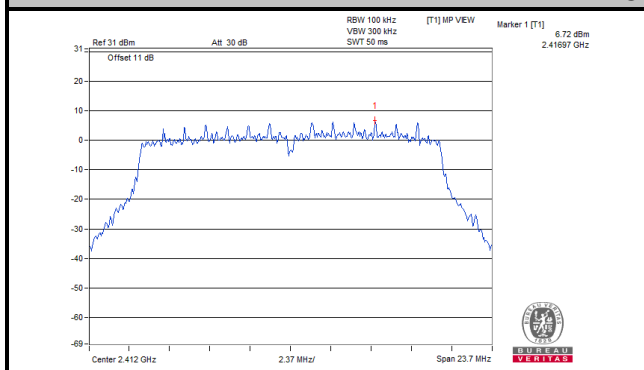


Ch 6

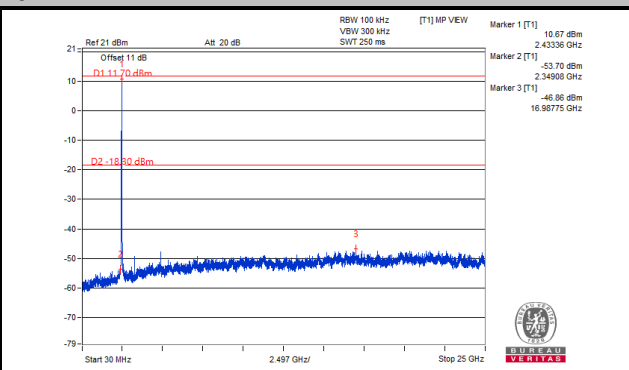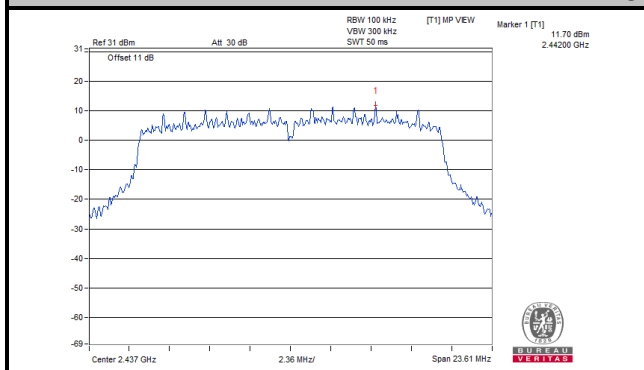


Ch 11

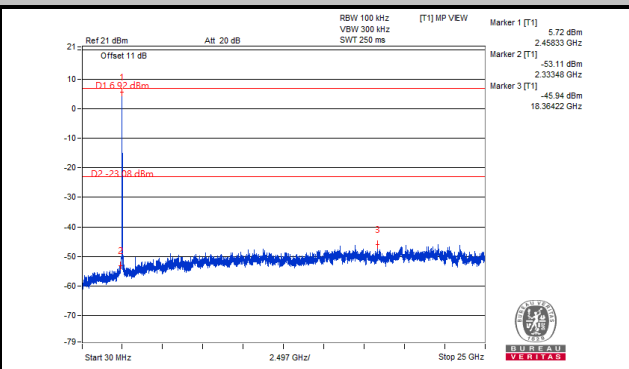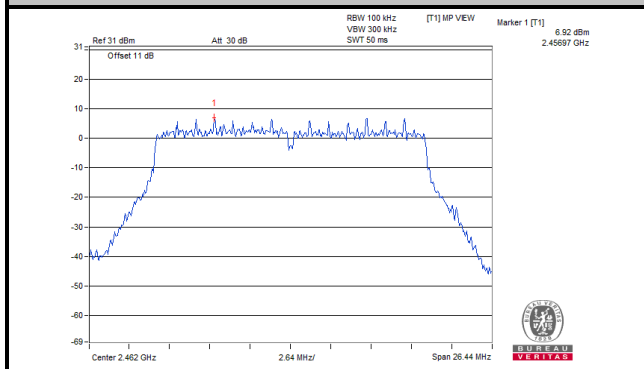

Ch 1 Band Edge


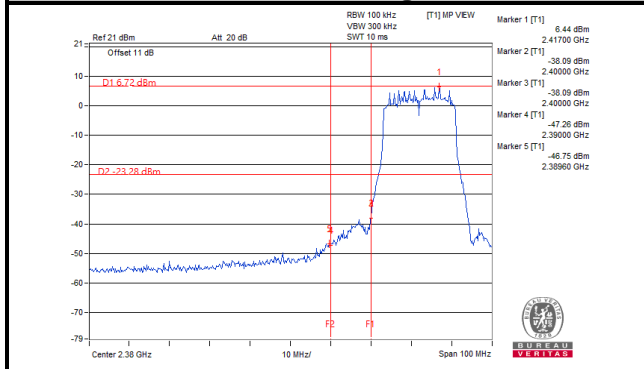


Ch 11 Band Edge


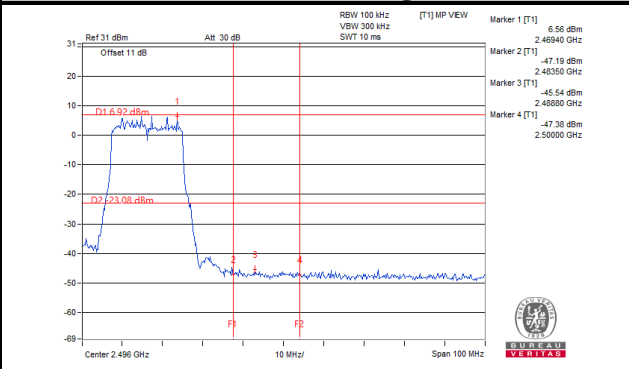


### CHAIN 3



#### Ch 1

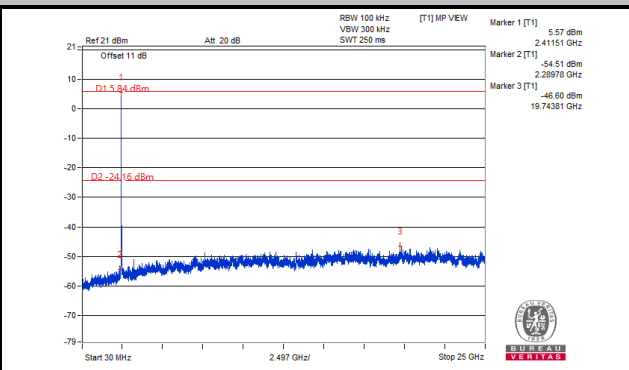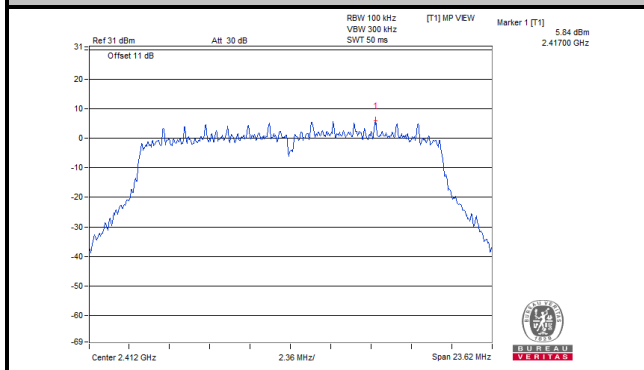


#### Ch 6

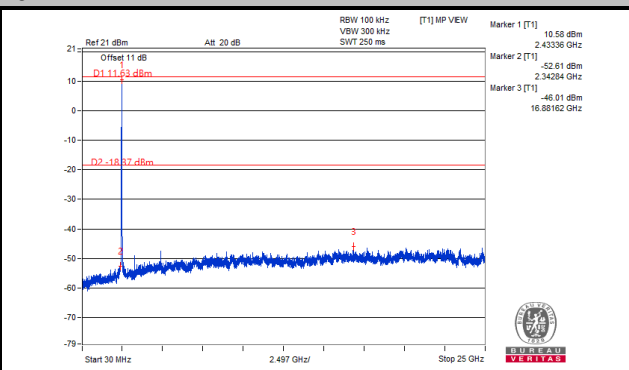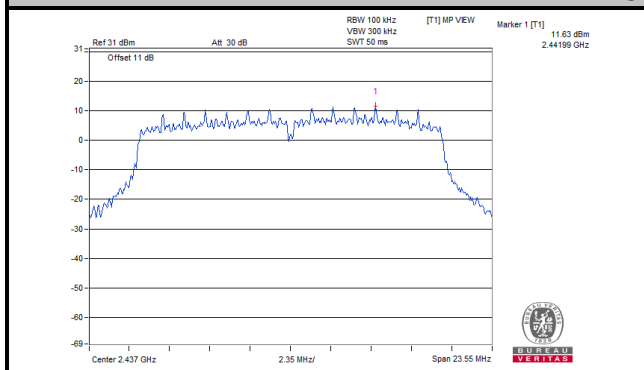


#### Ch 11

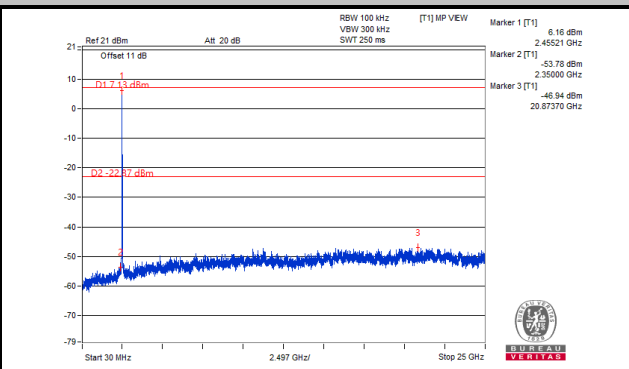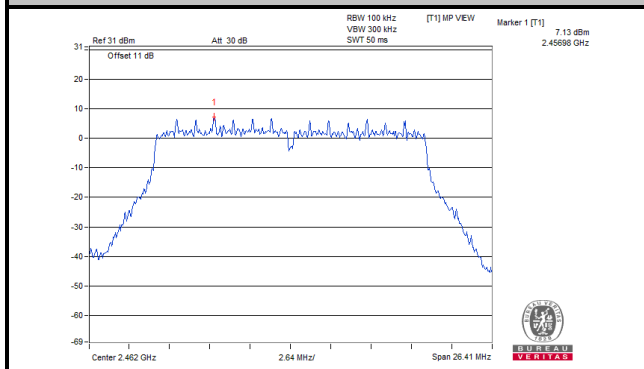

#### Ch 1 Band Edge


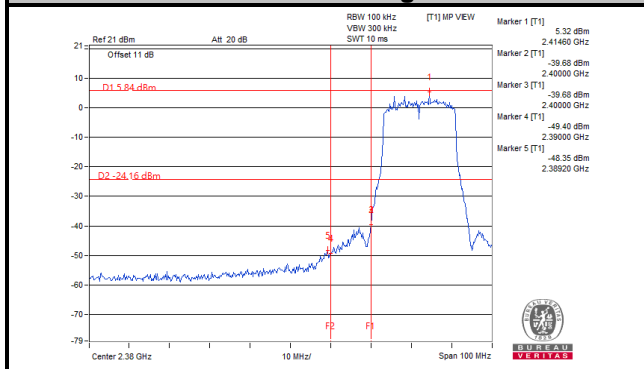


#### Ch 11 Band Edge


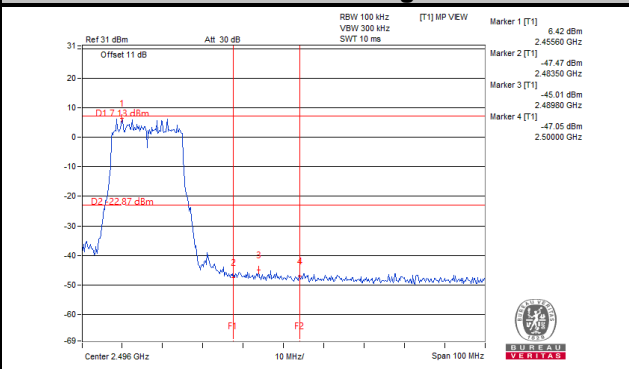


802.11n (HT40)  
CHAIN 0



Ch 3

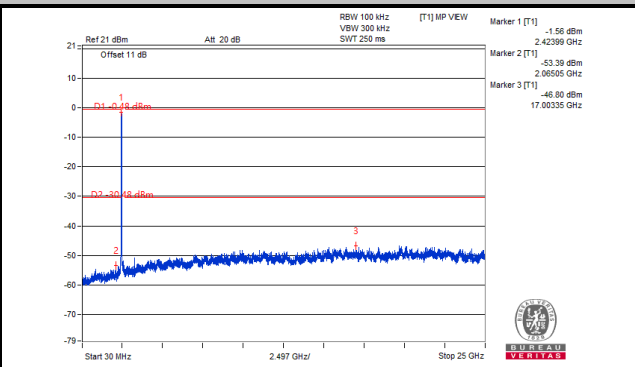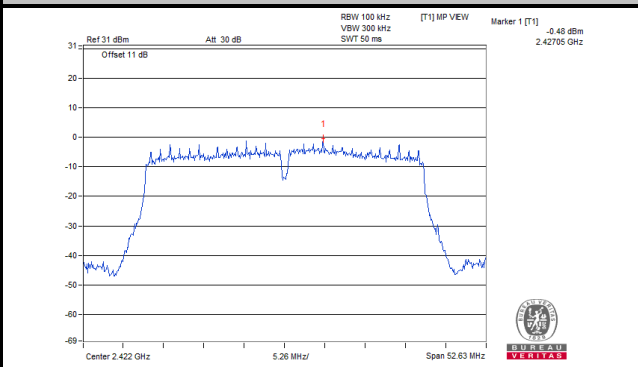


Ch 6

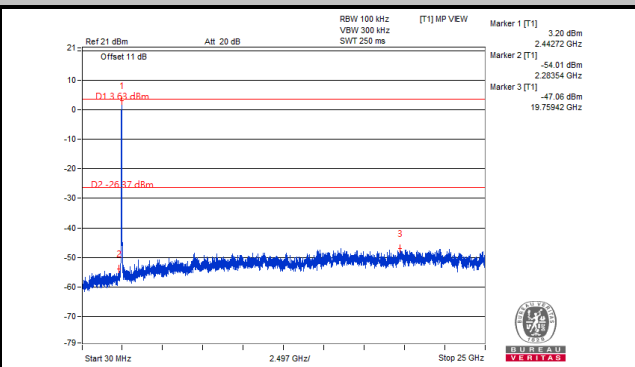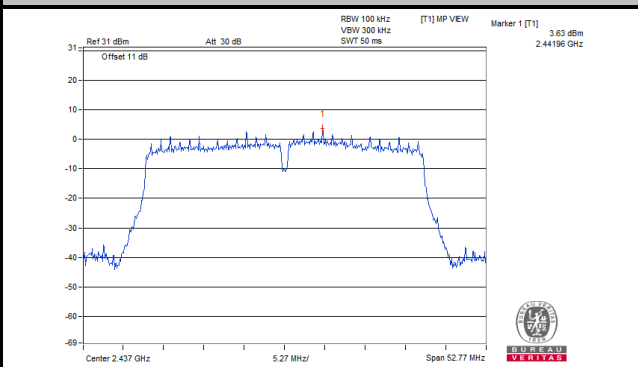


Ch 9

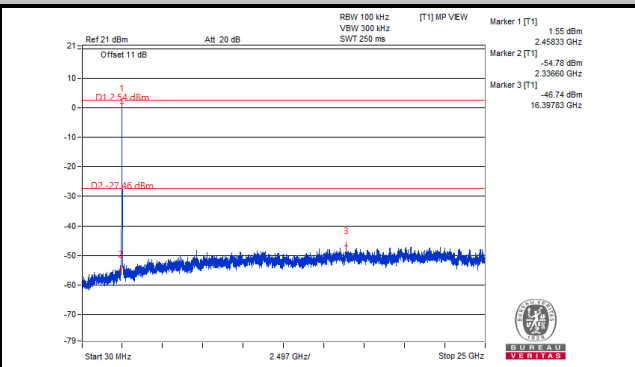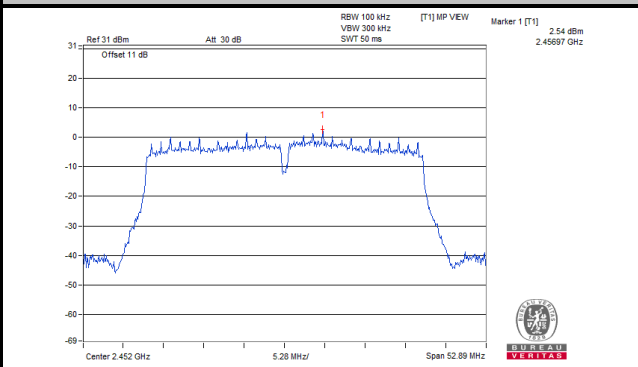

Ch 3 Band Edge


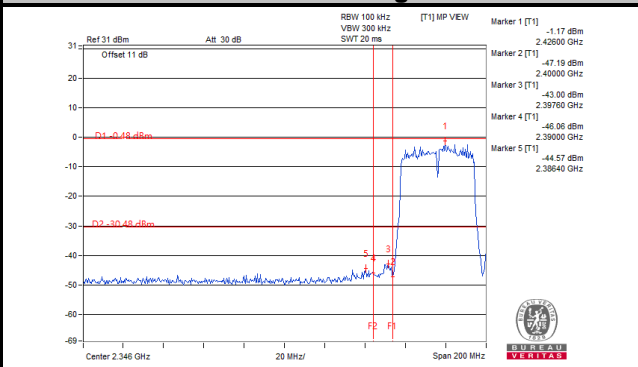


Ch 9 Band Edge


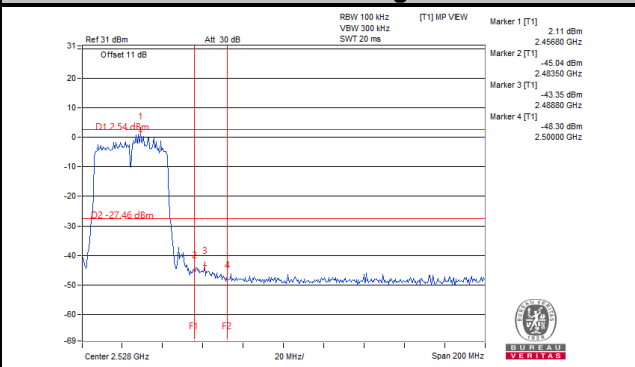


CHAIN 1



Ch 3

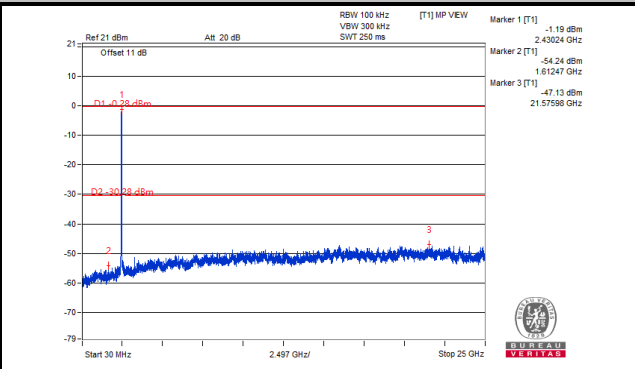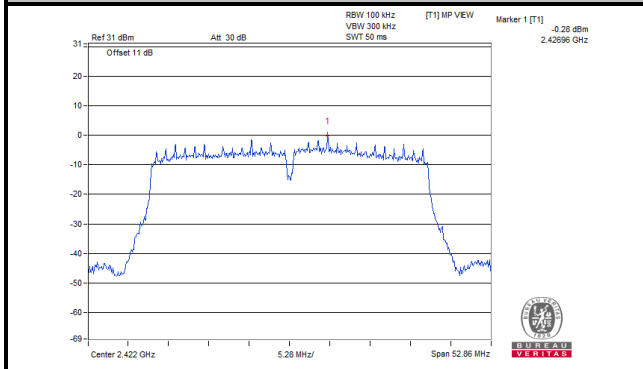


Ch 6

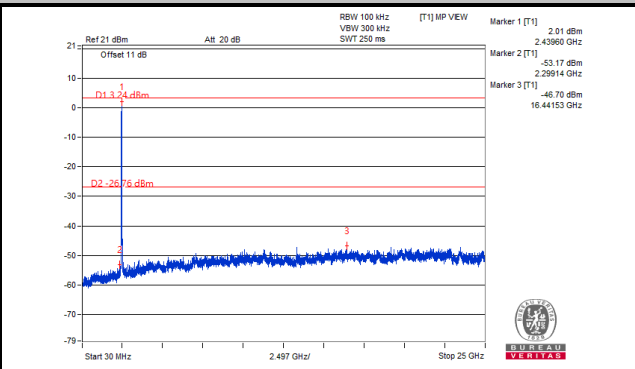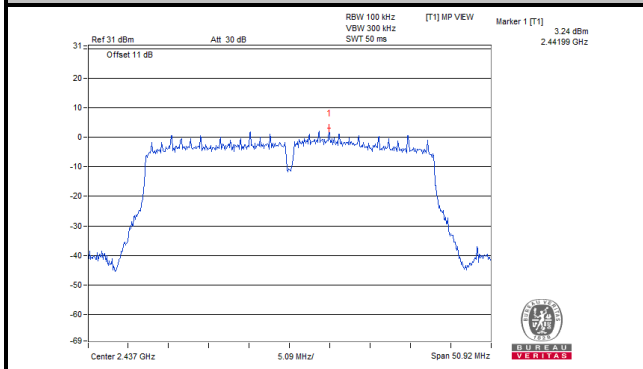


Ch 9

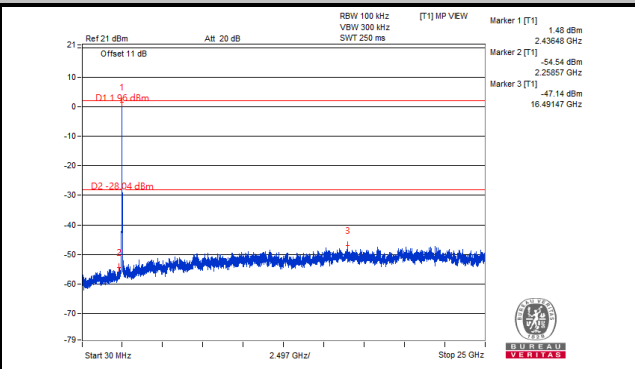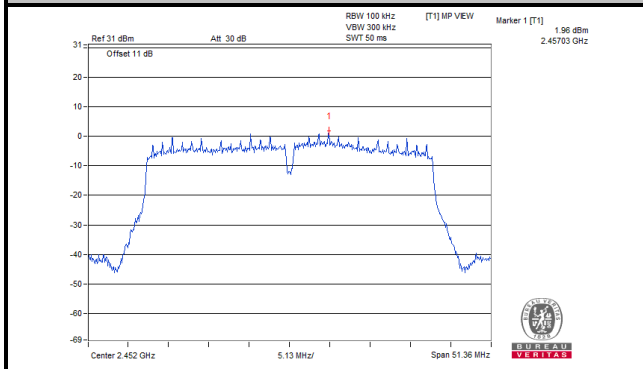

Ch 3 Band Edge


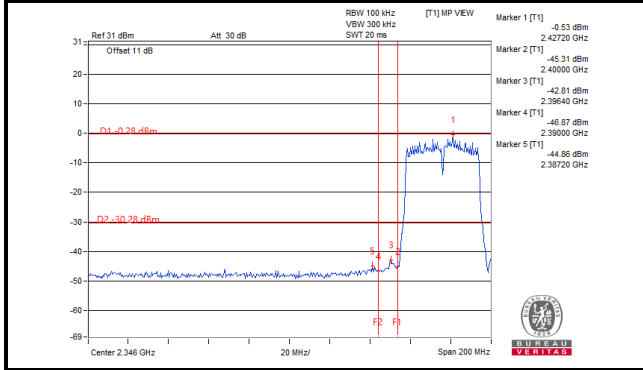


Ch 9 Band Edge


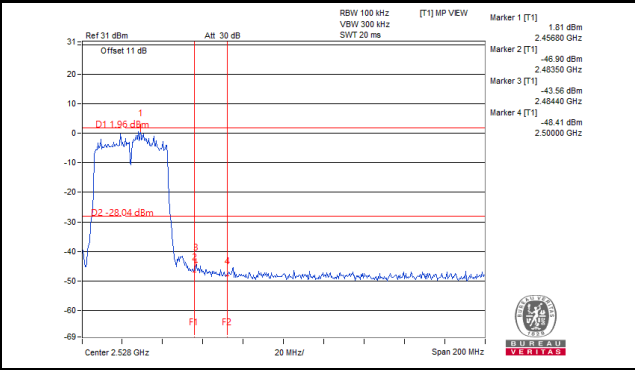


# CHAIN 2



## Ch 3

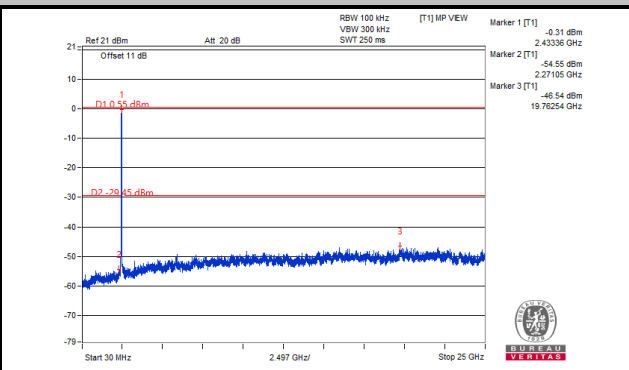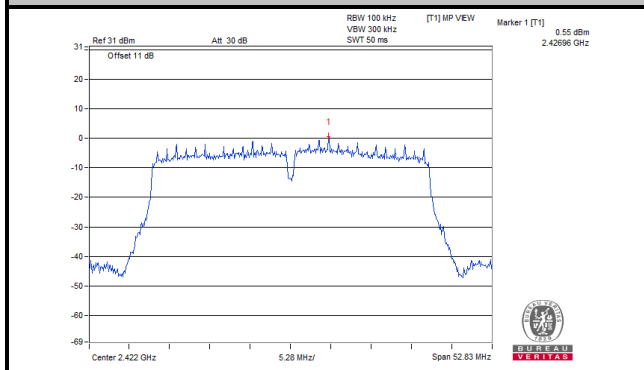


## Ch 6

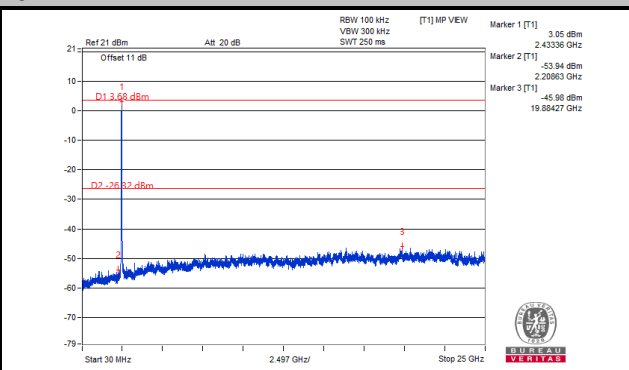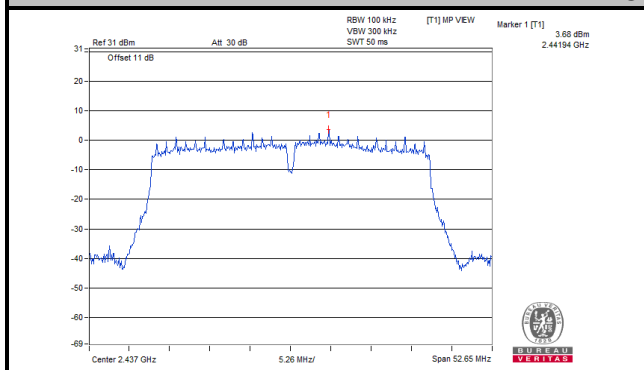


## Ch 9

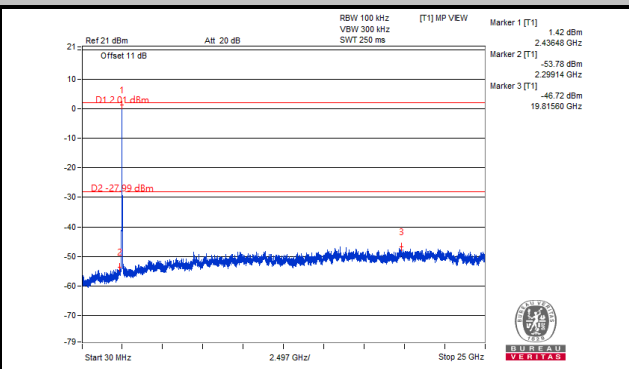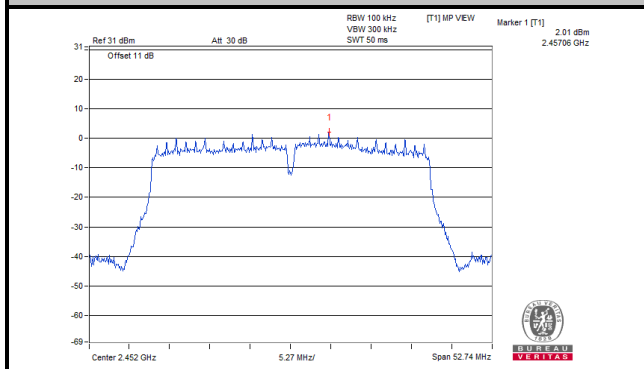

## Ch 3 Band Edge


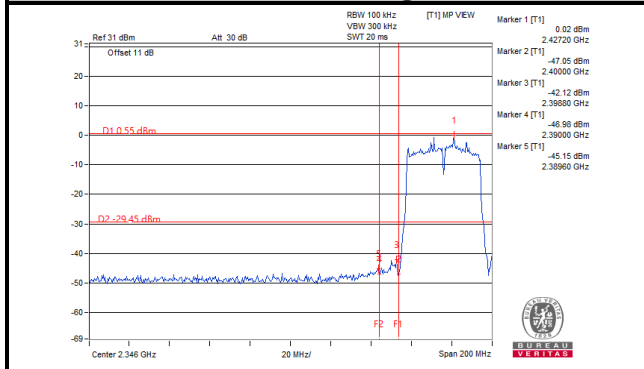


## Ch 9 Band Edge


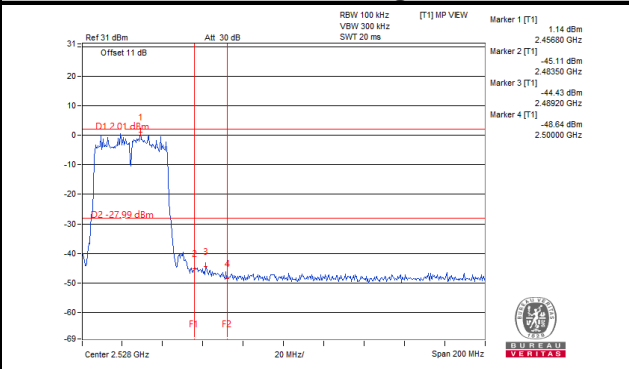


CHAIN 3



Ch 3

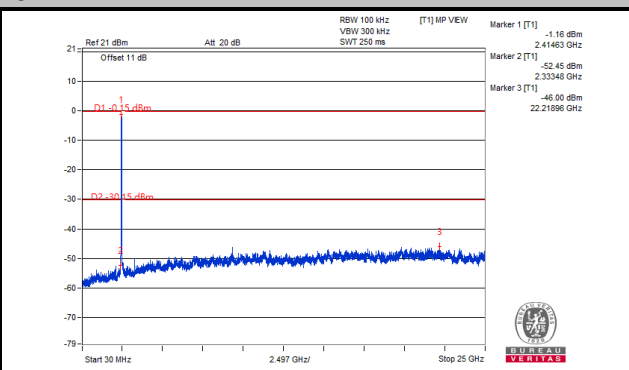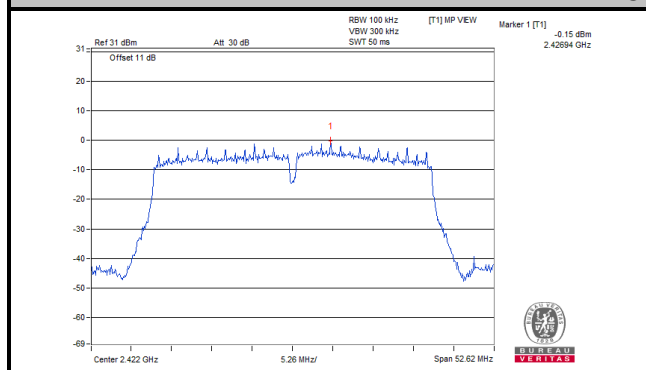


Ch 6

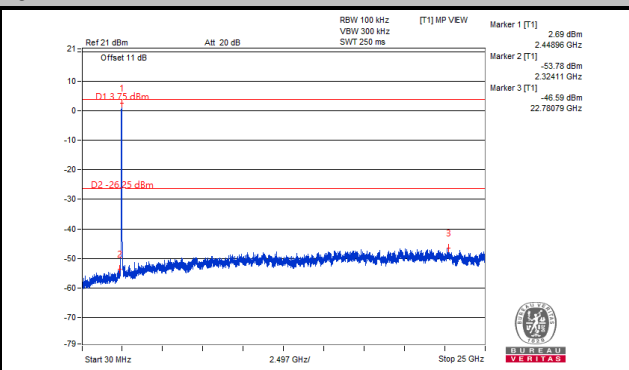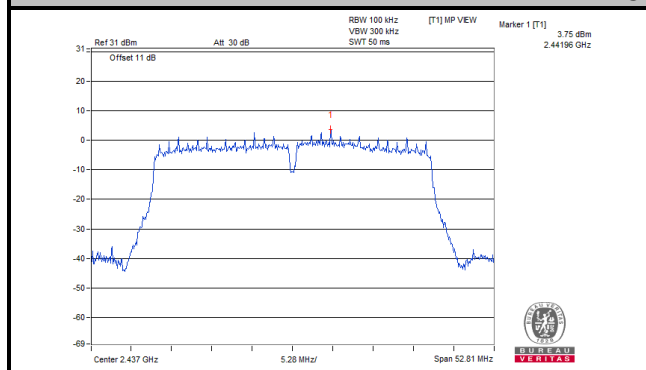


Ch 9

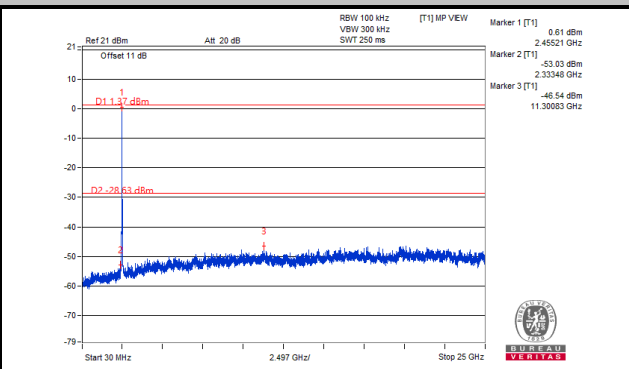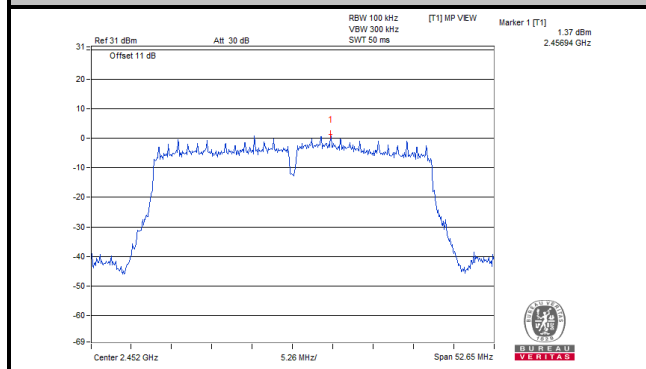

Ch 3 Band Edge

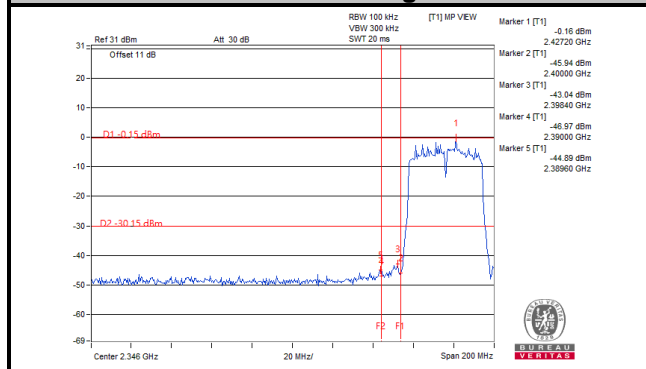

Ch 9 Band Edge

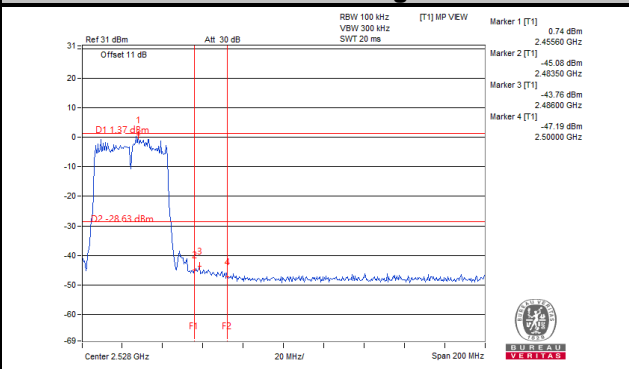





## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).


### Annex A- Band Edge Measurement

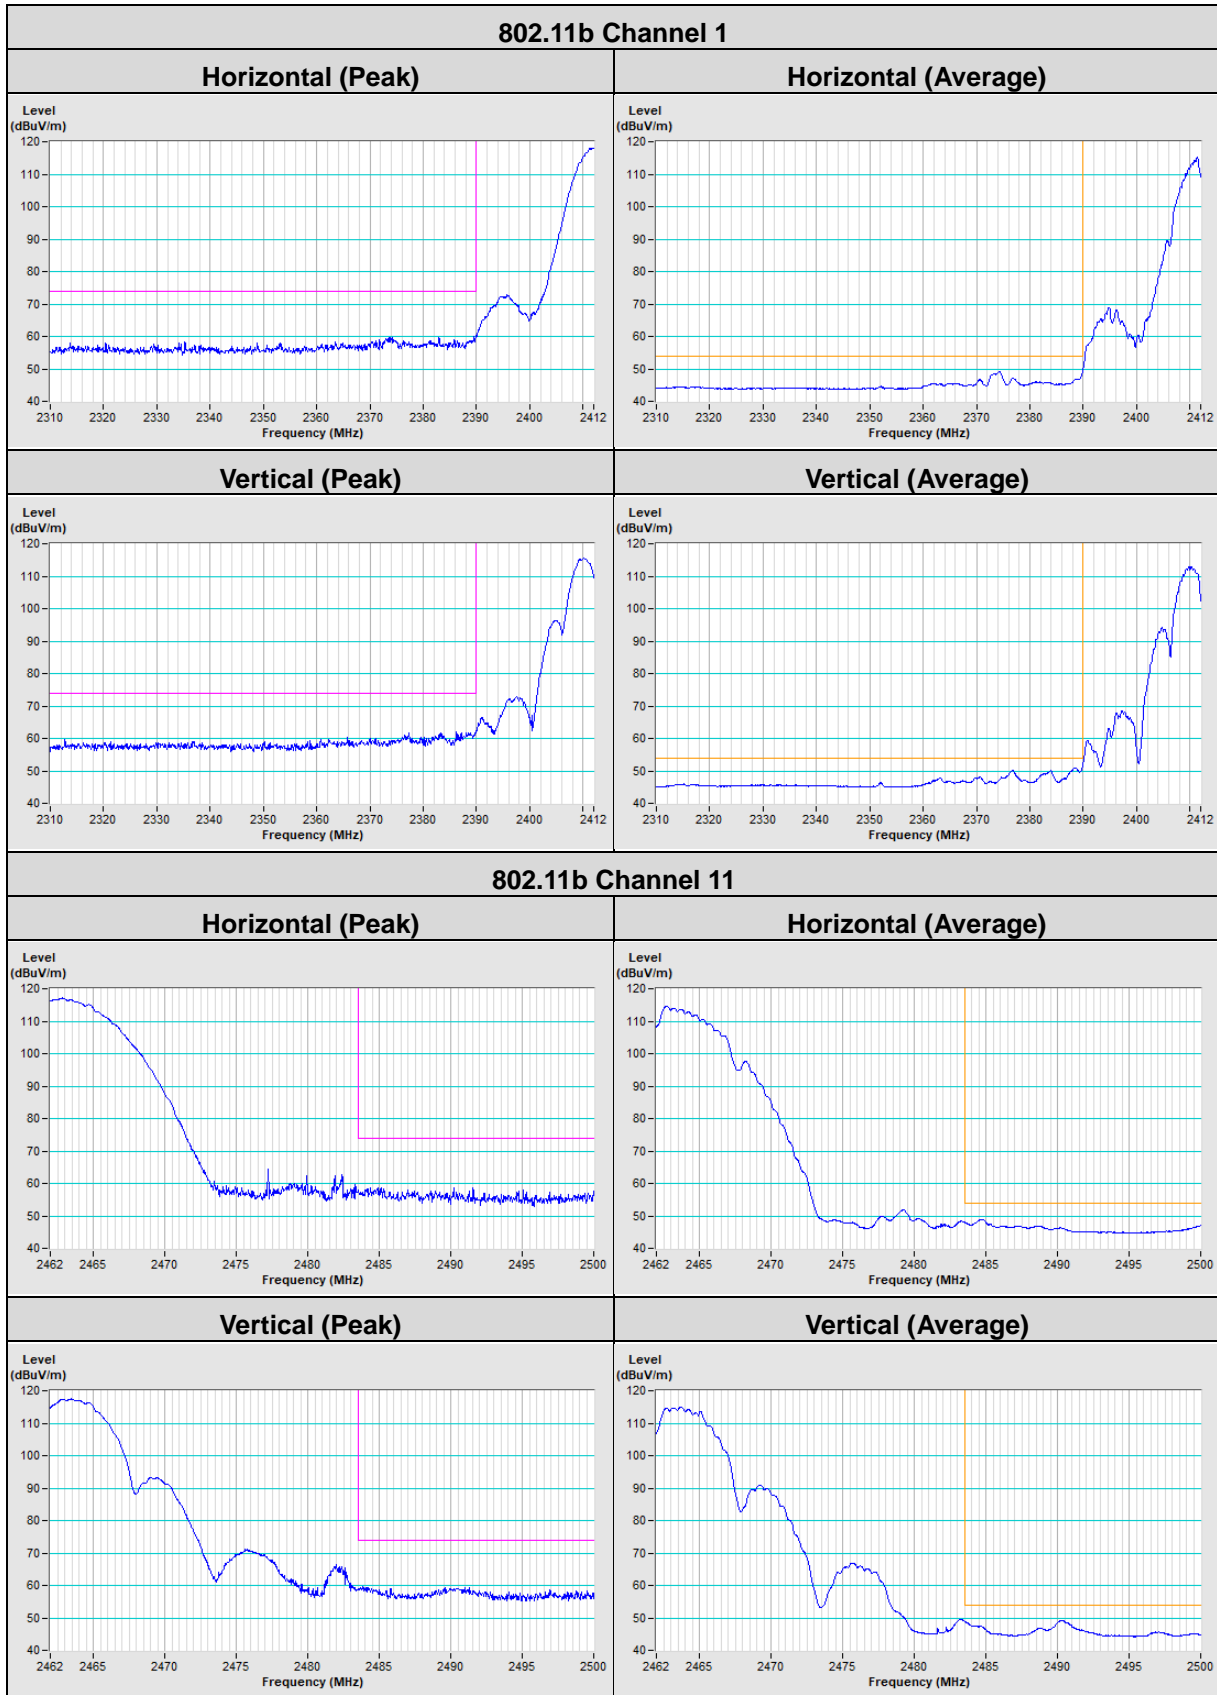



### 802.11g Channel 1

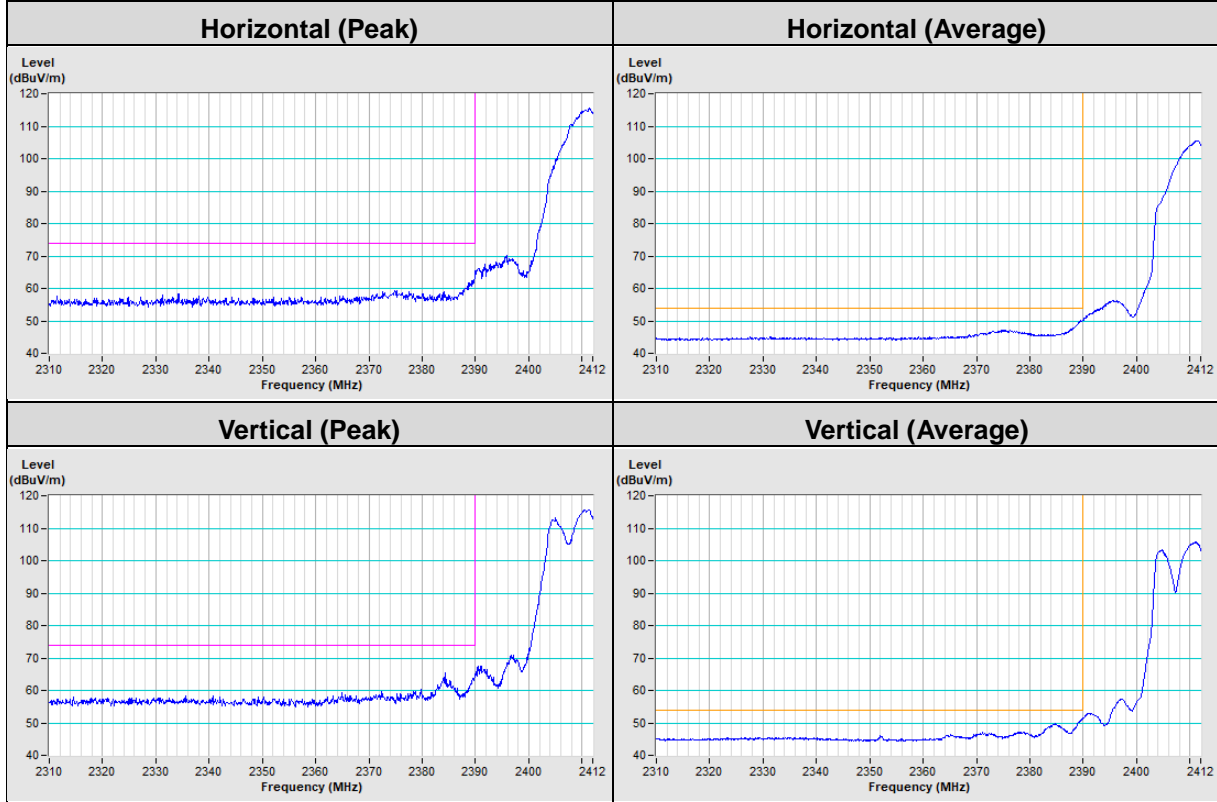

### 802.11g Channel 11

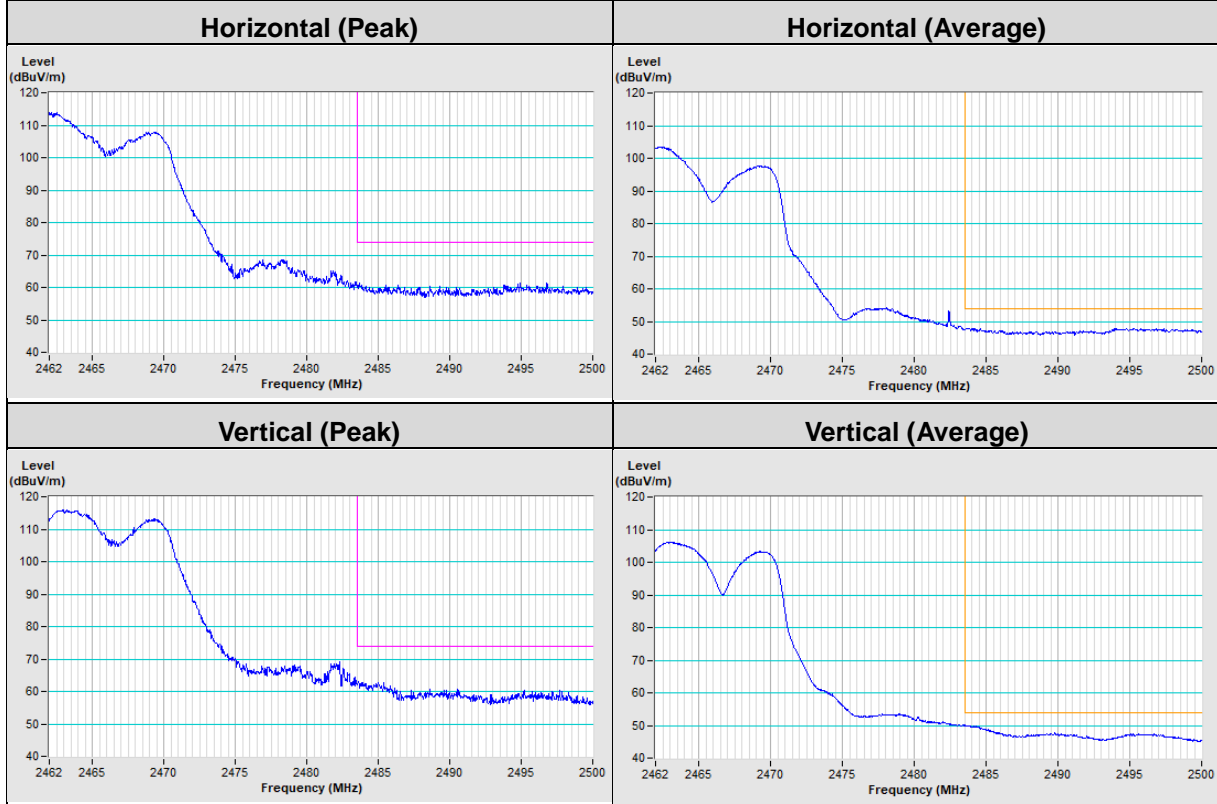

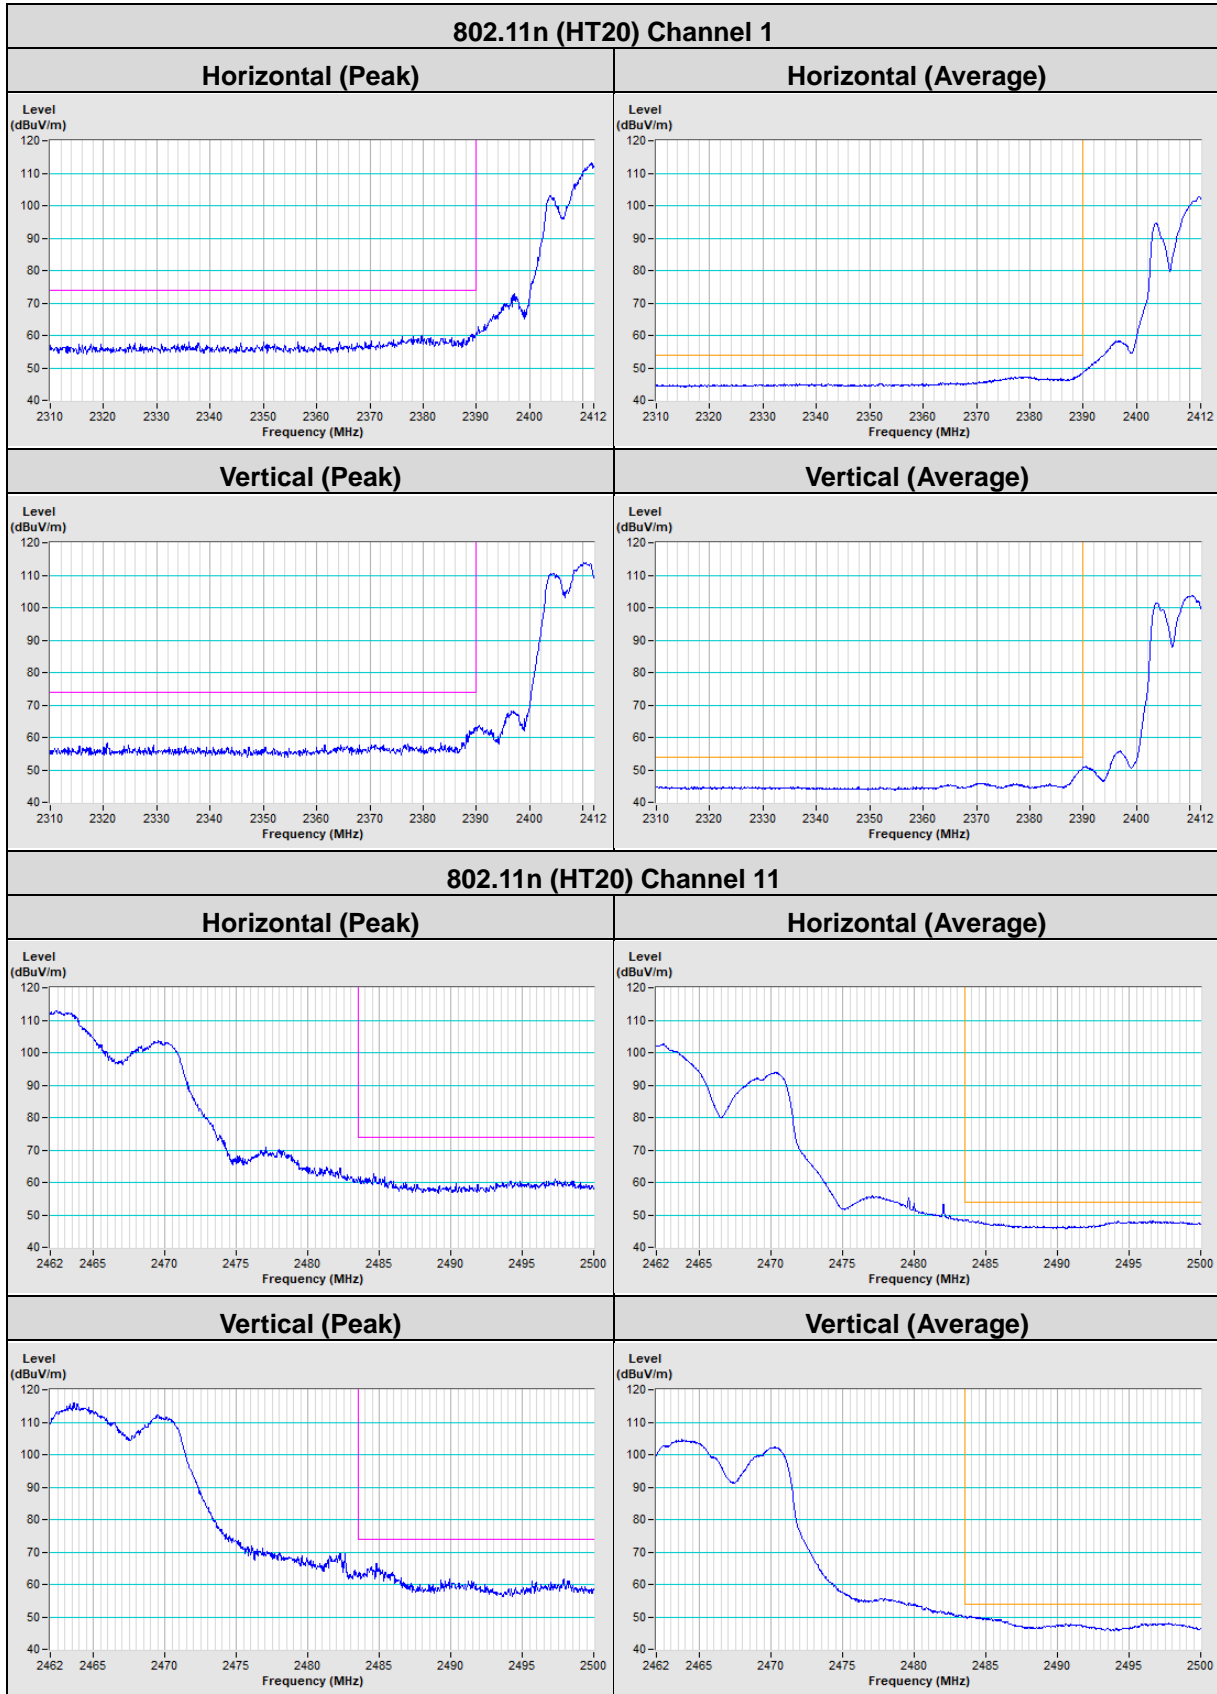

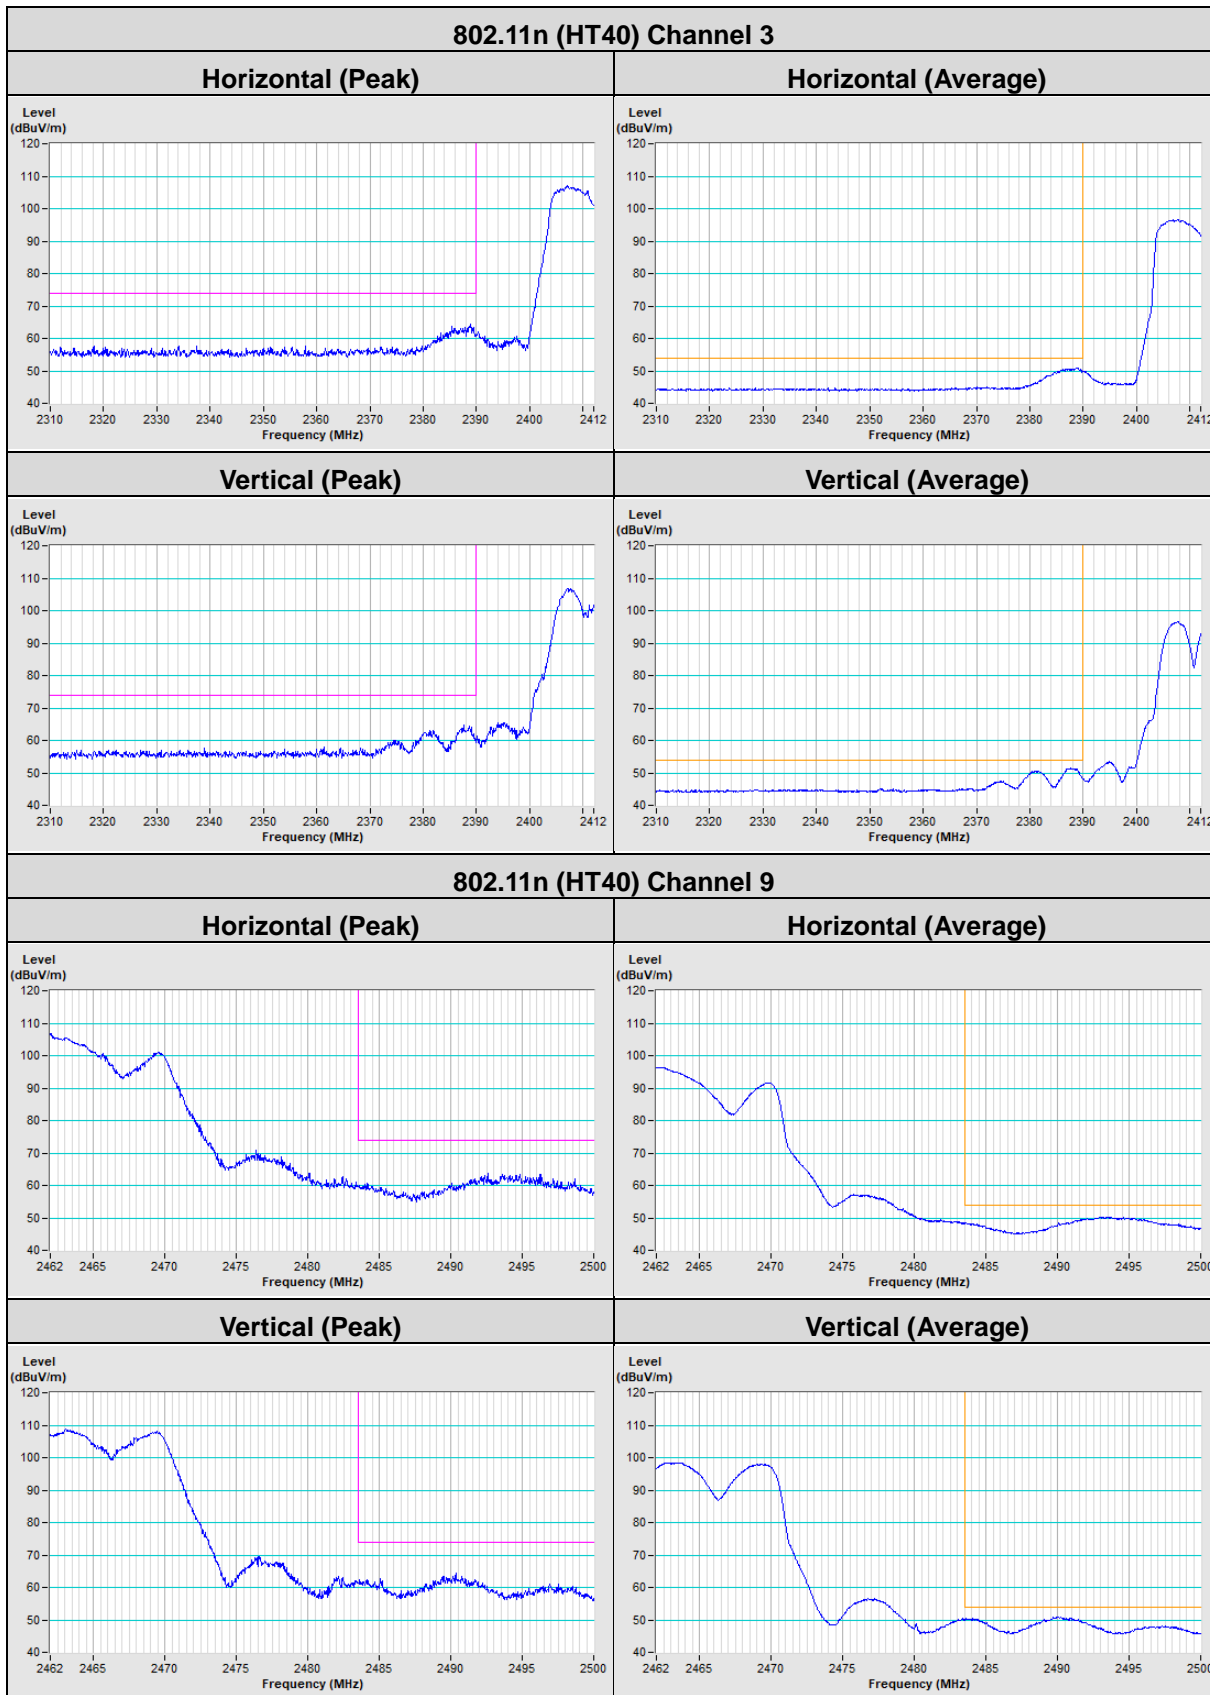

## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---