

**AT4 wireless, S.A.**

Parque Tecnológico de Andalucía,  
 c/ Severo Ochoa nº 2  
 29590 Campanillas/ Málaga/ España  
 Tel. 952 61 91 00 - Fax 952 61 91 13  
 MÁLAGA, C.I.F. A29 507 456  
 Registro Mercantil de Málaga, Tomo 1169,  
 Libro 82, Folio 133, Hoja MA3729

**TEST REPORT**

**REFERENCE STANDARDS:**

**FCC 47CFR Part 2.1093**

**FCC OET Bulletin 65, Supplement C (Edition 01-01)**

<b>NIE</b> .....	31131RET.002
Approved by (name / position & signature) .....	A. Llamas / RF Lab. Manager .....
Elaboration date .....	2010-02-15
<b>Identification of item tested</b> .....	Intel® Centrino® Wireless-N 1000 inside a host laptop
Trademark .....	Intel
Model and/or type reference .....	USA: 112BNHMW / Canada: 112BNHU
Serial number .....	MAC: 001E6400F552
Other identification of the product .....	FCC ID: PD9112BNHU / IC: 1000M-112BNHU
Features .....	802.11 b/g/n
Description .....	Wireles Module: Intel® Centrino® Wireless-N 1000 Antenna Type: WNC 25.91231.041 / 25.91231.031 Host platform: S10-3S
<b>Applicant</b> .....	Intel Corporation
Address .....	2111 Ne 25th Avenue JF3-3-G14, Hillsboro, OR 97124, USA
CIF/NIF/Passport .....	---
Contact person:	Steven C. Hackett (Wireless Regulatory Engineer)
Telephone / Fax .....	803-216-2344
e-mail: .....	steven.c.hackett@intel.com
<b>Test samples supplier</b> .....	Same as applicant
<b>Manufacturer</b> .....	Same as applicant

<b>Test method requested</b> .....	See Standard
<b>Standard</b> .....	<ol style="list-style-type: none"> <li>1. FCC 47 CFR Part 2.1093. Radiofrequency radiation exposure evaluation: portable devices.</li> <li>2. FCC OET Bulletin 65, Supplement C (Edition 01-01), “Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields”.</li> <li>3. FCC OET KDB 248227 – SAR Measurements Procedures 802.11a/b/g Transmitters (May 2007 – Revised).</li> <li>4. FCC OET KDB 616217 D03 – SAR Evaluation Considerations for Notebook/Netbook and Laptop Computers (November 2009).</li> <li>5. FCC OET KDB 450824 – SAR Probe Calibration and System Verification Considerations for measurements at 150 MHz – 3 GHz (January 2007).</li> </ol>
<b>Test procedure</b> .....	Same as standards.
<b>Non-standardized test method</b> .....	N/A
<b>Used instrumentation</b> .....	<ol style="list-style-type: none"> <li>1. Dosimetric E-field probe SPEAG ES3DV3</li> <li>2. Data acquisition device SPEAG DAE4</li> <li>3. Electro-optical converter SPEAG EOC3</li> <li>4. 2450 MHz dipole validation kit SPEAG D2450V2</li> <li>5. Robot STÄUBLI RX60BL</li> <li>6. Robot controller STÄUBLI CM7MB</li> <li>7. Oval flat phantom SPEAG ELI 4</li> <li>8. SAR measurement software SPEAG DASY4 V4.7 Build 80</li> <li>9. Measurement server SPEAG DASY4 SE UMS 001 DC</li> <li>10. Body Tissue Equivalent Liquids for 2450MHz band</li> <li>11. Vector network analyzer Agilent E5071C</li> <li>12. Dielectric probe kit Agilent 85070C</li> <li>13. Power meter R&amp;S NRVD</li> <li>14. Power Sensor R&amp;S NRV-Z51</li> <li>15. Power Sensor R&amp;S NRV-Z1</li> <li>16. RF Generator Agilent ESG E4438C</li> <li>17. Dual directional coupler NARDA FSCM 99899</li> <li>18. Power amplifier MITEQ AMF-4D-00400600-50-30P</li> <li>19. Laptop positioning extension SPEAG Laptop Holder</li> </ol>
<b>Report template No.</b> .....	FDT08_11
<p>IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of AT4 wireless.</p>	

## INDEX

Competences and guarantees .....	4
General conditions .....	4
Uncertainty .....	4
Usage of samples.....	5
Testing period .....	5
Environmental conditions .....	5
Summary .....	6
Remarks and comments .....	6
Testing verdicts.....	6
APPENDIX A: Test Configuration.....	7
APPENDIX B: Test results.....	15
APPENDIX C: Measurements Reports .....	20
APPENDIX D: Calibration Data .....	24
APPENDIX E: Photographs .....	31

### **Competences and guarantees**

AT4 wireless is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, AT4 wireless has a calibration and maintenance programme for its measurement equipment.

AT4 wireless guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at AT4 wireless at the time of performance of the test.

AT4 wireless is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

### **General conditions**

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of AT4 wireless.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of AT4 wireless and the Accreditation Bodies.

### **Uncertainty**

Uncertainty (factor  $k=2$ ) was calculated according to the following documents:

1. FCC OET Bulletin 65, Supplement C (Edition 01-01), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields".

### Usage of samples

Samples undergoing test have been selected by: **the client**.

Sample M/01 is composed of the following elements:

<u>Control N°</u>	<u>Description</u>	<u>Model</u>	<u>Serial N°</u>	<u>Date of reception</u>
31131/02	WiFi module inside a Laptop PC	Intel® Centrino® Wireless- N 1000 / Laptop S10-3S / Yageo Antennas	MAC Adress: 001E6400F552	2010-02-10

1. Sample M/01 has undergone the test(s) specified in subclause “Test method requested”.

### Testing period

The performed test started on 2010-02-11 and finished on the same day.

The tests have been performed at AT4 wireless.

### Environmental conditions

In the laboratory for measurements, the following limits were not exceeded during the test:

Temperature	Min. = 21.52 °C Max. = 23.37 °C
Relative humidity	Min. = 37.74 % Max. = 45.17 %
Air pressure	Min. = 1008 mbar Max. = 1010 mbar

**Summary**

Considering the results of the performed test according to FCC 47CFR Part 2.1093, the item under test is **IN COMPLIANCE** with the requested specifications specified in the standard.

The maximum 1g volume averaged SAR found during this test has been 0.027 W/kg, for the 2450 MHz band and 802.11n with 20MHz BW mode.

NOTE: The results presented in this Test Report apply only to the particular item under test established in page 1 of this document, as presented for test on the date(s) shown in section, "USAGE OF SAMPLES, TESTING PERIOD AND ENVIRONMENTAL CONDITIONS".

**Remarks and comments**

- 1: 802.11n = 20MHz BW / 802.11n\* = 40MHz BW.
- 2: Testing of 802.11g is not required due to the testing reductions mentioned in FCC OET KDB 248227 – SAR Measurements Procedures 802.11a/b/g Transmitters (May 2007 – Revised), paragraph "Frequency Channel Configurations".
- 3: Testing of other channels in each band is optional when the maximum output channel SAR fulfills the testing reductions mentioned in FCC OET KDB 248227 – SAR Measurements Procedures 802.11a/b/g Transmitters (May 2007 – Revised), paragraph "Frequency Channel Configurations".

**Testing verdicts**

Not applicable .....: NA  
 Pass.....: P  
 Fail .....: F  
 Not measured.....: NM

**2450 MHz band**

FCC 47CFR Part 2.1093 Paragraph	VERDICT			
	NA	P	F	NM
(d)(2) 802.11b		P		
(d)(2) 802.11g				NM <sup>2</sup>
(d)(2) 802.11n <sup>1</sup>		P		
(d)(2) 802.11n* <sup>1</sup>		P		

1 and 2: See Remarks and Comments.

## **APPENDIX A: Test Configuration**

## INDEX

1. GENERAL INTRODUCTION .....	9
1.1. Application Standard.....	9
1.2. General requirements .....	9
1.3. Measurement system and phantom requirements .....	9
1.4. Measurement Liquids requirements. ....	9
2. MEASUREMENT SYSTEM.....	10
2.1. Measurement System.....	10
2.2. Test Positions of device relative to body.....	11
2.3. Test to be performed .....	11
2.4. Description of interpolation/extrapolation scheme.....	11
2.5. Determination of the largest peak spatial-average SAR.....	11
2.6. System Validation .....	12
3. UNCERTAINTY .....	13
4. SAR LIMIT .....	14



## **1. GENERAL INTRODUCTION**

### **1.1. Application Standard**

The Federal Communications Commission (FCC) sets the limits for General Population / Uncontrolled exposure to radio frequency electromagnetic fields for transmitting devices designed to be used within 20 centimetres of the user body under FCC 47 CFR Part 2.1093 - "Radiofrequency radiation exposure evaluation: portable devices", paragraph (d)(2).

Specific requirements and procedure for SAR assessment are describe under FCC OET Bulletin 65, Supplement C (Edition 01-01), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields", and all the FCC OET Knowledge Database documents referred at the beginning of this document.

### **1.2. General requirements**

The SAR measurement has been performed continuing the following considerations and environment conditions:

- The ambient temperature shall be in the range of 18°C to 25°C and the variation shall not exceed +/-2°C during the test.
- The ambient humidity shall be in the range of and 30% - 70%.
- The device battery shall be fully charged before each measurement.

### **1.3. Measurement system and phantom requirements**

The measurement system used for SAR tests fulfils the procedural and technical requirements described at the reference standards used.

The phantom is a simplified representation of the human anatomy and comprised of material with electrical properties similar to the corresponding tissues in human body.

### **1.4. Measurement Liquids requirements.**

The liquids used to simulate the human tissues, must fulfils the requirements of the dielectric properties required. These target dielectric properties per FCC OET KDB 450824 instructions come from the dipole and probe calibration data which are included in Appendix B, Section 2, of this document.

As indicated in FCC OET KDB 450824, it is allowed a 5% variation of the above mentioned level at the 2450 MHz band.

## 2. MEASUREMENT SYSTEM

### 2.1. Measurement System

Manufacturer	Device	Type
Schmid & Partner Engineering AG	Dosimetric E-Fiel Probe	ES3DV3
Schmid & Partner Engineering AG	Data Acquisition Electronics	DAE4
Schmid & Partner Engineering AG	Electro-Optical Converter	EOC5
Schmid & Partner Engineering AG	2450 MHz System Validation Dipole	D2450V2
Stäubli	Robot	RX60BL
Stäubli	Robot controller	CM7MB
Schmid & Partner Engineering AG	Oval flat phantom	ELI 4
Schmid & Partner Engineering AG	Measurement Software	DASY V4.7 Build 80
Schmid & Partner Engineering AG	Measurement Server	DASY4 SE UMS 001 DC
Agilent	Vector Network Analyser	E5071C
Agilent	Dielectric Probe Kit	85070C
Rohde & Schwarz	Power Meter	NRVD
Rohde & Schwarz	Power Sensor	NRV-Z51
Rohde & Schwarz	Power Sensor	NRV-Z1
Agilent	RF Generator	ESG E4438C
NARDA	Dual directional coupler	FSCM 99899
MITEQ	Power amplifier	AMF-4D-00400600-50-30P
Schmid & Partner Engineering AG	Laptop Holder	SM LH1 001 AC

**Table 1:** Measurement Equipment

## **2.2. Test Positions of device relative to body**

The laptop device was tested in one position for all tests, with the bottom face placed directly against the phantom so the position of the laptop would be used (normal use condition). Further analysis was performed to determine the location which showed the highest SAR.

The antennas on the laptop are located within the edge screen. According to FCC OET Bulletin 65 – Supplement C, the antennas which would be applied in the test are antennas or radiating structures in direct contact with the user's body within 20 centimetres of the body of a user under normal operating conditions.

## **2.3. Test to be performed**

In all operating modes and bands the measurements have to be performed on the "default test channels" defined at FCC OET KDB 248227 – SAR Measurements Procedures 802.11a/b/g Transmitters (May 2007 – Revised), except those channels defined as "required test channels" at the same document.

## **2.4. Description of interpolation/extrapolation scheme**

The local SAR inside the Phantom is measured using small dipole sensing elements inside a probe element. The probe tip must not be in contact with the Phantom's surface in order to minimise measurement errors, but the highest local SAR is obtained from measurements at a certain distance from the shell through extrapolation. The accurate assessment of the maximum SAR averaged over 1 gr. and 10 gr. requires a very fine resolution in the three dimensional scanned data array. Since the measurements have to be performed over a limited time, the measured data have to be interpolated to provide an array of sufficient resolution.

The interpolation of 2D area scan is used after the initial area scan, at a fixed distance from the Phantom shell wall. The initial scan data is collected with a proper spatial resolution and this interpolation is used to find the location of the local maximum for positioning the subsequent 3D scanning to within a 1mm resolution.

For the 3D scan, data is collected on a spatially regular 3D grid having 5mm steps in both lateral directions, and 5mm in depth direction for the 2450MHz band. After the data collection by the SAR probe, the data are extrapolated in the depth direction to assign values to points in the 3D array closer to the shell wall. A notional extrapolation value is also assigned to the first point outside the shell wall so that subsequent interpolation schemes will be applicable right up to the shell wall boundary.

## **2.5. Determination of the largest peak spatial-average SAR**

To determine the maximum value of the peak spatial-average SAR of a EUT, all device positions, configurations and operational modes should be tested for each frequency band.

According to FCC 47 CFR Part 2.1093, the averaging volume shall be chosen as 1 g of contiguous tissue. The cubic volumes, over which the SAR measurements are averaged after extrapolation and interpolation, are chosen in order to include the highest values of local SAR.

The maximum SAR level for the EUT will be the maximum level obtained of the performed measurements, and indicated in the previous points.

## **2.6. System Validation**

Prior to the SAR measurements, system verification is done daily to verify the system accuracy. As FCC OET Bulletin 65 – Supplement C, Appendix D “SAR measurement procedures” Paragraph “System Verification” specifies, a complete SAR evaluation is done using a half-wavelength dipole as source with the frequency of the mid-band channel of the operating band, or within 100MHz of this channel.

The measured 1 gr. and 10 gr. SAR should be within 10% of the expected target values specified in the calibration certificate of the dipole, for the specific tissue and frequency used.

### 3. UNCERTAINTY

#### Uncertainty for 300 MHz – 3 GHz

ERROR SOURCES	Uncertainty value (%)	Probability distribution	Divisor	(c <sub>i</sub> ) 1g	(c <sub>i</sub> ) 10g	Standard uncertainty (1g)	Standard uncertainty (10g)	V <sub>i</sub> V <sub>eff</sub>
<b>Measurement Equipment</b>								
Probe Calibration	±5.9%	Normal	1	1	1	±5.90 %	±5.90%	∞
Axial Isotropy	±4.7%	Rectangular	√3	0.7	0.7	±1.92%	±1.92%	∞
Hemispherical Isotropy	±9.6%	Rectangular	√3	0.7	0.7	±3.92%	±3.92%	∞
Boundary effect	±1.0%	Rectangular	√3	1	1	±0.58%	±0.58%	∞
Linearity	±4.7%	Rectangular	√3	1	1	±2.71%	±2.71%	∞
System detection limits	±1.0%	Rectangular	√3	1	1	±0.58%	±0.58%	∞
Readout electronics	±1.0%	Normal	1	1	1	±1.00%	±1.00%	∞
Response time	±0.8%	Rectangular	√3	1	1	±0.46%	±0.46%	∞
Integration time	±2.6%	Rectangular	√3	1	1	±1.50%	±1.50%	∞
RF Ambien conditions	±3.0%	Rectangular	√3	1	1	±1.73%	±1.73%	∞
Probe positioner	±0.4%	Rectangular	√3	1	1	±0.23%	±0.23%	∞
Probe positioning	±2.9%	Rectangular	√3	1	1	±1.67%	±1.67%	∞
Maximum SAR evaluation	±1.0%	Rectangular	√3	1	1	±0.58%	±0.58%	∞
<b>Test Sample Related</b>								
Device positioning	±2.9%	Normal	1	1	1	±2.90%	±2.90%	145
Device Holder	±3.6%	Normal	1	1	1	±3.60%	±3.60%	5
Power Drift	±5.0%	Rectangular	√3	1	1	±2.89%	±2.89%	∞
<b>Phantom and Setup</b>								
Phantom uncertainty	±4.0%	Rectangular	√3	1	1	±2.31%	±2.31%	∞
Liquid conductivity (deviation from target)	±5.0%	Rectangular	√3	0.64	0.43	±1.85%	±1.24%	∞
Liquid conductivity (measurement error)	±2.5%	Normal	1	0.64	0.43	±1.60%	±1.08%	∞
Liquid permittivity (deviation from target)	±5.0%	Rectangular	√3	0.60	0.49	±1.73%	±1.41%	∞
Liquid permittivity (measurement error)	±2.5%	Normal	1	0.60	0.49	±1.50%	±1.23%	∞
<b>Combined standard uncertainty</b>	$u_c = \sqrt{\sum_{i=1}^m c_i^2 \cdot u_i^2}$					±10.85%	±10.62%	330
<b>Expanded uncertainty (confidence interval of 95%)</b>	$ue = 2.00 u_c$					±21.71%	±21.24%	

**Table 2:** Uncertainty Assessment for 300 MHz - 3 GHz

#### 4. SAR LIMIT

Having a worst case measurement, the SAR limit is valid for general population/uncontrolled exposure.

The SAR values have to be averaged over a mass of 1g (SAR<sub>1 gr.</sub>) with the shape of a cube. This level couldn't exceed the values indicated in the application Standard:

Standard	SAR	SAR Limit (W/Kg)
FCC 47 CFR Part 2.1093 Paragraph (d)(2)	SAR <sub>1 gr.</sub>	1.6

**Table 4:** SAR limit

## **APPENDIX B: Test results**

## INDEX

1.	TEST CONDITIONS .....	17
1.1.	Power supply (V):.....	17
1.2.	Temperature (°C):.....	17
1.3.	Test signal, Output Power and Frequencies.....	17
1.4.	DUT information .....	17
2.	TISSUE PARAMETERS MEASUREMENTS.....	18
3.	SYSTEM VALIDATION MEASUREMENTS .....	18
3.1.	Validation results in 2450 MHz Band for Body TSL.....	18
4.	MEASUREMENT RESULTS FOR SAR (SPECIFIC ABSORPTION RATE) .....	18
4.1.	Summary maximum results.....	18
4.2.	Results for 2450 MHz Band .....	19



## **1. TEST CONDITIONS**

### **1.1. Power supply (V):**

$V_n = 11.1$  Vdc battery

Type of power supply = DC Voltage from rechargeable Li-Ion 11.1 V battery.

### **1.2. Temperature (°C):**

$T_n = +21.52$  to  $+23.37$

The subscript n indicates normal test conditions.

### **1.3. Test signal, Output Power and Frequencies**

The device was put into operation by using an own control software to program the test mode required for select the continuous transmission with 100% duty cycle.

In all operating bands the measurements were performed on the “default test channels” defined at FCC OET KDB 248227 – SAR Measurements Procedures 802.11a/b/g Transmitters (May 2007 – Revised), except those that fulfil the frequency channel selection criteria mentioned on paragraph “Frequency Channel Configuration” at the same document.

The output power of the device was set to maximum power level for all tests; a fully charged battery was used for every test sequence.

The maximum average conducted power of the device was measured with a Power meter R&S NRVD and a thermocoupled Power sensor NRV-Z51.

### **1.4. DUT information**

The device under test was the Intel® Centrino® Wireless-N 1000 card located inside a host laptop (S10-3S) computer which utilises a set of WNC antennas (25.91231.041 / 25.91231.031). The card was operated utilizing proprietary software (CRTU Version 5.15.36.0) and each channel was measured using a broadband power meter to determine the maximum average power. The device was tested in a single chain configuration which is representative of the maximum exposure condition of this wireless transceiver.

## 2. TISSUE PARAMETERS MEASUREMENTS

Frequency (MHz)	Target Body Tissue: Parameters used in Probe Calibration		Target Body Tissue: Parameters used in Dipole Calibration		Measured Body Tissue		Measured Date
	Permittivity	Conductivity [S/m]	Permittivity	Conductivity [S/m]	Permittivity	Conductivity [S/m]	
2450	52.7 ± 5%	1.95 ± 5%	53.2 ± 6%	2.00 ± 6%	50.44	2.02	2010-02-10

Note: The dielectric properties have been measured by the contact probe method at 21.5° C.

## 3. SYSTEM VALIDATION MEASUREMENTS

### 3.1. Validation results in 2450 MHz Band for Body TSL

SAR	Target SAR (W/kg)	Measured SAR (W/kg)	Drift (%)	Limit (%)
1 gr.	53.0	50.76	-4.23	± 10
10 gr.	25.0	23.54	-5.84	± 10

## 4. MEASUREMENT RESULTS FOR SAR (SPECIFIC ABSORPTION RATE)

### 4.1. Summary maximum results

#### 2450 MHz band:

Band	Mode	Channel	Frequency (MHz)	Measured SAR 1g (W/Kg)	SAR limit 1g (W/Kg)
2450 MHz band	802.11b	1	2412	0.026	1.6
	802.11g	-	-	NM <sup>2</sup>	1.6
	802.11n <sup>1</sup>	6	2437	0.027	1.6
	802.11n* <sup>1</sup>	6	2437	0.013	1.6

1 and 2: See Remarks and Comments.

#### 4.2. Results for 2450 MHz Band

Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	SAR averaged over 1g (W/Kg)	Power Drift (%)	Limit (%)
802.11b	1	2412	16.75	0.026	-4.41	±5
	6	2437	16.59	NM <sup>3</sup>	-	±5
	11	2462	16.45	NM <sup>3</sup>	-	±5
802.11g	1	2412	12.60	NM <sup>2</sup>	-	±5
	6	2437	16.53	NM <sup>2</sup>	-	±5
	11	2462	11.40	NM <sup>2</sup>	-	±5
802.11n <sup>1</sup>	1	2417	11.75	NM <sup>3</sup>	-	±5
	6	2437	16.42	0.027	-2.61	±5
	11	2457	10.76	NM <sup>3</sup>	-	±5
802.11n* <sup>1</sup>	3	2422	10.40	NM <sup>3</sup>	-	±5
	6	2437	12.18	0.013	-0.98	±5
	9	2452	9.60	NM <sup>3</sup>	-	±5

1, 2 and 3: See Remarks and Comments.

## **APPENDIX C: Measurements Reports**

## 2450 MHz Band – 802.11b Channel 1

**DUT: S10-3S + Intel 112BNHMW + WNC Antennas; Type: Laptop; Serial: ---**  
**Program Name: 802.11b at 2450MHz**

Communication System: 802.11; Frequency: 2412 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 2412$  MHz;  $\sigma = 1.96$  mho/m;  $\epsilon_r = 50.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3052; ConvF(4.06, 4.06, 4.06); Calibrated: 27/10/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 26/10/2009
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**802.11b, Channel 1/Area Scan (81x81x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.029 mW/g

**802.11b, Channel 1/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 3.36 V/m; Power Drift = -0.392 dB

Peak SAR (extrapolated) = 0.045 W/kg


**SAR(1 g) = 0.026 mW/g; SAR(10 g) = 0.017 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.028 mW/g

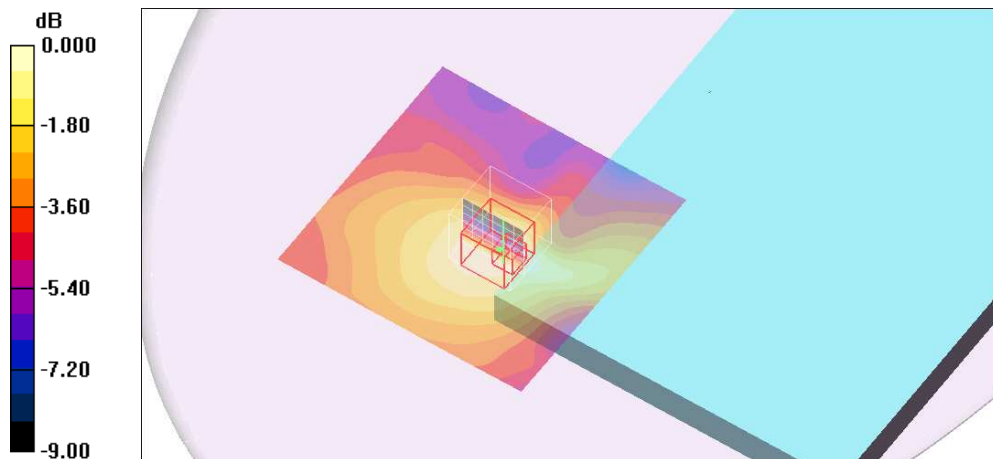

0 dB = 0.028mW/g

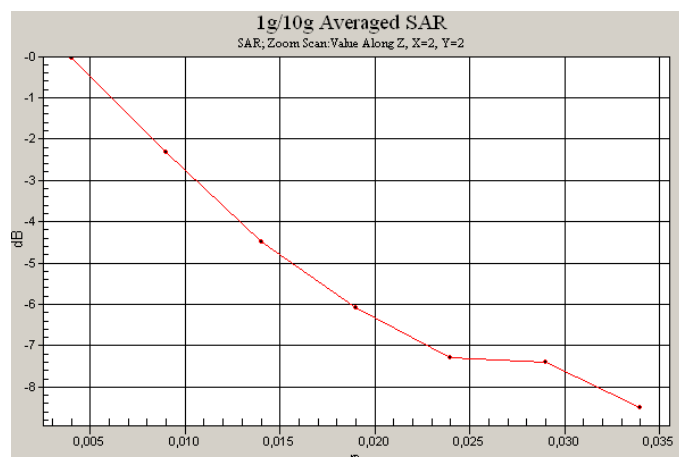

## 2450 MHz Band – 802.11n Channel 6

**DUT: S10-3S + Intel 112BNHMW + WNC Antennas; Type: Laptop; Serial: ---**  
**Program Name: 802.11n at 2450MHz**

Communication System: 802.11; Frequency: 2437 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 2$  mho/m;  $\epsilon_r = 50.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3052; ConvF(4.06, 4.06, 4.06); Calibrated: 27/10/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 26/10/2009
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**802.11n, Channel 6/Area Scan Chain (81x81x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.030 mW/g

**802.11n, Channel 6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 3.42 V/m; Power Drift = -0.230 dB

Peak SAR (extrapolated) = 0.049 W/kg


**SAR(1 g) = 0.027 mW/g; SAR(10 g) = 0.017 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.029 mW/g

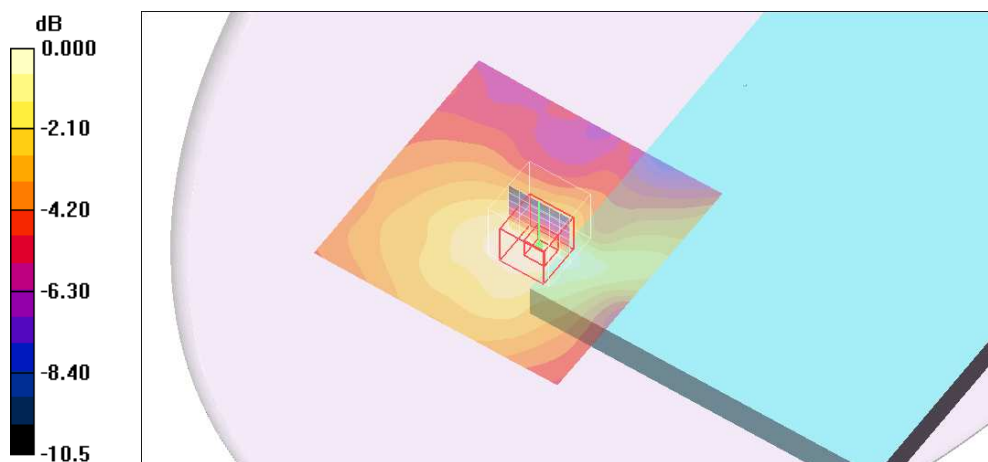

0 dB = 0.029mW/g

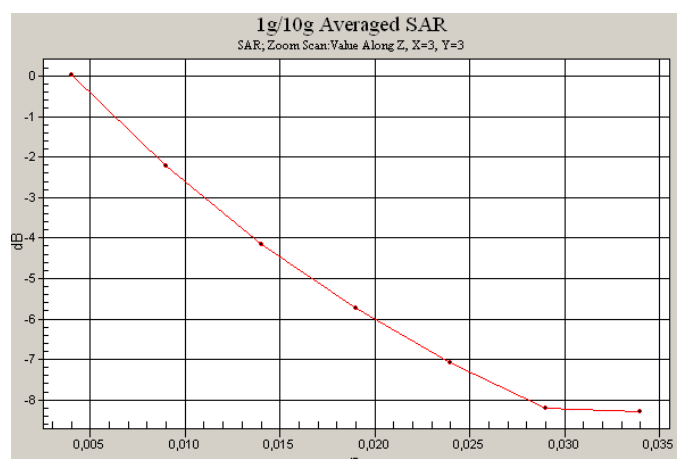

**2450 MHz Band – 802.11n\* Channel 6**

**DUT: S10-3S + Intel 112BNHMW + WNC Antennas; Type: Laptop; Serial: ---**  
**Program Name: 802.11n\* at 2450MHz**

Communication System: 802.11; Frequency: 2437 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 2$  mho/m;  $\epsilon_r = 50.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3052; ConvF(4.06, 4.06, 4.06); Calibrated: 27/10/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 26/10/2009
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**802.11n\*, Channel 6/Area Scan (81x81x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.014 mW/g

**802.11n\*, Channel 6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 2.70 V/m; Power Drift = -0.086 dB

Peak SAR (extrapolated) = 0.024 W/kg


**SAR(1 g) = 0.013 mW/g; SAR(10 g) = 0.00916 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.014 mW/g

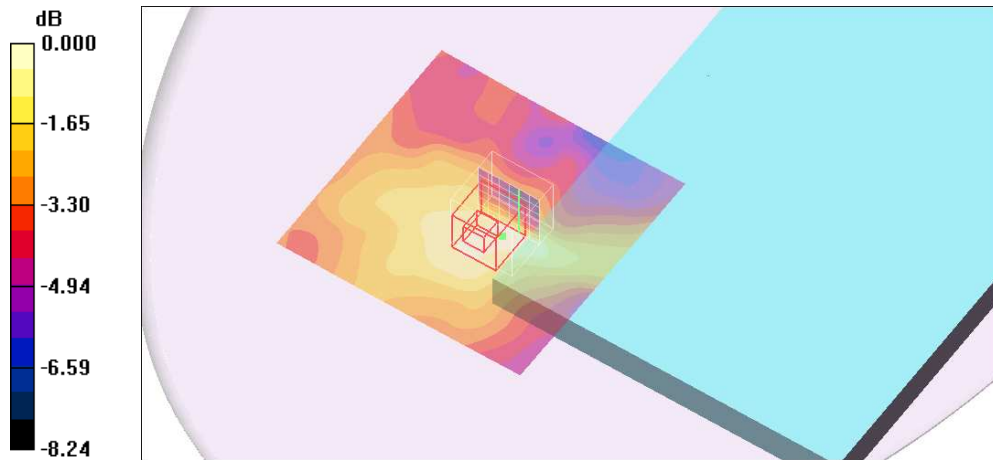

0 dB = 0.014mW/g

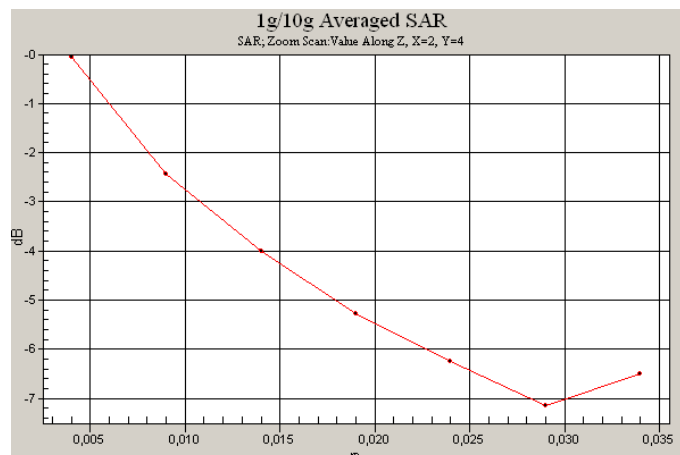

## **APPENDIX D: Calibration Data**



**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **AT4 wireless**

Certificate No: **ES3-3052\_Oct09**

## CALIBRATION CERTIFICATE

Object: **ES3DV3 - SN:3052**

Calibration procedure(s): **QA CAL-01.v6, QA CAL-23.v3 and QA CAL-25.v2  
Calibration procedure for dosimetric E-field probes**

Calibration date: **October 27, 2009**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	1-Apr-09 (No. 217-01030)	Apr-10
Power sensor E4412A	MY41495277	1-Apr-09 (No. 217-01030)	Apr-10
Power sensor E4412A	MY41498087	1-Apr-09 (No. 217-01030)	Apr-10
Reference 3 dB Attenuator	SN: S5054 (3c)	31-Mar-09 (No. 217-01026)	Mar-10
Reference 20 dB Attenuator	SN: S5086 (20b)	31-Mar-09 (No. 217-01028)	Mar-10
Reference 30 dB Attenuator	SN: S5129 (30b)	31-Mar-09 (No. 217-01027)	Mar-10
Reference Probe ES3DV2	SN: 3013	2-Jan-09 (No. ES3-3013_Jan09)	Jan-10
DAE4	SN: 860	29-Sep-09 (No. DAE4-860_Sep09)	Sep-10
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-09)	In house check: Oct10

	Name	Function	Signature
Calibrated by:	Marcel Fehr	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: October 27, 2009

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: ES3-3052\_Oct09

Page 1 of 11

ES3DV3 SN:3052

October 27, 2009

## DASY - Parameters of Probe: ES3DV3 SN:3052

### Calibration Parameter Determined in Head Tissue Simulating Media

f [MHz]	Validity [MHz] <sup>c</sup>	Permittivity	Conductivity	ConvF X	ConvF Y	ConvF Z	Alpha	Depth Unc (k=2)
835	± 50 / ± 100	41.5 ± 5%	0.90 ± 5%	5.83	5.83	5.83	0.76	1.13 ± 11.0%
900	± 50 / ± 100	41.5 ± 5%	0.97 ± 5%	5.65	5.65	5.65	0.69	1.17 ± 11.0%
1750	± 50 / ± 100	40.1 ± 5%	1.37 ± 5%	4.99	4.99	4.99	0.39	1.65 ± 11.0%
1900	± 50 / ± 100	40.0 ± 5%	1.40 ± 5%	4.81	4.81	4.81	0.43	1.61 ± 11.0%
2000	± 50 / ± 100	40.0 ± 5%	1.40 ± 5%	4.69	4.69	4.69	0.45	1.62 ± 11.0%
2450	± 50 / ± 100	39.2 ± 5%	1.80 ± 5%	4.26	4.26	4.26	0.31	2.22 ± 11.0%

<sup>c</sup> The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

ES3DV3 SN:3052

October 27, 2009

## DASY - Parameters of Probe: ES3DV3 SN:3052

### Calibration Parameter Determined in Body Tissue Simulating Media

f [MHz]	Validity [MHz] <sup>C</sup>	Permittivity	Conductivity	ConvF X	ConvF Y	ConvF Z	Alpha	Depth Unc (k=2)
835	± 50 / ± 100	55.2 ± 5%	0.97 ± 5%	5.71	5.71	5.71	0.70	1.18 ± 11.0%
900	± 50 / ± 100	55.0 ± 5%	1.05 ± 5%	5.55	5.55	5.55	0.78	1.16 ± 11.0%
1750	± 50 / ± 100	53.4 ± 5%	1.49 ± 5%	4.66	4.66	4.66	0.26	2.59 ± 11.0%
1900	± 50 / ± 100	53.3 ± 5%	1.52 ± 5%	4.43	4.43	4.43	0.30	2.45 ± 11.0%
2000	± 50 / ± 100	53.3 ± 5%	1.52 ± 5%	4.46	4.46	4.46	0.25	2.90 ± 11.0%
2450	± 50 / ± 100	52.7 ± 5%	1.95 ± 5%	4.06	4.06	4.06	0.49	1.49 ± 11.0%

<sup>C</sup> The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client: **AT4wireless**

Certificate No: **D2450V2-756\_Jun09**

## CALIBRATION CERTIFICATE

Object: **D2450V2 - SN: 756**

Calibration procedure(s): **QA CAL-05.v7  
Calibration procedure for dipole validation kits**

Calibration date: **June 19, 2009**



Condition of the calibrated item: **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	08-Oct-08 (No. 217-00898)	Oct-09
Power sensor HP 8481A	US37292783	08-Oct-08 (No. 217-00898)	Oct-09
Reference 20 dB Attenuator	SN: 5086 (20g)	31-Mar-09 (No. 217-01025)	Mar-10
Type-N mismatch combination	SN: 5047.2 / 06327	31-Mar-09 (No. 217-01029)	Mar-10
Reference Probe ES3DV2	SN: 3025	28-Apr-08 (No. ES3-3025_Apr08)	Apr-09
Reference Probe ES3DV2	SN: 3025	30-Apr-09 (No. ES3-3025_Apr09)	Apr-10
DAE4	SN: 601	07-Mar-09 (No. DAE4-601_Mar09)	Mar-10
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-07)	In house check: Oct-09
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-07)	In house check: Oct-09
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-08)	In house check: Oct-09

Calibrated by:	Name	Function	Signature
	Mike Meili	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: June 19, 2009

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

### Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V5.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz $\pm$ 1 MHz	

### Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	40.4 $\pm$ 6 %	1.78 mho/m $\pm$ 6 %
Head TSL temperature during test	(22.4 $\pm$ 0.2) °C	----	----

### SAR result with Head TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.3 mW / g
SAR normalized	normalized to 1W	53.2 mW / g
SAR for nominal Head TSL parameters <sup>1</sup>	normalized to 1W	<b>53.9 mW /g <math>\pm</math> 17.0 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.29 mW / g
SAR normalized	normalized to 1W	25.2 mW / g
SAR for nominal Head TSL parameters <sup>1</sup>	normalized to 1W	<b>25.3 mW /g <math>\pm</math> 16.5 % (k=2)</b>

<sup>1</sup> Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

### Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	53.2 ± 6 %	2.00 mho/m ± 6 %
Body TSL temperature during test	(21.5 ± 0.2) °C	----	----

### SAR result with Body TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	13.4 mW / g
SAR normalized	normalized to 1W	53.6 mW / g
SAR for nominal Body TSL parameters <sup>2</sup>	normalized to 1W	<b>53.0 mW /g ± 17.0 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	250 mW input power	6.27 mW / g
SAR normalized	normalized to 1W	25.1 mW / g
SAR for nominal Body TSL parameters <sup>2</sup>	normalized to 1W	<b>25.0 mW /g ± 16.5 % (k=2)</b>

<sup>2</sup> Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"