

FCC LISTED, REGISTRATION
 NUMBER: 720267

Informe de ensayo nº:
 Test report No:

IC LISTED REGISTRATION
 NUMBER IC 4621A-1

NIE: 43117RRF.001

Test report

USA FCC Part 15.247

CANADA RSS-210, RSS-Gen

Radio Frequency Devices. Operation within the bands 902 - 928 MHz, 2400 -2483.5 MHz.
 Licence-Exempt Radio Apparatus (All Frequency Bands): Category I Equipment.
 General Requirements and Information for the Certification of Radio Apparatus.

Identificación del objeto ensayado.....: Identification of item tested	PCIe M.2 adapter card Antenna Configuration: WiFi: 2x2 (Tx/Rx) BT: 1x1 (Tx/Rx) WiGig: 1 RFEM array
Marca Trade	INTEL
Modelo y/o referencia tipo Model and /or type reference	17265NGW (includes family sub-model 17265NGW LC)
Other identification of the product	Commercial name: INTEL TRI-BAND WIRELESS-AC 17265 FCC ID: PD917265NG IC: 1000M-17265NG
Final HW version	Engineering Sample
Final SW version	Test SW: DRTU_1_7_3_984 Op SW: V17.12.0.0
Serial number	WFM:001500F78C90 BDM:001500F78C94 WGM:001500F78C95
Características Features	WiFi 802.11 a/b/g/n/ac + WiGig 802.11ad + BT 4.0
Peticionario Applicant	INTEL MOBILE COMMUNICATIONS 100 Center Point Circle, Suite 200, Columbia, South Carolina 29210 USA Steven Hackett Tel: 803-216-2344/ FAX: 803-216-2176 steven.c.hackett@intel.com
Método de ensayo solicitado, norma.....: Test method requested, standard	USA FCC Part 15.247 (10-01-12 Edition): Operation within the bands 902 - 928 MHz, 2400 -2483.5 MHz. USA FCC Part 15.209 (10-01-13 Edition): Radiated emission limits; general requirements. CANADA RSS-210 Issue 8 (December 2010).

	CANADA RSS-Gen Issue 3 (December 2010). FCC part 15.247 and Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum System DA 00-705 Released March 30, 2000. ANSI C63.10-2009: American National Standard for Testing Unlicensed Wireless Devices.
Resultado.....: Summary	IN COMPLIANCE
Aprobado por (nombre / cargo y firma) Approved by (name / position & signature)	A. Llamas RF Lab. Manager
Fecha de realización Date of issue	2014-10-03
Formato de informe No. Report template No	FDT08_15

Index

Competences and guarantees.....	4
General conditions.....	4
Uncertainty	4
Usage of samples.....	4
Test sample description	6
Test samples supplier	6
Testing period.....	6
Environmental conditions.....	6
Remarks and comments.....	8
Testing verdicts	8
Appendix A – Test result.....	9

Competences and guarantees

AT4 wireless is a laboratory with a measurement facility in compliance with the requirements of Section 2.948 of the FCC rules and has been added to the list of facilities whose measurements data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Registration Number: 720267.

AT4 wireless is a laboratory with a measurement site in compliance with the requirements of RSS 212, Issue 1 (Provisional) and has been added to the list of filed sites of the Canadian Certification and Engineering Bureau. Reference File Number: IC 4621A-1.

In order to assure the traceability to other national and international laboratories, AT4 wireless has a calibration and maintenance program for its measurement equipment.

AT4 wireless guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at AT4 wireless at the time of performance of the test.

AT4 wireless is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of AT4 wireless.

General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of AT4 wireless.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of AT4 wireless and the Accreditation Bodies.

Uncertainty

Uncertainty (factor $k=2$) was calculated according to the AT4 wireless internal document PODT000.

Usage of samples

Samples undergoing test have been selected by: **the client**

Sample S/01 is composed of the following elements:

Control N°	Description	Model	Serial N°	Date of reception
43117/012	PCIe M.2 adapter card Antenna Configuration: WiFi: 2x2 (Tx/Rx) BT: 1x1 (Tx/Rx) WiGig: 1 RFEM array	17265NGW	TA#: H50077-001 WFM:001500F78C90 BDM:001500F78C94 WGM:001500F78C95	11/08/2014

Auxiliary elements used with the sample S/01:

Control N°	Description	Manufacture	Model	Serial N°	Date of reception
43117/01	Laptop PC	DELL	Latitude E6440	TAG 6C6YG12	11/08/2014
43117/03	Cable of the AC/DC Adapter	DELL	---	---	11/08/2014
43117/02	AC/DC Adapter	INTEL	DA90PM130	CN-OJCF3V- 48661-46G- 7VGK-A	11/08/2014
43117/08	Reference Antenna	SkyCross	WIMAX/WLAN	---	11/08/2014
43117/09	Reference Antenna	SkyCross	WIMAX/WLAN	---	11/08/2014
40079/11	Interface extender cable	---	---	---	26/09/2013
43117/13	NGFF 30x30 Testing board	INTEL	PCB00469	ASS00469- 001-4694213- 028	11/08/2014
38067/38	Adapter of the AC/DC Board Testing	SINPRO	SPU60-102	07990464 1249	20/08/2014
1302	Board 35mmx35mm	---	---	---	---

1. Sample S/01 has undergone following test(s).
 All radiated tests indicated in appendix A.

Sample S/02 is composed of the following elements:

Control N°	Description	Model	Serial N°	Date of reception
43117/017	PCIe M.2 adapter card Antenna Configuration: WiFi: 2x2 (Tx/Rx) BT: 1x1 (Tx/Rx) WiGig: 1 RFEM array	17265NGW	TA#: H50077-001 WFM:001500F78C90 BDM:001500F78C94 WGM:001500F78C95	11/08/2014

Auxiliary elements used with the sample S/02:

Control N°	Description	Manufacture	Model	Serial N°	Date of reception
43117/01	Laptop PC	DELL	Latitude E6440	TAG 6C6YG12	11/08/2014
43117/03	Cable of the AC/DC Adapter	DELL	---	---	11/08/2014
43117/02	AC/DC Adapter	INTEL	DA90PM130	CN-OJCF3V- 48661-46G- 7VGK-A	11/08/2014
40079/11	Interface extender cable	---	---	---	26/09/2013
43117/13	NGFF 30x30 Testing board	INTEL	PCB00469	ASS00469- 001-4694213- 028	11/08/2014
38067/38	Adapter of the AC/DC Board Testing	SINPRO	SPU60-102	07990464 1249	20/08/2014

1. Sample S/02 has undergone the test(s) specified in subclause “Test method requested”.

All conducted tests indicated in appendix A.

Test sample description

The test sample consists of a PCIe M.2 adapter card Antenna Configuration: WiFi: 2x2 (Tx/Rx) BT: 1x1 (Tx/Rx) WiGig: 1 RFEM array.

Test samples supplier

INTEL MOBILE COMMUNICATIONS

100 Center Point Circle, Suite 200, Columbia, South Carolina 29210 USA

Steven Hackett

Tel: 803-216-2344/ FAX: 803-216-2176

steven.c.hackett@intel.com

Testing period

The performed test started on 2014-08-12 and finished on 2014-08-22.

The tests have been performed at AT4 wireless.

Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

Temperature	Min. = 22.1 °C Max. = 22.5 °C
Relative humidity	Min. = 37.0 % Max. = 40.8 %
Shielding effectiveness	> 100 dB
Electric insulation	> 10 kΩ
Reference resistance to earth	< 0,5 Ω

In the semianechoic chamber (21 meters x 11 meters x 8 meters), the following limits were not exceeded during the test.

Temperature	Min. = 24.4 °C Max. = 24.8 °C
Relative humidity	Min. = 34.0 % Max. = 34.6 %
Air pressure	Min. = 1010 mbar Max. = 1013 mbar
Shielding effectiveness	> 100 dB
Electric insulation	> 10 kΩ
Reference resistance to earth	< 0,5 Ω
Normal site attenuation (NSA)	< ±4 dB at 10 m distance between item under test and receiver antenna, (30 MHz to 1000 MHz)
Field homogeneity	More than 75% of illuminated surface is between 0 and 6 dB (26 MHz to 1000 MHz).

In the chamber for conducted measurements, the following limits were not exceeded during the test:

Temperature	Min. = 23.1 °C Max. = 27.5 °C
Relative humidity	Min. = 34.6 % Max. = 51.6 %
Air pressure	Min. = 1012 mbar Max. = 1017 mbar
Shielding effectiveness	> 100 dB
Electric insulation	> 10 kΩ
Reference resistance to earth	< 0,5 Ω

Remarks and comments

1: Used instrumentation:

Conducted Measurements

				Last Cal. date	Cal. due date
1.	Spectrum analyser	Agilent	PSA	2014/06	2016/06
	E4440A				

Radiated Measurements

				Last Cal. date	Cal. due date
1.	Semianechoic Absorber Lined Chamber			N.A.	N.A.
	ETS FACT3 200STP				
2.	BiconicalLog antenna	ETS		2014/03	2017/03
	LINDGREN 3142E				
3.	Multi Device Controller EMCO 2090			N.A.	N.A.
4.	Double-ridge Guide Horn antenna 1-18 GHz			2013/11	2016/11
	SCHWARZBECK BBHA 9120 D				
5.	Double-ridge Guide Horn antenna 18-40 GHz			2011/09	2014/09
	Agilent 119665J				
6.	EMI Test Receiver R&S ESU 26			2013/08	2015/08
7.	Spectrum analyser Rohde & Schwarz FSW50			2013/10	2015/10
8.	RF pre-amplifier 10 MHz-6 GHz			2014/02	2015/02
	SCHWARZBECK BBV9743				
9.	RF pre-amplifier 1-18 GHz			2014/02	2015/02
	Schwarzbeck BBV 9718				
10.	RF pre-amplifier BONN ELEKTRONIK BLMA 1840-1M			2014/02	2015/02

Testing verdicts

Not applicable	N/A
Pass	P
Fail	F
Not measured	N/M

FCC PART 15 / RSS-210 PARAGRAPH	VERDICT			
	NA	P	F	NM
FCC 15.247 Subclause (a) (1). 20 dB Bandwidth and Carrier frequency separation / RSS-210 Clause A8.1 (b)		P		
FCC 15.247 Subclause (a) (1) (iii). Number of hopping channels / RSS-210 Clause A8.1 (d)		P		
FCC 15.247 Subclause (a) (1) (iii). Time of occupancy (Dwell Time) / RSS-210 Clause A8.1 (d)		P		
FCC 15.247 Subclause (b). Maximum peak output power and antenna gain / RSS-210, Clause A8.4 (2)		P		
FCC 15.247 Subclause (d). Emission limitations conducted (Transmitter) / RSS-210 Clause A8.5		P		
FCC 15.247 Subclause (d). Emission limitations radiated (Transmitter) / RSS-210 Clause A8.5		P		

Appendix A – Test result



INDEX

TEST CONDITIONS	11
FCC Section 15.247 Subclause (a) (1) / RSS-210 Clause A8.1 (b). 20 dB Bandwidth and Carrier frequency separation.....	12
FCC Section 15.247 Subclause (a) (1) (iii) / RSS-210 Clause A8.1 (d). Number of hopping channels.....	19
FCC Section 15.247 Subclause (a) (1) (iii) / RSS-210 Clause A8.1 (d). Time of occupancy (Dwell Time).....	25
FCC Section 15.247 Subclause (b) / RSS-210 Clause A8.4 (2). Maximum peak output power and antenna gain.....	34
FCC Section 15.247 Subclause (d) / RSS-210 Clause A8.5. Band-edge compliance of conducted emissions (Transmitter)	40
FCC Section 15.247 Subclause (d) / RSS-210 Clause A8.5. Emission limitations conducted (Transmitter).....	47
FCC Section 15.247 Subclause (d) / RSS-210 Clause A8.5. Emission limitations radiated (Transmitter)	52

TEST CONDITIONS

Power supply (V):

$$V_{\text{nominal}} = 3.3 \text{ Vdc}$$

Type of power supply = DC voltage from NGFF 30x30 Testing board.

Type of antenna = External attachable PIFA antenna.

Declared Gain for antenna (maximum) = 3.24 dBi

TEST FREQUENCIES:

Lowest channel: 2402 MHz

Middle channel: 2441 MHz

Highest channel: 2480 MHz

For Bluetooth Basic and EDR operational modes the transmission is at CHAIN B RF output.

For radio testing purposes the card was installed in a test fixture. The test fixture is connected to a laptop computer and dc power supplied. The laptop computer was used to configure the EUT to continuously transmit at a specified output power with different modes and modulation schemes.

CONDUCTED MEASUREMENTS

The equipment under test was set up in a shielded room and it is connected to the spectrum analyzer using a low loss RF cable. The reading in the spectrum analyser is corrected taking into account the cable loss.

RADIATED MEASUREMENTS

All radiated tests were performed in a semi-anechoic chamber. The measurement antenna is situated at a distance of 3 m for the frequency range 30 MHz-1000 MHz (30 MHz-1000 MHz Bilog antenna) and at a distance of 1m for the frequency range 1 GHz-25 GHz (1 GHz-18 GHz Double ridge horn antenna and 18 GHz-40 GHz horn antenna).

For radiated emissions in the range 1 GHz-25 GHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.

The equipment under test was set up on a non-conductive (wooden) platform one meter above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

FCC Section 15.247 Subclause (a) (1) / RSS-210 Clause A8.1 (b). 20 dB Bandwidth and Carrier frequency separation

SPECIFICATION

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

RESULTS

(See next plots)

Modulation: GFSK

	Lowest frequency 2402 MHz	Middle frequency 2441 MHz	Highest frequency 2480 MHz
20 dB Spectrum bandwidth (kHz)	960.81	960.19	964.97
Measurement uncertainty (kHz)	±11		

Modulation: Π/4-DQPSK (2Mbps)

	Lowest frequency 2402 MHz	Middle frequency 2441 MHz	Highest frequency 2480 MHz
20 dB Spectrum bandwidth (kHz)	1496.00	1494.00	1505.00
Measurement uncertainty (kHz)	±11		


Modulation: 8-DPSK (3Mbps)

	Lowest frequency 2402 MHz	Middle frequency 2441 MHz	Highest frequency 2480 MHz
20 dB Spectrum bandwidth (kHz)	1487.00	1488.00	1487.00
Measurement uncertainty (kHz)	±11		

Modulation: GFSK


20 dB BANDWIDTH.

Lowest Channel: 2402 MHz.

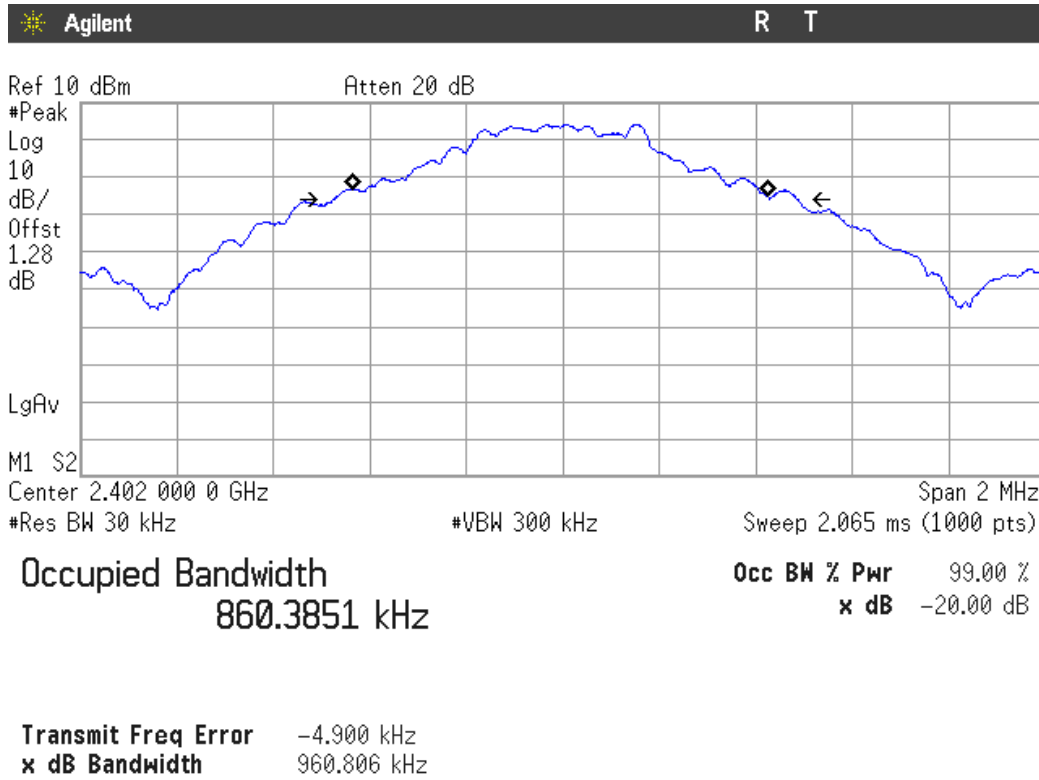


20 dB BANDWIDTH

Middle Channel: 2441 MHz.

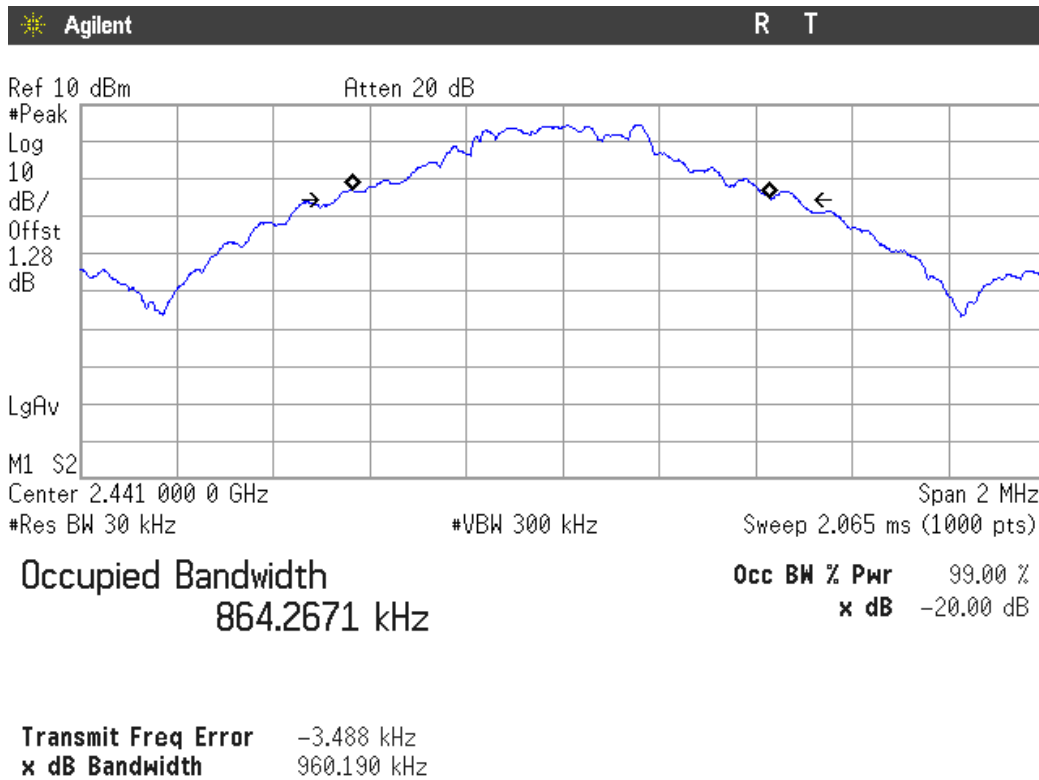


20 dB BANDWIDTH

Highest Channel: 2480 MHz.

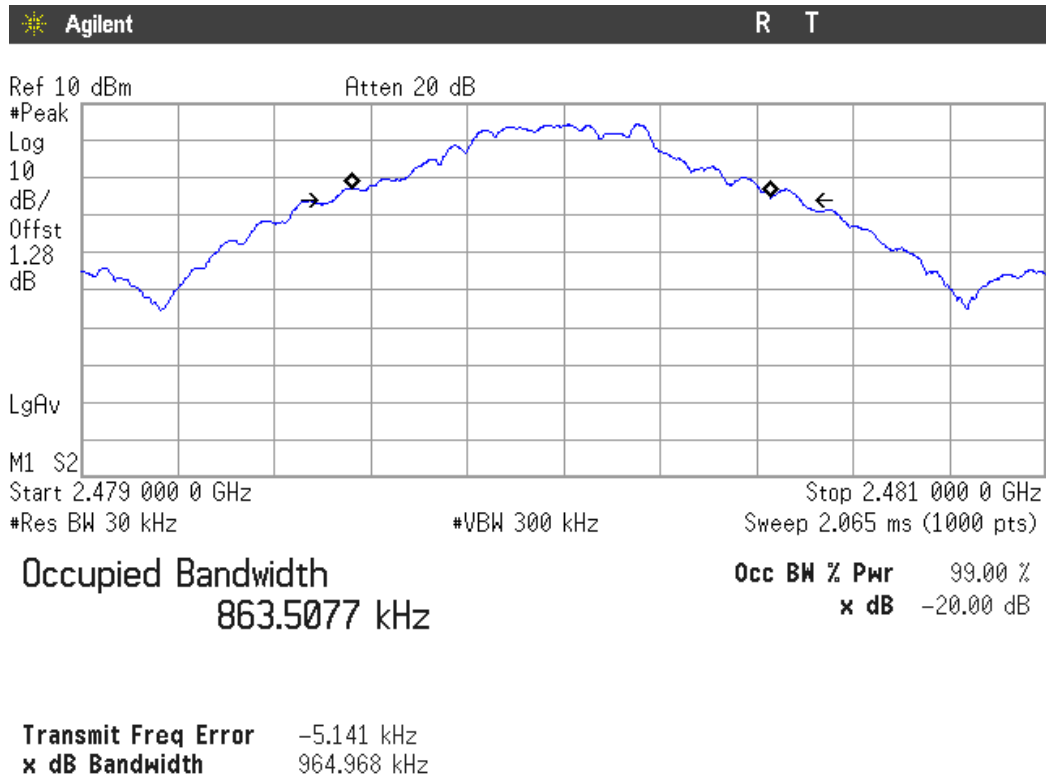

Carrier frequency separation

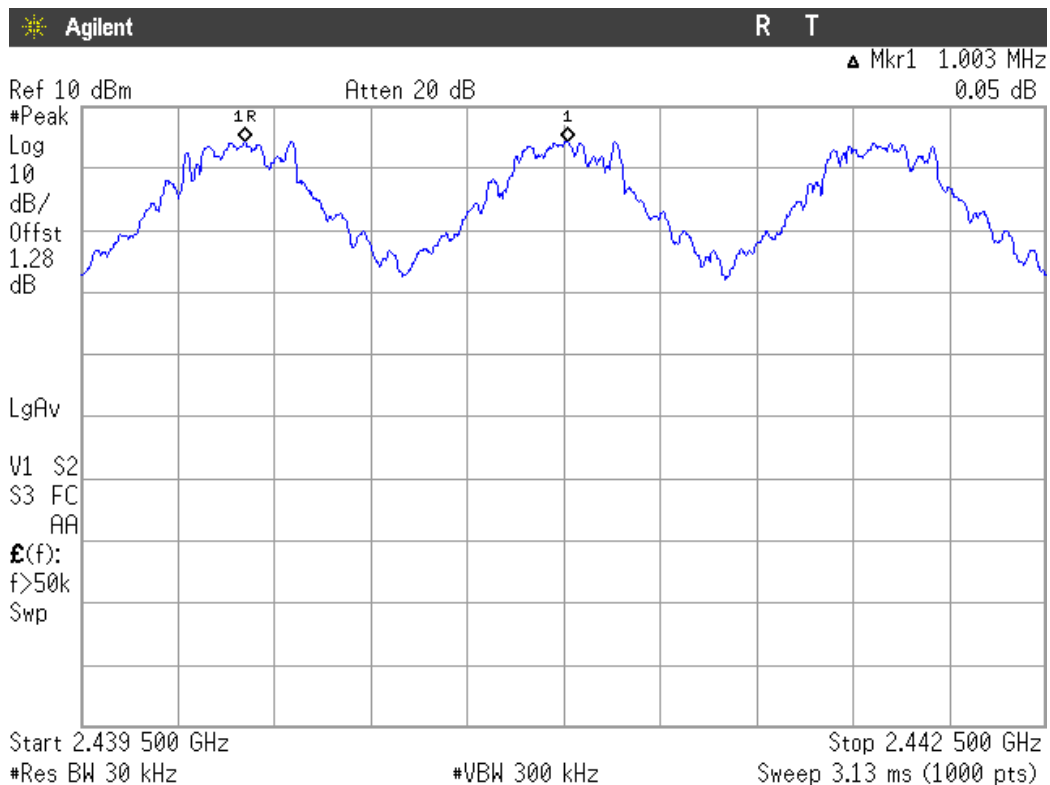


The hopping channel carrier frequencies are separated by a minimum of the 20 dB bandwidth of the hopping channel.

Verdict: PASS

Modulation: Π/4-DQPSK


20 dB BANDWIDTH.

Lowest Channel: 2402 MHz.

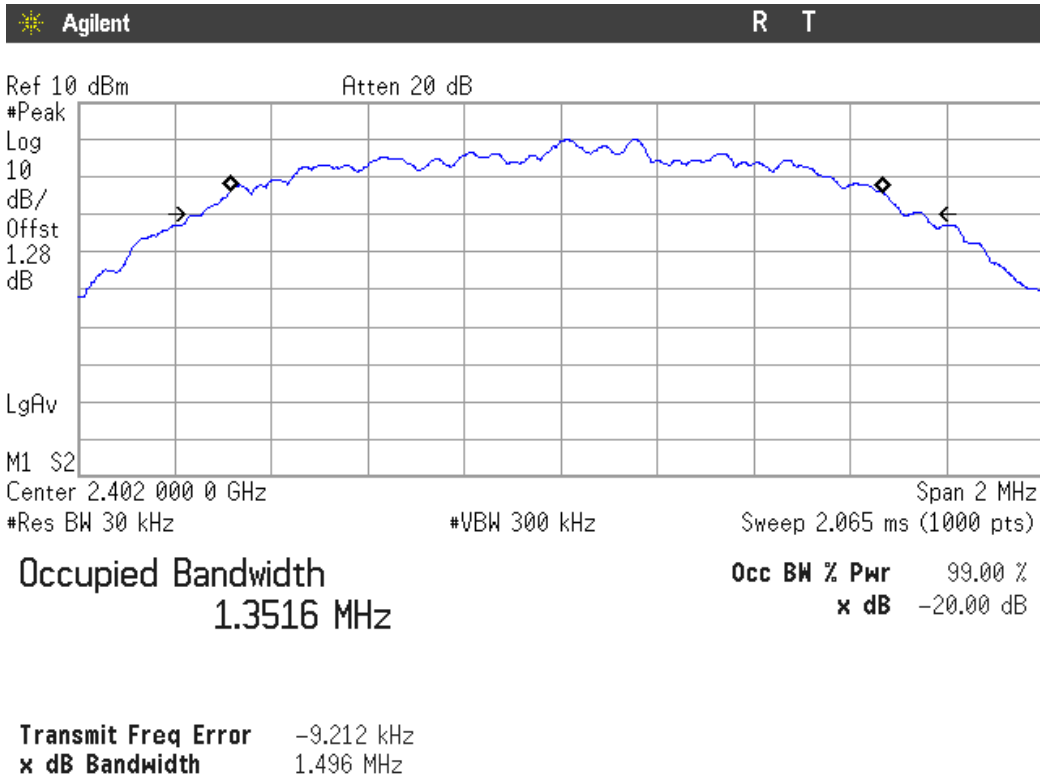


20 dB BANDWIDTH

Middle Channel: 2441 MHz.

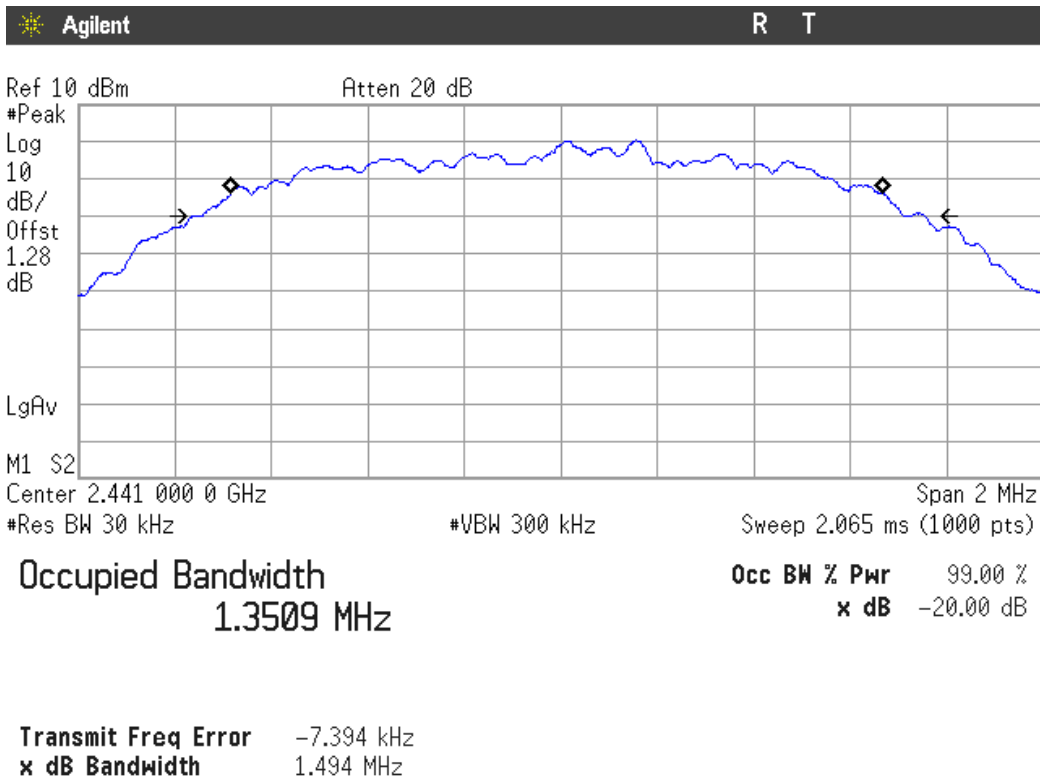


20 dB BANDWIDTH

Highest Channel: 2480 MHz.

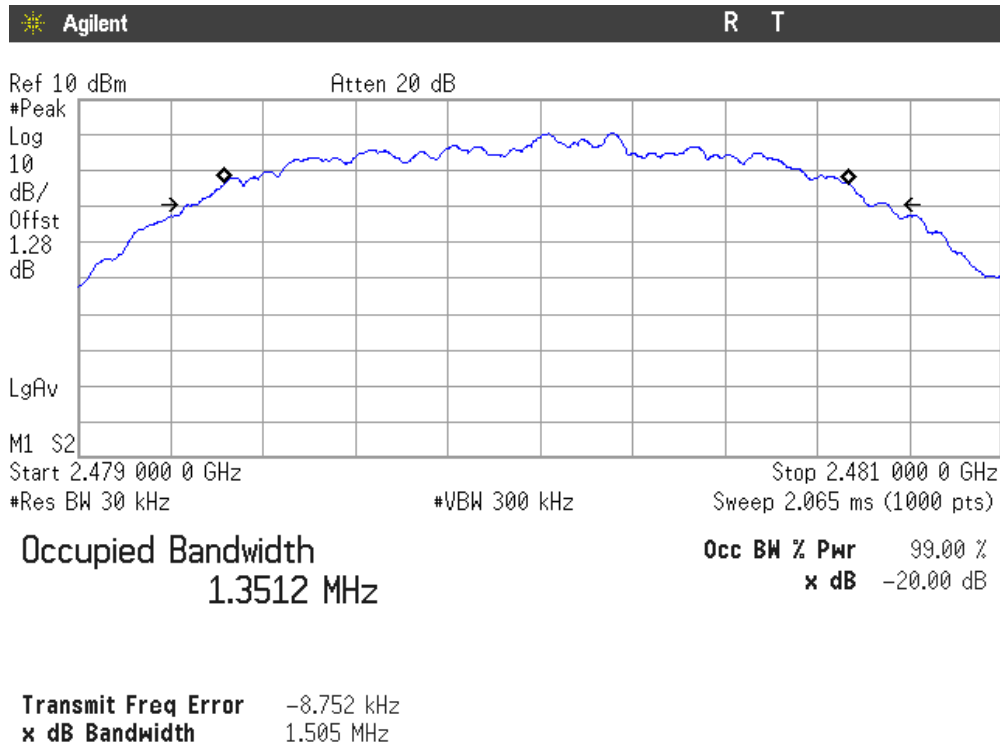

Carrier frequency separation

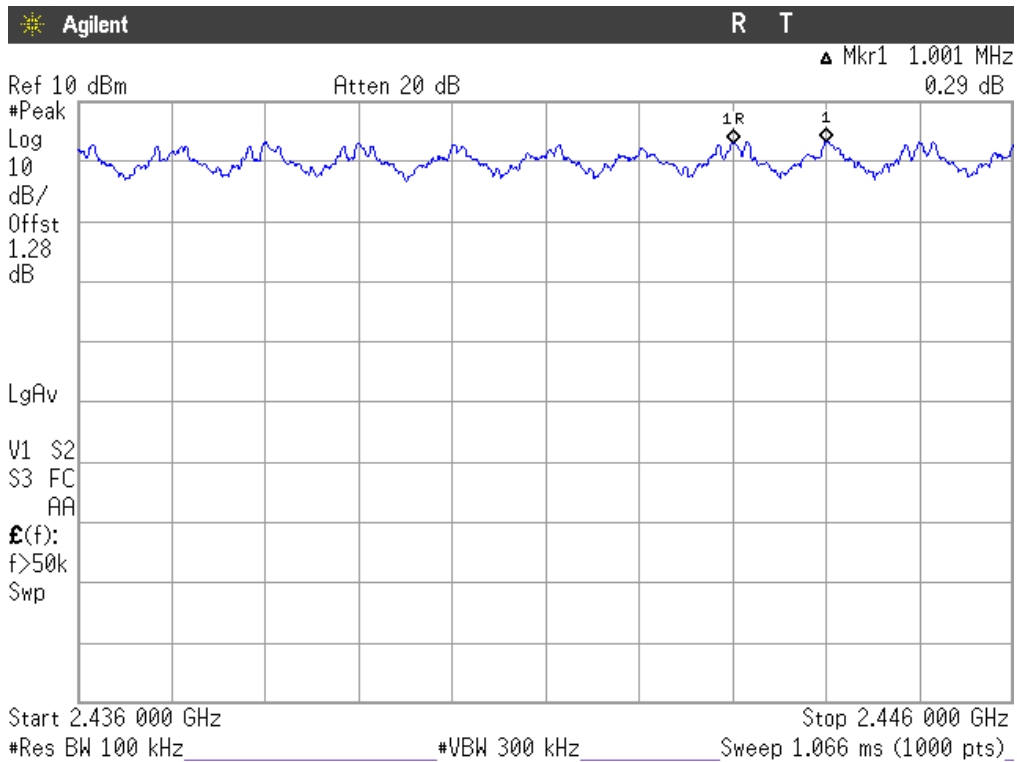


The hopping channel carrier frequencies are separated by a minimum of the two-thirds of the 20 dB bandwidth of the hopping channel

Verdict: PASS

Modulation: 8-DPSK


20 dB BANDWIDTH

Lowest Channel: 2402 MHz.

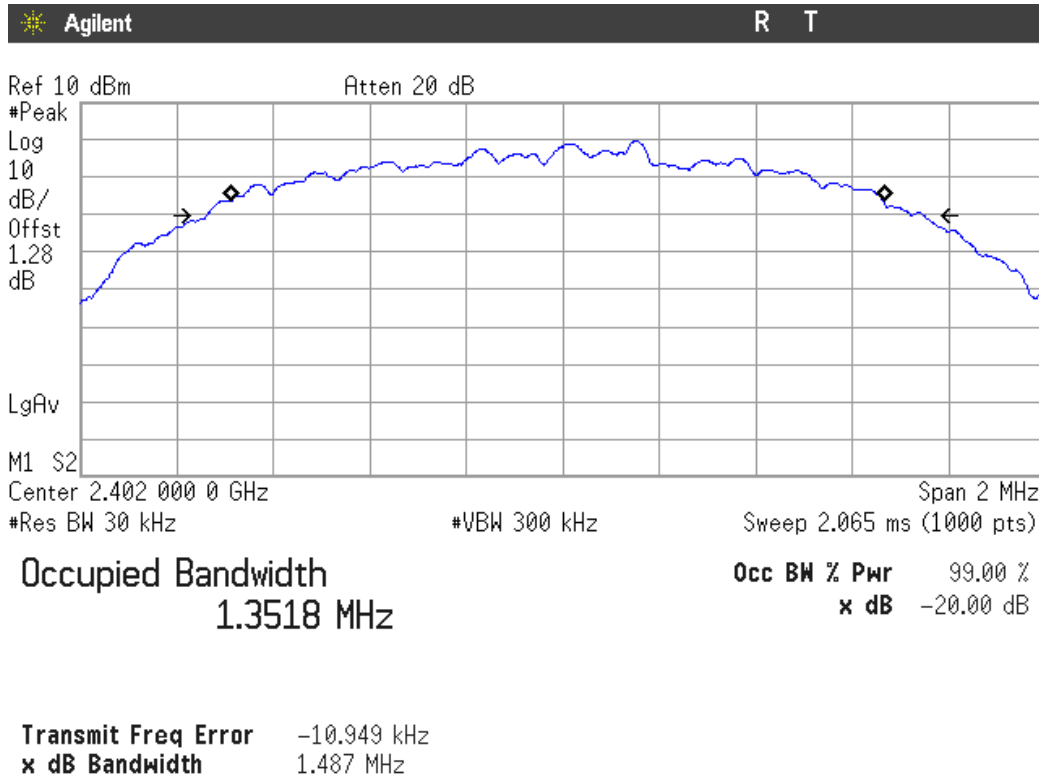


20 dB BANDWIDTH

Middle Channel: 2441 MHz.

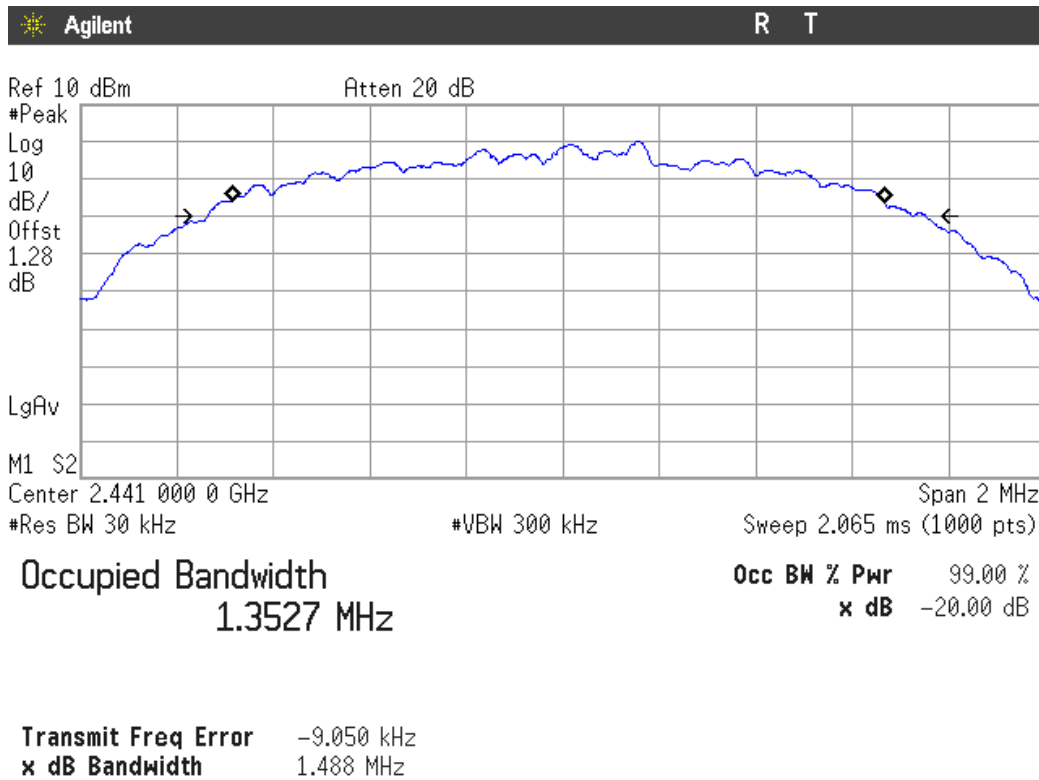


20 dB BANDWIDTH

Highest Channel: 2480 MHz.

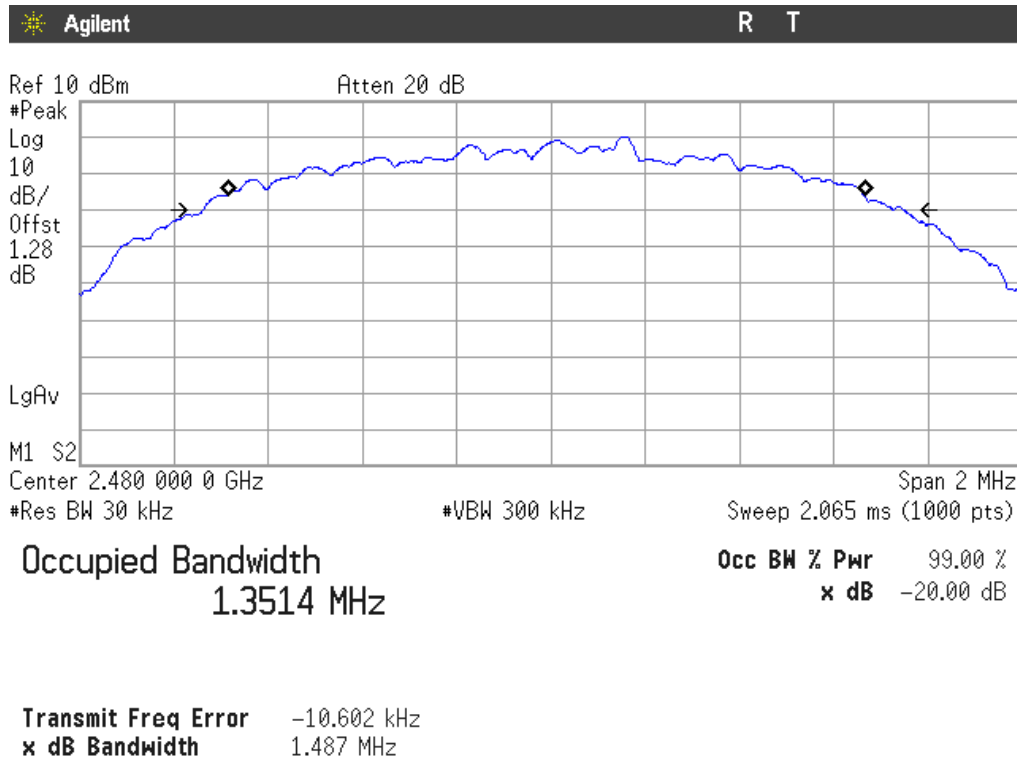

Carrier frequency separation

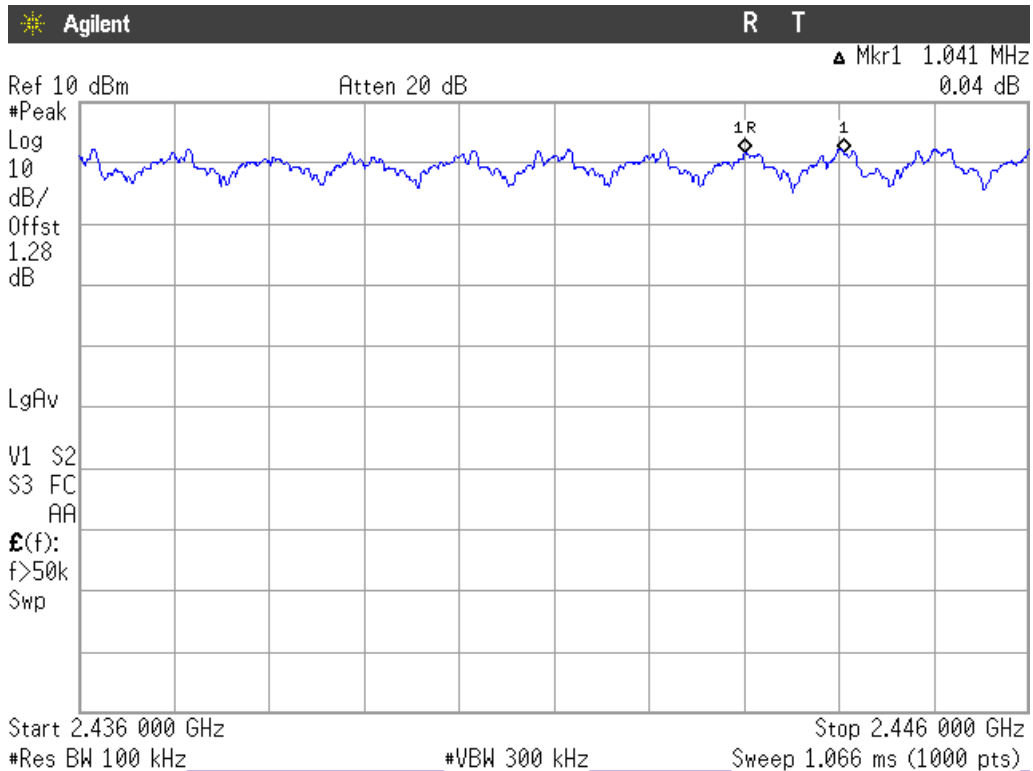

The hopping channel carrier frequencies are separated by a minimum of the two-thirds of the 20 dB bandwidth of the hopping channel.

Verdict: PASS

FCC Section 15.247 Subclause (a) (1) (iii) / RSS-210 Clause A8.1 (d). Number of hopping channels


SPECIFICATION

Frequency hopping system in the 2400-2483.5 MHz band shall use at least 15 channels.


RESULTS

The number of hopping channels is 79 for all three modes (see next plots).

Modulation: GFSK

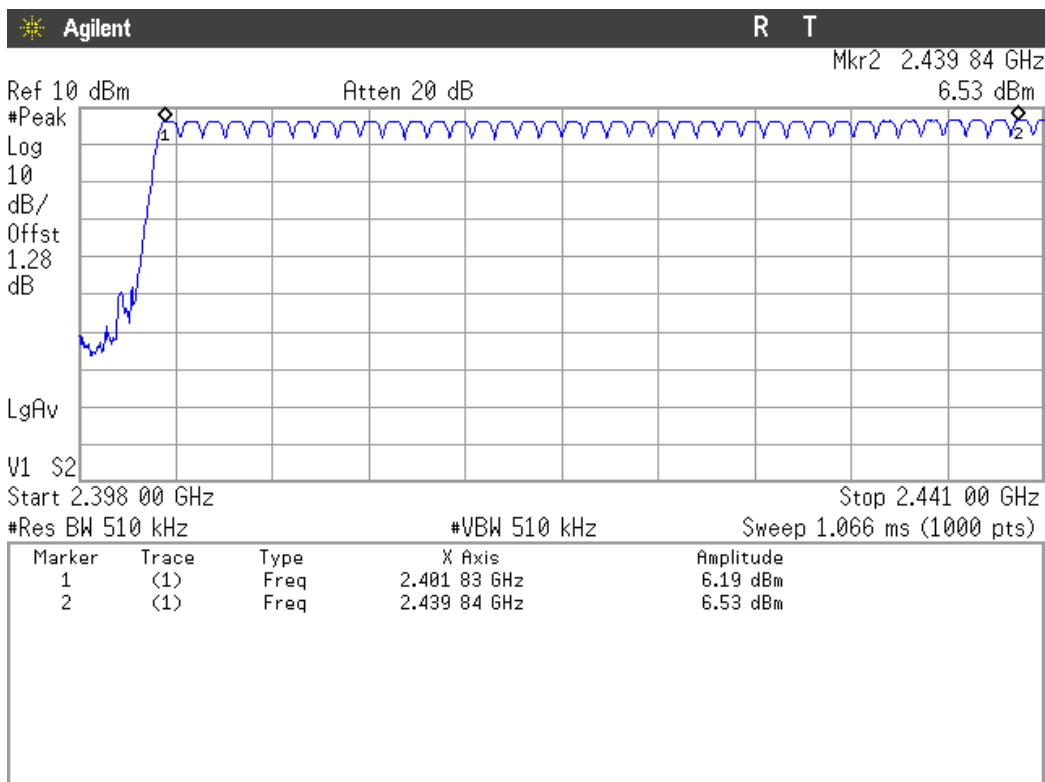

Number of hopping frequencies: 39

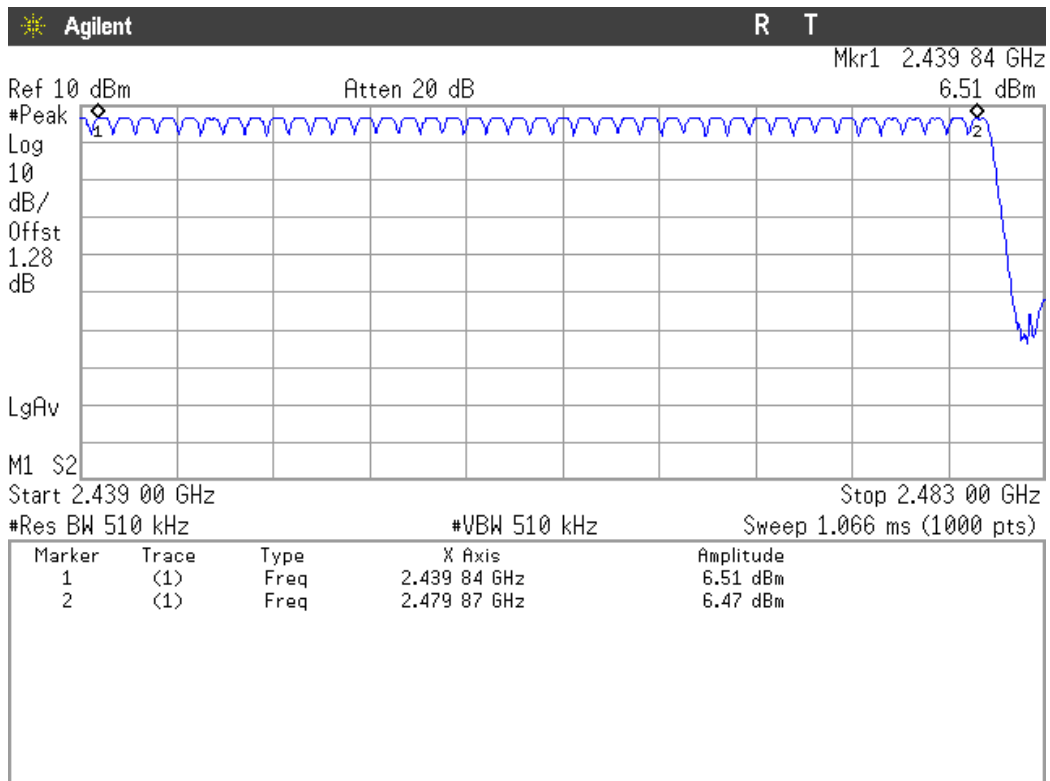


Number of hopping frequencies: 40


Total number of hopping frequencies: 79

Verdict: PASS

Modulation: Π/4-DQPSK

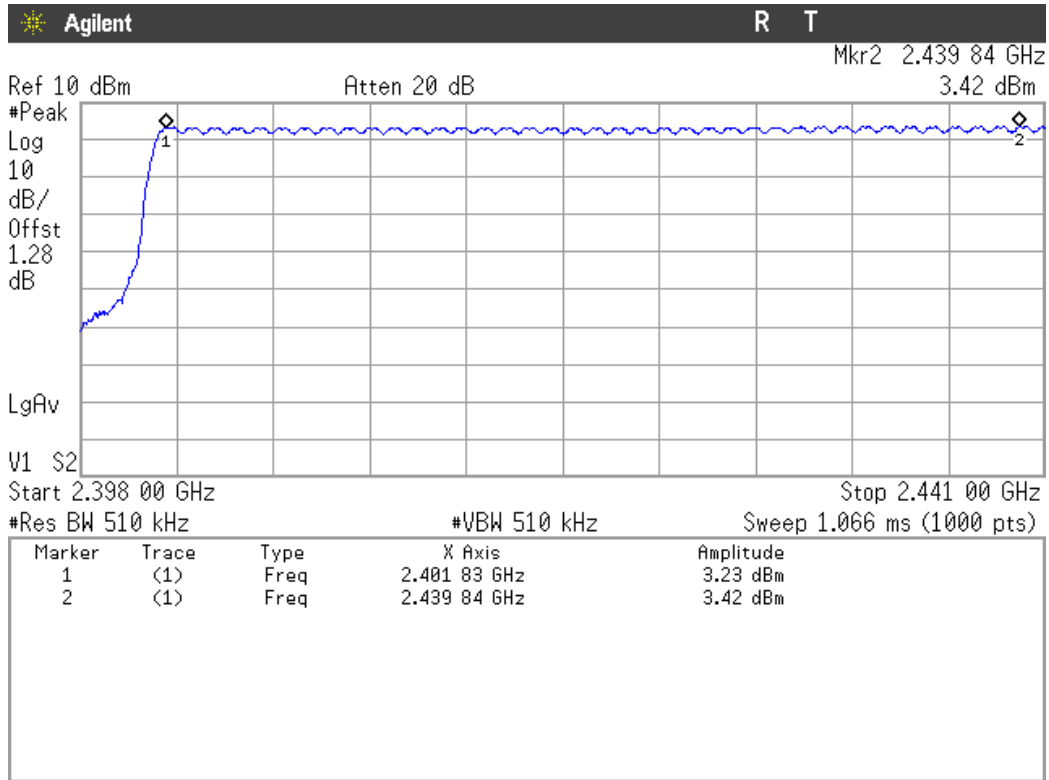

Number of hopping frequencies: 39

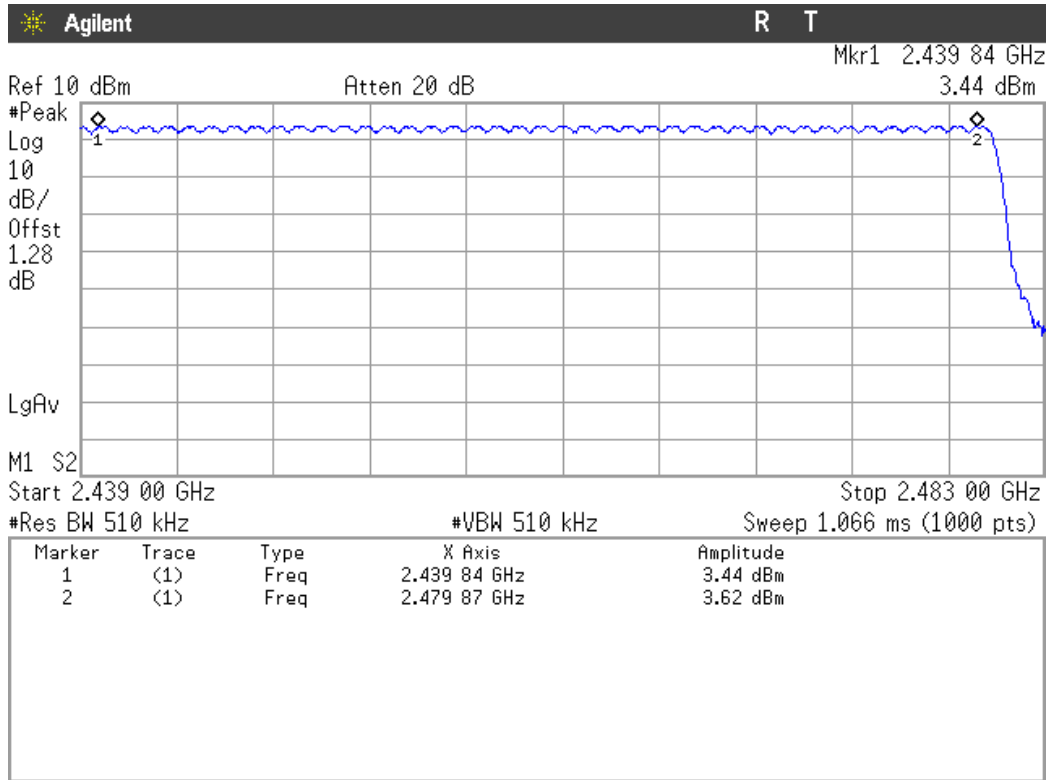


Number of hopping frequencies: 40


Total number of hopping frequencies: 79

Verdict: PASS

Modulation: 8-DPSK

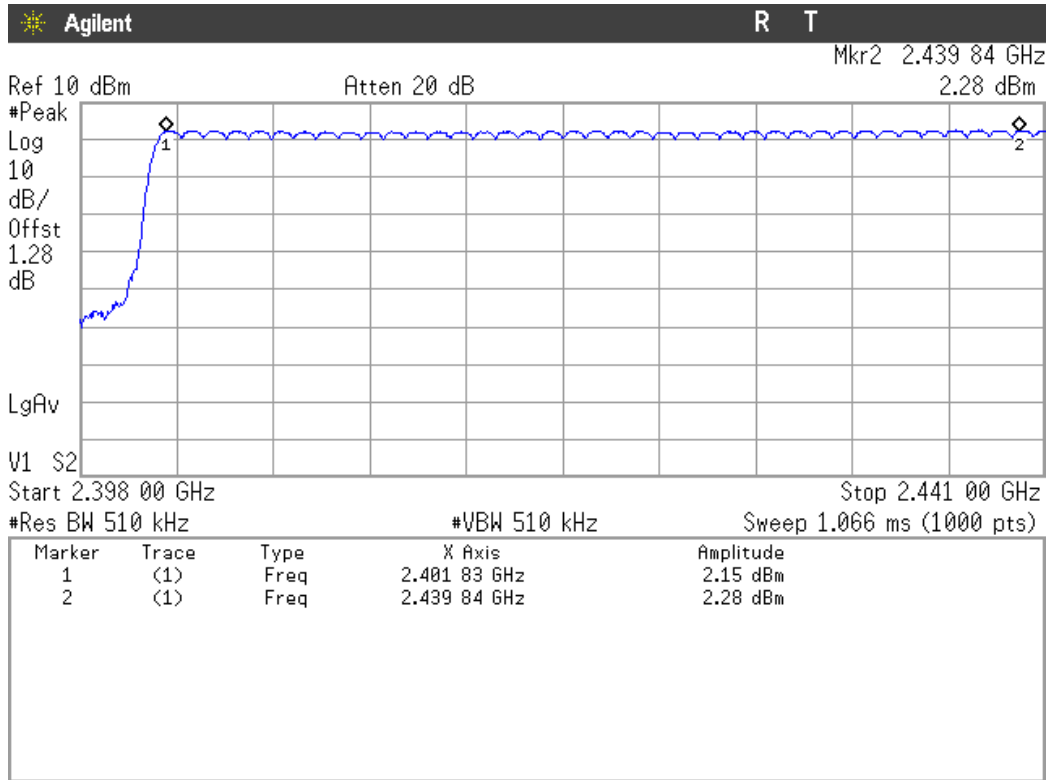

Number of hopping frequencies: 39

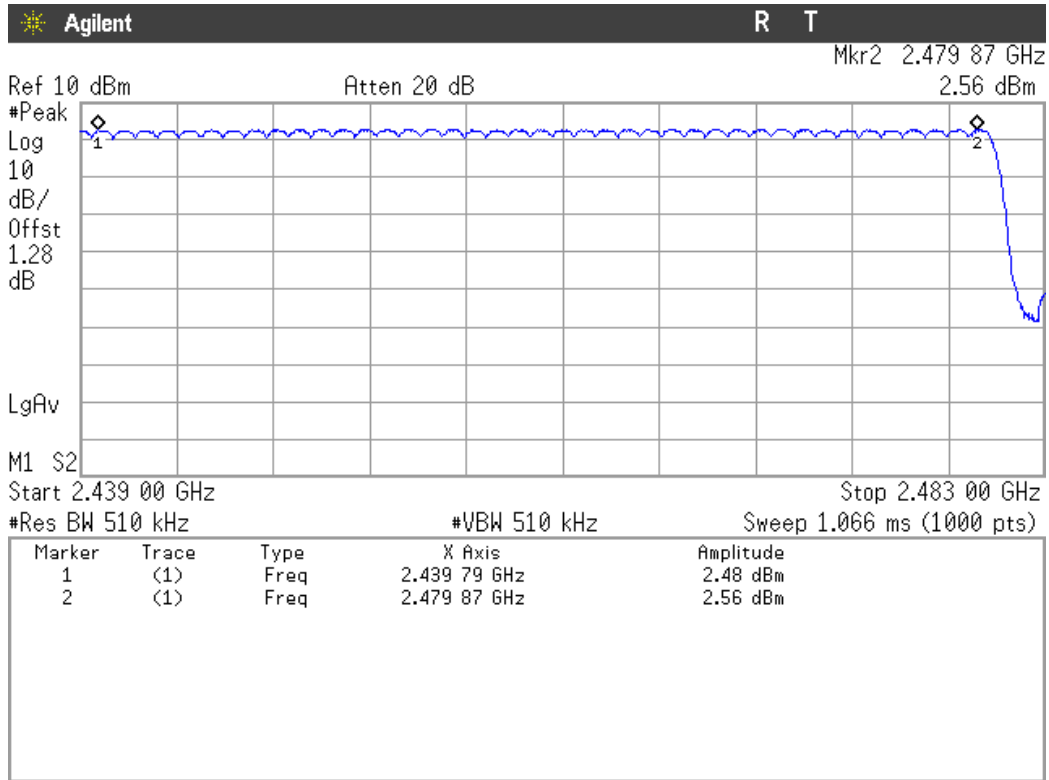

Number of hopping frequencies: 40

Total number of hopping frequencies: 79

Verdict: PASS

FCC Section 15.247 Subclause (a) (1) (iii) / RSS-210 Clause A8.1 (d). Time of occupancy (Dwell Time)

SPECIFICATION

The average time of occupancy on any channel shall not be greater than 0.4 seconds (400 ms) within a period of 0.4 seconds multiplied by the number of hopping channels employed = $0.4 \times 79 = 31.6$ seconds.

RESULTS


Modulation: GFSK

1. TIME OF OCCUPANCY (DWELL TIME) FOR PACKET TYPE DH1.

The system makes worst case 1600 hops per second or 1 time slot has a length of $625\mu s$ with 79 channels. A DH1 Packet need 1 time slot for transmitting and 1 time slot for receiving. Then the system makes worst case $1600/2 = 800$ hops per second with 79 channels. So you have each channel $800/79 = 10.13$ times per second and so for a period of $0.4 \times 79 = 31.6$ seconds you have $10.13 \times 31.6 = 320.11$ times of appearance.

Each Tx-time per appearance is $378.7 \mu s$ (see next plot).

So we have $320.11 \times 378.7 \mu s = 121.22$ ms per 31.6 seconds.

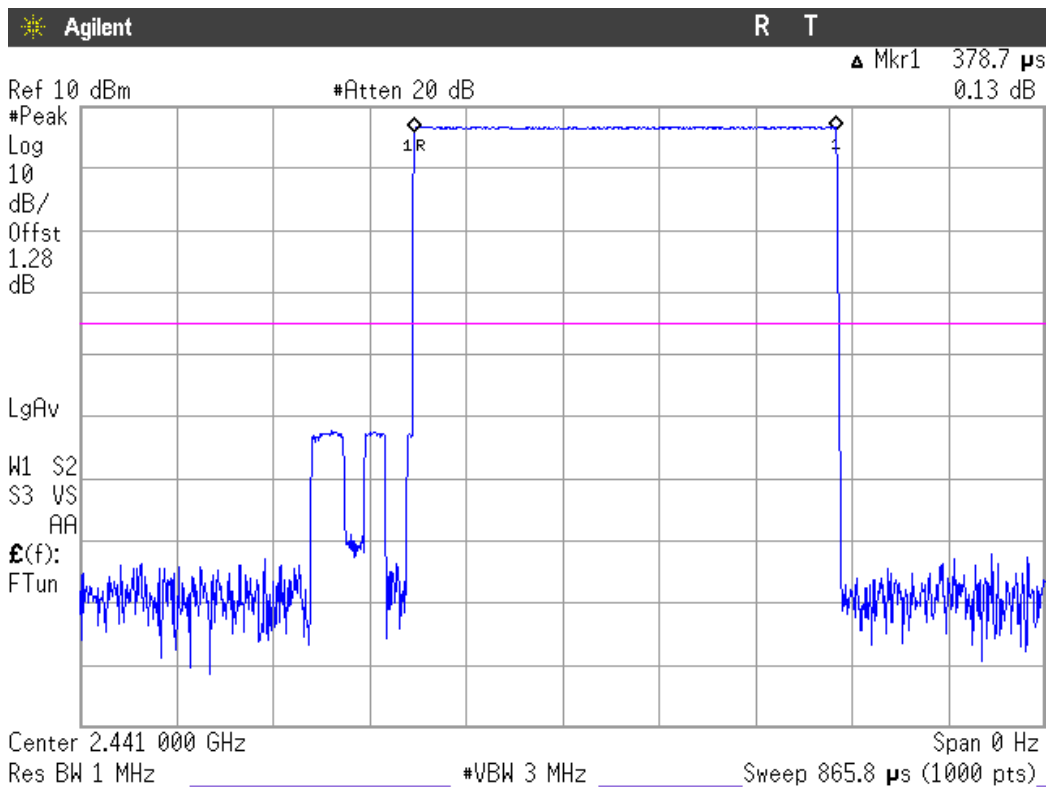


Verdict: PASS

2. TIME OF OCCUPANCY (DWELL TIME) FOR PACKET TYPE DH3.

A DH3 Packet needs 3 time slots for transmitting and 1 time slot for receiving. Then the system makes worst case $1600/4 = 400$ hops per second with 79 channels. So you have each channel $400/79 = 5.1$ times per second and so for a period of $0.4 \times 79 = 31.6$ seconds you have $5.1 \times 31.6 = 161.16$ times of appearance.

Each Tx-time per appearance is 1.635 ms (see next plot).


So we have $161.16 \times 1.635 \text{ ms} = 263.49 \text{ ms}$ per 31.6 seconds.

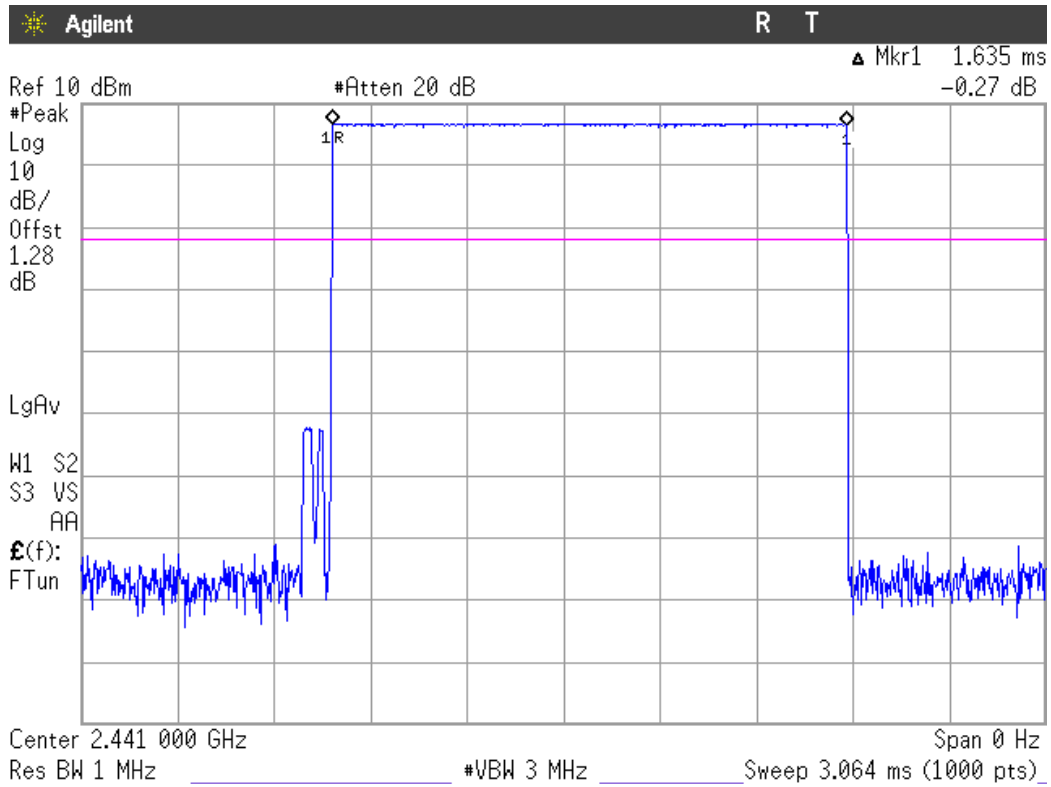

Verdict: PASS

3. TIME OF OCCUPANCY (DWELL TIME) FOR PACKET TYPE DH5.

A DH5 Packet needs 5 time slots for transmitting and 1 time slot for receiving. Then the system makes worst case $1600/6 = 266.67$ hops per second with 79 channels. So you have each channel $266.67/79 = 3.37$ times per second and so for a period of $0.4 \times 79 = 31.6$ seconds you have $3.37 \times 31.6 = 106.49$ times of appearance. Each Tx-time per appearance is 2.883 ms (see next plot). So we have $106.49 \times 2.883 \text{ ms} = 307.01 \text{ ms}$ per 31.6 seconds.

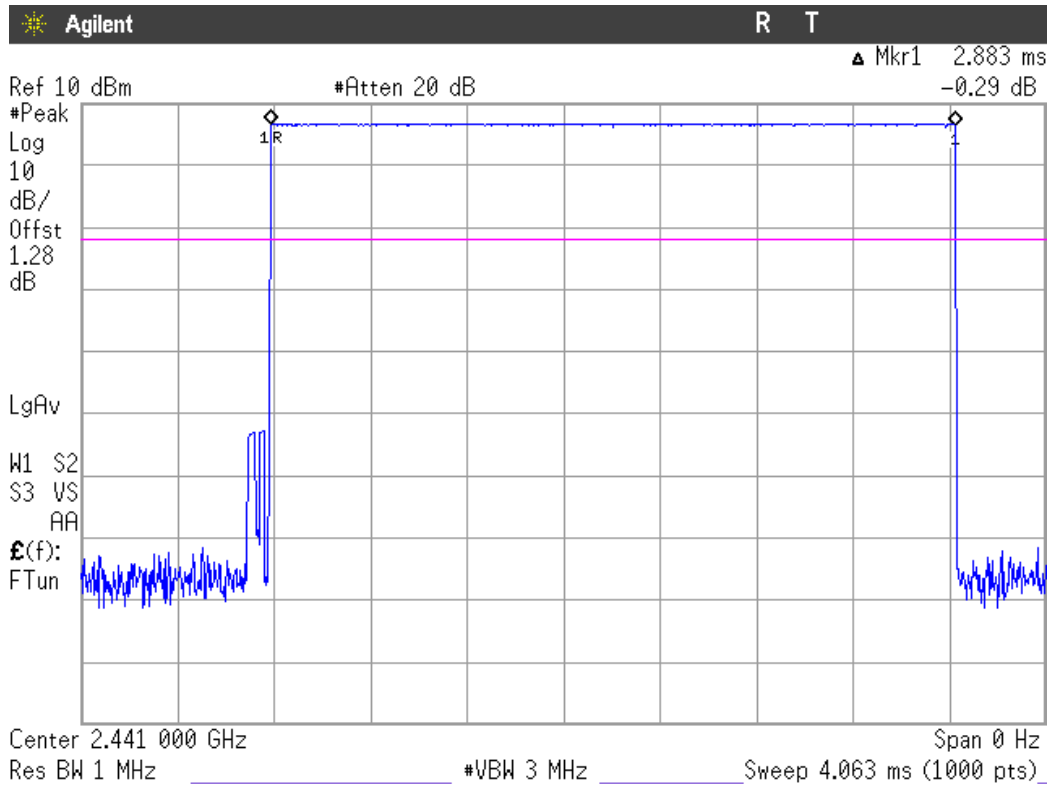

Verdict: PASS


Modulation: $\Pi/4$ -DQPSK

1. TIME OF OCCUPANCY (DWELL TIME) FOR PACKET TYPE DH1.

The system makes worst case 1600 hops per second or 1 time slot has a length of $625\mu\text{s}$ with 79 channels. A DH1 Packet need 1 time slot for transmitting and 1 time slot for receiving. Then the system makes worst case $1600/2 = 800$ hops per second with 79 channels. So you have each channel $800/79 = 10.13$ times per second and so for a period of $0.4 \times 79 = 31.6$ seconds you have $10.13 \times 31.6 = 320.11$ times of appearance.

Each Tx-time per appearance is $387.4 \mu\text{s}$ (see next plot).

So we have $320.11 \times 387.4 \mu\text{s} = 124.01 \text{ ms}$ per 31.6 seconds.

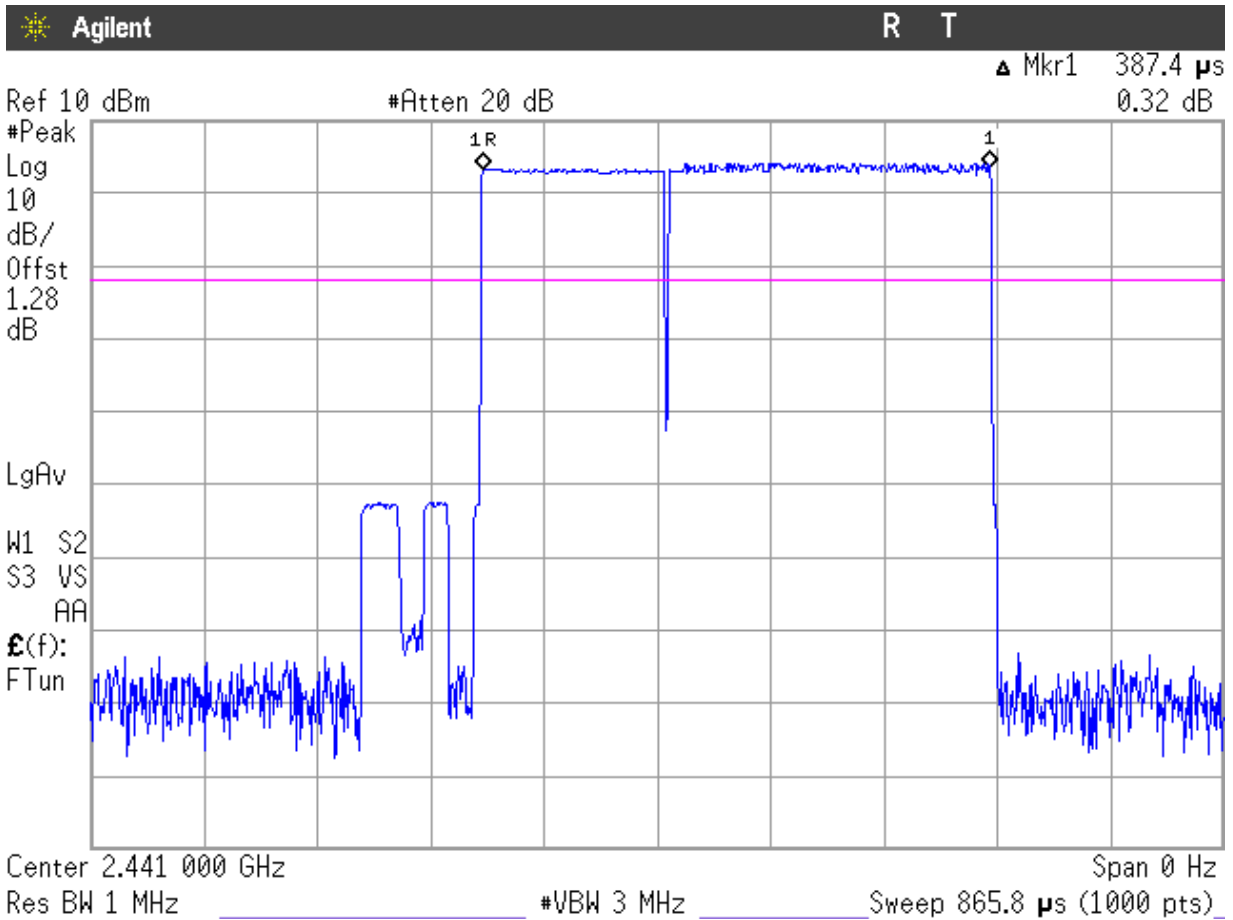


Verdict: PASS

2. TIME OF OCCUPANCY (DWELL TIME) FOR PACKET TYPE DH3.

A DH3 Packet needs 3 time slots for transmitting and 1 time slot for receiving. Then the system makes worst case $1600/4 = 400$ hops per second with 79 channels. So you have each channel $400/79 = 5.1$ times per second and so for a period of $0.4 \times 79 = 31.6$ seconds you have $5.1 \times 31.6 = 161.16$ times of appearance.

Each Tx-time per appearance is 1.641 ms (see next plot).

So we have $161.16 \times 1.641 \text{ ms} = 264.46 \text{ ms}$ per 31.6 seconds.

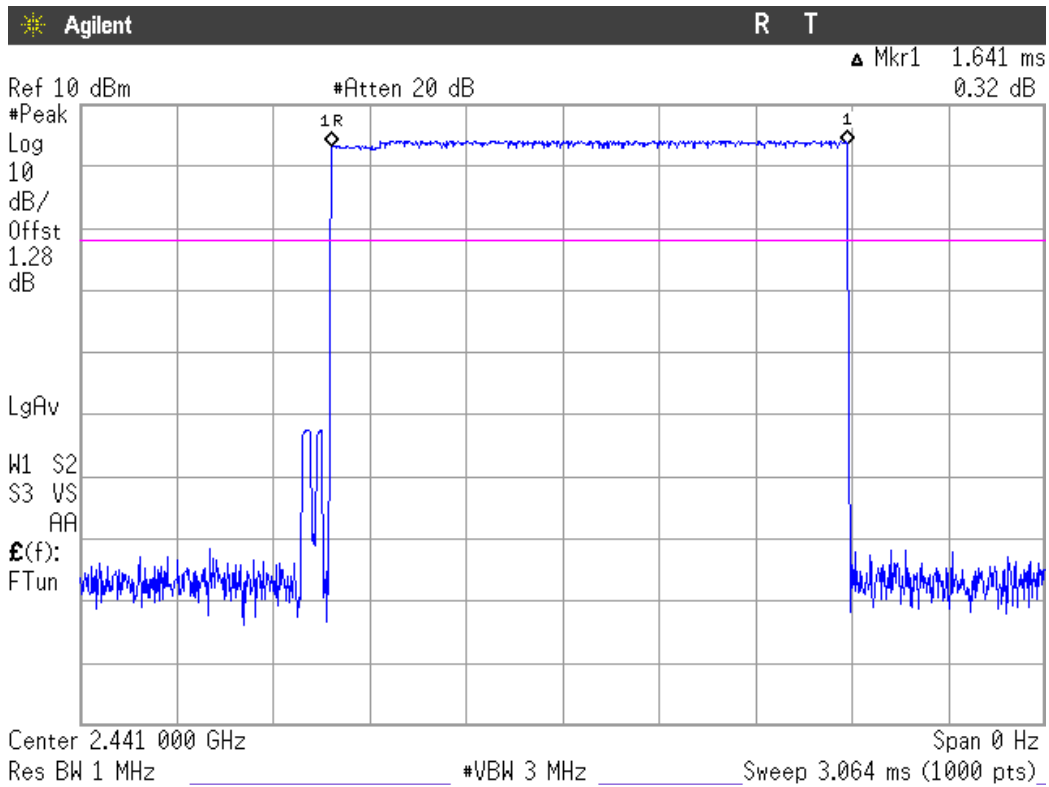


Verdict: PASS

3. TIME OF OCCUPANCY (DWEELL TIME) FOR PACKET TYPE DH5.

A DH5 Packet needs 5 time slots for transmitting and 1 time slot for receiving. Then the system makes worst case $1600/6 = 266.67$ hops per second with 79 channels. So you have each channel $266.67/79 = 3.37$ times per second and so for a period of $0.4 \times 79 = 31.6$ seconds you have $3.37 \times 31.6 = 106.49$ times of appearance.

Each Tx-time per appearance is 2.883 ms (see next plot).

So we have $106.49 \times 2.883 \text{ ms} = 307.01 \text{ ms}$ per 31.6 seconds.

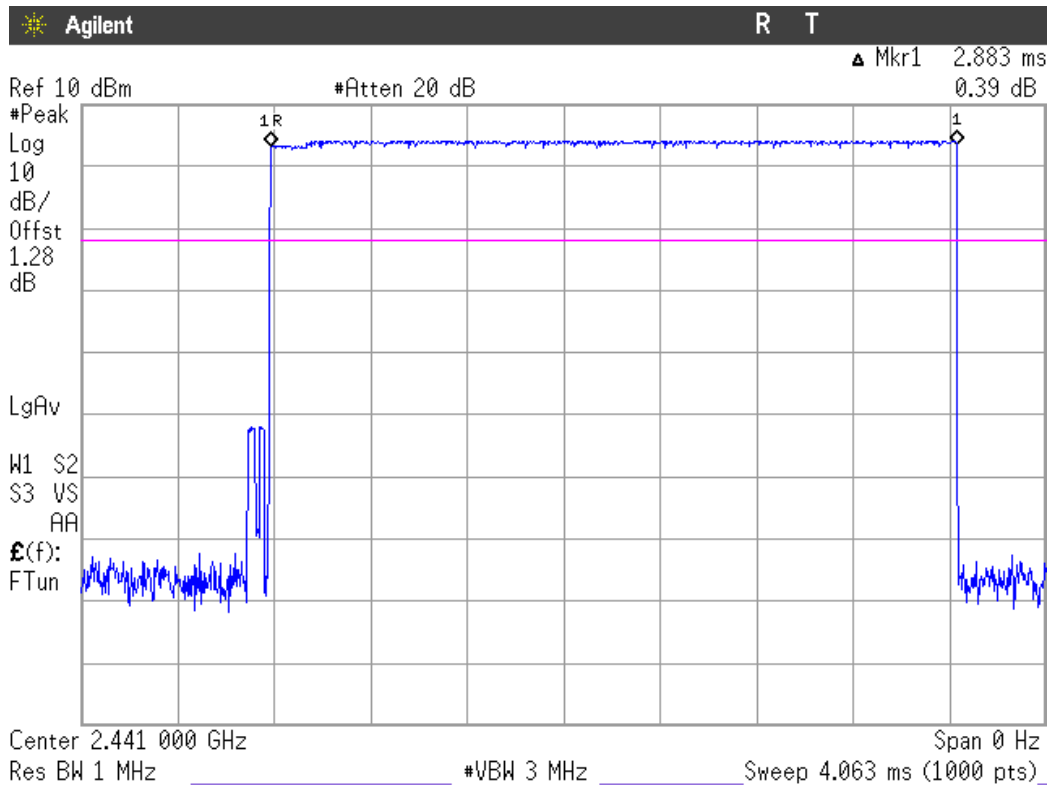

Verdict: PASS


Modulation: 8-DPSK

1. TIME OF OCCUPANCY (DWELL TIME) FOR PACKET TYPE DH1.

The system makes worst case 1600 hops per second or 1 time slot has a length of 625µs with 79 channels. A DH1 Packet need 1 time slot for transmitting and 1 time slot for receiving. Then the system makes worst case 1600/2 = 800 hops per second with 79 channels. So you have each channel 800/79 = 10.13 times per second and so for a period of 0.4 x 79 = 31.6 seconds you have 10.13 x 31.6 = 320.11 times of appearance.

Each Tx-time per appearance is 388.3µs (see next plot).

So we have 320.11 x 388.3µs = 124.298ms per 31.6 seconds.

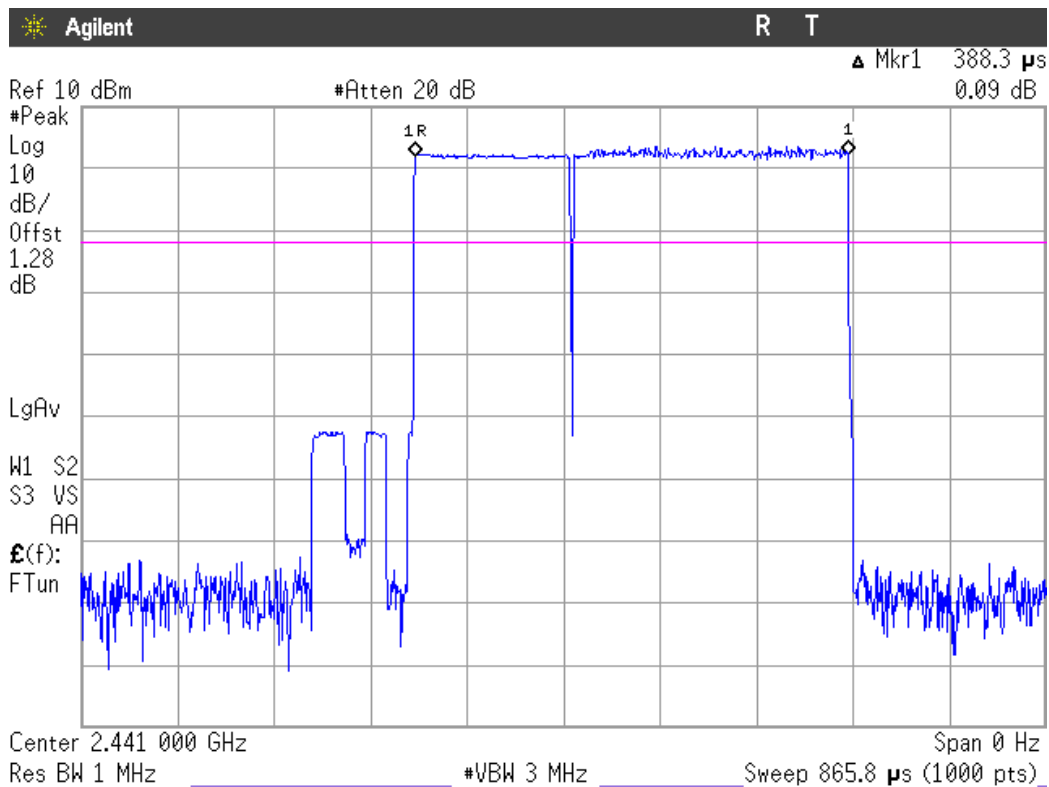


Verdict: PASS

2. TIME OF OCCUPANCY (DWELL TIME) FOR PACKET TYPE DH3.

A DH3 Packet needs 3 time slots for transmitting and 1 time slot for receiving. Then the system makes worst case $1600/4 = 400$ hops per second with 79 channels. So you have each channel $400/79 = 5.1$ times per second and so for a period of $0.4 \times 79 = 31.6$ seconds you have $5.1 \times 31.6 = 161.16$ times of appearance.

Each Tx-time per appearance is 1.641 ms (see next plot).

So we have $161.16 \times 1.641 \text{ ms} = 264.46 \text{ ms}$ per 31.6 seconds.

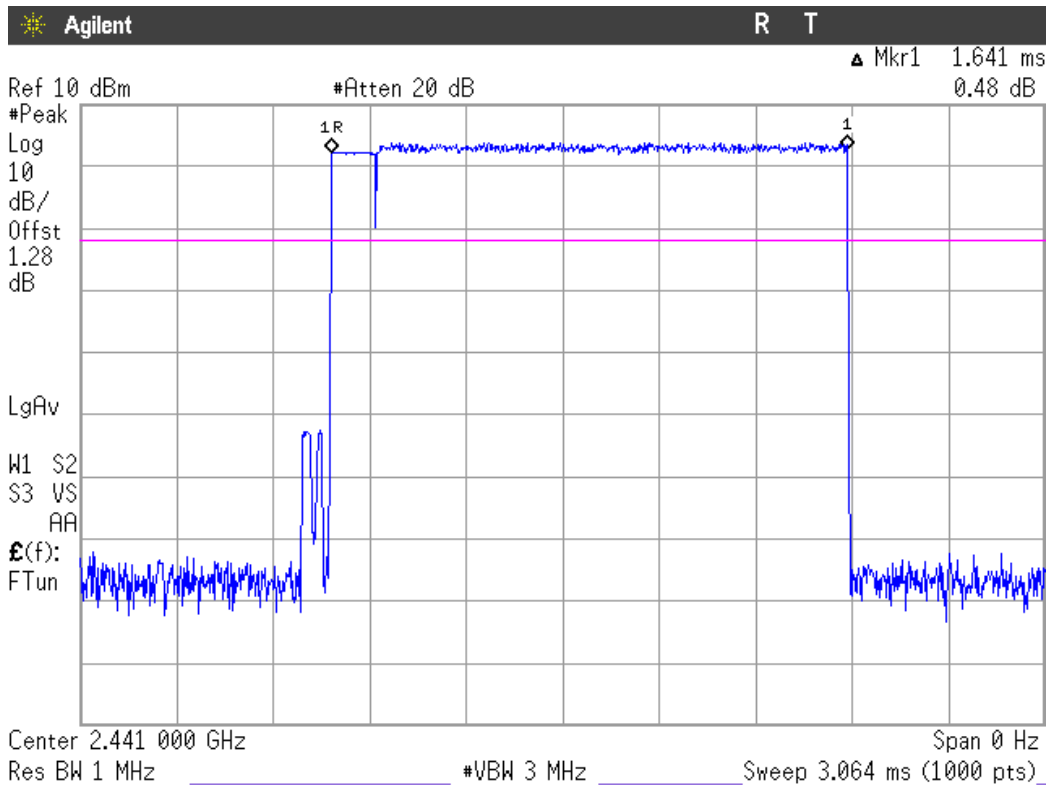


Verdict: PASS

3. TIME OF OCCUPANCY (DWELL TIME) FOR PACKET TYPE DH5.

A DH5 Packet needs 5 time slots for transmitting and 1 time slot for receiving. Then the system makes worst case $1600/6 = 266.67$ hops per second with 79 channels. So you have each channel $266.67/79 = 3.37$ times per second and so for a period of $0.4 \times 79 = 31.6$ seconds you have $3.37 \times 31.6 = 106.49$ times of appearance.

Each Tx-time per appearance is 2.891 ms (see next plot).

So we have $106.49 \times 2.891 \text{ ms} = 307.86 \text{ ms}$ per 31.6 seconds.

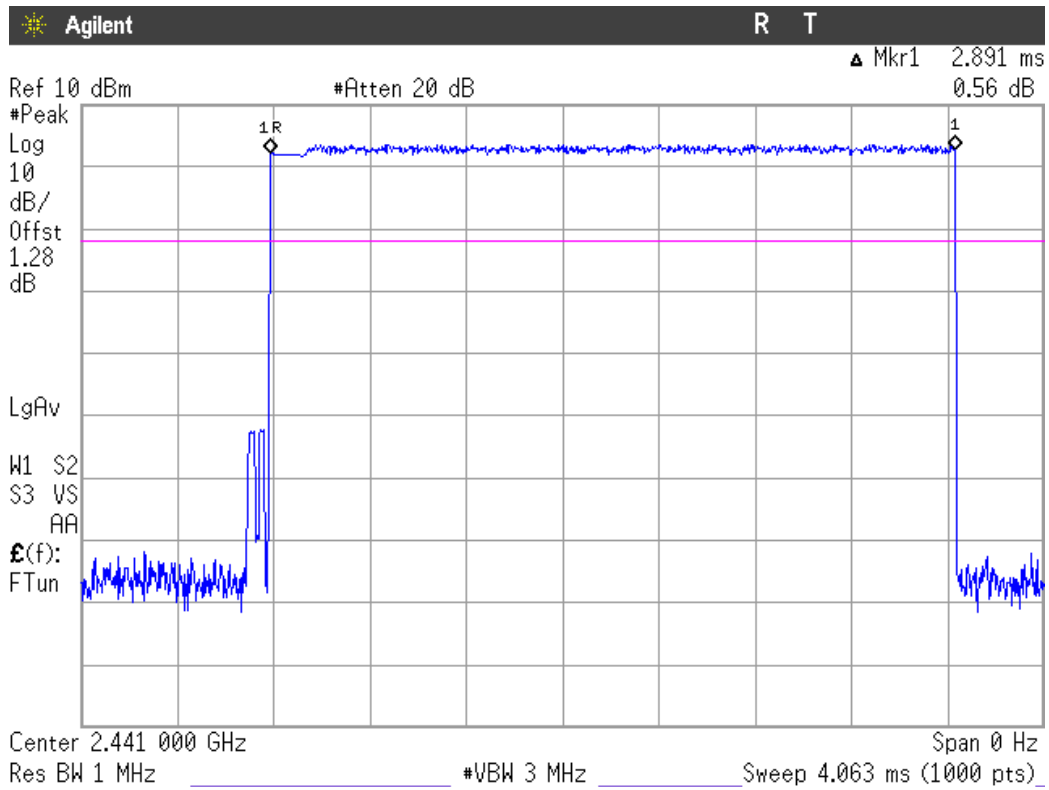

Verdict: PASS

FCC Section 15.247 Subclause (b) / RSS-210 Clause A8.4 (2). Maximum peak output power and antenna gain

SPECIFICATION

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels: 1 watt (30 dBm).

MAXIMUM OUTPUT POWER. See next plots.

Declared maximum antenna gain: 3.24 dBi.

The EIRP power (dBm) is calculated by adding the declared maximum antenna gain to the measured conducted power.

Modulation: GFSK

	Lowest frequency 2402 MHz	Middle frequency 2441 MHz	Highest frequency 2480 MHz
Maximum peak power (dBm)	6.26	6.60	6.49
Maximum EIRP power (dBm)	9.50	9.84	9.73
Measurement uncertainty (dB)	±1.5		

Modulation: Π/4-DQPSK (2Mbps)

	Lowest frequency 2402 MHz	Middle frequency 2441 MHz	Highest frequency 2480 MHz
Maximum peak power (dBm)	5.30	5.46	5.57
Maximum EIRP power (dBm)	8.54	8.70	8.81
Measurement uncertainty (dB)	±1.5		

Modulation: 8-DPSK (3Mbps)

	Lowest frequency 2402 MHz	Middle frequency 2441 MHz	Highest frequency 2480 MHz
Maximum peak power (dBm)	4.47	4.86	4.77
Maximum EIRP power (dBm)	7.71	8.10	8.01
Measurement uncertainty (dB)	±1.5		


The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Verdict: PASS

PEAK OUTPUT POWER (CONDUCTED).


Modulation: GFSK

Lowest Channel: 2402 MHz.

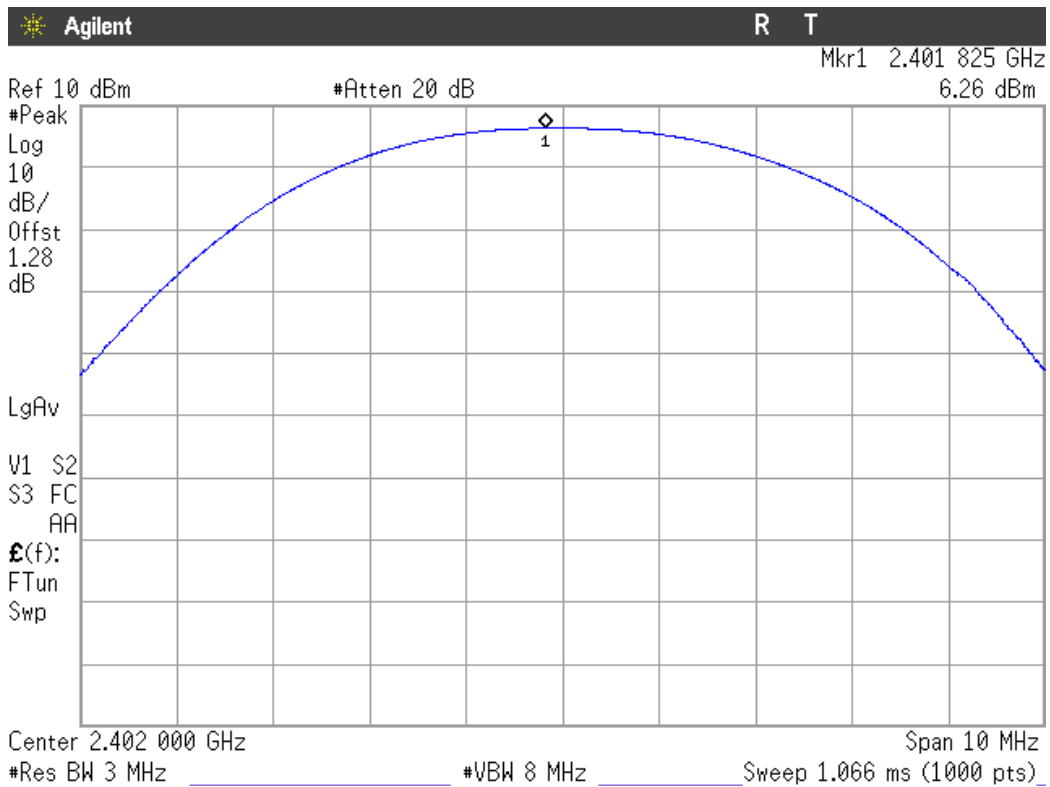

Modulation: GFSK


Middle Channel: 2441 MHz.

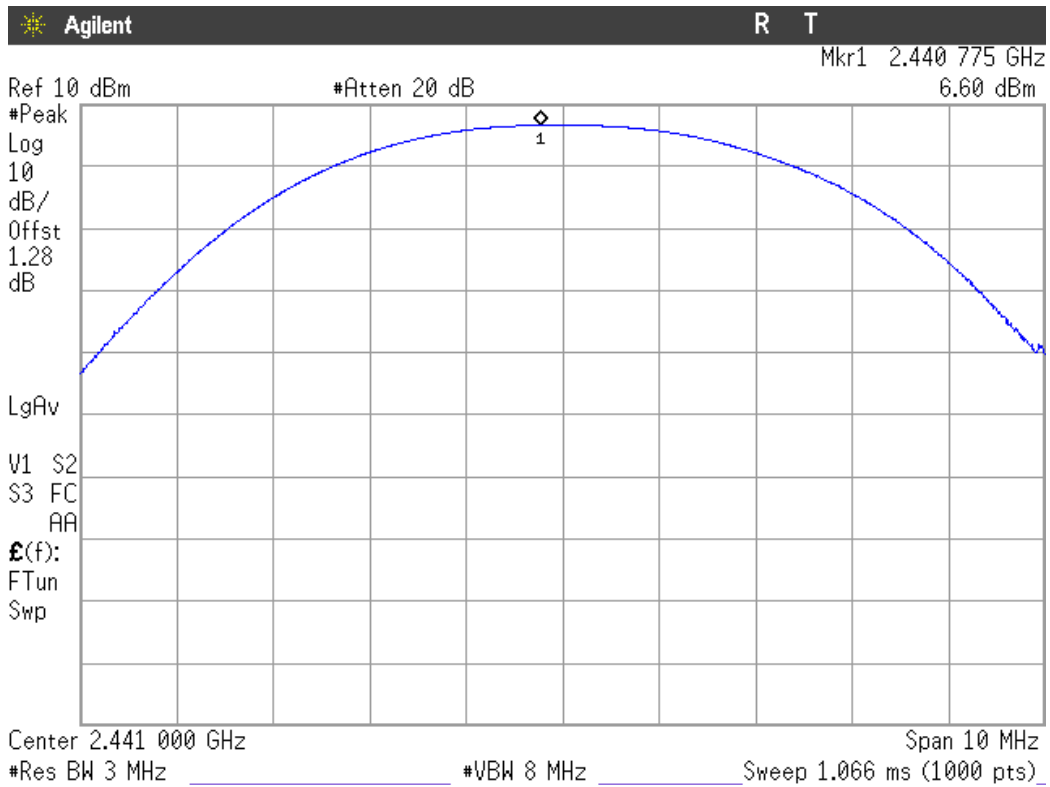

PEAK OUTPUT POWER (CONDUCTED).


Modulation: GFSK

Highest Channel: 2480 MHz.

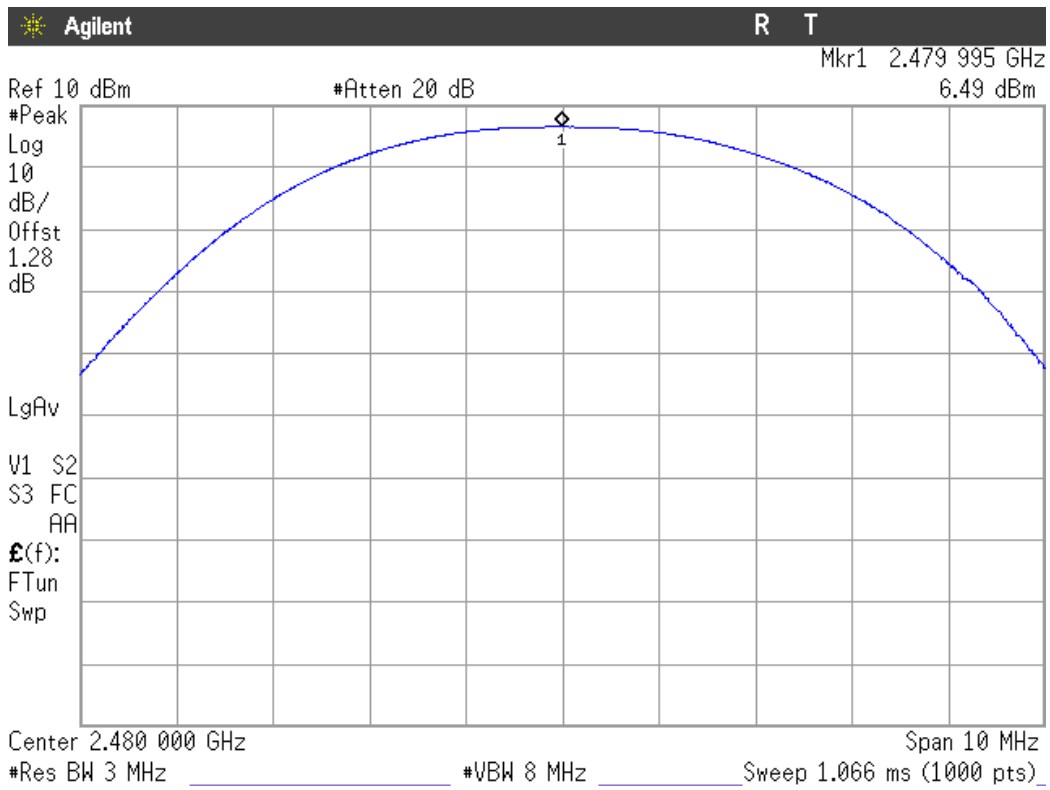


Modulation: Π/4-DQPSK

Lowest Channel: 2402 MHz

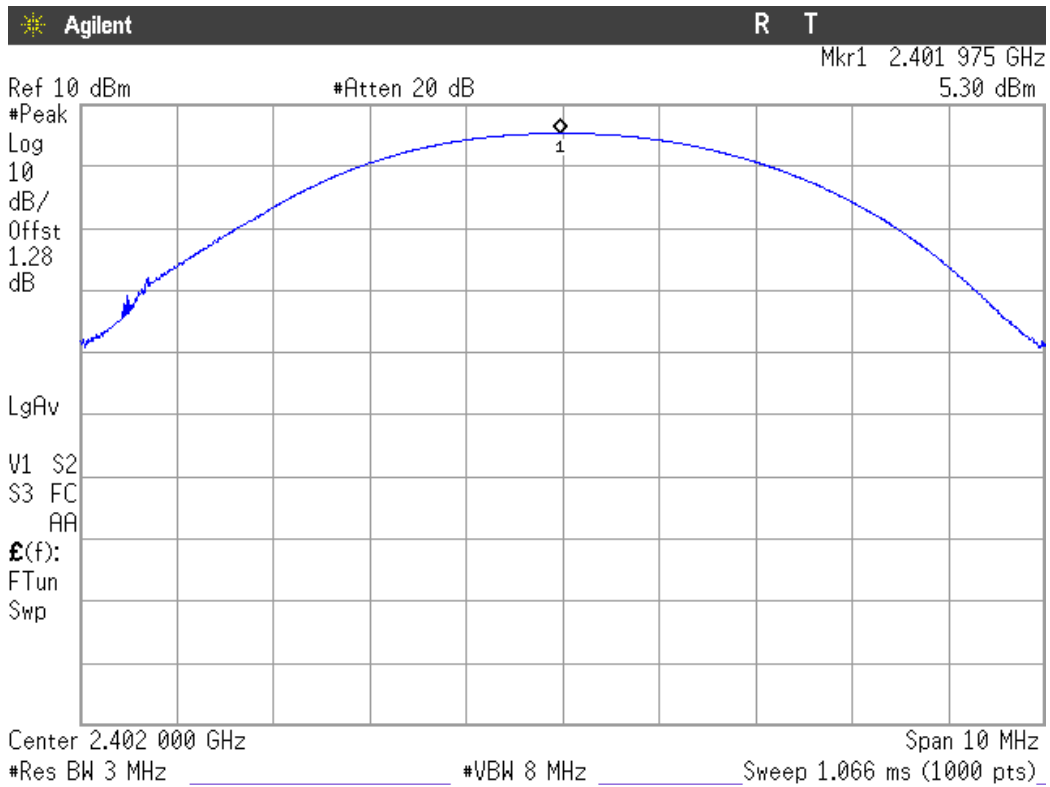


PEAK OUTPUT POWER (CONDUCTED)

Modulation: $\Pi/4$ -DQPSK Middle Channel: 2441 MHz.

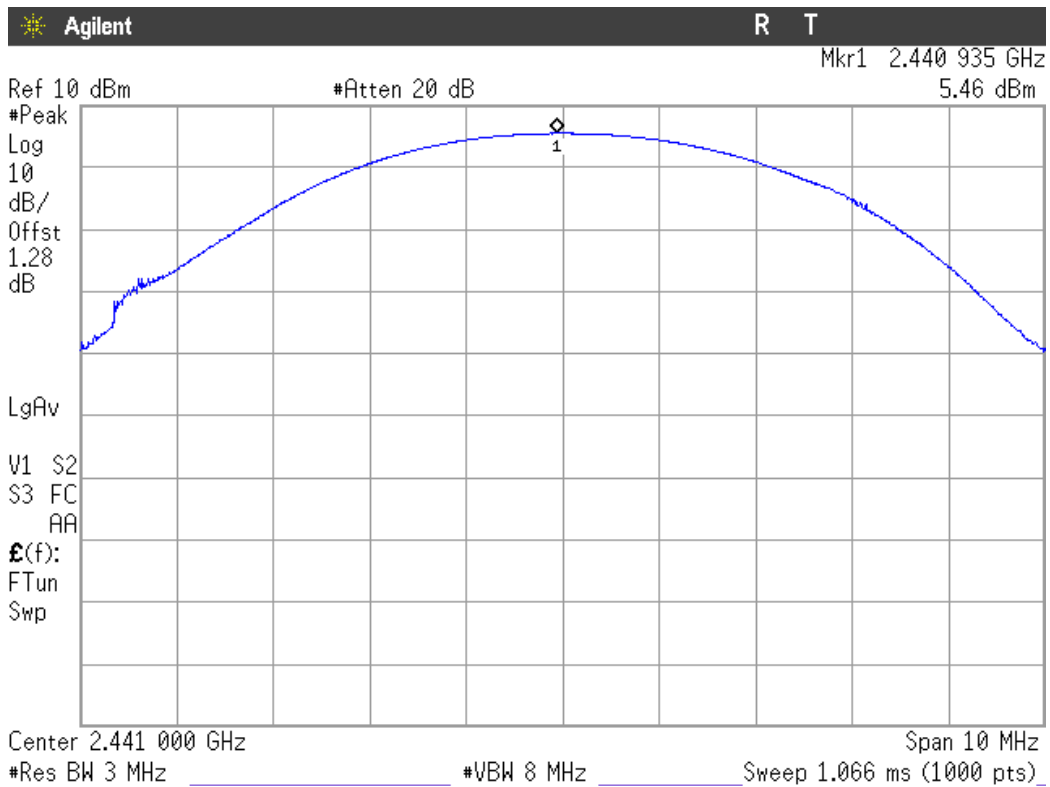


Modulation: $\Pi/4$ -DQPSK Highest Channel: 2480 MHz.

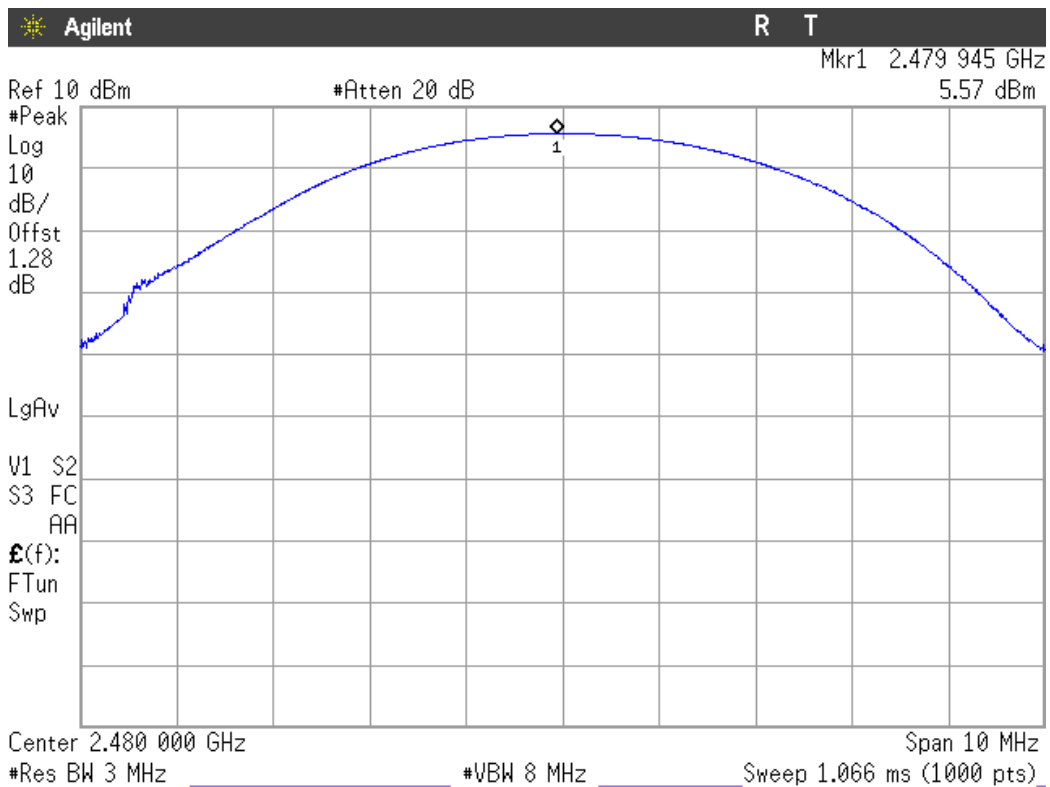

PEAK OUTPUT POWER (CONDUCTED).


Modulation: 8-DPSK

Lowest Channel: 2402 MHz

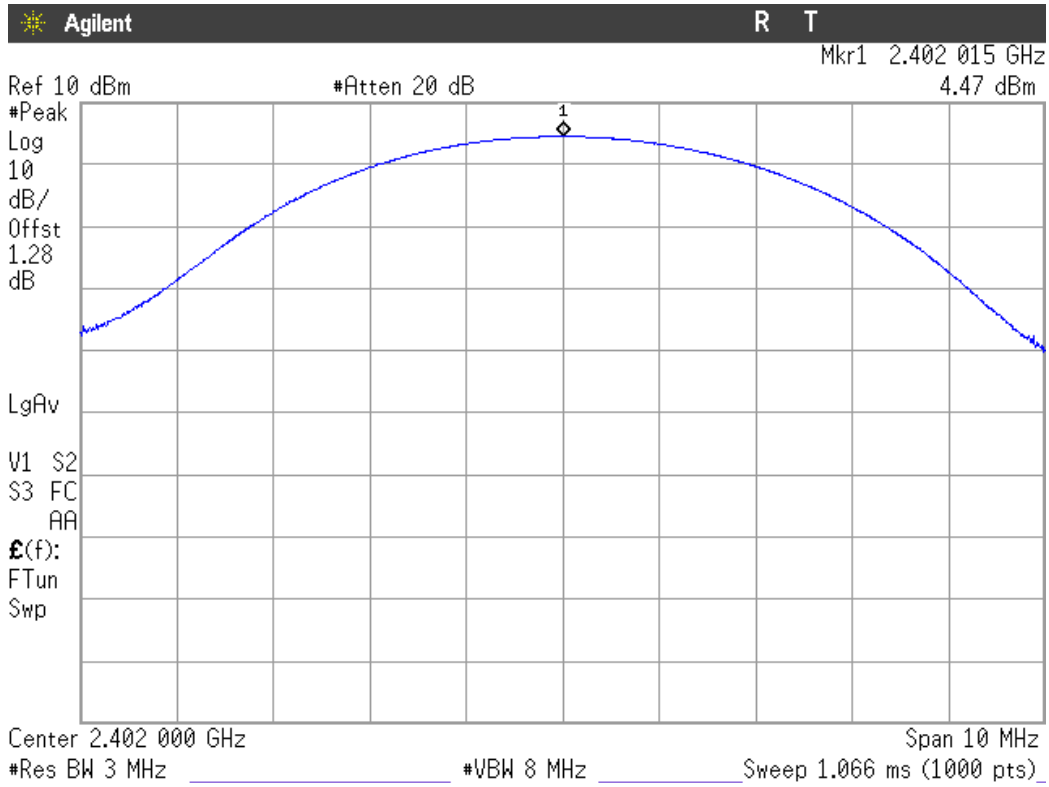

Modulation: 8-DPSK


Middle Channel: 2441 MHz.

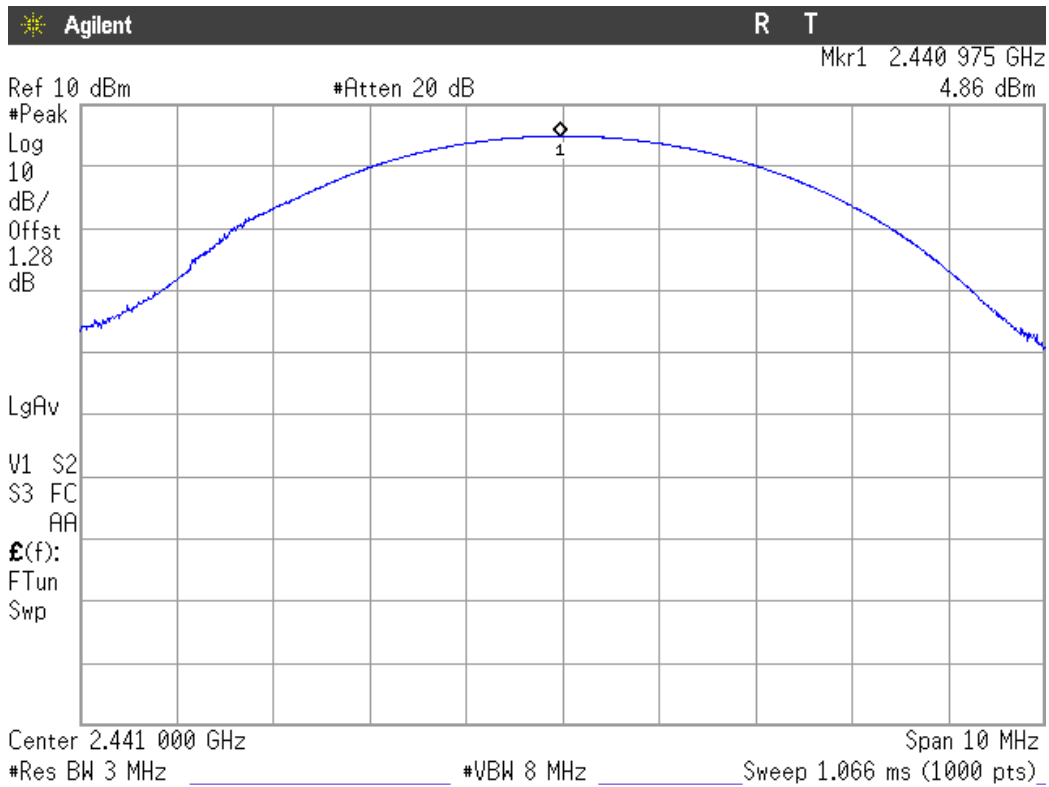

PEAK OUTPUT POWER (CONDUCTED).

Modulation: 8-DPSK

Highest Channel: 2480 MHz.

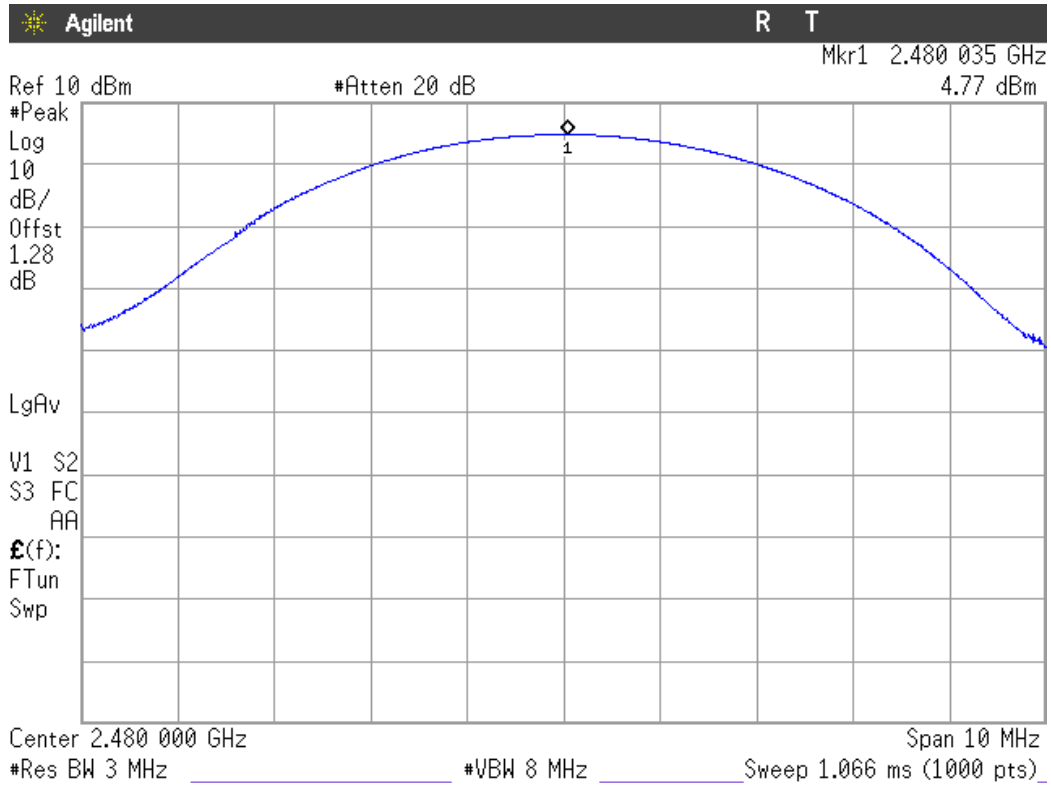

FCC Section 15.247 Subclause (d) / RSS-210 Clause A8.5. Band-edge compliance of conducted emissions (Transmitter)


SPECIFICATION

Emissions outside the frequency band in which the intentional radiator is operating shall be at least 20dB below the highest level of the desired power.

RESULTS:


Modulation: GFSK

1. LOW FREQUENCY SECTION 2402 MHz (HOPPING OFF). See next plot.

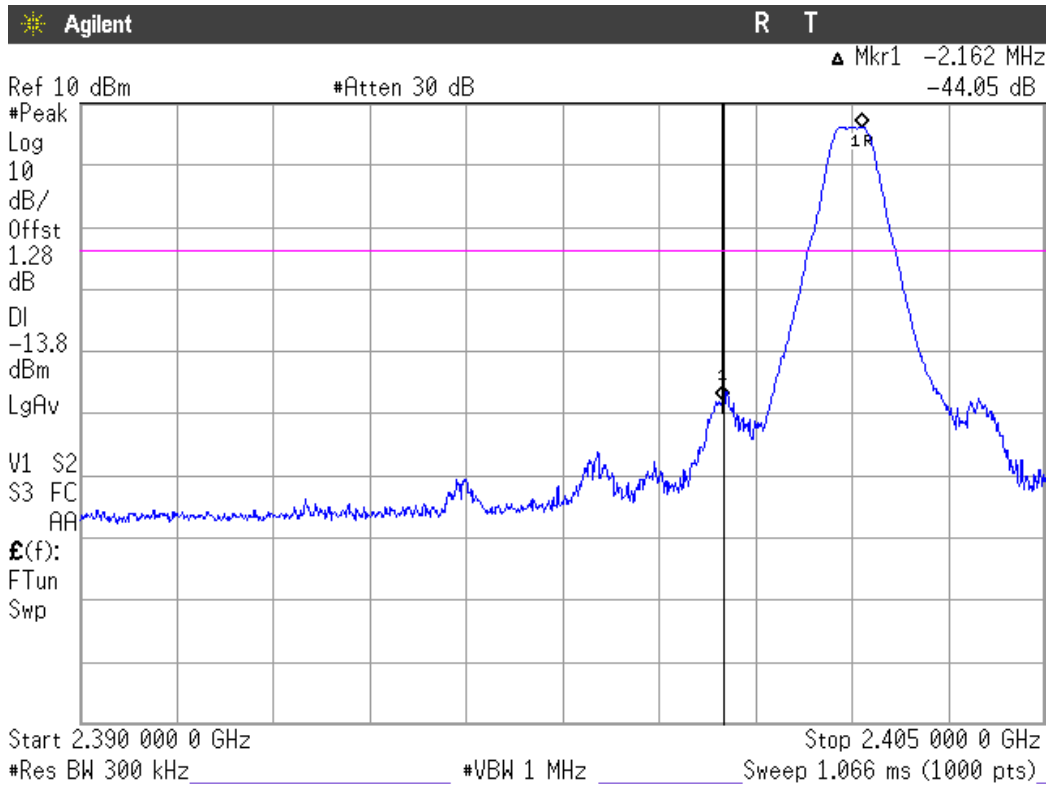


Verdict: PASS

2. HIGH FREQUENCY SECTION 2480 MHz (HOPPING OFF). See next plot.

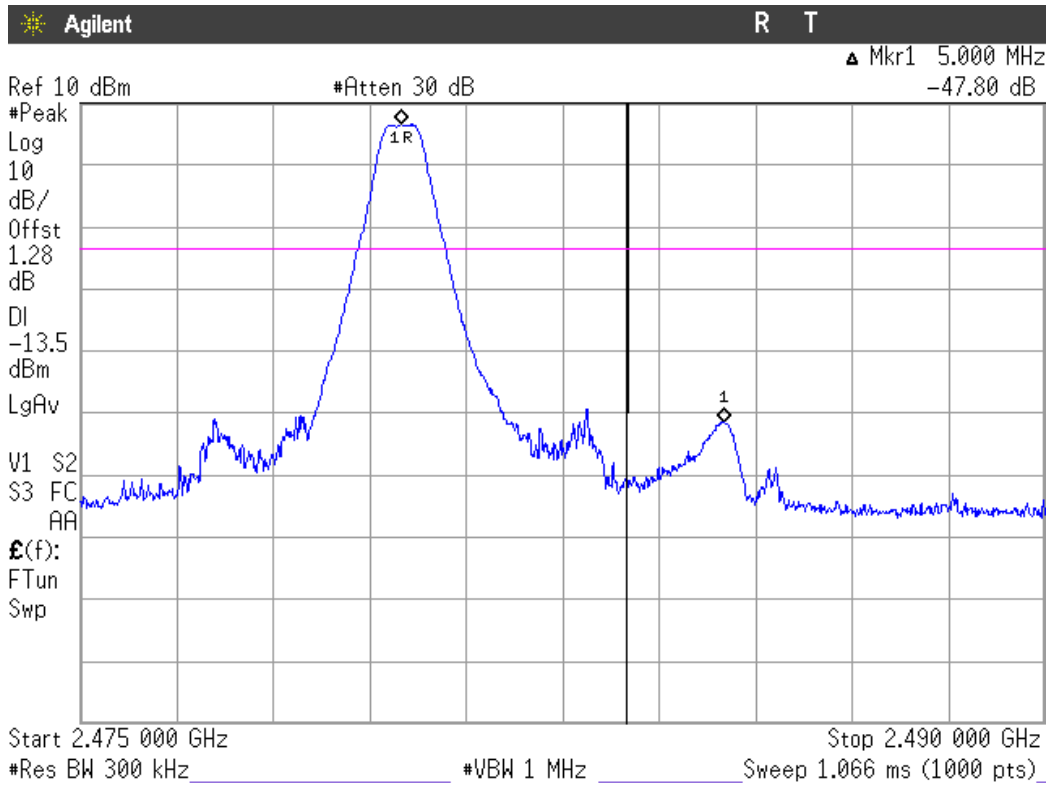


Verdict: PASS

3. LOW FREQUENCY SECTION (HOPPING ON). See next plot.

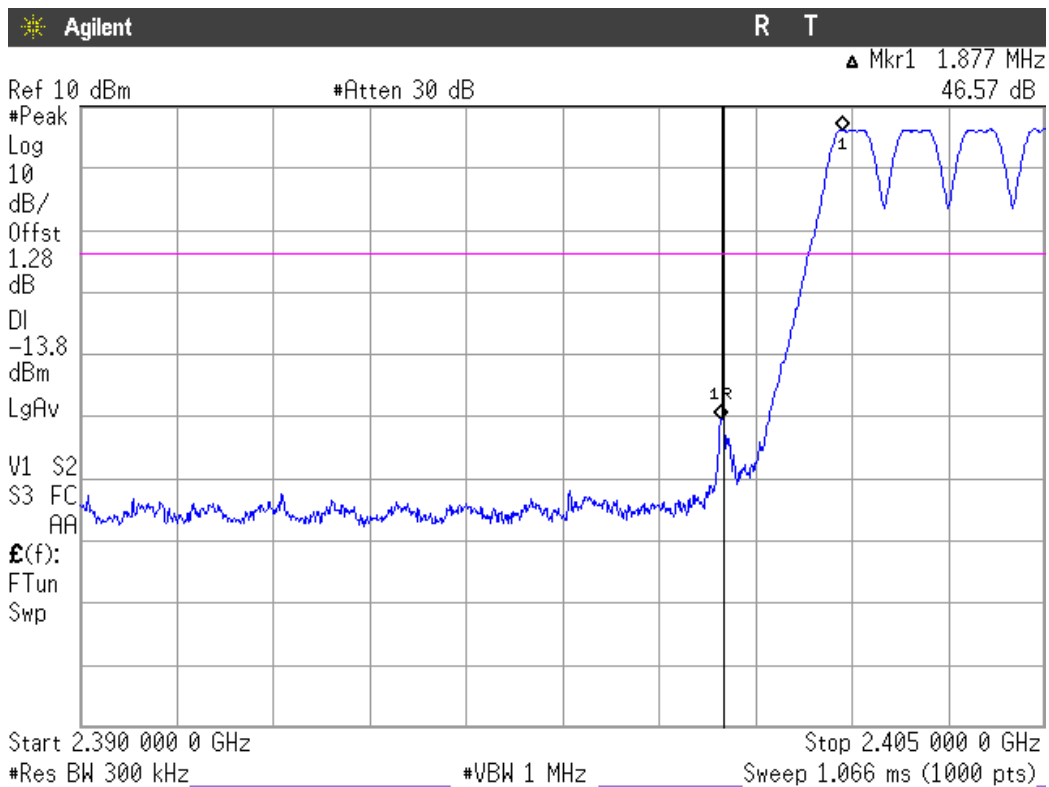

Verdict: PASS


4. HIGH FREQUENCY SECTION (HOPPING ON). See next plot.

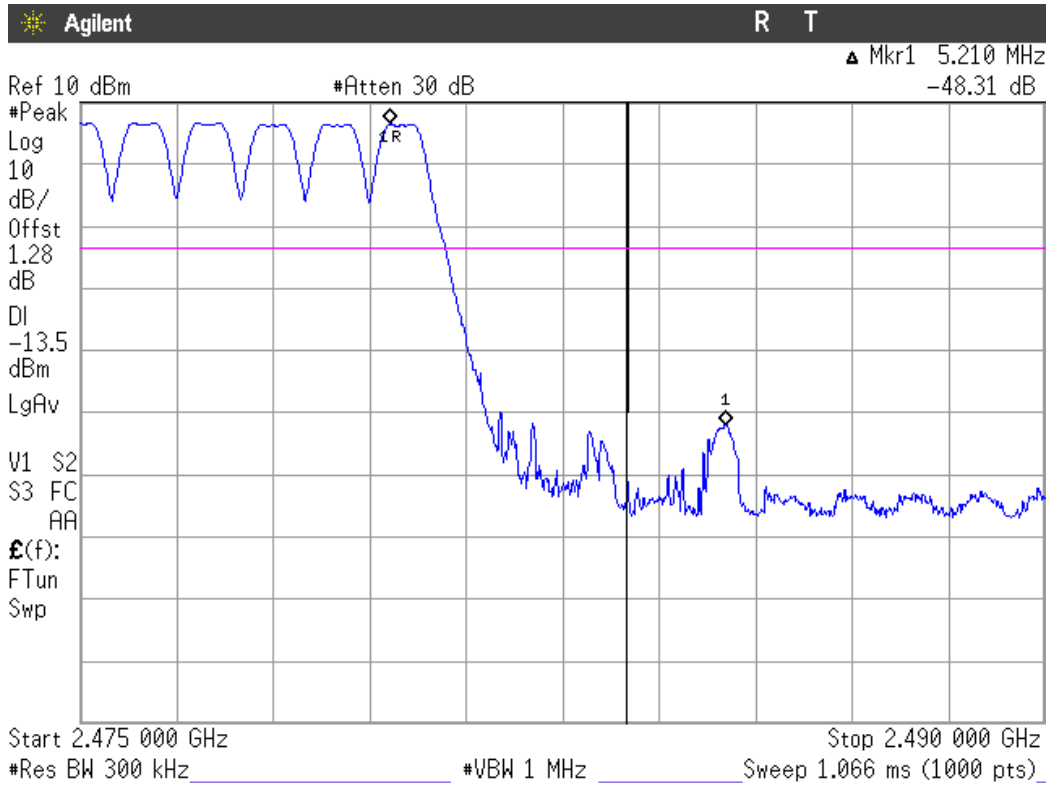

Verdict: PASS


Modulation: $\Pi/4$ -DQPSK

1. LOW FREQUENCY SECTION 2402 MHz (HOPPING OFF). See next plot.

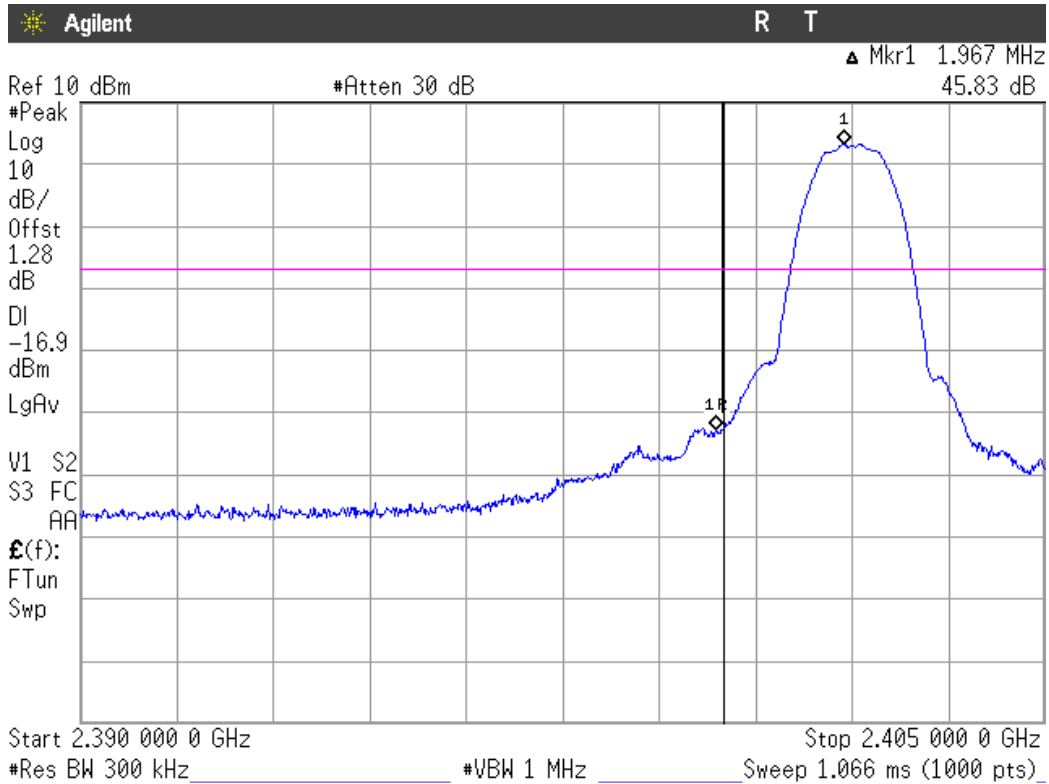


Verdict: PASS

2. HIGH FREQUENCY SECTION 2480 MHz (HOPPING OFF). See next plot.

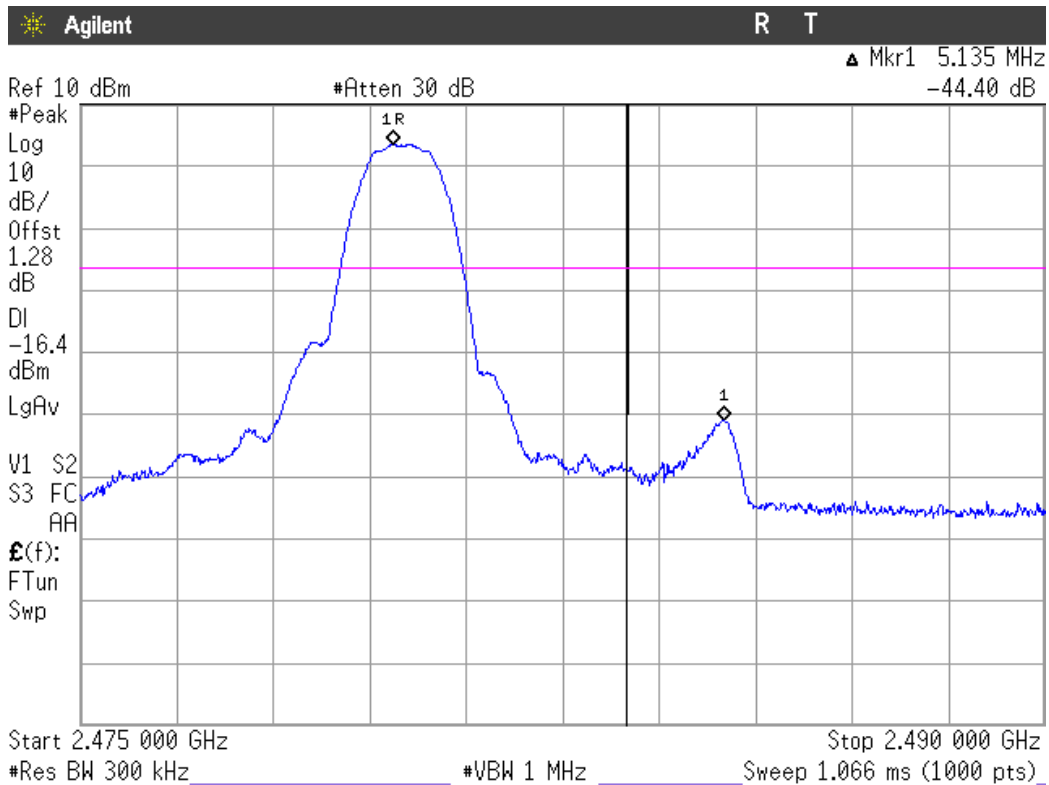


Verdict: PASS

3. LOW FREQUENCY SECTION (HOPPING ON). See next plot.

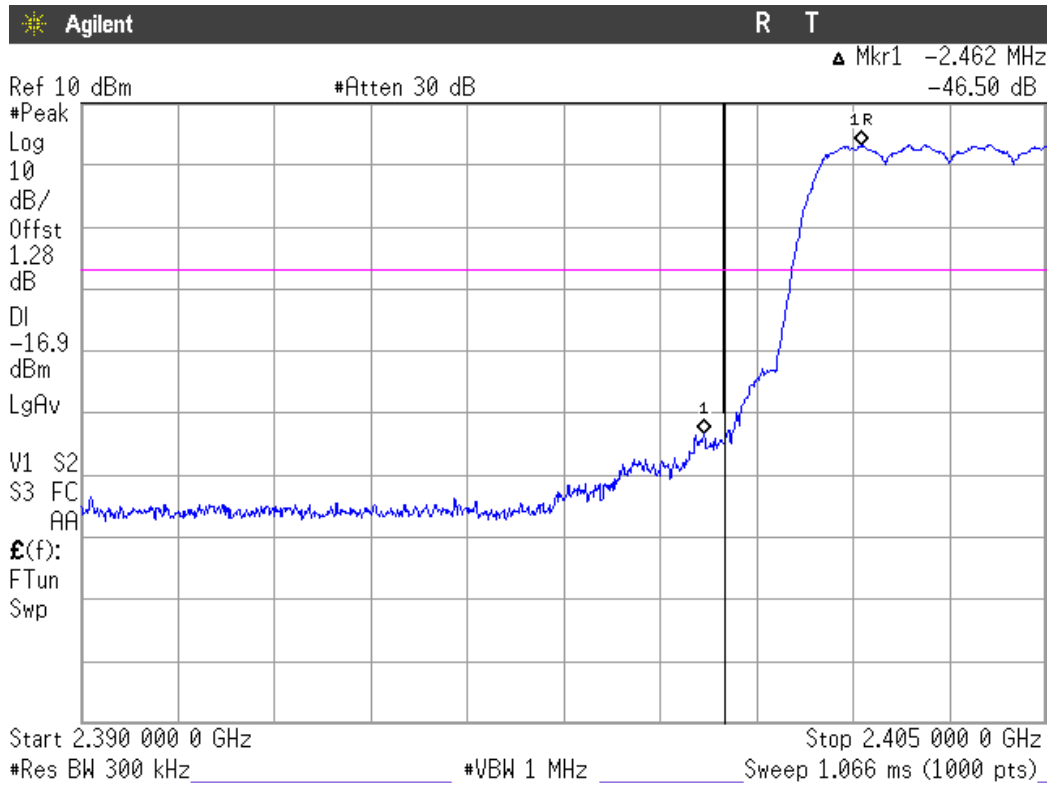

Verdict: PASS


4. HIGH FREQUENCY SECTION (HOPPING ON). See next plot.

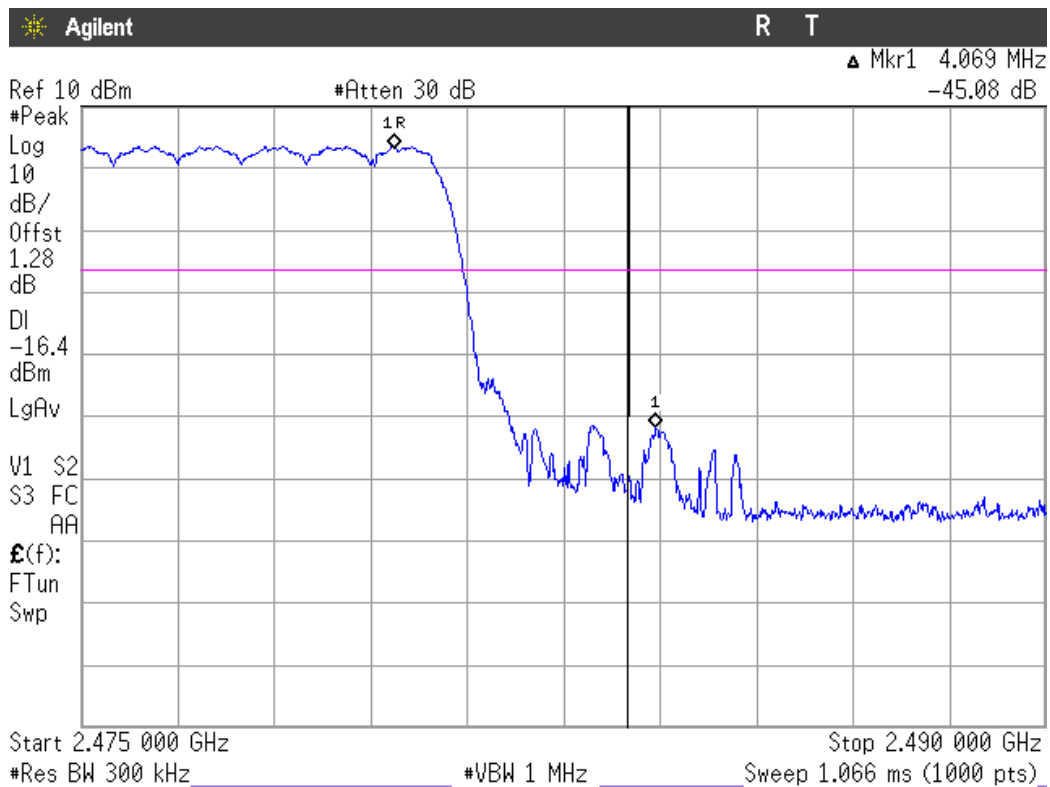

Verdict: PASS


Modulation: 8-DPSK

1. LOW FREQUENCY SECTION 2402 MHz (HOPPING OFF). See next plot.

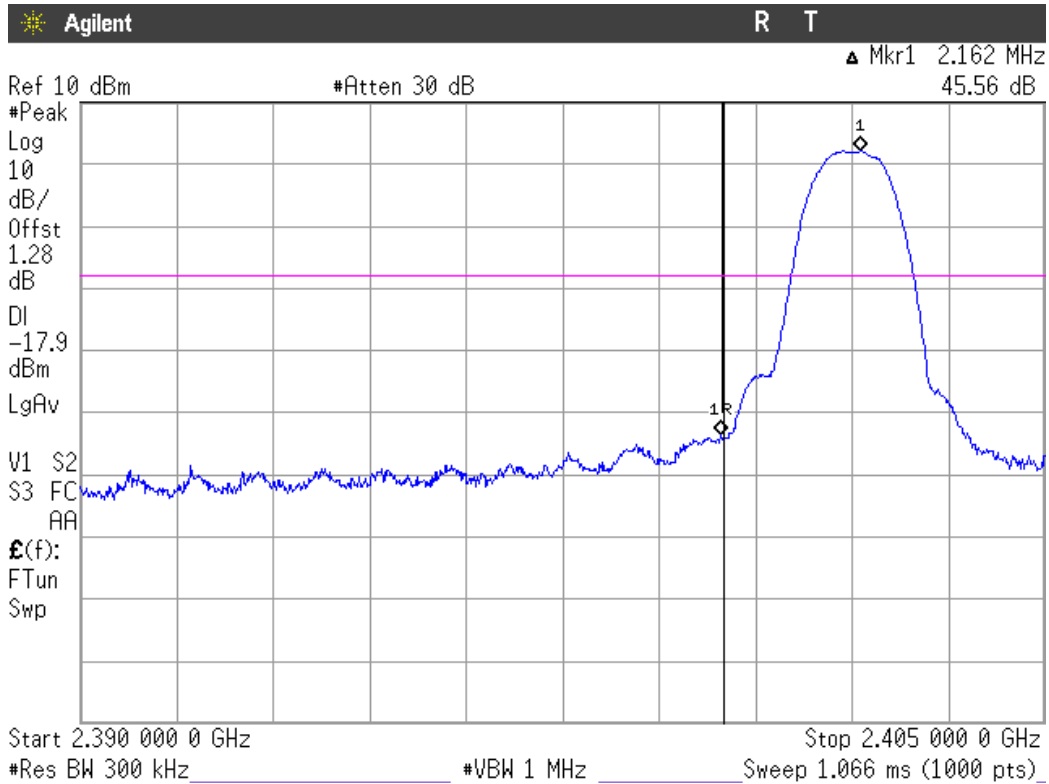


Verdict: PASS

2. HIGH FREQUENCY SECTION 2480 MHz (HOPPING OFF). See next plot.

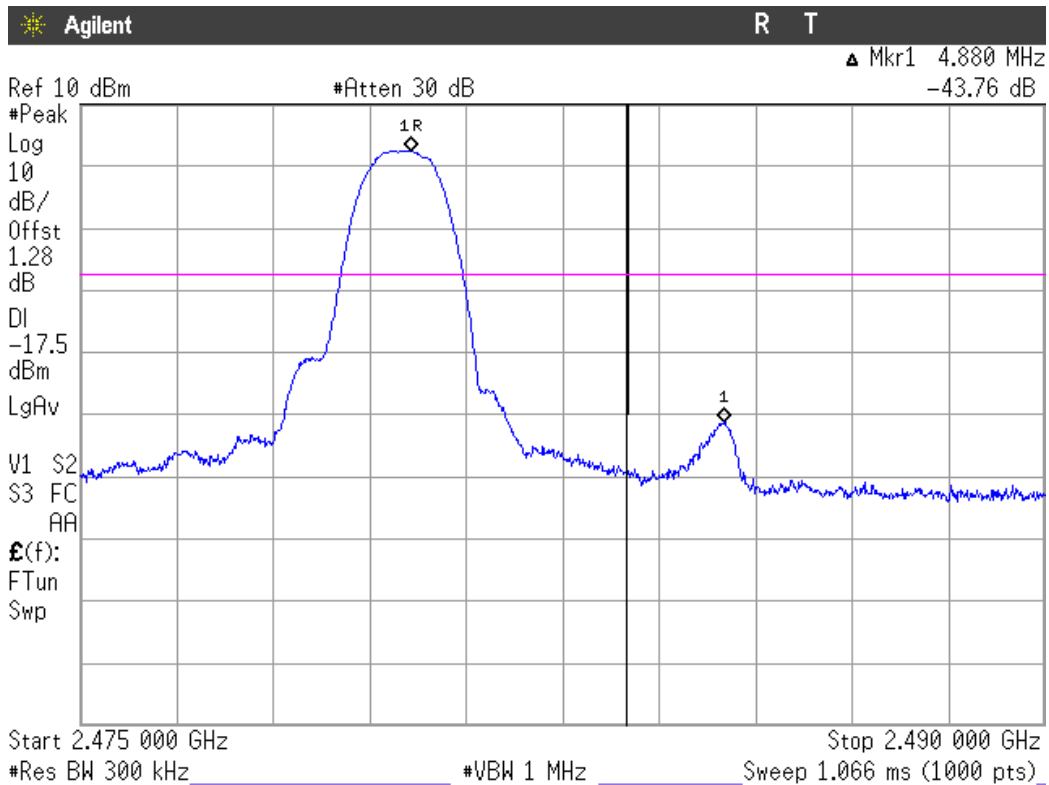


Verdict: PASS

3. LOW FREQUENCY SECTION (HOPPING ON). See next plot.

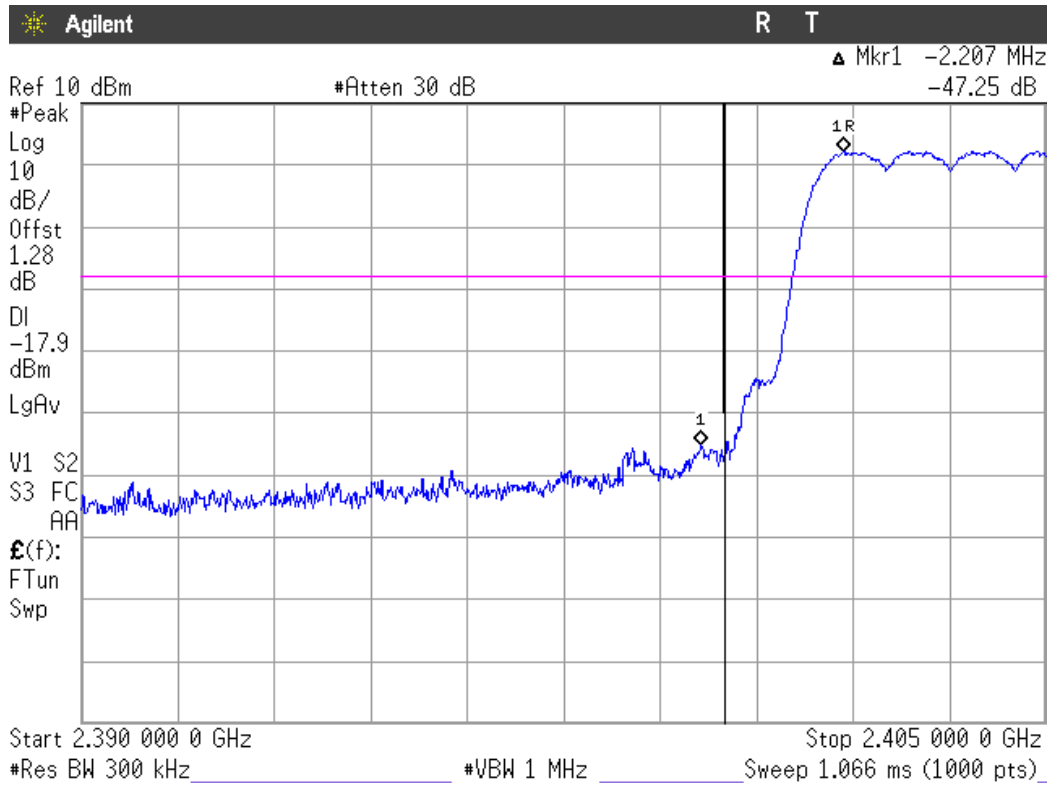

Verdict: PASS

4. HIGH FREQUENCY SECTION (HOPPING ON). See next plot.

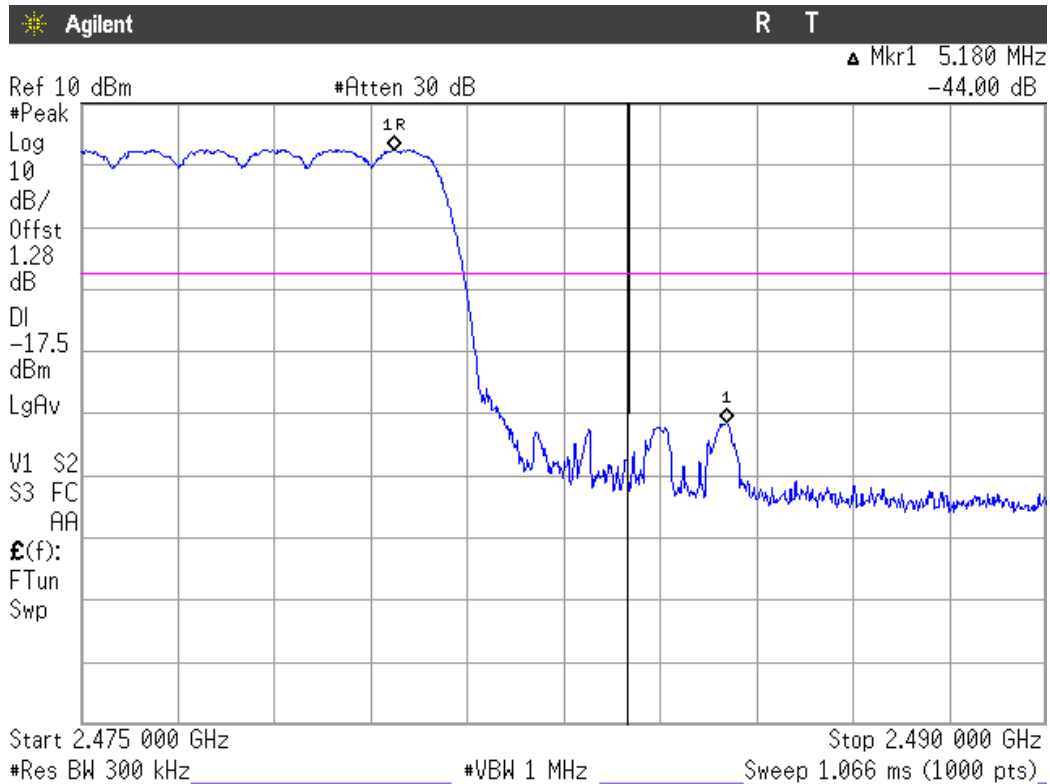

Verdict: PASS

FCC Section 15.247 Subclause (d) / RSS-210 Clause A8.5. Emission limitations conducted (Transmitter)


SPECIFICATION

In any 100 kHz bandwidths outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

RESULTS:

Modulation: GFSK


1. LOWEST CHANNEL (2402 MHz): 30 MHz-25 GHz (see next plot).

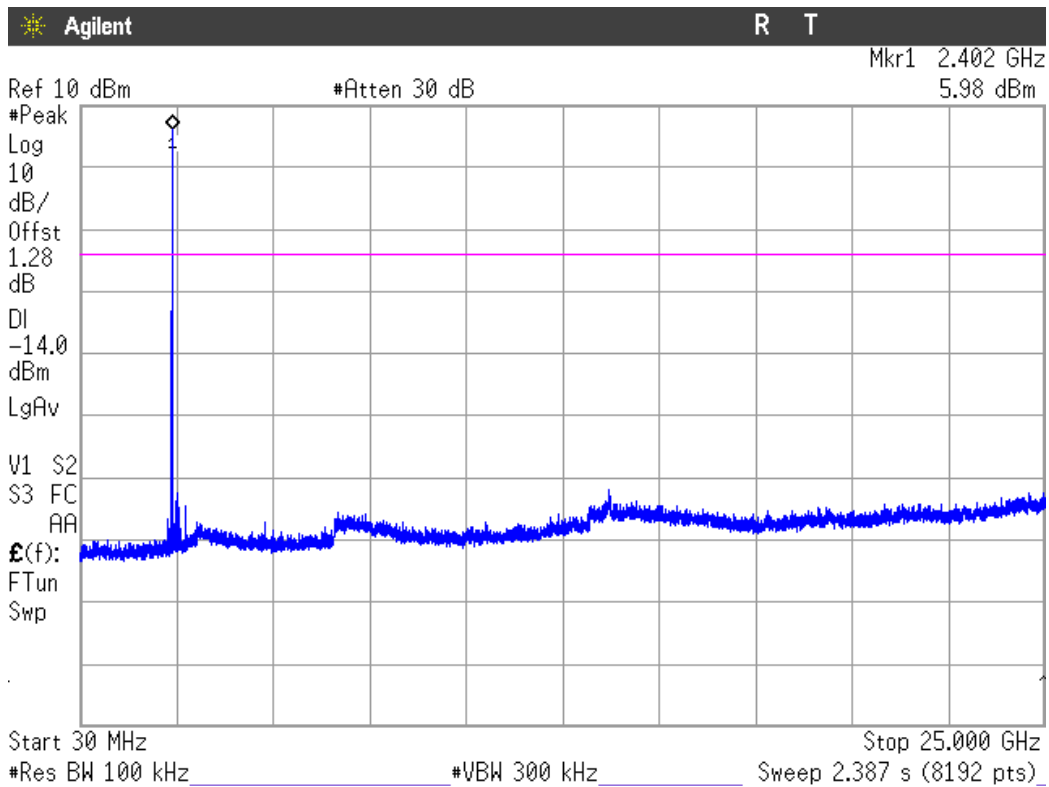

Note: The peak above the limit is the carrier frequency.

Verdict: PASS


2. MIDDLE CHANNEL (2441 MHz): 30 MHz-25 GHz (see next plot).

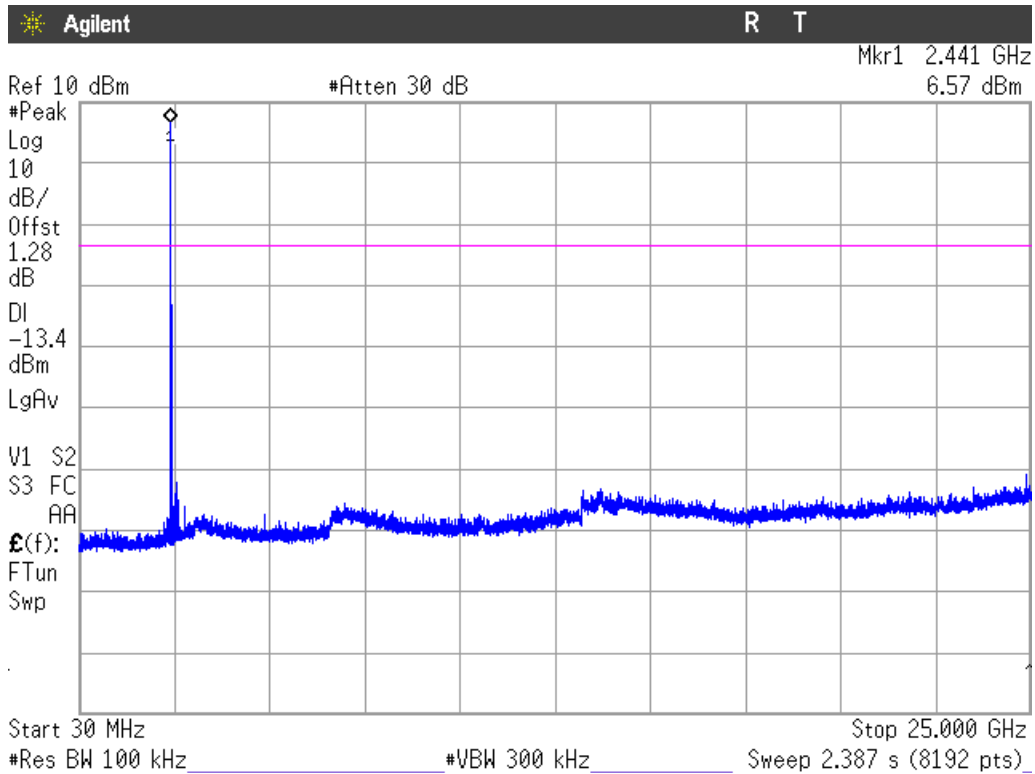

Note: The peak above the limits is the carrier frequency.

Verdict: PASS

3. HIGH CHANNEL (2480 MHz): 30 MHz-25 GHz (see next plot).

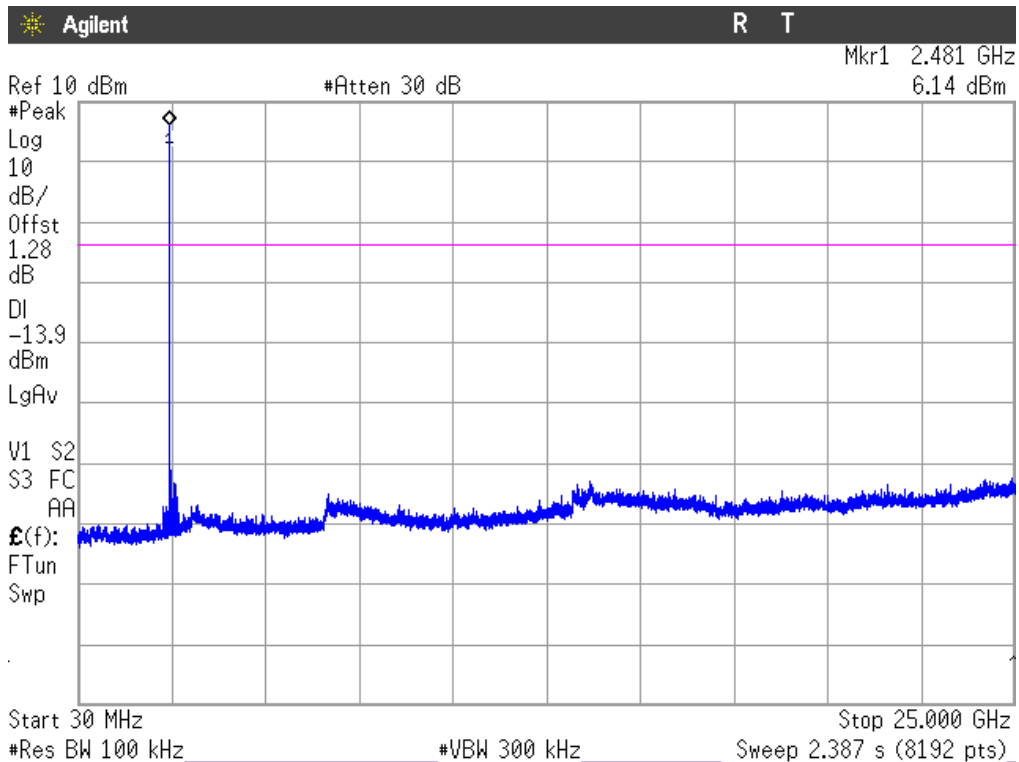


Note: The peak above the limits is the carrier frequency.

Verdict: PASS

Modulation: $\Pi/4$ -DQPSK


1. LOWEST CHANNEL (2402 MHz): 30 MHz-25 GHz (see next plot).

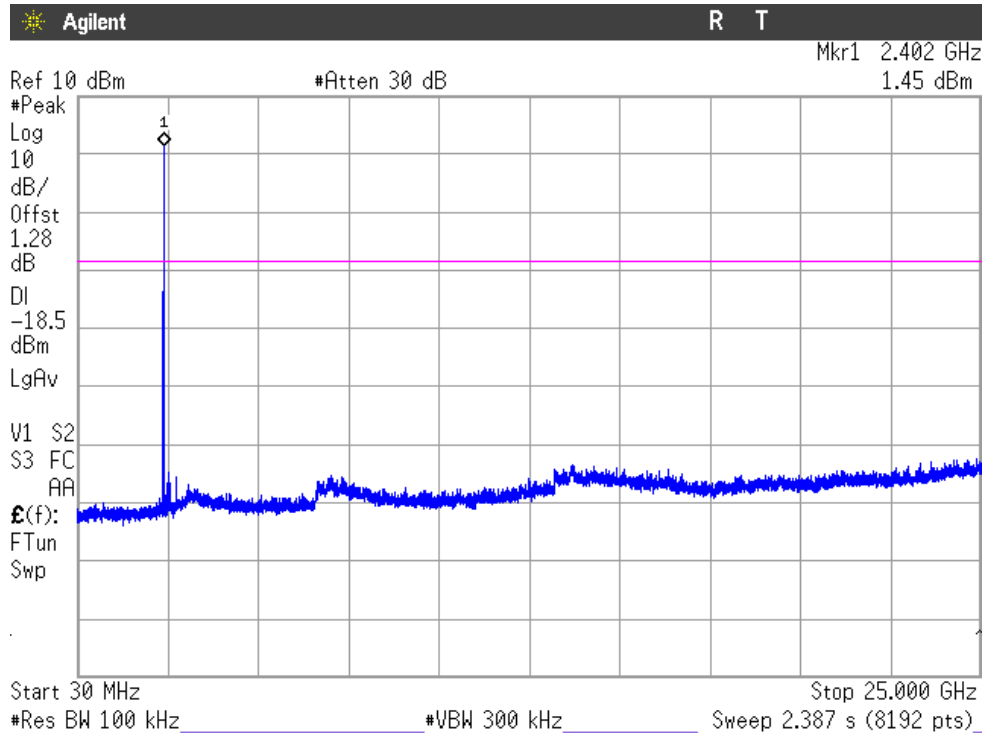

Note: The peak above the limits is the carrier frequency.

Verdict: PASS


2. MIDDLE CHANNEL (2441 MHz): 30 MHz-25 GHz (see next plot).

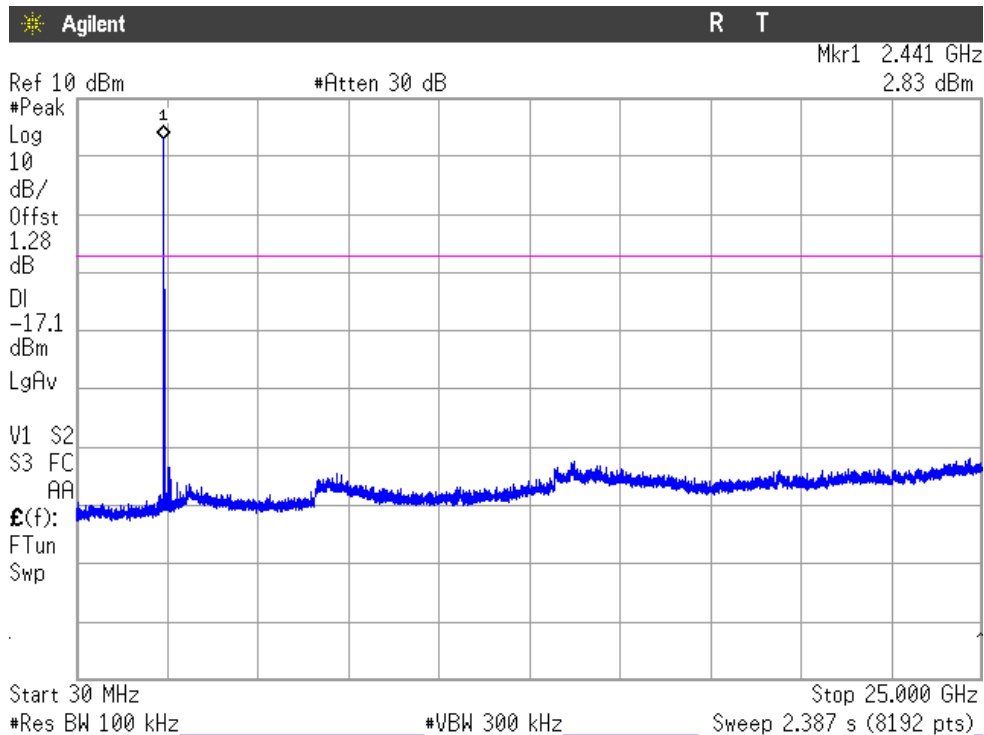

Note: The peaks above the limits are the carrier frequencies.

Verdict: PASS

3. HIGH CHANNEL (2480 MHz): 30 MHz-25 GHz (see next plot).

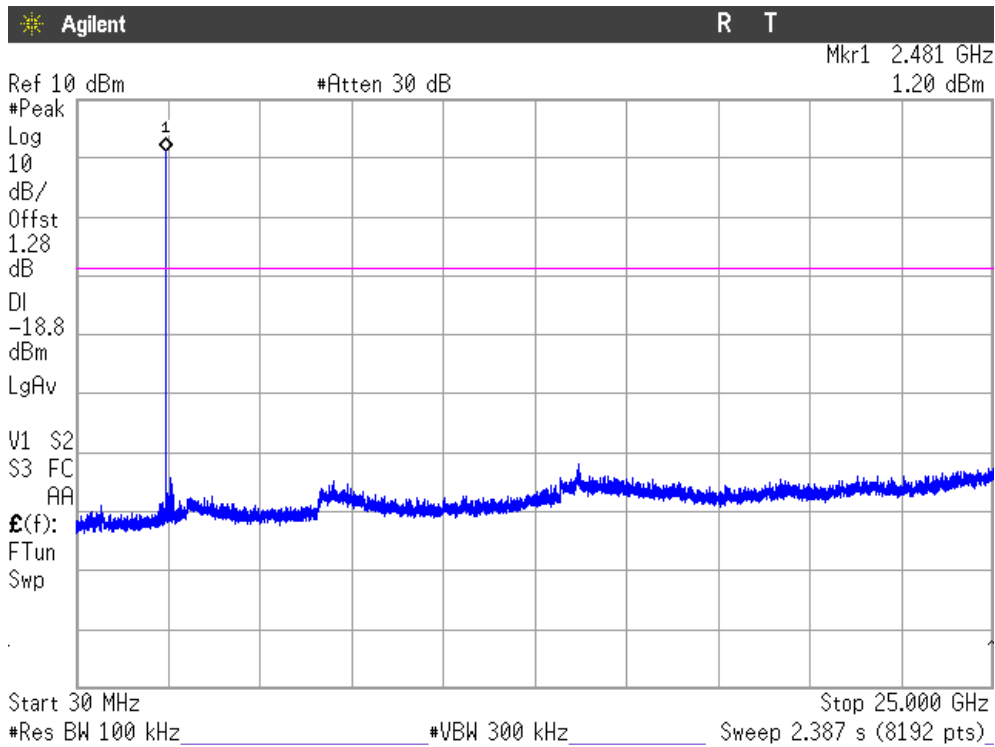


Note: The peak above the limit is the carrier frequency.

Verdict: PASS

Modulation: 8-DPSK


1. LOWEST CHANNEL (2402 MHz): 30 MHz-25 GHz (see next plot).

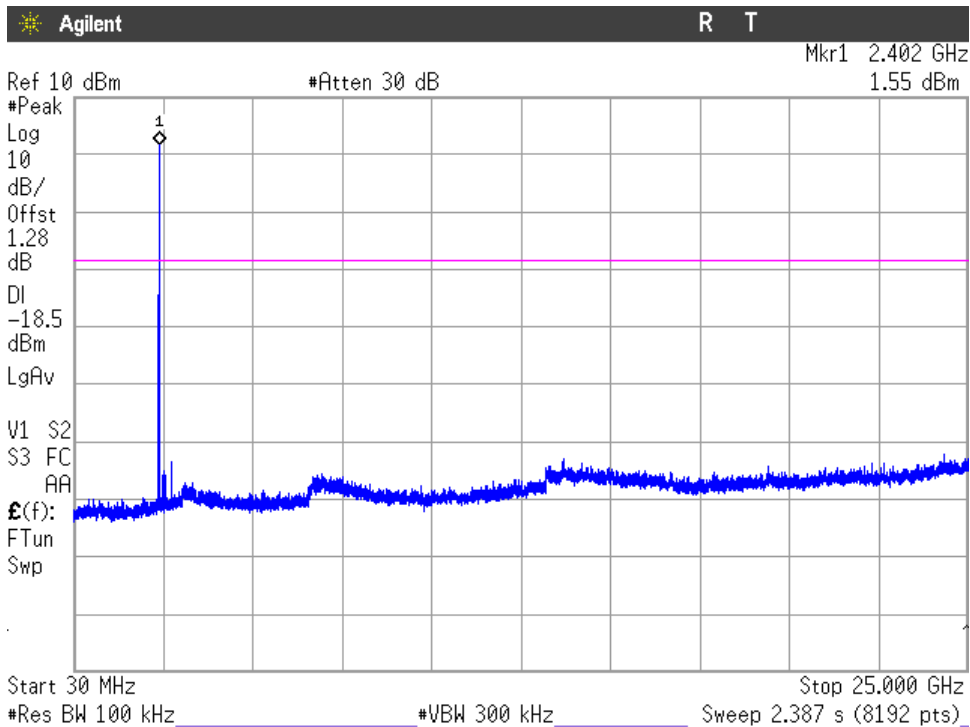

Note: The peak above the limits is the carrier frequency.

Verdict: PASS


2. MIDDLE CHANNEL (2441 MHz): 30 MHz-25 GHz (see next plot).

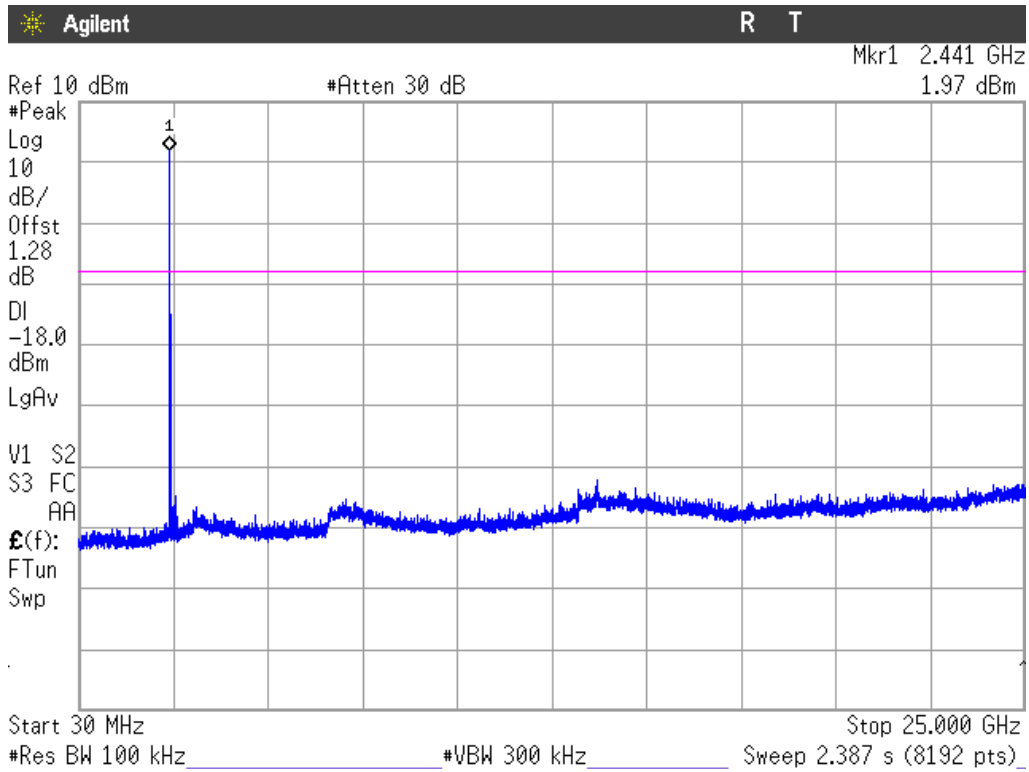

Note: The peaks above the limit are the carrier frequencies.

Verdict: PASS

3. HIGH CHANNEL (2481 MHz): 30 MHz-25 GHz (see next plot).

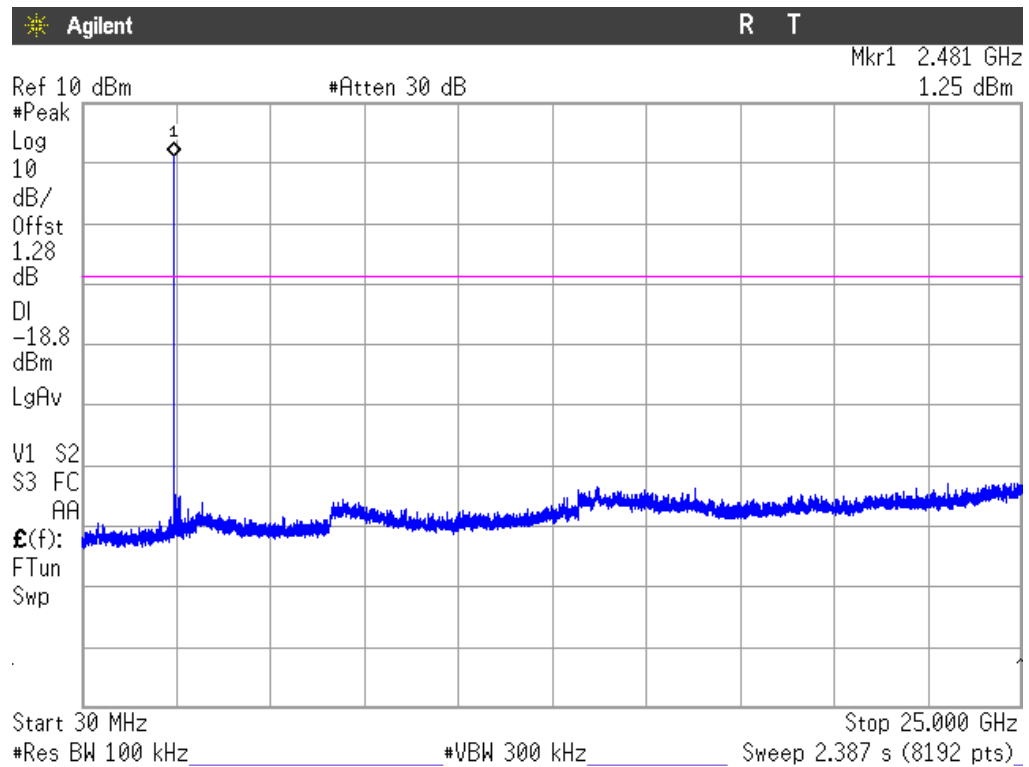

Note: The peak above the limit is the carrier frequency.

Verdict: PASS

FCC Section 15.247 Subclause (d) / RSS-210 Clause A8.5. Emission limitations radiated (Transmitter)

SPECIFICATION

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)):

Frequency Range (MHz)	Field strength (µV/m)	Field strength (dBµV/m)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	300
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
960 - 25000	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

RESULTS:

The situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

All tests were performed in a semi-anechoic chamber at a distance of 3 m for the frequency range 30 MHz-1000 MHz and at distance of 1m for the frequency range 1 GHz-25 GHz.

The field strength is calculated by adding correction factor to the measured level from the spectrum analyzer. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

Frequency range 30 MHz-1000 MHz.

Note: The spurious emissions below 1 GHz do not depend on either the operating channel or the modulation mode selected in the EUT.

Spurious levels operating (radiated) closest to limit.

Spurious frequency (MHz)	Polarization	Detector	Emission Level (dBµV/m)	Measurement Uncertainty (dB)
33.2737	V	Quasi-peak	26.68	±4.12
99.4762	H	Quasi-peak	27.60	±4.12
143.9750	V	Quasi-peak	30.56	±4.12
165.9212	V	Quasi-peak	33.28	±4.12

Frequency range 1 GHz-25 GHz

Modulation: GFSK

1. CHANNEL: LOWEST (2402 MHz).

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dBµV/m)	Measurement Uncertainty (dB)
2.321828	H	Peak	45.56	± 4.0
	H	RMS	36.44	± 4.0
2.499426	H	Peak	48.93	± 4.0
	H	RMS	36.39	± 4.0
4.804250	H	Peak	35.32	± 4.0
	H	RMS	28.62	± 4.0

2. CHANNEL: MIDDLE (2441 MHz).

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dBµV/m)	Measurement Uncertainty (dB)
2.360908	H	Peak	45.78	± 4.0
	H	RMS	36.64	± 4.0
2.493975	H	Peak	48.52	± 4.0
	H	RMS	36.39	± 4.0
4.881750	H	Peak	35.10	± 4.0
	H	RMS	28.39	± 4.0

3. CHANNEL: HIGHEST (2480 MHz).

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dBμV/m)	Measurement Uncertainty (dB)
2.379900	H	Peak	46.23	± 4.0
	H	RMS	37.25	± 4.0
2.484916	H	Peak	55.17	± 4.0
	H	RMS	46.50	± 4.0
4.960250	H	Peak	35.93	± 4.0
	H	RMS	29.95	± 4.0

Verdict: PASS

Modulation: Π/4-DQPSK

1. CHANNEL: LOWEST (2402 MHz).

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dBμV/m)	Measurement Uncertainty (dB)
2.381948	H	Peak	46.92	± 4.0
	H	RMS	38.51	± 4.0
2.491491	H	Peak	48.58	± 4.0
	H	RMS	36.52	± 4.0
3.088250	H	Peak	33.92	± 4.0
	H	RMS	27.66	± 4.0

2. CHANNEL: MIDDLE (2441 MHz).

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dBμV/m)	Measurement Uncertainty (dB)
2.339420	H	Peak	48.00	± 4.0
	H	RMS	35.78	± 4.0
2.493054	H	Peak	48.65	± 4.0
	H	RMS	35.67	± 4.0
3.138250	H	Peak	32.36	± 4.0
	H	RMS	24.33	± 4.0
4.842250	H	Peak	37.25	± 4.0
	H	RMS	25.55	± 4.0

3. CHANNEL: HIGHEST (2480 MHz).

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dBμV/m)	Measurement Uncertainty (dB)
2.318812	H	Peak	47.73	± 4.0
	H	RMS	35.94	± 4.0
2.484985	H	Peak	54.91	± 4.0
	H	RMS	45.50	± 4.0
3.188250	H	Peak	32.00	± 4.0
	H	RMS	25.92	± 4.0

Verdict: PASS

Modulation: 8-DPSK

1. CHANNEL: LOWEST (2402 MHz).

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dBμV/m)	Measurement Uncertainty (dB)
2.389164	H	Peak	49.47	± 4.0
	H	RMS	36.02	± 4.0
2.491508	H	Peak	48.64	± 4.0
	H	RMS	36.33	± 4.0
3.088750	H	Peak	34.12	± 4.0
	H	RMS	25.76	± 4.0

2. CHANNEL: MIDDLE (2441 MHz).


Spurious frequency (GHz)	Polarization	Detector	Emission Level (dBμV/m)	Measurement Uncertainty (dB)
2.322812	H	Peak	48.07	± 4.0
	H	RMS	35.91	± 4.0
2.488473	H	Peak	48.34	± 4.0
	H	RMS	36.52	± 4.0
2.564367	H	Peak	49.40	± 4.0
	H	RMS	37.55	± 4.0
3.138250	H	Peak	31.49	± 4.0
	H	RMS	23.79	± 4.0

3. CHANNEL: HIGHEST (2480 MHz).

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
2.337132	H	Peak	48.54	± 4.0
	H	RMS	35.63	± 4.0
2.484848	H	Peak	54.79	± 4.0
	H	RMS	45.04	± 4.0
3.188250	H	Peak	31.34	± 4.0
	H	RMS	24.65	± 4.0

Verdict: PASS

FREQUENCY RANGE 30 MHz-1000 MHz.

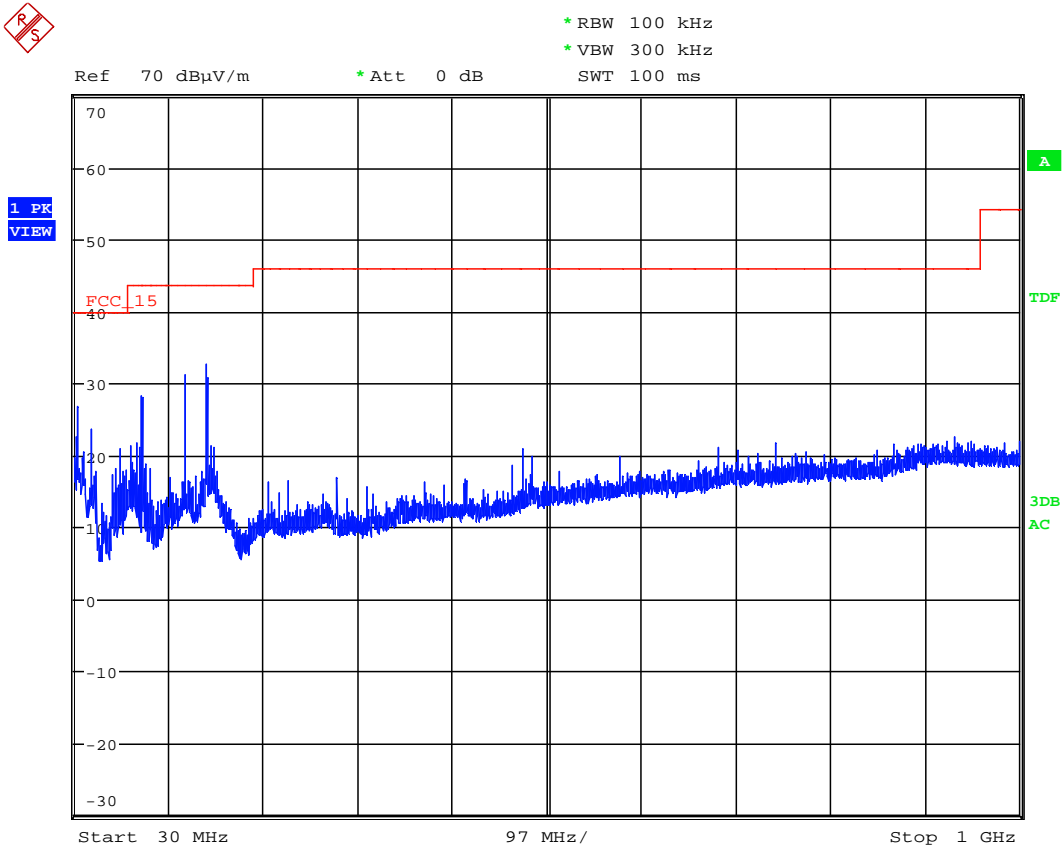


(This plot is valid for all three channels and all modulation modes).

FREQUENCY RANGE 1 GHz to 3 GHz.


Modulation: GFSK

CHANNEL: Lowest (2402 MHz).

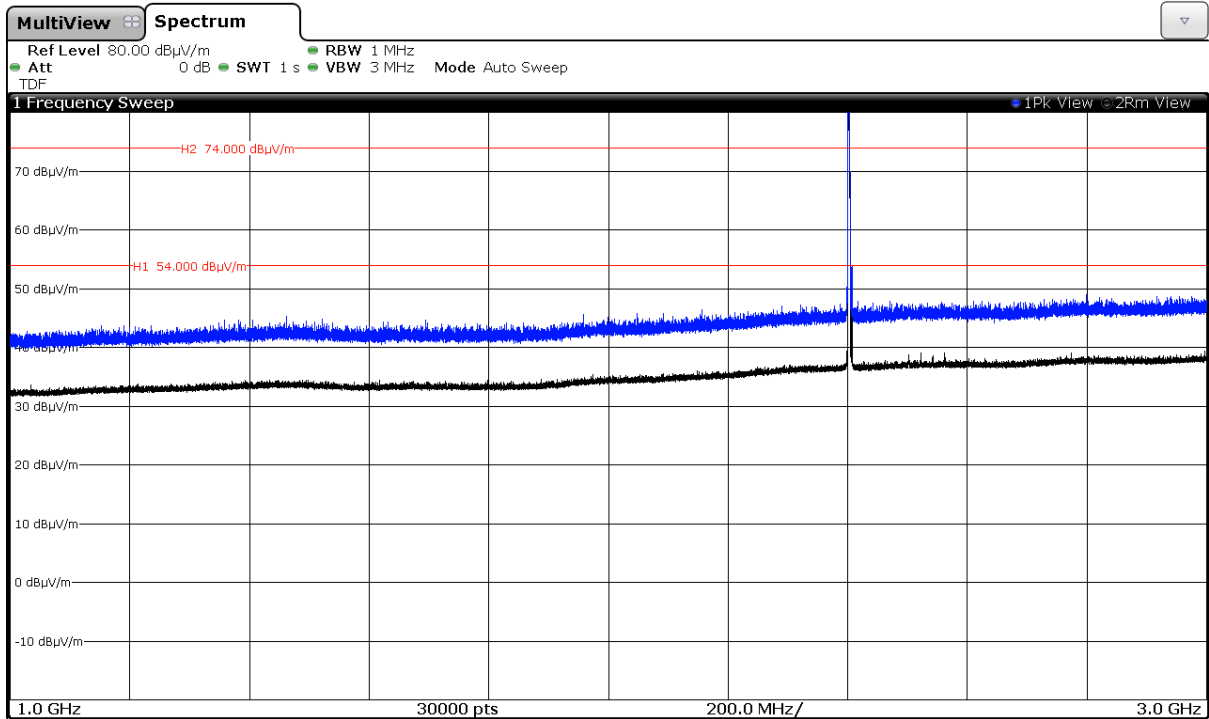


Note: The peak shown in the plot is the carrier frequency.

CHANNEL: Middle (2441 MHz).

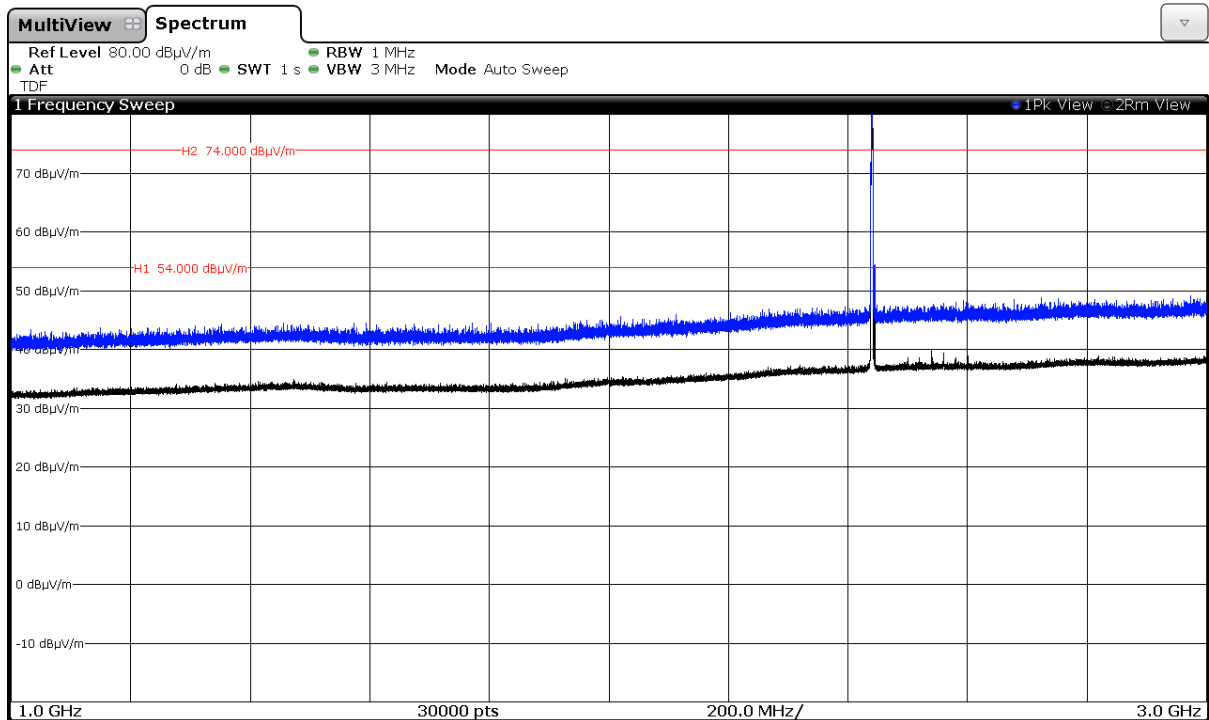

Note: The peak shown in the plot is the carrier frequency.


CHANNEL: Highest (2480 MHz).

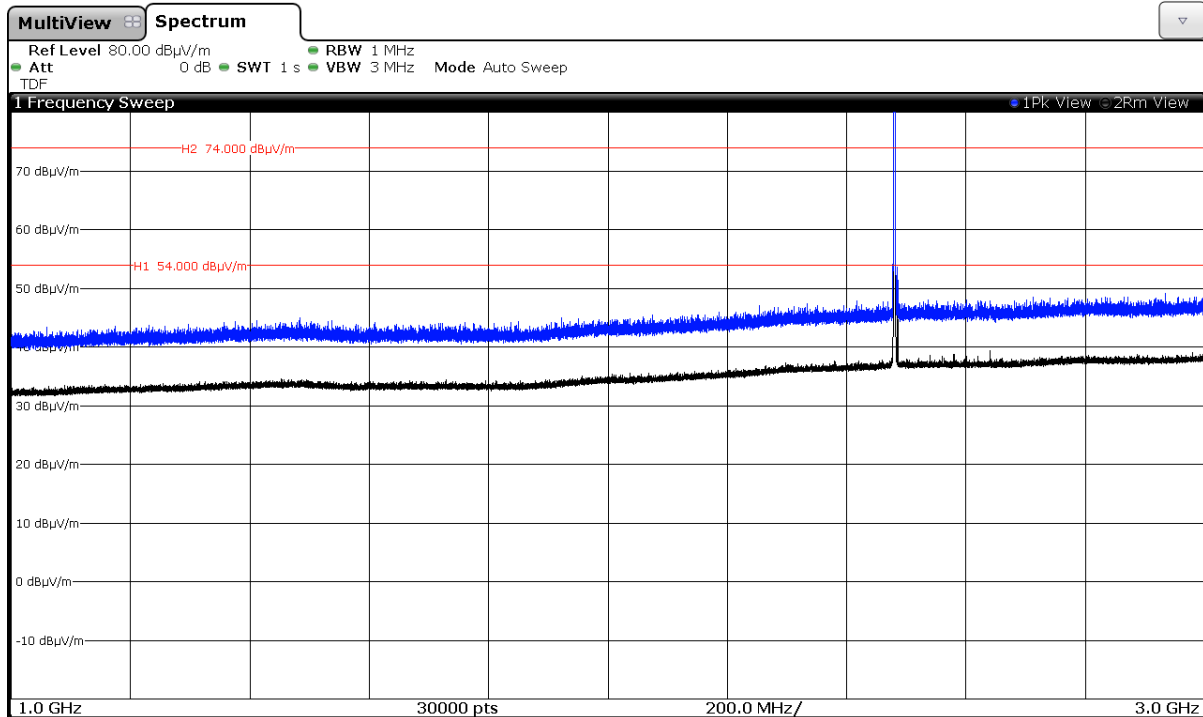

Note: The peak shown in the plot is the carrier frequency.


Modulation: Π/4-DQPSK

CHANNEL: Lowest (2402 MHz).

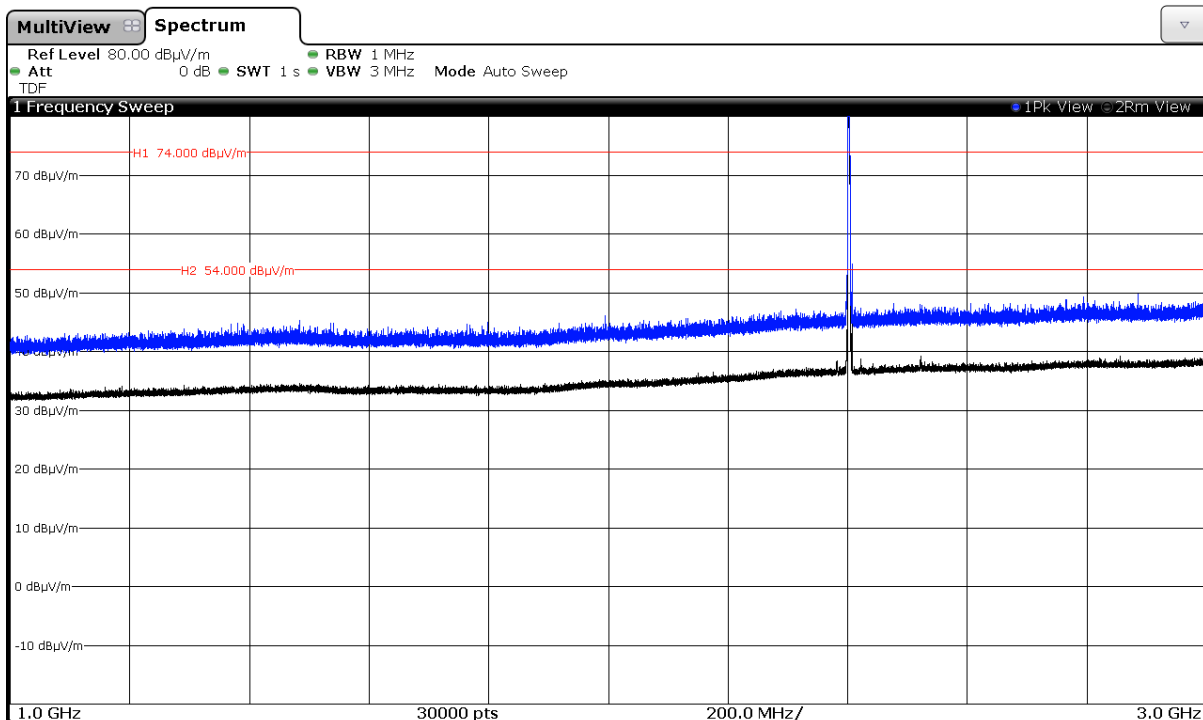


Note: The peak shown in the plot is the carrier frequency.

CHANNEL: Middle (2441 MHz).

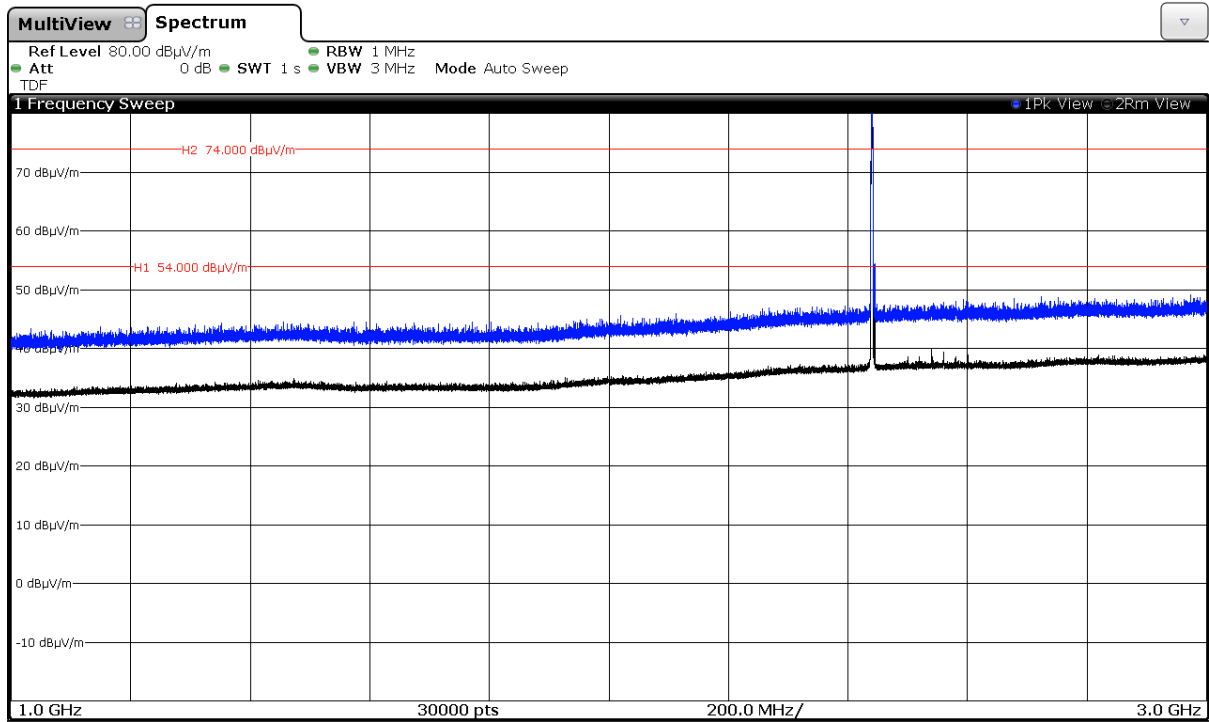

Note: The peak shown in the plot is the carrier frequency.


CHANNEL: Highest (2480 MHz).

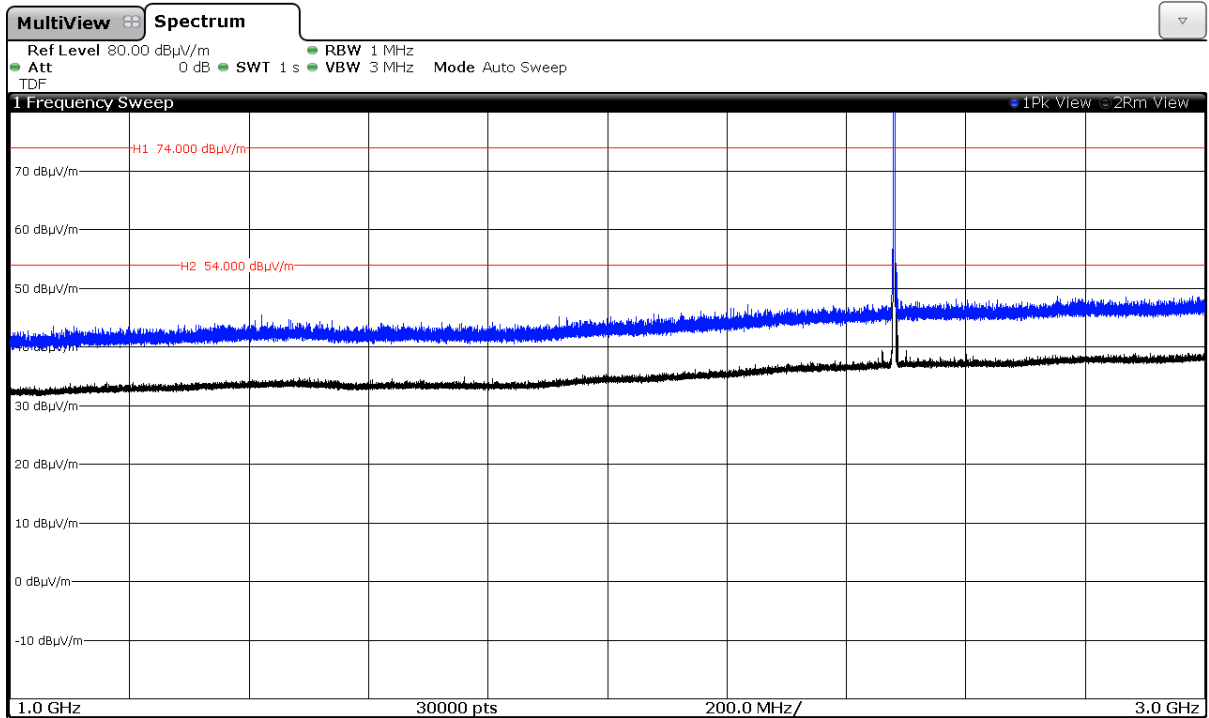

Note: The peak shown in the plot is the carrier frequency.


Modulation: 8-DPSK

CHANNEL: Lowest (2402 MHz).

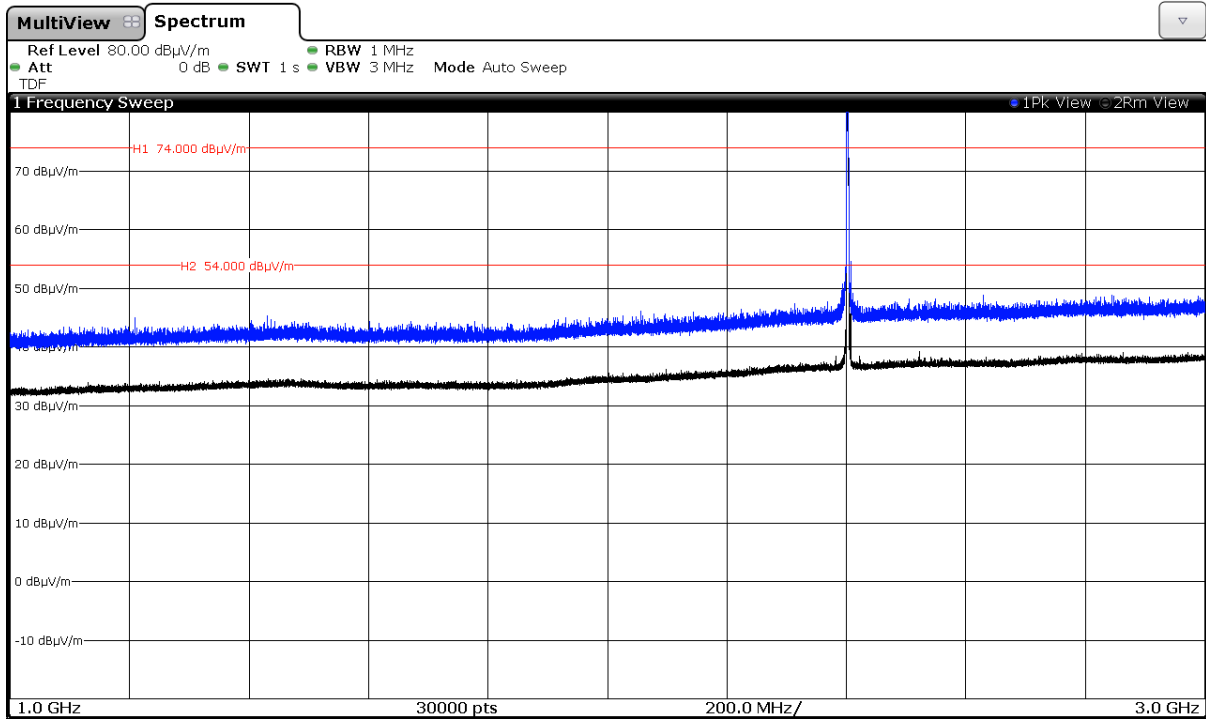


Note: The peak shown in the plot is the carrier frequency.

CHANNEL: Middle (2441 MHz).

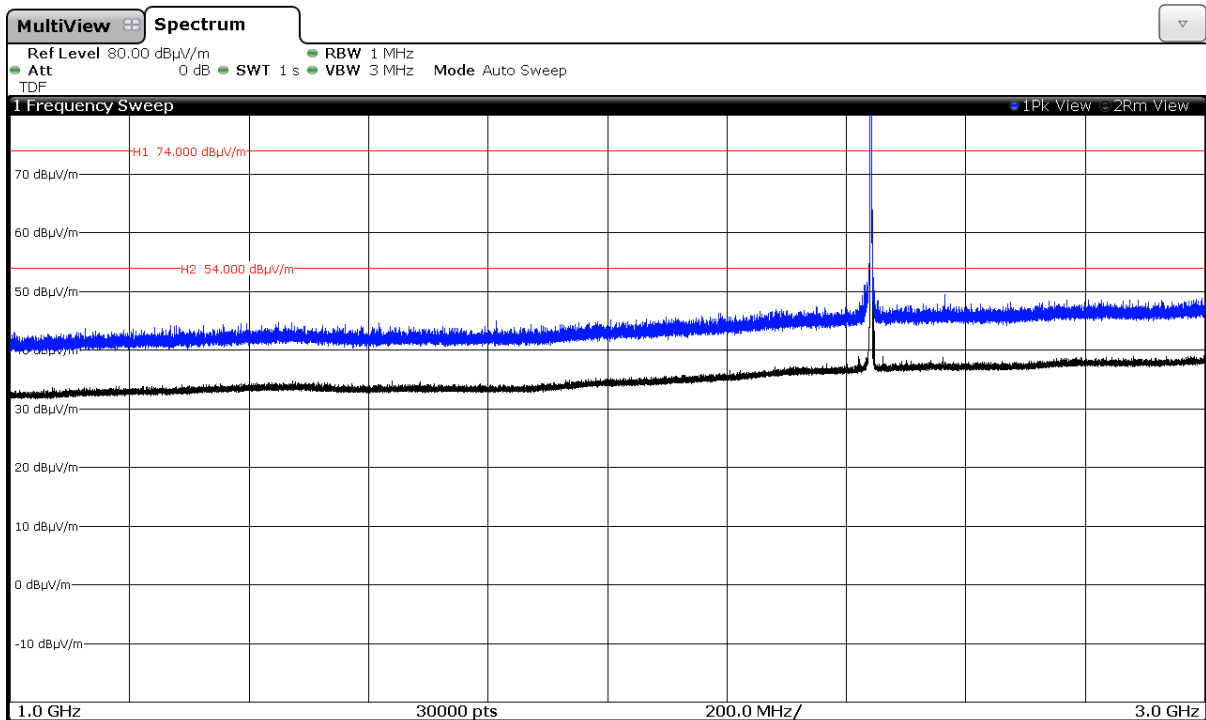

Note: The peak shown in the plot is the carrier frequency.

CHANNEL: Highest (2480 MHz).

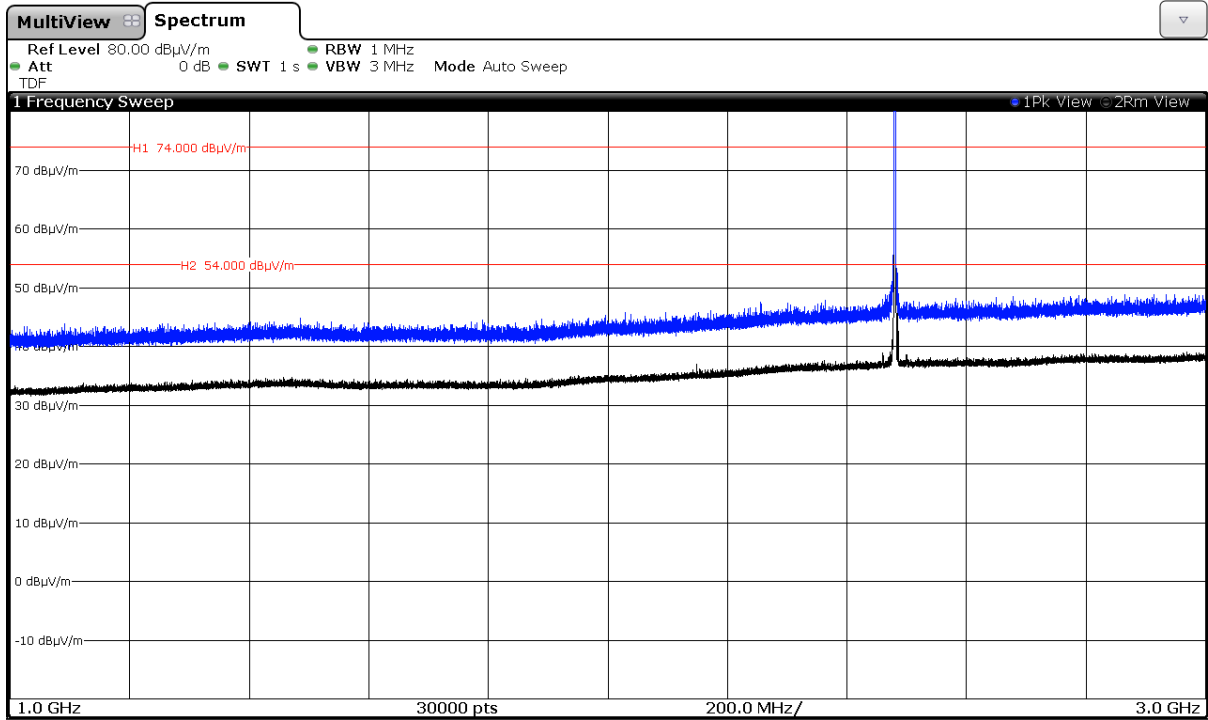


Note: The peak shown in the plot is the carrier frequency.


FREQUENCY RANGE 3 GHz to 18 GHz.

Modulation: GFSK


CHANNEL: Lowest (2402 MHz).

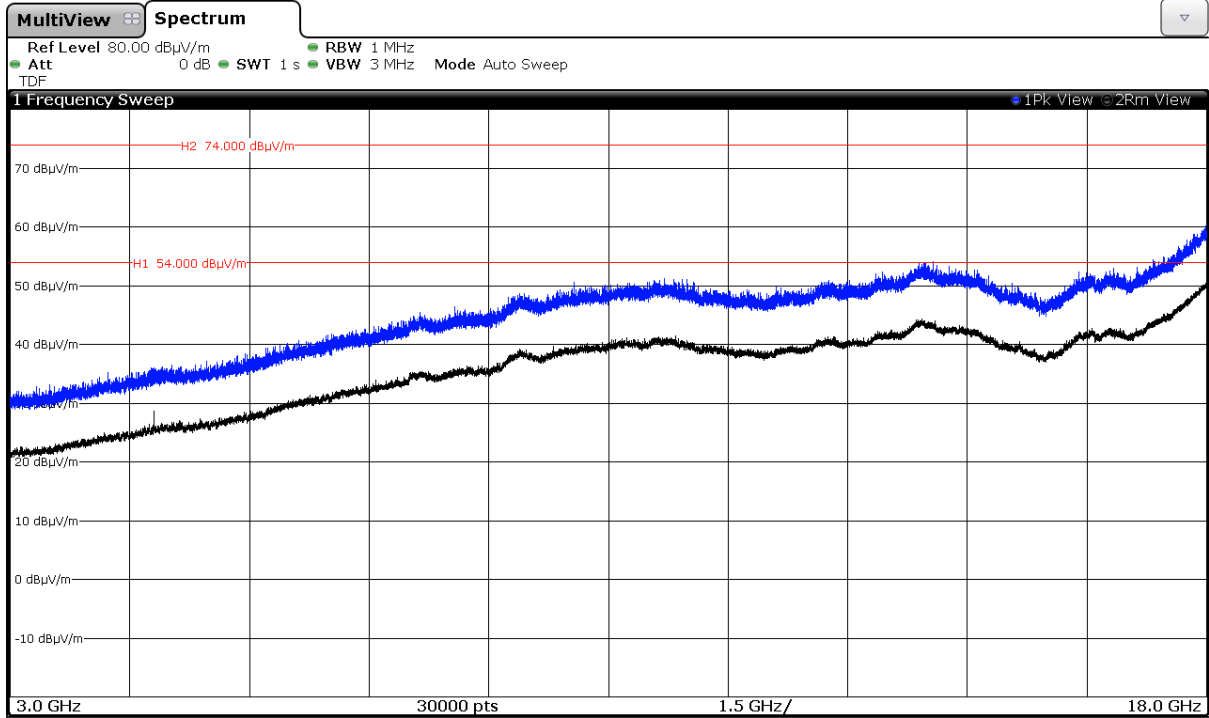

CHANNEL: Middle (2441 MHz).

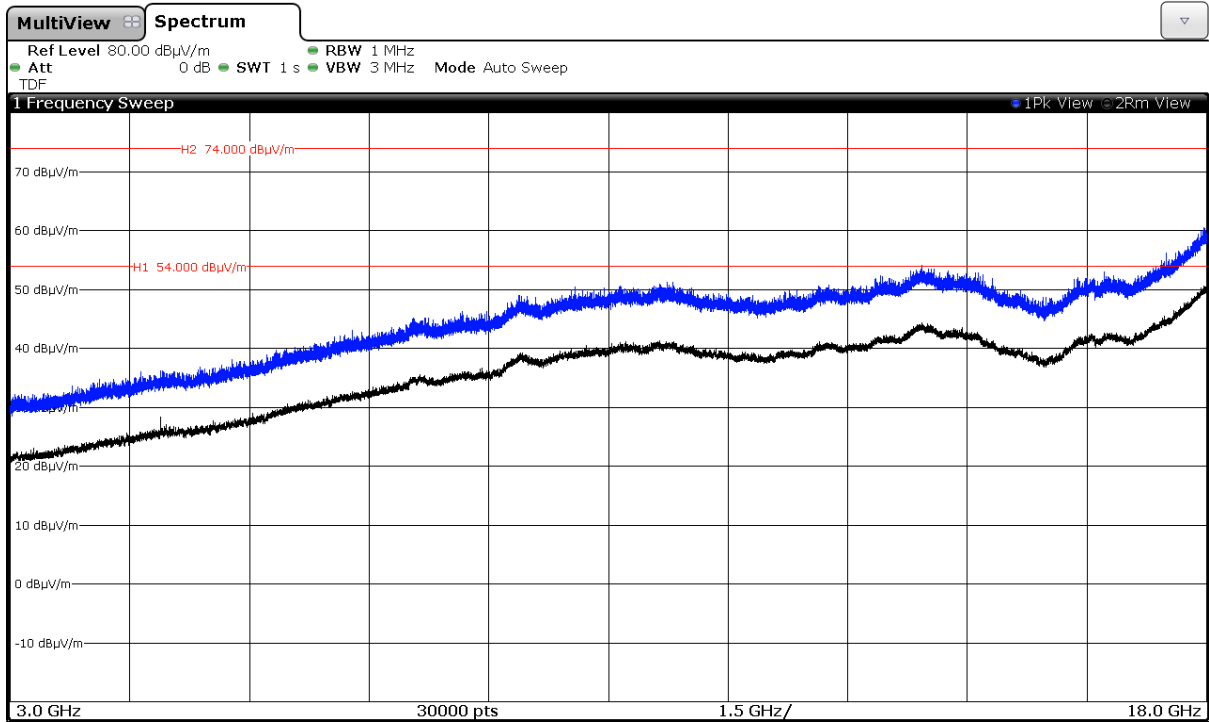


CHANNEL: Highest (2480 MHz).

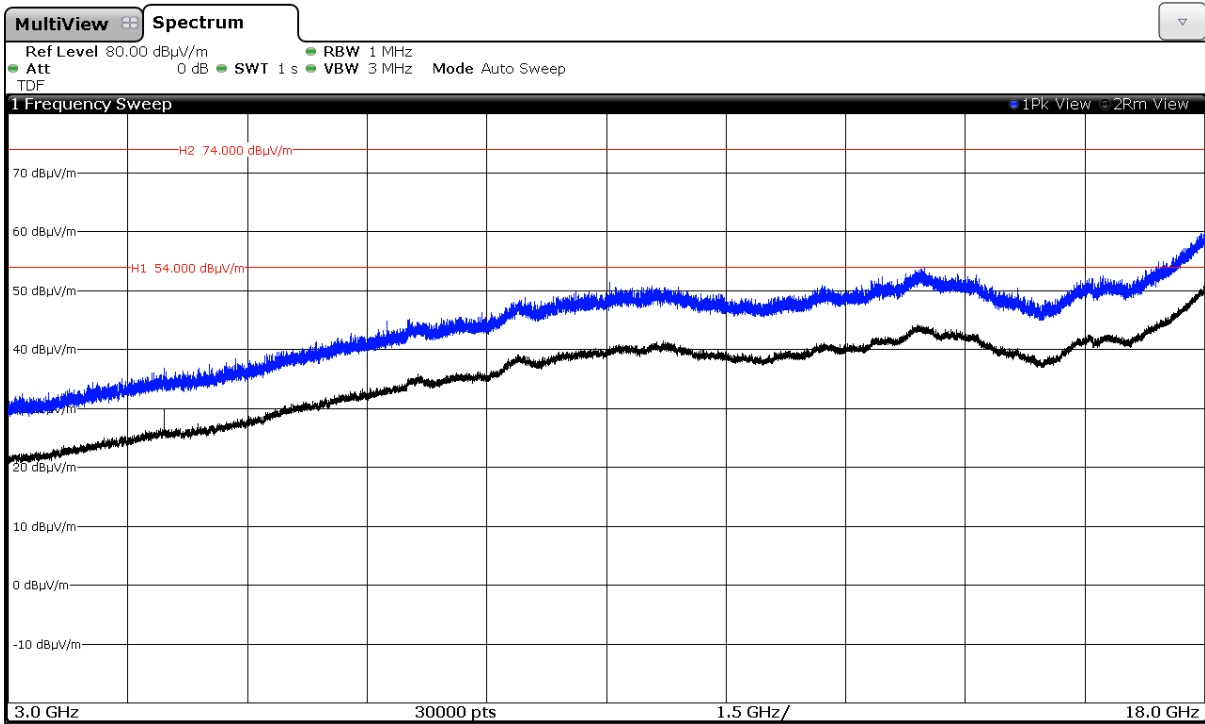


Modulation: Π/4-DQPSK


CHANNEL: Lowest (2402 MHz).

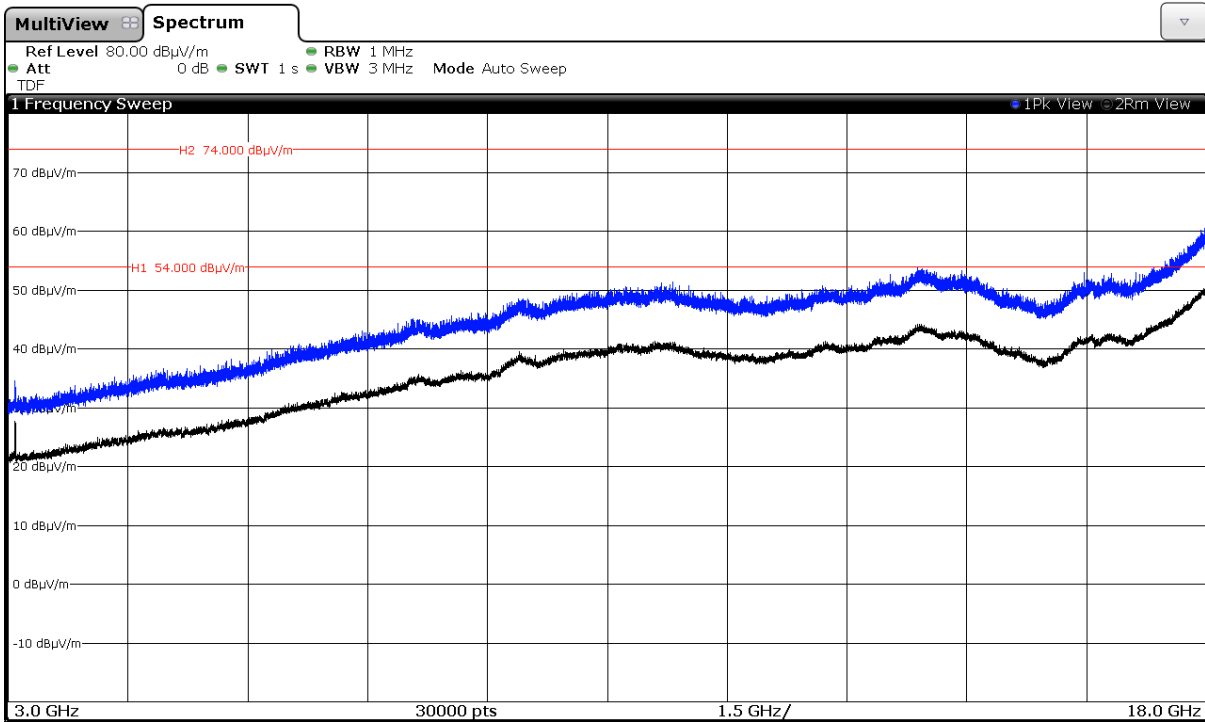

CHANNEL: Middle (2441 MHz).

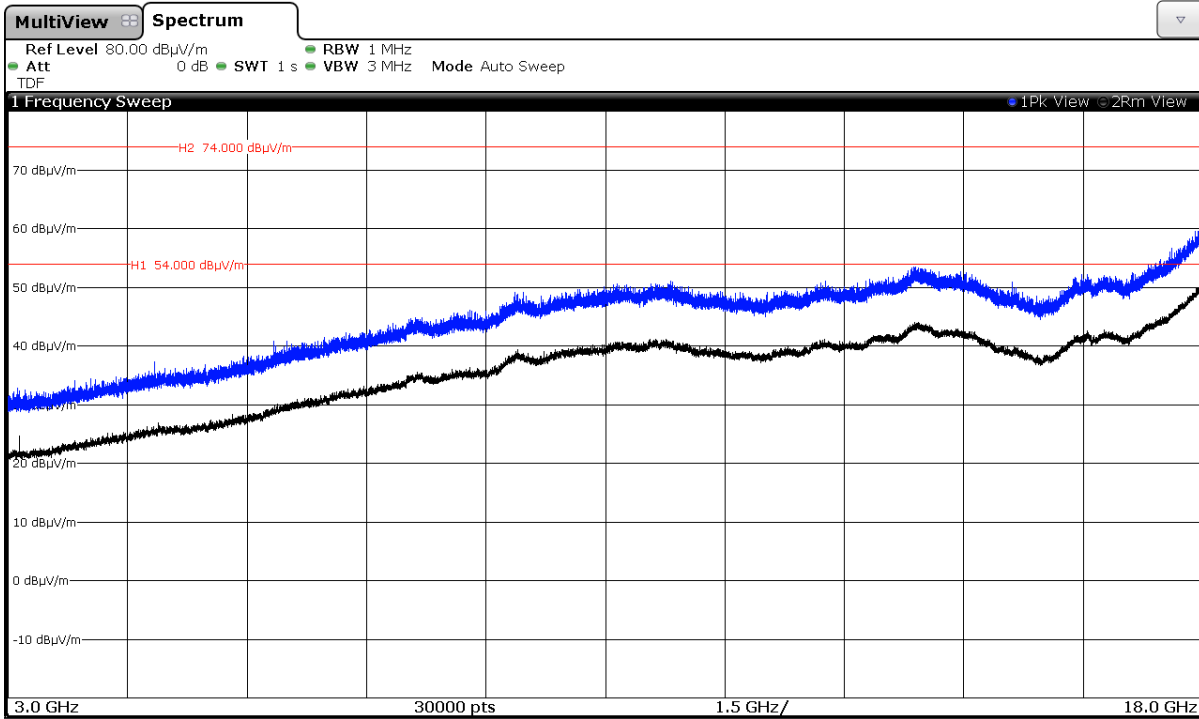


CHANNEL: Highest (2480 MHz).

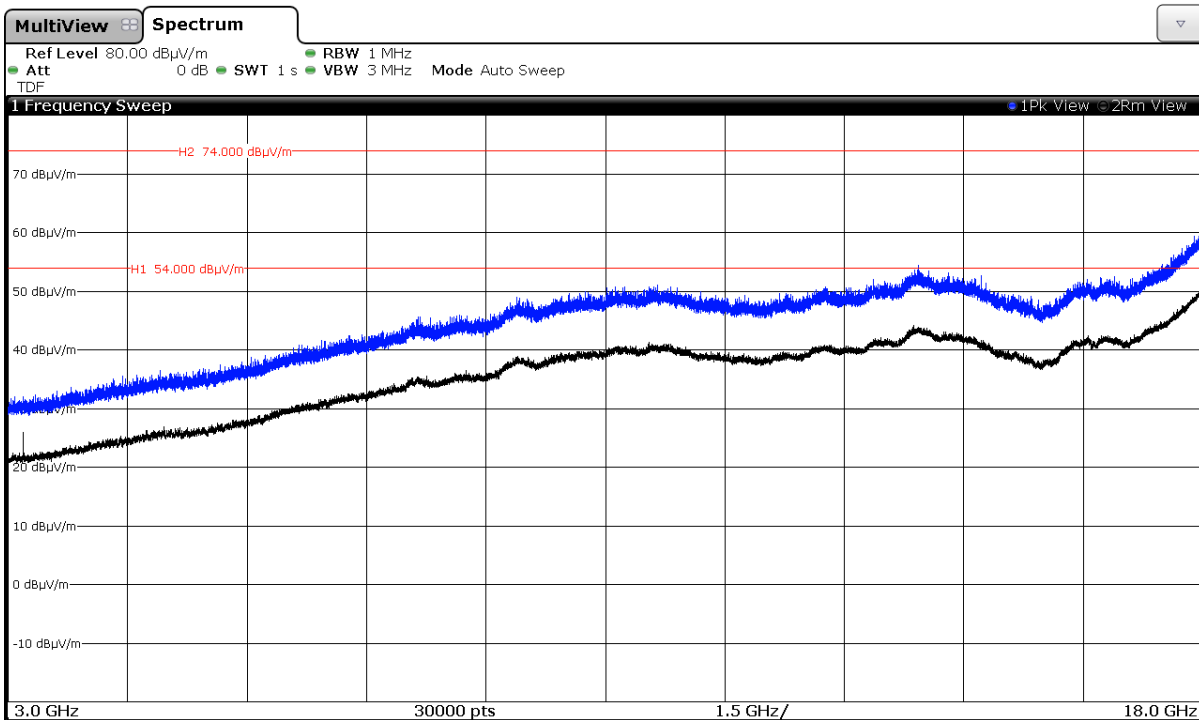


Modulation: 8-DPSK


CHANNEL: Lowest (2402 MHz).

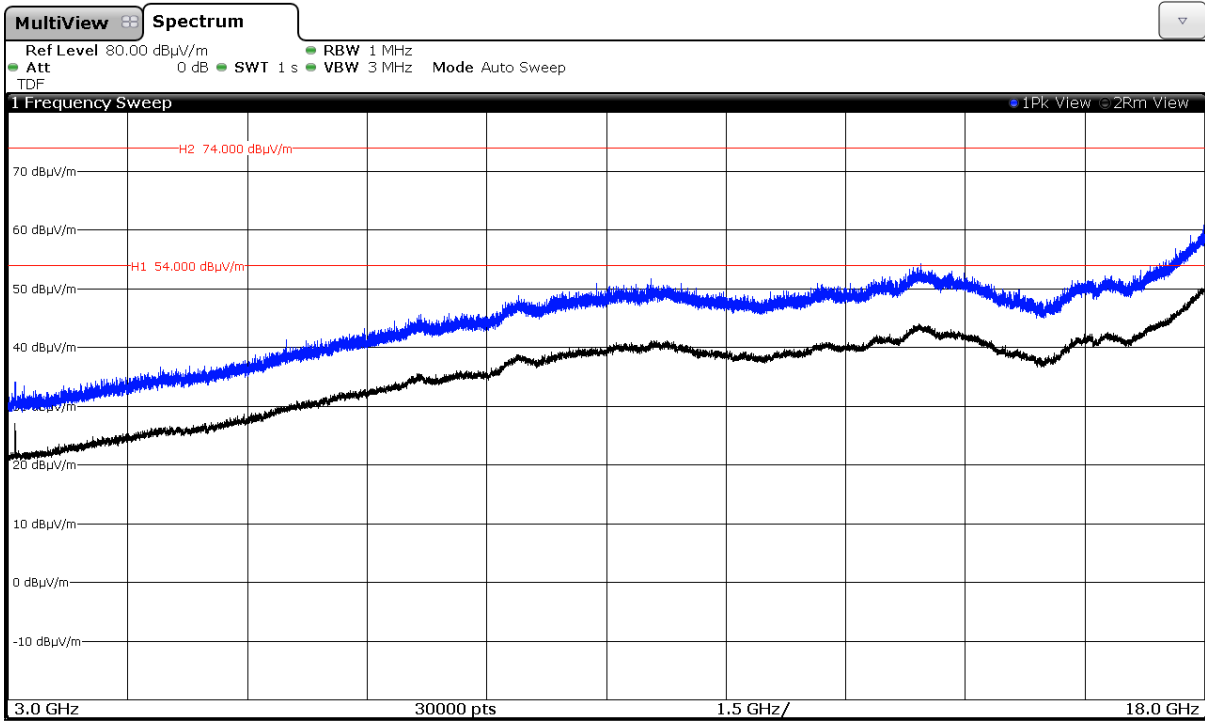


CHANNEL: Middle (2441 MHz).

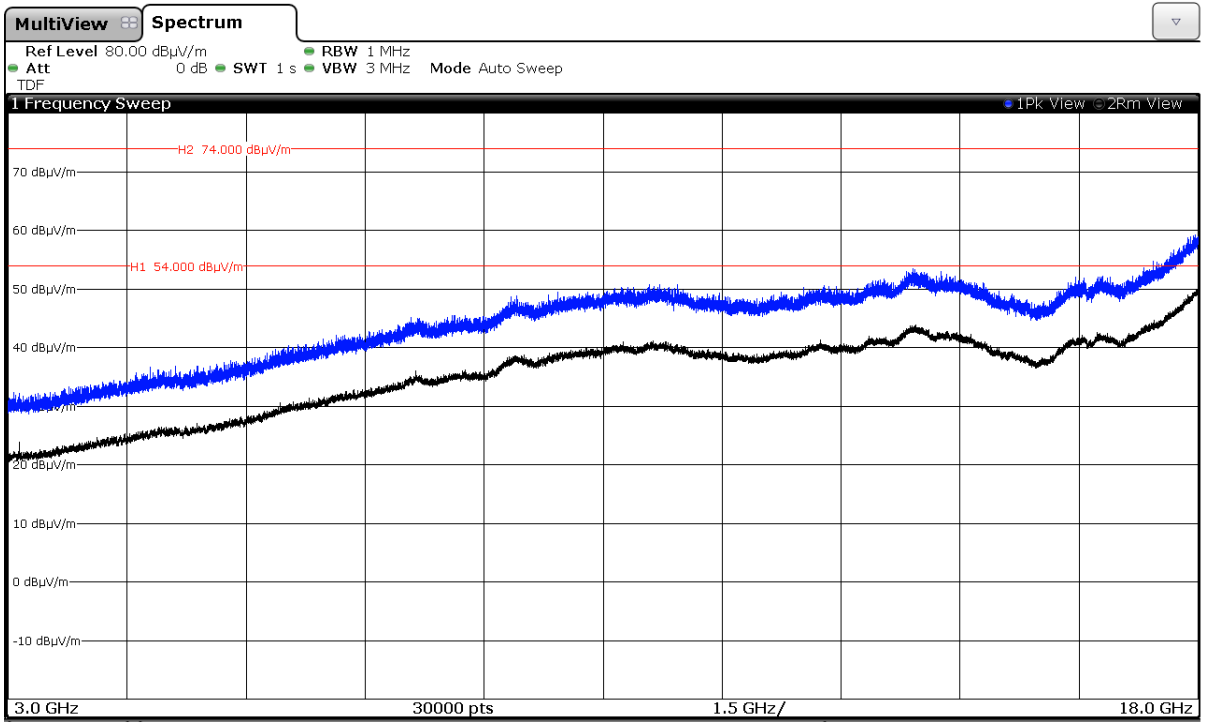

CHANNEL: Highest (2480 MHz).

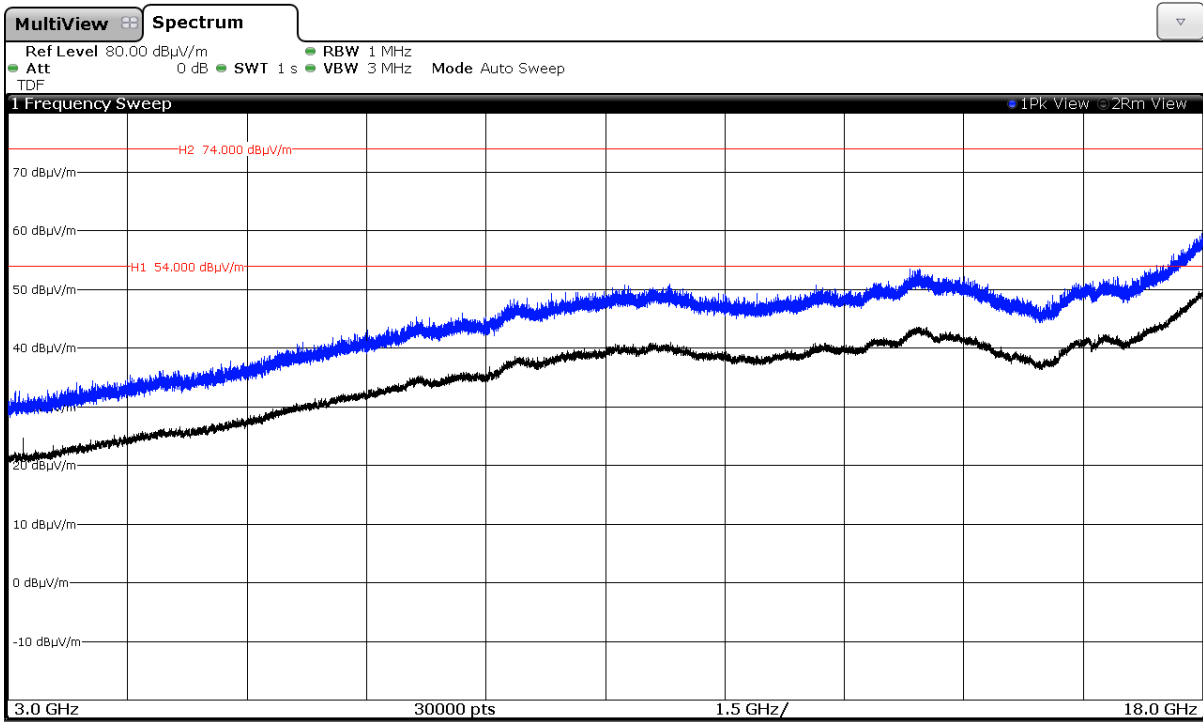

FREQUENCY RANGE 18 GHz to 25 GHz.

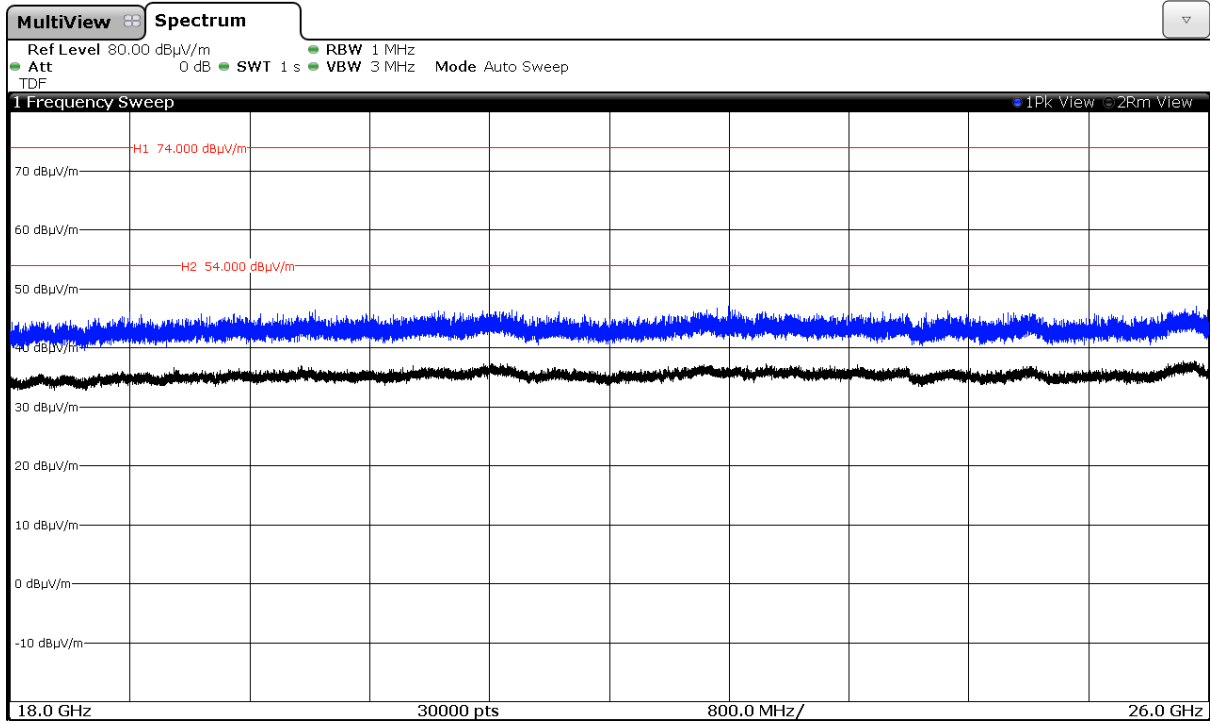


(This plot is valid for all three channels and all modulation modes).


FREQUENCY RANGE 2.31 GHz to 2.39 GHz. (RESTRICTED BAND)

CHANNEL: Lowest


Modulation: GFSK

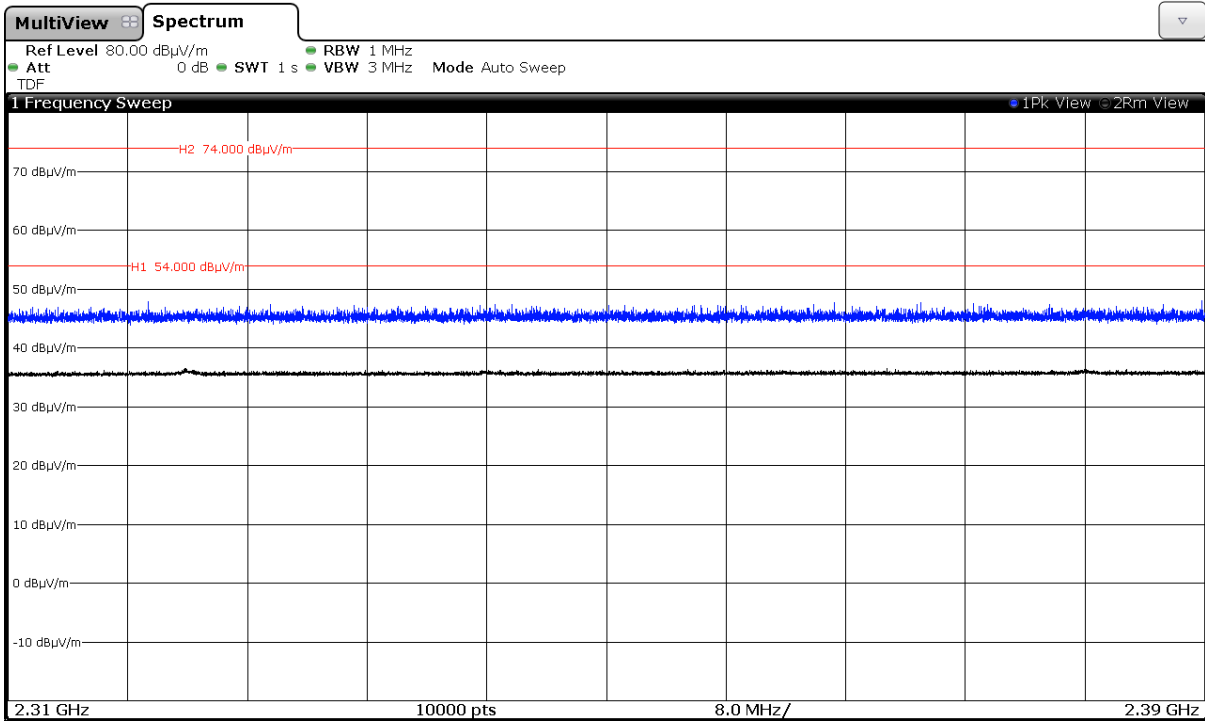

Modulation: $\Pi/4$ -DQPSK

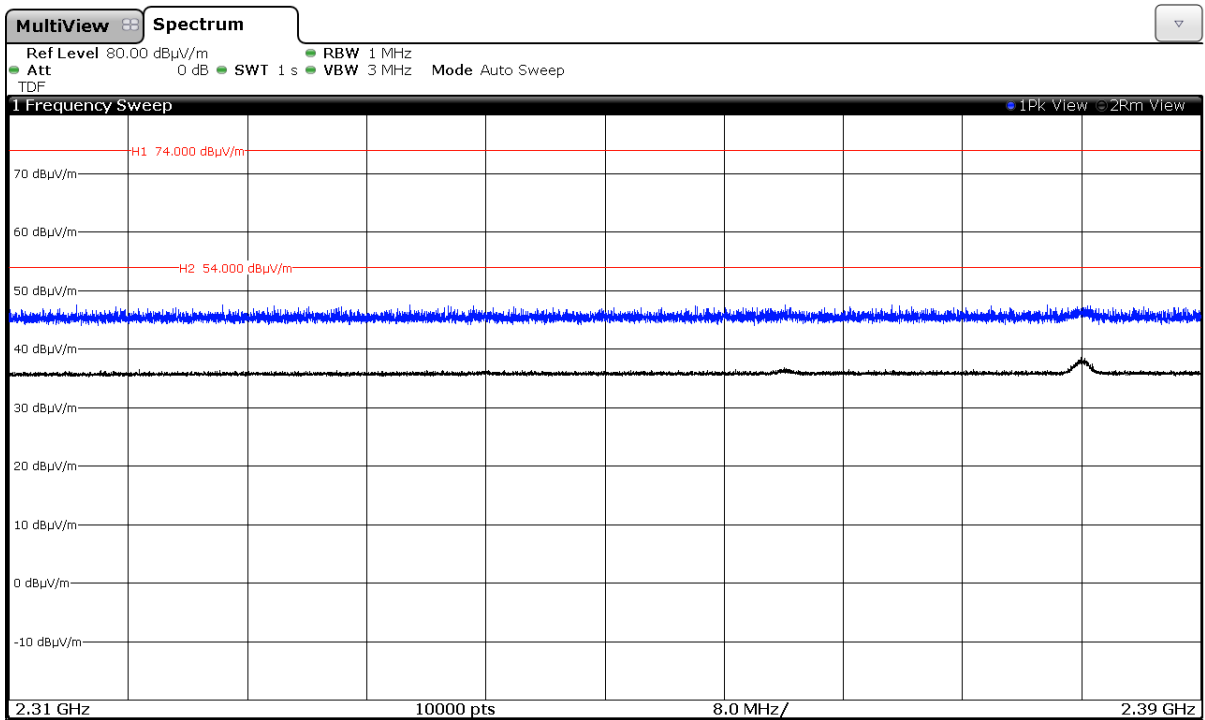


Modulation: 8-DPSK

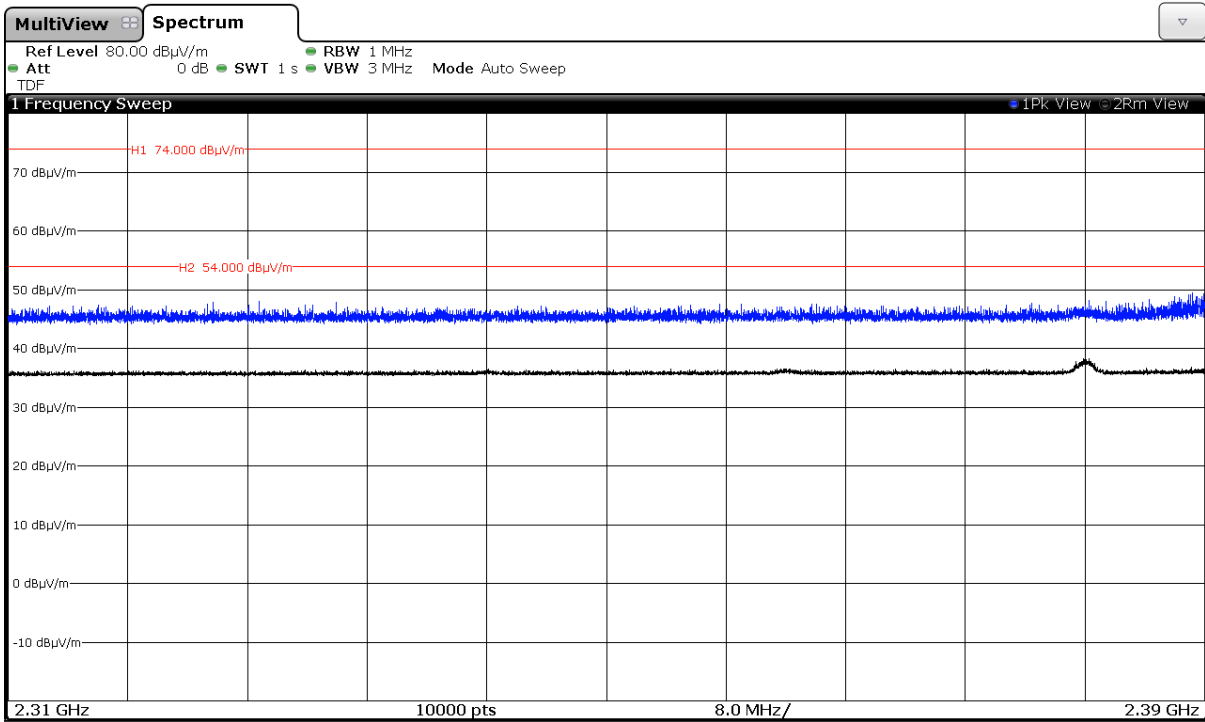


CHANNEL: Middle


Modulation: GFSK

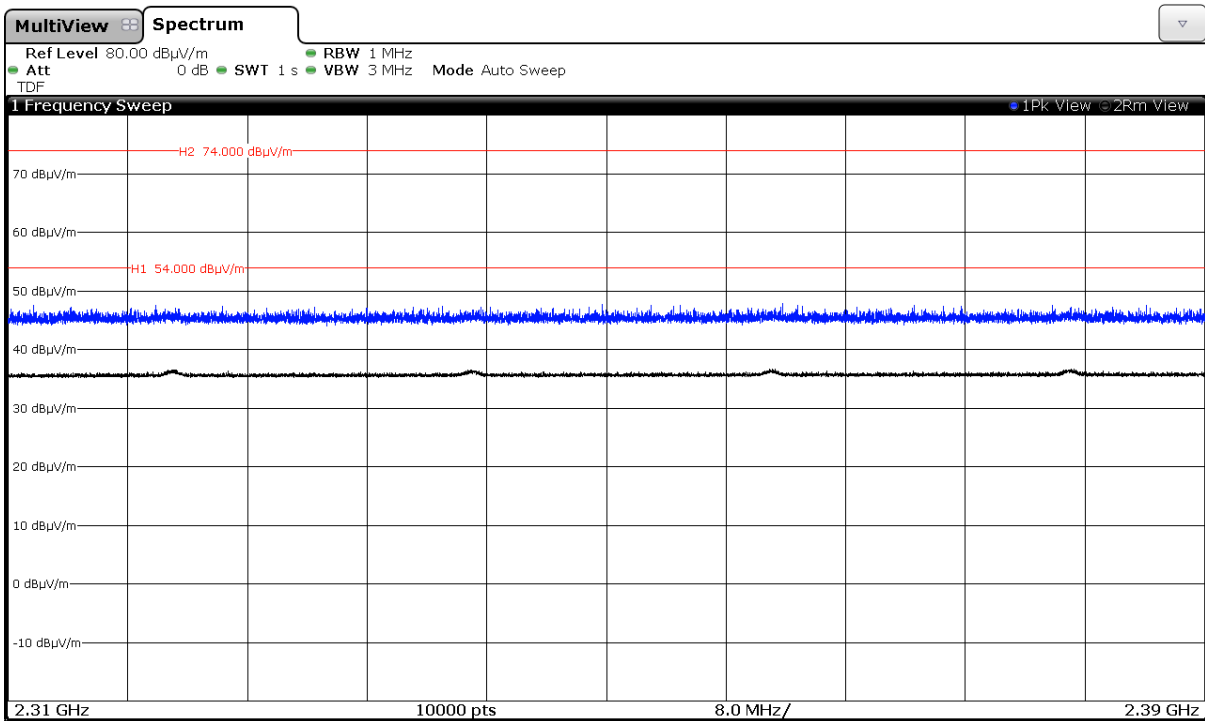

Modulation: $\Pi/4$ -DQPSK

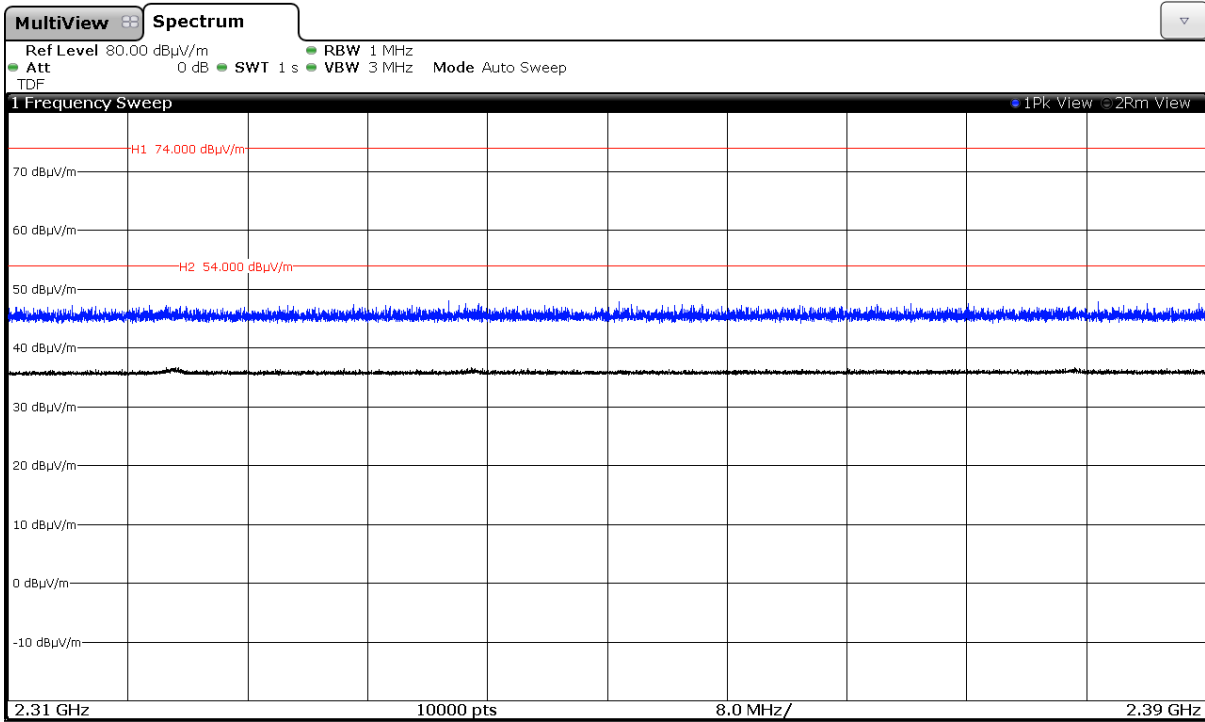


Modulation: 8-DPSK

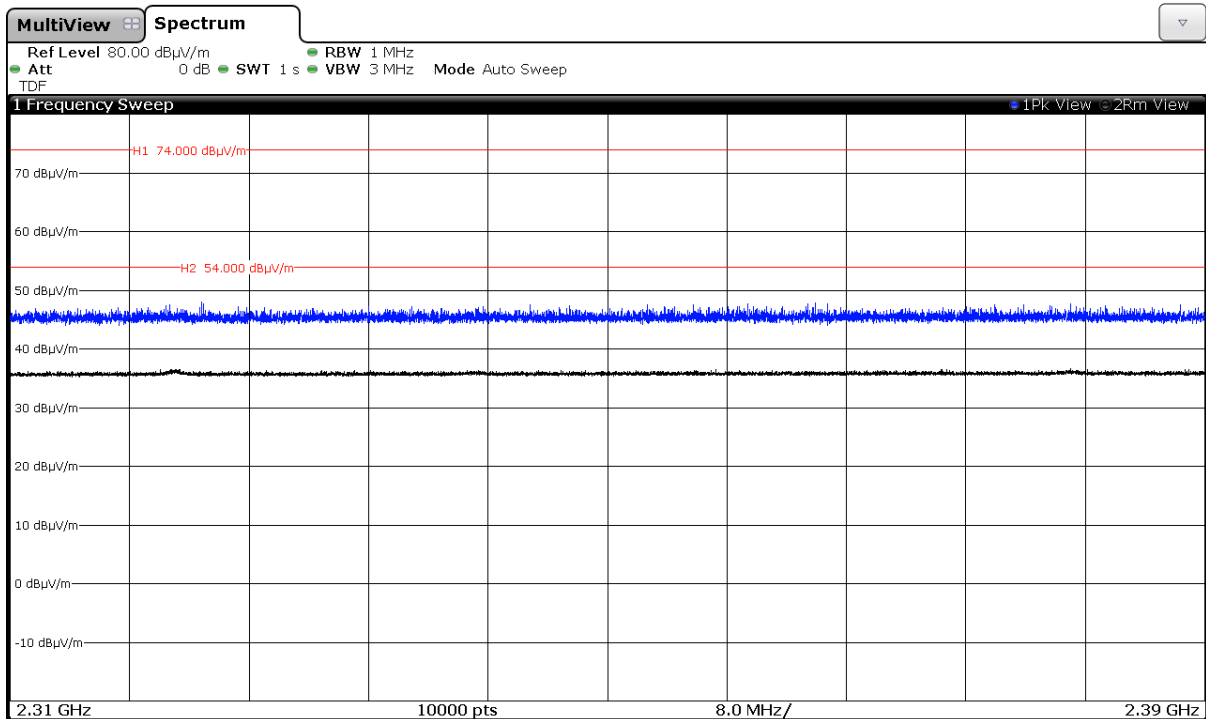


CHANNEL: Highest


Modulation: GFSK

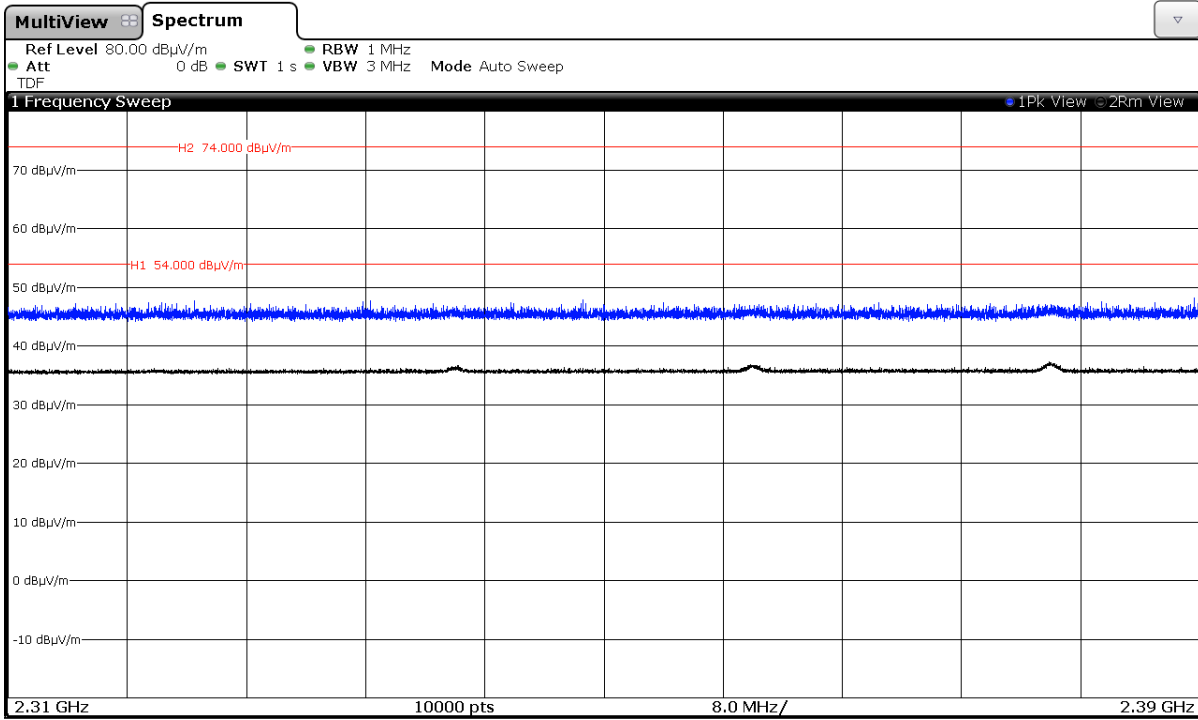

Modulation: Π/4-DQPSK

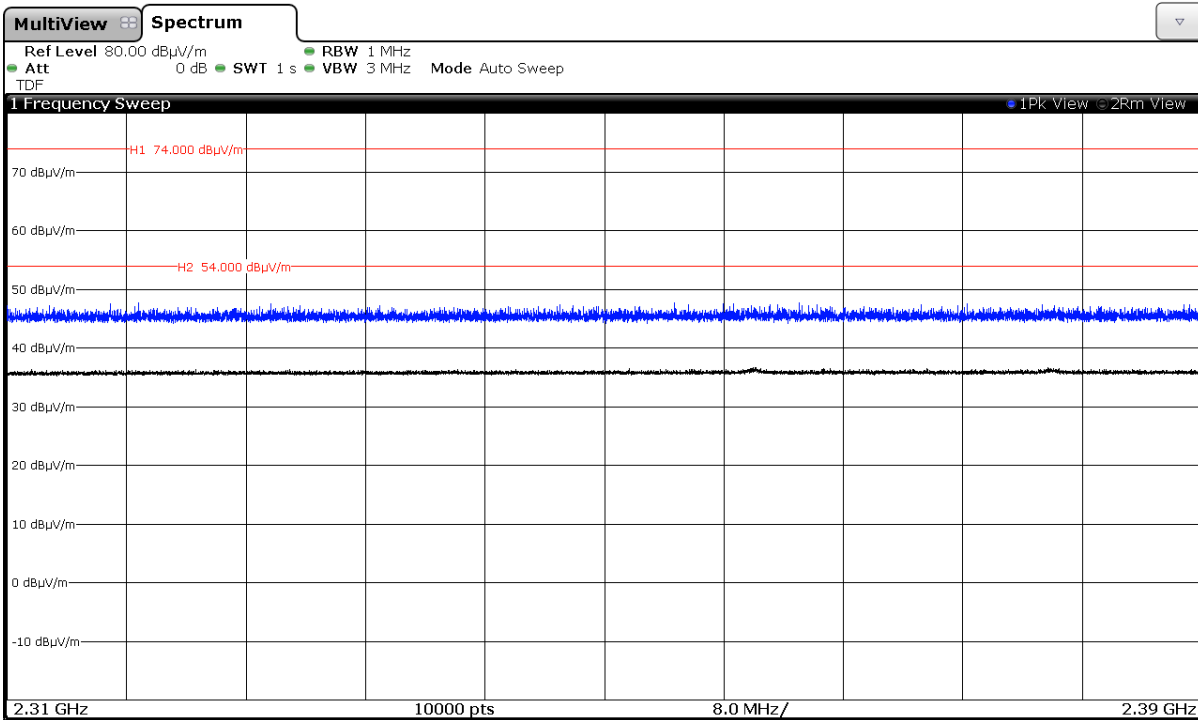


Modulation: 8-DPSK

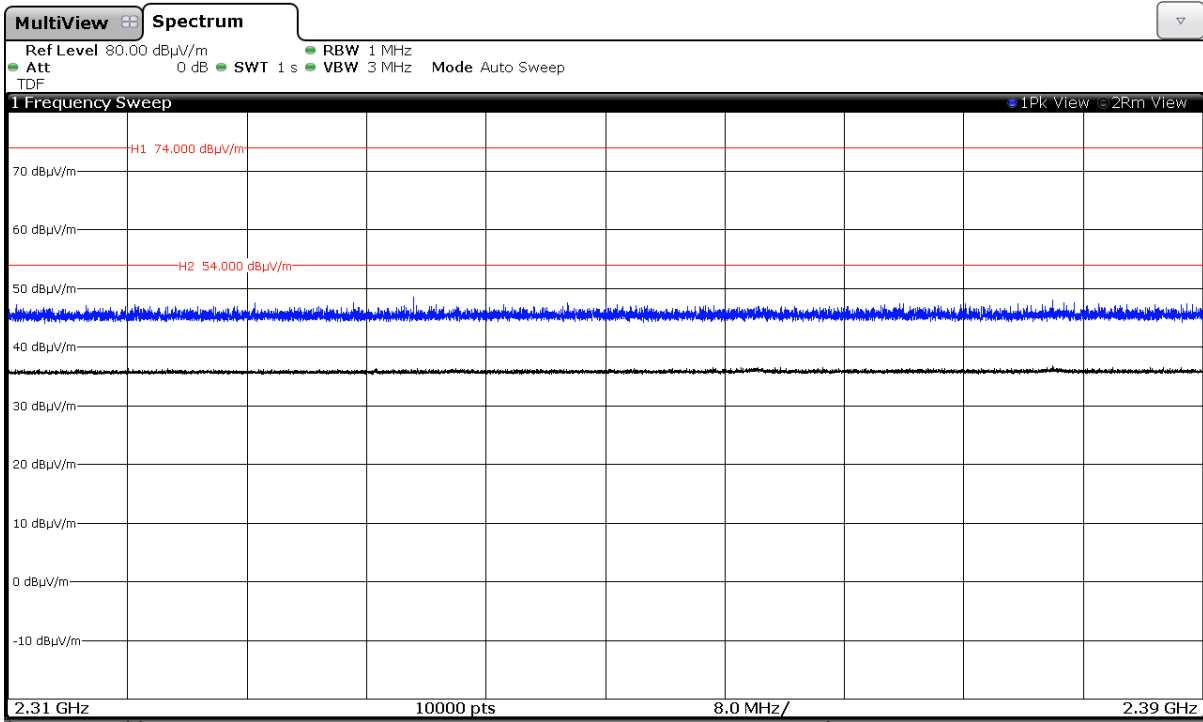


FREQUENCY RANGE 2.4835 GHz to 2.5 GHz. (RESTRICTED BAND)

CHANNEL: Lowest


Modulation: GFSK

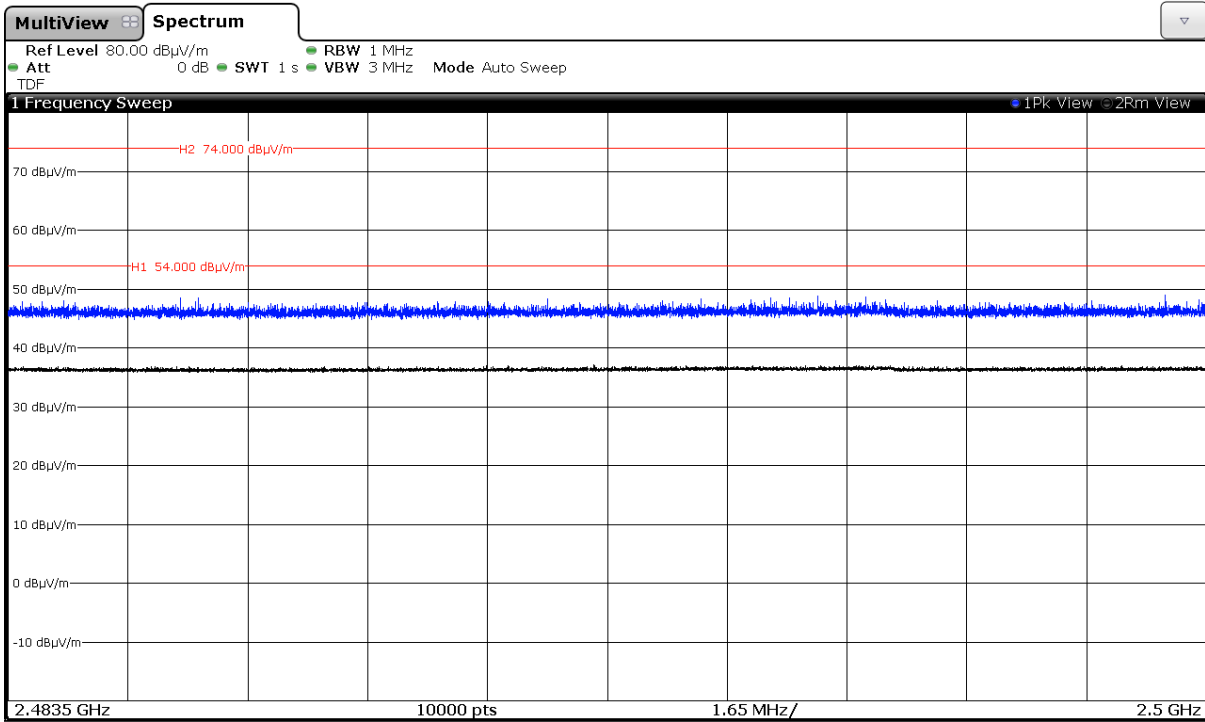

Modulation: Π/4-DQPSK

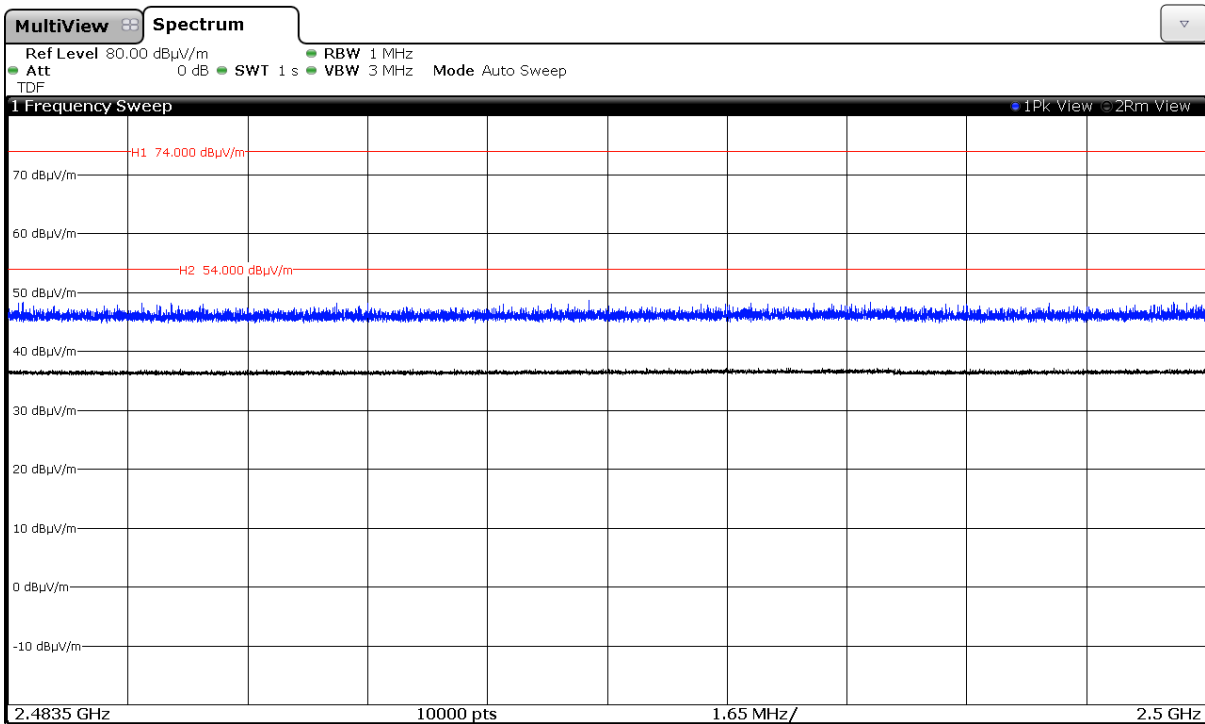


Modulation: 8-DPSK

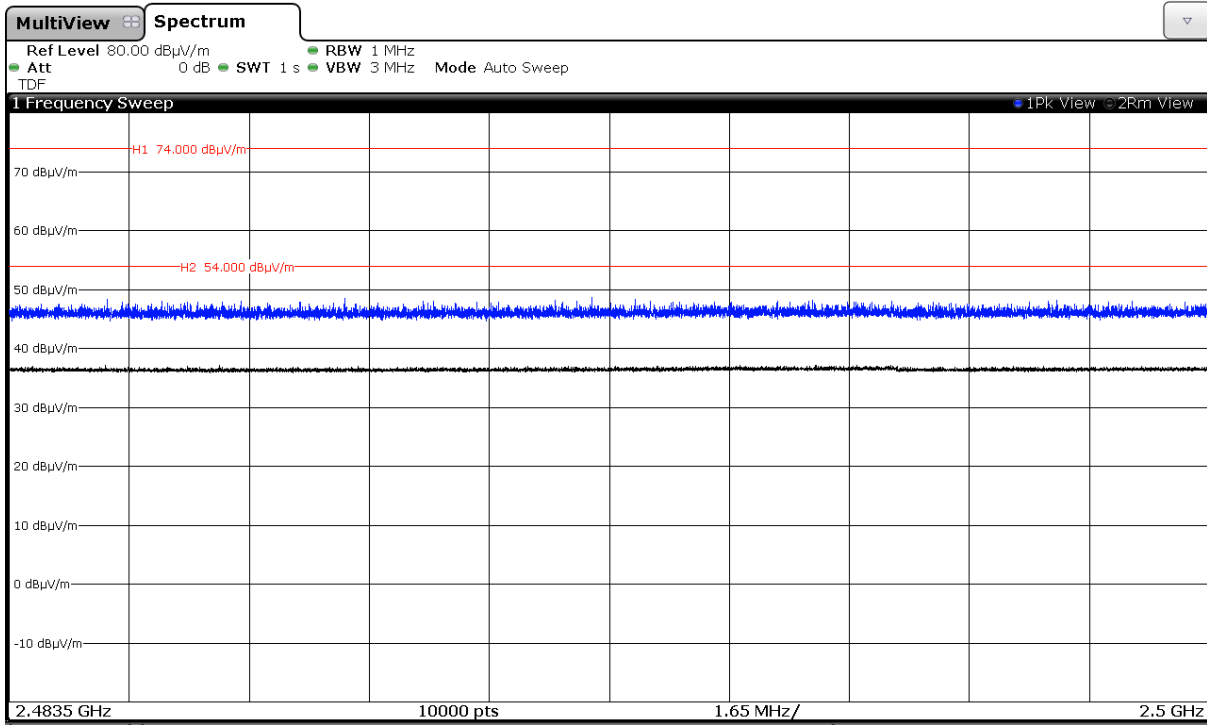


CHANNEL: Middle


Modulation: GFSK

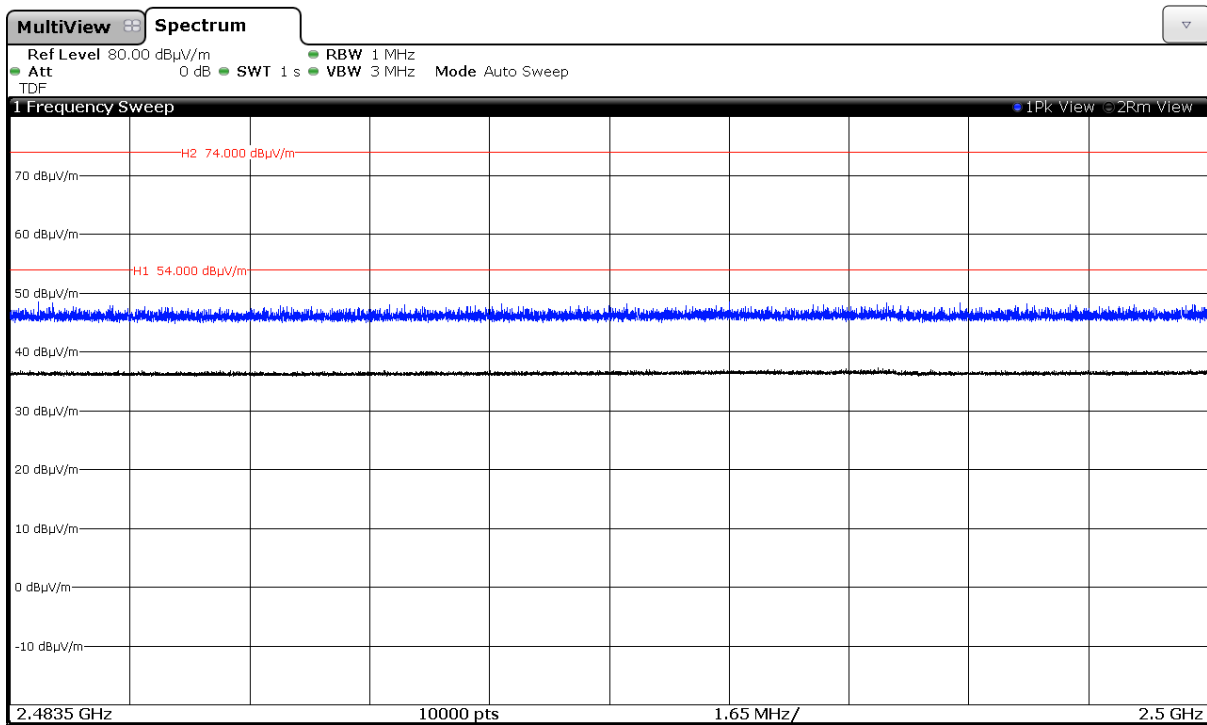

Modulation: $\Pi/4$ -DQPSK

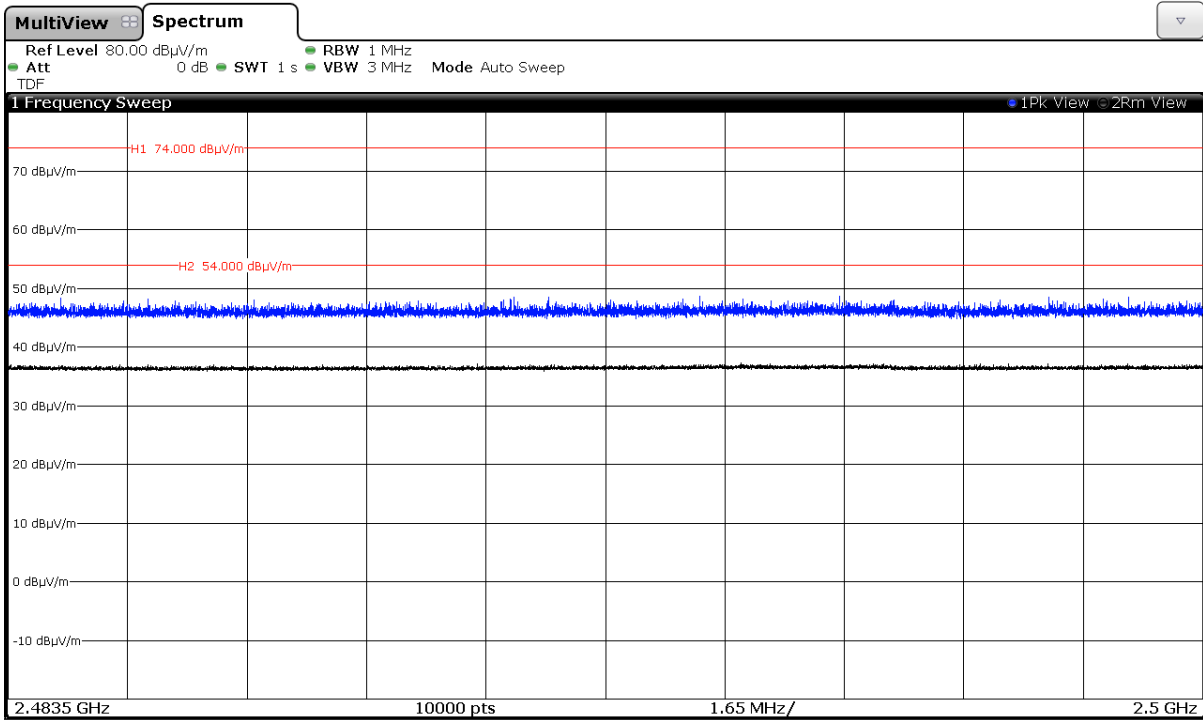


Modulation: 8-DPSK

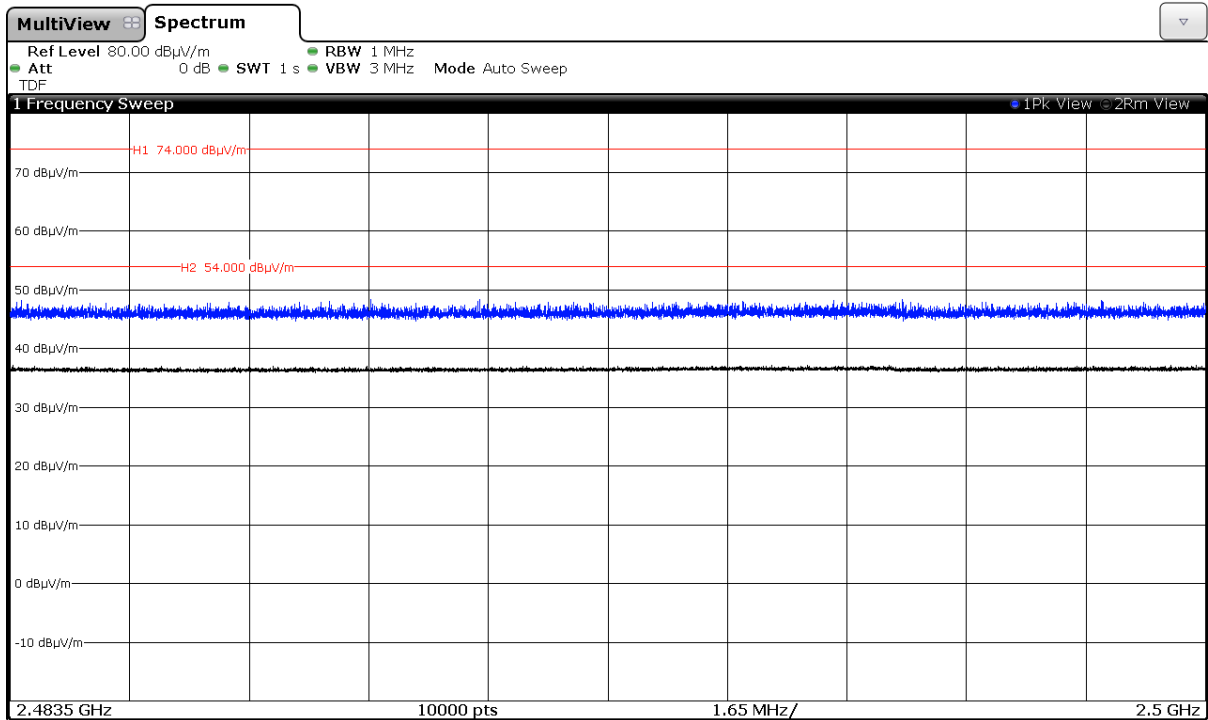


CHANNEL: Highest

Modulation: GFSK

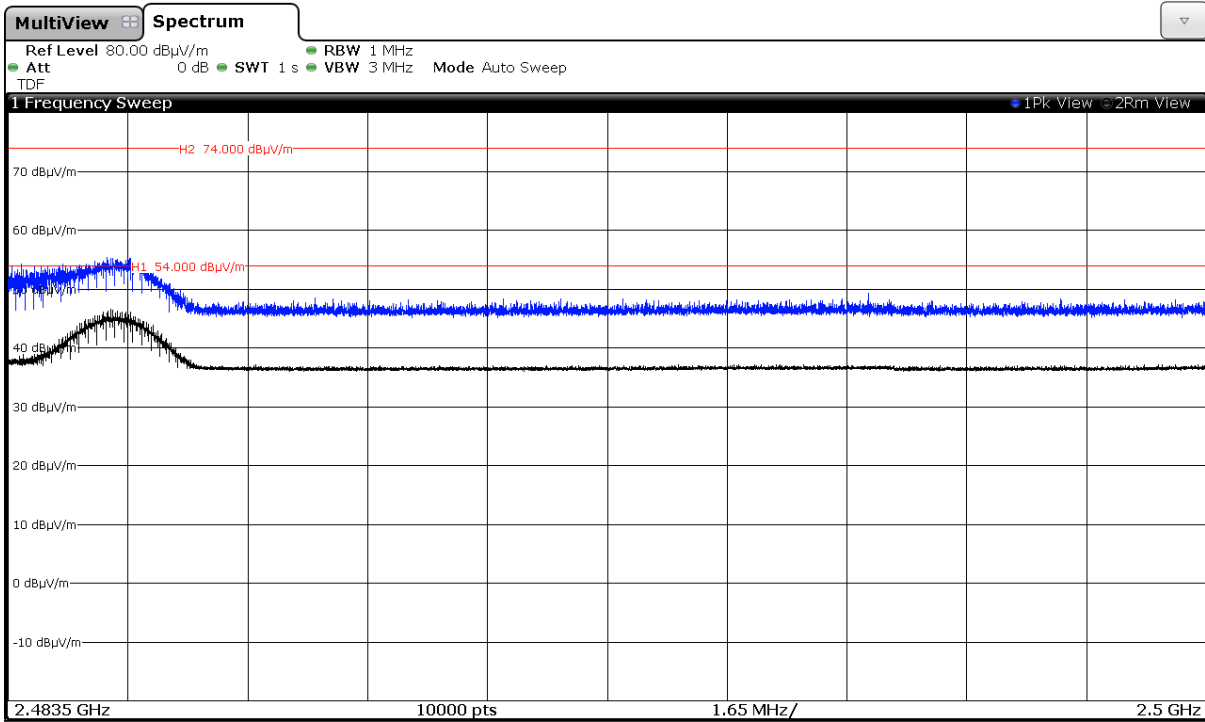

Modulation: Π/4-DQPSK

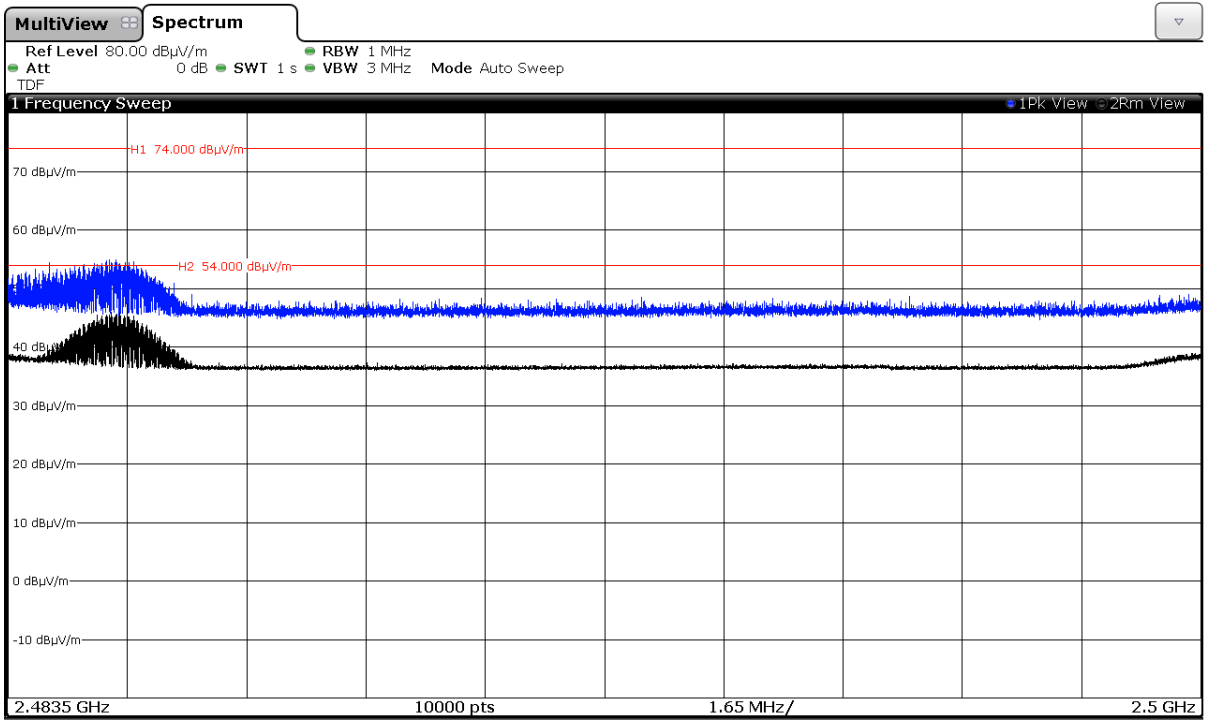

Modulation: 8-DPSK

