

ANTENNA INFORMATION

OEM	Lenovo
ODM	LCFC
Platform model name	Lenovo 500e Chromebook Gen 4s
Intel platform (ex: Yes, No or NA)	yes
Platform type (ex: regular NB, convertible PC, AIO...etc)	Convertible PC
SAR minimum separation (mm)	FCC (1g) 9.9mm ISED (1g) 187mm ISED (10g) 4.2mm

Antenna manufacturer	Company name	SPEEDWIRE
	Address	No. 138, Hi-tech District East-river, Huizhou, Guangdong, China
Test location	Company name	SPEEDWIRE
	Address	No. 138, Hi-tech District East-river, Huizhou, Guangdong, China
Test Personnel	Name(Full name)	Kevin Zhang
	E-mail	kevin_zhang@speed-hz.com
	Tel/Mobile	+886-3-3253361 ext 227
Testing date		2024/7/15

Antenna Part number	Main	DC330025820
	Aux	DC330025830
Antenna type (ex: PIFA, Dipole...etc)		PIFA

Antenna Peak gain w/ cable loss (dBi)*										
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	5.9GHz 5850-5895MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz
Main	1.36	2.63	2.34	2.50	2.69	2.47	2.71	2.71	2.64	2.83
Aux	1.56	2.11	2.75	2.91	2.60	2.60	2.54	2.26	2.75	2.79

Cable Assembly Part Number and Information					
	Cable PN	Cable length(mm)	Cable diameter(mm)	Impedance(ohm)	Connector type
Main	1.13 low loss	36	1.13	50	C87P115 or equivalent
Aux	1.13 low loss	133	1.13	50	C87P115 or equivalent

* 3D Antenna Peak Gain required being test in system basis.

Table of Contents

Cover page.....	1
1. Intel Reference Gain and Type.....	3
2. Document Revision History.....	3
3. Test & System Description	
3.1 Measurement Method and System.....	4
3.2 Test setup.....	4
3.3 Equipment list.....	5

1. Intel Reference Gain and Type

Antenna Peak gain w/ cable loss (dBi)											
Band/Frequency		2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	5.9GHz 5850-5895MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz
Design	EU/UK	3.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00
PIFA	For WiFi 6E and earlier	3.24	3.64	3.73	4.77	4.97	4.72	4.83	4.30	5.37	5.59
	From WiFi 7	2.95	5.11	4.55	5.15	5.13	4.45	5.02	5.02	4.96	4.96
Dipole	For WiFi 6E and earlier	2.89	2.92	3.19	4.41	4.22	4.22	4.83	4.30	4.49	5.34
	From WiFi 7	2.95	4.03	4.11	5.15	5.13	4.45	5.02	4.71	4.49	4.96
Monopole	From WiFi 7	2.83	4.57	4.44	4.95	4.95	4.43	4.87	4.91	4.91	4.79

3D Peak Antenna gain should be equal or greater than -2 dBi

If a host integrator plans to use a lower gain antenna of the same type, additional CBP(FCC)/EDT(EU) testing need to be performed while the module is installed in the host.

Revision #	Revision Details	Issued Date
Rev. 00	First Issue	

2. Document Revision History

3. Test & System Description


3.1 Measurement Method and System

<insert test description here for test method>

The testing of antenna gain should be made at a CTIA qualified lab with an RF anechoic chamber with at least 3-meter separation from the receive antenna to the antenna under test. The antenna gain report from unqualified lab can't be referenced a passing. Besides, all test equipment including horn antennas, adapters, cables, network analyzers, and receivers shall be calibrated per manufacturer's minimum calibration requirements.

3.2 Test setup

<insert test diagram here for test site utilized>

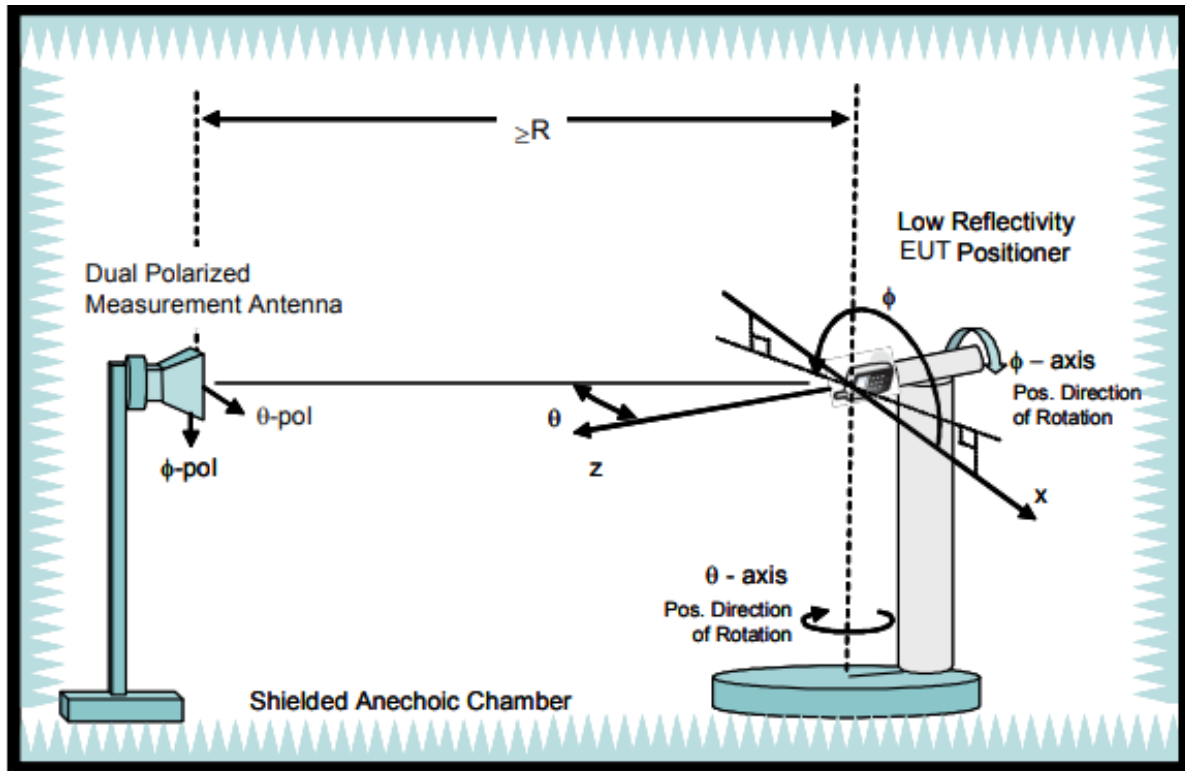

3.3 Equipment list

<insert test diagram here for test site utilized>

Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
Anechoic Chamber	AMS8500	-	ETS-Lindgren	22-Jun-23	10-Jul-25
Turn Table	2117-7200	SN00231447	ETS-Lindgren	22-Jun-23	10-Jul-25
Switch & Positioning systems	EMCenter	SN00242606	ETS-Lindgren	22-Jun-23	10-Jul-25
Measurement SW	EMQuest V1.15 build 27347	SN1802	ETS-Lindgren	22-Jun-23	10-Jul-25
Horn antenna	3164-10	SN00246202	ETS-Lindgren	22-Jun-23	10-Jul-25
Vector Network Analyzer	E5071C	PN5188-4462	Keysight	30-May-23	30-Nov-25
Cable 7.5m 400MHz to 18GHz(H-pol)	SS402	00100A1F5A1XXS	WOKEN	22-Jun-23	10-Nov-25
Cable 7.5m 400MHz to 18GHz(V-pol)	SS402	00100A1F5A1XXS	WOKEN	22-Jun-23	10-Nov-25
Cable 14m 400MHz to 18GHz	SS402	00100A1F5A1XXS	WOKEN	22-Jun-23	10-Nov-25
Temp & Humidity Logger	830	SN84972	PROVA	16-Jul-23	10-Jul-25