

# TEST REPORT

EUT Description	<b>Convertible PC</b>
Brand Name	<b>HP</b>
Model Name	<b>TPN-C172</b>
FCC ID	<b>PD9BE200NG</b>
ISED ID	<b>1000M-BE200NG</b>
Date of Test Start/End	<b>2024-02-02 / 2024-02-02</b>
Features	<b>IEEE 802.11a/b/g/n/ac/ax/be</b>

Applicant	<b>Intel Corporation SAS</b>
Address	<b>425 Rue de Goa – Le Cargo B6 – 06600 Antibes, FRANCE</b>
Contact Person	<b>Benjamin Lavenant</b>
Telephone/Fax/ Email	<b>Benjamin.lavenant@intel.com</b>

Test Report identification	<b>231027-02.TR01</b>
Revision Control	<b>Rev. 02</b> <b>This test report replaces any previous versions of this test report</b> (see Section 8)

The test results relate only to the samples tested.

Reviewed by \_\_\_\_\_

# Table of Contents

---

<b>1. Standards, reference documents and applicable test methods .....</b>	<b>3</b>
<b>2. General conditions, competences and guarantees .....</b>	<b>3</b>
<b>3. Environmental Conditions .....</b>	<b>3</b>
<b>4. Test Sample .....</b>	<b>3</b>
<b>5. EUT Features .....</b>	<b>4</b>
<b>6. Remarks and comments .....</b>	<b>4</b>
<b>7. Test Results summary .....</b>	<b>4</b>
7.1. WLAN TX POWER TABLE SUMMARY .....	4
<b>8. Document Revision History .....</b>	<b>5</b>
<b>Annex A. Test &amp; System description .....</b>	<b>6</b>
A.1 TEST SETUP .....	6
A.2 PROCEDURE .....	6
A.3 TEST EQUIPMENT LIST .....	7
A.4 MEASUREMENT UNCERTAINTY EVALUATION .....	7
<b>Annex B. Test Results .....</b>	<b>8</b>
B.1 TRIGGER LID ANGLE DETECTION AND POWER VERIFICATION 2.4GHZ .....	8
B.1.1 LCD DIRECTION 0° .....	8
B.1.2 LCD DIRECTION 90/270° .....	10
B.1.3 LCD DIRECTION 180° .....	12
B.2 TRIGGER LID ANGLE DETECTION AND POWER VERIFICATION 5GHZ .....	14
B.2.1 LCD DIRECTION 0° .....	14
B.2.2 LCD DIRECTION 90/270° .....	16
B.2.3 LCD DIRECTION 180° .....	18

## 1. Standards, reference documents and applicable test methods

- a. KDB 388624 D02 Pre-Approval Guidance List v18, PRE-APPROVAL GUIDANCE LIST
- b. FCC Presentations TCB Workshop November 2019, RF exposure procedures.

## 2. General conditions, competences and guarantees

- ✓ Intel WRF Lab only provides testing services and is committed to providing reliable, unbiased test results and interpretations.
- ✓ Intel WRF Lab is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.
- ✓ Intel WRF Lab has developed calibration and proficiency programs for its measurement equipment to ensure correlated and reliable results to its customers.
- ✓ This report is only referred to the item that has undergone the test.
- ✓ This report does not imply an approval of the product by the Certification Bodies or competent Authorities.

## 3. Environmental Conditions

- ✓ At the site where the measurements were performed the following limits were not exceeded during the tests:

Temperature	21.8°C ± 1°C
Humidity	37% ± 4%

## 4. Test Sample

Sample	ID #	Description	Model	Serial #	Note
#1	231027-02.S08	Convertible PC	TPN-C172	DUT #16	-

## 5. EUT Features

The herein information is provided by the customer.

Intel WRF Lab declines any responsibility for the accuracy of the stated customer provided information, especially if it has any impact on the correctness of test results presented in this report.

Brand Name	HP
Model Name	TPN-C172
Prototype / Production	Pre - Production
Host Identification	Convertible PC

## 6. Remarks and comments

1. The test report is validation of the G sensor functionality

## 7. Test Results summary

### 7.1. WLAN Tx Power Table Summary

Device Mode	Lid Angle range	LCD Direction	2.4GHz-CH6 802.11b - 1Mbps				5GHz-CH120 802.11a - 6Mbps				
			Target Power (dBm)		Measured Power (dBm)		Target Power (dBm)		Measured Power (dBm)		
			Antenna AUX (1)	Antenna MAIN (2)	Antenna AUX (1)	Antenna MAIN (2)	Antenna AUX (1)	Antenna MAIN (2)	Antenna AUX (1)	Antenna MAIN (2)	
Lid Close	0° ≤ - <30°	-	Standby	Standby	Standby	Standby	Standby	Standby	Standby	Standby	Standby
Laptop	30° ≤ - <130°	0°	20.0	20.0	20.0	20.0	21.25	21.25	19.4	19.7	
Tent	200° ≤ - <340°	180°	18.5	18.5	17.9	18.0	16.5	16.5	15.7	15.6	
Stand	200° ≤ - <340°	0°	20.0	20.0	20.0	20.0	21.25	21.25	19.4	19.7	
Tablet	130° ≤ - <200° 200° ≤ - <340° 340° ≤ - <360°	0° 90° or 270°	18.5	18.5	17.9	18.0	16.5	16.5	15.7	15.6	
Book	30° ≤ - <200°	90° or 270°	18.5	18.5	17.9	18.0	16.5	16.5	15.7	15.6	

## 8. Document Revision History

Revision #	Modified by	Revision Details
Rev.00	Cheiel In	First release
Rev.01	Cheiel In	Modification of maximum tune up power for 2.4GHz in laptop mode per customer request
Rev.02	Cheiel In	Modification of maximum tune up power for 2.4GHz in laptop mode per customer request


# Annex A. Test & System description

## A.1 Test setup

The conducted power measurement test setup is described in the following and illustrated in Figure 1.

- The DUT is convertible PC from HP model TPN-C172. An BE200NGW connectivity module is installed inside
- The call box is used as an access point to manage the uplink and downlink data traffic.
- Uplink signal power is measured with the access point.
- Path loss in the power measurement setup from the wireless module antenna port to the access point is compensated
- ANT tool version .01404.23.0.0 is used on the DUT to query the power table index and sensor status

Figure.1 – Power measurement test setup.

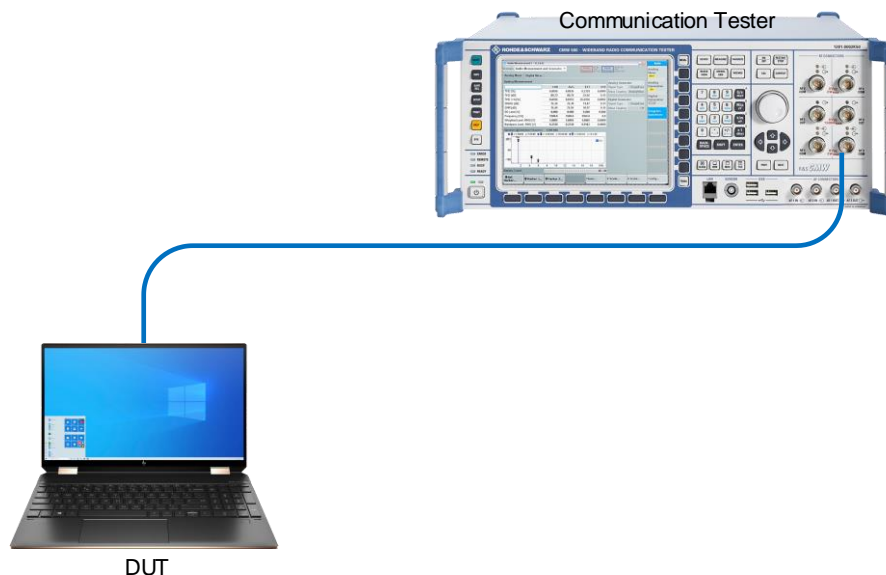

## A.2 Procedure

The following additional guidance applies only to convertible laptops whose screen rotates around one axis, from 0 degrees to 360 degrees, in a clamshell style, i.e., from closed mode to open mode, to “tent” mode, and finally, to tablet mode. This process must be followed to determine the lid angle where a power reduction occurs, by taking power measurements at each step, as indicated in the step listed here below:

1. From the lid in closed mode (0 degrees), open the screen in 10-degree steps until laptop mode is obtained
2. Lower the screen by 5 degrees increments to verify that the “closed mode” is triggered
3. From the position of the previous step, open the screen in 1-degree increments until laptop mode is triggered again
4. Continue opening the screen in 1-degree increments until at least 5 degrees past where “laptop mode” was obtained, then continue opening the screen in 10-degree steps until the device switches to tablet mode
5. Reverse the previous procedure to go from tablet mode back down to closed mode

### A.3 Test Equipment List

Equipment and accessories used for the conducted power measurement test setup are listed below. The Test Platform (DUT), test setup and associated equipment are shown in A.1.

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
125-000	Communication Tester	CMW500	129337	Rohde & Schwartz	2023-04-12	2025-04-12
022-003 022-004	RF path (RF cable + Adapters)	-	-	-	RF path loss was verified before usage	

### A.4 Measurement Uncertainty Evaluation

The system uncertainty evaluation is shown in the table below with a coverage factor of  $k = 2$  to indicate a 95% level of confidence:

Measurement type	Uncertainty	Unit
Power level	$\pm 1$	dB

# Annex B. Test Results

## B.1 Trigger lid angle detection and power verification 2.4GHz

### B.1.1 LCD direction 0°

The lid is rotating from 0 to 360. The screen is vertical, LCD direction is 0 degree.

Mode	Angle (degree)	Measured Power 2.4GHz-Ch6(dBm)	
		AUX (1)	MAIN (2)
	Lid close	0	Standby
10		Standby	Standby
20		Standby	Standby
Laptop	30	20.0	20.0
Lid close	25	Standby	Standby
	26	Standby	Standby
	27	Standby	Standby
	28	Standby	Standby
	29	Standby	Standby
Laptop	30	20.0	20.0
	31	20.0	20.0
	32	20.0	20.0
	33	20.0	20.0
	34	20.0	20.0
	35	20.0	20.0
	40	20.0	20.0
	50	20.0	20.0
	60	20.0	20.0
	70	20.0	20.0
	80	20.0	20.0
	90	20.0	20.0
	100	20.0	20.0
	110	20.0	20.0
	120	20.0	20.0
130	20.0	20.0	
Tablet	140	17.9	18.0
Laptop	135	20.0	20.0
Tablet	136	17.9	18.0
	137	17.9	18.0
	138	17.9	18.0
	139	17.9	18.0
	140	17.9	18.0
	150	17.9	18.0
	160	17.9	18.0
	170	17.9	18.0
	180	17.9	18.0
	190	17.9	18.0
200	17.9	18.0	
Stand	210	20.0	20.0
Tablet	205	17.9	18.0
Stand	206	20.0	20.0
	207	20.0	20.0
	208	20.0	20.0
	209	20.0	20.0
	210	20.0	20.0
	220	20.0	20.0
	230	20.0	20.0

Mode	Angle (degree)	Measured Power 2.4GHz-Ch6(dBm)	
		AUX (1)	MAIN (2)
	Stand	240	20.0
250		20.0	20.0
260		20.0	20.0
270		20.0	20.0
280		20.0	20.0
290		20.0	20.0
300		20.0	20.0
310		20.0	20.0
320		20.0	20.0
330		20.0	20.0
340		20.0	20.0
Tablet	350	17.9	18.0
Stand	345	20.0	20.0
Tablet	346	17.9	18.0
	347	17.9	18.0
	348	17.9	18.0
	349	17.9	18.0
	350	17.9	18.0
	351	17.9	18.0
	360	17.9	18.0



The lid is rotating from 360 degrees to 0 degree. The screen is vertical, LCD direction to 0 degree.

Mode	Angle (degree)	Measured Power 2.4GHz-Ch6(dBm)	
		AUX (1)	MAIN (2)
Tablet	360	17.9	18.0
	350	17.9	18.0
	340	17.9	18.0
Stand	330	20.0	20.0
Tablet	335	17.9	18.0
Stand	334	20.0	20.0
	333	20.0	20.0
	332	20.0	20.0
	331	20.0	20.0
	330	20.0	20.0
	329	20.0	20.0
	320	20.0	20.0
	310	20.0	20.0
	300	20.0	20.0
	290	20.0	20.0
	280	20.0	20.0
	270	20.0	20.0
	260	20.0	20.0
	250	20.0	20.0
	240	20.0	20.0
	230	20.0	20.0
	220	20.0	20.0
	210	20.0	20.0
	200	20.0	20.0
	Tablet	190	17.9
Stand	195	20.0	20.0
Tablet	194	17.9	18.0
	193	17.9	18.0
	192	17.9	18.0
	191	17.9	18.0
	190	17.9	18.0
	180	17.9	18.0
	170	17.9	18.0
	160	17.9	18.0
	150	17.9	18.0
	140	17.9	18.0
Laptop	130	17.9	18.0
Laptop	120	20.0	20.0
Tablet	125	17.9	18.0
Laptop	124	20.0	20.0
	123	20.0	20.0
	122	20.0	20.0
	121	20.0	20.0
Laptop	120	20.0	20.0

Mode	Angle (degree)	Measured Power 2.4GHz-Ch6(dBm)	
		AUX (1)	MAIN (2)
Laptop	110	20.0	20.0
	100	20.0	20.0
	90	20.0	20.0
	80	20.0	20.0
	70	20.0	20.0
	60	20.0	20.0
	50	20.0	20.0
	40	20.0	20.0
	30	20.0	20.0
	Lid close	20	Standby
Laptop	25	20.0	20.0
Lid close	24	Standby	Standby
	23	Standby	Standby
	22	Standby	Standby
	21	Standby	Standby
	20	Standby	Standby
	10	Standby	Standby
	0	Standby	Standby

**B.1.2 LCD direction 90/270°**

The lid is rotating from 0 to 360 degrees. The screen is vertical, LCD direction to 90 degrees.

Mode	Angle (degree)	Measured Power 2.4GHz-Ch6(dBm)	
		AUX (1)	MAIN (2)
	Lid close	0	Standby
10		Standby	Standby
20		Standby	Standby
Book	30	17.9	18.0
Lid close	25	Standby	Standby
	26	Standby	Standby
	27	Standby	Standby
	28	Standby	Standby
	29	Standby	Standby
Book	30	17.9	18.0
	31	17.9	18.0
	32	17.9	18.0
	33	17.9	18.0
	34	17.9	18.0
	35	17.9	18.0
	40	17.9	18.0
	50	17.9	18.0
	60	17.9	18.0
	70	17.9	18.0
	80	17.9	18.0
	90	17.9	18.0
	100	17.9	18.0
	110	17.9	18.0
	120	17.9	18.0
	130	17.9	18.0
	140	17.9	18.0
	150	17.9	18.0
	160	17.9	18.0
	170	17.9	18.0
180	17.9	18.0	
190	17.9	18.0	
200	17.9	18.0	
Tablet	210	17.9	18.0
Book	205	17.9	18.0
Tablet	206	17.9	18.0
	207	17.9	18.0
	208	17.9	18.0
	209	17.9	18.0
	210	17.9	18.0
	220	17.9	18.0
	230	17.9	18.0
	240	17.9	18.0
	250	17.9	18.0
	260	17.9	18.0
	270	17.9	18.0
	280	17.9	18.0
	290	17.9	18.0
	300	17.9	18.0
	310	17.9	18.0
	320	17.9	18.0
330	17.9	18.0	
340	17.9	18.0	
350	17.9	18.0	
360	17.9	18.0	

The lid is rotating from 360 to 0 degree. The screen is vertical, LCD direction to 90 or 270 degrees.

Mode	Angle (degree)	Measured Power 2.4GHz-Ch6(dBm)	
		AUX (1)	MAIN (2)
	Tablet	360	17.9
350		17.9	18.0
340		17.9	18.0
330		17.9	18.0
320		17.9	18.0
310		17.9	18.0
300		17.9	18.0
290		17.9	18.0
280		17.9	18.0
270		17.9	18.0
260		17.9	18.0
250		17.9	18.0
240		17.9	18.0
230		17.9	18.0
220		17.9	18.0
210		17.9	18.0
200	17.9	18.0	
Book	190	17.9	18.0
Tablet	195	17.9	18.0
Book	194	17.9	18.0
	193	17.9	18.0
	192	17.9	18.0
	191	17.9	18.0
	190	17.9	18.0
	180	17.9	18.0
	170	17.9	18.0
	160	17.9	18.0
	150	17.9	18.0
	140	17.9	18.0
	130	17.9	18.0
	120	17.9	18.0
	110	17.9	18.0
	100	17.9	18.0
	90	17.9	18.0
	80	17.9	18.0
70	17.9	18.0	
60	17.9	18.0	
50	17.9	18.0	
40	17.9	18.0	
30	17.9	18.0	
Lid close	20	Standby	Standby
Book	25	17.9	18.0
Lid close	24	Standby	Standby
	23	Standby	Standby
	22	Standby	Standby
	21	Standby	Standby
	20	Standby	Standby
	10	Standby	Standby
	0	Standby	Standby

**B.1.3 LCD direction 180°**

The lid is rotating from 360 degrees to 180 degrees. The screen is vertical, LCD direction to 180 degrees.  
 Note: The LCD direction switch to 0 degrees for low angle.

Mode	Angle (degree)	Measured Power 2.4GHz-Ch6(dBm)	
		AUX (1)	MAIN (2)
Tablet	360	17.9	18.0
	350	17.9	18.0
	340	17.9	18.0
Tent	330	17.9	18.0
Tablet	335	17.9	18.0
Tent	334	17.9	18.0
	333	17.9	18.0
	332	17.9	18.0
	331	17.9	18.0
	330	17.9	18.0
	320	17.9	18.0
	310	17.9	18.0
	300	17.9	18.0
	290	17.9	18.0
	280	17.9	18.0
	270	17.9	18.0
	260	17.9	18.0
	250	17.9	18.0
	240	17.9	18.0
	230	17.9	18.0
	220	17.9	18.0
	210	17.9	18.0
200	17.9	18.0	
Tablet	190	17.9	18.0
Tent	195	17.9	18.0
Tablet	194	17.9	18.0
	193	17.9	18.0
	192	17.9	18.0
	191	17.9	18.0
	190	17.9	18.0
	180	17.9	18.0

The lid is rotating from 180 degrees to 360 degrees. The screen is vertical, LCD direction to 180 degrees.  
 Note: The LCD direction switch to 0 degrees for low angle.

Mode	Angle (degree)	Measured Power 2.4GHz-Ch6(dBm)	
		AUX (1)	MAIN (2)
Tablet	180	17.9	18.0
	190	17.9	18.0
Tent	200	17.9	18.0
Tablet	195	17.9	18.0
Tent	196	17.9	18.0
	197	17.9	18.0
	198	17.9	18.0
	199	17.9	18.0
	200	17.9	18.0
	210	17.9	18.0
	220	17.9	18.0
	230	17.9	18.0
	240	17.9	18.0
	250	17.9	18.0
	260	17.9	18.0
	270	17.9	18.0
	280	17.9	18.0
	290	17.9	18.0
	300	17.9	18.0
Tablet	310	17.9	18.0
	320	17.9	18.0
	330	17.9	18.0
	340	17.9	18.0
Tent	335	17.9	18.0
	336	17.9	18.0
	337	17.9	18.0
	338	17.9	18.0
	339	17.9	18.0
Tablet	340	17.9	18.0
	350	17.9	18.0
	360	17.9	18.0

## B.2 Trigger lid angle detection and power verification 5GHz

### B.2.1 LCD direction 0°

The lid is rotating from 0 to 360. The screen is vertical, LCD direction is 0 degree.

Mode	Angle	Measured Power	
	(degree)	5GHz-Ch120(dBm)	
		AUX (1)	MAIN (2)
Lid close	0	Standby	Standby
	10	Standby	Standby
	20	Standby	Standby
Laptop	30	19.4	19.7
Lid close	25	Standby	Standby
	26	Standby	Standby
	27	Standby	Standby
	28	Standby	Standby
Laptop	29	Standby	Standby
	30	19.4	19.7
	31	19.4	19.7
	32	19.4	19.7
	33	19.4	19.7
	34	19.4	19.7
	35	19.4	19.7
	40	19.4	19.7
	50	19.4	19.7
	60	19.4	19.7
	70	19.4	19.7
	80	19.4	19.7
	90	19.4	19.7
	100	19.4	19.7
110	19.4	19.7	
120	19.4	19.7	
130	19.4	19.7	
Tablet	140	15.7	15.6
Laptop	135	19.4	19.7
Tablet	136	15.7	15.6
	137	15.7	15.6
	138	15.7	15.6
	139	15.7	15.6
	140	15.7	15.6
	150	15.7	15.6
	160	15.7	15.6
	170	15.7	15.6
	180	15.7	15.6
	190	15.7	15.6
200	15.7	15.6	
Stand	210	19.4	19.7
Tablet	205	15.7	15.6
Stand	206	19.4	19.7
	207	19.4	19.7
	208	19.4	19.7
	209	19.4	19.7
	210	19.4	19.7
	220	19.4	19.7
	230	19.4	19.7

Mode	Angle	Measured Power	
	(degree)	5GHz-Ch120(dBm)	
		AUX (1)	MAIN (2)
Stand	240	19.4	19.7
	250	19.4	19.7
	260	19.4	19.7
	270	19.4	19.7
	280	19.4	19.7
	290	19.4	19.7
	300	19.4	19.7
	310	19.4	19.7
	320	19.4	19.7
	330	19.4	19.7
340	19.4	19.7	
Tablet	350	15.7	15.6
Stand	345	19.4	19.7
Tablet	346	15.7	15.6
	347	15.7	15.6
	348	15.7	15.6
	349	15.7	15.6
	350	15.7	15.6
	351	15.7	15.6
	360	15.7	15.6

The lid is rotating from 360 degrees to 0 degree. The screen is vertical, LCD direction to 0 degree.

Mode	Angle	Measured Power	
	(degree)	5GHz-Ch120(dBm)	
		AUX (1)	MAIN (2)
Tablet	360	15.7	15.6
	350	15.7	15.6
	340	15.7	15.6
Stand	330	19.4	19.7
Tablet	335	15.7	15.6
Stand	334	19.4	19.7
	333	19.4	19.7
	332	19.4	19.7
	331	19.4	19.7
	330	19.4	19.7
	329	19.4	19.7
	320	19.4	19.7
	310	19.4	19.7
	300	19.4	19.7
	290	19.4	19.7
	280	19.4	19.7
	270	19.4	19.7
	260	19.4	19.7
	250	19.4	19.7
	240	19.4	19.7
	230	19.4	19.7
	220	19.4	19.7
	210	19.4	19.7
	200	19.4	19.7
	Tablet	190	15.7
Stand	195	19.4	19.7
Tablet	194	15.7	15.6
	193	15.7	15.6
	192	15.7	15.6
	191	15.7	15.6
	190	15.7	15.6
	180	15.7	15.6
	170	15.7	15.6
	160	15.7	15.6
	150	15.7	15.6
	140	15.7	15.6
130	15.7	15.6	
Laptop	120	19.4	19.7
Tablet	125	15.7	15.6
Laptop	124	19.4	19.7
	123	19.4	19.7
	122	19.4	19.7
	121	19.4	19.7
	120	19.4	19.7

Mode	Angle	Measured Power	
	(degree)	5GHz-Ch120(dBm)	
		AUX (1)	MAIN (2)
Laptop	110	19.4	19.7
	100	19.4	19.7
	90	19.4	19.7
	80	19.4	19.7
	70	19.4	19.7
	60	19.4	19.7
	50	19.4	19.7
	40	19.4	19.7
	30	19.4	19.7
	Lid close	20	Standby
Laptop	25	19.4	19.7
Lid close	24	Standby	Standby
	23	Standby	Standby
	22	Standby	Standby
	21	Standby	Standby
	20	Standby	Standby
	10	Standby	Standby
	0	Standby	Standby

### B.2.2 LCD direction 90/270°

The lid is rotating from 0 to 360 degrees. The screen is vertical, LCD direction to 90 degrees.

Mode	Angle	Measured Power	
	(degree)	5GHz-Ch120(dBm)	
		AUX (1)	MAIN (2)
Lid close	0	Standby	Standby
	10	Standby	Standby
	20	Standby	Standby
Book	30	15.7	15.6
Lid close	25	Standby	Standby
	26	Standby	Standby
	27	Standby	Standby
	28	Standby	Standby
Book	29	Standby	Standby
	30	15.7	15.6
	31	15.7	15.6
	32	15.7	15.6
	33	15.7	15.6
	34	15.7	15.6
	35	15.7	15.6
	40	15.7	15.6
	50	15.7	15.6
	60	15.7	15.6
	70	15.7	15.6
	80	15.7	15.6
	90	15.7	15.6
	100	15.7	15.6
	110	15.7	15.6
	120	15.7	15.6
	130	15.7	15.6
	140	15.7	15.6
	150	15.7	15.6
	160	15.7	15.6
170	15.7	15.6	
180	15.7	15.6	
190	15.7	15.6	
200	15.7	15.6	
Tablet	210	15.7	15.6
Book	205	15.7	15.6
Tablet	206	15.7	15.6
	207	15.7	15.6
	208	15.7	15.6
	209	15.7	15.6
	210	15.7	15.6
	220	15.7	15.6
	230	15.7	15.6
	240	15.7	15.6
	250	15.7	15.6
	260	15.7	15.6
	270	15.7	15.6
	280	15.7	15.6
	290	15.7	15.6
	300	15.7	15.6
	310	15.7	15.6
	320	15.7	15.6
330	15.7	15.6	
340	15.7	15.6	
350	15.7	15.6	
360	15.7	15.6	



The lid is rotating from 360 to 0 degree. The screen is vertical, LCD direction to 90 or 270 degrees.

Mode	Angle	Measured Power	
	(degree)	5GHz-Ch120(dBm)	
		AUX (1)	MAIN (2)
Tablet	360	15.7	15.6
	350	15.7	15.6
	340	15.7	15.6
	330	15.7	15.6
	320	15.7	15.6
	310	15.7	15.6
	300	15.7	15.6
	290	15.7	15.6
	280	15.7	15.6
	270	15.7	15.6
	260	15.7	15.6
	250	15.7	15.6
	240	15.7	15.6
	230	15.7	15.6
	220	15.7	15.6
	210	15.7	15.6
	200	15.7	15.6
Book	190	15.7	15.6
Tablet	195	15.7	15.6
Book	194	15.7	15.6
	193	15.7	15.6
	192	15.7	15.6
	191	15.7	15.6
	190	15.7	15.6
	180	15.7	15.6
	170	15.7	15.6
	160	15.7	15.6
	150	15.7	15.6
	140	15.7	15.6
	130	15.7	15.6
	120	15.7	15.6
	110	15.7	15.6
	100	15.7	15.6
	90	15.7	15.6
	80	15.7	15.6
	70	15.7	15.6
60	15.7	15.6	
50	15.7	15.6	
40	15.7	15.6	
30	15.7	15.6	
Lid close	20	Standby	Standby
Book	25	15.7	15.6
Lid close	24	Standby	Standby
	23	Standby	Standby
	22	Standby	Standby
	21	Standby	Standby
	20	Standby	Standby
	10	Standby	Standby
	0	Standby	Standby

**B.2.3 LCD direction 180°**

The lid is rotating from 360 degrees to 180 degrees. The screen is vertical, LCD direction to 180 degrees.  
 Note: The LCD direction switch to 0 degrees for low angle.

Mode	Angle (degree)	Measured Power 5GHz-Ch120(dBm)	
		AUX (1)	MAIN (2)
Tablet	360	15.7	15.6
	350	15.7	15.6
	340	15.7	15.6
Tent	330	15.7	15.6
Tablet	335	15.7	15.6
Tent	334	15.7	15.6
	333	15.7	15.6
	332	15.7	15.6
	331	15.7	15.6
	330	15.7	15.6
	320	15.7	15.6
	310	15.7	15.6
	300	15.7	15.6
	290	15.7	15.6
	280	15.7	15.6
	270	15.7	15.6
	260	15.7	15.6
	250	15.7	15.6
	240	15.7	15.6
	230	15.7	15.6
	220	15.7	15.6
	210	15.7	15.6
200	15.7	15.6	
Tablet	190	15.7	15.6
Tent	195	15.7	15.6
Tablet	194	15.7	15.6
	193	15.7	15.6
	192	15.7	15.6
	191	15.7	15.6
	190	15.7	15.6
	180	15.7	15.6

The lid is rotating from 180 degrees to 360 degrees. The screen is vertical, LCD direction to 180 degrees.  
 Note: The LCD direction switch to 0 degrees for low angle.

Mode	Angle (degree)	Measured Power 5GHz-Ch120(dBm)	
		AUX (1)	MAIN (2)
Tablet	180	15.7	15.6
	190	15.7	15.6
Tent	200	15.7	15.6
Tablet	195	15.7	15.6
Tent	196	15.7	15.6
	197	15.7	15.6
	198	15.7	15.6
	199	15.7	15.6
	200	15.7	15.6
	210	15.7	15.6
	220	15.7	15.6
	230	15.7	15.6
	240	15.7	15.6
	250	15.7	15.6
	260	15.7	15.6
	270	15.7	15.6
	280	15.7	15.6
	290	15.7	15.6
	300	15.7	15.6
310	15.7	15.6	
320	15.7	15.6	
330	15.7	15.6	
Tablet	340	15.7	15.6
Tent	335	15.7	15.6
	336	15.7	15.6
	337	15.7	15.6
	338	15.7	15.6
	339	15.7	15.6
Tablet	340	15.7	15.6
	350	15.7	15.6
	360	15.7	15.6