

Test Setup photos for RM-626 SAR Compliance Test Report

Test report no.:	SAR_Photo_RM-626_12	Date of report:	2011-02-18
Template version:	16.0	Number of pages:	6
Testing laboratory:	TCC Nokia Salo Laboratory P.O.Box 86 Joensuunkatu 7H / Kiila 1B FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 45220	Client:	Nokia Corporation P.O. Box 68 Sinitaival 5 FIN-33721 TAMPERE, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 46880
Responsible test engineer:	Virpi Tuominen	Product contact person:	Tero Huhtala
Measurements made by:	Heikki Haloila, Janne Hirsimäki, Alina Tähkääpää		
Tested device:	RM-626		
FCC ID:	PDNRM-626	IC:	661R-RM626
Supplement reports:	FCC_RM-626_11		
Testing has been carried out in accordance with:	47CFR §2.1093 Radiofrequency Radiation Exposure Evaluation: Portable Devices FCC OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01) Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields RSS-102 Evaluation Procedure for Mobile and Portable Radio Transmitters with Respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields IEEE 1528 - 2003 IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Technique		
Documentation:	The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test results:	The tested device complies with the requirements in respect of all parameters subject to the test. The test results and statements relate only to the items tested. The test report shall not be reproduced except in full, without written approval of the laboratory.		
Date and signatures:			
For the contents:			

CONTENTS

1. SUMMARY OF SAR TEST REPORT.....	3
1.1 TEST DETAILS.....	3
1.2 PICTURE OF THE DEVICE.....	3
2. TEST POSITIONS	4
2.1 WIRELESS ROUTER CONFIGURATION.....	4

1. SUMMARY OF SAR TEST REPORT

1.1 Test Details

Period of test	2011-02-10 to 2011-02-16
SN, HW and SW numbers of tested device	SN: 004402/13/206405/0, HW: 2100, SW: 012.002, DUT: 14990 SN: 004402/13/206412/6, HW: 2100, SW: 012.002, DUT: 14989 SN: 004402/13/206419/1, HW: 2100, SW: 012.002, DUT: 14987 SN: 354864/04/000448/4, HW: 3003, SW: 013.003, DUT: 15303
Batteries used in testing	-
Headsets used in testing	-
Other accessories used in testing	-
State of sample	Prototype unit
Notes	-

1.2 Picture of the Device



2. TEST POSITIONS

2.1 Wireless Router Configuration

The device was placed in the SPEAG holder using the Nokia spacer and, in sequence, the back and all 4 edges was positioned 12.5mm away from the flat phantom. The spacer was removed before the start of the measurements.



Photo of the device positioned for WR mode measurement – back facing phantom.
The spacer was removed before the start of the measurements.



Photo of the device positioned for WR mode measurement – top edge facing phantom.
The spacer was removed before the start of the measurements.

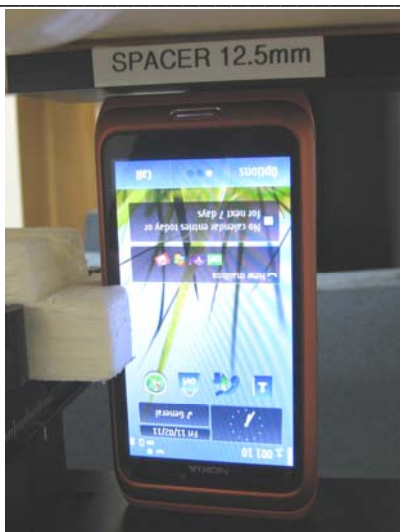


Photo of the device positioned for WR mode measurement – bottom edge facing phantom.
The spacer was removed before the start of the measurements.



Photo of the device positioned for WR mode measurement – left edge facing phantom.
The spacer was removed before the start of the measurements.



Photo of the device positioned for WR mode measurement – right edge facing phantom.
The spacer was removed before the start of the measurements.