



Hermon Laboratories Ltd.
Harakevet Industrial Zone, Binyamina 30500,
Israel
Tel. +972-4-6288001
Fax. +972-4-6288277
E-mail: mail@hermonlabs.com

TEST REPORT

ACCORDING TO: FCC 47CFR part 27

FOR:

Airspan Networks Inc.

LTE Base Station

Model: AirHarmony 1000 2.5 GHz (B38, B41)

FCC ID:PIDAHR2500

This report is in conformity with ISO/IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested. This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.



Table of contents

1	Applicant information.....	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details.....	3
5	Tests summary.....	4
6	EUT description.....	5
6.1	General information.....	5
6.2	Ports and lines	5
6.3	Support and test equipment	5
6.4	Changes made in the EUT	5
6.5	Test configuration.....	6
6.6	Transmitter characteristics	7
7	Transmitter tests according to 47CFR part 27.....	8
7.1	Occupied bandwidth test.....	8
7.2	Peak output power test.....	19
7.3	Band edge emissions at RF connector test.....	47
7.4	Spurious emissions at RF antenna connector test.....	63
7.5	Radiated spurious emission measurements.....	80
7.6	Frequency stability test.....	93
8	APPENDIX A Test equipment and ancillaries used for tests.....	102
9	APPENDIX B Measurement uncertainties.....	104
10	APPENDIX C Test facility description	105
11	APPENDIX D Specification references	105
12	APPENDIX E Test equipment correction factors.....	106
13	APPENDIX F Abbreviations and acronyms.....	115

1 Applicant information

Client name: Airspan Networks Inc.
Address: 777 Yamato, Road Suite 310 Boca Raton, FL 33431, USA
Telephone: +1 561 893 8670
Fax: +1 561 893 8671
E-mail: zlevi@airspan.com
Contact name: Mr. Zion Levi

2 Equipment under test attributes

Product name: LTE Base Station
Product type: Transceiver
Model(s): AirHarmony 1000 2.5 GHz (B38, B41)
Serial number: 7CFFF7CC7FDC
Hardware version: 00A00ACC7FDC
Software release: 14.14.10.13
Receipt date: 26-Jul-15

3 Manufacturer information

Manufacturer name: Airspan Networks Inc.
Address: 777 Yamato, Road Suite 310 Boca Raton, FL 33431, USA
Telephone: +1 561 893 8670
Fax: +1 561 893 8671
E-Mail: zlevi@airspan.com
Contact name: Mr. Zion Levi




4 Test details

Project ID: 27309
Location: Hermon Laboratories Ltd. Harakevet Industrial Zone, Binyamina 30500, Israel
Test started: 27-Jul-15
Test completed: 02-Aug-15
Test specification(s): FCC 47CFR part 27

5 Tests summary

Test	Status
Section 27.50(h), Peak output power at RF antenna connector	Pass
Section 27.50(h)(4), Spectral power density	Pass
Section 2.1091, 27.52, RF safety	Pass, exhibit provided in Application for certification
Section 27.53(m)(2), Spurious emissions at RF antenna connector	Pass
Section 27.53(m)(2), Band edge emissions at RF antenna connector	Pass
Section 27.53(m)(2), Radiated spurious emissions	Pass
Section 27.54, Frequency stability	Pass
Section 2.1049, Occupied bandwidth	Pass

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.
The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
Tested by:	Mrs. E. Pitt, test engineer	August 2, 2015	
Reviewed by:	Mrs. M. Cherniavsky, certification engineer	August 10, 2015	
Approved by:	Mrs. E. Pitt, EMC and Radio group deputy	August 18, 2015	

6 EUT description

6.1 General information

The EUT, Base station radio, AirHarmony 1000 2.5 GHz (B38, B41), is part of a LTE broadband fixed cellular wireless access system. The system provides a radio link between an end-user (a subscriber) and a network to give high-speed data access. The AirHarmony's transceiver/receiver (Up to 64 QAM modulation, data rate up to 95) uses OFDM and operating in TDD mode, equipped with a 18 dBi external antenna. The maximum total RF output power (not including antenna gain) is 39.86 dBm for 18 dBi antenna and it can be reduced by software.

The AirHarmony is installed outdoors and typically is mounted on a pole. The Subscriber transmits and receives traffic to and from the base station respectively. The transceiver provides subscribers with "always-on" Internet, high speed data only, or data and voice (VoIP) services and is configured with a unique base station reference number, preventing the LTE UE from relocating to another subscriber premises without authorization.

6.2 Ports and lines

Port type	Port description	Connected from	Connected to	Qty.	Cable type	Cable length, m
Power	DC power	DC power supply	EUT	1	Unshielded	10
Signal	Ethernet	ETH1 port	Laptop	1	Shielded	10
Signal	Antenna	EUT	GPS external antenna	1	Coax	5
RF	Antenna	EUT	Termination 50 Ohm	2	Coax	NA
Signal*	RS-232	EUT	Laptop	1	Unshielded	2

* For maintenance only


6.3 Support and test equipment

Description	Manufacturer	Model number	Serial number
DC power supply	Mean Well	PSP-600-48	RB29063683
GPS antenna	Tallysman Wireless	32-3030-0	20110606
Laptop	DELL	E6410	PO1038624
4 Port USB to RS-232 hub	ATEN INTERNATIONAL	UC2324	Z3CA2180AB40199

6.4 Changes made in the EUT

No changes were implemented in the EUT during testing.

6.5 Test configuration

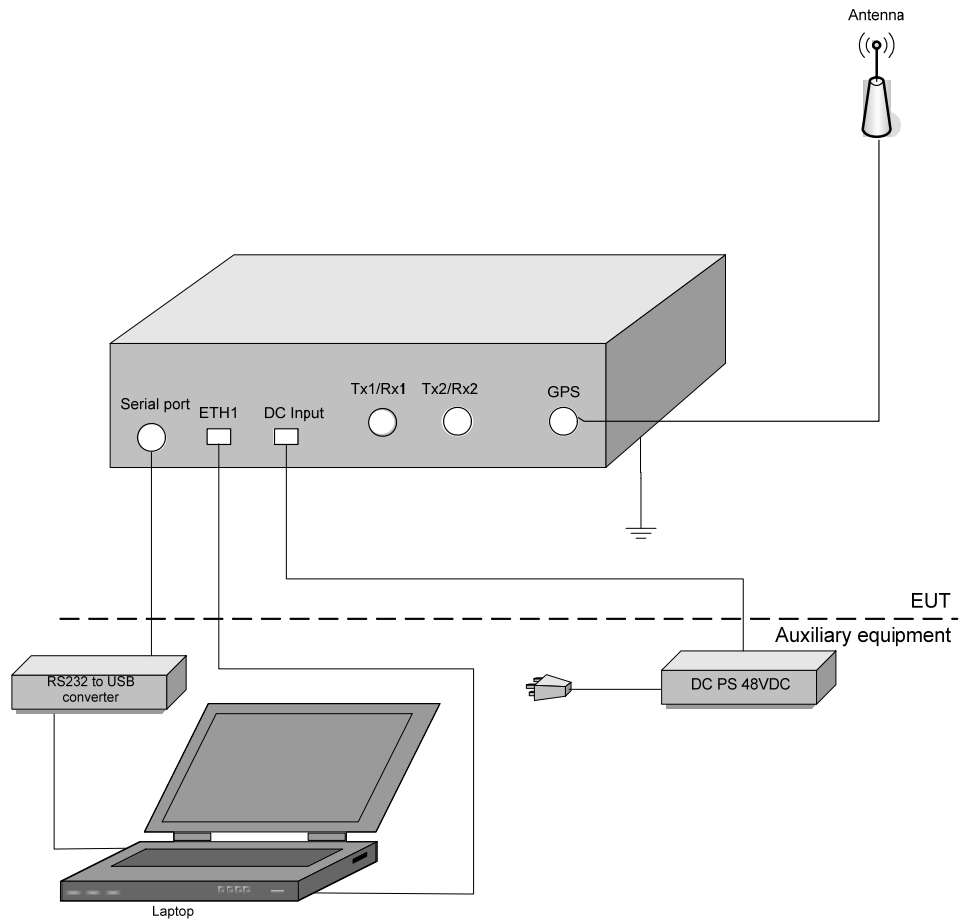



6.6 Transmitter characteristics

Type of equipment				
<input checked="" type="checkbox"/>	Stand-alone (Equipment with or without its own control provisions)			
<input type="checkbox"/>	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)			
<input type="checkbox"/>	Plug-in card (Equipment intended for a variety of host systems)			
Intended use		Condition of use		
<input checked="" type="checkbox"/>	fixed	Always at a distance more than 2 m from all people		
<input type="checkbox"/>	mobile	Always at a distance more than 20 cm from all people		
<input type="checkbox"/>	portable	May operate at a distance closer than 20 cm to human body		
Assigned frequency range		2496.0 – 2690.0 MHz		
Operating frequency		2499.0 - 2687.0 MHz for 5 MHz OBW 2501.0 – 2685.0 MHz for 10 MHz OBW 2506.0 – 2680.0 MHz for 20 MHz OBW		
RF channel spacing		5 MHz; 10 MHz, 20MHz		
Maximum rated output power		At transmitter 50 Ω RF output connector (aggregate power of both RF chains)	39.86 dBm	
Is transmitter output power variable?				
<input type="checkbox"/>	No			
<input checked="" type="checkbox"/>	Yes	continuous variable		
		stepped variable with stepsize	0.25 dB	
		minimum RF power	-30 dBm	
		maximum RF power at antenna connector	37.00 dBm	
Antenna connection				
<input type="checkbox"/>	unique coupling	<input checked="" type="checkbox"/>	standard connector	
<input type="checkbox"/>		<input type="checkbox"/>	Integral	
<input checked="" type="checkbox"/>		<input type="checkbox"/>	with temporary RF connector	
<input type="checkbox"/>		<input type="checkbox"/>	without temporary RF connector	
Antenna/s technical characteristics				
Type	Manufacturer	Model number	Gain	
External	ALPHA Wireless Ltd	AW3007	18 dBi	
External	ALPHA Wireless Ltd	AW3008	17 dBi	
External sector	Cobham Antenna Systems	SA12-2.5-DS/1915	11 dBi	
Transmitter aggregate data rate/s, MBps				
Transmitter 99% power bandwidth	Type of modulation			
		QPSK	16QAM	64QAM
	5 MHz	5.3	10.7	23.0
	10 MHz	10.7	22.7	47.3
20 MHz	23.4	45.4	95.0	
Type of multiplexing		TDD		
Modulating test signal (baseband)		PRBS		
Maximum transmitter duty cycle in normal use		75%		
Transmitter power source				
<input checked="" type="checkbox"/>	DC	Nominal rated voltage	Battery type	
	AC mains	Nominal rated voltage	Frequency	
		48 VDC		
Common power source for transmitter and receiver		<input checked="" type="checkbox"/>	yes	
		<input type="checkbox"/>	no	



Test specification:		Section 2.1049, Occupied bandwidth	
Test procedure:		47 CFR, Section 2.1049	
Test mode:		Compliance	
Date(s):		27-Jul-15 - 28-Jul-15	
Temperature: 24 °C		Air Pressure: 1008 hPa	
		Relative Humidity: 55 %	
		Power Supply: 48 VDC	
Remarks:			

7 Transmitter tests according to 47CFR part 27

7.1 Occupied bandwidth test

7.1.1 General

This test was performed to measure transmitter occupied bandwidth. Specification test limits are given in Table 7.1.1

Table 7.1.1 Occupied bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points*, dBc	Maximum allowed bandwidth, kHz
2496.0 – 2686.0 MHz	26	NA

* - Modulation envelope reference points are provided in terms of attenuation below the unmodulated carrier.


7.1.2 Test procedure

7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and its proper operation was checked.

7.1.2.2 The EUT was set to transmit the normal modulated signal and actual channel width was measured at the 26 dBc modulation envelope reference points.

7.1.2.3 The transmitter occupied bandwidth was measured with spectrum analyzer as a frequency delta between the reference points on modulation envelope and provided in Table 7.1.2 and the associated plots.

Figure 7.1.1 Occupied bandwidth test setup

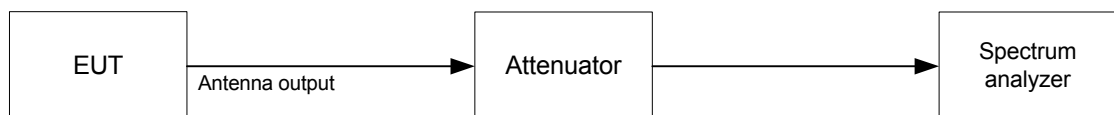



Test specification:		Section 2.1049, Occupied bandwidth	
Test procedure:		47 CFR, Section 2.1049	
Test mode:		Compliance	
Date(s):		27-Jul-15 - 28-Jul-15	
Temperature: 24 °C		Air Pressure: 1008 hPa	
		Relative Humidity: 55 %	
		Power Supply: 48 VDC	
Remarks:			
		Verdict: PASS	

Table 7.1.2 Occupied bandwidth test results

DETECTOR USED: Peak
 MODULATING SIGNAL: PRBS
 RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: 300 kHz
 EBW: 5 MHz

Carrier frequency, MHz	OBW 26 dBc, MHz	OBW 99%, MHz	Limit, kHz	Verdict
QPSK				
2499	4.888	4.4413	NA	Pass
2593	4.854	4.4383	NA	Pass
2687	4.849	4.4550	NA	Pass
64QAM				
2499	4.888	4.4301	NA	Pass
2593	4.802	4.4391	NA	Pass
2687	4.797	4.4408	NA	Pass

RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: 300 kHz
 EBW: 10 MHz

Carrier frequency, MHz	OBW 26 dBc, MHz	OBW 99%, MHz	Limit, kHz	Verdict
QPSK				
2501	9.737	8.9274	NA	Pass
2595	9.693	8.9368	NA	Pass
2685	9.700	8.9358	NA	Pass
64QAM				
2501	9.634	8.9355	NA	Pass
2595	9.659	8.9558	NA	Pass
2685	9.601	8.9344	NA	Pass

RESOLUTION BANDWIDTH: 200 kHz
 VIDEO BANDWIDTH: 620 kHz
 EBW: 20 MHz

Carrier frequency, MHz	OBW 26 dBc, MHz	OBW 99%, MHz	Limit, kHz	Verdict
QPSK				
2506	19.892	17.8888	NA	Pass
2595	19.827	17.8750	NA	Pass
2680	19.874	17.8825	NA	Pass
64QAM				
2506	19.965	17.8852	NA	Pass
2595	19.897	17.8841	NA	Pass
2680	19.744	17.9088	NA	Pass

Reference numbers of test equipment used

HL 3818							
---------	--	--	--	--	--	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

Test specification:		Section 2.1049, Occupied bandwidth	
Test procedure:		47 CFR, Section 2.1049	
Test mode:		Compliance	
Date(s):		27-Jul-15 - 28-Jul-15	
Temperature: 24 °C		Air Pressure: 1008 hPa	
Relative Humidity: 55 %		Power Supply: 48 VDC	
Remarks:			
		Verdict: PASS	

Plot 7.1.1 Occupied bandwidth test results at low frequency, 5 MHz EBW, QPSK, RF#2

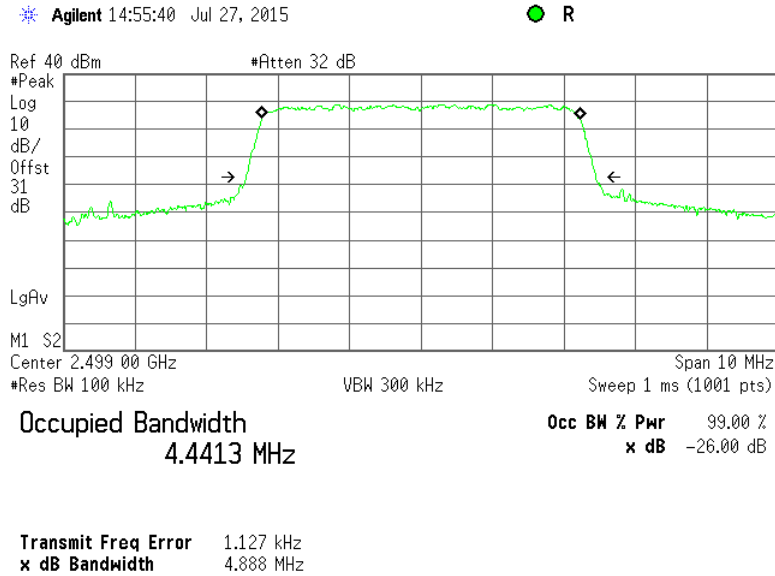


Plot 7.1.2 Occupied bandwidth test results at mid frequency, 5 MHz EBW, QPSK, RF#2

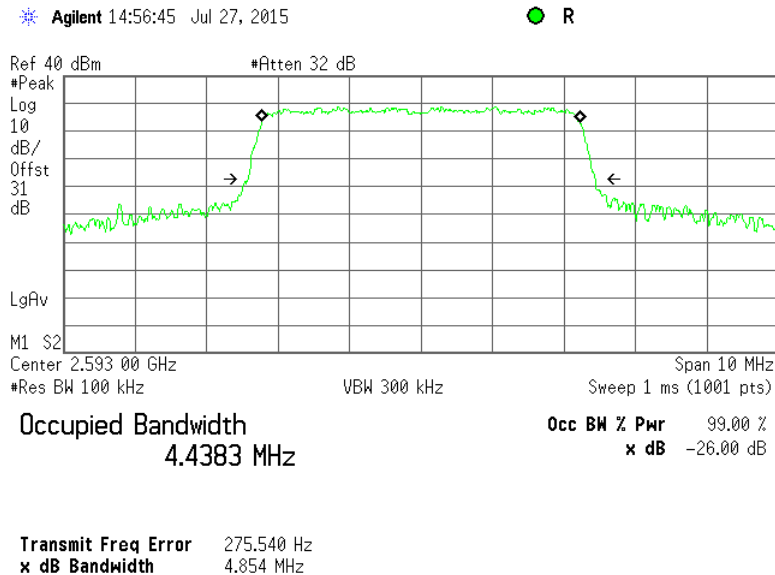




Test specification:		Section 2.1049, Occupied bandwidth	
Test procedure:		47 CFR, Section 2.1049	
Test mode:		Compliance	
Date(s):		27-Jul-15 - 28-Jul-15	
Temperature: 24 °C		Air Pressure: 1008 hPa	
Relative Humidity: 55 %		Power Supply: 48 VDC	
Remarks:			
		Verdict: PASS	

Plot 7.1.3 Occupied bandwidth test results at high frequency, 5 MHz EBW, QPSK, RF#2

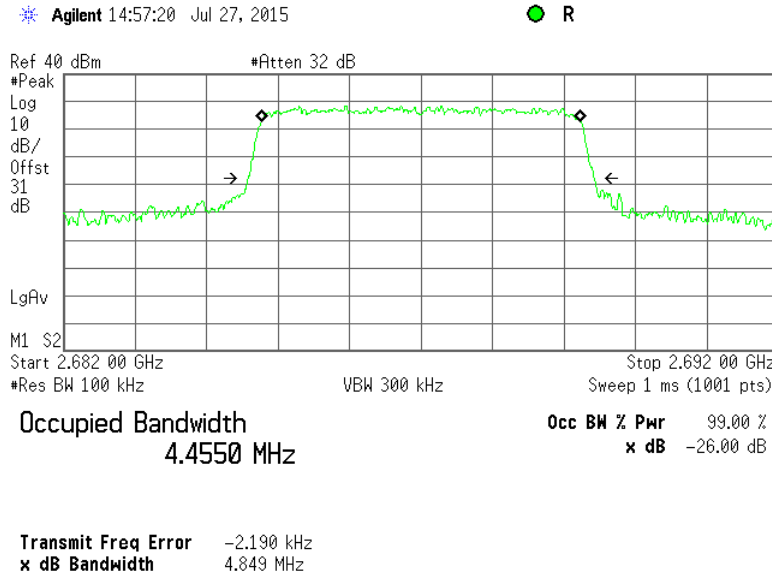

Plot 7.1.4 Occupied bandwidth test results at low frequency, 5 MHz EBW, 64QAM, RF#2

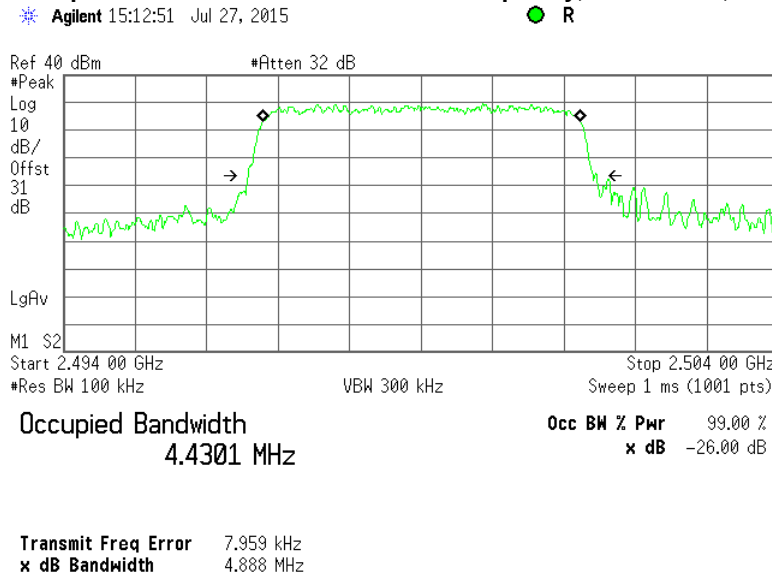




HERMON LABORATORIES


Test specification:		Section 2.1049, Occupied bandwidth	
Test procedure:		47 CFR, Section 2.1049	
Test mode:		Compliance	
Date(s):		27-Jul-15 - 28-Jul-15	
Temperature: 24 °C		Air Pressure: 1008 hPa	
Relative Humidity: 55 %		Power Supply: 48 VDC	
Remarks:			
		Verdict: PASS	

Plot 7.1.5 Occupied bandwidth test results at mid frequency, 5 MHz EBW, 64QAM, RF#2

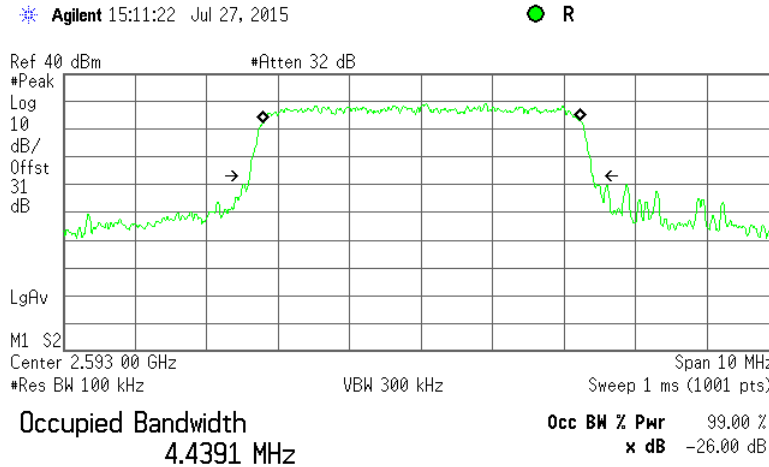

Transmit Freq Error 11.714 kHz
x dB Bandwidth 4.802 MHz

Plot 7.1.6 Occupied bandwidth test results at high frequency, 5 MHz EBW, 64QAM, RF#2

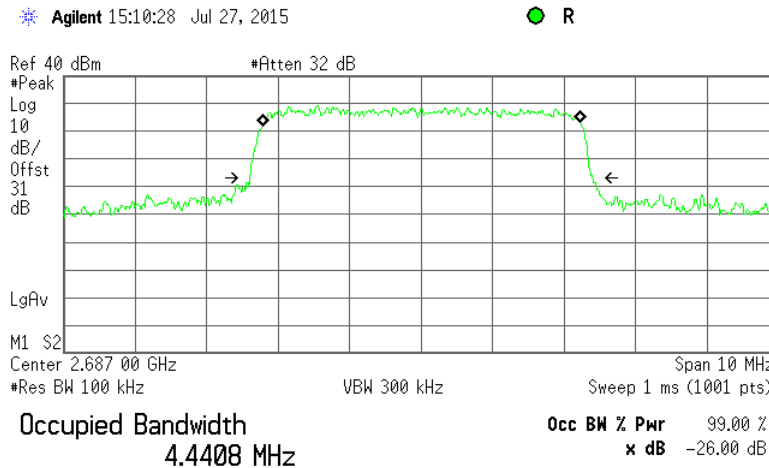


Transmit Freq Error 8.067 kHz
x dB Bandwidth 4.797 MHz




Test specification:		Section 2.1049, Occupied bandwidth	
Test procedure:		47 CFR, Section 2.1049	
Test mode:		Compliance	
Date(s):		27-Jul-15 - 28-Jul-15	
Temperature: 24 °C		Air Pressure: 1008 hPa	
Relative Humidity: 55 %		Power Supply: 48 VDC	
Remarks:			
		Verdict: PASS	

Plot 7.1.7 Occupied bandwidth test results at low frequency, 10 MHz EBW, QPSK, RF#2

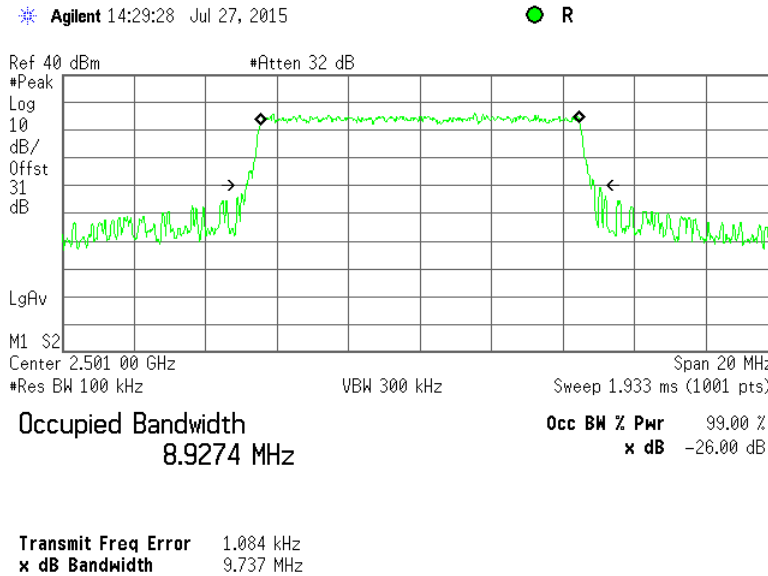

Plot 7.1.8 Occupied bandwidth test results at mid frequency, 10 MHz EBW, QPSK, RF#2

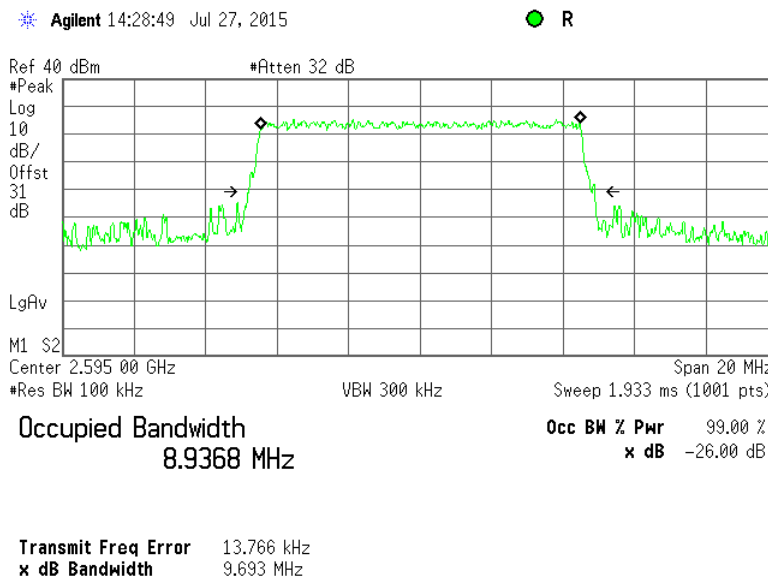




HERMON LABORATORIES


Test specification:		Section 2.1049, Occupied bandwidth	
Test procedure:		47 CFR, Section 2.1049	
Test mode:		Compliance	
Date(s):		27-Jul-15 - 28-Jul-15	
Temperature: 24 °C		Air Pressure: 1008 hPa	
Relative Humidity: 55 %		Power Supply: 48 VDC	
Remarks:			
		Verdict: PASS	

Plot 7.1.9 Occupied bandwidth test results at high frequency, 10 MHz EBW, QPSK, RF#2

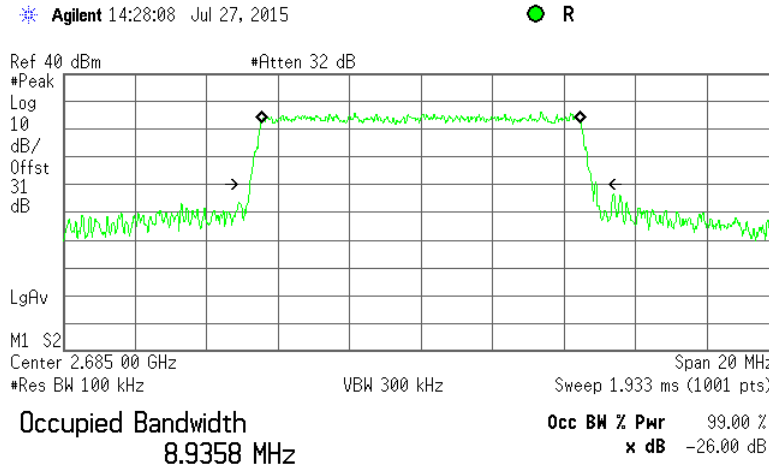

Transmit Freq Error 1.592 kHz
x dB Bandwidth 9.700 MHz

Plot 7.1.10 Occupied bandwidth test results at low frequency, 10 MHz EBW, 64QAM, RF#2

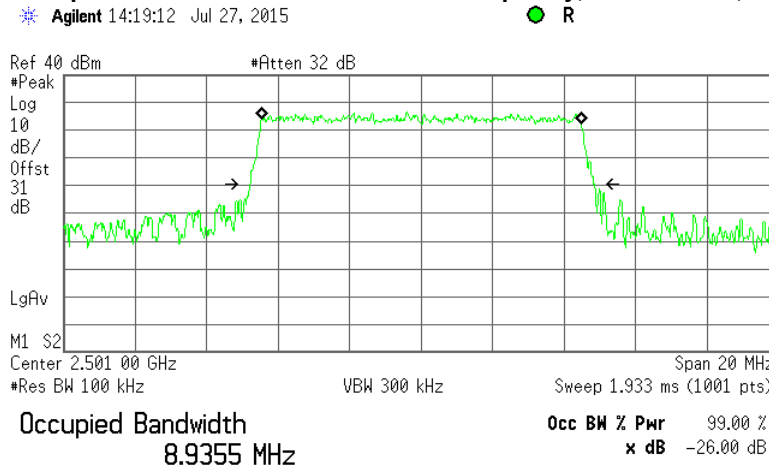


Transmit Freq Error 3.658 kHz
x dB Bandwidth 9.634 MHz




HERMON LABORATORIES

Test specification:		Section 2.1049, Occupied bandwidth	
Test procedure:		47 CFR, Section 2.1049	
Test mode:		Compliance	
Date(s):		27-Jul-15 - 28-Jul-15	
Temperature: 24 °C		Air Pressure: 1008 hPa	
Relative Humidity: 55 %		Power Supply: 48 VDC	
Remarks:			
		Verdict: PASS	

Plot 7.1.11 Occupied bandwidth test results at mid frequency, 10 MHz EBW, 64QAM, RF#2

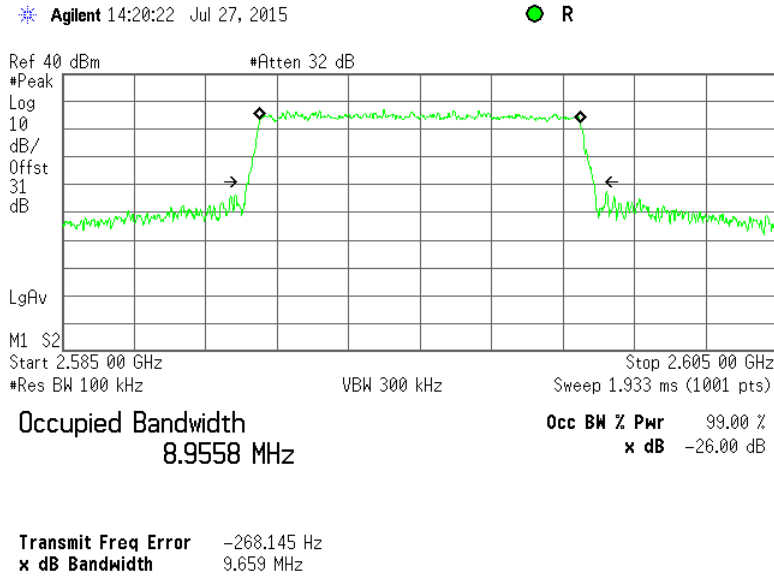

Plot 7.1.12 Occupied bandwidth test results at high frequency, 10 MHz EBW, 64QAM, RF#2

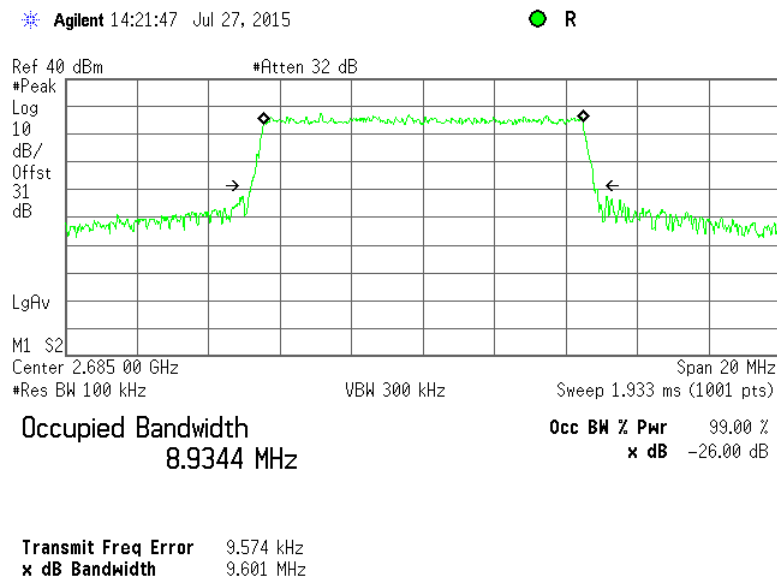




HERMON LABORATORIES


Test specification:		Section 2.1049, Occupied bandwidth	
Test procedure:		47 CFR, Section 2.1049	
Test mode:		Compliance	
Date(s):		27-Jul-15 - 28-Jul-15	
Temperature: 24 °C		Air Pressure: 1008 hPa	
Remarks:		Verdict: PASS	
		Relative Humidity: 55 %	
		Power Supply: 48 VDC	

Plot 7.1.13 Occupied bandwidth test results at low frequency, 20 MHz EBW, QPSK, RF#2

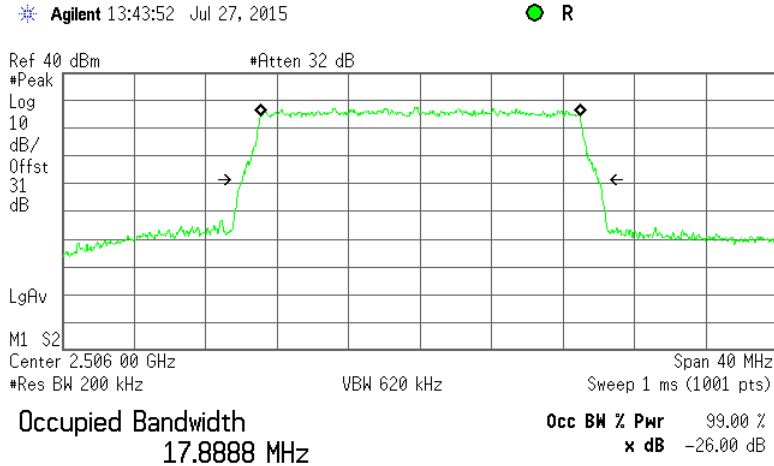

Transmit Freq Error 13.033 kHz
x dB Bandwidth 19.892 MHz

Plot 7.1.14 Occupied bandwidth test results at mid frequency, 20 MHz EBW, QPSK, RF#2

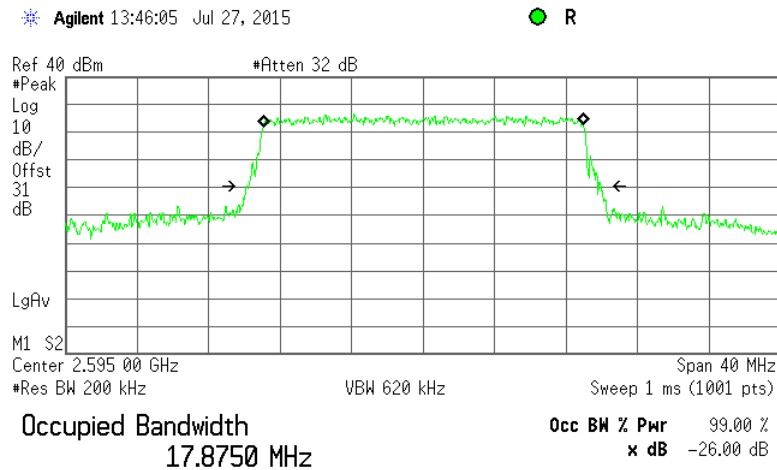


Transmit Freq Error 19.950 kHz
x dB Bandwidth 19.827 MHz




HERMON LABORATORIES

Test specification:		Section 2.1049, Occupied bandwidth	
Test procedure:		47 CFR, Section 2.1049	
Test mode:		Compliance	
Date(s):		27-Jul-15 - 28-Jul-15	
Temperature: 24 °C		Air Pressure: 1008 hPa	
Relative Humidity: 55 %		Power Supply: 48 VDC	
Remarks:			

Plot 7.1.15 Occupied bandwidth test results at high frequency, 20 MHz EBW, QPSK, RF#2

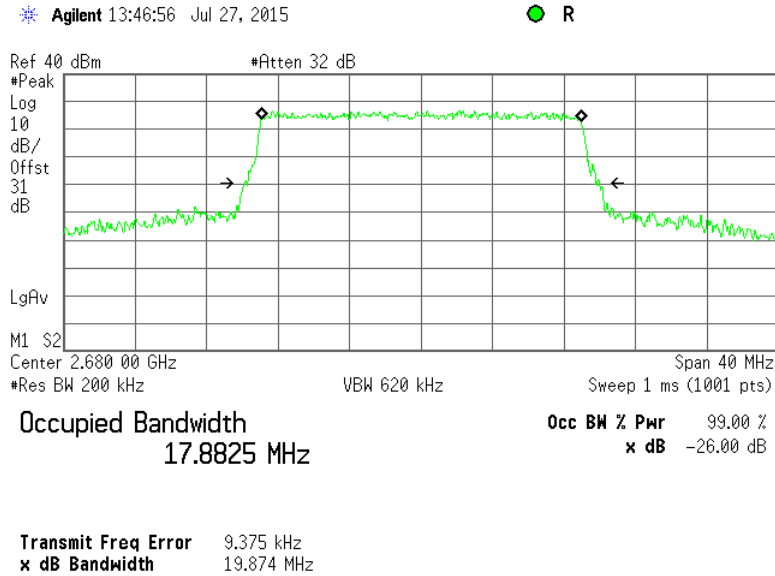

Plot 7.1.16 Occupied bandwidth test results at low frequency, 20 MHz EBW, 64QAM, RF#2

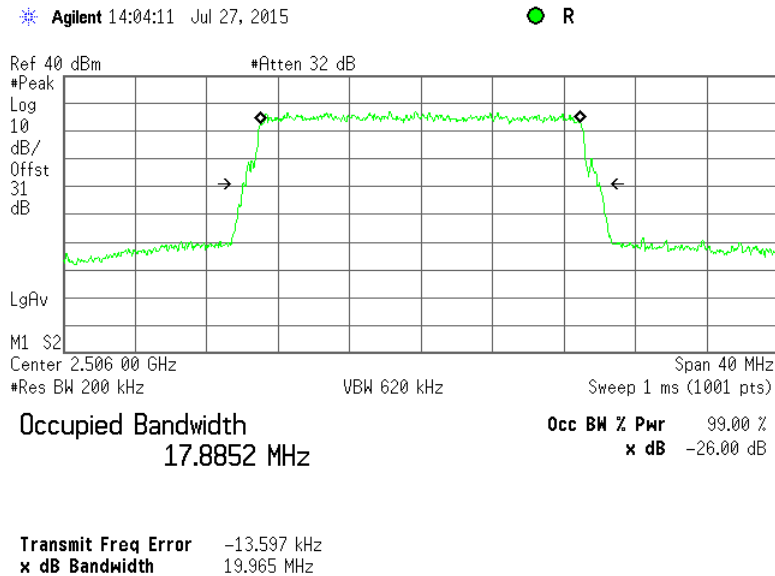





HERMON LABORATORIES

Test specification:		Section 2.1049, Occupied bandwidth	
Test procedure:		47 CFR, Section 2.1049	
Test mode:		Compliance	
Date(s):		27-Jul-15 - 28-Jul-15	
Temperature: 24 °C		Air Pressure: 1008 hPa	
Relative Humidity: 55 %		Power Supply: 48 VDC	
Remarks:			

Plot 7.1.17 Occupied bandwidth test results at mid frequency, 20 MHz EBW, 64QAM, RF#2

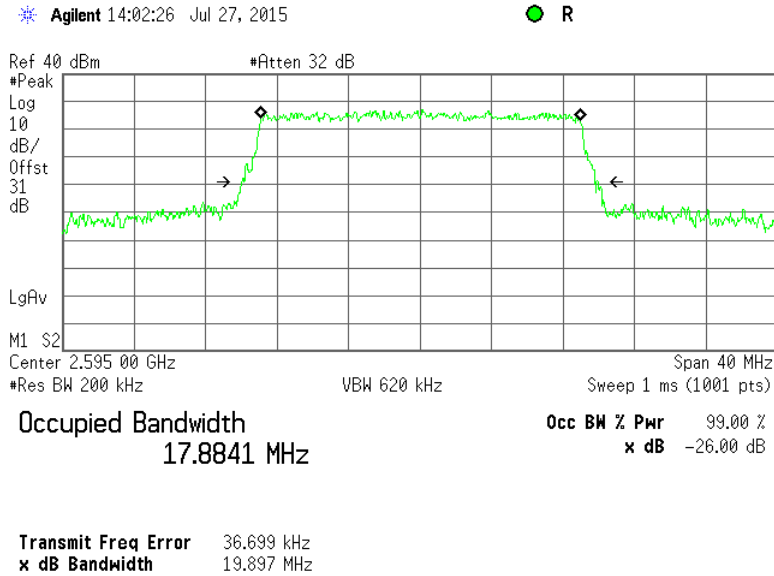

Plot 7.1.18 Occupied bandwidth test results at high frequency, 20 MHz EBW, 64QAM, RF#2

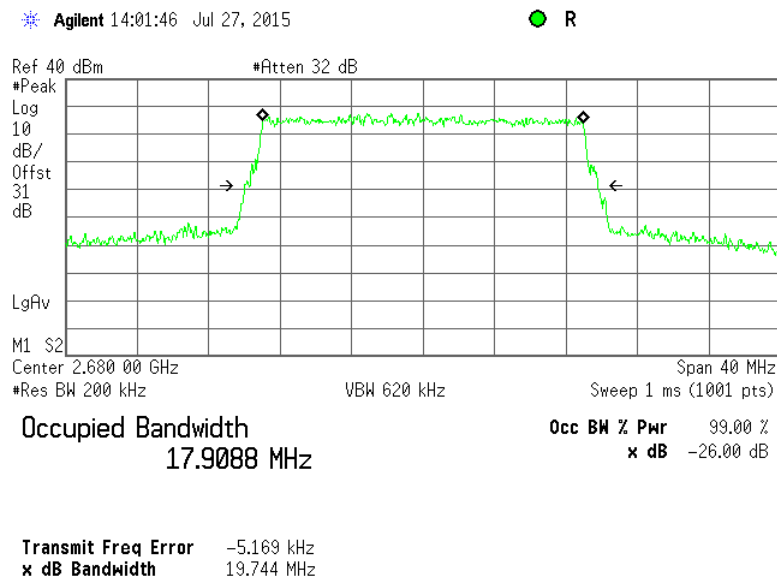



Test specification:		Section 27.50 (h), Peak output power	
Test procedure:		47 CFR, Section 2.1046; TIA/EIA-603-C, Section 2.2.1	
Test mode:		Compliance	
Date(s):		28-Jul-15	
Temperature: 24 °C		Air Pressure: 1006 hPa	
Remarks:		Verdict: PASS	
		Relative Humidity: 55 %	
		Power Supply: 48 VDC	

7.2 Peak output power test

7.2.1 General

This test was performed to measure the peak output power at RF antenna connector. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Peak output power limits

Transmitter type	Assigned frequency range, MHz	Maximum peak output power dBm
Main, booster and base stations	2496 – 2690	$63+10\log(X/Y)+10\log(360/\text{beamwidth})$
		Maximum peak power density dBm/100 kHz
		$\text{EIRP}+10\log(0.1/Y)$

*- X is the actual channel width in MHz (occupied bandwidth), Y is either

- 1) 6 MHz if prior to transition or the station is in the MBS following transition or
- 2) 5.5 MHz if the station is in the LBS and UBS following transition, and
- 3) beamwidth is the total horizontal plane beam width of the individual transmitting antenna for the station or any sector measured at the half-power points.

7.2.2 Test procedure


7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and its proper operation was checked.

7.2.2.2 The EUT was adjusted to produce maximum available to the end user RF output power.

7.2.2.3 The average output power was measured with power meter as provided in Table 7.2.2 to Table 7.2.4.

7.2.2.4 The power spectral density was measured with spectrum analyzer as provided in Table 7.2.5 to Table 7.2.7 and the associated plots.

Figure 7.2.1 Peak output power test setup

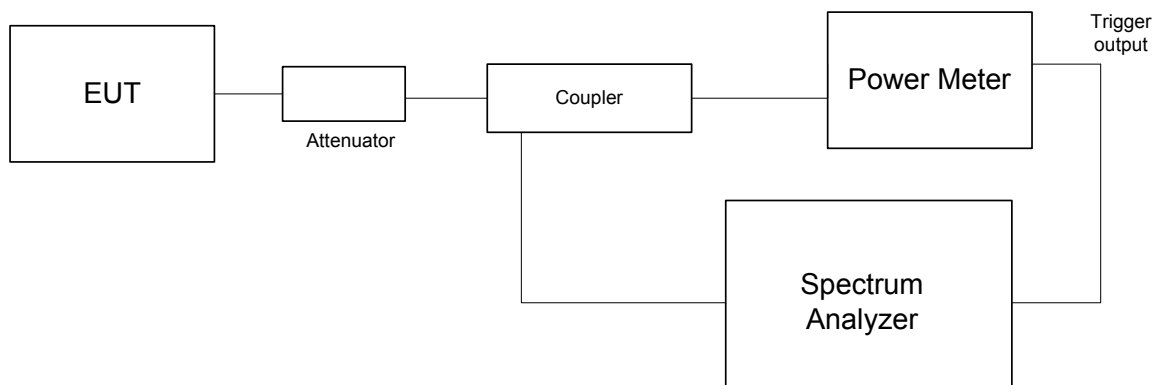



Test specification:		Section 27.50 (h), Peak output power	
Test procedure:		47 CFR, Section 2.1046; TIA/EIA-603-C, Section 2.2.1	
Test mode:		Compliance	
Date(s):		28-Jul-15	
Temperature: 24 °C		Air Pressure: 1006 hPa	
		Relative Humidity: 55 %	
		Power Supply: 48 VDC	
Remarks:			

Table 7.2.2 Peak output power test results

ASSIGNED FREQUENCY RANGE: 2496.0 – 2690.0 MHz
 DETECTOR USED: Average
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 EBW: 5 MHz
 NUMBER OF RF OUTPUTS: N = 2
 MAXIMUM ANTENNA GAIN: 18 dBi

Carrier frequency, MHz	Power Meter reading RF#1, dBm	Power Meter reading RF#2, dBm	Total RF power**, dBm	Antenna gain, dBi	Total EIRP*, dBm	Limit***, dBm	Margin, dB	Verdict
QPSK								
2499	36.4	36.4	39.41	18.0	57.41	67.33	-9.92	Pass
2593	36.3	36.5	39.41	18.0	57.41	69.23	-12.10	Pass
2687	36.4	36.6	39.51	18.0	57.51	67.33	-9.78	Pass
64QAM								
2499	36.0	36.3	39.16	18.0	57.16	67.33	-10.17	Pass
2593	35.9	36.3	39.11	18.0	57.11	69.51	-12.40	Pass
2687	36.0	36.4	39.21	18.0	57.21	67.24	-10.03	Pass

* - EIRP total, dBm = Total RF power**, dBm + Antenna Gain, dBi
 ** - Total RF power , dBm = 10 log{10^[P(dBm,RF#1)/10]+ 10^[P(dBm, RF#2)/10]}
 *** - See Table 7.2.9

MAXIMUM ANTENNA GAIN: 17 dBi

Carrier frequency, MHz	Power Meter reading RF#1, dBm	Power Meter reading RF#2, dBm	Total RF power**, dBm	Antenna gain, dBi	Total EIRP*, dBm	Limit***, dBm	Margin, dB	Verdict
QPSK								
2499	36.4	36.4	39.41	17.0	56.41	65.89	-9.48	Pass
2593	36.3	36.5	39.41	17.0	56.41	67.08	-10.67	Pass
2687	36.4	36.6	39.51	17.0	56.51	65.88	-9.37	Pass
64QAM								
2499	36.0	36.3	39.16	17.0	56.16	65.89	-9.73	Pass
2593	35.9	36.3	39.11	17.0	56.11	68.03	-11.92	Pass
2687	36.0	36.4	39.21	17.0	56.21	65.81	-9.60	Pass

* - EIRP total, dBm = Total RF power**, dBm + Antenna Gain, dBi
 ** - Total RF power , dBm = 10 log{10^[P(dBm,RF#1)/10]+ 10^[P(dBm, RF#2)/10]}
 *** - See Table 7.2.9



Test specification:		Section 27.50 (h), Peak output power	
Test procedure:		47 CFR, Section 2.1046; TIA/EIA-603-C, Section 2.2.1	
Test mode:		Compliance	
Date(s):		28-Jul-15	
Temperature: 24 °C		Air Pressure: 1006 hPa	
		Relative Humidity: 55 %	
		Power Supply: 48 VDC	
Remarks:			
Verdict: PASS			

Table 7.2.3 Peak output power test results

ASSIGNED FREQUENCY RANGE: 2496.0 – 2690.0 MHz
 DETECTOR USED: Average
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 EBW: 10 MHz
 NUMBER OF RF OUTPUTS: N = 2
 MAXIMUM ANTENNA GAIN: 18 dBi

- Carrier frequency, MHz	Power Meter reading RF#1, dBm	Power Meter reading RF#2, dBm	Total RF power**, dBm	Antenna gain, dBi	Total EIRP*, dBm	Limit***, dBm	Margin, dB	Verdict
QPSK								
2501	36.2	36.6	39.41	18.0	57.41	70.32	-12.91	Pass
2595	36.3	36.3	39.31	18.0	57.31	69.51	-12.20	Pass
2685	36.4	36.4	39.41	18.0	57.41	70.30	-12.89	Pass
64QAM								
2501	36.4	36.7	39.56	18.0	57.56	70.37	-12.81	Pass
2595	36.2	36.9	39.57	18.0	57.57	69.50	-11.93	Pass
2685	36.3	36.6	39.46	18.0	57.46	70.26	-12.80	Pass

* - EIRP total, dBm = Total RF power**, dBm + Antenna Gain, dBi
 ** - Total RF power , dBm = 10 log{10^[P(dBm,RF#1)/10]+ 10^([P(dBm, RF#2)/10]}
 *** - See Table 7.2.9

MAXIMUM ANTENNA GAIN: 17 dBi

Carrier frequency, MHz	Power Meter reading RF#1, dBm	Power Meter reading RF#2, dBm	Total RF power**, dBm	Antenna gain, dBi	Total EIRP*, dBm	Limit***, dBm	Margin, dB	Verdict
QPSK								
2501	36.2	36.6	39.41	17.0	56.41	68.88	-12.47	Pass
2595	36.3	36.3	39.31	17.0	56.31	68.07	-11.76	Pass
2685	36.4	36.4	39.41	17.0	56.41	68.87	-12.46	Pass
64QAM								
2501	36.4	36.7	39.56	17.0	56.56	68.94	-12.38	Pass
2595	36.2	36.9	39.57	17.0	56.57	68.06	-11.49	Pass
2685	36.3	36.6	39.46	17.0	56.46	68.82	-12.36	Pass

* - EIRP total, dBm = Total RF power**, dBm + Antenna Gain, dBi
 ** - Total RF power , dBm = 10 log{10^[P(dBm,RF#1)/10]+ 10^([P(dBm, RF#2)/10]}
 *** - See Table 7.2.9



Test specification:		Section 27.50 (h), Peak output power	
Test procedure:		47 CFR, Section 2.1046; TIA/EIA-603-C, Section 2.2.1	
Test mode:		Compliance	
Date(s):		28-Jul-15	
Temperature: 24 °C		Air Pressure: 1006 hPa	
Remarks:		Verdict: PASS	
		Relative Humidity: 55 %	
		Power Supply: 48 VDC	

Table 7.2.4 Peak output power test results

ASSIGNED FREQUENCY RANGE: 2496.0 – 2690.0 MHz
 DETECTOR USED: Average
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 EBW: 20 MHz
 NUMBER OF RF OUTPUTS: N = 2
 MAXIMUM ANTENNA GAIN: 18 dBi

- Carrier frequency, MHz	Power Meter reading RF#1, dBm	Power Meter reading RF#2, dBm	Total RF power**, dBm	Antenna gain, dBi	Total EIRP*, dBm	Limit***, dBm	Margin, dB	Verdict
QPSK								
2506	36.4	37.0	39.72	18.0	57.72	70.00	-12.28	Pass
2595	36.4	36.8	39.61	18.0	57.61	69.60	-11.99	Pass
2680	36.7	36.9	39.81	18.0	57.81	69.99	-12.18	Pass
64QAM								
2506	36.4	36.5	39.46	18.0	57.46	70.00	-12.54	Pass
2595	36.5	36.7	39.61	18.0	57.61	69.62	-12.01	Pass
2680	36.7	37.0	39.86	18.0	57.86	69.99	-12.13	Pass

* - EIRP total, dBm = Total RF power**, dBm + Antenna Gain, dBi
 ** - Total RF power , dBm = 10 log{10^[P(dBm,RF#1)/10]+ 10^[P(dBm, RF#2)/10]}
 *** - See Table 7.2.9

MAXIMUM ANTENNA GAIN: 17 dBi

- Carrier frequency, MHz	Power Meter reading RF#1, dBm	Power Meter reading RF#2, dBm	Total RF power**, dBm	Antenna gain, dBi	Total EIRP*, dBm	Limit***, dBm	Margin, dB	Verdict
QPSK								
2506	36.4	37.0	39.72	17.0	56.72	68.56	-11.84	Pass
2595	36.4	36.8	39.61	17.0	56.61	68.17	-11.56	Pass
2680	36.7	36.9	39.81	17.0	56.81	68.56	-11.75	Pass
64QAM								
2506	36.4	36.5	39.46	17.0	56.46	68.58	-12.12	Pass
2595	36.5	36.7	39.61	17.0	56.61	68.19	-11.58	Pass
2680	36.7	37.0	39.86	17.0	56.86	68.58	-11.72	Pass

* - EIRP total, dBm = Total RF power**, dBm + Antenna Gain, dBi
 ** - Total RF power , dBm = 10 log{10^[P(dBm,RF#1)/10]+ 10^[P(dBm, RF#2)/10]}
 *** - See Table 7.2.9

Reference numbers of test equipment used

HL 3301	HL 3302	HL 3818	HL 4229	HL 4232	HL 4273	HL 4366
---------	---------	---------	---------	---------	---------	---------

Full description is given in Appendix A.



Test specification:		Section 27.50 (h), Peak output power	
Test procedure:		47 CFR, Section 2.1046; TIA/EIA-603-C, Section 2.2.1	
Test mode:		Compliance	
Date(s):		28-Jul-15	
Temperature: 24 °C		Air Pressure: 1006 hPa	
		Relative Humidity: 55 %	
		Power Supply: 48 VDC	
Remarks:			
Verdict: PASS			

Table 7.2.5 Power spectral density test results

ASSIGNED FREQUENCY RANGE: 2496.0 – 2690.0 MHz
 DETECTOR USED: Average
 RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: 300 kHz
 CHANNEL BANDWIDTH: 5 MHz
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 NUMBER OF RF OUTPUTS: N = 2
 MAXIMUM ANTENNA GAIN: 18 dBi

Carrier frequency, MHz	SA reading, RF #2, dBm/100kHz	PSD result**, dBm/100kHz	Antenna gain, dBi	Total PSD*, dBm/100kHz	Limit***, dBm	Margin, dB	Verdict
QPSK							
2499	18.52	21.52	18.0	39.52	47.33	-7.81	Pass
2593	18.16	21.16	18.0	39.16	51.73	-12.57	Pass
2687	18.89	21.89	18.0	39.89	47.33	-7.44	Pass
64QAM							
2499	18.96	21.96	18.0	39.96	47.33	-7.37	Pass
2593	18.56	21.56	18.0	39.56	51.73	-12.17	Pass
2687	19.04	22.04	18.0	40.04	47.24	-7.20	Pass

* - Total PSD, dBm/100kHz = PSD result**, dBm/100kHz + Antenna Gain, dBi

** - PSD result, dBm/100kHz = SA reading + 10*log(N)

*** - See Table 7.2.10

MAXIMUM ANTENNA GAIN: 17 dBi

Carrier frequency, MHz	SA reading, RF #2, dBm/100kHz	PSD result**, dBm/100kHz	Antenna gain, dBi	Total PSD*, dBm/100kHz	Limit***, dBm	Margin, dB	Verdict
QPSK							
2501	18.52	21.52	17.0	38.52	48.88	-10.36	Pass
2595	18.16	21.16	17.0	38.16	47.30	-9.14	Pass
2685	18.89	21.89	17.0	38.89	48.87	-9.98	Pass
64QAM							
2501	18.96	21.96	17.0	38.96	45.89	-6.93	Pass
2595	18.56	21.56	17.0	38.56	50.32	-11.76	Pass
2685	19.04	22.04	17.0	39.04	45.81	-6.77	Pass

* - Total PSD, dBm/100kHz = PSD result**, dBm/100kHz + Antenna Gain, dBi

** - PSD result, dBm/100kHz = SA reading + 10*log(N)

*** - See Table 7.2.10



Test specification:		Section 27.50 (h), Peak output power	
Test procedure:		47 CFR, Section 2.1046; TIA/EIA-603-C, Section 2.2.1	
Test mode:		Compliance	
Date(s):		28-Jul-15	
Temperature: 24 °C		Air Pressure: 1006 hPa	
		Relative Humidity: 55 %	
		Power Supply: 48 VDC	
Remarks:			
Verdict: PASS			

Table 7.2.6 Power spectral density test results

ASSIGNED FREQUENCY RANGE: 2496.0 – 2690.0 MHz
 DETECTOR USED: Average
 RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: 300 kHz
 CHANNEL BANDWIDTH: 10 MHz
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 NUMBER OF RF OUTPUTS: N = 2
 MAXIMUM ANTENNA GAIN: 18 dBi

Carrier frequency, MHz	SA reading, RF #2, dBm/100kHz	PSD result**, dBm/100kHz	Antenna gain, dBi	Total PSD*, dBm/100kHz	Limit***, dBm	Margin, dB	Verdict
QPSK							
2501	15.83	18.83	18.0	36.83	50.32	-13.49	Pass
2595	15.41	18.41	18.0	36.41	48.71	-12.30	Pass
2685	15.99	18.99	18.0	36.99	50.30	-13.31	Pass
64QAM							
2501	16.16	19.16	18.0	37.16	50.32	-13.16	Pass
2595	16.26	19.26	18.0	37.26	48.71	-11.45	Pass
2685	15.82	18.82	18.0	36.82	50.30	-13.48	Pass

* - Total PSD, dBm/100kHz = PSD result**, dBm/100kHz + Antenna Gain, dBi
 ** - PSD result, dBm/100kHz = SA reading + 10*log(N)
 *** - See Table 7.2.10

MAXIMUM ANTENNA GAIN: 17 dBi

Carrier frequency, MHz	SA reading, RF #2, dBm/100kHz	PSD result**, dBm/100kHz	Antenna gain, dBi	Total PSD*, dBm/100kHz	Limit***, dBm	Margin, dB	Verdict
QPSK							
2501	15.83	18.83	17.0	35.83	48.88	-13.05	Pass
2595	15.41	18.41	17.0	35.41	47.30	-11.89	Pass
2685	15.99	18.99	17.0	35.99	48.87	-12.88	Pass
64QAM							
2501	16.16	19.16	17.0	36.16	48.94	-12.78	Pass
2595	16.26	19.26	17.0	36.26	47.30	-11.04	Pass
2685	15.82	18.82	17.0	35.82	48.82	-13.00	Pass

* - Total PSD, dBm/100kHz = PSD result**, dBm/100kHz + Antenna Gain, dBi
 ** - PSD result, dBm/100kHz = SA reading + 10*log(N)
 *** - See Table 7.2.10



Test specification:		Section 27.50 (h), Peak output power	
Test procedure:		47 CFR, Section 2.1046; TIA/EIA-603-C, Section 2.2.1	
Test mode:		Compliance	
Date(s):		28-Jul-15	
Temperature: 24 °C		Air Pressure: 1006 hPa	
		Relative Humidity: 55 %	
		Power Supply: 48 VDC	
Remarks:			
Verdict: PASS			

Table 7.2.7 Power spectral density test results

ASSIGNED FREQUENCY RANGE: 2496.0 – 2690.0 MHz
 DETECTOR USED: Average
 RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: 300 kHz
 CHANNEL BANDWIDTH: 20 MHz
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 NUMBER OF RF OUTPUTS: N = 2
 MAXIMUM ANTENNA GAIN: 18 dBi

Carrier frequency, MHz	SA reading, RF #2, dBm/100kHz	PSD result**, dBm/100kHz	Antenna gain, dBi	Total PSD*, dBm/100kHz	Limit***, dBm	Margin, dB	Verdict
QPSK							
2506	13.95	16.95	18.0	34.95	46.57	-11.62	Pass
2595	13.22	16.22	18.0	34.22	45.80	-11.58	Pass
2680	13.55	16.55	18.0	34.55	46.57	-12.02	Pass
64QAM							
2506	13.15	16.15	18.0	34.15	46.57	-12.42	Pass
2595	13.14	16.14	18.0	34.14	45.80	-11.66	Pass
2680	13.48	16.48	18.0	34.48	46.57	-12.09	Pass

* - Total PSD, dBm/100kHz = PSD result**, dBm/100kHz + Antenna Gain, dBi
 ** - PSD result, dBm/100kHz = SA reading + 10*log(N)
 *** - See Table 7.2.10

MAXIMUM ANTENNA GAIN: 17 dBi

Carrier frequency, MHz	SA reading, RF #2, dBm/100kHz	PSD result**, dBm/100kHz	Antenna gain, dBi	Total PSD*, dBm/100kHz	Limit***, dBm	Margin, dB	Verdict
QPSK							
2506	13.95	16.95	17.0	33.95	45.14	-11.19	Pass
2595	13.22	16.22	17.0	33.22	44.37	-11.15	Pass
2680	13.55	16.55	17.0	33.55	45.14	-11.59	Pass
64QAM							
2506	13.15	16.15	17.0	33.15	45.16	-12.01	Pass
2595	13.14	16.14	17.0	33.14	44.39	-11.25	Pass
2680	13.48	16.48	17.0	33.48	45.16	-11.68	Pass

* - Total PSD, dBm/100kHz = PSD result**, dBm/100kHz + Antenna Gain, dBi
 ** - PSD result, dBm/100kHz = SA reading + 10*log(N)
 *** - See Table 7.2.10



Test specification:		Section 27.50 (h), Peak output power	
Test procedure:		47 CFR, Section 2.1046; TIA/EIA-603-C, Section 2.2.1	
Test mode:		Compliance	
Date(s):		28-Jul-15	
Temperature: 24 °C		Air Pressure: 1006 hPa	
Remarks:		Verdict: PASS	
		Relative Humidity: 55 %	
		Power Supply: 48 VDC	

Table 7.2.8 Pre - transition frequency channels assignment

Channel	OBW, MHz	Peak power limit, dBm	Power density limit, dBm/100kHz
5 MHz Dual Channel QPSK 5.3 Mbps			
2499 MHz BRS Ch.1 + ERS Ch. A1	4.888	$63+10\log(\text{OBW}/10.0)+10\log(360/\text{beamwidth})$	$\text{EIRP}+10\log(0.1/10.0)$
2593.0 MHz EBS Ch.D4	4.854	$63+10\log(\text{OBW}/6.0)+10\log(360/\text{beamwidth})$	$\text{EIRP}+10\log(0.1/6.0)$
2687.0 MHz EBS Ch.I + EBS Ch.G4	4.849	$63+10\log(\text{OBW}/10.0)+10\log(360/\text{beamwidth})$	$\text{EIRP}+10\log(0.1/10.0)$
5 MHz Dual Channel 64QAM 23 Mbps			
2499 MHz BRS Ch.1 + ERS Ch. A1	4.888	$63+10\log(\text{OBW}/10.0)+10\log(360/\text{beamwidth})$	$\text{EIRP}+10\log(0.1/10.0)$
2593.0 MHz EBS Ch.D4	4.802	$63+10\log(\text{OBW}/6.0)+10\log(360/\text{beamwidth})$	$\text{EIRP}+10\log(0.1/6.0)$
2687.0 MHz EBS Ch.I + EBS Ch.G4	4.797	$63+10\log(\text{OBW}/10.0)+10\log(360/\text{beamwidth})$	$\text{EIRP}+10\log(0.1/10.0)$
10 MHz Dual Channel QPSK 10.7 Mbps			
2501.0 MHz BRS Ch.1+ERS Ch. A1	9.737	$63+10\log(\text{OBW}/10.0)+10\log(360/\text{beamwidth})$	$\text{EIRP}+10\log(0.1/10.0)$
2595.0 MHz EBS Ch.D4+BRS Ch. E1	9.693	$63+10\log(\text{OBW}/12.0)+10\log(360/\text{beamwidth})$	$\text{EIRP}+10\log(0.1/12.0)$
2685.0 MHz EBS Ch.I + EBS Ch.G4	9.700	$63+10\log(\text{OBW}/10.0)+10\log(360/\text{beamwidth})$	$\text{EIRP}+10\log(0.1/10.0)$
10 MHz Dual Channel 64QAM 47.3 Mbps			
2501.0 MHz BRS Ch.1 + ERS Ch. A1	9.634	$63+10\log(\text{OBW}/10.0)+10\log(360/\text{beamwidth})$	$\text{EIRP}+10\log(0.1/10.0)$
2595.0 MHz EBS Ch.D4+ BRS Ch. E1	9.659	$63+10\log(\text{OBW}/12.0)+10\log(360/\text{beamwidth})$	$\text{EIRP}+10\log(0.1/12.0)$
2685.0 MHz EBS Ch.I + EBS Ch.G4	9.601	$63+10\log(\text{OBW}/10.0)+10\log(360/\text{beamwidth})$	$\text{EIRP}+10\log(0.1/10.0)$
20 MHz 4 Channels QPSK 23.4 Mbps			
2506.0 MHz BRS Ch.1+EBS Ch. A1+A2+B1	19.892	$63+10\log(\text{OBW}/22.0)+10\log(360/\text{beamwidth})$	$\text{EIRP}+10\log(0.1/22.0)$
2595.0 MHz EBS Ch.C4+D4+BRS Ch.E1+F1	19.827	$63+10\log(\text{OBW}/24.0)+10\log(360/\text{beamwidth})$	$\text{EIRP}+10\log(0.1/24.0)$
2680.0 MHz EBS CH.I+G3+G4 BRS Ch.H3	19.874	$63+10\log(\text{OBW}/22.0)+10\log(360/\text{beamwidth})$	$\text{EIRP}+10\log(0.1/22.0)$
20 MHz 4 Channels 64QAM 95 Mbps			
2506.0 MHz BRS Ch.1+ EBS Ch. A1+A2+B1	19.965	$63+10\log(\text{OBW}/22.0)+10\log(360/\text{beamwidth})$	$\text{EIRP}+10\log(0.1/22.0)$
2595.0 MHz EBS Ch.C4+D4+ BRS Ch.E1+F1	19.897	$63+10\log(\text{OBW}/24.0)+10\log(360/\text{beamwidth})$	$\text{EIRP}+10\log(0.1/24.0)$
2680.0 MHz EBS CH.I+G3+G4 BRS Ch.H3	19.744	$63+10\log(\text{OBW}/22.0)+10\log(360/\text{beamwidth})$	$\text{EIRP}+10\log(0.1/22.0)$



Test specification: Section 27.50 (h), Peak output power	
Test procedure:	47 CFR, Section 2.1046; TIA/EIA-603-C, Section 2.2.1
Test mode:	Compliance
Date(s):	28-Jul-15
Temperature: 24 °C	Air Pressure: 1006 hPa
Remarks:	Relative Humidity: 55 %
	Power Supply: 48 VDC
Verdict: PASS	

Table 7.2.9 EIRP limits

Channel	Channel BW, MHz	Peak power limit, dBm	
		17 dBi, 90° beamwidth	11 dBi/18 dBi, 65° beamwidth
5 MHz Dual Channel QPSK			
2499 MHz BRS Ch.1 + ERS Ch. A1	10.0	65.89	67.33
2593.0 MHz EBS Ch.D4	6.0	67.08	69.23
2687.0 MHz EBS Ch.I + EBS Ch.G4	10.0	65.86	67.33
10 MHz Dual Channel QPSK			
2501.0 MHz BRS Ch.1 + ERS Ch. A1	10.0	68.88	70.32
2595.0 MHz EBS Ch.D4+BRS Ch. E1	12.0	68.07	69.51
2685.0 MHz EBS Ch.I + EBS Ch.G4	10.0	68.87	70.30
20 MHz Dual Channel QPSK			
2506.0 MHz BRS Ch.1+ EBCh.A1+A2+B1	22.0	68.56	70.00
2595.0 MHz EBS Ch.C4+D4+BRS Ch.E1+F1	24.0	68.17	69.60
2680.0 MHz EBS CH.I+G3+G4 BRS Ch.H3	22.0	68.56	69.99
5 MHz Dual Channel 64 QAM			
2499 MHz BRS Ch.1 + ERS Ch. A1	10.0	65.89	67.33
2593.0 MHz EBS Ch.D4	6.0	68.03	69.51
2687.0 MHz EBS Ch.I + EBS Ch.G4	10.0	65.81	67.24
10 MHz Dual Channel 64 QAM			
2501.0 MHz BRS Ch.1 + ERS Ch. A1	10.0	68.94	70.37
2595.0 MHz EBS Ch.D4+BRS Ch. E1	12.0	68.06	69.50
2685.0 MHz EBS Ch.I + EBS Ch.G4	10.0	68.82	70.26
20 MHz Dual Channel 64 QAM			
2506.0 MHz BRS Ch.1+ EBCh.A1+A2+B1	22.0	68.58	70.00
2595.0 MHz EBS Ch.C4+D4+BRS Ch.E1+F1	24.0	68.19	69.62
2680.0 MHz EBS CH.I+G3+G4 BRS Ch.H3	22.0	68.58	69.99



Test specification:		Section 27.50 (h), Peak output power	
Test procedure:		47 CFR, Section 2.1046; TIA/EIA-603-C, Section 2.2.1	
Test mode:		Compliance	
Date(s):		28-Jul-15	
Temperature: 24 °C		Air Pressure: 1006 hPa	
Remarks:		Verdict: PASS	
		Relative Humidity: 55 %	
		Power Supply: 48 VDC	


Table 7.2.10 Peak power density limits

Channel	Channel BW, MHz	Peak power density, dBm/100kHz	
		17 dBi, 90° beamwidth	18 dBi, 65° beamwidth
5 MHz Dual Channel QPSK			
2499 MHz BRS Ch.1 + ERS Ch. A1	10.0	45.89	47.33
2593.0 MHz EBS Ch.D4	6.0	50.32	51.73
2687.0 MHz EBS Ch.I + EBS Ch.G4	10.0	45.86	47.33
10 MHz Dual Channel QPSK			
2501.0 MHz BRS Ch.1 + ERS Ch. A1	10.0	48.88	50.32
2595.0 MHz EBS Ch.D4+BRS Ch. E1	12.0	47.30	48.71
2685.0 MHz EBS Ch.I + EBS Ch.G4	10.0	48.87	50.30
20 MHz Dual Channel QPSK			
2506.0 MHz BRS Ch.1+ EBCh.A1+A2+B1	22.0	45.14	46.57
2595.0 MHz EBS Ch.C4+D4+BRS Ch.E1+F1	24.0	44.37	45.80
2680.0 MHz EBS CH.I+G3+G4 BRS Ch.H3	22.0	45.14	46.57
5 MHz Dual Channel 64 QAM			
2499 MHz BRS Ch.1 + ERS Ch. A1	10.0	45.89	47.33
2593.0 MHz EBS Ch.D4	6.0	50.32	51.73
2687.0 MHz EBS Ch.I + EBS Ch.G4	10.0	45.81	47.24
10 MHz Dual Channel 64 QAM			
2501.0 MHz BRS Ch.1 + ERS Ch. A1	10.0	48.94	50.32
2595.0 MHz EBS Ch.D4+BRS Ch. E1	12.0	47.30	48.71
2685.0 MHz EBS Ch.I + EBS Ch.G4	10.0	48.82	50.30
20 MHz Dual Channel 64 QAM			
2506.0 MHz BRS Ch.1+ EBCh.A1+A2+B1	22.0	45.16	46.57
2595.0 MHz EBS Ch.C4+D4+BRS Ch.E1+F1	24.0	44.39	45.80
2680.0 MHz EBS CH.I+G3+G4 BRS Ch.H3	22.0	45.16	46.57




Test specification:		Section 27.50 (h), Peak output power	
Test procedure:		47 CFR, Section 2.1046; TIA/EIA-603-C, Section 2.2.1	
Test mode:		Compliance	
Date(s):		28-Jul-15	
Temperature: 24 °C	Air Pressure: 1006 hPa	Relative Humidity: 55 %	Power Supply: 48 VDC
Remarks:			
		Verdict: PASS	

Plot 7.2.1 Power spectral density test results at low frequency, QPSK, 5 MHz EBW, RF # 1

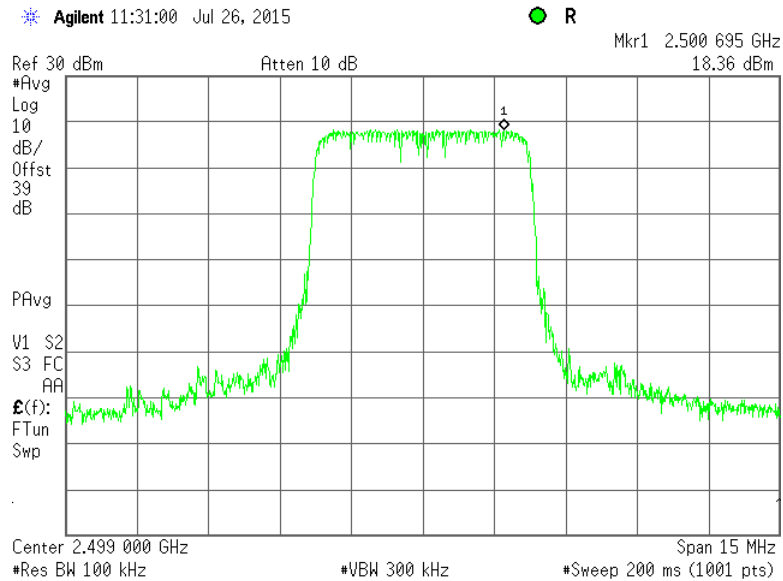

Plot 7.2.2 Power spectral density test results at mid frequency, QPSK, 5 MHz EBW, RF # 1

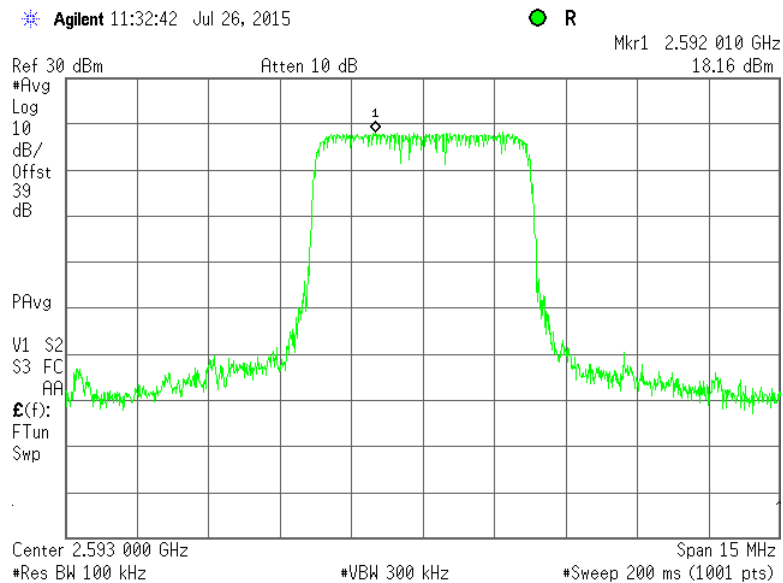





HERMON LABORATORIES

Test specification:	Section 27.50 (h), Peak output power		
Test procedure:	47 CFR, Section 2.1046; TIA/EIA-603-C, Section 2.2.1		
Test mode:	Compliance	Verdict:	PASS
Date(s):	28-Jul-15		
Temperature: 24 °C	Air Pressure: 1006 hPa	Relative Humidity: 55 %	Power Supply: 48 VDC
Remarks:			

Plot 7.2.3 Power spectral density test results at high frequency, QPSK, 5 MHz EBW, RF # 1

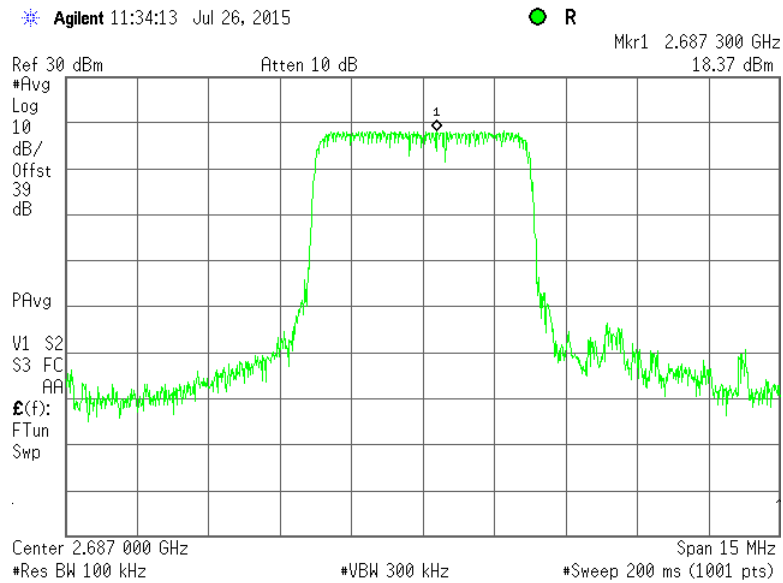

Plot 7.2.4 Power spectral density test results at low frequency, QPSK, 5 MHz EBW, RF # 2

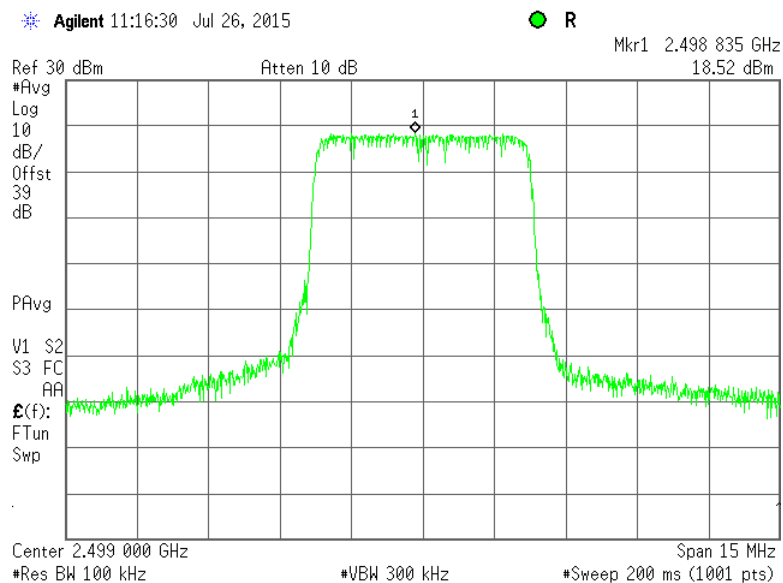





HERMON LABORATORIES

Test specification:		Section 27.50 (h), Peak output power	
Test procedure:		47 CFR, Section 2.1046; TIA/EIA-603-C, Section 2.2.1	
Test mode:		Compliance	
Date(s):		28-Jul-15	
Temperature: 24 °C		Air Pressure: 1006 hPa	
		Relative Humidity: 55 %	
		Power Supply: 48 VDC	
Remarks:			
		Verdict: PASS	

Plot 7.2.5 Power spectral density test results at mid frequency, QPSK, 5 MHz EBW, RF # 2

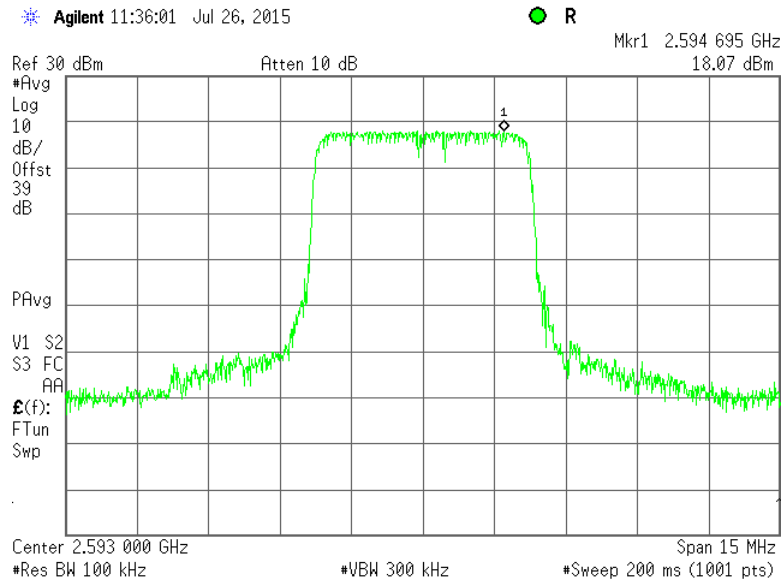

Plot 7.2.6 Power spectral density test results at high frequency, QPSK, 5 MHz EBW, RF # 2

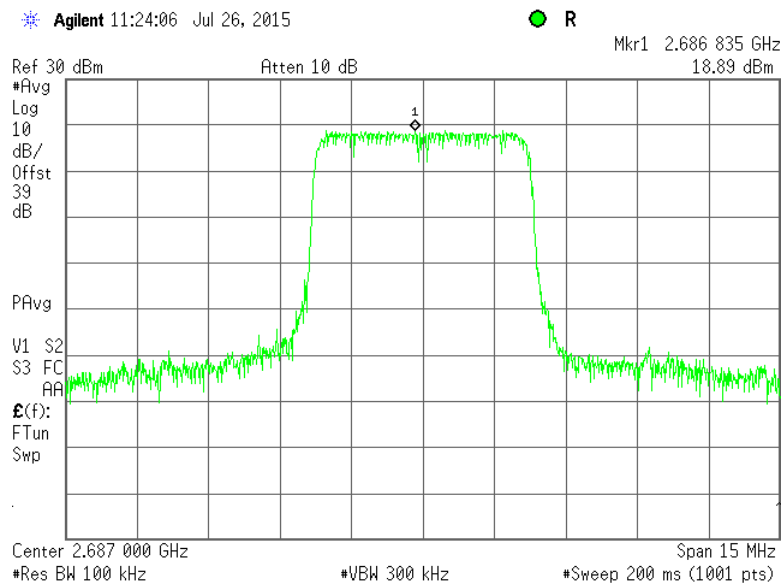





HERMON LABORATORIES

Test specification:		Section 27.50 (h), Peak output power	
Test procedure:		47 CFR, Section 2.1046; TIA/EIA-603-C, Section 2.2.1	
Test mode:		Compliance	
Date(s):		28-Jul-15	
Temperature: 24 °C		Air Pressure: 1006 hPa	
		Relative Humidity: 55 %	
		Power Supply: 48 VDC	
Remarks:			
		Verdict: PASS	

Plot 7.2.7 Power spectral density test results at low frequency, 64QAM, 5 MHz EBW, RF # 1

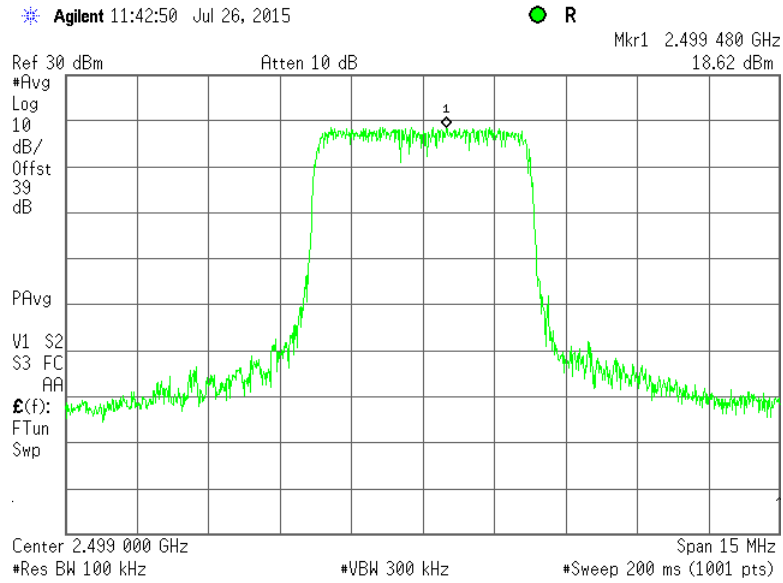


Plot 7.2.8 Power spectral density test results at mid frequency, 64QAM, 5 MHz EBW, RF # 1

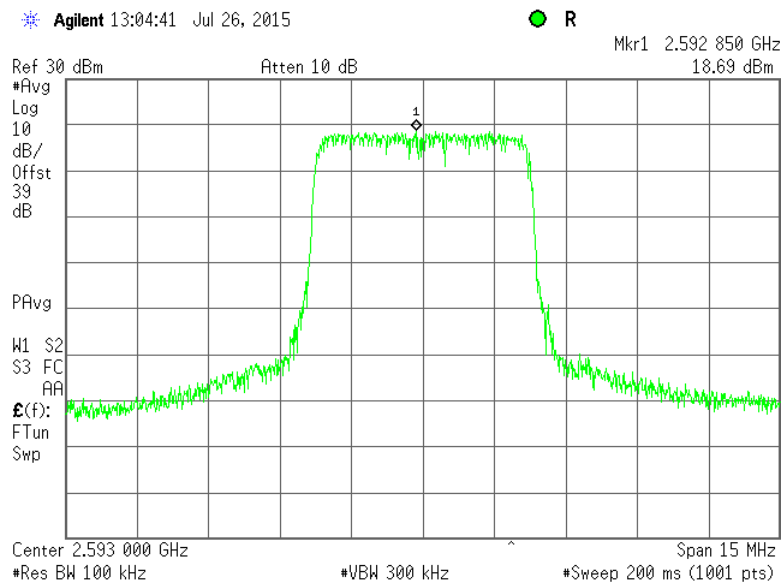




Test specification:		Section 27.50 (h), Peak output power	
Test procedure:		47 CFR, Section 2.1046; TIA/EIA-603-C, Section 2.2.1	
Test mode:		Compliance	
Date(s):		28-Jul-15	
Temperature: 24 °C		Air Pressure: 1006 hPa	
		Relative Humidity: 55 %	
		Power Supply: 48 VDC	
Remarks:			
		Verdict: PASS	

Plot 7.2.9 Power spectral density test results at high frequency, 64QAM, 5 MHz EBW, RF # 1

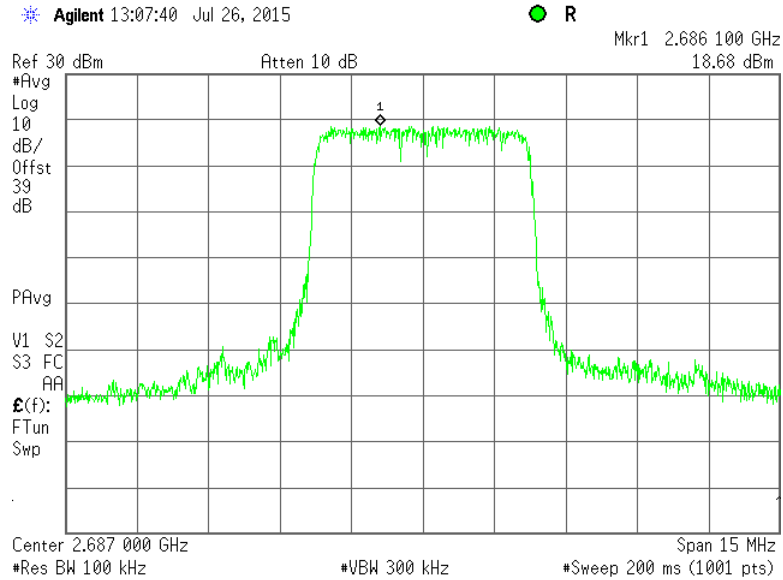

Plot 7.2.10 Power spectral density test results at low frequency, 64QAM, 5 MHz EBW, RF # 2

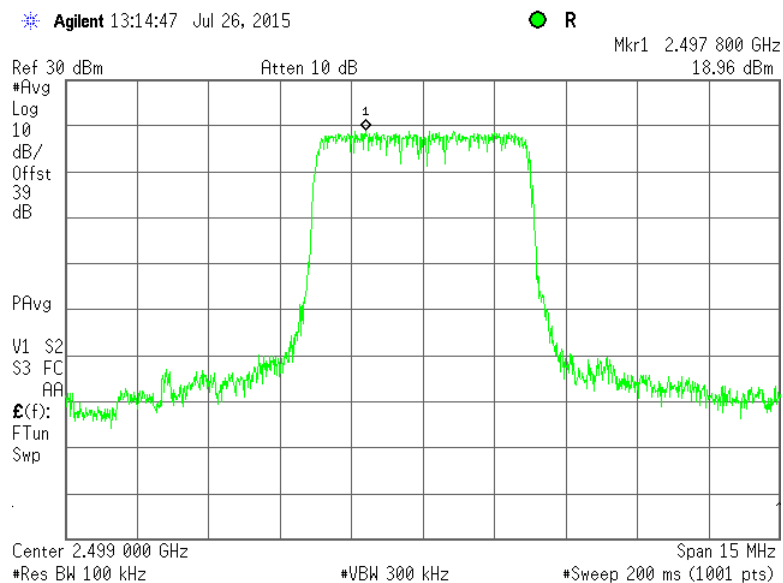





HERMON LABORATORIES

Test specification:	Section 27.50 (h), Peak output power		
Test procedure:	47 CFR, Section 2.1046; TIA/EIA-603-C, Section 2.2.1		
Test mode:	Compliance	Verdict:	PASS
Date(s):	28-Jul-15		
Temperature: 24 °C	Air Pressure: 1006 hPa	Relative Humidity: 55 %	Power Supply: 48 VDC
Remarks:			

Plot 7.2.11 Power spectral density test results at mid frequency, 64QAM, 5 MHz EBW, RF # 2

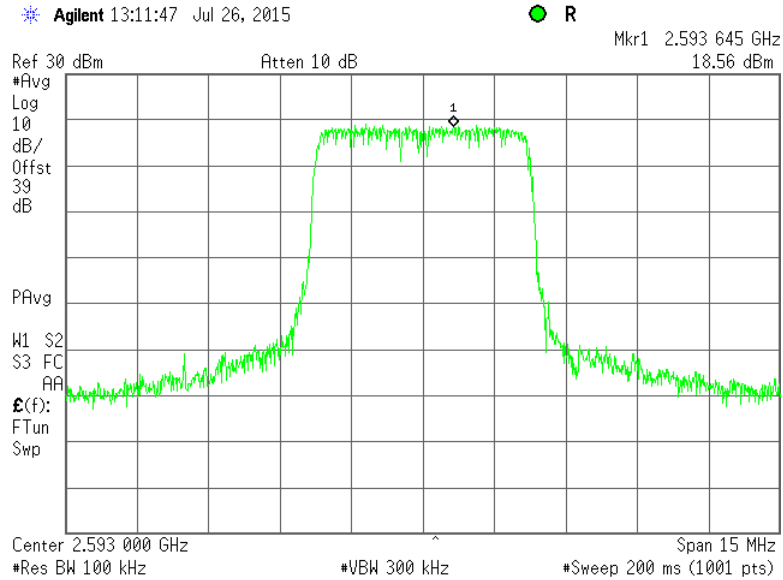

Plot 7.2.12 Power spectral density test results at high frequency, 64QAM, 5 MHz EBW, RF # 2

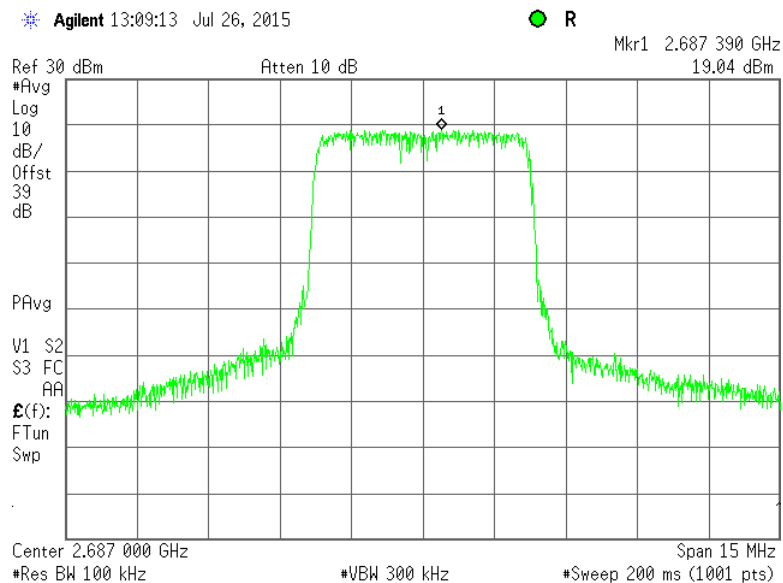





HERMON LABORATORIES

Test specification:		Section 27.50 (h), Peak output power	
Test procedure:		47 CFR, Section 2.1046; TIA/EIA-603-C, Section 2.2.1	
Test mode:		Compliance	
Date(s):		28-Jul-15	
Temperature: 24 °C		Air Pressure: 1006 hPa	
Relative Humidity: 55 %		Power Supply: 48 VDC	
Remarks:			
		Verdict: PASS	

Plot 7.2.13 Power spectral density test results at low frequency, QPSK, 10 MHz EBW, RF # 1

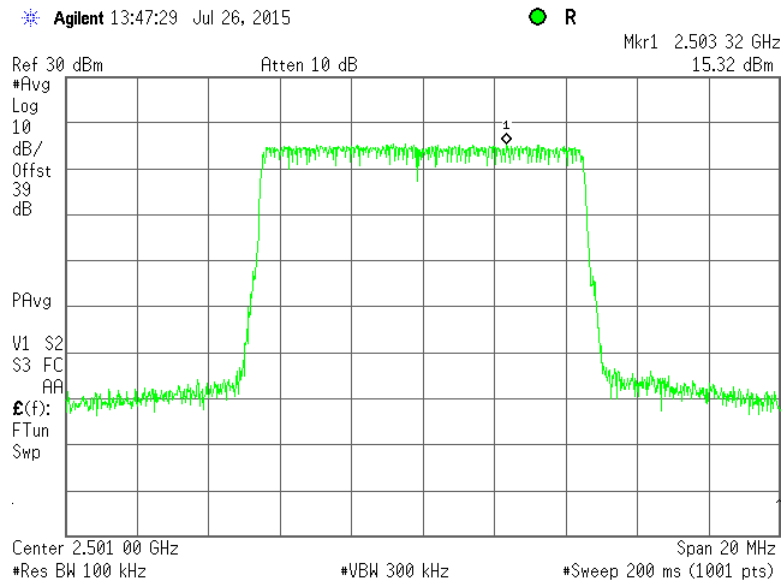

Plot 7.2.14 Power spectral density test results at mid frequency, QPSK, 10 MHz EBW, RF # 1

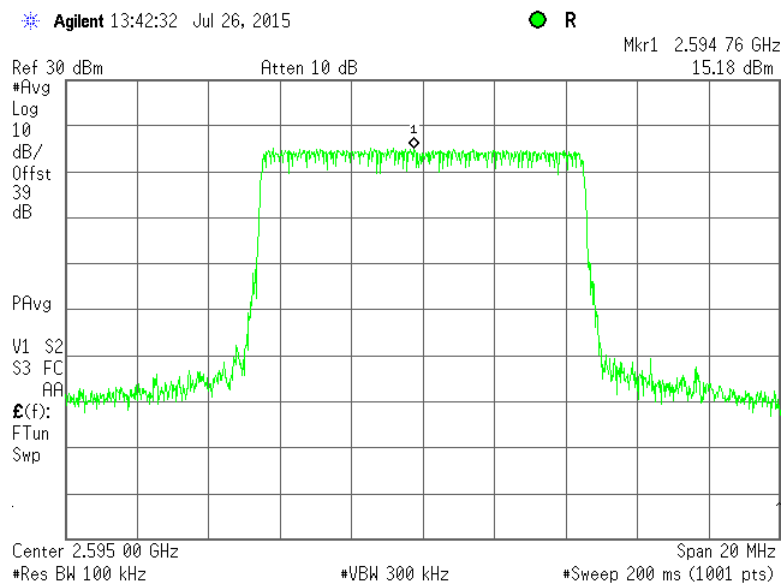





HERMON LABORATORIES

Test specification:		Section 27.50 (h), Peak output power	
Test procedure:		47 CFR, Section 2.1046; TIA/EIA-603-C, Section 2.2.1	
Test mode:		Compliance	
Date(s):		28-Jul-15	
Temperature: 24 °C		Air Pressure: 1006 hPa	
Relative Humidity: 55 %		Power Supply: 48 VDC	
Remarks:			
		Verdict: PASS	

Plot 7.2.15 Power spectral density test results at high frequency, QPSK, 10 MHz EBW, RF # 1

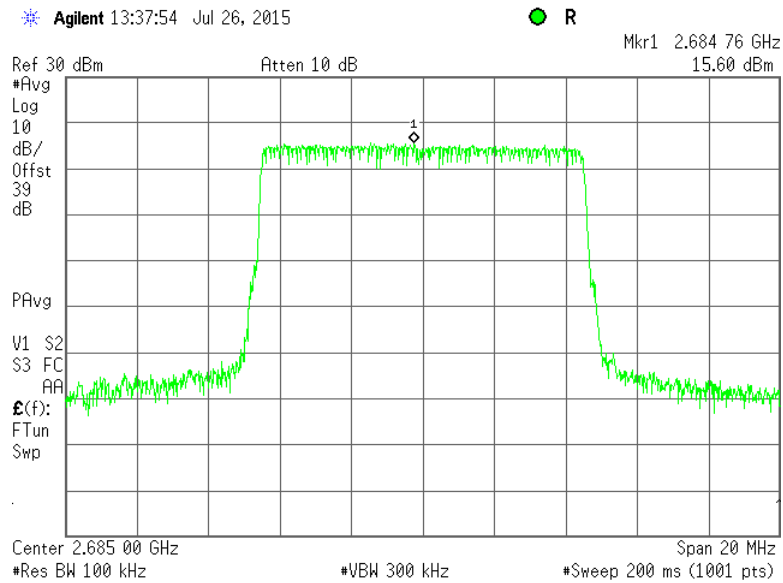

Plot 7.2.16 Power spectral density test results at low frequency, 64QAM, 10 MHz EBW, RF # 1

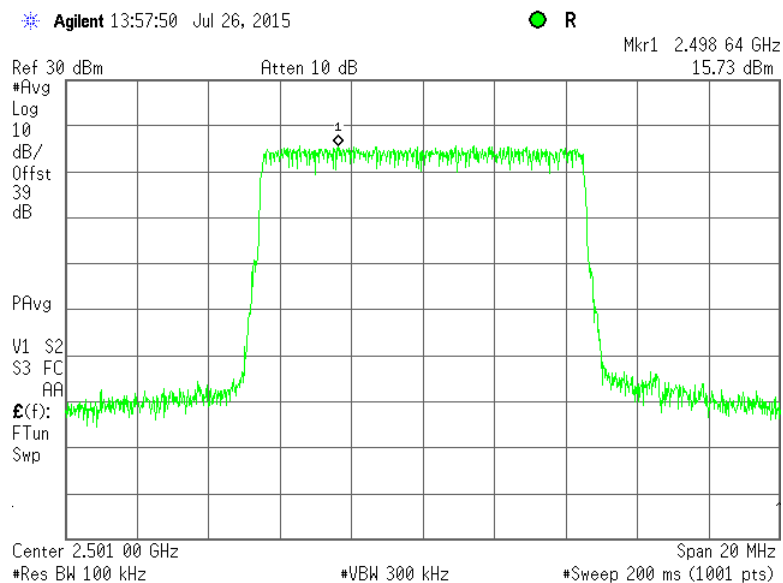





HERMON LABORATORIES

Test specification:	Section 27.50 (h), Peak output power		
Test procedure:	47 CFR, Section 2.1046; TIA/EIA-603-C, Section 2.2.1		
Test mode:	Compliance	Verdict:	PASS
Date(s):	28-Jul-15	Relative Humidity:	55 %
Temperature: 24 °C	Air Pressure: 1006 hPa	Power Supply:	48 VDC
Remarks:			

Plot 7.2.17 Power spectral density test results at mid frequency, 64QAM, 10 MHz EBW, RF # 1

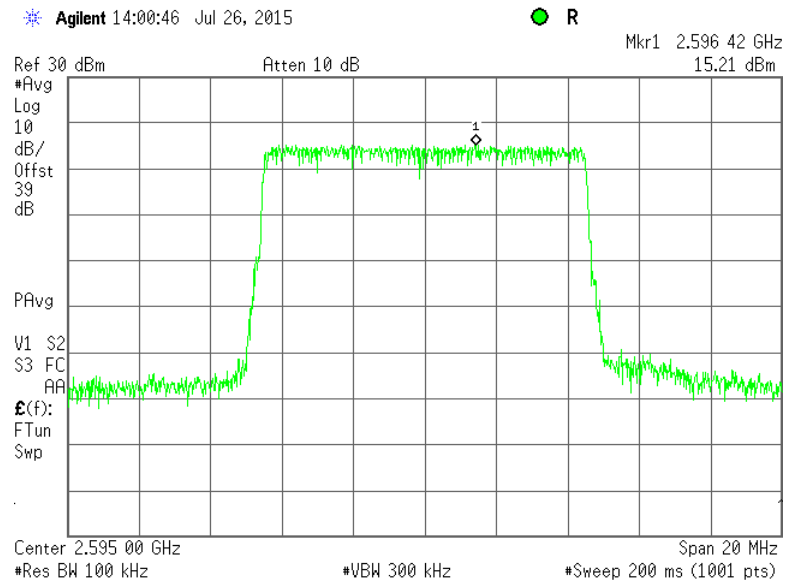

Plot 7.2.18 Power spectral density test results at high frequency, 64QAM, 10 MHz EBW, RF # 1

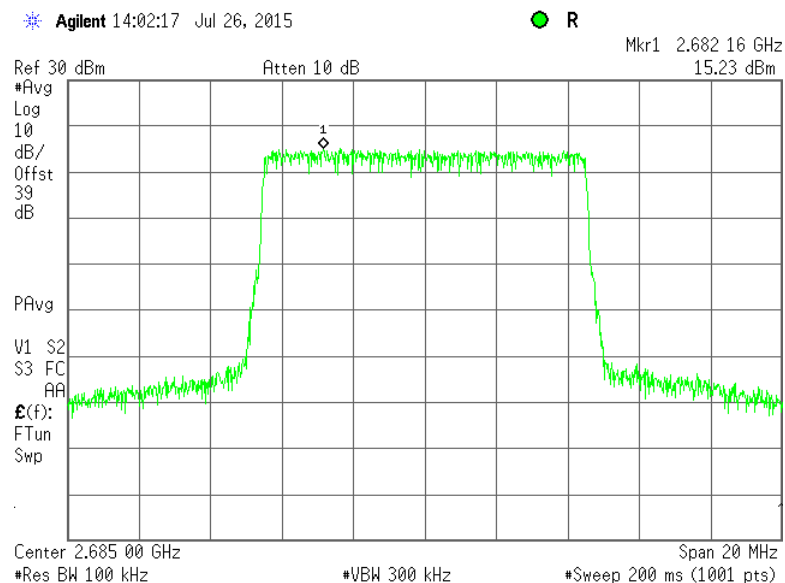





HERMON LABORATORIES

Test specification:		Section 27.50 (h), Peak output power	
Test procedure:		47 CFR, Section 2.1046; TIA/EIA-603-C, Section 2.2.1	
Test mode:		Compliance	
Date(s):		28-Jul-15	
Temperature: 24 °C		Air Pressure: 1006 hPa	
		Relative Humidity: 55 %	
		Power Supply: 48 VDC	
Remarks:			
		Verdict: PASS	

Plot 7.2.19 Power spectral density test results at low frequency, QPSK, 10 MHz EBW, RF # 2

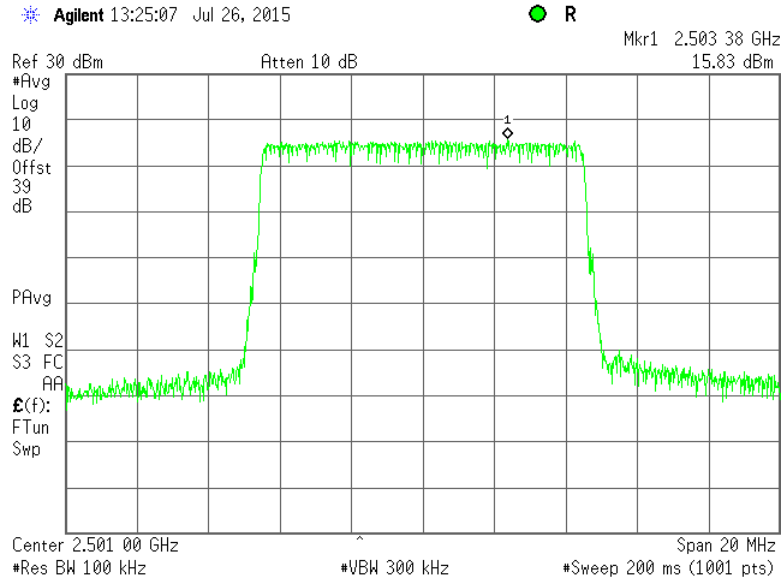


Plot 7.2.20 Power spectral density test results at mid frequency, QPSK, 10 MHz EBW, RF # 2

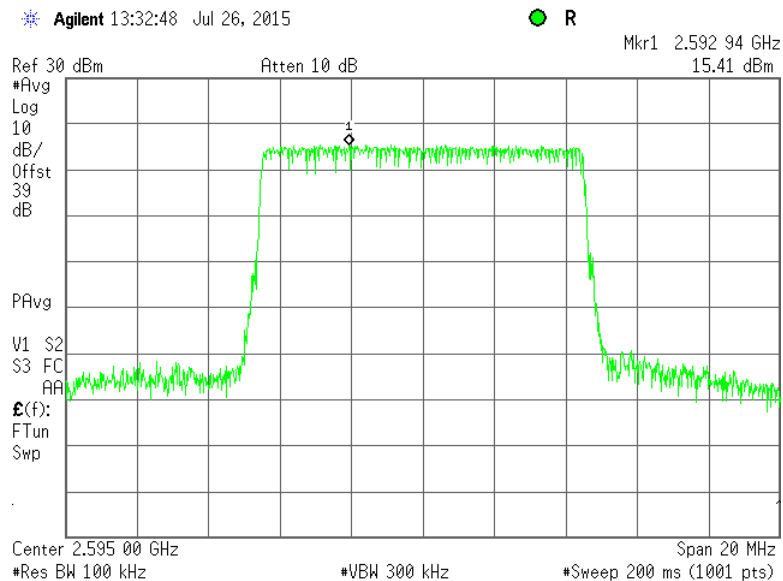




Test specification:		Section 27.50 (h), Peak output power	
Test procedure:		47 CFR, Section 2.1046; TIA/EIA-603-C, Section 2.2.1	
Test mode:		Compliance	
Date(s):		28-Jul-15	
Temperature: 24 °C		Air Pressure: 1006 hPa	
Relative Humidity: 55 %		Power Supply: 48 VDC	
Remarks:			
		Verdict: PASS	

Plot 7.2.21 Power spectral density test results at high frequency, QPSK, 10 MHz EBW, RF # 2

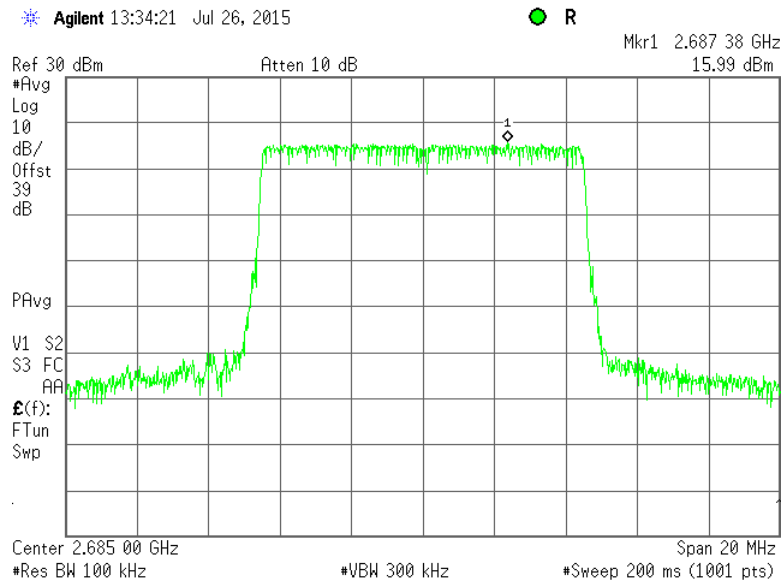

Plot 7.2.22 Power spectral density test results at low frequency, 64QAM, 10 MHz EBW, RF # 2

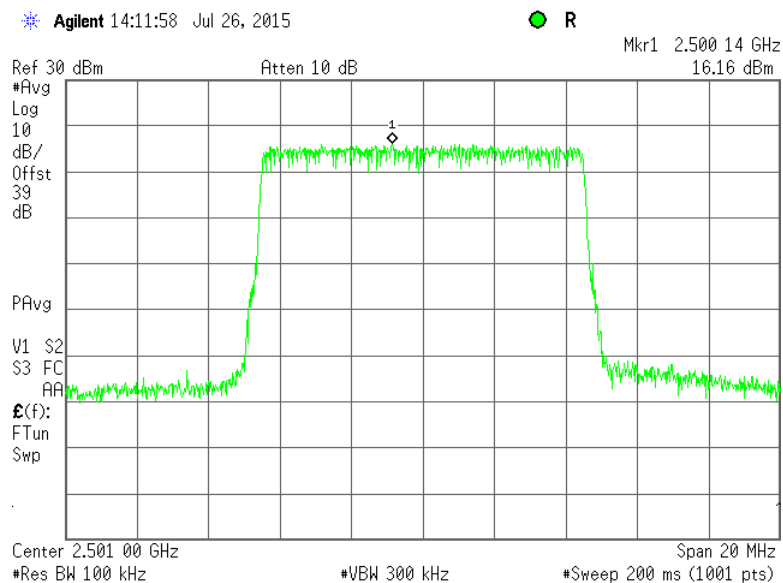





HERMON LABORATORIES

Test specification:		Section 27.50 (h), Peak output power	
Test procedure:		47 CFR, Section 2.1046; TIA/EIA-603-C, Section 2.2.1	
Test mode:		Compliance	
Date(s):		28-Jul-15	
Temperature: 24 °C		Air Pressure: 1006 hPa	
		Relative Humidity: 55 %	
		Power Supply: 48 VDC	
Remarks:			
		Verdict: PASS	

Plot 7.2.23 Power spectral density test results at mid frequency, 64QAM, 10 MHz EBW, RF # 2

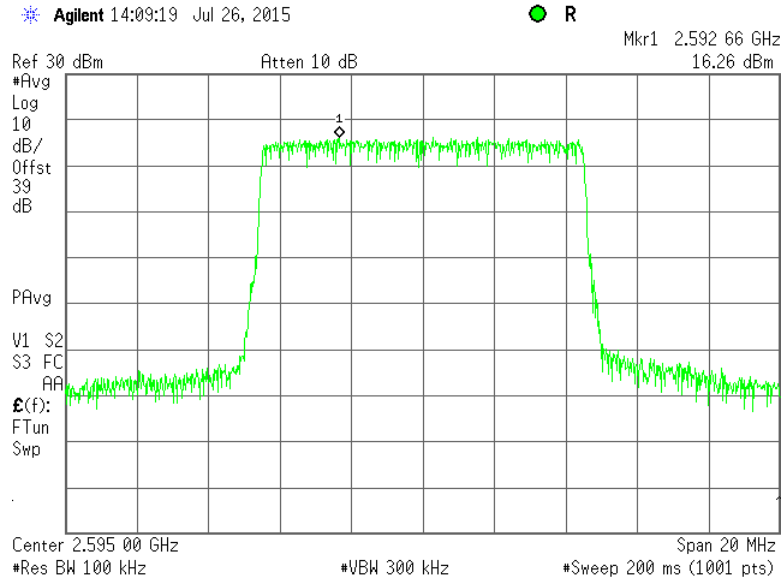


Plot 7.2.24 Power spectral density test results at high frequency, 64QAM, 10 MHz EBW, RF # 2

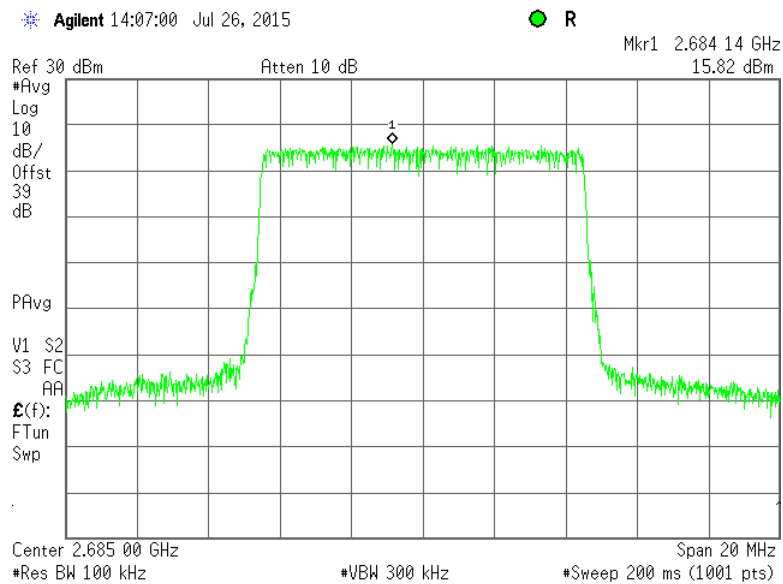




Test specification:		Section 27.50 (h), Peak output power	
Test procedure:		47 CFR, Section 2.1046; TIA/EIA-603-C, Section 2.2.1	
Test mode:		Compliance	
Date(s):		28-Jul-15	
Temperature: 24 °C		Air Pressure: 1006 hPa	
Relative Humidity: 55 %		Power Supply: 48 VDC	
Remarks:			
		Verdict: PASS	

Plot 7.2.25 Power spectral density test results at low frequency, QPSK, 20 MHz EBW, RF # 1

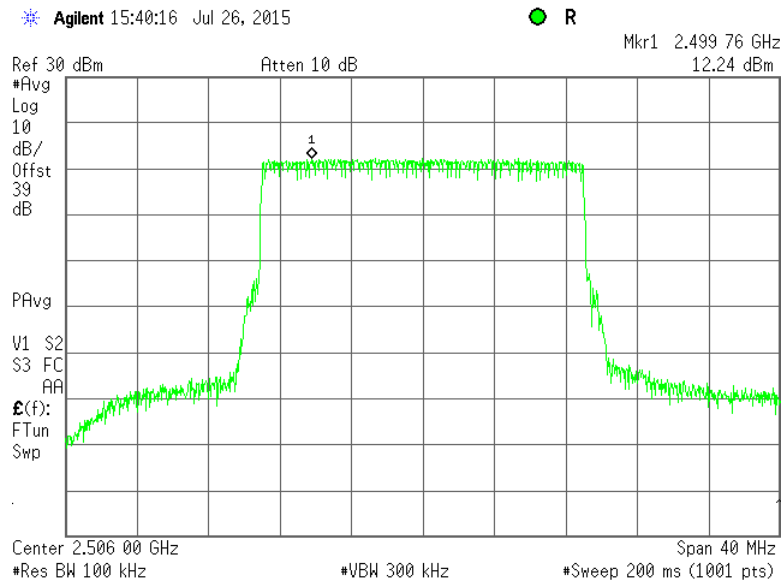

Plot 7.2.26 Power spectral density test results at mid frequency, QPSK, 20 MHz EBW, RF # 1

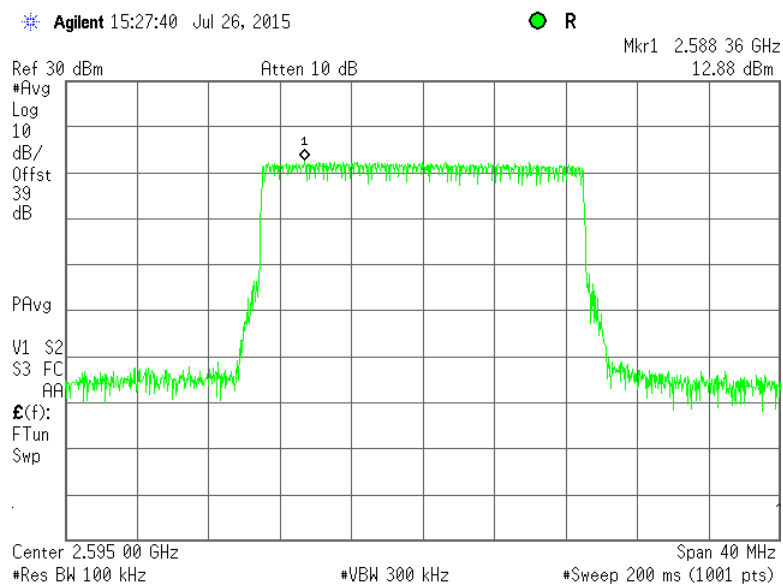





HERMON LABORATORIES

Test specification:		Section 27.50 (h), Peak output power	
Test procedure:		47 CFR, Section 2.1046; TIA/EIA-603-C, Section 2.2.1	
Test mode:		Compliance	
Date(s):		28-Jul-15	
Temperature: 24 °C		Air Pressure: 1006 hPa	
		Relative Humidity: 55 %	
		Power Supply: 48 VDC	
Remarks:			
		Verdict: PASS	

Plot 7.2.27 Power spectral density test results at high frequency, QPSK, 20 MHz EBW, RF # 1

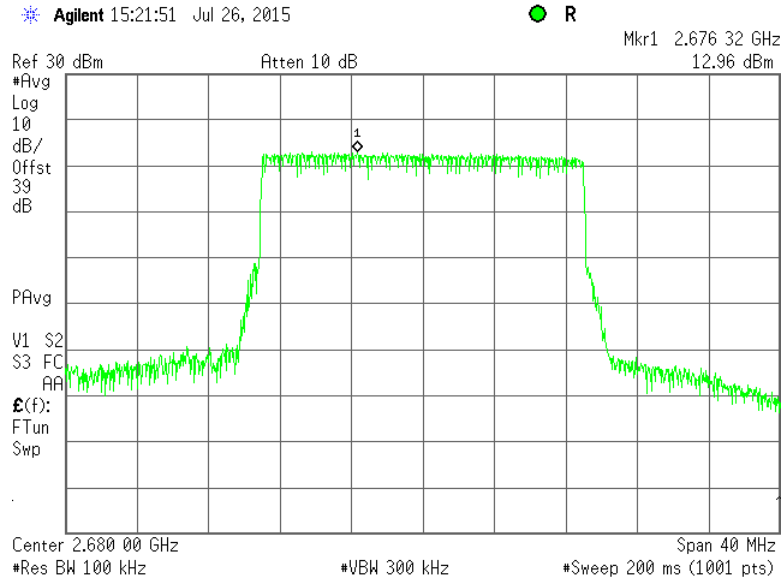

Plot 7.2.28 Power spectral density test results at low frequency, 64QAM, 20 MHz EBW, RF # 1

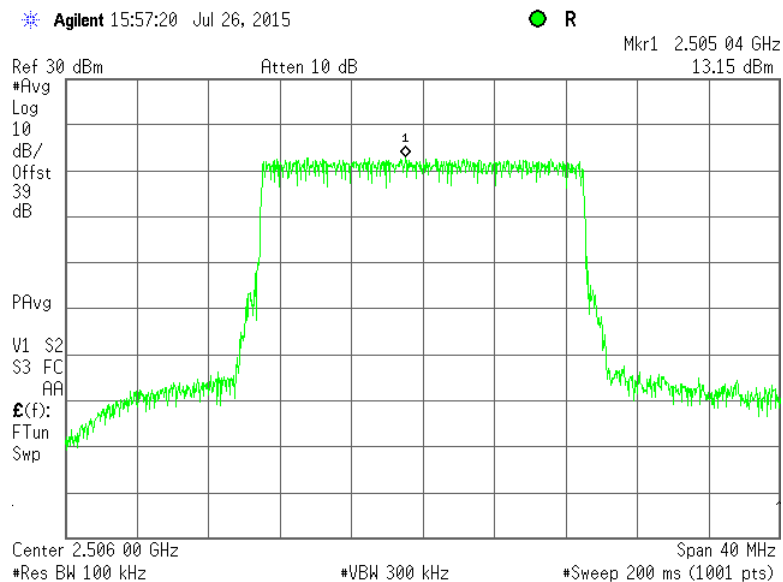





HERMON LABORATORIES

Test specification:		Section 27.50 (h), Peak output power	
Test procedure:		47 CFR, Section 2.1046; TIA/EIA-603-C, Section 2.2.1	
Test mode:		Compliance	
Date(s):		28-Jul-15	
Temperature: 24 °C		Air Pressure: 1006 hPa	
		Relative Humidity: 55 %	
		Power Supply: 48 VDC	
Remarks:			
		Verdict: PASS	

Plot 7.2.29 Power spectral density test results at mid frequency, 64QAM, 20 MHz EBW, RF # 1

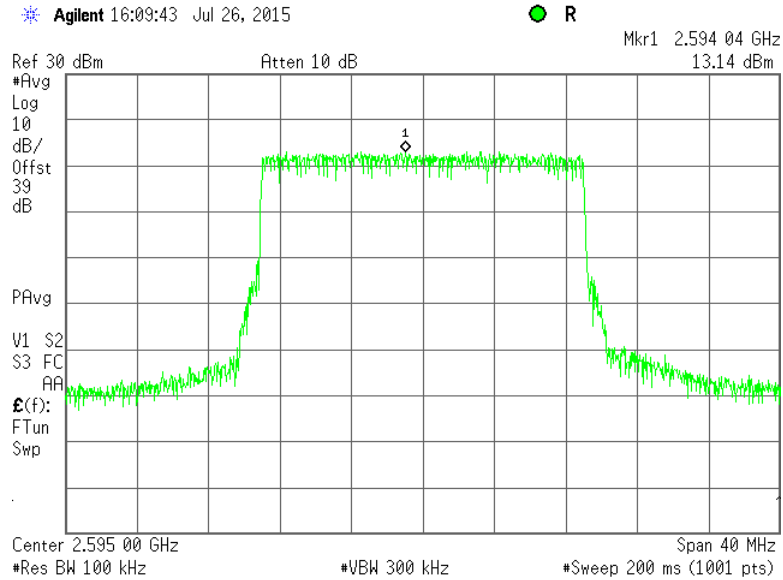

Plot 7.2.30 Power spectral density test results at high frequency, 64QAM, 20 MHz EBW, RF # 1

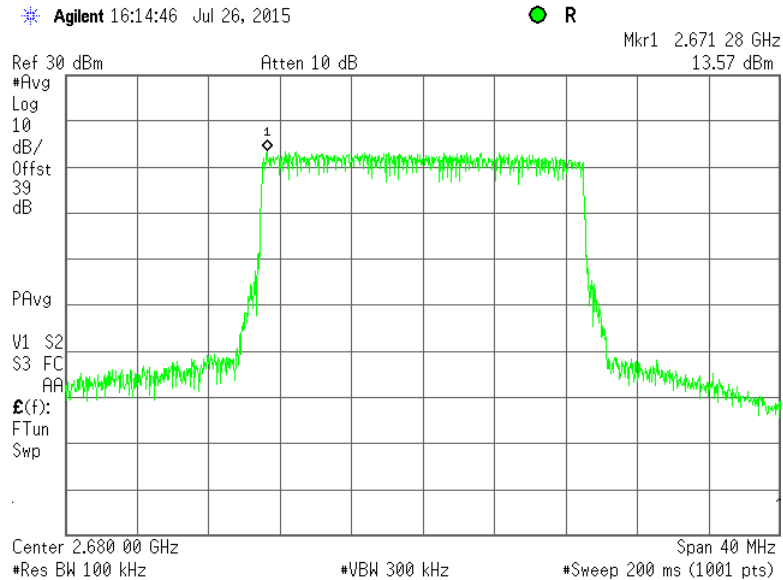





HERMON LABORATORIES

Test specification:		Section 27.50 (h), Peak output power	
Test procedure:		47 CFR, Section 2.1046; TIA/EIA-603-C, Section 2.2.1	
Test mode:		Compliance	
Date(s):		28-Jul-15	
Temperature: 24 °C		Air Pressure: 1006 hPa	
Relative Humidity: 55 %		Power Supply: 48 VDC	
Remarks:			
		Verdict: PASS	

Plot 7.2.31 Power spectral density test results at low frequency, QPSK, 20 MHz EBW, RF # 2

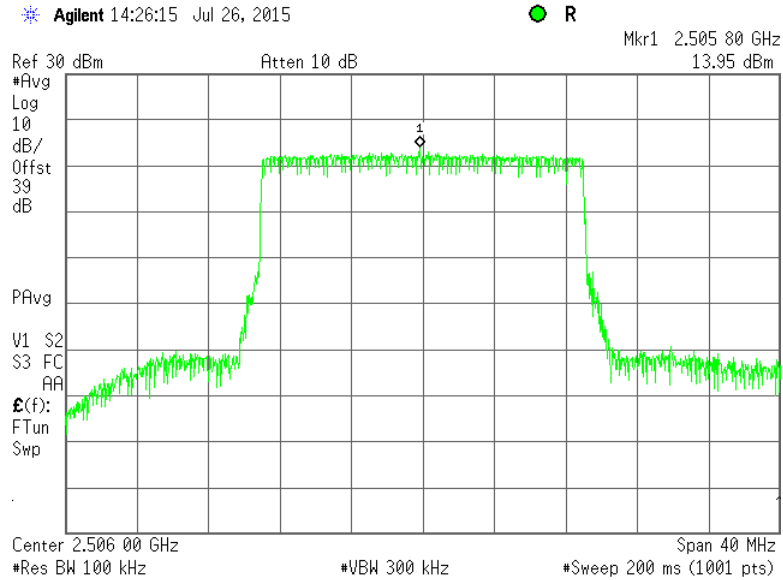


Plot 7.2.32 Power spectral density test results at mid frequency, QPSK, 20 MHz EBW, RF # 2

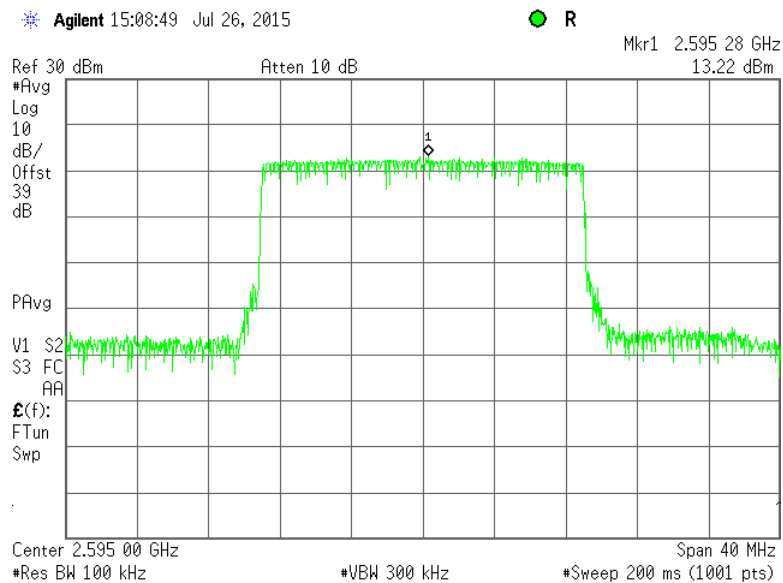




Test specification:		Section 27.50 (h), Peak output power	
Test procedure:		47 CFR, Section 2.1046; TIA/EIA-603-C, Section 2.2.1	
Test mode:		Verdict: PASS	
Date(s):		28-Jul-15	
Temperature: 24 °C	Air Pressure: 1006 hPa	Relative Humidity: 55 %	Power Supply: 48 VDC
Remarks:			

Plot 7.2.33 Power spectral density test results at high frequency, QPSK, 20 MHz EBW, RF # 2

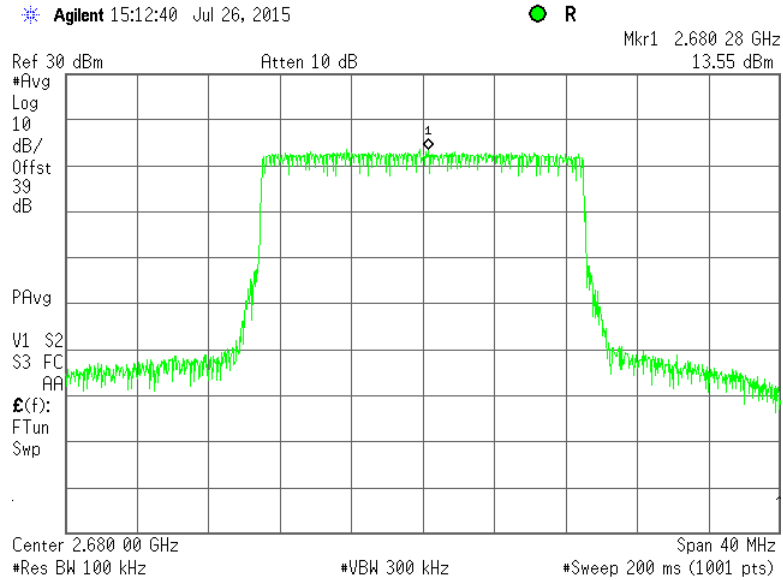

Plot 7.2.34 Power spectral density test results at low frequency, 64QAM, 20 MHz EBW, RF # 2

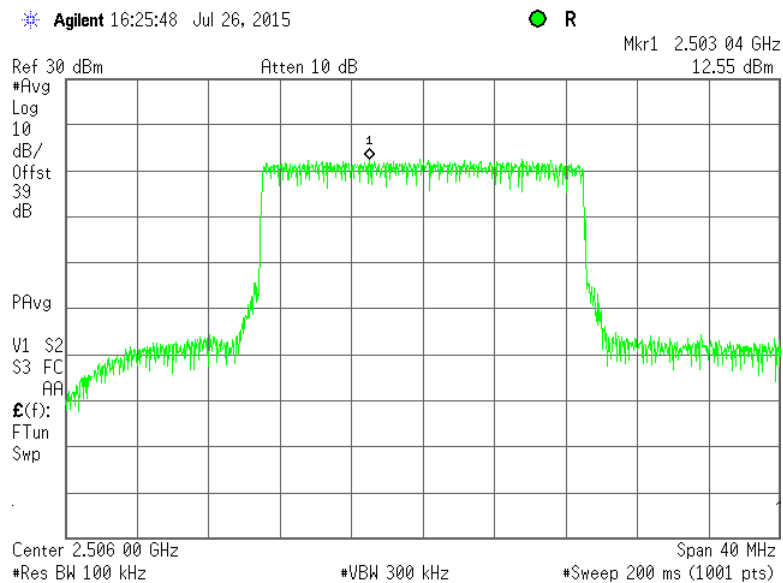





HERMON LABORATORIES

Test specification:	Section 27.50 (h), Peak output power		
Test procedure:	47 CFR, Section 2.1046; TIA/EIA-603-C, Section 2.2.1		
Test mode:	Compliance	Verdict:	PASS
Date(s):	28-Jul-15		
Temperature: 24 °C	Air Pressure: 1006 hPa	Relative Humidity: 55 %	Power Supply: 48 VDC
Remarks:			

Plot 7.2.35 Power spectral density test results at mid frequency, 64QAM, 20 MHz EBW, RF # 2

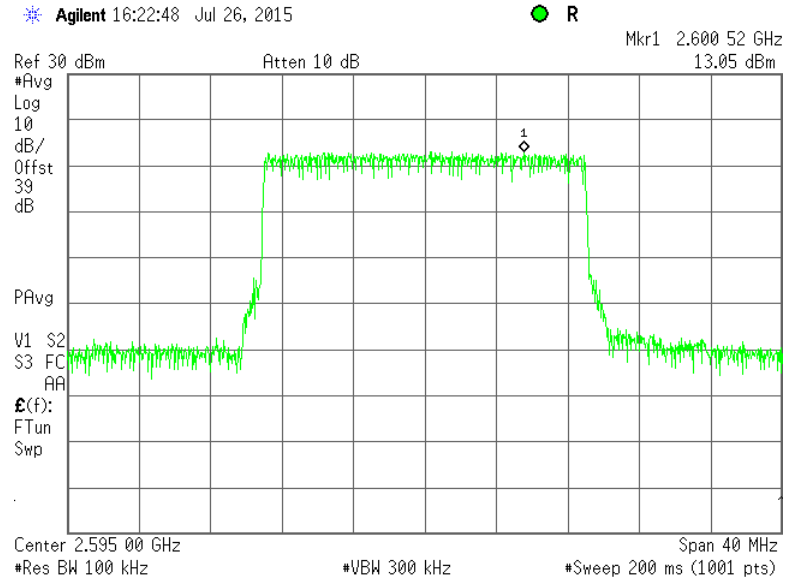

Plot 7.2.36 Power spectral density test results at high frequency, 64QAM, 20 MHz EBW, RF # 2

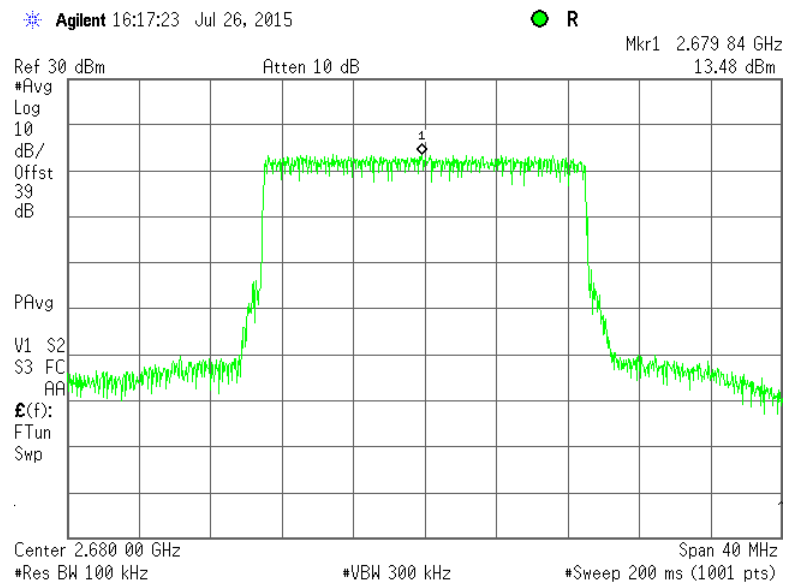



Test specification:		Section 27.53(m)(2), Band edge emissions	
Test procedure:		47 CFR, Sections 2.1051, 27.53; TIA/EIA-603-C, Section 2.2.13	
Test mode:		Verdict: PASS	
Date(s):		27-Jul-15 - 28-Jul-15	
Temperature: 24 °C	Air Pressure: 1008 hPa	Relative Humidity: 55 %	Power Supply: 48 VDC
Remarks:			

7.3 Band edge emissions at RF connector test

7.3.1 General

This test was performed to measure spurious emissions at the channel edge at the RF antenna connector. Specification test limits are given in Table 7.3.1.

Table 7.3.1 Spurious emission limits at band edges

Channel	Frequency range	Attenuation below carrier, dBc	Limit, dBm
Channel bandwidth 5 MHz			
2499	2496.0 - 2500.0	43+ 10*Log (P*)	-13.0
	2500.0 - 2506.0		
2593	2590.0 - 2596.0	43+ 10*Log (P*)	-13.0
2687	2680.0 - 2686.0	43+ 10*Log (P*)	-13.0
	2686.0 - 2690.0		
Channel bandwidth 10 MHz			
2501	2490.0 - 2496.0	43+ 10*Log (P*)	-13.0
	2506.0 - 2512.0		
2595	2584.0 - 2590.0	43+ 10*Log (P*)	-13.0
	2602.0 - 2608.0		
2685	2674.0 - 2680.0	43+ 10*Log (P*)	-13.0
	2690.0 - 2696.0		
Channel bandwidth 20 MHz			
2506	2490.0 - 2496.0	43+ 10*Log (P*)	-13.0
	2518.0 - 2524.0		
2595	2578.0 - 2584.0	43+ 10*Log (P*)	-13.0
	2608.0 - 2614.0		
2680	2662.0 - 2668.0	43+ 10*Log (P*)	-13.0
	2690.0 - 2696.0		


* - P is transmitter output power in Watts

7.3.2 Test procedure

7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and its proper operation was checked.

7.3.2.2 The spurious emission was measured with spectrum analyzer as provided in Table 7.3.2 to Tble 7.3.7 and the associated plots.

Figure 7.3.1 Spurious emission test setup for single output

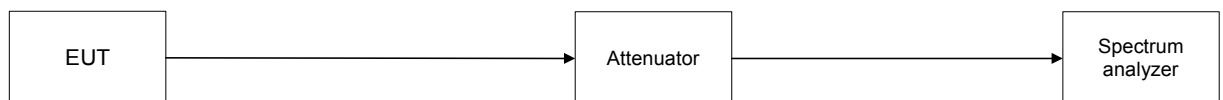



Test specification:		Section 27.53(m)(2), Band edge emissions	
Test procedure:		47 CFR, Sections 2.1051, 27.53; TIA/EIA-603-C, Section 2.2.13	
Test mode:		Compliance	
Date(s):		27-Jul-15 - 28-Jul-15	
Temperature: 24 °C		Air Pressure: 1008 hPa	
		Relative Humidity: 55 %	
		Power Supply: 48 VDC	
Remarks:			
		Verdict: PASS	

Table 7.3.2 Spurious emission at the low band edge test results

ASSIGNED FREQUENCY RANGE: 2496.0 – 2690.0 MHz
 DETECTOR USED: Average
 VIDEO BANDWIDTH: ≥ Resolution bandwidth
 MODULATING SIGNAL: PRBS
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 MODULATION: QPSK, 64QAM
 EBW: 5 MHz
 NUMBER OF RF OUTPUTS: N = 2

Frequency offset, ± MHz	Low band edge SA reading, dBm	Low band edge result, dBm	RBW, kHz	Integration BW, kHz	Limit, dBm	Verdict
Low carrier frequency 2499 MHz QPSK						
3.5	-17.57	-14.57	51	1000	-13.0	Pass
4.5	-20.46	-17.46	51	1000	-13.0	
6.5	-23.53	-20.53	51	1000	-13.0	
Low carrier frequency 2499 MHz 64QAM						
3.5	-20.05	-17.05	51	1000	-13.0	Pass
4.5	-22.82	-22.82	51	1000	-13.0	
6.5	-27.15	-24.15	51	1000	-13.0	
Mid carrier frequency 2593 MHz QPSK						
3.5	-16.93	-13.93	51	1000	-13.0	Pass
4.5	-19.32	-16.32	51	1000	-13.0	
6.5	-20.49	-17.49	51	1000	-13.0	
Mid carrier frequency 2593 MHz 64QAM						
3.5	-18.91	-15.91	51	1000	-13.0	Pass
4.5	-21.19	-18.19	51	1000	-13.0	
6.5	-25.54	-22.54	51	1000	-13.0	
High carrier frequency 2687 MHz QPSK						
3.5	-17.63	-14.63	51	1000	-13.0	Pass
4.5	-19.97	-16.97	51	1000	-13.0	
6.5	-24.89	-21.89	51	1000	-13.0	
High carrier frequency 2687 MHz 64QAM						
3.5	-16.97	-13.97	51	1000	-13.0	Pass
4.5	-19.78	-16.78	51	1000	-13.0	
6.5	-22.15	-19.15	51	1000	-13.0	

* - Low band edge result = Low band edge SA Reading + 10log(N)



Test specification:		Section 27.53(m)(2), Band edge emissions	
Test procedure:		47 CFR, Sections 2.1051, 27.53; TIA/EIA-603-C, Section 2.2.13	
Test mode:		Compliance	
Date(s):		27-Jul-15 - 28-Jul-15	
Temperature: 24 °C		Air Pressure: 1008 hPa	
		Relative Humidity: 55 %	
		Power Supply: 48 VDC	
Remarks:			

Table 7.3.3 Spurious emission at the high band edge test results

ASSIGNED FREQUENCY RANGE: 2496.0 – 2690.0 MHz
 DETECTOR USED: Average
 VIDEO BANDWIDTH: ≥ Resolution bandwidth
 MODULATING SIGNAL: PRBS
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 MODULATION: QPSK, 64QAM
 EBW: 5 MHz
 NUMBER OF RF OUTPUTS: N = 2

Frequency offset, ± MHz	High band edge SA reading, dBm	High band edge result, dBm*	RBW, kHz	Integration BW, kHz	Limit, dBm	Verdict
Low carrier frequency 2499 MHz QPSK						
6.5	-24.12	-21.12	51	1000	-13.0	Pass
7.5	-21.31	-18.31	51	1000	-13.0	
Low carrier frequency 2499 MHz 64QAM						
6.5	-25.41	-22.41	51	1000	-13.0	Pass
7.5	-26.94	-23.94	51	1000	-13.0	
Mid carrier frequency 2593 MHz QPSK						
3.5	-16.06	-13.06	51	1000	-13.0	Pass
4.5	-17.49	-14.49	51	1000	-13.0	
6.5	-21.22	-18.22	51	1000	-13.0	
Mid carrier frequency 2593 MHz 64QAM						
3.5	-20.36	-17.36	51	1000	-13.0	Pass
4.5	-22.97	-19.97	51	1000	-13.0	
6.5	-26.43	-23.43	51	1000	-13.0	
High carrier frequency 2687 MHz QPSK						
3.5	-19.32	-16.32	51	1000	-13.0	Pass
4.5	-19.23	-16.23	51	1000	-13.0	
6.5	-23.72	-20.72	51	1000	-13.0	
High carrier frequency 2687 MHz 64QAM						
3.5	-17.63	-14.63	51	1000	-13.0	Pass
4.5	-19.79	-16.79	51	1000	-13.0	
6.5	-23.48	-20.48	51	1000	-13.0	

* - High band edge result = High band edge SA Reading + 10log(N)



Test specification:		Section 27.53(m)(2), Band edge emissions	
Test procedure:		47 CFR, Sections 2.1051, 27.53; TIA/EIA-603-C, Section 2.2.13	
Test mode:		Compliance	
Date(s):		27-Jul-15 - 28-Jul-15	
Temperature: 24 °C		Air Pressure: 1008 hPa	
		Relative Humidity: 55 %	
		Power Supply: 48 VDC	
Remarks:			
Verdict: PASS			

Table 7.3.4 Spurious emission at the low band edge test results

ASSIGNED FREQUENCY RANGE: 2490.0 – 2696.0 MHz
 DETECTOR USED: Average
 VIDEO BANDWIDTH: ≥ Resolution bandwidth
 MODULATING SIGNAL: PRBS
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 MODULATION: QPSK, 64QAM
 EBW: 10 MHz
 NUMBER OF RF OUTPUTS: N = 2

Frequency offset, ± MHz	Low band edge SA reading, dBm	Low band edge result, dBm	RBW, kHz	Integration BW, kHz	Limit, dBm	Verdict
Low carrier frequency 2501.0 MHz QPSK						
5.5	-23.28	-20.28	100	1000	-13.0	Pass
6.5	-25.28	-22.28	100	1000	-13.0	
Low carrier frequency 2501.0 MHz 64QAM						
5.5	-19.82	-16.82	100	1000	-13.0	Pass
6.5	-20.91	-17.91	100	1000	-13.0	
Mid carrier frequency 2595.0 MHz QPSK						
5.5	-18.11	-15.11	100	1000	-13.0	Pass
6.5	-19.28	-16.28	100	1000	-13.0	
Mid carrier frequency 2595.0 MHz 64QAM						
5.5	-17.08	-14.08	100	1000	-13.0	Pass
6.5	-19.15	-16.15	100	1000	-13.0	
High carrier frequency 2685.0 MHz QPSK						
5.5	-17.94	-14.94	100	1000	-13.0	Pass
6.5	-19.62	-16.62	100	1000	-13.0	
High carrier frequency 2685.0 MHz 64QAM						
5.5	-18.17	-15.17	100	1000	-13.0	Pass
6.5	-20.46	-17.46	100	1000	-13.0	

* - Low band edge result = Low band edge SA Reading + 10log(N)



Test specification:		Section 27.53(m)(2), Band edge emissions	
Test procedure:		47 CFR, Sections 2.1051, 27.53; TIA/EIA-603-C, Section 2.2.13	
Test mode:		Compliance	
Date(s):		27-Jul-15 - 28-Jul-15	
Temperature: 24 °C		Air Pressure: 1008 hPa	
		Relative Humidity: 55 %	
		Power Supply: 48 VDC	
Remarks:			
Verdict: PASS			

Table 7.3.5 Spurious emission at the high band edge test results

ASSIGNED FREQUENCY RANGE: 2490.0 – 2696.0 MHz
 DETECTOR USED: Average
 VIDEO BANDWIDTH: ≥ Resolution bandwidth
 MODULATING SIGNAL: PRBS
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 MODULATION: QPSK, 64QAM
 EBW: 10 MHz
 NUMBER OF RF OUTPUTS: N = 2

Frequency offset, ± MHz	High band edge SA reading, dBm	High band edge result, dBm*	RBW, kHz	Integration BW, kHz	Limit, dBm	Verdict
Low carrier frequency 2501.0 MHz QPSK						
5.5	-21.49	-18.49	100	1000	-13.0	Pass
6.5	-23.68	-20.68	100	1000	-13.0	
Low carrier frequency 2501.0 MHz 64QAM						
5.5	-19.82	-16.82	100	1000	-13.0	Pass
6.5	-20.91	-17.91	100	1000	-13.0	
Mid carrier frequency 2595.0 MHz QPSK						
7.5	-20.40	-17.40	100	1000	-13.0	Pass
8.5	-22.00	-19.00	100	1000	-13.0	
Mid carrier frequency 2595.0 MHz 64QAM						
7.5	-19.70	-16.70	100	1000	-13.0	Pass
8.5	-22.66	-19.66	100	1000	-13.0	
High carrier frequency 2685.0 MHz QPSK						
5.5	-19.70	-16.70	100	1000	-13.0	Pass
6.5	-22.66	-19.66	100	1000	-13.0	
High carrier frequency 2685.0 MHz 64QAM						
5.5	-18.17	-15.17	100	1000	-13.0	Pass
6.5	-20.46	-17.46	100	1000	-13.0	

* - High band edge result = High band edge SA Reading + 10log(N)



Test specification:		Section 27.53(m)(2), Band edge emissions	
Test procedure:		47 CFR, Sections 2.1051, 27.53; TIA/EIA-603-C, Section 2.2.13	
Test mode:		Compliance	
Date(s):		27-Jul-15 - 28-Jul-15	
Temperature: 24 °C		Air Pressure: 1008 hPa	
		Relative Humidity: 55 %	
		Power Supply: 48 VDC	
Remarks:			
Verdict: PASS			

Table 7.3.6 Spurious emission at the low band edge test results

ASSIGNED FREQUENCY RANGE: 2490.0 – 2696.0 MHz
 DETECTOR USED: Average
 VIDEO BANDWIDTH: ≥ Resolution bandwidth
 MODULATING SIGNAL: PRBS
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 MODULATION: QPSK, 64QAM
 EBW: 20 MHz
 NUMBER OF RF OUTPUTS: N = 2

Frequency offset, ± MHz	Low band edge SA reading, dBm	Low band edge result, dBm	RBW, kHz	Integration BW, kHz	Limit, dBm	Verdict
Low carrier frequency 2506.0 MHz QPSK						
10.5	-19.51	-16.51	200	1000	-13.0	Pass
11.5	-23.95	-20.95	200	1000	-13.0	
Low carrier frequency 2506.0 MHz 64QAM						
10.5	-17.32	-14.32	200	1000	-13.0	Pass
11.5	-21.37	-18.37	200	1000	-13.0	
Mid carrier frequency 2595.0 MHz QPSK						
11.5	-20.14	-17.14	200	1000	-13.0	Pass
12.5	-20.45	-17.45	200	1000	-13.0	
Mid carrier frequency 2595.0 MHz 64QAM						
11.5	-23.15	-20.15	200	1000	-13.0	Pass
12.5	-23.00	-20.00	200	1000	-13.0	
High carrier frequency 2680.0 MHz QPSK						
12.5	-21.75	-18.75	200	1000	-13.0	Pass
13.5	-22.04	-19.04	200	1000	-13.0	
High carrier frequency 2680.0 MHz 64QAM						
12.5	-21.47	-21.47	200	1000	-13.0	Pass
13.5	-22.48	-19.48	200	1000	-13.0	

* - Low band edge result = Low band edge SA Reading + 10log(N)



Test specification:		Section 27.53(m)(2), Band edge emissions	
Test procedure:		47 CFR, Sections 2.1051, 27.53; TIA/EIA-603-C, Section 2.2.13	
Test mode:		Compliance	
Date(s):		27-Jul-15 - 28-Jul-15	
Temperature: 24 °C		Air Pressure: 1008 hPa	
		Relative Humidity: 55 %	
		Power Supply: 48 VDC	
Remarks:			

Table 7.3.7 Spurious emission at the high band edge test results

ASSIGNED FREQUENCY RANGE: 2490.0 – 2696.0 MHz
 DETECTOR USED: Average
 VIDEO BANDWIDTH: ≥ Resolution bandwidth
 MODULATING SIGNAL: PRBS
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 MODULATION: QPSK, 64QAM
 EBW: 20 MHz
 NUMBER OF RF OUTPUTS: N = 2

Frequency offset, ± MHz	High band edge SA reading, dBm	High band edge result, dBm*	RBW, kHz	Integration BW, kHz	Limit, dBm	Verdict
Low carrier frequency 2506.0 MHz QPSK						
12.5	-22.65	-19.65	200	1000	-13.0	Pass
13.5	-23.66	-20.66	200	1000	-13.0	
Low carrier frequency 2506.0 MHz 64QAM						
12.5	-22.88	-19.88	200	1000	-13.0	Pass
13.5	-24.23	-21.23	200	1000	-13.0	
Mid carrier frequency 2595.0 MHz QPSK						
13.5	-19.88	-16.88	200	1000	-13.0	Pass
14.5	-20.34	-17.34	200	1000	-13.0	
Mid carrier frequency 2595.0 MHz 64QAM						
13.5	-22.62	-19.62	200	1000	-13.0	Pass
14.5	-24.03	-21.03	200	1000	-13.0	
High carrier frequency 2680.0 MHz QPSK						
10.5	-17.67	-14.67	200	1000	-13.0	Pass
11.5	-21.02	-18.02	200	1000	-13.0	
High carrier frequency 2680.0 MHz 64QAM						
10.5	-18.28	-15.28	200	1000	-13.0	Pass
11.5	-21.43	-18.43	200	1000	-13.0	

* - High band edge result = High band edge SA Reading + 10log(N)

Reference numbers of test equipment used

HL 3301	HL 3302	HL 3818	HL 4229	HL 4234	HL 4293	HL 4366	
---------	---------	---------	---------	---------	---------	---------	--

Full description is given in Appendix A.




HERMON LABORATORIES

Test specification:		Section 27.53(m)(2), Band edge emissions	
Test procedure:		47 CFR, Sections 2.1051, 27.53; TIA/EIA-603-C, Section 2.2.13	
Test mode:		Compliance	
Date(s):		27-Jul-15 - 28-Jul-15	
Temperature: 24 °C		Air Pressure: 1008 hPa	
Relative Humidity: 55 %		Power Supply: 48 VDC	
Remarks:			
		Verdict: PASS	


Plot 7.3.1 Spurious emission at band edges test results at low carrier frequency, 5 MHz EBW

ASSIGNED FREQUENCY RANGE: 2496.0 – 2506.0 MHz
DETECTOR USED: Average
MODULATION: QPSK
MODULATING SIGNAL: PRBS
BIT RATE: 5.3 Mbps

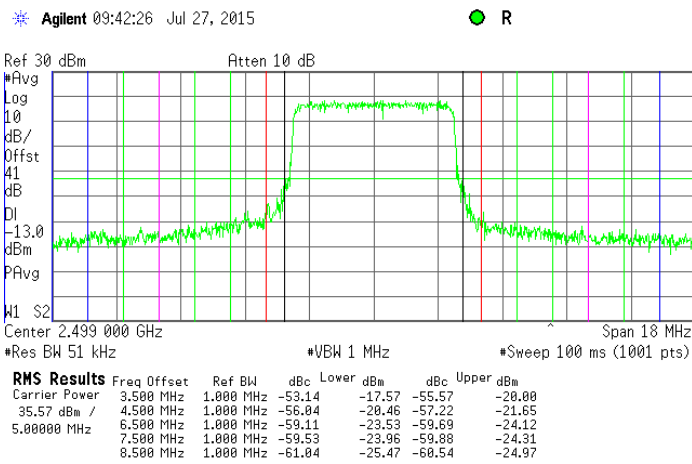

Plot 7.3.2 Spurious emission at band edges test results at mid carrier frequency, 5 MHz EBW

ASSIGNED FREQUENCY RANGE: 2590.0 – 2696.0 MHz
DETECTOR USED: Average
MODULATION: QPSK
MODULATING SIGNAL: PRBS
BIT RATE: 5.3 Mbps

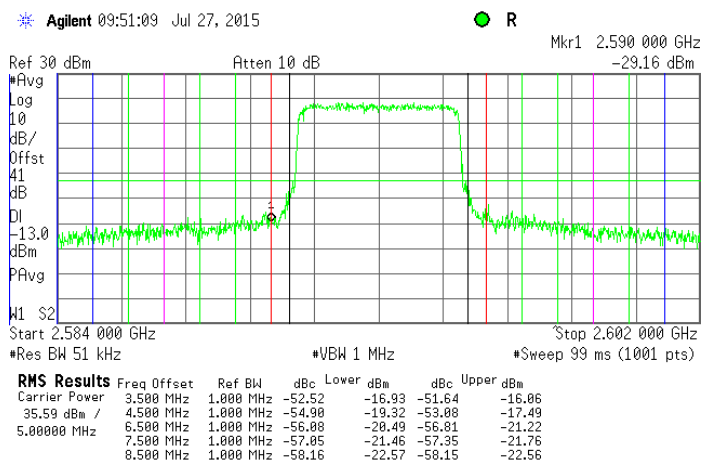




HERMON LABORATORIES

Test specification:		Section 27.53(m)(2), Band edge emissions	
Test procedure:		47 CFR, Sections 2.1051, 27.53; TIA/EIA-603-C, Section 2.2.13	
Test mode:		Compliance	
Date(s):		27-Jul-15 - 28-Jul-15	
Temperature: 24 °C		Air Pressure: 1008 hPa	
Relative Humidity: 55 %		Power Supply: 48 VDC	
Remarks:			
		Verdict: PASS	


Plot 7.3.3 Spurious emission at band edges test results at high carrier frequency, 5 MHz EBW

ASSIGNED FREQUENCY RANGE: 2680.0 – 2690.0 MHz
 DETECTOR USED: Average
 MODULATION: QPSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 5.3 Mbps

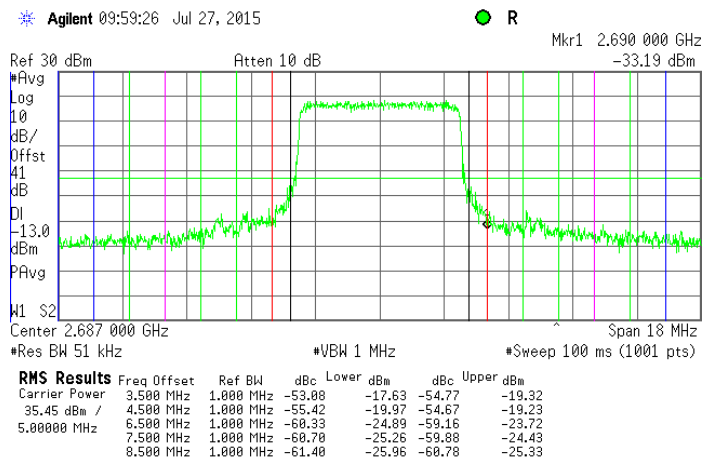

Plot 7.3.4 Spurious emission at band edges test results at low carrier frequency, 5 MHz EBW

ASSIGNED FREQUENCY RANGE: 2496.0 – 2506.0 MHz
 DETECTOR USED: Average
 MODULATION: 64QAM
 MODULATING SIGNAL: PRBS
 BIT RATE: 23 Mbps

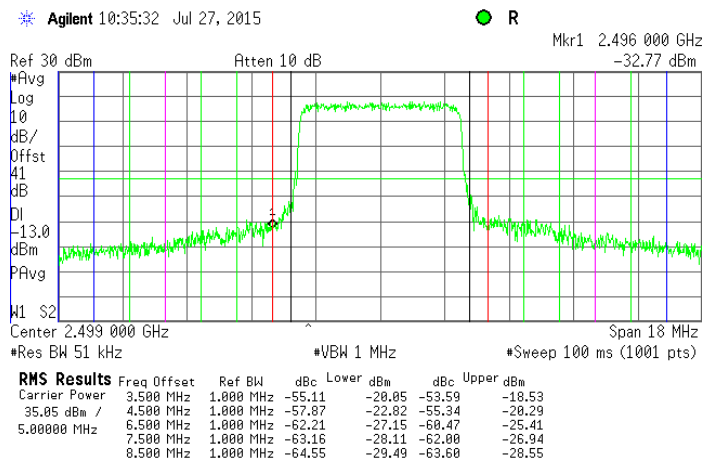




HERMON LABORATORIES

Test specification:		Section 27.53(m)(2), Band edge emissions	
Test procedure:		47 CFR, Sections 2.1051, 27.53; TIA/EIA-603-C, Section 2.2.13	
Test mode:		Compliance	
Date(s):		27-Jul-15 - 28-Jul-15	
Temperature: 24 °C		Air Pressure: 1008 hPa	
Relative Humidity: 55 %		Power Supply: 48 VDC	
Remarks:			
		Verdict: PASS	


Plot 7.3.5 Spurious emission at band edges test results at mid carrier frequency, 5 MHz EBW

ASSIGNED FREQUENCY RANGE: 2590.0 – 2696.0 MHz
DETECTOR USED: Average
MODULATION: 64QAM
MODULATING SIGNAL: PRBS
BIT RATE: 23 Mbps

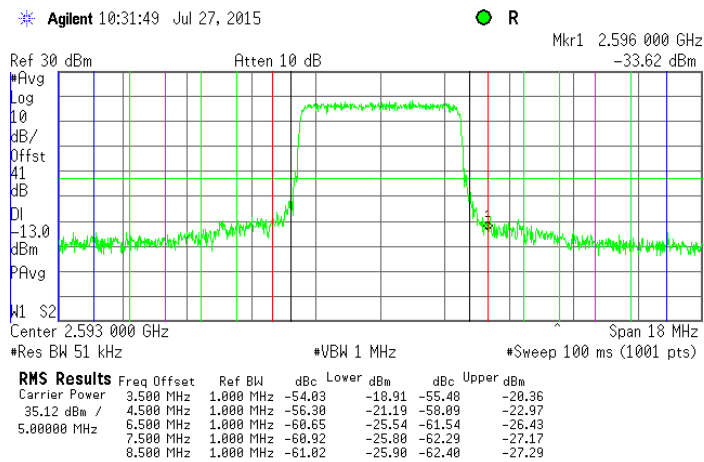

Plot 7.3.6 Spurious emission at band edges test results at high carrier frequency, 5 MHz EBW

ASSIGNED FREQUENCY RANGE: 2680.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: 64QAM
MODULATING SIGNAL: PRBS
BIT RATE: 23 Mbps

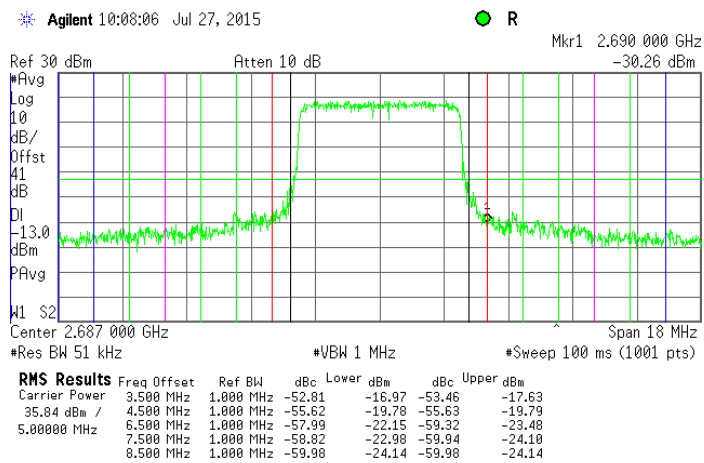




HERMON LABORATORIES

Test specification:		Section 27.53(m)(2), Band edge emissions	
Test procedure:		47 CFR, Sections 2.1051, 27.53; TIA/EIA-603-C, Section 2.2.13	
Test mode:		Compliance	
Date(s):		27-Jul-15 - 28-Jul-15	
Temperature: 24 °C		Air Pressure: 1008 hPa	
Relative Humidity: 55 %		Power Supply: 48 VDC	
Remarks:			
		Verdict: PASS	


Plot 7.3.7 Spurious emission at band edges test results at low carrier frequency, 10 MHz EBW

ASSIGNED FREQUENCY RANGE: 2490.0 – 2512.0 MHz
DETECTOR USED: Average
MODULATION: QPSK
MODULATING SIGNAL: PRBS
BIT RATE: 10.7 Mbps

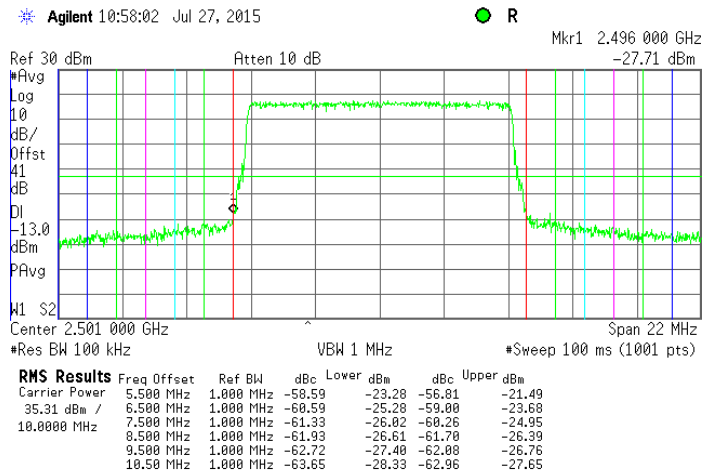

Plot 7.3.8 Spurious emission at band edges test results at mid carrier frequency, 10 MHz EBW

ASSIGNED FREQUENCY RANGE: 2584.0 – 2608.0 MHz
DETECTOR USED: Average
MODULATION: QPSK
MODULATING SIGNAL: PRBS
BIT RATE: 10.7 Mbps

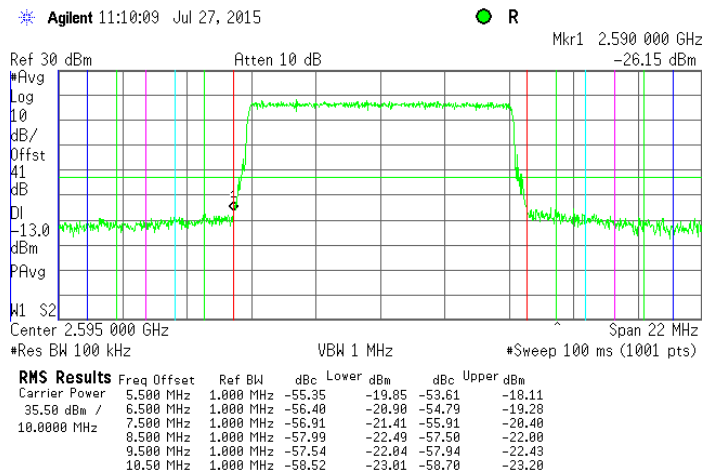




HERMON LABORATORIES

Test specification:		Section 27.53(m)(2), Band edge emissions	
Test procedure:		47 CFR, Sections 2.1051, 27.53; TIA/EIA-603-C, Section 2.2.13	
Test mode:		Compliance	
Date(s):		27-Jul-15 - 28-Jul-15	
Temperature: 24 °C		Air Pressure: 1008 hPa	
Relative Humidity: 55 %		Power Supply: 48 VDC	
Remarks:			
		Verdict: PASS	


Plot 7.3.9 Spurious emission at band edges test results at high carrier frequency, 10 MHz EBW

ASSIGNED FREQUENCY RANGE: 2674.0 – 2696.0 MHz
 DETECTOR USED: Average
 MODULATION: QPSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 10.7 Mbps

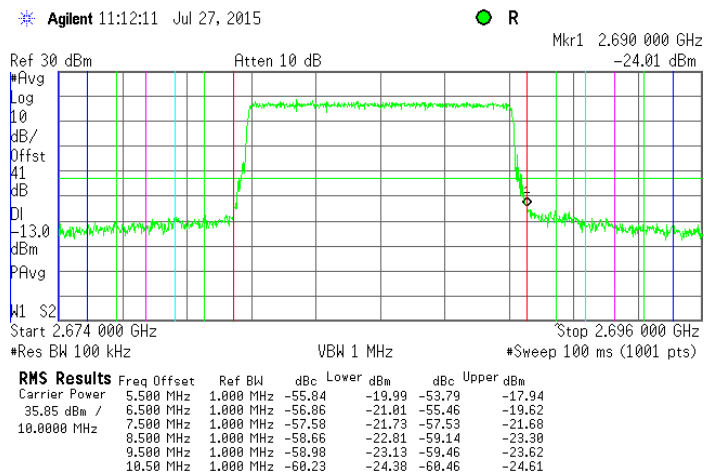

Plot 7.3.10 Spurious emission at band edges test results at low carrier frequency, 10 MHz EBW

ASSIGNED FREQUENCY RANGE: 2490.0 – 2512.0 MHz
 DETECTOR USED: Average
 MODULATION: 64QAM
 MODULATING SIGNAL: PRBS
 BIT RATE: 47.3 Mbps

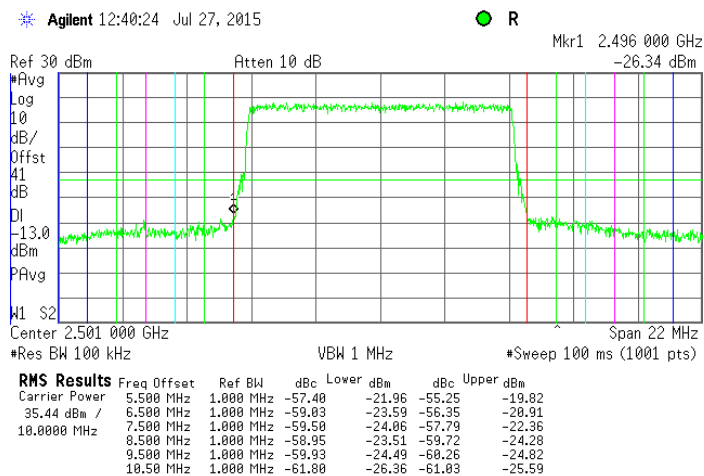




HERMON LABORATORIES

Test specification:		Section 27.53(m)(2), Band edge emissions	
Test procedure:		47 CFR, Sections 2.1051, 27.53; TIA/EIA-603-C, Section 2.2.13	
Test mode:		Compliance	
Date(s):		27-Jul-15 - 28-Jul-15	
Temperature: 24 °C		Air Pressure: 1008 hPa	
		Relative Humidity: 55 %	
		Power Supply: 48 VDC	
Remarks:			
		Verdict: PASS	


Plot 7.3.11 Spurious emission at band edges test results at mid carrier frequency, 10 MHz EBW

ASSIGNED FREQUENCY RANGE: 2584.0 – 2608.0 MHz
DETECTOR USED: Average
MODULATION: 64QAM
MODULATING SIGNAL: PRBS
BIT RATE: 47.3 Mbps

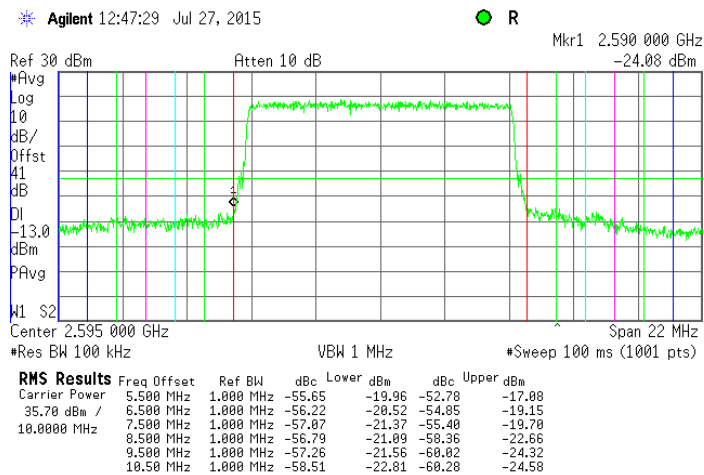

Plot 7.3.12 Spurious emission at band edges test results at high carrier frequency, 10 MHz EBW

ASSIGNED FREQUENCY RANGE: 2674.0 – 2696.0 MHz
DETECTOR USED: Average
MODULATION: 64QAM
MODULATING SIGNAL: PRBS
BIT RATE: 47.3 Mbps

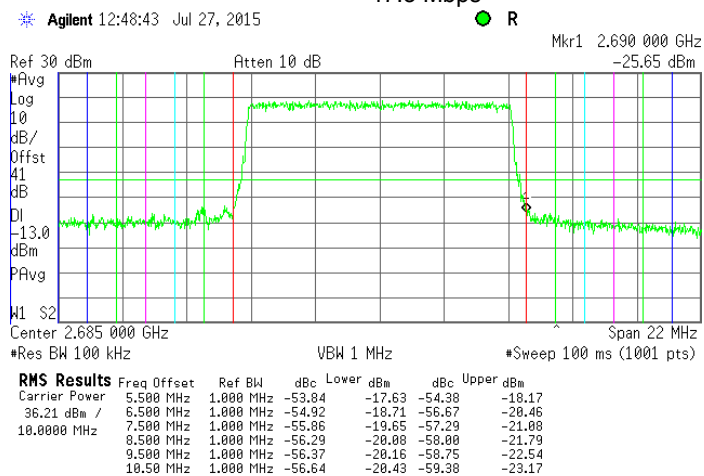




HERMON LABORATORIES

Test specification:		Section 27.53(m)(2), Band edge emissions	
Test procedure:		47 CFR, Sections 2.1051, 27.53; TIA/EIA-603-C, Section 2.2.13	
Test mode:		Compliance	
Date(s):		27-Jul-15 - 28-Jul-15	
Temperature: 24 °C		Air Pressure: 1008 hPa	
Relative Humidity: 55 %		Power Supply: 48 VDC	
Remarks:			
		Verdict: PASS	


Plot 7.3.13 Spurious emission at band edges test results at low carrier frequency, 20 MHz EBW

ASSIGNED FREQUENCY RANGE: 2490.0 – 2524.0 MHz
DETECTOR USED: Average
MODULATION: QPSK
MODULATING SIGNAL: PRBS
BIT RATE: 23.4 Mbps

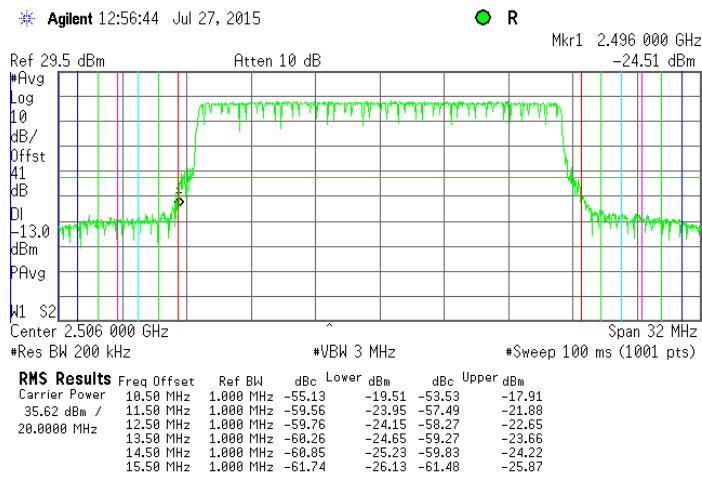

Plot 7.3.14 Spurious emission at band edges test results at mid carrier frequency, 20 MHz EBW

ASSIGNED FREQUENCY RANGE: 2578.0 – 2614.0 MHz
DETECTOR USED: Average
MODULATION: QPSK
MODULATING SIGNAL: PRBS
BIT RATE: 23.4 Mbps

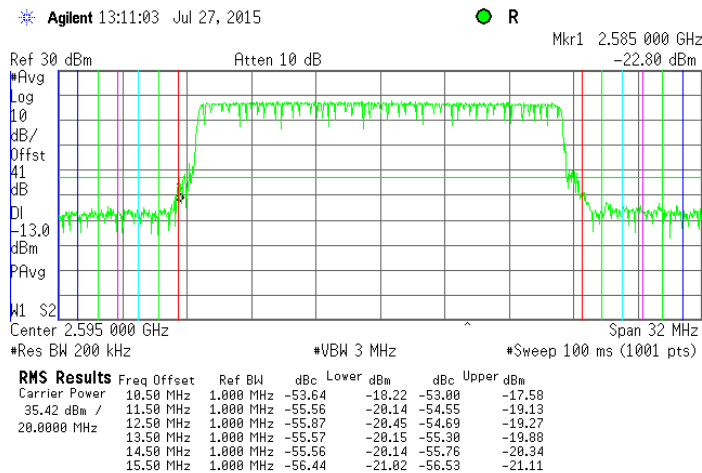




HERMON LABORATORIES

Test specification:		Section 27.53(m)(2), Band edge emissions	
Test procedure:		47 CFR, Sections 2.1051, 27.53; TIA/EIA-603-C, Section 2.2.13	
Test mode:		Compliance	
Date(s):		27-Jul-15 - 28-Jul-15	
Temperature: 24 °C		Air Pressure: 1008 hPa	
Relative Humidity: 55 %		Power Supply: 48 VDC	
Remarks:			
		Verdict: PASS	


Plot 7.3.15 Spurious emission at band edges test results at high carrier frequency, 20 MHz EBW

ASSIGNED FREQUENCY RANGE: 2662.0 – 2696.0 MHz
DETECTOR USED: Average
MODULATION: QPSK
MODULATING SIGNAL: PRBS
BIT RATE: 23.4 Mbps

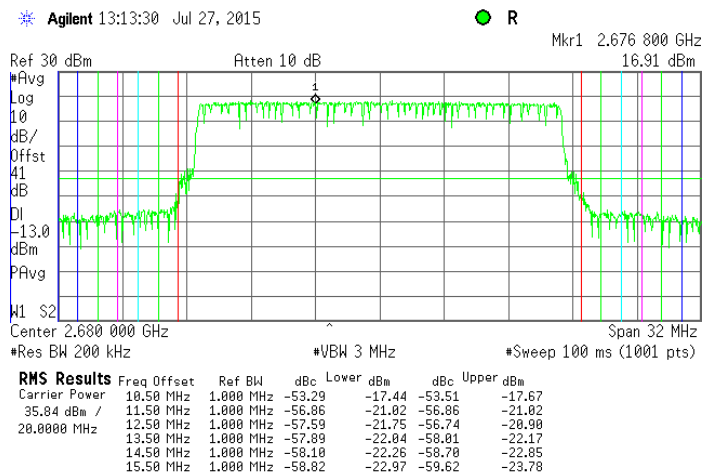

Plot 7.3.16 Spurious emission at band edges test results at low carrier frequency, 20 MHz EBW

ASSIGNED FREQUENCY RANGE: 2490.0 – 2524.0 MHz
DETECTOR USED: Average
MODULATION: 64QAM
MODULATING SIGNAL: PRBS
BIT RATE: 95 Mbps

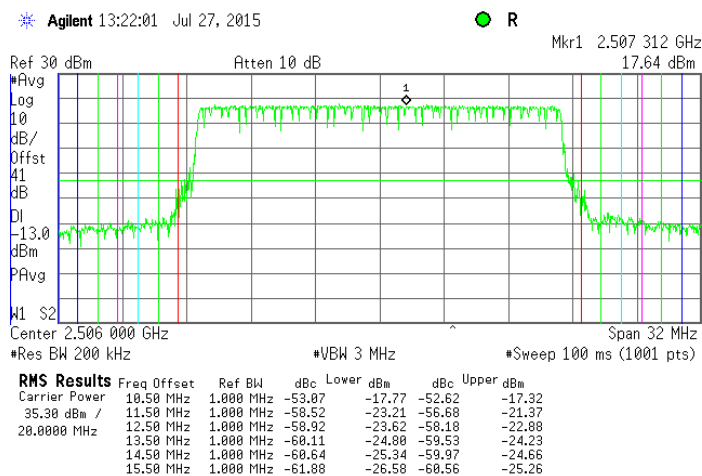




HERMON LABORATORIES

Test specification:	Section 27.53(m)(2), Band edge emissions		
Test procedure:	47 CFR, Sections 2.1051, 27.53; TIA/EIA-603-C, Section 2.2.13		
Test mode:	Compliance	Verdict:	PASS
Date(s):	27-Jul-15 - 28-Jul-15		
Temperature: 24 °C	Air Pressure: 1008 hPa	Relative Humidity: 55 %	Power Supply: 48 VDC
Remarks:			


Plot 7.3.17 Spurious emission at band edges test results at mid carrier frequency, 20 MHz EBW

ASSIGNED FREQUENCY RANGE: 2578.0 – 2614.0 MHz
DETECTOR USED: Average
MODULATION: 64QAM
MODULATING SIGNAL: PRBS
BIT RATE: 95 Mbps

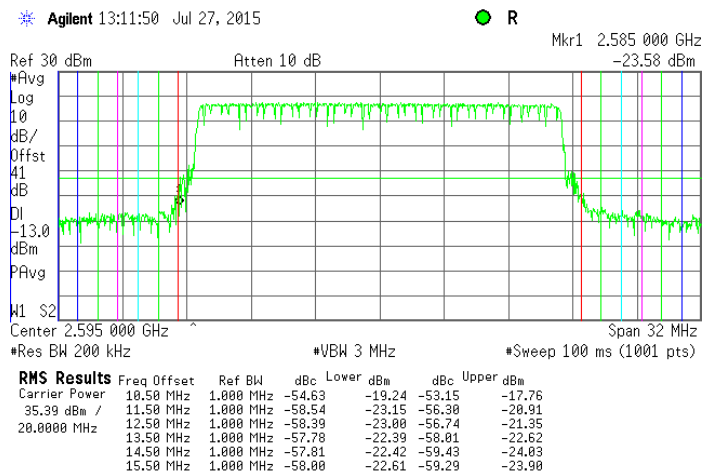

Plot 7.3.18 Spurious emission at band edges test results at high carrier frequency, 20 MHz EBW

ASSIGNED FREQUENCY RANGE: 2662.0 – 2696.0 MHz
DETECTOR USED: Average
MODULATION: 64QAM
MODULATING SIGNAL: PRBS
BIT RATE: 95 Mbps

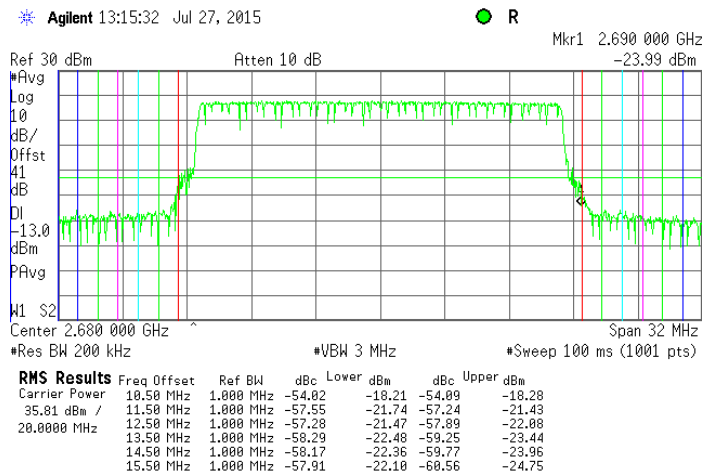



Test specification:		Section 27.53(m)(2), Spurious emissions at RF antenna connector	
Test procedure:		47 CFR, Sections 2.1051, 27.53	
Test mode:		Compliance	
Date(s):		28-Jul-15	
Temperature: 24 °C		Air Pressure: 1008 hPa	
		Relative Humidity: 55 %	
		Power Supply: 48 VDC	
Remarks:			

7.4 Spurious emissions at RF antenna connector test

7.4.1 General

This test was performed to measure spurious emissions at RF antenna connector. Specification test limits are given in Table 7.4.1.

Table 7.4.1 Spurious emission limits

Frequency, MHz	Attenuation below carrier, dBc	Spurious emissions, dBm
Base and fixed user stations		
0.009 – 10th harmonic	43+10logP(W)**	-13.0

* - spurious emission limits do not apply to the channel edge emission investigated in course of band edge emission testing

** - P is transmitter output power in watts


7.4.2 Test procedure

7.4.2.1 The EUT was set up as shown in Figure 7.4.1, energized and its proper operation was checked.

7.4.2.2 The EUT was adjusted to produce maximum available for end user RF output power.

7.4.2.3 The spurious emission was measured with spectrum analyzer as provided in Table 7.4.2 and the associated plots.

Figure 7.4.1 Spurious emission test setup, single output

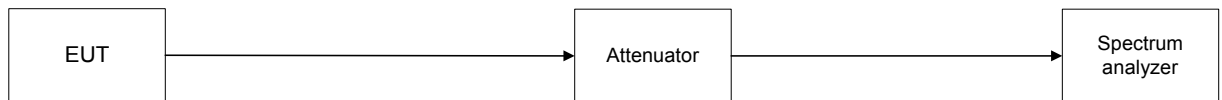



Test specification:		Section 27.53(m)(2), Spurious emissions at RF antenna connector	
Test procedure:		47 CFR, Sections 2.1051, 27.53	
Test mode:		Compliance	
Date(s):		28-Jul-15	
Temperature: 24 °C		Air Pressure: 1008 hPa	
		Relative Humidity: 55 %	
		Power Supply: 48 VDC	
Remarks:			

Table 7.4.2 Spurious emission test results

ASSIGNED FREQUENCY RANGE: 2620 – 2690 MHz
 INVESTIGATED FREQUENCY RANGE: 0.009 – 27000 MHz
 VIDEO BANDWIDTH: ≥ Resolution bandwidth
 MODULATION: 64QAM
 MODULATING SIGNAL: PRBS
 BIT RATE: 23.0 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 TESTED RF CHAIN: RF#2

Frequency, MHz	SA reading, dBm**	Attenuation, dB	Cable loss, dB	RBW, kHz	Spurious emission, dBm	Limit, dBm	Margin, dB*	Verdict
Low carrier frequency								
2492.000	-20.39	included	included	1000	-20.39	-13.00	-7.39	Pass
2507.293	-21.90	included	included	1000	-21.90	-13.00	-8.90	Pass
Mid carrier frequency								
2584.740	-23.89	included	included	1000	-23.89	-13.00	-10.89	Pass
2600.000	-23.88	included	included	1000	-23.88	-13.00	-10.88	Pass
High carrier frequency								
2680.000	-23.51	included	included	1000	-23.51	-13.00	-10.51	Pass
2694.206	-24.58	included	included	1000	-24.58	-13.00	-11.58	Pass

*- Margin = Spurious emission – specification limit.

** - SA reading, dBm = Spurious emissions in one chain + 10*Log(N) = Spurious emissions in one chain + 3dB.

Reference numbers of test equipment used


HL 3455	HL 3818	HL 3903	HL 4293				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.




Test specification:	Section 27.53(m)(2), Spurious emissions at RF antenna connector		
Test procedure:	47 CFR, Sections 2.1051, 27.53		
Test mode:	Compliance	Verdict:	PASS
Date(s):	28-Jul-15		
Temperature: 24 °C	Air Pressure: 1008 hPa	Relative Humidity: 55 %	Power Supply: 48 VDC
Remarks:			

Plot 7.4.1 Spurious emission measurements in 9 - 150 kHz range at low carrier frequency, RF#2

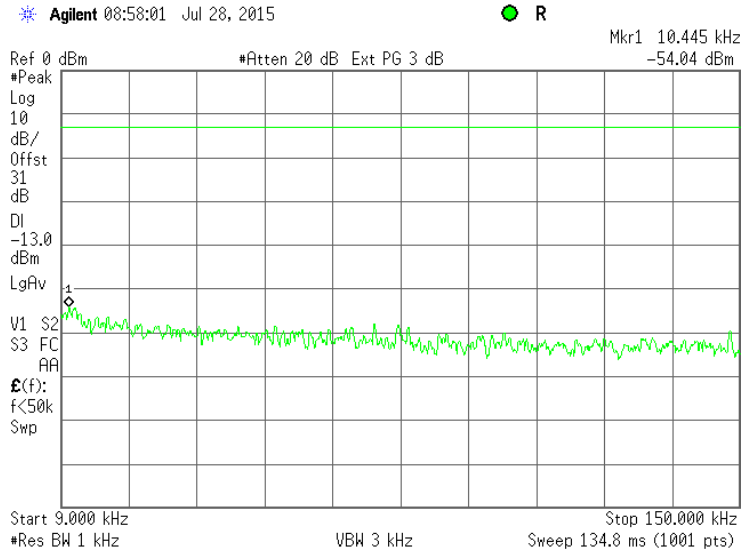


Plot 7.4.2 Spurious emission measurements in 9 - 150 kHz range at mid carrier frequency, RF#2

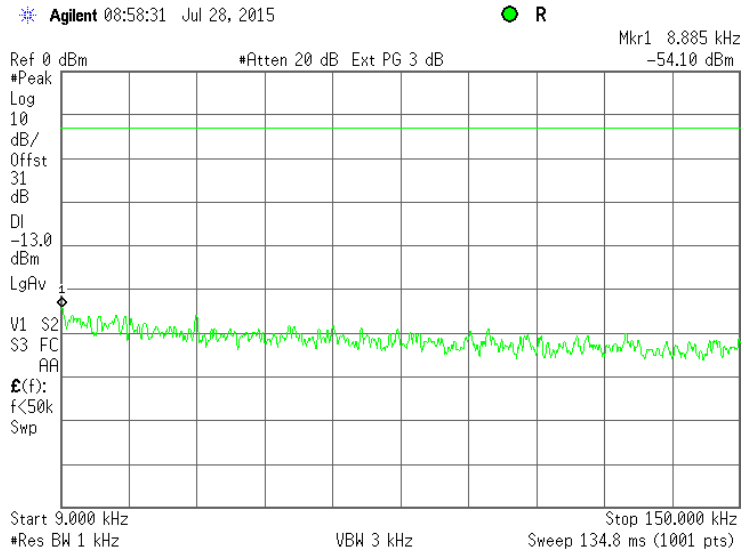




Test specification:		Section 27.53(m)(2), Spurious emissions at RF antenna connector	
Test procedure:		47 CFR, Sections 2.1051, 27.53	
Test mode:		Verdict:	
Compliance		PASS	
Date(s):		28-Jul-15	
Temperature: 24 °C	Air Pressure: 1008 hPa	Relative Humidity: 55 %	Power Supply: 48 VDC
Remarks:			

Plot 7.4.3 Spurious emission measurements in 9 - 150 kHz range at high carrier frequency, RF#2

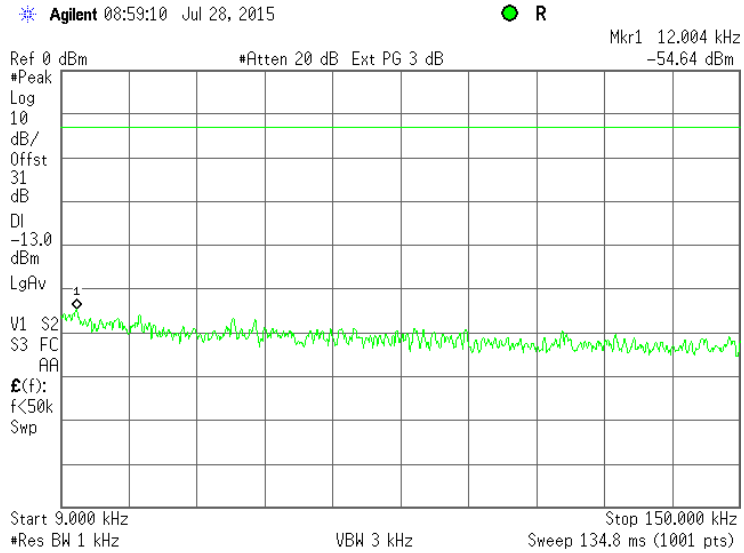


Plot 7.4.4 Spurious emission measurements in 0.15 - 30.0 MHz range at low carrier frequency, #RF2

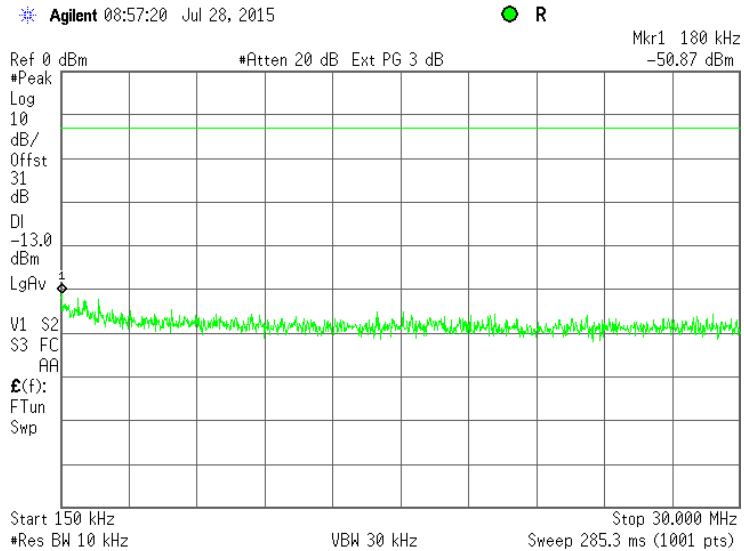




Test specification:		Section 27.53(m)(2), Spurious emissions at RF antenna connector	
Test procedure:		47 CFR, Sections 2.1051, 27.53	
Test mode:		Verdict:	
Compliance		PASS	
Date(s):		28-Jul-15	
Temperature: 24 °C	Air Pressure: 1008 hPa	Relative Humidity: 55 %	Power Supply: 48 VDC
Remarks:			

Plot 7.4.5 Spurious emission measurements in 0.15 - 30.0 MHz range at mid carrier frequency, #RF2

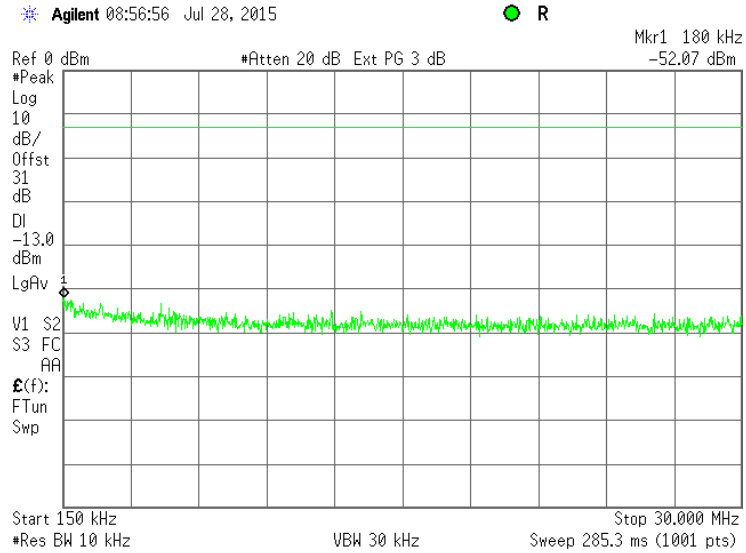


Plot 7.4.6 Spurious emission measurements in 0.15 - 30.0 MHz range at high carrier frequency, #RF2

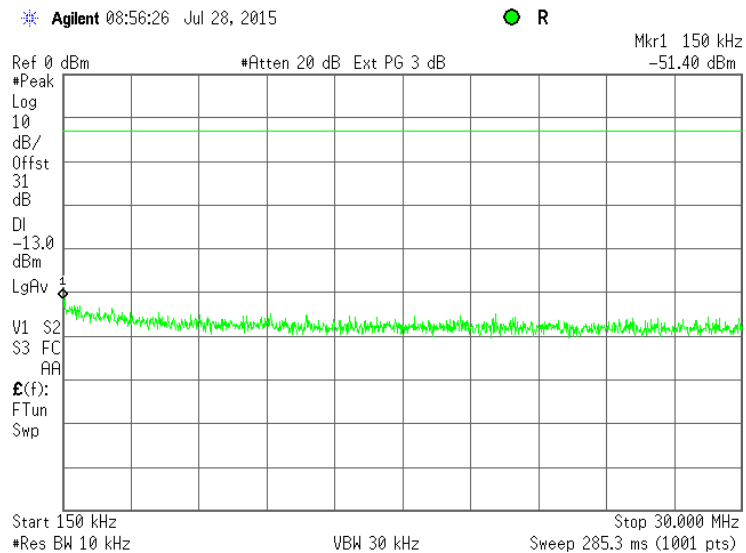




Test specification:		Section 27.53(m)(2), Spurious emissions at RF antenna connector	
Test procedure:		47 CFR, Sections 2.1051, 27.53	
Test mode:		Verdict: PASS	
Date(s):		28-Jul-15	
Temperature: 24 °C	Air Pressure: 1008 hPa	Relative Humidity: 55 %	Power Supply: 48 VDC
Remarks:			

Plot 7.4.7 Spurious emission measurements in 30 - 1000 MHz range at low carrier frequency, #RF2

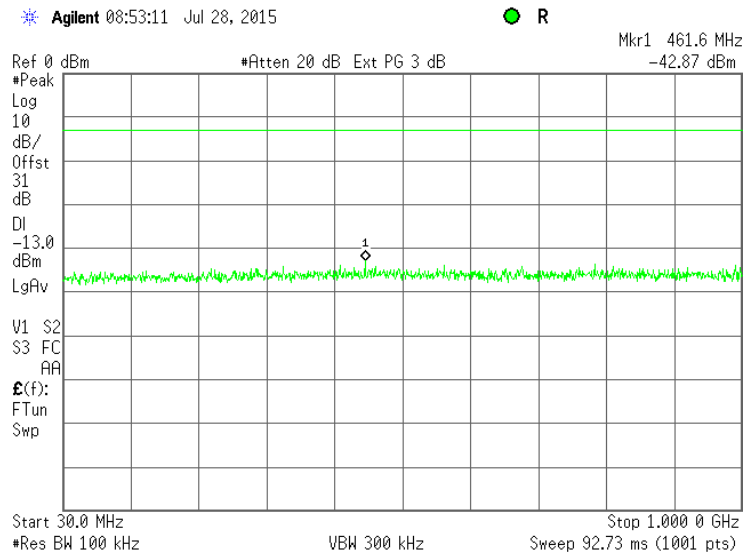


Plot 7.4.8 Spurious emission measurements in 30 - 1000 MHz range at mid carrier frequency, #RF2

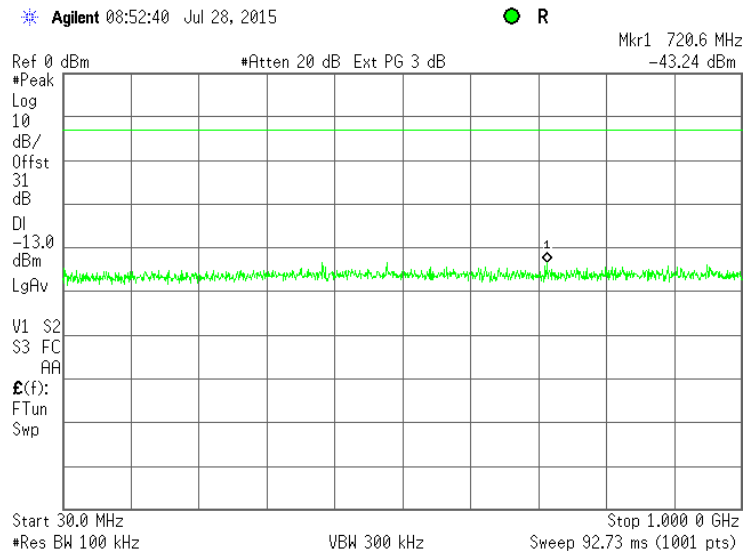




Test specification:		Section 27.53(m)(2), Spurious emissions at RF antenna connector	
Test procedure:		47 CFR, Sections 2.1051, 27.53	
Test mode:		Verdict: PASS	
Date(s):		28-Jul-15	
Temperature: 24 °C	Air Pressure: 1008 hPa	Relative Humidity: 55 %	Power Supply: 48 VDC
Remarks:			

Plot 7.4.9 Spurious emission measurements in 30 - 1000 MHz range at high carrier frequency, #RF2

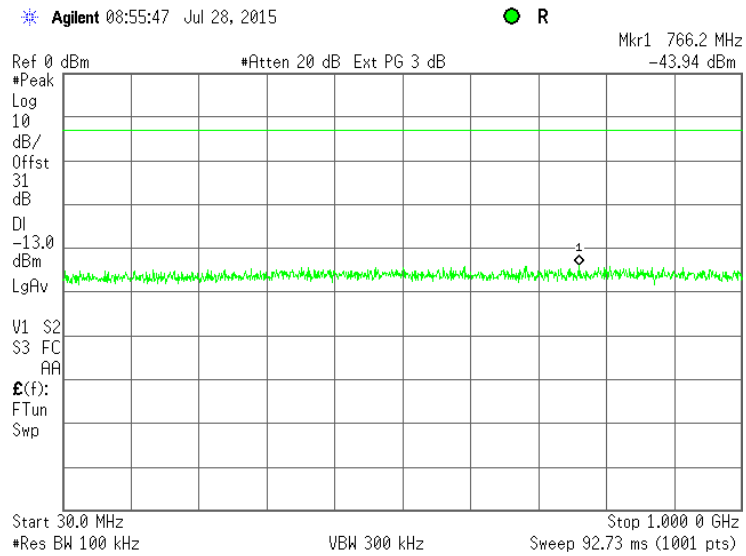


Plot 7.4.10 Spurious emission measurements in 1000 – 2400 MHz range at low carrier frequency, #RF2

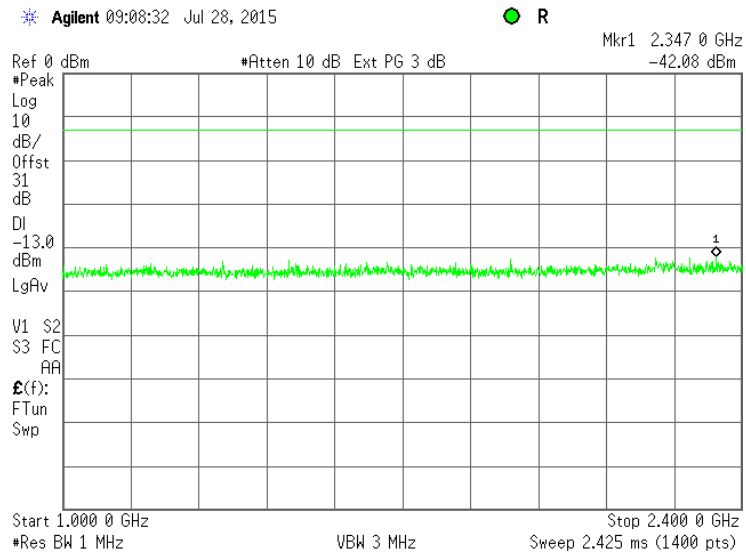




Test specification:		Section 27.53(m)(2), Spurious emissions at RF antenna connector	
Test procedure:		47 CFR, Sections 2.1051, 27.53	
Test mode:		Verdict:	
Compliance		PASS	
Date(s):		28-Jul-15	
Temperature: 24 °C	Air Pressure: 1008 hPa	Relative Humidity: 55 %	Power Supply: 48 VDC
Remarks:			

Plot 7.4.11 Spurious emission measurements in 2400 – 2492 MHz range at low carrier frequency, #RF2

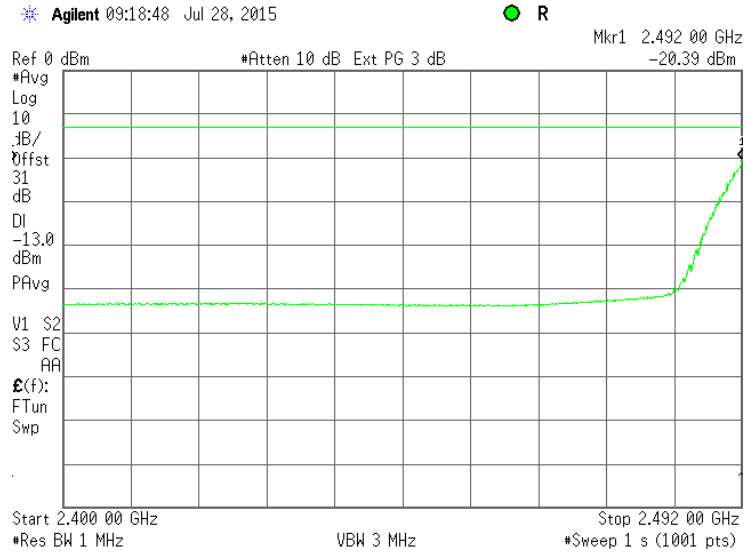

NOTE: Average Detector and Max Hold were used

Plot 7.4.12 Spurious emission measurements in 2507 - 2800 MHz range at low carrier frequency, #RF2

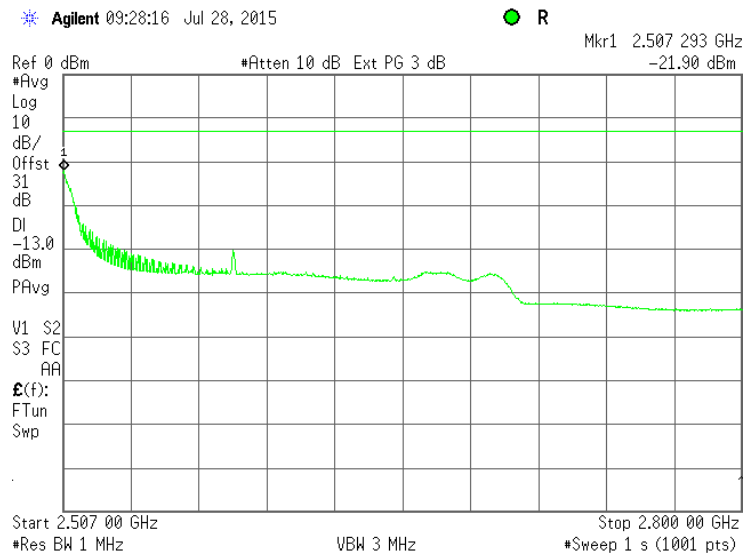


NOTE: Average Detector and Max Hold were used




Test specification:		Section 27.53(m)(2), Spurious emissions at RF antenna connector	
Test procedure:		47 CFR, Sections 2.1051, 27.53	
Test mode:		Verdict:	
Compliance		PASS	
Date(s):		28-Jul-15	
Temperature: 24 °C	Air Pressure: 1008 hPa	Relative Humidity: 55 %	Power Supply: 48 VDC
Remarks:			

Plot 7.4.13 Spurious emission measurements in 1000 - 2400 MHz range at mid carrier frequency, #RF2

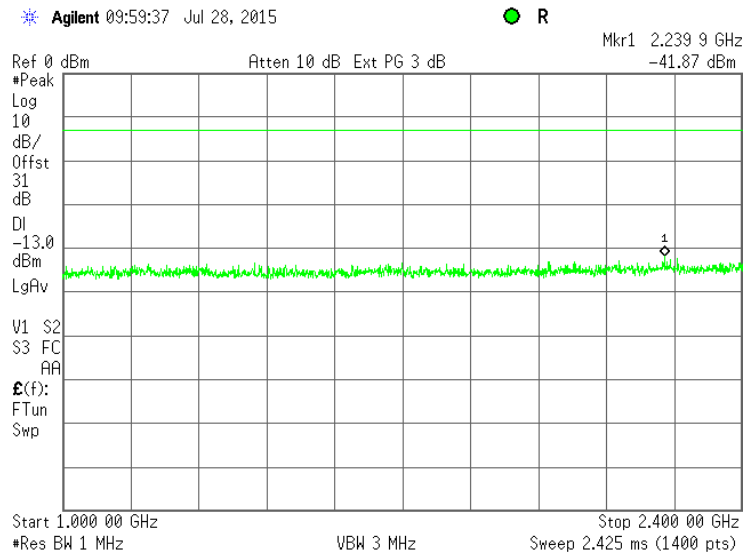

Plot 7.4.14 Spurious emission measurements in 2400 - 2585 MHz range at mid carrier frequency, #RF2

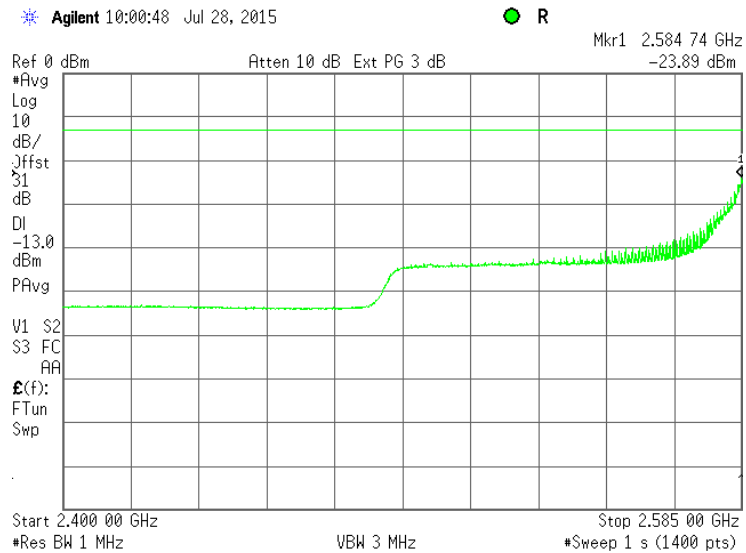


NOTE: Average Detector and Max Hold were used




Test specification:		Section 27.53(m)(2), Spurious emissions at RF antenna connector	
Test procedure:		47 CFR, Sections 2.1051, 27.53	
Test mode:		Verdict: PASS	
Date(s):		28-Jul-15	
Temperature: 24 °C	Air Pressure: 1008 hPa	Relative Humidity: 55 %	Power Supply: 48 VDC
Remarks:			

Plot 7.4.15 Spurious emission measurements in 2600 - 2900 MHz range at mid carrier frequency, #RF2

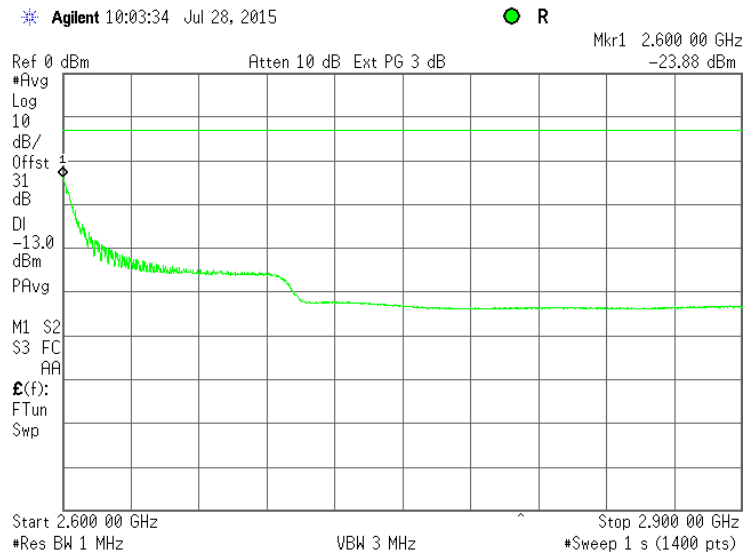

NOTE: Average Detector and Max Hold were used


Plot 7.4.16 Spurious emission measurements in 1000 - 2400 MHz at high carrier frequency, #RF2

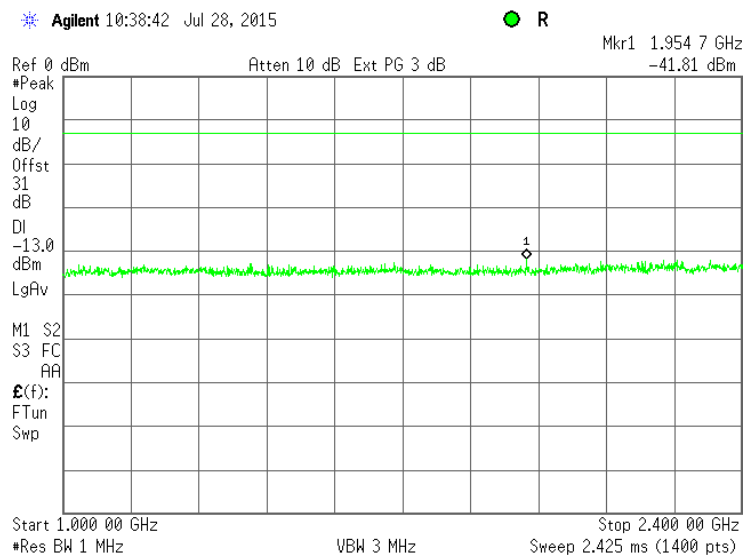




Test specification:		Section 27.53(m)(2), Spurious emissions at RF antenna connector	
Test procedure:		47 CFR, Sections 2.1051, 27.53	
Test mode:		Verdict: PASS	
Date(s):		28-Jul-15	
Temperature: 24 °C	Air Pressure: 1008 hPa	Relative Humidity: 55 %	Power Supply: 48 VDC
Remarks:			

Plot 7.4.17 Spurious emission measurements in 2400 - 2680 MHz at high carrier frequency, #RF2

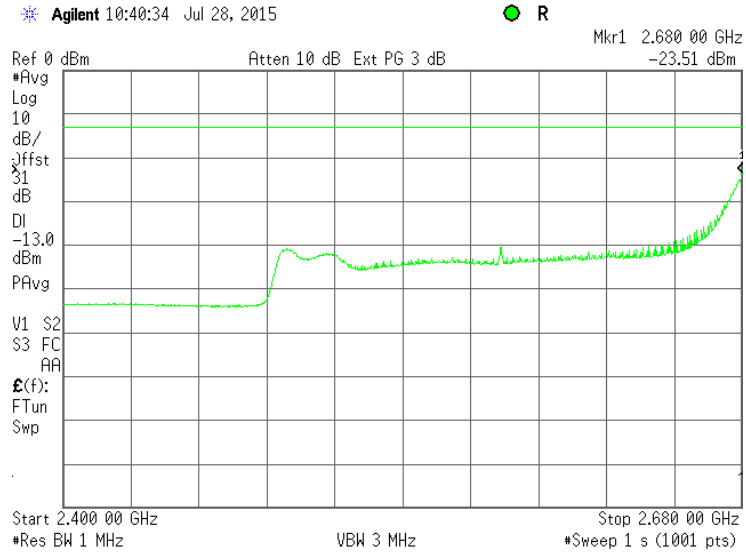

NOTE: Average Detector and Max Hold were used

Plot 7.4.18 Spurious emission measurements in 2694 – 2900 MHz range at high carrier frequency, #RF2

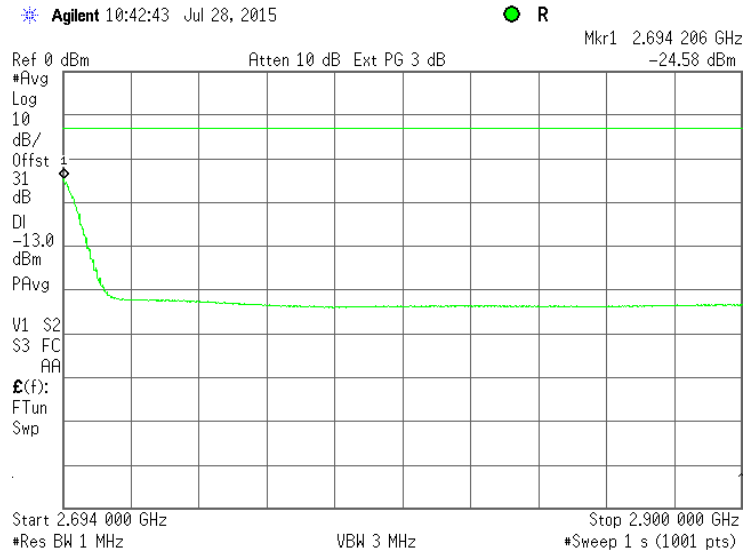


NOTE: Average Detector and Max Hold were used




Test specification:		Section 27.53(m)(2), Spurious emissions at RF antenna connector	
Test procedure:		47 CFR, Sections 2.1051, 27.53	
Test mode:		Verdict: PASS	
Date(s):		28-Jul-15	
Temperature: 24 °C	Air Pressure: 1008 hPa	Relative Humidity: 55 %	Power Supply: 48 VDC
Remarks:			

Plot 7.4.19 Spurious emission measurements in 2800 - 10000 MHz range at low carrier frequency, #RF2

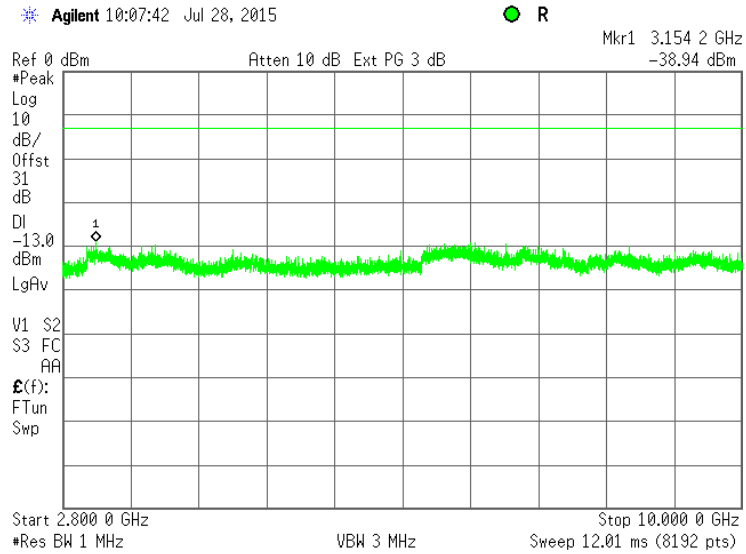


Plot 7.4.20 Spurious emission measurements in 2900 - 10000 MHz at mid carrier frequency, #RF2

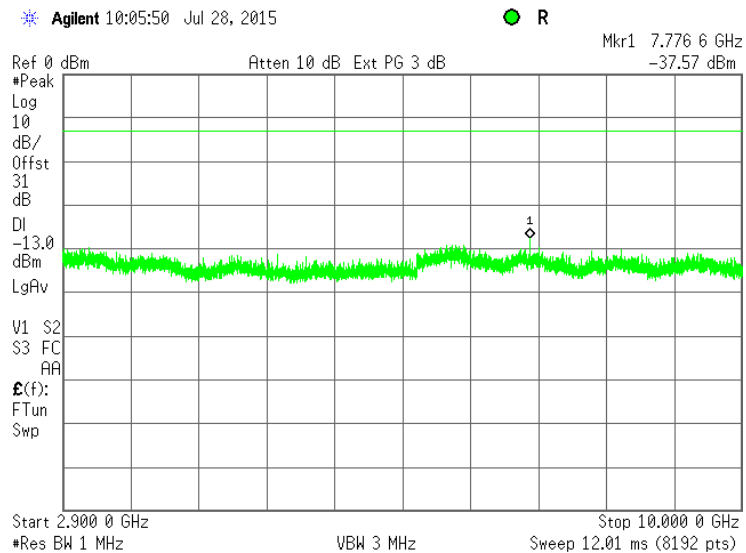




Test specification:		Section 27.53(m)(2), Spurious emissions at RF antenna connector	
Test procedure:		47 CFR, Sections 2.1051, 27.53	
Test mode:		Verdict: PASS	
Date(s):		28-Jul-15	
Temperature: 24 °C	Air Pressure: 1008 hPa	Relative Humidity: 55 %	Power Supply: 48 VDC
Remarks:			

Plot 7.4.21 Spurious emission measurements in 2900 - 10000 MHz at high carrier frequency, #RF2

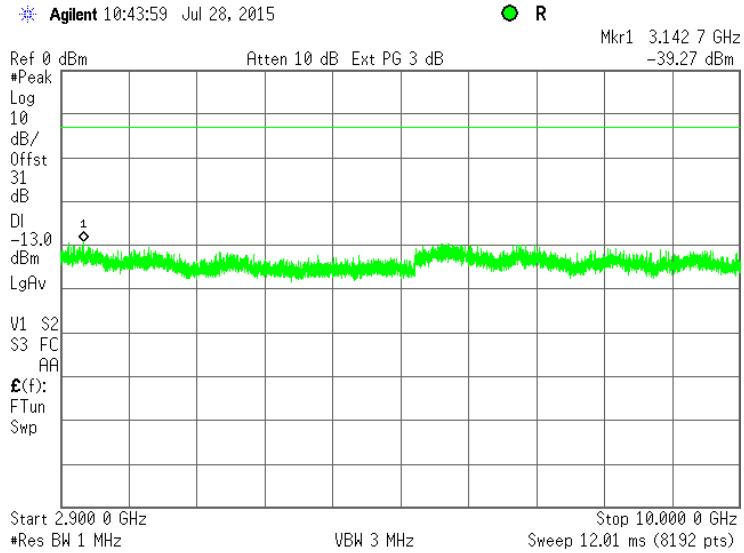

Plot 7.4.22 Spurious emission measurements in 10000 - 18000 MHz range at low carrier frequency, #RF2

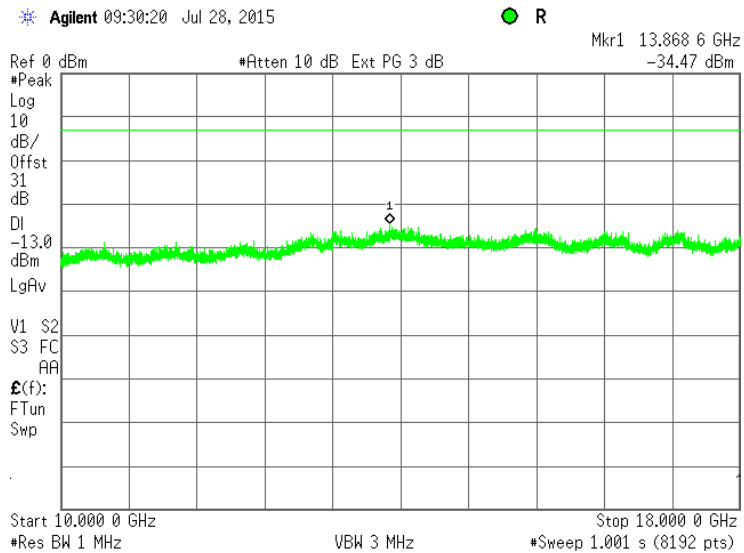





HERMON LABORATORIES

Test specification:		Section 27.53(m)(2), Spurious emissions at RF antenna connector	
Test procedure:		47 CFR, Sections 2.1051, 27.53	
Test mode:		Verdict: PASS	
Date(s):		28-Jul-15	
Temperature: 24 °C	Air Pressure: 1008 hPa	Relative Humidity: 55 %	Power Supply: 48 VDC
Remarks:			

Plot 7.4.23 Spurious emission measurements in 10000 - 18000 MHz at mid carrier frequency, #RF2

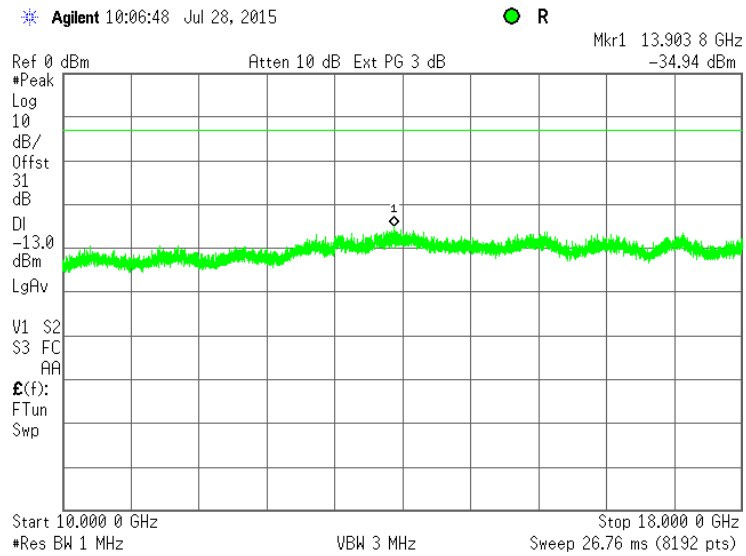


Plot 7.4.24 Spurious emission measurements in 10000 - 18000 MHz at high carrier frequency, #RF2

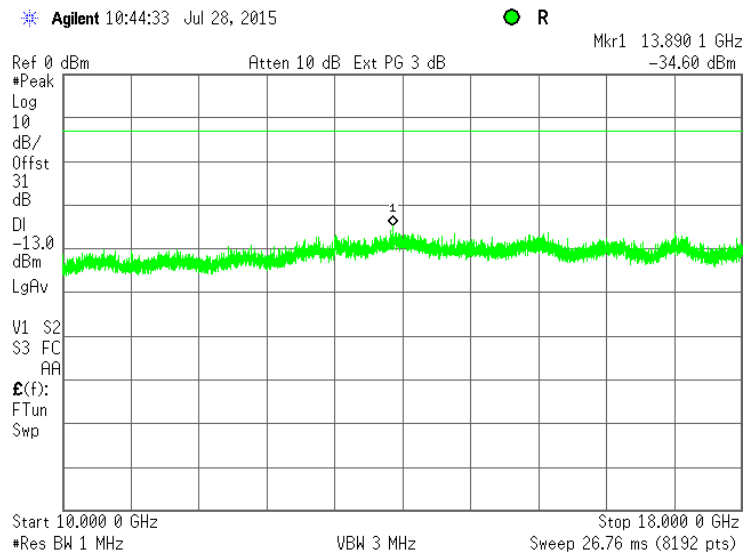




Test specification:		Section 27.53(m)(2), Spurious emissions at RF antenna connector	
Test procedure:		47 CFR, Sections 2.1051, 27.53	
Test mode:		Verdict: PASS	
Date(s):		28-Jul-15	
Temperature: 24 °C	Air Pressure: 1008 hPa	Relative Humidity: 55 %	Power Supply: 48 VDC
Remarks:			

Plot 7.4.25 Spurious emission measurements in 18000 - 23000 MHz at low carrier frequency, #RF2

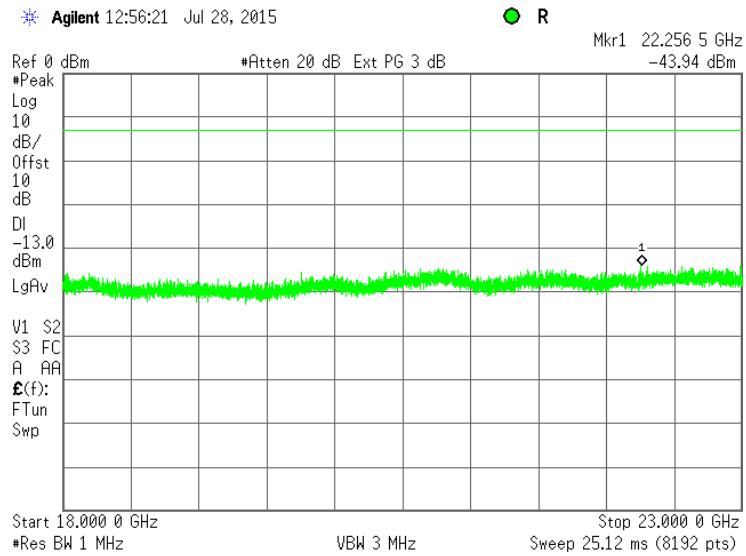


Plot 7.4.26 Spurious emission measurements in 18000 - 23000 MHz at mid carrier frequency, #RF2

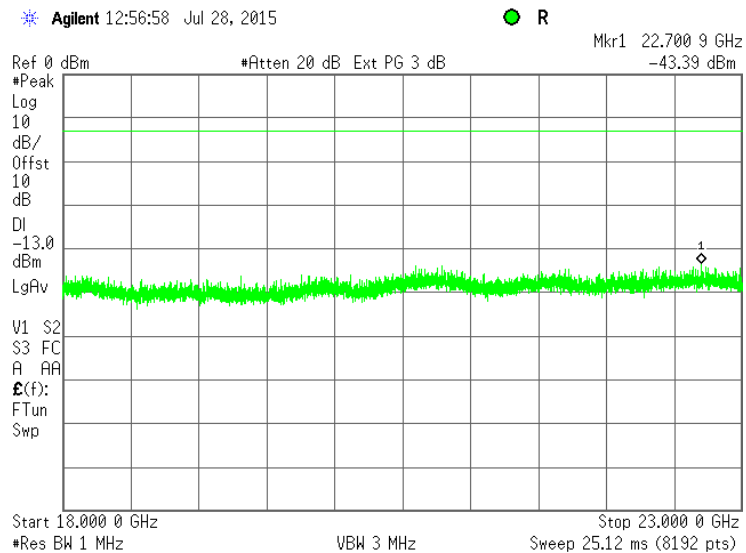




Test specification:		Section 27.53(m)(2), Spurious emissions at RF antenna connector	
Test procedure:		47 CFR, Sections 2.1051, 27.53	
Test mode:		Verdict: PASS	
Date(s):		28-Jul-15	
Temperature: 24 °C	Air Pressure: 1008 hPa	Relative Humidity: 55 %	Power Supply: 48 VDC
Remarks:			

Plot 7.4.27 Spurious emission measurements in 18000 - 23000 MHz at high carrier frequency, #RF2

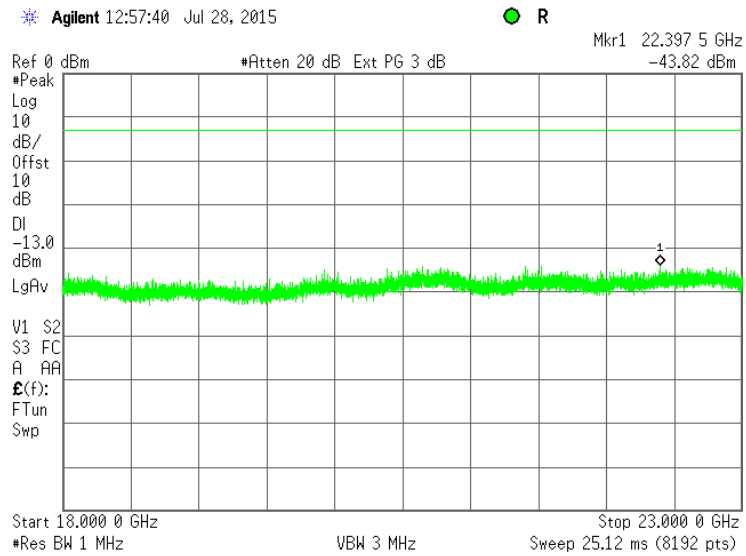


Plot 7.4.28 Spurious emission measurements in 23000 – 27000 MHz range at low carrier frequency, #RF2

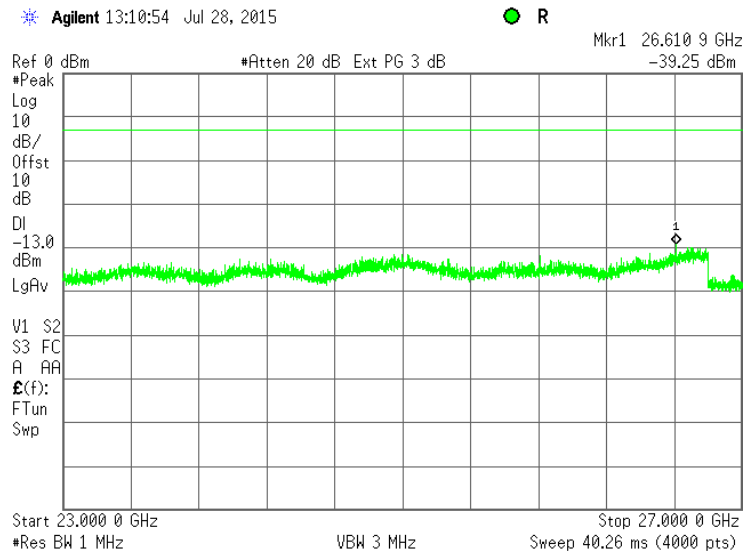




Test specification:		Section 27.53(m)(2), Spurious emissions at RF antenna connector	
Test procedure:		47 CFR, Sections 2.1051, 27.53	
Test mode:		Verdict: PASS	
Date(s):		28-Jul-15	
Temperature: 24 °C	Air Pressure: 1008 hPa	Relative Humidity: 55 %	Power Supply: 48 VDC
Remarks:			

Plot 7.4.29 Spurious emission measurements in 23000 – 27000 MHz at mid carrier frequency, #RF2

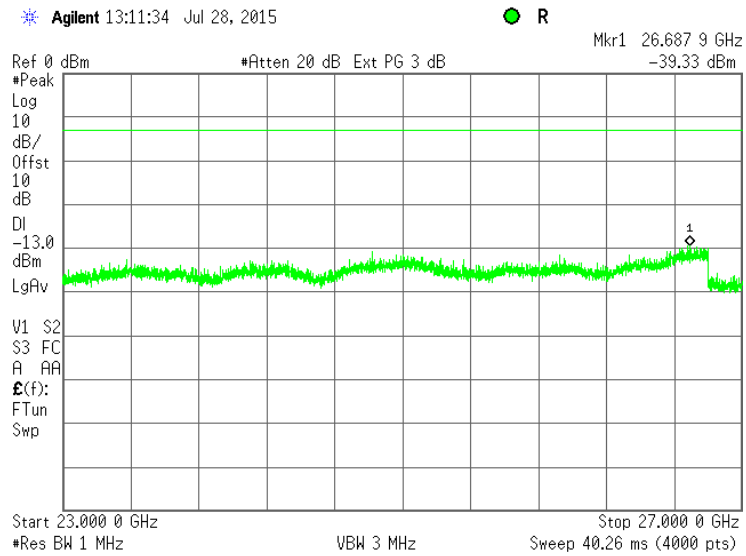

Plot 7.4.30 Spurious emission measurements in 23000 – 27000 MHz at high carrier frequency, #RF2

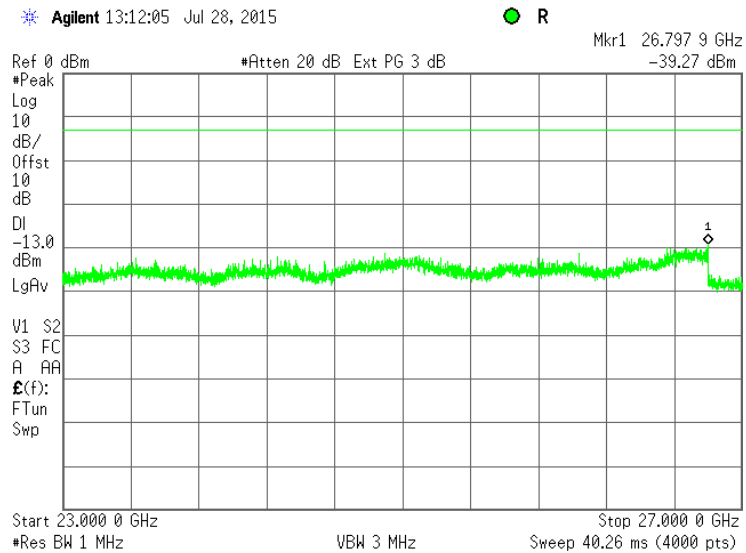



Test specification:	Section 27.53(m)(2), Radiated spurious emissions		
Test procedure:	47 CFR, Sections 2.1053; TIA/EIA-603-C, Section 2.2.12		
Test mode:	Compliance	Verdict:	PASS
Date(s):	29-Jul-15		
Temperature: 24 °C	Air Pressure: 1005 hPa	Relative Humidity: 44 %	Power Supply: 48 VDC
Remarks:			

7.5 Radiated spurious emission measurements

7.5.1 General

This test was performed to measure radiated spurious emissions from the EUT. Specification test limits are given in Table 7.5.1.

Table 7.5.1 Radiated spurious emission test limits

Frequency, MHz	Attenuation below carrier, dBc	ERP of spurious, dBm	Equivalent field strength limit @ 3m, dB(μ V/m) ^{***}
0.009 – 10 th harmonic*	43+10logP ^{**} fixed	-13	84.4

* - Excluding the band emission

** - P is transmitter output power in Watts

*** - Equivalent field strength limit was calculated from maximum allowed ERP of spurious as follows:
 $E = \sqrt{30 \times P \times 1.64} / r$, where P is ERP in Watts, 1.64 is numeric gain of ideal dipole and r is antenna to EUT distance in meters

7.5.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.5.2.1 The EUT was set up as shown in Figure 7.5.1, energized and the performance check was conducted.

7.5.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.5.2.3 The worst test results (the lowest margins) were recorded in Table 7.5.2 and shown in the associated plots.

7.5.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.5.3.1 The EUT was set up as shown in Figure 7.5.2, energized and the performance check was conducted.

7.5.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept from 1 to 4 m in both, vertical and horizontal, polarizations.

7.5.3.3 The worst test results (the lowest margins) were recorded in Table 7.5.2 and shown in the associated plots.



Test specification:		Section 27.53(m)(2), Radiated spurious emissions	
Test procedure:		47 CFR, Sections 2.1053; TIA/EIA-603-C, Section 2.2.12	
Test mode:		Compliance	
Date(s):		29-Jul-15	
Temperature: 24 °C		Air Pressure: 1005 hPa	
Relative Humidity: 44 %		Power Supply: 48 VDC	
Remarks:			
		Verdict: PASS	

Figure 7.5.1 Setup for spurious emission field strength measurements in 9 kHz to 30 MHz band


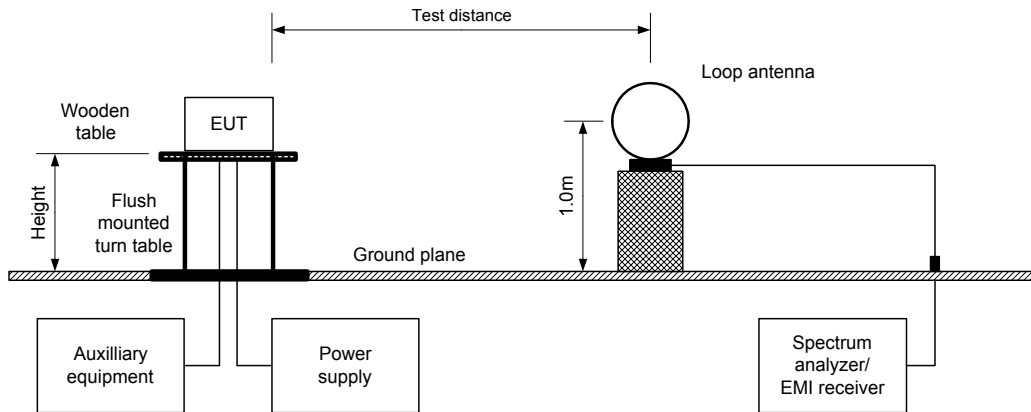


Figure 7.5.2 Setup for spurious emission field strength measurements above 30 MHz



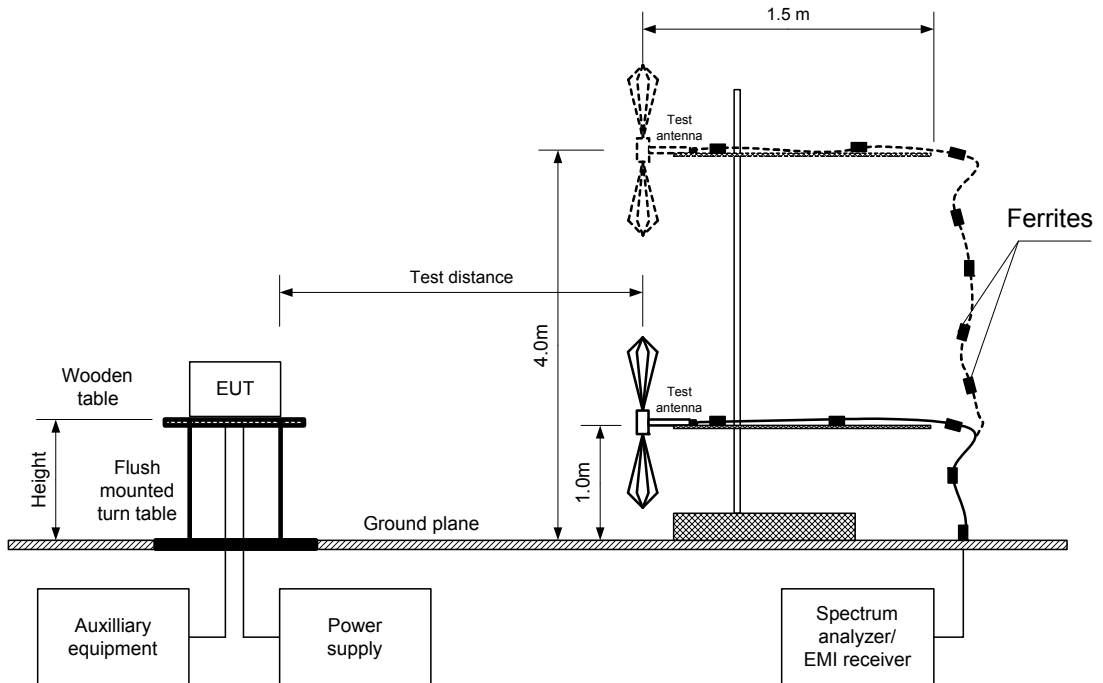

Test specification:		Section 27.53(m)(2), Radiated spurious emissions	
Test procedure:		47 CFR, Sections 2.1053; TIA/EIA-603-C, Section 2.2.12	
Test mode:		Compliance	
Date(s):		29-Jul-15	
Temperature: 24 °C		Air Pressure: 1005 hPa	
		Relative Humidity: 44 %	
		Power Supply: 48 VDC	
Remarks:			

Table 7.5.2 Spurious emission field strength test results

ASSIGNED FREQUENCY RANGE: 2496-2690 MHz
TEST DISTANCE: 3 m
TEST SITE: Semi anechoic chamber
EUT HEIGHT: 0.8 m
INVESTIGATED FREQUENCY RANGE: 0.009 – 27000 MHz
DETECTOR USED: Peak
VIDEO BANDWIDTH: > Resolution bandwidth
TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
Biconilog (30 MHz – 1000 MHz)
Double ridged guide (above 1000 MHz)

MODULATION: 64QAM***
MODULATING SIGNAL: PRBS
BANDWIDTH: 5 MHz***
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

Frequency, MHz	Field strength, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*	RBW, kHz	Antenna polarization	Antenna height, m	Turn-table position**, degrees
Low carrier frequency 2501MHz							
No emissions were found							
Mid carrier frequency 2595MHz							
No emissions were found							
High carrier frequency 2690MHz							
No emissions were found							

Verdict: Pass

*- Margin = Field strength of spurious – calculated field strength limit.
**- EUT front panel refers to 0 degrees position of turntable.
***- Maximum Power Density

Reference numbers of test equipment used

HL 0446	HL 0521	HL 0604	HL 0768	HL 0769	HL 1984	HL 2780	HL 3535
HL 3818	HL 3901	HL 3903	HL 4150	HL 4338	HL 4353	HL 4932	

Full description is given in Appendix A.




HERMON LABORATORIES

Test specification:	Section 27.53(m)(2), Radiated spurious emissions		
Test procedure:	47 CFR, Sections 2.1053; TIA/EIA-603-C, Section 2.2.12		
Test mode:	Compliance	Verdict:	PASS
Date(s):	29-Jul-15		
Temperature: 24 °C	Air Pressure: 1005 hPa	Relative Humidity: 44 %	Power Supply: 48 VDC
Remarks:			


Plot 7.5.1 Radiated emission measurements in 9 - 150 kHz range

TEST SITE: Semi anechoic chamber
 CARRIER FREQUENCY: Low, Mid, High
 ANTENNA POLARIZATION: Vertical and Horizontal
 TEST DISTANCE: 3 m

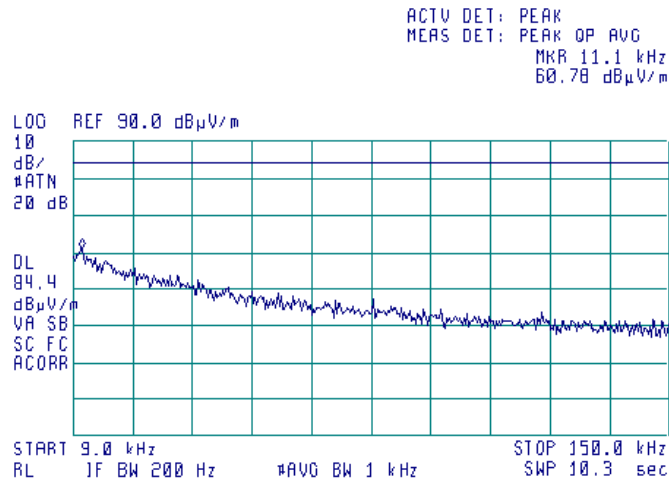

Plot 7.5.2 Radiated emission measurements in 0.15 - 30 MHz range

TEST SITE: Semi anechoic chamber
 CARRIER FREQUENCY: Low, Mid, High
 ANTENNA POLARIZATION: Vertical and Horizontal
 TEST DISTANCE: 3 m

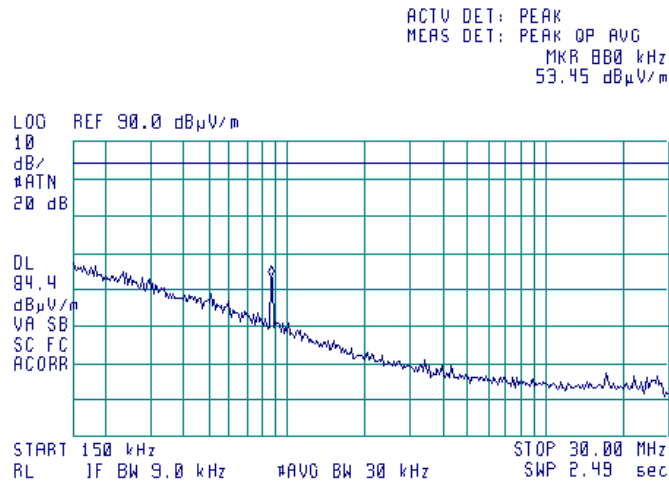




HERMON LABORATORIES

Test specification:		Section 27.53(m)(2), Radiated spurious emissions	
Test procedure:		47 CFR, Sections 2.1053; TIA/EIA-603-C, Section 2.2.12	
Test mode:		Compliance	
Date(s):		29-Jul-15	
Temperature: 24 °C		Air Pressure: 1005 hPa	
Remarks:		Verdict: PASS	
		Relative Humidity: 44 %	
		Power Supply: 48 VDC	


Plot 7.5.3 Radiated emission measurements in 30 - 1000 MHz range

TEST SITE: Semi anechoic chamber
 CARRIER FREQUENCY: Low
 ANTENNA POLARIZATION: Vertical and Horizontal
 TEST DISTANCE: 3 m

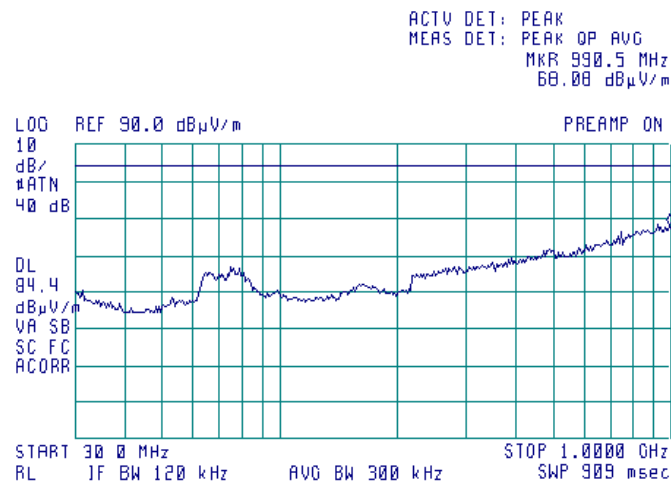

Plot 7.5.4 Radiated emission measurements in 30 - 1000 MHz range

TEST SITE: Semi anechoic chamber
 CARRIER FREQUENCY: Mid
 ANTENNA POLARIZATION: Vertical and Horizontal
 TEST DISTANCE: 3 m

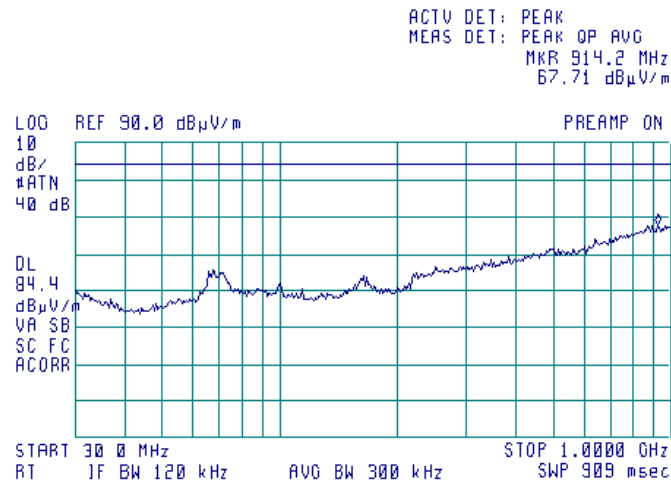




HERMON LABORATORIES

Test specification:		Section 27.53(m)(2), Radiated spurious emissions	
Test procedure:		47 CFR, Sections 2.1053; TIA/EIA-603-C, Section 2.2.12	
Test mode:		Compliance	
Date(s):		29-Jul-15	
Temperature: 24 °C		Air Pressure: 1005 hPa	
Relative Humidity: 44 %		Power Supply: 48 VDC	
Remarks:			
		Verdict: PASS	


Plot 7.5.5 Radiated emission measurements in 30 - 1000 MHz range

TEST SITE:	Semi anechoic chamber
CARRIER FREQUENCY:	High
ANTENNA POLARIZATION:	Vertical and Horizontal
TEST DISTANCE:	3 m

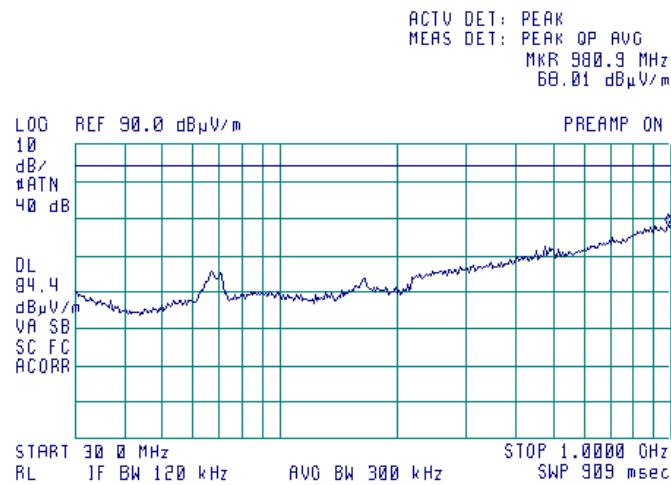

Plot 7.5.6 Radiated emission measurements in 1000 – 6.500 MHz range

TEST SITE:	Semi anechoic chamber
CARRIER FREQUENCY:	Low
ANTENNA POLARIZATION:	Vertical and Horizontal
TEST DISTANCE:	3 m

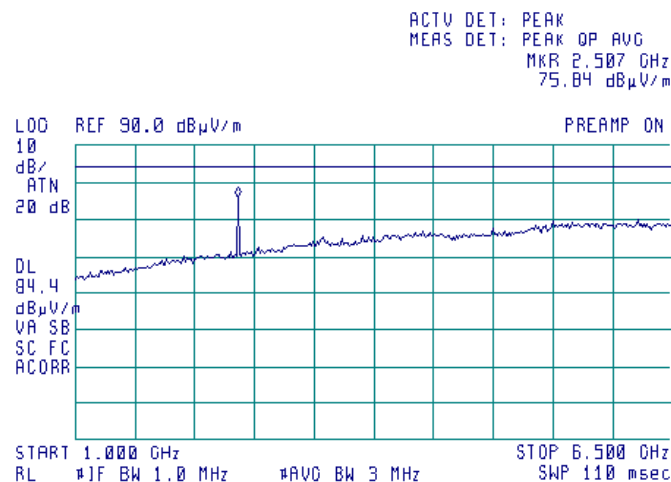

NOTE: 2499 MHz - carrier frequency




HERMON LABORATORIES

Test specification:		Section 27.53(m)(2), Radiated spurious emissions	
Test procedure:		47 CFR, Sections 2.1053; TIA/EIA-603-C, Section 2.2.12	
Test mode:		Compliance	
Date(s):		29-Jul-15	
Temperature: 24 °C		Air Pressure: 1005 hPa	
Relative Humidity: 44 %		Power Supply: 48 VDC	
Remarks:			
		Verdict: PASS	

Plot 7.5.7 Radiated emission measurements in 1000 – 6500 MHz range


TEST SITE:	Semi anechoic chamber
CARRIER FREQUENCY:	Mid
ANTENNA POLARIZATION:	Vertical and Horizontal
TEST DISTANCE:	3 m

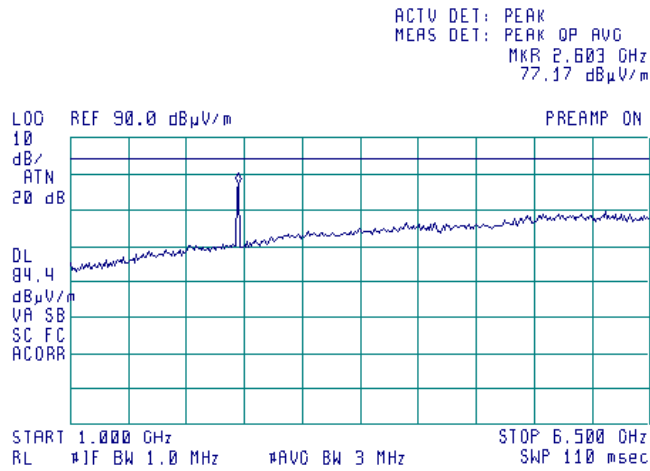

NOTE: 2593 MHz - carrier frequency

Plot 7.5.8 Radiated emission measurements in 1000 – 6500 MHz range

TEST SITE:	Semi anechoic chamber
CARRIER FREQUENCY:	High
ANTENNA POLARIZATION:	Vertical and Horizontal
TEST DISTANCE:	3 m

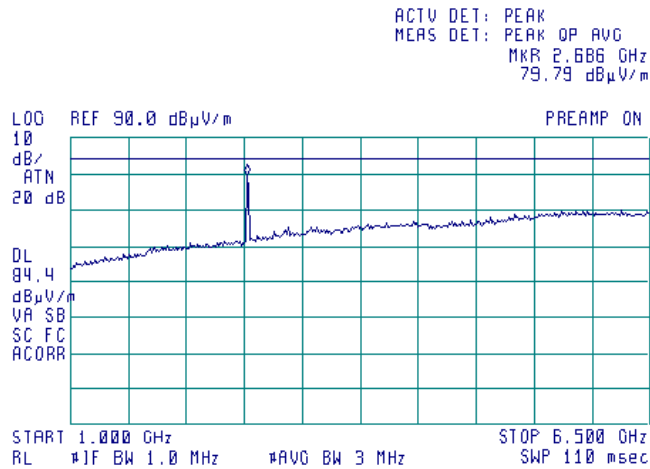

NOTE: 2687 MHz - carrier frequency




HERMON LABORATORIES

Test specification:		Section 27.53(m)(2), Radiated spurious emissions	
Test procedure:		47 CFR, Sections 2.1053; TIA/EIA-603-C, Section 2.2.12	
Test mode:		Verdict: PASS	
Date(s):		29-Jul-15	
Temperature: 24 °C	Air Pressure: 1005 hPa	Relative Humidity: 44 %	Power Supply: 48 VDC
Remarks:			


Plot 7.5.9 Radiated emission measurements in 6500 – 12000 MHz range

TEST SITE: Semi anechoic chamber
 CARRIER FREQUENCY: Low
 ANTENNA POLARIZATION: Vertical and Horizontal
 TEST DISTANCE: 3 m

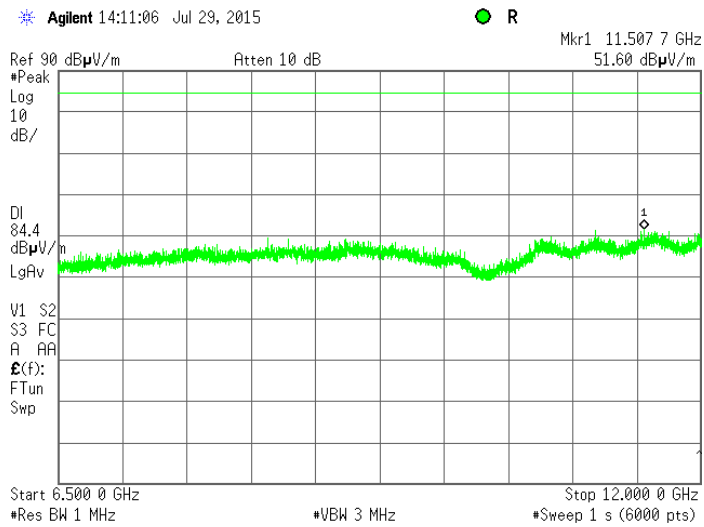

Plot 7.5.10 Radiated emission measurements in 6500 – 12000 MHz range

TEST SITE: Semi anechoic chamber
 CARRIER FREQUENCY: Mid
 ANTENNA POLARIZATION: Vertical and Horizontal
 TEST DISTANCE: 3 m

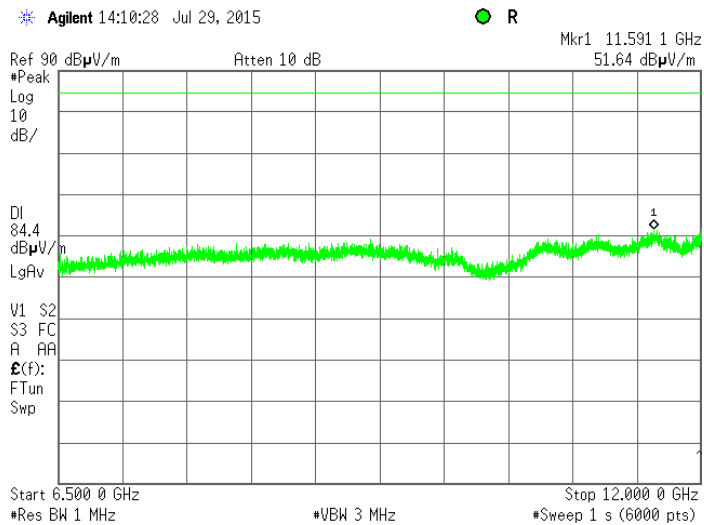




HERMON LABORATORIES

Test specification:		Section 27.53(m)(2), Radiated spurious emissions	
Test procedure:		47 CFR, Sections 2.1053; TIA/EIA-603-C, Section 2.2.12	
Test mode:		Verdict:	
Compliance		PASS	
Date(s):		29-Jul-15	
Temperature: 24 °C	Air Pressure: 1005 hPa	Relative Humidity: 44 %	Power Supply: 48 VDC
Remarks:			


Plot 7.5.11 Radiated emission measurements in 6500 – 12000 MHz range

TEST SITE: Semi anechoic chamber
 CARRIER FREQUENCY: High
 ANTENNA POLARIZATION: Vertical and Horizontal
 TEST DISTANCE: 3 m

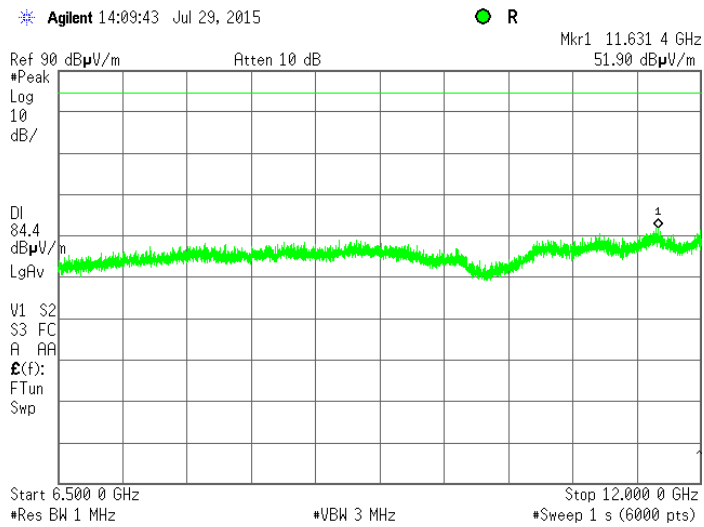

Plot 7.5.12 Radiated emission measurements in 12000 – 18000 MHz range

TEST SITE: Semi anechoic chamber
 CARRIER FREQUENCY: Low
 ANTENNA POLARIZATION: Vertical and Horizontal
 TEST DISTANCE: 3 m

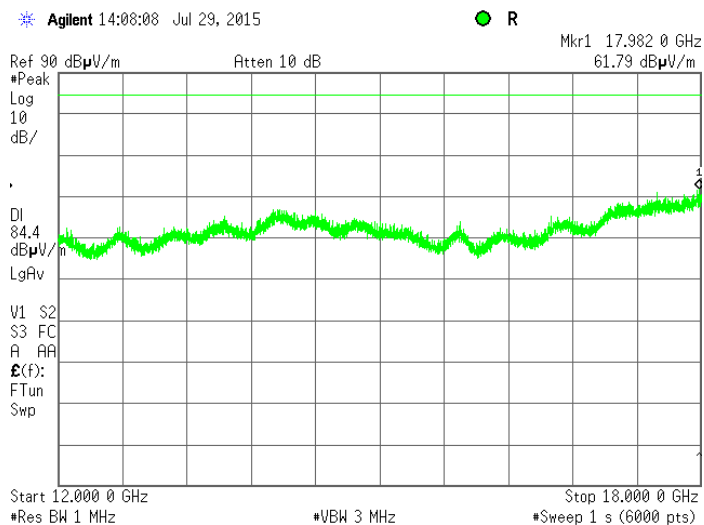




HERMON LABORATORIES

Test specification:		Section 27.53(m)(2), Radiated spurious emissions	
Test procedure:		47 CFR, Sections 2.1053; TIA/EIA-603-C, Section 2.2.12	
Test mode:		Verdict: PASS	
Date(s):		29-Jul-15	
Temperature: 24 °C	Air Pressure: 1005 hPa	Relative Humidity: 44 %	Power Supply: 48 VDC
Remarks:			


Plot 7.5.13 Radiated emission measurements in 12000 – 18000 MHz range

TEST SITE:	Semi anechoic chamber
CARRIER FREQUENCY:	Mid
ANTENNA POLARIZATION:	Vertical and Horizontal
TEST DISTANCE:	3 m

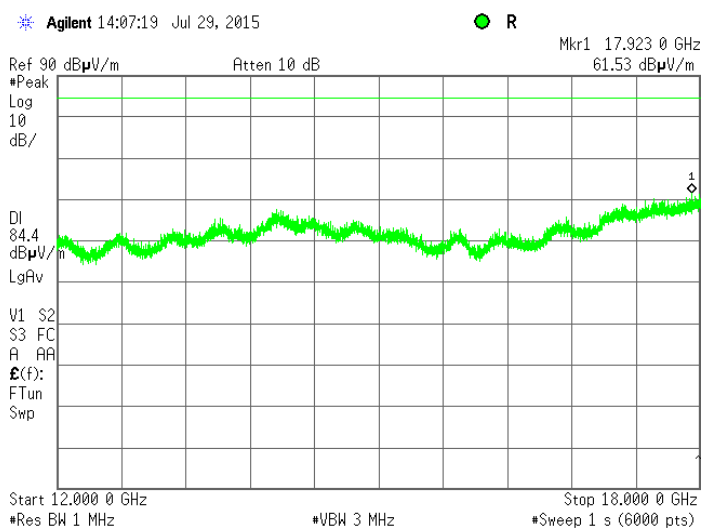

Plot 7.5.14 Radiated emission measurements in 12000 – 18000 MHz range

TEST SITE:	Semi anechoic chamber
CARRIER FREQUENCY:	High
ANTENNA POLARIZATION:	Vertical and Horizontal
TEST DISTANCE:	3 m

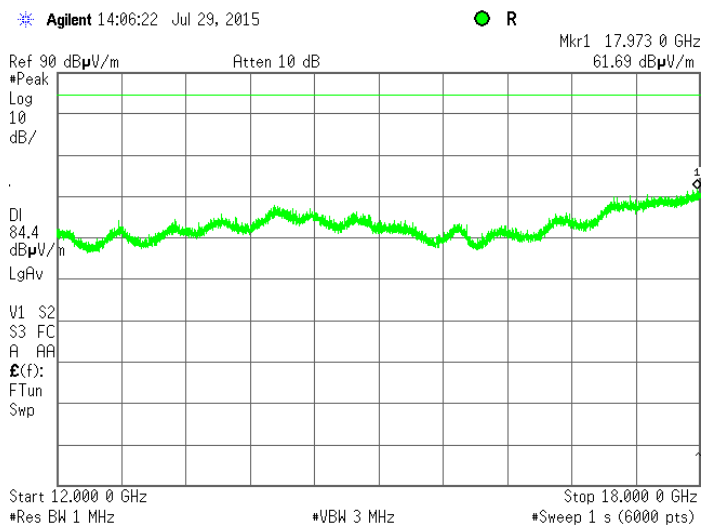




HERMON LABORATORIES

Test specification:		Section 27.53(m)(2), Radiated spurious emissions	
Test procedure:		47 CFR, Sections 2.1053; TIA/EIA-603-C, Section 2.2.12	
Test mode:		Verdict:	
Compliance		PASS	
Date(s):		29-Jul-15	
Temperature: 24 °C	Air Pressure: 1005 hPa	Relative Humidity: 44 %	Power Supply: 48 VDC
Remarks:			


Plot 7.5.15 Radiated emission measurements in 18000 – 26500 MHz range

TEST SITE: Semi anechoic chamber
 CARRIER FREQUENCY: Low
 ANTENNA POLARIZATION: Vertical and Horizontal
 TEST DISTANCE: 3 m

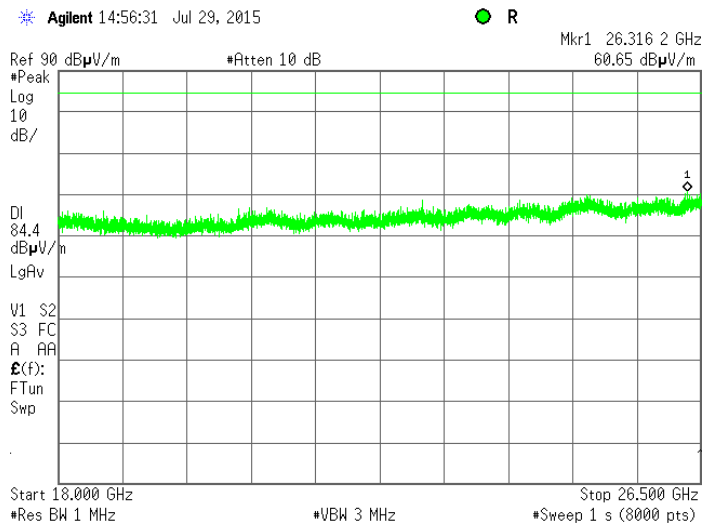

Plot 7.5.16 Radiated emission measurements in 18000 – 26500 MHz range

TEST SITE: Semi anechoic chamber
 CARRIER FREQUENCY: Mid
 ANTENNA POLARIZATION: Vertical and Horizontal
 TEST DISTANCE: 3 m

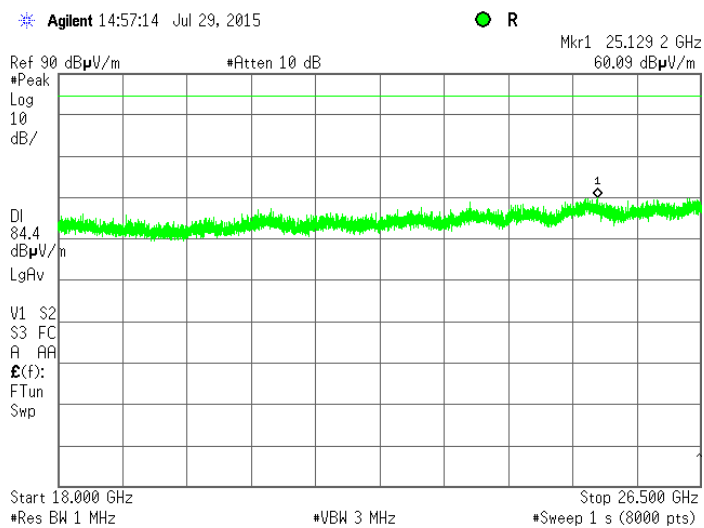




HERMON LABORATORIES

Test specification:		Section 27.53(m)(2), Radiated spurious emissions	
Test procedure:		47 CFR, Sections 2.1053; TIA/EIA-603-C, Section 2.2.12	
Test mode:		Verdict:	
Compliance		PASS	
Date(s):		29-Jul-15	
Temperature: 24 °C	Air Pressure: 1005 hPa	Relative Humidity: 44 %	Power Supply: 48 VDC
Remarks:			


Plot 7.5.17 Radiated emission measurements in 18000 – 26500 MHz range

TEST SITE:	Semi anechoic chamber
CARRIER FREQUENCY:	High
ANTENNA POLARIZATION:	Vertical and Horizontal
TEST DISTANCE:	3 m

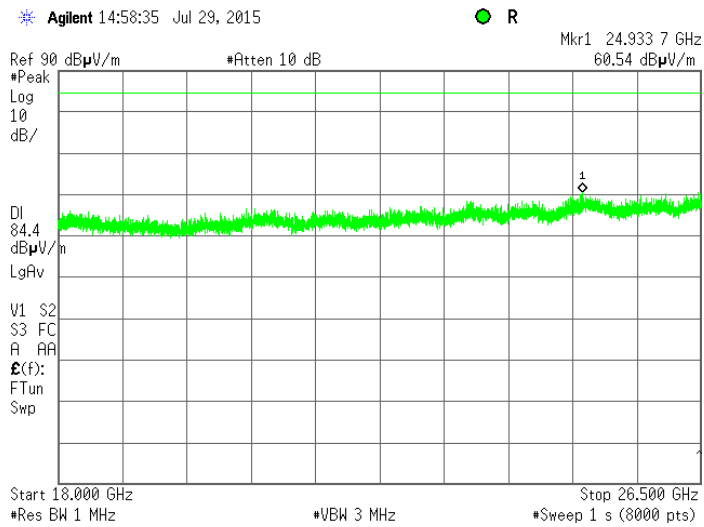

Plot 7.5.18 Radiated emission measurements in 26500 –27000 MHz range

TEST SITE:	Semi anechoic chamber
CARRIER FREQUENCY:	Low
ANTENNA POLARIZATION:	Vertical and Horizontal
TEST DISTANCE:	3 m

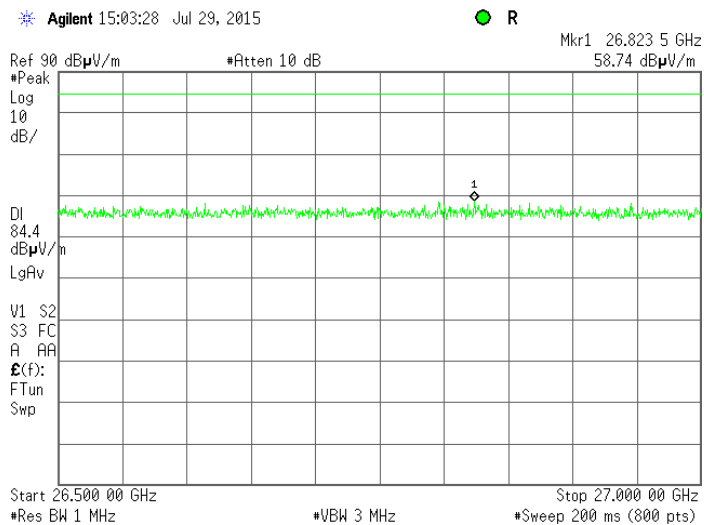




HERMON LABORATORIES

Test specification:		Section 27.53(m)(2), Radiated spurious emissions	
Test procedure:		47 CFR, Sections 2.1053; TIA/EIA-603-C, Section 2.2.12	
Test mode:		Verdict:	
Compliance		PASS	
Date(s):		29-Jul-15	
Temperature: 24 °C	Air Pressure: 1005 hPa	Relative Humidity: 44 %	Power Supply: 48 VDC
Remarks:			


Plot 7.5.19 Radiated emission measurements in 26500 - 27000MHz range

TEST SITE: Semi anechoic chamber
 CARRIER FREQUENCY: Mid
 ANTENNA POLARIZATION: Vertical and Horizontal
 TEST DISTANCE: 3 m

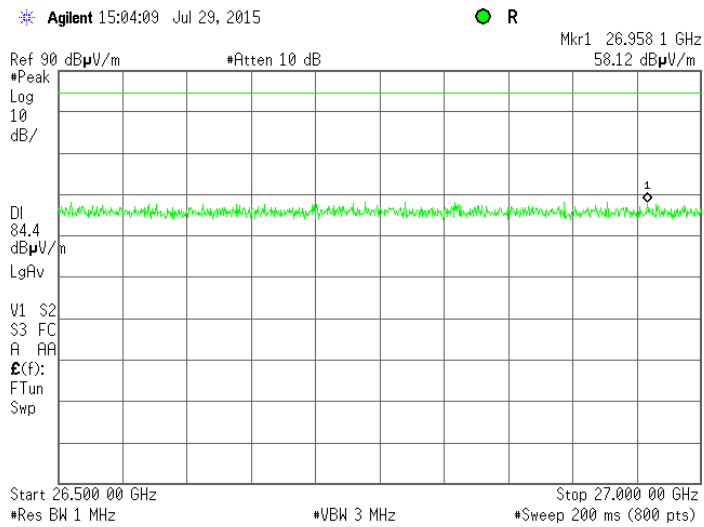

Plot 7.5.20 Radiated emission measurements in 26500 27000 MHz range

TEST SITE: Semi anechoic chamber
 CARRIER FREQUENCY: High
 ANTENNA POLARIZATION: Vertical and Horizontal
 TEST DISTANCE: 3 m

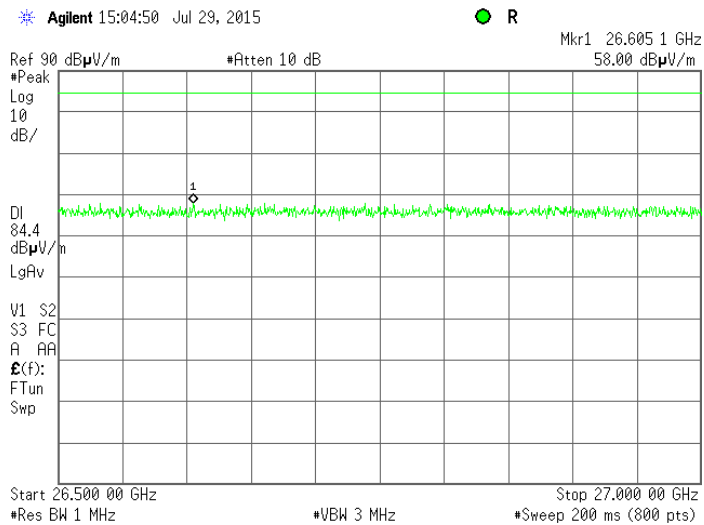



Test specification:		Section 27.54, Frequency stability	
Test procedure:		47 CFR, Section 2.1055; TIA/EIA-603-C Section 2.2.2	
Test mode:		Compliance	
Date(s):		30-Jul-15	
Temperature: 23 °C		Air Pressure: 1004 hPa	
		Relative Humidity: 48 %	
		Power Supply: 48 VDC	
Remarks:			

7.6 Frequency stability test

7.6.1 General

This test was performed to measure frequency stability of transmitter RF carrier. Specification test limits are given in Table 7.6.1.

Table 7.6.1 Frequency stability limits

Assigned frequency, MHz	Maximum allowed frequency displacement
2496.0 – 2690.0	The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.


7.6.2 Test procedure

- 7.6.2.1 The EUT was set up as shown in Figure 7.6.1, energized and its proper operation was checked.
- 7.6.2.2 The EUT power was turned off. Temperature within test chamber was set to +30°C and a period of time sufficient to stabilize all of the oscillator circuit components was allowed.
- 7.6.2.3 The EUT was powered on and carrier frequency was measured at start up moment and then every minute until frequency had been stabilized or 10 minutes elapsed whichever reached the last. The EUT was powered off.
- 7.6.2.4 The above procedure was repeated at 0°C and at the lowest test temperature.
- 7.6.2.5 The EUT was powered on and carrier frequency was measured at start up moment and at the end of stabilization period at the rest of test temperatures and voltages. The EUT was powered off.
- 7.6.2.6 Frequency displacement was calculated and compared with the limit as provided in Table 7.6.2.



Test specification:	Section 27.54, Frequency stability		
Test procedure:	47 CFR, Section 2.1055; TIA/EIA-603-C Section 2.2.2		
Test mode:	Compliance	Verdict:	PASS
Date(s):	30-Jul-15		
Temperature: 23 °C	Air Pressure: 1004 hPa	Relative Humidity: 48 %	Power Supply: 48 VDC
Remarks:			

Figure 7.6.1 Frequency stability test setup

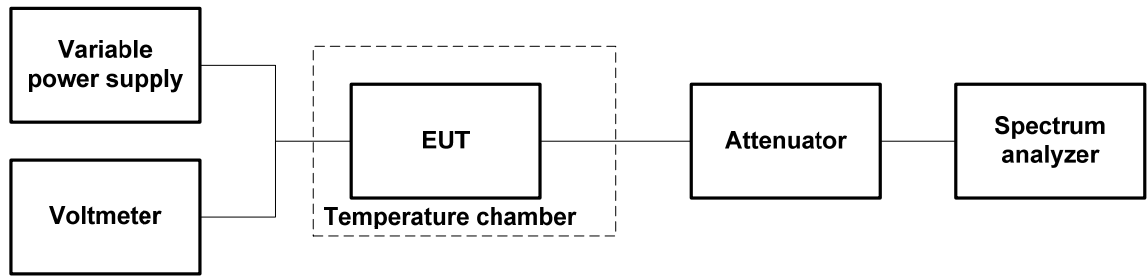



HERMON LABORATORIES

Test specification:		Section 27.54, Frequency stability	
Test procedure:		47 CFR, Section 2.1055; TIA/EIA-603-C Section 2.2.2	
Test mode:		Compliance	
Date(s):		30-Jul-15	
Temperature: 23 °C		Air Pressure: 1004 hPa	
Remarks:		Verdict: PASS	
		Relative Humidity: 48 %	
		Power Supply: 48 VDC	

Table 7.6.2 Frequency stability test results

OPERATING FREQUENCY: 2496.0 – 2690.0 MHz
 NOMINAL POWER VOLTAGE: 48 VDC
 TEMPERATURE STABILIZATION PERIOD: 20 min
 POWER DURING TEMPERATURE TRANSITION: Off
 SPECTRUM ANALYZER MODE: Max Hold
 RESOLUTION BANDWIDTH: 1 kHz
 VIDEO BANDWIDTH: 3 kHz
 MODULATION: Unmodulated

T, °C	Voltage, V	Frequency, MHz							Max frequency drift, Hz	
		Start up	1 st min	2 nd min	3 rd min	4 th min	5 th min	10 th min	Positive	Negative
Low carrier frequency 2499 MHz										
-30	48.0	2499.96027	2499.96027	2499.96027	2499.96027	2499.96027	2499.96027	2499.96027	0	230
-20	48.0	2499.96030	NA	NA	NA	NA	NA	2499.96030	0	200
-10	48.0	2499.96030	NA	NA	NA	NA	NA	2499.96030	0	200
0	48.0	2499.96030	2499.96030	2499.96030	2499.96030	2499.96030	2499.96033	2499.96033	0	170
10	48.0	2499.96030	NA	NA	NA	NA	NA	2499.96030	0	200
20	55.2	2499.96050	NA	NA	NA	NA	NA	2499.96050	0	0
20	48.0	2499.96050	NA	NA	NA	NA	NA	2499.96050*	NA	NA
20	40.8	2499.96050	NA	NA	NA	NA	NA	2499.96050	0	0
30	48.0	2499.96080	2499.96070	2499.96050	2499.96050	2499.96050	2499.96070	2499.96070	300	0
40	48.0	2499.96070	NA	NA	NA	NA	NA	2499.96070	200	0
50	48.0	2499.96050	NA	NA	NA	NA	NA	2687.96070	200	0
Mid carrier frequency 2593 MHz										
-30	48.0	2593.96030	2593.96030	2593.96030	2593.96030	2593.96030	2593.96030	2593.96030	0	200
-20	48.0	2593.96027	NA	NA	NA	NA	NA	2593.96033	0	230
-10	48.0	2593.96030	NA	NA	NA	NA	NA	2593.96030	0	200
0	48.0	2593.96033	2593.96033	2593.96033	2593.96033	2593.96033	2593.96030	2593.96030	0	200
10	48.0	2593.96030	NA	NA	NA	NA	NA	2593.96030	0	200
20	55.2	2593.96050	NA	NA	NA	NA	NA	2593.96050	0	0
20	48.0	2593.96050	NA	NA	NA	NA	NA	2593.96050*	NA	NA
20	40.8	2593.96050	NA	NA	NA	NA	NA	2593.96050	0	0
30	48.0	2593.96050	2593.96050	2593.96070	2593.96050	2593.96050	2593.96050	2593.96050	200	0
40	48.0	2593.96070	NA	NA	NA	NA	NA	2593.96070	200	0
50	48.0	2593.96070	NA	NA	NA	NA	NA	2593.96070	200	0
High carrier frequency 2687 MHz										
-30	48.0	2687.96033	2687.96033	2687.96033	2687.96033	2687.96033	2687.96033	2687.96033	0	170
-20	48.0	2687.96033	NA	NA	NA	NA	NA	2687.96033	0	170
-10	48.0	2687.96033	NA	NA	NA	NA	NA	2687.96030	0	200
0	48.0	2687.96030	2687.96033	2687.96033	2687.96033	2687.96030	2687.96030	2687.96030	0	200
10	48.0	2687.96033	NA	NA	NA	NA	NA	2687.96033	0	170
20	55.2	2687.96050	NA	NA	NA	NA	NA	2687.96050	0	0
20	48.0	2687.96050	NA	NA	NA	NA	NA	2687.96050	NA	NA
20	40.8	2687.96050	NA	NA	NA	NA	NA	2687.96050	0	0
30	48.0	2687.96070	2687.96080	2687.96080	2687.96070	2687.96070	2687.96070	2687.96070	300	0
40	48.0	2687.96070	NA	NA	NA	NA	NA	2687.96070	200	0
50	48.0	2687.96070	NA	NA	NA	NA	NA	2687.96070	200	0

* - Reference frequency



Test specification: Section 27.54, Frequency stability			
Test procedure: 47 CFR, Section 2.1055; TIA/EIA-603-C Section 2.2.2			
Test mode: Compliance	Verdict: PASS		
Date(s): 30-Jul-15			
Temperature: 23 °C	Air Pressure: 1004 hPa	Relative Humidity: 48 %	Power Supply: 48 VDC
Remarks:			

Table 7.6.3 Maximum frequency displacement

Channel	Maximum frequency displacement, Hz	
	Negative	Positive
Low (2499 MHz)	230	300
Mid (2593 MHz)	230	200
High (2687 MHz)	200	300

Table 7.6.4 Transmission occupied bandwidth with frequency drift test results

Lower measured* band edge, MHz	Upper measured* band edge, MHz	Lower calculated** band edge, MHz	Upper calculated** band edge, MHz	Lower specified band edge, MHz	Upper specified band edge, MHz	Lower margin***, MHz	Upper margin***, MHz	Verdict
5 MHz BW								
2496.47	2501.52	2496.46977	2501.5203	2496.00	2506.00	-0.46977	-4.4797	Pass
2590.50	2595.47	2590.49977	2595.4703	2590.00	2600.00	-0.49977	-4.5297	Pass
2684.52	2689.46	2684.51977	2689.4603	2680.00	2690.00	-4.51977	-0.5397	Pass
10 MHz BW								
2496.22	2505.78	2496.21977	2505.7803	2496.00	2506.00	-0.21977	-0.2197	Pass
2590.22	2599.78	2590.21977	2599.7803	2589.00	2601.00	-1.21977	-1.2197	Pass
2680.22	2689.78	2680.21977	2689.7803	2680.00	2690.00	-0.21977	-0.2197	Pass
20 MHz BW								
2496.34	2515.78	2496.33977	2515.7803	2496.00	2518.00	0.33977	-2.2197	Pass
2585.31	2604.75	2585.30977	2604.7503	2584.00	2608.00	-1.30977	-3.2497	Pass
2670.31	2689.75	2670.30977	2689.7503	2668.00	2690.00	-2.30977	-0.2407	Pass

** - Measured band edge with proper drift addition

*** - Margin = Calculated band edge – specified band edge

Reference numbers of test equipment used

HL 2979	HL 3286	HL 3301	HL 3302	HL 3433	HL 3435	HL 3818	HL 4164
HL 4229	HL 4232	HL 4273	HL 4293	HL 4366			

Full description is given in Appendix A.




HERMON LABORATORIES

Test specification:	Section 27.54, Frequency stability		
Test procedure:	47 CFR, Section 2.1055; TIA/EIA-603-C Section 2.2.2		
Test mode:	Compliance	Verdict:	PASS
Date(s):	30-Jul-15		
Temperature: 23 °C	Air Pressure: 1004 hPa	Relative Humidity: 48 %	Power Supply: 48 VDC
Remarks:			


Plot 7.6.1 Emission mask test results at low carrier frequency, 5 MHz EBW

ASSIGNED FREQUENCY BAND: 2496.0 – 2506.0 MHz
DETECTOR USED: Average
MODULATION: 64 QAM

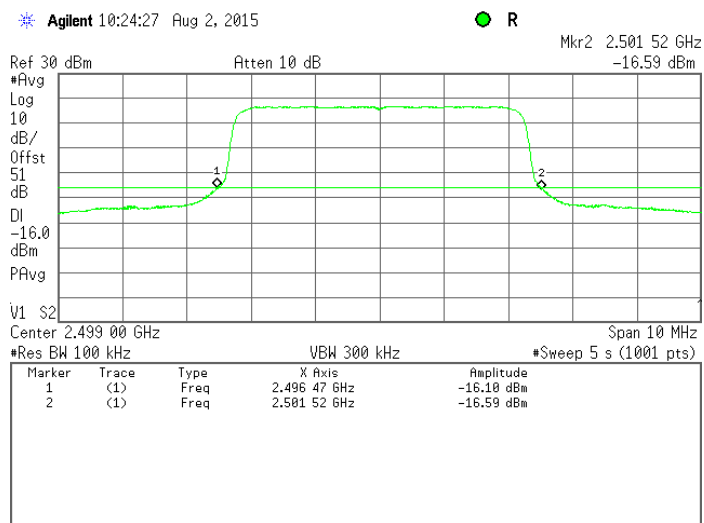

Plot 7.6.2 Emission mask test results at mid carrier frequency, 5 MHz EBW

ASSIGNED FREQUENCY BAND: 2590.0 – 2696.0 MHz
DETECTOR USED: Average
MODULATION: 64 QAM

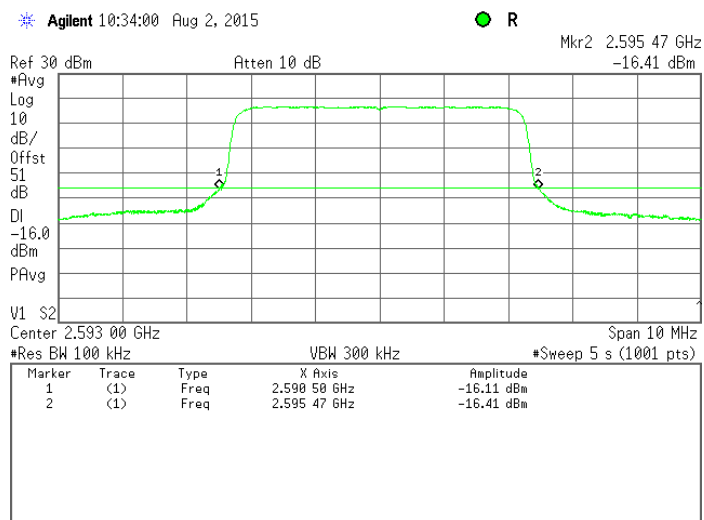




HERMON LABORATORIES

Test specification:		Section 27.54, Frequency stability	
Test procedure:		47 CFR, Section 2.1055; TIA/EIA-603-C Section 2.2.2	
Test mode:		Compliance	
Date(s):		30-Jul-15	
Temperature: 23 °C		Air Pressure: 1004 hPa	
Relative Humidity: 48 %		Power Supply: 48 VDC	
Remarks:			
		Verdict: PASS	


Plot 7.6.3 Emission mask test results at high carrier frequency, 5 MHz EBW

ASSIGNED FREQUENCY BAND: 2680.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: 64 QAM

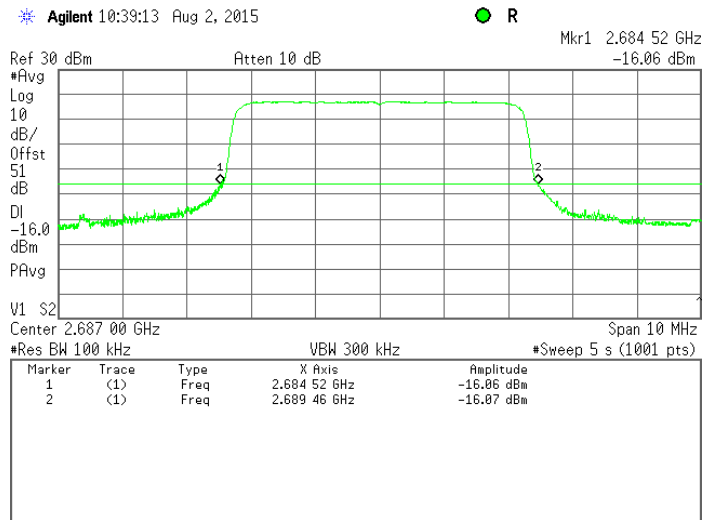

Plot 7.6.4 Emission mask test results at low carrier frequency, 10 MHz EBW

ASSIGNED FREQUENCY BAND: 2490.0 – 2512.0 MHz
DETECTOR USED: Average
MODULATION: 64QAM

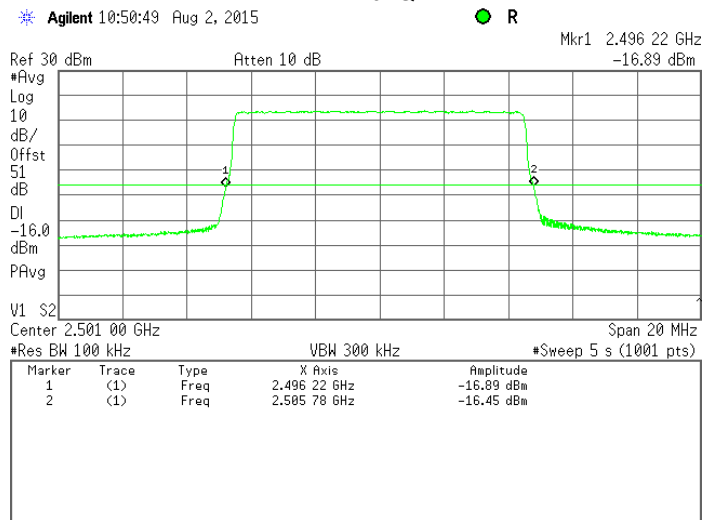




HERMON LABORATORIES

Test specification: Section 27.54, Frequency stability			
Test procedure: 47 CFR, Section 2.1055; TIA/EIA-603-C Section 2.2.2			
Test mode: Compliance			Verdict: PASS
Date(s): 30-Jul-15			
Temperature: 23 °C	Air Pressure: 1004 hPa	Relative Humidity: 48 %	Power Supply: 48 VDC
Remarks:			


Plot 7.6.5 Emission mask test results at mid carrier frequency, 10 MHz EBW

ASSIGNED FREQUENCY BAND: 2584 – 2608 MHz
DETECTOR USED: Average
MODULATION: 64QAM

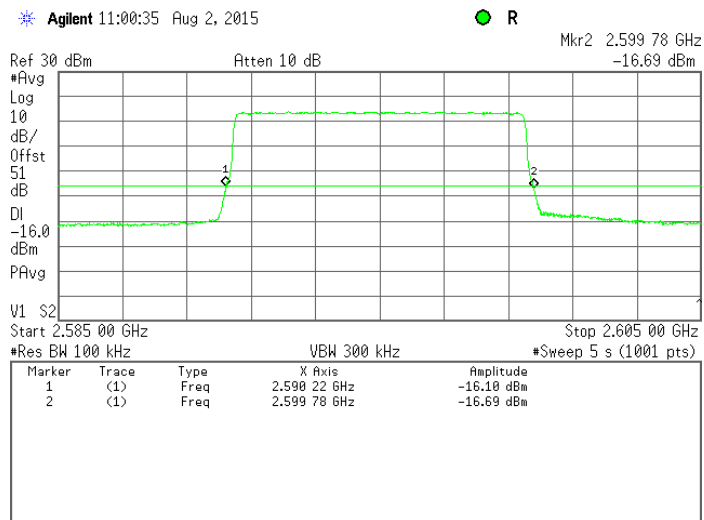

Plot 7.6.6 Emission mask test results at high carrier frequency, 10 MHz EBW

ASSIGNED FREQUENCY BAND: 2674.0 – 2696.0 MHz
DETECTOR USED: Average
MODULATION: 64QAM

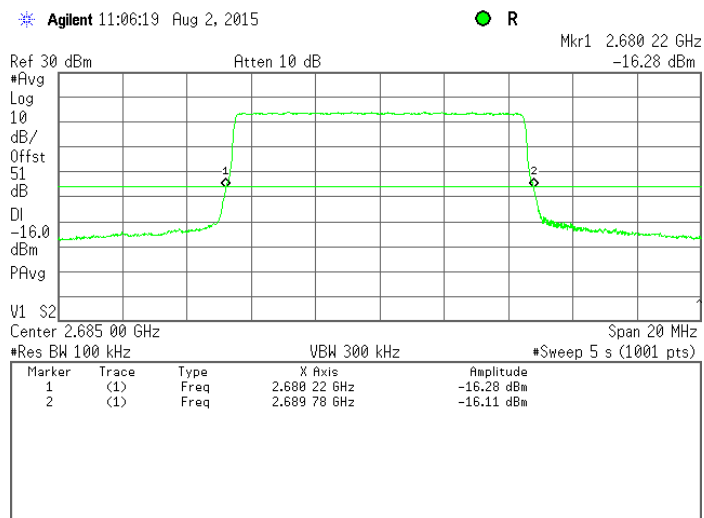




HERMON LABORATORIES

Test specification:		Section 27.54, Frequency stability	
Test procedure:		47 CFR, Section 2.1055; TIA/EIA-603-C Section 2.2.2	
Test mode:		Compliance	
Date(s):		30-Jul-15	
Temperature: 23 °C		Air Pressure: 1004 hPa	
Relative Humidity: 48 %		Power Supply: 48 VDC	
Remarks:			
		Verdict: PASS	


Plot 7.6.7 Emission mask test results at low carrier frequency, 20 MHz EBW

ASSIGNED FREQUENCY BAND: 2490.0 – 2524.0 MHz
DETECTOR USED: Average
MODULATION: 64QAM

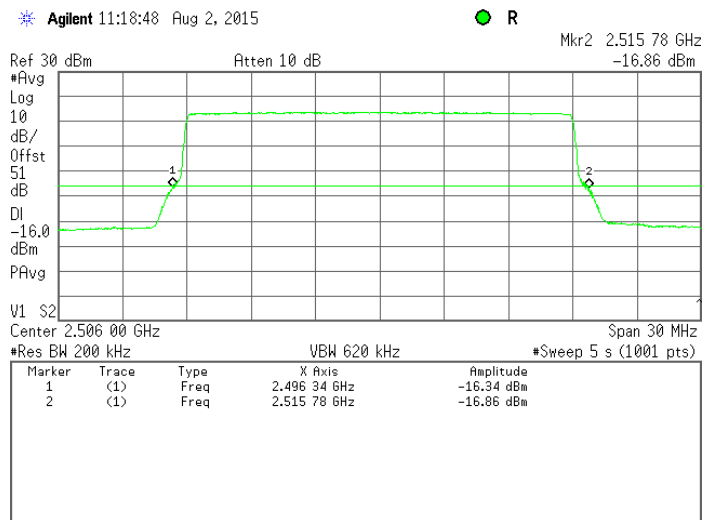

Plot 7.6.8 Emission mask test results at mid carrier frequency, 20 MHz EBW

ASSIGNED FREQUENCY BAND: 2578.0 – 2614.0 MHz
DETECTOR USED: Average
MODULATION: 64QAM

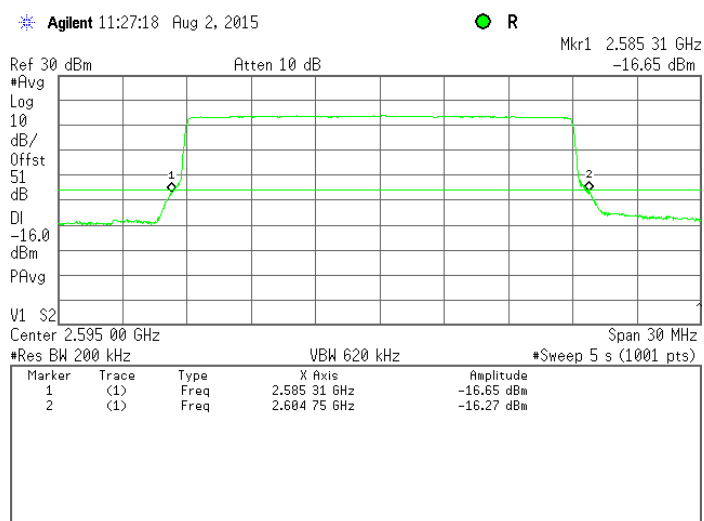




HERMON LABORATORIES

Test specification:		Section 27.54, Frequency stability	
Test procedure:		47 CFR, Section 2.1055; TIA/EIA-603-C Section 2.2.2	
Test mode:		Compliance	
Date(s):		30-Jul-15	
Temperature: 23 °C		Air Pressure: 1004 hPa	
		Relative Humidity: 48 %	
		Power Supply: 48 VDC	
Remarks:			
		Verdict: PASS	

Plot 7.6.9 Emission mask test results at high carrier frequency, 20 MHz EBW

ASSIGNED FREQUENCY BAND: 2662.0 – 2696.0 MHz
DETECTOR USED: Average
MODULATION: 64QAM

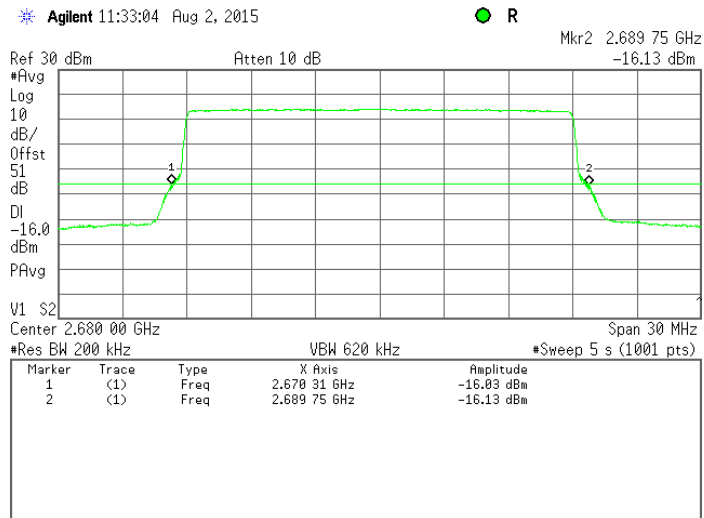

**8 APPENDIX A Test equipment and ancillaries used for tests**

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./ Check	Due Cal./ Check
0446	Antenna, Loop, Active, 10 kHz - 30 MHz	EMCO	6502	2857	13-Jan-15	13-Jan-16
0521	EMI Receiver (Spectrum Analyzer) with RF filter section 9 kHz-6.5 GHz	Hewlett Packard	8546A	3617A 00319, 3448A002 53	22-Oct-14	22-Oct-15
0604	Antenna BiconiLog Log-Periodic/T Bow-TIE, 26 - 2000 MHz	EMCO	3141	9611-1011	15-May-15	15-May-16
0768	Antenna Standard Gain Horn, 18-26.5 GHz, WR-42, 25 dB gain	Quinstar Technology	QWH-4200-BA	110	25-Dec-14	25-Dec-15
0769	Antenna Standard Gain Horn, 26.5-40 GHz, WR28, 25 dB gain	Quinstar Technology	QWH-2800-BA	112	25-Dec-14	25-Dec-15
1424	Spectrum Analyzer, 30 Hz- 40 GHz	Agilent Technologies	8564EC	3946A002 19	12-Apr-15	12-Apr-16
1984	Antenna, Double-Ridged Waveguide Horn, 1-18 GHz, 300 W	EMC Test Systems	3115	9911-5964	17-Apr-15	17-Apr-16
2780	EMC analyzer, 100 Hz to 26.5 GHz	Agilent Technologies	E7405A	MY451024 62	02-Sep-14	02-Sep-15
2979	Cable 1 m, N/N-type	Harbour Industries	7/60- RG142	2979	02-Sep-14	02-Sep-15
3286	Temperature Chamber, (-50 to +170) °C	Thermotron	EL-8-CH- 1-1-CO2	21-9048	23-Sep-14	23-Sep-15
3301	Power Meter, P-series, 50 MHz to 40 GHz	Agilent Technologies	N1911A	MY451010 57	30-Jan-15	30-Jan-16
3302	Power sensor, P-Series, 50 MHz to 40 GHz, -35/30 to 20 dBm	Agilent Technologies	N1922A	MY452405 86	30-Jan-15	30-Jan-16
3433	Test Cable , DC-18 GHz, 1.5 m, SMA - SMA	Mini-Circuits	CBL-5FT- SMSM+	25679	11-Mar-15	11-Mar-16
3435	Precision Fixed Attenuator, 50 Ohm, 5 W, 10 dB, DC to 18 GHz	Mini-Circuits	BW- S10W5+	NA	10-Mar-15	10-Mar-16
3455	Medium Power Fixed Coaxial Attenuator DC to 40 GHz, 20 dB, 5 W	Aeroflex / Weinschel	75A-20-12	1182	11-Mar-15	11-Mar-16
3535	Amplifier, low noise, 18 to 40 GHz	Quinstar Technology	QLJ- 18404537 -J0	111590030 01	30-Dec-14	30-Dec-15
3818	PSA Series Spectrum Analyzer, 3 Hz- 44 GHz	Agilent Technologies	E4446A	MY482502 88	29-Apr-15	29-Apr-16
3901	Microwave Cable Assembly, 40.0 GHz, 3.5 m, SMA/SMA	Huber-Suhner	SUCOFLE X 102A	1225/2A	10-Feb-15	10-Feb-16
3903	Microwave Cable Assembly, 40.0 GHz, 1.5 m, SMA/SMA	Huber-Suhner	SUCOFLE X 102A	1226/2A	10-Feb-15	10-Feb-16
4150	Preamplifier, 0.1 to 18 GHz, Gain 25 dB, N-type(f) in, N-type(m) out.	Agilent Technologies	87405C	MY470105 91	30-Dec-14	30-Dec-15
4164	DC Power Supply, 60V, 5A	Standig	605D	NA	11-Jan-15	11-Jan-16
4229	Precision Fixed Attenuator, 50 Ohm, 5W, 10dB, DC to 18000 MHz	Mini-Circuits	BW- N10W5+	NA	09-Mar-15	09-Mar-16



HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./ Check	Due Cal./ Check
4232	Precision Fixed Attenuator, 50 Ohm, 5W, 20dB, DC to 18000 MHz	Mini-Circuits	BW-N20W5+	NA	09-Mar-15	09-Mar-16
4234	Precision Fixed Attenuator, 50 Ohm, 5W, 20dB, DC to 18000 MHz	Mini-Circuits	BW-N20W5+	NA	10-Mar-15	10-Mar-16
4273	Test Cable , DC-18 GHz, 1.8 m, SMA/M - N/M	Mini-Circuits	CBL-6FT-SMNM+	70045	28-May-15	28-May-16
4293	Microwave Cable Assembly, 18.0 GHz, 3.4 m, SMA/SMA	Huber-Suhner	Sucoflex P103	NA	02-Dec-14	02-Dec-15
4338	Reject Band Filter, 50 Ohm, 0 to 2170 and 3000 to 18000 MHz, SMA-FM / SMA-M	Micro-Tronics	BRM 50702-02	023	05-May-15	05-May-16
4353	Low Loss Armored Test Cable, DC - 18 GHz, 6.2 m, N type-M/N type-M	MegaPhase	NC29-N1N1-244	12025101 003	15-Mar-15	15-Mar-16
4366	Directional coupler, 1 GHz to 18 GHz, 10 dB, SMA Female	Tiger Micro-Electronics Institute	TGD-A1101-10	01e-JSDE805-007	18-May-14	18-May-16
4932	Microwave preamplifier, 500 MHz to 18 GHz, 40 dB Gain	COM-POWER CORPORATION	PAM-118A	551029	18-Nov-14	18-Nov-15

**9 APPENDIX B Measurement uncertainties****Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements**

Test description	Expanded uncertainty
Transmitter tests	
Carrier power conducted at antenna connector	± 1.7 dB
Carrier power radiated (substitution method)	± 4.5 dB
Occupied bandwidth	±8%
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Spurious emissions radiated 30 MHz – 40 GHz (substitution method)	± 4.5 dB
Frequency error	30 – 300 MHz: ± 50.5 Hz (1.68 ppm) 300 – 1000 MHz: ± 168 Hz (0.56 ppm)
Transient frequency behaviour	187 Hz ± 13.9 %
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.

10 APPENDIX C Test facility description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility.

Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47), Registration Numbers 90624 for OATS and 90623 for the anechoic chamber; by Industry Canada for electromagnetic emissions (file number IC 2186A-1 for OATS), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, G-27 for full-anechoic chamber for RE measurements above 1 GHz, C-845 for conducted emissions site, T-1606 for conducted emissions at telecommunication ports), has a status of a Telefication - Listed Testing Laboratory, Certificate No. L138/00. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01). The FCC Designation Number is US1003.

Address: P.O. Box 23, Binyamina 30500, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.

11 APPENDIX D Specification references

47CFR part 27: 2014	Private land mobile radio services
47CFR part 1: 2014	Practice and procedure
47CFR part 2: 2014	Frequency allocations and radio treaty matters; general rules and regulations
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications.
ANSI C63.4: 2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
ANSI/TIA/EIA-603-D:2010	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards



12 APPENDIX E Test equipment correction factors

Antenna factor
Active loop antenna
Model 6502, S/N 2857, HL 0446

Frequency, MHz	Magnetic antenna factor, dB	Electric antenna factor, dB
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.8
0.750	-41.9	9.7
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.2
4.000	-41.4	10.1
5.000	-41.5	10.1
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field strength in dB(μ V/m).

Antenna factor
Standard gain horn antenna
Quinstar Technology
Model QWH
Ser.No.112, HL 0768, 0769, 0770, 0771, 0772

Frequency min, GHz	Frequency max, GHz	Antenna factor, dB(1/m)
18.000	26.500	32.01
26.500	40.000	35.48
40.000	60.000	39.03
60.000	90.000	42.55
90.000	140.000	46.23
140.000	220.000	50.11

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field strength in dB(μ V/m).



Antenna factor
Biconilog antenna EMCO Model 3141
Ser.No.1011, HL 0604

Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)
26	7.8	580	20.6	1320	27.8
28	7.8	600	21.3	1340	28.3
30	7.8	620	21.5	1360	28.2
40	7.2	640	21.2	1380	27.9
60	7.1	660	21.4	1400	27.9
70	8.5	680	21.9	1420	27.9
80	9.4	700	22.2	1440	27.8
90	9.8	720	22.2	1460	27.8
100	9.7	740	22.1	1480	28.0
110	9.3	760	22.3	1500	28.5
120	8.8	780	22.6	1520	28.9
130	8.7	800	22.7	1540	29.6
140	9.2	820	22.9	1560	29.8
150	9.8	840	23.1	1580	29.6
160	10.2	860	23.4	1600	29.5
170	10.4	880	23.8	1620	29.3
180	10.4	900	24.1	1640	29.2
190	10.3	920	24.1	1660	29.4
200	10.6	940	24.0	1680	29.6
220	11.6	960	24.1	1700	29.8
240	12.4	980	24.5	1720	30.3
260	12.8	1000	24.9	1740	30.8
280	13.7	1020	25.0	1760	31.1
300	14.7	1040	25.2	1780	31.0
320	15.2	1060	25.4	1800	30.9
340	15.4	1080	25.6	1820	30.7
360	16.1	1100	25.7	1840	30.6
380	16.4	1120	26.0	1860	30.6
400	16.6	1140	26.4	1880	30.6
420	16.7	1160	27.0	1900	30.6
440	17.0	1180	27.0	1920	30.7
460	17.7	1200	26.7	1940	30.9
480	18.1	1220	26.5	1960	31.2
500	18.5	1240	26.5	1980	31.6
520	19.1	1260	26.5	2000	32.0
540	19.5	1280	26.6		
560	19.8	1300	27.0		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field strength in dB(μ V/m).



Antenna factor
Double-ridged wave guide horn antenna
Model 3115, S/N 9911-5964, HL1984

Frequency, MHz	Antenna factor, dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.6
2500.0	28.9
3000.0	31.2
3500.0	32.0
4000.0	32.5
4500.0	32.7
5000.0	33.6
5500.0	35.1
6000.0	35.4
6500.0	34.9
7000.0	36.1
7500.0	37.8
8000.0	38.0
8500.0	38.1
9000.0	39.1
9500.0	38.3
10000.0	38.6
10500.0	38.2
11000.0	38.7
11500.0	39.5
12000.0	40.0
12500.0	40.4
13000.0	40.5
13500.0	41.1
14000.0	41.6
14500.0	41.7
15000.0	38.7
15500.0	38.2
16000.0	38.8
16500.0	40.5
17000.0	42.5
17500.0	45.9
18000.0	49.4

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field strength in dB(μ V/m).



Cable loss
Test Cable, Mini-Circuits, CBL-5FT-SMSM+, SMA-SMA, 18 GHz, 1.5 m, S/N 25679
Mini-Circuits, HL 3433

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10.0	0.06	9000	2.01
100	0.17	9500	2.06
500	0.41	10000	2.05
1000	0.58	10500	2.18
1500	0.72	11000	2.26
2000	0.86	11500	2.28
2500	0.96	12000	2.43
3000	1.04	12500	2.53
3500	1.13	13000	2.52
4000	1.23	13500	2.56
4500	1.31	14000	2.60
5000	1.41	14500	2.59
5500	1.49	15000	2.67
6000	1.55	15500	2.76
6500	1.63	16000	2.86
7000	1.71	16500	2.91
7500	1.78	17000	2.95
8000	1.86	17500	3.02
8500	1.92	18000	3.07



Cable loss
Microwave Cable Assembly, Huber-Suhner, 40 GHz, 3.5 m, SMA-SMA, S/N 1225/2A
HL 3901

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.09	9500	4.29	21000	6.67
100	0.41	10000	4.40	22000	6.92
500	0.93	10500	4.52	23000	7.00
1000	1.33	11000	4.64	24000	7.18
1500	1.63	11500	4.76	25000	7.29
2000	1.90	12000	4.87	26000	7.55
2500	2.12	12500	4.99	27000	7.70
3000	2.33	13000	5.11	28000	7.88
3500	2.50	13500	5.20	29000	8.02
4000	2.67	14000	5.31	30000	8.15
4500	2.82	14500	5.42	31000	8.35
5000	2.99	15000	5.51	32000	8.40
5500	3.16	15500	5.58	33000	8.62
6000	3.32	16000	5.68	34000	8.73
6500	3.51	16500	5.78	35000	8.78
7000	3.65	17000	5.91	36000	8.94
7500	3.79	17500	5.99	37000	9.21
8000	3.92	18000	6.07	38000	9.37
8500	4.04	19000	6.36	39000	9.45
9000	4.18	20000	6.49	40000	9.52



Cable loss
Microwave Cable Assembly, Huber-Suhner, 40 GHz, 1.5 m, SMA-SMA, S/N 1226/2A
HL 3903

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	-0.02	9500	1.84	21000	2.98
100	0.15	10000	1.86	22000	3.07
500	0.38	10500	1.93	23000	3.13
1000	0.56	11000	1.99	24000	3.21
1500	0.69	11500	2.04	25000	3.26
2000	0.82	12000	2.10	26000	3.48
2500	0.90	12500	2.15	27000	3.44
3000	0.98	13000	2.21	28000	3.53
3500	1.06	13500	2.25	29000	3.59
4000	1.11	14000	2.29	30000	3.66
4500	1.17	14500	2.34	31000	3.70
5000	1.24	15000	2.36	32000	3.79
5500	1.32	15500	2.40	33000	3.88
6000	1.40	16000	2.45	34000	3.94
6500	1.50	16500	2.48	35000	3.91
7000	1.56	17000	2.56	36000	4.05
7500	1.62	17500	2.58	37000	4.22
8000	1.68	18000	2.60	38000	4.25
8500	1.74	19000	2.84	39000	4.27
9000	1.78	20000	2.88	40000	4.33



Cable loss
Test cable, Mini-Circuits, S/N 70045, 18 GHz, 1.8 m, SMA/M - N/M
CBL-6FT-SMNM+, HL 4273

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.09	4800	1.76	9800	2.70	14800	3.59
30	0.11	4900	1.78	9900	2.71	14900	3.59
50	0.14	5000	1.81	10000	2.73	15000	3.60
100	0.20	5100	1.82	10100	2.75	15100	3.63
200	0.30	5200	1.86	10200	2.76	15200	3.67
300	0.38	5300	1.89	10300	2.79	15300	3.70
400	0.45	5400	1.92	10400	2.81	15400	3.68
500	0.50	5500	1.96	10500	2.82	15500	3.70
600	0.55	5600	2.00	10600	2.83	15600	3.71
700	0.60	5700	2.03	10700	2.87	15700	3.77
800	0.65	5800	2.04	10800	2.87	15800	3.75
900	0.69	5900	2.07	10900	2.88	15900	3.77
1000	0.73	6000	2.10	11000	2.89	16000	3.79
1100	0.77	6100	2.10	11100	2.91	16100	3.85
1200	0.80	6200	2.11	11200	2.92	16200	3.82
1300	0.84	6300	2.11	11300	2.94	16300	3.83
1400	0.88	6400	2.14	11400	2.95	16400	3.88
1500	0.92	6500	2.15	11500	2.98	16500	3.89
1600	0.95	6600	2.15	11600	3.00	16600	3.92
1700	0.98	6700	2.16	11700	3.02	16700	3.88
1800	1.01	6800	2.19	11800	3.04	16800	3.95
1900	1.04	6900	2.22	11900	3.08	16900	3.91
2000	1.07	7000	2.24	12000	3.09	17000	3.97
2100	1.09	7100	2.26	12100	3.12	17100	3.92
2200	1.13	7200	2.29	12200	3.13	17200	3.94
2300	1.15	7300	2.32	12300	3.16	17300	3.94
2400	1.18	7400	2.36	12400	3.17	17400	3.98
2500	1.21	7500	2.39	12500	3.19	17500	3.93
2600	1.24	7600	2.41	12600	3.20	17600	3.95
2700	1.27	7700	2.43	12700	3.21	17700	3.96
2800	1.30	7800	2.46	12800	3.21	17800	3.97
2900	1.34	7900	2.49	12900	3.22	17900	3.96
3000	1.36	8000	2.52	13000	3.22	18000	3.97
3100	1.38	8100	2.52	13100	3.24		
3200	1.41	8200	2.54	13200	3.24		
3300	1.45	8300	2.59	13300	3.27		
3400	1.46	8400	2.61	13400	3.28		
3500	1.49	8500	2.60	13500	3.31		
3600	1.51	8600	2.63	13600	3.31		
3700	1.55	8700	2.65	13700	3.35		
3800	1.34	8800	2.65	13800	3.37		
3900	1.36	8900	2.65	13900	3.40		
4000	1.38	9000	2.66	14000	3.43		
4100	1.41	9100	2.66	14100	3.45		
4200	1.45	9200	2.67	14200	3.46		
4300	1.46	9300	2.67	14300	3.46		
4400	1.49	9400	2.67	14400	3.49		
4500	1.51	9500	2.68	14500	3.50		
4600	1.55	9600	2.69	14600	3.50		
4700	1.34	9700	2.69	14700	3.52		



Cable loss
Microwave Cable Assembly, 18.0 GHz, 3.4 m, SMA/SMA, Huber-Suhner,
Sucoflex P103, HL 4293

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
50	0.20	4900	2.01	9800	2.94	14700	3.85
100	0.28	5000	2.03	9900	2.95	14800	3.87
200	0.39	5100	2.06	10000	2.98	14900	3.89
300	0.48	5200	2.08	10100	3.01	15000	3.94
400	0.55	5300	2.07	10200	3.04	15100	3.94
500	0.61	5400	2.12	10300	3.04	15200	3.91
600	0.68	5500	2.12	10400	3.04	15300	3.93
700	0.73	5600	2.16	10500	3.07	15400	3.94
800	0.78	5700	2.16	10600	3.10	15500	3.96
900	0.83	5800	2.22	10700	3.11	15600	3.96
1000	0.88	5900	2.24	10800	3.12	15700	3.97
1100	0.92	6000	2.28	10900	3.15	15800	4.00
1200	0.96	6100	2.31	11000	3.22	15900	4.01
1300	1.00	6200	2.32	11100	3.20	16000	4.03
1400	1.04	6300	2.34	11200	3.19	16100	4.02
1500	1.07	6400	2.37	11300	3.21	16200	4.05
1600	1.11	6500	2.38	11400	3.26	16300	4.06
1700	1.15	6600	2.38	11500	3.27	16400	4.08
1800	1.19	6700	2.40	11600	3.27	16500	4.07
1900	1.22	6800	2.42	11700	3.28	16600	4.10
2000	1.25	6900	2.43	11800	3.32	16700	4.14
2100	1.28	7000	2.44	11900	3.34	16800	4.12
2200	1.34	7100	2.48	12000	3.34	16900	4.13
2300	1.35	7200	2.46	12100	3.35	17000	4.13
2400	1.39	7300	2.51	12200	3.39	17100	4.19
2500	1.40	7400	2.53	12300	3.44	17200	4.22
2600	1.44	7500	2.50	12400	3.44	17300	4.20
2700	1.47	7600	2.53	12500	3.43	17400	4.21
2800	1.50	7700	2.63	12600	3.45	17500	4.19
2900	1.54	7800	2.62	12700	3.47	17600	4.22
3000	1.56	7900	2.58	12800	3.51	17700	4.24
3100	1.59	8000	2.64	12900	3.51	17800	4.23
3200	1.62	8100	2.66	13000	3.52	17900	4.26
3300	1.64	8200	2.67	13100	3.56	18000	4.27
3400	1.67	8300	2.63	13200	3.57		
3500	1.69	8400	2.64	13300	3.58		
3600	1.72	8500	2.65	13400	3.60		
3700	1.74	8600	2.68	13500	3.61		
3800	1.78	8700	2.72	13600	3.66		
3900	1.80	8800	2.73	13700	3.68		
4000	1.83	8900	2.74	13800	3.67		
4100	1.84	9000	2.77	13900	3.68		
4200	1.86	9100	2.79	14000	3.73		
4300	1.89	9200	2.82	14100	3.74		
4400	1.92	9300	2.81	14200	3.74		
4500	1.94	9400	2.85	14300	3.76		
4600	1.97	9500	2.89	14400	3.78		
4700	1.97	9600	2.90	14500	3.81		
4800	2.01	9700	2.92	14600	3.83		



Cable loss
Low Loss Armored Test Cable, MegaPhase, 18 GHz, 6.2 m, N type-M/N type-M,
NC29-N1N1-244S/N 12025101 003,
HL 4353

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
50	0.20	9000	2.71
100	0.27	9500	2.81
300	0.47	10000	2.90
500	0.61	10500	2.97
1000	0.87	11000	3.06
1500	1.07	11500	3.13
2000	1.24	12000	3.20
2500	1.39	12500	3.26
3000	1.53	13000	3.34
3500	1.65	13500	3.39
4000	1.77	14000	3.47
4500	1.89	14500	3.54
5000	1.99	15000	3.62
5500	2.07	15500	3.69
6000	2.20	16000	3.76
6500	2.30	16500	3.83
7000	2.39	17000	3.86
7500	2.51	17500	3.94
8000	2.58	18000	4.02
8500	2.65		



13 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
AM	amplitude modulation
AVRG	average (detector)
BB	broad band
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(μ V)	decibel referred to one microvolt
dB(μ V/m)	decibel referred to one microvolt per meter
dB(μ A)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
μ s	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
Ω	Ohm
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt

END OF DOCUMENT