



Report No.:SZ11070110W03

# FCC TEST REPORT

Issued to

**Raymarine UK Ltd**

For

**Trinity Bluetooth Remote**

Model Name: RCU-3  
 Trade Name: Raymarine  
 Brand Name: Raymarine  
 FCC ID: PJ5-RM0805  
 IC ID: 4069B-RM0805  
 Standard: 47 CFR Part 15 Subpart C  
 RSS-GEN and RSS-210  
 Test date: July 15, 2011 –August 9, 2011  
 Issue date: Sep 6, 2011



**Shenzhen Morlab Communications Technology Co., Ltd.**

Tested by Zhang Yan  
Zhang Yan

Date 2011.9.6

Approved by Wu Xuewen  
Wu Xuewen

Date 2011.9.6

Review by Peng Huarui  
Peng Huarui

Date 2011.9.6



*The report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen MORLAB Communication Technology Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the Shenzhen MORLAB Telecommunication Co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen MORLAB Telecommunication Co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. In the event of the improper use of the report, Shenzhen MORLAB Telecommunication Co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.*

**TABLE OF CONTENTS**

<b>1.</b>	<b>GENERAL INFORMATION .....</b>	<b>4</b>
<b>1.1</b>	<b>EUT Description .....</b>	<b>4</b>
<b>1.2</b>	<b>Test Standards and Results .....</b>	<b>5</b>
<b>1.3</b>	<b>Facilities and Accreditations .....</b>	<b>6</b>
1.3.1	Facilities .....	6
1.3.2	Test Environment Conditions .....	6
<b>2.</b>	<b>47 CFR PART 15C REQUIREMENTS .....</b>	<b>7</b>
<b>2.1</b>	<b>Number of Hopping Frequency .....</b>	<b>7</b>
2.1.1	Requirement .....	7
2.1.2	Test Description .....	7
2.1.3	Test Result .....	7
<b>2.2</b>	<b>Peak Output Power .....</b>	<b>10</b>
2.2.1	Requirement .....	10
2.2.2	Test Description .....	10
2.2.3	Test Result .....	10
<b>2.3</b>	<b>20dB Bandwidth .....</b>	<b>17</b>
2.3.1	Definition .....	17
2.3.2	Test Description .....	17
2.3.3	Test Result .....	17
<b>2.4</b>	<b>Carried Frequency Separation .....</b>	<b>24</b>
2.4.1	Definition .....	24
2.4.2	Test Description .....	24
2.4.3	Test Result .....	24
<b>2.5</b>	<b>Time of Occupancy (Dwell time) .....</b>	<b>26</b>
2.5.1	Requirement .....	26
2.5.2	Test Description .....	26
2.5.3	Test Result .....	26
<b>2.6</b>	<b>Conducted Spurious Emissions .....</b>	<b>33</b>
2.6.1	Requirement .....	33
2.6.2	Test Description .....	33
2.6.3	Test Result .....	33



**2.7 Band Edge .....44**

2.7.1 Requirement ..... 44

2.7.2 Test Description ..... 44

2.7.3 Test Result ..... 45

**2.8 Radiated Emission .....53**

2.8.1 Requirement ..... 53

2.8.2 Test Description ..... 53

2.8.3 Test Result ..... 55

Change History		
Issue	Date	Reason for change
1.0	August 23, 2011	First edition

## 1. GENERAL INFORMATION

### 1.1 EUT Description

EUT Type .....: Trinity Bluetooth Remote  
Serial No.....: (n.a, marked #1 by test site)  
Hardware Version .....: 07  
Software Version .....: 0.40  
Applicant .....: Raymarine UK Ltd  
Marine House,5 Harbourgate Southampton Road ,Portsmouth  
Hampshire PO64BQ,UK  
Manufacturer .....: In-Tech Electronics Ltd  
2 Qihang Industrial Park Haoxiang Road, Shajing, Baoan  
Shenzhen , P. R . China  
Frequency Range .....: The frequency range used is 2402MHz - 2480MHz (79 channels, at  
intervals of 1MHz);  
The frequency block is 2400MHz to 2483.5MHz.  
Modulation Type.....: Bluetooth: FHSS (GFSK(1Mbps),  $\pi/4$ -DQPSK(EDR 2Mbps),  
8-DPSK(EDR 3Mbps))

*Note 1:* The EUT is a Trinity Bluetooth Remote, it contains Bluetooth Module operating at 2.4GHz ISM band; the frequencies allocated for the Bluetooth Module is  $F(\text{MHz})=2402+1*n$  ( $0 \leq n \leq 78$ ). The lowest, middle, highest channel numbers of the Bluetooth Module used and tested in this report are separately 0 (2402MHz), 39 (2441MHz) and 78 (2480MHz).

*Note 2:* For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

## 1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C and RSS-210 (Bluetooth, 2.4GHz ISM band radiators) for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15 (10-1-09 Edition)	Radio Frequency Devices
2	RSS-210: Issue 8, December 2010	Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment

Test detailed items/section required by FCC rules and results are as below:

No	Section in CFR 47	Section in RSS-GEN or RSS-210	Description	Result
1	15.247(a)	A8.1 (4)	Number of Hopping Frequency	PASS
2	15.247(b)	A8.4 (2)	Peak Output Power	PASS
3	15.247(a)	A8.1 (1)	20dB Bandwidth	PASS
4	15.247(a)	A8.1 (2)	Carrier Frequency Separation	PASS
5	15.247(a)	A8.1 (4)	Time of Occupancy (Dwell time)	PASS
6	15.247(c)	A8.5	Conducted Spurious Emission	PASS
7	15.247(c)	A8.5	Band Edge	PASS
8	15.207	7.2.2	Conducted Emission	N.A
9	15.209 15.247(c)	A8.5	Radiated Emission	PASS

NOTE:

The tests were performed according to the method of measurements prescribed in DA-00-705.



## **1.3 Facilities and Accreditations**

### **1.3.1 Facilities**

Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L3572.

All measurement facilities used to collect the measurement data are located at 3/F, Electronic Testing Building, Shahe Road, Xili, Nanshan District, Shenzhen, 518055 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22; the FCC registration number is 741109.

### **1.3.2 Test Environment Conditions**

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106

## 2. 47 CFR PART 15C REQUIREMENTS


### 2.1 Number of Hopping Frequency

#### 2.1.1 Requirement

According to FCC §15.247(a)(1)(iii) and RSS-210 A8.1 (4), frequency hopping systems operating in the 2400MHz to 2483.5MHz bands shall use at least 75 hopping frequencies.

#### 2.1.2 Test Description

##### A. Test Setup:

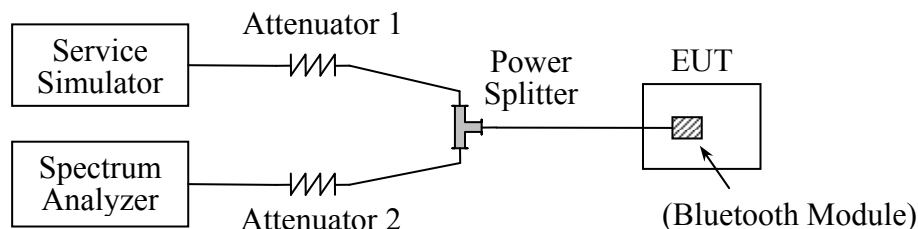

The Bluetooth Module of the EUT, which is powered by the Battery, is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

##### B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date
Service Simulator	Agilent	E5515C	GB43130131	2011.05
Spectrum Analyzer	Agilent	E7405A	US44210471	2011.05
Power Splitter	Weinschel	1506A	NW521	(n.a.)
Attenuator 1	Resnet	20dB	(n.a.)	(n.a.)
Attenuator 2	Resnet	3dB	(n.a.)	(n.a.)

#### 2.1.3 Test Result


The Bluetooth Module operates at hopping-on test mode; the frequencies number employed is counted to verify the Module's using the number of hopping frequency.

##### A. Test Verdict:




Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Refer to Plot	Verdict
GFSK	2400 - 2483.5	78.49	75	Plot A	PASS
$\pi/4$ -DQPSK	2400 - 2483.5	78.70	75	Plot B	PASS
8-DPSK	2400 - 2483.5	78.70	75	Plot C	PASS

**B. Test Plot:**

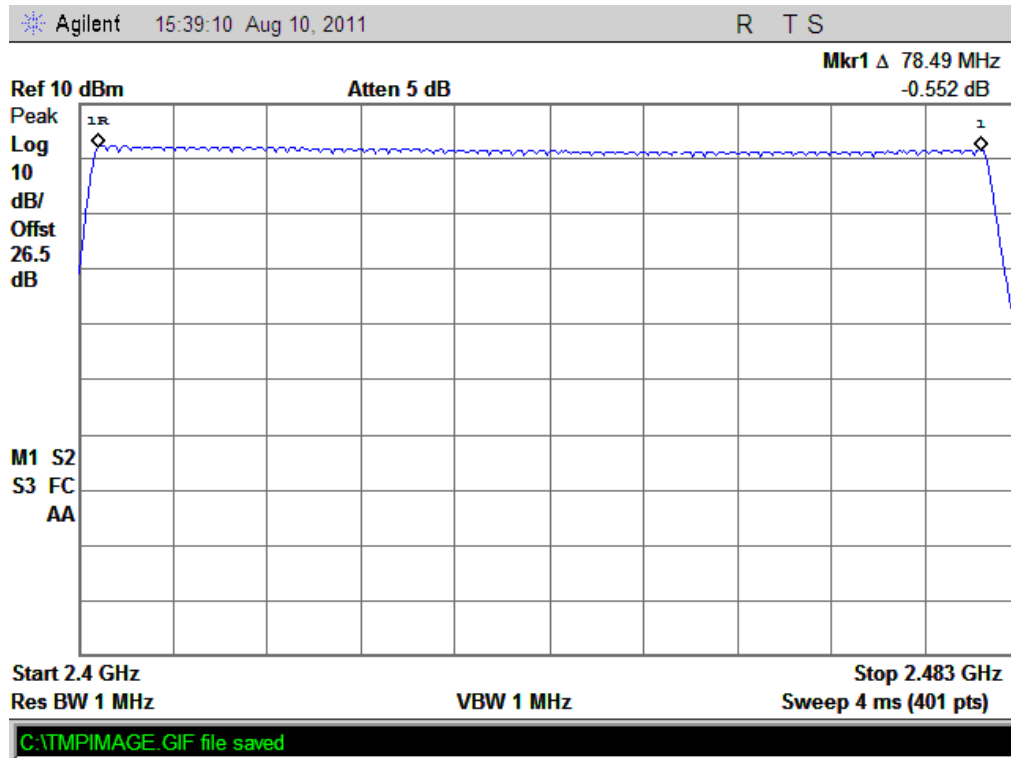


(Plot A: GFSK)



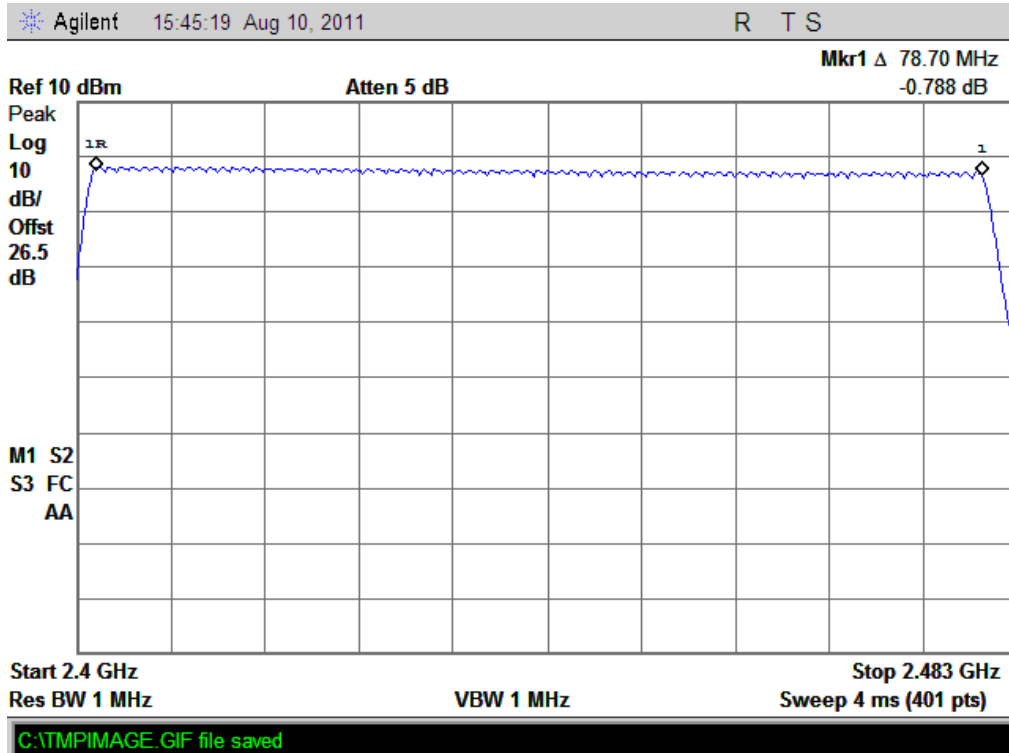

(Plot B: 16-QAM)

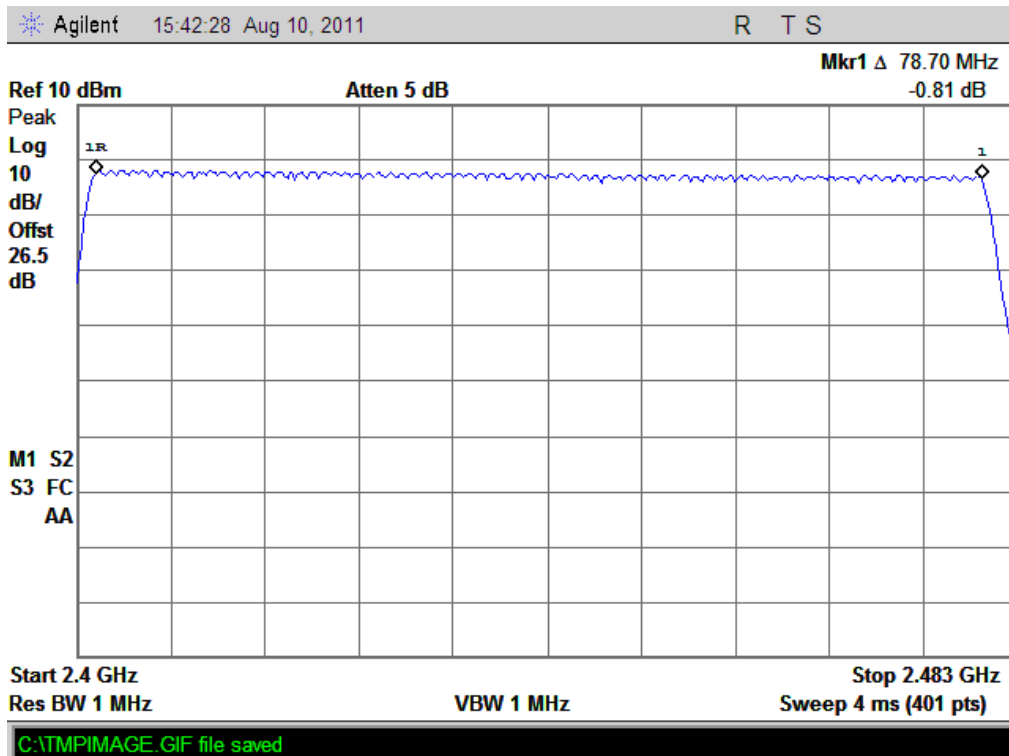

(Plot C: 8-PSK)

## 2.2 Peak Output Power

### 2.2.1 Requirement

According to FCC §15.247(b)(1) and RSS-210 A8.4 (2), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

### 2.2.2 Test Description

See section 2.1.2 of this report.

### 2.2.3 Test Result


The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

#### A. Test Verdict:


##### GFSK Mode

Channel	Frequency (MHz)	Measured Output Peak Power			Limit		Verdict
		dBm	W	Refer to Plot	dBm	W	
0	2402	2.238	0.001674	Plot A	30	1	PASS
39	2441	1.363	0.001369	Plot B			PASS
78	2480	1.464	0.001401	Plot C			PASS


#### B. Test Plot:

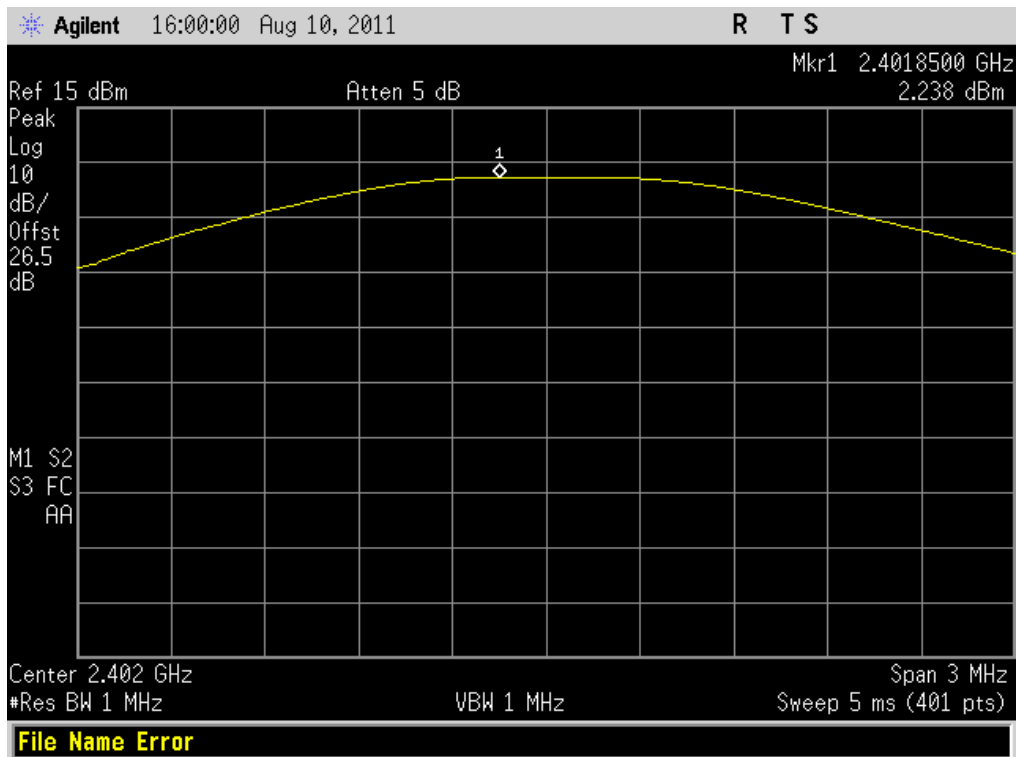

(Plot A: Channel = 2402)

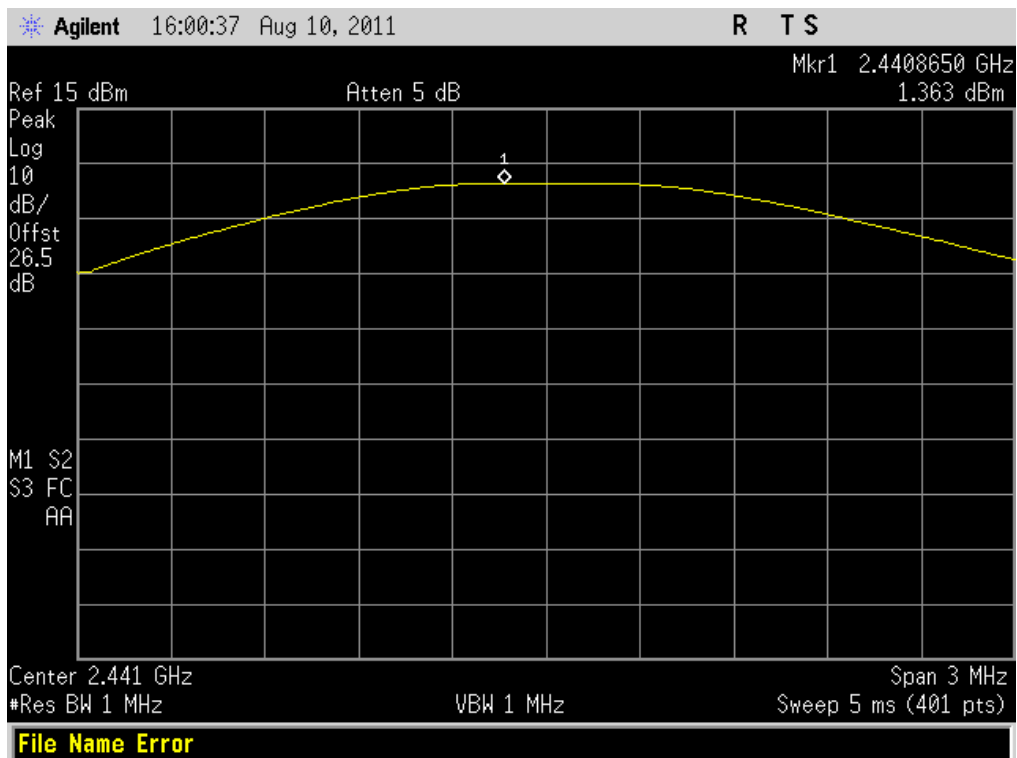

(Plot B: Channel = 2441)

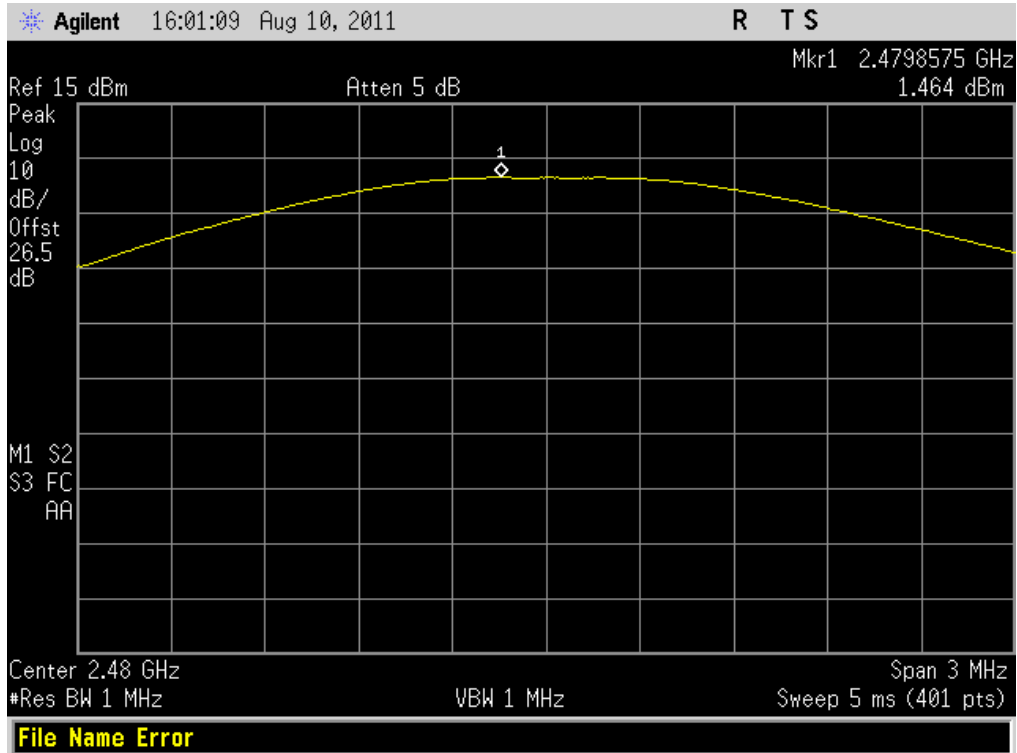


(Plot C: Channel = 2480)

**C. Test Verdict:**


**$\pi/4$ -DQPSK Mode**

Channel	Frequency (MHz)	Measured Output Peak Power			Limit		Verdict
		dBm	W	Refer to Plot	dBm	W	
0	2402	-1.77	0.000665	Plot D	30	1	PASS
39	2441	-2.468	0.000567	Plot E			PASS
78	2480	-2.866	0.000517	Plot F			PASS


**D. Test Plot:**

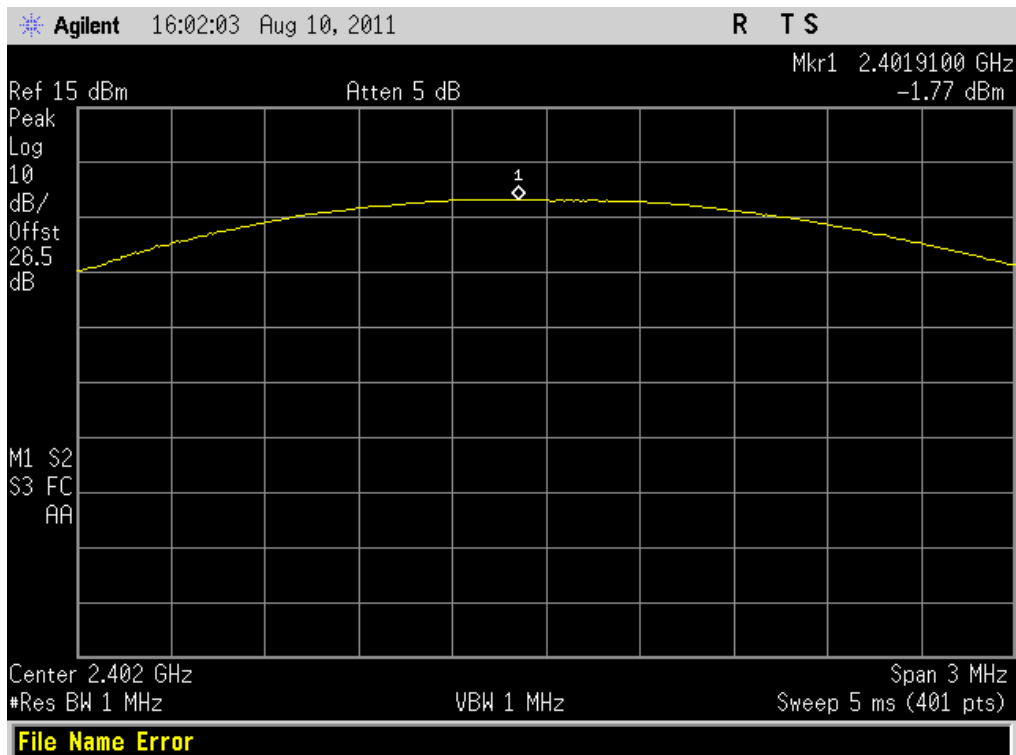

(Plot D: Channel = 2402)

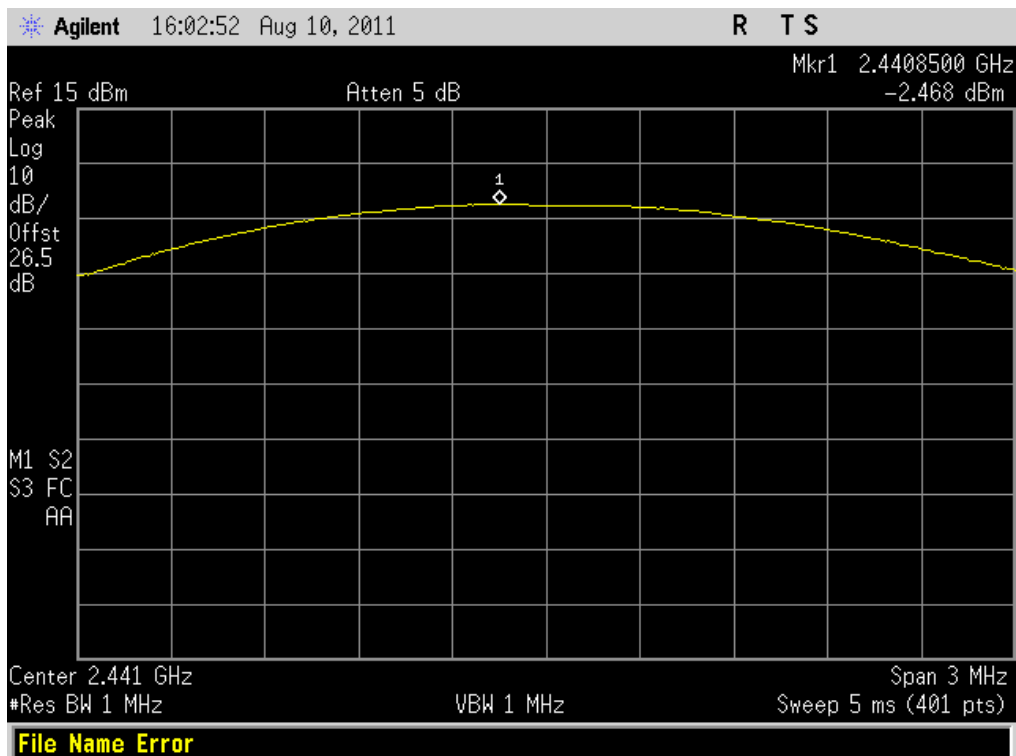

(Plot E: Channel = 2441)

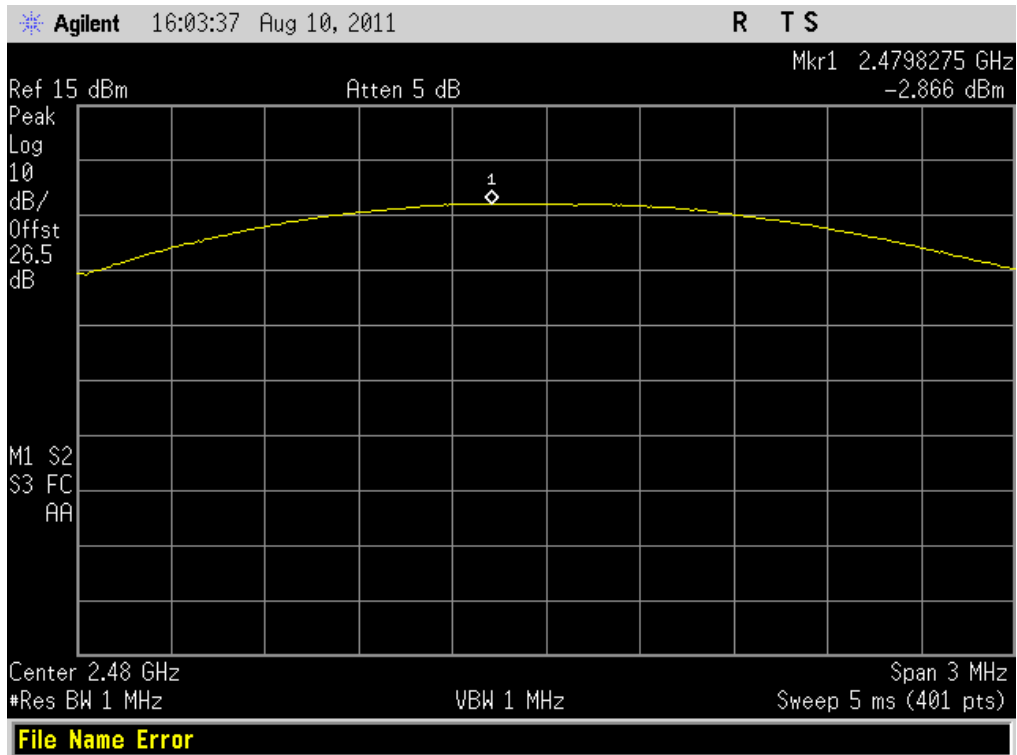


(Plot F: Channel = 2480)

**E. Test Verdict:**


**8-DPSK Mode**

Channel	Frequency (MHz)	Measured Output Peak Power			Limit		Verdict
		dBm	W	Refer to Plot	dBm	W	
0	2402	-1.82	0.000658	Plot G	30	1	PASS
39	2441	-2.51	0.000561	Plot H			PASS
78	2480	-2.92	0.000511	Plot I			PASS


**F. Test Plot:**

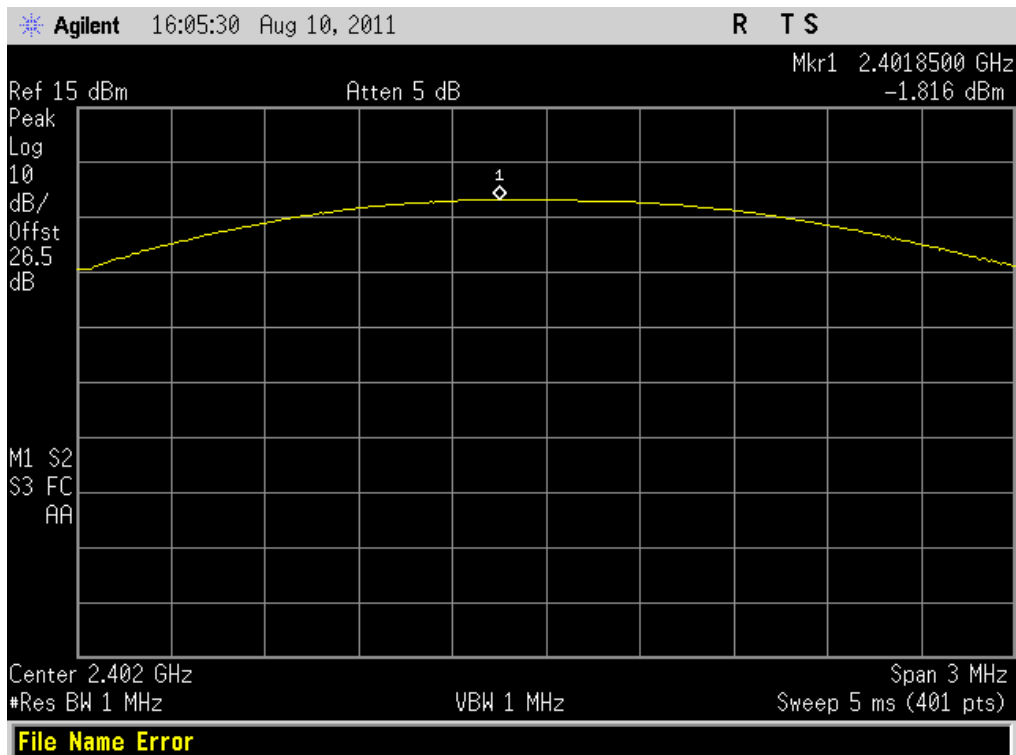

(Plot G: Channel = 2402)

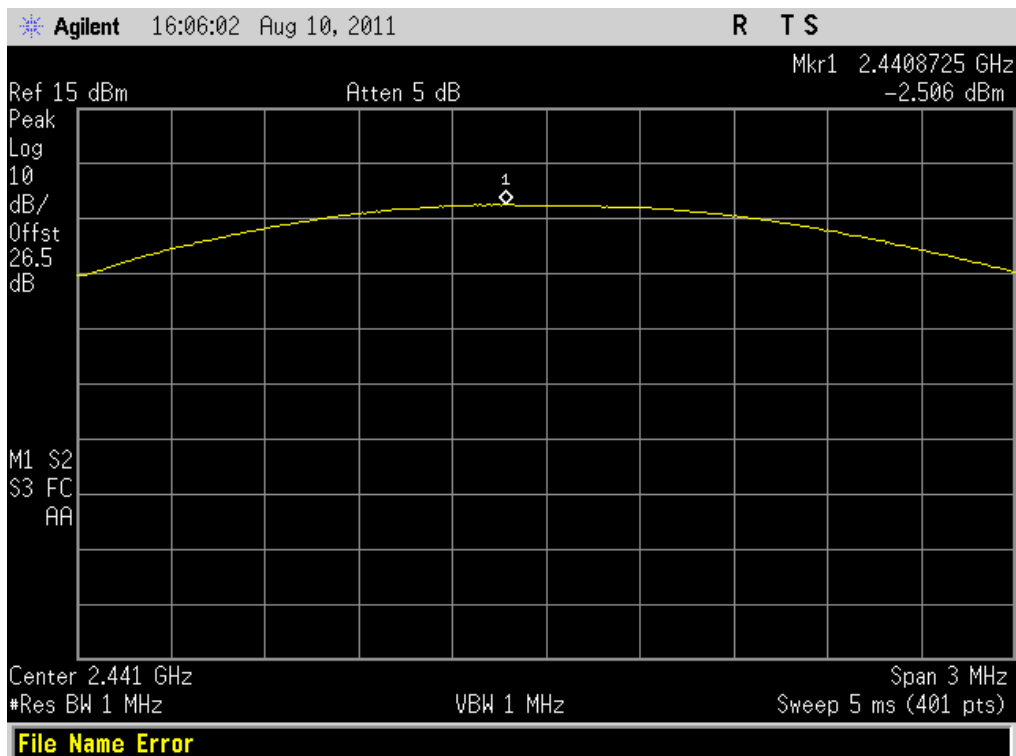

(Plot H: Channel = 2441)

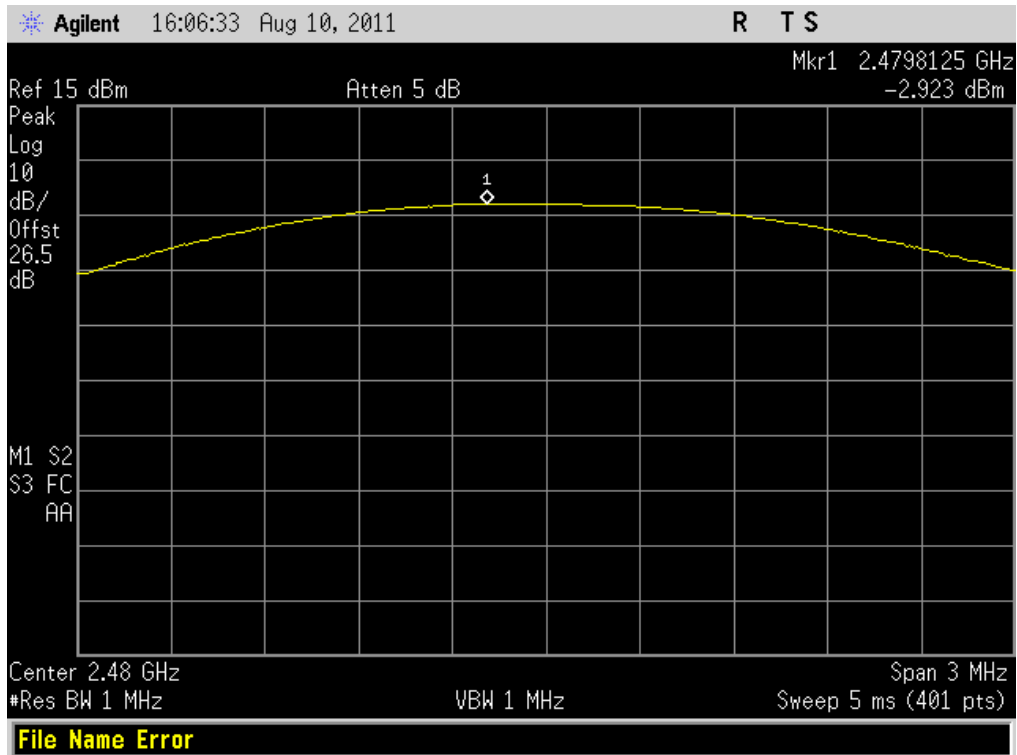

(Plot I: Channel = 2480)



## 2.3 20dB Bandwidth

### 2.3.1 Definition

According to FCC §15.247(a)(1) and RSS-210 A8.1 (1), the 20dB bandwidth is known as the 99% emission bandwidth, or 20dB bandwidth ( $10 \cdot \log 1\% = 20\text{dB}$ ) taking the total RF output power.

### 2.3.2 Test Description

See section 2.1.2 of this report.

### 2.3.3 Test Result

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to record the 20dB bandwidth of the Module.


#### A. Test Verdict:

##### GFSK Mode


The maximum 20dB bandwidth measured is 1.185MHz according to the table below.

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Refer to Plot
0	2402	1.185	Plot A
39	2441	1.125	Plot B
78	2480	1.175	Plot C


#### B. Test Plot:

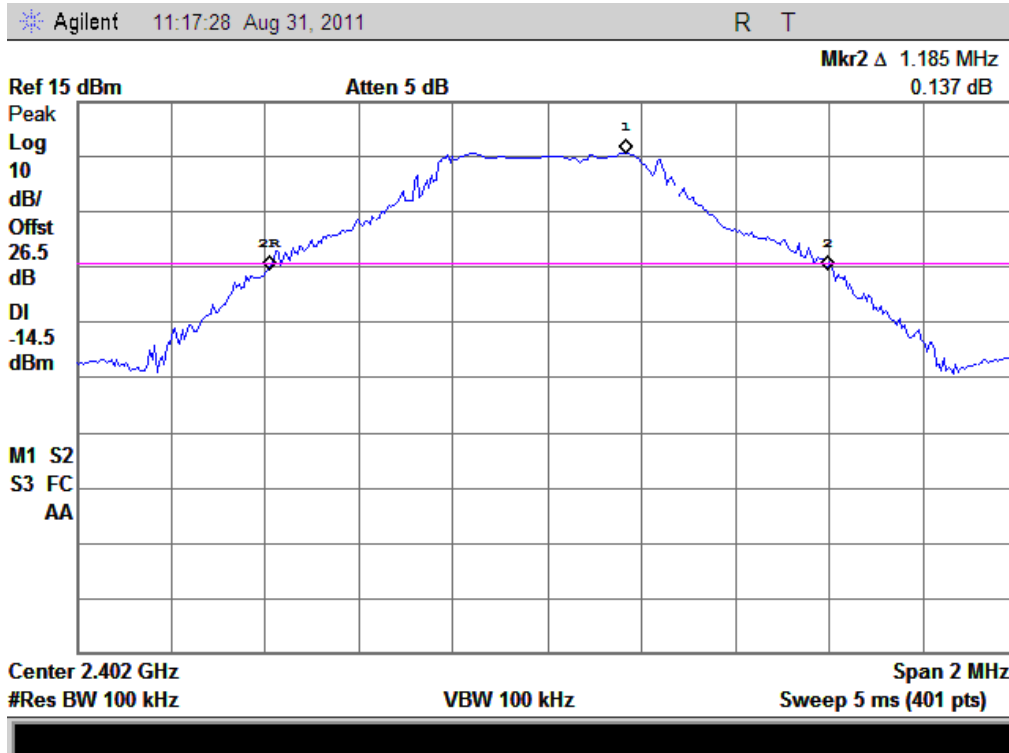

(Plot A: Channel = 2402)

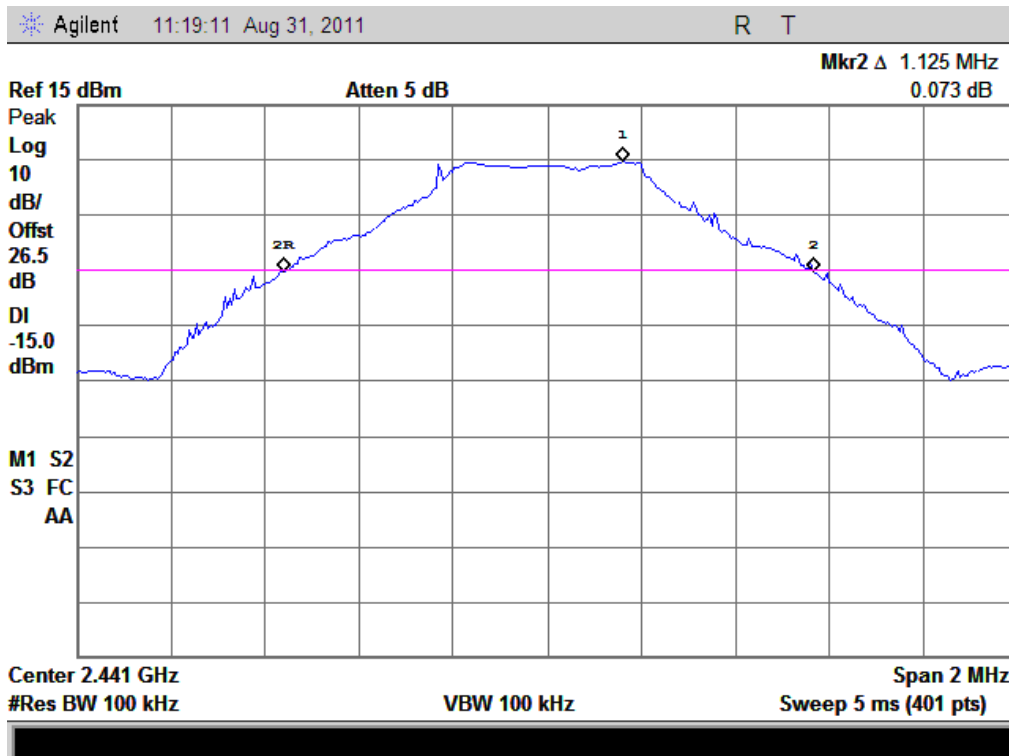

(Plot B: Channel = 2441)

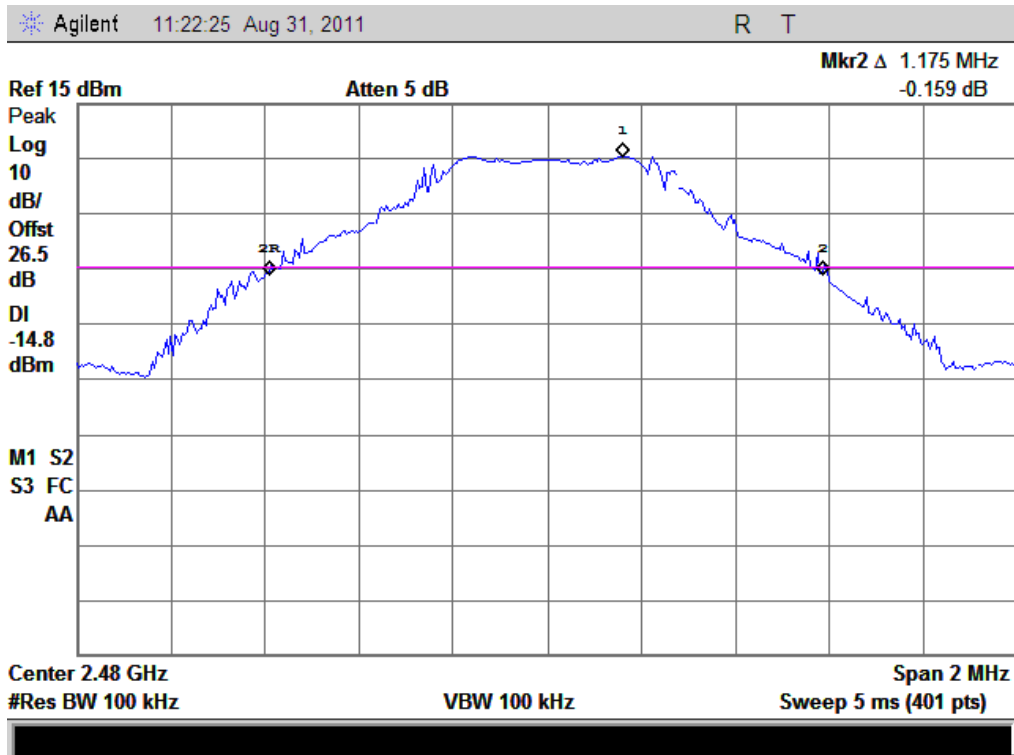

(Plot C: Channel = 2480)


**C. Test Verdict:**

**$\pi/4$ -DQPSK Mode**


The maximum 20dB bandwidth measured is 1.465MHz according to the table below.

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Refer to Plot
0	2402	1.420	Plot D
39	2441	1.450	Plot E
78	2480	1.465	Plot F


**D. Test Plot:**

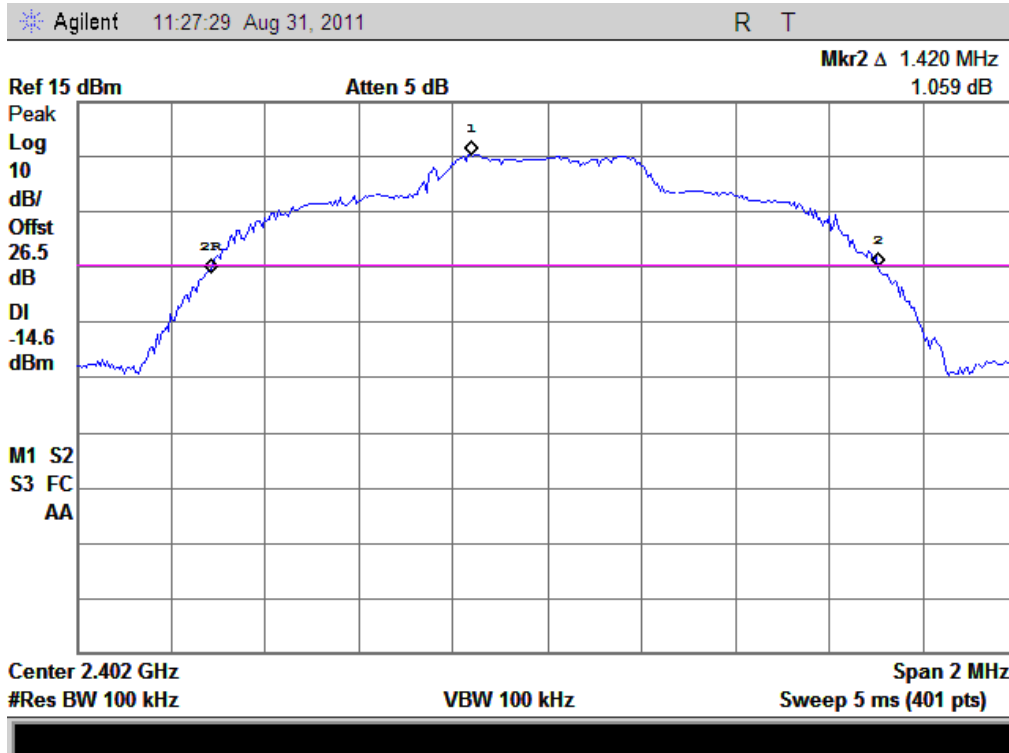

(Plot D: Channel = 2402)

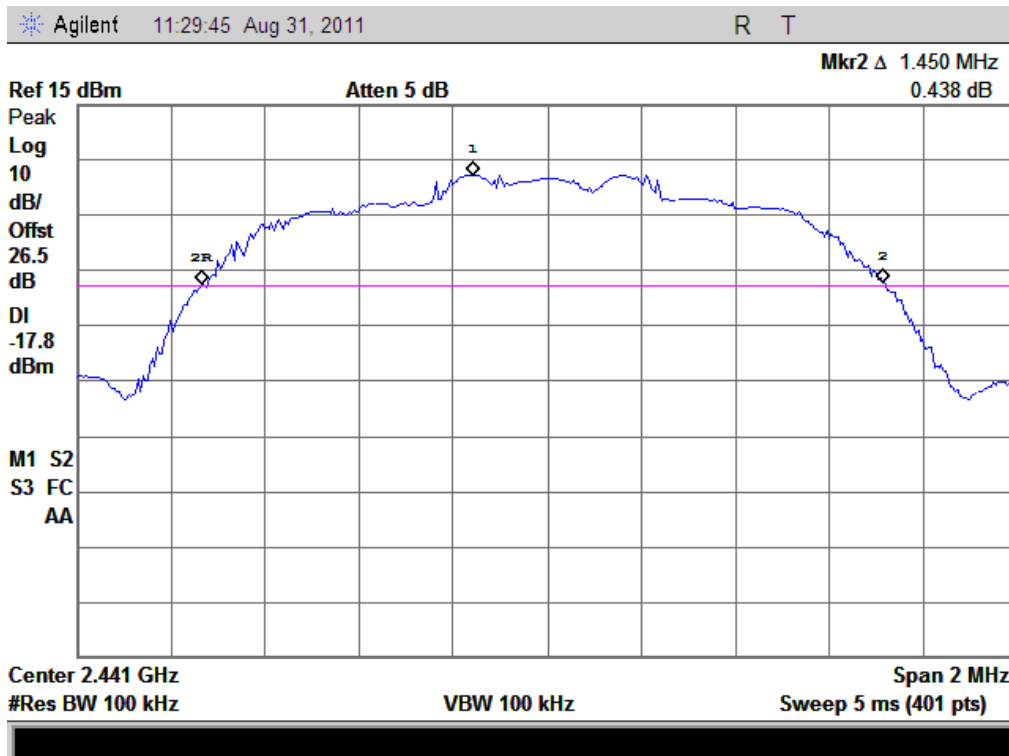

(Plot E: Channel = 2441)

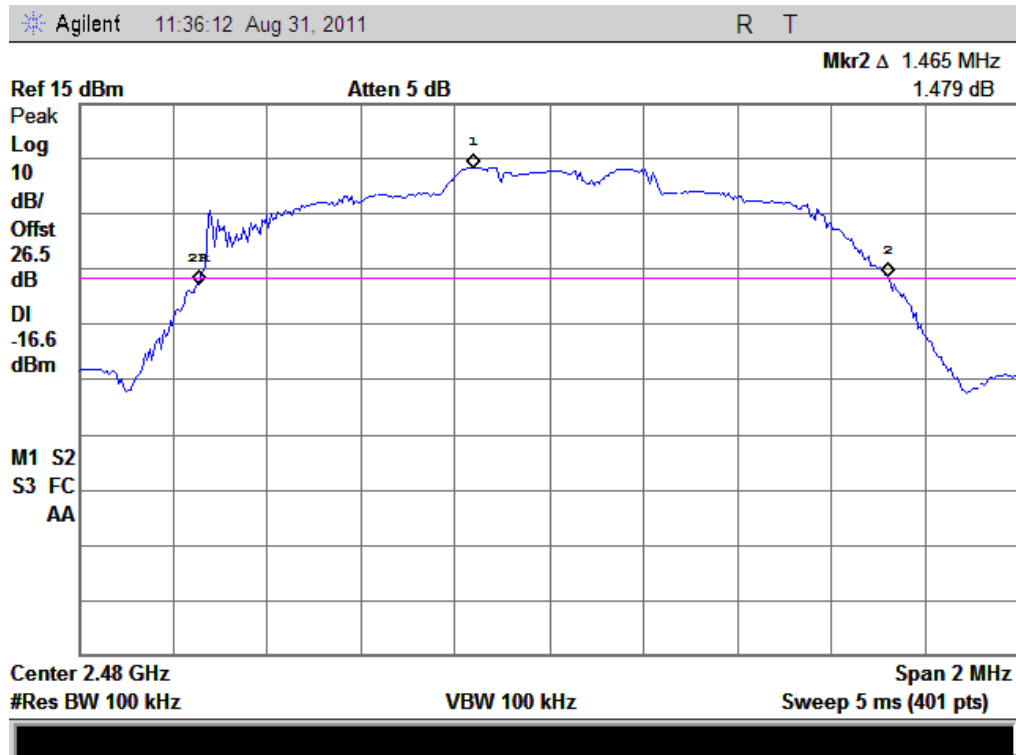

(Plot F: Channel = 2480)


**E. Test Verdict:**

**8-DPSK Mode**


The maximum 20dB bandwidth measured is 1.480MHz according to the table below.

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Refer to Plot
0	2402	1.365	Plot G
39	2441	1.480	Plot H
78	2480	1.456	Plot I


**F. Test Plot:**

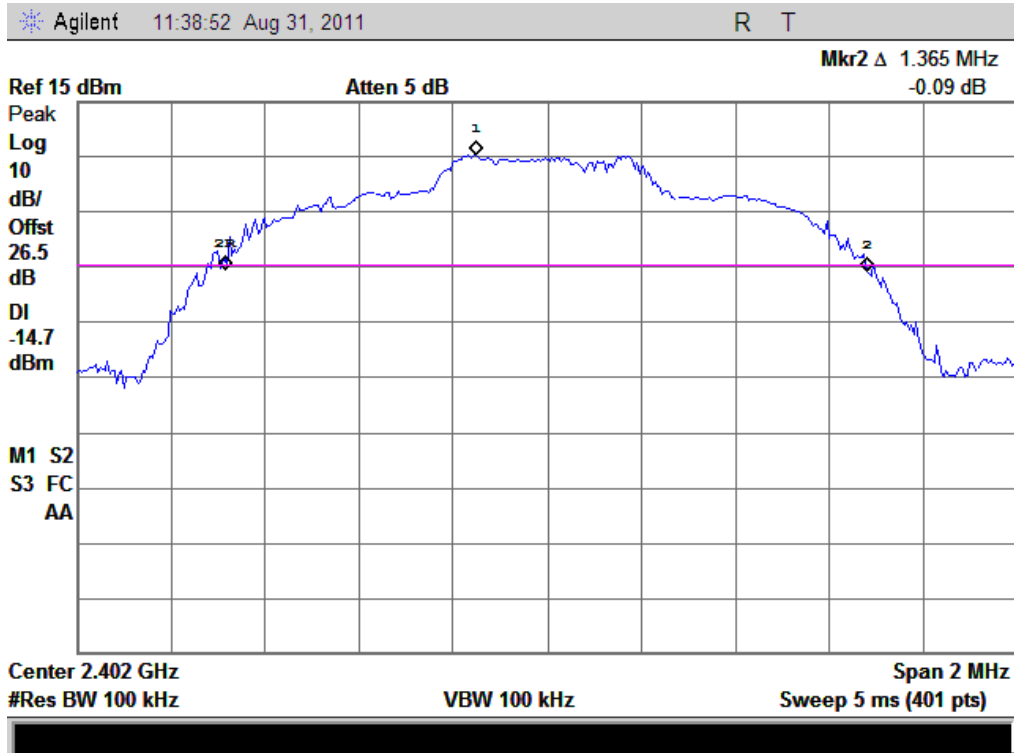

(Plot G: Channel = 2402)

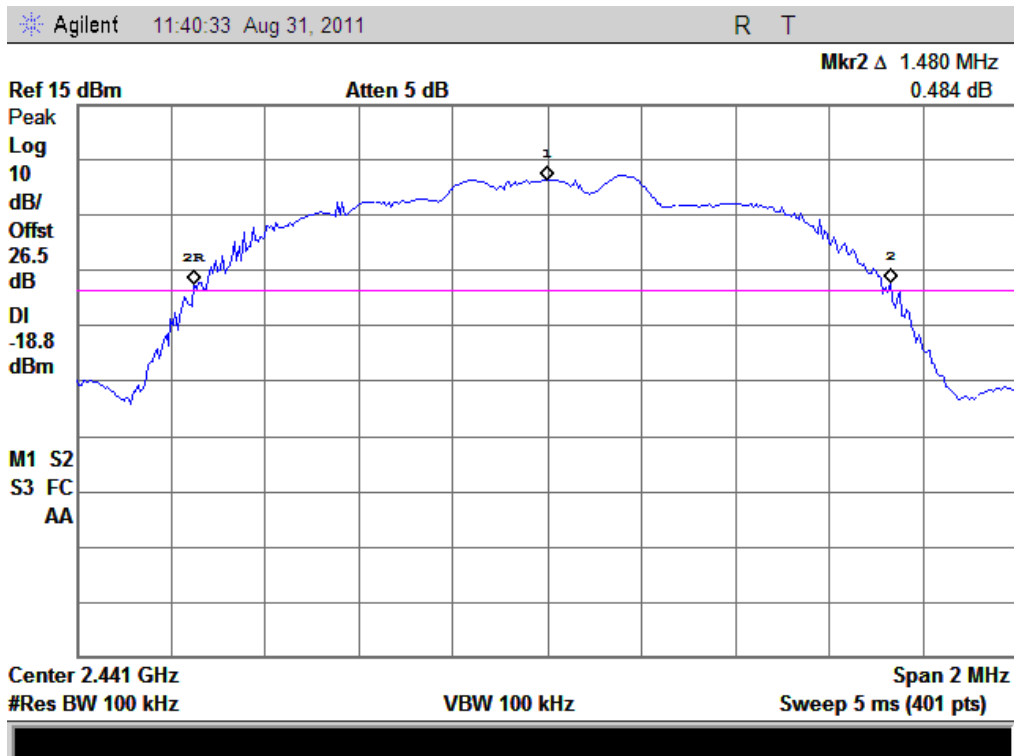

(Plot H: Channel = 2441)

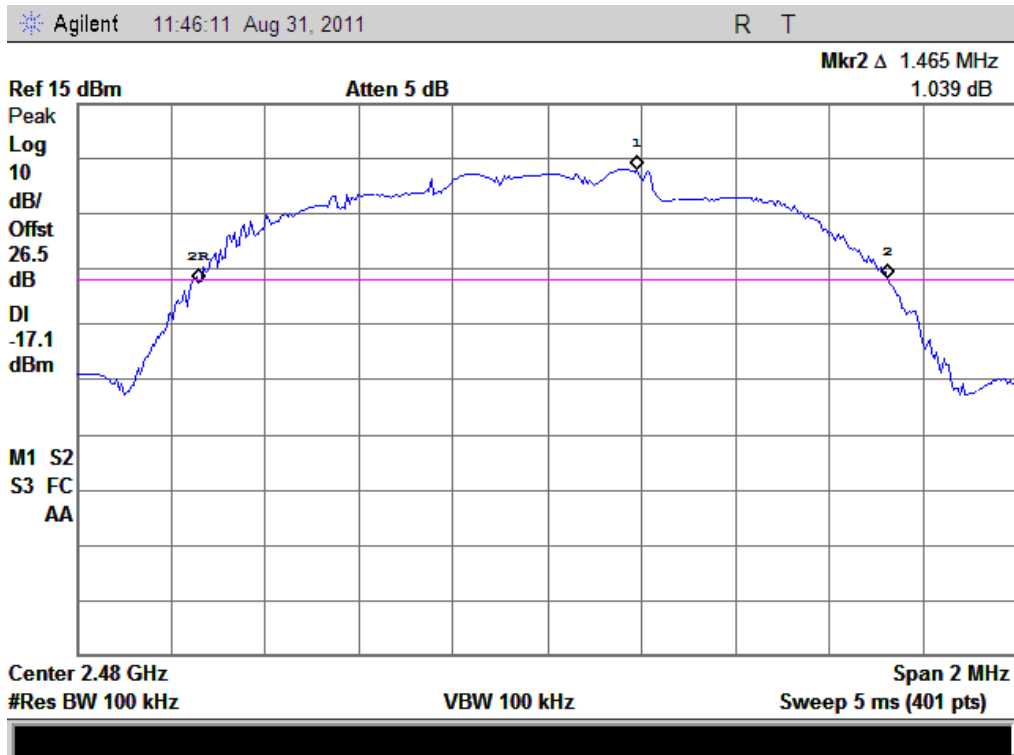

(Plot I: Channel = 2480)

## 2.4 Carried Frequency Separation

### 2.4.1 Definition

According to FCC §15.247(a)(1) and RSS-210 A8.1 (2), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.


### 2.4.2 Test Description

See section 2.1.2 of this report.

### 2.4.3 Test Result


The Bluetooth Module operates at hopping-on test mode.

For any adjacent channels (e.g. the channel 39 and 40 as showed in the Plot A), the Module does have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel (1.025MHz for GFSK mode, 1.340MHz for  $\pi/4$ -DQPSK mode and 1.320MHz for 8-DPSK mode, refer to section 2.3.3), whichever is greater. So, the verdict is PASS.

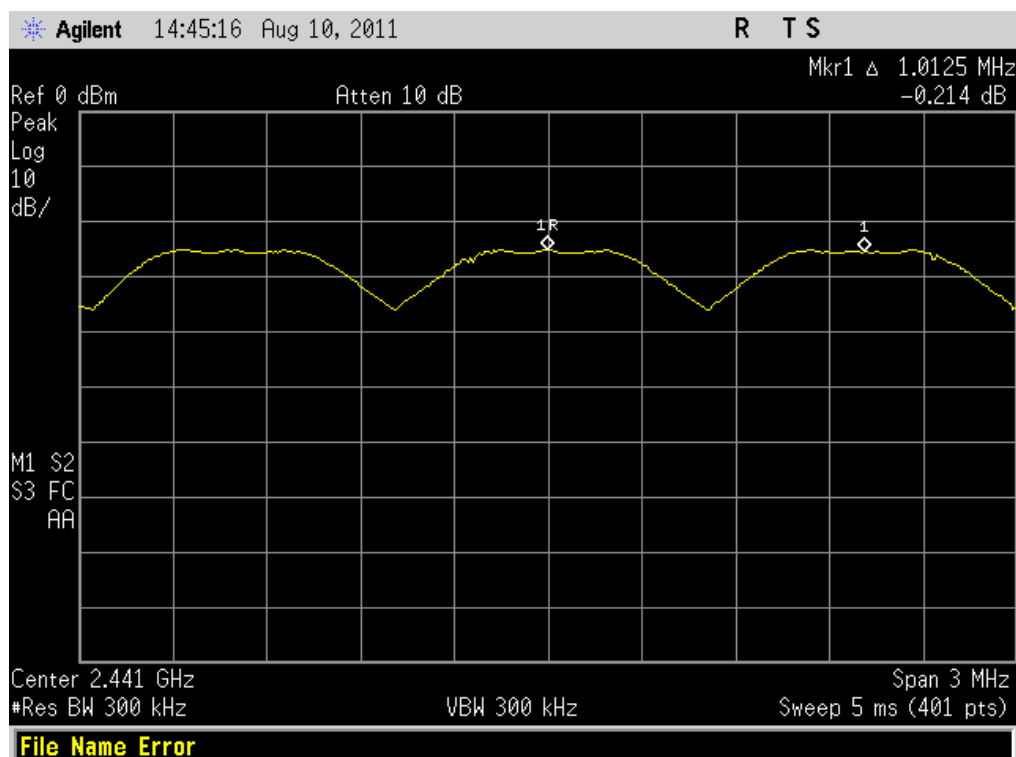


(Plot A: GFSK)



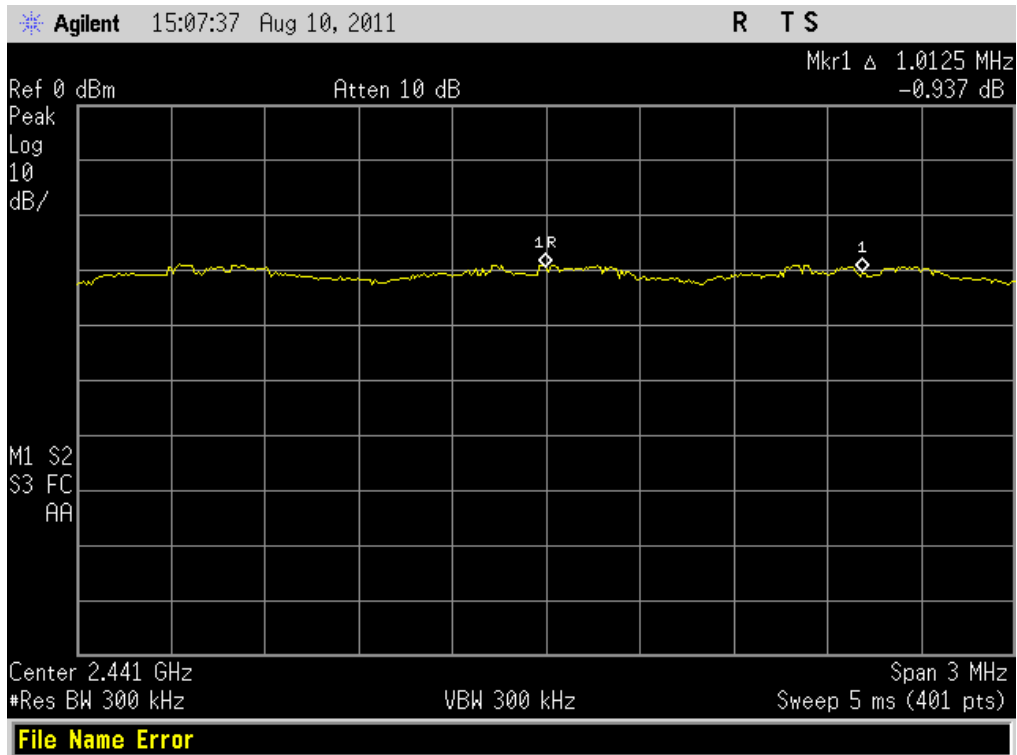

(Plot B:  $\pi/4$ -DQPSK)

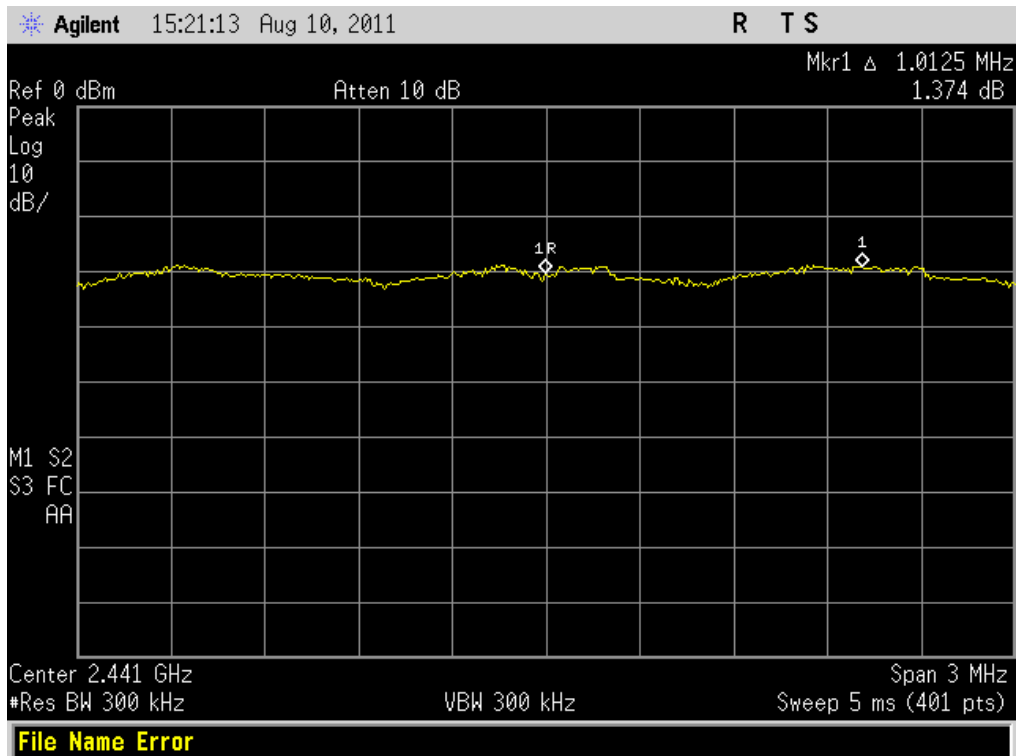

(Plot C: 8-DPSK)

## 2.5 Time of Occupancy (Dwell time)

### 2.5.1 Requirement

According to FCC §15.247(a)(1)(iii) and RSS-210 A8.1 (4), frequency hopping systems in the 2400 - 2483.5MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### 2.5.2 Test Description

See section 2.1.2 of this report.

### 2.5.3 Test Result

The average time of occupancy on any channel within the Period can be calculated with formulas (for DH5 package type):

$$\begin{aligned} \{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (1600 / 6) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4s * \{\text{Number of Hopping Frequency}\} \end{aligned}$$

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.


#### A. Test Verdict:

##### GFSK Mode


Channel	Frequency (MHz)	Pulse Time		Total of Dwell (ms)	Limit (ms)	Verdict
		ms	Refer to Plot			
0	2402	0.39	Plot A	41.6	400	PASS
39	2441	0.39	Plot B	41.6		PASS
78	2480	0.40	Plot C	42.7		PASS

#### B. Test Plot:


Note: the following plots record the Pulse Time of the Module carrier.

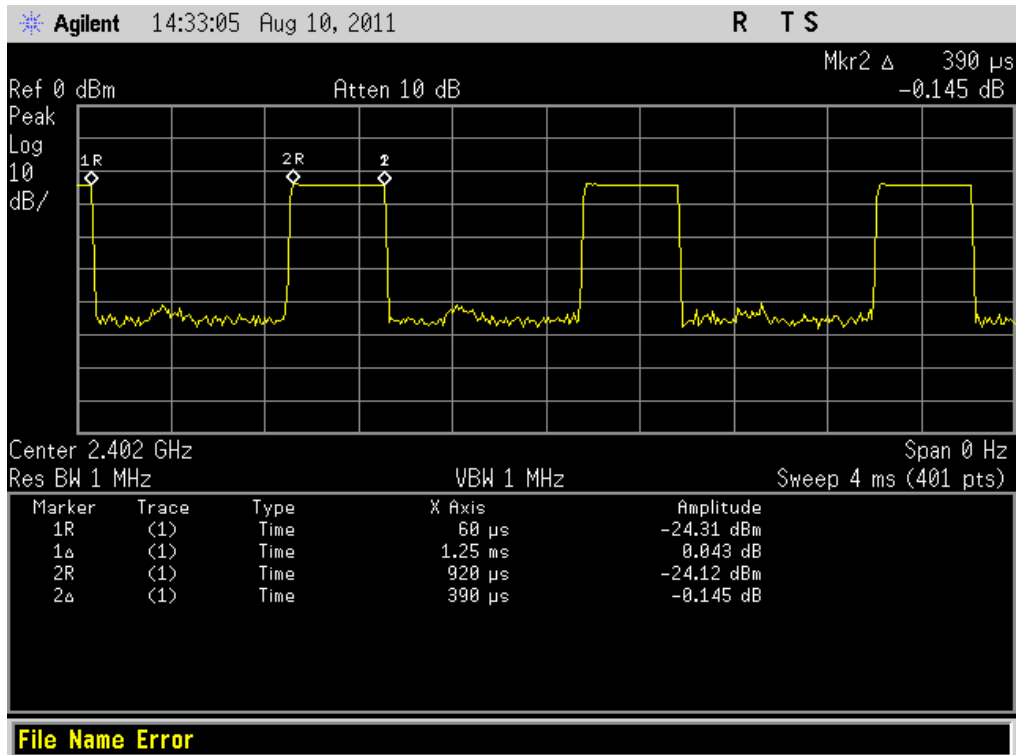

(Plot A: Channel = 2402)

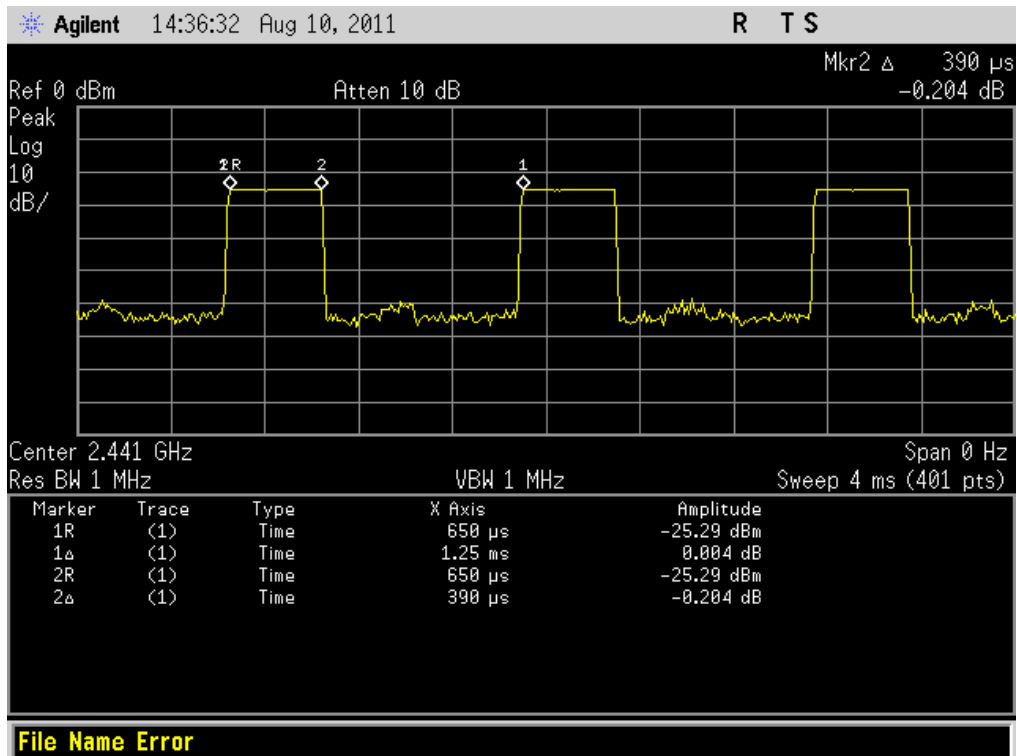

(Plot B: Channel = 2441)

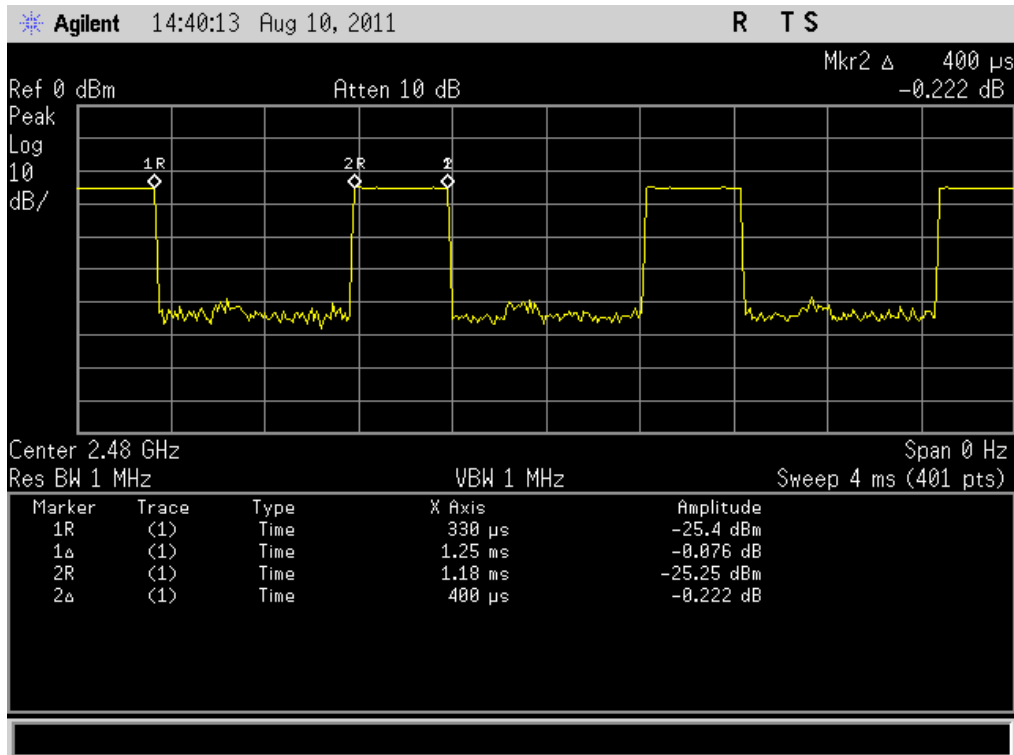

(Plot C: Channel = 2480)


**C. Test Verdict:**

**$\pi/4$ -DQPSK Mode**


Channel	Frequency (MHz)	Pulse Time		Total of Dwell (ms)	Limit (ms)	Verdict
		ms	Refer to Plot			
0	2402	2.91	Plot D	310.4	400	PASS
39	2441	2.90	Plot E	309.3		PASS
78	2480	2.91	Plot F	310.4		PASS

**D. Test Plot:**


Note: the following plots record the Pulse Time of the Module carrier.

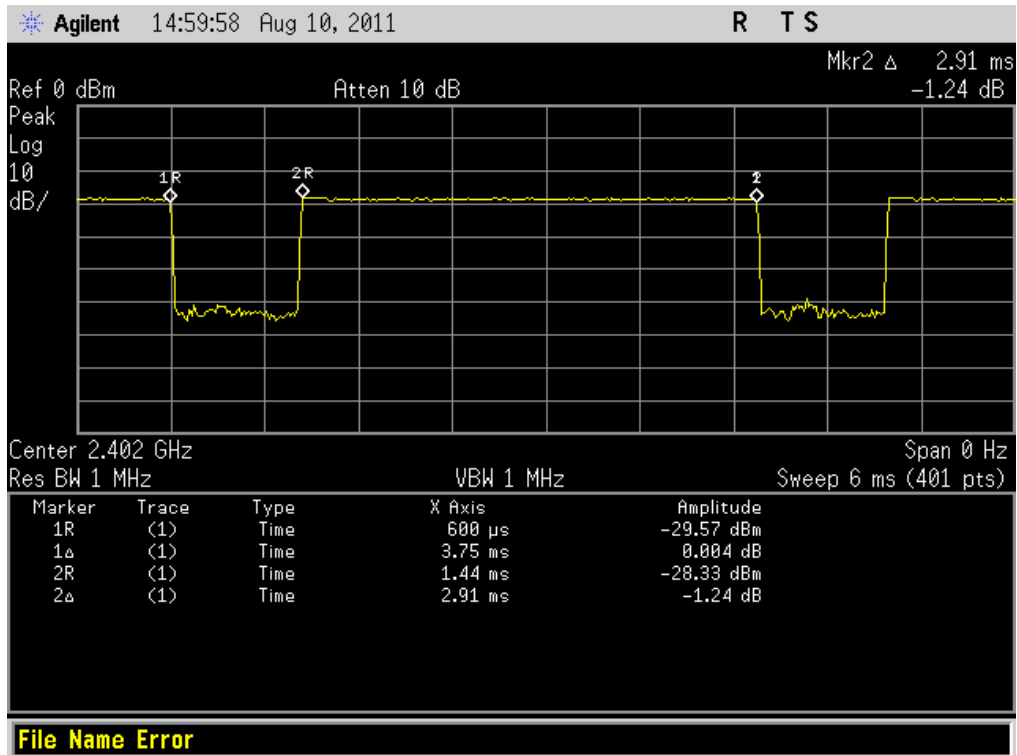

(Plot D: Channel = 2402)

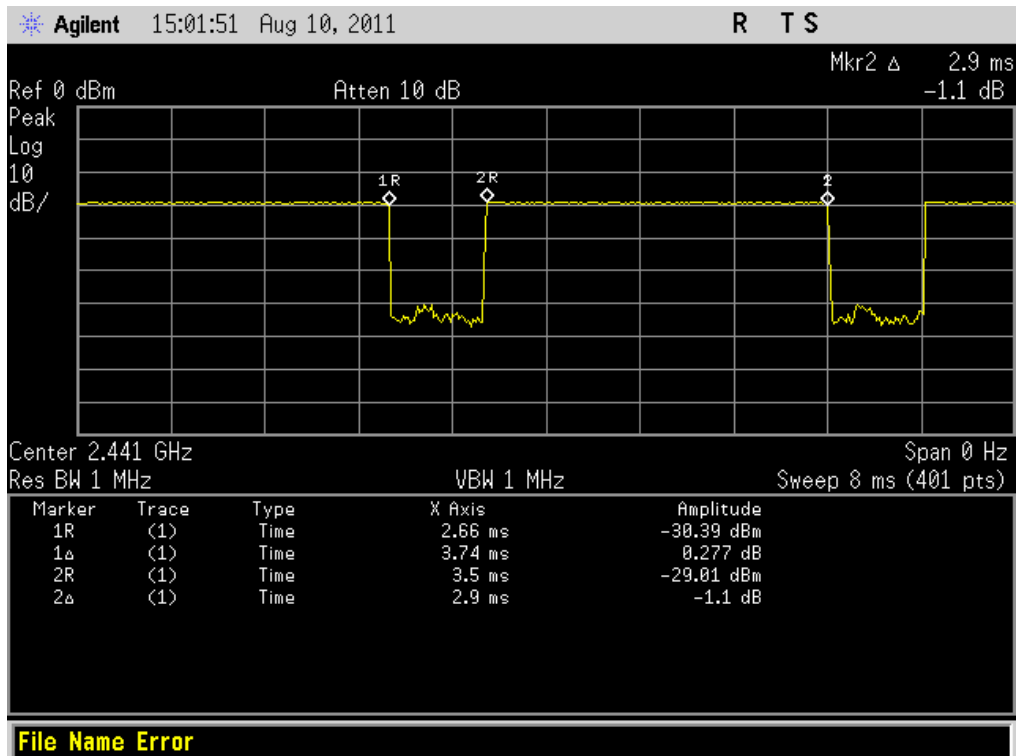

(Plot E: Channel = 2441)

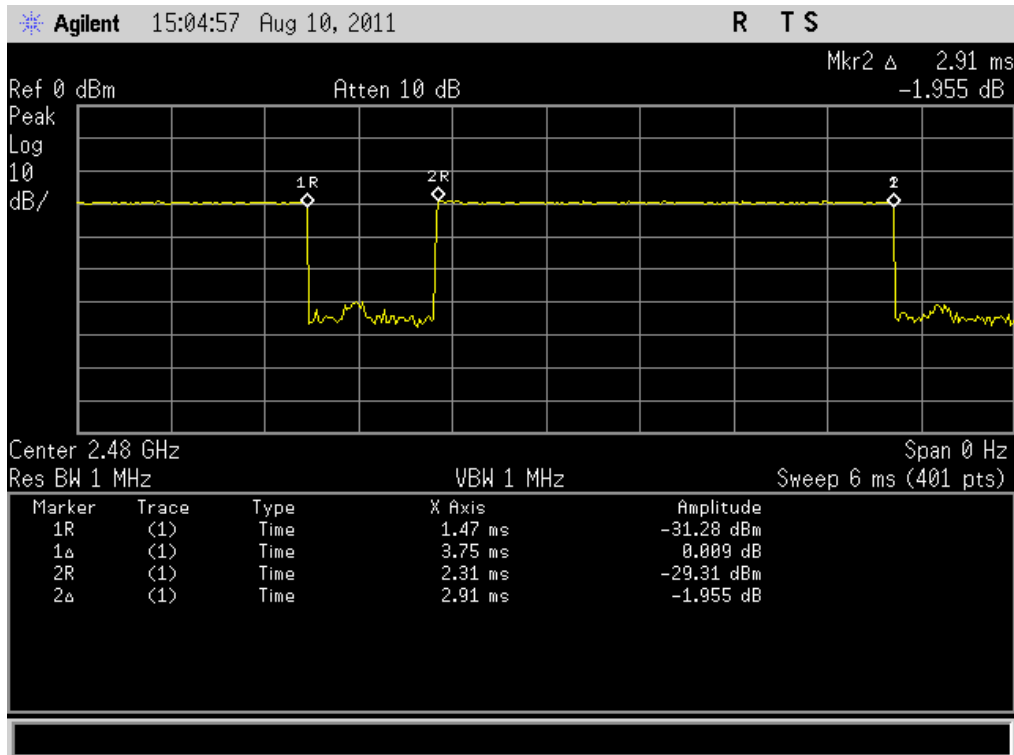

(Plot F: Channel = 2480)


**E. Test Verdict (8-DPSK mode):**

**8-DPSK Mode**


Channel	Frequency (MHz)	Pulse Time		Total of Dwell (ms)	Limit (ms)	Verdict
		ms	Refer to Plot			
0	2402	2.92	Plot G	311.5	400	PASS
39	2441	2.91	Plot H	310.4		PASS
78	2480	2.91	Plot I	310.4		PASS

**F. Test Plot:**


Note: the following plots record the Pulse Time of the Module carrier.

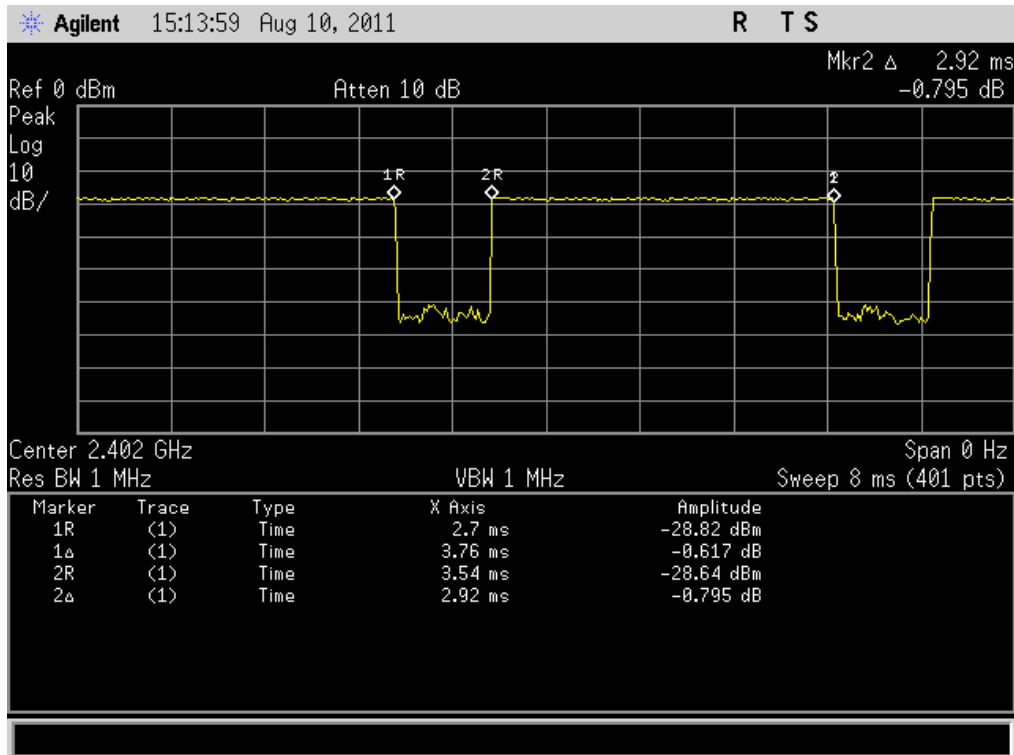

(Plot G: Channel = 2402)

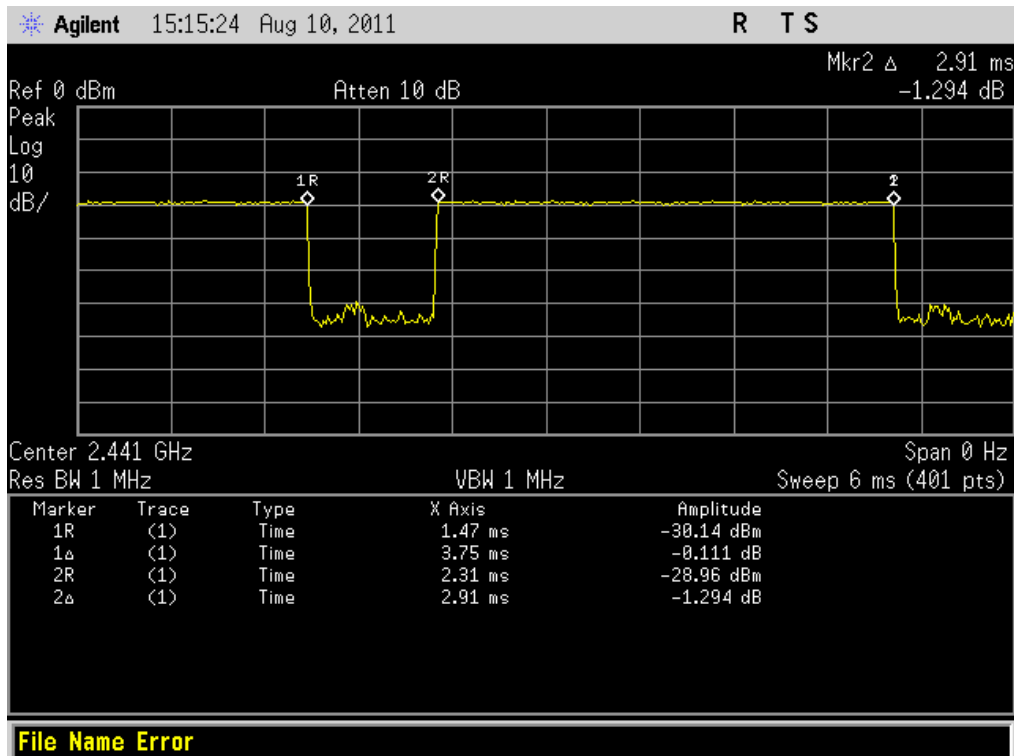

(Plot H: Channel = 2441)

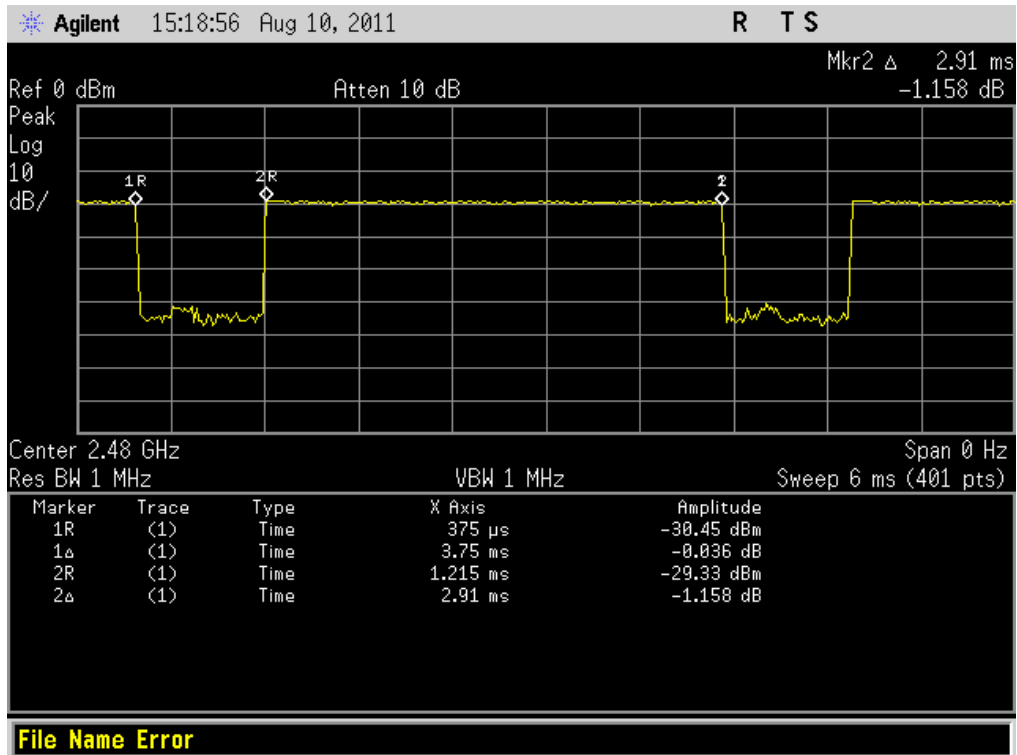

(Plot I: Channel = 2480)



## 2.6 Conducted Spurious Emissions

### 2.6.1 Requirement

According to FCC §15.247(c) and RSS-A8.5, in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 2.6.2 Test Description

See section 2.1.2 of this report.

### 2.6.3 Test Result

The Bluetooth Module operates at hopping-off test mode. The measurement frequency range is from 30MHz to the 10<sup>th</sup> harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.


#### A. Test Verdict:

##### GFSK Mode


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-50.36	Plot A.1/A.2	2.13	-18.0	PASS
39	2441	-49.91	Plot B.1/B.2	1.21	-18.8	PASS
78	2480	-50.72	Plot C.1/C.2	1.28	-19.1	PASS

#### B. Test Plot:


Note: the power of the Module transmitting frequency should be ignored.

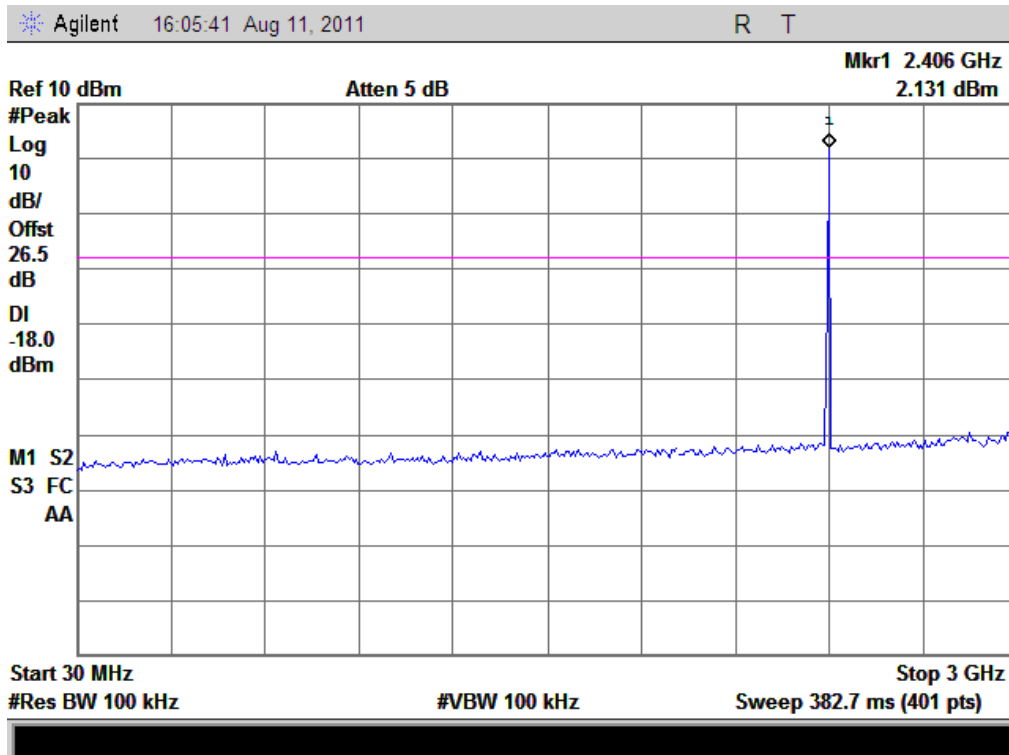


(Plot A.1: Channel = 0, 30MHz to 3GHz)

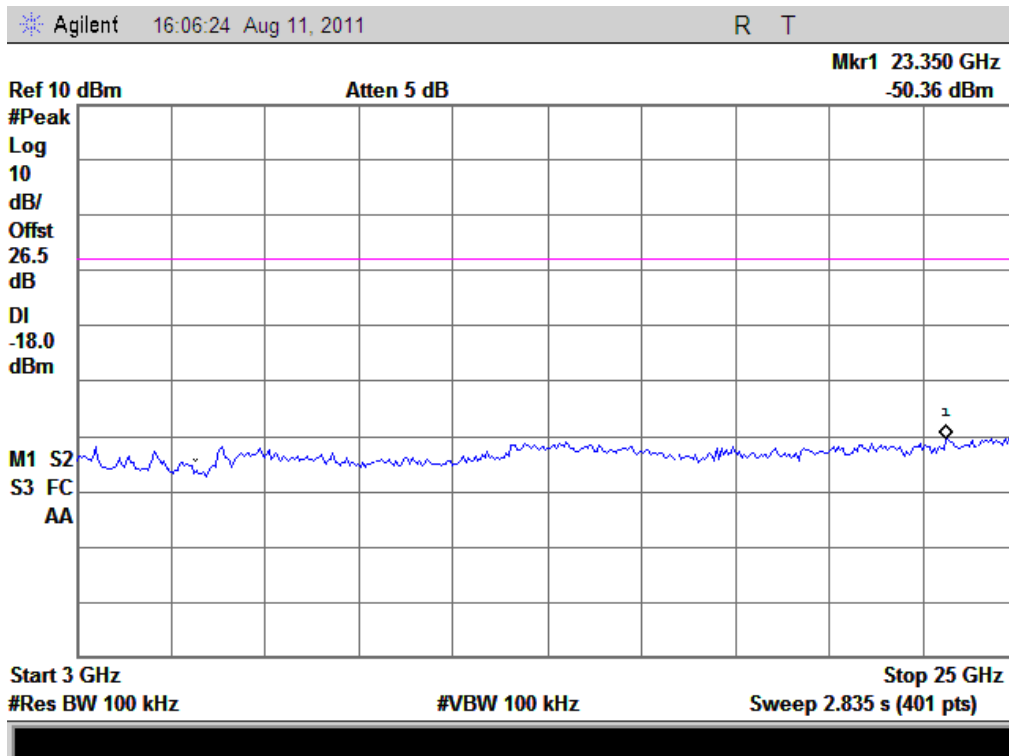


(Plot A.2: Channel = 0, 4GHz to 25GHz)

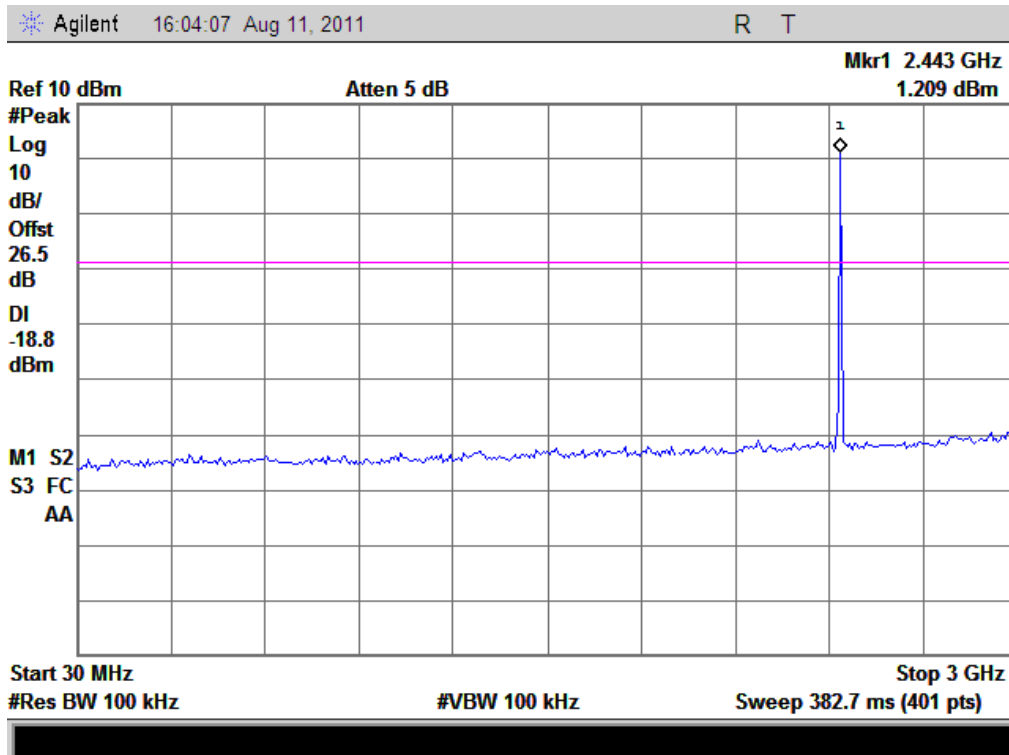


(Plot B.1: Channel = 39, 30MHz to 3GHz)

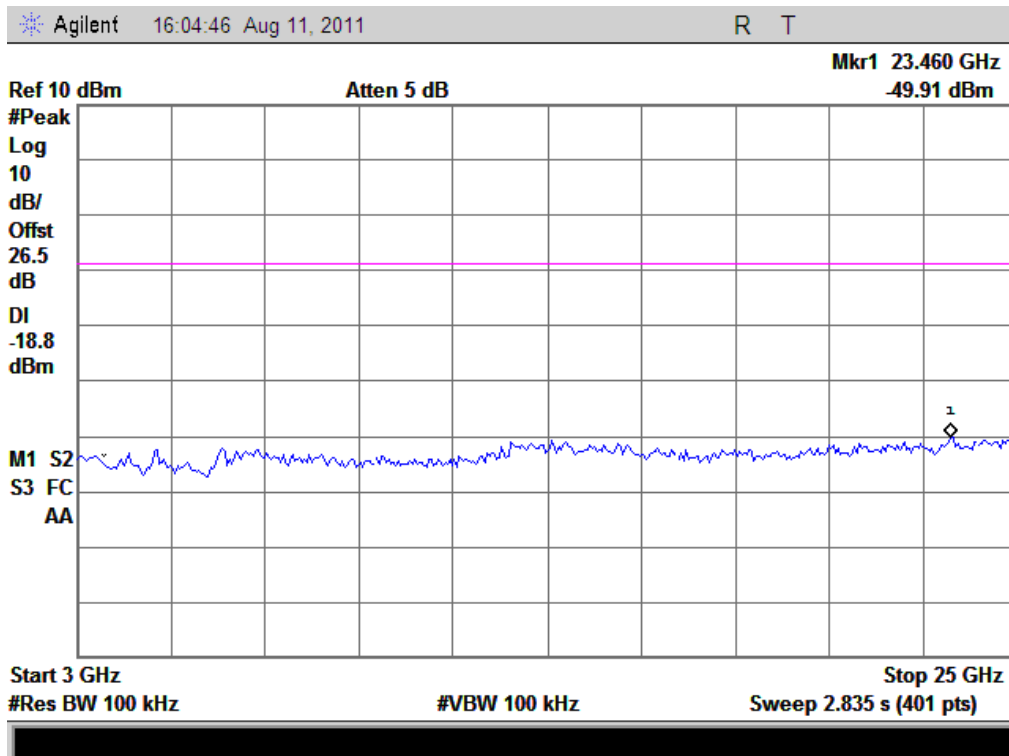

(Plot B.2: Channel = 39, 3GHz to 25GHz)

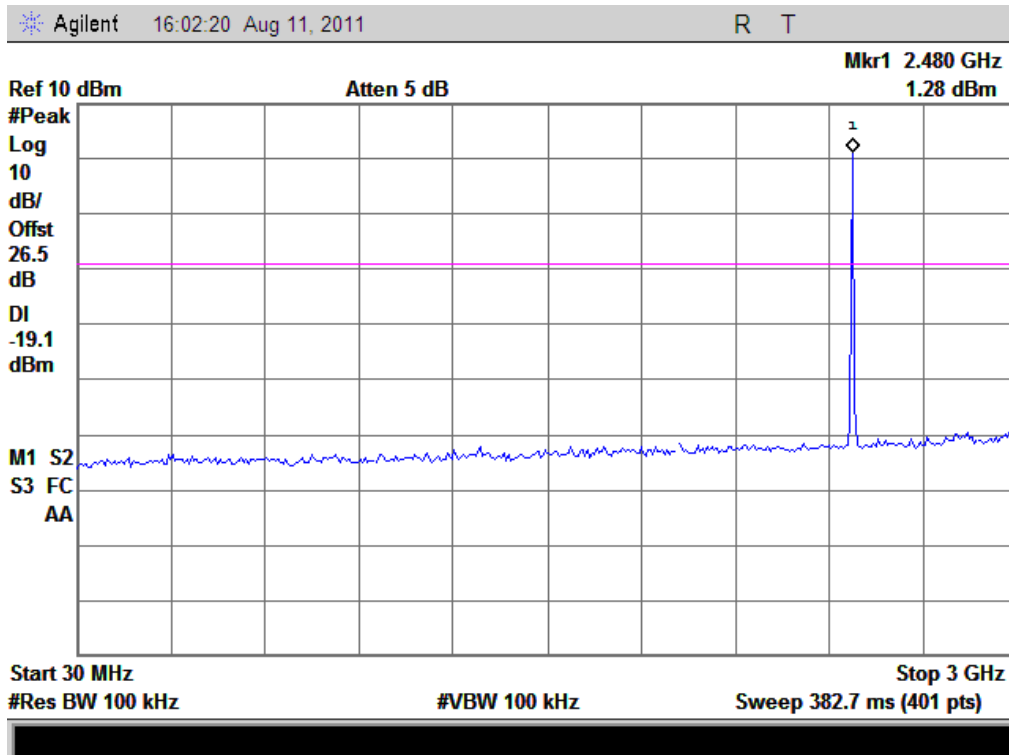

(Plot C.1: Channel = 78, 30MHz to 3GHz)

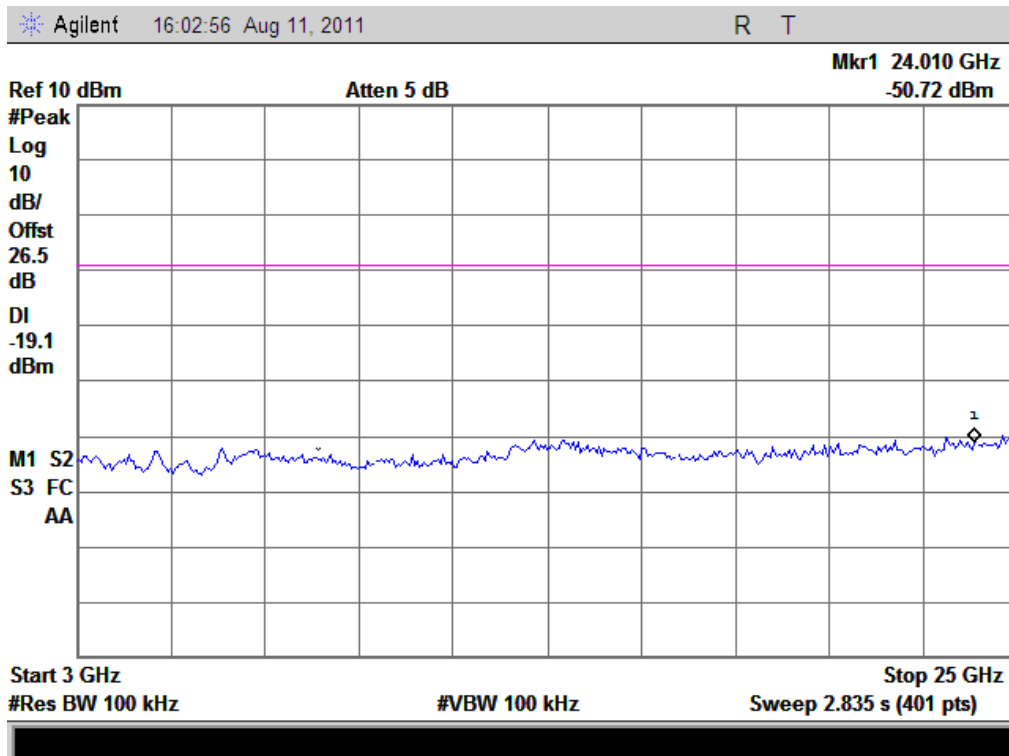

(Plot C.2: Channel = 78, 3GHz to 25GHz)


**C. Test Verdict:**

**$\pi/4$ -DQPSK Mode**


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-50.06	Plot D.1/D.2	-2.91	-23.5	PASS
39	2441	-49.62	Plot E.1/E.2	-3.37	-23.5	PASS
78	2480	-50.17	Plot F.1/F.2	-4.53	-24.5	PASS

**D. Test Plot:**


Note: the power of the Module transmitting frequency should be ignored.

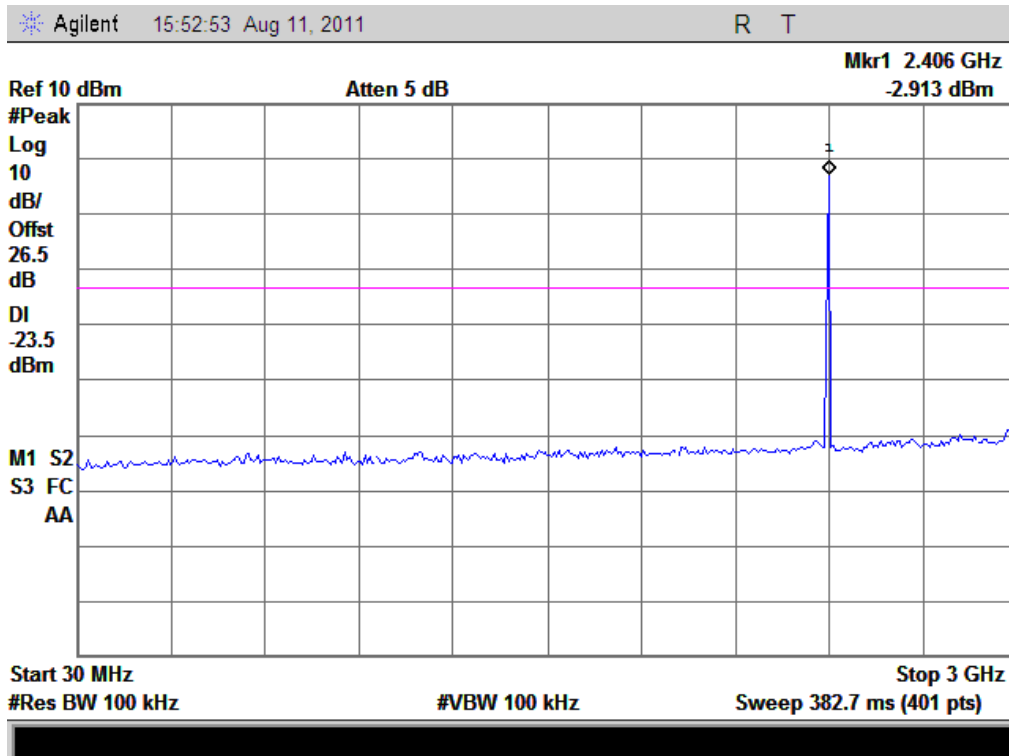


(Plot D.1: Channel = 0, 30MHz to 3GHz)

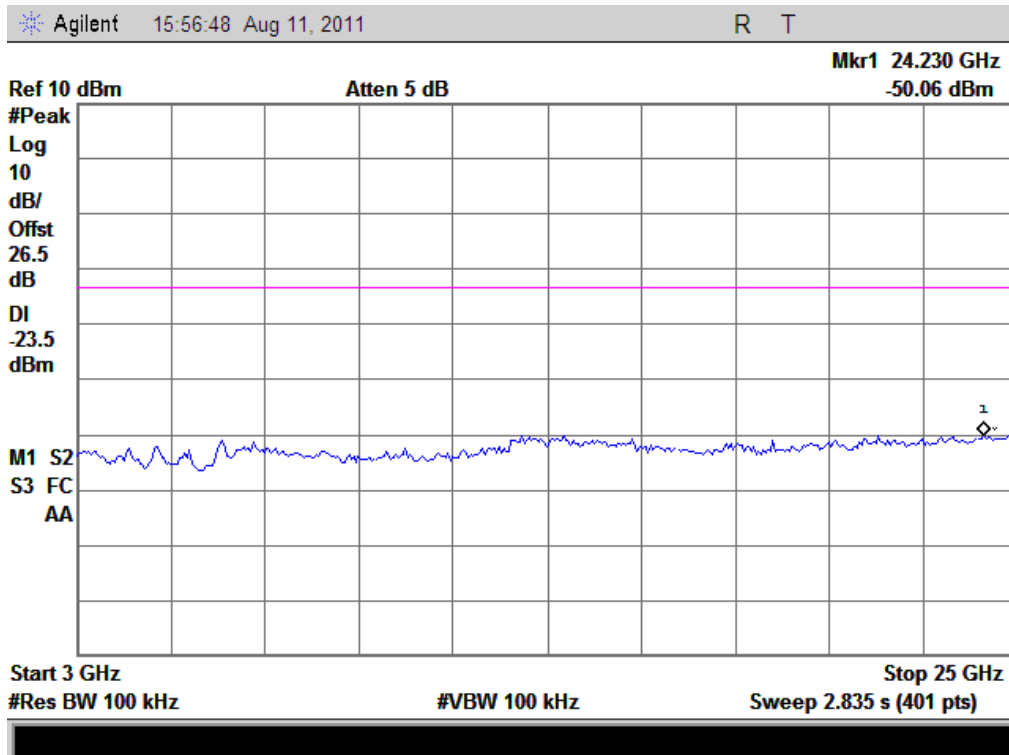


(Plot D.2: Channel = 0, 3GHz to 25GHz)

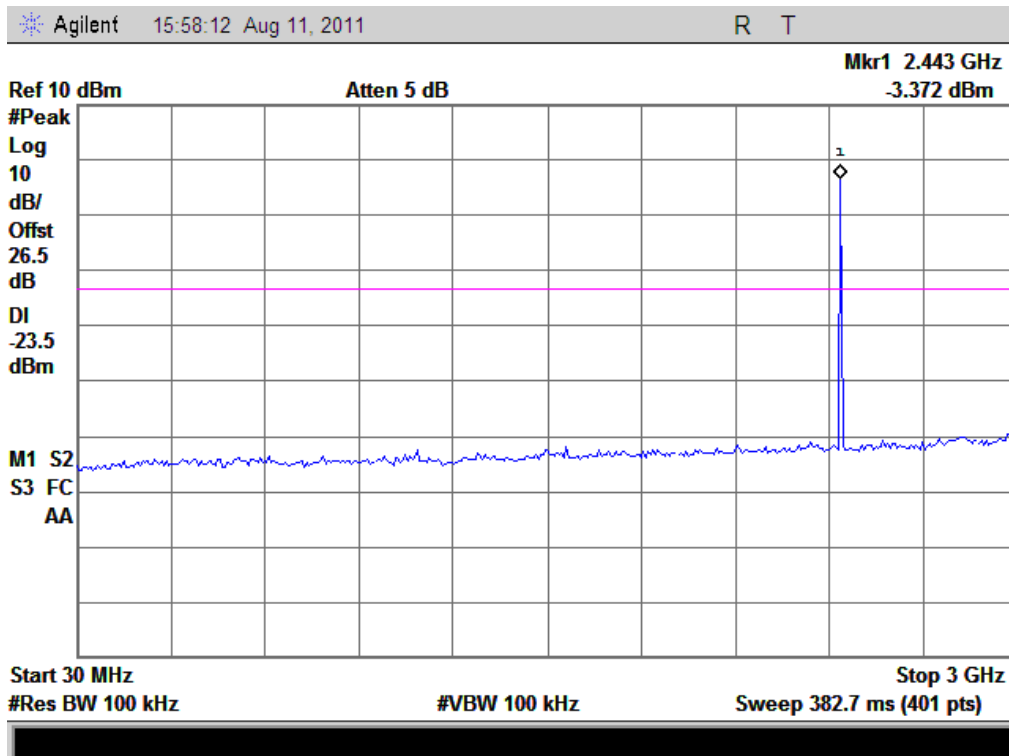


(Plot E.1: Channel = 39, 30MHz to 3GHz)

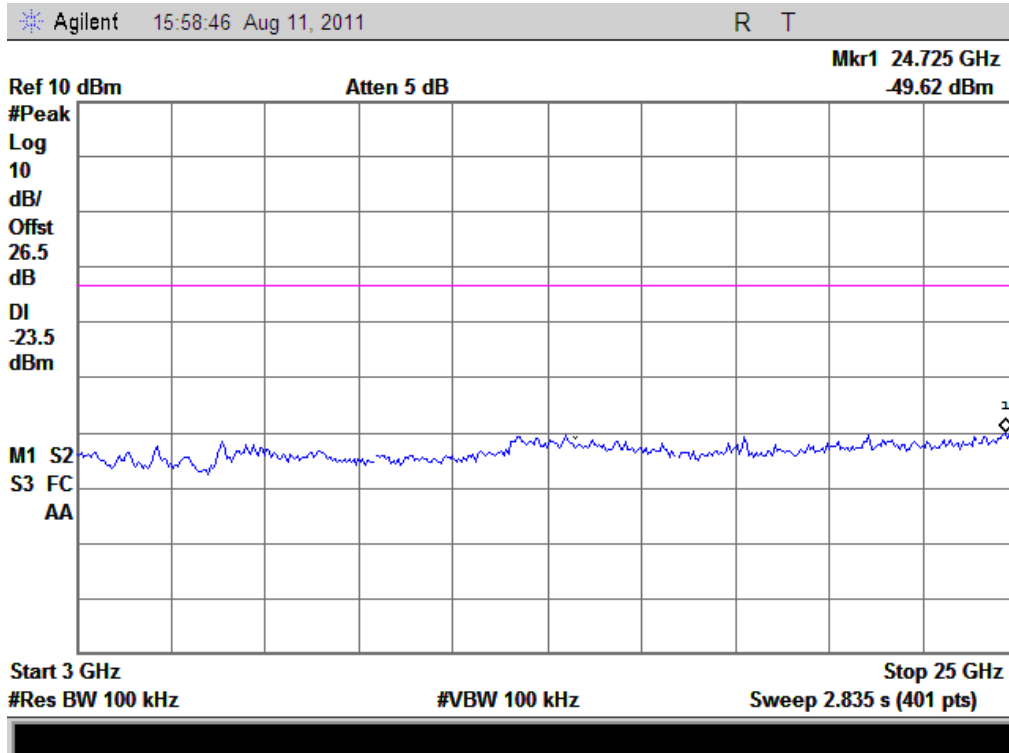

(Plot E.2: Channel = 39, 3GHz to 25GHz)

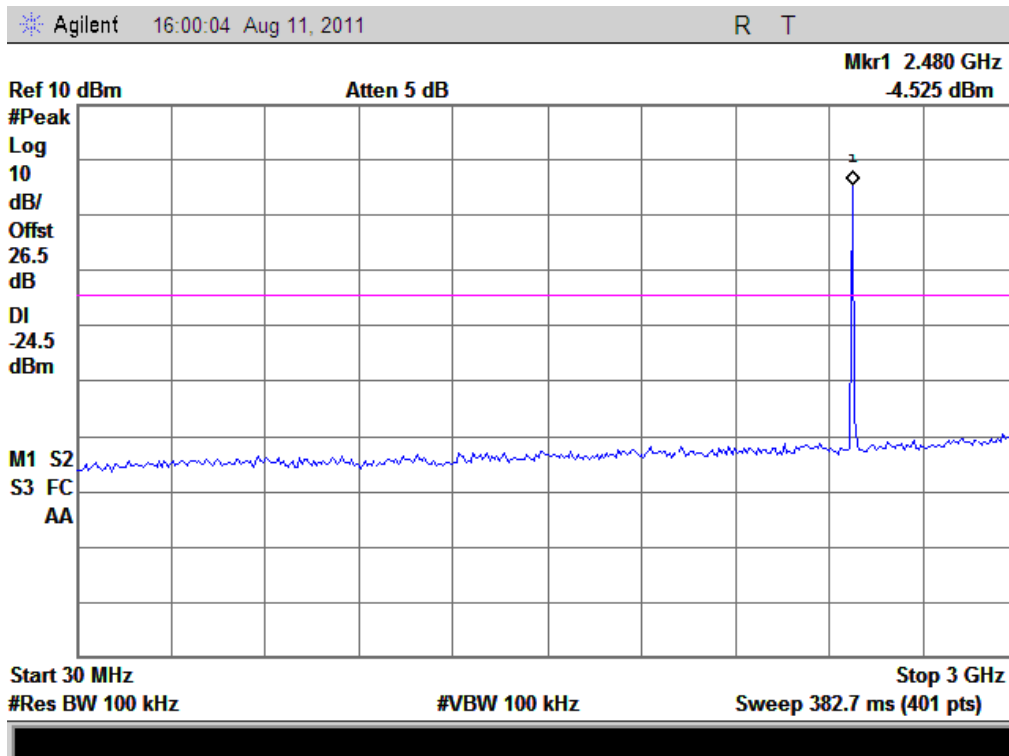

(Plot F.1: Channel = 78, 30MHz to 3GHz)

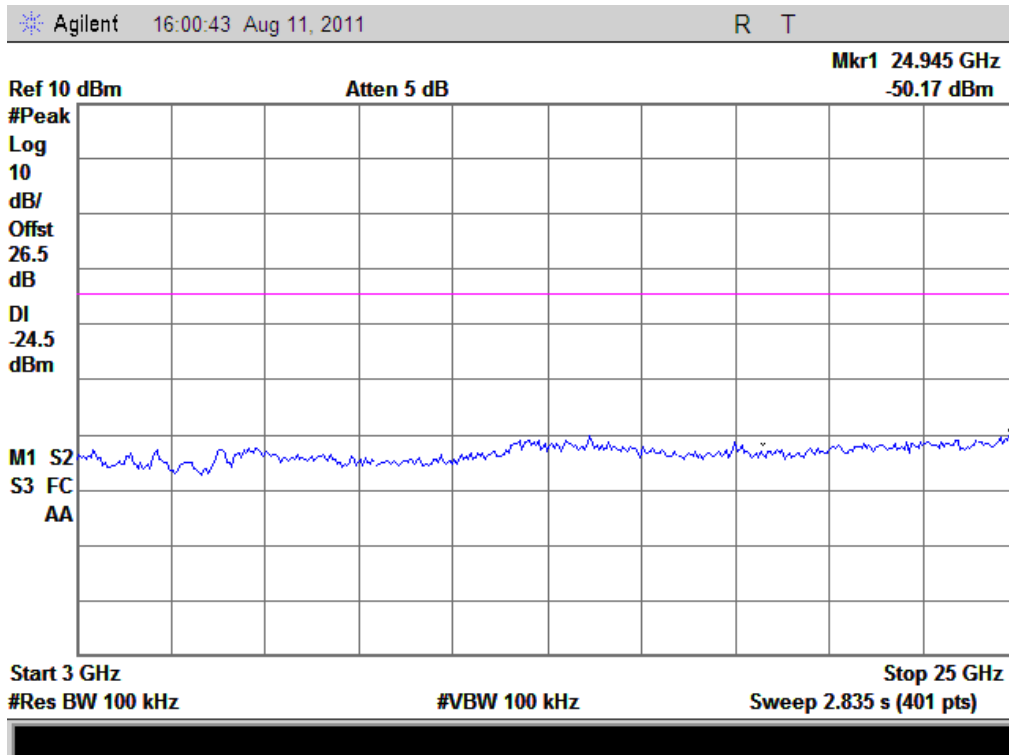

(Plot F.2: Channel = 78, .GHz to 25GHz)

**E. Test Verdict:**


**8-DPSK Mode**

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-50.83	Plot G.1/G.2	-3.05	-23.1	PASS
39	2441	-49.65	Plot H.1/H.2	-3.17	-23.1	PASS
78	2480	-50.83	Plot I.1/I.2	-3.14	-23.1	PASS


**F. Test Plot:**

Note: the power of the Module transmitting frequency should be ignored.




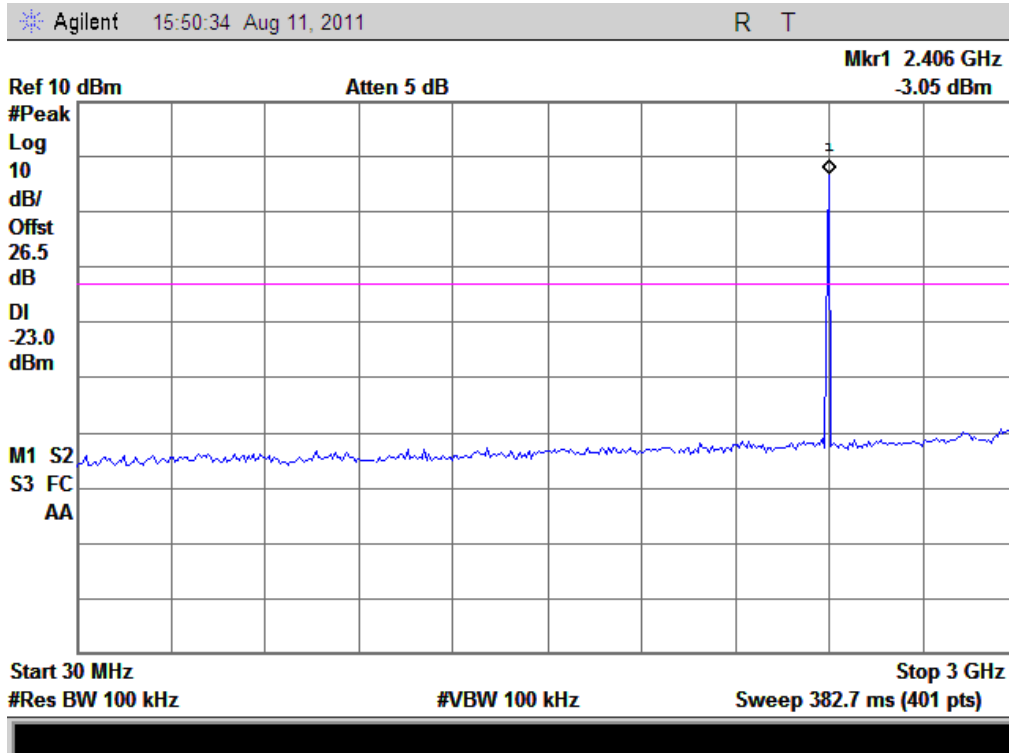


(Plot G.1: Channel = 0, 30MHz to 3GHz)

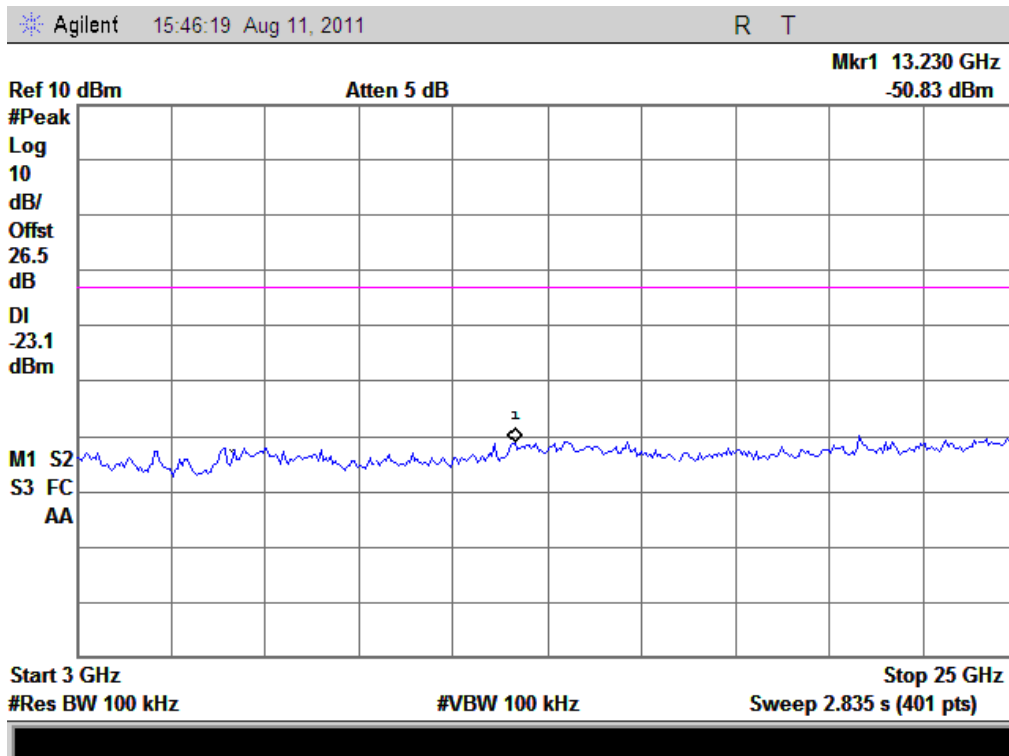


(Plot G.2: Channel = 0, 3GHz to 25GHz)

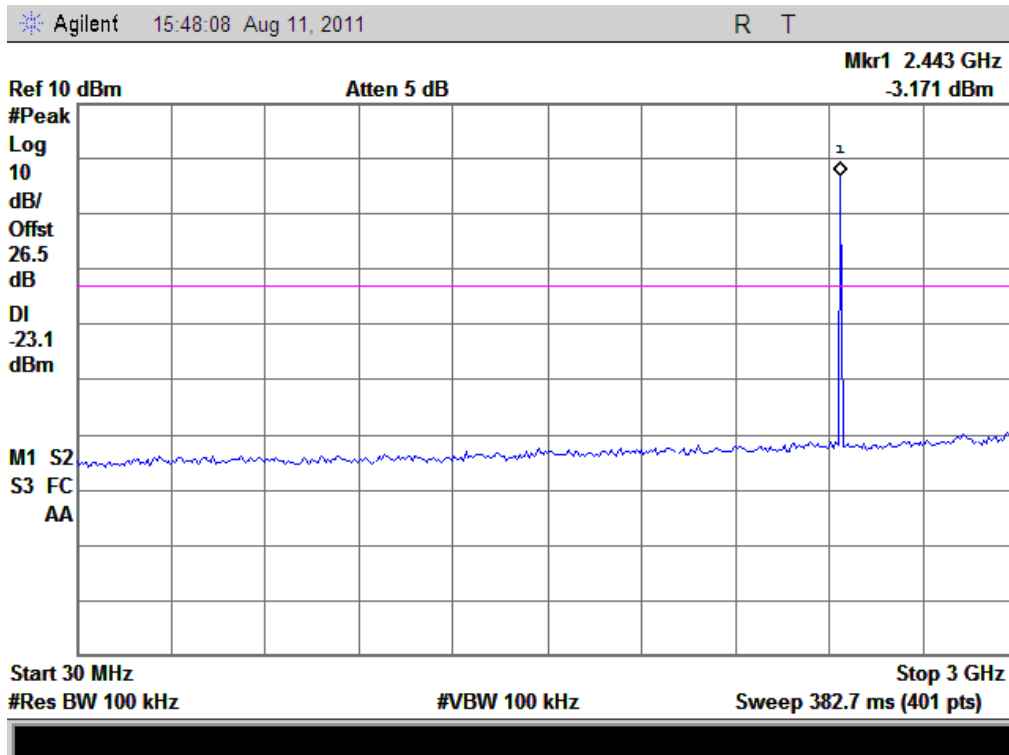


(Plot H.1: Channel = 39, 30MHz to 3GHz)

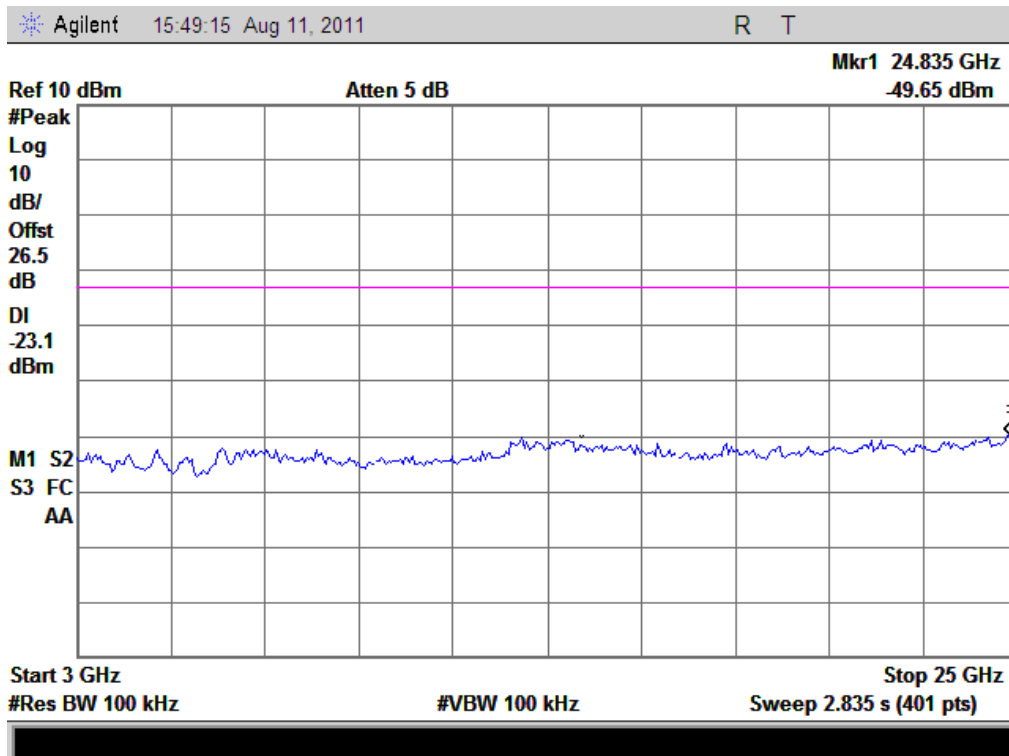

(Plot H.2: Channel = 39, 3GHz to 25GHz)

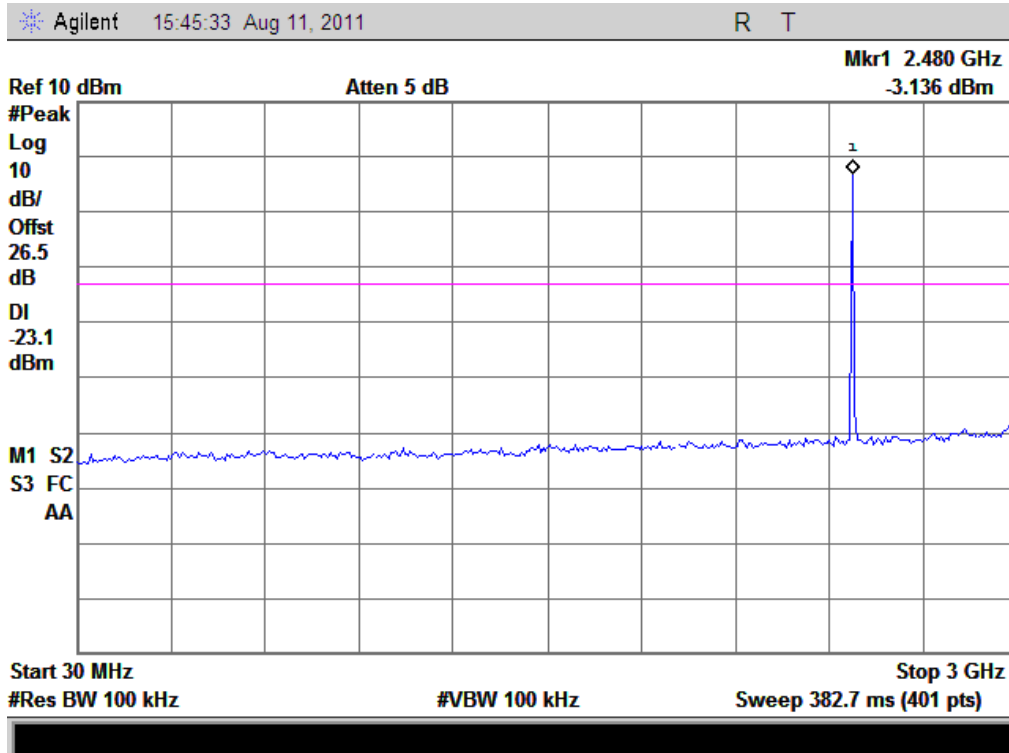

(Plot I.1: Channel = 78, 30MHz to 3GHz)

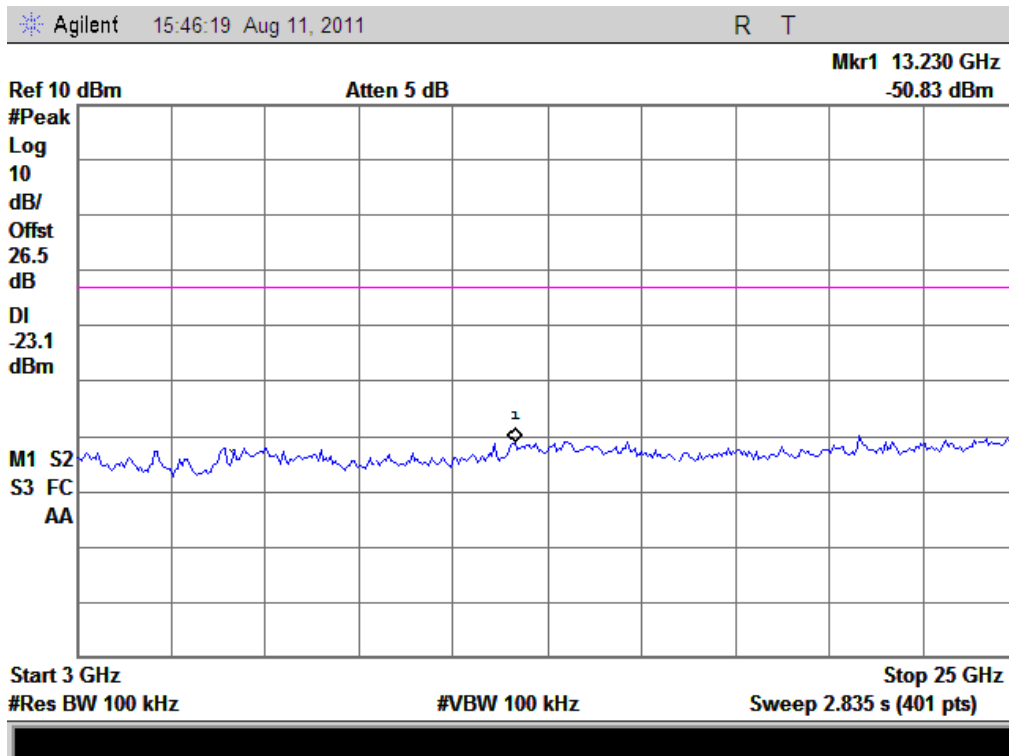

(Plot I.2: Channel = 78, 3GHz to 25GHz)


## 2.7 Band Edge

### 2.7.1 Requirement

According to FCC section 15.247(c) and RSS- A8.5, in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 2.7.2 Test Description

#### A. Test Setup:

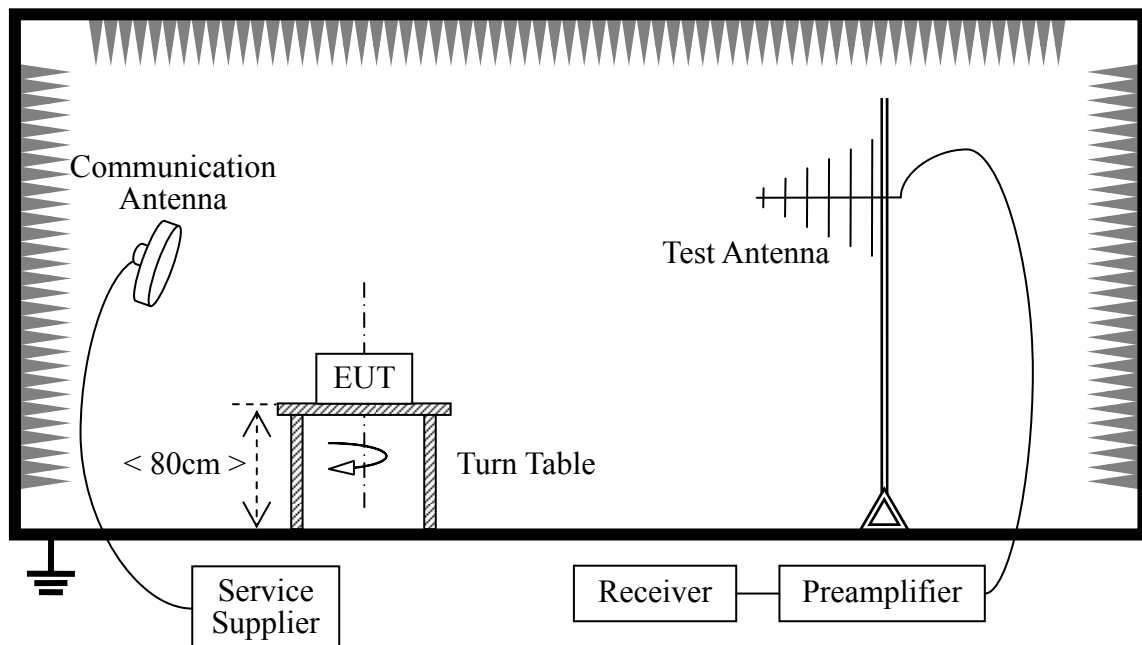

The Bluetooth Module of the EUT is powered by the Battery. The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the Bluetooth Module is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at maximum power.

For the Test Antenna:

Horn Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

**B. Equipments List:**

Description	Manufacturer	Model	Serial No.	Cal. Date
System Simulator	R&S	CMU200	100448	2011.05
Receiver	Agilent	E7405A	US44210471	2011.05
Full-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)	2011.05
Test Antenna - Horn	Schwarzbeck	BBHA 9120C	9120C-384	2011.05

**2.7.3 Test Result**


The Bluetooth Module operates at hopping-off test mode. The lowest and highest channels are tested to verify the band edge emissions.

**A. Test Verdict:**
**GFSK Mode**


Channel	Frequency (MHz)	Max. Emission in the Restricted Bands (dB $\mu$ V/m)		Limit (dB $\mu$ V/m)		Verdict
		PK	AV	PK	AV	
0	2402	40.87	39.23	74	54	PASS
78	2480	40.61	38.43	74	54	PASS




**B. Test Plot:**

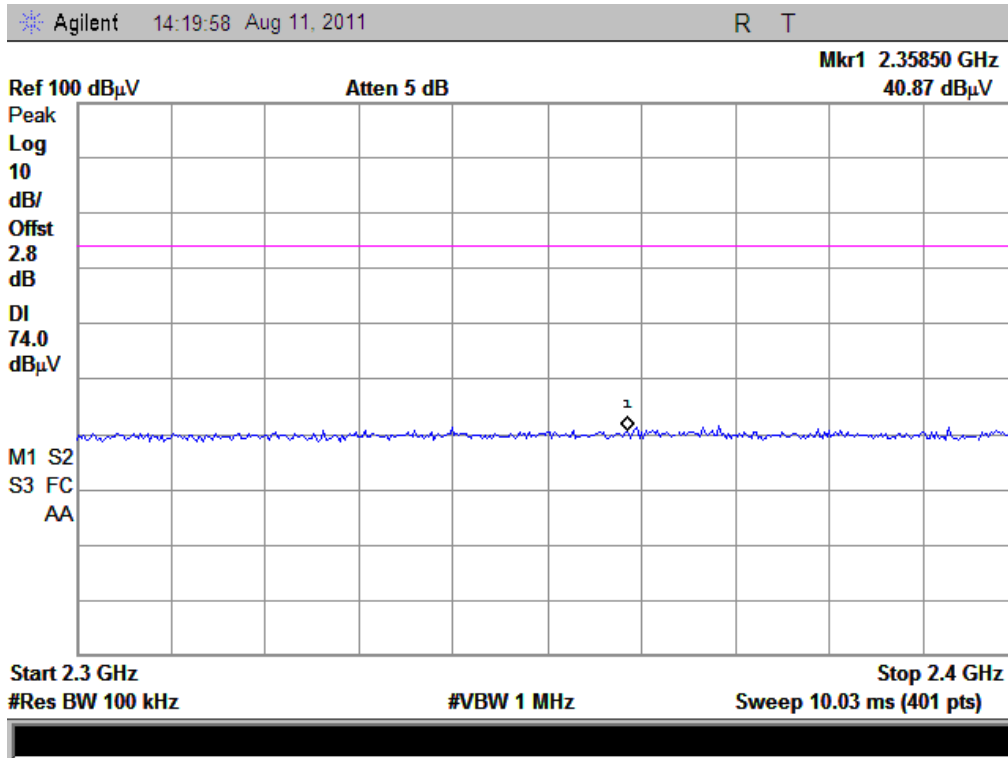


(Plot A1: Channel = 0 PEAK)

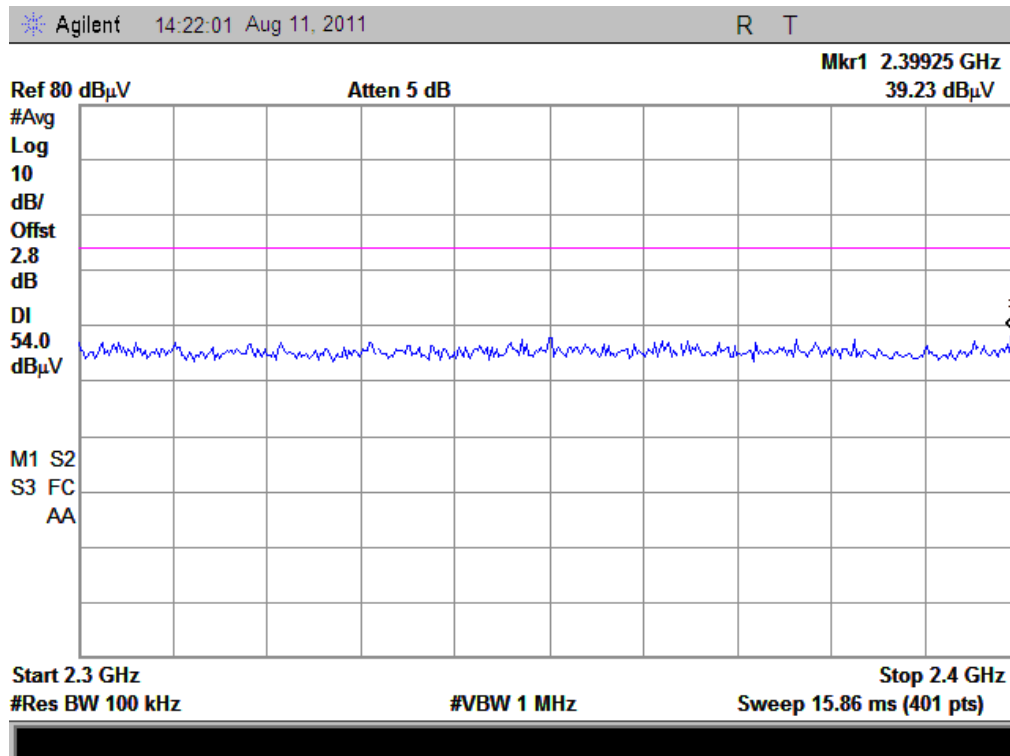

(Plot A2: Channel = 0 AVERAGE)

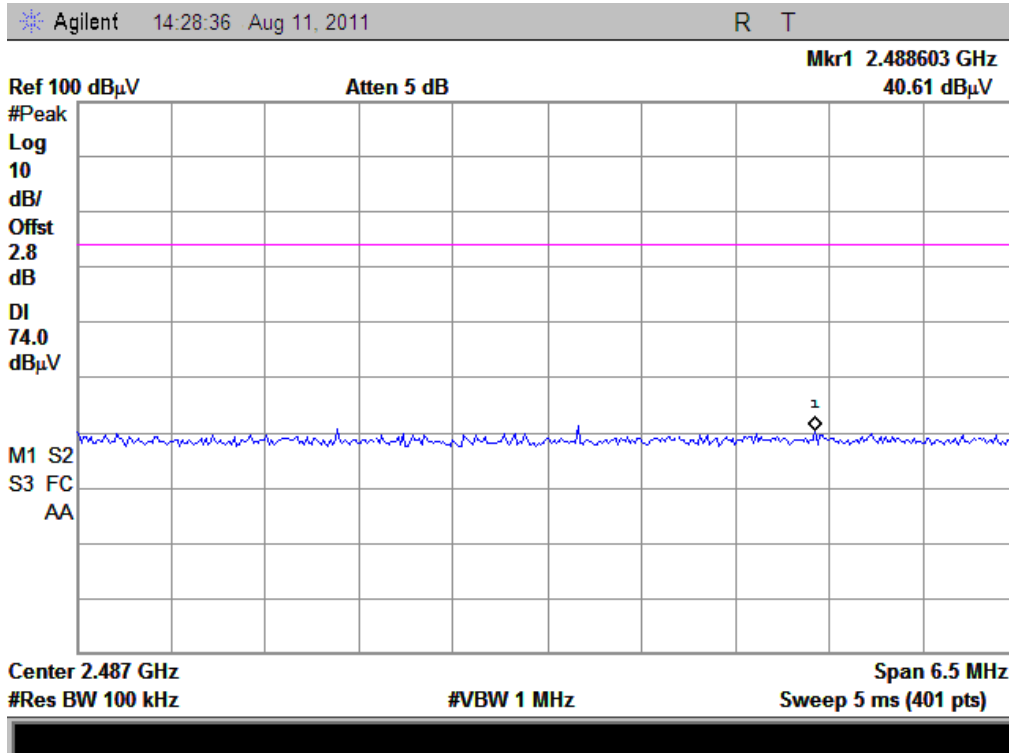

(Plot B1: Channel = 78 PEAK)

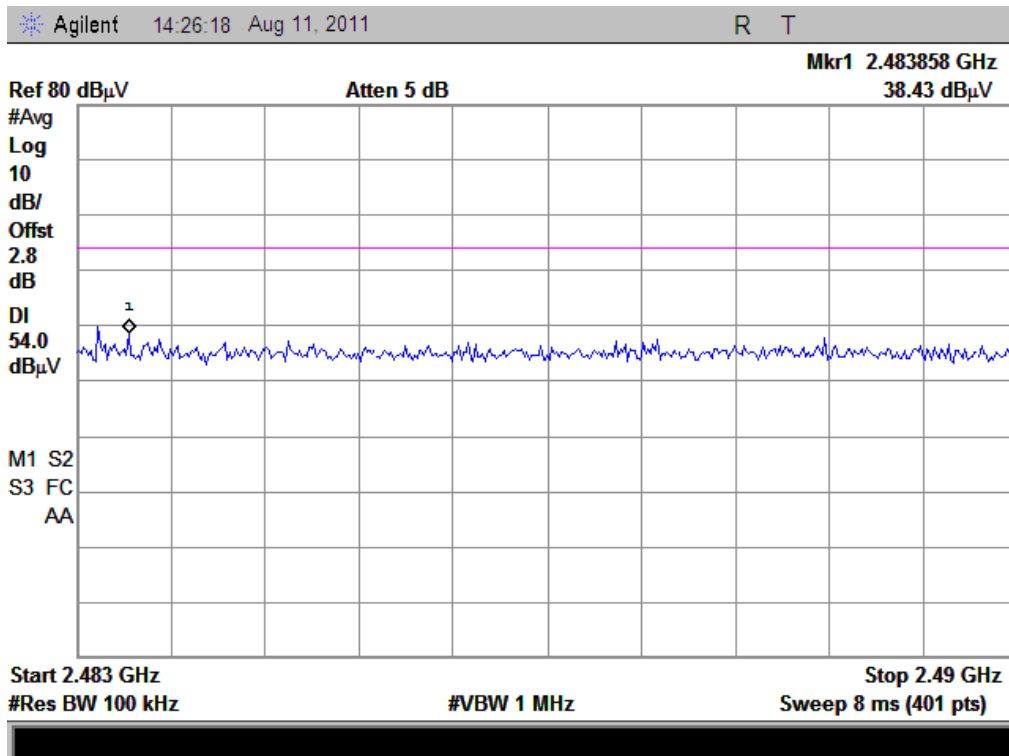


(Plot B2: Channel = 78 AVERAGE)

**A. Test Verdict:**

**$\pi/4$ -DQPSK Mode**


Channel	Frequency (MHz)	Max. Emission in the Restricted Bands (dB $\mu$ V/m)		Limit (dB $\mu$ V/m)		Verdict
		PK	AV	PK	AV	
0	2402	43.26	37.68	74	54	PASS
78	2480	40.99	38.34	74	54	PASS

**B. Test Plot:**

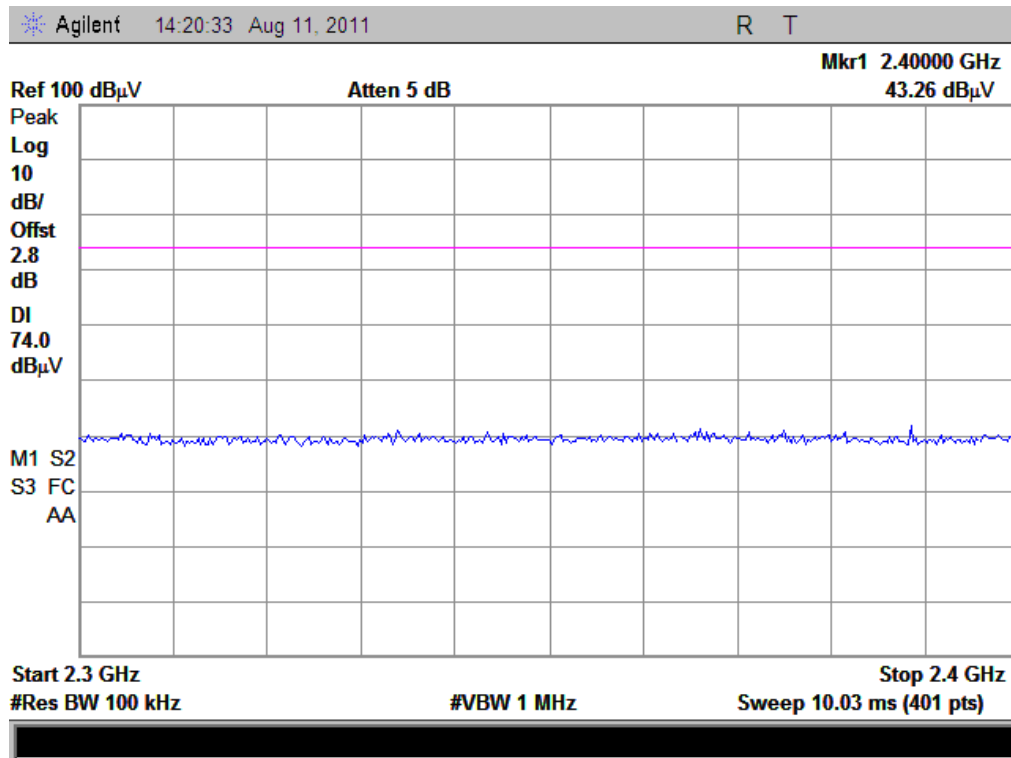


(Plot A1: Channel = 0 PEAK)




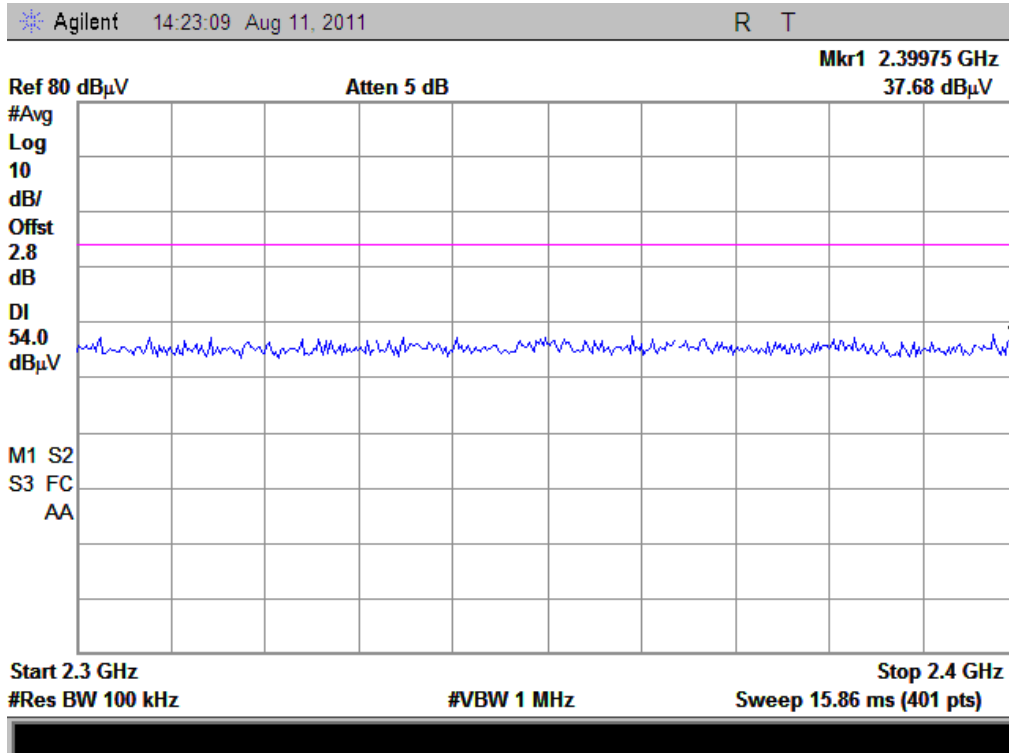

(Plot A2: Channel = 0 AVERAGE)

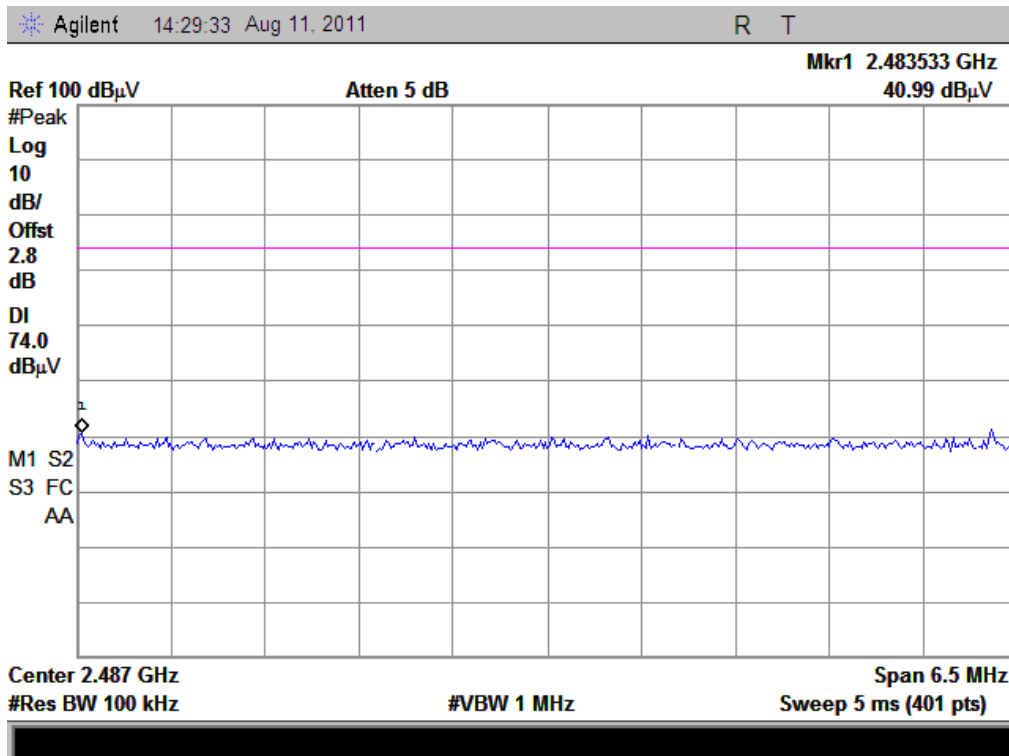

(Plot B1: Channel = 78 PEAK)

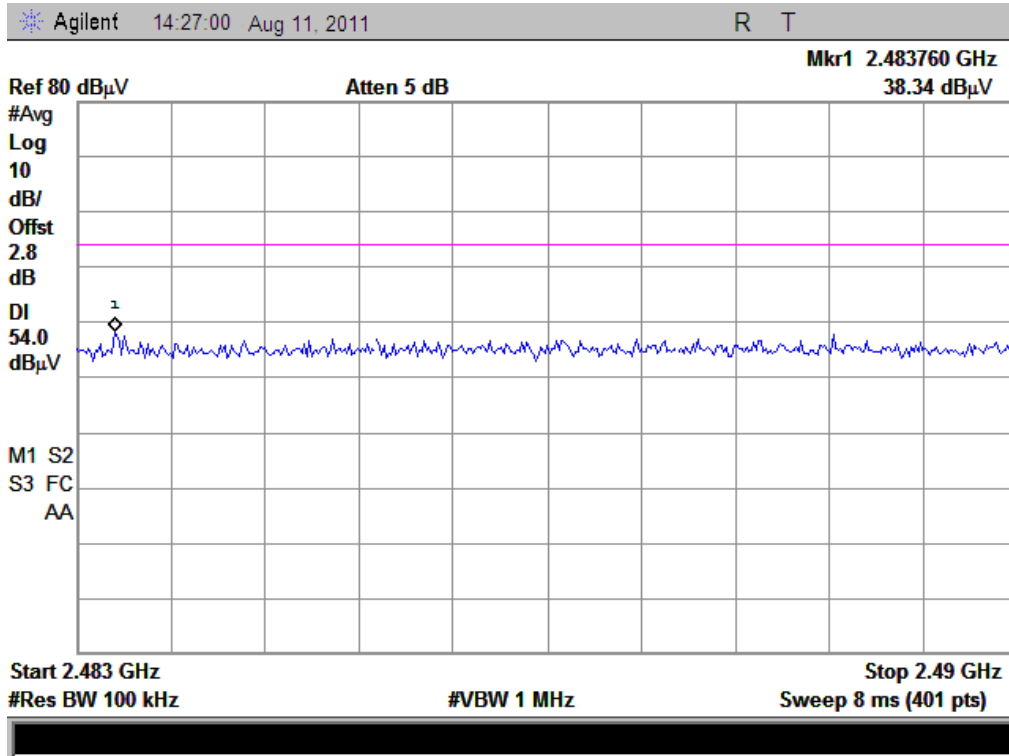


(Plot B2: Channel = 78 AVERAGE)

**A. Test Verdict:**


**8-DPSK Mode**

Channel	Frequency (MHz)	Max. Emission in the Restricted Bands (dB $\mu$ V/m)		Limit (dB $\mu$ V/m)		Verdict
		PK	AV	PK	AV	
0	2402	41.06	37.24	74	54	PASS
78	2480	40.06	38.37	74	54	PASS


**B. Test Plot:**

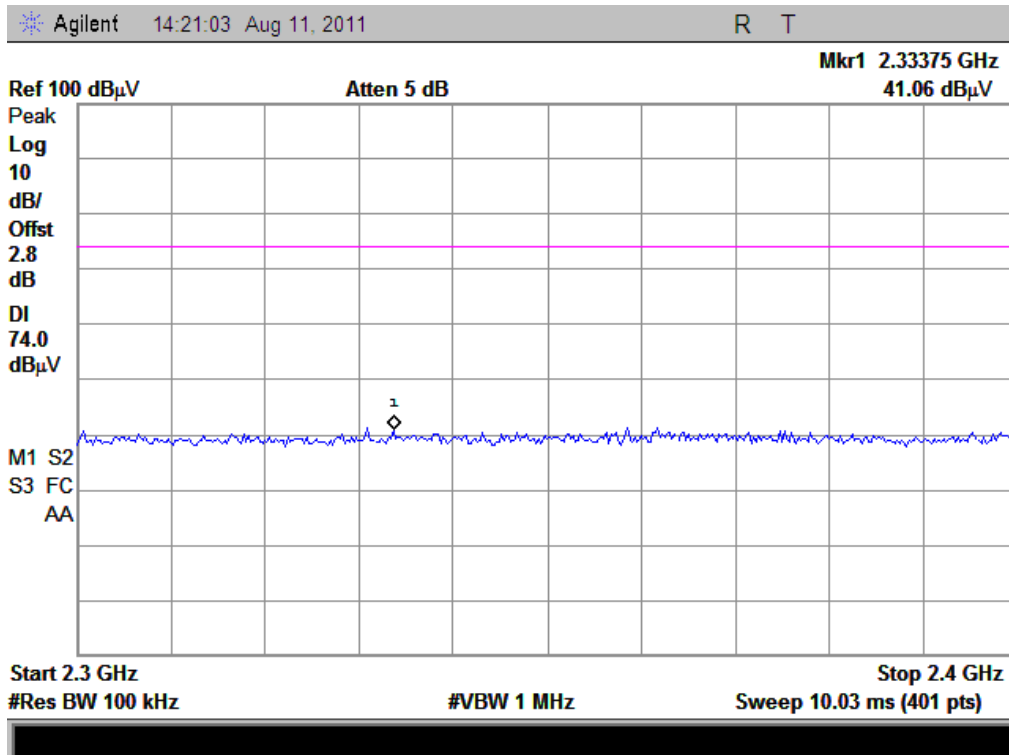


(Plot A1: Channel = 0 PEAK)

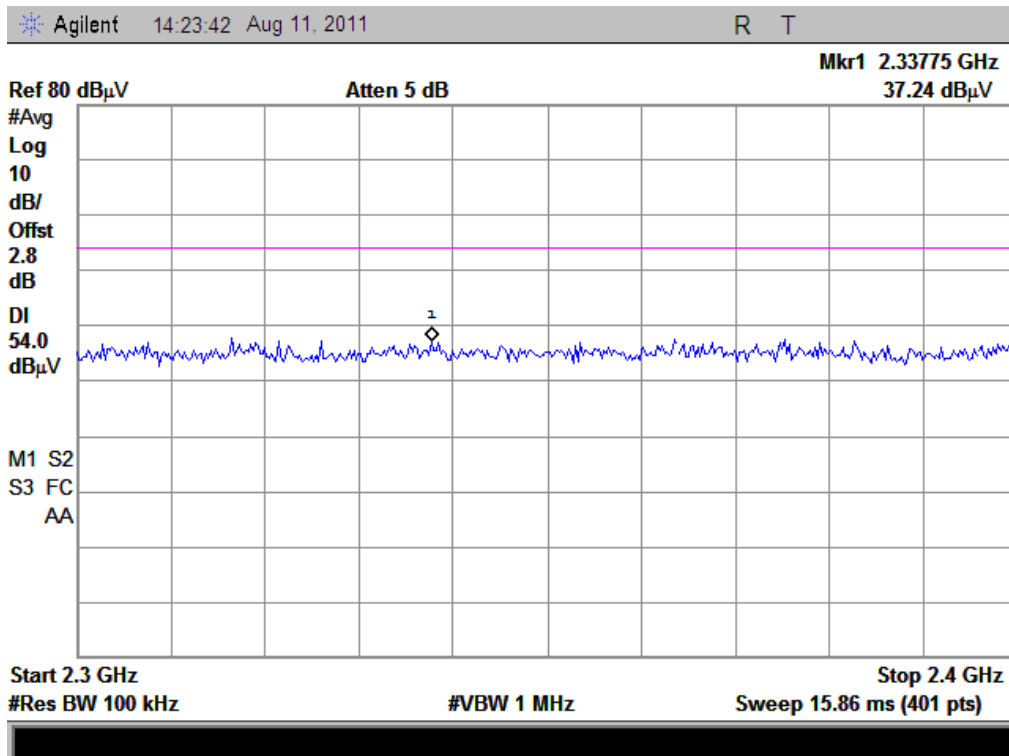

(Plot A2: Channel = 0 AVERAGE)

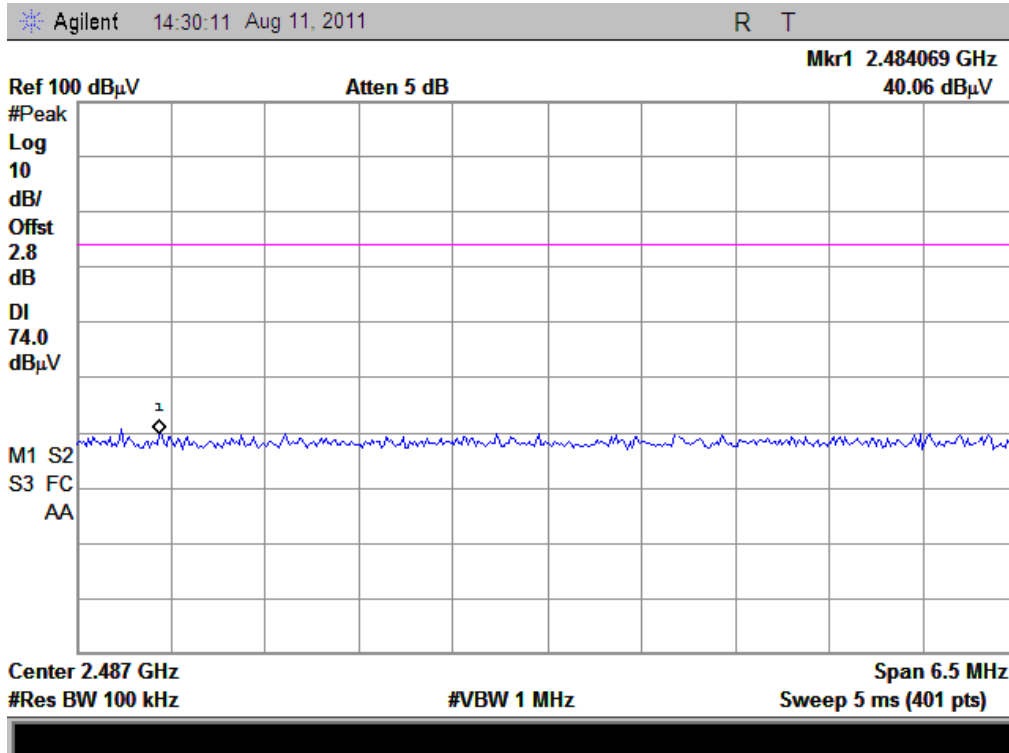

(Plot B1: Channel = 78 PEAK)

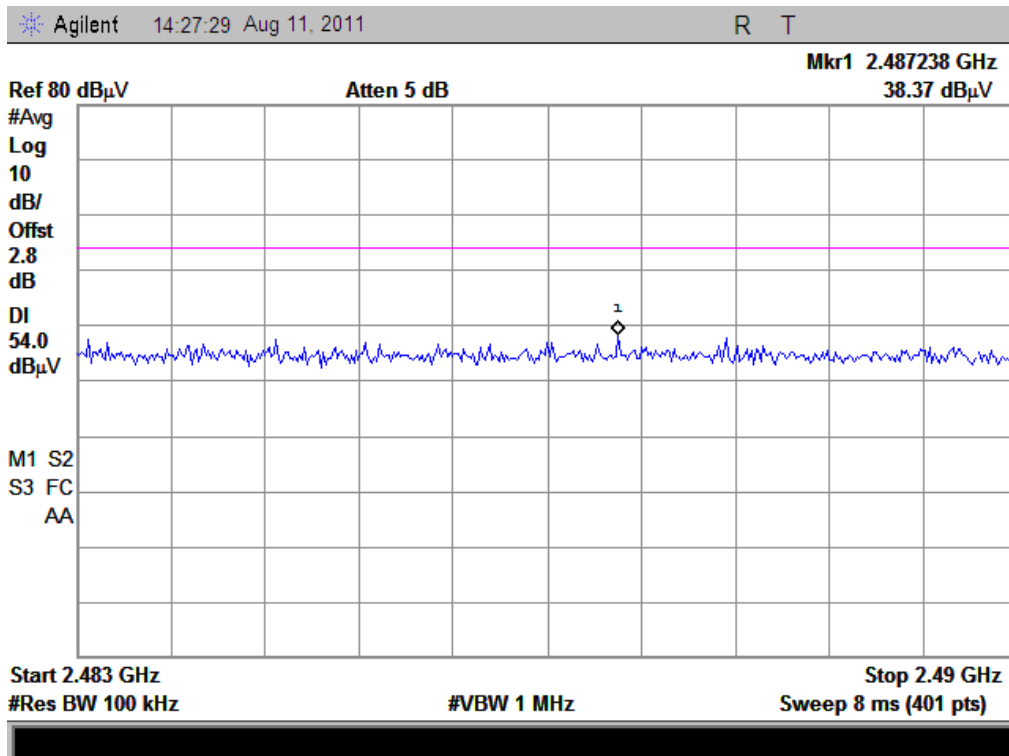

(Plot B2: Channel = 78 AVERAGE)

## 2.8 Radiated Emission

### 2.8.1 Requirement

According to FCC section 15.247(c) and RSS-A8.5, radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to RSS- Gen section 7.2.3. Those emissions generated in a receiver and radiated from the receiver either via the antenna path or via the control, power, and audio cables that may be used with the receiver. All spurious emissions shall comply with the limits of next table:


According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu\text{V/m}$ )	Measurement Distance (m)	Detector
30 - 88	100	3	QP
88 - 216	150	3	QP
216 - 960	200	3	QP
960 - 1000	500	3	QP
Above 1000	500	3	AV

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)

### 2.8.2 Test Description

#### A. Test Setup:

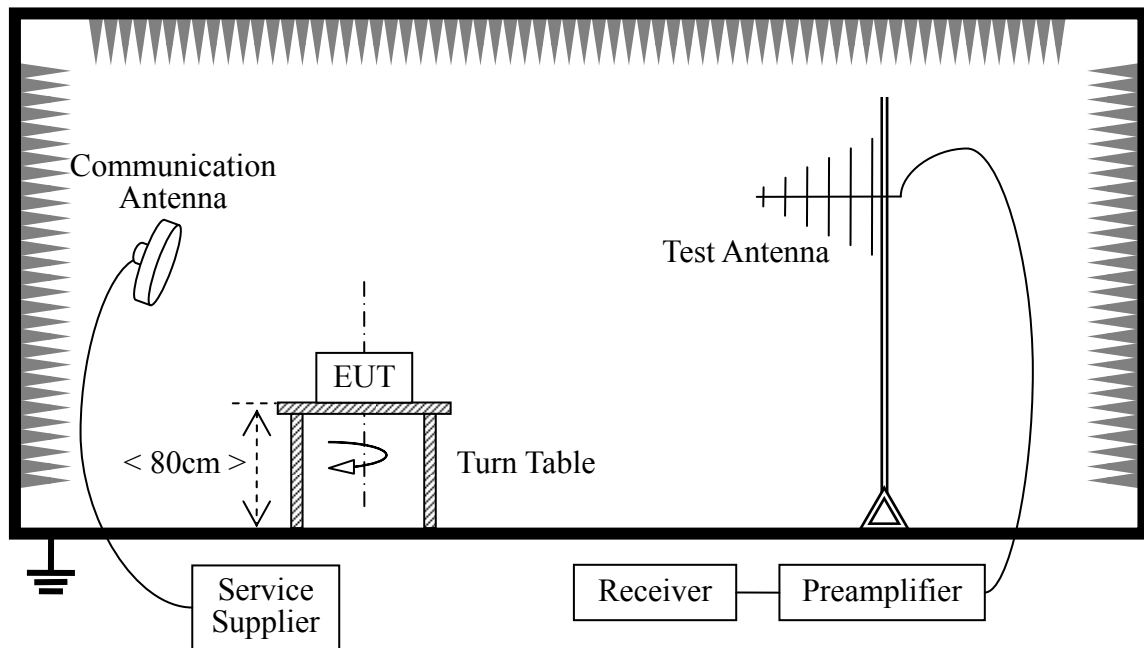

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.4 (2003). The EUT was set-up on insulator 80cm above the Ground Plane. The set-up and test methods were according to ANSI C63.4.

The Bluetooth Module of the EUT is powered by the Battery. The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the Bluetooth Module is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at maximum power.

For the Test Antenna: In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength, the azimuth range of turntable was  $0^{\circ}$  to  $360^{\circ}$ , the receive antenna has two polarizations horizontal and vertical. When doing measurements above 1GHz, the EUT was placed within the 3dB beam width range of the horn antenna, and the EUT was tested in 3 orthogonal positions as recommended in ANSI C63.4 for Radiated Emissions and the worst-case data was presented.

## B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date
System Simulator	R&S	CMU200	100448	2011.05
Receiver	Agilent	E7405A	US44210471	2011.05
Full-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)	2011.05
Test Antenna - Bi-Log	Schwarzbeck	VULB 9163	9163-274	2011.05
Test Antenna - Horn	Schwarzbeck	BBHA 9120C	9120C-384	2011.05
Test Antenna - circular	R&S	AC004R1	0749.3000.03	2011.05

### 2.8.3 Test Result

#### GFSK Mode:

#### A. Test Verdict for Harmonics:

#### The Fundamental Emissions

The field strength of {Fundamental Emission} listed below is recorded, and used in the next table.

Channel	Frequency (MHz)	Fundamental Emission (dB $\mu$ V/m)		Antenna Polarization	Refer to Plot
		PK	AV		
0	2402	69.98	64.04	Horizontal	Plot A.1
		74.54	70.25	Vertical	Plot A.2
39	2441	71.45	68.06	Horizontal	Plot B.1
		75.78	70.79	Vertical	Plot B.2
78	2480	71.77	66.23	Horizontal	Plot C.1
		75.41	70.37	Vertical	Plot C.2

#### Test result of channel: 0 (2402MHz)

Frequency (MHz)	PK Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
912.7M	33.4	46	-6.53	340	100	Vertical
14.065G	43.49	54	-10.51	4	100	Vertical
598.4 M	33.94	46	-10.84	113	100	Horizontal
3.085 G	43.21	54	-10.79	103	100	Horizontal
14.132 G	44.31	54	-9.69	114	100	Horizontal

#### Test result of channel: 39 (2442MHz)

Frequency (MHz)	PK Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
111.5M	27.51	43.5	-12.42	28	100	Vertical
266.7M	26.39	46	-19.61	107	100	Vertical
912.7M	34.32	46	-11.68	93	100	Vertical
7.922G	44.61	46	-1.39	117	100	Vertical
598.4M	34.75	46	-11.25	125	100	Horizontal
14.02 G	43.58	54	-5.13	20	100	Horizontal




Test result of channel: 78 (2480MHz)

Frequency (MHz)	PK Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
111.5 M	28.46	43.5	-15.04	114	100	Vertical
912.7M	34.3	46	-11.7	20	100	Vertical
14.335G	43.63	54	-10.37	97	100	Vertical
111.5 M	27.43	43.5	-16.07	60	100	Horizontal
912.7 M	33.61	46	-12.39	46	100	Horizontal
8.508 G	44.07	54	-6.24	92	100	Horizontal


**B. Test Plots for the Whole Measurement Frequency Range:**

Plots for Channel = 0

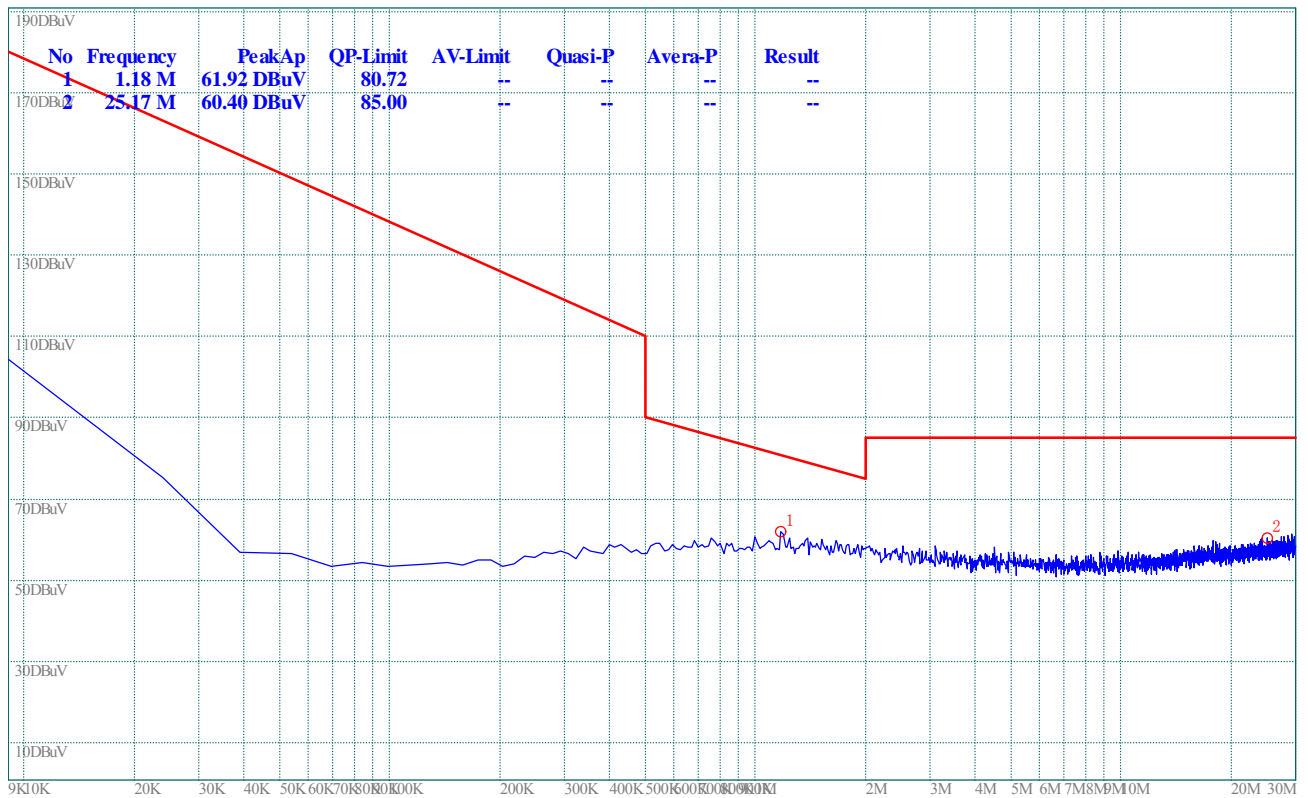


(Plot A.0: 9kHz to 30MHz)



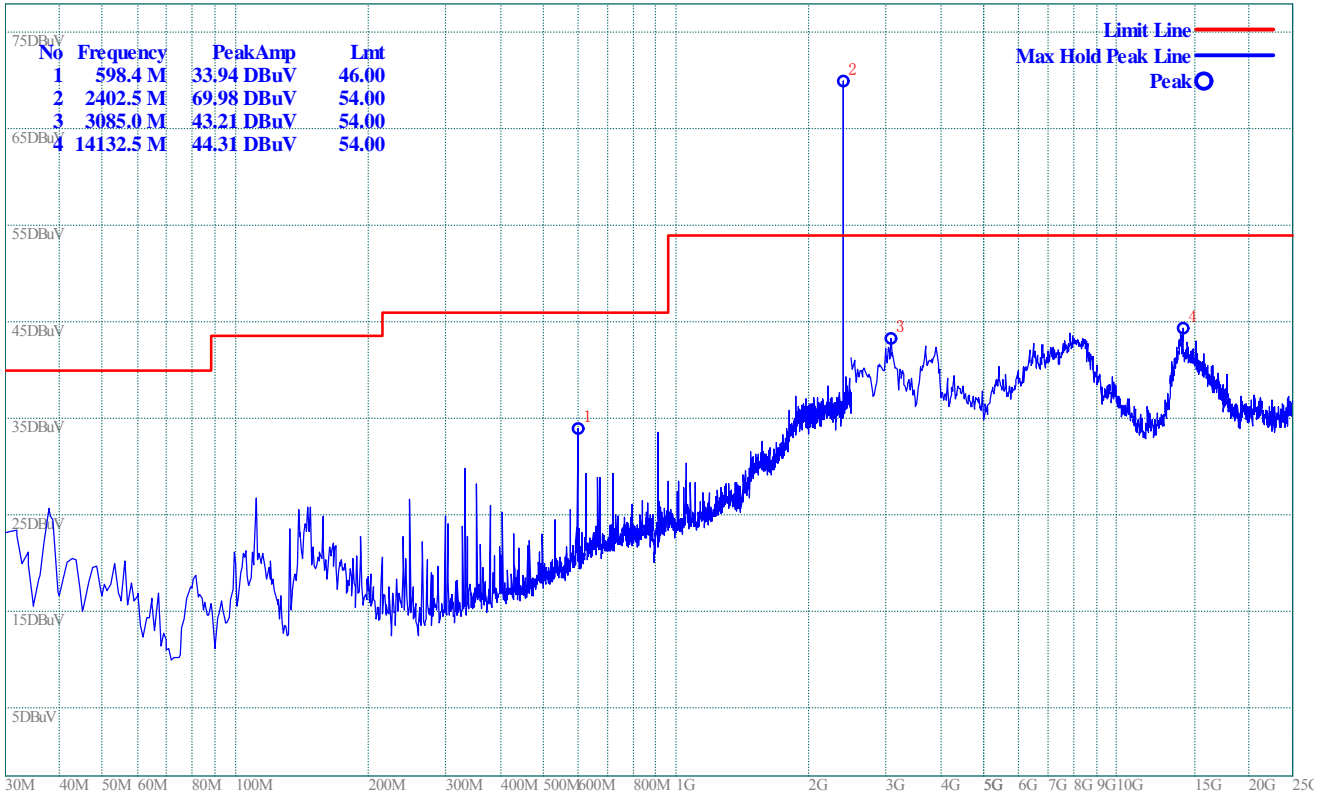


(Plot A.1: Antenna Horizontal)

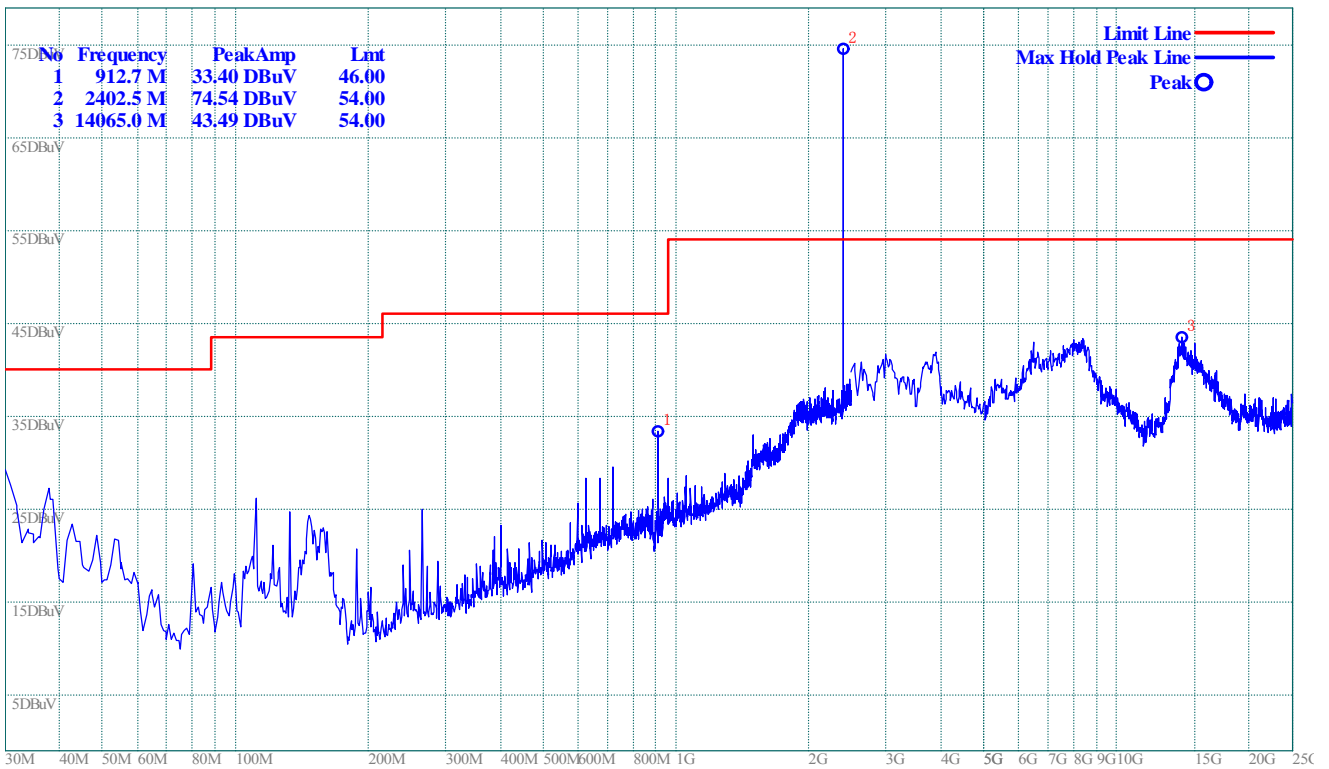


(Plot A.2: Antenna Vertical)


Plot for Channel = 39

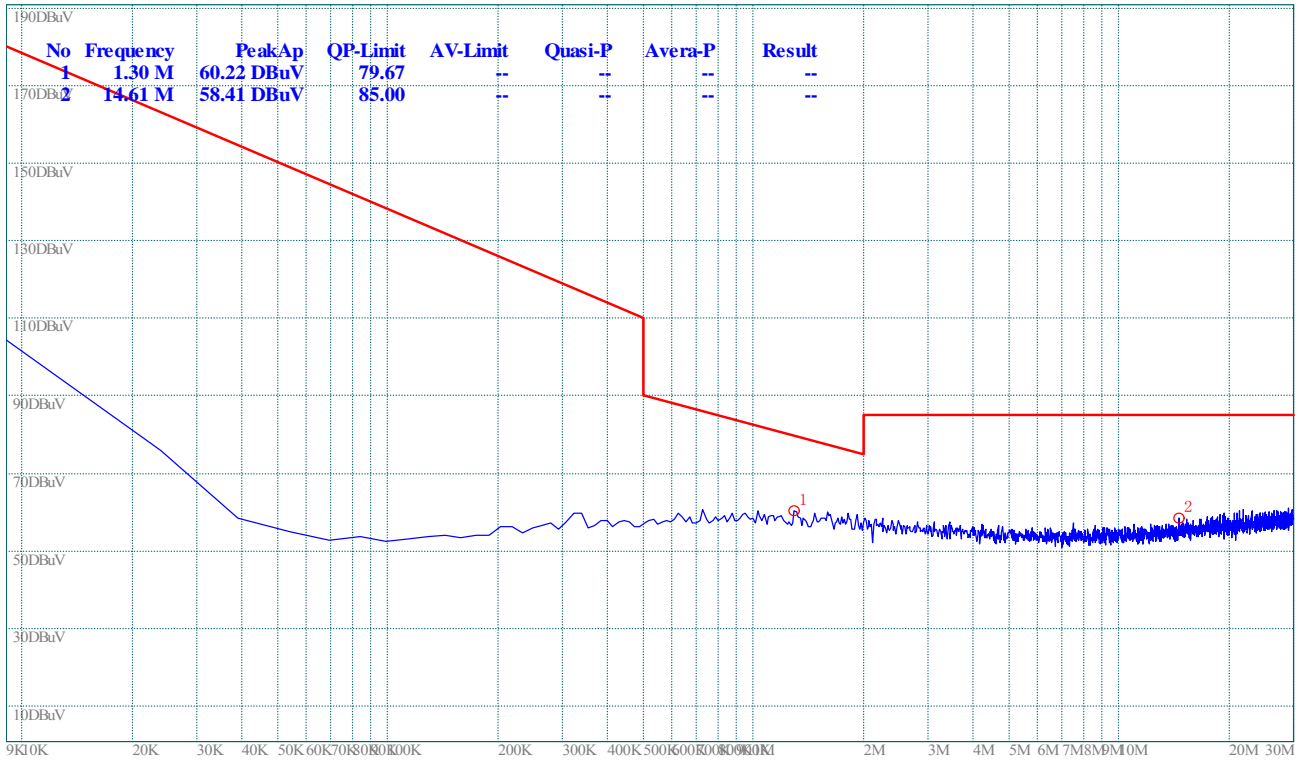

(Plot B.0: 9kHz to 30MHz)

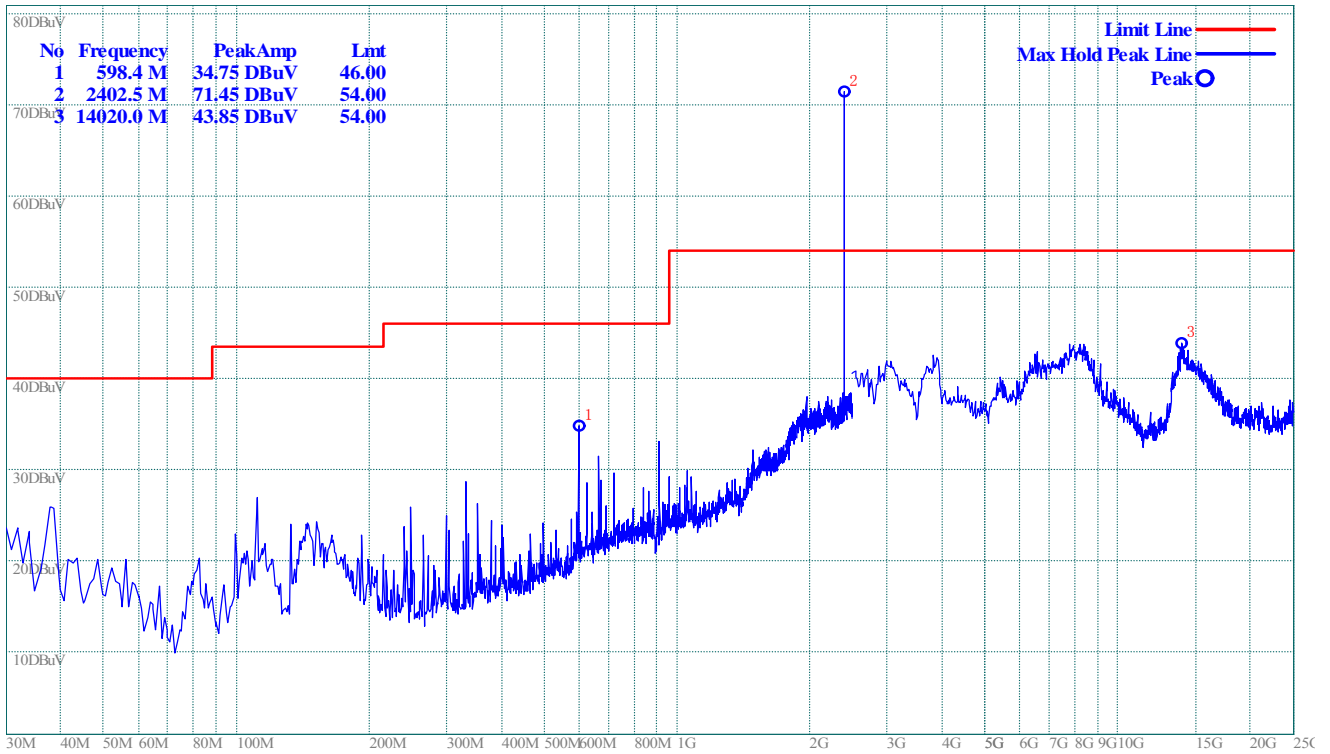

(Plot B.1: Antenna Horizontal)

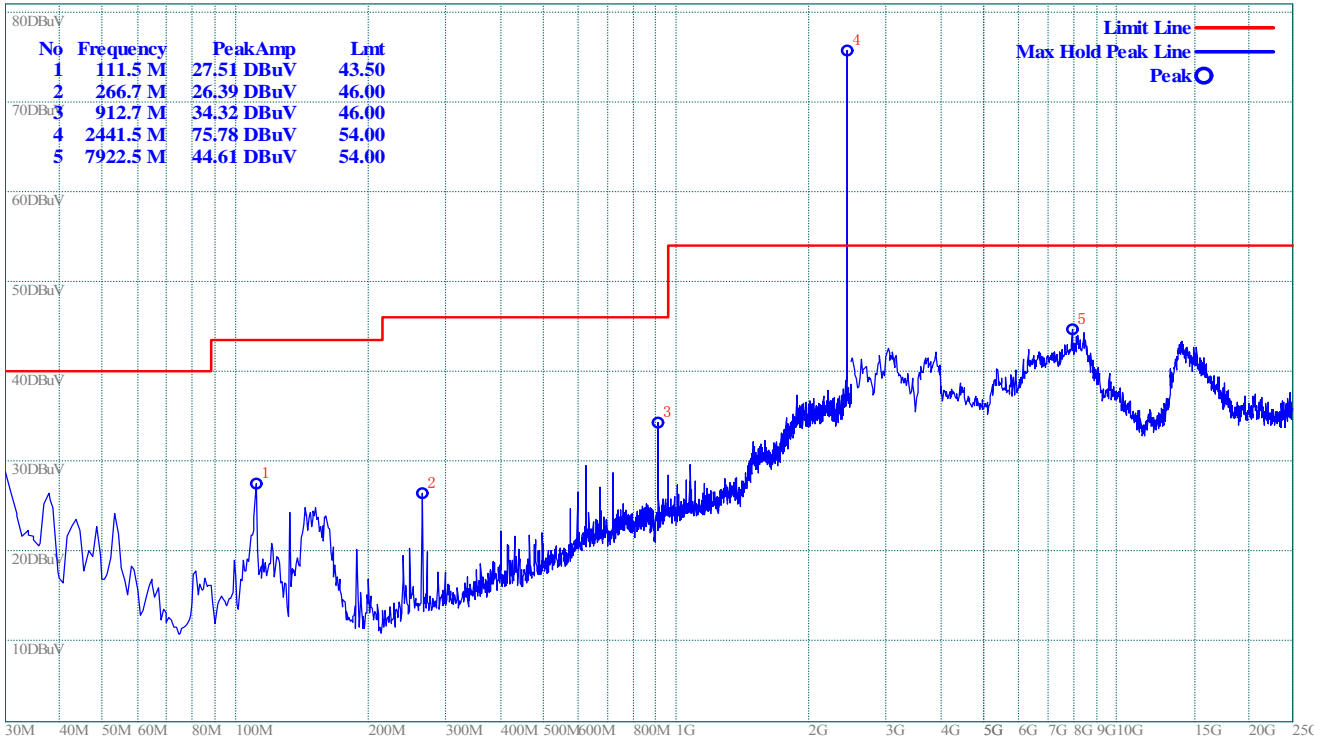


(Plot B.2: Antenna Vertical)


Plot for Channel = 78



(Plot C.0: 9kHz to 30MHz)

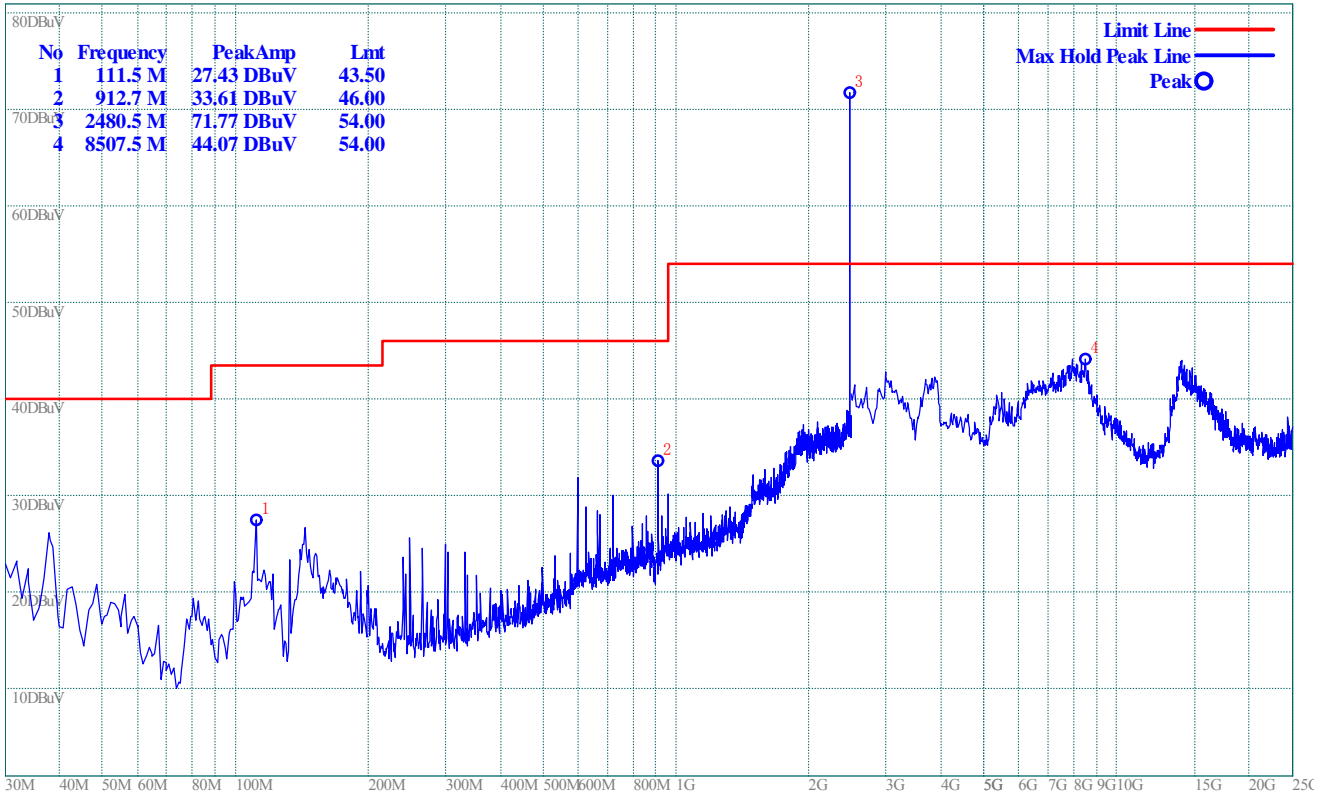

(Plot C.1: Antenna Horizontal)

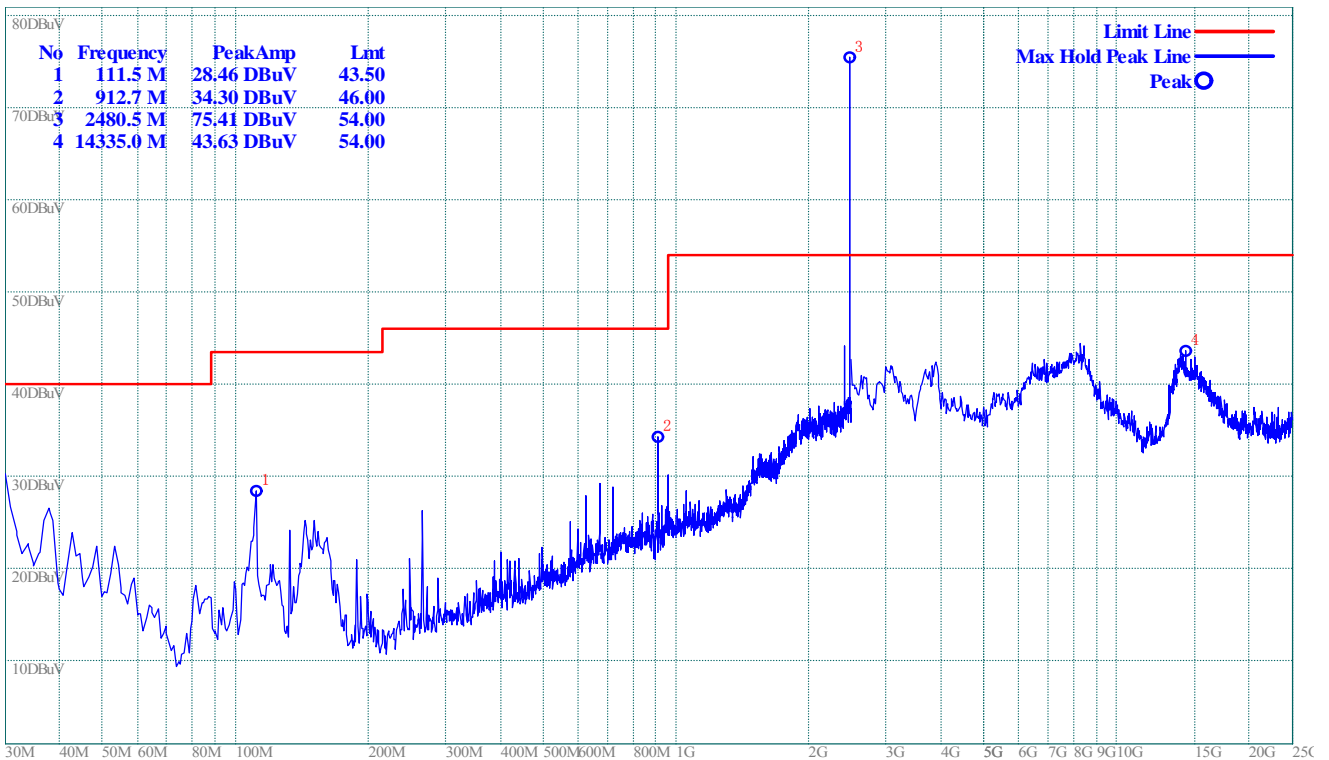

(Plot C.2: Antenna Vertical)

**$\pi/4$ -DQPSK Mode:**
**A. Test Verdict for Harmonics:**
**The Fundamental Emissions**

The field strength of {Fundamental Emission} listed below is recorded, and used in the next table.

Channel	Frequency (MHz)	Fundamental Emission (dB $\mu$ V/m)		Antenna Polarization	Refer to Plot
		PK	AV		
0	2402	71.45	67.05	Horizontal	Plot A.1
		74.16	70.26	Vertical	Plot A.2
39	2441	75.05	70.33	Horizontal	Plot B.1
		76.57	72.15	Vertical	Plot B.2
78	2480	71.87	67.65	Horizontal	Plot C.1
		75.47	71.43	Vertical	Plot C.2

**Test result of channel: 0 (2402MHz)**

Frequency (MHz)	PK Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
912.7M	33.78	46	-12.22	37	100	Vertical
8.08G	45.24	54	-8.76	65	100	Vertical
14.448G	43.98	54	-10.02	104	100	Vertical
598.4 M	34.38	46	-11.62	56	100	Horizontal
3.018 G	42.55	54	-11.45	113	100	Horizontal
8.418 G	44.48	54	-9.52	117	100	Horizontal

**Test result of channel: 39 (2442MHz)**

Frequency (MHz)	PK Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
111.5M	28.18	43.5	-15.32	20	100	Vertical
912.7M	33.88	46	-12.12	118	100	Vertical
14.065G	43.6	54	-10.4	103	100	Vertical
598.4M	35.02	46	-10.98	97	100	Horizontal
912.7M	33.7	46	-12.3	65	100	Horizontal
8.125G	44.14	54	-9.86	38	100	Horizontal



Test result of channel: 78 (2480MHz)


Frequency (MHz)	PK Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
912.7M	33.47	46	-12.53	94	100	Vertical
3.918G	43.95	54	-10.05	80	100	Vertical
14.065G	43.89	54	-10.11	107	100	Vertical
111.5M	28.46	43.5	-15.04	78	100	Horizontal
912.7 M	33.62	46	-12.38	64	100	Horizontal
14.245G	44.04	54	-9.96	102	100	Horizontal

**B. Test Plots for the Whole Measurement Frequency Range:**


Plots for Channel = 0



(Plot A.0: 9kHz to 30MHz)

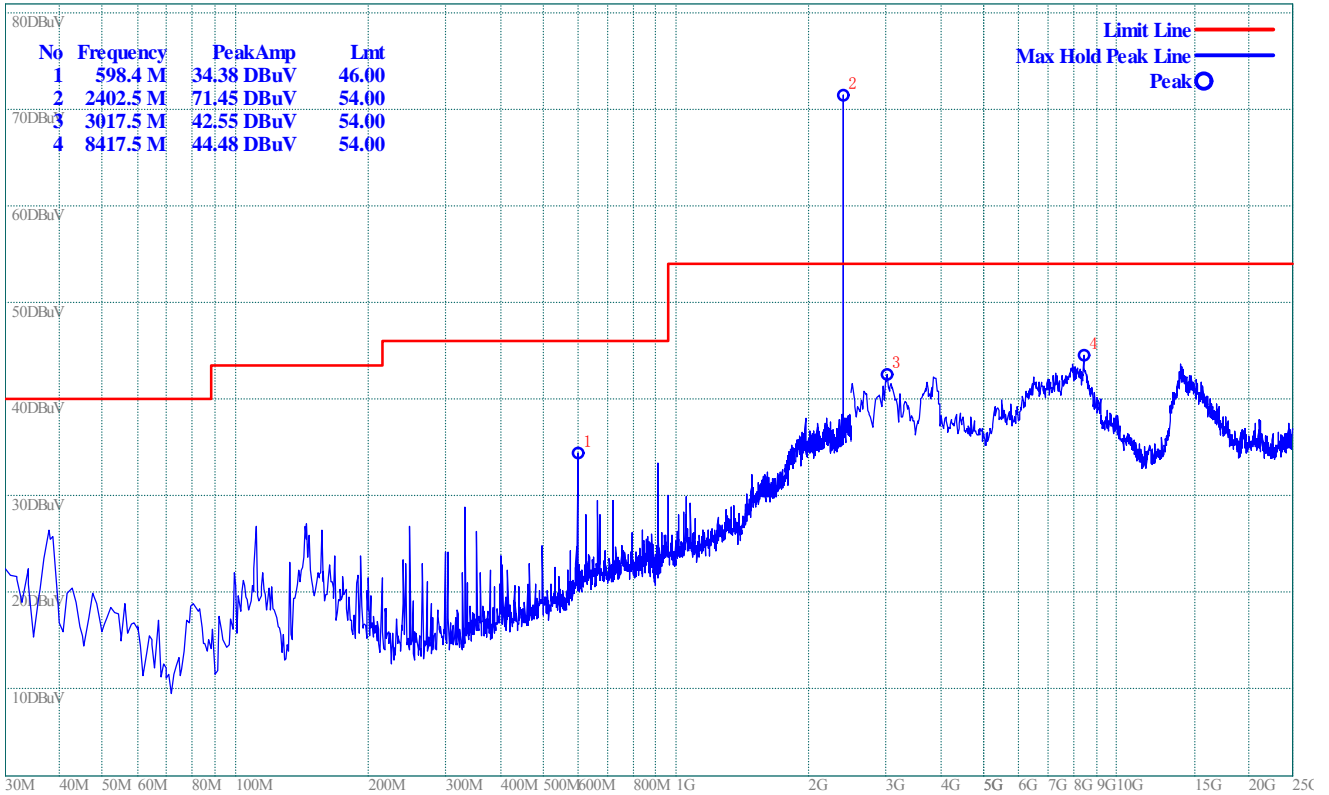

(Plot A.1: Antenna Horizontal)

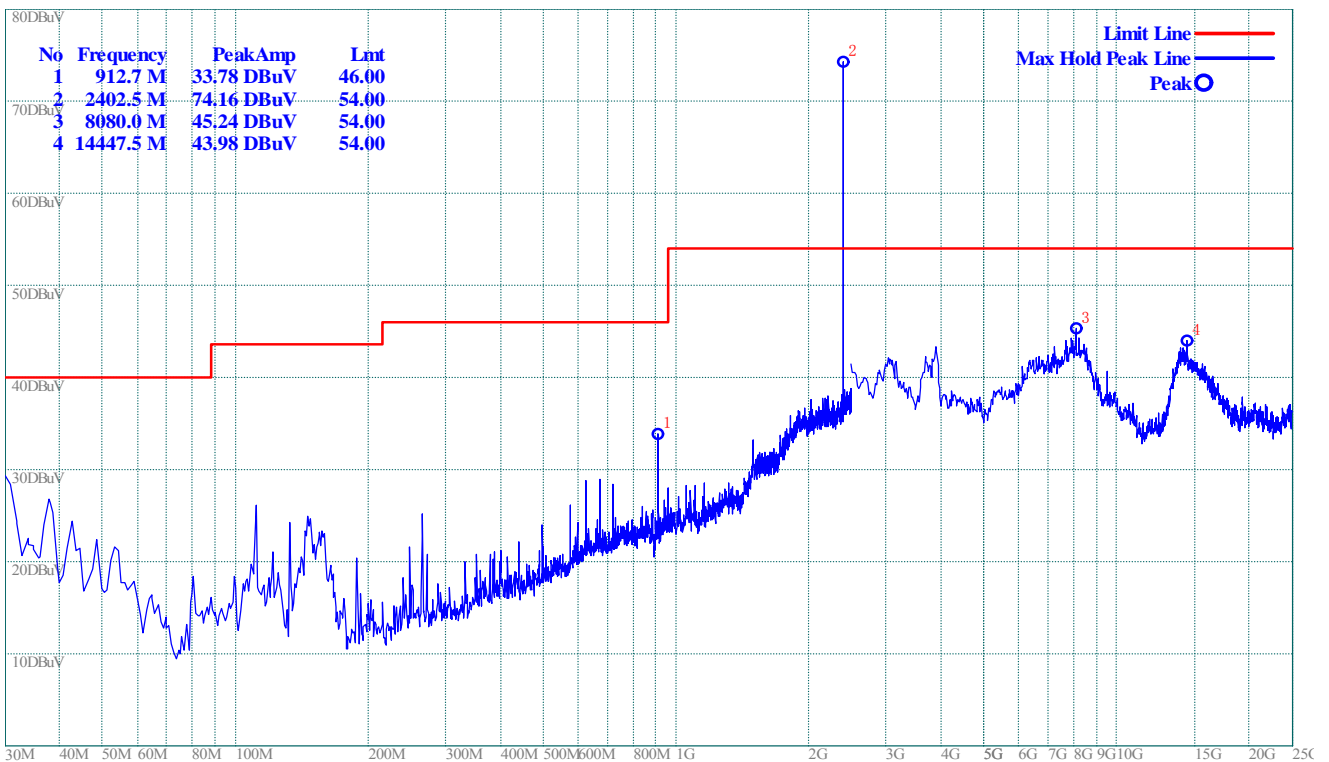


(Plot A.2: Antenna Vertical)






Plot for Channel = 39

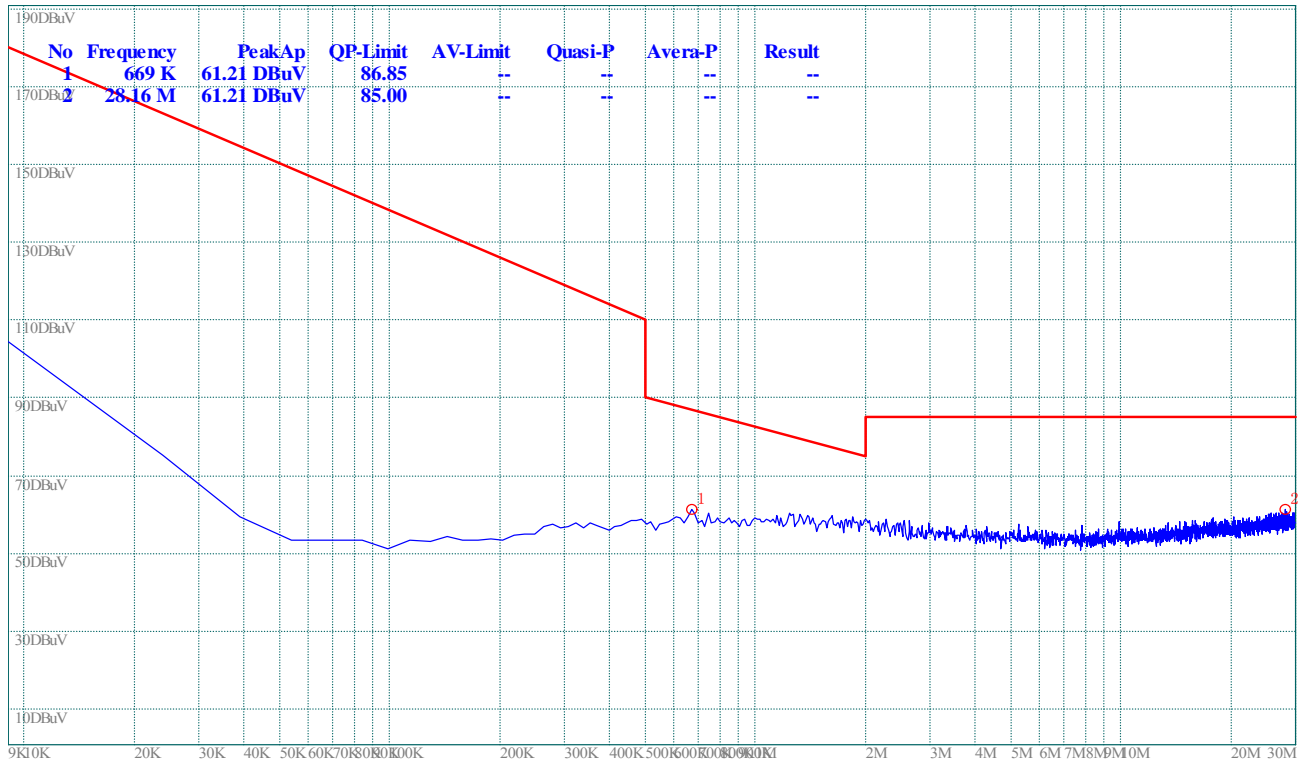


(Plot B.0: 9kHz to 30MHz)

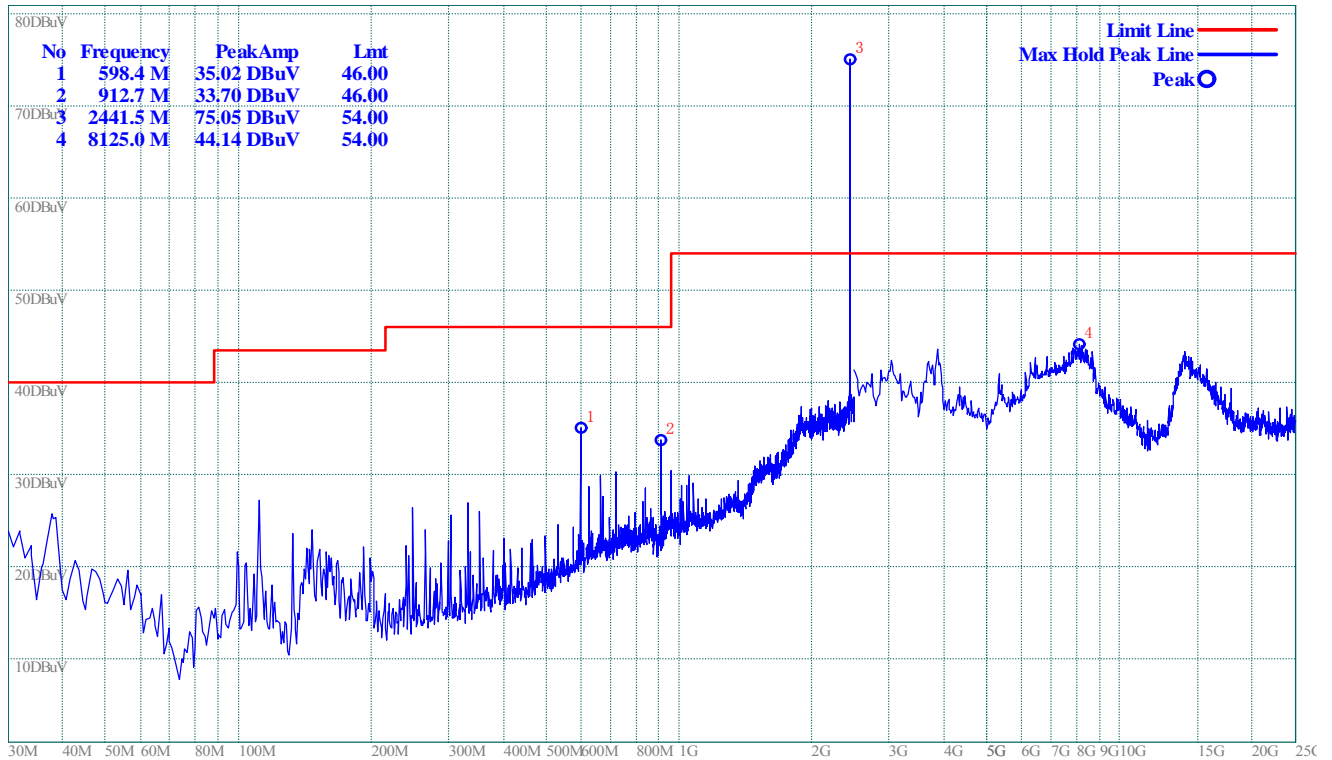


(Plot B.1: Antenna Horizontal)



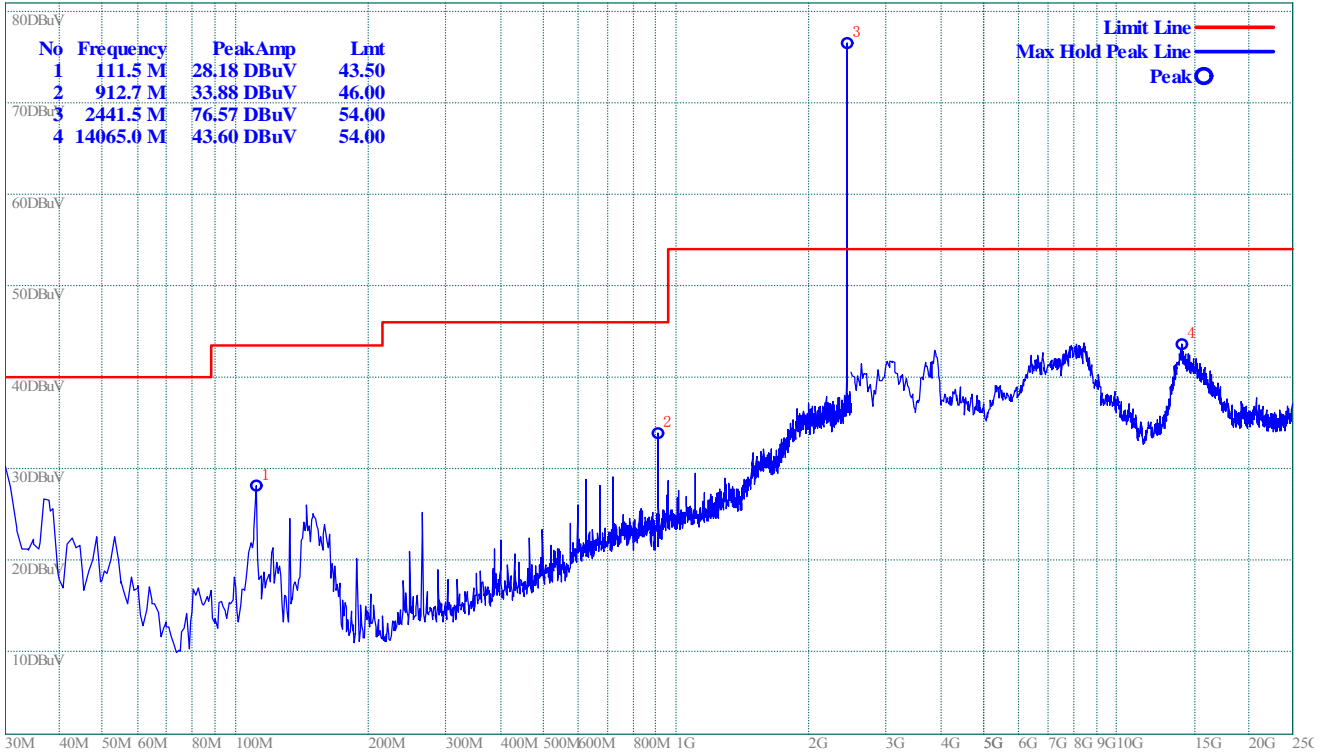


(Plot B.2: Antenna Vertical)


Plot for Channel = 78

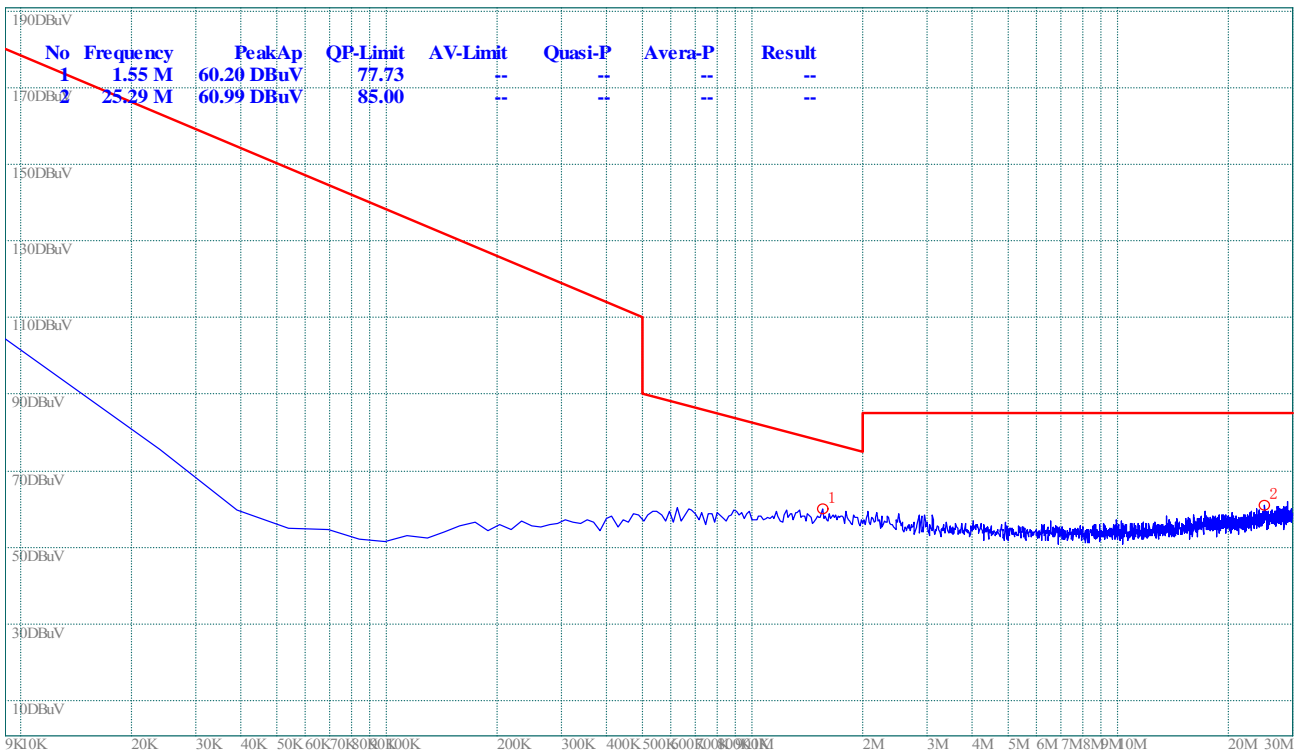

(Plot C.0: 9kHz to 30MHz)

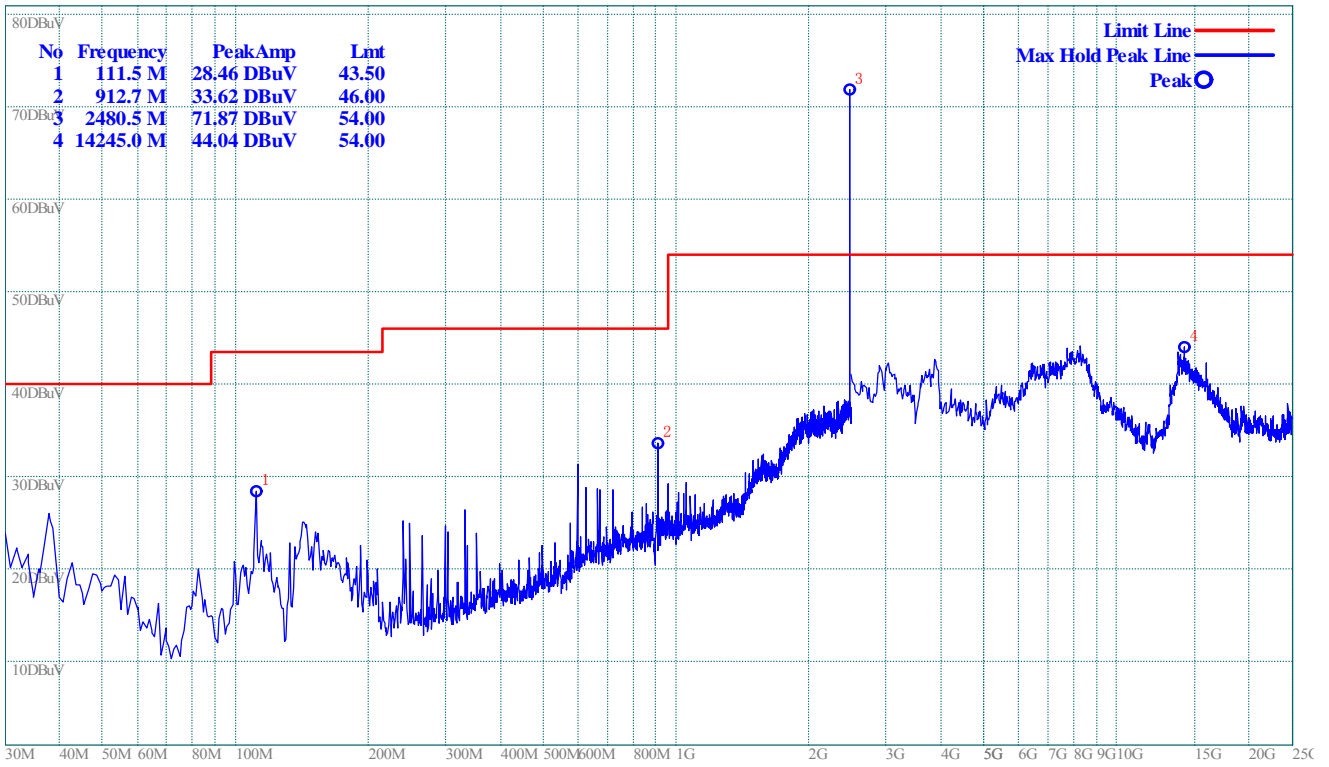

(Plot C.1: Antenna Horizontal)

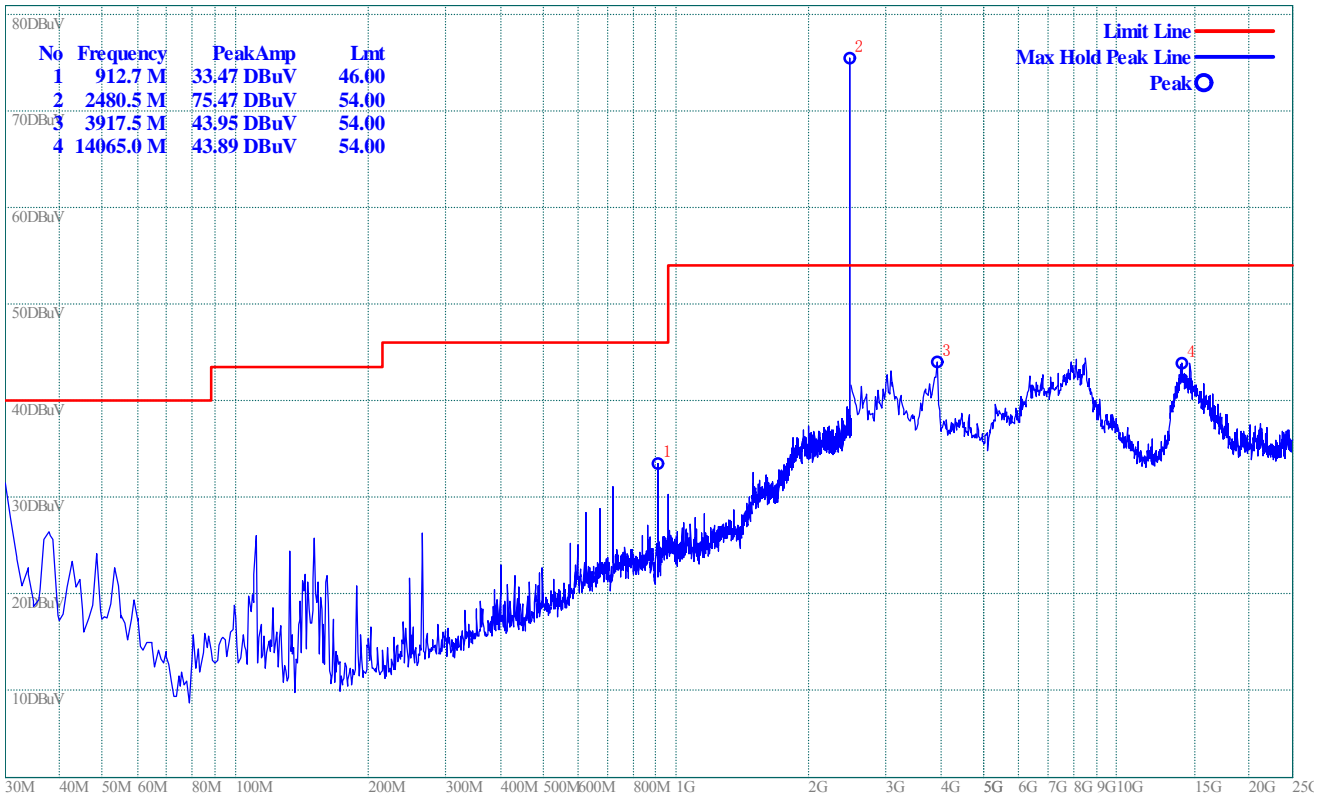

(Plot C.2: Antenna Vertical)

**8-DPSK Mode:**
**A. Test Verdict for Harmonics:**
**The Fundamental Emissions**

The field strength of {Fundamental Emission} listed below is recorded, and used in the next table.

Channel	Frequency (MHz)	Fundamental Emission (dB $\mu$ V/m)		Antenna Polarization	Refer to Plot
		PK	AV		
0	2402	71.45	67.56	Horizontal	Plot A.1
		74.24	70.06	Vertical	Plot A.2
39	2441	74.49	70.52	Horizontal	Plot B.1
		76.26	72.09	Vertical	Plot B.2
78	2480	72.14	68.68	Horizontal	Plot C.1
		75.02	71.24	Vertical	Plot C.2

Test result of channel: 0 (2402MHz)

Frequency (MHz)	PK Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
912.7M	33.74	46	-12.42	49	100	Vertical
3.873G	43.18	54	-10.82	113	100	Vertical
14.133G	44.52	54	-9.48	112	100	Vertical
598.4 M	33.58	46	-12.42	98	100	Horizontal
14.38G	44.52	54	-9.6	56	100	Horizontal

Test result of channel: 39 (2442MHz)


Frequency (MHz)	PK Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
111.5M	26.88	43.5	-16.62	23	100	Vertical
912.7M	33.45	46	-12.55	106	100	Vertical
14.115G	44.3	54	-9.7	114	100	Vertical
598.4M	33.35	46	-12.65	79	100	Horizontal
3.85G	42.96	54	-11.04	87	100	Horizontal
8.305G	43.87	54	-10.13	69	100	Horizontal

Test result of channel: 78 (2480MHz)


Frequency (MHz)	PK Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
912.7M	33.74	46	-12.26	43	100	Vertical
3.873G	43.18	54	-10.82	106	100	Vertical
14.133G	44.52	54	-9.48	112	100	Vertical
598.4M	33.58	46	-12.42	78	100	Horizontal
14.38G	44.4	54	-9.6	59	100	Horizontal

**B. Test Plots for the Whole Measurement Frequency Range:**


Plots for Channel = 0

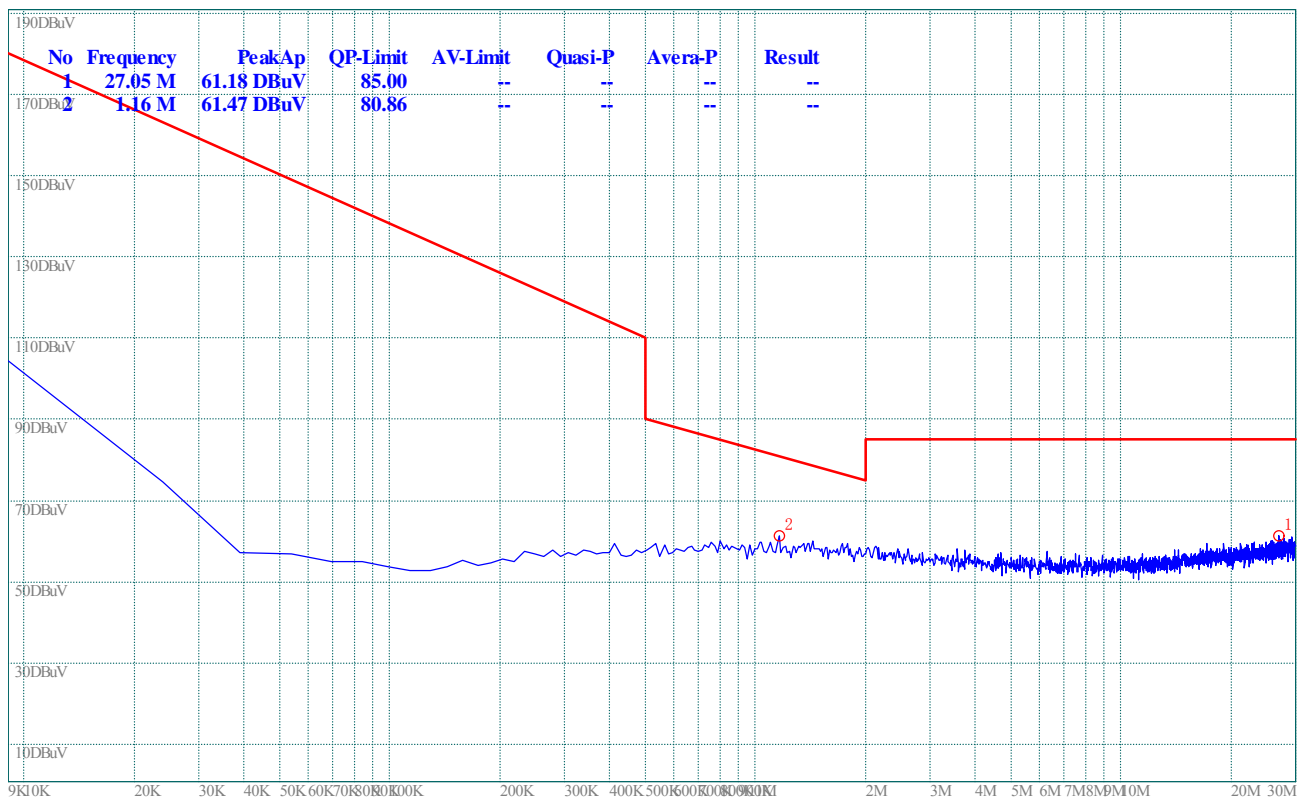

(Plot A.0: 9kHz to 30MHz)

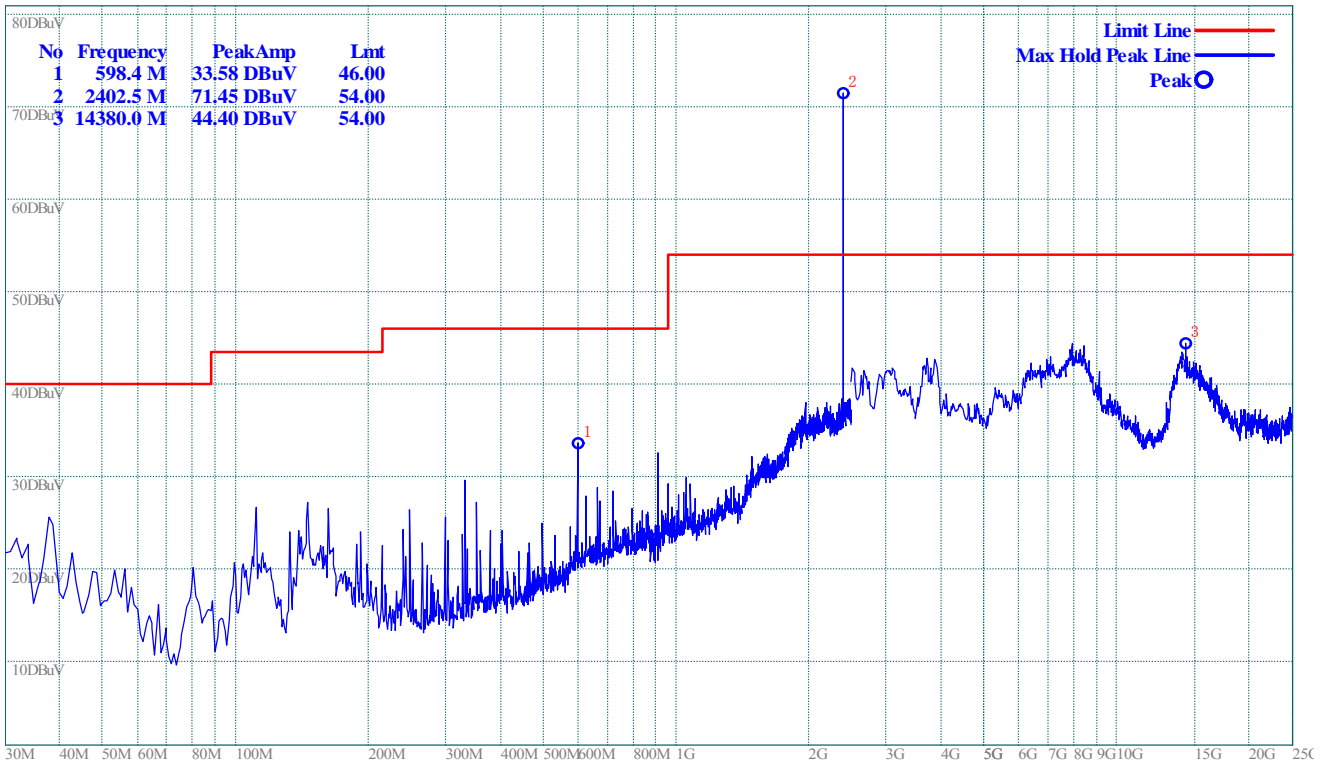


(Plot A.1: Antenna Horizontal)

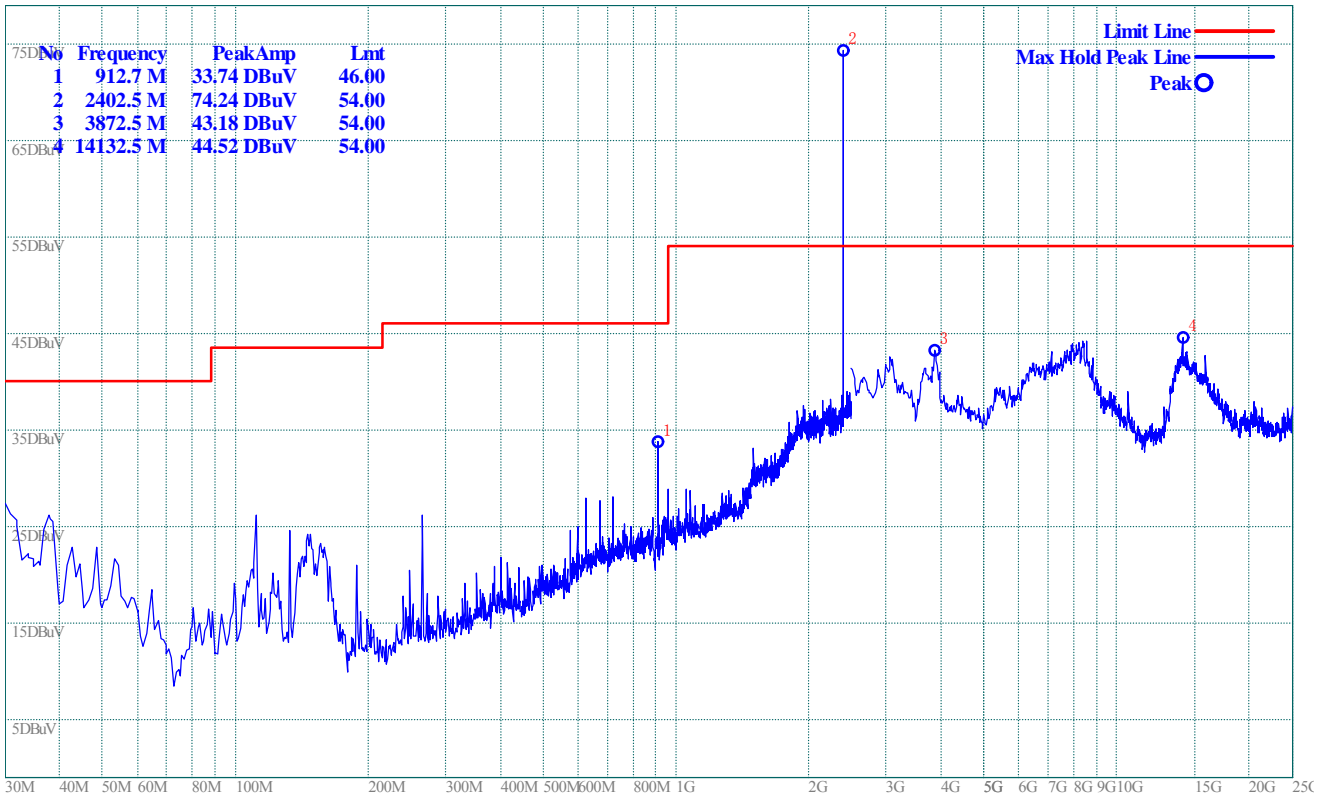


(Plot A.2: Antenna Vertical)




Plot for Channel = 39

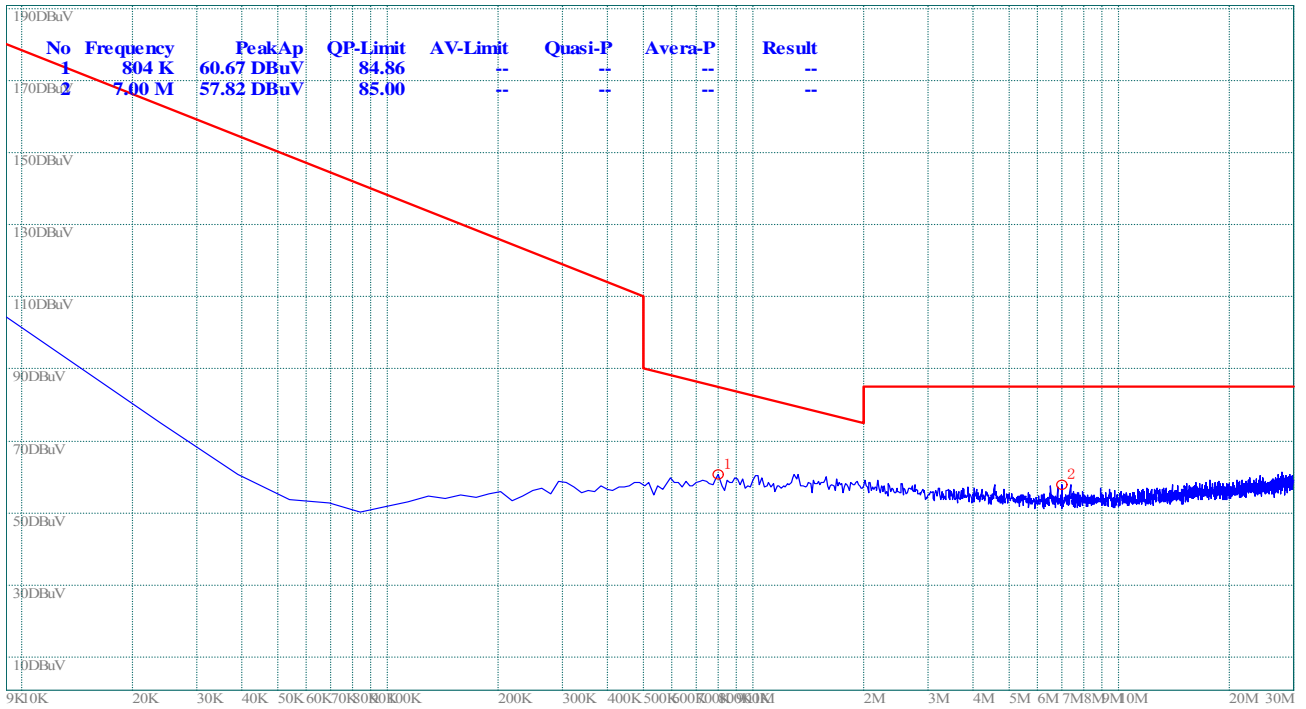

(Plot B.0: 9kHz to 30MHz)

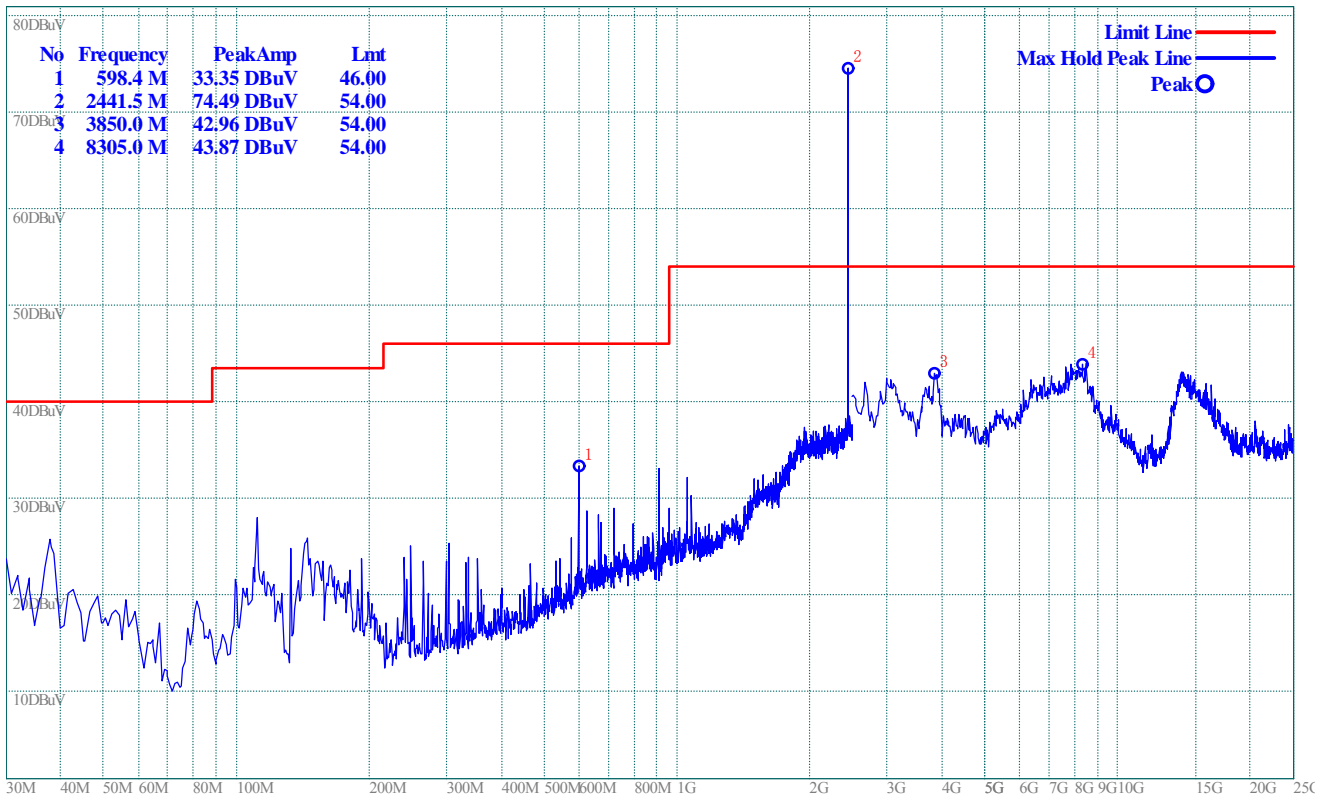


(Plot B.1: Antenna Horizontal)

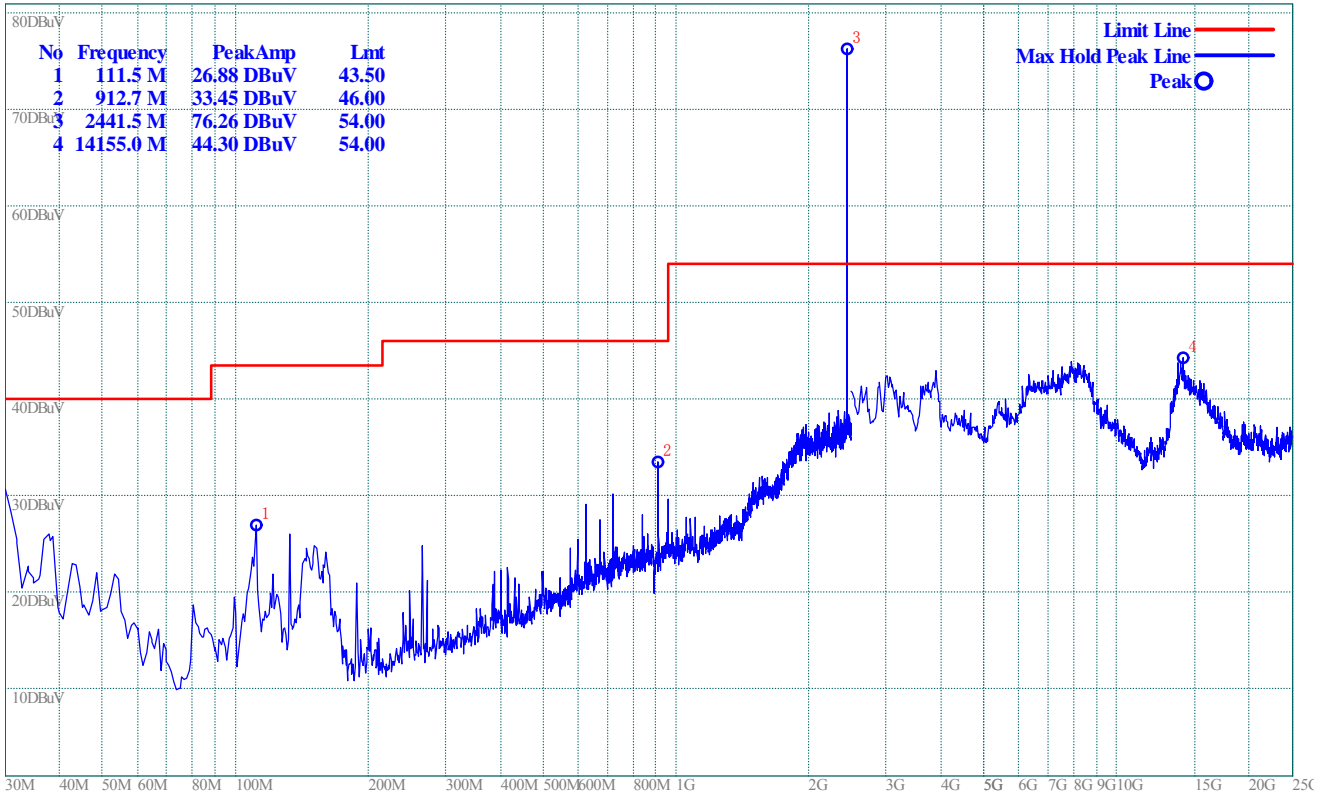


(Plot B.2: Antenna Vertical)

Plot for Channel = 78

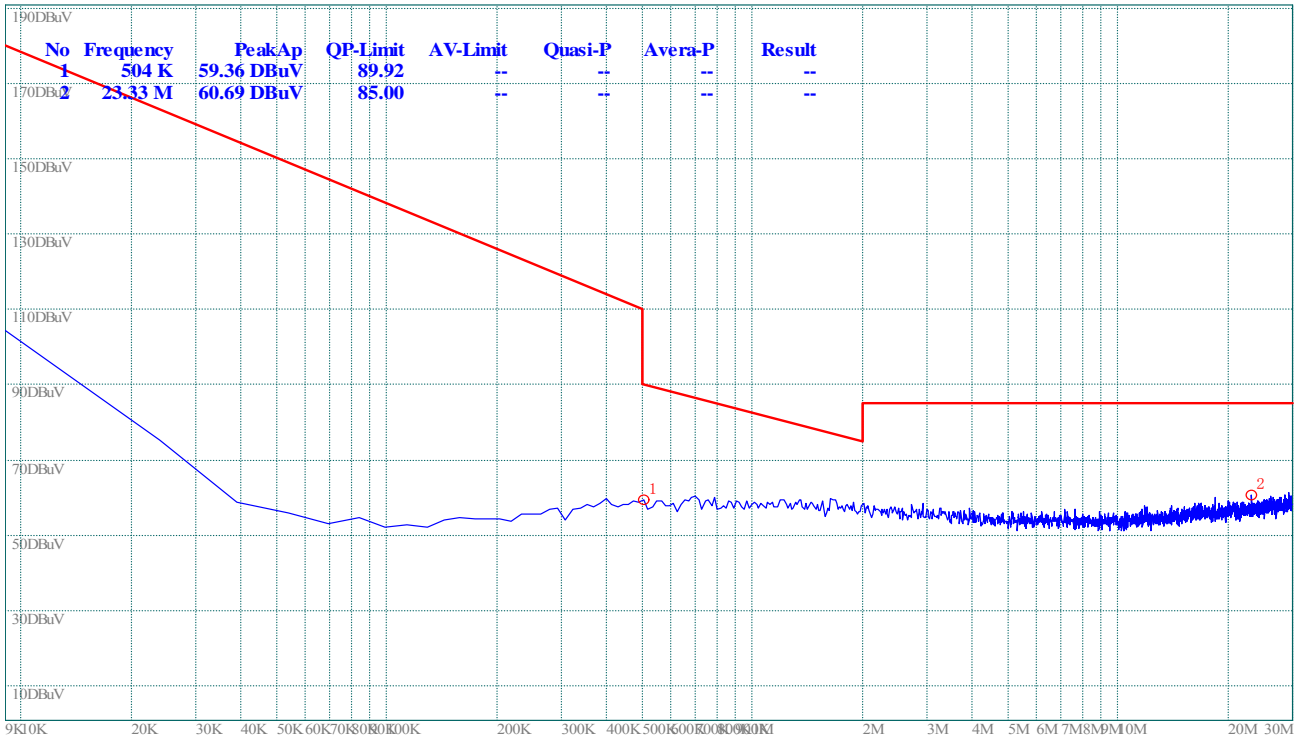


(Plot C.0: 9kHz to 30MHz)



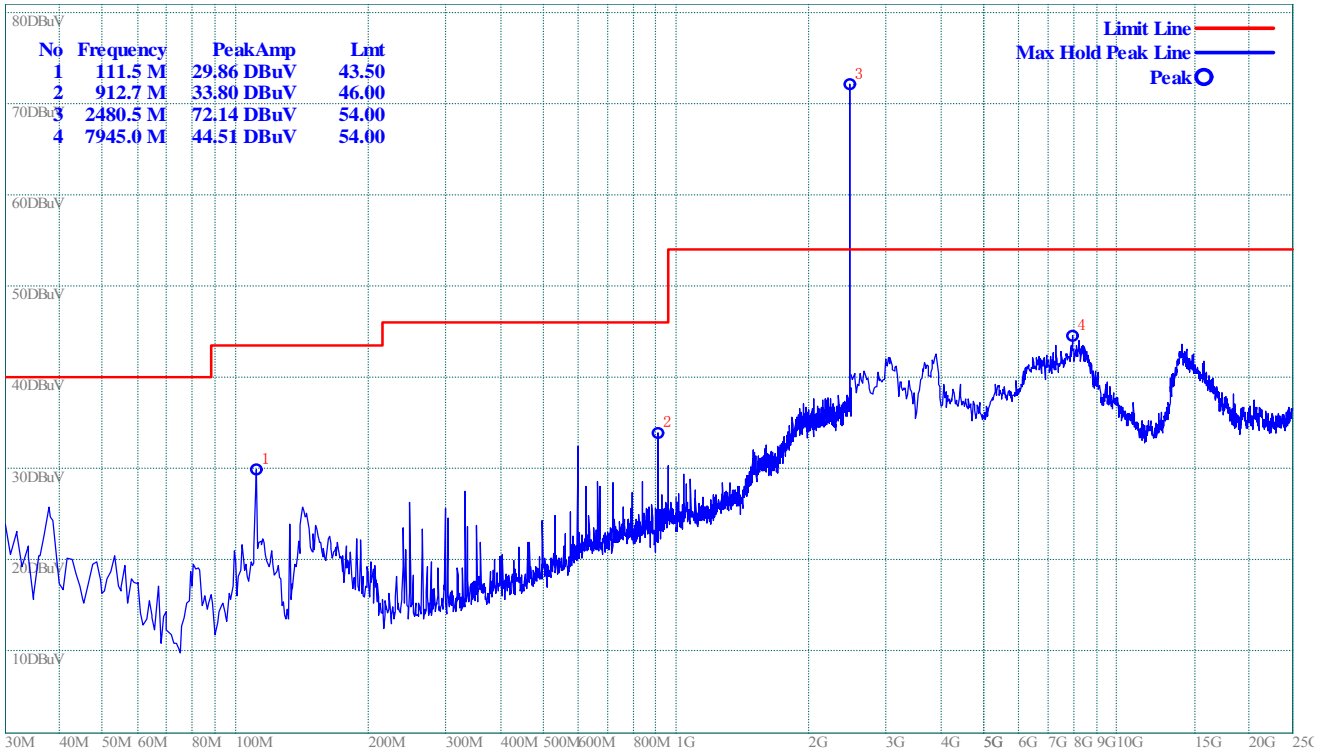

(Plot C.1: Antenna Horizontal)

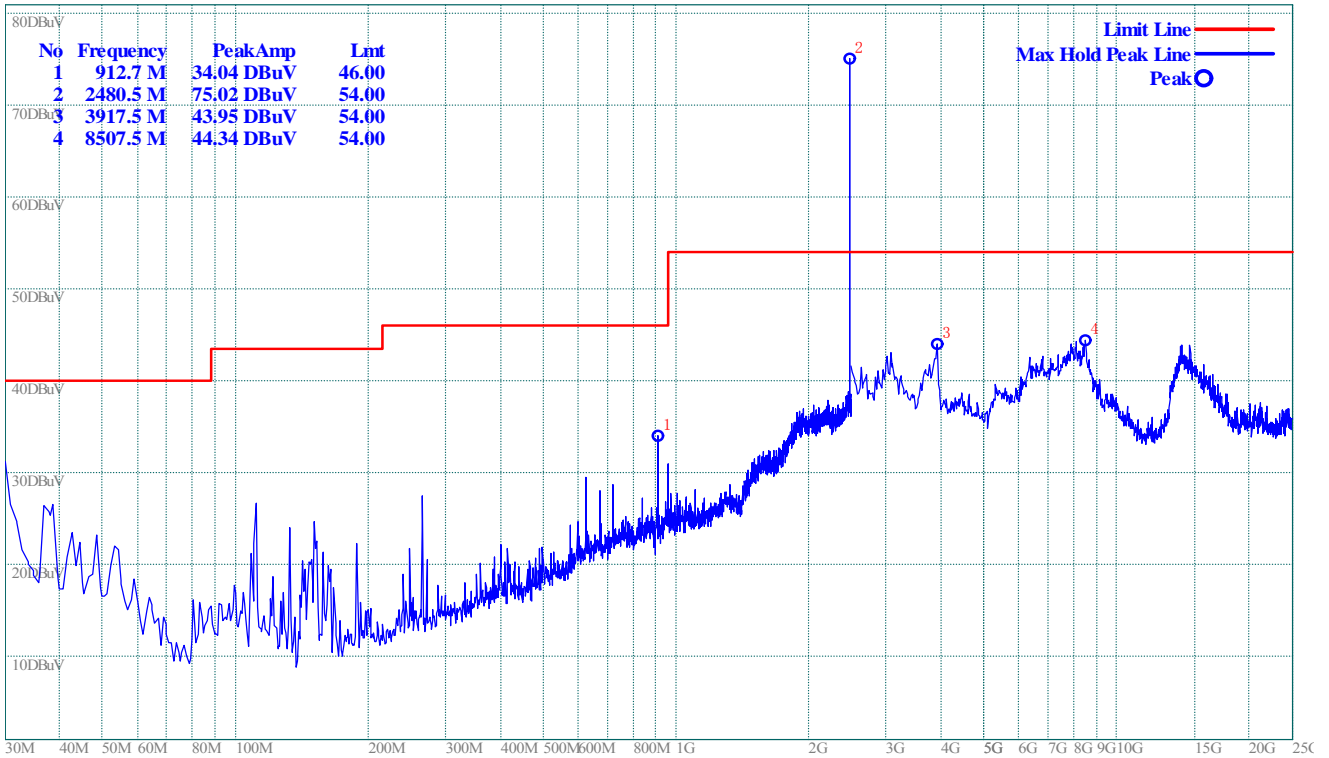

(Plot C.2: Antenna Vertical)



**Receiver Mode:**
**C. Test Verdict for Harmonics:**
**The Fundamental Emissions**

The field strength of {Fundamental Emission} listed below is recorded, and used in the next table.

Mode	Frequency (MHz)	Fundamental Emission (dB $\mu$ V/m)		Antenna Polarization	Refer to Plot
		PK	AV		
GFSK	7206	34.22	--	Horizontal	Plot A.1
	2882.5	49.87	--	Vertical	Plot A.2
$\Pi/4$ -DQPSK	3962.5	51.33	--	Horizontal	Plot B.1
	3962.5	50.44	--	Vertical	Plot B.2
8DPSK	3962.5	47.50	--	Horizontal	Plot C.1
	3962.5	50.77	--	Vertical	Plot C.2

Test result of channel: 0 (2402MHz)

Frequency (MHz)	PK Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
60.1M	33.11	40	-6.89	113	100	Vertical
720.6M	36.19	46	-9.81	96	100	Vertical
60.1M	32.75	40	-7.25	30	100	Horizontal

Test result of channel: 39 (2442MHz)


Frequency (MHz)	PK Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
720.6M	36.7	40	-3.3	48	100	Vertical
60.1M	35.02	40	-10.98	106	100	Horizontal

Test result of channel: 78 (2480MHz)


Frequency (MHz)	PK Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
60.1M	36.58	40	-3.42	36	100	Vertical
60.1M	37.71	40	-2.29	59	100	Horizontal
720.6M	35.03	46	-10.97	63	100	Horizontal

**D. Test Plots for the Whole Measurement Frequency Range:**

Plots for Channel = 0

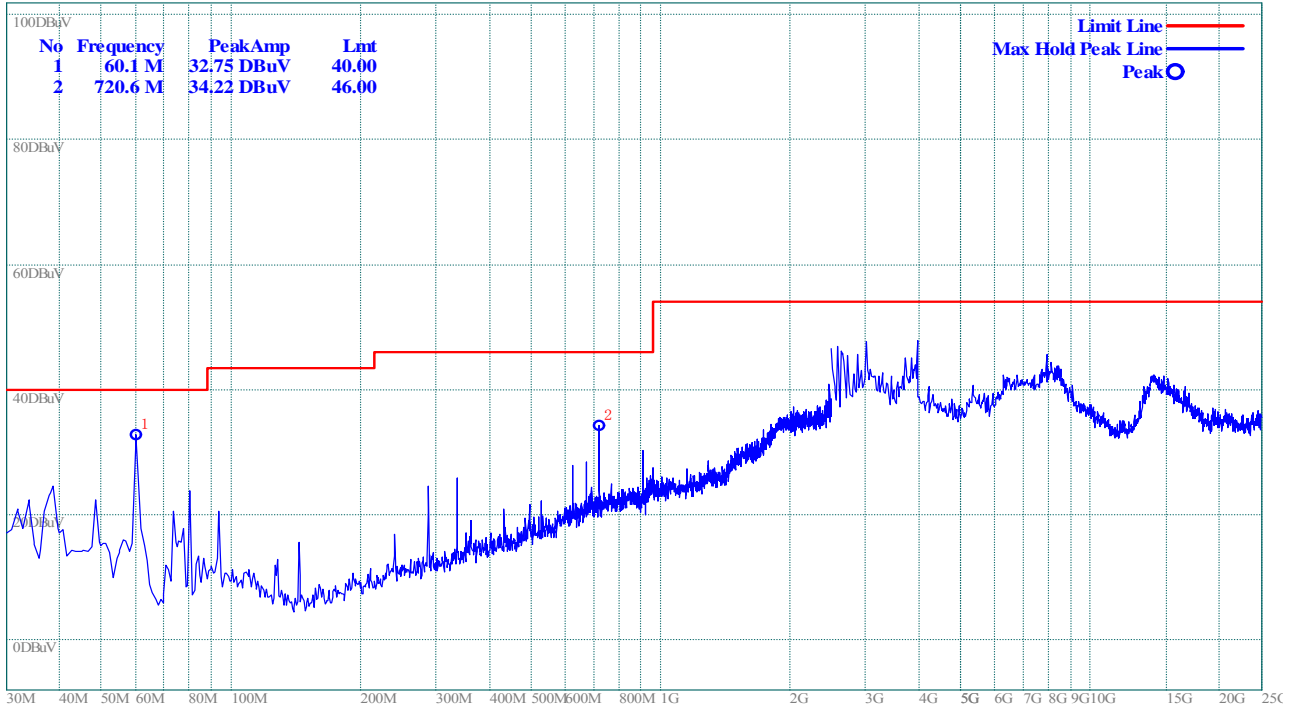


(Plot A.1: Antenna Horizontal)

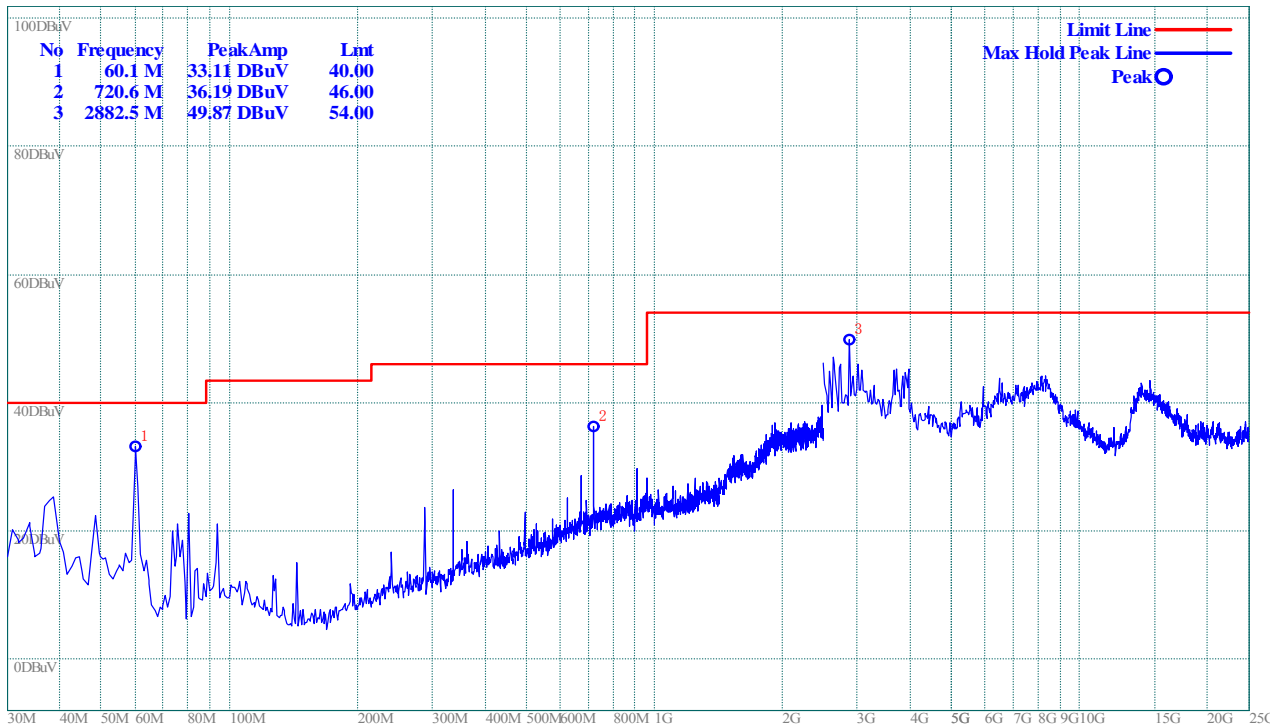


(Plot A.2: Antenna Vertical)



Plot for Channel = 39

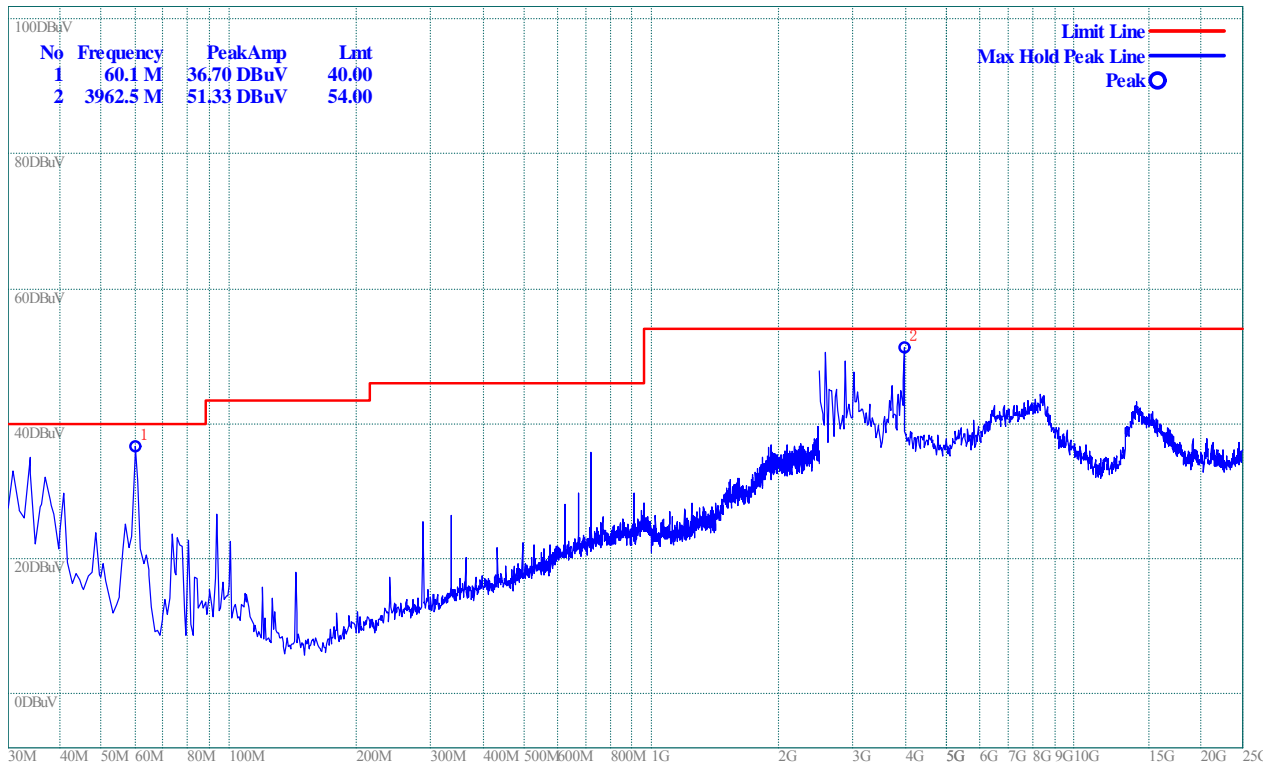


(Plot B.1: Antenna Horizontal)

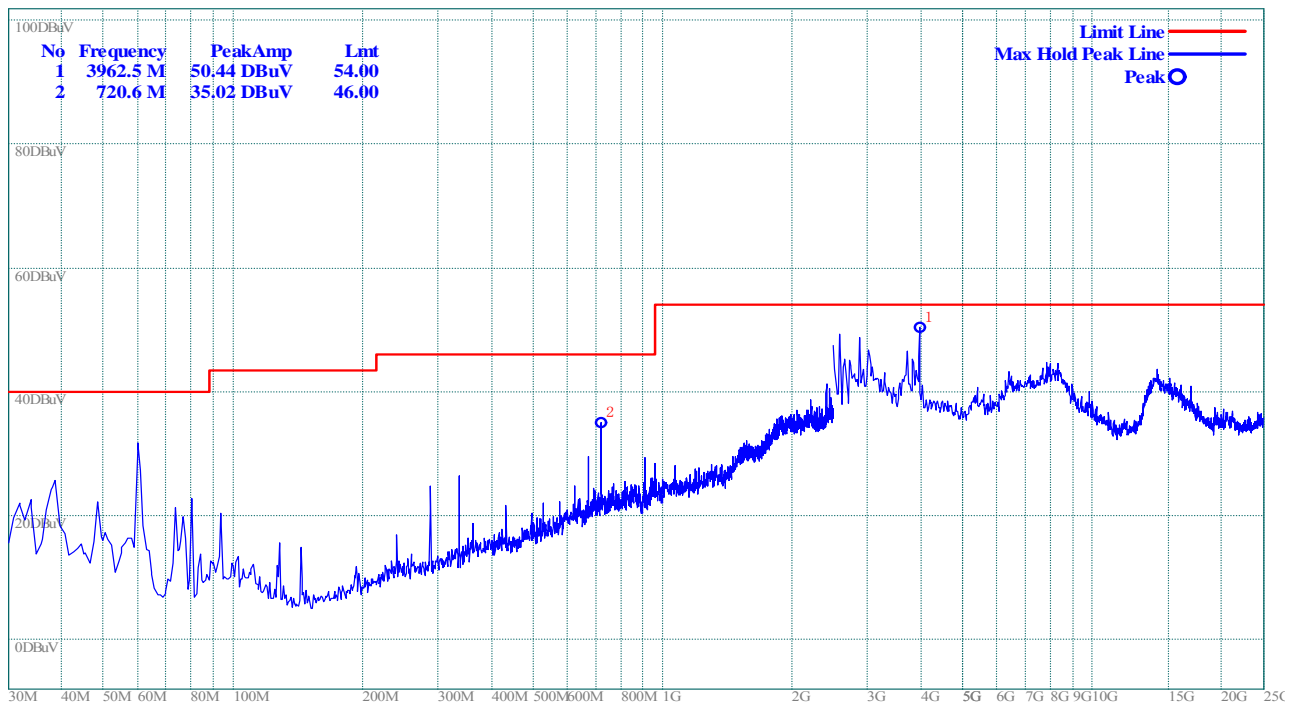


(Plot B.2: Antenna Vertical)

Plot for Channel = 78

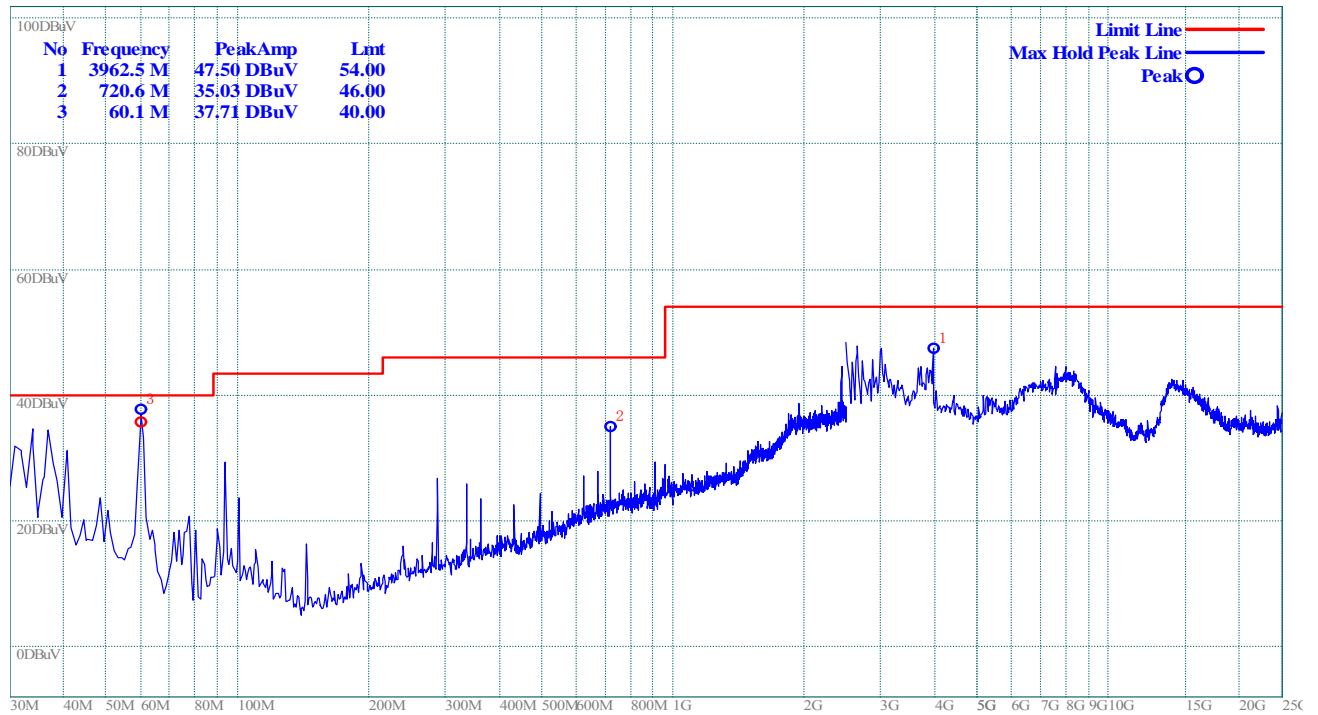

(Plot C.1: Antenna Horizontal)

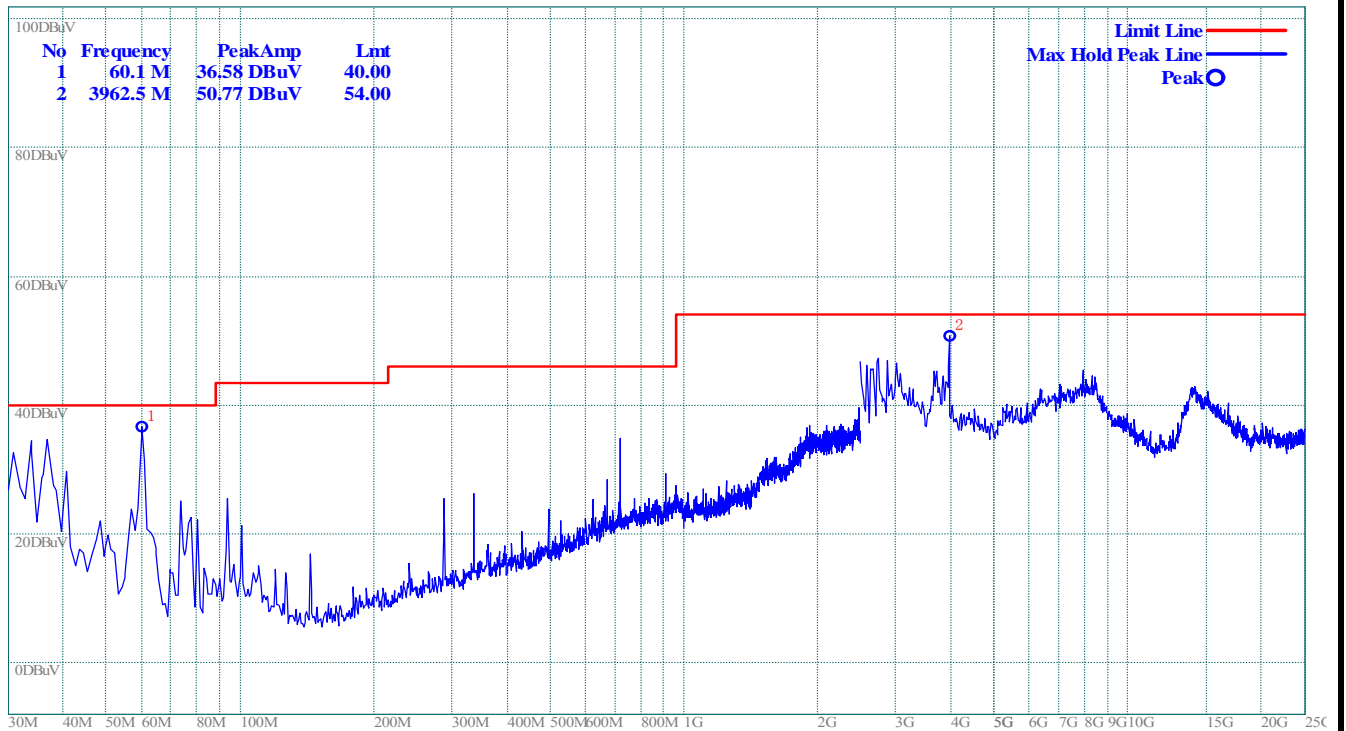

(Plot C.2: Antenna Vertical)

\*\* END OF REPORT \*\*