

FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

WLAN 11b/g/n SDIO MODULE

Model: 05010TX

Trade Name: N/A

Issued to

Baby's Journey, Inc.
22 Shore Rd, Narragansett, Rhode Island, United States, 02882

Issued by

Compliance Certification Services Inc.
No.11, Wugong 6th Rd., Wugu Dist.,
New Taipei City 24891, Taiwan. (R.O.C.)
<http://www.ccsrf.com>
service@ccsrf.com
Issued Date: February 25, 2016



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.

Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	February 25, 2016	Initial Issue	ALL	Doris Chu

TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION	4
2. EUT DESCRIPTION.....	5
3. TEST METHODOLOGY.....	6
3.1 EUT CONFIGURATION	6
3.2 EUT EXERCISE	6
3.3 GENERAL TEST PROCEDURES.....	6
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	7
3.5 DESCRIPTION OF TEST MODES.....	8
4. INSTRUMENT CALIBRATION	9
4.1 MEASURING INSTRUMENT CALIBRATION	9
4.2 MEASUREMENT EQUIPMENT USED	9
4.3 MEASUREMENT UNCERTAINTY	10
5. FACILITIES AND ACCREDITATIONS	11
5.1 FACILITIES	11
5.2 EQUIPMENT	11
5.3 LABORATORY ACCREDITATIONS AND LISTING.....	11
5.4 TABLE OF ACCREDITATIONS AND LISTINGS.....	12
6. SETUP OF EQUIPMENT UNDER TEST	13
6.1 SETUP CONFIGURATION OF EUT	13
6.2 SUPPORT EQUIPMENT.....	13
7. FCC PART 15.247 REQUIREMENTS	14
7.1 6DB BANDWIDTH.....	14
7.2 PEAK POWER	24
7.3 AVERAGE POWER	26
7.4 BAND EDGES MEASUREMENT	28
7.5 PEAK POWER SPECTRAL DENSITY	62
7.6 RADIATED EMISSIONS	72
7.7 POWERLINE CONDUCTED EMISSIONS.....	102
APPENDIX II PHOTOGRAPHS OF TEST SETUP	105

1. TEST RESULT CERTIFICATION

Applicant: Baby's Journey, Inc.
 22 Shore Rd, Narragansett, Rhode Island, United States,
 02882

Equipment Under Test: WLAN 11b/g/n SDIO MODULE

Model Number: 05010TX

Trade Name: N/A

Date of Test: February 18 ~ 24, 2016

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10: 2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:




Miller Lee
 Manager
 Compliance Certification Services Inc.

Angel Cheng
 Section Manager
 Compliance Certification Services Inc.

2. EUT DESCRIPTION

Product	WLAN 11b/g/n SDIO MODULE			
Model Number	05010TX			
Trade Name	N/A			
Model Discrepancy	N/A			
Received Date	January 13, 2016			
Power Adapter	Power form host device			
Frequency Range	IEEE 802.11b/g/ IEEE 802.11n HT 20 MHz Mode: 2412 ~ 2462 MHz IEEE 802.11n HT 40 MHz Mode: 2422~ 2452 MHz			
Transmit Power	Mode	Frequency Range	Output Power (dBm)	Output Power (W)
	IEEE 802.11b	2412 - 2462	4.43	0.0028
	IEEE 802.11g	2412 - 2462	13.51	0.0224
	IEEE 802.11n HT 20 MHz	2412 - 2462	12.07	0.0161
	IEEE 802.11n HT 40 MHz	2422 - 2452	10.91	0.0123
Number of Channels	IEEE 802.11b/g mode: 11 Channels IEEE 802.11n HT 20 MHz mode: 11 Channels IEEE 802.11n HT 40 MHz mode: 7 Channels			
Antenna Specification	Dipole Antenna / 2.3 dBi			
Host Brand	Smart Sync™ 5" Internet Viewable Camera	Host Model Name	05010TX	

Remark:

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **PJF-O5010TX** filing to comply with FCC Part 15C, Section 15.207, 15.209.

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10: 2013 and FCC CFR 47 Part 15.207, 15.209, 15.247, KDB 558074 D01 DTS Meas Guidance v03r03.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

According to the requirements in ANSI C63.10: 2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 1.5 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in ANSI C63.10: 2013.

3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

3.5 DESCRIPTION OF TEST MODES

The EUT (model: 05010TX) had been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting and receiving mode was programmed.

After verification, all tests carried out are with the worst-case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode and receiving radiated spurious emission above 1GHz, which worst case was in CH Mid mode only.

IEEE 802.11b mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 1Mbps data rate were chosen for full testing.

IEEE 802.11g mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing.

IEEE 802.11n HT 20 MHz mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6.5Mbps data rate were chosen for full testing.

IEEE 802.11n HT 40 MHz mode:

Channel Low (2422MHz), Channel Mid (2437MHz) and Channel High (2452MHz) with 13.5Mbps data rate were chosen for full testing.

4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year and Loop Antenna is scheduled for calibration once three years.

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510252	12/07/2016
Thermostatic/Humidity Chamber	TAICHY	MHG-150LF	930619	10/07/2016
AC Power Source	EXTECH	6205	1140845	N.C.R
DC Power Supply	ABM	8301HD	D011531	N.C.R
Power Meter	Anritsu	ML2495A	1012009	07/07/2016
Power Sensor	Anritsu	MA2411A	0917072	07/07/2016
Spectrum Analyzer	ROHDE&SCHWARZ	FSV40	101073	07/19/2016

Wugu 966 Chamber A				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510268	01/24/2017
EMI Test Receiver	R&S	ESCI	100064	06/03/2016
Bilog Antenna	Sunol Sciences	JB3	A030105	08/05/2016
Horn Antenna	EMCO	3117	00055165	01/25/2017
Horn Antenna	EMCO	3116	26370	12/24/2016
Turn Table	CCS	CC-T-1F	N/A	N.C.R
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R
Pre-Amplifier	MITEQ	1652-3000	1490939	08/09/2016
Pre-Amplifier	EMC	EMC 012635	980151	06/04/2016
Pre-Amplifier	MITEQ	AMF-6F-260400-40-8P	985646	12/24/2016
Coaxial Cable	Huber+Suhner	102	29212/2	12/24/2016
Coaxial Cable	Huber+Suhner	102	29406/2	12/24/2016
Test S/W	EZ-EMC (CCS-3A1RE)			

Conducted Emission room # B				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCI	101073	09/08/2016
LISN	R&S	ENV216	101054	06/06/2016
LISN	SCHWARZBECK	NSLK 8127	8127-541	11/22/2016
Capacitive Voltage Probe	FCC	F-CVP-1	100185	03/12/2016
Test S/W	CCS-3A1-CE			

4.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
Powerline Conducted Emission	+/- 1.2575
3M Semi Anechoic Chamber / 30M~200M	+/- 4.0138
3M Semi Anechoic Chamber / 200M~1000M	+/- 3.9483
3M Semi Anechoic Chamber / 1G~8G	+/- 2.5975
3M Semi Anechoic Chamber / 8G~18G	+/- 2.6112
3M Semi Anechoic Chamber / 18G~26G	+/- 2.7389
3M Semi Anechoic Chamber / 26G~40G	+/- 2.9683

Remark: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

- No.199, Chungshen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.
Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029
- No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.)
Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045
- No.81-1, Lane 210, Bade 2nd Rd., Lujhu Township, Taoyuan County 33841, TAIWAN, R.O.C.
Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10: 2013 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, ridged waveguide, horn and/or Loop. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.




Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 LABORATORY ACCREDITATIONS AND LISTING

The test facilities used to perform radiated and conducted emissions tests are accredited by American Association for Laboratory Accreditation Program for the specific scope accreditation under Lab Code: 0824-01 to perform Electromagnetic Interference tests according to FCC Part 15 and CISPR 22 requirements. In addition, the test facilities are listed with Industry Canada, Certification and Engineering Bureau, IC 2324G-1 for 3M Semi Anechoic Chamber A, 2324G-2 for 3M Semi Anechoic Chamber B.

5.4 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3M Semi Anechoic Chamber (FCC MRA: TW1039) to perform FCC Part 15 measurements	 FCC MRA: TW1039
Taiwan	TAF	LP0002, RTTE01, FCC Method-47 CFR Part 15 Subpart C, D, E, RSS-210, RSS-310 IDA TS SRD, AS/NZS 4268, AS/NZS 4771, TS 12.1 & 12.2, ETSI EN 300 440-1, ETSI EN 300 440-2, ETSI EN 300 328, ETSI EN 300 220-1, ETSI EN 300 220-2, ETSI EN 301 893, ETSI EN 301 489-1/3/7/17 FCC OET Bulletin 65 + Supplement C, EN 50360, EN 50361, EN 50371, RSS 102, EN 50383, EN 50385, EN 50392, IEC 62209, CNS 14958-1, CNS 14959 FCC Method -47 CFR Part 15 Subpart B IEC / EN 61000-3-2, IEC / EN 61000-3-3, IEC / EN 61000-4-2/3/4/5/6/8/11	
Canada	Industry Canada	3M Semi Anechoic Chamber (IC 2324G-1 / IC 2324G-2) to perform	 IC 2324G-1 IC 2324G-2

** No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.*

6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

No	Equipment	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1	Notebook PC	IBM	7663 (T61)	L3E9812	N/A	N/A	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core
2	Smart Sync™ 5" Internet Viewable Camera	N/A	05010TX	N/A	N/A	N/A	N/A

Remark:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.


7. FCC PART 15.247 REQUIREMENTS

7.1 6DB BANDWIDTH

LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 100 kHz, VBW= 300kHz, Span = 50 MHz, Sweep = auto.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

TEST RESULTS

No non-compliance noted

Test Data

IEEE 802.11b mode

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	10.0720	>500	PASS
Mid	2437	10.0720		PASS
High	2462	10.0290		PASS

IEEE 802.11g mode

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.3680	>500	PASS
Mid	2437	16.5850		PASS
High	2462	16.5850		PASS

IEEE 802.11n HT 20 MHz mode

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	17.8000	>500	PASS
Mid	2437	17.8000		PASS
High	2462	17.8000		PASS


IEEE 802.11n HT 40 MHz mode

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	2422	36.580	>500	PASS
Mid	2437	36.580		PASS
High	2452	36.580		PASS


Test Plot

IEEE 802.11b mode


6dB Bandwidth (CH Low)

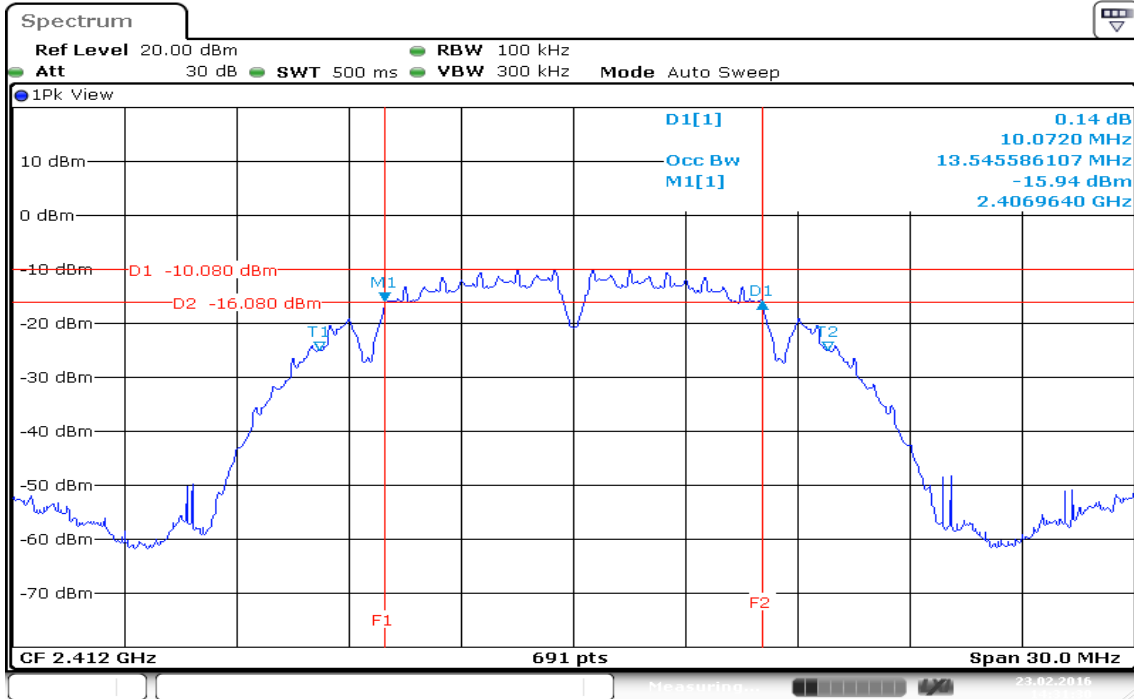

6dB Bandwidth (CH Mid)

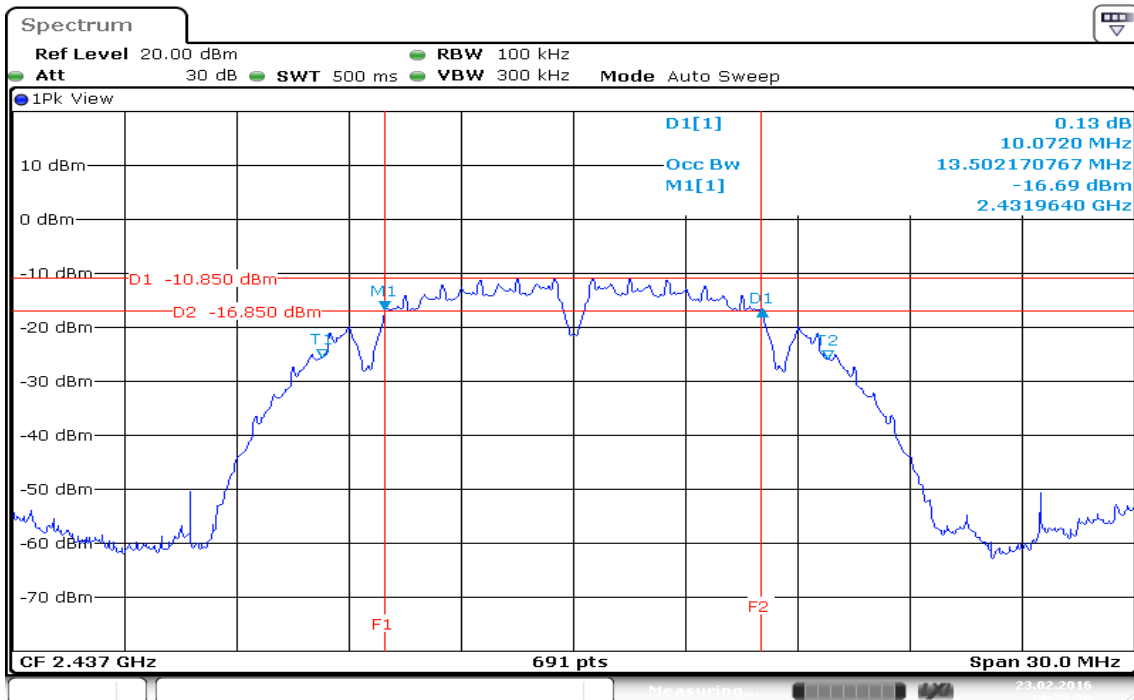


6dB Bandwidth (CH High)

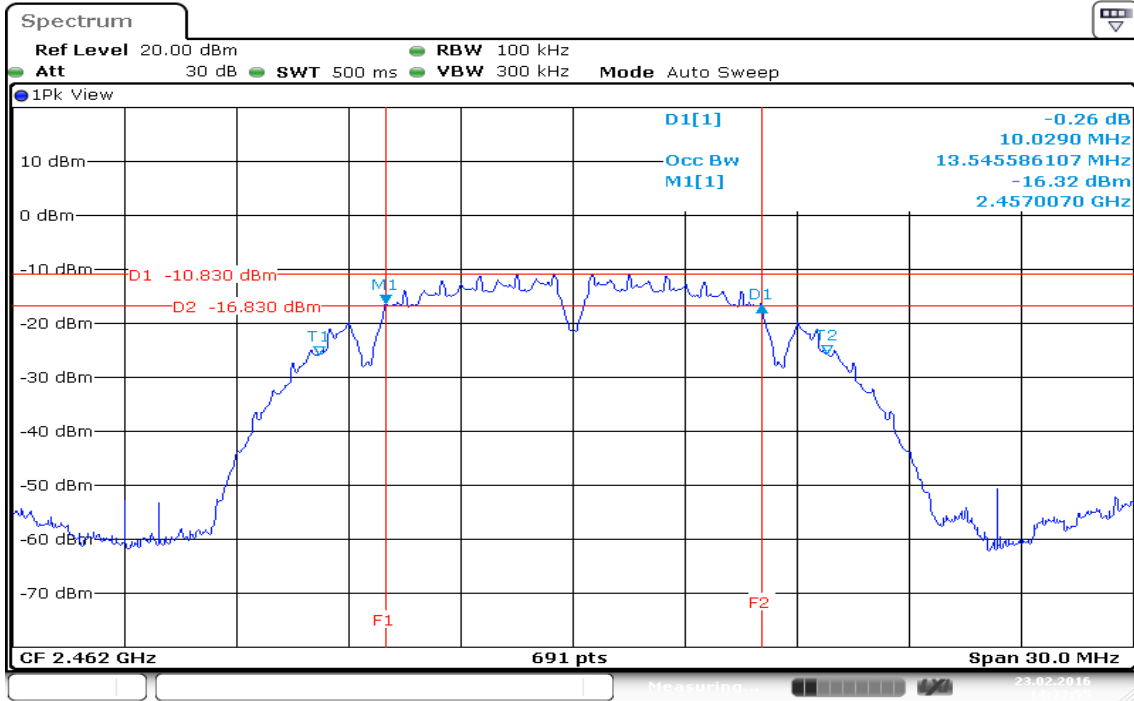


Date: 23.FEB.2016 14:33:55

IEEE 802.11g mode


6dB Bandwidth (CH Low)

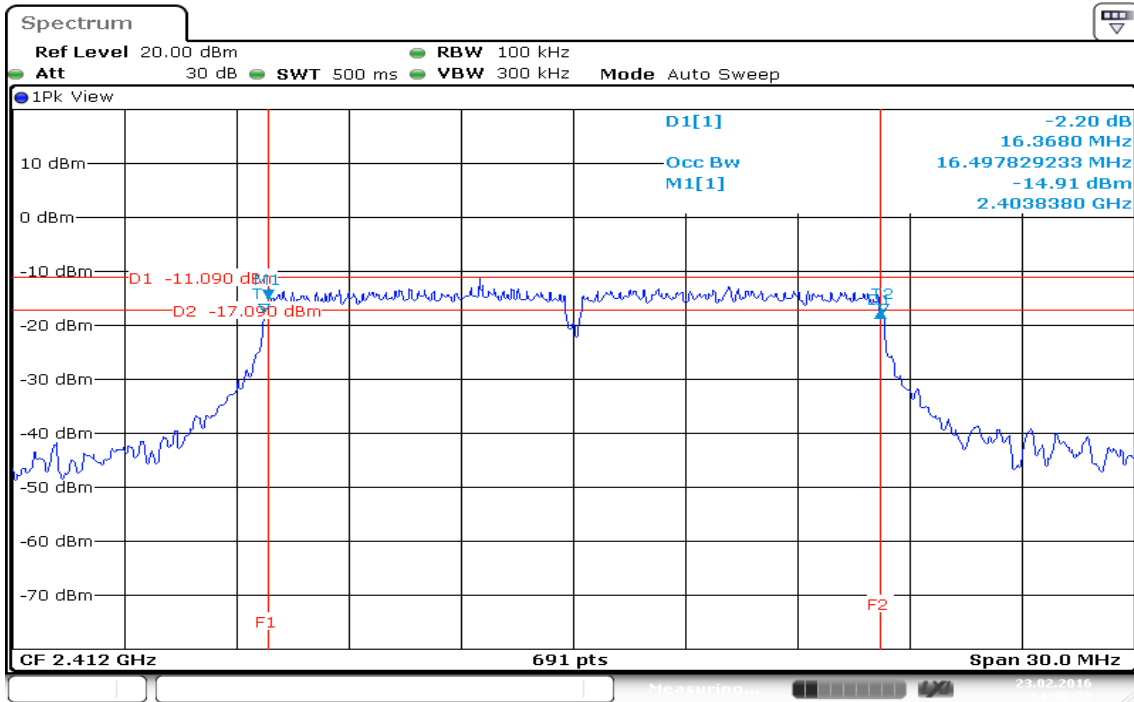

6dB Bandwidth (CH Mid)

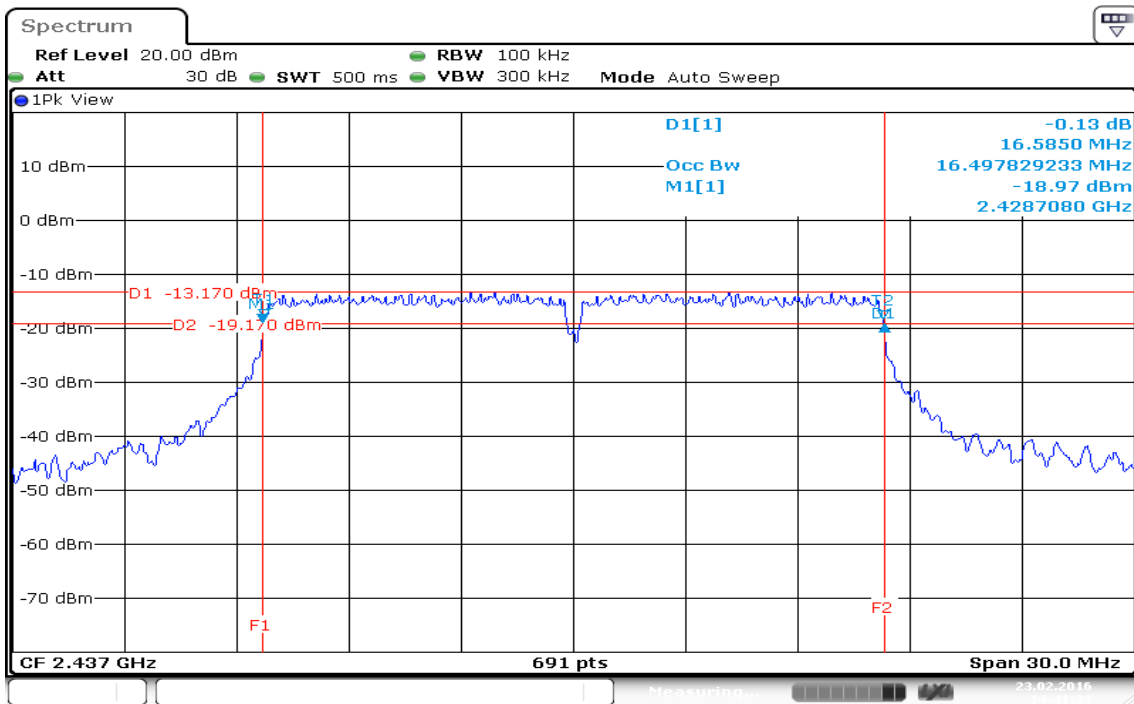


6dB Bandwidth (CH High)

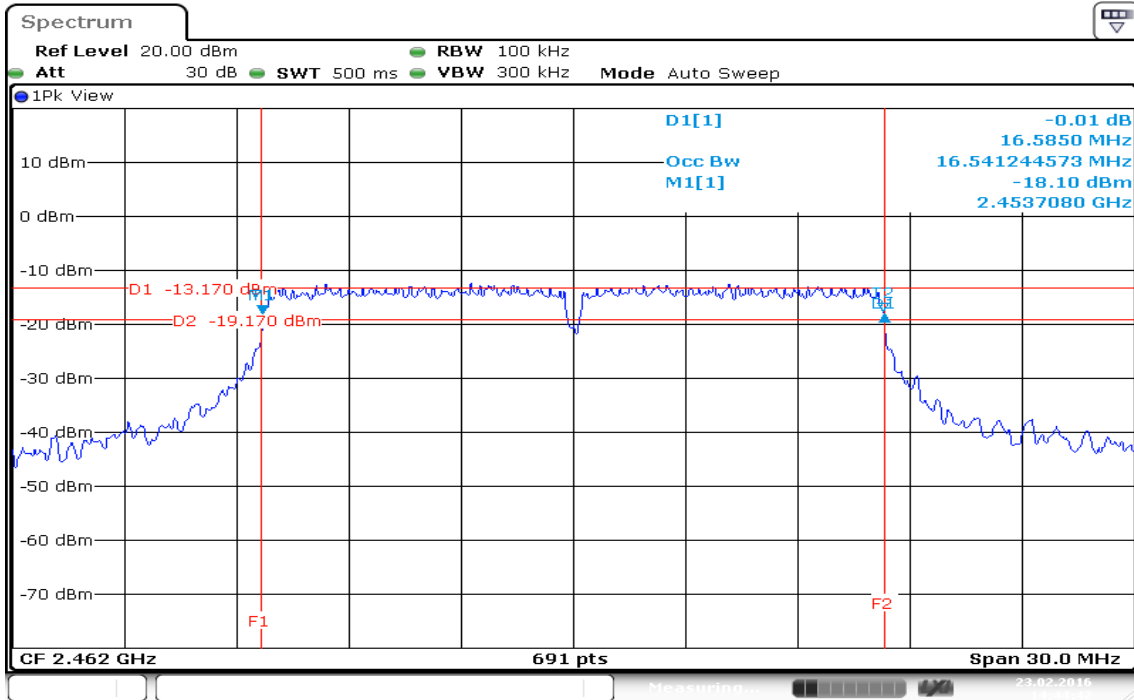


IEEE 802.11n HT 20 MHz mode


6dB Bandwidth (CH Low)

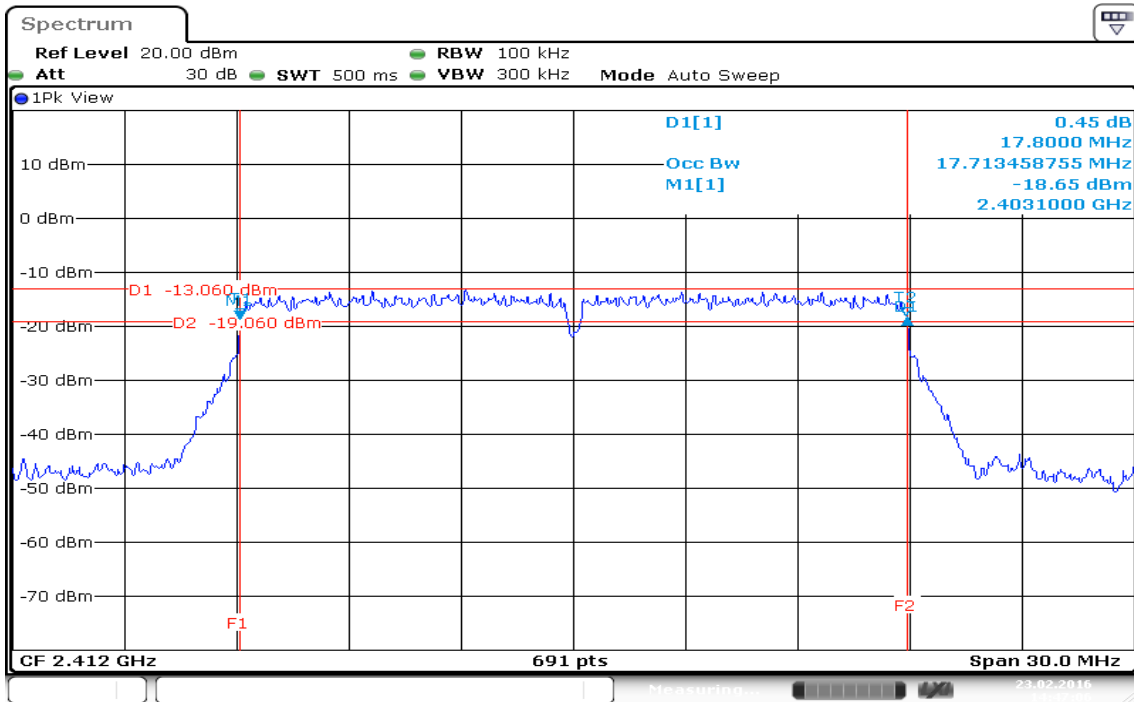

6dB Bandwidth (CH Mid)

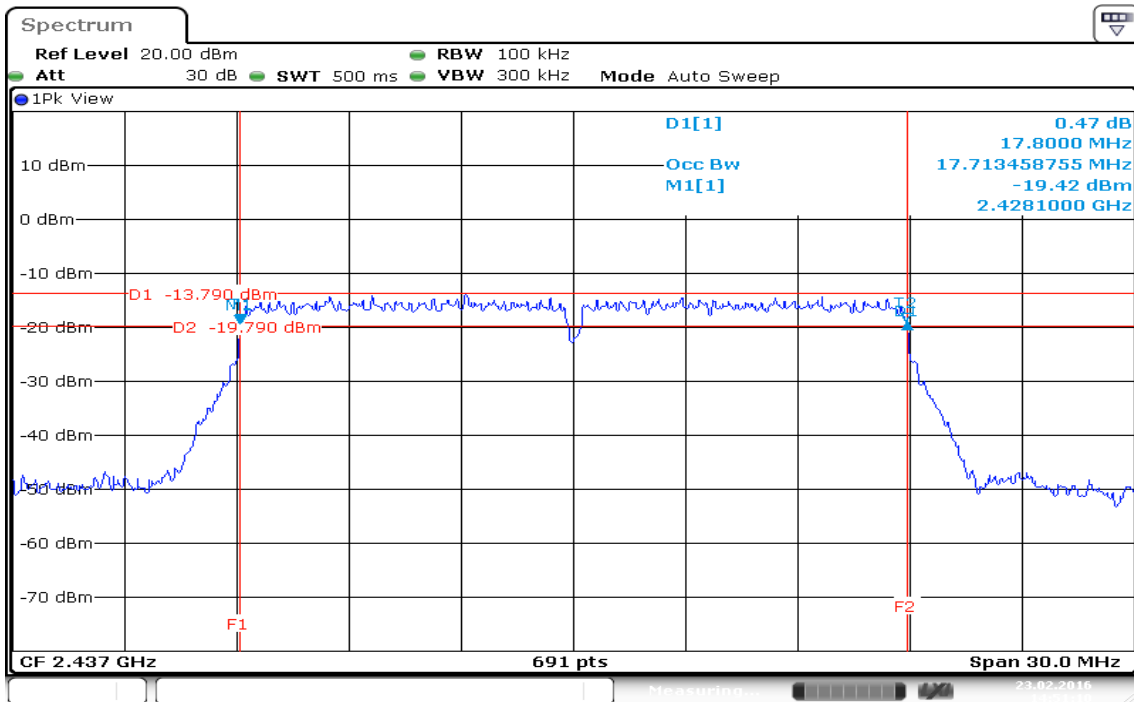


6dB Bandwidth (CH High)

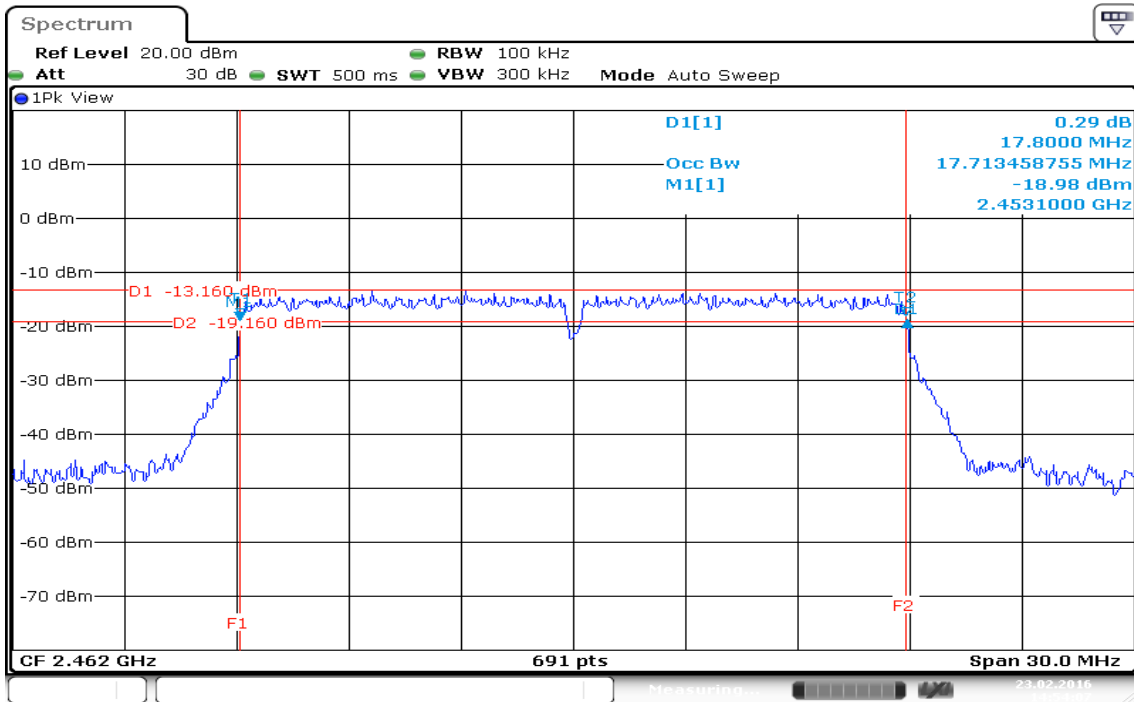


Date: 23.FEB.2016 14:54:07


IEEE 802.11n HT 40 MHz mode
6dB Bandwidth (CH Low)

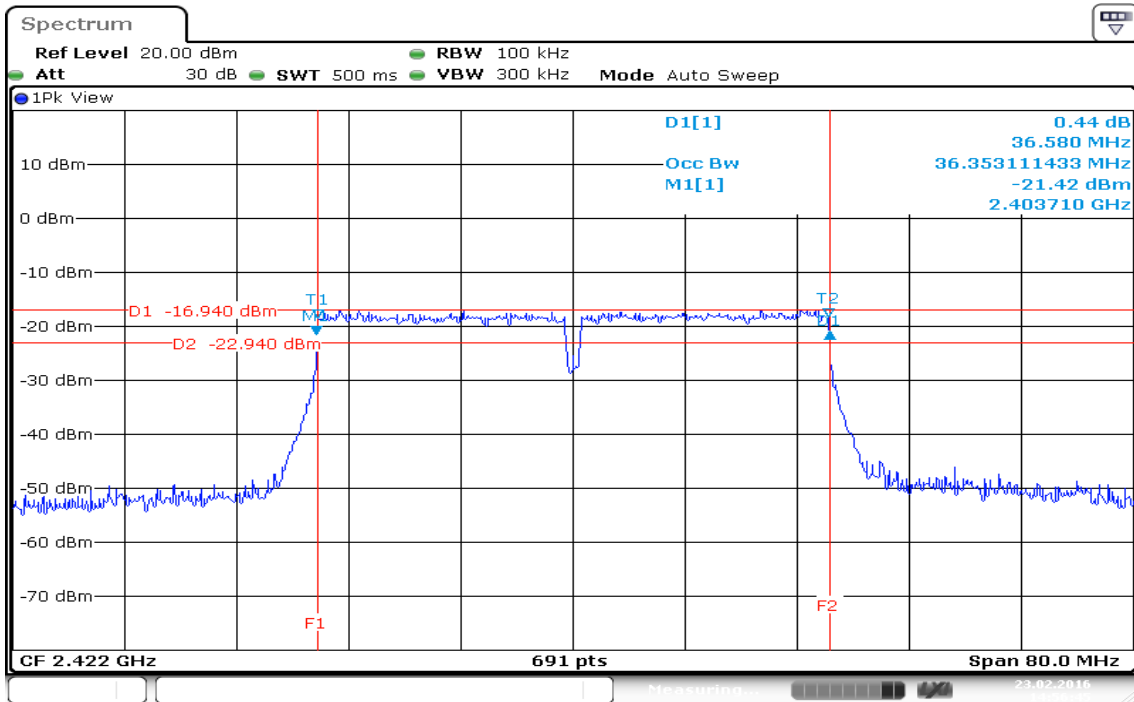

6dB Bandwidth (CH Mid)

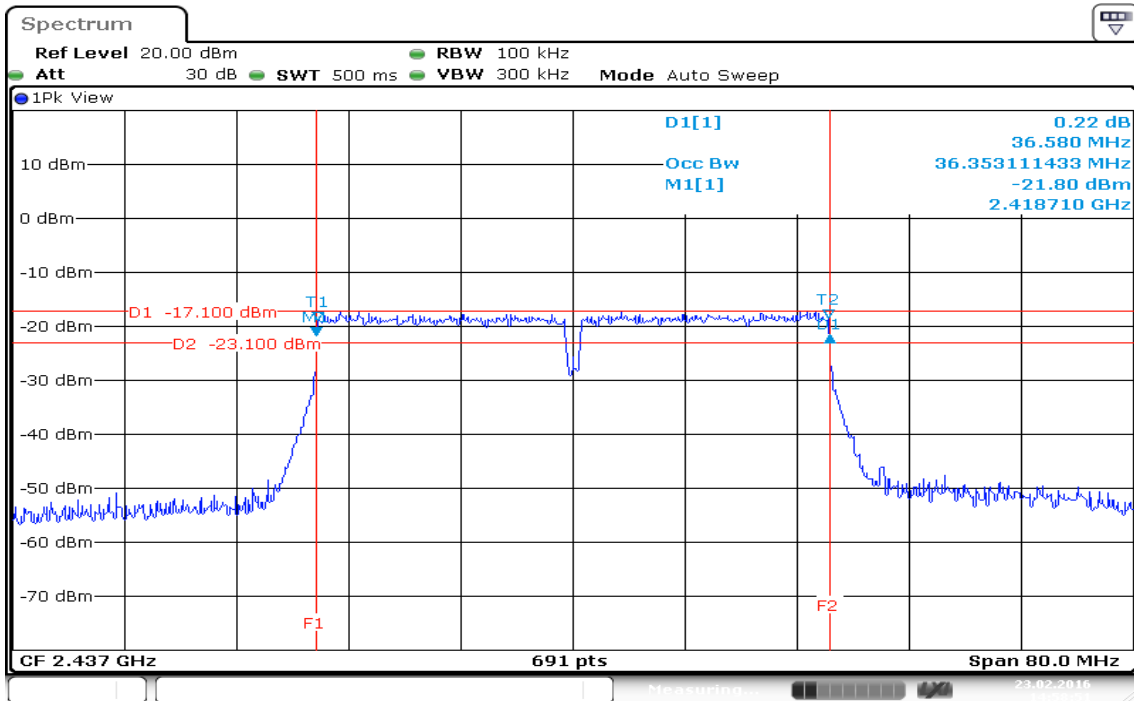

6dB Bandwidth (CH High)

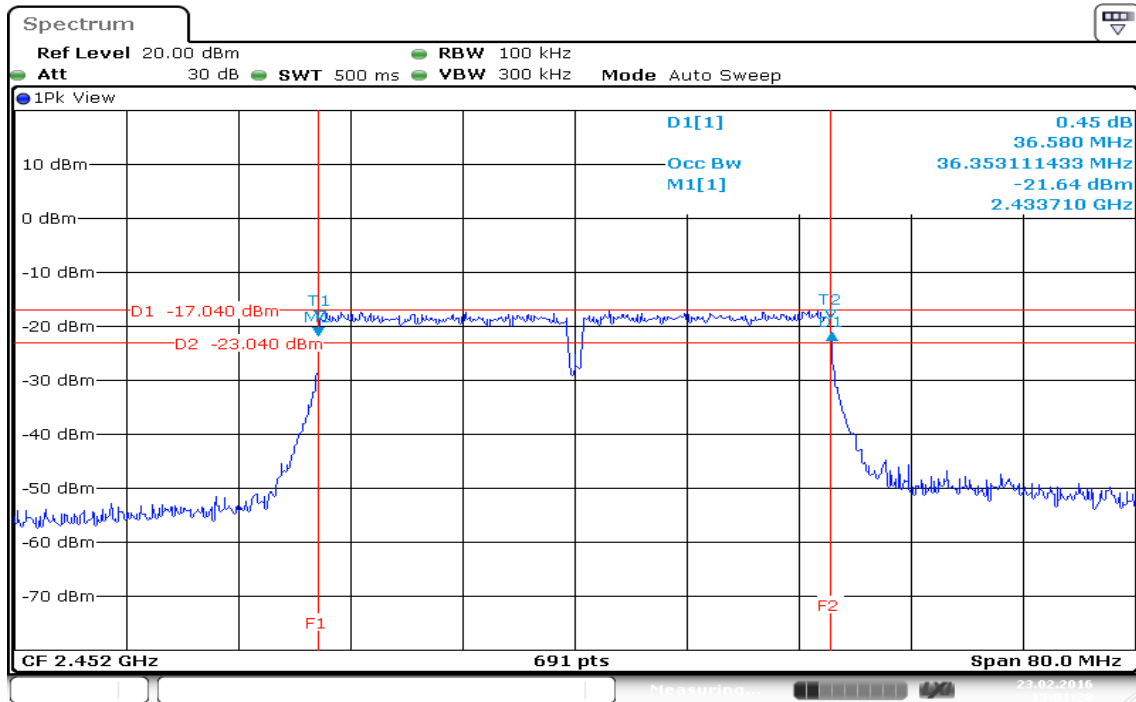

Date: 23.FEB.2016 15:01:29


7.2 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Configuration

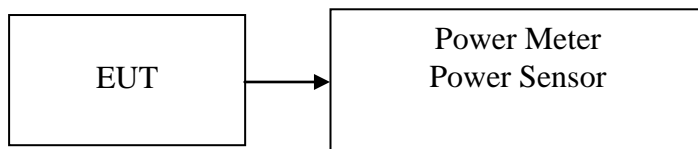

TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.

TEST RESULTS

No non-compliance noted

Test Data

IEEE 802.11b mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (dBm)	Result
Low	2412	*4.43	0.0028	30	PASS
Mid	2437	3.74	0.0024		PASS
High	2462	4.30	0.0027		PASS

IEEE 802.11g mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (dBm)	Result
Low	2412	13.34	0.0216	30	PASS
Mid	2437	13.01	0.0200		PASS
High	2462	*13.51	0.0224		PASS

IEEE 802.11n HT 20 MHz mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (dBm)	Result
Low	2412	11.18	0.0131	30	PASS
Mid	2437	11.94	0.0156		PASS
High	2462	*12.07	0.0161		PASS

IEEE 802.11n HT 40 MHz mode


Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (dBm)	Result
Low	2422	10.88	0.0122	30	PASS
Mid	2437	10.73	0.0118		PASS
High	2452	*10.91	0.0123		PASS

7.3 AVERAGE POWER

LIMIT

None; for reporting purposes only.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.

TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	1.88	0.0015
Mid	2437	1.15	0.0013
High	2462	1.67	0.0015

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	3.24	0.0021
Mid	2437	2.48	0.0018
High	2462	3.61	0.0023

Test mode: IEEE 802.11n HT 20 MHz mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	1.90	0.0015
Mid	2437	2.15	0.0016
High	2462	2.35	0.0017

Test mode: IEEE 802.11n HT 40 MHz mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2422	1.40	0.0014
Mid	2437	1.14	0.0013
High	2452	1.30	0.0013


7.4 BAND EDGES MEASUREMENT

LIMIT


According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration

For Radiated

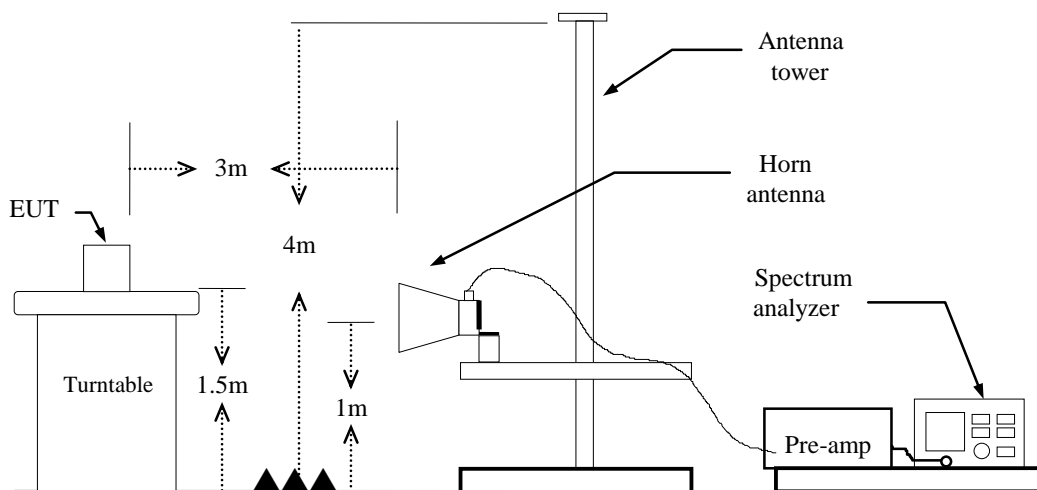

For Conducted



TEST PROCEDURE

For Radiated

1. The EUT is placed on a turntable, which is 1.5m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=1MHz / VBW=3MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz,
if duty cycle $\geq 98\%$, VBW=10Hz.
if duty cycle $< 98\%$ VBW=1/T.
IEEE 802.11b mode: $\geq 98\%$, VBW=10Hz
IEEE 802.11g mode: $\geq 98\%$, VBW=10Hz
IEEE 802.11n HT 20 MHz mode: $\geq 98\%$, VBW=10Hz
IEEE 802.11n HT 40 MHz mode: $\geq 98\%$, VBW=10Hz
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.
6. Result = Spectrum Reading + cable loss(spectrum to Amp) - Amp Gain + Cable loss(Amp to receive Ant)+ Receive Ant

For Conducted

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.


The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

TEST RESULTS

Refer to attach spectrum analyzer data chart.


Band Edges (IEEE 802.11b mode / CH Low)

Detector mode: Peak

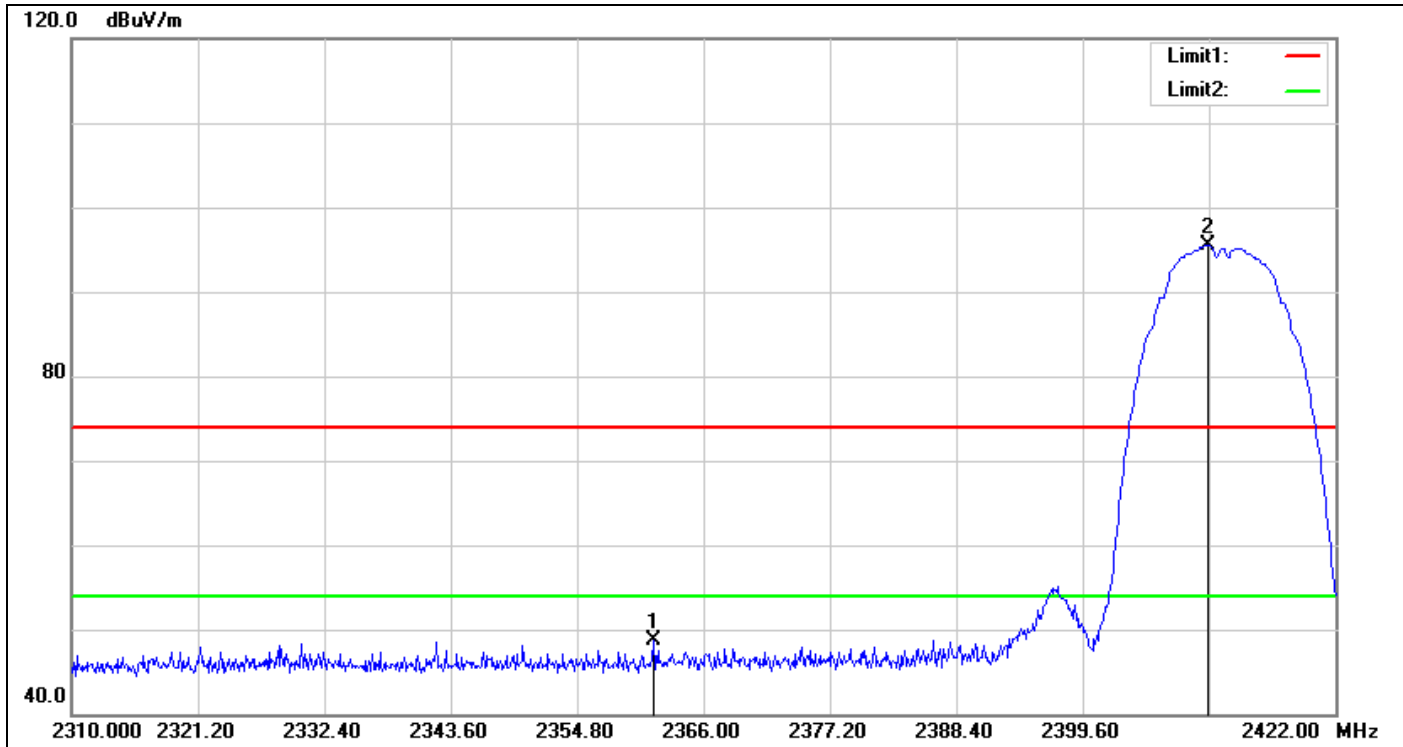

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2361.632	51.56	-2.78	48.78	74.00	-25.22	peak
2	2410.688	97.91	-2.43	95.48	74.00	21.48	peak


Detector mode: Average

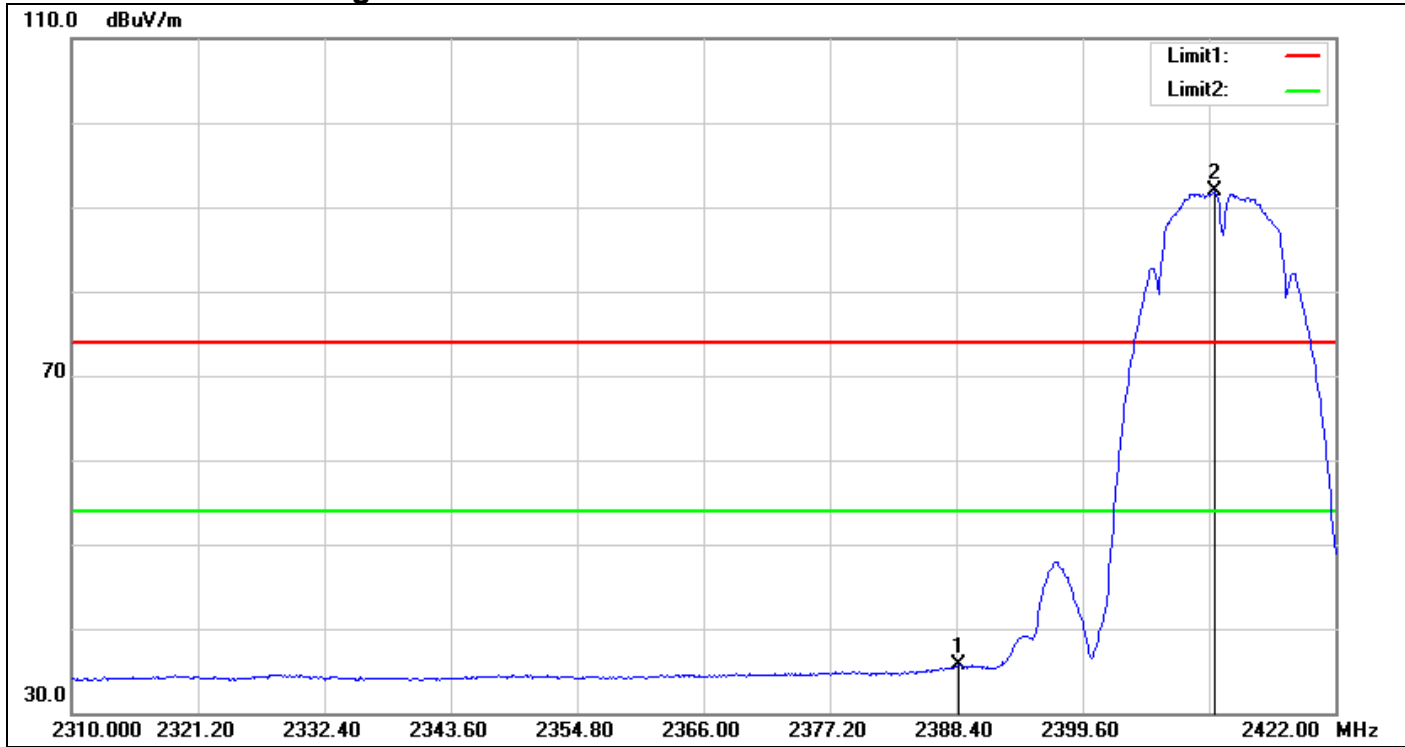

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.624	38.18	-2.50	35.68	54.00	-18.32	AVG
2	2411.248	94.25	-2.42	91.83	54.00	37.83	AVG


Band Edges (IEEE 802.11b mode / CH Mid)

Detector mode: Peak

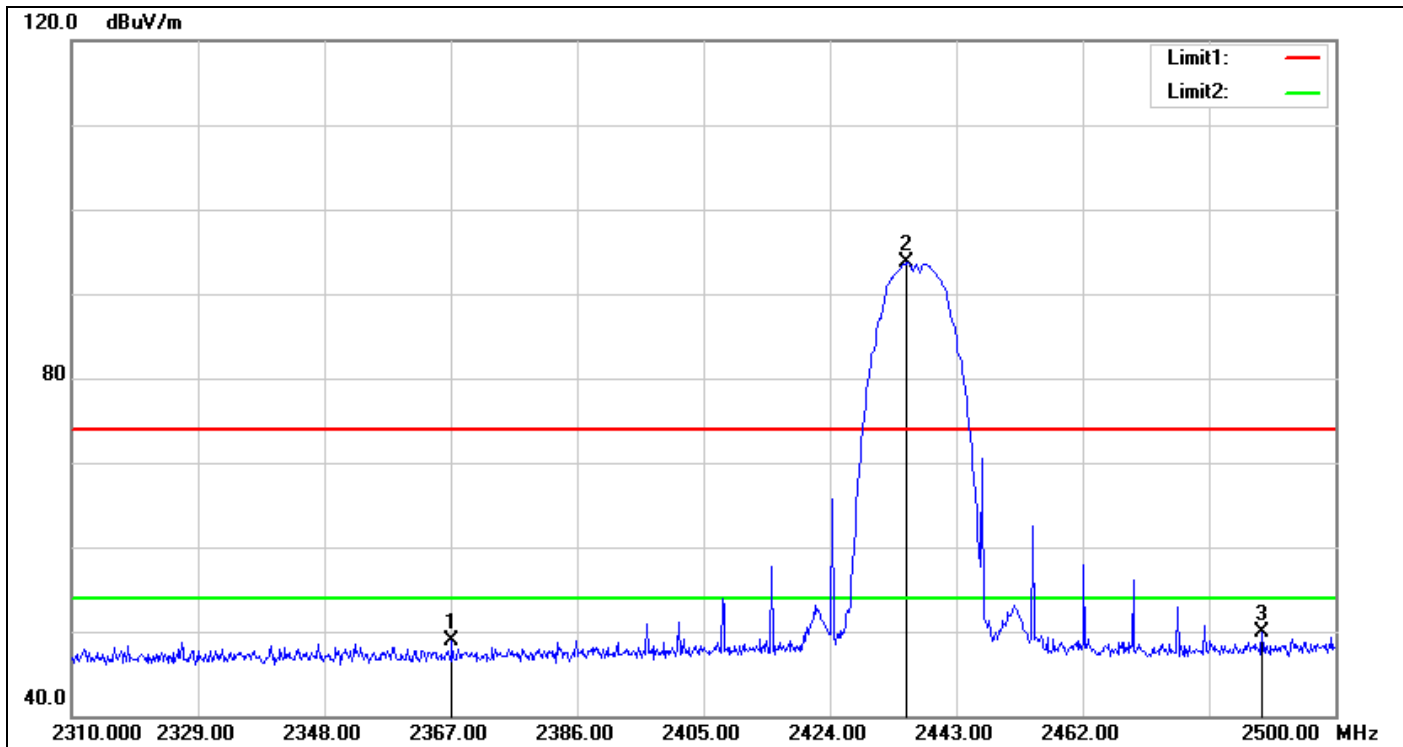

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2367.190	51.67	-2.69	48.98	74.00	-25.02	peak
2	2435.590	95.89	-2.24	93.65	74.00	19.65	peak
3	2488.980	51.90	-1.94	49.96	74.00	-24.04	peak


Detector mode: Average

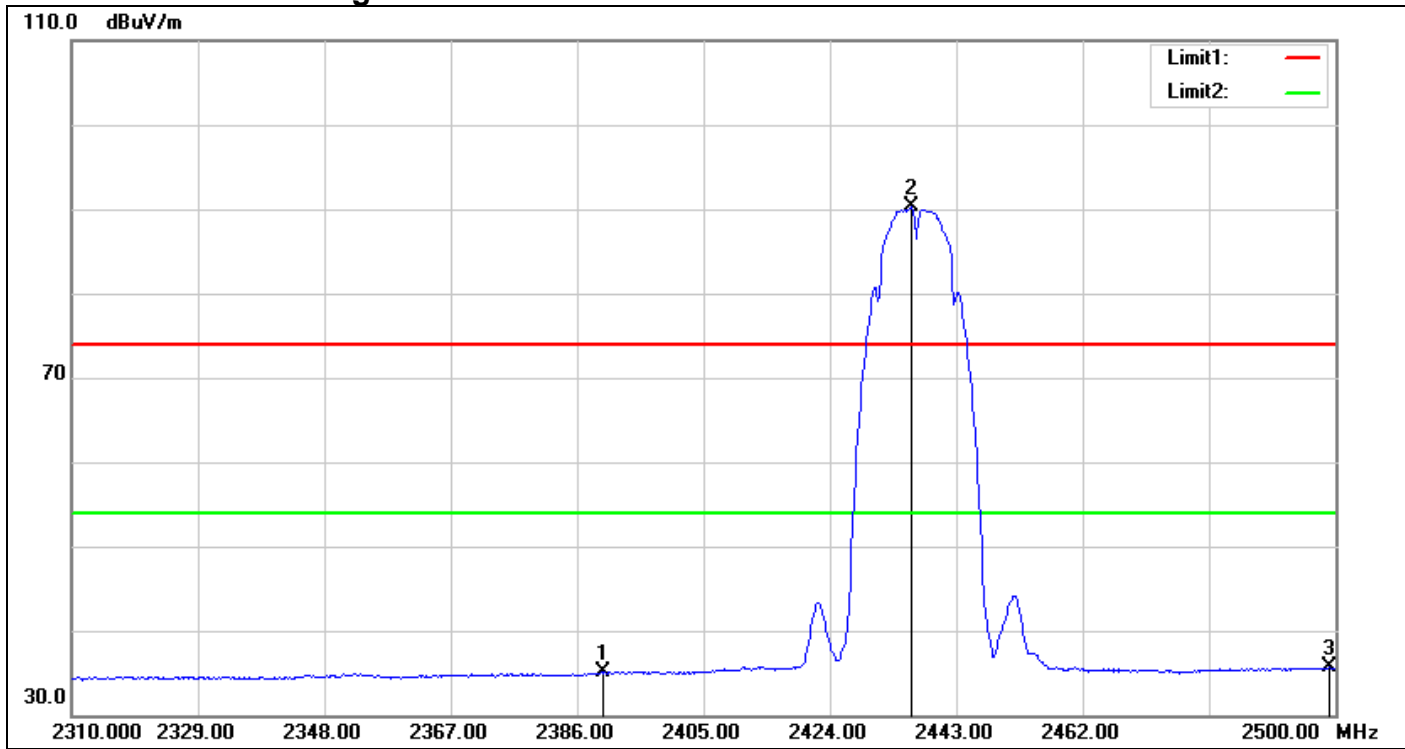

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	37.51	-2.49	35.02	54.00	-18.98	AVG
2	2436.160	92.55	-2.24	90.31	54.00	36.31	AVG
3	2499.050	37.48	-1.87	35.61	54.00	-18.39	AVG


Band Edges (IEEE 802.11b mode / CH High)

Detector mode: Peak

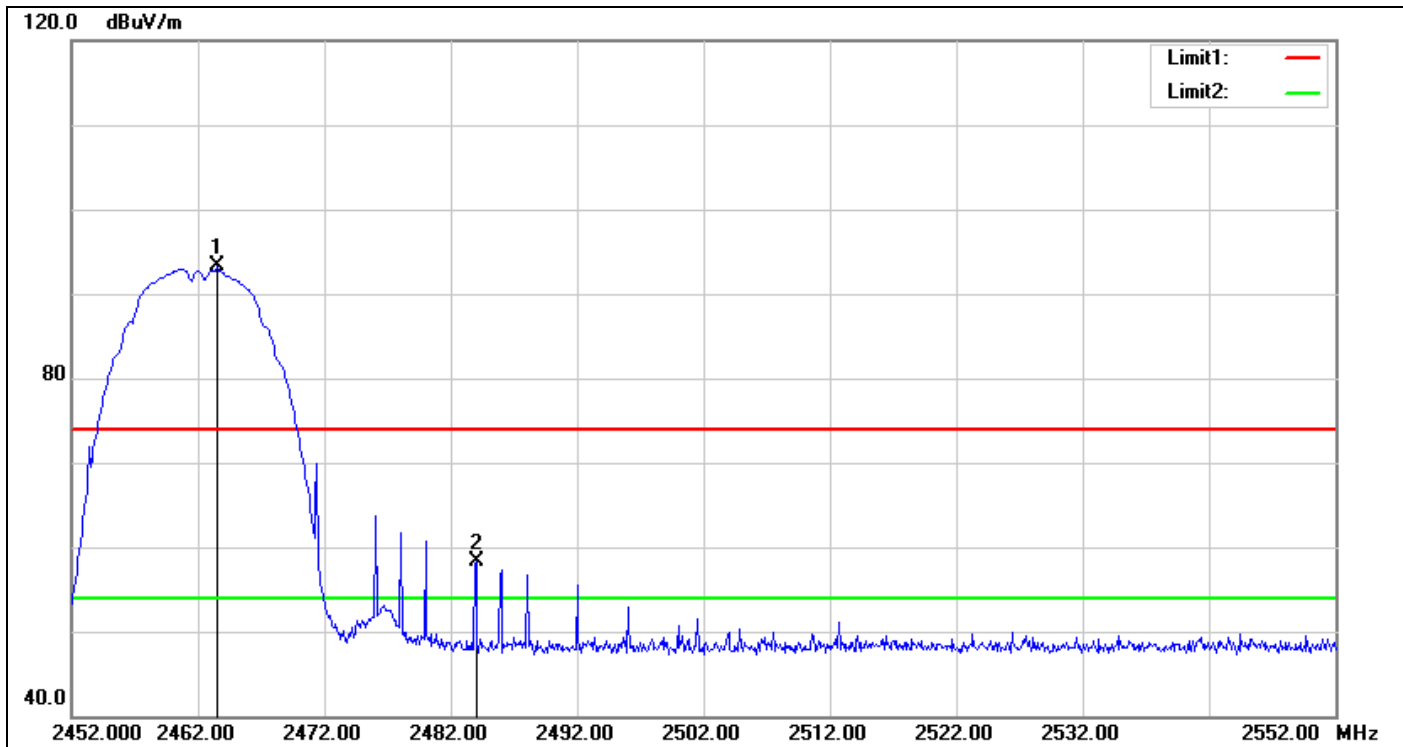

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.500	95.34	-2.09	93.25	74.00	19.25	peak
2	2484.000	60.19	-1.99	58.20	74.00	-15.80	peak


Detector mode: Average

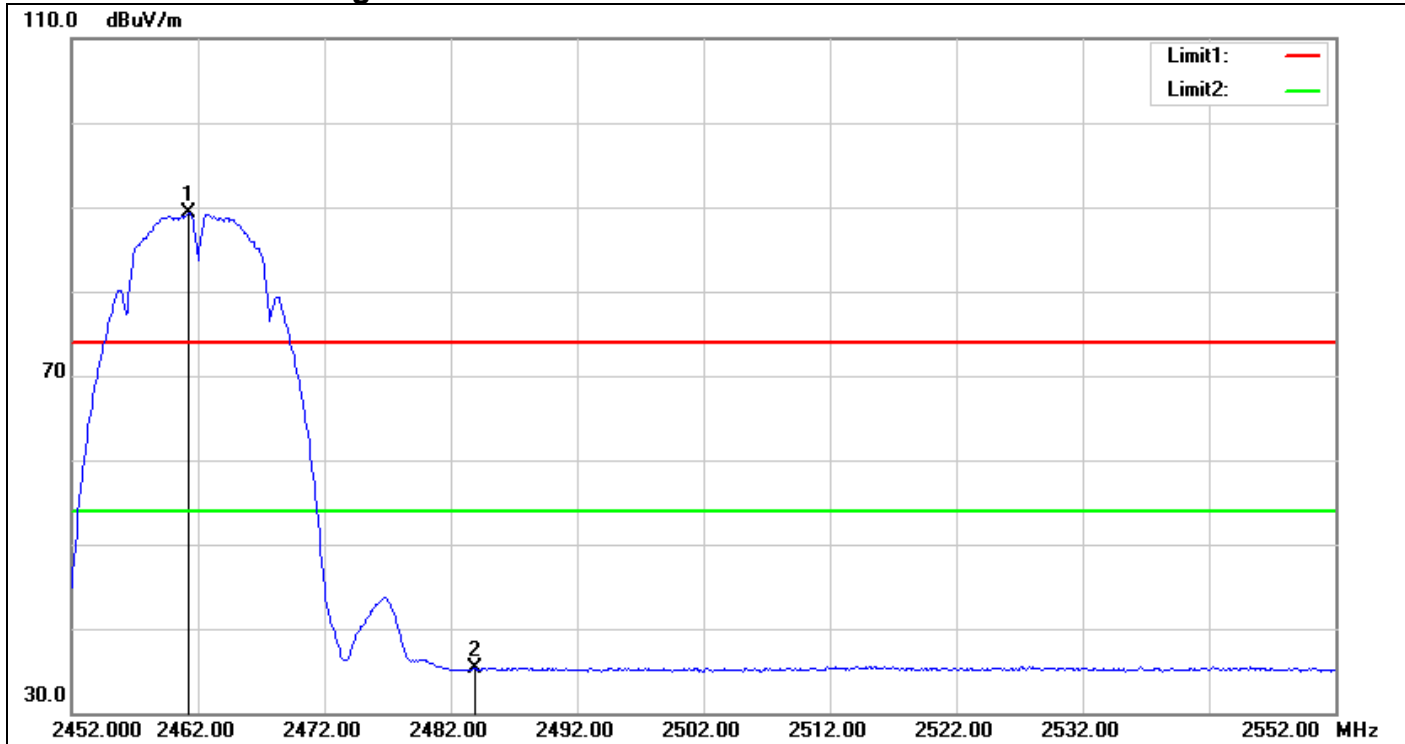

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2461.300	91.40	-2.10	89.30	54.00	35.30	AVG
2	2483.900	37.38	-1.99	35.39	54.00	-18.61	AVG


Band Edges (IEEE 802.11g mode / CH Low)

Detector mode: Peak

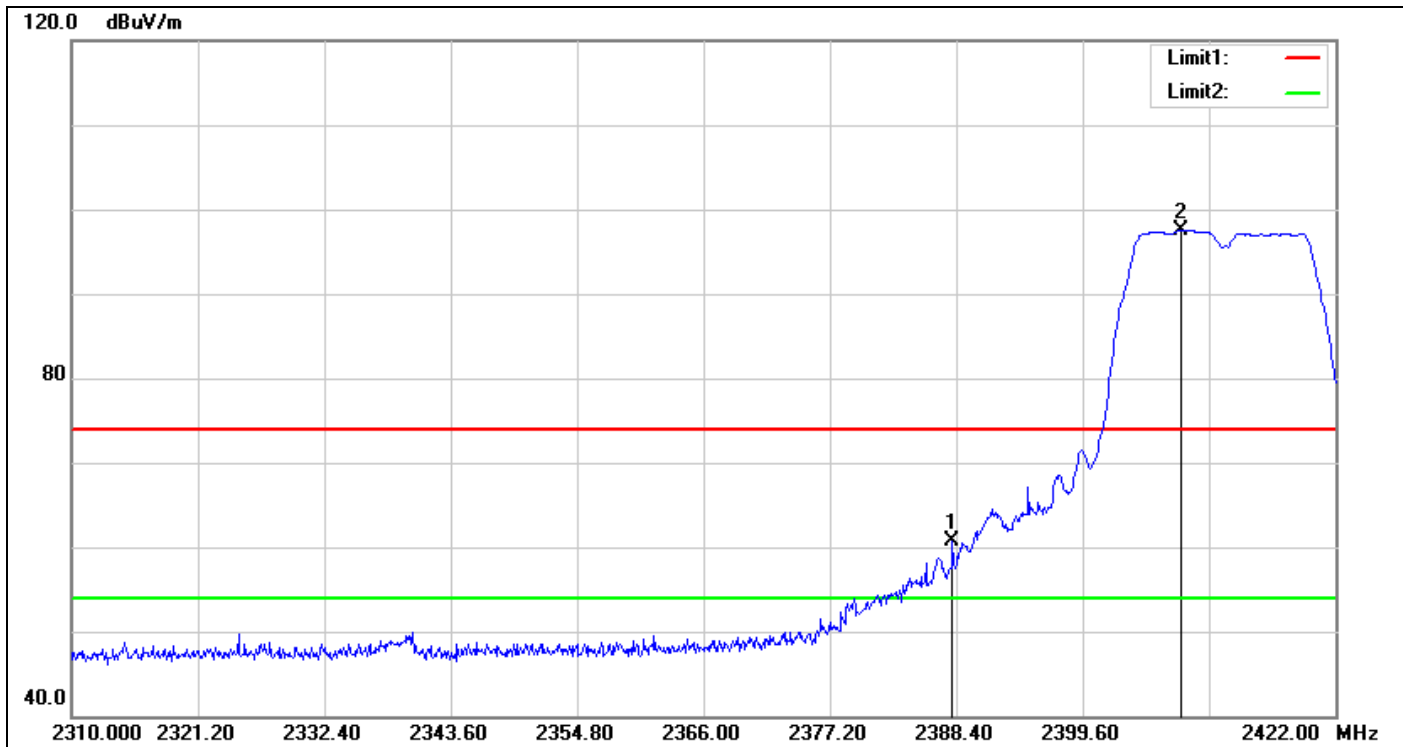

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.064	63.22	-2.51	60.71	74.00	-13.29	peak
2	2408.336	99.97	-2.43	97.54	74.00	23.54	peak


Detector mode: Average

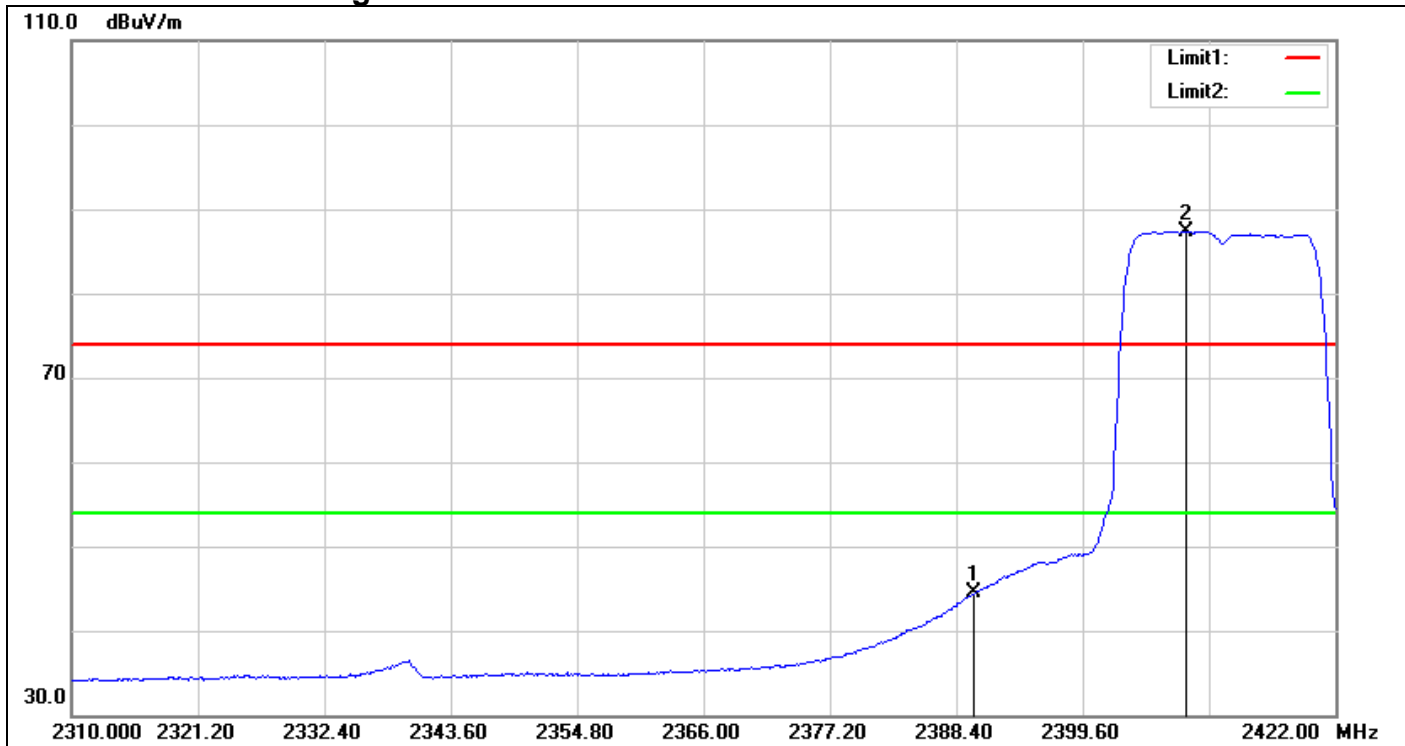

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	46.96	-2.49	44.47	54.00	-9.53	AVG
2	2408.784	89.80	-2.43	87.37	54.00	33.37	AVG


Band Edges (IEEE 802.11g mode / CH Mid)

Detector mode: Peak

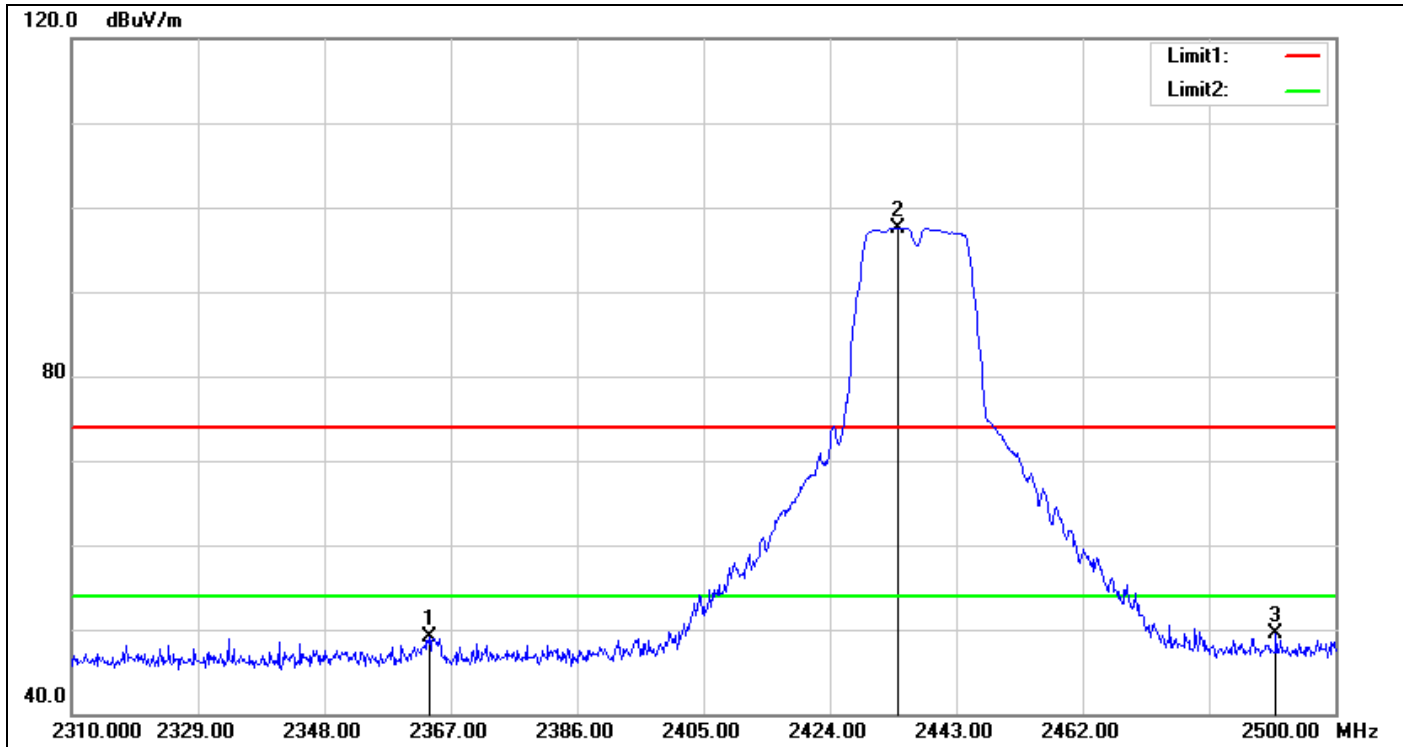

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2363.770	51.91	-2.75	49.16	74.00	-24.84	peak
2	2434.260	99.83	-2.25	97.58	74.00	23.58	peak
3	2491.070	51.41	-1.92	49.49	74.00	-24.51	peak


Detector mode: Average

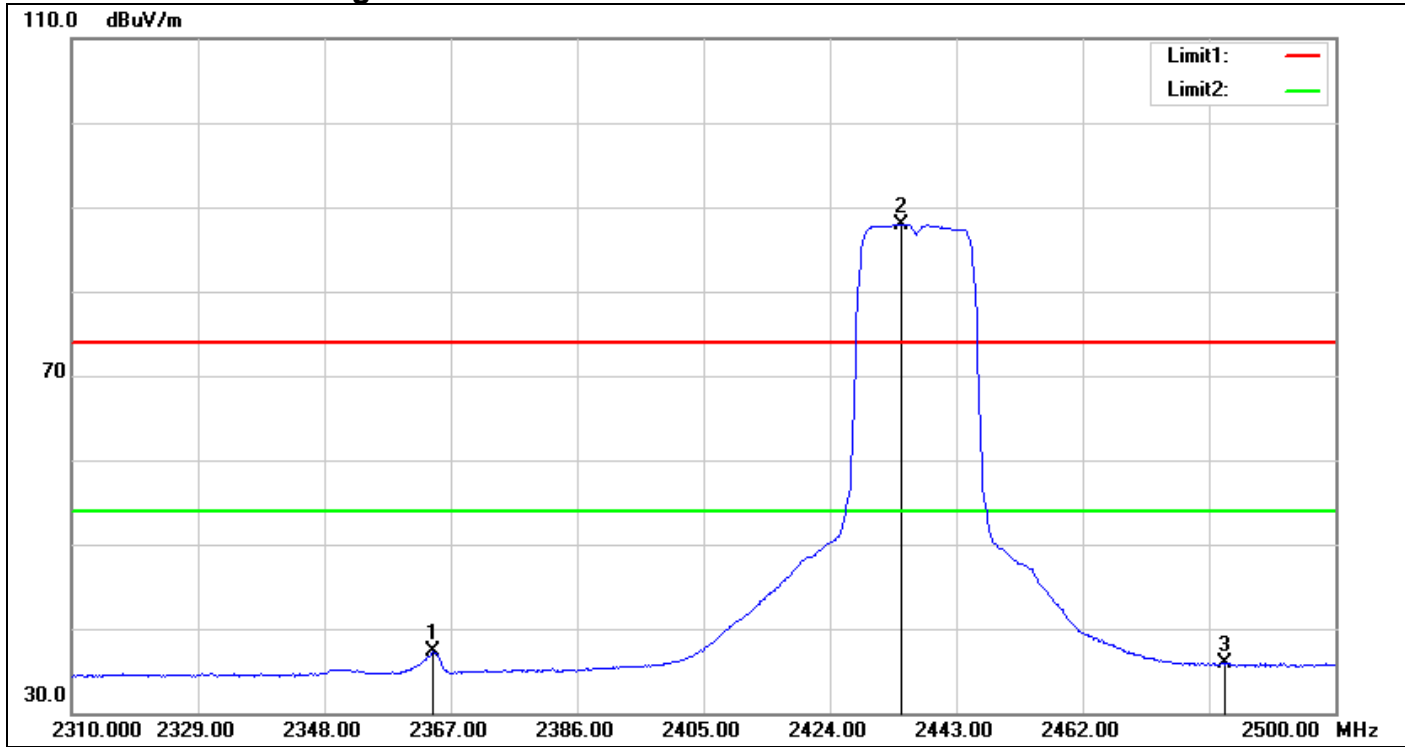

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2364.340	39.95	-2.74	37.21	54.00	-16.79	AVG
2	2434.830	90.19	-2.25	87.94	54.00	33.94	AVG
3	2483.500	37.85	-1.99	35.86	54.00	-18.14	AVG


Band Edges (IEEE 802.11g mode / CH High)

Detector mode: Peak

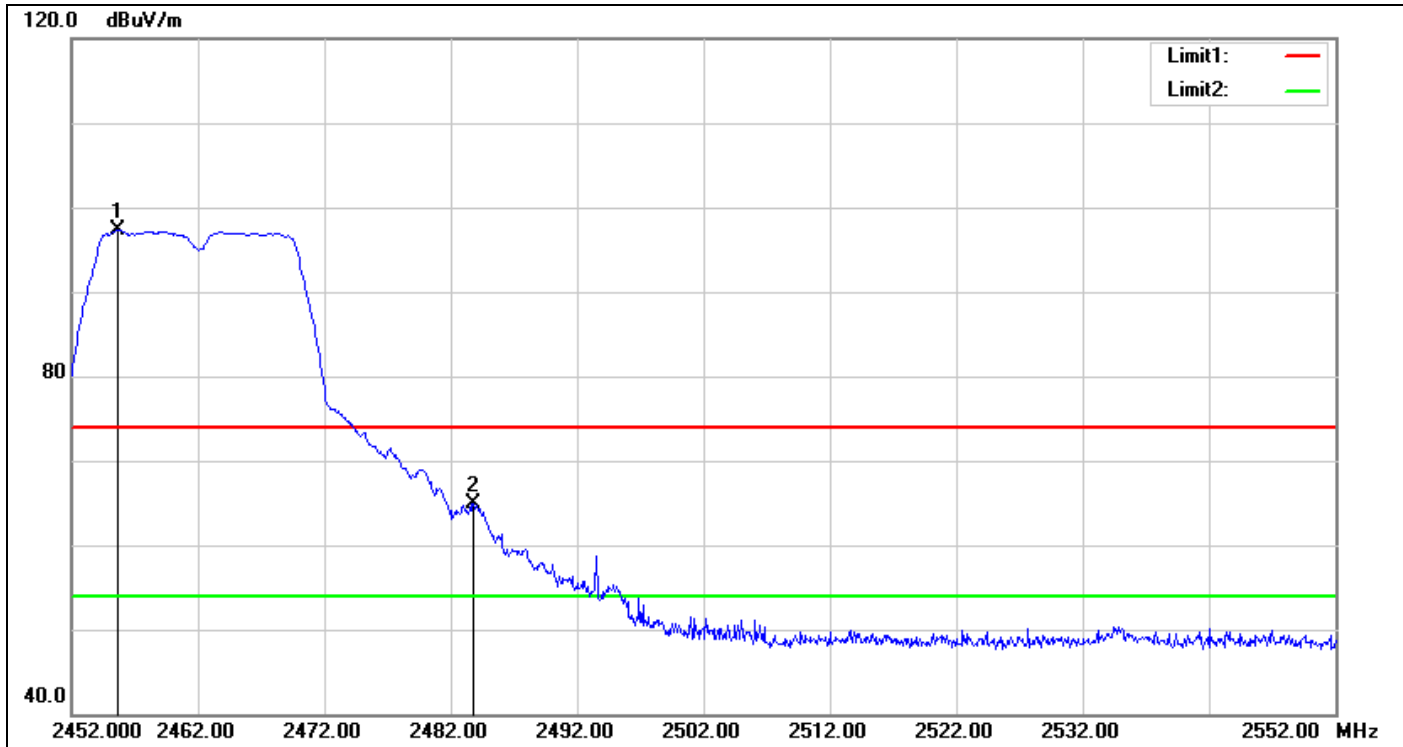

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2455.700	99.34	-2.12	97.22	74.00	23.22	peak
2	2483.800	66.89	-1.99	64.90	74.00	-9.10	peak


Detector mode: Average

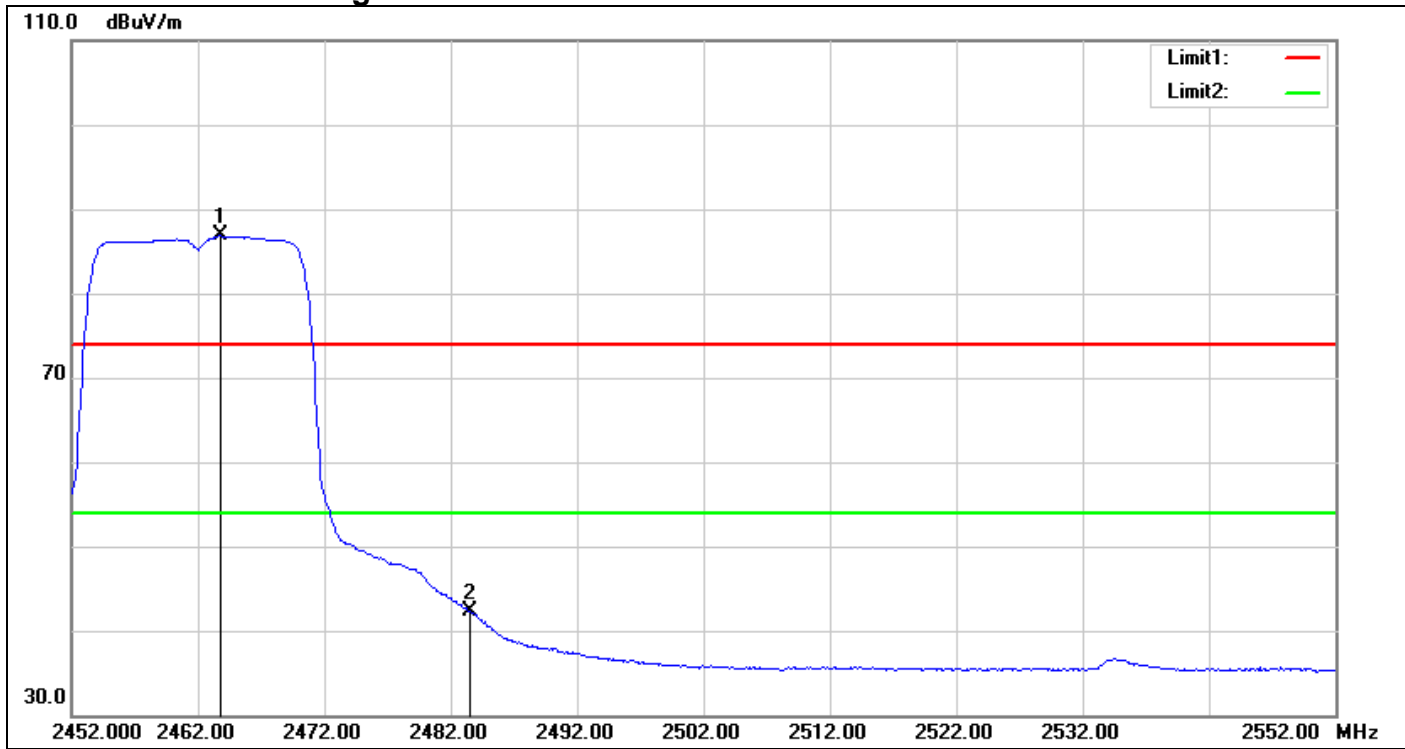

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.800	88.95	-2.09	86.86	54.00	32.86	AVG
2	2483.500	44.26	-1.99	42.27	54.00	-11.73	AVG


Band Edges (IEEE 802.11n HT 20 MHz mode / CH Low)

Detector mode: Peak

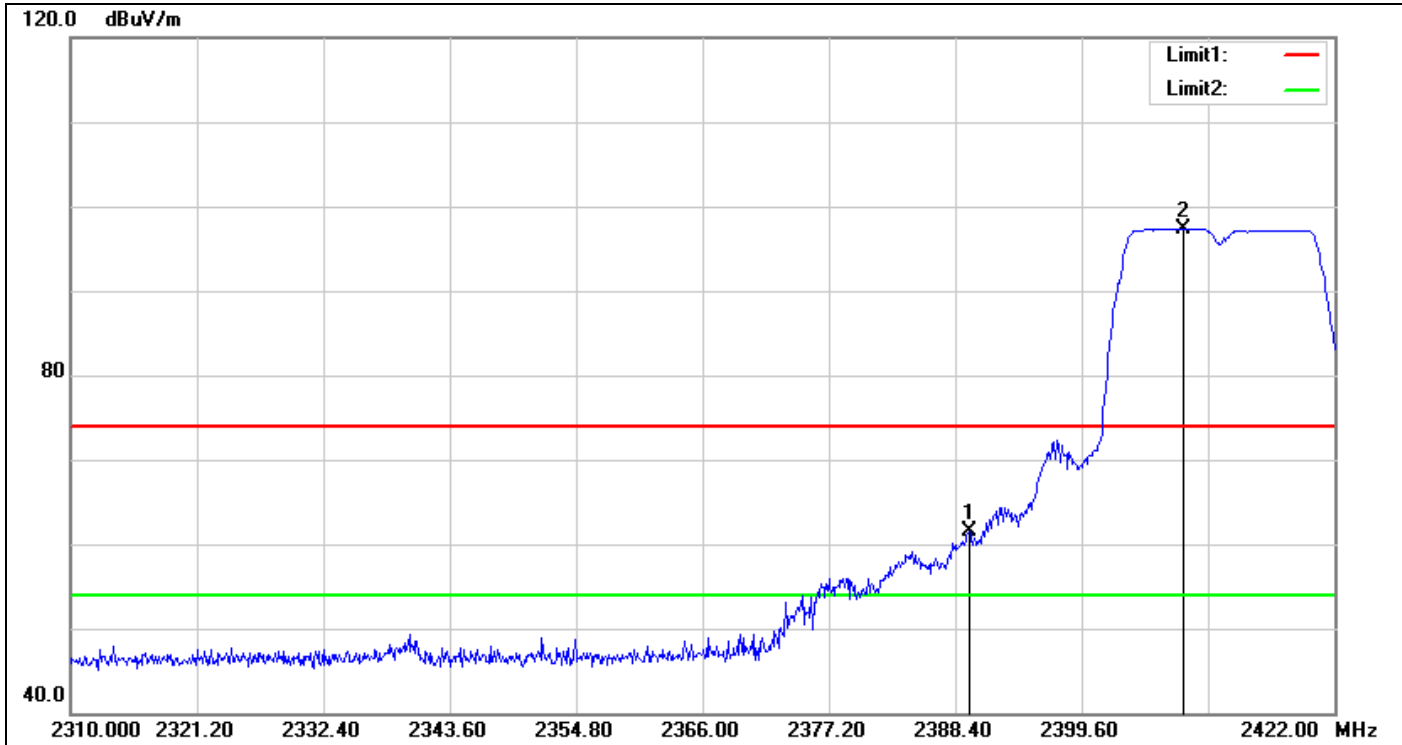

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.632	63.93	-2.49	61.44	74.00	-12.56	peak
2	2408.560	99.82	-2.43	97.39	74.00	23.39	peak


Detector mode: Average

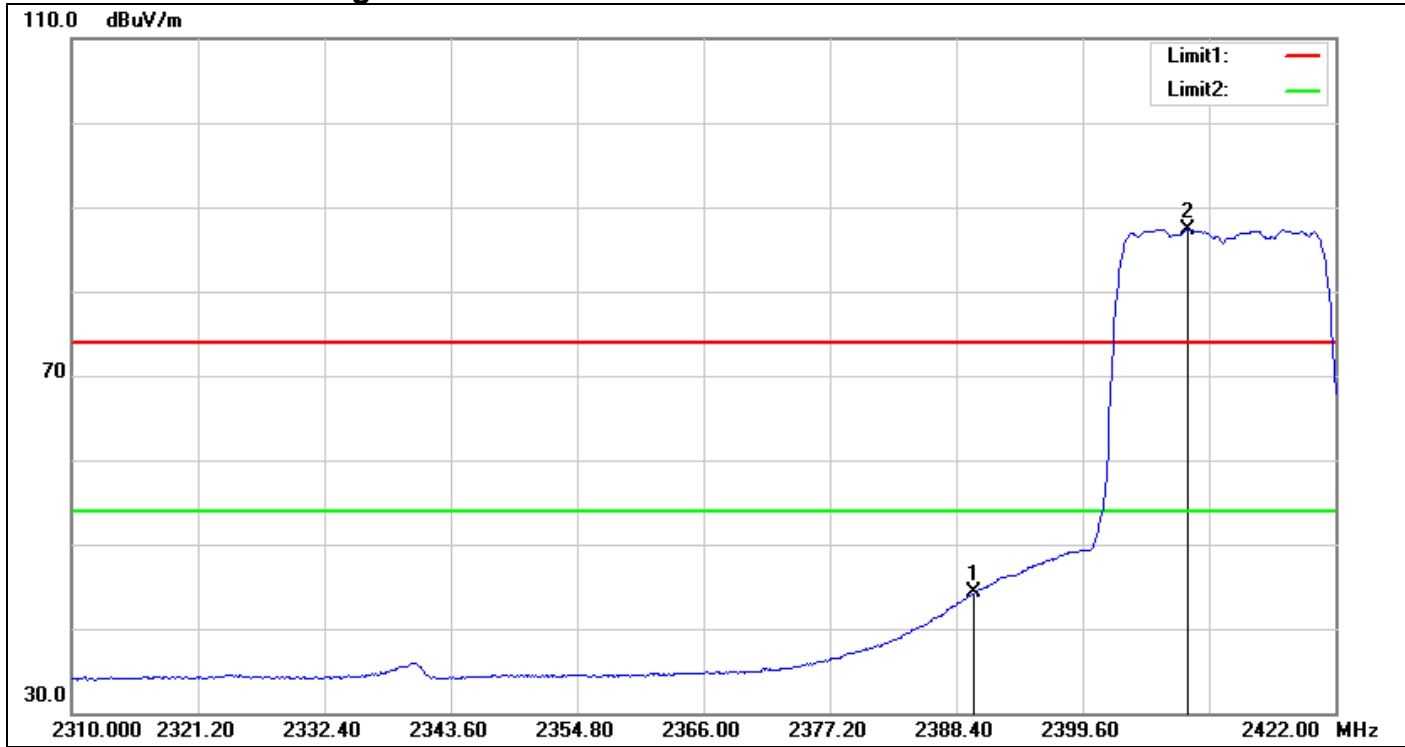

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	46.77	-2.49	44.28	54.00	-9.72	AVG
2	2408.896	89.81	-2.43	87.38	54.00	33.38	AVG


Band Edges (IEEE 802.11n HT 20 MHz mode / CH Mid)

Detector mode: Peak

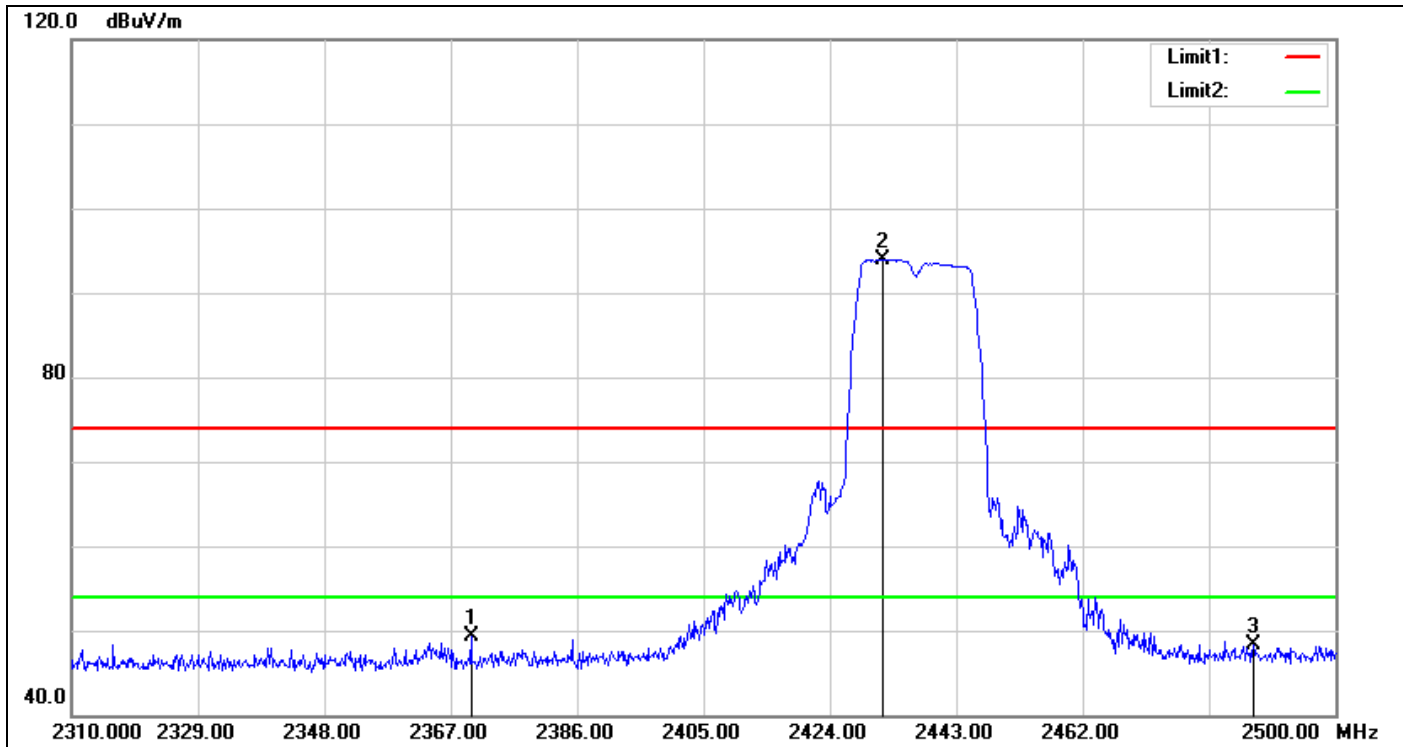

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2370.040	51.88	-2.65	49.23	74.00	-24.77	peak
2	2431.980	96.16	-2.27	93.89	74.00	19.89	peak
3	2487.650	50.22	-1.95	48.27	74.00	-25.73	peak


Detector mode: Average

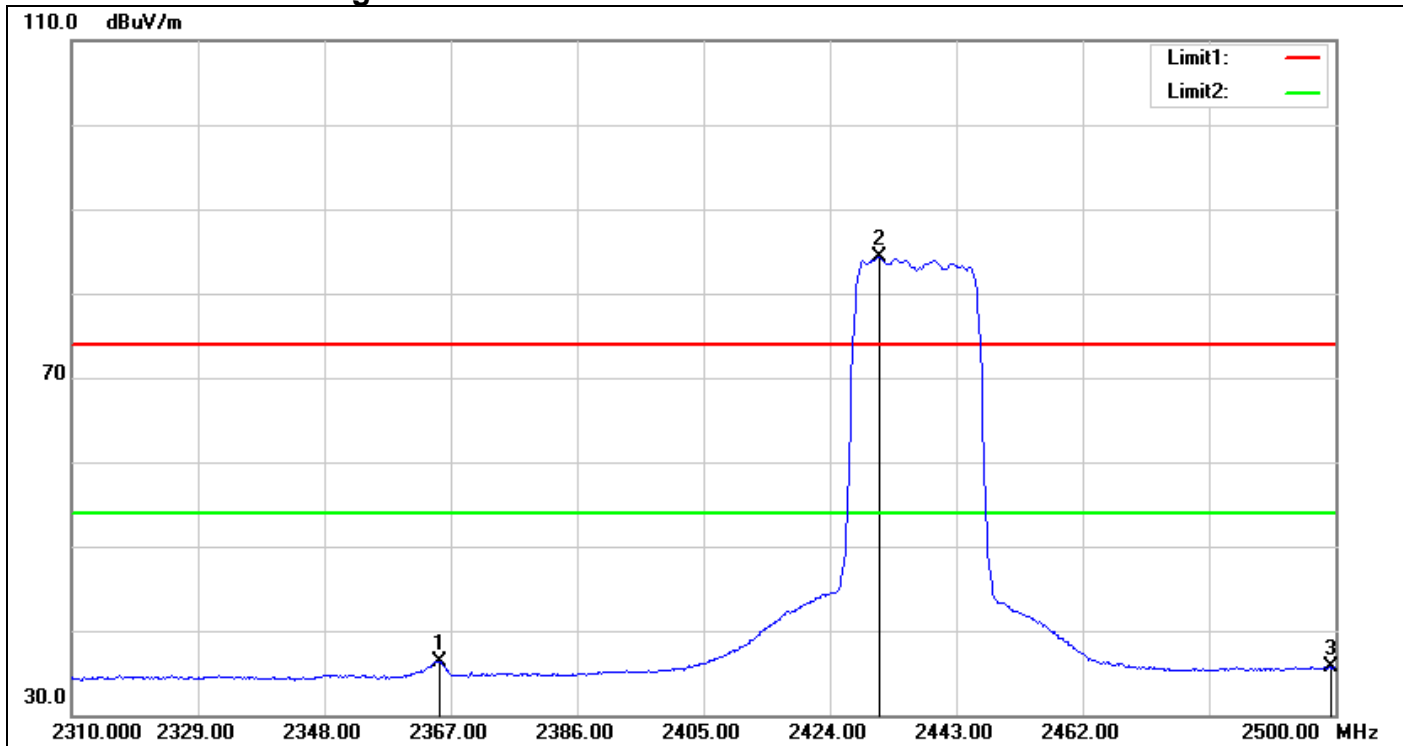

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2365.290	39.10	-2.73	36.37	54.00	-17.63	AVG
2	2431.410	86.49	-2.27	84.22	54.00	30.22	AVG
3	2499.240	37.55	-1.87	35.68	54.00	-18.32	AVG


Band Edges (IEEE 802.11n HT 20 MHz mode / CH High)

Detector mode: Peak

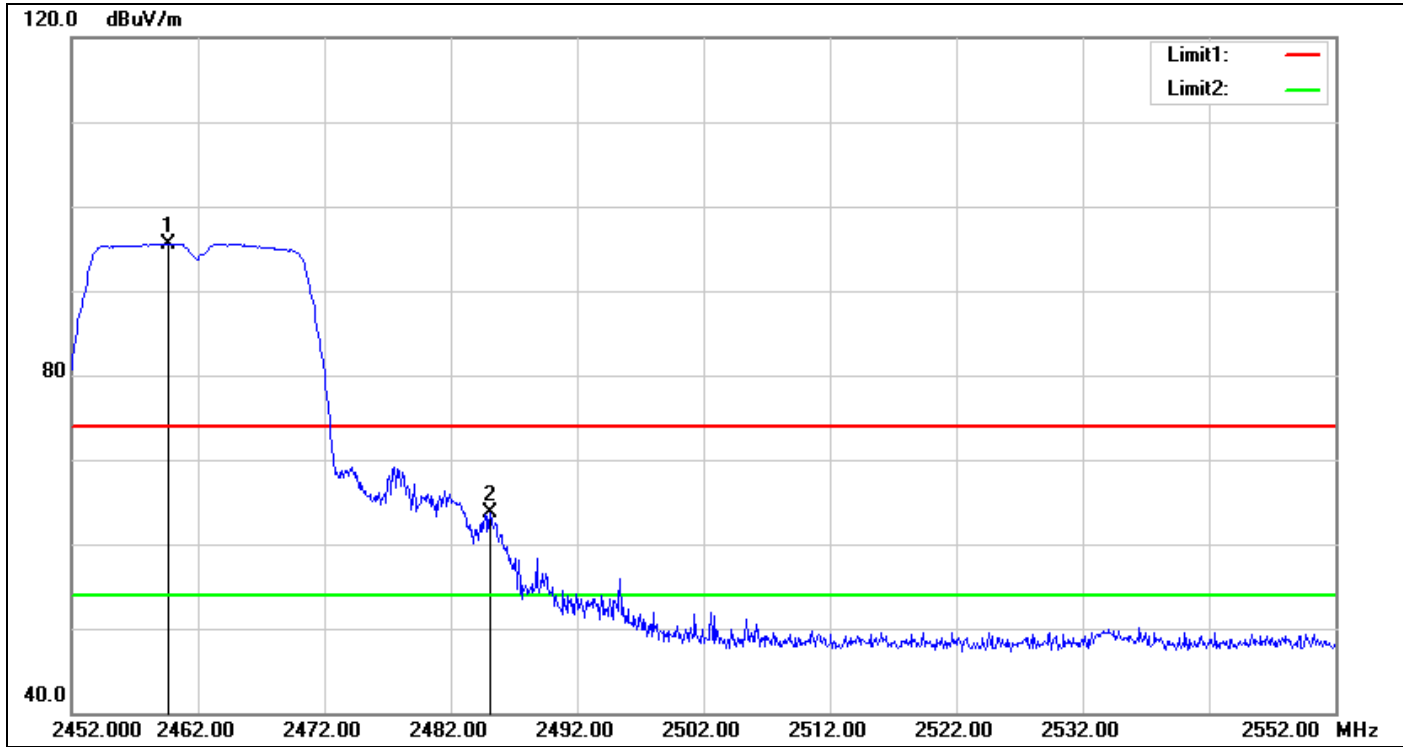

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2459.600	97.68	-2.10	95.58	74.00	21.58	peak
2	2485.100	65.70	-1.98	63.72	74.00	-10.28	peak


Detector mode: Average

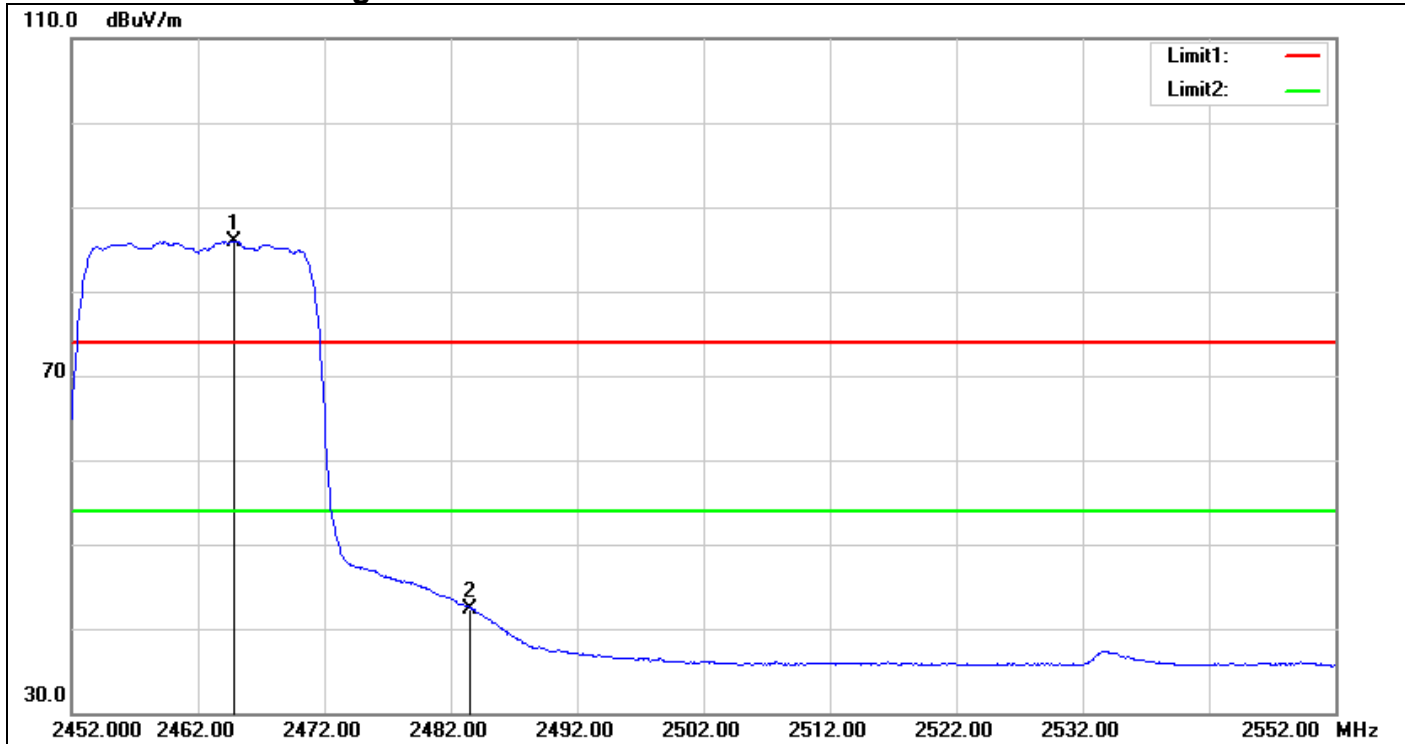

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2464.800	88.01	-2.09	85.92	54.00	31.92	AVG
2	2483.500	44.39	-1.99	42.40	54.00	-11.60	AVG

Band Edges (IEEE 802.11n HT 40 MHz mode / CH Low)


Detector mode: Peak

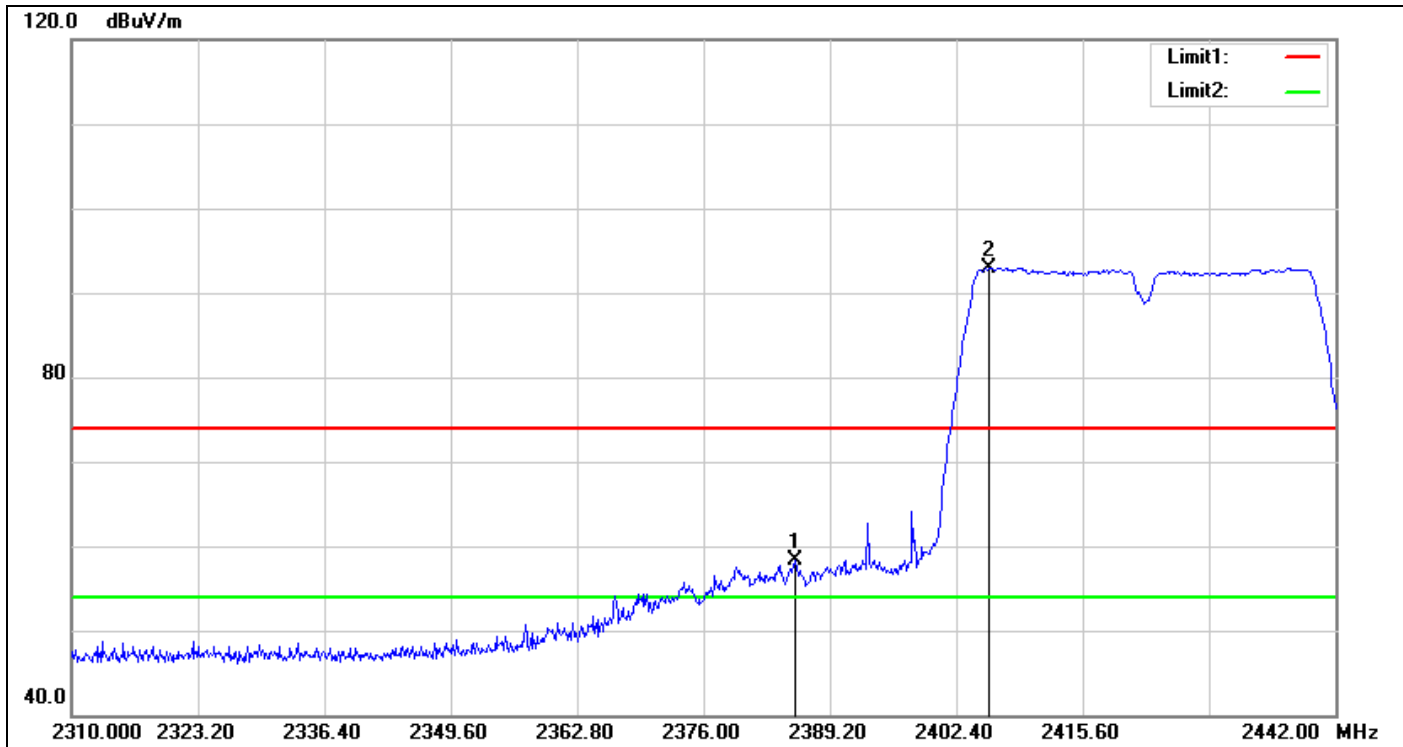

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.504	60.77	-2.53	58.24	74.00	-15.76	peak
2	2405.832	95.38	-2.42	92.96	74.00	18.96	peak

Detector mode: Average


110.0 dBuV/m

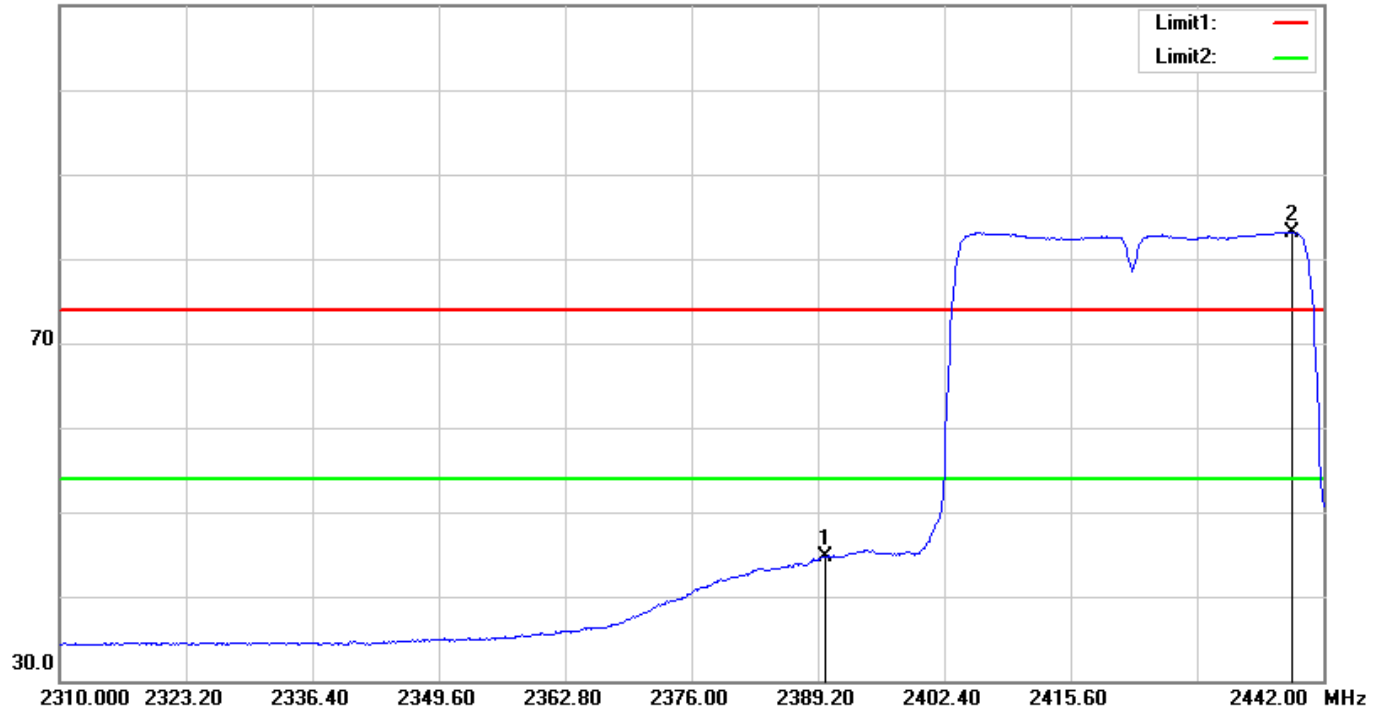

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	47.28	-2.49	44.79	54.00	-9.21	AVG
2	2438.700	85.38	-2.22	83.16	54.00	29.16	AVG


Band Edges (IEEE 802.11n HT 40 MHz mode / CH Mid)

Detector mode: Peak

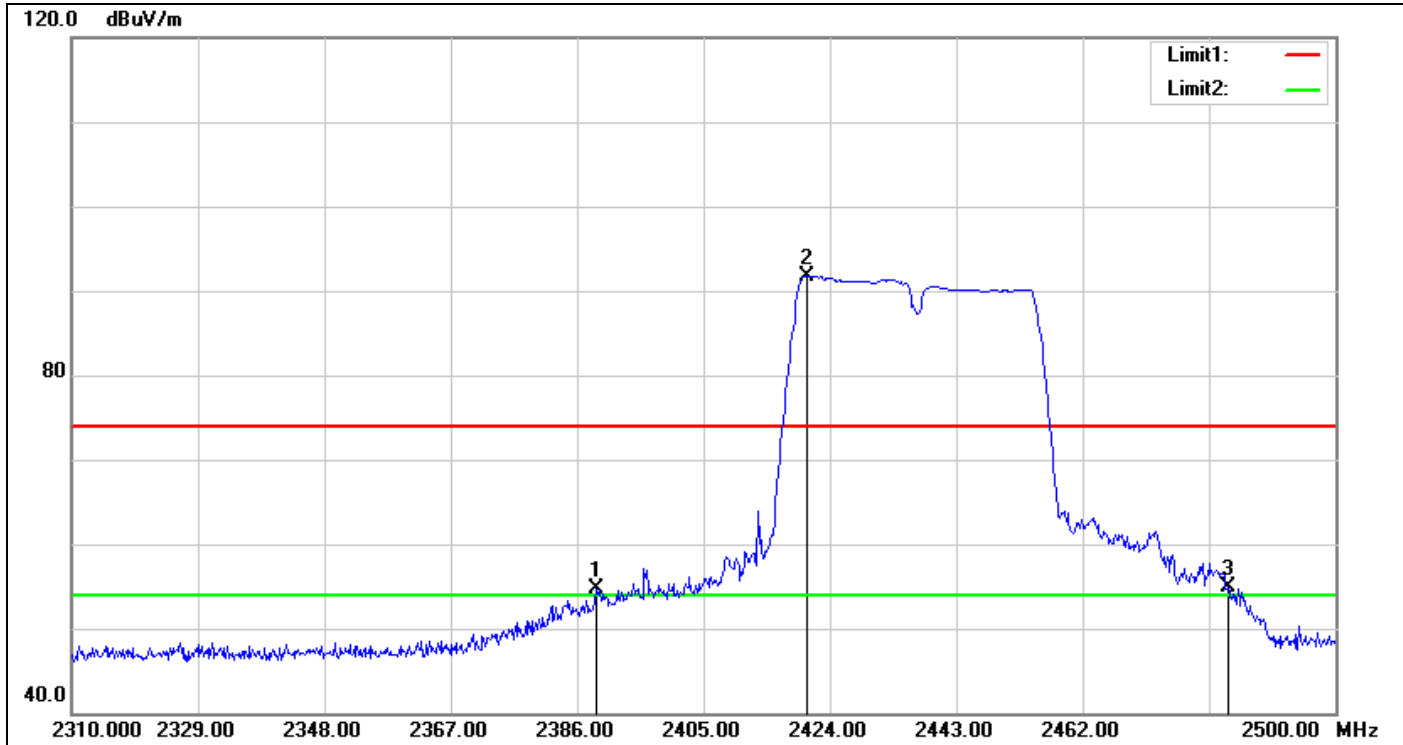

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.850	57.18	-2.50	54.68	74.00	-19.32	peak
2	2420.580	94.11	-2.35	91.76	74.00	17.76	peak
3	2483.850	56.84	-1.99	54.85	74.00	-19.15	peak


Detector mode: Average

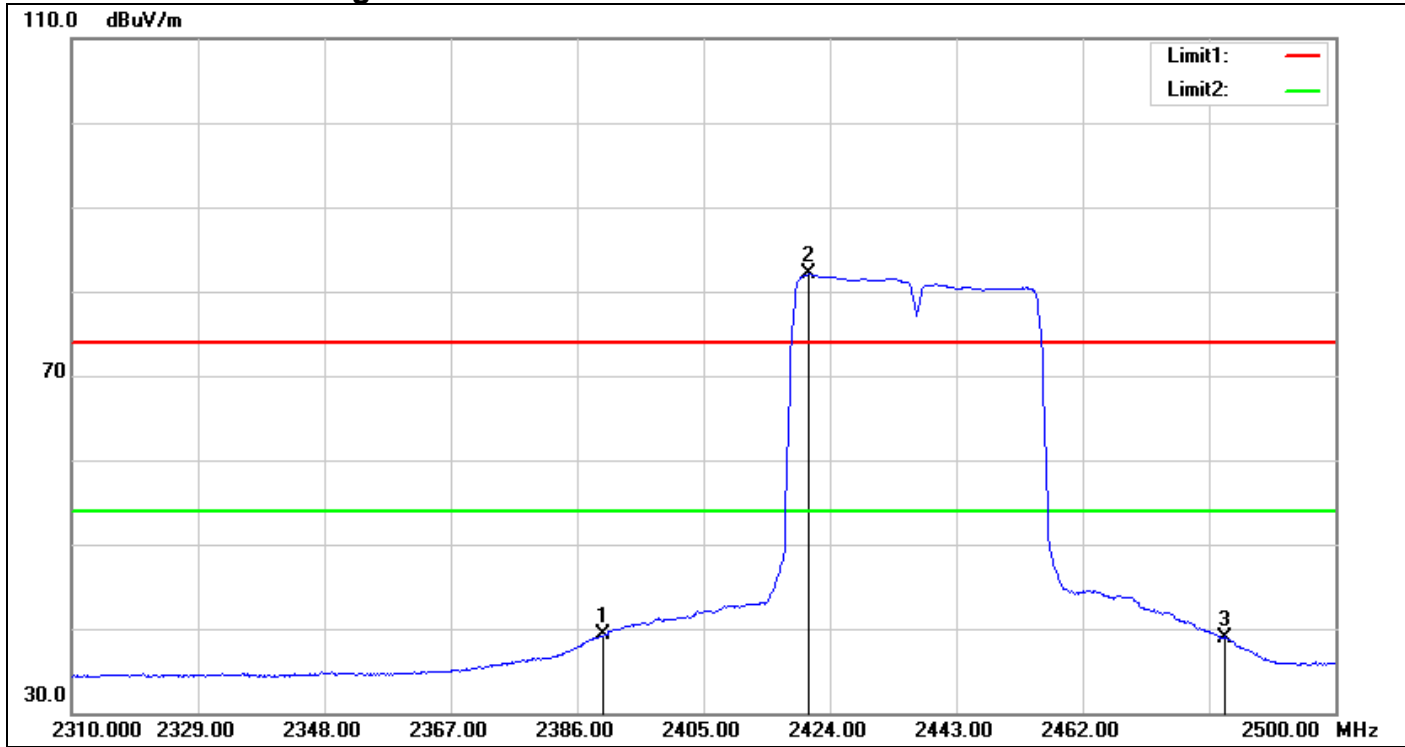

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	41.82	-2.49	39.33	54.00	-14.67	AVG
2	2420.770	84.36	-2.35	82.01	54.00	28.01	AVG
3	2483.500	40.91	-1.99	38.92	54.00	-15.08	AVG


Band Edges (IEEE 802.11n HT 40 MHz mode / CH High)

Detector mode: Peak

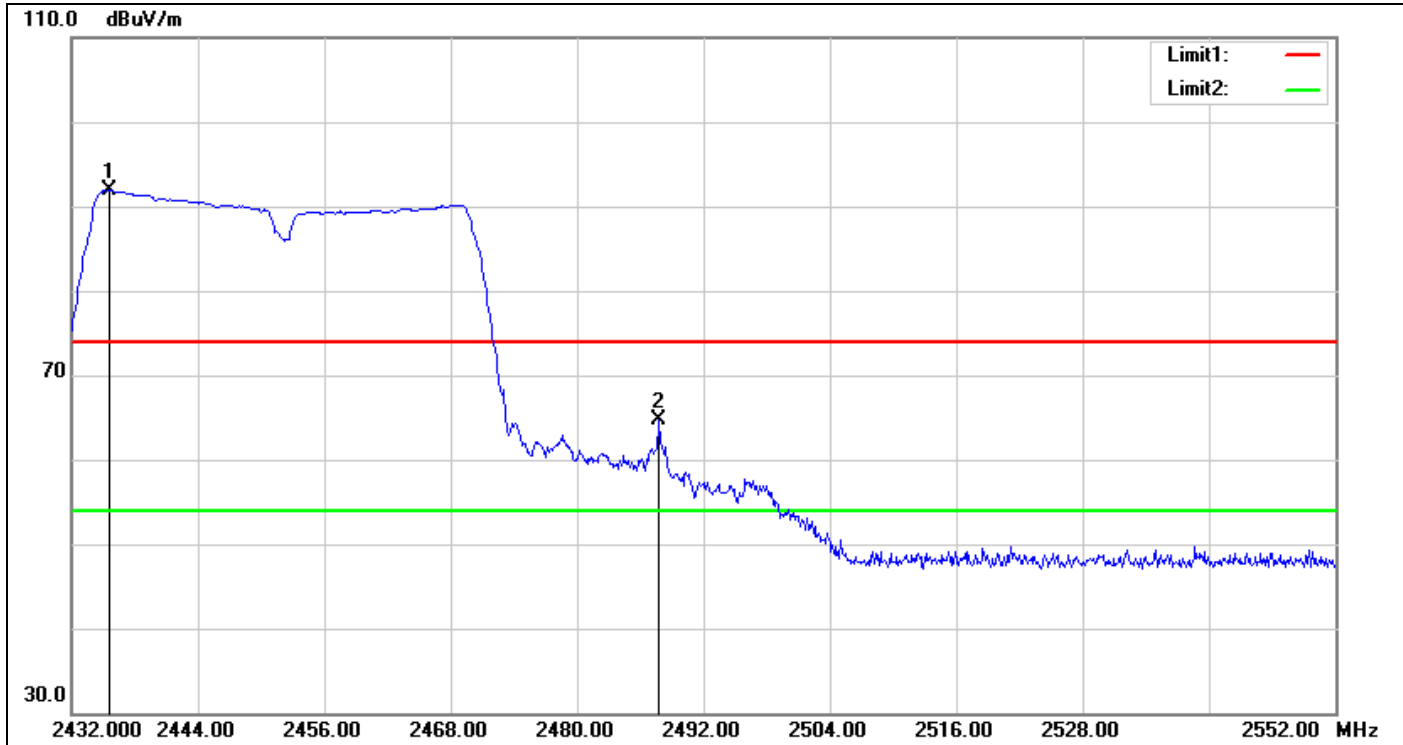


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2435.600	94.10	-2.24	91.86	74.00	17.86	peak
2	2487.800	66.57	-1.95	64.62	74.00	-9.38	peak

Detector mode: Average

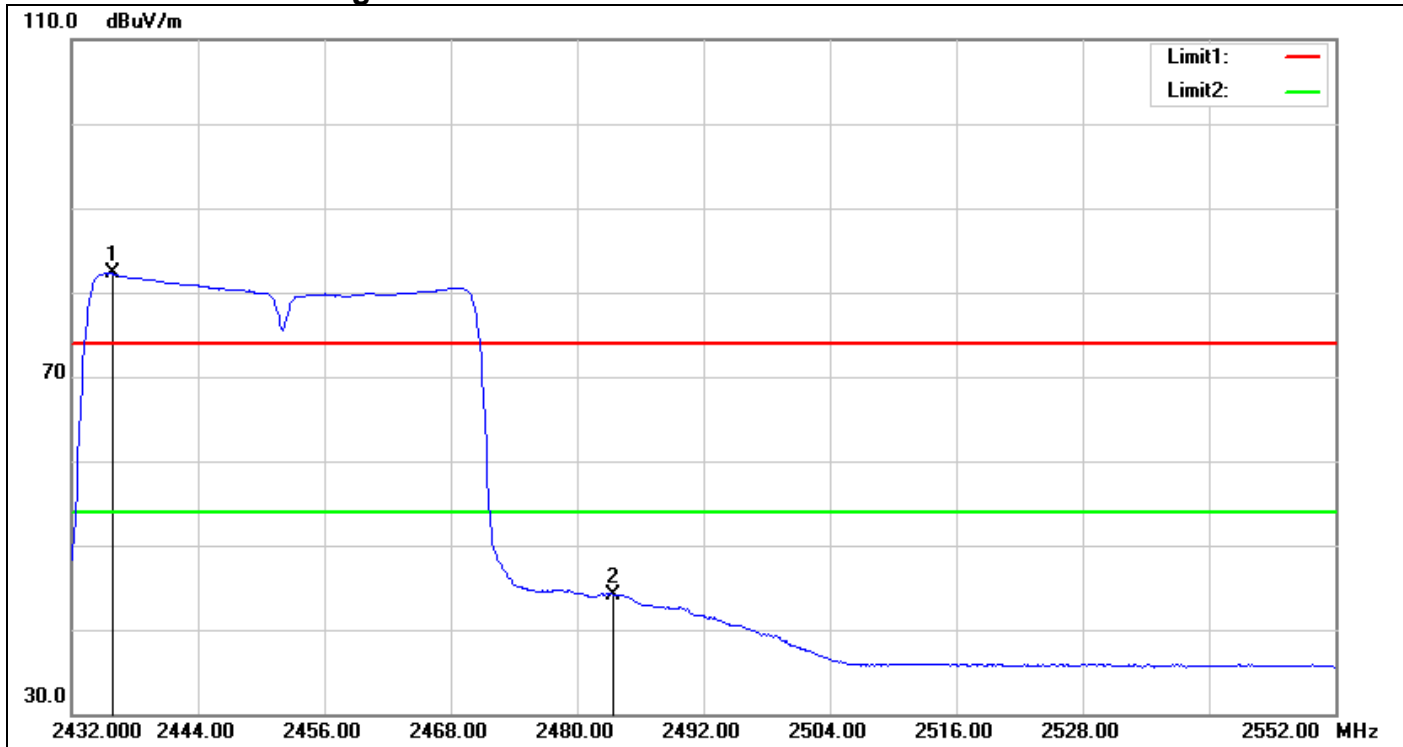


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2435.840	84.50	-2.24	82.26	54.00	28.26	AVG
2	2483.500	46.16	-1.99	44.17	54.00	-9.83	AVG

Test Plot
Conducted Band Edges (IEEE 802.11b mode / CH Low)

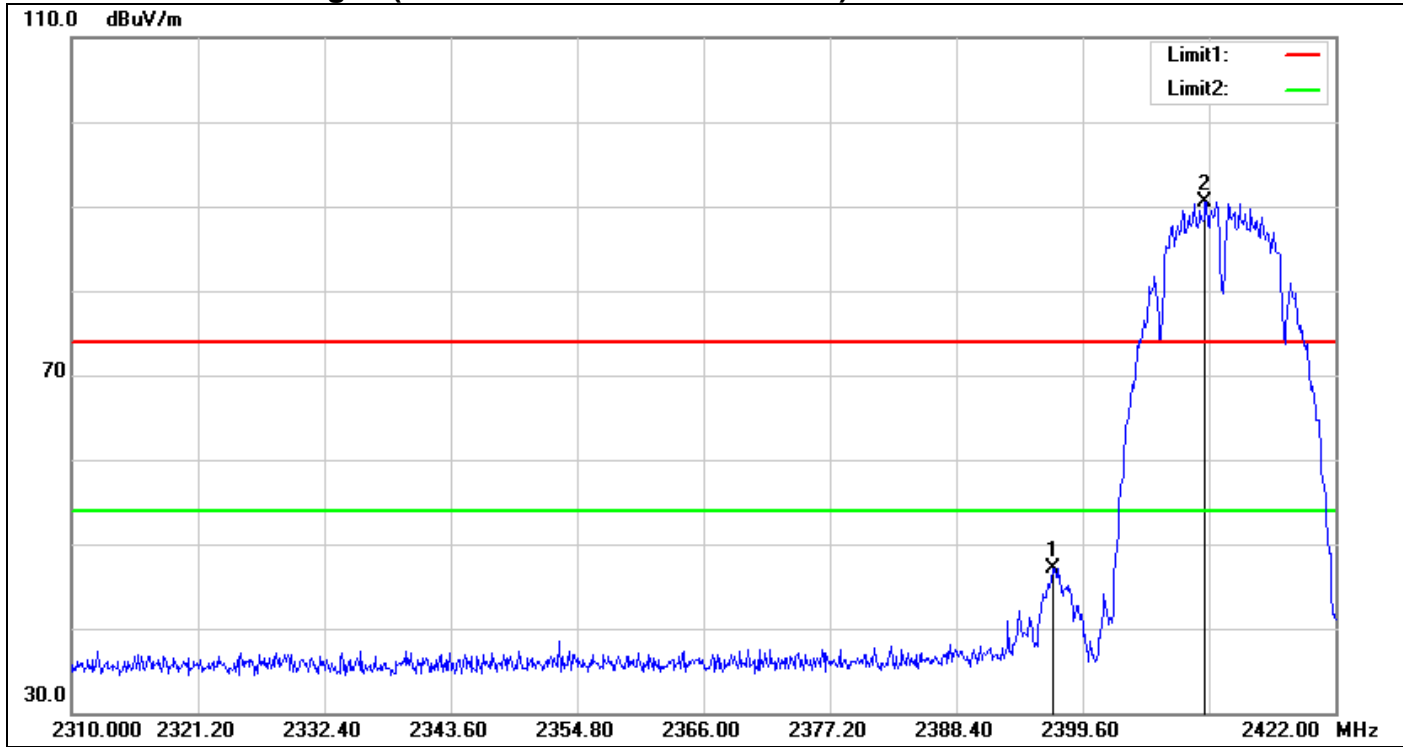


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2397.024	49.58	-2.43	47.15	74.00	-26.85	peak
2	2410.464	93.01	-2.43	90.58	74.00	16.58	peak

Conducted Band Edges (IEEE 802.11b mode / CH High)

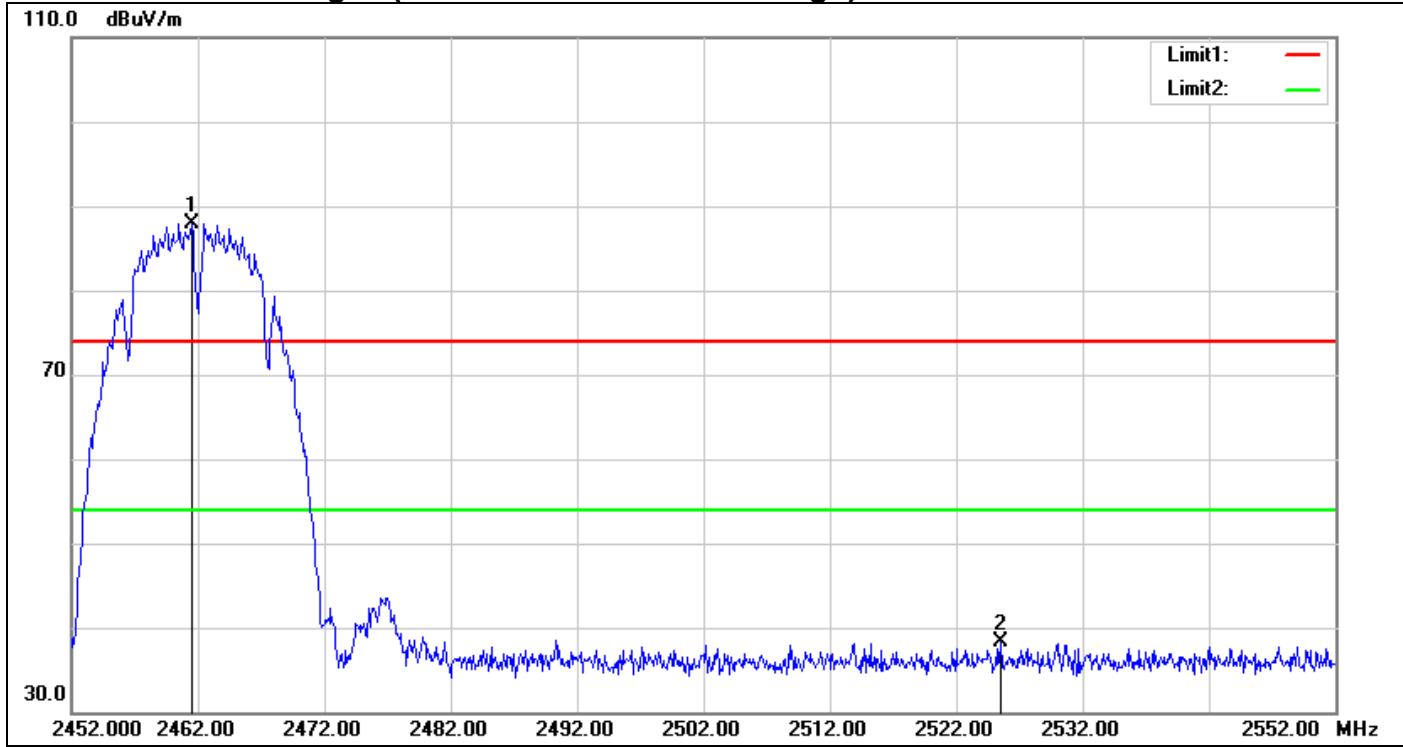


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2461.500	89.97	-2.10	87.87	74.00	13.87	peak
2	2525.500	40.14	-1.80	38.34	74.00	-35.66	peak

Conducted Band Edges (IEEE 802.11g mode / CH Low)

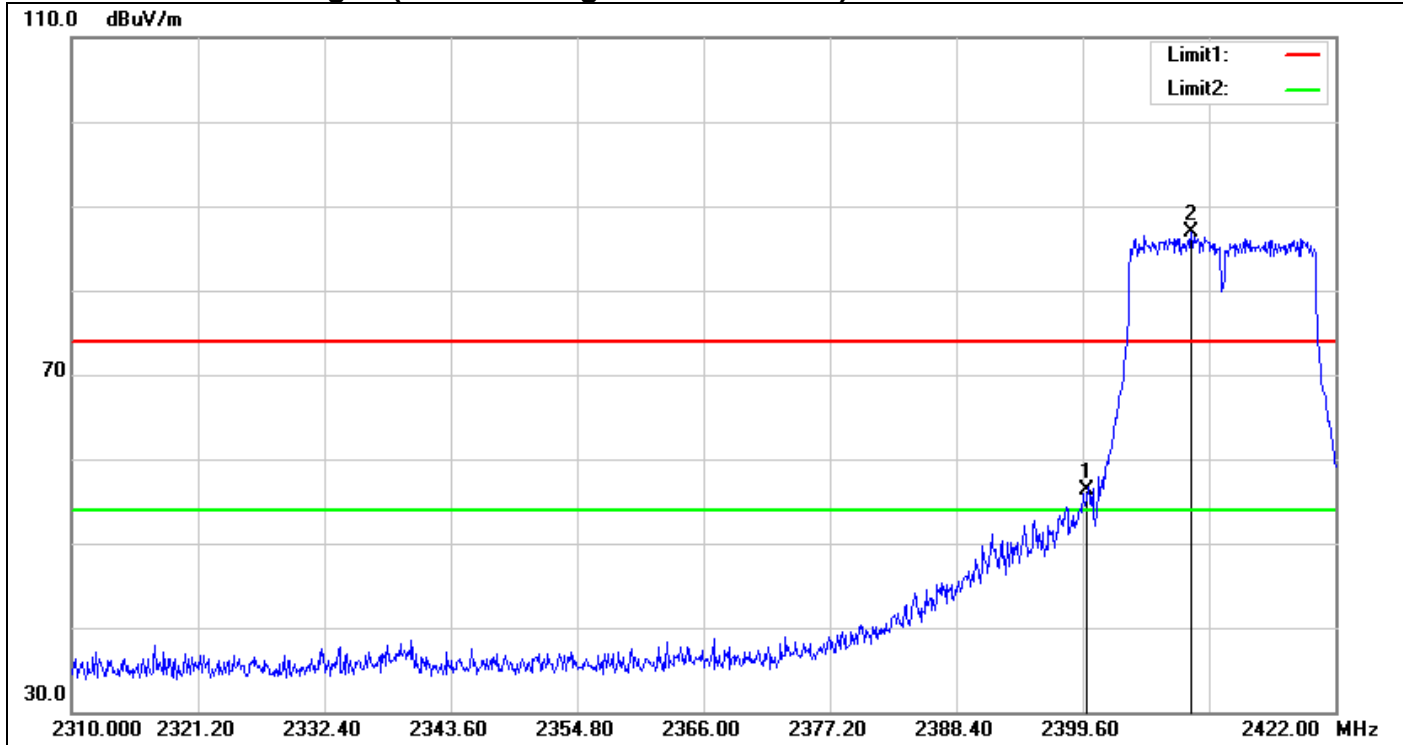


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2400.000	58.76	-2.41	56.35	74.00	-17.65	peak
2	2409.232	89.28	-2.43	86.85	74.00	12.85	peak

Conducted Band Edges (IEEE 802.11g mode / CH High)

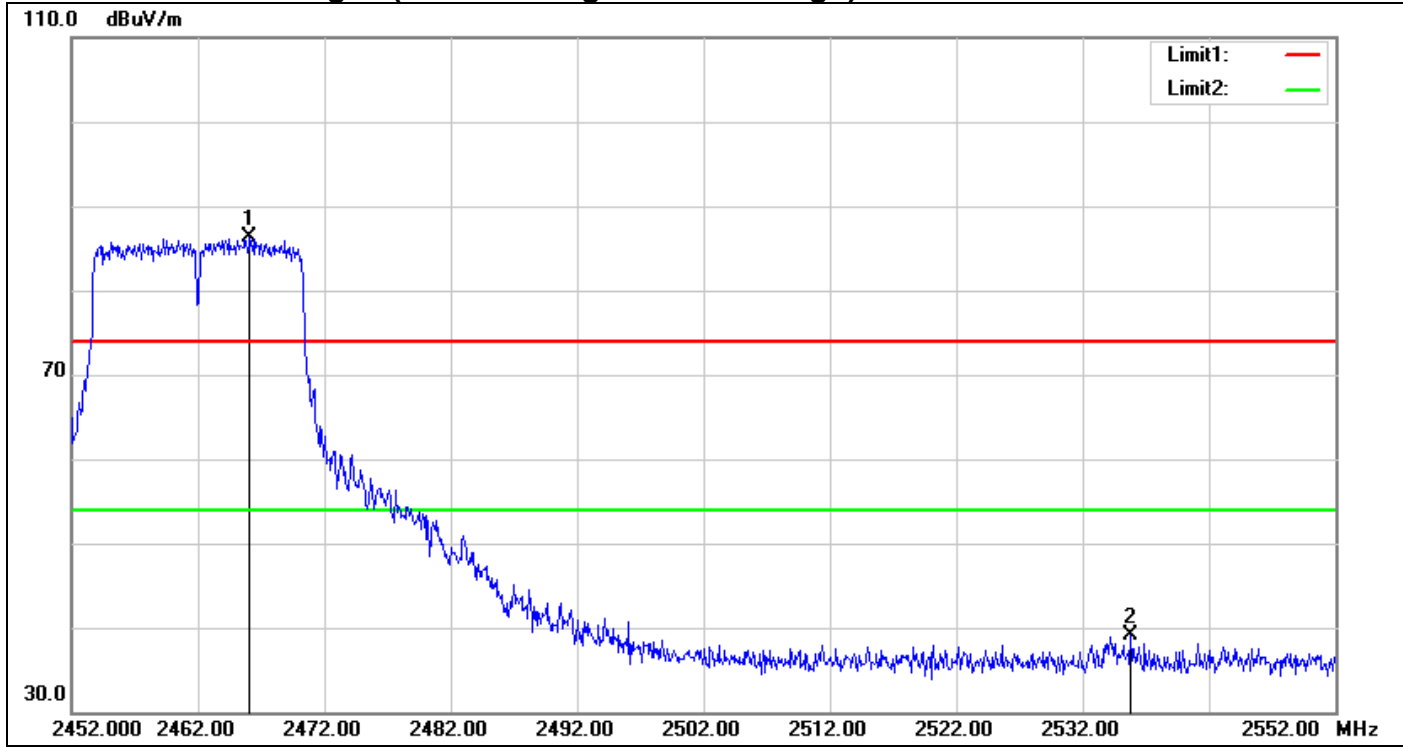


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2466.100	88.41	-2.08	86.33	74.00	12.33	peak
2	2535.800	40.85	-1.77	39.08	74.00	-34.92	peak

Conducted Band Edges (IEEE 802.11n HT 20 MHz mode / CH Low)

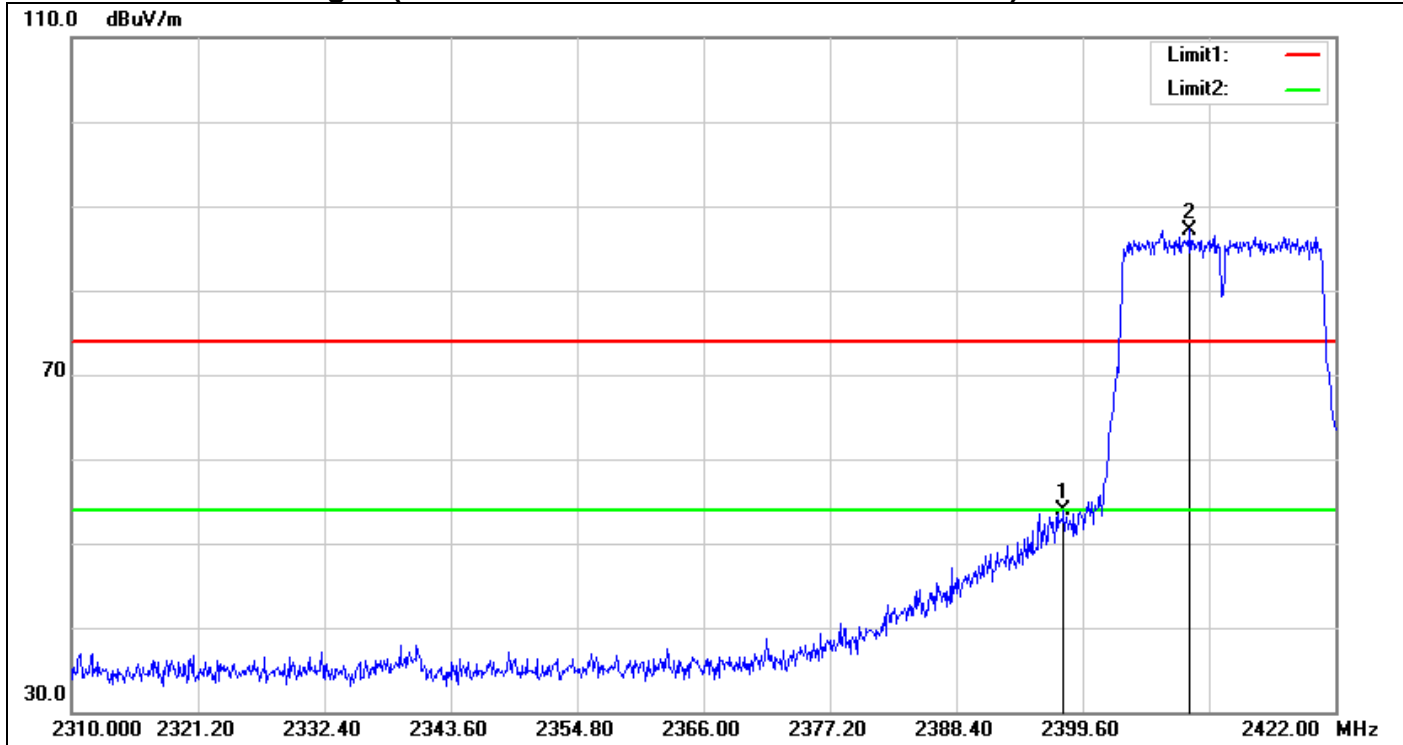


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2397.920	56.33	-2.43	53.90	74.00	-20.10	peak
2	2409.120	89.63	-2.43	87.20	74.00	13.20	peak

Conducted Band Edges (IEEE 802.11n HT 20 MHz mode / CH High)

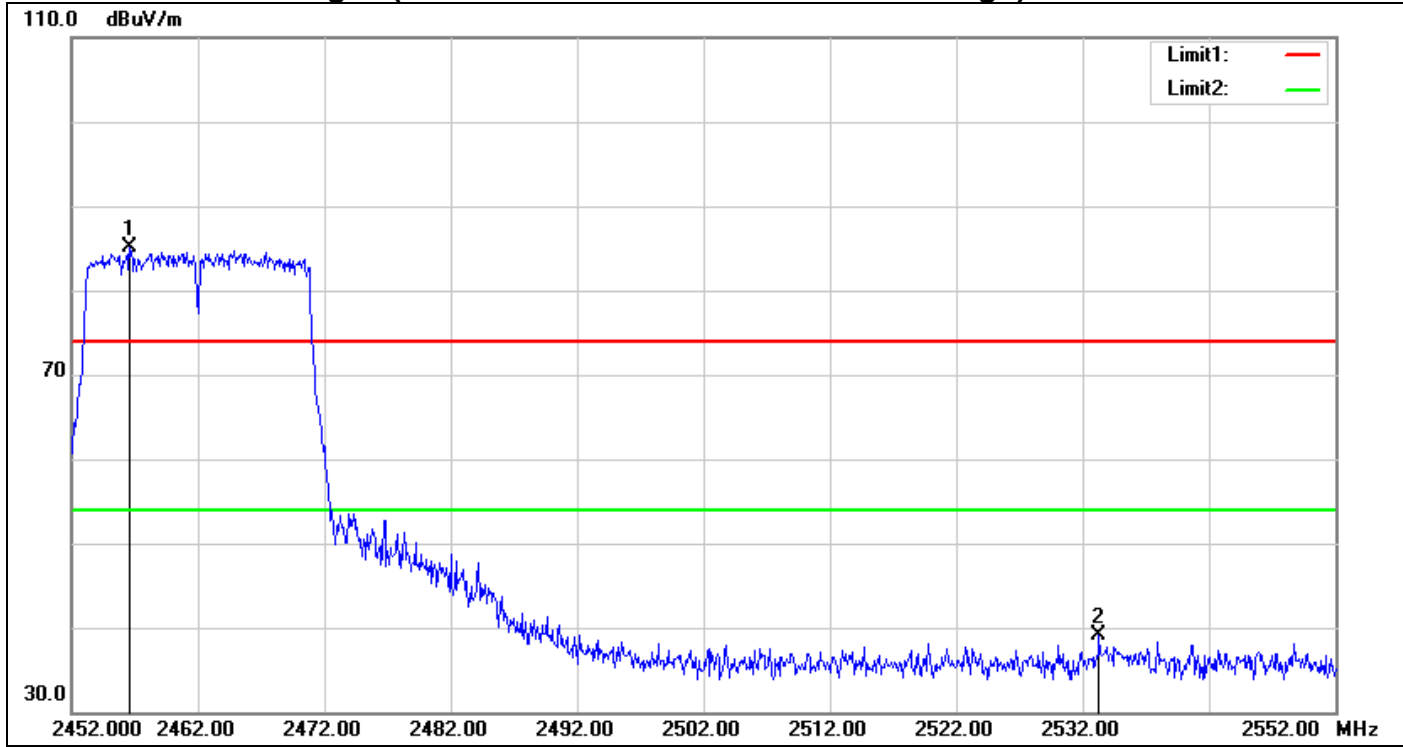


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2456.600	87.23	-2.12	85.11	74.00	11.11	peak
2	2533.300	40.86	-1.78	39.08	74.00	-34.92	peak

Conducted Band Edges (IEEE 802.11n HT 40 MHz mode / CH Low)

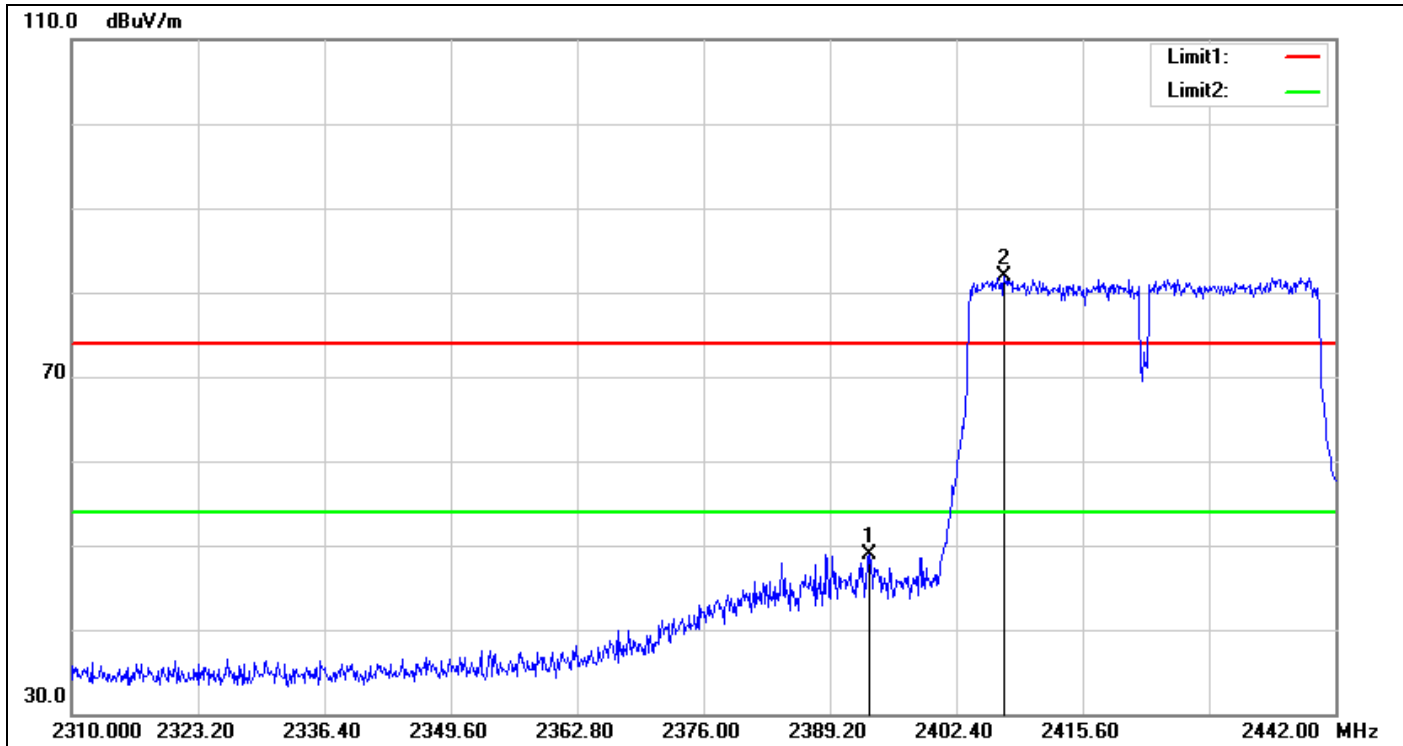

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2393.292	51.44	-2.46	48.98	74.00	-25.02	peak
2	2407.416	84.33	-2.42	81.91	74.00	7.91	peak

Conducted Band Edges (IEEE 802.11n HT 40 MHz mode / CH High)

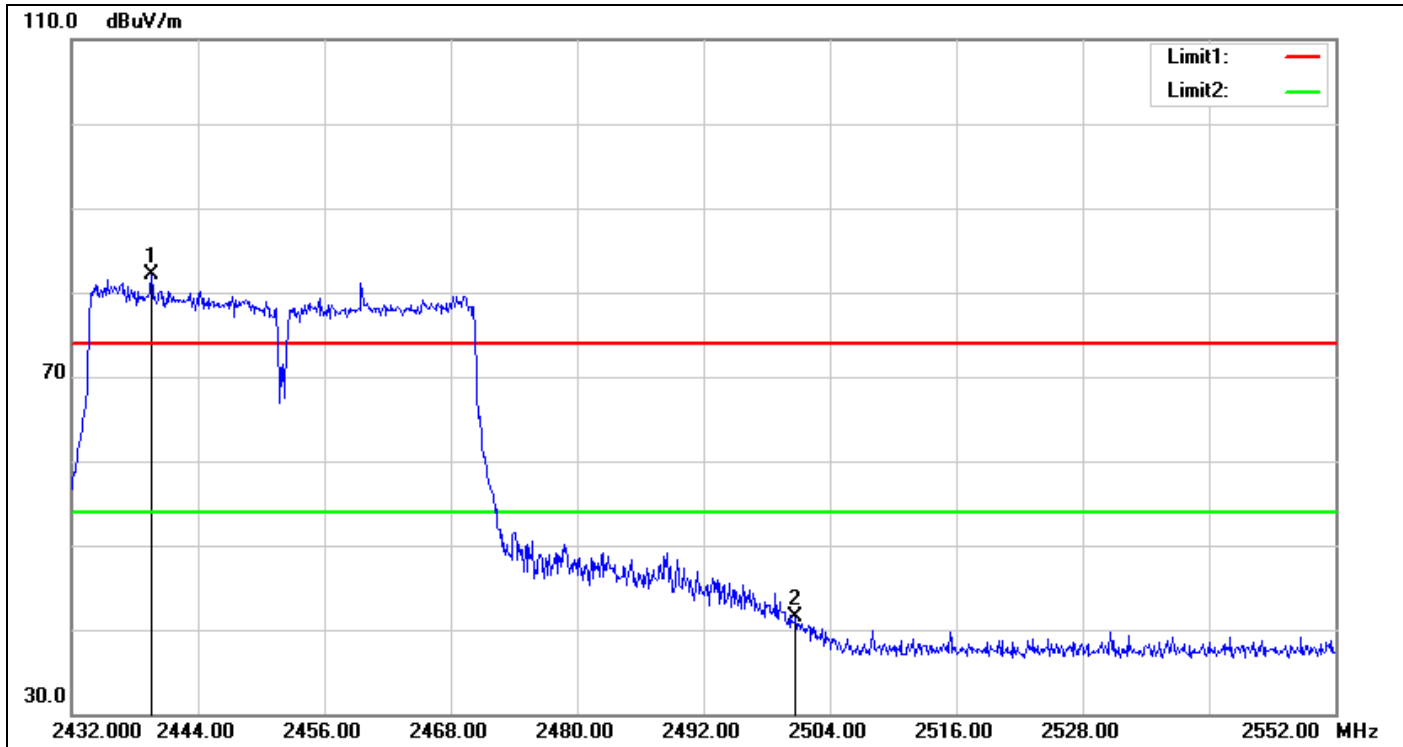


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2439.560	84.26	-2.22	82.04	74.00	8.04	peak
2	2500.760	43.41	-1.86	41.55	74.00	-32.45	peak

7.5 PEAK POWER SPECTRAL DENSITY

LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

Test Configuration

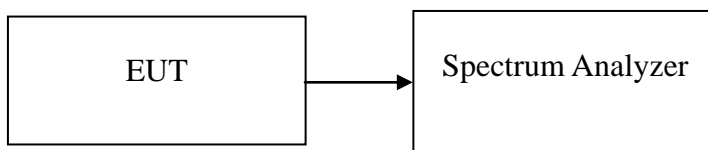

TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3 kHz, VBW = 30 kHz, Span = 300 kHz, Sweep time = 100 s
3. Record the max reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

TEST RESULTS

No non-compliance noted

Test Data

IEEE 802.11b mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-28.10	8.00	PASS
Mid	2437	-28.24		PASS
High	2462	-27.94		PASS

IEEE 802.11g mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-25.87	8.00	PASS
Mid	2437	-26.18		PASS
High	2462	-25.42		PASS

IEEE 802.11n HT 20 MHz mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-25.97	8.00	PASS
Mid	2437	-26.60		PASS
High	2462	-25.56		PASS


IEEE 802.11n HT 40 MHz mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2422	-27.64	8.00	PASS
Mid	2437	-27.62		PASS
High	2452	-27.46		PASS

Test Plot


IEEE 802.11b mode

PPSD (CH Low)

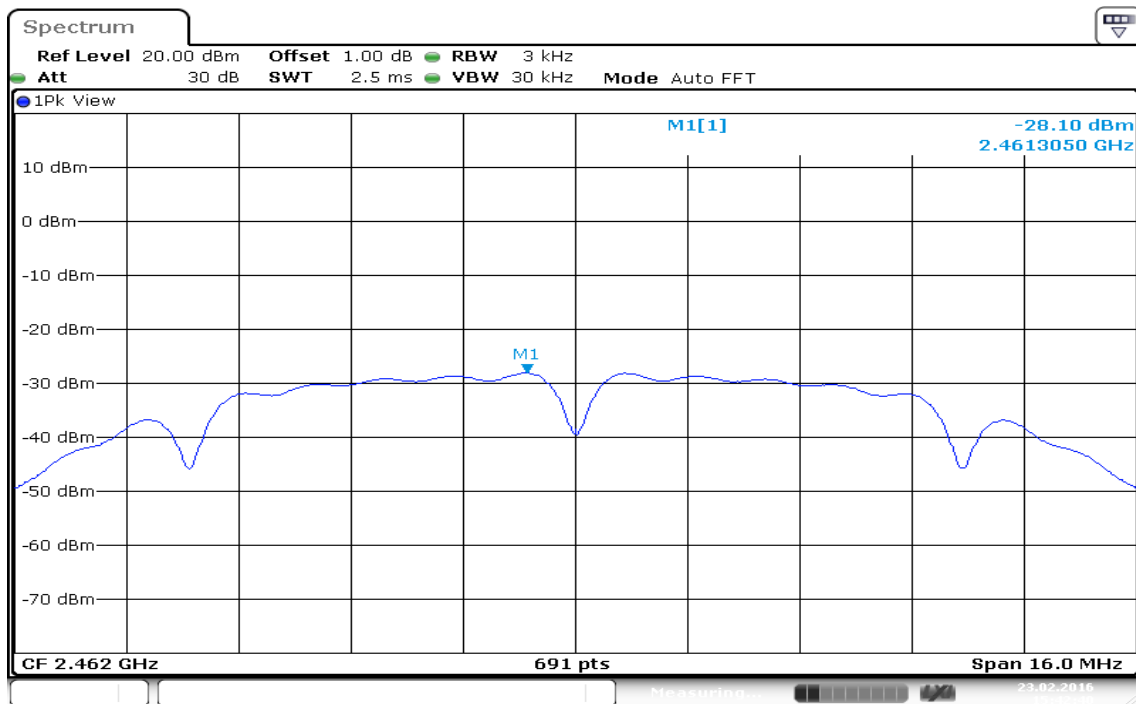


Date: 23.FEB.2016 15:42:41

PPSD (CH Mid)

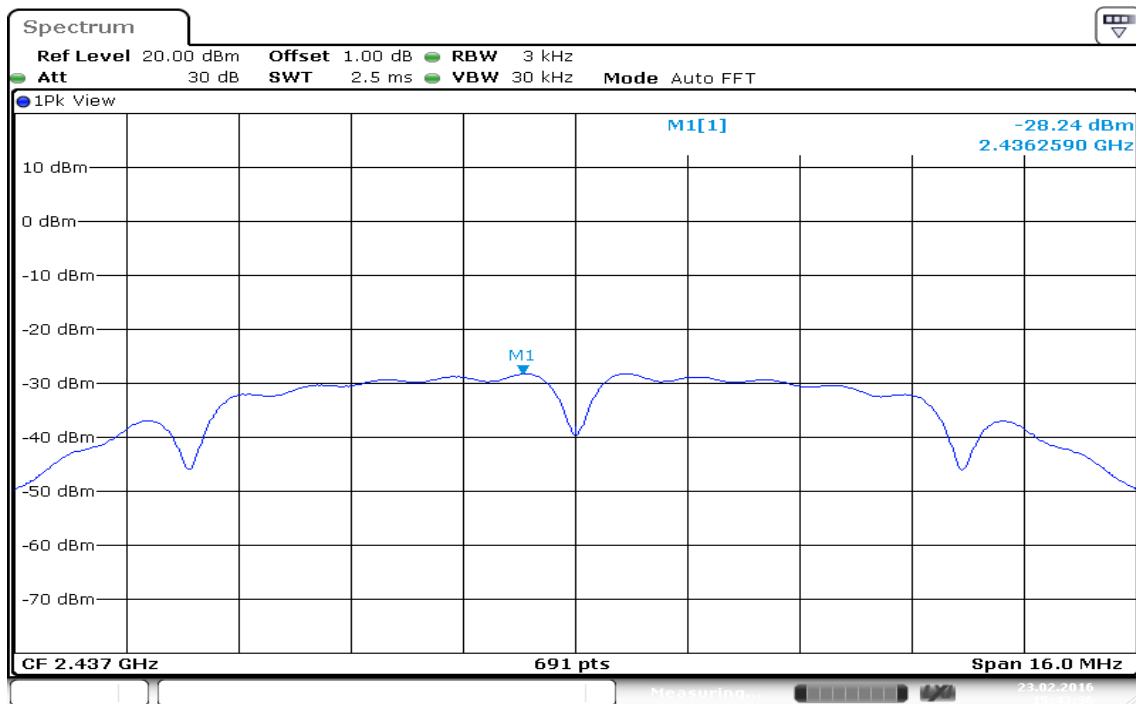

Date: 23.FEB.2016 15:43:37


PPSD (CH High)

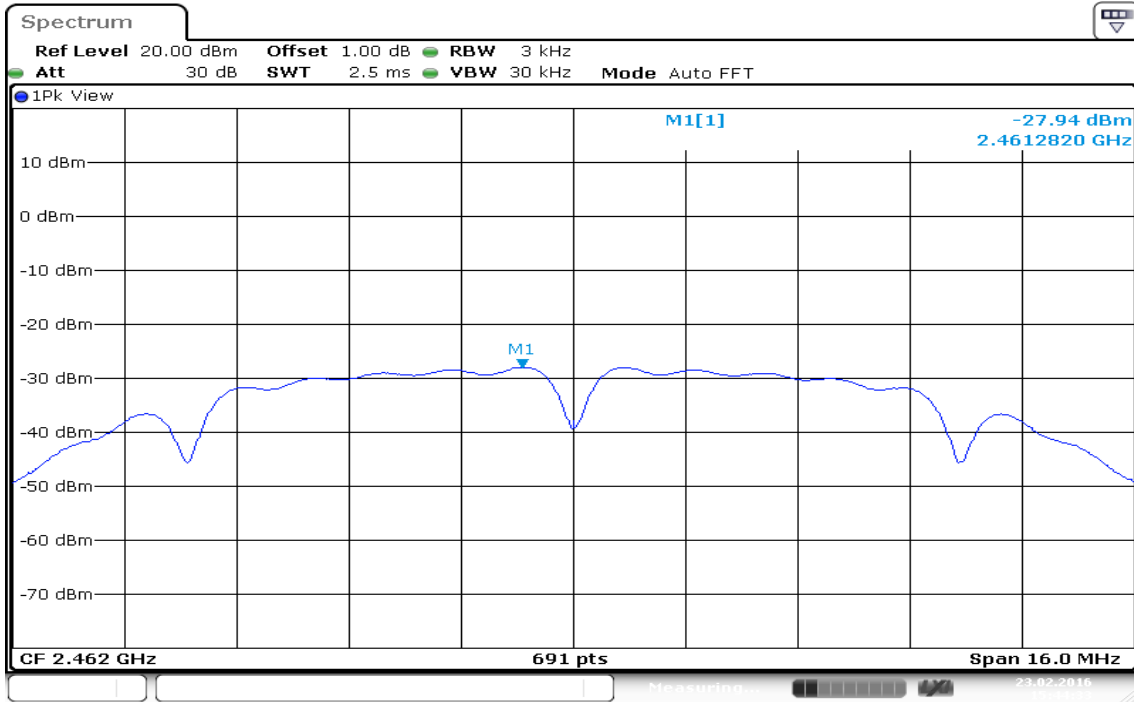

Date: 23.FEB.2016 15:44:33


IEEE 802.11g mode

PPSD (CH Low)

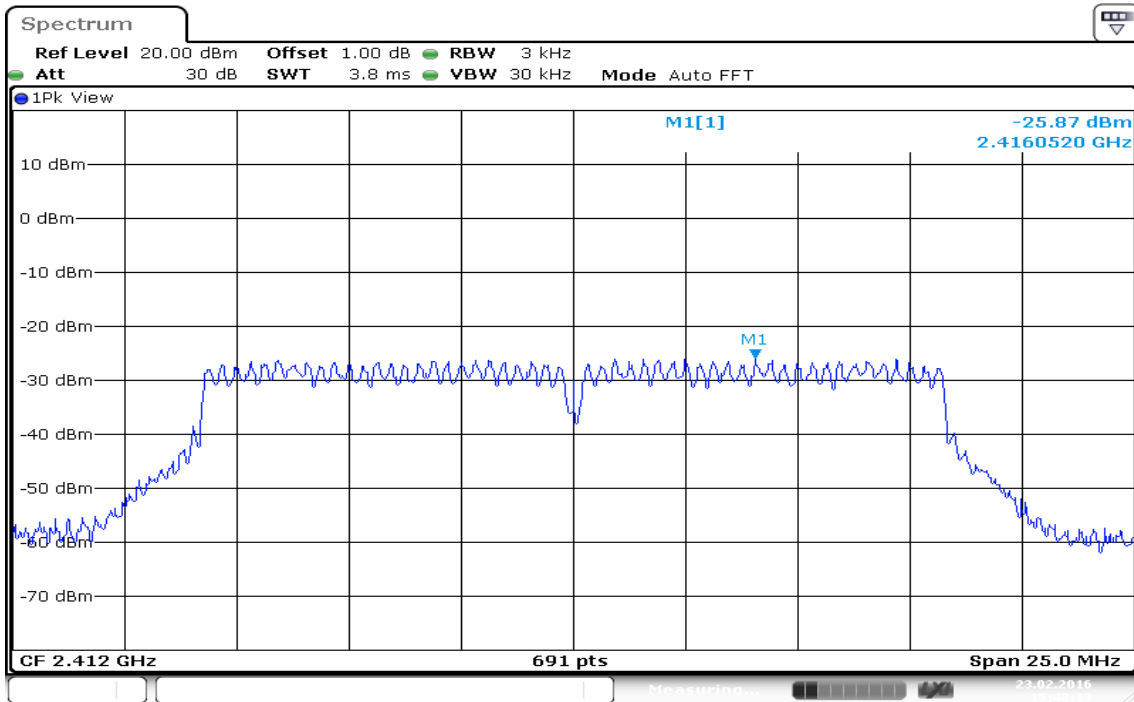


Date: 23.FEB.2016 15:48:14

PPSD (CH Mid)

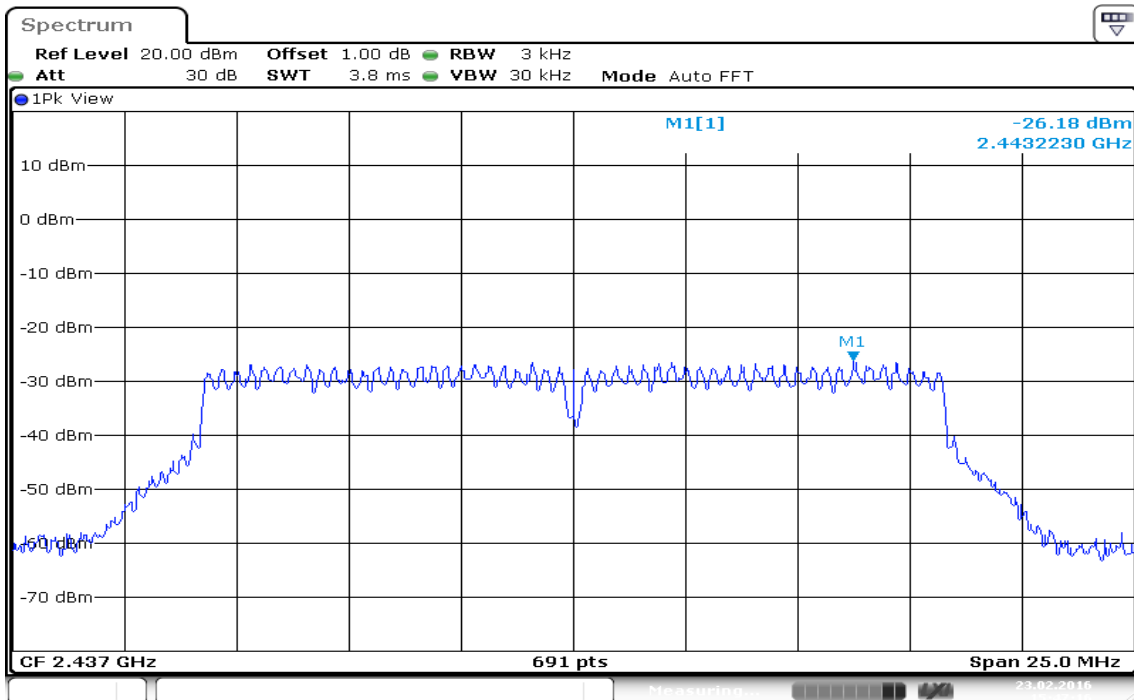

Date: 23.FEB.2016 15:47:16


PPSD (CH High)

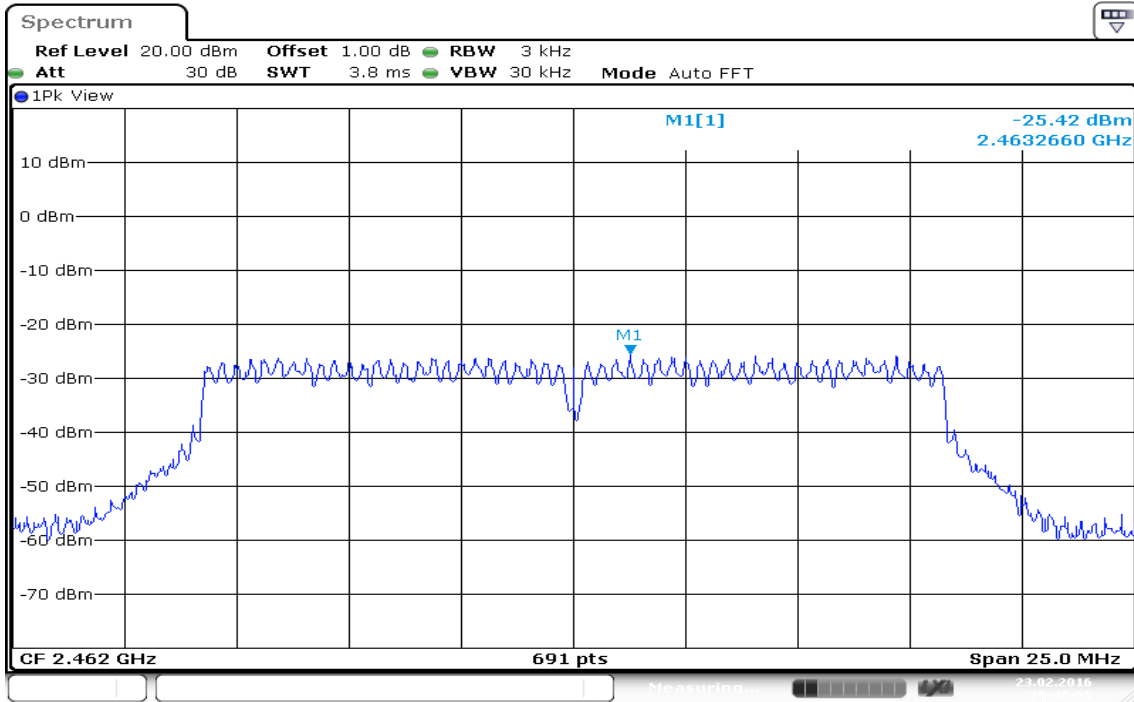


Date: 23.FEB.2016 15:45:56

IEEE 802.11n HT 20 MHz mode


PPSD (CH Low)

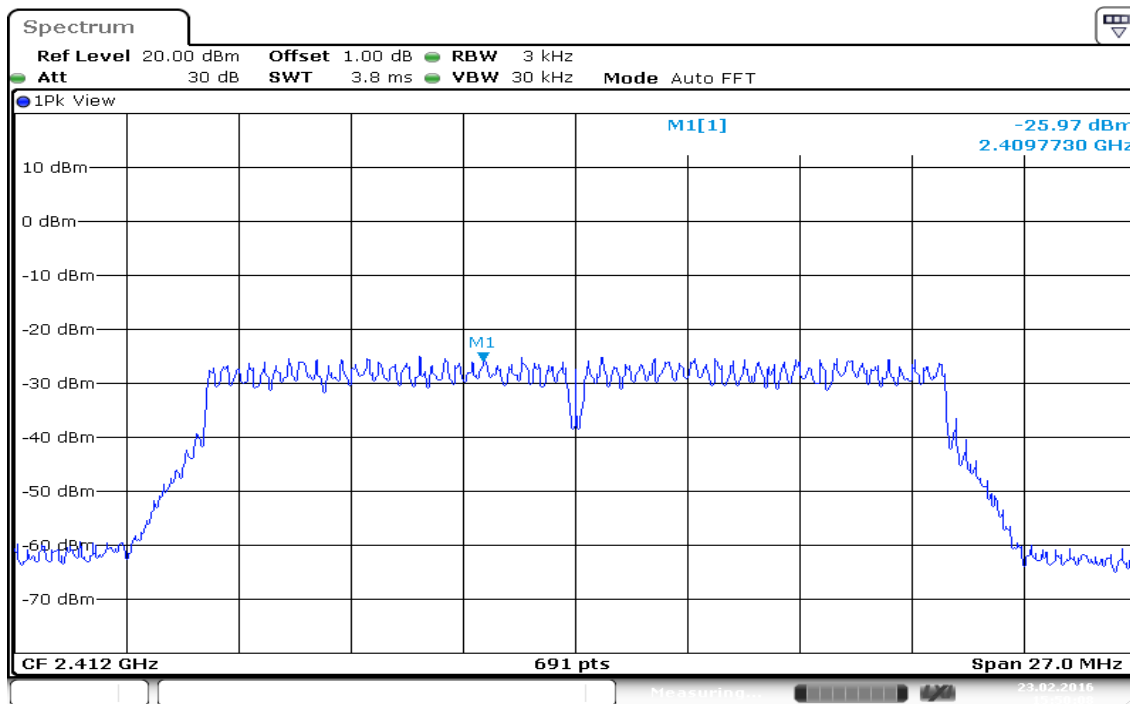

PPSD (CH Mid)

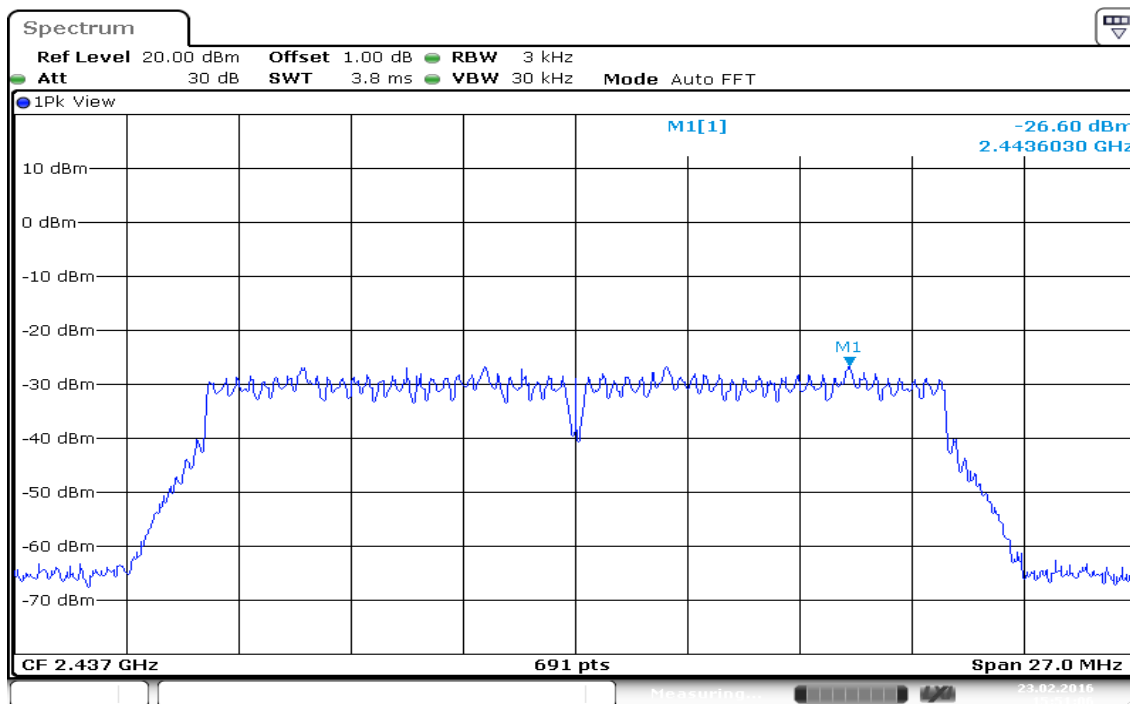


PPSD (CH High)

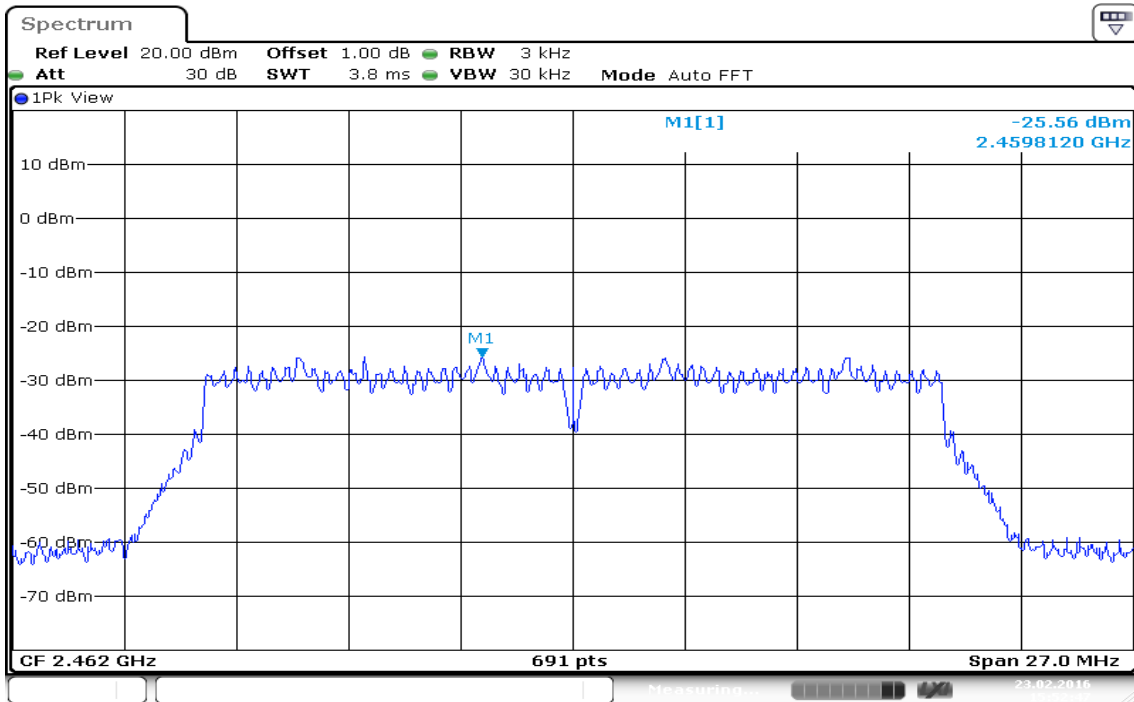


Date: 23.FEB.2016 15:52:48

IEEE 802.11n HT 40 MHz mode


PPSD (CH Low)

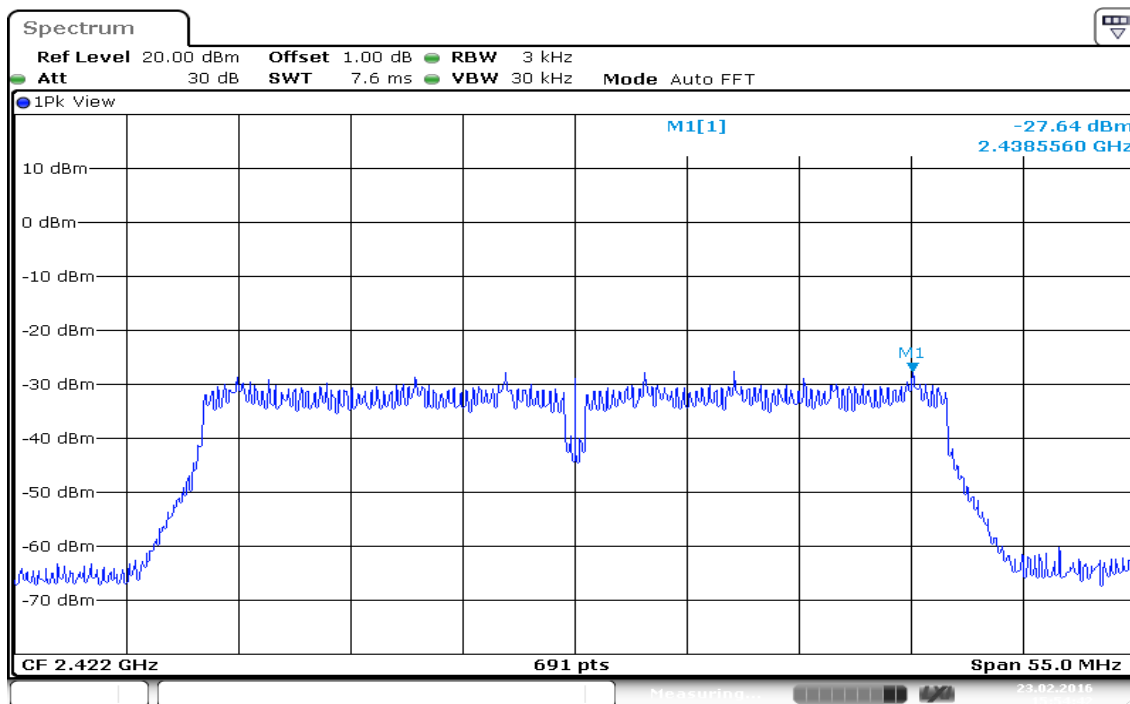

PPSD (CH Mid)

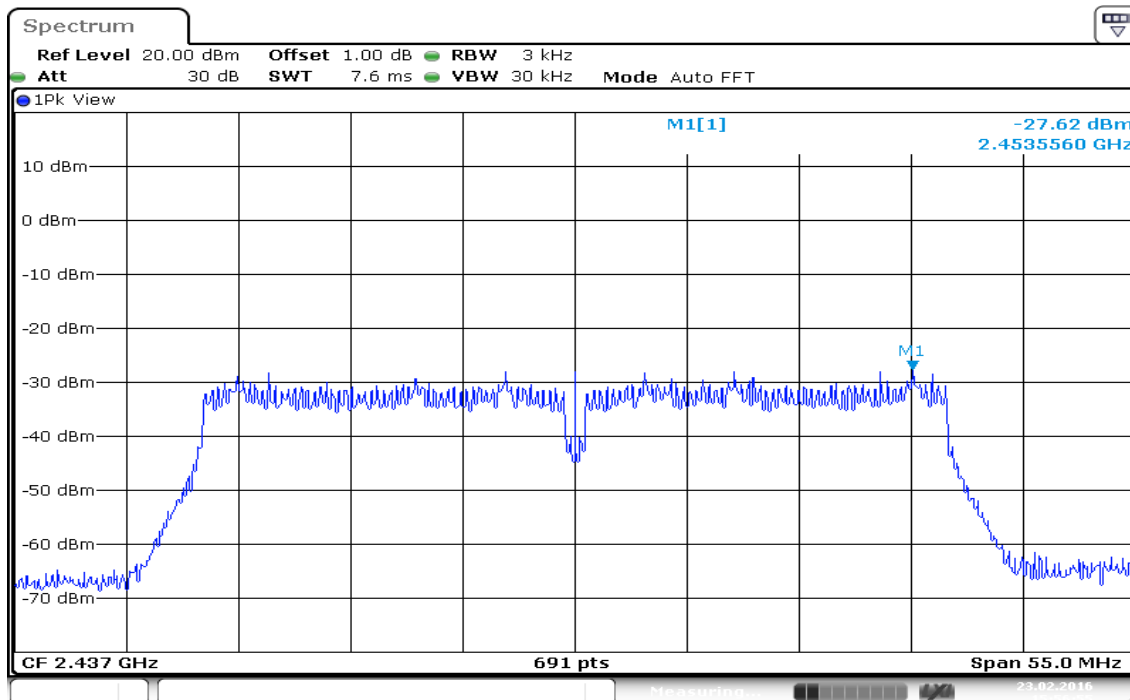

PPSD (CH High)

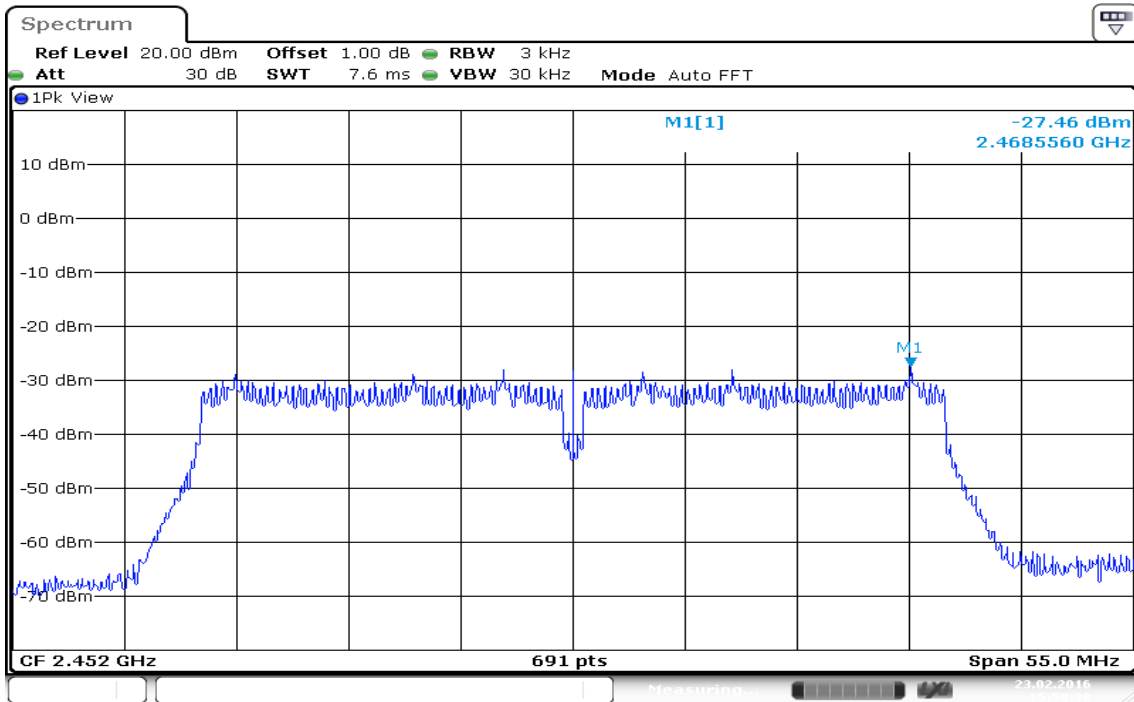

Date: 23.FEB.2016 15:58:39

7.6 RADIATED EMISSIONS

LIMIT

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (µV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the emission table above, the tighter limit applies at the band edges.


Frequency (MHz)	Field Strength (µV/m at 3-meter)	Field Strength (dBµV/m at 3-meter)
0.009 - 0.490	2400/F(kHz) +80	20LOG((2400/F(kHz))+80)
0.490 - 1.705	24000/F(kHz) +40	20LOG((24000/F(kHz))+40)
1.705 – 30.0	30	69.54
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Test Configuration


9kHz ~ 30MHz

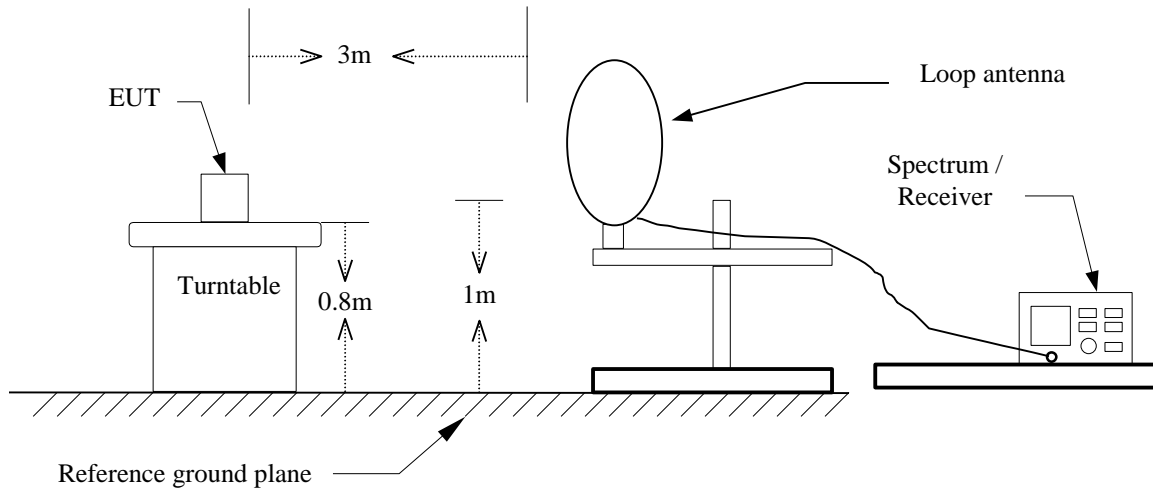

30MHz ~ 1GHz

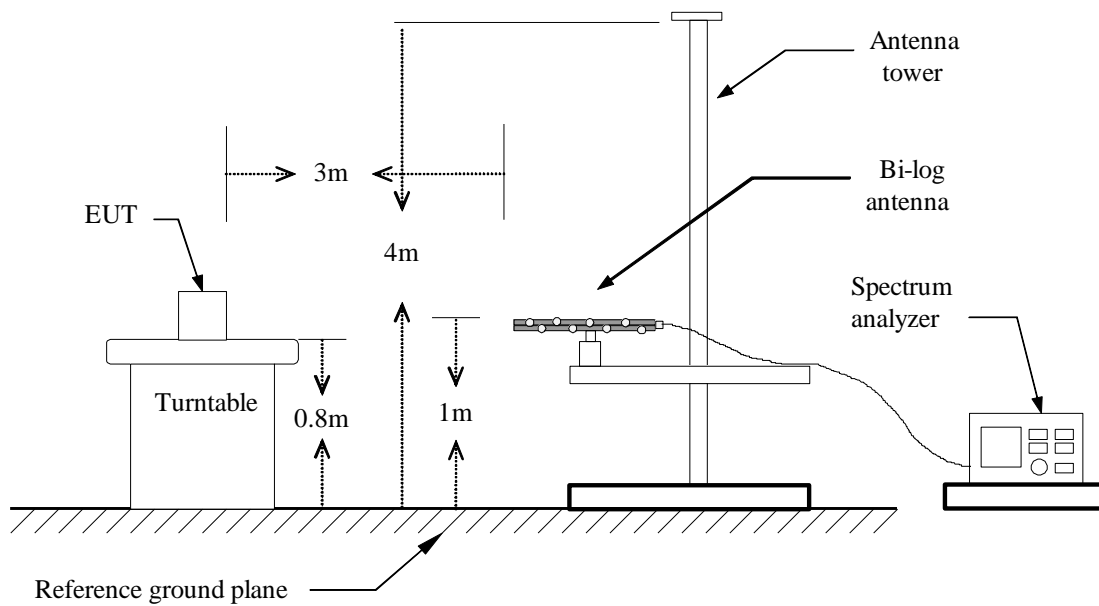

Above 1 GHz

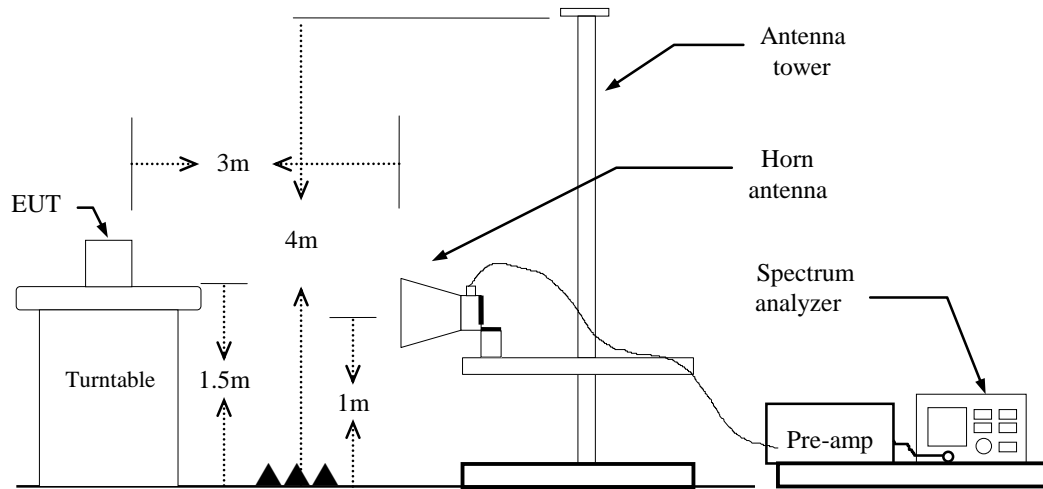

TEST PROCEDURE

1. The EUT is placed on a turntable, Above 1 GHz is 1.5m high and below 1 GHz is 0.8m high above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

(a) PEAK: RBW=1MHz / VBW=3MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz,
if duty cycle $\geq 98\%$, VBW=10Hz.
if duty cycle $< 98\%$ VBW=1/T.

IEEE 802.11b mode: $\geq 98\%$, VBW=10Hz

IEEE 802.11g mode: $\geq 98\%$, VBW=10Hz

IEEE 802.11n HT 20 MHz mode: $\geq 98\%$, VBW=10Hz

IEEE 802.11n HT 40 MHz mode: $\geq 98\%$, VBW=10Hz

7. Repeat above procedures until the measurements for all frequencies are complete.
8. Result = Spectrum Reading + cable loss(spectrum to Amp) - Amp Gain + Cable loss(Amp to receive Ant)+ Receive Ant

Note: We checked every harmonics frequencies from Fundamental frequencies with reduced VBW, and we mark a point to prove pass or not if we find any emission. For this case, there are no emissions hidden in the noise floor.

Below 1GHz

Operation Mode: Normal Link


Test Date: February 23, 2016

Temperature: 27°C

Tested by: Jason Lu

Humidity: 53% RH

Polarity: Ver.

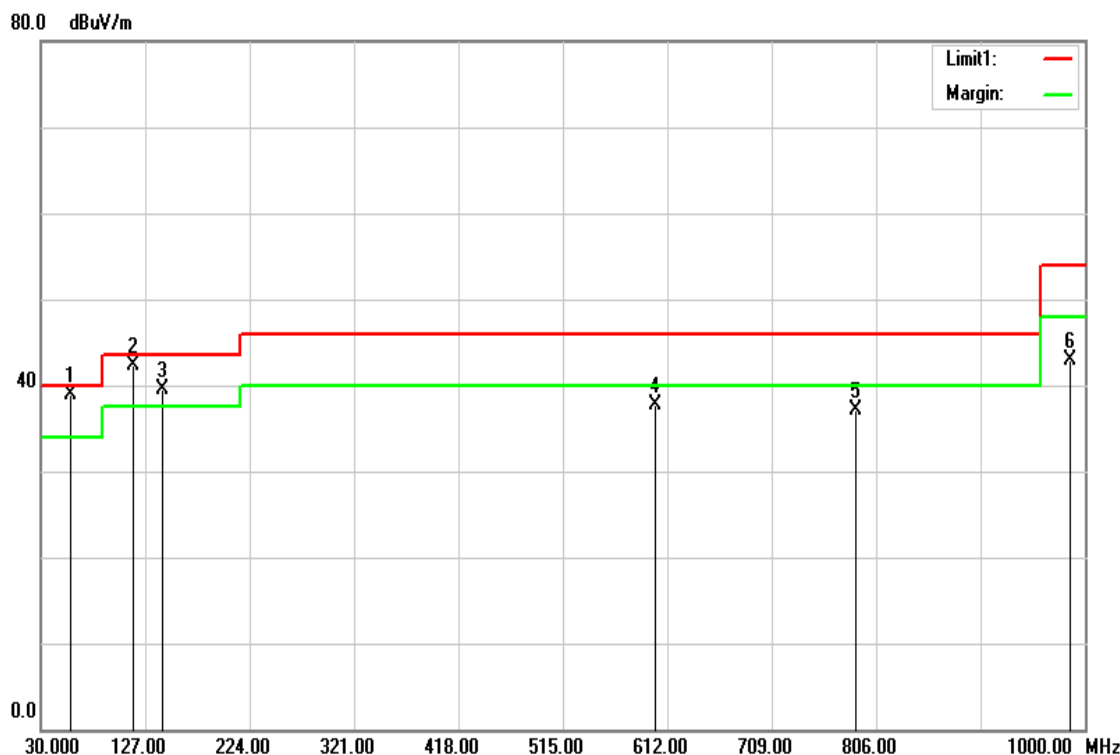

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
57.1600	60.78	-21.81	38.97	40.00	-1.03	QP	V
115.3600	58.61	-16.32	42.29	43.50	-1.21	QP	V
143.4900	55.32	-15.88	39.44	43.50	-4.06	QP	V
600.3600	45.39	-7.75	37.64	46.00	-8.36	peak	V
786.6000	41.64	-4.61	37.03	46.00	-8.97	peak	V
986.4200	44.64	-1.80	42.84	54.00	-11.16	peak	V

Remark:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Result (dBuV/m) – Limit (dBuV/m).

Operation Mode: Normal Link


Test Date: February 23, 2016

Temperature: 27°C

Tested by: Jason Lu

Humidity: 53% RH

Polarity: Hor.

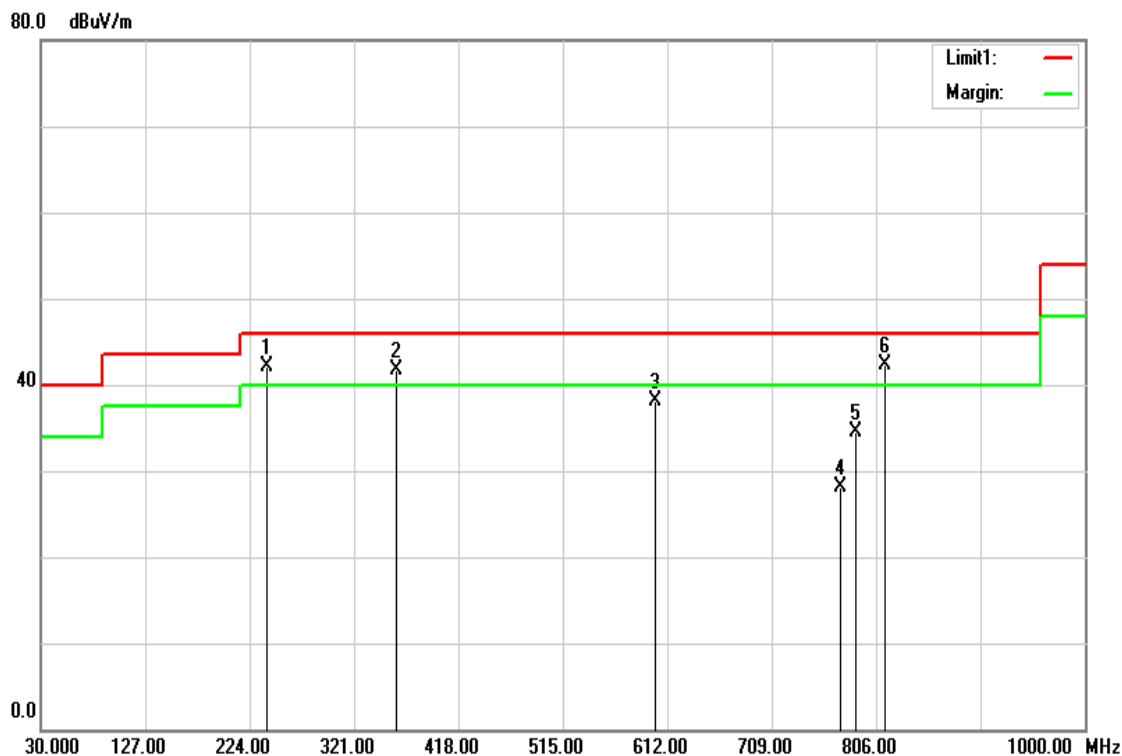

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
239.5200	58.60	-16.52	42.08	46.00	-3.92	peak	H
359.8000	54.36	-12.66	41.70	46.00	-4.30	peak	H
600.3600	45.79	-7.75	38.04	46.00	-7.96	peak	H
773.0200	32.90	-4.73	28.17	46.00	-17.83	QP	H
786.6000	39.05	-4.61	34.44	46.00	-11.56	QP	H
813.7600	46.57	-4.30	42.27	46.00	-3.73	peak	H


Remark:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Result (dBuV/m) – Limit (dBuV/m).


Above 1 GHz

TX / IEEE 802.11b / CH Low

Polarity: Vertical

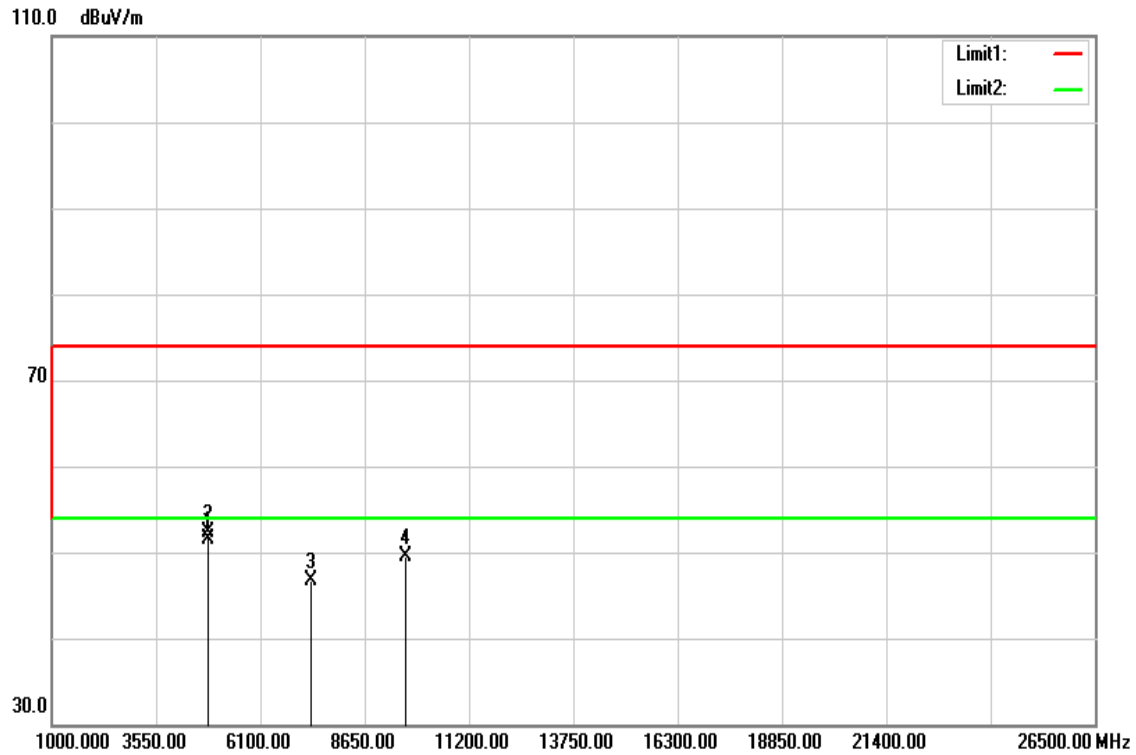

Polarity: Horizontal

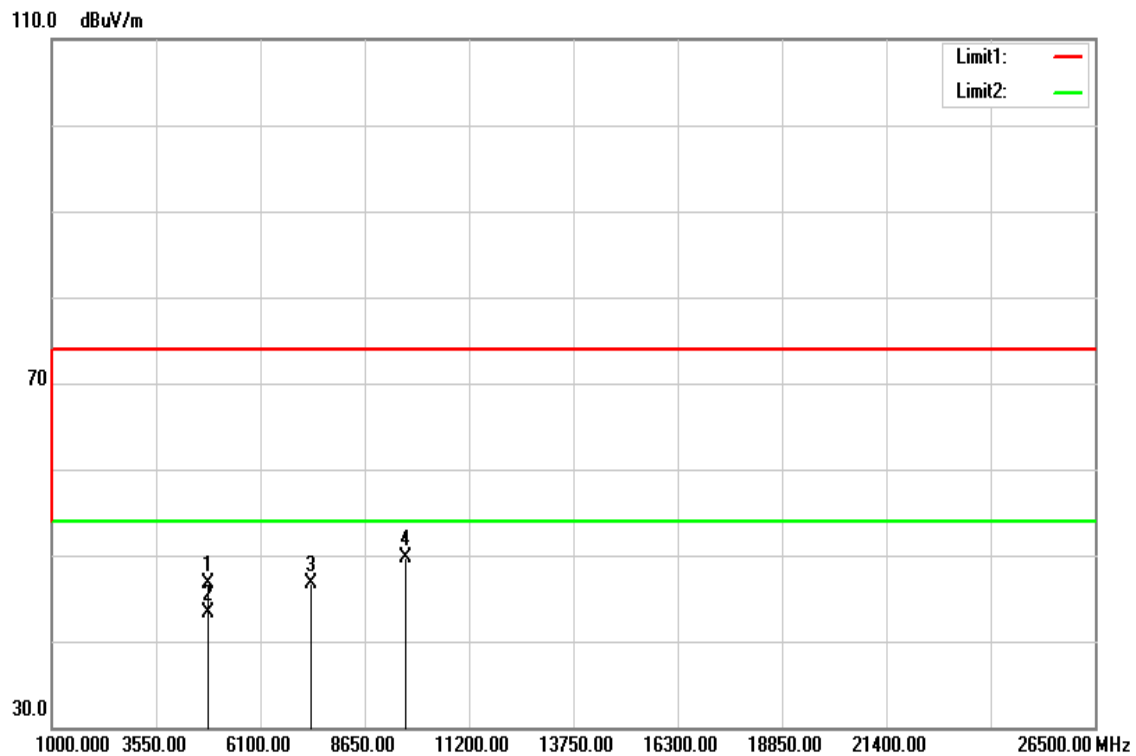

Above 1 GHz

Operation Mode: TX / IEEE 802.11b / CH Low

Test Date: February 24, 2016

Temperature: 27°C

Tested by: Jason Lu

Humidity: 53% RH

Polarity: Ver. / Hor.


Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
4827.000	46.42	5.11	51.53	74.00	-22.47	peak	V
4827.000	47.18	5.11	52.29	54.00	-1.71	AVG	V
7236.000	33.74	12.98	46.72	74.00	-27.28	peak	V
9648.000	31.90	17.60	49.50	74.00	-24.50	peak	V
N/A							
4827.000	41.59	5.11	46.70	74.00	-27.30	peak	H
4827.000	38.21	5.11	43.32	54.00	-10.68	AVG	H
7236.000	33.66	12.98	46.64	74.00	-27.36	peak	H
9648.000	32.11	17.60	49.71	74.00	-24.29	peak	H
N/A							

Remark:


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

TX / IEEE 802.11b / CH Mid

Polarity: Vertical

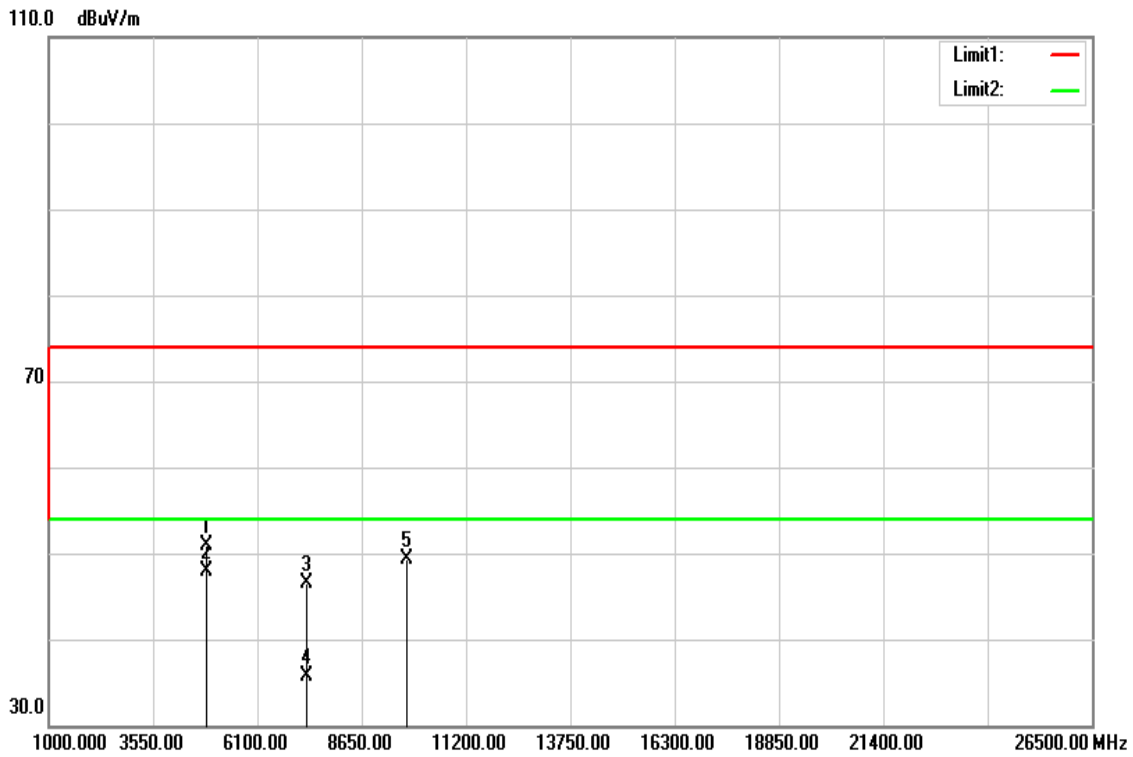

Polarity: Horizontal

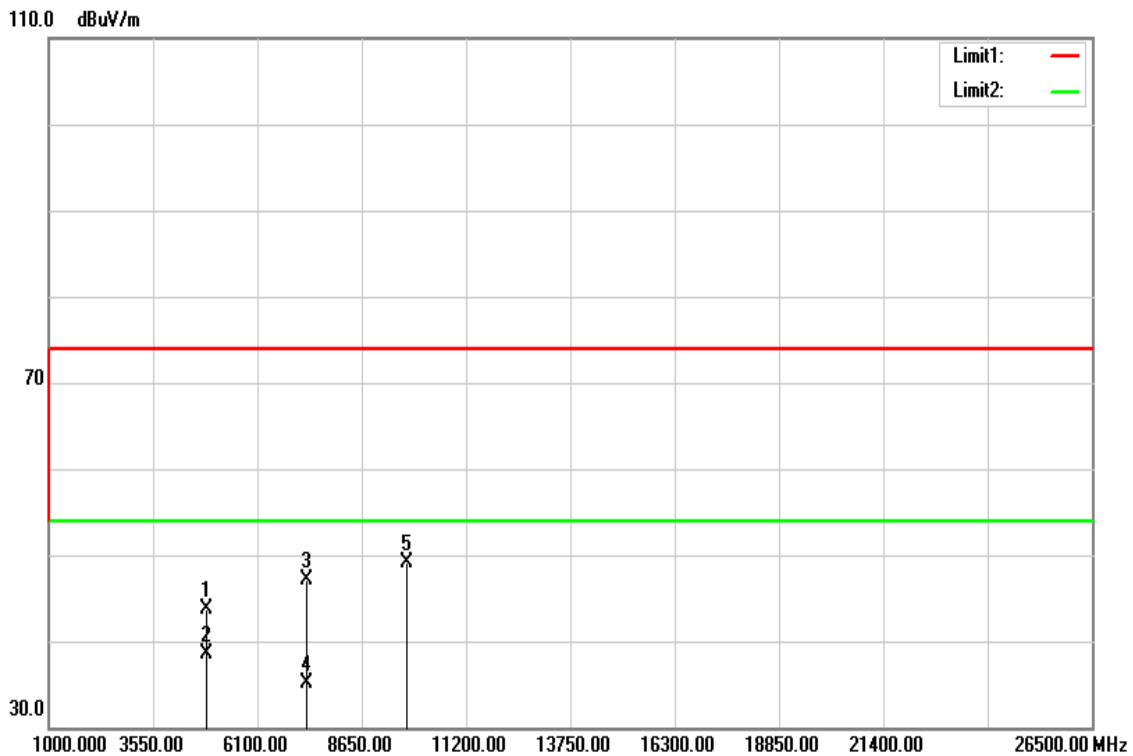

Operation Mode: TX / IEEE 802.11b / CH Mid

Test Date: February 24, 2016

Temperature: 27°C

Tested by: Jason Lu

Humidity: 53% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
4874.000	45.76	5.23	50.99	74.00	-23.01	peak	V
4874.000	42.62	5.23	47.85	54.00	-6.15	AVG	V
7311.000	33.59	12.94	46.53	74.00	-27.47	peak	V
7311.000	22.69	12.94	35.63	54.00	-18.37	AVG	V
9748.000	31.78	17.60	49.38	74.00	-24.62	peak	V
N/A							
4874.000	38.39	5.23	43.62	74.00	-30.38	peak	H
4874.000	33.26	5.23	38.49	54.00	-15.51	AVG	H
7311.000	34.15	12.94	47.09	74.00	-26.91	peak	H
7311.000	22.10	12.94	35.04	54.00	-18.96	AVG	H
9748.000	31.49	17.60	49.09	74.00	-24.91	peak	H
N/A							

Remark:


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

TX / IEEE 802.11b / CH High

Polarity: Vertical



Polarity: Horizontal

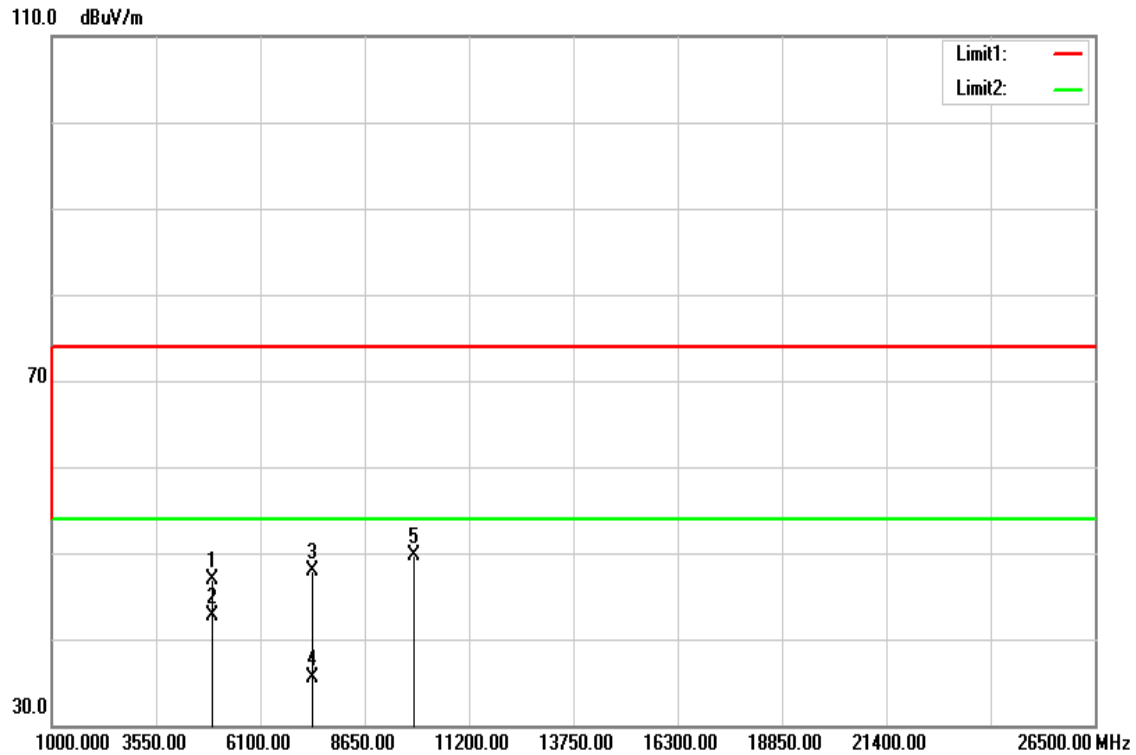

Operation Mode: TX / IEEE 802.11b / CH High

Test Date: February 24, 2016

Temperature: 27°C

Tested by: Jason Lu

Humidity: 53% RH

Polarity: Ver. / Hor.


Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
4924.000	45.73	5.37	51.10	74.00	-22.90	peak	V
4924.000	44.57	5.37	49.94	54.00	-4.06	AVG	V
7386.000	33.90	13.17	47.07	74.00	-26.93	peak	V
7386.000	22.31	13.17	35.48	54.00	-18.52	AVG	V
9848.000	32.73	17.60	50.33	74.00	-23.67	peak	V
N/A							
4924.000	41.57	5.37	46.94	74.00	-27.06	peak	H
4924.000	37.41	5.37	42.78	54.00	-11.22	AVG	H
7386.000	34.80	13.17	47.97	74.00	-26.03	peak	H
7386.000	22.30	13.17	35.47	54.00	-18.53	AVG	H
9848.000	32.05	17.60	49.65	74.00	-24.35	peak	H
N/A							

Remark:


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

TX / IEEE 802.11g / CH Low

Polarity: Vertical

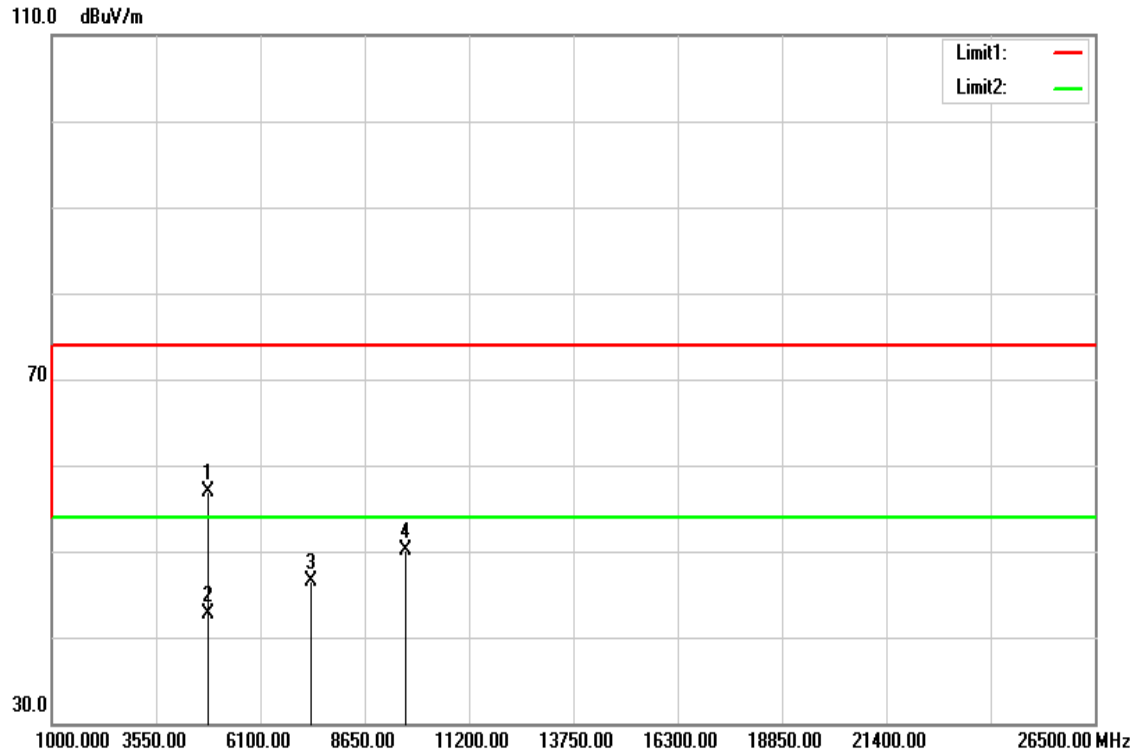

Polarity: Horizontal

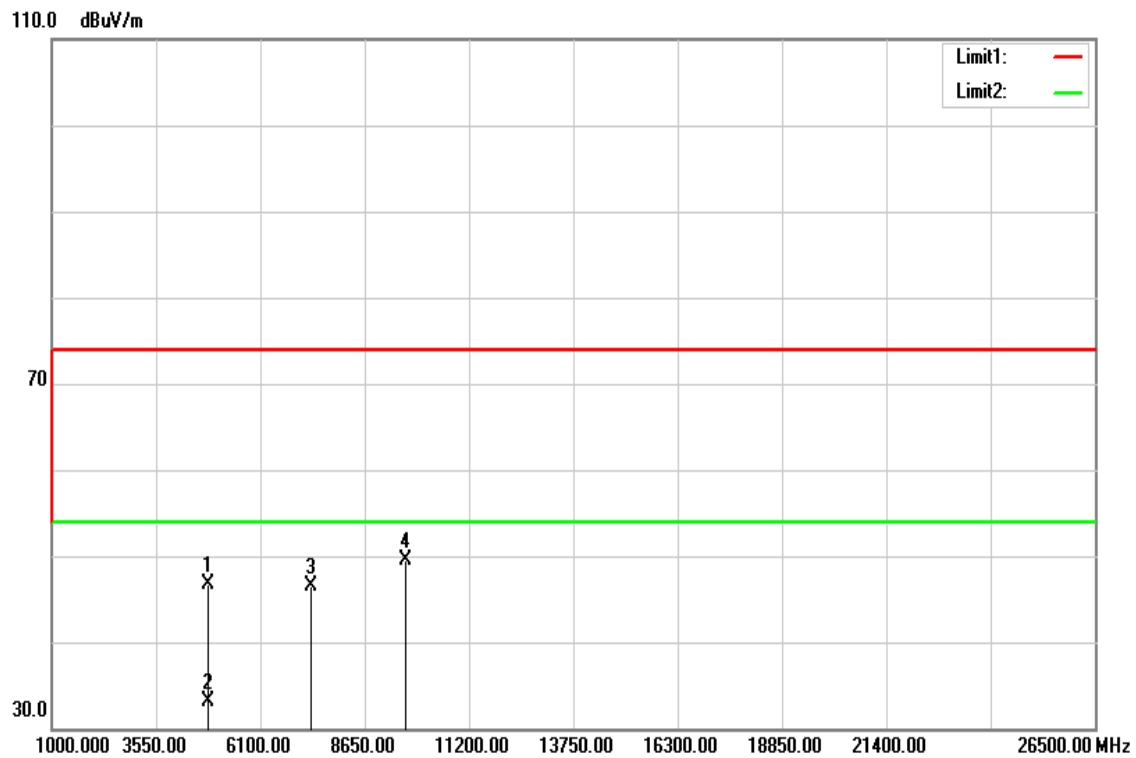

Operation Mode: TX / IEEE 802.11g / CH Low

Test Date: February 24, 2016

Temperature: 27°C

Tested by: Jason Lu

Humidity: 53% RH

Polarity: Ver. / Hor.


Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
4827.000	51.86	5.11	56.97	74.00	-17.03	peak	V
4827.000	37.65	5.11	42.76	54.00	-11.24	AVG	V
7236.000	33.61	12.98	46.59	74.00	-27.41	peak	V
9648.000	32.48	17.60	50.08	74.00	-23.92	peak	V
N/A							
4827.000	41.68	5.11	46.79	74.00	-27.21	peak	H
4827.000	28.07	5.11	33.18	54.00	-20.82	AVG	H
7236.000	33.54	12.98	46.52	74.00	-27.48	peak	H
9648.000	31.86	17.60	49.46	74.00	-24.54	peak	H
N/A							

Remark:


1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

TX / IEEE 802.11g / CH Mid

Polarity: Vertical

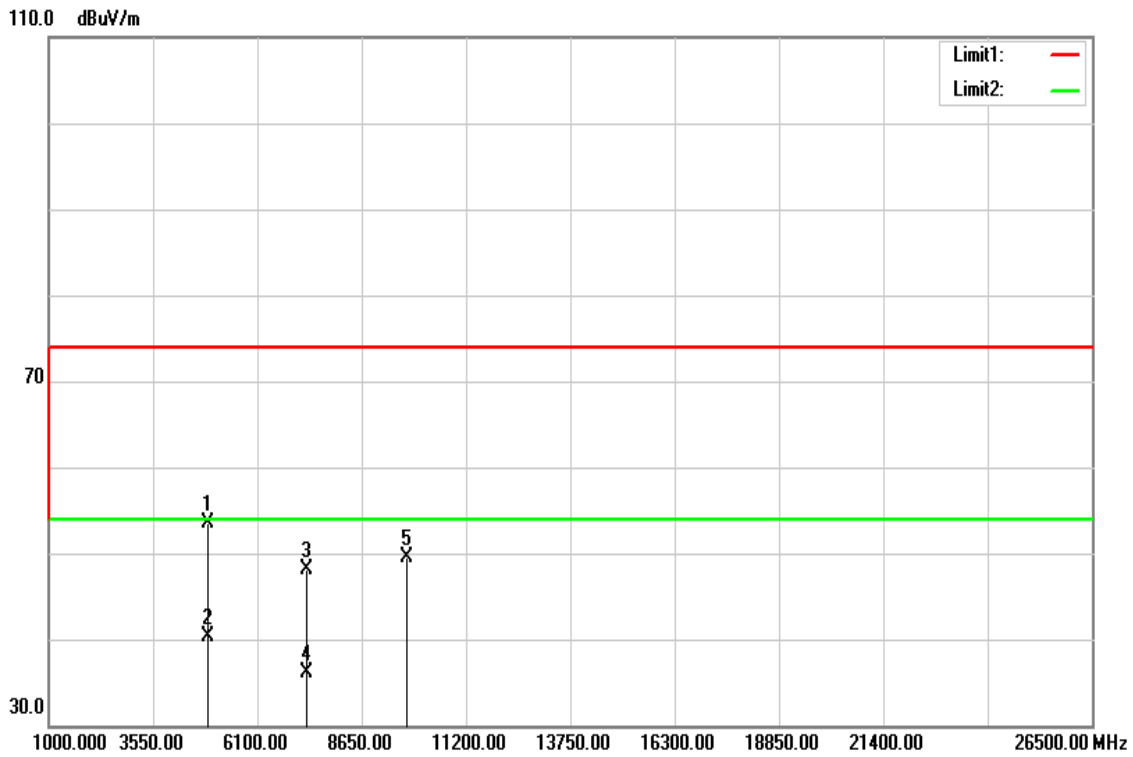

Polarity: Horizontal

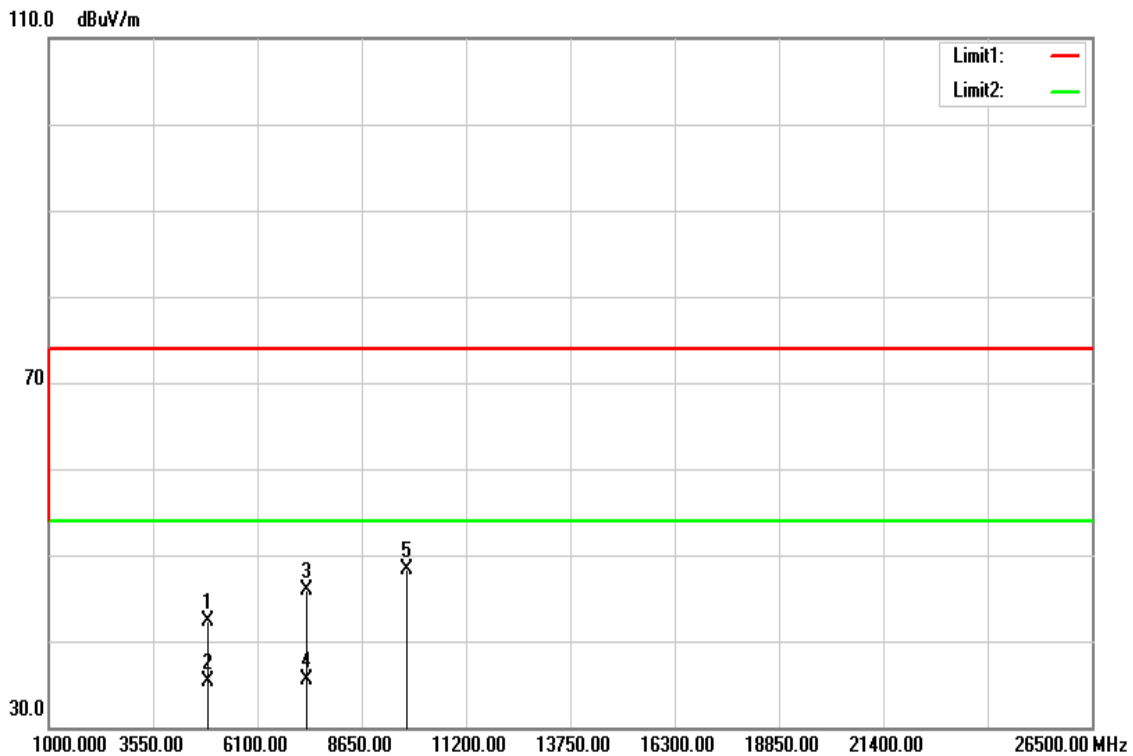

Operation Mode: TX / IEEE 802.11g / CH Mid

Test Date: February 24, 2016

Temperature: 27°C

Tested by: Jason Lu

Humidity: 53% RH

Polarity: Ver. / Hor.


Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
4876.000	48.35	5.24	53.59	74.00	-20.41	peak	V
4876.000	35.15	5.24	40.39	54.00	-13.61	AVG	V
7311.000	35.15	12.94	48.09	74.00	-25.91	peak	V
7311.000	23.17	12.94	36.11	54.00	-17.89	AVG	V
9748.000	31.86	17.60	49.46	74.00	-24.54	peak	V
N/A							
4876.000	37.15	5.24	42.39	74.00	-31.61	peak	H
4876.000	30.02	5.24	35.26	54.00	-18.74	AVG	H
7311.000	32.95	12.94	45.89	74.00	-28.11	peak	H
7311.000	22.47	12.94	35.41	54.00	-18.59	AVG	H
9748.000	30.68	17.60	48.28	74.00	-25.72	peak	H

Remark:


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

TX / IEEE 802.11g / CH High

Polarity: Vertical

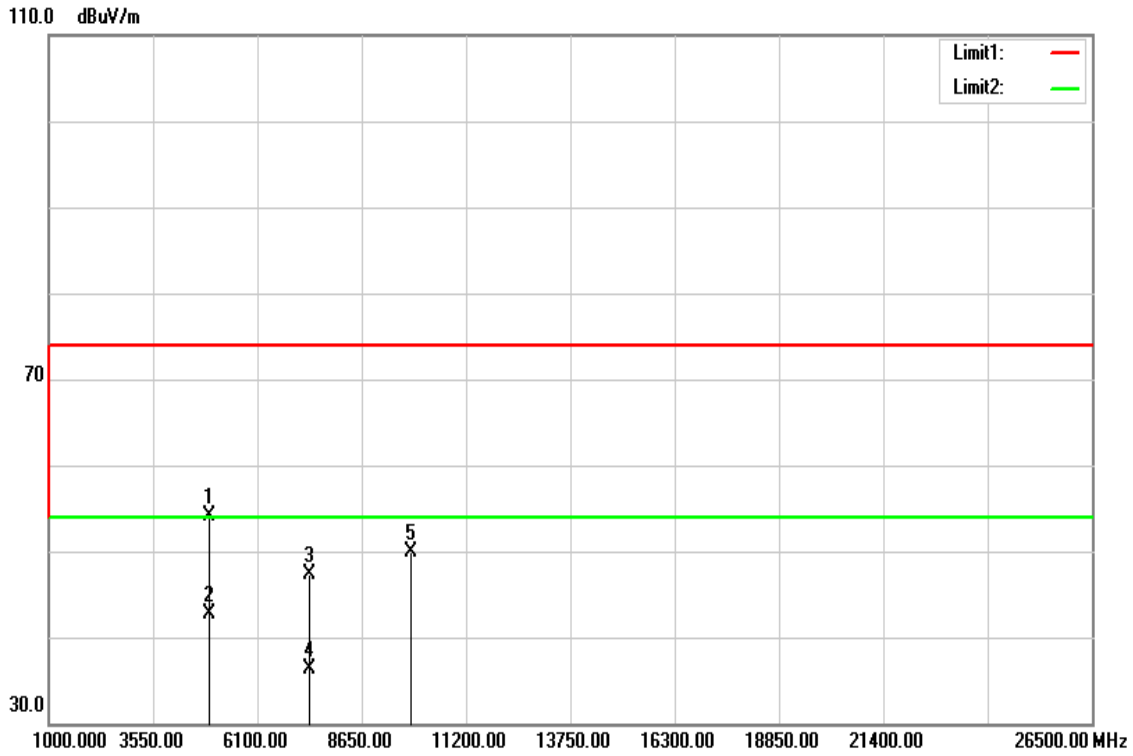

Polarity: Horizontal

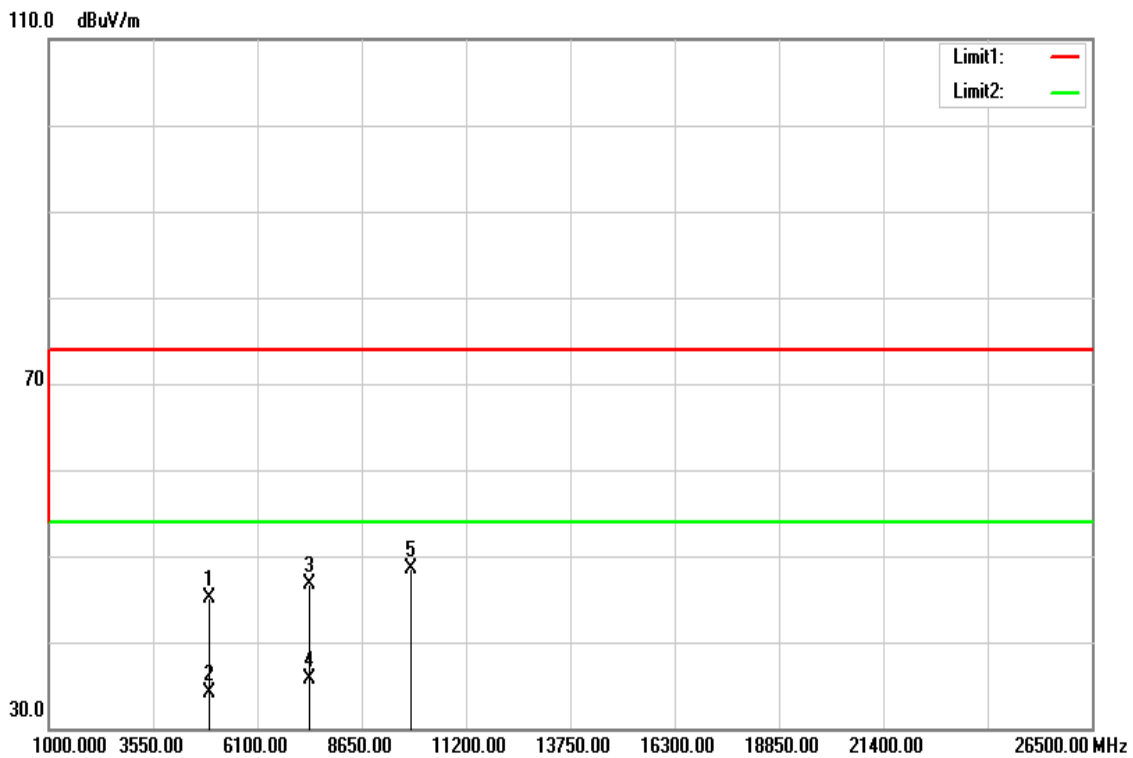

Operation Mode: TX / IEEE 802.11g / CH High

Test Date: February 24, 2016

Temperature: 27°C

Tested by: Jason Lu

Humidity: 53% RH

Polarity: Ver. / Hor.


Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
4918.000	48.75	5.35	54.10	74.00	-19.90	peak	V
4918.000	37.31	5.35	42.66	54.00	-11.34	AVG	V
7386.000	34.22	13.17	47.39	74.00	-26.61	peak	V
7386.000	23.10	13.17	36.27	54.00	-17.73	AVG	V
9848.000	32.39	17.60	49.99	74.00	-24.01	peak	V
N/A							
4918.000	39.82	5.35	45.17	74.00	-28.83	peak	H
4918.000	28.70	5.35	34.05	54.00	-19.95	AVG	H
7386.000	33.58	13.17	46.75	74.00	-27.25	peak	H
7386.000	22.50	13.17	35.67	54.00	-18.33	AVG	H
9848.000	30.88	17.60	48.48	74.00	-25.52	peak	H
N/A							

Remark:


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

TX / IEEE 802.11n HT 20 MHz mode / CH Low

Polarity: Vertical

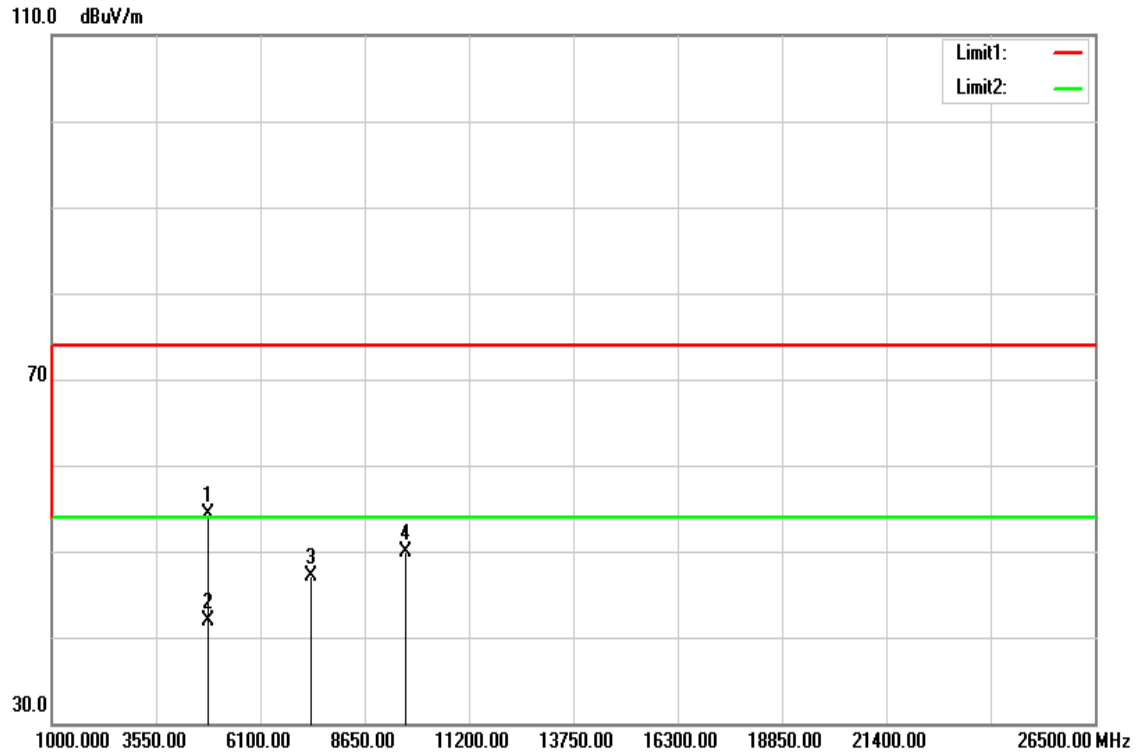

Polarity: Horizontal

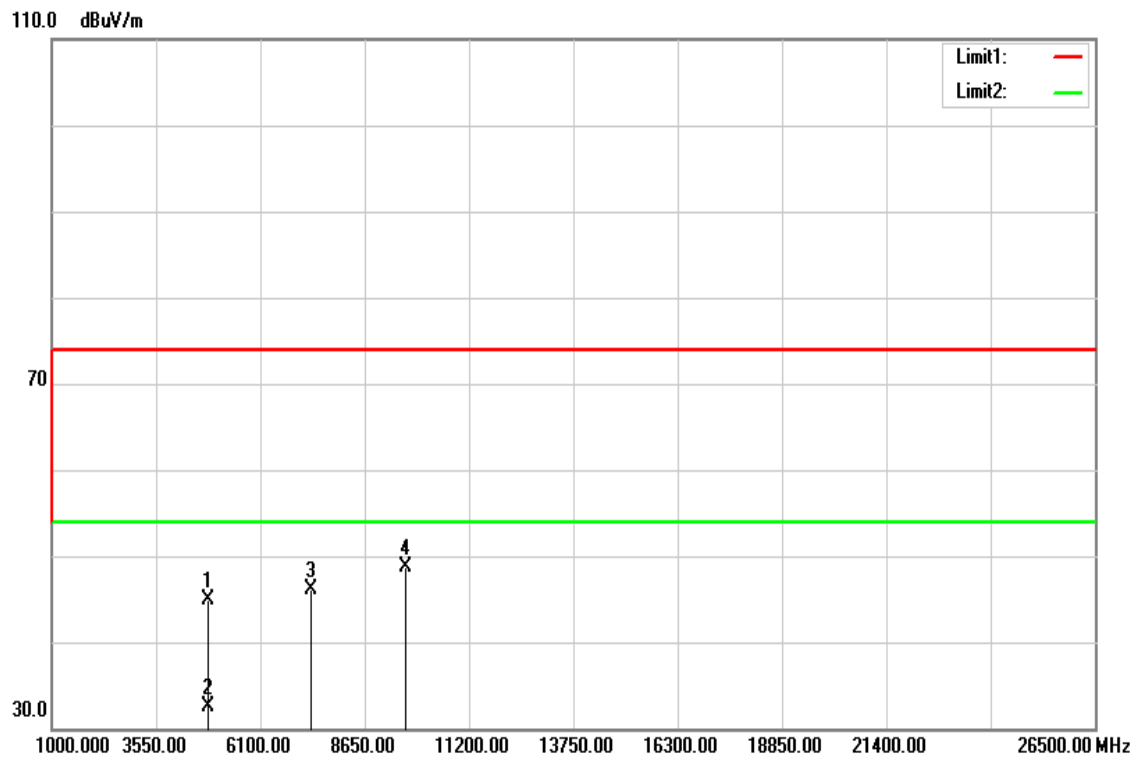

Operation Mode: TX / IEEE 802.11n HT 20 MHz mode / CH Low **Test Date:** February 24, 2016

Temperature: 27°C

Tested by: Jason Lu

Humidity: 53% RH

Polarity: Ver. / Hor.


Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
4820.000	49.19	5.09	54.28	74.00	-19.72	peak	V
4820.000	36.79	5.09	41.88	54.00	-12.12	AVG	V
7236.000	34.09	12.98	47.07	74.00	-26.93	peak	V
9648.000	32.34	17.60	49.94	74.00	-24.06	peak	V
N/A							
4820.000	39.89	5.09	44.98	74.00	-29.02	peak	H
4820.000	27.39	5.09	32.48	54.00	-21.52	AVG	H
7236.000	33.09	12.98	46.07	74.00	-27.93	peak	H
9648.000	31.02	17.60	48.62	74.00	-25.38	peak	H
N/A							

Remark:


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

TX / IEEE 802.11n HT 20 MHz mode / CH Mid

Polarity: Vertical

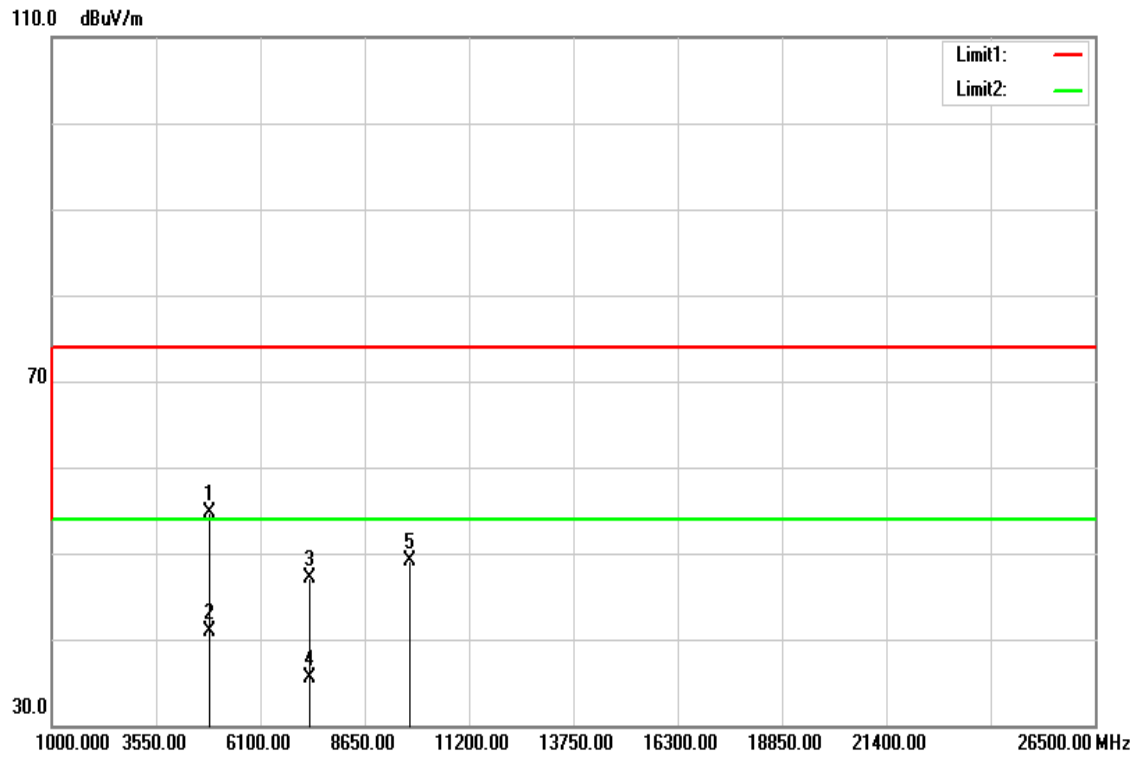

Polarity: Horizontal

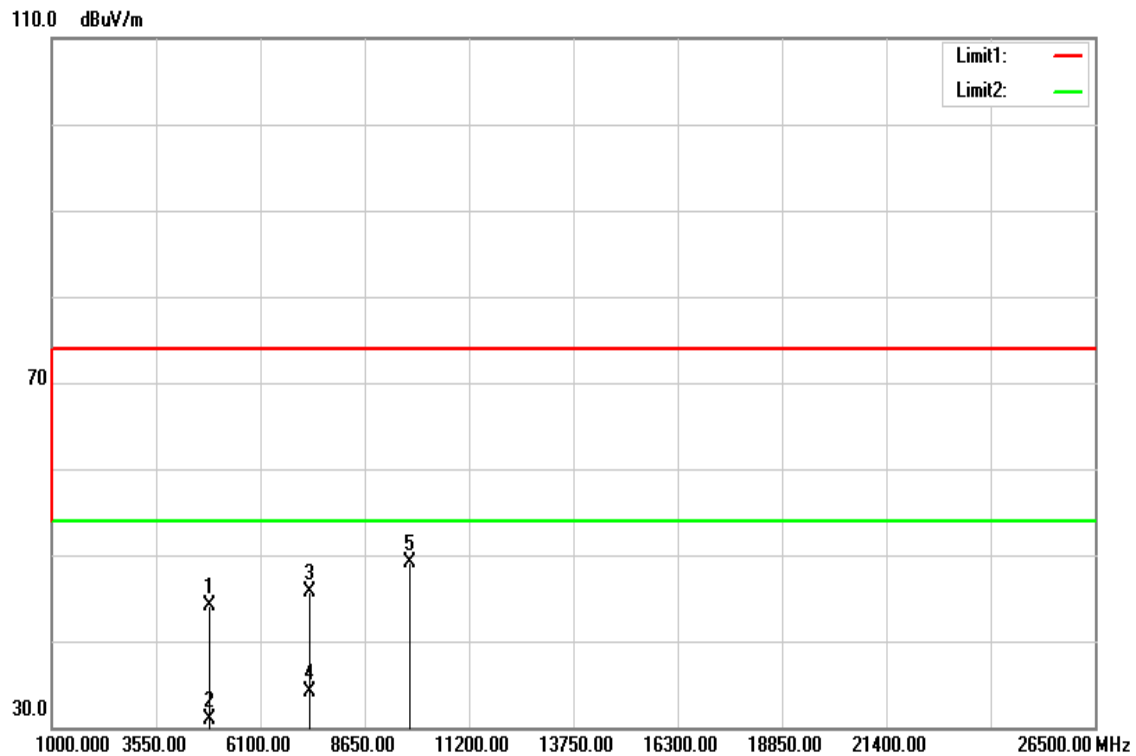

Operation Mode: TX / IEEE 802.11n HT 20 MHz mode / CH Mid **Test Date:** February 24, 2016

Temperature: 27°C

Tested by: Jason Lu

Humidity: 53% RH

Polarity: Ver. / Hor.


Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
4869.000	49.40	5.22	54.62	74.00	-19.38	peak	V
4869.000	35.69	5.22	40.91	54.00	-13.09	AVG	V
7311.000	34.15	12.94	47.09	74.00	-26.91	peak	V
7311.000	22.53	12.94	35.47	54.00	-18.53	AVG	V
9748.000	31.46	17.60	49.06	74.00	-24.94	peak	V
N/A							
4869.000	38.79	5.22	44.01	74.00	-29.99	peak	H
4869.000	25.67	5.22	30.89	54.00	-23.11	AVG	H
7311.000	32.81	12.94	45.75	74.00	-28.25	peak	H
7311.000	21.24	12.94	34.18	54.00	-19.82	AVG	H
9748.000	31.58	17.60	49.18	74.00	-24.82	peak	H
N/A							

Remark:


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

TX / IEEE 802.11n HT 20 MHz mode / CH High

Polarity: Vertical

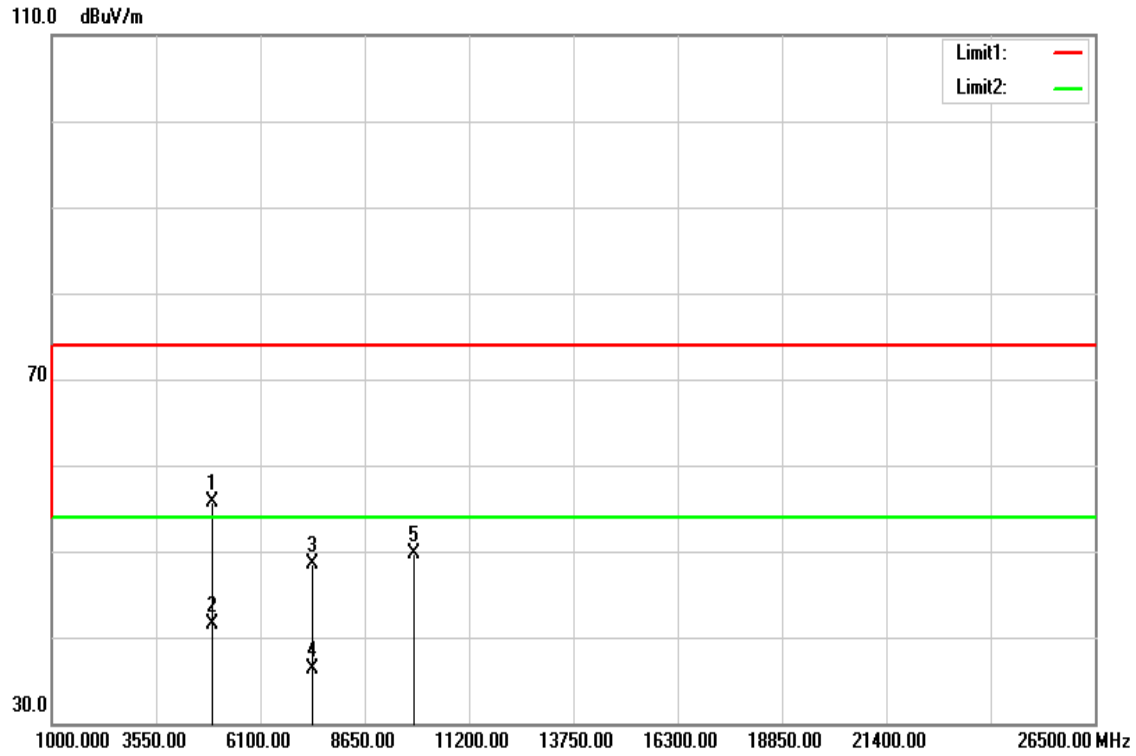

Polarity: Horizontal

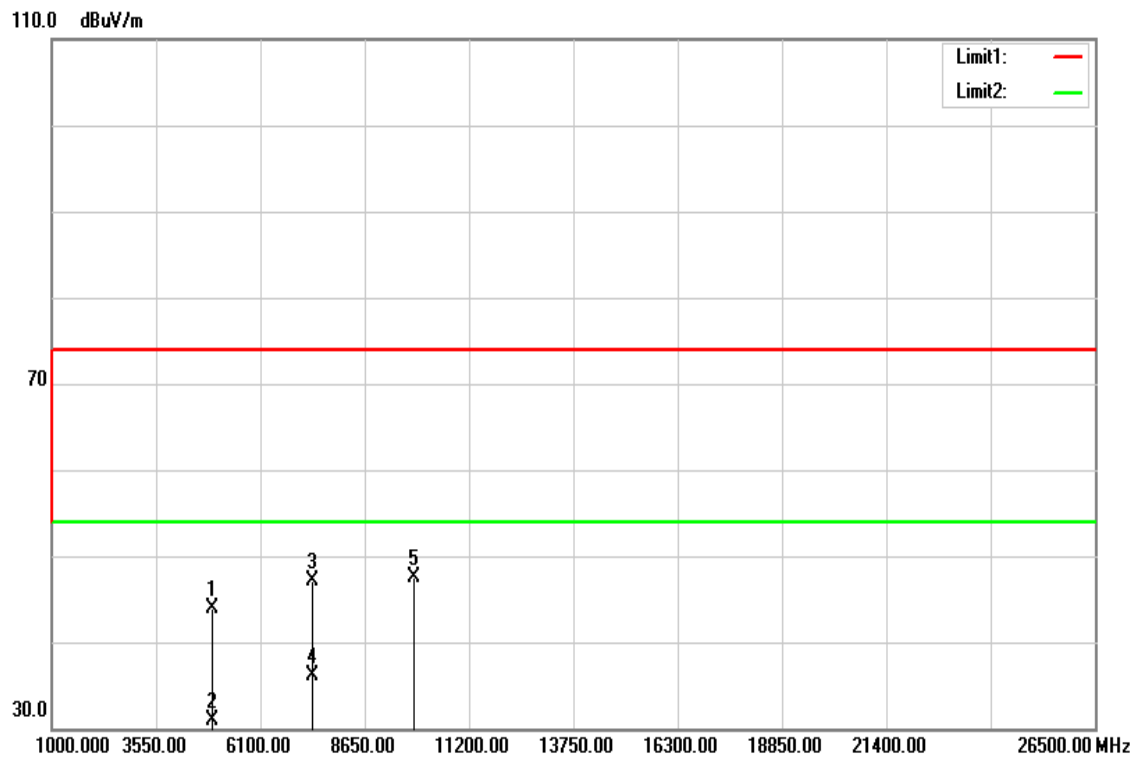

Operation Mode: TX / IEEE 802.11n HT 20 MHz mode / CH High
Temperature: 27°C
Humidity: 53% RH

Test Date: February 24, 2016
Tested by: Jason Lu
Polarity: Ver. / Hor.


Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
4925.000	50.32	5.37	55.69	74.00	-18.31	peak	V
4925.000	36.15	5.37	41.52	54.00	-12.48	AVG	V
7386.000	35.37	13.17	48.54	74.00	-25.46	peak	V
7386.000	23.10	13.17	36.27	54.00	-17.73	AVG	V
9848.000	32.19	17.60	49.79	74.00	-24.21	peak	V
N/A							
4932.000	38.53	5.39	43.92	74.00	-30.08	peak	H
4932.000	25.42	5.39	30.81	54.00	-23.19	AVG	H
7386.000	33.92	13.17	47.09	74.00	-26.91	peak	H
7386.000	22.84	13.17	36.01	54.00	-17.99	AVG	H
9848.000	29.95	17.60	47.55	74.00	-26.45	peak	H
N/A							

Remark:


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

TX / IEEE 802.11n HT 40 MHz mode / CH Low

Polarity: Vertical

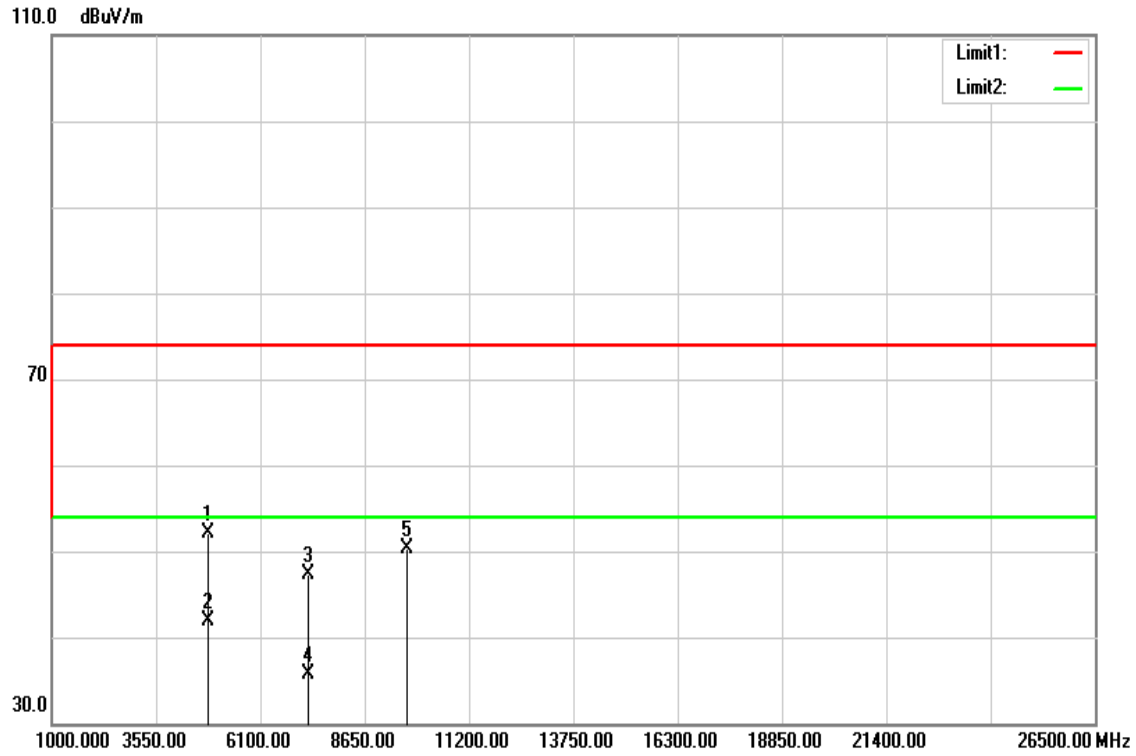

Polarity: Horizontal

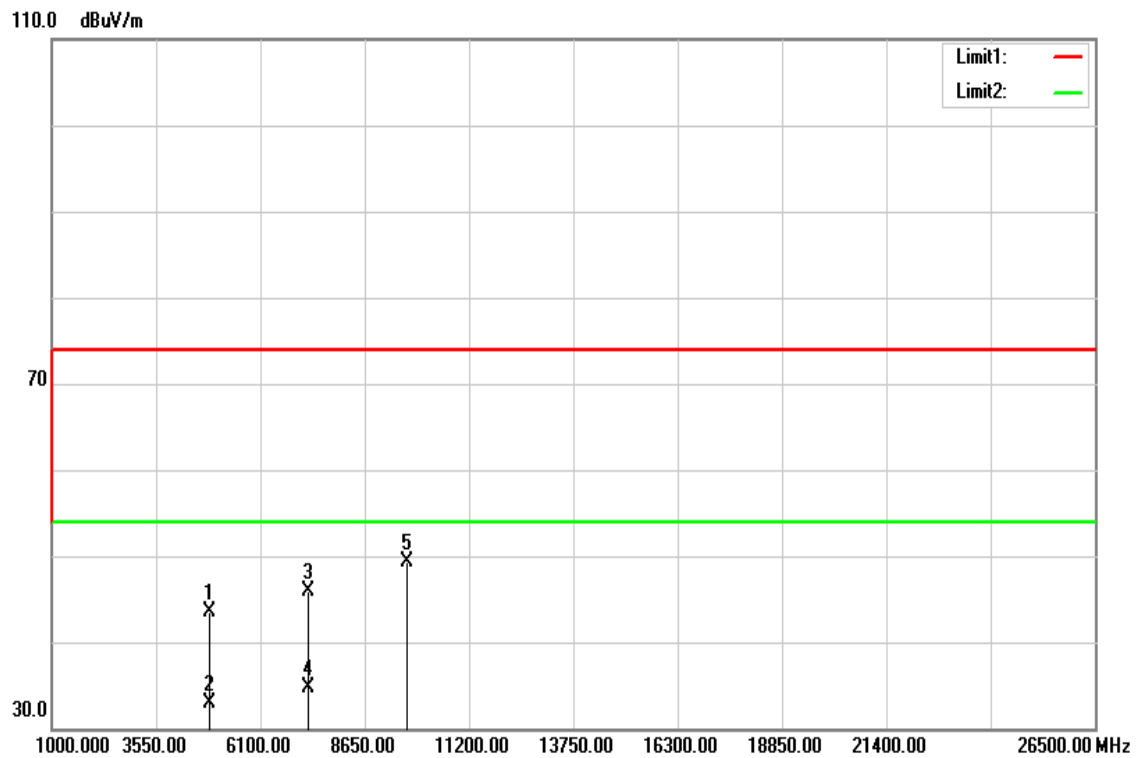

Operation Mode: TX / IEEE 802.11n HT 40 MHz mode
/ CH Low

Test Date: February 24, 2016

Temperature: 27°C

Tested by: Jason Lu

Humidity: 53% RH

Polarity: Ver. / Hor.


Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
4841.000	46.89	5.14	52.03	74.00	-21.97	peak	V
4841.000	36.73	5.14	41.87	54.00	-12.13	AVG	V
7266.000	34.52	12.80	47.32	74.00	-26.68	peak	V
7266.000	22.82	12.80	35.62	54.00	-18.38	AVG	V
9688.000	32.68	17.60	50.28	74.00	-23.72	peak	V
N/A							
4848.000	38.32	5.16	43.48	74.00	-30.52	peak	H
4848.000	27.65	5.16	32.81	54.00	-21.19	AVG	H
7266.000	33.15	12.80	45.95	74.00	-28.05	peak	H
7266.000	22.00	12.80	34.80	54.00	-19.20	AVG	H
9688.000	31.79	17.60	49.39	74.00	-24.61	peak	H
N/A							

Remark:


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

TX / IEEE 802.11n HT 40 MHz mode / CH Mid

Polarity: Vertical

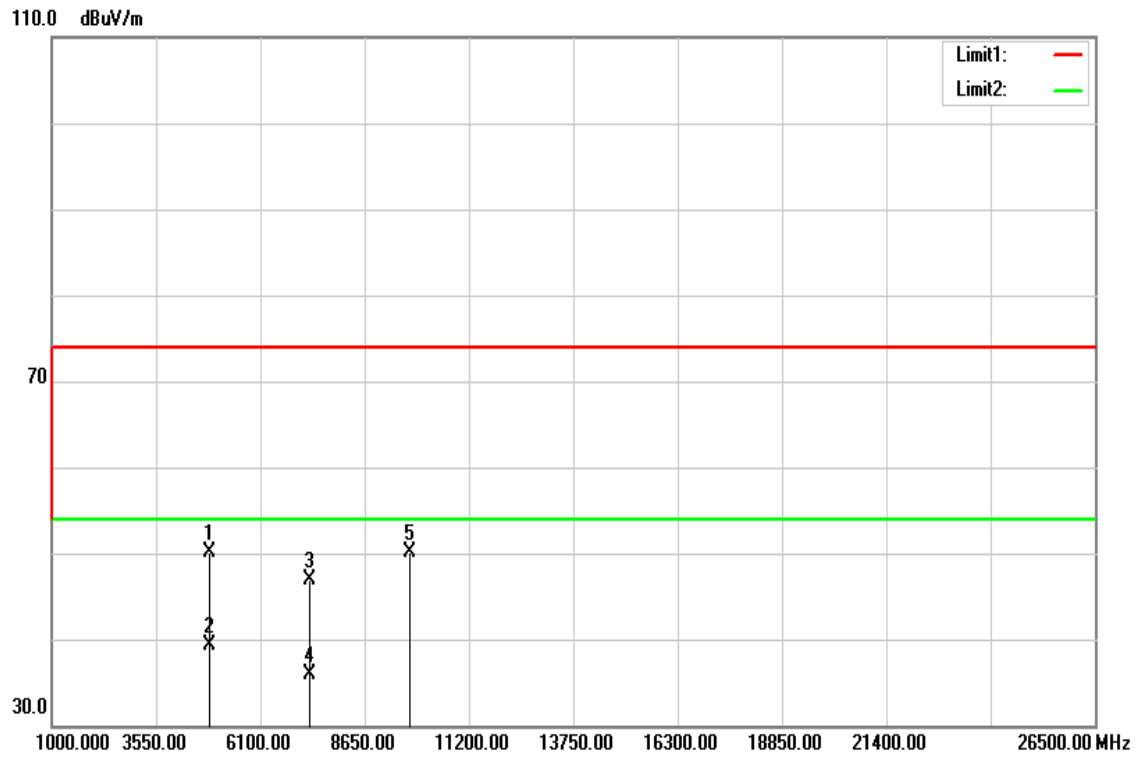

Polarity: Horizontal

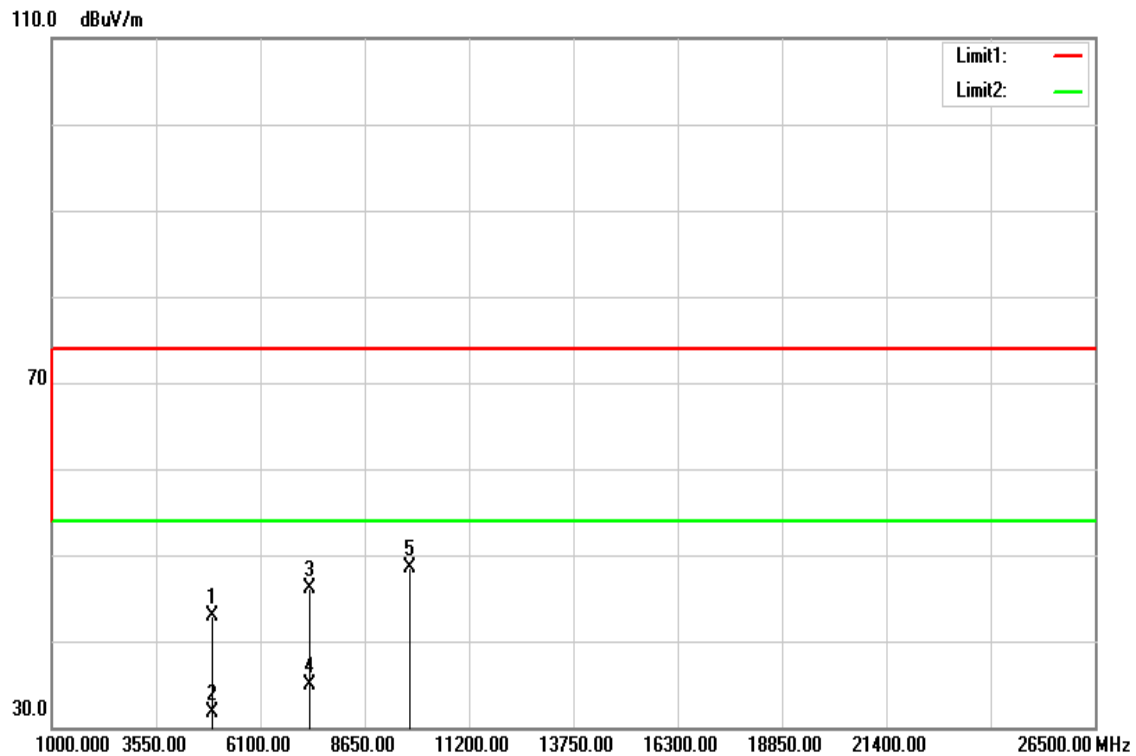

Operation Mode: TX / IEEE 802.11n HT 40 MHz mode
/ CH Mid

Test Date: February 24, 2016

Temperature: 27°C

Tested by: Jason Lu

Humidity: 53% RH

Polarity: Ver. / Hor.


Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
4855.000	44.84	5.18	50.02	74.00	-23.98	peak	V
4855.000	34.19	5.18	39.37	54.00	-14.63	AVG	V
7311.000	33.88	12.94	46.82	74.00	-27.18	peak	V
7311.000	23.02	12.94	35.96	54.00	-18.04	AVG	V
9748.000	32.55	17.60	50.15	74.00	-23.85	peak	V
N/A							
4932.000	37.53	5.39	42.92	74.00	-31.08	peak	H
4932.000	26.35	5.39	31.74	54.00	-22.26	AVG	H
7311.000	33.23	12.94	46.17	74.00	-27.83	peak	H
7311.000	21.91	12.94	34.85	54.00	-19.15	AVG	H
9748.000	30.99	17.60	48.59	74.00	-25.41	peak	H
N/A							

Remark:


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

TX / IEEE 802.11n HT 40 MHz mode / CH High

Polarity: Vertical

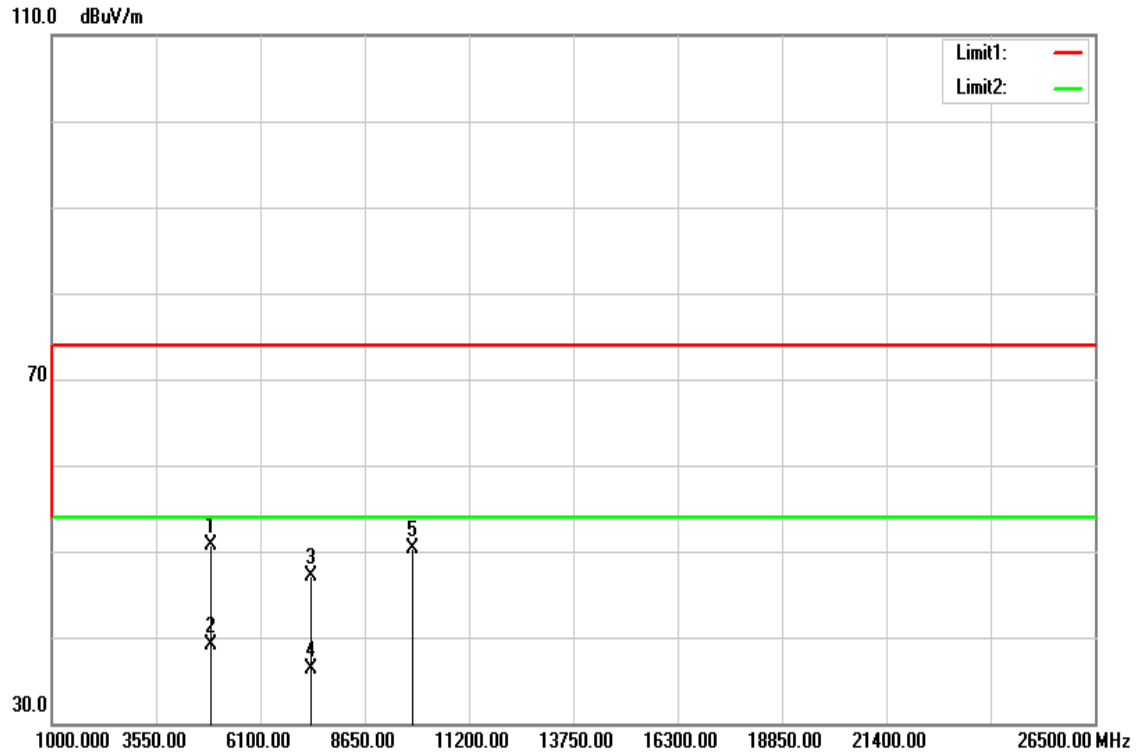

Polarity: Horizontal

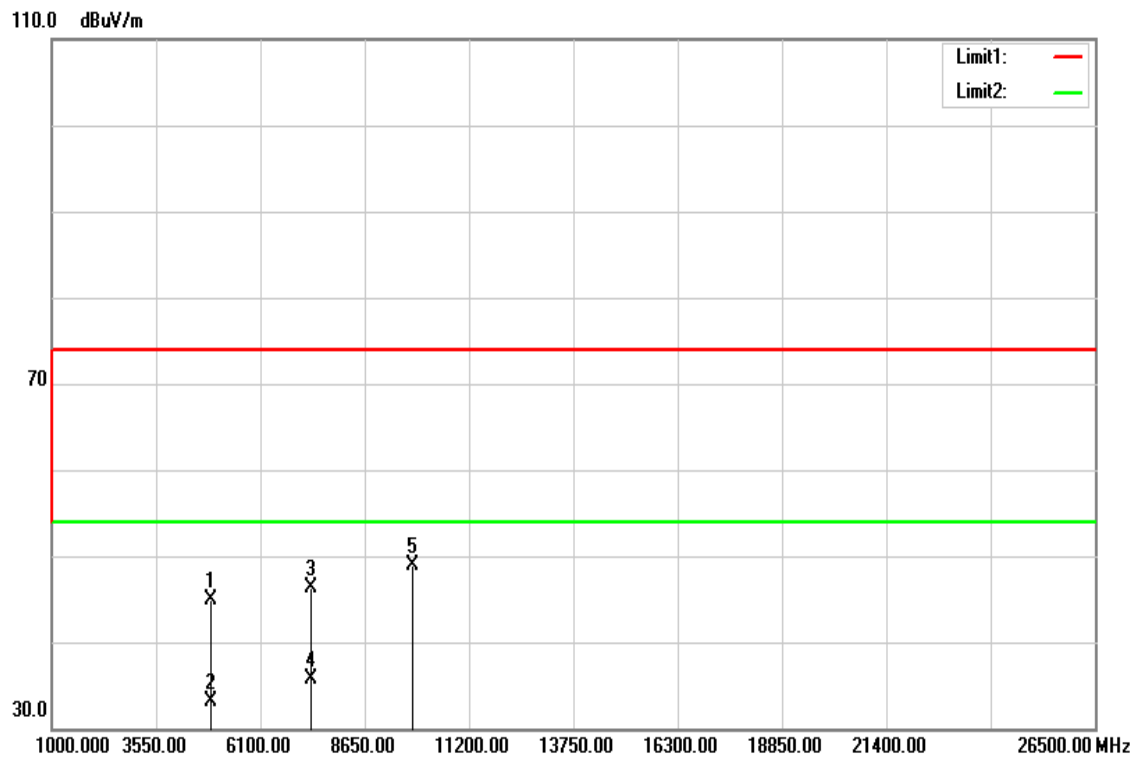

Operation Mode: TX / IEEE 802.11n HT 40 MHz mode
/ CH High

Test Date: February 24, 2016

Temperature: 27°C

Tested by: Jason Lu

Humidity: 53% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
4904.000	45.45	5.31	50.76	74.00	-23.24	peak	V
4904.000	33.71	5.31	39.02	54.00	-14.98	AVG	V
7356.000	34.07	13.08	47.15	74.00	-26.85	peak	V
7356.000	23.17	13.08	36.25	54.00	-17.75	AVG	V
9808.000	32.76	17.60	50.36	74.00	-23.64	peak	V
N/A							
4904.000	39.59	5.31	44.90	74.00	-29.10	peak	H
4904.000	27.87	5.31	33.18	54.00	-20.82	AVG	H
7356.000	33.15	13.08	46.23	74.00	-27.77	peak	H
7356.000	22.62	13.08	35.70	54.00	-18.30	AVG	H
9808.000	31.39	17.60	48.99	74.00	-25.01	peak	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

7.7 POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 µH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dBµV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Test Data

Operation Mode: Normal Link **Test Date:** February 24, 2016
Temperature: 24°C **Tested by:** Jason Lu
Humidity: 50% RH


Freq. (MHz)	QP Reading (dBuV)	AV Reading (dBuV)	Corr. factor (dB/m)	QP Result (dBuV/m)	AV Result (dBuV/m)	QP Limit (dBuV)	AV Limit (dBuV)	QP Margin (dB)	AV Margin (dB)	Note
0.4940	38.81	28.06	9.82	48.63	37.88	56.10	46.10	-7.47	-8.22	L1
0.5140	40.41	30.30	9.85	50.26	40.15	56.00	46.00	-5.74	-5.85	L1
0.5380	43.74	33.51	9.88	53.62	43.39	56.00	46.00	-2.38	-2.61	L1
0.5580	39.57	29.40	9.91	49.48	39.31	56.00	46.00	-6.52	-6.69	L1
0.6580	33.83	24.22	10.05	43.88	34.27	56.00	46.00	-12.12	-11.73	L1
1.0140	36.46	24.40	10.51	46.97	34.91	56.00	46.00	-9.03	-11.09	L1
1.0740	34.66	23.82	10.46	45.12	34.28	56.00	46.00	-10.88	-11.72	L1
0.1580	35.42	26.70	9.64	45.06	36.34	65.56	55.57	-20.50	-19.23	L2
0.5140	38.41	32.04	9.81	48.22	41.85	56.00	46.00	-7.78	-4.15	L2
0.5340	41.42	34.39	9.84	51.26	44.23	56.00	46.00	-4.74	-1.77	L2
0.5540	39.25	32.71	9.86	49.11	42.57	56.00	46.00	-6.89	-3.43	L2
0.6740	34.15	27.60	10.03	44.18	37.63	56.00	46.00	-11.82	-8.37	L2
1.0300	33.18	26.10	10.46	43.64	36.56	56.00	46.00	-12.36	-9.44	L2
1.4980	31.74	25.36	10.10	41.84	35.46	56.00	46.00	-14.16	-10.54	L2

Remark:

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10 kHz; the IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9 kHz;
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)

Test Plots

Conducted emissions (Line 1)

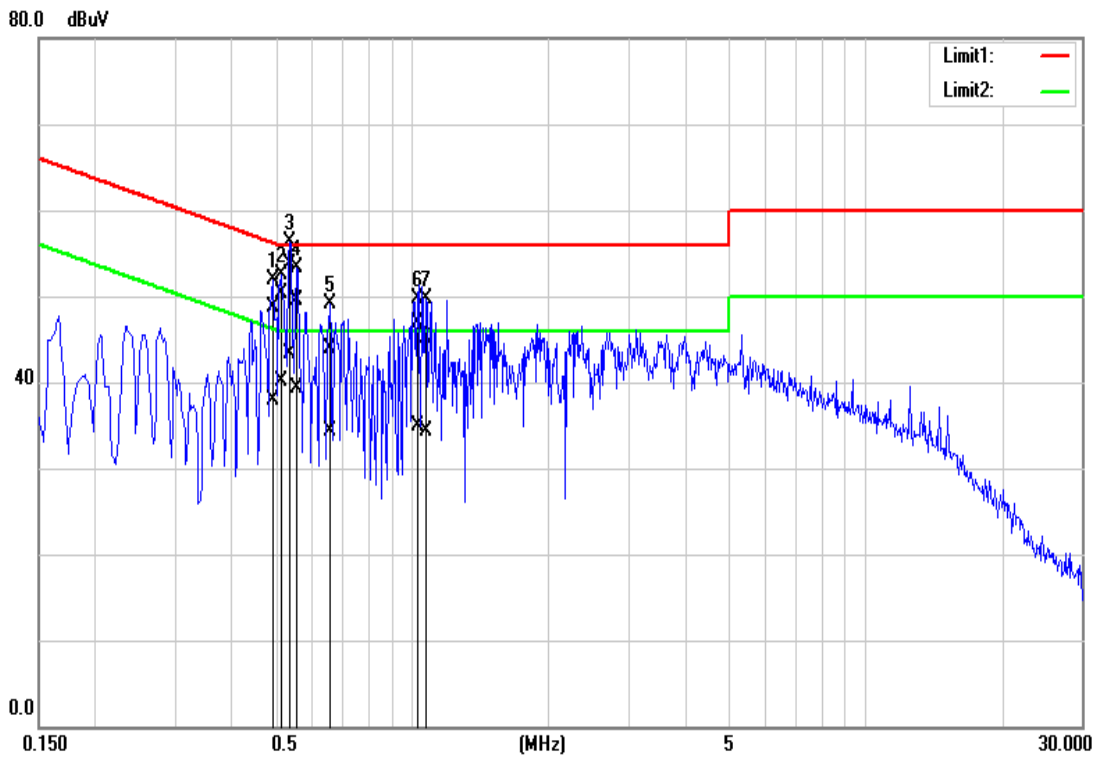

Conducted emissions (Line 2)

