

**HYUNDAI CALIBRATION & CERTIFICATION TECH. CO., LTD.**

Product Compliance Division, EMC Team  
SAN 136-1, AMI-RI, BUBAL-EUP, ICHEON-SI, KYOUNKI-DO, 467-701, KOREA

TEL : +82 31 639 8518 FAX : +82 31 639 8525

**TEST REPORT**

**Manufacture;**  
**HYUNDAI IT CORP.**

**SAN 136-1, AMI-RI, BUBAL-EUP, ICHEON-SI,  
KYOUNKI-DO, 467-701, KOREA**

**HYUNDAI IT CORP. FRN : 0005-8664-39**

**Date of Issue : April 26, 2006**

**Test Report No.: HCT-F06-0404**

**Test Site: HYUNDAI CALIBRATION & CERTIFICATION  
TECHNOLOGIES CO., LTD.**

**HCT FRN : 0005-8664-21**

**FCC ID :**

**PJILT26AW001**

**Type No.:**

**LT26AW001**

**Rule Part(s):** Part 15 & 2  
**Equipment Class:** FCC Class B Peripheral Device (JBP)  
**Standard(s):** FCC Class B: (CISPR 22)  
**EUT Type:** 26" LCD TV  
**Max. Resolution(s):** 1024 X 768 (@/75Hz)  
**Type No.:** LT26AW001  
**Port/Connector(s)** 15-pin D-sub, S/PDiF output, Composite output, HDMI, Comosite Audio output, VGA Audio input, Component 1 input, Component 1 Audio input, Composite input, S-Video input, Composite Audio input, Component 2 Audio input, Component 2 input  
**LCD Panel** SAMSUNG(LTA260W2-L01)

**This equipment has been shown to be in compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003**

**I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.**



**Report prepared by**  
**: Kun-Hyoung Kim**  
**Test engineer of EMC Tech.Part**



**Approved by**  
**: Sang Jun LEE**  
**Manager of EMC Tech.Part**



# TABLE OF CONTENTS

PAGE

## REPORT COVER

## TABLE OF CONTENTS

1.1	SCOPE	3
2.1	INTRODUCTION (SITE DESCRIPTION)	4
3.1	PRODUCTION INFORMATION	5-6
4.1	DESCRIPTION OF TESTS (CONDUCTED)	7
4.3	DESCRIPTION OF TESTS (RADIATED)	8
5.1	LIST OF SUPPORT EQUIPMENT	9-11
6.1	TEST DATA (CONDUCTED)	12-16
7.1	TEST DATA (RADIATED)	17
8.1	SAMPLE CALCULATIONS	18
9.1	TEST EQUIPMENT	19
10.1	TEST SOFTWARE USED	20
11.1	CONCLUSION	21

ATTACHMENT A : FCC ID LABEL & LOCATION

ATTACHMENT B : EXTERNAL PHOTOGRAPHS

ATTACHMENT C : BLOCK DIAGRAM

ATTACHMENT D : TEST SETUP PHOTOGRAPHS

ATTACHMENT E : USER'S MANUAL

ATTACHMENT F : INTERNAL PHOTOGRAPHS

# MEASUREMENT REPORT

## 1.Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

<b>Applicant Name:</b>	<b>HYUNDAI IT CORP.</b>
<b>Address:</b>	<b>SAN 136-1, AMI-RI , BUBAL-EUP, ICHEON-SI, KYOUNGI-DO, 467-701,KOREA</b>

- **FCC ID : PJILT26AW001**
- Equipment Class: FCC Class B Peripheral Device (JBP)
- EUT Type: 26" LCD TV
- Type No.: LT26AW001
- Max. Resolution: 1024 X 768 (@75Hz)
- Power Cord: Unshielded
- Rule Part(s): FCC Part 15 Subpart B
- Test Procedure(s): ANSI C63.4 (2003)
- Dates of Tests: April 18, 2006 ~ April 21, 2006
- Place of Tests: 254-1,MAEKOK-RI,HOBUP-MYUN,ICHON-SI,KYOUNGKI-DO,467-701,KOREA

## **2.1 INTRODUCTION**

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-2003) was used in determining radiated and conducted emissions emanating from **HYUNDAI IT CORP. 26-inch LCD TV FCC ID: PJILT26AW001**

The open area test site and conducted measurement facility used to collect the radiated data are located at the 254-1, MAEKOK-RI, HOBUP-MYUN, ICHON-SI, KYOUNGKI-DO, 467-701, KOREA. The site is constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated July 23, 2003 (Confirmation Number: EA90661)

## 3.1 PRODUCT INFORMATION

### 3.2 Equipment Description

Equipment Under Test (EUT) is the **HYUNDAI IT CORP. (Type : LT26AW001 ) 26-inch LCD TV**

FCC ID: **PJILT26AW001**

Maximum Resolution(s): 1024 X 768 (@75Hz)

Dimensions(W x D x H mm- Stand included) : 684 x 194 x 541.5

Power Supply: AC 100-240 V , 50/60 Hz

Port(s)/Input Connector(s): 15-pin D-sub, S/PDiF output, Composite output, HDMI,  
Comosite Audio output, VGA Audio input, Component 1 input,  
Component 1 Audio input, Composite input, S-Video input,  
Composite Audio input, Component 2 Audio input, Component 2 input

Cable(s): Shielded D-Sub (with ferrite on both ends), Audio cable(with ferrite on both ends)


Weight (Stand included):12.2 Kg

Power Consumption : Typical 130W


### EMI Suppression Devices:

Modifications were made to the device. Please refer to the next page.


**1. Attach a gasket on the Rear frame.**

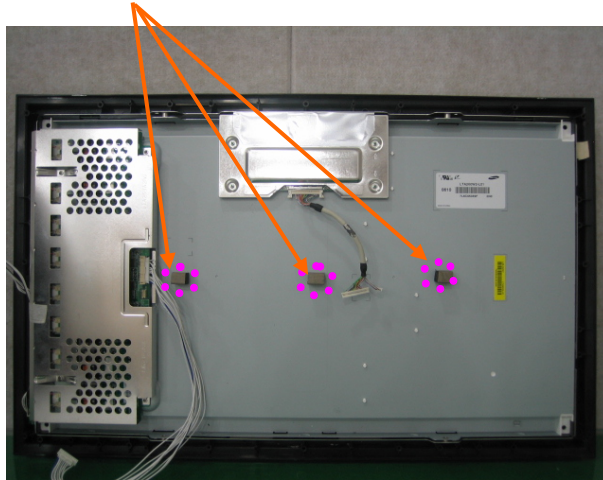

**2. Attach aluminum tape on the main board to contact the main frame**

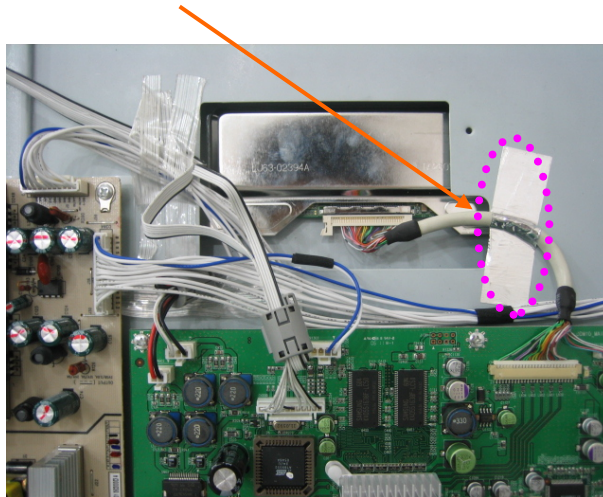

**3. Apply a ferrite core to the cable.**

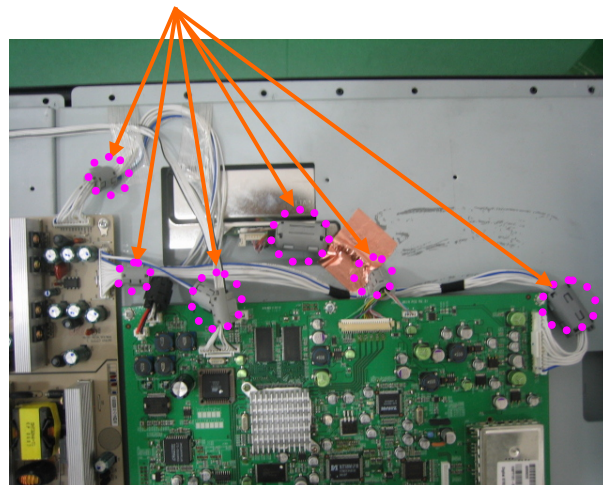

## 4.1 Description of Tests(Conducted)

### 4.2 Powerline Conducted RFI (150kHz- 30MHz)

The power line conducted RFI measurements were performed according to CISPR 22.

The EUT was placed on a non-conducting 1.0 by 1.5 meter table which is 0.8 meters in height and 0.40 meters away from the vertical wall of the shielded enclosure. Power to the EUT is provided through a Rohde & Schwarz 50  $\Omega$  / 50 uH Line Impedance Stabilization Network (LISN) and the support equipment through a separate Solar 50  $\Omega$  / 50 uH Line- Conducted Test Facility LISN. Sufficient time for the EUT, support equipment, and test equipment were allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME. The spectrum was scanned from 150kHz to 30 MHz. Each maximum EME was remeasured using an EMI receiver. The detector function of the receiver was set to CISPR quasi- peak and average mode with the bandwidth set to 9 kHz. Each emission was maximized consistent with the typical applications by varying the configuration of the test sample. Interface cables were connected to the available interface ports of the test unit. The effect of varying the position of cables was investigated to find the configuration that produces maximum Diagram emission. Excess cable lengths were bundled at the center with 30- 40cm. in length. The worst-case configuration is noted in the test report and the photographs are attached.

RFI CONDUCTED	CISPR 22 CLASS B Limits dB(uV/m)	
	CISPR 22 Quasi-Peak	CISPR 22 Average
150kHz - 0.5MHz	66-56**	56-46**
0.5MHz - 5MHz	56	46
5MHz - 30MHz	60	50
**Limits decreases linearly with the logarithm of frequency		

Table 1. RFI Conducted Limits

## 4.3 Description of Tests(Radiated)

### Radiated Emissions

Preliminary measurements were made indoors at 1 meter using broadband antennas, broadband amplifier, and spectrum analyzer to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The spectrum was scanned from 30 to 300 MHz using biconical antenna, 300 to 1000 MHz using log- periodic antenna, and above 1 GHz using linearly polarized horn antennas. Final measurements were made outdoors at 10-meter test range using Dipole antennas and EMI receiver. For frequencies above 1 GHz, horn antennas were used. Sufficient time for the EUT, support equipment, and test equipment were allowed in order for them to warm up to their normal operating condition. The EMI receiver detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 120 kHz. The EUT, support equipment, and interconnecting cables were arranged to the configuration that produces the maximum EME emission found during preliminary scan. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission. Horizontal and vertical antenna polarizations were checked. Each emission was maximized by: varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/ or support equipment, and powering the monitor the computer aux AC outlet, if applicable; and changing the polarity of the antenna, whichever determined the worst-case emission.

<b>ITE Radiated Limits</b>			
<b>Frequency (MHz)</b>	<b>FCC Limit @ 3m. Quasi-Peak dB[<math>\mu</math>V/m]</b>	<b>FCC Limit @ 10m.* Quasi – Peak dB [<math>\mu</math>V/m]</b>	<b>CISPR Limit @ 10m. Quasi-Peak dB [<math>\mu</math>V/m]</b>
<b>30-88</b>	<b>40.0</b>	<b>29.5</b>	<b>30.0</b>
<b>88-216</b>	<b>43.5</b>	<b>33.0</b>	<b>30.0</b>
<b>216-230</b>	<b>46.0</b>	<b>35.6</b>	<b>30.0</b>
<b>230-960</b>	<b>46.0</b>	<b>35.6</b>	<b>37.0</b>
<b>960-1000</b>	<b>54.0</b>	<b>43.5</b>	<b>37.0</b>
<b>&gt; 1000</b>	<b>54.0</b>	<b>43.5</b>	<b>No Specified Limit</b>
<b>* Limit extrapolated 20 dB/decade</b>			

**Table 2. Radiated Class B limits @ 10-meters**



## 5.1 Support Equipment Used

DEVICE TYPE	MANUFACTURER	Type NUMBER	FCC ID / DoC	CONNECTED TO
LCD TV (EUT)	HYUNDAI IT CORP.	LT26AW001	PJILT26AW001	P.C

DEVICE TYPE	MANUFACTURER	MODEL NUMBER	FCC ID / DoC	CONNECTED TO
P.C	DELL	OPTIPLEXGX620	DoC	EUT
Mouse	DELL	MO56U0	DoC	P.C
Serial Mouse	LOGITECH	M-M28	DoC	P.C
Key Board	DELL	SK-8115	DoC	P.C
Printer	H/P	C4569A	DoC	P.C
MPEG-Recoder	Tektronix	MTX 100	-	-
All Channel Converter	EIDEN	4200C-006	-	-
8VSB Modulator	EIDEN	3313b-002	-	-
TV PATTERN GENERATOR	PROMAX	GV-698	-	-

## 5.2 Cable Description

		Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (M)
LCD TV (EUT)	D-Sub	N/A	Y	1.6(D)
	Comosite Audio Out	N/A	Y	1.6(D)
	S/PDIF Out	N/A	Y	1.6(D)
	Composite Out	N/A	Y	1.6(D)
	HDMI	N/A	Y	1.6(D)
	VGA Audio In	N/A	Y	1.6(D)
	Component In1	N/A	Y	1.6(D)
	Component Audio In 1	N/A	Y	1.6(D)
	Component In2	N/A	Y	1.6(D)
	Component Audio In 2	N/A	Y	1.6(D)
	Component Audio In2	N/A	Y	1.6(D)
	S-Video In	N/A	Y	1.6(D)
	Video In	N/A	Y	1.6(D)
	Audio In	N/A	Y	1.6(D)
Power	N	N/A	1.8(P)	
PC	AC In	N	N/A	1.8(P)
Key Board	USB	N/A	Y	2.1(D)
Mouse	USB	N/A	Y	1.8(D)
Serial Mouse	Serial	N/A	Y	1.8(D)
Printer	Parallel	N/A	Y	1.8(D)

The marked "(D)" means the Data Cable and "(P)" means the Power Cable.

### 5.3 Noise Suppression Parts on Cable. (I/O CABLE)

		Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
LCD TV (EUT)	D-Sub	Y	BOTH END	Y	BOTH END
	Comosite Audio Out	N	N/A	Y	BOTH END
	S/PDIF Out	N	N/A	Y	BOTH END
	Composite Out	N	N/A	Y	BOTH END
	HDMI	N	N/A	Y	BOTH END
	VGA Audio In	Y	BOTH END	Y	BOTH END
	Component In1	N	N/A	Y	BOTH END
	Component Audio In 1	N	N/A	Y	BOTH END
	Component In2	N	N/A	Y	BOTH END
	Component Audio In2	N	N/A	Y	BOTH END
	S-Video In	N	N/A	Y	BOTH END
	Video In	N	N/A	Y	BOTH END
	Audio In	N	N/A	Y	BOTH END
	Power	N	N/A	N	N/A
PC	Power	N	N/A	N	N/A
Key Board	USB	N	N/A	N	PC END
Mouse	USB	N	N/A	Y	PC END
Serial Mouse	Serial	N	N/A	Y	PC END
Printer	Parallel	N	N/A	Y	BOTH END

## 6.1 LINE-CONDUCTED TEST DATA


HCT

**EMC TEST LAB**

EUT: LT26AW001  
 Manufacturer: HYUNDAI IT CORP.  
 Operating Condition: 1024 X 768 75Hz (A)  
 Test Site: SHIELD ROOM  
 Operator: KH-KIM  
 Test Specification: CISPR 22 CLASS B  
 Comment: H

**SCAN TABLE: "CISPR 22 Voltage"**

Short Description: CISPR 22 Voltage			Detector	Meas. Time	IF Bandw.	Transducer
Start Frequency	Stop Frequency	Step Width				
150.1 kHz	500.0 kHz	2.5 kHz	MaxPeak	10.0 ms	9 kHz	None
500.0 kHz	5.0 MHz	5.0 kHz	Average	10.0 ms	9 kHz	None
5.0 MHz	30.0 MHz	5.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

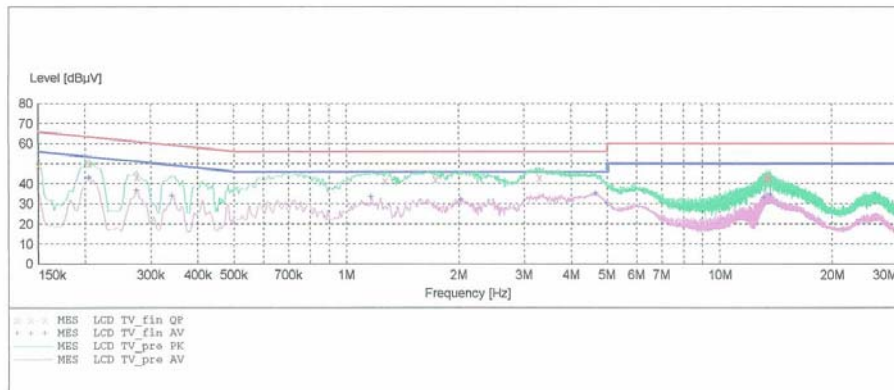

**MEASUREMENT RESULT: "LCD TV\_fin QP"**

4/18/2006 4:03PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.150100	48.90	10.1	66	17.1	---	---
0.205100	49.90	10.1	63	13.5	---	---
0.275100	43.50	10.1	61	17.5	---	---
1.270000	41.60	10.2	56	14.4	---	---
1.735000	42.30	10.2	56	13.7	---	---
3.290000	43.20	10.2	56	12.8	---	---
13.300000	43.50	10.5	60	16.5	---	---
13.370000	42.70	10.5	60	17.3	---	---
13.570000	43.00	10.5	60	17.0	---	---

**MEASUREMENT RESULT: "LCD TV\_fin AV"**

4/18/2006 4:03PM


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.205100	43.20	10.1	53	10.2	---	---
0.275100	36.90	10.1	51	14.0	---	---
0.342600	34.00	10.1	49	15.2	---	---
1.165000	33.60	10.1	46	12.4	---	---
2.030000	32.10	10.3	46	13.9	---	---
4.665000	35.30	10.3	46	10.7	---	---
5.000000	30.50	10.3	46	15.5	---	---
13.165000	33.20	10.5	50	16.8	---	---
13.710000	34.70	10.5	50	15.3	---	---

**HCT**
**EMC TEST LAB**

EUT: LT26AW001  
 Manufacturer: HYUNDAI IT CORP.  
 Operating Condition: 1024 X 768 75Hz (A)  
 Test Site: SHIELD ROOM  
 Operator: KH-KIM  
 Test Specification: CISPR 22 CLASS B  
 Comment: N

**SCAN TABLE: "CISPR 22 Voltage"**

Short Description:		CISPR 22 Voltage					
Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer	
150.1 kHz	500.0 kHz	2.5 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
500.0 kHz	5.0 MHz	5.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
5.0 MHz	30.0 MHz	5.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				

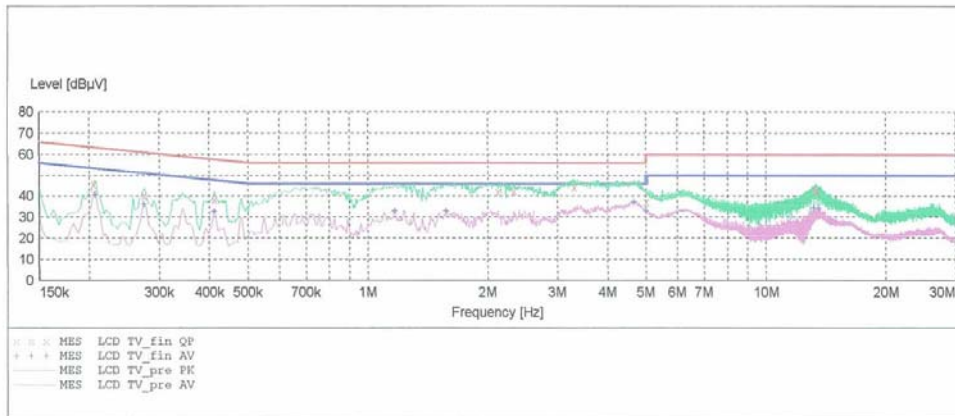
**MEASUREMENT RESULT: "LCD TV\_fin QP"**

4/18/2006 4:01PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.205100	45.90	10.1	63	17.5	---	---
0.275100	40.30	10.1	61	20.6	---	---
0.412600	38.40	10.1	58	19.2	---	---
2.125000	42.00	10.3	56	14.0	---	---
2.330000	42.50	10.3	56	13.5	---	---
3.300000	44.30	10.2	56	11.7	---	---
5.000000	37.30	10.3	56	18.7	---	---
13.300000	42.90	10.5	60	17.1	---	---
13.370000	43.00	10.5	60	17.0	---	---

MEASUREMENT RESULT: "LCD TV\_fin AV"

4/18/2006 4:01PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.207600	40.60	10.1	53	12.7	---	---
0.275100	36.10	10.1	51	14.9	---	---
0.412600	32.80	10.1	48	14.8	---	---
1.170000	32.90	10.1	46	13.1	---	---
1.575000	32.90	10.2	46	13.1	---	---
4.670000	37.30	10.3	46	8.7	---	---
5.000000	32.90	10.3	46	13.1	---	---
13.230000	34.20	10.5	50	15.8	---	---
13.575000	34.40	10.5	50	15.6	---	---

**NOTES:**

- 1. All modes of operation were investigated and the worst-case emissions are reported.**
- 2. The CISPR RFI conducted limits are listed on Table 1 (Page 7).**
- 3. Line H = Phase Line N = Neutral Line**

---

\*\* Measurements using CISPR quasi-peak mode.



## 7.1 RADIATED TEST DATA

[Analog]

Frequency MHz	Reading dBuV	Ant. Factor dB/m	Cable Loss dB	ANT POL (H/V)	Total dBuV/m	Limit dBuV/m	Margin dB
36.7	15.6	11.3	1.3	V	28.2	30.0	1.8
102.7	12.0	9.5	2.3	V	23.8	30.0	6.2
165.4	7.4	12.5	2.9	H	22.8	30.0	7.2
274.0	16.0	12.3	3.8	H	32.1	37.0	4.9
331.6	13.4	13.8	4.2	H	31.4	37.0	5.6
663.6	10.5	20.5	5.9	V	36.9	37.0	0.1

Radiated Measurements at 10-meters.  
**1024 X 768 (@75Hz)**

NOTES:

1. All modes of operation were investigated, and the worst-case emissions are reported.
2. The radiated limits are listed on Table 2 (Page 8).

\*\*\* Measurements using CISPR quasi-peak mode. Above 1GHz, peak detector function mode is used using a resolution bandwidth of 1MHz and a video bandwidth of 1MHz. The peak level complies with the average limit. Peak mode is used with linearly polarized horn antenna and low-loss microwave cable.

## 8.1 Sample Calculations

$$\text{dB } \mu\text{V} = 20 \log_{10} (\mu\text{V}/\text{m})$$

### 8.2 Example 1:

**@ 4.670 MHz**

Class B limit = 46.0 dB  $\mu\text{V}$   
Reading = 37.3 dB  $\mu\text{V}$  (calibrated level)

**Margin** = 46.0 – 37.3 = - 8.7 dB  $\mu\text{V}$   
= **8.7 dB below limit**

### 8.3 Example 2:

**@663.6 MHz**

Class B limit = 37 dB  $\mu\text{V}/\text{m}$   
Reading = 10.5dB  $\mu\text{V}/\text{m}$  (calibrated level)  
Antenna Factor + Cable Loss = 26.4 dB  
Total = 36.9 dB  $\mu\text{V}/\text{m}$

**Margin** = 36.9 – 37.0 = - 0.1 dB  $\mu\text{V}/\text{m}$   
= **0.1 dB below limit**

## 9.1 Test Equipment

<u>Type</u>	<u>Manufacture</u>	<u>Model Number</u>	<u>CAL Due Date</u>
EMI Test Receiver	Rohde & Schwarz	ESVS30	2006.07.01
EMI Test Receiver	Rohde & Schwarz	ESCI	2006.09.13
LISN	Rohde & Schwarz	ESH2-Z5	2007.04.26
LISN	EMCO	703125	2007.04.26
TRILOG Antenna	Schwarzbeck	9160	2006.05.27
Antenna Position Tower	HD	MA240	N/A
Turn Table	EMCO	1050	N/A
Power Analyzer	Voltech	PM 3300	2007.03.22
Reference Network Impedance	Voltech	IEC 555	N/A
AC Power Source	PACIFIC	Magnetic Module	N/A
AC Power Source	PACIFIC	360-AMX	2006.11.25
Controller	HD GmbH	HD 100	N/A
SlideBar	HD GmbH	KMS 560	N/A
PULSE LIMITER	Rohde & Schwarz	ESH3-Z2	2006.11.16

## 10.1 Test Software Used

The EUT exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. The software, contained on a 3-1/2 inch disc, was inserted into drive A and is auto starting on power-up. Once loaded, the program sequentially exercises each system component in turn. The sequence used is :(1) Display test, (2) RS 232 test (3) Key board test,(4) Printer test,(5) FDD test,(6) HDD test. The complete cycle takes about 20 seconds and is repeated continuously. As the keyboard and mouse are strictly input devices, no data is transmitted to them during test. They are however, continuously scanned for data input activity. The video resolution modes setup and change program was used during the radiated and conducted emission testing.

NOTE: This is a sample of the basic program used during the test. However, during testing, a different software program may be used; whichever determines the worst-case condition. In addition, the program used also depends on the number and type of devices being tested.

Actual program used is the "H" pattern in Notepad under Windows environment. All resolution modes (1024x768, 800x600, 640x480, 720x400) were investigated and tested

## **11.1 Conclusion**

The data collected shows that the HYUNDAI IT CORP. 26-inch LCD TV **FCC ID: PJILT26AW001** complies with §15.107 and §15.109 of the FCC Rules.