

Akkreditiertes Prüflaboratorium

**DAR-Registriernummer:
TTI-P-G 166/98**

**Test report no.: 2_2521-C/01
FCC Rule 15.225
ID ISC.PR100**

Table of Contents

1 General information

1.1 Notes

1.2 Testing laboratory

1.3 Details of applicant

1.4 Application details

1.5 Test item

1.6 Test standards

2 Technical test

2.1 Summary of test results

2.2 Test report

1 General information

1.1 Notes

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

1.2 Testing laboratory

CETECOM ICT Services GmbH

66117 Saarbrücken

Untertürkheimer Straße 6 - 10

Deutschland

Telefone : + 49 681 598 - 8411

Telefax : + 49 681 598 - 9075

E-mail : Michael.Berg@ict.cetecom.de

Internet : www.cetecom.de

Accredited testing laboratory

DAR-registration number : TTI-P-G-166/98

1.3 Details of applicant

Name : FEIG ELECTRONIC GmbH

Street : Lange Straße 4

City : D-35781 Weilburg-Waldhausen

Country : Germany

Telephone : +49 (0)6471 / 3109-0

Telefax : +49 (0)6471 / 3109-99

Contact : Mr. C.Fiedler

Telephone: +49 (0)6471 / 3109-95

1.4 Application details

Date of receipt of application : 03.05.01

Date of receipt of test item : 03.05.01

Date of test : 03.05.01

1.5 Test item

Type of equipment : **Passive Transponder Reader**

Type designation : **ID ISC.PR100**

Manufacturer : **-applicant-**

Street :

City :

Country :

Serial number :

Additional informations: :

Frequency : **13,56 MHz / 5K00A1D** **Output RF Power: 0.5 W**

Number of channels : **1**

Antenna : **Inductive loop antenna**

Power supply : **12-24V DC / 0.4 A ext. / 5V DC / 0.4A via USB**

Type of equipment :

Carrier power : **0,29 mW EIRP for USB / 0,29 mW EIRP for extern DC**

1.6 Test standards: FCC Rule Part 15.225

2 Technical test

2.1 Summary of test results

The tested ID system has identical layout on the PCBs, but differs in power supply.

The type PR100 USB is directly powered by the USB connection.

The type PR100 extern is powered by an external DC power supply between 12 and 24 Volt.

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

Technical responsibility for area of testing :

09.05.01 RSC8414 Ames.H
Date Section Name



Signature

09.05.01 RSC8411 Berg.M
Date Section Name



Signature

2.2 Test report

TEST REPORT

FCC Rule Part 15.225

Test report no. : 2_2521-C/01

TEST REPORT REFERENCE

LIST OF MEASUREMENTS

SUBCLAUSE	PARAMETER TO BE MEASURED	PAGE
	Transmitter parameters	
§ 15.225 (a)	Field strength of fundamental	7
§ 15.209	Emissions radiated outside of the specified frequency bands	8
	Band edge compliance	
§ 15.225 (c)	Frequency tolerance	14
§ 15.207	Conducted limits	16
	Test equipment listing	17
	Photographs of the equipment	19

Equipment under test : ID ISC.PR100

Ambient temperature : 23°C

Relative humidity : 37%

FIELD STRENGTH OF FUNDAMENTIAL

SUBCLAUSE § 15.225 (a)

Polarisation of the measurements for the larger power level .: vertical

Measurement distance 30 m

TEST CONDITIONS		FIELD STRENGTH (µV/m)		
		PR100 USB	PR100 extern	
Frequency (MHz)				
$T_{nom}(23)°C$	$V_{nom}(5V/17.0)V$	QP: 3162 µV/m 70.0 dBµV/m	QP: 668 µV/m 56.5 dBµV/m	
Maximum deviation from output power under extreme test conditions (dBc)		-0,18	-0.2	
Measurement uncertainty		±3dB		

Limits

SUBCLAUSE § 15.225 (a)

Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
13,56	10,000 80 dBµV/m	30

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

42 , 65

Equipment under test : ID ISC.PR100

Ambient temperature : 23°C

Relative humidity : 37%

EMISSIONS RADIATED

SUBCLAUSE §15.209

Transmitter operating

Modulated/Unmodulated*

*(Delete whichever is inappropriate)

Measurement distance see table

SPURIOUS EMISSIONS LEVEL (µV/m)								
13,56 MHz USB			13,56 MHz extern					
f (MHz)	Detector	Level (µV/m)	f (MHz)	Detector	Level (µV/m)	f (MHz)	Detector	Level (µV/m)
40.82	QP	60.3	41.02	QP	93.3			
81.71	QP	52.5	91.89	QP	75.0			
98.39	QP	24.5	100.4	QP	139.6			
108.5	QP	26.6	149.8	QP	98.8			
163.6	QP	47.3	1100.0	AV	25.1			
196.9	QP	40.7						
392.4	QP	171.8						
426.4	QP	195.0						
1116.0	AV	50.3						
1213.6	AV	31.6						
1318.8	AV	28.2						
Measurement uncertainty			± 3dB					

Limits

SUBCLAUSE § 15.209

Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

Equipment under test : ID ISC.PR100


Ambient temperature : 23°C

Relative humidity : 37%

EMISSIONS RADIATED >30 MHz

SUBCLAUSE §15.209

ID ISC.PR100 USB

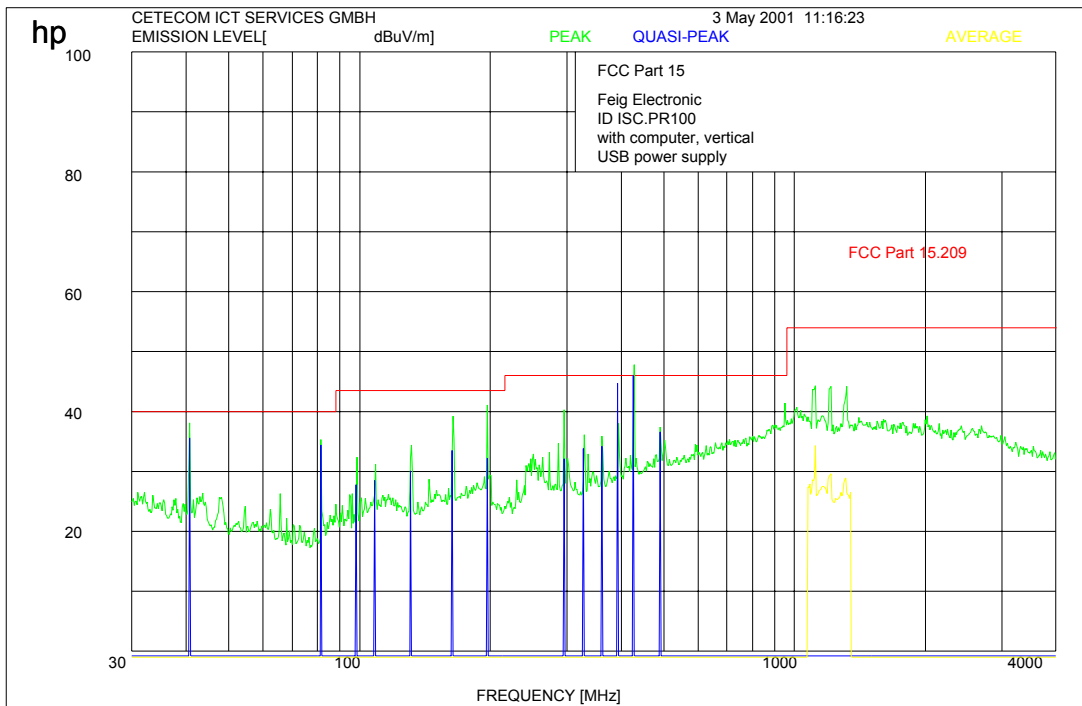

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 - 24

Equipment under test : ID ISC.PR100


Ambient temperature : 23°C

Relative humidity : 37%

EMISSIONS RADIATED >30 MHz

SUBCLAUSE §15.209

ID ISC.PR100 with external DC supply

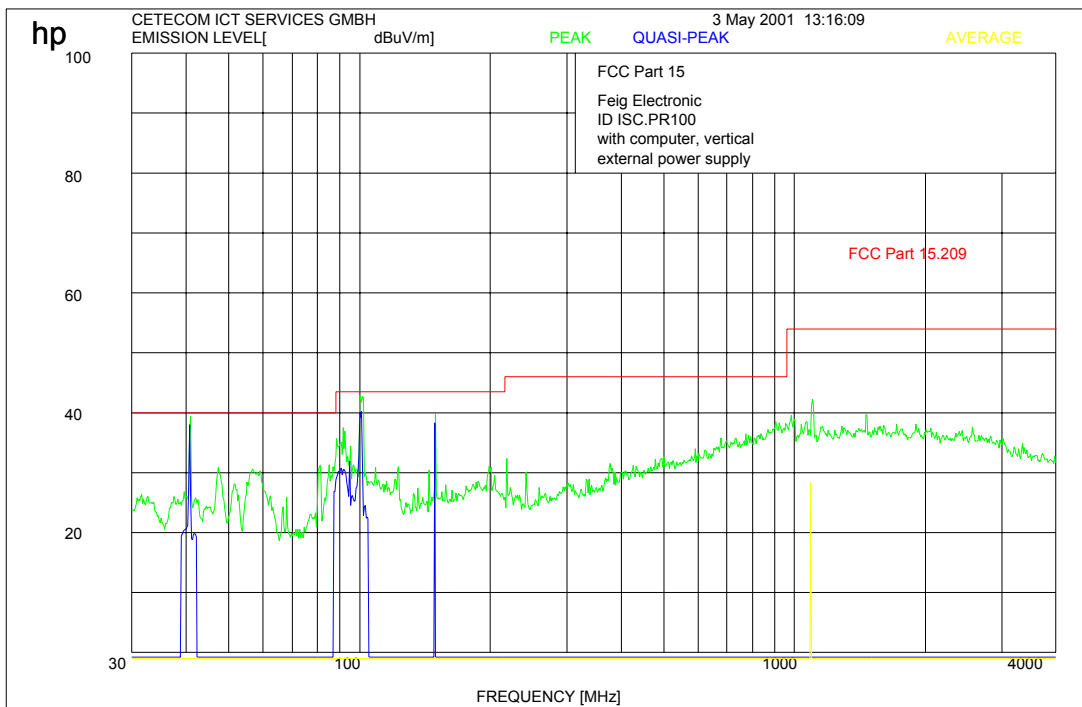

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 - 24

Equipment under test : ID ISC.PR100


Ambient temperature : 23°C

Relative humidity : 37%

EMISSIONS RADIATED <30 MHz

SUBCLAUSE §15.209

ID ISC.PR100 USB

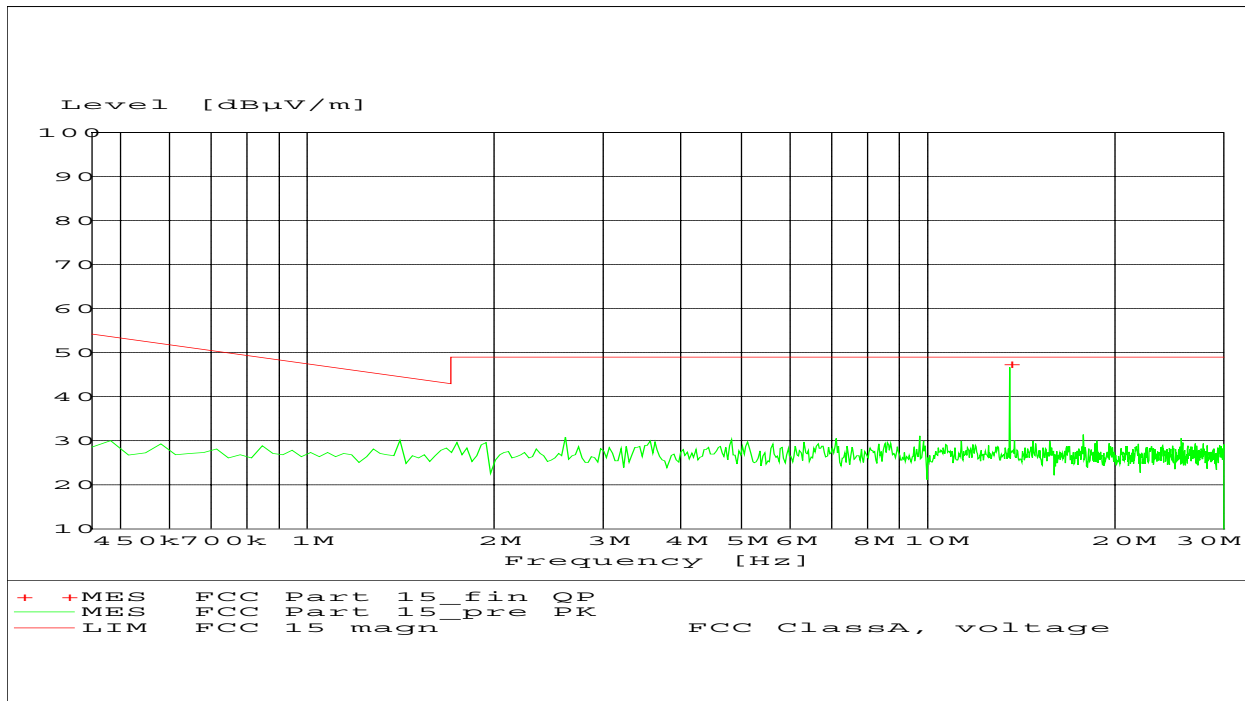

MEASUREMENT RESULT: "FCC Part 15_fin QP"

11.05.01 08:16

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Loop	Azimuth deg
13.560000	47.50	20.4	49.0	1.5	---	15.00

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

Equipment under test : ID ISC.PR100


Ambient temperature : 23°C

Relative humidity : 37%

EMISSIONS RADIATED <30 MHz

SUBCLAUSE §15.209

ID ISC.PR100 with external DC supply

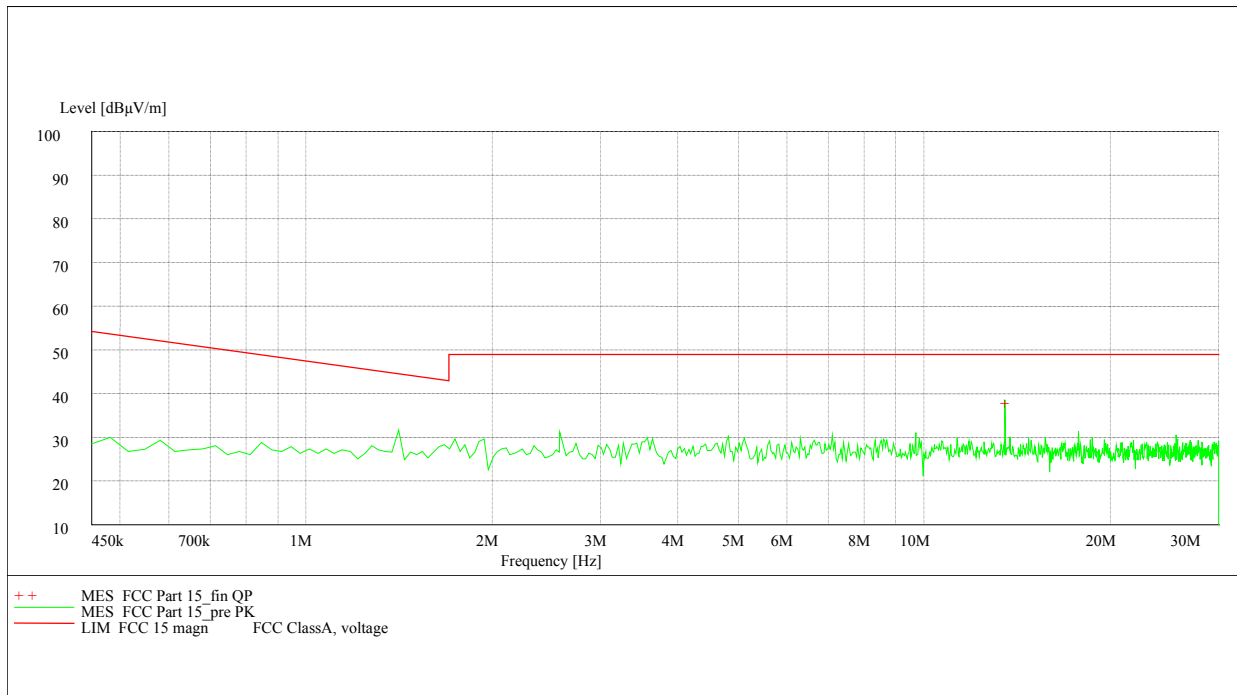

MEASUREMENT RESULT: "FCC Part 15_fin QP"

11.05.01 08:16

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Loop	Azimuth deg
13.560000	37.50	20.4	49.0	11.5	---	15.00

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

01 , 02 , 05

Equipment under test : ID ISC.PR100


Ambient temperature : 23°C

Relative humidity : 37%

FREQUENCY STABILITY

SUBCLAUSE §15.225 (c)

Temperature [° C]	Frequency error [Hz]	Frequency [MHz]	Error in %	Error in ppm
-20°	-150	13,56	-0,0011	-0,0904
-10°	-156	13,56	-0,0012	-0,0869
0,0°	-159	13,56	-0,0012	-0,0853
+10°	-178	13,56	-0,0013	-0,0762
+20°	-184	13,56	-0,0014	-0,0737
+30°	-188	13,56	-0,0014	-0,0721
+40°	-192	13,56	-0,0014	-0,0706
+50°	-198	13,56	-0,0015	-0,0685

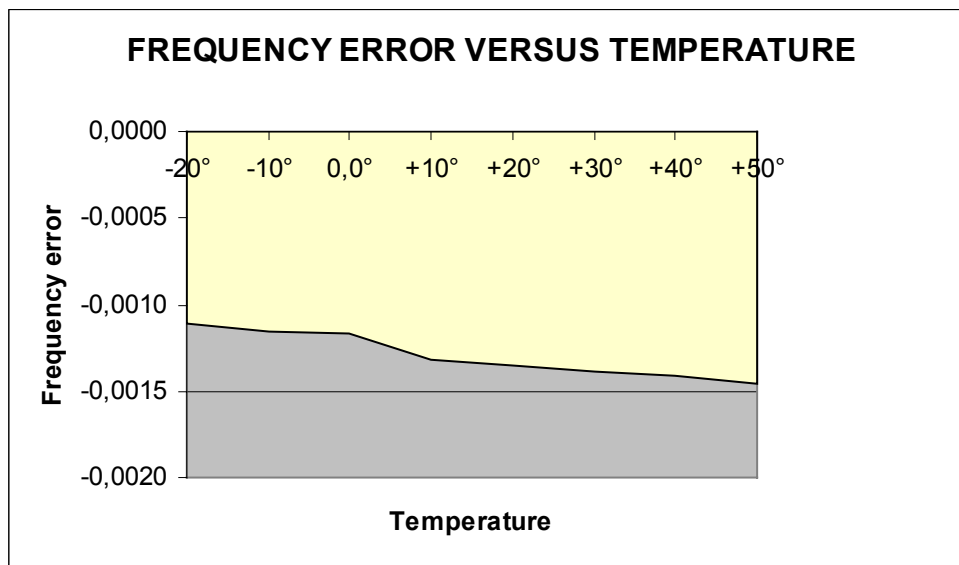

Limit

SUBCLAUSE §15.225 (c)

Conditions: -20°C to +50°C at normal supply voltage and variation from 12 to 24V at 20°C	± 0,01 %
--	----------

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

01 , 02 , 05

Equipment under test : ID ISC.PR100

Ambient temperature : 23°C

Relative humidity : 37%

FREQUENCY STABILITY


SUBCLAUSE §15.225 (c)

nom. Voltage	nom. Voltage in %	Voltage [V]	Frequency error [Hz]	Frequency [MHz]	Error in %	Error in ppm
17		12	-112	13,56	-0,0008	-0,1211
		14	-114	13,56	-0,0008	-0,1189
		16	-115	13,56	-0,0008	-0,1179
		18	-116	13,56	-0,0009	-0,1169
		20	-116	13,56	-0,0009	-0,1169
		22	-117	13,56	-0,0009	-0,1159
		24	-118	13,56	-0,0009	-0,1149

Limit

SUBCLAUSE §15.225 (c)

Conditions: -20°C to +50°C at normal supply voltage and variation from 12 to 24V at 20°C	± 0,01 %
--	----------

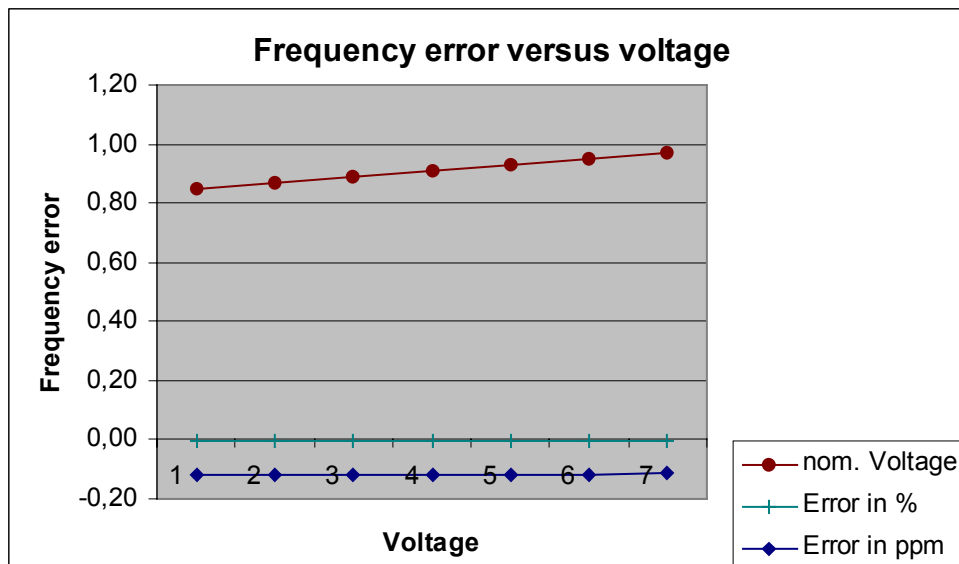

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

01 , 02 , 05

Equipment under test : ID ISC.PR100


Ambient temperature : 23°C

Relative humidity : 37%

CONDUCTED EMISSIONS

SUBCLAUSE § 15.207 / 15.107

ID ISC.PR100 with external DC supply

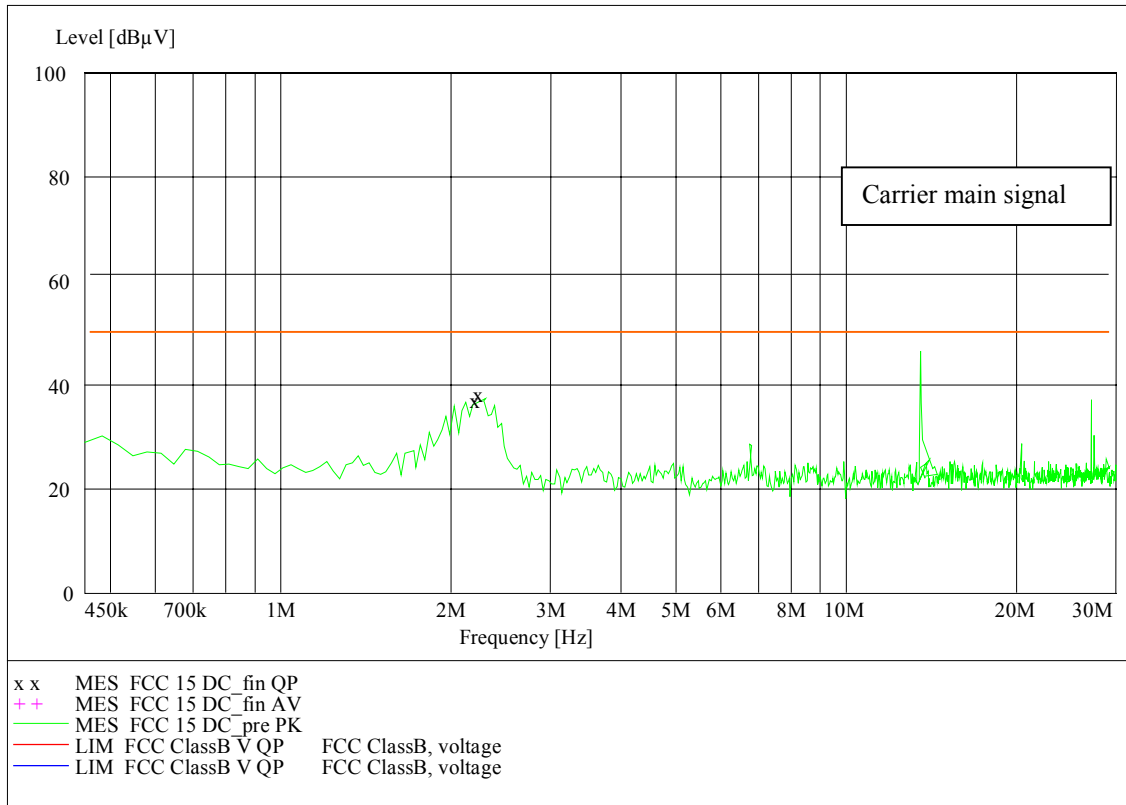

Frequency (MHz)	Level (dBµV) (QP)	Limit (dBµV)	Line
2.226	37.30	48.0	MINUS
2.250	38.30	48.0	MINUS
6.832	27.45	48.0	MINUS
13.560 (Carrier) !	46.10	48.0	MINUS
27.120	38.80	48.0	MINUS

Limit	Technical specification : 15.207 / 15.107
0.45 to 30 MHz	250 µV / 47.96 dBµV

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.


No	Instrument/Ancillary	Type	Manufacturer	Serial No.
01	Spectrum Analyzer	8566 A	Hewlett-Packard	1925A00257
02	Analyzer Display	8566 A	Hewlett-Packard	1925A00860
03	Oscilloscope	7633	Tektronix	230054
04	Radio Analyzer	CMTA 54	Rohde & Schwarz	894 043/010
05	System Power Supply	6038 A	Hewlett-Packard	2848A07027
06	Signal Generator	8111 A	Hewlett-Packard	2215G00867
07	Signal Generator	8662 A	Hewlett-Packard	2224A01012
08	Funktionsgenerator	AFGU	Rohde & Schwarz	862 480/032
09	Regeltrenntrafo	MPL	Erfi	91350
10	Netznachbildung	NNLA 8120	Schwarzbeck	8120331
11	Relais-Matrix	PSU	Rohde & Schwarz	893 285/020
12	Power-Meter	436 A	Hewlett-Packard	2101A12378
13	Power-Sensor	8484 A	Hewlett-Packard	2237A10156
14	Power-Sensor	8482 A	Hewlett-Packard	2237A00616
15	Modulationsmeter	9008	Racal-Dana	2647
16	Frequenzzähler	5340 A	Hewlett-Packard	1532A03899
17	Absorber Schirmkabine	---	MWB	87400/002
18	Spectrum Analyzer	85660 B	Hewlett-Packard	2747A05306
19	Analyzer Display	85662 A	Hewlett-Packard	2816A16541
20	Quasi Peak Adapter	85650 A	Hewlett-Packard	2811A01131
21	RF-Preselector	85685 A	Hewlett-Packard	2833A00768
22	Biconical Antenne	3104	Emco	3758
23	Log. Per. Antenne	3146	Emco	2130
24	Double Ridge Horn	3115	Emco	3088
25	EMI-Testreceiver	ESAI	Rohde & Schwarz	863 180/013
26	EMI-Analyzer-Display	ESAI-D	Rohde & Schwarz	862 771/008
27	Biconical Antenne	HK 116	Rohde & Schwarz	888 945/013
28	Log. Per. Antenne	HL 223	Rohde & Schwarz	825 584/002
29	Relais-Switch-Unit	RSU	Rohde & Schwarz	375 339/002
30	Highpass	HM985955	FSY Microwave	001
31	Amplifier	P42-GA29	Tron-Tech	B 23602
32	Absorber Schirmkabine		Frankonia	
33	Steuerrechner	PSM 7	Rohde & Schwarz	834 621/004
34	EMI Test Receiver	ESMI	Rohde & Schwarz	827 063/010
35	EMI Test Receiver	Display	Rohde & Schwarz	829 808/010

TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS


To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

No	Instrument/Ancillary	Type	Manufacturer	Serial No.
36	Controler	HD 100	Deisel	100/322/93
37	Relais Matrix	PSN	Rohde & Schwarz	829 065/003
38	Control Unit	GB 016 A2	Rohde & Schwarz	344 122/008
39	Relais Switch Unit	RSU	Rohde & Schwarz	316 790/001
40	Power Supply	6032A	Hewlett Packard	2846A04063
41	Spektrum Monitor	EZM	Rohde & Schwarz	883 720/006
42	Meßempfänger	ESH 3	Rohde & Schwarz	890 174/002
43	Meßempfänger	ESVP	Rohde & Schwarz	891 752/005
44	Biconi Ant. 20-300MHz	HK 116	Rohde & Schwarz	833 162/011
45	Logper Ant. 0.3-1 GHz	HL 223	Rohde & Schwarz	832 914/010
46	Amplifier 0.1-4 GHz	AFS4	Miteq Inc.	206461
47	Logper Ant. 1-18 GHz	HL 024 A2	Rohde & Schwarz	342 662/002
48	Polarisationsnetzwerk	HL 024 Z1	Rohde & Schwarz	341 570/002
49	Double Ridge G Horn Antenne 1-26.5 GHz	3115	EMCO	9107-3696
50	Microw. Sys. Amplifier 0.5- 26.5 GHz	8317A	Hewlett Packard	3123A00105
51	Steuerrechner	PSA 17	Rohde & Schwarz	883086/026
52	Analyzer	EZM	Rohde & Schwarz	883086/026
53	Receiver	ESH3	Rohde & Schwarz	881515/002
54	Relais Matrix	PSU	Rohde & Schwarz	882943/029
55	Art.mains network	ESH2Z5	Rohde & Schwarz	882394/007
56	Art.mains network	ESH3Z5	Rohde & Schwarz	861189/014
57	Art.mains network	ESH3Z5	Rohde & Schwarz	892475/017
58	Art.mains network	ESH3Z5	Rohde & Schwarz	894981/019
59	Art.mains network	ESH3Z6	Rohde & Schwarz	836501/652
60	Art.mains network	ESH3Z6	Rohde & Schwarz	861406/005
61	Art.mains network	ESH3Z6	Rohde & Schwarz	893689/012
62	Art.mains network	HFH2Z2	Rohde & Schwarz	881058/42
63	Power supply	6032A	Hewlett Packard	2818A-03449
64	Spectrum Analyzer	FSIQ 26	Rohde & Schwarz	119.6001.27
65	Magn. Ant. 9 kHz–30 Mhz			
66				
67				
68				
69				


Test site

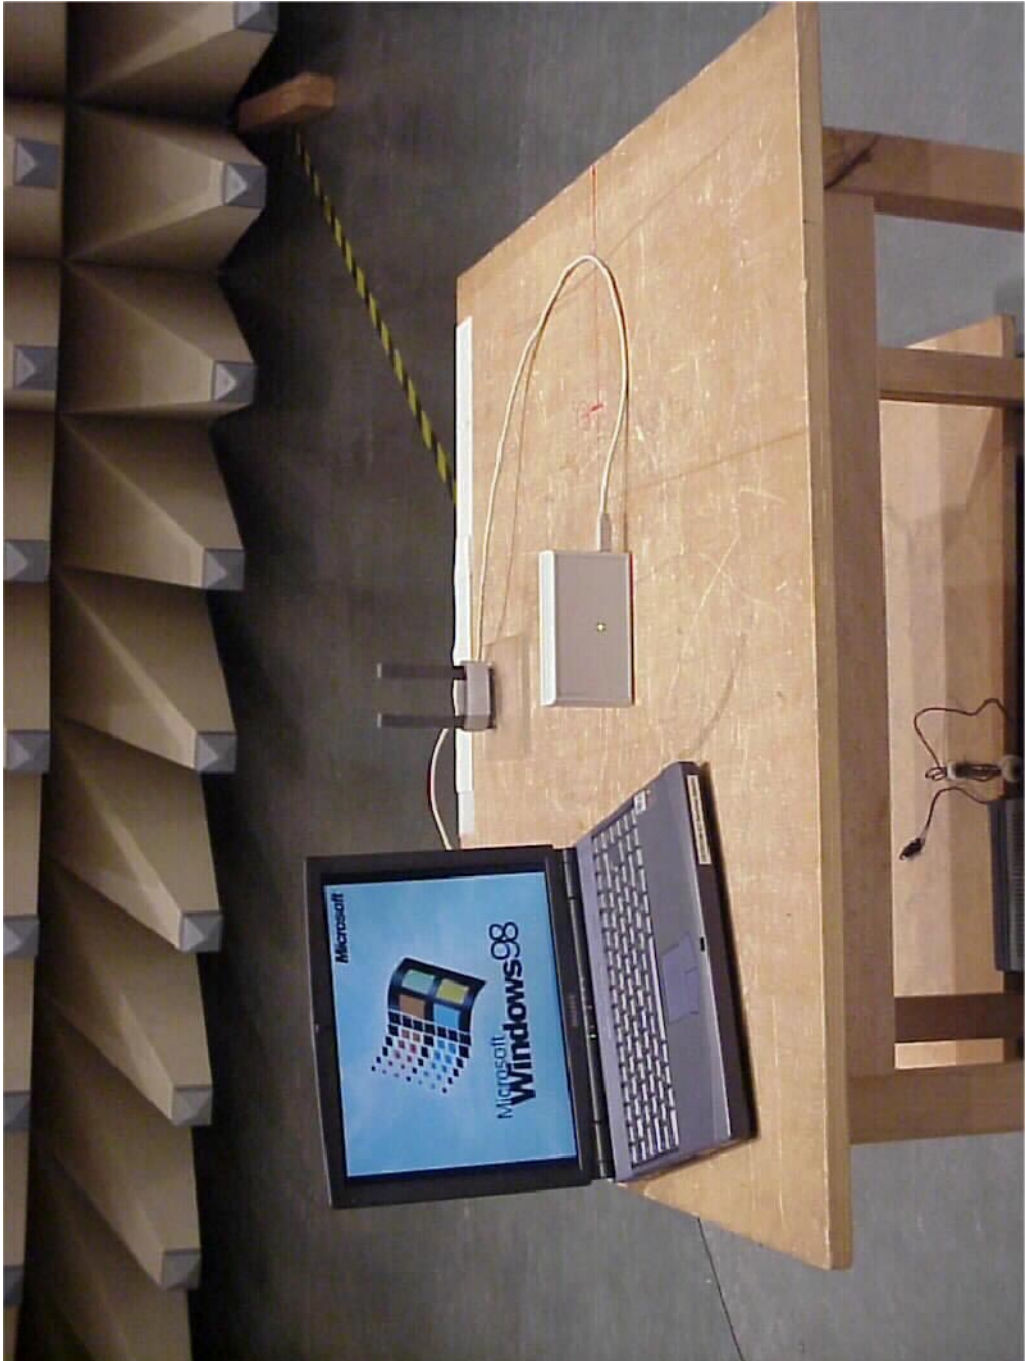

Test site

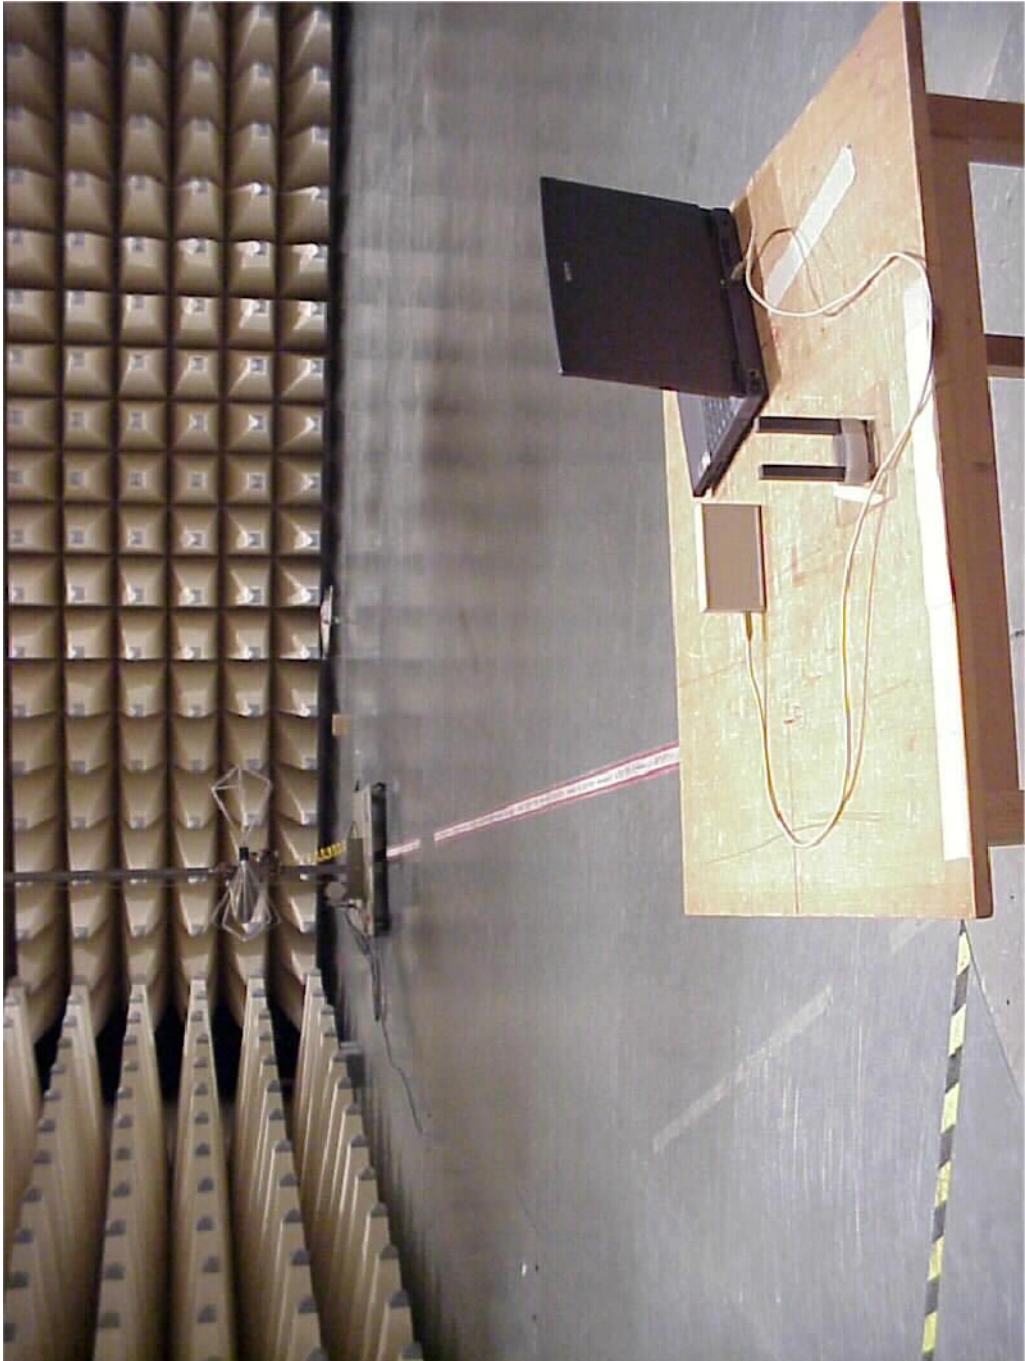

Test site

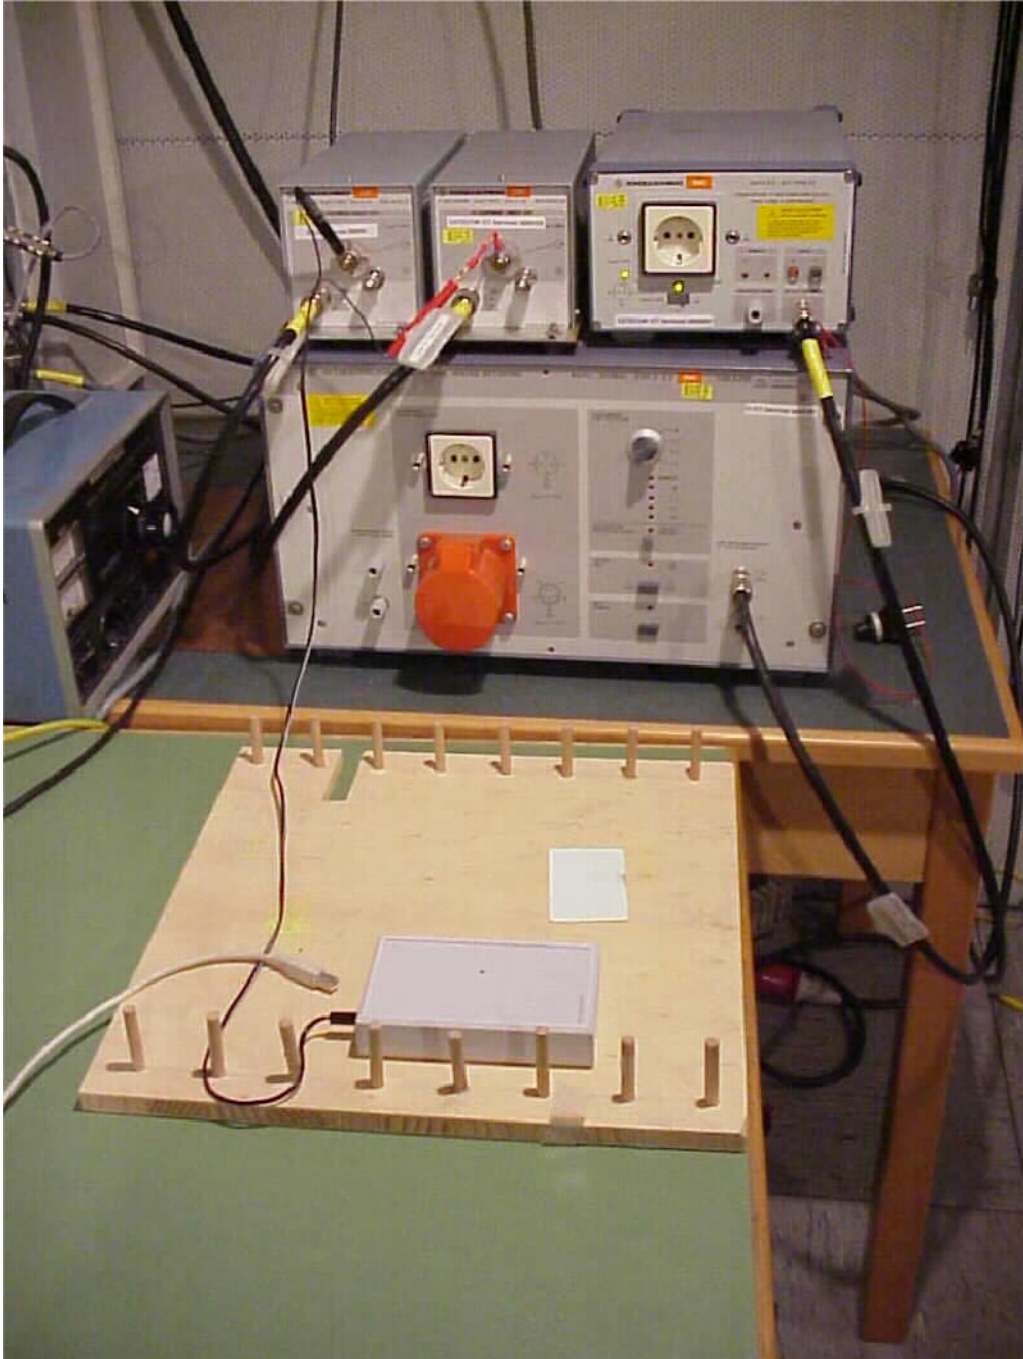

PHOTOGRAPHS OF THE EQUIPMENT

ID ISC.PR100 (powered via USB)

Photograph no.: 1



PHOTOGRAPHS OF THE EQUIPMENT

ID ISC.PR100 (powered via USB)

Photograph no.: 2



PHOTOGRAPHS OF THE EQUIPMENT

ID ISC.PR100 (powered via USB)

Photograph no.: 3



PHOTOGRAPHS OF THE EQUIPMENT

ID ISC.PR100 (powered via USB)

Photograph no.: 4



PHOTOGRAPHS OF THE EQUIPMENT

ID ISC.PR100 (powered via USB)

Photograph no.: 5



PHOTOGRAPHS OF THE EQUIPMENT

ID ISC.PR100 (powered by external power supply)

Photograph no.: 1



PHOTOGRAPHS OF THE EQUIPMENT

ID ISC.PR100 (powered by external power supply)

Photograph no.: 2



PHOTOGRAPHS OF THE EQUIPMENT

ID ISC.PR100 (powered by external power supply)

Photograph no.: 3



PHOTOGRAPHS OF THE EQUIPMENT

ID ISC.PR100 (powered by external power supply)

Photograph no.: 4



PHOTOGRAPHS OF THE EQUIPMENT

ID ISC.PR100 (powered by external power supply)

Photograph no.: 5

