


**PCTEST ENGINEERING LABORATORY, INC.**  
**6660 – B Dobbin Road · Columbia, MD 21045 · USA**  
**Telephone 410.290.6652 / Fax 410.290.6654**  
<http://www.pctestlab.com> (email: [randy@pctestlab.com](mailto:randy@pctestlab.com))  
**CERTIFICATE OF COMPLIANCE (SAR EVALUATION)**



**APPLICANT NAME & ADDRESS:**

Novatel Wireless, Inc.  
 9645 Scranton Road, Suite 205  
 San Diego, CA 92121

**DATE & LOCATION OF TESTING:**

Dates of Tests: May 24-29, 2006  
 Test Report S/N: 0605230405  
 Test Site: PCTEST Lab, Columbia MD

<b>FCC ID:</b>	<b>PKRNVVW720</b>
<b>APPLICANT:</b>	<b>Novatel Wireless, Inc.</b>

<b>EUT Type:</b>	<b>Dual-Band CDMA Modem Card</b>
<b>Tx/Rx Frequency:</b>	<b>824.70 – 848.31 MHz (CDMA) / 1851.25 – 1908.75 MHz (PCS CDMA)              869.70 – 893.31 MHz (CDMA) / 1931.25 – 1988.75 MHz (PCS CDMA)</b>
<b>Max. RF Output Power:</b>	<b>0.300 W ERP CDMA (24.773 dBm) / 24.3 dBm Conducted              0.284 W EIRP PCS CDMA (24.521 dBm) / 24.5 dBm Conducted</b>
<b>Max. SAR Measurement:</b>	<b>1.44 W/kg CDMA Laptop Body SAR (w/ Toshiba PSAA2U-04P018);              0.869 W/kg PCS CDMA Laptop Body SAR (w/ Toshiba PSAA2U-04P018);              0.098 W/kg CDMA Bystander Body SAR (w/ Toshiba PSAA2U-04P018);              0.298 W/kg PCS CDMA Bystander Body SAR (w/ Toshiba PSAA2U-04P018)</b>
<b>Trade Name/Model(s):</b>	<b>NVW-S720</b>
<b>FCC Classification(s):</b>	<b>Licensed Portable Transmitter (PCB)</b>
<b>FCC Rule Part(s):</b>	<b>§2.1093; FCC/OET Bulletin 65 Supplement C [July 2001]</b>
<b>Application Type:</b>	<b>Certification</b>
<b>Test Device Serial No.:</b>	<b>identical prototype [S/N: #5B100449]</b>

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE Std. C95.1-1992 and had been tested in accordance with the measurement procedures specified in FCC/OET Bulletin 65 Supplement C (2001) and IEEE Std. 1528-2003.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

**Grant conditions: Power output listed is ERP for Part 22 and EIRP for Part 24. SAR compliance has been established in the host product(s) with slot configurations as tested in this filing, and can be used in host product(s) with substantially similar physical dimensions, construction, and electrical and RF characteristics. This transmitter is restricted for use with the specific antenna(s) tested for this filing. The antenna(s) used for this transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. End-users must be provided with specific information required to satisfy RF exposure compliance for all final host devices.**

*PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.*

Randy Orlowicz  
 President



<b>PCTEST SAR REPORT</b>	<b>FCC CERTIFICATION</b>		<b>Reviewed by:</b> Quality Manager
<b>SAR Filename:</b> 0605230405	<b>Test Dates:</b> May 24-29, 2006	<b>Phone Type:</b> Dual-Band CDMA Modem Card	<b>FCC ID:</b> PKRNVVW720 Page 1 of 31

## TABLE OF CONTENTS

1.	INTRODUCTION / SAR DEFINITION.....	3
2.	SAR MEASUREMENT SETUP .....	4
3.	DASY4 E-FIELD PROBE SYSTEM.....	5
4.	Probe Calibration Process.....	6
5.	PHANTOM & EQUIVALENT TISSUES.....	7
6.	TEST SYSTEM SPECIFICATIONS.....	8
7.	DOSIMETRIC ASSESSMENT & PHANTOM SPECS .....	9
8.	DEFINITION OF REFERENCE POINTS.....	10
9.	TEST CONFIGURATION POSITIONS.....	11
10.	ANSI/IEEE C95.1 - 1992 RF EXPOSURE LIMITS.....	12
11.	MEASUREMENT UNCERTAINTIES.....	13
12.	SYSTEM VERIFICATION .....	14-16
13.	FCC 3G MEASUREMENT PROCEDURES.....	15-16
14.	SAR DATA SUMMARY .....	17-28
15.	SAR TEST EQUIPMENT.....	29
16.	CONCLUSION .....	30
17.	REFERENCES.....	31

<b>PCTEST SAR REPORT</b>	<b>FCC CERTIFICATION</b>		<b>Reviewed by:</b> Quality Manager
<b>SAR Filename:</b> 0605230405	<b>Test Dates:</b> May 24-29, 2006	<b>Phone Type:</b> Dual-Band CDMA Modem Card	<b>FCC ID:</b> PKRNVV720 Page 2 of 31

# 1. INTRODUCTION / SAR DEFINITION

The FCC has adopted the guidelines for evaluating the environmental effects of radiofrequency radiation in ET Docket 93-62 on Aug. 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices.[1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in *IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz*. (c) 1992 by the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017.[2] The measurement procedure described in *IEEE/ANSI C95.3-1992 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave*[3] is used for guidance in measuring SAR due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in *Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields*, NCRP Report No. 86 (c) NCRP, 1986, Bethesda, MD 20814.[6] SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

## SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy ( $dU$ ) absorbed by (dissipated in) an incremental mass ( $dm$ ) contained in a volume element ( $dV$ ) of a given density ( $\rho$ ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Fig. 1.1).

$$SAR = \frac{d}{dt} \left( \frac{dU}{dm} \right) = \frac{d}{dt} \left( \frac{dU}{\rho dV} \right)$$

**Figure 1.1**  
**SAR Mathematical Equation**






**SAR is expressed in units of Watts per Kilogram (W/kg).**

$$SAR = \sigma E^2 / \rho$$

where:

- $\sigma$  = conductivity of the tissue-simulant material (S/m)
- $\rho$  = mass density of the tissue-simulant material (kg/m<sup>3</sup>)
- $E$  = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

<b>PCTEST SAR REPORT</b>	<b>FCC CERTIFICATION</b>			<b>Reviewed by:</b> Quality Manager
				
<b>SAR Filename:</b> 0605230405	<b>Test Dates:</b> May 24-29, 2006	<b>Phone Type:</b> Dual-Band CDMA Modem Card	<b>FCC ID:</b> PKRNVWV720	Page 3 of 31

## 2. SAR MEASUREMENT SETUP


### Robotic System

Measurements are performed using the DASY4 automated dosimetric assessment system. The DASY4 is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland and consists of high precision robotics system (Staubli), robot controller, Pentium III computer, near-field probe, probe alignment sensor, and the generic twin phantom containing the head equivalent material. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF) (see Fig. 2.1).

### System Hardware


A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and a remote control used to drive the robot motors. The PC consists of the Gateway Pentium 4 2.53 GHz computer with Windows XP system and SAR Measurement Software DASY4, A/D interface card, monitor, mouse, and keyboard. The Staubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit that performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

### System Electronics

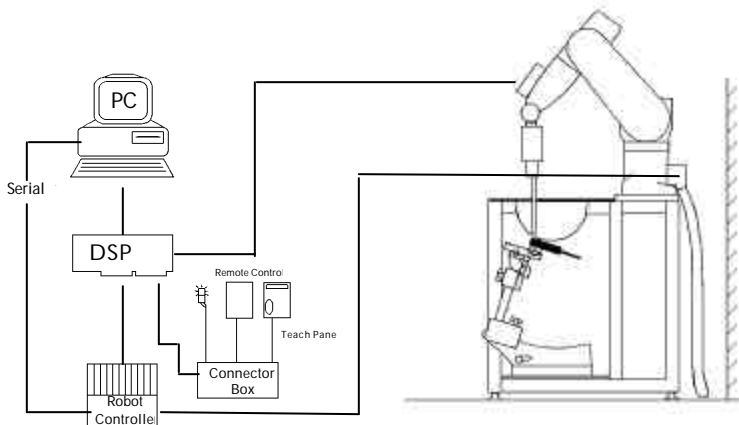

**Figure 2.1 SAR Measurement System Setup**

The DAE4 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer. The system is described in detail in [7].

<b>PCTEST SAR REPORT</b>	<b>FCC CERTIFICATION</b>			<b>Reviewed by:</b> Quality Manager
<b>SAR Filename:</b> 0605230405	<b>Test Dates:</b> May 24-29, 2006	<b>Phone Type:</b> Dual-Band CDMA Modem Card	<b>FCC ID:</b> PKRNVWV720	Page 4 of 31

## 3. DASY4 E-FIELD PROBE SYSTEM

### Probe Measurement System




**Figure 3.1** DAE System

The SAR measurements were conducted with the dosimetric probe ET3DV6, designed in the classical triangular configuration [7] (see Fig. 3.2) and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multifiber line ending at the front of the probe tip (see Fig. 3.3). It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY4 software reads the reflection during a software approach and looks for the maximum using a 2<sup>nd</sup> order fitting (see Fig.3.1). The approach is stopped at reaching the maximum.

### Probe Specifications

- Calibration: In air from 10 MHz to 6 GHz  
In head and body simulating tissue at  
Frequencies of 150 MHz, 450 MHz, 835 MHz,  
900 MHz, 1900MHz, 2450MHz, 5300MHz,  
& 5800MHz
- Frequency: 10 MHz to > 6 GHz; Linearity:  $\pm 0.2$  dB  
(30 MHz to 6 GHz)
- Directivity:  $\pm 0.2$  dB in HSL (rotation around probe axis)  
 $\pm 0.4$  dB in HSL (rotation normal probe axis)
- Dynamic: 5 mW/g to > 100 mW/g;
- Range: Linearity:  $\pm 0.2$  dB
- Dimensions: Overall length: 330 mm  
Tip length: 16 mm  
Body diameter: 12 mm  
Tip diameter: 3 mm  
Distance from probe tip to dipole centers: 2 mm
- Application: General dosimetry up to 6 GHz  
Compliance tests of mobile phones  
Fast automatic scanning in arbitrary phantoms



**Figure 3.1** Triangular Probe Configuration



**Figure 3.2** Probe Thick-Film Technique

<b>PCTEST SAR REPORT</b>	<b>FCC CERTIFICATION</b>			<b>Reviewed by:</b> Quality Manager
<b>SAR Filename:</b> 0605230405	<b>Test Dates:</b> May 24-29, 2006	<b>Phone Type:</b> Dual-Band CDMA Modem Card	<b>FCC ID:</b> PKRNVW720	Page 5 of 31

# 4. PROBE CALIBRATION PROCESS

## Dosimetric Assessment Procedure

Each probe is calibrated according to a dosimetric assessment procedure described in [8] with accuracy better than +/- 10%. The spherical isotropy was evaluated with the procedure described in [9] and found to be better than +/-0.25dB. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe is tested.

## Free Space Assessment

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz (see Fig. 4.1), and in a waveguide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity at the proper orientation with the field. The probe is then rotated 360 degrees.

## Temperature Assessment \*

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated head tissue. The measured free space Efield in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe (see Fig. 4.2).

$$SAR = C \frac{\Delta T}{\Delta t}$$

where:


- $\Delta t$  = exposure time (30 seconds),
- C = heat capacity of tissue (head or body),
- $\Delta T$  = temperature increase due to RF exposure.

SAR is proportional to  $\Delta T / \Delta t$ , the initial rate of tissue heating, before thermal diffusion takes place. Now it's possible to quantify the electric field in the simulated tissue by equating the thermally derived SAR to the E- field;


$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

where:

- $\sigma$  = simulated tissue conductivity,
- $\rho$  = Tissue density (1.25 g/cm<sup>3</sup> for head tissue)





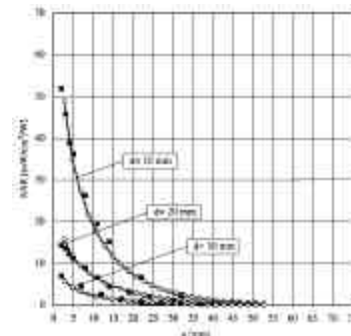


**Figure 4.1 E-Field and Temperature measurements at 900MHz [7]**



**Figure 4.2 E-Field and temperature measurements at 1.9GHz [7]**


\*NOTE: The temperature calibration was not performed by PCTEST. For information use only.

<b>PCTEST SAR REPORT</b>	<b>FCC CERTIFICATION</b>			<b>Reviewed by:</b> Quality Manager
				
<b>SAR Filename:</b> 0605230405	<b>Test Dates:</b> May 24-29, 2006	<b>Phone Type:</b> Dual-Band CDMA Modem Card	<b>FCC ID:</b> PKRNVW720	Page 6 of 31



## 5. PHANTOM & EQUIVALENT TISSUES

### SAM Phantom



**Figure 5.1 SAM Twin Phantom**

The SAM Twin Phantom V4.0 is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users [11][12]. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. (see Fig. 5.1)

### Head & Body Simulating Mixture Characterization



**Figure 5.2 Simulated Tissue**

The head and body mixtures consist of a viscous gel using hydroxyethylcellulose (HEC) gelling agent and saline solution (see Table 6.1). Preservation with a bactericide is added and visual inspection is made to make sure air bubbles are not trapped during the mixing process. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the desired tissue. The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 have been incorporated in the following table. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the Cole-Cole equations. The mixture characterizations used for the head and body tissue simulating liquids are according to the data by C. Gabriel and G. Hartsgrove [13]. (see Fig. 5.2)

**Table 5.1 Composition of the Head & Body Tissue Equivalent Matter**

INGREDIENTS		SIMULATING TISSUE					
		835MHz Head	835MHz Body	1900MHz Head	1900MHz Body	2450MHz Head	2450MHz Body
Mixture Percentage							
WATER		41.45	52.50	54.90	59.98	62.70	73.2
DGBE		0.000	0.000	44.92	38.41	0.000	26.7
SUGAR		56.00	45.00	0.000	58.00	0.000	0.000
SALT		1.450	1.400	0.180	0.100	0.5	0.04
BACTERIACIDE		0.100	0.100	0.000	0.100	0.000	0.000
HEC		1.000	1.000	0.000	1.410	0.000	0.000
Dielectric Constant	Target	41.50	55.20	40.0	53.30	39.20	52.70
Conductivity (S/m)	Target	0.900	0.970	1.400	1.520	1.80	1.95

### Device Holder for Transmitters



**Figure 5.2 Mounting Device**

In combination with the SAM Twin Phantom V4.0, the Mounting Device (see Fig. 5.2) enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation point is the ear opening. The devices can be easily, accurately, and repeatably be positioned according to the FCC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).

\* Note: A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produce infinite number of configurations [12]. To produce the worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.

PCTEST SAR REPORT	FCC CERTIFICATION			Reviewed by: Quality Manager
SAR Filename: 0605230405	Test Dates: May 24-29, 2006	Phone Type: Dual-Band CDMA Modem Card	FCC ID: PKRNVW720	Page 7 of 31

# 6. TEST SYSTEM SPECIFICATIONS

## Automated Test System Specifications

### Positioner

**Robot:** Stäubli Unimation Corp. Robot Model: RX60L  
**Repeatability:** 0.02 mm  
**No. of axis:** 6



**Figure 6.1 DASY4 Test System**

### Data Acquisition Electronic (DAE) System

#### Cell Controller

**Processor:** Pentium 4  
**Clock Speed:** 2.53 GHz  
**Operating System:** Windows XP Professional

#### Data Converter

**Features:** Signal Amplifier, multiplexer, A/D converter, & control logic  
**Software:** DASY4 software  
**Connecting Lines:** Optical downlink for data and status info.  
 Optical uplink for commands and clock

### PC Interface Card


**Function:** 24 bit (64 MHz) DSP for real time processing  
 Link to DAE4  
 16 bit A/D converter for surface detection system  
 serial link to robot  
 direct emergency stop output for robot

### E-Field Probes

**Model:** EX3DV4                      S/N: 3550  
**Construction:** Triangular core  
**Frequency:** 10 MHz to 6 GHz  
**Linearity:** ± 0.2 dB (30 MHz to 6 GHz)

### Phantom

**Phantom:** SAM Twin Phantom (V4.0)  
**Shell Material:** VIVAC Composite  
**Thickness:** 2.0 ± 0.2 mm

<b>PCTEST SAR REPORT</b>	<b>FCC CERTIFICATION</b>			<b>Reviewed by:</b> Quality Manager
<b>SAR Filename:</b> 0605230405	<b>Test Dates:</b> May 24-29, 2006	<b>Phone Type:</b> Dual-Band CDMA Modem Card	<b>FCC ID:</b> PKRNVVW720	Page 8 of 31



## 7. DOSIMETRIC ASSESSMENT & PHANTOM SPECS

### Measurement Procedure

The evaluation was performed using the following procedure:

1. The SAR measurement was taken at a selected spatial reference point to monitor power variations during testing. This fixed location point was measured and used as a reference value.
2. The SAR distribution at the exposed side of the head was measured at a distance of 3.9mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 15mm x 15mm.
3. Based on the area scan data, the area of the maximum absorption was determined by spline interpolation. Around this point, a volume of 32mm x 32mm x 34mm (fine resolution volume scan, zoom scan) was assessed by measuring 7 x 7 x 7 points. On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see Fig. 7.1):
  - a. The data at the surface was extrapolated, since the center of the dipoles is 2.7mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2mm. The extrapolation was based on a least square algorithm [15]. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
  - b. The maximum interpolated value was searched with a straight-forward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions) [15][16]. The volume was integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average.
  - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as procedure #1, was re-measured. If the value changed by more than 5%, the evaluation is repeated.



**Figure 7.1 Sample SAR Area Scan**

**Deviation from measurement procedure - None**

### Specific Anthropomorphic Mannequin (SAM) Specifications

The phantom for handset SAR assessment testing is a low-loss dielectric shell, with shape and dimensions derived from the anthropometric data of the 90<sup>th</sup> percentile adult male head dimensions as tabulated by the US Army. The SAM Twin Phantom shell is bisected along the mid-sagittal plane into right and left halves (see Fig. 7.2). The perimeter sidewalls of each phantom halves are extended to allow filling with liquid to a depth that is sufficient to minimized reflections from the upper surface. The liquid depth is maintained at a minimum depth of 15cm to minimize reflections from the upper surface.




**Figure 7.2 SAM Twin Phantom shell**

<b>PCTEST SAR REPORT</b>	<b>FCC CERTIFICATION</b>			<b>Reviewed by:</b> Quality Manager
SAR Filename: 0605230405	Test Dates: May 24-29, 2006	Phone Type: Dual-Band CDMA Modem Card	FCC ID: PKRNVW720	Page 9 of 31

## 8. DEFINITION OF REFERENCE POINTS

### EAR Reference Point

Figure 8.1 shows the front, back and side views of the SAM Twin Phantom. The point “M” is the reference point for the center of the mouth, “LE” is the left ear reference point (ERP), and “RE” is the right ERP. The ERPs are 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 9.2. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front) is perpendicular to the reference plane and passing through the RE (or LE) is called the Reference Pivoting Line (see Figure 8.2). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].




**Figure 8.2** Close-up side view of ERPs



**Figure 8.1** Front, back and side view of SAM Twin Phantom

### Handset Reference Points

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the “test device reference point” located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (See Fig. 8.3). The “test device reference point” was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.

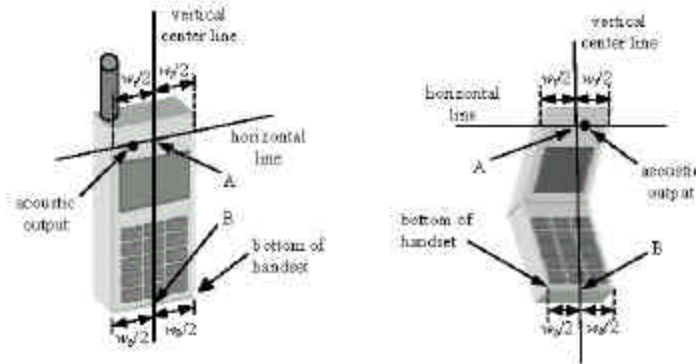

**Figure 8.3** Handset Vertical Center & Horizontal Line Reference Points

<b>PCTEST SAR REPORT</b>	<b>FCC CERTIFICATION</b>			<b>Reviewed by:</b> Quality Manager
SAR Filename: 0605230405	Test Dates: May 24-29, 2006	Phone Type: Dual-Band CDMA Modem Card	FCC ID: PKRNVW720	Page 10 of 31

## 9. TEST CONFIGURATION POSITIONS

### Body Holster /Belt Clip Configurations

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.5). A device with a headset output is tested with a headset connected to the device. Body dielectric parameters are used.

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are supplied with the device, the device is tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration where a separation distance between the back of the device and the flat phantom is used. All test position spacings are documented.

Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessory(ies), including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

In all cases SAR measurements are performed to investigate the worst-case positioning. Worst-case positioning is then documented and used to perform Body SAR testing.

In order for users to be aware of the body-worn operating requirements for meeting RF exposure compliance, operating instructions and cautions statements are included in the user's manual



**Figure 9.5 Body Belt Clip & Holster Configurations  
Sample Photo  
(Not Actual EUT)**

<b>PCTEST SAR REPORT</b>	<b>FCC CERTIFICATION</b>			<b>Reviewed by:</b> Quality Manager
<b>SAR Filename:</b> 0605230405	<b>Test Dates:</b> May 24-29, 2006	<b>Phone Type:</b> Dual-Band CDMA Modem Card	<b>FCC ID:</b> PKRNVW720	Page 11 of 31

# 10. ANSI/IEEE C95.1 - 1992 RF EXPOSURE LIMITS

## Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

## Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Table 10.1. Safety Limits for Partial Body Exposure [2]**

	HUMAN EXPOSURE LIMITS	
	UNCONTROLLED ENVIRONMENT General Population (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT Occupational (W/kg) or (mW/g)
SPATIAL PEAK SAR <sup>1</sup> Head	1.60	8.00
SPATIAL AVERAGE SAR <sup>2</sup> Whole Body	0.08	0.40
SPATIAL PEAK SAR <sup>3</sup> Hands, Feet, Ankles, Wrists	4.00	20.00



- 
- 1 The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
  - 2 The Spatial Average value of the SAR averaged over the whole body.
  - 3 The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

PCTEST SAR REPORT	FCC CERTIFICATION			Reviewed by: Quality Manager
SAR Filename: 0605230405	Test Dates: May 24-29, 2006	Phone Type: Dual-Band CDMA Modem Card	FCC ID: PKRNVV720	Page 12 of 31

## 11. MEASUREMENT UNCERTAINTIES 5 GHz Band

a	b	c	d	e= f(d,k)	f	g	h = cxf/e	i = cxg/e	k
Uncertainty Component	Sec.	Tol. (± %)	Prob. Dist.	Div.	c <sub>f</sub> (1 - g)	c <sub>g</sub> (10 - g)	1 - g u <sub>i</sub> (± %)	10 - g u <sub>i</sub> (± %)	v <sub>i</sub>
<b>Measurement System</b>									
Probe Calibration	E1.1	4.8	N	1	1	1	4.8	4.8	∞
Axial Isotropy	E1.2	4.7	R	√3	0.7	0.7	1.9	1.9	∞
Hemishperical Isotropy	E1.2	9.6	R	√3	0.7	0.7	3.9	3.9	∞
Boundary Effect	E1.3	1.0	R	√3	1	1	0.6	0.6	∞
Linearity	E1.4	4.7	R	√3	1	1	2.7	2.7	∞
System Detection Limits	E1.5	1.0	R	√3	1	1	0.6	0.6	∞
Readout Electronics	E1.6	1.0	N	1	1	1	1.0	1.0	∞
Response Time	E1.7	0.8	R	√3	1	1	0.5	0.5	∞
Integration Time	E1.8	2.6	R	√3	1	1	1.5	1.5	∞
RF Ambient Conditions	E5.1	3.0	R	√3	1	1	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E5.2	0.4	R	√3	1	1	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	E5.3	2.9	R	√3	1	1	1.7	1.7	∞
Extrapolation, Interpolation & Integration Algorithms for Max. SAR Evaluation	E4.2	1.0	R	√3	1	1	0.6	0.6	∞
<b>Test Sample Related</b>									
Test Sample Positioning	E3.2.1	2.9	N	1	1	1	2.9	2.9	145
Device Holder Uncertainty	E3.1.1	3.6	N	1	1	1	3.6	3.6	5
Output Power Variation - SAR drift measurement	5.6.2	5.0	R	√3	1	1	2.9	2.9	∞
<b>Phantom &amp; Tissue Parameters</b>									
Phantom Uncertainty (Shape & Thickness tolerances)	E2.1	4.0	R	√3	1	1	2.3	2.3	∞
Liquid Conductivity - deviation from target values	E2.2	5.0	R	√3	0.64	0.43	1.8	1.2	∞
Liquid Conductivity - measurement uncertainty	E2.2	2.5	N	1	0.64	0.43	1.6	1.1	∞
Liquid Permittivity - deviation from target values	E2.2	5.0	R	√3	0.6	0.5	1.7	1.4	∞
Liquid Permittivity - measurement uncertainty	E2.2	2.5	N	1	0.6	0.5	1.5	1.2	∞
<b>Combined Standard Uncertainty (k=1)</b>				RSS			10.3	10.0	
<b>Expanded Uncertainty (k=2)</b> (95% CONFIDENCE LEVEL)							20.6	20.1	

The above measurement uncertainties are according to IEEE 1528-2003

<b>PCTEST SAR REPORT</b>	<b>FCC CERTIFICATION</b>			<b>Reviewed by:</b> Quality Manager
<b>SAR Filename:</b> 0605230405	<b>Test Dates:</b> May 24-29, 2006	<b>Phone Type:</b> Dual-Band CDMA Modem Card		
			<b>FCC ID:</b> PKRNVW720	Page 13 of 31

## 12. SYSTEM VERIFICATION

### Tissue Verification

**Table 12.1 Simulated Tissue Verification [5]**


MEASURED TISSUE PARAMETERS									
	05-24-2006	835MHz Head		835MHz Body		1900MHz Head		1900MHz Body	
Liquid Temperature (°C)	23.5	Target	Measured	Target	Measured	Target	Measured	Target	Measured
Dielectric Constant: $\epsilon$		41.50	41.48	55.20	54.33	40.00	39.73	53.30	52.47
Conductivity: $\sigma$		0.900	0.870	0.970	0.990	1.400	1.380	1.520	1.570

### Test System Validation


Prior to assessment, the system is verified to the  $\pm 10\%$  of the specifications at 835MHz and 1900MHz, by using the system validation kit(s). (Graphic Plots Attached)

**Table 12.2 System Validation [5]**

System Validation TARGET & MEASURED							
Date:	Amb. Temp (°C)	Liquid Temp(°C)	Input Power (W)	Tissue	Targeted SAR <sub>1g</sub> (mW/g)	Measured SAR <sub>1g</sub> (mW/g)	Deviation (%)
05/26/2006	23.6	22.3	<b>0.250</b>	<b>835MHz Head</b>	<b>2.375</b>	2.310	-2.73
05/28/2006	23.4	21.8				2.230	-6.10
05/29/2006	23.5	22.2				2.250	-5.26
05/24/2006	23.2	21.6	<b>0.100</b>	<b>1900MHz Head</b>	<b>3.970</b>	3.700	-6.80
05/25/2006	23.8	22.1				3.600	-9.31
05/29/2006	23.0	21.7				3.770	-5.03

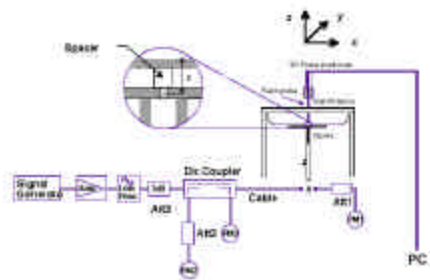

**Figure 12.1 Dipole Validation Test Setup**

<b>PCTEST SAR REPORT</b>	<b>FCC CERTIFICATION</b>			<b>Reviewed by:</b> Quality Manager
<b>SAR Filename:</b> 0605230405	<b>Test Dates:</b> May 24-29, 2006	<b>Phone Type:</b> Dual-Band CDMA Modem Card	 <b>FCC ID:</b> PKRNVW720	Page 14 of 31

# 13. FCC 3G MEASUREMENT PROCEDURES

Power measurements were performed using a base station simulator under digital average power.

## Procedures Used to Establish RF Signal for SAR

The handset was placed into a simulated call using a base station simulator in a shielded chamber. Such test signals offer a consistent means for testing SAR and are recommended for evaluating SAR[4]. SAR measurements were taken with a fully charged battery. In order to verify that the device was tested and maintained at full power, this was configured with the base station simulator. The SAR measurement software calculates a reference point at the start and end of the test to check for power drifts. If conducted power deviations of more than 5% occurred, the tests were repeated.

## SAR Measurement Conditions for CDMA2000

The following procedures were followed according to FCC “SAR Measurement Procedures for 3G Devices”, May 2006.

### 5.1.1 Output Power Verification

See 3GPP2 C.S0011/TIA-98-E as recommended by “SAR Measurement Procedures for 3G Devices”, May 2006. Maximum output power is verified on the Hgh, Middle and Low channels according to procedures in section 4.4.5.2 of 3GPP2 C.S0011/TIA-98-E. SO55 tests were measured with power control bits in “All Up” condition. .

1. If the mobile station (MS) supports Reverse TCH RC 1 and Forward TCH RC 1, set up a call using Fundamental Channel Test Mode 1 (RC=1/1) with 9600 bps data rate only.
2. Under RC1, C.S0011 Table 4.4.5.2-1, Table 0-1 parameters were applied.
3. If the MS supports the RC 3 Reverse FCH, RC3 Reverse SCH0 and demodulation of RC 3,4, or 5, set up a call using Supplemental Channel Test Mode 3 (RC 3/3) with 9600 bps Fundamental Channel and 9600 bps SCH0 data rate.
4. Under RC3, C.S0011 Table 4.4.5.2-2, Table 0-2 was applied.
5. FCHs were configured at full rate for maximum SAR with “All Up” power control bits.

**Table 0-1  
Parameters for Max. Power for RC1**

Parameter	Units	Value
$T_{\text{off}}$	dBm/1.2 MHz	-104
$\frac{\text{Pilot } E_c}{I_{\text{off}}}$	dB	-7
$\frac{\text{Traffic } E_c}{I_{\text{off}}}$	dB	-7.4

**Table 0-2  
Parameters for Max. Power for RC3**

Parameter	Units	Value
$T_{\text{off}}$	dBm/1.2 MHz	-96
$\frac{\text{Pilot } E_c}{I_{\text{off}}}$	dB	-7
$\frac{\text{Traffic } E_c}{I_{\text{off}}}$	dB	-7.4

### 5.1.2 Head SAR Measurements

SAR for head exposure configurations is measured in RC3 with the DUT configured to transmit at full rate using Loopback Service Option SO55. SAR for RC1 is not required when the maximum average output of each channel is less than ¼ dB higher than that measured in RC3. Otherwise, SAR is measured on the maximum output channel in RC1 using the exposure configuration that results in the highest SAR for that channel in RC3.

PCTEST SAR REPORT	FCC CERTIFICATION			Reviewed by: Quality Manager
SAR Filename: 0605230405	Test Dates: May 24-29, 2006	Phone Type: Dual-Band CDMA Modem Card	FCC ID: PKRNVW720	Page 15 of 31



### 5.1.3 Body SAR Measurements

SAR for body exposure configurations is measured in RC3 with the DUT configured to transmit at full rate on FCH with all other code channels disabled using TDSO / SO32. SAR for multiple code channels (FCH + SCHn) is not required when the maximum average output of each RF channel is less than ¼ dB higher than that measured with FCH only. Otherwise, SAR is measured on the maximum output channel (FCH + SCHn) with FCH at full rate and SCH0 enabled at 9600 bps using the exposure configuration that results in the highest SAR for that channel with FCH only. When multiple code channels are enabled, the DUT output may shift by more than 0.5 dB and lead to higher SAR drifts and SCH dropouts. Body SAR was measured using TDSO / SO32 with power control bits in the “All Up”

Body SAR in RC1 is not required when the maximum average output of each channel is less than ¼ dB higher than that measured in RC3. Otherwise, SAR is measured on the maximum output channel in RC1; with Loopback Service Option SO55, at full rate, using the body exposure configuration that results in the highest SAR for that channel in RC3.

### 5.1.4 Handsets with EVDO

For handsets with Ev-Do capabilities, when the maximum average output of each channel in Rev. 0 is less than ¼ dB higher than that measured in RC3 (1x RTT), body SAR for EV-DO is not required.7 Otherwise, SAR for Rev. 0 is measured on the maximum output channel at 153.6 kbps using the body exposure configuration that results in the highest SAR for that channel in RC3.7 SAR for Rev. A is not required when the maximum average output of each channel is less than that measured in Rev. 0 or less than ¼ dB higher than that measured in RC3. Otherwise, SAR is measured on the maximum output channel for Rev. A using a Reverse Data Channel payload size of 4096 bits and a Termination Target of 16 slots defined for Subtype 2 Physical Layer configurations. A Forward Traffic Channel data rate corresponding to the 2-slot version of 307.2 kbps with the ACK Channel transmitting in all slots should be configured in the downlink for both Rev. 0 and Rev. A.

**Table 0-3  
Max. Power Output Table for PKRNVVW720**

Band	Channel	1X EVDO (153.6Kbps)		TDSO SO32 Loopback
		RTAP	FTAP	
Cellular	1013	24.65	24.6	24.51
	384	24.53	24.55	24.42
	777	24.59	24.45	24.54
PCS	25	24.6	24.48	24.62
	600	24.55	24.4	24.46
	1175	24.58	24.45	24.51

PCTEST SAR REPORT	FCC CERTIFICATION			Reviewed by: Quality Manager
SAR Filename: 0605230405	Test Dates: May 24-29, 2006	Phone Type: Dual-Band CDMA Modem Card	FCC ID: PKRNVVW720	Page 16 of 31

# 14. SAR DATA SUMMARY

Mixture Type: 835MHz Body  
 Host PC: Toshiba PSAA2U-04P018

<b>14.1 MEASUREMENT RESULTS (CDMA, Laptop Position)</b>								
FREQUENCY		Modulation	Begin / End Average POWER <sup>†</sup>		Test Position	Separation Distance (cm)	Antenna Position	SAR (W/kg)
MHz	Ch.		(dBm)					
824.70	1013	CDMA	24.29	24.24	Laptop	1.2 cm	Open	1.310
824.70	1013	CDMA	24.29	24.30	Laptop	1.2 cm	Close	1.360
836.52	384	CDMA	24.28	24.32	Laptop	1.2 cm	Open	1.310
836.52	384	CDMA	24.28	24.31	Laptop	1.2 cm	Close	1.440
848.31	777	CDMA	24.40	24.30	Laptop	1.2 cm	Open	1.350
848.31	777	CDMA	24.40	24.37	Laptop	1.2 cm	Close	1.440
<b>ANSI / IEEE C95.1 1992 - SAFETY LIMIT</b>					<b>Body</b>			
<b>Spatial Peak</b>					<b>1.6 W/kg (mW/g)</b>			
<b>Uncontrolled Exposure/General Population</b>					averaged over 1 gram			

**NOTES:**

1. The test data reported are the worst-case SAR value with the antenna position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Laptop is fully charged for all readings.
4. SAR Measurement System  DASY4  IDX  
 Phantom Configuration  Left Head  Flat Phantom  Right Head
5. SAR Configuration  Head  Body  Hand
6. Test Signal Call Mode  Manu. Test Codes  Base Station Simulator
7. Tissue parameters and temperatures are listed on the SAR plots.
8. Liquid tissue depth is 15.1 cm. ± 0.1
9. Body SAR was tested under RC3/SO32
10. Justification for reduced test configurations: This model supports EV-DO. The maximum average output of each channel in Rev. 0 is less than ¼ dB higher than that measured in RC3 (1x RTT). Therefore Body SAR is not required for EV-DO mode. SAR for Rev. A is not required when the maximum average output of each channel is less than that measured in Rev. 0 or less than ¼ dB higher than that measured in RC3. (FCC SAR Measurement Procedures for 3G Devices, May 2006)



Randy Ortanez  
President

<b>PCTEST SAR REPORT</b>	<b>FCC CERTIFICATION</b>			<b>Reviewed by:</b> Quality Manager
SAR Filename: 0605230405	Test Dates: May 24-29, 2006	Phone Type: Dual-Band CDMA Modem Card	FCC ID: PKRNVVW720	Page 17 of 31

# SAR DATA SUMMARY (Continued)

Mixture Type: 1900MHz Body  
 Host PC: Toshiba PSAA2U-04P018

<b>14.2 MEASUREMENT RESULTS (PCS, Laptop Position)</b>								
FREQUENCY		Modulation	Begin / End Average POWER <sup>‡</sup>		Test Position	Separation Distance (cm)	Antenna Position	SAR (W/kg)
MHz	Ch.		(dBm)					
1851.25	25	PCS CDMA	24.62	24.69	Laptop	1.2 cm	Open	0.858
1880.00	600	PCS CDMA	24.46	24.43	Laptop	1.2 cm	Open	<b>0.869</b>
1880.00	600	PCS CDMA	24.46	24.32	Laptop	1.2 cm	Close	0.738
1908.75	1175	PCS CDMA	24.51	24.71	Laptop	1.2 cm	Open	0.655
<b>ANSI / IEEE C95.1 1992 - SAFETY LIMIT</b>					<b>Body</b>			
<b>Spatial Peak</b>					<b>1.6 W/kg (mW/g)</b>			
<b>Uncontrolled Exposure/General Population</b>					averaged over 1 gram			

**NOTES:**

1. The test data reported are the worst-case SAR value with the antenna position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Laptop is fully charged for all readings.
4. SAR Measurement System  DASY4  IDX  
 Phantom Configuration  Left Head  Flat Phantom  Right Head
5. SAR Configuration  Head  Body  Hand
6. Test Signal Call Mode  Manu. Test Codes  Base Station Simulator
7. Tissue parameters and temperatures are listed on the SAR plots.
8. Liquid tissue depth is 15.1 cm. ± 0.1
9. Body SAR was tested under RC3/SO32
10. Justification for reduced test configurations: This model supports EV-DO. The maximum average output of each channel in Rev. 0 is less than ¼ dB higher than that measured in RC3 (1x RTT). Therefore Body SAR is not required for EV-DO mode. SAR for Rev. A is not required when the maximum average output of each channel is less than that measured in Rev. 0 or less than ¼ dB higher than that measured in RC3. (FCC SAR Measurement Procedures for 3G Devices, May 2006)



Randy Orlanez  
President

<b>PCTEST SAR REPORT</b>	<b>FCC CERTIFICATION</b>			<b>Reviewed by:</b> Quality Manager
SAR Filename: 0605230405	Test Dates: May 24-29, 2006	Phone Type: Dual-Band CDMA Modem Card	FCC ID: PKRNVVW720	Page 18 of 31

# 14. SAR DATA SUMMARY


Mixture Type: 835MHz Body  
 Host PC: Toshiba PSAA2U-04P018

<b>14.3 MEASUREMENT RESULTS (CDMA, Bystander Position)</b>								
FREQUENCY		Modulation	Begin / End Average POWER <sup>†</sup>		Test Position	Separation Distance (cm)	Antenna Position	SAR (W/kg)
MHz	Ch.		(dBm)					
836.52	384	CDMA	24.28	24.23	Bystander	2.5 cm	Open	<b>0.098</b>
836.52	384	CDMA	24.28	24.41	Bystander	2.5 cm	Close	<b>0.036</b>
<b>ANSI / IEEE C95.1 1992 - SAFETY LIMIT</b>					<b>Body</b>			
<b>Spatial Peak</b>					<b>1.6 W/kg (mW/g)</b>			
<b>Uncontrolled Exposure/General Population</b>					averaged over 1 gram			

**NOTES:**

1. The test data reported are the worst-case SAR value with the antenna position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Laptop is fully charged for all readings.
4. SAR Measurement System  DASY4  IDX  
 Phantom Configuration  Left Head  Flat Phantom  Right Head
5. SAR Configuration  Head  Body  Hand
6. Test Signal Call Mode  Manu. Test Codes  Base Station Simulator
7. Tissue parameters and temperatures are listed on the SAR plots.
8. Liquid tissue depth is 15.1 cm. ± 0.1
9. Body SAR was tested under RC3/SO32
10. Justification for reduced test configurations: This model supports EV-DO. The maximum average output of each channel in Rev. 0 is less than ¼ dB higher than that measured in RC3 (1x RTT). Therefore Body SAR is not required for EV-DO mode. SAR for Rev. A is not required when the maximum average output of each channel is less than that measured in Rev. 0 or less than ¼ dB higher than that measured in RC3. (FCC SAR Measurement Procedures for 3G Devices, May 2006)

  
 Randy Orlanez  
 President

<b>PCTEST SAR REPORT</b>	<b>FCC CERTIFICATION</b>			<b>Reviewed by:</b> Quality Manager
<b>SAR Filename:</b> 0605230405	<b>Test Dates:</b> May 24-29, 2006	<b>Phone Type:</b> Dual-Band CDMA Modem Card	 <b>FCC ID:</b> PKRNVV720	Page 19 of 31

# 14. SAR DATA SUMMARY

Mixture Type: 1900MHz Body  
 Host PC: Toshiba PSAA2U-04P018

<b>14.4 MEASUREMENT RESULTS (PCS, Bystander Position)</b>								
FREQUENCY		Modulation	Begin / End Average POWER <sup>†</sup>		Test Position	Separation Distance (cm)	Antenna Position	SAR (W/kg)
MHz	Ch.		(dBm)					
1880.00	600	PCS CDMA	24.46	24.61	Bystander	2.5 cm	Open	0.072
1880.00	600	PCS CDMA	24.46	24.39	Bystander	2.5 cm	Close	<b>0.298</b>
<b>ANSI / IEEE C95.1 1992 - SAFETY LIMIT</b>					<b>Body</b>			
<b>Spatial Peak</b>					<b>1.6 W/kg (mW/g)</b>			
<b>Uncontrolled Exposure/General Population</b>					averaged over 1 gram			

**NOTES:**

1. The test data reported are the worst-case SAR value with the antenna position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Laptop is fully charged for all readings.
4. SAR Measurement System  DASY4  IDX  
 Phantom Configuration  Left Head  Flat Phantom  Right Head
5. SAR Configuration  Head  Body  Hand
6. Test Signal Call Mode  Manu. Test Codes  Base Station Simulator
7. Tissue parameters and temperatures are listed on the SAR plots.
8. Liquid tissue depth is 15.1 cm. ± 0.1
9. Body SAR was tested under RC3/SO32
10. Justification for reduced test configurations: This model supports EV-DO. The maximum average output of each channel in Rev. 0 is less than ¼ dB higher than that measured in RC3 (1x RTT). Therefore Body SAR is not required for EV-DO mode. SAR for Rev. A is not required when the maximum average output of each channel is less than that measured in Rev. 0 or less than ¼ dB higher than that measured in RC3. (FCC SAR Measurement Procedures for 3G Devices, May 2006)



Randy Orlanez  
President

PCTEST SAR REPORT	FCC CERTIFICATION			Reviewed by: Quality Manager
SAR Filename: 0605230405	Test Dates: May 24-29, 2006	Phone Type: Dual-Band CDMA Modem Card	FCC ID: PKRNVV720	Page 20 of 31

# 14. SAR DATA SUMMARY

Mixture Type: 835MHz Body  
 Host PC: Dell PP05L

<b>14.5 MEASUREMENT RESULTS (CDMA, Laptop Position)</b>								
FREQUENCY		Modulation	Begin / End Average POWER <sup>†</sup>		Test Position	Separation Distance (cm)	Antenna Position	SAR (W/kg)
MHz	Ch.		(dBm)					
824.70	1013	CDMA	24.29	24.27	Laptop	1.4 cm	Close	0.995
836.52	384	CDMA	24.28	24.23	Laptop	1.4 cm	Open	0.726
836.52	384	CDMA	24.28	24.29	Laptop	1.4 cm	Close	<b>1.010</b>
848.31	777	CDMA	24.40	24.39	Laptop	1.4 cm	Close	0.983
<b>ANSI / IEEE C95.1 1992 - SAFETY LIMIT</b>					<b>Body</b>			
<b>Spatial Peak</b>					<b>1.6 W/kg (mW/g)</b>			
<b>Uncontrolled Exposure/General Population</b>					averaged over 1 gram			

**NOTES:**

1. The test data reported are the worst-case SAR value with the antenna position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Laptop is fully charged for all readings.
4. SAR Measurement System  DASY4  IDX  
 Phantom Configuration  Left Head  Flat Phantom  Right Head
5. SAR Configuration  Head  Body  Hand
6. Test Signal Call Mode  Manu. Test Codes  Base Station Simulator
7. Tissue parameters and temperatures are listed on the SAR plots.
8. Liquid tissue depth is 15.1 cm. ± 0.1
9. Body SAR was tested under RC3/SO32
10. Justification for reduced test configurations: This model supports EV-DO. The maximum average output of each channel in Rev. 0 is less than ¼ dB higher than that measured in RC3 (1x RTT). Therefore Body SAR is not required for EV-DO mode. SAR for Rev. A is not required when the maximum average output of each channel is less than that measured in Rev. 0 or less than ¼ dB higher than that measured in RC3. (FCC SAR Measurement Procedures for 3G Devices, May 2006)



Randy Orlanez  
President

<b>PCTEST SAR REPORT</b>	<b>FCC CERTIFICATION</b>			<b>Reviewed by:</b> Quality Manager
SAR Filename: 0605230405	Test Dates: May 24-29, 2006	Phone Type: Dual-Band CDMA Modem Card	FCC ID: PKRNVV720	Page 21 of 31

# SAR DATA SUMMARY (Continued)

Mixture Type: 1900MHz Body  
 Host PC: Dell PP05L

<b>14.6 MEASUREMENT RESULTS (PCS, Laptop Position)</b>								
FREQUENCY		Modulation	Begin / End Average POWER <sup>‡</sup>		Test Position	Separation Distance (cm)	Antenna Position	SAR (W/kg)
MHz	Ch.		(dBm)					
1880.00	600	PCS CDMA	24.46	24.69	Laptop	1.4 cm	Open	0.540
1880.00	600	PCS CDMA	24.46	24.33	Laptop	1.4 cm	Close	<b>0.616</b>
<b>ANSI / IEEE C95.1 1992 - SAFETY LIMIT</b>					<b>Body</b>			
<b>Spatial Peak</b>					<b>1.6 W/kg (mW/g)</b>			
<b>Uncontrolled Exposure/General Population</b>					averaged over 1 gram			

**NOTES:**

1. The test data reported are the worst-case SAR value with the antenna position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Laptop is fully charged for all readings.
4. SAR Measurement System  DASY4  IDX  
 Phantom Configuration  Left Head  Flat Phantom  Right Head
5. SAR Configuration  Head  Body  Hand
6. Test Signal Call Mode  Manu. Test Codes  Base Station Simulator
7. Tissue parameters and temperatures are listed on the SAR plots.
8. Liquid tissue depth is 15.1 cm. ± 0.1
9. Body SAR was tested under RC3/SO32
10. Justification for reduced test configurations: This model supports EV-DO. The maximum average output of each channel in Rev. 0 is less than ¼ dB higher than that measured in RC3 (1x RTT). Therefore Body SAR is not required for EV-DO mode. SAR for Rev. A is not required when the maximum average output of each channel is less than that measured in Rev. 0 or less than ¼ dB higher than that measured in RC3. (FCC SAR Measurement Procedures for 3G Devices, May 2006)

  
 Randy Orlanez  
 President

<b>PCTEST SAR REPORT</b>	<b>FCC CERTIFICATION</b>			<b>Reviewed by:</b> Quality Manager
SAR Filename: 0605230405	Test Dates: May 24-29, 2006	Phone Type: Dual-Band CDMA Modem Card	FCC ID: PKRNVW720	Page 22 of 31



# 14. SAR DATA SUMMARY

Mixture Type: 835MHz Body  
 Host PC: Dell PP05L

<b>14.7 MEASUREMENT RESULTS (CDMA, Bystander Position)</b>								
FREQUENCY		Modulation	Begin / End Average POWER <sup>†</sup>		Test Position	Separation Distance (cm)	Antenna Position	SAR (W/kg)
MHz	Ch.		(dBm)					
836.52	384	CDMA	24.28	24.12	Bystander	2.5 cm	Open	0.044
836.52	384	CDMA	24.28	24.30	Bystander	2.5 cm	Close	<b>0.050</b>
<b>ANSI / IEEE C95.1 1992 - SAFETY LIMIT</b>					<b>Body</b>			
<b>Spatial Peak</b>					<b>1.6 W/kg (mW/g)</b>			
<b>Uncontrolled Exposure/General Population</b>					averaged over 1 gram			

**NOTES:**

1. The test data reported are the worst-case SAR value with the antenna position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Laptop is fully charged for all readings.
4. SAR Measurement System  DASY4  IDX  
 Phantom Configuration  Left Head  Flat Phantom  Right Head
5. SAR Configuration  Head  Body  Hand
6. Test Signal Call Mode  Manu. Test Codes  Base Station Simulator
7. Tissue parameters and temperatures are listed on the SAR plots.
8. Liquid tissue depth is 15.1 cm. ± 0.1
9. Body SAR was tested under RC3/SO32
10. Justification for reduced test configurations: This model supports EV-DO. The maximum average output of each channel in Rev. 0 is less than ¼ dB higher than that measured in RC3 (1x RTT). Therefore Body SAR is not required for EV-DO mode. SAR for Rev. A is not required when the maximum average output of each channel is less than that measured in Rev. 0 or less than ¼ dB higher than that measured in RC3. (FCC SAR Measurement Procedures for 3G Devices, May 2006)

  
 Randy Orlanez  
 President

<b>PCTEST SAR REPORT</b>	<b>FCC CERTIFICATION</b>			<b>Reviewed by:</b> Quality Manager
SAR Filename: 0605230405	Test Dates: May 24-29, 2006	Phone Type: Dual-Band CDMA Modem Card	FCC ID: PKRNVW720	Page 23 of 31

# 14. SAR DATA SUMMARY

Mixture Type: 1900MHz Body  
 Host PC: Dell PP05L


<b>14.8 MEASUREMENT RESULTS (PCS, Bystander Position)</b>								
FREQUENCY		Modulation	Begin / End Average POWER <sup>†</sup>		Test Position	Separation Distance (cm)	Antenna Position	SAR (W/kg)
MHz	Ch.		(dBm)					
1880.00	600	PCS CDMA	24.46	24.56	Bystander	2.5 cm	Open	0.094
1880.00	600	PCS CDMA	24.46	24.51	Bystander	2.5 cm	Close	<b>0.280</b>
<b>ANSI / IEEE C95.1 1992 - SAFETY LIMIT</b>					<b>Body</b>			
<b>Spatial Peak</b>					<b>1.6 W/kg (mW/g)</b>			
<b>Uncontrolled Exposure/General Population</b>					averaged over 1 gram			

**NOTES:**

1. The test data reported are the worst-case SAR value with the antenna position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Laptop is fully charged for all readings.
4. SAR Measurement System  DASY4  IDX  
 Phantom Configuration  Left Head  Flat Phantom  Right Head
5. SAR Configuration  Head  Body  Hand
6. Test Signal Call Mode  Manu. Test Codes  Base Station Simulator
7. Tissue parameters and temperatures are listed on the SAR plots.
8. Liquid tissue depth is 15.1 cm. ± 0.1
9. Body SAR was tested under RC3/SO32
10. Justification for reduced test configurations: This model supports EV-DO. The maximum average output of each channel in Rev. 0 is less than ¼ dB higher than that measured in RC3 (1x RTT). Therefore Body SAR is not required for EV-DO mode. SAR for Rev. A is not required when the maximum average output of each channel is less than that measured in Rev. 0 or less than ¼ dB higher than that measured in RC3. (FCC SAR Measurement Procedures for 3G Devices, May 2006)



Randy Orlanez  
President

<b>PCTEST SAR REPORT</b>	<b>FCC CERTIFICATION</b>			<b>Reviewed by:</b> Quality Manager
SAR Filename: 0605230405	Test Dates: May 24-29, 2006	Phone Type: Dual-Band CDMA Modem Card	 FCC ID: PKRNVW720	Page 24 of 31

# 14. SAR DATA SUMMARY

Mixture Type: 835MHz Body  
 Host PC: Dell PP02X

<b>14.9 MEASUREMENT RESULTS (CDMA, Laptop Position)</b>								
FREQUENCY		Modulation	Begin / End Average POWER <sup>†</sup>		Test Position	Separation Distance (cm)	Antenna Position	SAR (W/kg)
MHz	Ch.		(dBm)					
836.52	384	CDMA	24.28	24.16	Laptop	1.7 cm	Open	0.513
836.52	384	CDMA	24.28	24.33	Laptop	1.7 cm	Close	0.742
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					Body 1.6 W/kg (mW/g) <small>averaged over 1 gram</small>			

**NOTES:**

1. The test data reported are the worst-case SAR value with the antenna position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Laptop is fully charged for all readings.
4. SAR Measurement System
 

<input checked="" type="checkbox"/> DASY4	<input type="checkbox"/> IDX
<input type="checkbox"/> Left Head	<input checked="" type="checkbox"/> Flat Phantom
<input type="checkbox"/> Head	<input type="checkbox"/> Right Head
5. SAR Configuration
 

<input type="checkbox"/> Head	<input checked="" type="checkbox"/> Body	<input type="checkbox"/> Hand
-------------------------------	--	-------------------------------
6. Test Signal Call Mode
 

<input type="checkbox"/> Manu. Test Codes	<input checked="" type="checkbox"/> Base Station Simulator
---	--
7. Tissue parameters and temperatures are listed on the SAR plots.
8. Liquid tissue depth is 15.1 cm. ± 0.1
9. Body SAR was tested under RC3/SO32
10. Justification for reduced test configurations: This model supports EV-DO. The maximum average output of each channel in Rev. 0 is less than ¼ dB higher than that measured in RC3 (1x RTT). Therefore Body SAR is not required for EV-DO mode. SAR for Rev. A is not required when the maximum average output of each channel is less than that measured in Rev. 0 or less than ¼ dB higher than that measured in RC3. (FCC SAR Measurement Procedures for 3G Devices, May 2006)



Randy Ortanez  
President

<b>PCTEST SAR REPORT</b>	<b>FCC CERTIFICATION</b>			<b>Reviewed by:</b> Quality Manager
SAR Filename: 0605230405	Test Dates: May 24-29, 2006	Phone Type: Dual-Band CDMA Modem Card	FCC ID: PKRNVW720	Page 25 of 31

# SAR DATA SUMMARY (Continued)

Mixture Type: 1900MHz Body  
 Host PC: Dell PP02X

<b>14.10 MEASUREMENT RESULTS (PCS, Laptop Position)</b>								
FREQUENCY		Modulation	Begin / End Average POWER <sup>‡</sup>		Test Position	Separation Distance (cm)	Antenna Position	SAR (W/kg)
MHz	Ch.		(dBm)					
1880.00	600	PCS CDMA	24.46	24.44	Laptop	1.7 cm	Open	0.356
1880.00	600	PCS CDMA	24.46	24.53	Laptop	1.7 cm	Close	0.426
<b>ANSI / IEEE C95.1 1992 - SAFETY LIMIT</b>								
<b>Spatial Peak</b>					<b>Body</b>			
<b>Uncontrolled Exposure/General Population</b>					<b>1.6 W/kg (mW/g)</b> averaged over 1 gram			

**NOTES:**

1. The test data reported are the worst-case SAR value with the antenna position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Laptop is fully charged for all readings.
4. SAR Measurement System  DASY4  IDX  
 Phantom Configuration  Left Head  Flat Phantom  Right Head
5. SAR Configuration  Head  Body  Hand
6. Test Signal Call Mode  Manu. Test Codes  Base Station Simulator
7. Tissue parameters and temperatures are listed on the SAR plots.
8. Liquid tissue depth is 15.1 cm. ± 0.1
9. Body SAR was tested under RC3/SO32
10. Justification for reduced test configurations: This model supports EV-DO. The maximum average output of each channel in Rev. 0 is less than ¼ dB higher than that measured in RC3 (1x RTT). Therefore Body SAR is not required for EV-DO mode. SAR for Rev. A is not required when the maximum average output of each channel is less than that measured in Rev. 0 or less than ¼ dB higher than that measured in RC3. (FCC SAR Measurement Procedures for 3G Devices, May 2006)

  
 Randy Orlanez  
 President

<b>PCTEST SAR REPORT</b>	<b>FCC CERTIFICATION</b>			<b>Reviewed by:</b> Quality Manager
<b>SAR Filename:</b> 0605230405	<b>Test Dates:</b> May 24-29, 2006	<b>Phone Type:</b> Dual-Band CDMA Modem Card	<b>FCC ID:</b> PKRNVW720	Page 26 of 31

# 14. SAR DATA SUMMARY

Mixture Type: 835MHz Body  
 Host PC: Dell PP02X

<b>14.11 MEASUREMENT RESULTS (CDMA, Bystander Position)</b>								
FREQUENCY		Modulation	Begin / End Average POWER <sup>†</sup>		Test Position	Separation Distance (cm)	Antenna Position	SAR (W/kg)
MHz	Ch.		(dBm)					
836.52	384	CDMA	24.28	24.41	Bystander	2.5 cm	Open	0.051
836.52	384	CDMA	24.28	24.20	Bystander	2.5 cm	Close	<b>0.055</b>
<b>ANSI / IEEE C95.1 1992 - SAFETY LIMIT</b>					<b>Body</b>			
<b>Spatial Peak</b>					<b>1.6 W/kg (mW/g)</b>			
<b>Uncontrolled Exposure/General Population</b>					averaged over 1 gram			

- NOTES:**
- The test data reported are the worst-case SAR value with the antenna position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
  - All modes of operation were investigated, and worst-case results are reported.
  - Laptop is fully charged for all readings.
  - SAR Measurement System  DASY4  IDX  
 Phantom Configuration  Left Head  Flat Phantom  Right Head
  - SAR Configuration  Head  Body  Hand
  - Test Signal Call Mode  Manu. Test Codes  Base Station Simulator
  - Tissue parameters and temperatures are listed on the SAR plots.
  - Liquid tissue depth is 15.1 cm. ± 0.1
  - Body SAR was tested under RC3/SO32
  - Justification for reduced test configurations: This model supports EV-DO. The maximum average output of each channel in Rev. 0 is less than ¼ dB higher than that measured in RC3 (1x RTT). Therefore Body SAR is not required for EV-DO mode. SAR for Rev. A is not required when the maximum average output of each channel is less than that measured in Rev. 0 or less than ¼ dB higher than that measured in RC3. (FCC SAR Measurement Procedures for 3G Devices, May 2006)

  
 Randy Orlanez  
 President

<b>PCTEST SAR REPORT</b>	<b>FCC CERTIFICATION</b>			<b>Reviewed by:</b> Quality Manager
SAR Filename: 0605230405	Test Dates: May 24-29, 2006	Phone Type: Dual-Band CDMA Modem Card	FCC ID: PKRNVW720	Page 27 of 31

# 14. SAR DATA SUMMARY

Mixture Type: 1900MHz Body  
 Host PC: Dell PP02X

<b>14.12 MEASUREMENT RESULTS (PCS, Bystander Position)</b>								
FREQUENCY		Modulation	Begin / End Average POWER <sup>†</sup>		Test Position	Separation Distance (cm)	Antenna Position	SAR (W/kg)
MHz	Ch.		(dBm)					
1880.00	600	PCS CDMA	24.46	24.47	Bystander	2.5 cm	Open	0.098
1880.00	600	PCS CDMA	24.46	24.33	Bystander	2.5 cm	Close	<b>0.268</b>
<b>ANSI / IEEE C95.1 1992 - SAFETY LIMIT</b>					<b>Body</b>			
<b>Spatial Peak</b>					<b>1.6 W/kg (mW/g)</b>			
<b>Uncontrolled Exposure/General Population</b>					averaged over 1 gram			

- NOTES:**
- The test data reported are the worst-case SAR value with the antenna position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
  - All modes of operation were investigated, and worst-case results are reported.
  - Laptop is fully charged for all readings.
  - SAR Measurement System  DASY4  IDX  
 Phantom Configuration  Left Head  Flat Phantom  Right Head
  - SAR Configuration  Head  Body  Hand
  - Test Signal Call Mode  Manu. Test Codes  Base Station Simulator
  - Tissue parameters and temperatures are listed on the SAR plots.
  - Liquid tissue depth is 15.1 cm. ± 0.1
  - Body SAR was tested under RC3/SO32
  - Justification for reduced test configurations: This model supports EV-DO. The maximum average output of each channel in Rev. 0 is less than ¼ dB higher than that measured in RC3 (1x RTT). Therefore Body SAR is not required for EV-DO mode. SAR for Rev. A is not required when the maximum average output of each channel is less than that measured in Rev. 0 or less than ¼ dB higher than that measured in RC3. (FCC SAR Measurement Procedures for 3G Devices, May 2006)

  
 Randy Orlanez  
 President

<b>PCTEST SAR REPORT</b>	<b>FCC CERTIFICATION</b>			<b>Reviewed by:</b> Quality Manager
SAR Filename: 0605230405	Test Dates: May 24-29, 2006	Phone Type: Dual-Band CDMA Modem Card	FCC ID: PKRNVV720	Page 28 of 31

## 15. SAR TEST EQUIPMENT

### Equipment Calibration

Type	Calibration DUE	Serial Number
Stäubli Robot RX60L	N/A	599131-01
Stäubli Robot Controller	N/A	PCT592
Stäubli Teach Pendant (Joystick)	N/A	3323-00161
Micron Computer, 450 MHz Pentium III, Windows NT	N/A	PCT577
SPEAG EDC3	N/A	321
SPEAG DAE4	Feb-07	900
SPEAG E-Field Probe EX3DV4	Jan-07	3550
SPEAG SAM Twin Phantom V4.0 (Main)	N/A	TP:1197
SPEAG SAM Twin Phantom V4.0 (Sub)	N/A	TP:1357
SPEAG Light Alignment Sensor	N/A	205
SPEAG Validation Dipole D835V2	Feb-07	4d026
SPEAG Validation Dipole D1900V2	Feb-07	502
SPEAG Validation Dipole D2450V2	Feb-07	719
Gigatronics 8651A Power Meter	Jan-07	1835299
HP-8648D (9kHz ~ 4GHz) Signal Generator	Jan-07	PCT530
Amplifier Research 5S1G4 Power Amp	N/A	PCT540
HP-8753E (30kHz ~ 6GHz) Network Analyzer	Jun-07	PCT552/ JP8020182
HP85070B Dielectric Probe Kit	N/A	PCT501
Ambient Noise/Reflection, etc. <12mW/kg/<3% of SAR	N/A	Anechoic Room PCT01

**Table 15.1 Test Equipment Calibration**

**NOTE:**

The E-field probe was calibrated by SPEAG, by waveguide technique procedure. Dipole Validation measurement is performed by PCTEST Lab. before each test. The head simulating material is calibrated by PCTEST using the dielectric probe system and network analyzer to determine the conductivity and permittivity (dielectric constant) of the head-equivalent material.

PCTEST SAR REPORT	FCC CERTIFICATION			Reviewed by: Quality Manager
	SAR Filename: 0605230405	Test Dates: May 24-29, 2006	Phone Type: Dual-Band CDMA Modem Card	








# 16. CONCLUSION

## Measurement Conclusion

The SAR measurement indicates that the EUT complies with the RF radiation exposure limits of the FCC. These measurements are taken to simulate the RF effects exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters subject to the test. The test results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because innumerable factors may interact to determine the specific biological outcome of an exposure to electromagnetic fields, any protection guide shall consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables.[3]

<b>PCTEST SAR REPORT</b>	<b>FCC CERTIFICATION</b>			<b>Reviewed by:</b> Quality Manager
				
<b>SAR Filename:</b> 0605230405	<b>Test Dates:</b> May 24-29, 2006	<b>Phone Type:</b> Dual-Band CDMA Modem Card	<b>FCC ID:</b> PKRNVVW720	Page 30 of 31

# 17. REFERENCES

[1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.

[2] ANSI/IEEE C95.1 - 1991, *American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 300kHz to 100GHz*, New York: IEEE, Aug. 1992.

[3] ANSI/IEEE C95.3 - 1991, *IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave*, New York: IEEE, 1992.

[4] Federal Communications Commission, OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01), *Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields*, July 2001.

[5] IEEE Standards Coordinating Committee 34 – IEEE Std. 1528-2003, *Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices*.

[6] NCRP, National Council on Radiation Protection and Measurements, *Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields*, NCRP Report No. 86, 1986. Reprinted Feb. 1995.

[7] T. Schmid, O. Egger, N. Kuster, *Automated E-field scanning system for dosimetric assessments*, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.

[8] K. Pokovic, T. Schmid, N. Kuster, *Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies*, ICECOM97, Oct. 1997, pp. 120-124.

[9] K. Poković, T. Schmid, and N. Kuster, *E-field Probe with improved isotropy in brain simulating liquids*, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.

[10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.

[11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, *The Dependence of EM Energy Absorption upon Human Head Modeling at 900 MHz*, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.

[12] N. Kuster and Q. Balzano, *Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz*, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.

[13] G. Hartsgrove, A. Kraszewski, A. Surowiec, *Simulated Biological Materials for Electromagnetic Radiation Absorption Studies*, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.

[14] Q. Balzano, O. Garay, T. Manning Jr., *Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones*, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.

[15] W. Gander, *Computermathematick*, Birkhaeuser, Basel, 1992.

[16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, *Numerical Recipes in C, The Art of Scientific Computing*, Second edition, Cambridge University Press, 1992.

[17] Federal Communications Commission, OET Bulletin 65, Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields. Supplement C, Dec. 1997.

[18] N. Kuster, R. Kastle, T. Schmid, *Dosimetric evaluation of mobile communications equipment with known precision*, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.

[19] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.

[20] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.

<b>PCTEST SAR REPORT</b>	<b>FCC CERTIFICATION</b>			<b>Reviewed by:</b> Quality Manager
<b>SAR Filename:</b> 0605230405	<b>Test Dates:</b> May 24-29, 2006	<b>Phone Type:</b> Dual-Band CDMA Modem Card	<b>FCC ID:</b> PKRNVVW720	Page 31 of 31

## **APPENDIX A: SAR TEST DATA**

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: S720/V720 with Toshiba PSAA2U-04P018; Type: Dual Band CDMA Modem Card; Serial: 5B100449**

Communication System: Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Muscle ( $\sigma = 0.99$  mho/m,  $\epsilon_r = 54.33$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section; Space: 1.2 cm

Test Date: 05-26-2006; Ambient Temp: 23.1°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN3550; ConvF(7.56, 7.56, 7.56); Calibrated: 1/18/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn900; Calibrated: 2/28/2006

Phantom: SAM with CRP; Type: SAM; Serial: TP1375

Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Mode: CDMA, Laptop position, SO32, Mid.ch, Ant.close**


**Area Scan (7x21x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 38.2 V/m

Peak SAR (extrapolated) = 2.25 W/kg

**SAR(1 g) = 1.44 mW/g; SAR(10 g) = 0.895 mW/g**

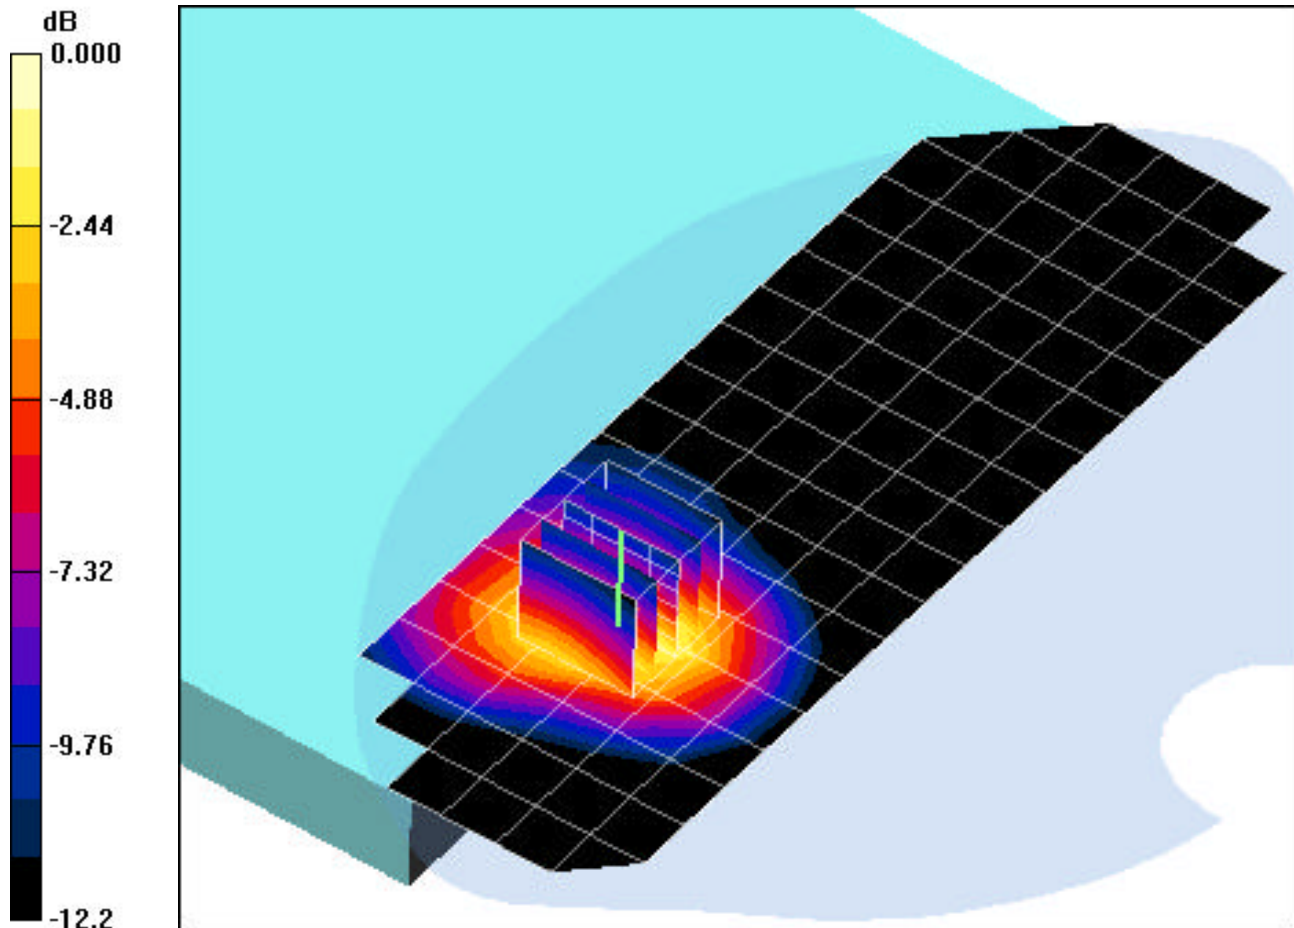

0 dB = 1.72mW/g

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: S720/V720 with Toshiba PSAA2U-04P018; Type: Dual Band CDMA Modem Card; Serial: 5B100449**

Communication System: PCS CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Muscle ( $\sigma = 1.57$  mho/m,  $\epsilon_r = 52.47$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section; Space: 1.2 cm

Test Date: 05-25-2006; Ambient Temp: 23.3°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN3550; ConvF(6.3, 6.3, 6.3); Calibrated: 1/18/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn900; Calibrated: 2/28/2006

Phantom: SAM with CRP; Type: SAM; Serial: TP1375

Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Mode: PCS, Laptop position, SO32, Mid.ch, Ant.open**


**Area Scan (7x21x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.8 V/m

Peak SAR (extrapolated) = 1.39 W/kg

**SAR(1 g) = 0.869 mW/g; SAR(10 g) = 0.483 mW/g**

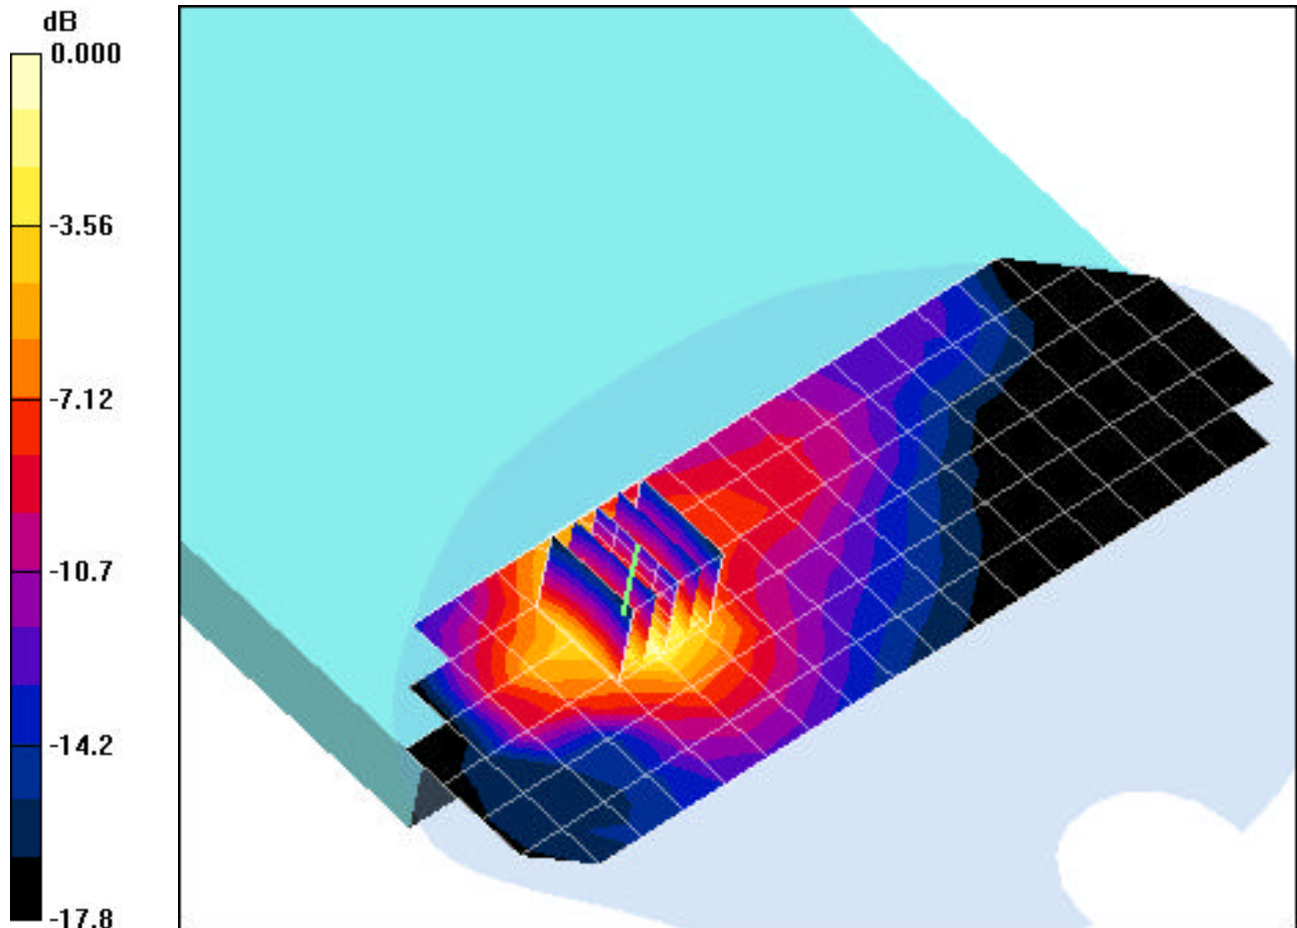

0 dB = 1.04mW/g

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: S720/V720 with Toshiba PSAA2U-04P018; Type: Dual Band CDMA Modem Card; Serial: 5B100449**

Communication System: Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Muscle ( $\sigma = 0.99$  mho/m,  $\epsilon_r = 54.33$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section; Space: 2.5 cm

Test Date: 05-28-2006; Ambient Temp: 23.2°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN3550; ConvF(7.56, 7.56, 7.56); Calibrated: 1/18/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn900; Calibrated: 2/28/2006

Phantom: SAM with CRP; Type: SAM; Serial: TP1375

Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Mode: CDMA, Bystander position, SO32, Mid.ch, Ant.open**


**Area Scan (9x21x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.16 V/m

Peak SAR (extrapolated) = 0.126 W/kg

**SAR(1 g) = 0.098 mW/g; SAR(10 g) = 0.073 mW/g**

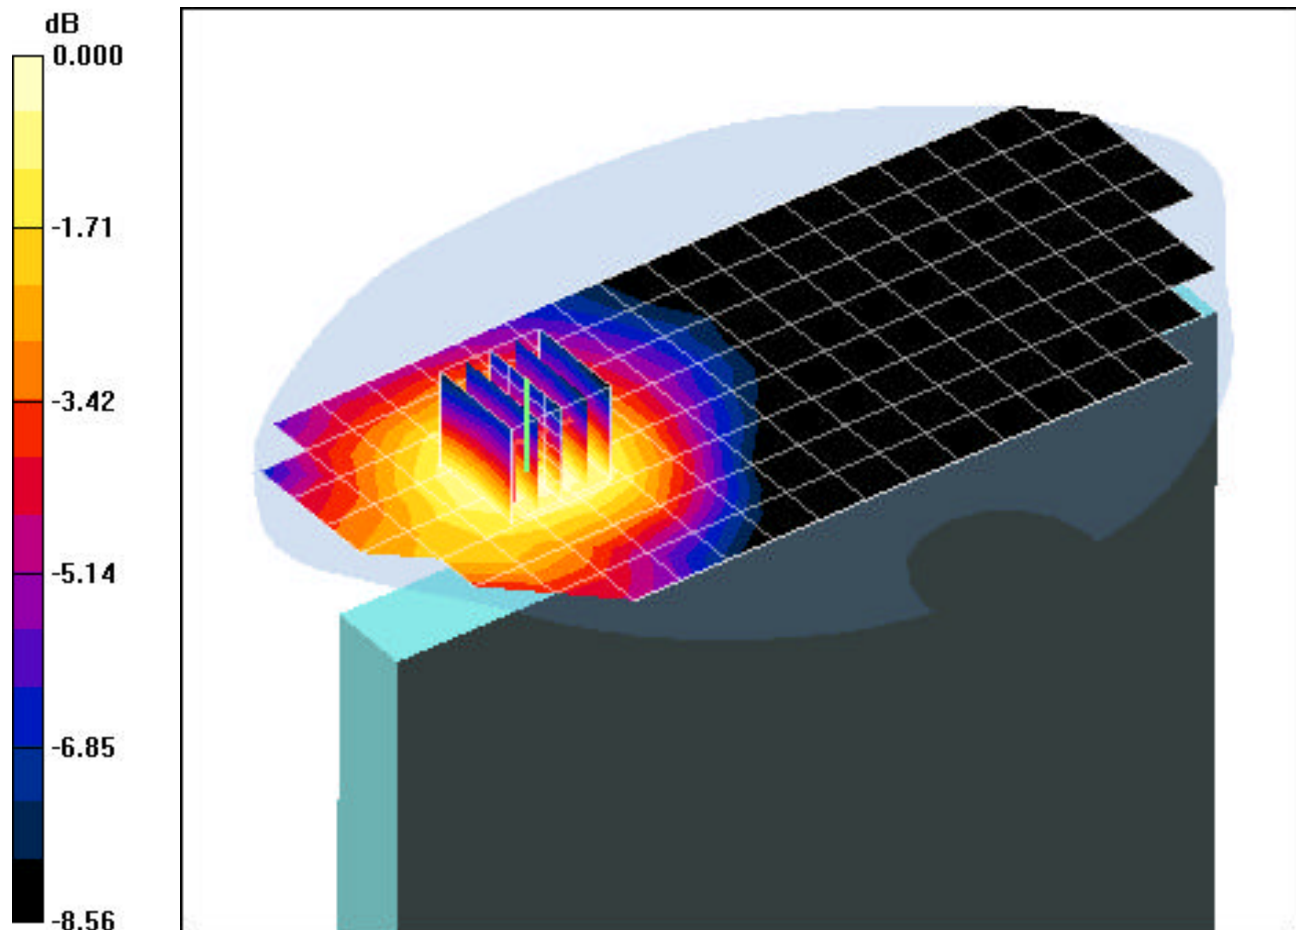

0 dB = 0.108mW/g



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: S720/V720 with Toshiba PSAA2U-04P018; Type: Dual Band CDMA Modem Card; Serial: 5B100449**

Communication System: PCS CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Muscle ( $\sigma = 1.57$  mho/m,  $\epsilon_r = 52.47$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section; Space: 2.5 cm

Test Date: 05-29-2006; Ambient Temp: 23.4°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN3550; ConvF(6.3, 6.3, 6.3); Calibrated: 1/18/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn900; Calibrated: 2/28/2006

Phantom: SAM with CRP; Type: SAM; Serial: TP1375

Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Mode: PCS, Bystander position, SO32, Mid.ch, Ant.close**


**Area Scan (9x21x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.7 V/m

Peak SAR (extrapolated) = 0.420 W/kg

**SAR(1 g) = 0.298 mW/g; SAR(10 g) = 0.193 mW/g**

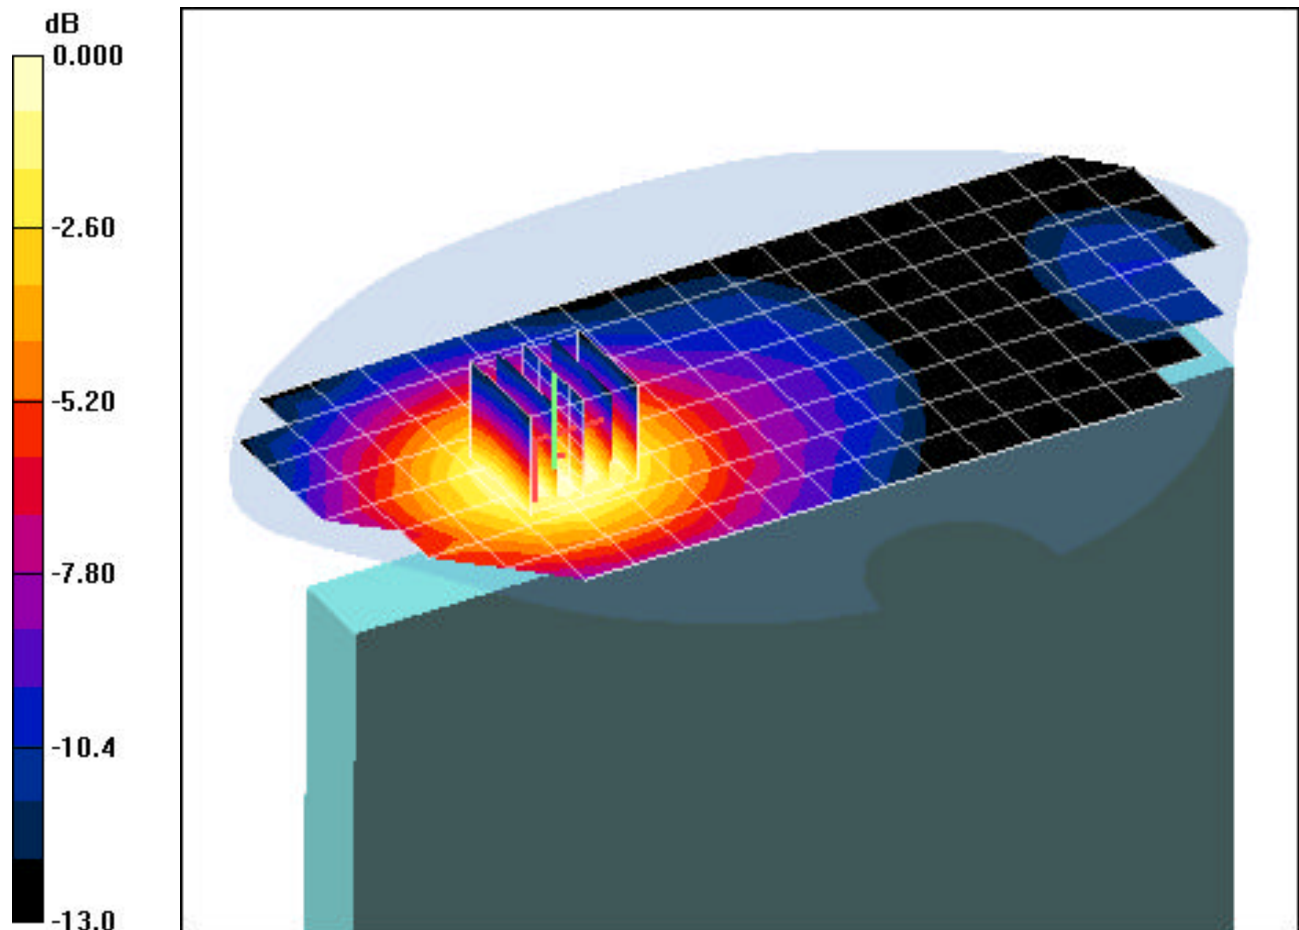

0 dB = 0.342mW/g



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: S720/V720 with DELL PP05L; Type: Dual Band CDMA Modem Card; Serial: 5B100449**

Communication System: Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Muscle ( $\sigma = 0.99$  mho/m,  $\epsilon_r = 54.33$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section; Space: 1.4 cm

Test Date: 05-28-2006; Ambient Temp: 23.2°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN3550; ConvF(7.56, 7.56, 7.56); Calibrated: 1/18/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn900; Calibrated: 2/28/2006

Phantom: SAM with CRP; Type: SAM; Serial: TP1375

Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Mode: CDMA, Laptop position, SO32, Mid.ch, Ant.close**


**Area Scan (9x21x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.8 V/m

Peak SAR (extrapolated) = 1.47 W/kg

**SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.684 mW/g**

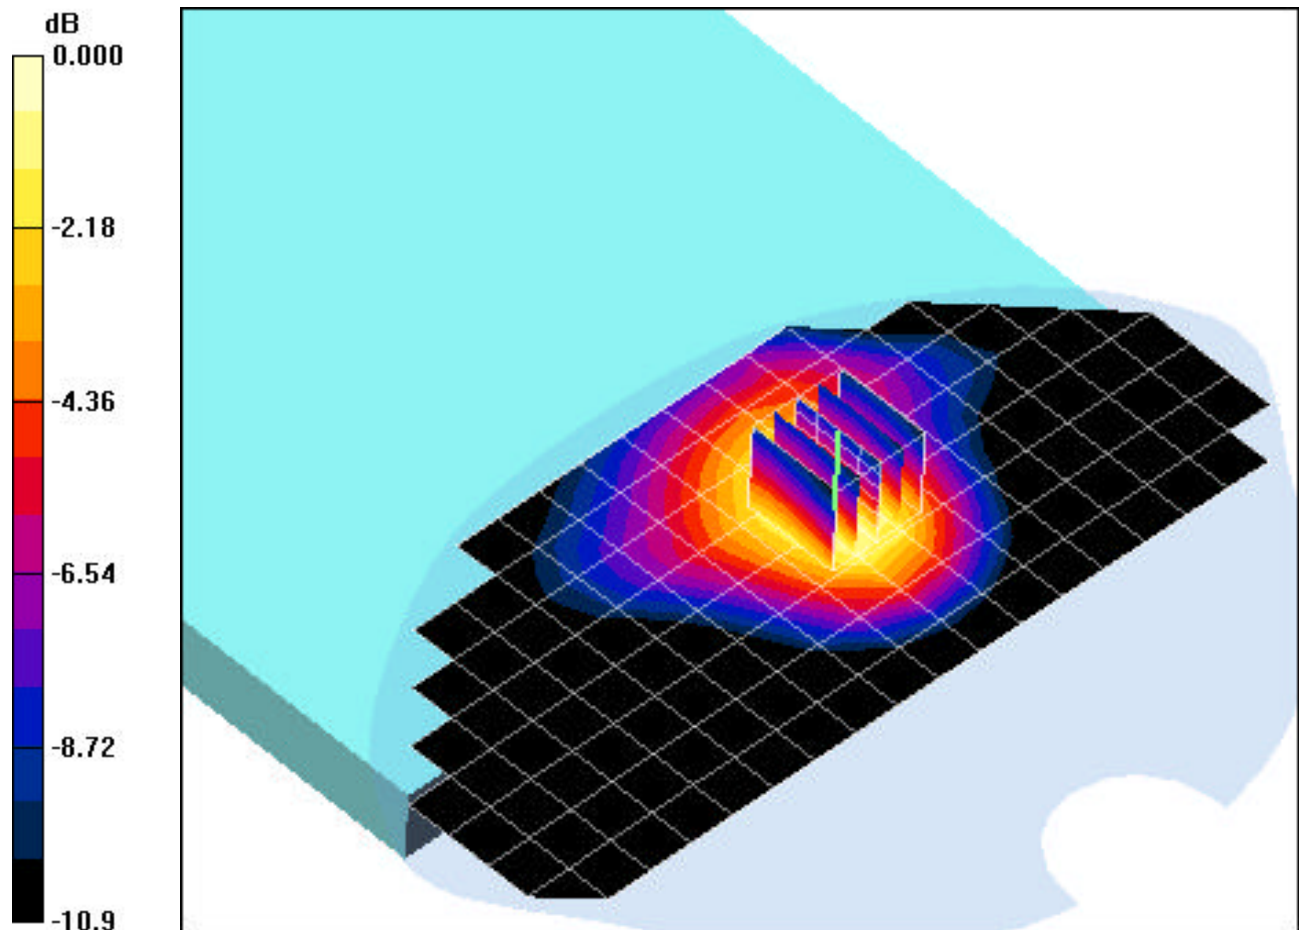

0 dB = 1.17mW/g

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: S720/V720 with DELL PP05L; Type: Dual Band CDMA Modem Card; Serial: 5B100449**

Communication System: PCS CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Muscle ( $\sigma = 1.57$  mho/m,  $\epsilon_r = 52.47$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section; Space: 1.4 cm

Test Date: 05-29-2006; Ambient Temp: 23.4°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN3550; ConvF(6.3, 6.3, 6.3); Calibrated: 1/18/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn900; Calibrated: 2/28/2006

Phantom: SAM with CRP; Type: SAM; Serial: TP1375

Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Mode: PCS, Laptop position, SO32, Mid.ch, Ant.close**


**Area Scan (9x21x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.8 V/m

Peak SAR (extrapolated) = 0.948 W/kg

**SAR(1 g) = 0.616 mW/g; SAR(10 g) = 0.363 mW/g**

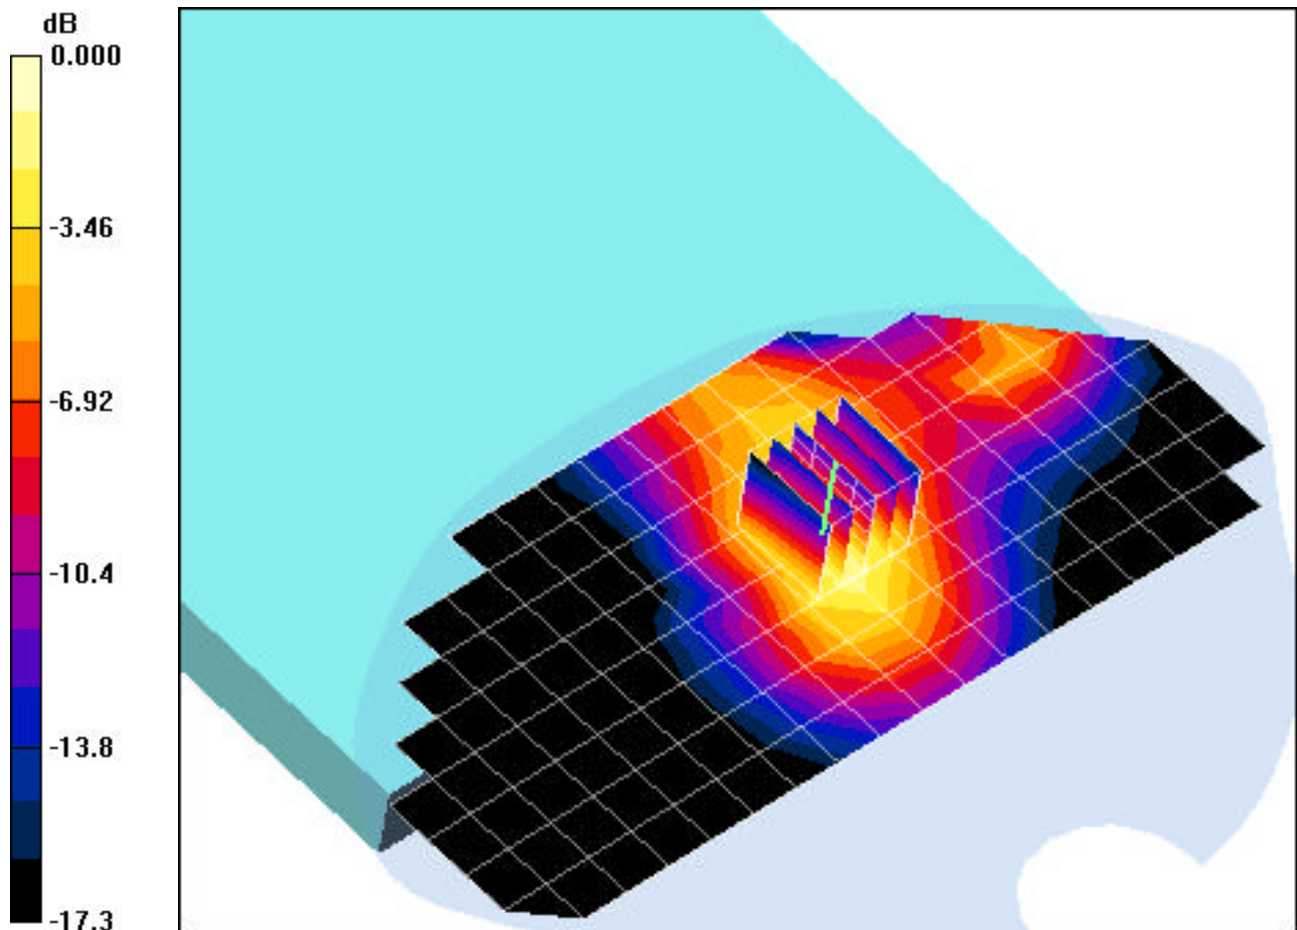

0 dB = 0.737mW/g

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: S720/V720 with DELL PP05L; Type: Dual Band CDMA Modem Card; Serial: 5B100449**

Communication System: Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Muscle ( $\sigma = 0.99$  mho/m,  $\epsilon_r = 54.33$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section; Space: 2.5 cm

Test Date: 05-28-2006; Ambient Temp: 23.2°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN3550; ConvF(7.56, 7.56, 7.56); Calibrated: 1/18/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn900; Calibrated: 2/28/2006

Phantom: SAM with CRP; Type: SAM; Serial: TP1375

Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Mode: CDMA, Bystander position, SO32, Mid.ch, Ant.close**


**Area Scan (9x21x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.23 V/m

Peak SAR (extrapolated) = 0.065 W/kg

**SAR(1 g) = 0.050 mW/g; SAR(10 g) = 0.038 mW/g**

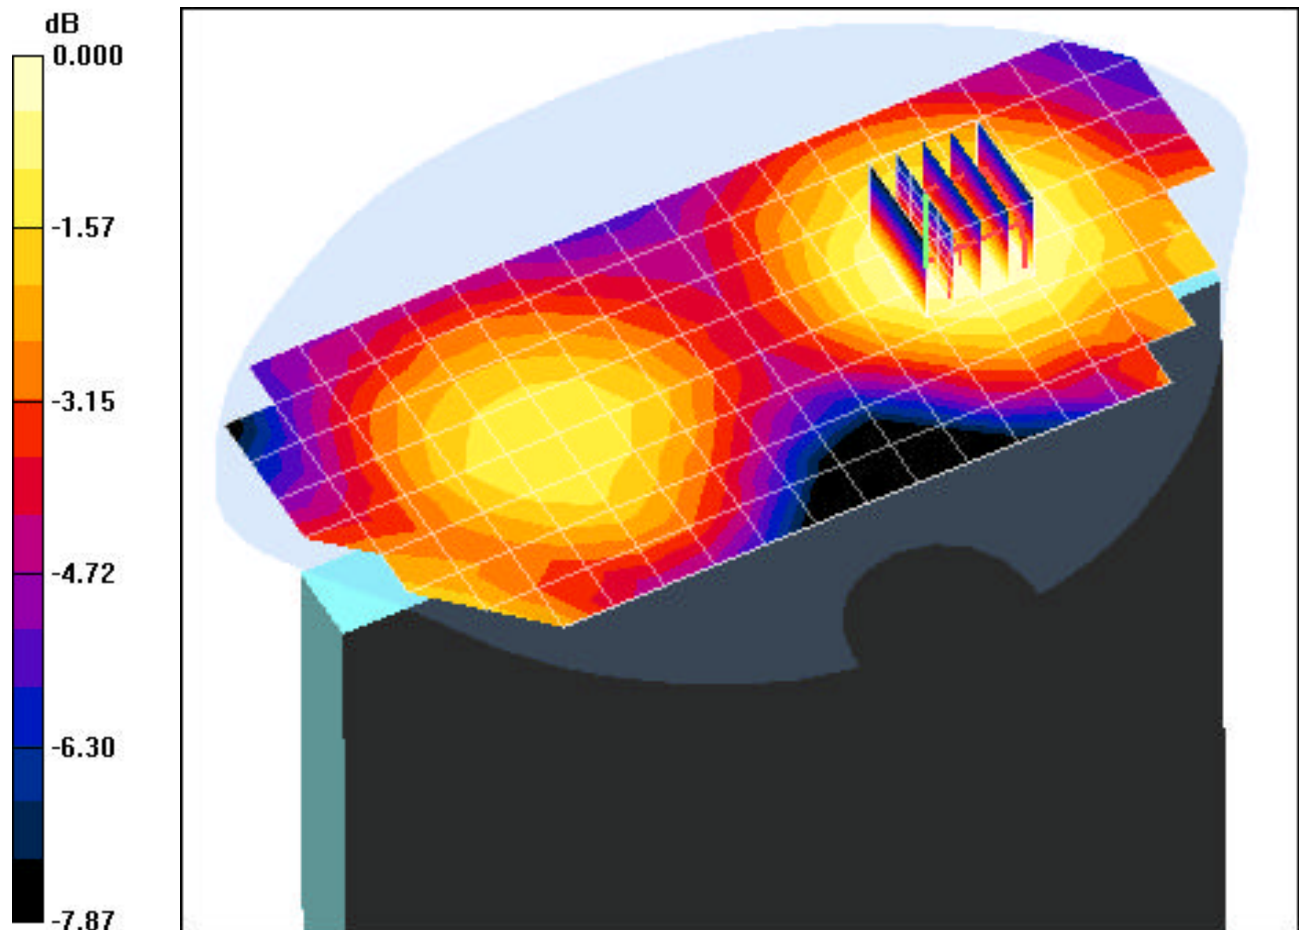

0 dB = 0.056mW/g

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: S720/V720 with DELL PP05L; Type: Dual Band CDMA Modem Card; Serial: 5B100449**

Communication System: PCS CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Muscle ( $\sigma = 1.57$  mho/m,  $\epsilon_r = 52.47$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section; Space: 2.5 cm

Test Date: 05-29-2006; Ambient Temp: 23.4°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN3550; ConvF(6.3, 6.3, 6.3); Calibrated: 1/18/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn900; Calibrated: 2/28/2006

Phantom: SAM with CRP; Type: SAM; Serial: TP1375

Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Mode: PCS, Bystander position, SO32, Mid.ch, Ant.close**


**Area Scan (9x21x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.8 V/m

Peak SAR (extrapolated) = 0.405 W/kg

**SAR(1 g) = 0.280 mW/g; SAR(10 g) = 0.182 mW/g**

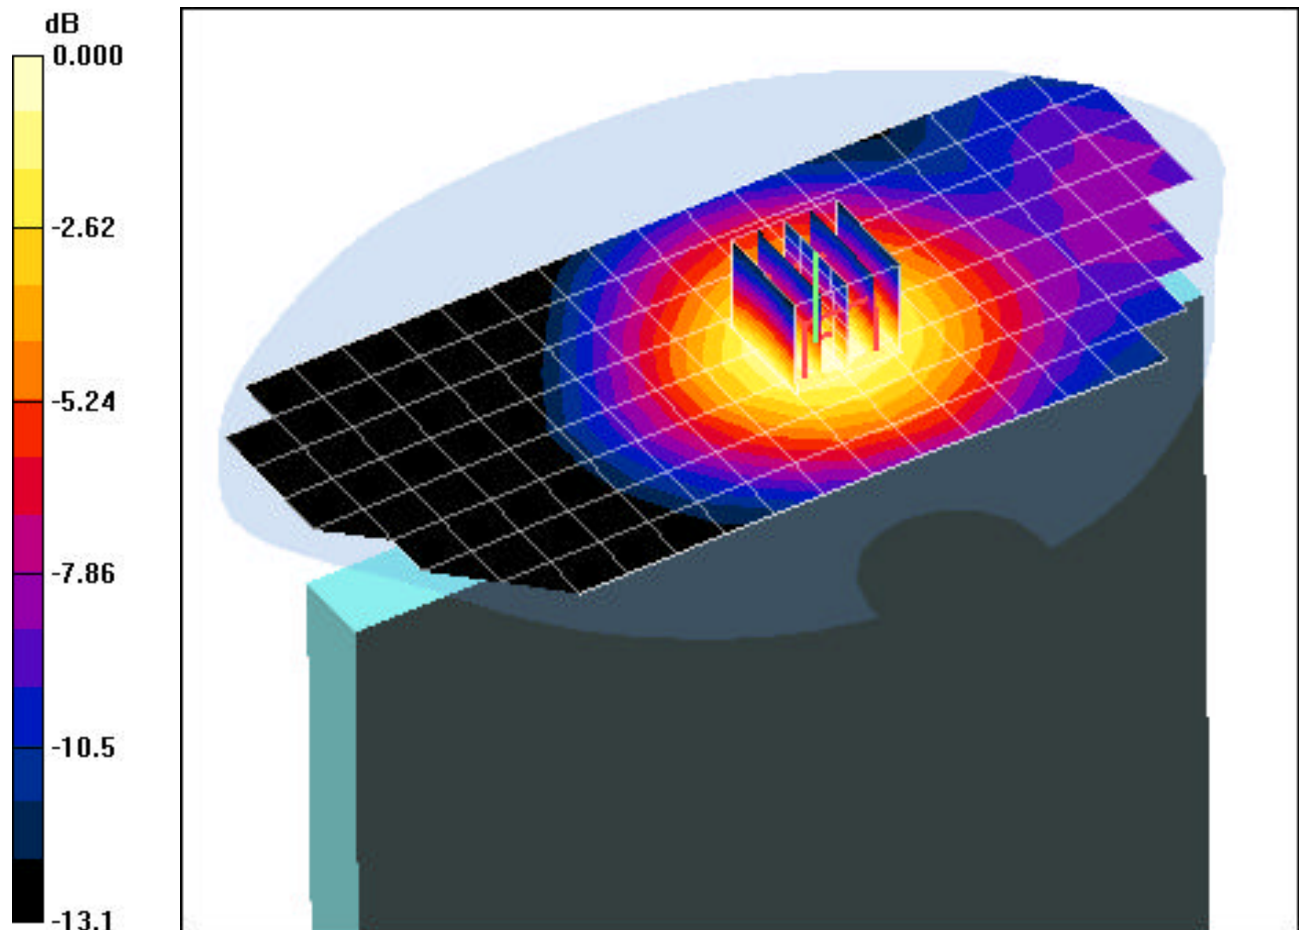

0 dB = 0.325mW/g



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: S720/V720 with DELL PP02X; Type: Dual Band CDMA Modem Card; Serial: 5B100449**

Communication System: Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Muscle ( $\sigma = 0.99$  mho/m,  $\epsilon_r = 54.33$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section; Space: 1.7 cm

Test Date: 05-29-2006; Ambient Temp: 23.7°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN3550; ConvF(7.56, 7.56, 7.56); Calibrated: 1/18/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn900; Calibrated: 2/28/2006

Phantom: SAM with CRP; Type: SAM; Serial: TP1375

Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Mode: CDMA, Laptop position, SO32, Mid.ch, Ant.close**


**Area Scan (9x21x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.1 V/m

Peak SAR (extrapolated) = 1.08 W/kg

**SAR(1 g) = 0.742 mW/g; SAR(10 g) = 0.497 mW/g**

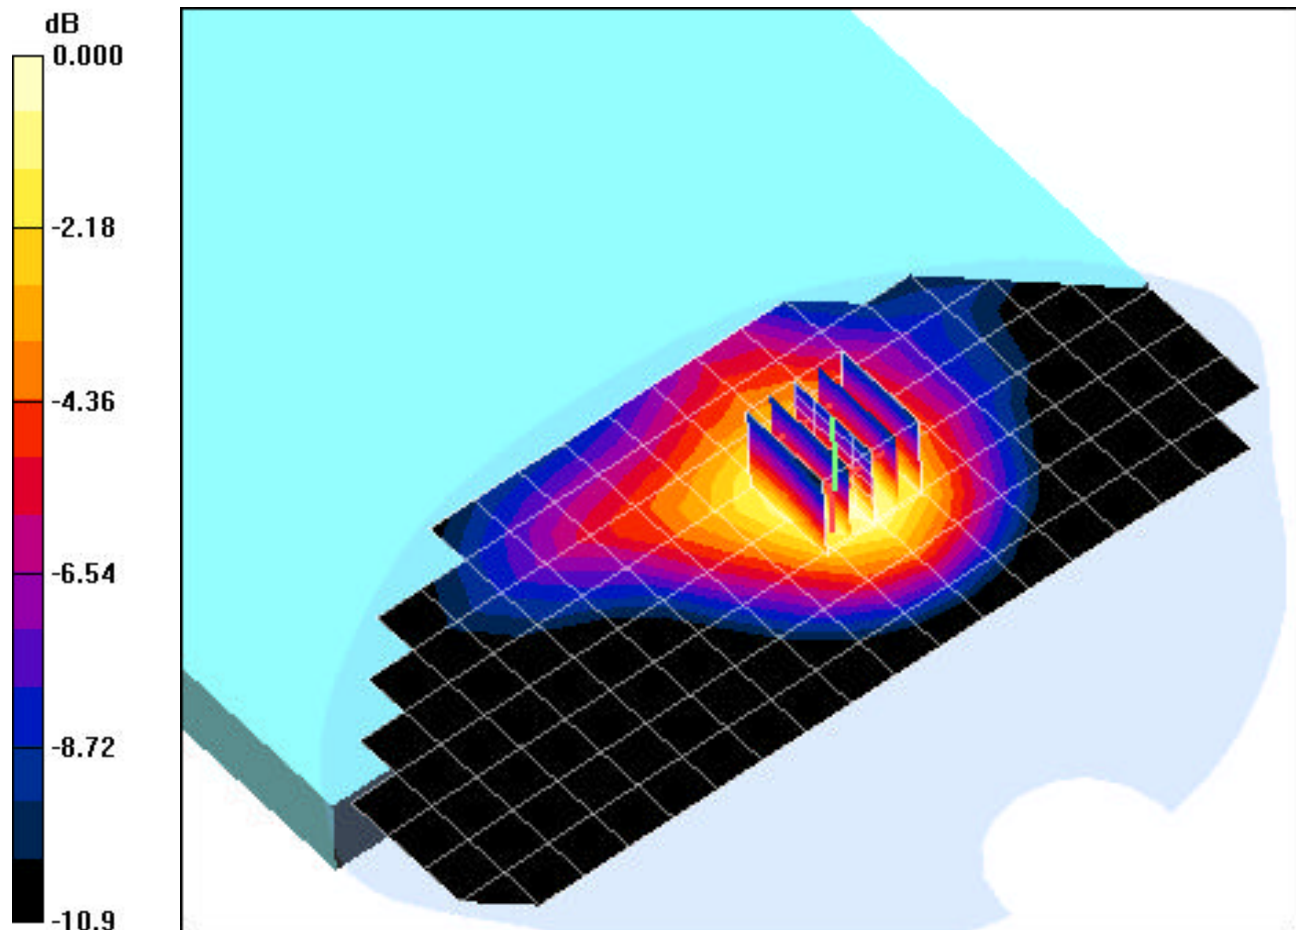

0 dB = 0.858mW/g

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: S720/V720 with DELL PP02X; Type: Dual Band CDMA Modem Card; Serial: 5B100449**

Communication System: PCS CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Muscle ( $\sigma = 1.57$  mho/m,  $\epsilon_r = 52.47$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section; Space: 1.7 cm

Test Date: 05-29-2006; Ambient Temp: 23.4°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN3550; ConvF(6.3, 6.3, 6.3); Calibrated: 1/18/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn900; Calibrated: 2/28/2006

Phantom: SAM with CRP; Type: SAM; Serial: TP1375

Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Mode: PCS, Laptop position, SO32, Mid.ch, Ant.close**


**Area Scan (9x21x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.6 V/m

Peak SAR (extrapolated) = 0.650 W/kg

**SAR(1 g) = 0.426 mW/g; SAR(10 g) = 0.258 mW/g**

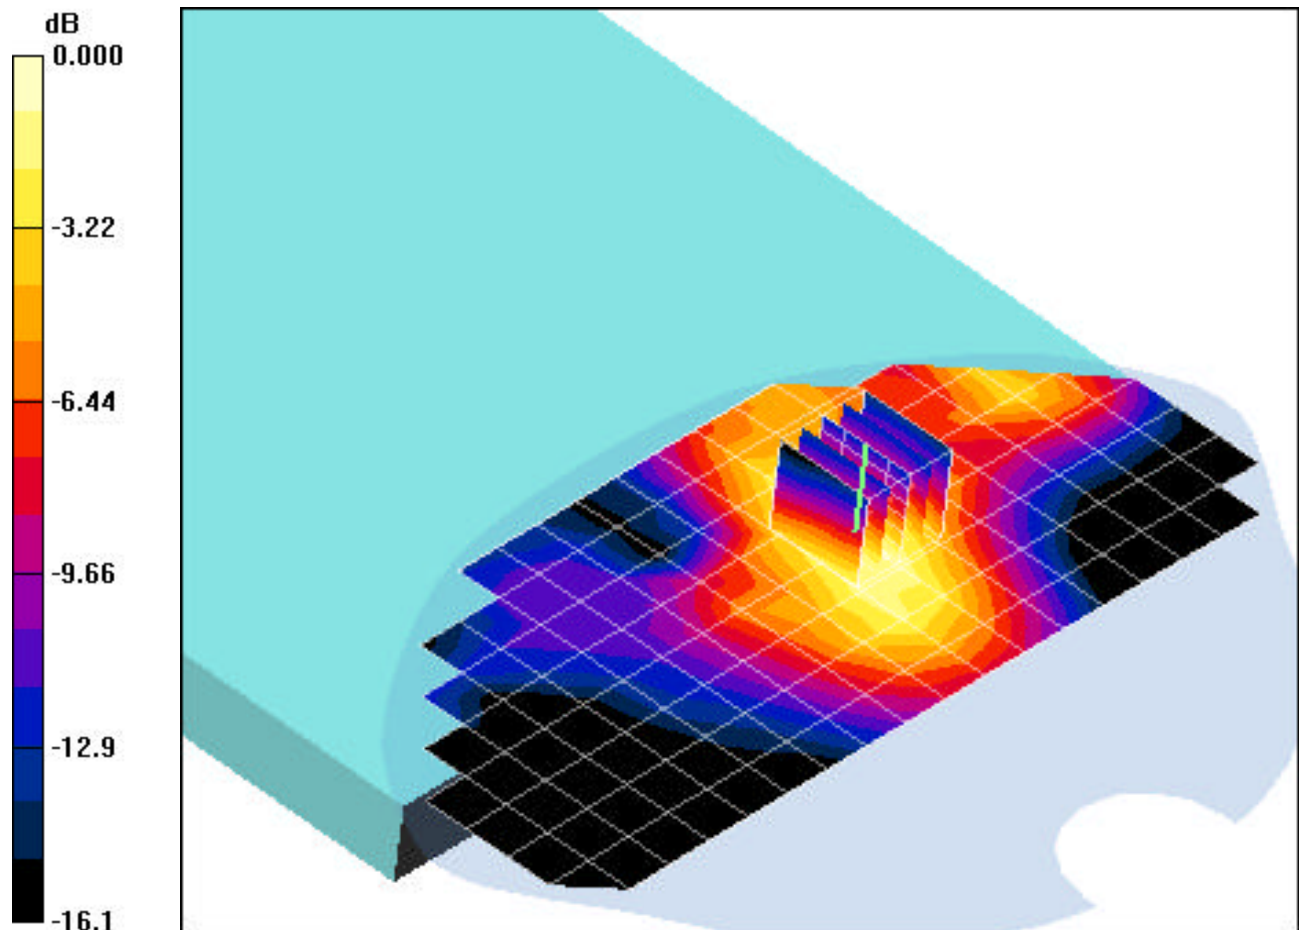

0 dB = 0.512mW/g

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: S720/V720 with DELL PP02X; Type: Dual Band CDMA Modem Card; Serial: 5B100449**

Communication System: Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Muscle ( $\sigma = 0.99$  mho/m,  $\epsilon_r = 54.33$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section; Space: 2.5 cm

Test Date: 05-29-2006; Ambient Temp: 23.7°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN3550; ConvF(7.56, 7.56, 7.56); Calibrated: 1/18/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn900; Calibrated: 2/28/2006

Phantom: SAM with CRP; Type: SAM; Serial: TP1375

Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Mode: CDMA, Bystander position, SO32, Mid.ch, Ant.close**


**Area Scan (9x21x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.74 V/m

Peak SAR (extrapolated) = 0.069 W/kg

**SAR(1 g) = 0.055 mW/g; SAR(10 g) = 0.042 mW/g**

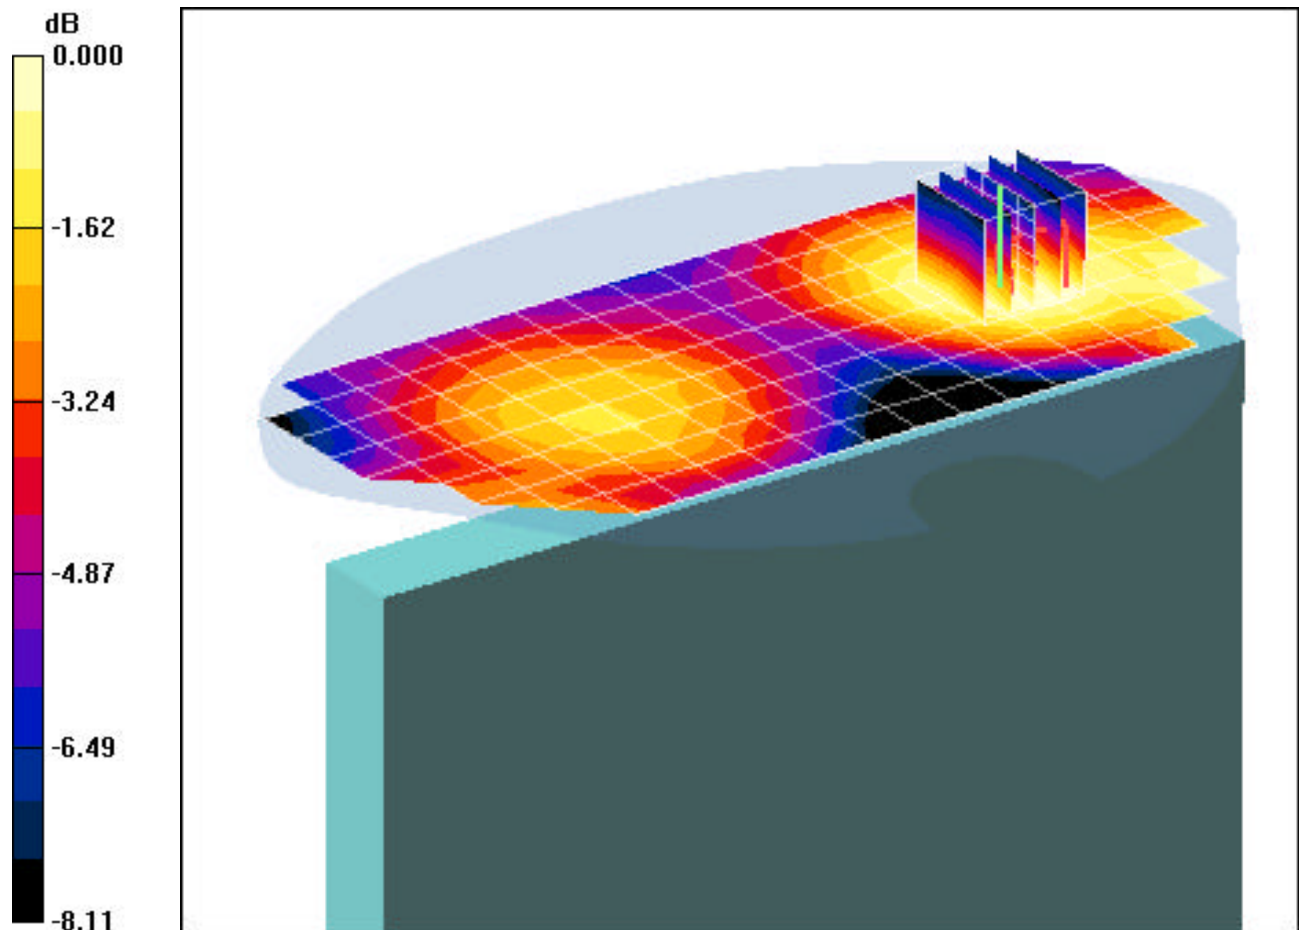

0 dB = 0.060mW/g

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: S720/V720 with DELL PP02X; Type: Dual Band CDMA Modem Card; Serial: 5B100449**

Communication System: PCS CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Muscle ( $\sigma = 1.57$  mho/m,  $\epsilon_r = 52.47$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section; Space: 2.5 cm

Test Date: 05-29-2006; Ambient Temp: 23.4°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN3550; ConvF(6.3, 6.3, 6.3); Calibrated: 1/18/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn900; Calibrated: 2/28/2006

Phantom: SAM with CRP; Type: SAM; Serial: TP1375

Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Mode: PCS, Bystander position, SO32, Mid.ch, Ant.close**


**Area Scan (9x21x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.0 V/m

Peak SAR (extrapolated) = 0.382 W/kg

**SAR(1 g) = 0.268 mW/g; SAR(10 g) = 0.172 mW/g**

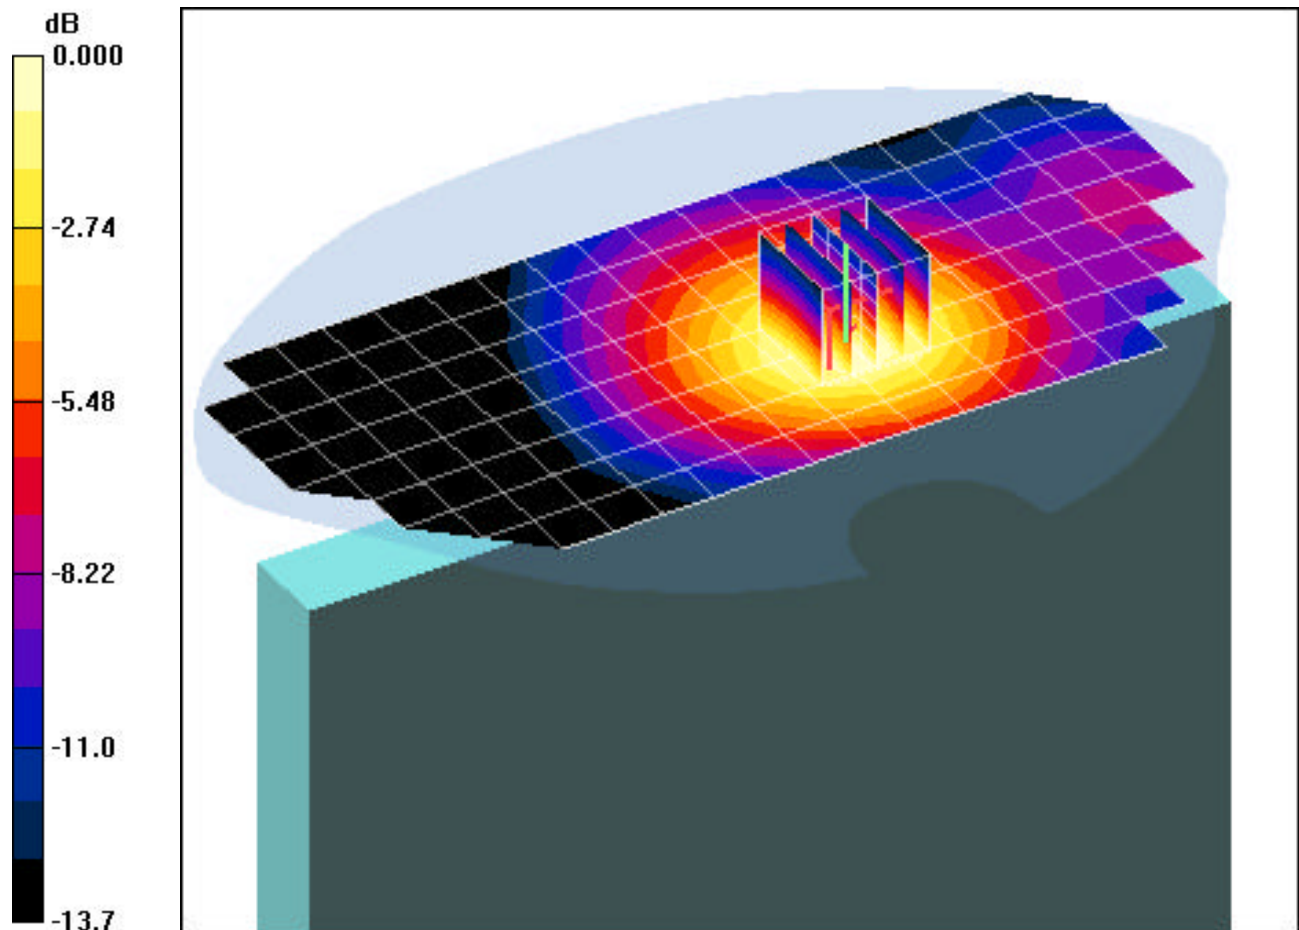

0 dB = 0.312mW/g



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: S720/V720 with Toshiba PSAA2U-04P018; Type: Dual Band CDMA Modem Card; Serial: 5B100449**

Communication System: Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Muscle ( $\sigma = 0.99$  mho/m,  $\epsilon_r = 54.33$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section; Space: 1.2 cm

Test Date: 05-26-2006; Ambient Temp: 23.1°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN3550; ConvF(7.56, 7.56, 7.56); Calibrated: 1/18/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn900; Calibrated: 2/28/2006

Phantom: SAM with CRP; Type: SAM; Serial: TP1375

Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Mode: CDMA, Laptop position, SO32, Mid.ch, Ant.close**


**Area Scan (7x21x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 38.2 V/m

Peak SAR (extrapolated) = 2.25 W/kg

**SAR(1 g) = 1.44 mW/g; SAR(10 g) = 0.895 mW/g**

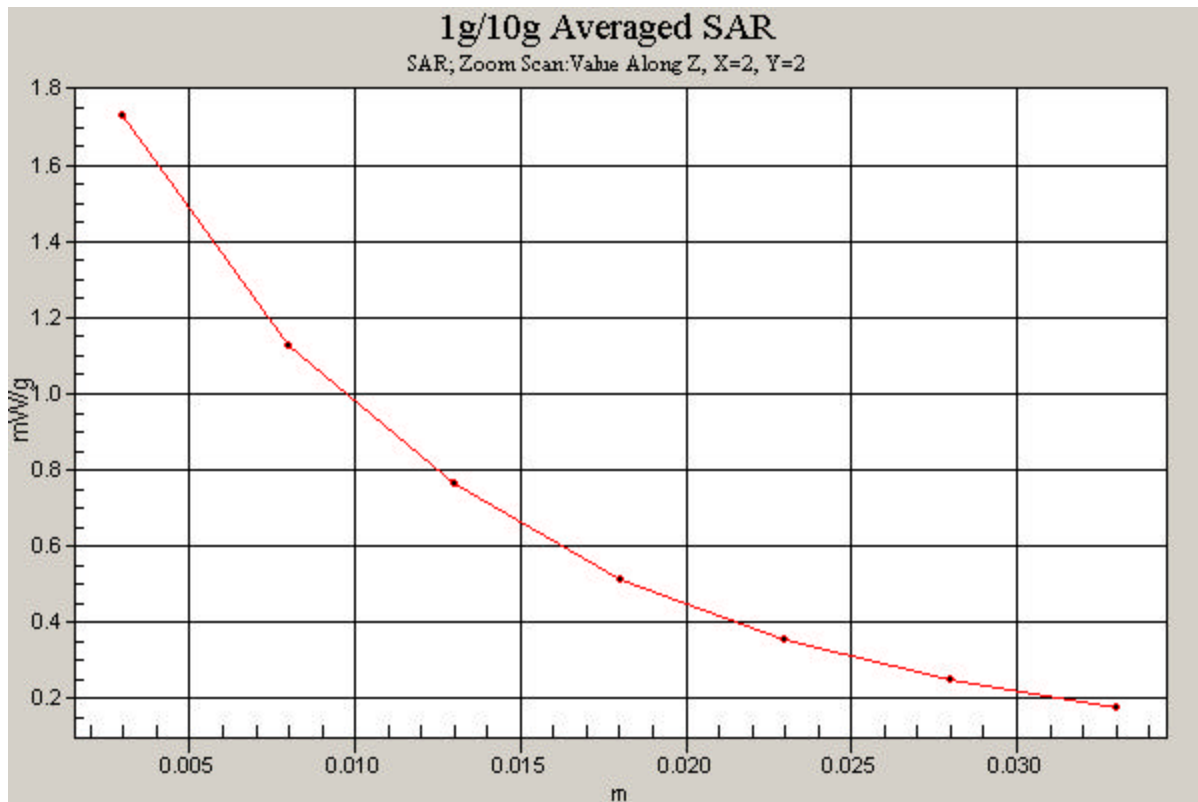

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: S720/V720 with Toshiba PSAA2U-04P018; Type: Dual Band CDMA Modem Card; Serial: 5B100449**

Communication System: PCS CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Muscle ( $\sigma = 1.57$  mho/m,  $\epsilon_r = 52.47$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section; Space: 1.2 cm

Test Date: 05-25-2006; Ambient Temp: 23.3°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN3550; ConvF(6.3, 6.3, 6.3); Calibrated: 1/18/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn900; Calibrated: 2/28/2006

Phantom: SAM with CRP; Type: SAM; Serial: TP1375

Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Mode: PCS, Laptop position, SO32, Mid.ch, Ant.open**


**Area Scan (7x21x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.8 V/m

Peak SAR (extrapolated) = 1.39 W/kg

**SAR(1 g) = 0.869 mW/g; SAR(10 g) = 0.483 mW/g**

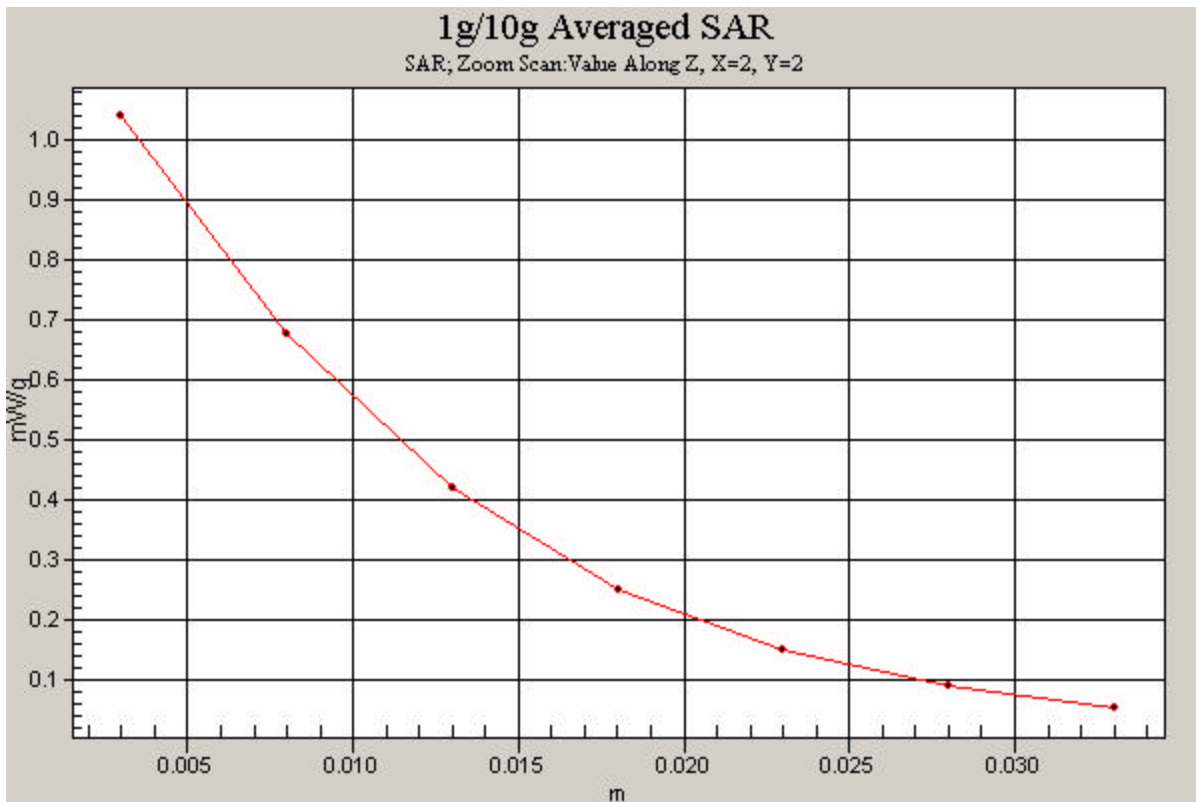

## **APPENDIX B: DIPOLE VALIDATION**

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d026**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Brain ( $\sigma = 0.87$  mho/m,  $\epsilon_r = 41.48$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 05-26-2006; Ambient Temp: 23.6°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN3550; ConvF(7.71, 7.71, 7.71); Calibrated: 1/18/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn900; Calibrated: 2/28/2006

Phantom: SAM with CRP; Type: SAM; Serial: TP1375

Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

## 835MHz Dipole Validation


**Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 24.0 dBm (250 mW)

**SAR(1 g) = 2.31 mW/g; SAR(10 g) = 1.51 mW/g**

Target SAR(1g) = 2.375 mW/g; Deviation = -2.73 %

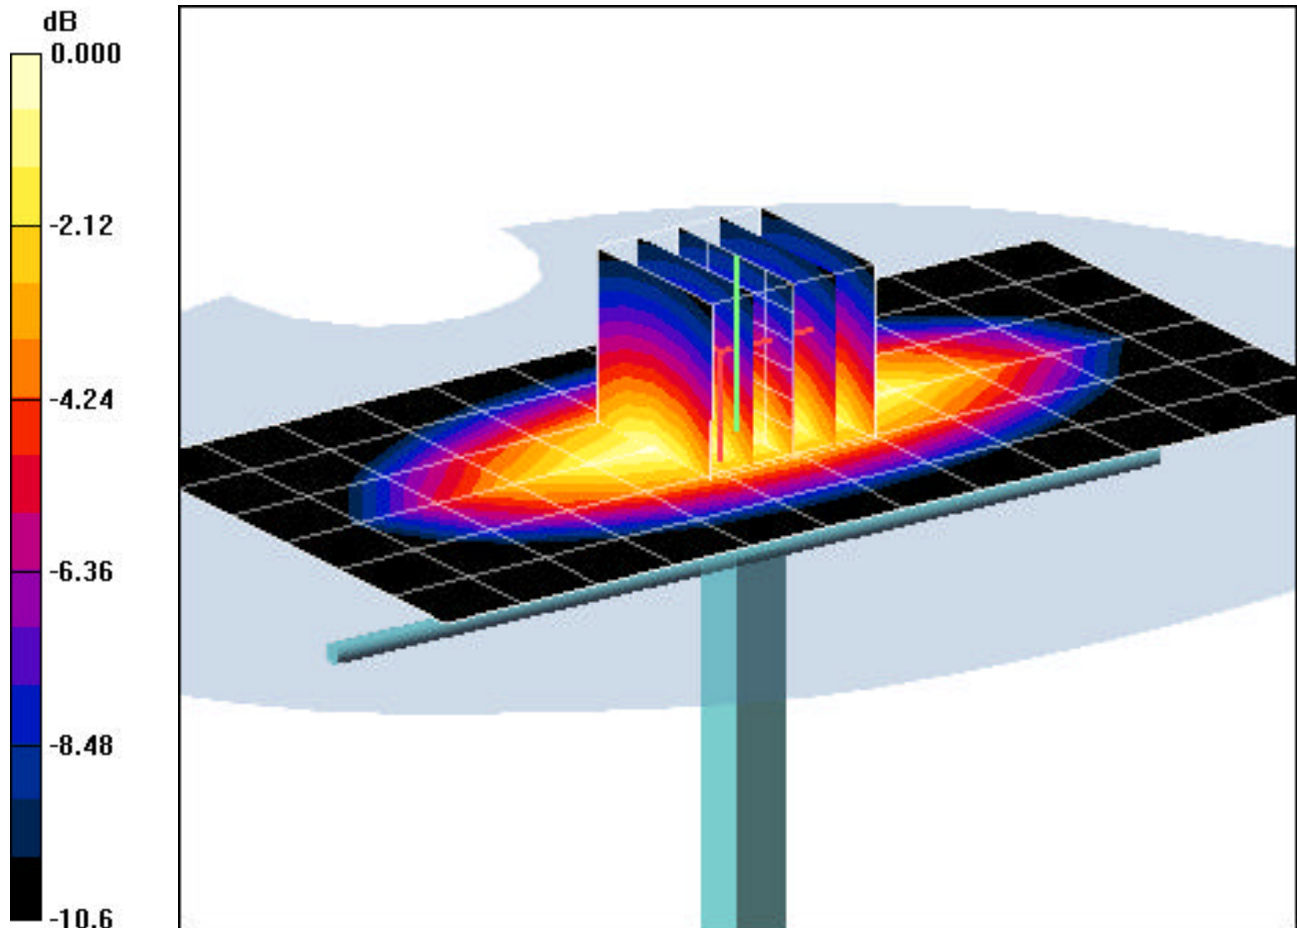

0 dB = 2.71mW/g

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d026**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Brain ( $\sigma = 0.87$  mho/m,  $\epsilon_r = 41.48$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 05-28-2006; Ambient Temp: 23.4°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN3550; ConvF(7.71, 7.71, 7.71); Calibrated: 1/18/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn900; Calibrated: 2/28/2006

Phantom: SAM with CRP; Type: SAM; Serial: TP1375

Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

## 835MHz Dipole Validation


**Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 24.0 dBm (250 mW)

**SAR(1 g) = 2.23 mW/g; SAR(10 g) = 1.46 mW/g**

Target SAR(1g) = 2.375 mW/g; Deviation = -6.10 %

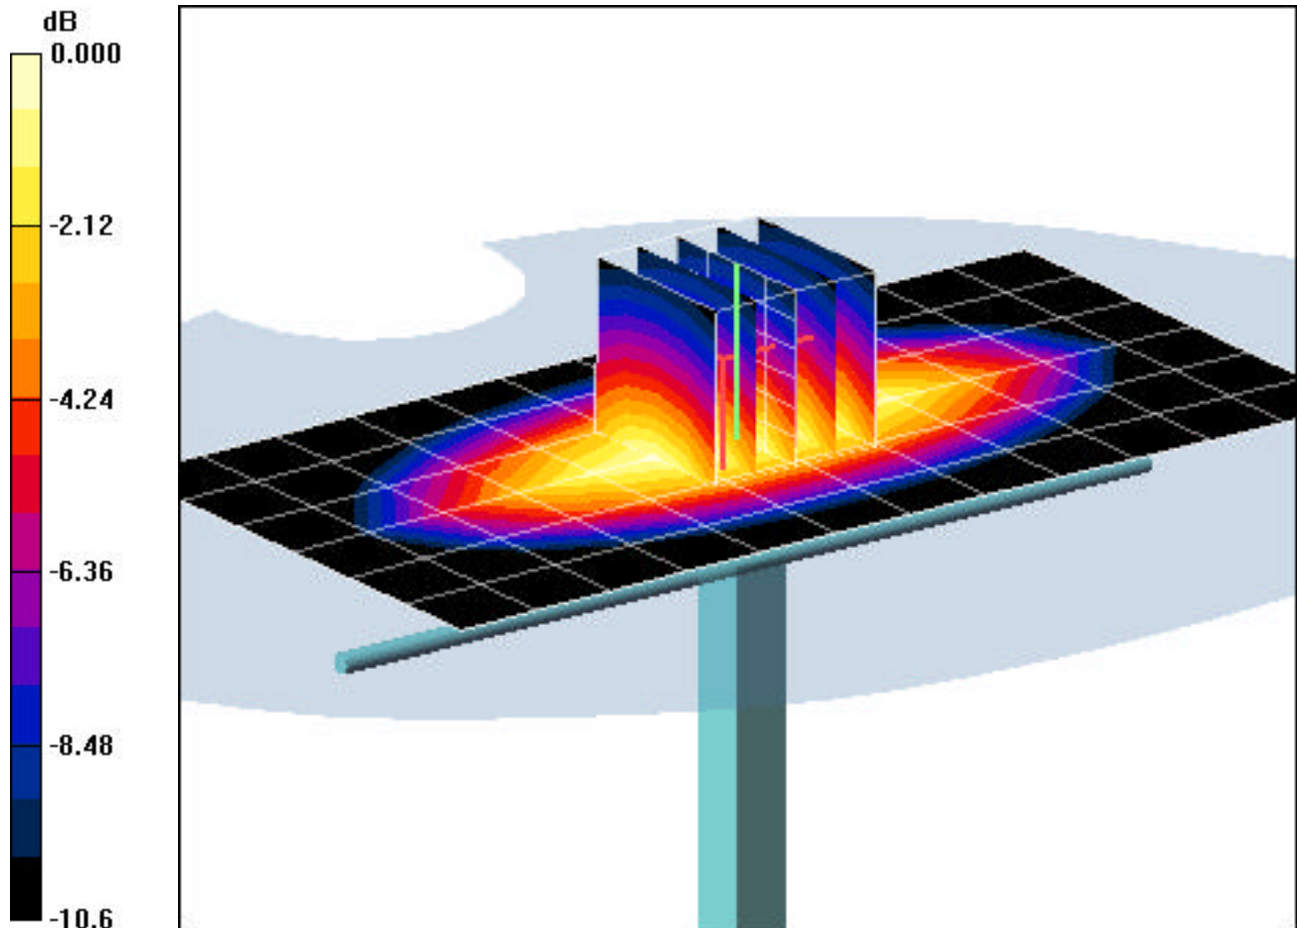

0 dB = 2.61mW/g

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d026**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Brain ( $\sigma = 0.87$  mho/m,  $\epsilon_r = 41.48$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 05-29-2006; Ambient Temp: 23.5°C; Tissue Temp: 22.2°C

Probe: EX3DV4 - SN3550; ConvF(7.71, 7.71, 7.71); Calibrated: 1/18/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn900; Calibrated: 2/28/2006

Phantom: SAM with CRP; Type: SAM; Serial: TP1375

Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

## 835MHz Dipole Validation


**Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 24.0 dBm (250 mW)

**SAR(1 g) = 2.25 mW/g; SAR(10 g) = 1.47 mW/g**

Target SAR(1g) = 2.375 mW/g; Deviation = -5.26 %

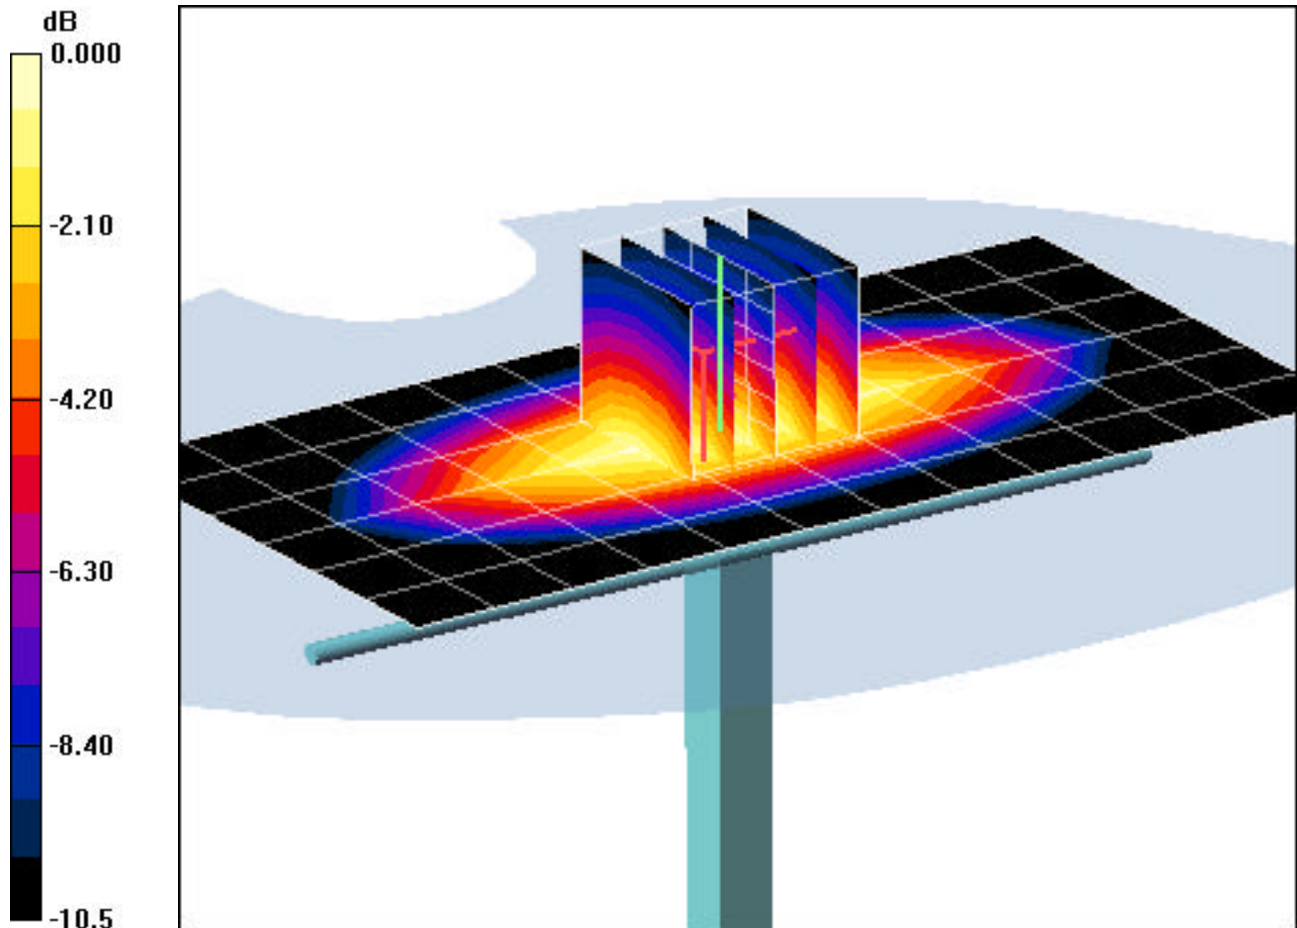

0 dB = 2.63mW/g

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 502**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Brain ( $\sigma = 1.38$  mho/m,  $\epsilon_r = 39.73$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-24-2006; Ambient Temp: 23.2°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN3550; ConvF(6.65, 6.65, 6.65); Calibrated: 1/18/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn900; Calibrated: 2/28/2006

Phantom: SAM with CRP; Type: SAM; Serial: TP1375

Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

## 1900MHz Dipole Validation


**Area Scan (5x7x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20.0 dBm (100 mW)

**SAR(1 g) = 3.7 mW/g; SAR(10 g) = 1.91 mW/g**

Target SAR(1g) = 3.97 mW/g; Deviation = -6.80 %

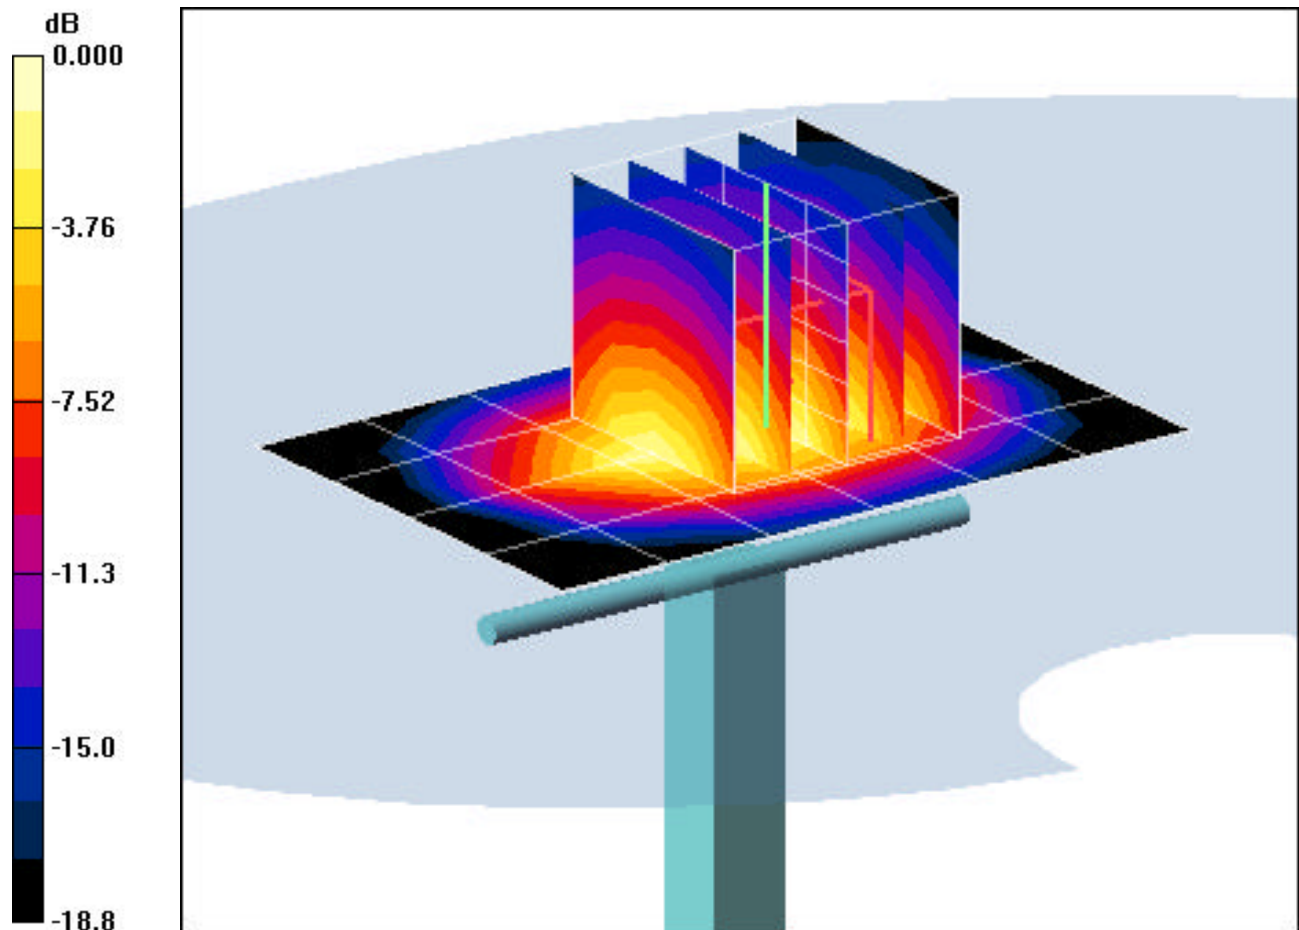

0 dB = 4.61mW/g



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 502**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Brain ( $\sigma = 1.38$  mho/m,  $\epsilon_r = 39.73$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-25-2006; Ambient Temp: 23.8°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN3550; ConvF(6.65, 6.65, 6.65); Calibrated: 1/18/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn900; Calibrated: 2/28/2006

Phantom: SAM with CRP; Type: SAM; Serial: TP1375

Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

## 1900MHz Dipole Validation


**Area Scan (5x7x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20.0 dBm (100 mW)

**SAR(1 g) = 3.6 mW/g; SAR(10 g) = 1.85 mW/g**

Target SAR(1g) = 3.97 mW/g; Deviation = -9.31 %

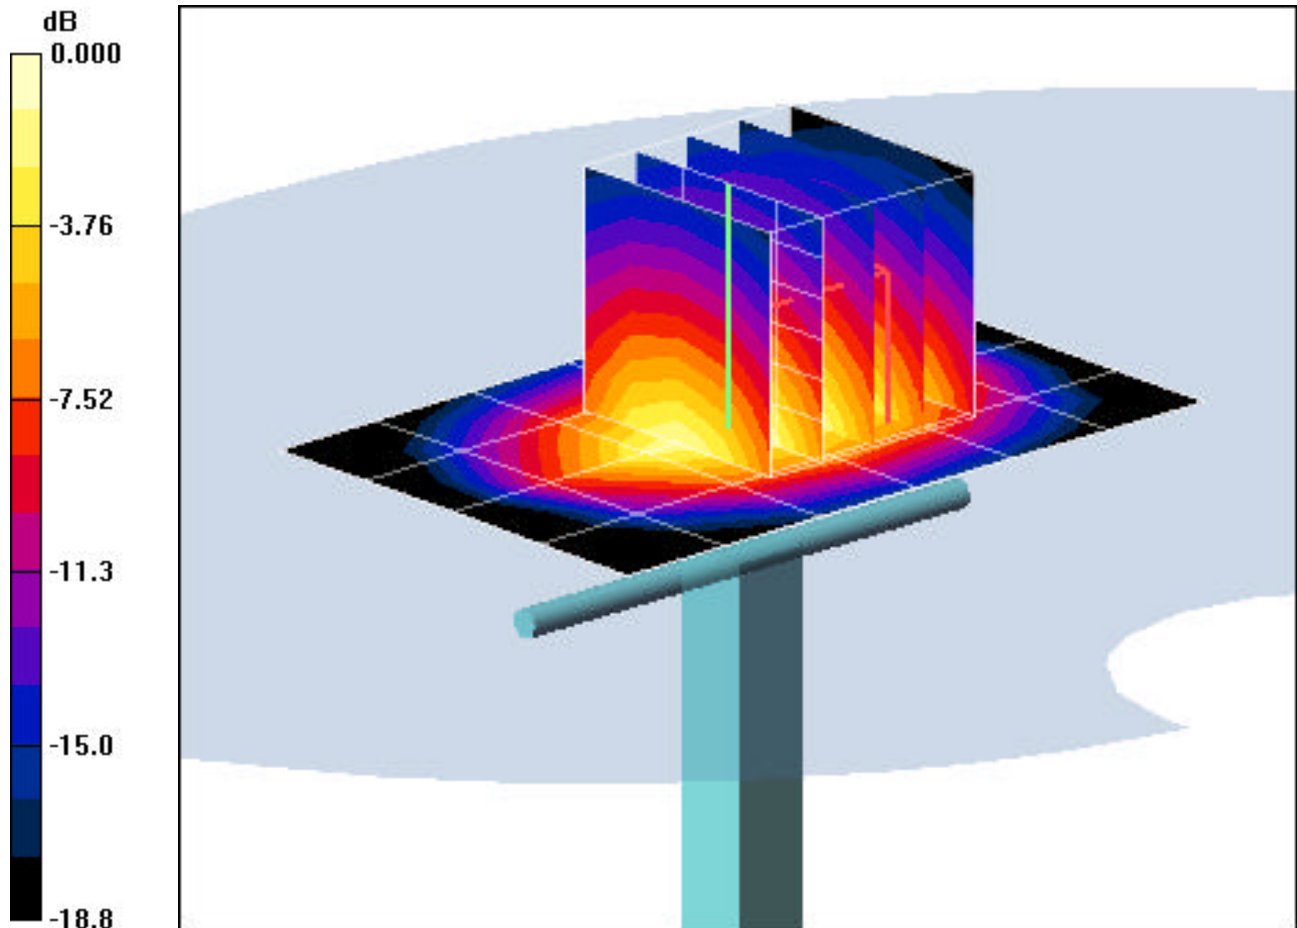

0 dB = 4.49mW/g



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 502**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Brain ( $\sigma = 1.38$  mho/m,  $\epsilon_r = 39.73$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 05-29-2006; Ambient Temp: 23.0°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN3550; ConvF(6.65, 6.65, 6.65); Calibrated: 1/18/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn900; Calibrated: 2/28/2006

Phantom: SAM with CRP; Type: SAM; Serial: TP1375

Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

## 1900MHz Dipole Validation


**Area Scan (5x7x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20.0 dBm (100 mW)

**SAR(1 g) = 3.77 mW/g; SAR(10 g) = 1.95 mW/g**

Target SAR(1g) = 3.97 mW/g; Deviation = -5.03 %

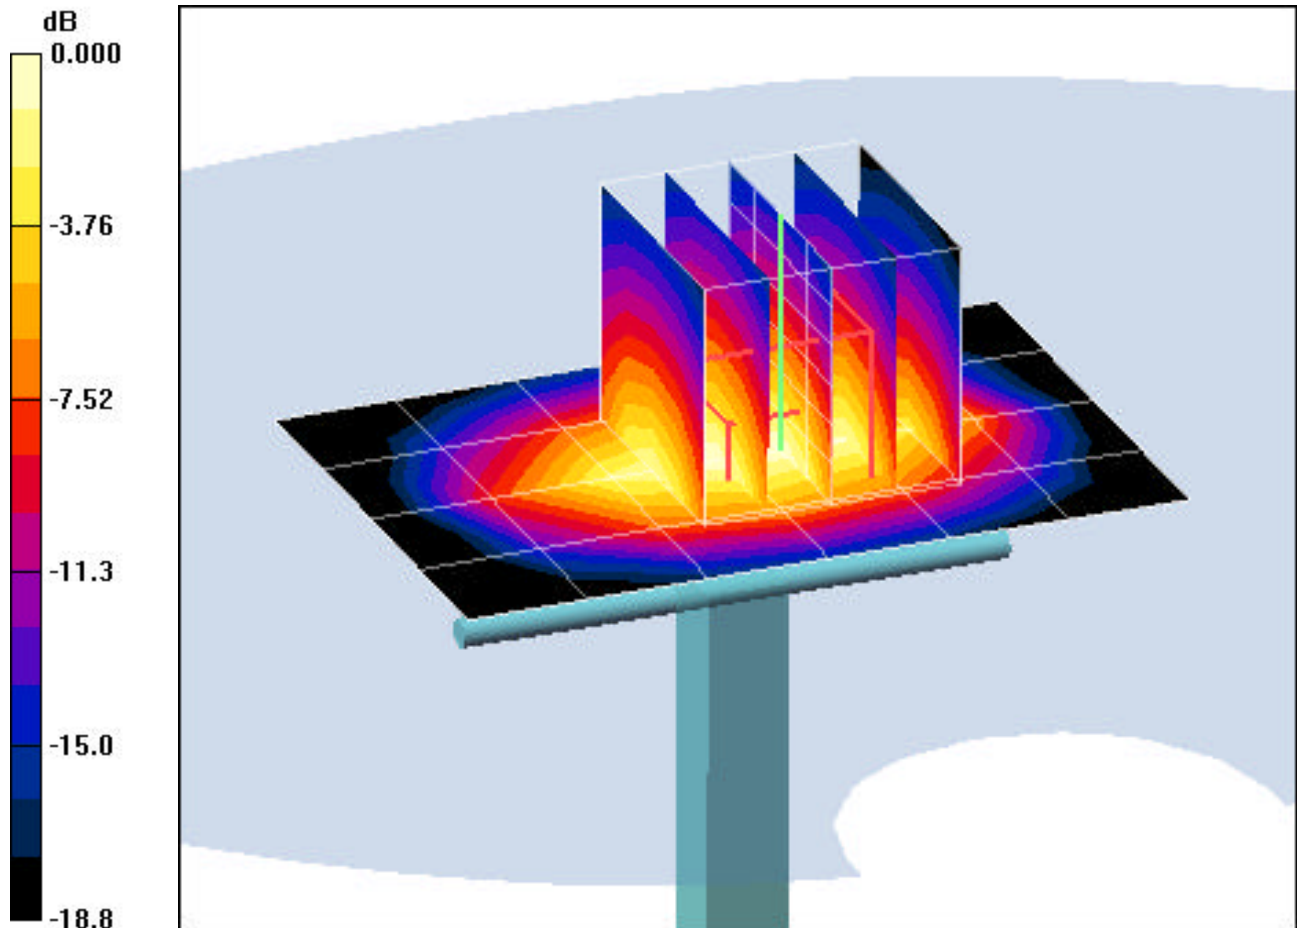

0 dB = 4.69mW/g

## **APPENDIX C: PROBE CALIBRATION**



Accredited by the Swiss Federal Office of Metrology and Accreditation  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **EX3-3550\_Jan06**

## CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3550**

Calibration procedure(s) **QA CAL-01.v5, QA CAL-12.v4 and QA CAL-14.v3  
Calibration procedure for dosimetric E-field probes**

Calibration date: **January 18, 2006**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	3-May-05 (METAS, No. 251-00466)	May-06
Power sensor E4412A	MY41495277	3-May-05 (METAS, No. 251-00466)	May-06
Power sensor E4412A	MY41498087	3-May-05 (METAS, No. 251-00466)	May-06
Reference 3 dB Attenuator	SN: S5054 (3c)	11-Aug-05 (METAS, No. 251-00499)	Aug-06
Reference 20 dB Attenuator	SN: S5086 (20b)	3-May-05 (METAS, No. 251-00467)	May-06
Reference 30 dB Attenuator	SN: S5129 (30b)	11-Aug-05 (METAS, No. 251-00500)	Aug-06
Reference Probe ES3DV2	SN: 3013	2-Jan-06 (SPEAG, No. ES3-3013_Jan06)	Jan-07
DAE4	SN: 654	27-Oct-05 (SPEAG, No. DAE4-654_Oct05)	Oct-06

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Nov-05)	In house check: Nov-07
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Nov-05)	In house check: Nov 06

	Name	Function	Signature
Calibrated by:	Katja Pokovic	Technical Manager	
Approved by:	Fin Bomholt	R&D Director	

Issued: January 21, 2006

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Federal Office of Metrology and Accreditation  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

### Glossary:

TSL	tissue simulating liquid
NORM <sub>x,y,z</sub>	sensitivity in free space
ConF	sensitivity in TSL / NORM <sub>x,y,z</sub>
DCP	diode compression point
Polarization $\varphi$	$\varphi$ rotation around probe axis
Polarization $\vartheta$	$\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz), July 2001

### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not effect the E<sup>2</sup>-field uncertainty inside TSL (see below *ConvF*).
- NORM(f)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* *frequency\_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

# Probe EX3DV4

## SN:3550

Manufactured:	May 19, 2004
Last calibrated:	October 26, 2004
Recalibrated:	January 18, 2006

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

## DASY - Parameters of Probe: EX3DV4 SN:3550

Sensitivity in Free Space <sup>A</sup>			Diode Compression <sup>B</sup>	
NormX	<b>0.483</b> ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP X	<b>92</b> mV
NormY	<b>0.485</b> ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP Y	<b>92</b> mV
NormZ	<b>0.494</b> ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP Z	<b>92</b> mV

### Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

### Boundary Effect

<b>TSL</b>	<b>900 MHz</b>	<b>Typical SAR gradient: 5 % per mm</b>		
	Sensor Center to Phantom Surface Distance		<b>2.0 mm</b>	<b>3.0 mm</b>
	SAR <sub>be</sub> [%] Without Correction Algorithm		3.3	1.0
	SAR <sub>be</sub> [%] With Correction Algorithm		0.1	0.3
<b>TSL</b>	<b>1810 MHz</b>	<b>Typical SAR gradient: 10 % per mm</b>		
	Sensor Center to Phantom Surface Distance		<b>2.0 mm</b>	<b>3.0 mm</b>
	SAR <sub>be</sub> [%] Without Correction Algorithm		4.2	2.2
	SAR <sub>be</sub> [%] With Correction Algorithm		0.8	0.6

### Sensor Offset

Probe Tip to Sensor Center **1.0 mm**


**The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.**

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Page 8).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.




# Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

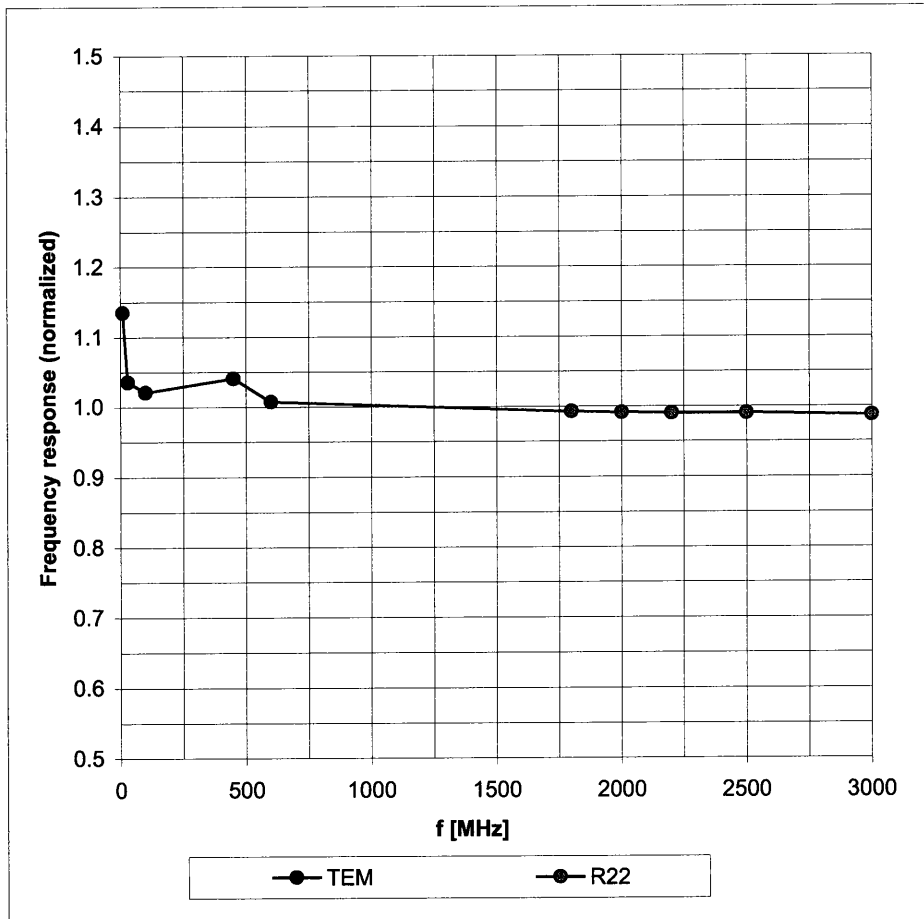

Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  (k=2)



### Receiving Pattern ( $\phi$ ), $\vartheta = 0^\circ$

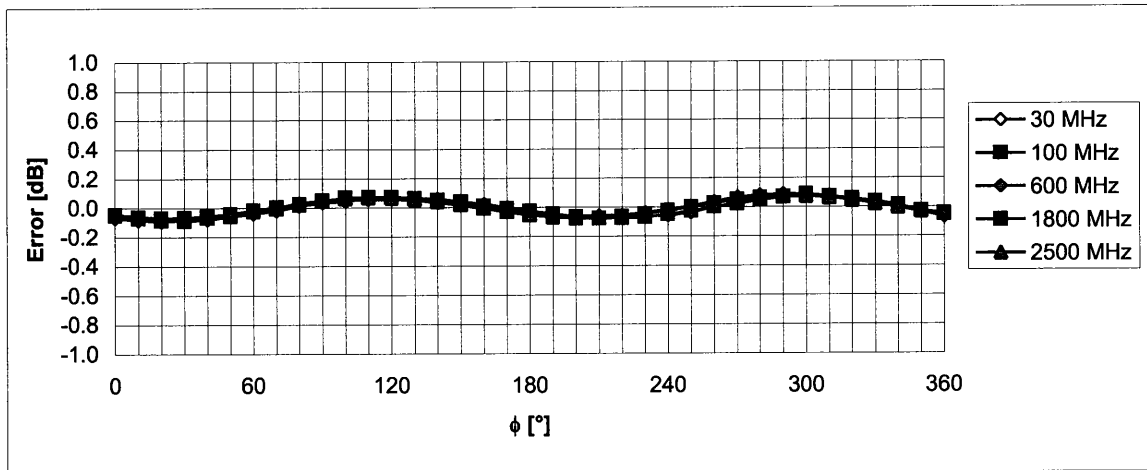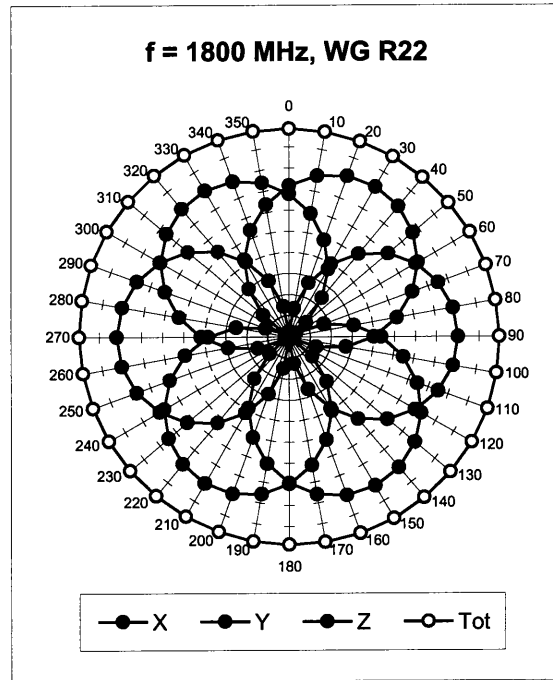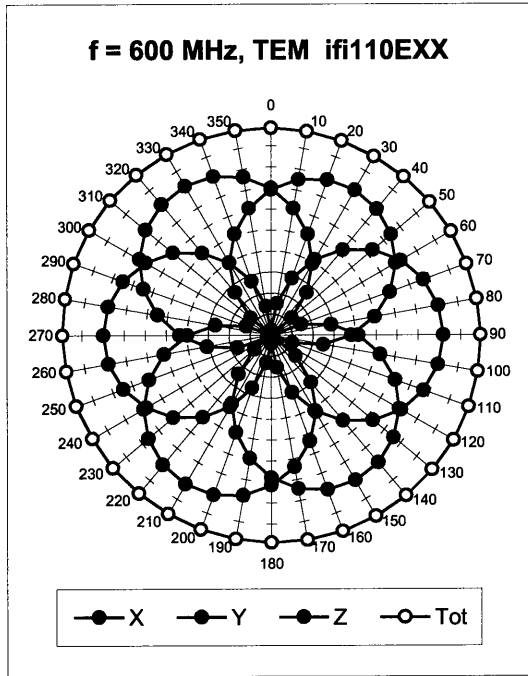

Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  (k=2)





## Dynamic Range $f(\text{SAR}_{\text{head}})$ (Waveguide R22, $f = 1800 \text{ MHz}$ )

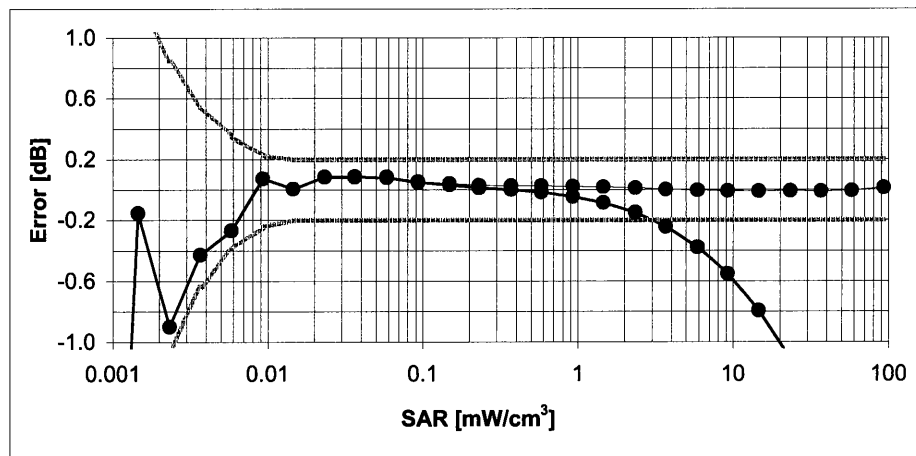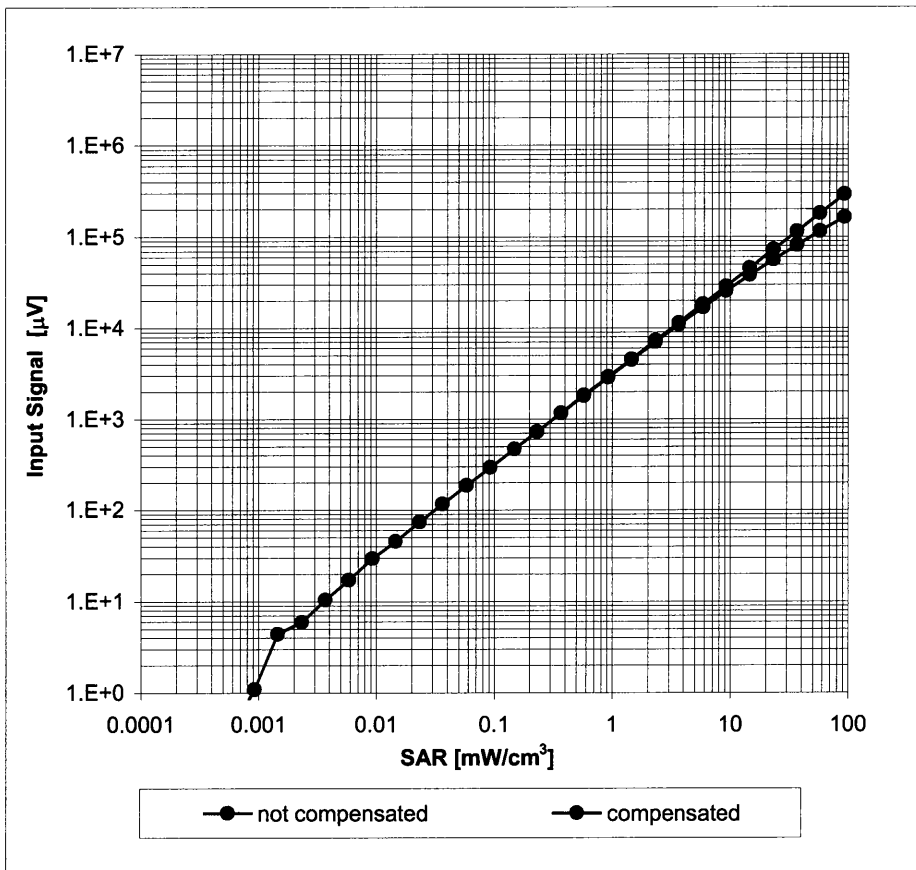

Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )

### Conversion Factor Assessment

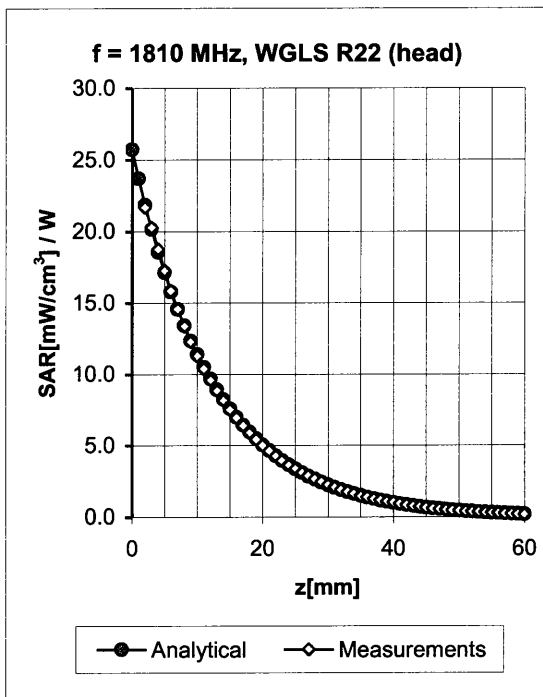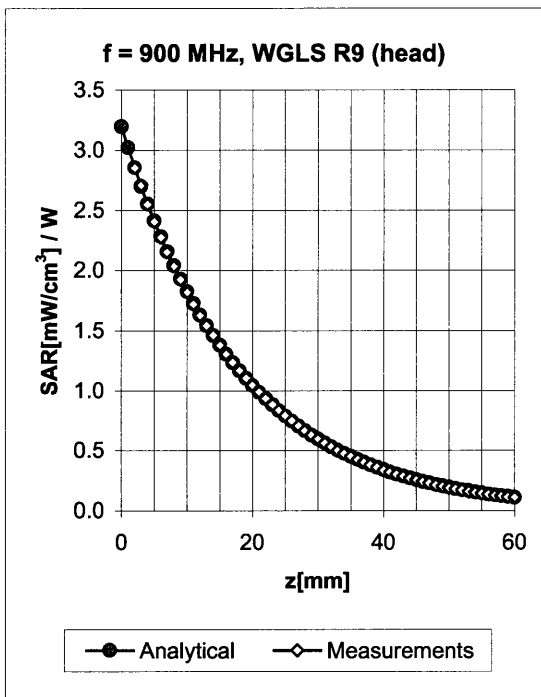


f [MHz]	Validity [MHz] <sup>c</sup>	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
450	± 50 / ± 100	Head	43.5 ± 5%	0.87 ± 5%	0.15	2.73	7.91 ± 13.3% (k=2)
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	0.72	0.65	7.71 ± 11.0% (k=2)
1810	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.49	0.86	6.65 ± 11.0% (k=2)
2450	± 50 / ± 100	Head	39.2 ± 5%	1.80 ± 5%	0.54	0.55	6.19 ± 11.8% (k=2)
5200	± 50 / ± 100	Head	36.0 ± 5%	4.76 ± 5%	0.52	1.05	4.39 ± 13.1% (k=2)
5800	± 50 / ± 100	Head	35.3 ± 5%	5.27 ± 5%	0.56	0.93	3.87 ± 13.1% (k=2)
450	± 50 / ± 100	Body	56.7 ± 5%	0.94 ± 5%	0.12	2.95	8.61 ± 13.3% (k=2)
900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	0.37	0.86	7.56 ± 11.0% (k=2)
1810	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.11	4.07	6.30 ± 11.0% (k=2)
2450	± 50 / ± 100	Body	52.7 ± 5%	1.95 ± 5%	1.73	0.34	6.27 ± 11.8% (k=2)
5200	± 50 / ± 100	Body	49.0 ± 5%	5.30 ± 5%	0.50	1.54	4.19 ± 13.1% (k=2)
5800	± 50 / ± 100	Body	48.2 ± 5%	6.00 ± 5%	0.51	1.48	3.79 ± 13.1% (k=2)

<sup>c</sup> The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

# Deviation from Isotropy in HSL

Error ( $\phi$ ,  $\theta$ ),  $f = 900$  MHz

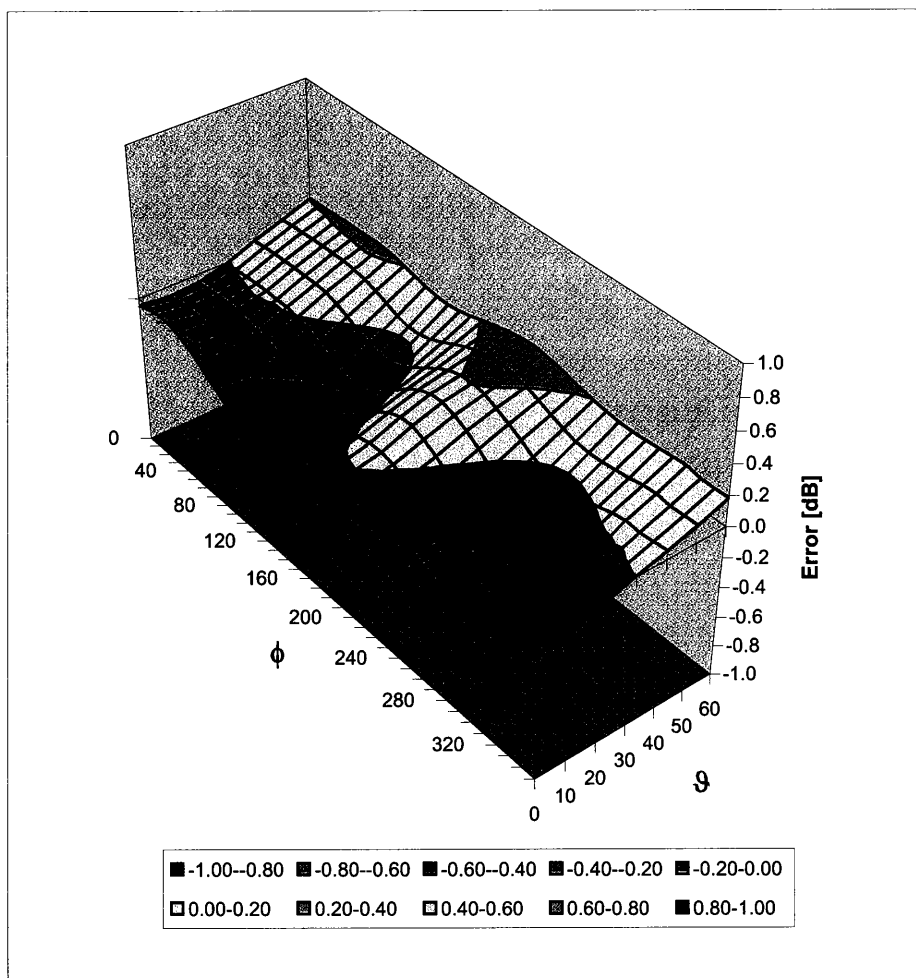

Uncertainty of Spherical Isotropy Assessment:  $\pm 2.6\%$  ( $k=2$ )