

SPECIFICATION FOR APPROVAL

产品规格承认书

CUSTOMER:

(客户名称)

CUSTOMER P/N:

(客户型号)

A11

DESCRIPTION/SPEC:

(品名/规格)

TX A11 无线充发射线圈模组

PART NUMBER:

(产品编号)

SAMPLE DATE:

(送样日期)

APPROVAL SIGNATURE (供应商承认签章)

制作	检查	审核
谢新香	梅路萍	张志强

APPROVAL SIGNATURE (客户承认签章)

	日 期


Xingning Mujianwang Electronic Technology Co., Ltd

Add: No. 839 Guanshan Fourth Road, Ningxin Street, Xingning City,
Guangdong Province, China

Mobile: 135 2870 3607

E-mail: 773085417@qq.com

1. DIMENSIONS & MARKING(UNIT:mm):

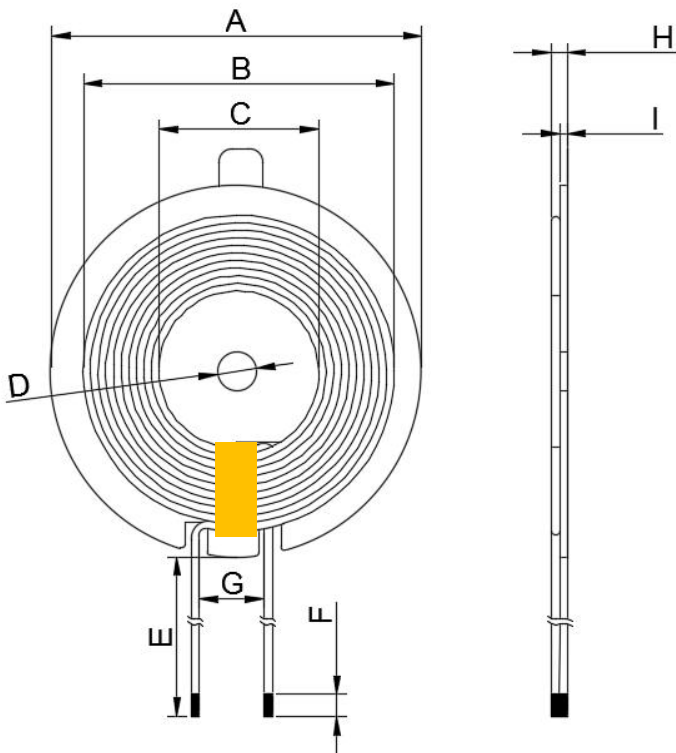


项目	规格
A	50.0±1.0
B	42.0±1.0
C	20.5±0.5
D	5.3±0.5
E	8±1.5
F	3.0±1.5
G	10.0 TYP
H	2.8 MAX (不含离型纸厚度)
I	1.0±0.1 (不含离型纸厚度)

备注:

- 1.1. High temperature adhesive tape: Brown 7mm wide;
- 1.2. Double sided adhesive size: 48*6*0.08mm

2. SCHEMATICS:



3.WINDING INSTRUCTION & DESCPTION:

序号 No.	起头 S	收尾 F	圈数 TURNS	漆包线 WIRE	高温胶带 HIGH TEMPERATURE TAPE	绕线方式 WINDING DIRECTION
L1	S	F	10 T 1 层	丙酮丝包线 0.08*105P	7mm TYP	反绕

4. ELECTRICAL SPECIFICATIONS @25℃:

4. 1. OCL: S-F=6.5uH±10% @100KHz/1V;
4. 2. DCR: S-F =35mΩ Max