



EMC Measurement/Technical Report

on

Bluetooth™ Module

WML-C11

Report Reference: 4_MITSU_0102_BTT_FCCb

7 Layers AG
Borsigstr. 11
40880 Ratingen
Germany

Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the testing laboratory.

Registergericht - registered in:
Ratingen, HRB 3264
Aufsichtsratsvorsitzende -
Chairman of the Supervisory Board:
Dr. Sabine Grobecker

Vorstand - Board of Directors:
Dr. Wolfgang Dahm
Dr. Hans-Jürgen Meckelburg

7 layers AG, Borsigstrasse 11
40880 Ratingen, Germany
Phone: +49 (0) 2102 749 0
Fax: +49 (0) 2102 749 350
<http://www.7Layers.com>



Table of Contents

| | |
|----------------------------------|-----------|
| 0. Summary | 3 |
| 0.1 Technical Report Summary | 3 |
| 0.2 Measurement Summary | 4 |
| 1. Administrative Data | 6 |
| 1.1 Testing Laboratory | 6 |
| 1.2 Project Data | 6 |
| 1.3 Applicant Data | 6 |
| 1.4 Manufacturer Data | 6 |
| 2. Product Labeling | 7 |
| 2.1 FCC ID Label | 7 |
| 2.2 Location of Label on the EUT | 7 |
| 3. Testobject Data | 8 |
| 3.1 General EUT Description | 8 |
| 3.2 EUT Main Components | 9 |
| 3.3 Ancillary Equipment | 9 |
| 3.4 EUT Setups | 9 |
| 3.5 Operating Modes | 10 |
| 4. Measurement Results | 11 |
| - Conducted Emissions | - |
| 4.1 Occupied Bandwidth | 11 |
| 4.2 Output Power | 14 |
| 4.3 Spurious Emissions Conducted | 17 |
| 4.4 Spurious Emissions Radiated | 19 |
| 4.5 Dwell Time | 23 |
| 4.6 Power Density | 25 |
| 4.7 Channel Separation | 27 |
| - Processing Gain | - |
| 5. Testequipment | 28 |
| 6. Foto Report | 30 |
| 7. Setup Drawings | 33 |
| 8. Annex | 35 |
| Measurement plots | 25 Pages |



0 Summary

0.1 Technical Report Summary

Type of Authorization:

Certification for an Intentional Radiator (Frequency Hopping Spread Spectrum)

Applicable FCC Rules:

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 0 to 19 (10-1-98 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification Sections

Part 15, Subpart C - Intentional Radiators

§ 15.201 Equipment authorization requirement

§ 15.203 Antenna requirements

§ 15.207 Conducted limits

§ 15.209 Radiated emission limits; general requirements

§ 15.247 Operation within the bands 902-928 MHz, 2400-2483,5 MHz and 5725-5850 MHz

Note:

The tests were selected and performed with reference to the FCC Public Notice DA 00-705, released March 30, 2000

Summary Test Results:

The equipment under test fulfilled the requirements of the applied FCC rules.



0.2 Measurement Summary

FCC Part 15, Subpart C § 15.247 (a) (1) (ii)

Occupied Bandwidth

The measurement was performed according to ANSI C63.4 1992

| OP Mode | Setup | Port | Final Result |
|----------------|--------------|-----------------------------|---------------------|
| op-mode 1 | setup 1 | temporary antenna connector | passed |
| op-mode 2 | setup 1 | temporary antenna connector | passed |
| op-mode 3 | setup 1 | temporary antenna connector | passed |
| op-mode 4 | setup 1 | temporary antenna connector | passed |
| op-mode 5 | setup 1 | temporary antenna connector | passed |

FCC Part 15, Subpart C § 15.247 (b) (1)

Peak Power Output

The measurement was performed according to FCC §15.31 10-1-1998

| OP Mode | Setup | Port | Final Result |
|----------------|--------------|-----------------------------|---------------------|
| op-mode 1 | setup 1 | temporary antenna connector | passed |
| op-mode 2 | setup 1 | temporary antenna connector | passed |
| op-mode 3 | setup 1 | temporary antenna connector | passed |
| op-mode 4 | setup 1 | temporary antenna connector | passed |
| op-mode 5 | setup 1 | temporary antenna connector | passed |

FCC Part 15, Subpart C § 15.247 (c)

Spurious RF Conducted Emissions

The measurement was performed according to FCC §15.31 10-1-1998

| OP Mode | Setup | Port | Final Result |
|----------------|--------------|-----------------------------|---------------------|
| op-mode 1 | setup 1 | temporary antenna connector | passed |
| op-mode 2 | setup 1 | temporary antenna connector | passed |
| op-mode 3 | setup 1 | temporary antenna connector | passed |

FCC Part 15, Subpart C § 15.247 (c), §15.35 (b), § 15.209

Spurious Radiated Emissions

The measurement was performed according to ANSI C63.4 1992

| OP Mode | Setup | Port | Final Result |
|----------------|--------------|-------------|---------------------|
| op-mode 1 | setup 2 | enclosure | passed |
| op-mode 2 | setup 2 | enclosure | passed |
| op-mode 3 | setup 2 | enclosure | passed |

FCC Part 15, Subpart C § 15.247 (g)

Dwell Time

The measurement was performed according to FCC §15.31 10-1-1998

| OP Mode | Setup | Port | Final Result |
|----------------|--------------|-----------------------------|---------------------|
| op-mode 4 | setup 1 | temporary antenna connector | passed |
| op-mode 5 | setup 1 | temporary antenna connector | passed |

FCC Part 15, Subpart C § 15.247 (g)



Power Density

The measurement was performed according to FCC §15.31 10-1-1998

| OP Mode | Setup | Port | Final Result |
|----------------|--------------|-----------------------------|---------------------|
| op-mode 4 | setup 1 | temporary antenna connector | passed |
| op-mode 5 | setup 1 | temporary antenna connector | passed |

FCC Part 15, Subpart C § 15.247 (a) (1)

Channel Separation

The measurement was performed according to FCC §15.31 10-1-1998

| OP Mode | Setup | Port | Final Result |
|----------------|--------------|-----------------------------|---------------------|
| op-mode 6 | setup 1 | temporary antenna connector | passed |

Responsible for
Accreditation Scope: _____

Responsible
for Test Report: _____



1. Administrative Data

1.1 Testing Laboratory

Company Name: 7 Layers AG
Address: Borsigstr. 11
40880 Ratingen
Germany

This facility has been fully described in a report submitted to the FCC and accepted in a letter dated February 07, 2000 under the registration number 96716.

The test facility is also accredited by the following accreditation organisation:

- Deutscher Akkreditierungs Rat DAR-Registration no. TTI-P-G 178/99-10

Responsible for Accreditation Scope: Dipl.-Ing Bernhard Retka
Dipl.-Ing Arndt Stöcker

1.2 Project Data

Responsible for Test Report: Dipl.-Ing. Robert Machulec
Receipt of EUT: 17.05.02
Date of Test(s): 20.05-22.05.02; 16.06.02
Date of Report: 27.06.02

1.3 Applicant Data

Company Name: Mitsumi Electronics Co. Ltd.
Address: 8-8-2, Kokuryo-cho
ZIP 182-8557
chohu-shi, 182-8557 Tokyo
Japan
Contact Person: Mr. Takashi Watanabe

1.4 Manufacturer Data

Company Name: see applicant
Address:

Contact Person:



2.0 Product Labeling

2.1 FCC ID Label:

At the time of the test report there was no FCC label available.

2.2 Location of Label on the EUT:

see above

3. Testobject Data

3.1 General EUT Description

| | |
|---------------------------------------|------------------------------|
| Equipment under Test: | Bluetooth™ Module |
| Type Designation: | WML-C11 |
| Kind of Device: (optional) | Bluetooth transceiver module |
| Voltage Type: | DC |
| Voltage level: | 3,3 V |

General product description:

Bluetooth is a short-range radio link intended to be a cable replacement between portable and/or fixed electronic devices.

Bluetooth operates in the unlicensed ISM Band at 2.4 GHz. In the US a band of 83.5 MHz width is available. In this band, 79 RF channels spaced 1MHz apart are defined. The channel is represented by a pseudo-random hopping sequence through the 79 channels. The channel is divided into time slots, with a nominal slot length of 625µs, where each slot corresponds to different RF hop frequencies. The nominal hop rate is 1600 hops/s. All frequencies are equally used. The average time of occupancy is 0.3797 s within a 30 second period. The symbol rate on the channel is 1 Ms/s.

The EUT provides the following ports:

Ports

temporary antenna connector
Enclosure

The main components of EUT are listed and described in Chapter 3.2

3.2 EUT Main components: Type, S/N, Short Descriptions etc. used in this Test Report

| Short Description | Equipment under Test | Type Designation | Serial No. | HW Status | SW Status | Date of Receipt |
|---|----------------------|------------------|------------|-----------|-----------|-----------------|
| EUT A EUT A | BT-chip | WML-11 | - | Rev. 1 | Rev. 12.3 | 17.05.02 |
| EUT is equipped with an temporary antenna connector | | | | | | |
| EUT B | BT-chip | WML-11 | - | Rev. 1 | Rev. 12.3 | 17.05.02 |
| EUT is equipped with an temporary antenna connector | | | | | | |

NOTE: The short description is used to simplify the identification of the EUT in this test report

3.3 Ancillary Equipment

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide additional operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it.

| Short Description | Equipment under Test | Type Designation | HW Status | SW Status | Serial No. | FCC Id |
|-------------------|-----------------------------|------------------|-----------|-----------|------------|--------|
| AE 2 | CSR Development board (CSR) | - | - | - | - | - |
| AE 1 | Mitsumi Control board | - | - | - | AG31T | - |

3.4 EUT Setups

This chapter describes the combination of EUT's and ancillary equipment used for testing.

| Setup No. | Combination of EUTs | Description |
|-----------|---------------------|-------------------------------|
| setup 1 | EUT A + AE 1 | For conducted RF measurements |
| setup 2 | EUT B + AE 2 | For radiated RF measurements |

3.5 Operating Modes

This chapter describes the operating modes of the EUT's used for testing.

| Op. Mode | Description of Operating Modes | Remarks |
|-----------------|---------------------------------------|---|
| op-mode 1 | Loopback mode on 2402 MHz | The R&S tester PTW 60 was used as a master and the EUT was configured to be a slave. Data (DH 1 packet, PRBS 9) was sent from the master to the slave and returned back by the slave. |
| op-mode 2 | Loopback mode on 2441 MHz | The R&S tester PTW 60 was used as a master and the EUT was configured to be a slave. Data (DH 1 packet, PRBS 9) was sent from the master to the slave and returned back by the slave. |
| op-mode 3 | Loopback mode on 2480 MHz | The R&S tester PTW 60 was used as a master and the EUT was configured to be a slave. Data (DH 1 packet, PRBS 9) was sent from the master to the slave and returned back by the slave. |
| op-mode 4 | inquiry mode | |
| op-mode 5 | paging mode | |
| op-mode 6 | 10 neighbouring channels | The EUT is set to transmit on ten neighbouring channels one after the other to see the channel separation. |

4. Test Results

4.1 Occupied Bandwidth

Standard FCC Part 15, 10-1-98
Subpart C

The test was performed according to: ANSI C63.4 1992

4.1.1 Test Description

The test set-up was made in accordance to the general provisions of ANSI C63.4-1992.

The Equipment Under Test (EUT) was setup in a shielded room to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produce the worst-case (widest) occupied bandwidth.

The resolution bandwidth for measuring the reference level and the occupied bandwidth was 10 kHz.

The reference level of the spectrum analyser was set equal to the reference level of the EUT.

4.1.2 Test Limits

- FCC Part 15, Subpart C, §15.247 (a) (1) (ii)
- (1) Frequency hopping systems operating in the 2400 - 2483.5 MHz band should use at least 75 hopping frequencies.
 - (2) The average time of occupancy on any frequency should not be greater than 0.4 seconds within a 30 second period.
 - (3) The maximum 20 dB bandwidth of the hopping channel is 1MHz.

4.1.3 Test Protocol

Temperature: 24°C
Air Pressure: 1018 hPa
Humidity: 30%

| Op. Mode | Setup | Port | Test Parameter |
|-----------|---------|-----------------------------|----------------|
| op-mode 1 | setup 1 | temporary antenna connector | |

| 20 dB Bandwidth MHz | Remarks |
|---------------------|--|
| 0,8344 | Please see annex for the measurement plot. |

Remark: none



Temperature: 24 °C
Air Pressure: 1018 hPa
Humidity: 30%

| Op. Mode | Setup | Port | Test Parameter |
|-----------|---------|-----------------------------|----------------|
| op-mode 2 | setup 1 | temporary antenna connector | |

| 20 dB Bandwidth MHz | Remarks |
|---------------------|--|
| 0,9384 | Please see annex for the measurement plot. |

Remark: none

Temperature: 24 °C
Air Pressure: 1018 hPa
Humidity: 30 %

| Op. Mode | Setup | Port | Test Parameter |
|-----------|---------|-----------------------------|----------------|
| op-mode 3 | setup 1 | temporary antenna connector | |

| 20 dB Bandwidth MHz | Remarks |
|---------------------|--|
| 0,8424 | Please see annex for the measurement plot. |

Remark: none

Temperature: 25 °C
Air Pressure: 1022 hPa
Humidity: 40 %

| Op. Mode | Setup | Port | Test Parameter |
|-----------|---------|-----------------------------|----------------|
| op-mode 4 | setup 1 | temporary antenna connector | |

| 20 dB Bandwidth MHz | Remarks |
|---------------------|--|
| 0,612 | Please see annex for the measurement plot. |

Remark: none

Temperature: 25 °C
Air Pressure: 1022 hPa
Humidity: 40 %

| Op. Mode | Setup | Port | Test Parameter |
|-----------|---------|-----------------------------|----------------|
| op-mode 5 | setup 1 | temporary antenna connector | |

| 20 dB Bandwidth MHz | Remarks |
|---------------------|--|
| 0,676 | Please see annex for the measurement plot. |

Remark: none



4.1 .4 Test result: Occupied Bandwidth

| FCC Part 15, Subpart J | Op. Mode | Setup | Port | Result |
|------------------------|-----------|---------|-----------------------------|---------------|
| | op-mode 1 | setup 1 | temporary antenna connector | passed |
| | op-mode 2 | setup 1 | temporary antenna connector | passed |
| | op-mode 3 | setup 1 | temporary antenna connector | passed |
| | op-mode 4 | setup 1 | temporary antenna connector | passed |
| | op-mode 5 | setup 1 | temporary antenna connector | passed |

4. 2 Peak Power Output

Standard FCC Part 15, 10-1-98
Subpart C

The test was performed according to: FCC §15.31 10-1-1998

4. 2 .1 Test Description

The Equipment Under Test (EUT) was set up in a shielded room to perform the output power measurements.

The results recorded were measured with the modulation which produces the worst-case (highest) output power.

The resolution bandwidth for measuring the output power was 1 MHz.

The reference level of the spectrum analyser was set equal to the output power of the EUT.

The EUT was connected to the spectrum analyzer via a short coax cable (Type: Rosenberger RTK 161, 1m, SMA connectors), with a known loss.

4. 2 .2 Test Limits

FCC Part 15, Subpart C, §15.247 (b) (1)

(1) For frequency hopping systems operating in the band 2400 - 2483,5 MHz or 5725 - 5850 MHz and for all direct sequence systems: 1 Watt

Used conversion factor: Limit (dBm) = 10 log (Limit (W)/1mW)

==> Maximum Output Power: 30 dBm

4. 2 .3 Test Protocol

Temperature: 24 °C

Air Pressure: 1018 hPa

Humidity: 30 %

| Op. Mode | Setup | Port | Test Parameter |
|-----------|---------|-----------------------------|----------------|
| op-mode 1 | setup 1 | temporary antenna connector | |

| Output Power dBm | Remarks |
|------------------|--|
| 16,26 | The EIRP including antenna gain (2,1 dBi) is 18,36 dBm |

Remark: Please see annex for the measurement plot.



Temperature: 24 °C
Air Pressure: 1018 hPa
Humidity: 30 %

| Op. Mode | Setup | Port | Test Parameter |
|-----------|---------|-----------------------------|----------------|
| op-mode 2 | setup 1 | temporary antenna connector | |

| Output Power dBm | Remarks |
|------------------|--|
| 16,11 | The EIRP including antenna gain (2,1 dBi) is 18,21 dBm |

Remark: Please see annex for the measurement plot.

Temperature: 24 °C
Air Pressure: 1018 hPa
Humidity: 30 %

| Op. Mode | Setup | Port | Test Parameter |
|-----------|---------|-----------------------------|----------------|
| op-mode 3 | setup 1 | temporary antenna connector | |

| Output Power dBm | Remarks |
|------------------|--|
| 15,69 | The EIRP including antenna gain 2,1 dBi) is17,79 dBm |

Remark: Please see annex for the measurement plot.

Temperature: 25 °C
Air Pressure: 1022 hPa
Humidity: 40 %

| Op. Mode | Setup | Port | Test Parameter |
|-----------|---------|-----------------------------|----------------|
| op-mode 4 | setup 1 | temporary antenna connector | |

| Output Power dBm | Remarks |
|------------------|---|
| 13,9 | The EIRP including antenna gain (2,1 dBi) is 16,0 dBm |

Remark: Please see annex for the measurement plot.

Temperature: 25 °C
Air Pressure: 1022 hPa
Humidity: 40 %

| Op. Mode | Setup | Port | Test Parameter |
|-----------|---------|-----------------------------|----------------|
| op-mode 5 | setup 1 | temporary antenna connector | |

| Output Power dBm | Remarks |
|------------------|--|
| 14,04 | The EIRP including antenna gain (2,1 dBi) is 16,14 dBm |

Remark: Please see annex for the measurement plot.



4.2 .4 Test result: Peak Power Output

| FCC Part 15, Subpart | Op. Mode | Setup | Port | Result |
|----------------------|-----------|---------|-----------------------------|---------------|
| | op-mode 1 | setup 1 | temporary antenna connector | passed |
| | op-mode 2 | setup 1 | temporary antenna connector | passed |
| | op-mode 3 | setup 1 | temporary antenna connector | passed |
| | op-mode 4 | setup 1 | temporary antenna connector | passed |
| | op-mode 5 | setup 1 | temporary antenna connector | passed |

4.3 Spurious RF Conducted Emissions

Standard FCC Part 15, 10-1-98
Subpart C

The test was performed according to: FCC §15.31 10-1-1998

4.3.1 Test Description

The Equipment Under Test (EUT) was set up in a shielded room to perform the output power measurements

The EUT was connected to spectrum analyzer via a short coax cable (Type: Rosenberger RTK 161, 1m, SMA connectors), with a known loss.

Analyser settings:

- Detector: Peak-Maxhold
- Frequency range: 30 – 25000 MHz
- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 100 kHz
- Sweep Time: Coupled

The reference level of the spectrum analyser was set equal to the reference level of the EUT.

4.3.2 Test Limits

FCC Part 15, Subpart C, §15.247 (c)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

4.3.3 Test Protocol

Temperature: 24 °C

Air Pressure: 1018 hPa

Humidity: 30 %

| Op. Mode | Setup | Port | Test Parameter |
|-----------|---------|-----------------------------|----------------|
| op-mode 1 | setup 1 | temporary antenna connector | |

| Frequency MHz | Measured Value dBm | Correction Factor dB | Corrected Value dBm | Reference Value dBm | Limit dBm | Delta to Limit dB |
|---------------|--------------------|----------------------|---------------------|---------------------|-----------|-------------------|
| | | | | | | |

Remark: No spurious emission in the range 20 dB below the limit found. Please see annex for the measurement plot.



Temperature: 24 °C
 Air Pressure: 1018 hPa
 Humidity: 30 %

| Op. Mode | Setup | Port | Test Parameter |
|-----------|---------|-----------------------------|----------------|
| op-mode 2 | setup 1 | temporary antenna connector | |

| Frequency MHz | Measured Value dBm | Correction Factor dB | Corrected Value dBm | Reference Value dBm | Limit dBm | Delta to Limit dB |
|---------------|--------------------|----------------------|---------------------|---------------------|-----------|-------------------|
| | | | | | | |

Remark: No spurious emission in the range 20 dB below the limit found. Please see annex for the measurement plot.

Temperature: 24 °C
 Air Pressure: 1018 hPa
 Humidity: 30 %

| Op. Mode | Setup | Port | Test Parameter |
|-----------|---------|-----------------------------|----------------|
| op-mode 3 | setup 1 | temporary antenna connector | |

| Frequency MHz | Measured Value dBm | Correction Factor dB | Corrected Value dBm | Reference Value dBm | Limit dBm | Delta to Limit dB |
|---------------|--------------------|----------------------|---------------------|---------------------|-----------|-------------------|
| | | | | | | |

Remark: No spurious emission in the range 20 dB below the limit found. Please see annex for the measurement plot.

4.3 .4 Test result: Spurious RF Conducted Emissions

| FCC Part 15, Subpart J | Op. Mode | Setup | Port | Result |
|------------------------|-----------|---------|-----------------------------|---------------|
| | op-mode 1 | setup 1 | temporary antenna connector | passed |
| | op-mode 2 | setup 1 | temporary antenna connector | passed |
| | op-mode 3 | setup 1 | temporary antenna connector | passed |

4. 4 Spurious Radiated Emissions

Standard FCC Part 15, 10-1-98
Subpart C

The test was performed according to: ANSI C63.4 1992

4. 4 .1 Test Description

The test set-up was made in accordance to the general provisions of ANSI C63.4-1992.

The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m in the semi-anechoic chamber. The test was performed at an EUT to receiving antenna distance of 3m.

The radiated emissions measurements was made in a typical installation configuration.

The measurement procedure consists of four steps. It is implemented into EMI test software ES-K1 from R&S.

Step 1: Preliminary scan

Preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Detector: Peak-Maxhold
- Frequency range: 30 – 1000 MHz
- Frequency steps: 60 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 µs
- Turntable angle range: -180 to 180 °
- Turntable stepsize: 90°
- Height variation range: 1 – 3m
- Height variation stepsize: 2m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. With this data, the test system performs (to reduce the number of final measurements) a data reduction with the following parameters:

- Offset for acceptance analysis: Limit line – 10 dB
- Maximum number of final measurements: 12

Step 2:

With the frequencies determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is, to find out the approximate turntable angle and antenna height for each frequency.

Settings for step 2:

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100ms
- Turntable angle range: -180 to 180 °
- Turntable stepsize: 45°
- Height variation range: 1 – 4m
- Height variation stepsize: 0,5m
- Polarisation: horizontal + vertical

After this step the EMI test system has determined the following values for each frequency (of step 1):

- Frequency
- Azimuth value (of turntable)
- Antenna height

The last two values have now the following accuracy:

- Azimuth value (of turntable): 45°
- Antenna height: 0,5m

Step 3:

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency the turntable azimuth and antenna height, which was determined in step 3, will be adjusted.

The turntable azimuth will be slowly varied by +/- 22,5° around this value. During this action the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position the antenna height is also slowly varied by +/- 25 cm around the antenna height determined in step 3. During this action the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

Settings for step 3:

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100ms
- Turntable angle range: -22,5° to + 22,5 ° around the value determined in step 2
- Height variation range: -0,25m to + 0,25m around the value determined in step 2

Step 4:

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak(< 1GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1s

The following modifications apply to the measurement procedure for the frequency range above 1 GHz:

The measurement distance was reduced to 1m. The results were extrapolated by the extrapolation factor of 20 dB/decade (invers linear-distance for field strength measurements, invers linear-distance squared for the power reference level measurements). Due to the fact that in this frequency range a double ridged wave guided horn antenna (up to 18 Ghz) and a horn antenna (18-25 GHz) are used, the steps 2-4 are omitted. Step 1 was performed with one height of the receiving antenna only.

Detector: Peak, Average

RBW = VBW = 1 MHz, above 7 GHz 100 kHz

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

4. 4 .2 Test Limits

FCC Part 15, Subpart C, §15.247 (c)

(2) A radiated emission test applies to harmonic/spurs that fall in the restricted bands as listed in § 15.205(a). The maximum permitted QP (< 1GHz) and average (> 1GHz) field strength is listed in § 15.209(a).

(3)

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

| Frequency Range (MHz): | Class B Limit (dBµV/m) |
|------------------------|------------------------|
| 30 – 88 | 40,0 |
| 88 – 216 | 43,5 |
| 216 – 960 | 46,0 |
| above 960 | 54,0 |

§15.35(b)

..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: Limit (dBµV/m) = 20 log (Limit (µV/m)/1µV/m)

4. 4 .3 Test Protocol

Temperature: 25 °C

Air Pressure: 1018 hPa

Humidity: 36 %

| Op. Mode | Setup | Port | Test Parameter | | | | | |
|--------------|---------------|------------------------|----------------|-------|--------------------|-------------------|-------------------------|------------------------|
| op-mode 1 | setup 2 | enclosure | | | | | | |
| Polarisation | Frequency MHz | Corrected Value dBµV/m | | | Limit QP/AV dBµV/m | Limit Peak dBµV/m | Delta to AV/QP Limit/dB | Delta to Peak Limit dB |
| | | QP | Peak | AV | | | | |
| Horizontal | 2386,00 | | 55,82 | 41,44 | 54,00 | 74,00 | 12,56 | 18,18 |
| Vertical | 4804,00 | | 47,81 | 36,56 | 54,00 | 74,00 | 17,44 | 26,19 |

Remark: No further spurious emission in the range 20 dB below the limit found.

Temperature: 25 °C

Air Pressure: 1018 hPa

Humidity: 36 %

| Op. Mode | Setup | Port | Test Parameter | | | | | |
|--------------|---------------|------------------------|----------------|-------|--------------------|-------------------|-------------------------|------------------------|
| op-mode 2 | setup 2 | enclosure | | | | | | |
| Polarisation | Frequency MHz | Corrected Value dBµV/m | | | Limit QP/AV dBµV/m | Limit Peak dBµV/m | Delta to AV/QP Limit/dB | Delta to Peak Limit dB |
| | | QP | Peak | AV | | | | |
| Horizontal | 4882,00 | | 41,67 | 30,38 | 54,00 | 74,00 | 23,62 | 32,33 |
| Vertical | 7322,00 | | 53,71 | 39,44 | 54,00 | 74,00 | 14,56 | 20,29 |

Remark: No further spurious emission in the range 20 dB below the limit found.



Temperature: 25 °C
 Air Pressure: 1018 hPa
 Humidity: 36 %

| Op. Mode | Setup | Port | Test Parameter |
|-----------|---------|-----------|----------------|
| op-mode 3 | setup 2 | enclosure | |

| Polarisation | Frequency MHz | Corrected Value dBµV/m | | | Limit QP/AV dBµV/m | Limit Peak dBµV/m | Delta to AV/QP Limit/dB | Delta to Peak Limit dB |
|--------------|---------------|------------------------|-------|-------|--------------------|-------------------|-------------------------|------------------------|
| | | QP | Peak | AV | | | | |
| Vertical | 2483,00 | | 65,61 | 43,82 | 54,00 | 74,00 | 10,18 | 8,39 |
| Horizontal | 7435,00 | | 37,99 | 52,10 | 54,00 | 74,00 | 1,90 | 36,01 |

Remark: No further spurious emission in the range 20 dB below the limit found.

4.4 .4 Test result: Spurious Radiated Emissions

| FCC Part 15, Subpart (| Op. Mode | Setup | Port | Result |
|------------------------|-----------|---------|-----------|---------------|
| | op-mode 1 | setup 2 | enclosure | passed |
| | op-mode 2 | setup 2 | enclosure | passed |
| | op-mode 3 | setup 2 | enclosure | passed |

4.5 Dwell Time

Standard FCC Part 15, 10-1-98
Subpart C

The test was performed according to: FCC §15.31 10-1-1998

4.5.1 Test Description

The Equipment Under Test (EUT) was set up in a shielded room to perform the output power measurements.

The reference level of the spectrum analyser was set equal to the output power of the EUT.

The EUT was connected to the spectrum analyzer via a short coax cable (Type: Rosenberger RTK 161, 1m, SMA connectors), with a known loss.

To determine the dwell time, 3 single measurements are necessary. The first plot shows the activity for an complete inquiry/paging on one channel. The second plot shows the repetition rate on one channel, and the third plot shows the duration of the burst used in inquiry/paging.

With this 3 single values the dwell time of the channel can be calculated.

4.5.2 Test Limits

FCC Part 15, Subpart C, §15.247 (g)

The dwell time of the channel shall be less than 400 ms in a 30 s period

4.5.3 Test Protocol

Temperature: 25 °C
Air Pressure: 1022 hPa
Humidity: 40 %

| Op. Mode | Setup | Port | Test Parameter |
|-----------|---------|-----------------------------|----------------|
| op-mode 4 | setup 1 | temporary antenna connector | |

| Dwell time ms | Remarks |
|---------------|--|
| 98,3 | $(3 \cdot 2,56s / 10ms) \cdot 128,0\mu s = 98,3ms$ |

Remark: Please see annex for the measurement plot.



Temperature: 25 °C
 Air Pressure: 1022 hPa
 Humidity: 40 %

| Op. Mode | Setup | Port | Test Parameter |
|-----------|---------|-----------------------------|----------------|
| op-mode 5 | setup 1 | temporary antenna connector | |

| Dwell time ms | Remarks |
|---------------|---|
| 33,04 | $(5,1298s/20ms) * 128,8\mu s = 33,04ms$ |

Remark: Please see annex for the measurement plot.

4.5 .4 Test result: Dwell Time

| FCC Part 15, Subpart 1 | Op. Mode | Setup | Port | Result |
|------------------------|-----------|---------|-----------------------------|---------------|
| | op-mode 4 | setup 1 | temporary antenna connector | passed |
| | op-mode 5 | setup 1 | temporary antenna connector | passed |

4. 6 Power Density

Standard FCC Part 15, 10-1-98
Subpart C

The test was performed according to: FCC §15.31 10-1-1998

4. 6 .1 Test Description

The Equipment Under Test (EUT) was set up in a shielded room to perform the output power measurements

The EUT was connected to spectrum analyzer via a short coax cable (Type: Rosenberger RTK 161, 1m, SMA connectors), with a known loss.

The Analyser settings are according 15.247 (d):

- Detector: Peak-Maxhold
- Span: 2 MHz
- Resolution Bandwidth (RBW): 3 kHz
- Video Bandwidth (VBW): 3 kHz
- Sweep Time: Coupled

The reference level of the spectrum analyser was set equal to the reference level of the EUT.

4. 6 .2 Test Limits

FCC Part 15, Subpart C, §15.247 (g)

The power density shall be below 8 dBm measured with a resolution bandwidth of 3 kHz.

4. 6 .3 Test Protocol

Temperature: 25 °C

Air Pressure: 1022 hPa

Humidity: 40 %

| Op. Mode | Setup | Port | Test Parameter |
|-----------|---------|-----------------------------|----------------|
| op-mode 4 | setup 1 | temporary antenna connector | |

| Power Density dBm/3 kHz | Remarks |
|-------------------------|--|
| 4 | Please see annex for the measurement plot. |

Remark: none



Temperature: 25 °C
 Air Pressure: 1022 hPa
 Humidity: 40 %

| Op. Mode | Setup | Port | Test Parameter |
|-----------|---------|-----------------------------|----------------|
| op-mode 5 | setup 1 | temporary antenna connector | |

| Power Density dBm/3 kHz | Remarks |
|-------------------------|--|
| 1,37 | Please see annex for the measurement plot. |

Remark: none

4.6 .4 Test result: Power Density

| FCC Part 15, Subpart 1 | Op. Mode | Setup | Port | Result |
|------------------------|-----------|---------|-----------------------------|---------------|
| | op-mode 4 | setup 1 | temporary antenna connector | passed |
| | op-mode 5 | setup 1 | temporary antenna connector | passed |

4.7 Channel Separation

Standard FCC Part 15, 10-1-98
Subpart C

The test was performed according to: FCC §15.31 10-1-1998

4.7.1 Test Description

The Equipment Under Test (EUT) was set up in a shielded room to perform the output power measurements

The EUT was connected to spectrum analyzer via a short coax cable (Type: Rosenberger RTK 161, 1m, SMA connectors), with a known loss.

Analyser settings:

- Detector: Peak-Maxhold
- Span: 10 MHz
- Resolution Bandwidth (RBW): 300 kHz
- Video Bandwidth (VBW): 300 kHz
- Sweep Time: Coupled

The reference level of the spectrum analyser was set equal to the reference level of the EUT.

4.7.2 Test Limits

FCC Part 15, Subpart C, § 15.247 (a) (1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

4.7.3 Test Protocol

Temperature: 25° C

Air Pressure: 1022 hPa

Humidity: 40%

| Op. Mode | Setup | Port | Test Parameter |
|-----------|---------|-----------------------------|----------------|
| op-mode 6 | setup 1 | temporary antenna connector | |

| Channel Separation MHz | Remarks |
|------------------------|--|
| 1 | Please see annex for the measurement plot. |

Remark: Please see annex for the measurement plot.

4.7.4 Test result: Channel Separation

| FCC Part 15, Subpart C | Op. Mode | Setup | Port | Result |
|------------------------|-----------|---------|-----------------------------|---------------|
| | op-mode 6 | setup 1 | temporary antenna connector | passed |

5. Testequipment

EUT Digital Signalling System

| Equipment | Type | Serial No. | Manufacturer |
|------------------------------------|-------------|-------------------|---------------------|
| Digital Radio Communication Tester | CMD 55 | 831050/020 | Rohde & Schwarz |

EMI Test System

| Equipment | Type | Serial No. | Manufacturer |
|--------------------------|-------------|-------------------|---------------------|
| Signal Generator | SMR 20 | 846834/008 | Rohde & Schwarz |
| EMI Analyzer | ESI 26 | 830482/004 | Rohde & Schwarz |
| Comparison Noise Emitter | CNE III | 99/016 | York |

EMI Radiated Auxiliary Equipment

| Equipment | Type | Serial No. | Manufacturer |
|-----------------------------|-----------------|-------------------|---------------------|
| Cable "ESI to Horn Antenna" | RTK 081 | W18.04+3599/001 | Rosenberger |
| Loop Antenna | HFH2-Z2 | 829324/006 | Rohde & Schwarz |
| Log.-per. Antenna | HL 562 Ultralog | 830547/003 | Rohde & Schwarz |
| Biconical dipole | VUBA 9117 | 9117108 | Schwarzbeck |
| Double-ridged horn | HF 906 | 357357/002 | Rohde & Schwarz |
| Cable "ESI to EMI Antenna" | RTK081+Aircell7 | W18.01+W38.01a | Huber+Suhner |
| Double-ridged horn | HF 906 | 357357/001 | Rohde & Schwarz |


EMI Conducted Auxiliary Equipment

| Equipment | Type | Serial No. | Manufacturer |
|--------------------|-------------|-------------------|---------------------|
| Two-Line V-Network | ESH 3-Z5 | 829996/002 | Rohde & Schwarz |


Auxiliary Test Equipment

| Equipment | Type | Serial No. | Manufacturer |
|-------------------------------------|-------------------|-------------------|---------------------|
| Broadband Resist. Power Divider SMA | 1515 / 93459 | LN673 | Weinschel |
| Digital Multimeter 02 | Voltcraft M-3860M | IJ095955 | Conrad |
| Digital Multimeter 01 | Voltcraft M-3860M | IJ096055 | Conrad |
| Digital Oscilloscope | TDS 784C | B021311 | Tektronix |
| Fibre optic link Satellite | FO RS232 Link | 181-018 | Pontis |
| Notch Filter ultra stable | WRCA800/960-6EE | 24 | Wainwright |
| Broadband Resist. Power Divider N | 1506A / 93459 | LM390 | Weinschel |
| I/Q Modulation Generator | AMIQ-B1 | 832085/018 | Rohde & Schwarz |
| Temperature Chamber | VT 4002 | 58566002150010 | Vötsch |
| Temperature Chamber | S-1.2C-B | 393/25-1389-27RF | Thermotron |
| ThermoHygro_01 | 430202 | | Fischer |
| Signal Generator | SMIQ 03B | 832492/061 | Rohde & Schwarz |
| Temperature Chamber | KWP 120/70 | 59226012190010 | Weiss |
| Fibre optic link Transceiver | FO RS232 Link | 182-018 | Pontis |


6. Foto Report

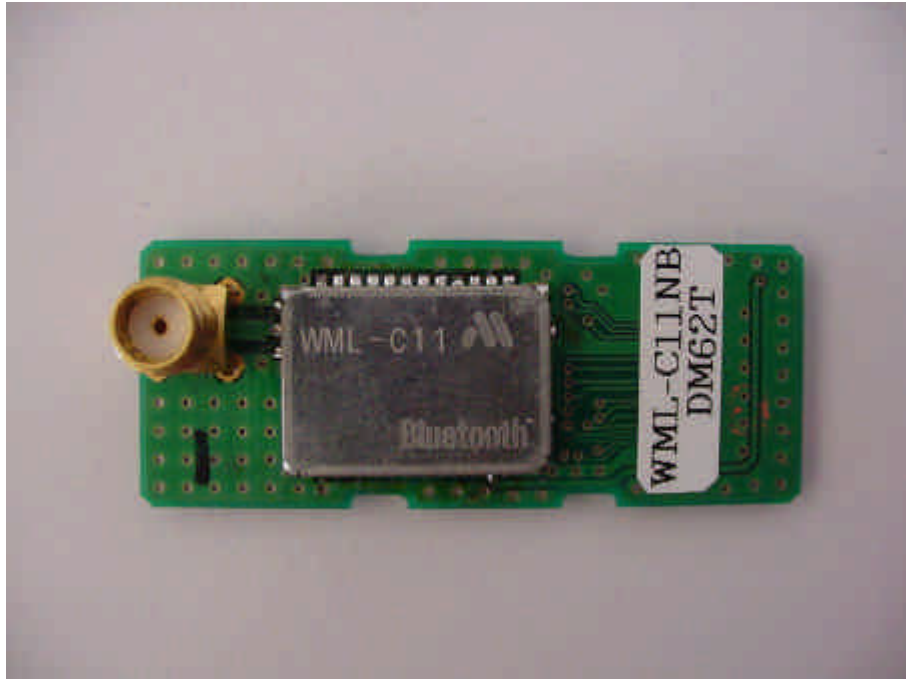


Picture 1 : EUT for conducted tests (top side)

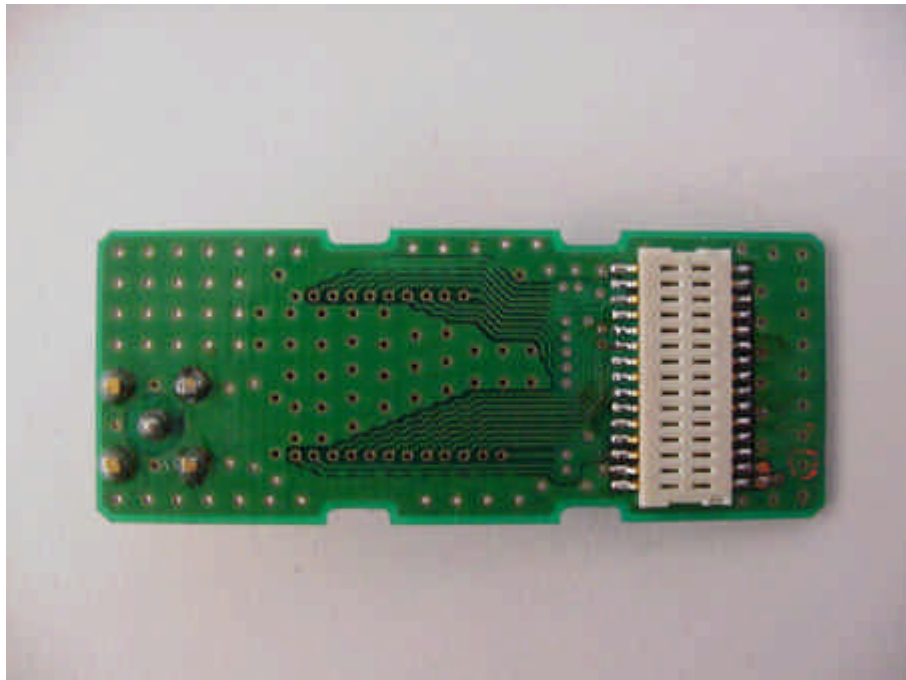


Picture 2 : EUT for conducted tests (bottom side)

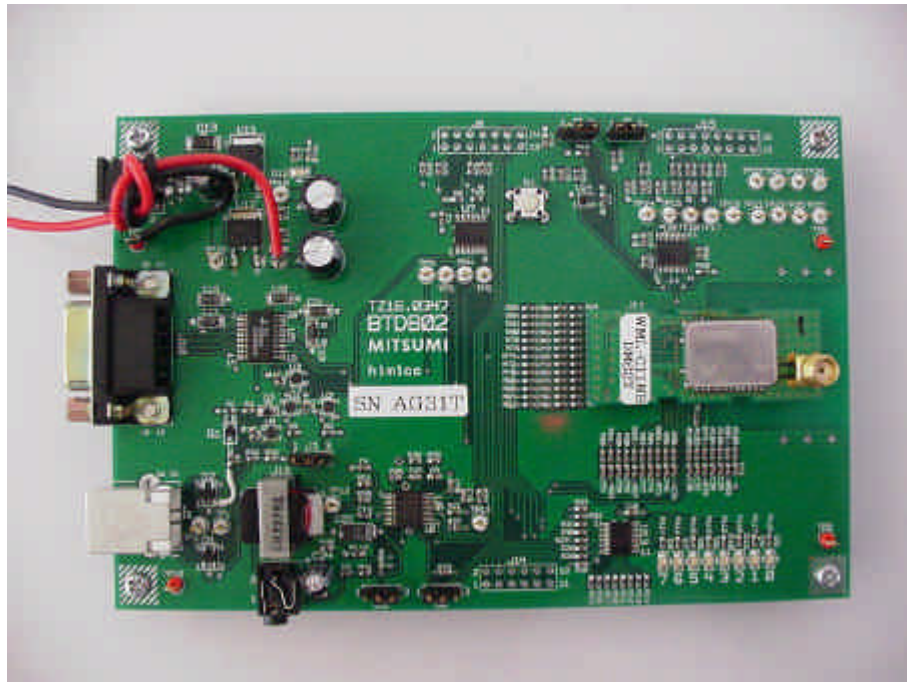


Picture 3 : Mitsumi Control board (top side)

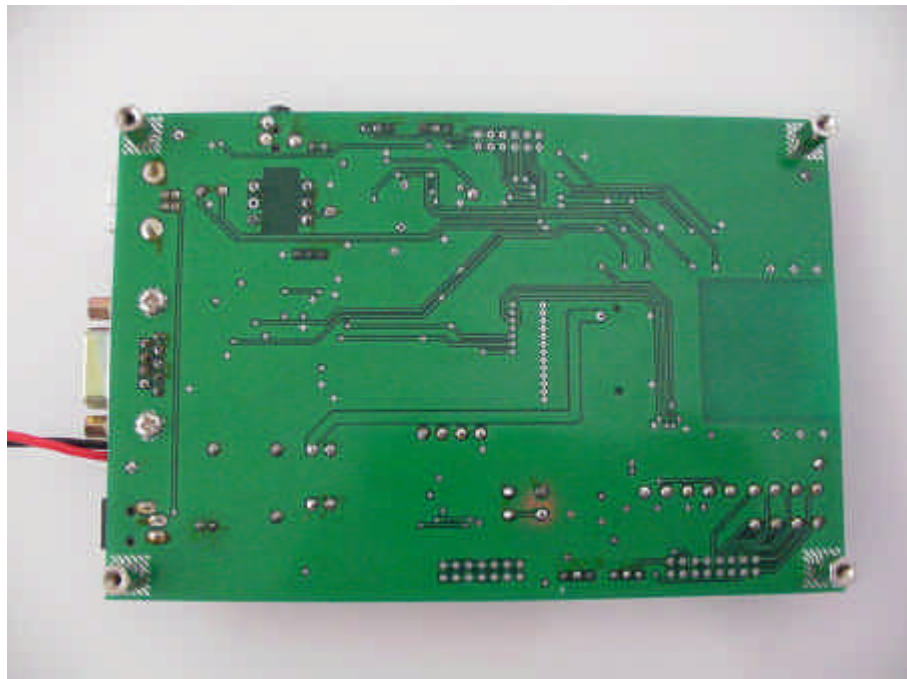

Picture 4 : Mitsumi Control board (bottom side)

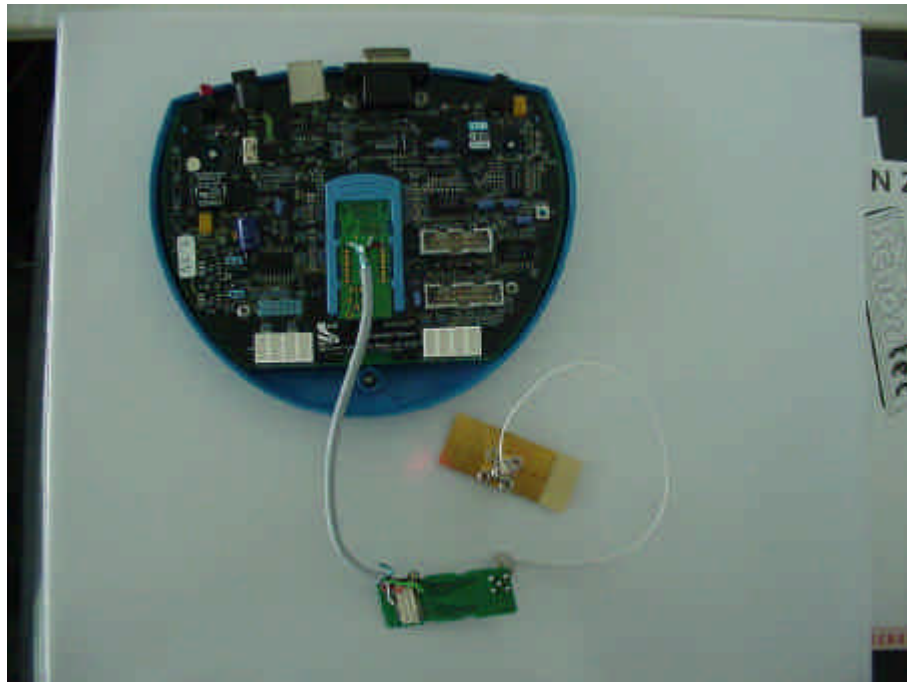


Picture 5 : EUT for radiated tests in the CSR Development board

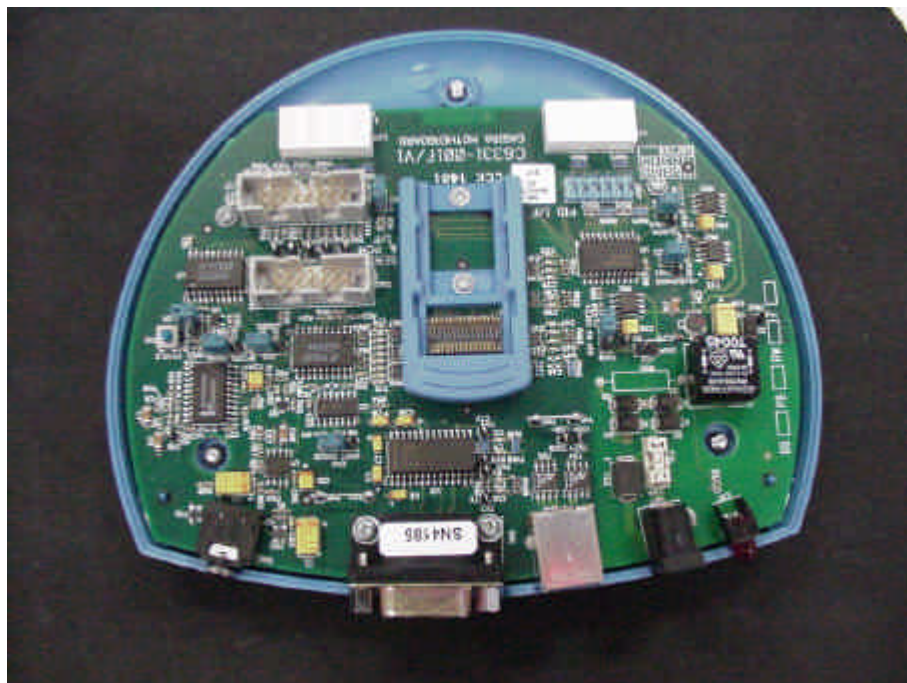


Picture 6 : CSR Development board for radiated tests

7. Setup Drawings

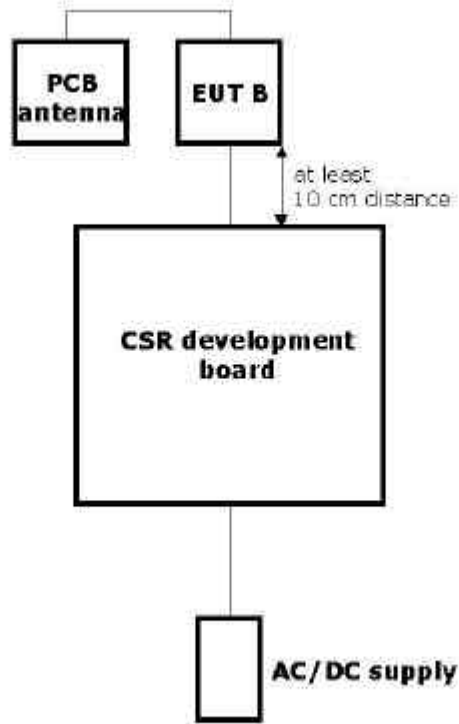

Drawing 1 : Setup for radiated measurements

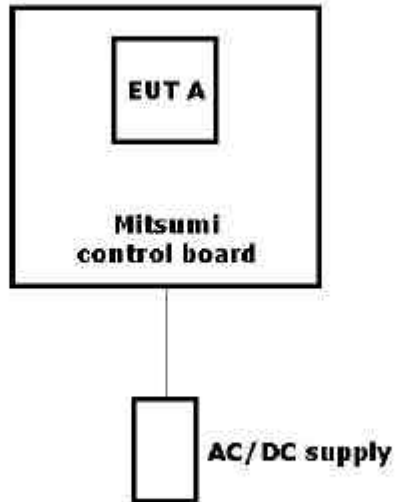


Drawing 2 : Setup for conducted measurements

8. Annex

Measurement plots

Occupied Bandwidth

Op. Mode Setup Port
 op-mode 1 setup 1 temporary
 antenna
 connector

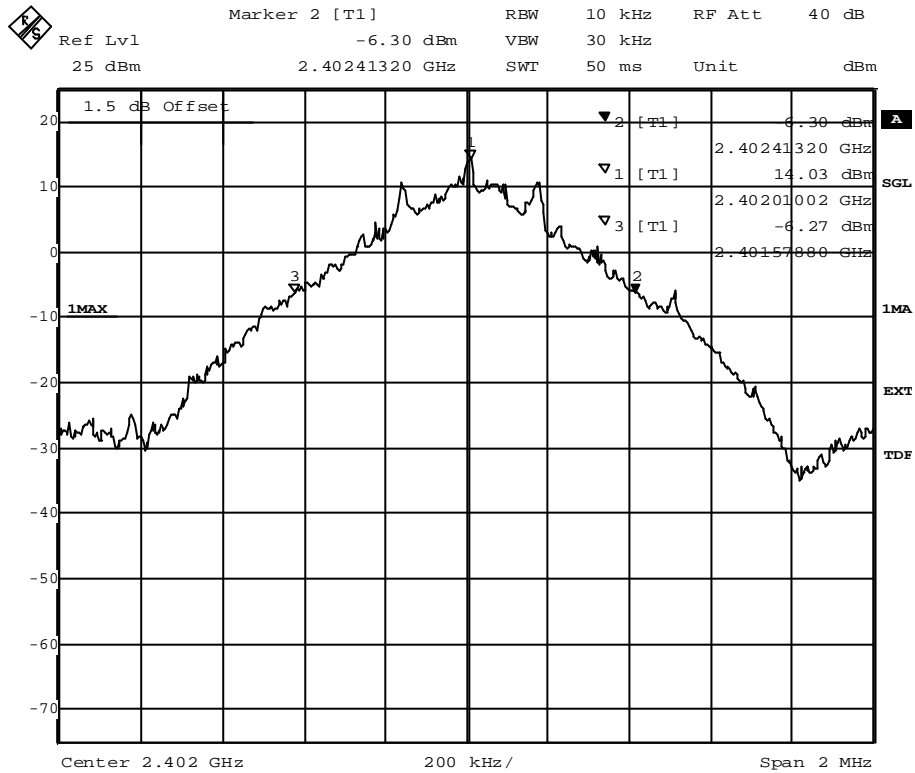


Title: 20dB Bandwidth
 Comment A: CH B: 2402 MHz; 20dB bandwidth (kHz):834.4
 Date: 21.MAY.2002 14:33:36

20 dB bandwidth



Op. Mode **Setup** **Port**
 op-mode 3 setup 1 temporary
 antenna
 connector

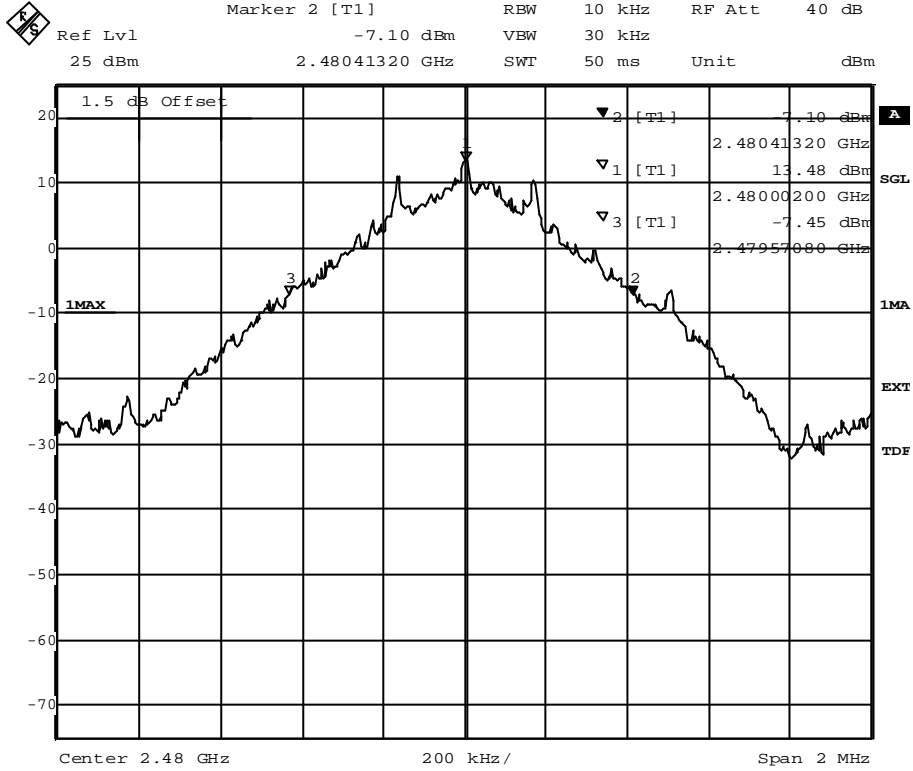

Title: 20dB Bandwidth
 Comment A: CH T: 2480 MHz; 20dB bandwidth (kHz):842.4
 Date: 21.MAY.2002 15:36:55

20 dB bandwidth




Op. Mode **Setup** **Port**
op-mode 4 setup 1 temporary
 antenna
 connector



13.Jun 02 21:00
Ref 35.5 dBm

*Att 40 dB

*RBW 10 kHz Delta 3 [T1]
*VBW 30 kHz -20.00 dB
SWT 20 ms -320.00000000 kHz

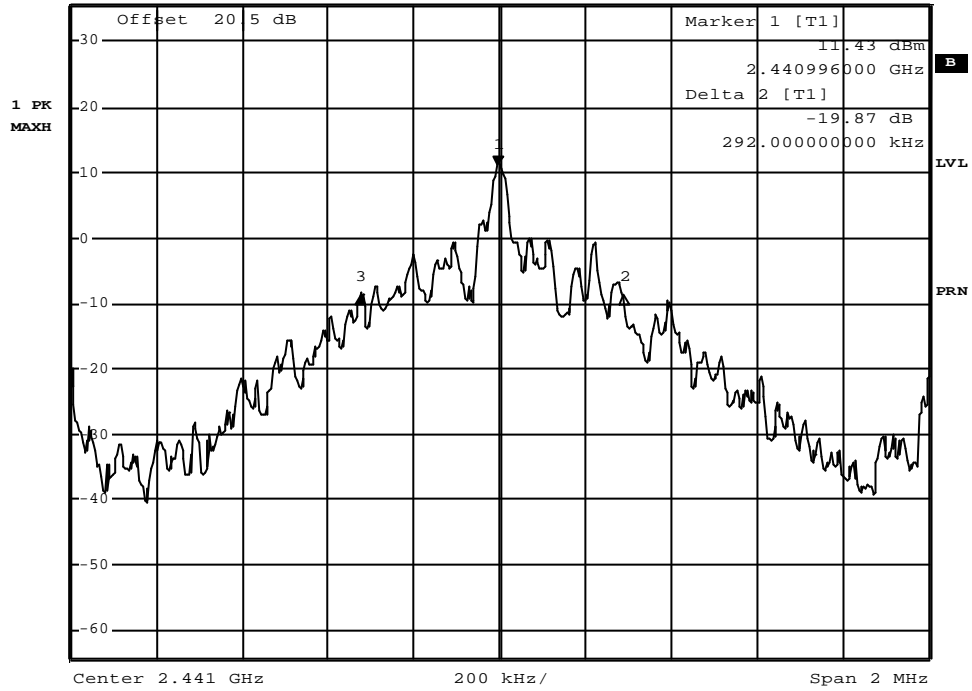

Date: 13.JUN.2002 21:00:04


20 dB bandwidth



Op. Mode **Setup** **Port**
op-mode 5 setup 1 temporary
 antenna
 connector



15.Jun 02 18:01 *RBW 10 kHz Delta 3 [T1]
Ref 35.5 dBm *Att 40 dB *VBW 30 kHz -20.27 dB
SWT 20 ms -380.00000000 kHz

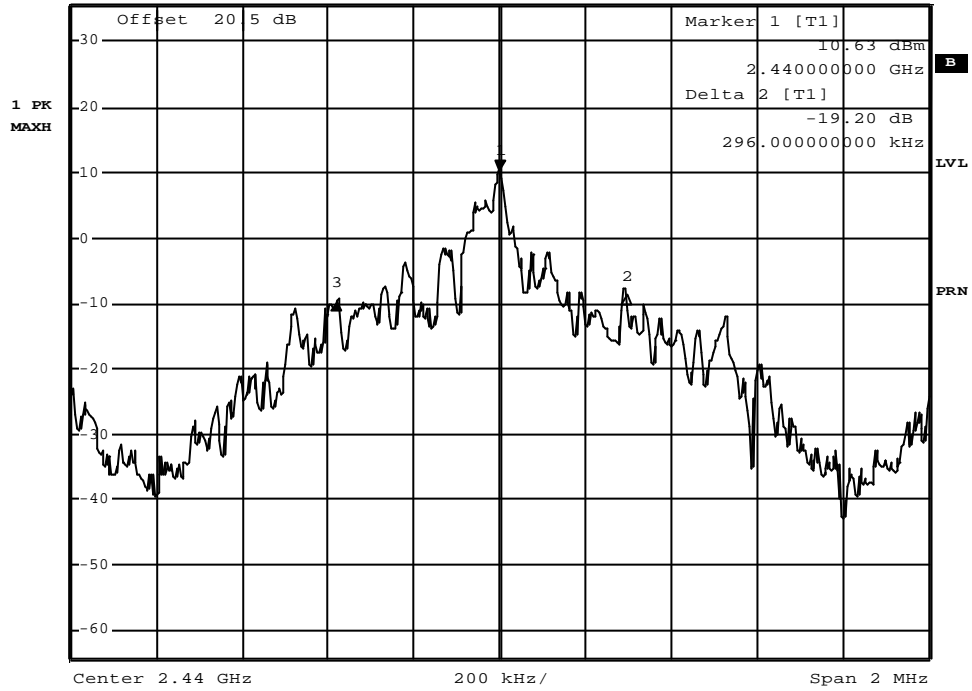


Date: 15.JUN.2002 18:01:35

20 dB bandwidth



Peak Power Output

| | | |
|-----------------|--------------|-----------------------------|
| Op. Mode | Setup | Port |
| op-mode 1 | setup 1 | temporary antenna connector |

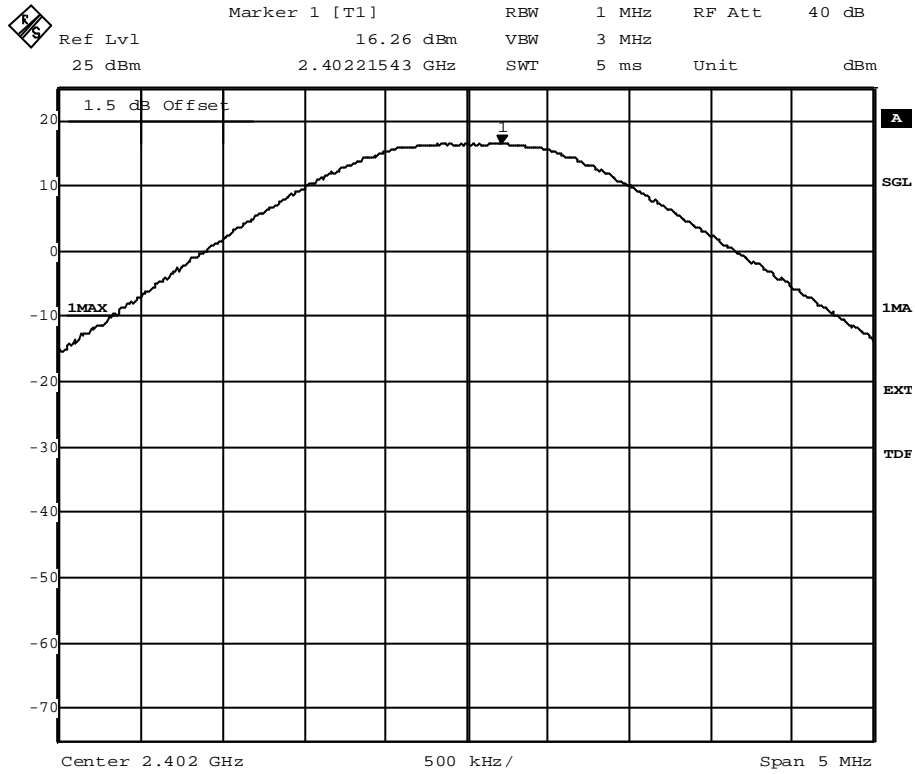


Title: Peak outputpower Power
Comment A: CH B: 2402 MHz
Date: 21.MAY.2002 14:34:03

peak output power




Op. Mode **Setup** **Port**
op-mode 2 setup 1 temporary
 antenna
 connector

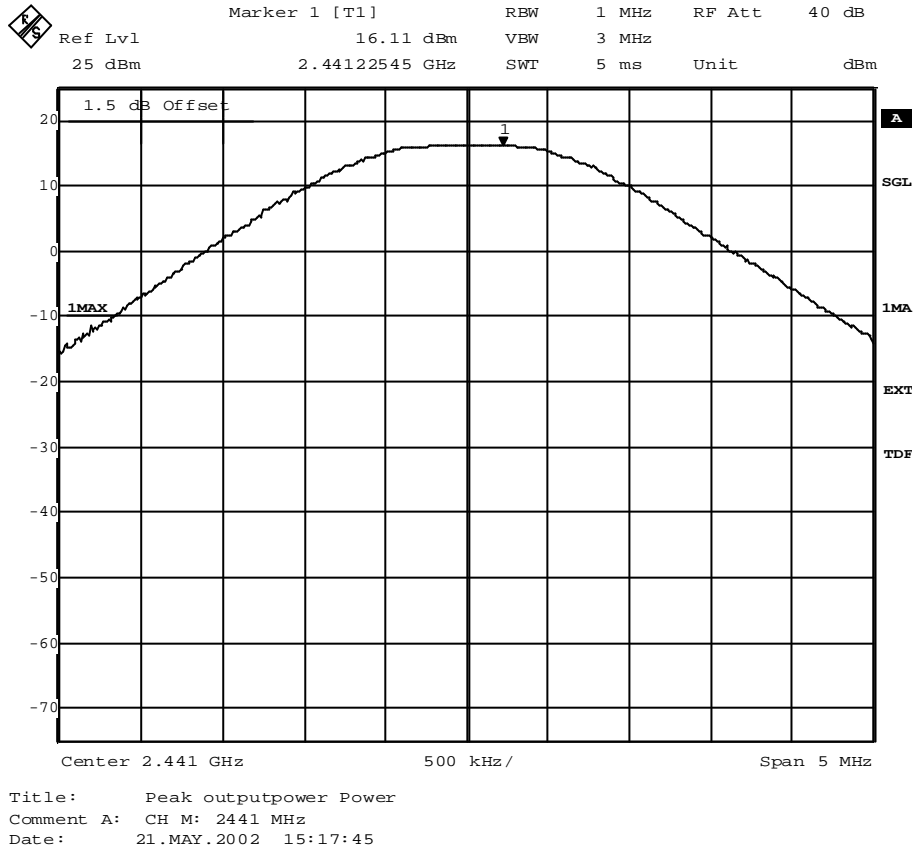

peak output power



Op. Mode **Setup** **Port**
op-mode 3 setup 1 temporary
 antenna
 connector

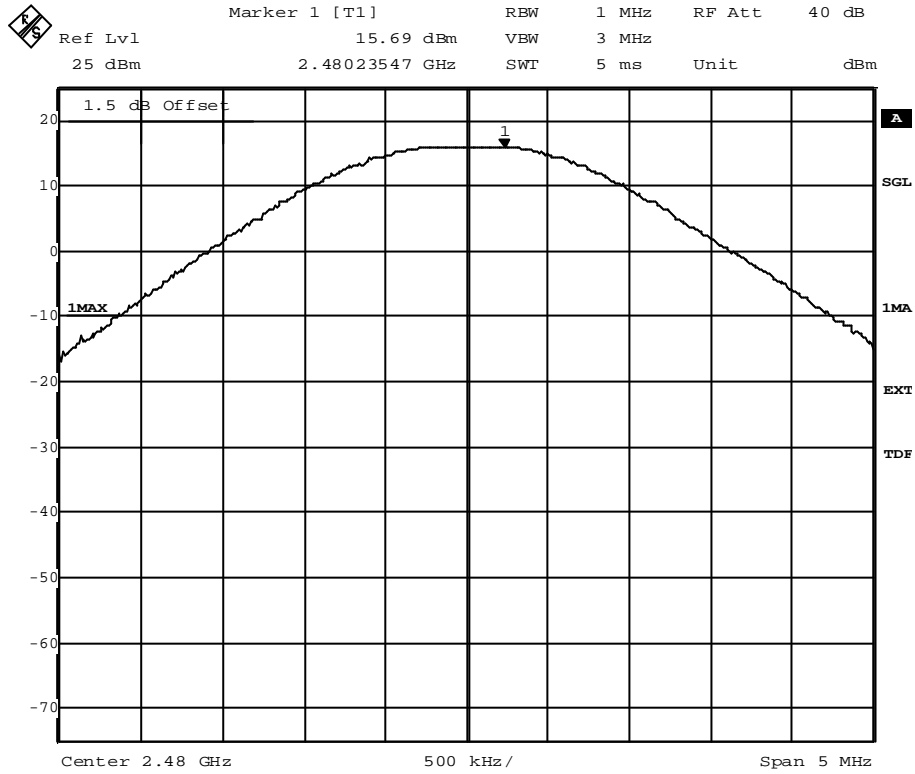


Title: Peak outputpower Power
Comment A: CH T: 2480 MHz
Date: 21.MAY.2002 15:37:21

peak output power



Op. Mode **Setup** **Port**
op-mode 4 setup 1 temporary
 antenna
 connector

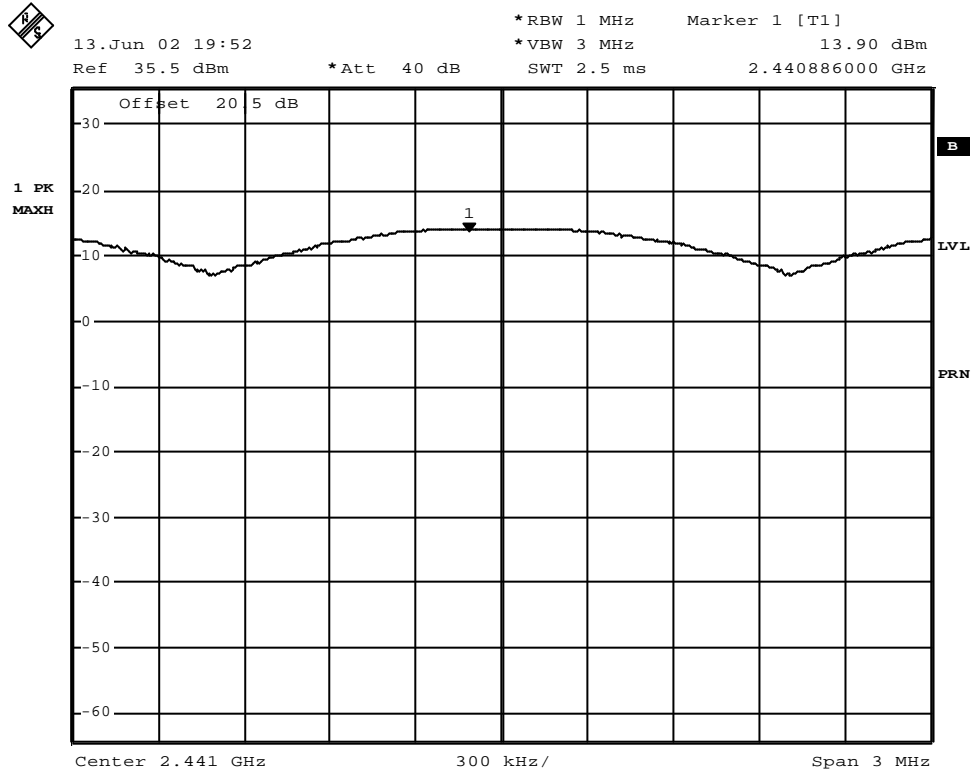


Date: 13.JUN.2002 19:52:53

peak output power



Op. Mode **Setup** **Port**
op-mode 5 setup 1 temporary
 antenna
 connector

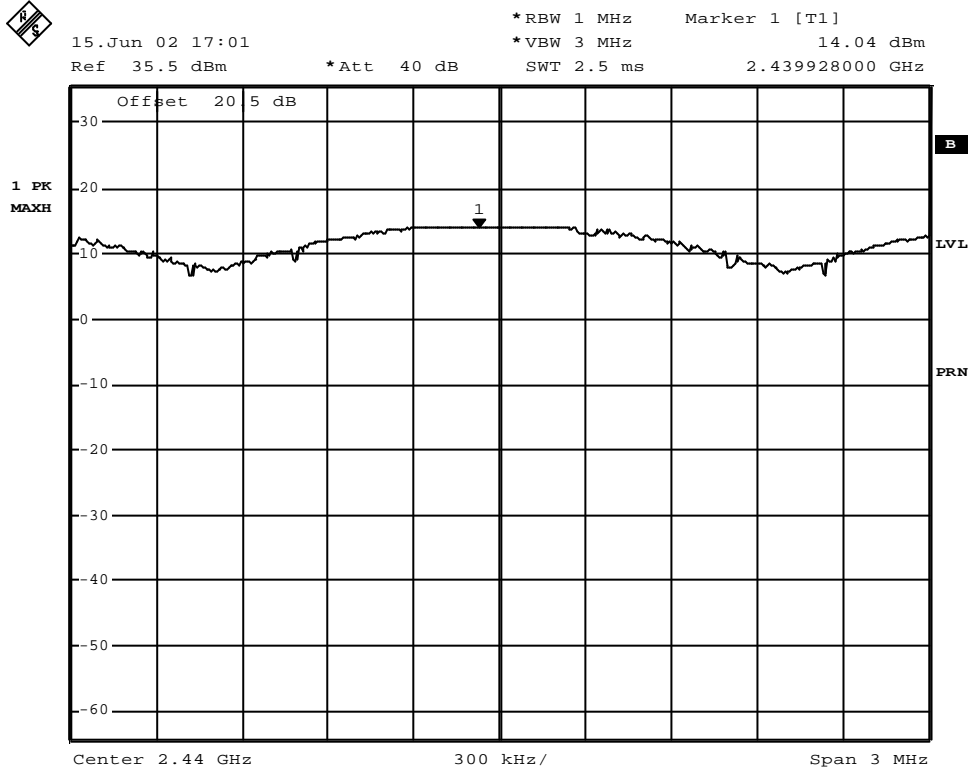


Date: 15.JUN.2002 17:01:34

peak output power

Spurious RF Conducted Emissions

Op. Mode **Setup** **Port**
 op-mode 1 setup 1 temporary
 antenna
 connector

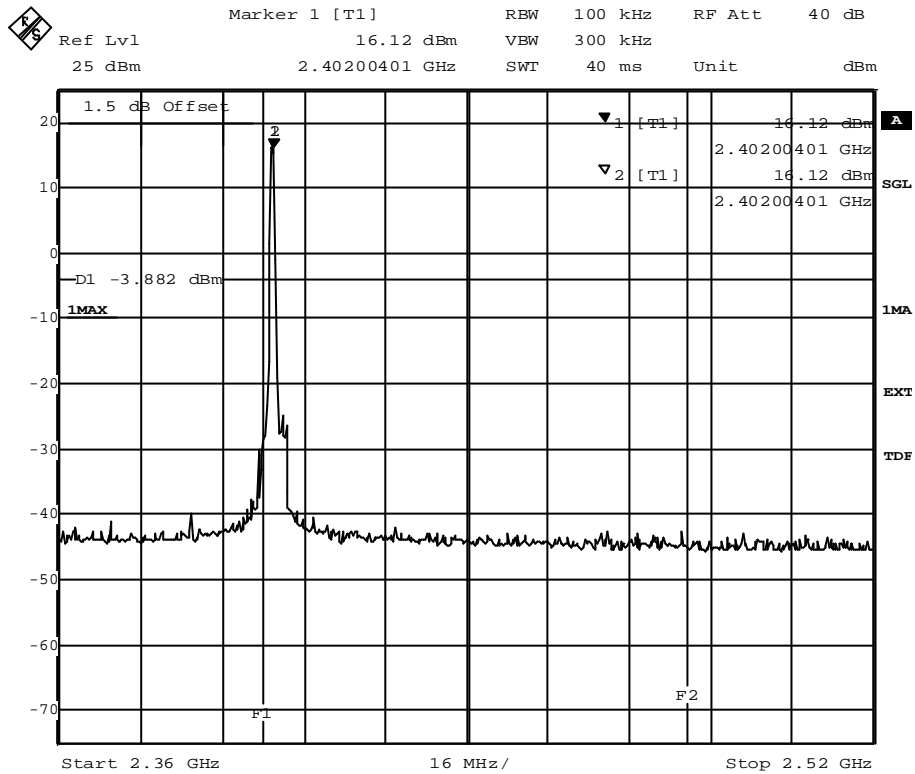


Title: Band Edge Compliance
 Comment A: CH B: 2402 MHz
 Date: 21.MAY.2002 14:18:11

Band edge compliance




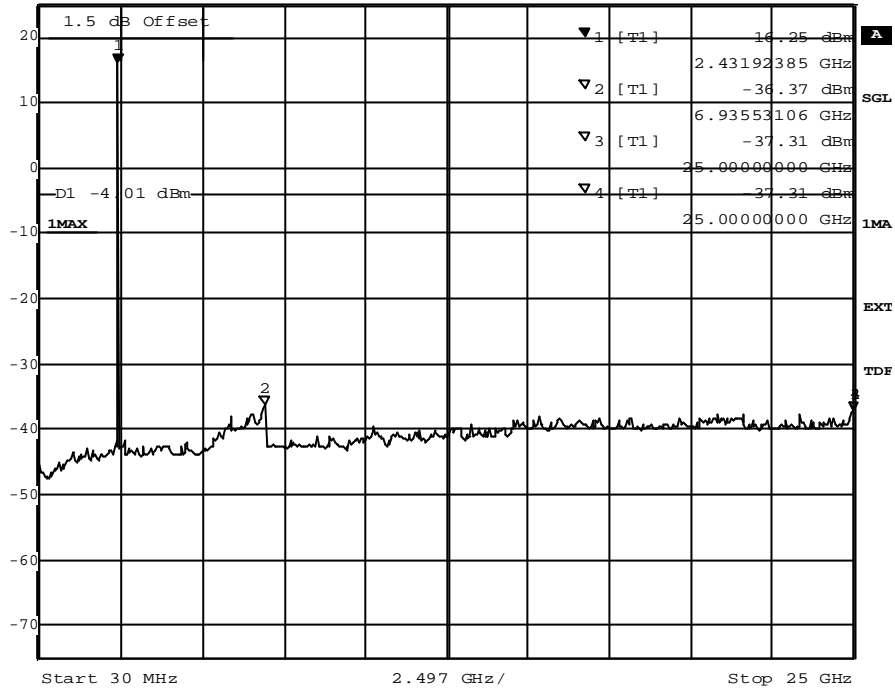
Marker 1 [T1] RBW 100 kHz RF Att 40 dB
 Ref Lvl 16.17 dBm VBW 300 kHz
 25 dBm 2.38188377 GHz SWT 330 s Unit dBm

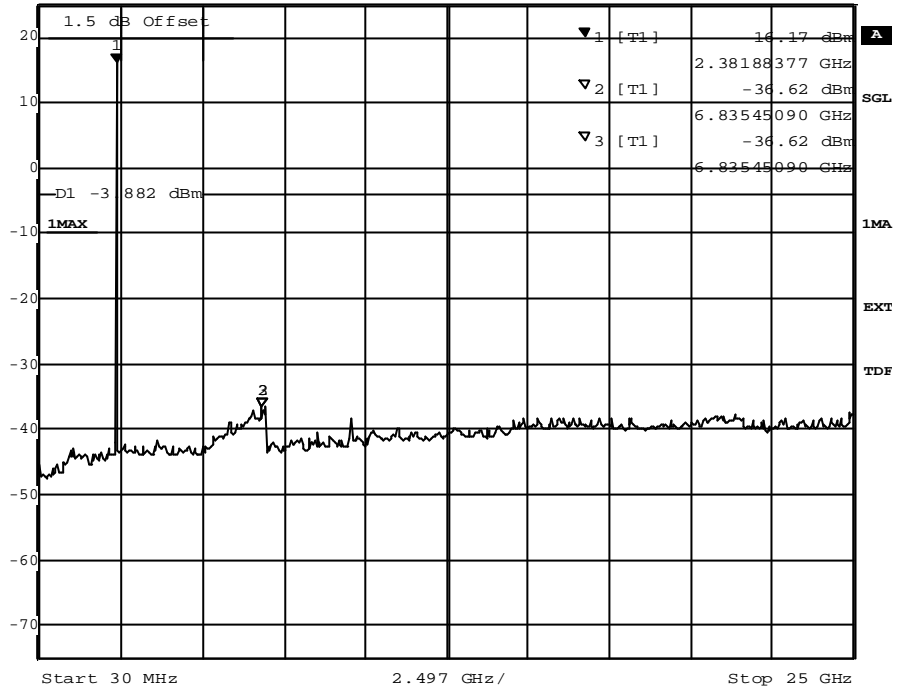

Title: spurious emissions
 Comment A: CH B: 2402 MHz
 Date: 21.MAY.2002 14:29:48


Spurious emissions



 Marker 1 [T1] RBW 100 kHz RF Att 40 dB
 Ref Lvl 16.25 dBm VBW 300 kHz
 25 dBm 2.43192385 GHz SWT 330 s Unit dBm



Title: spurious emissions
 Comment A: CH M: 2441 MHz
 Date: 21.MAY.2002 15:13:47

Spurious emissions


 Marker 1 [T1] RBW 100 kHz RF Att 40 dB
 Ref Lvl 15.69 dBm VBW 300 kHz
 25 dBm 2.48196393 GHz SWT 330 s Unit dBm

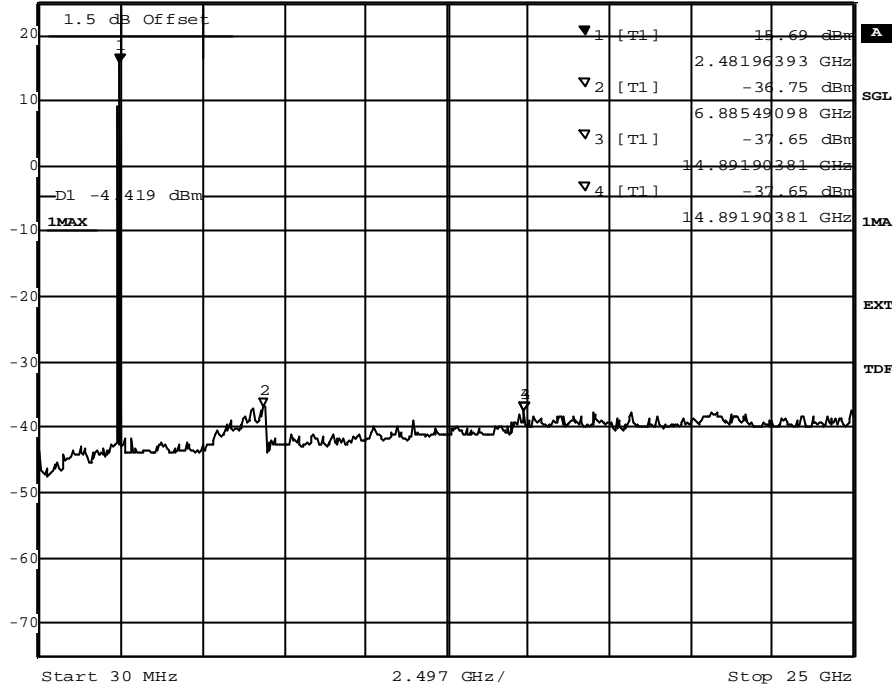

Title: spurious emissions
 Comment A: CH T: 2480 MHz
 Date: 21.MAY.2002 15:33:03


Spurious emissions



13.Jun 02 20:34
 Ref 35.5 dBm

*Att 40 dB

RBW 300 kHz Delta 3 [T1] -0.00 dB
 *VBW 300 kHz
 SWT 100 ms -10.000000 ms

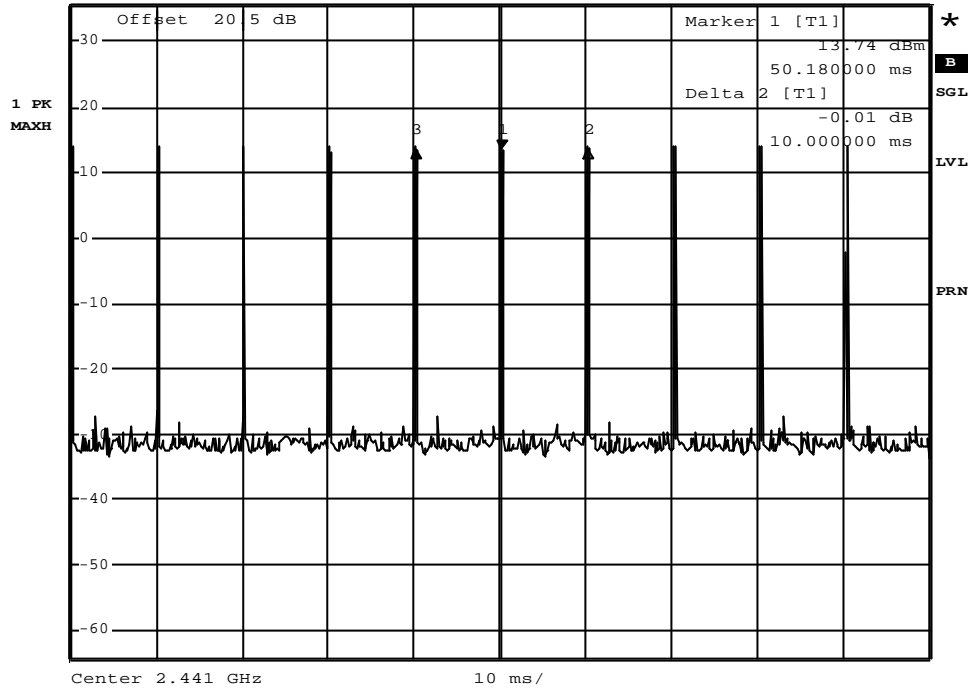


Date: 13.JUN.2002 20:34:34

Dwell time



13.Jun 02 20:33 RBW 300 kHz Delta 2 [T1]
 Ref 35.5 dBm *Att 40 dB *VBW 300 kHz 0.11 dB
 SWT 200 μs 128.000000 μs

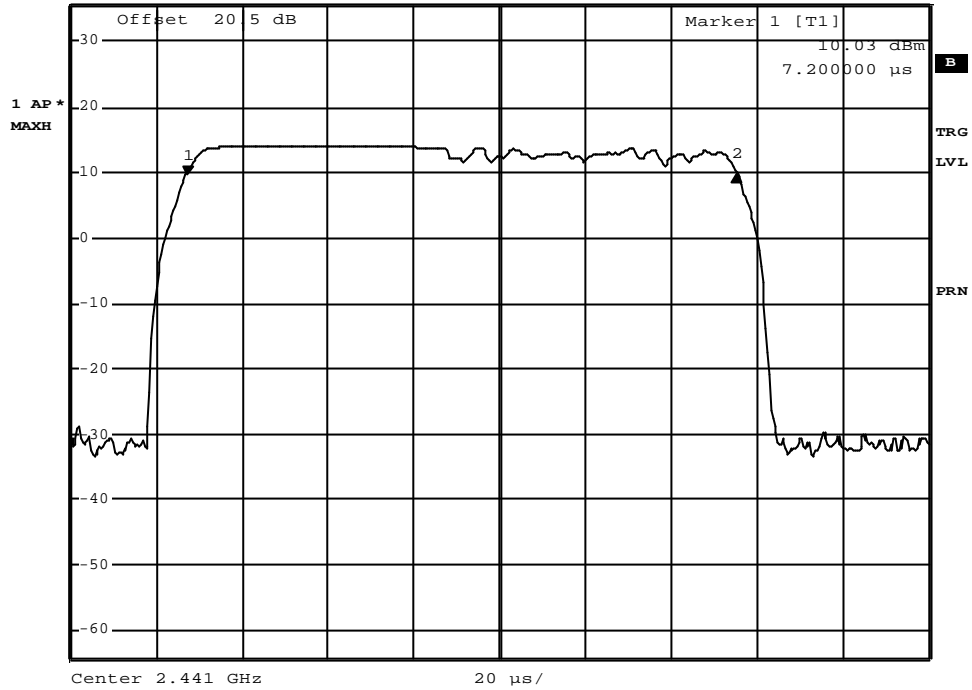

Date: 13.JUN.2002 20:33:24

Dwell time




Op. Mode **Setup** **Port**
op-mode 5 setup 1 temporary
 antenna
 connector



15.Jun 02 17:03
Ref 35.5 dBm

*Att 40 dB

RBW 300 kHz Delta 2 [T1]
*VBW 300 kHz 0.02 dB
SWT 15 s 5.129800 s

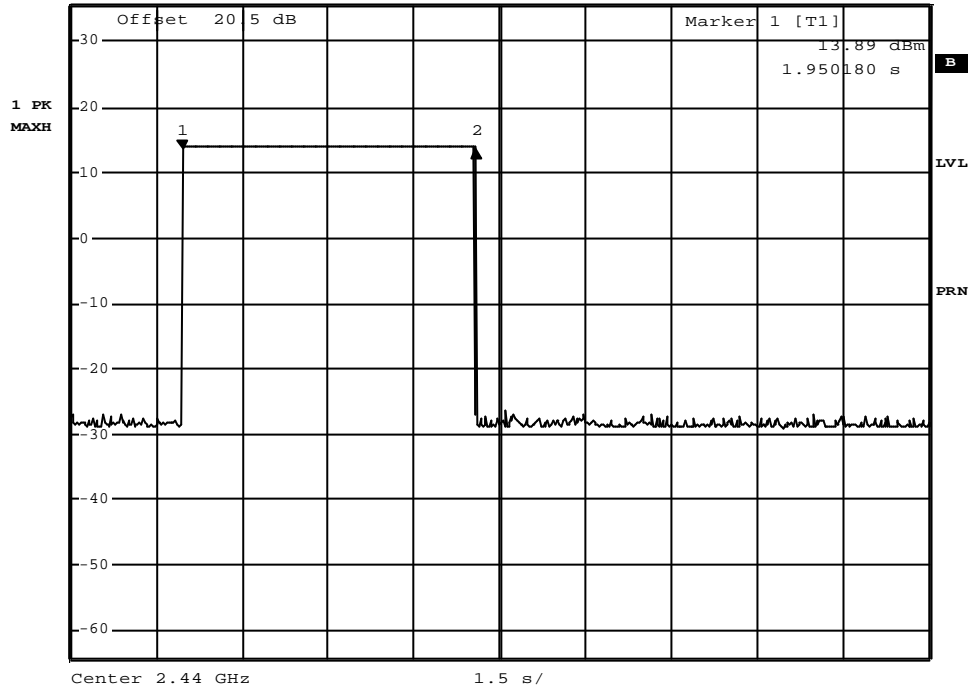

Date: 15.JUN.2002 17:03:52


Dwell time



15.Jun 02 17:04
 Ref 35.5 dBm

*Att 40 dB

RBW 300 kHz Delta 3 [T1]
 *VBW 300 kHz 0.00 dB
 SWT 100 ms -20.000000 ms

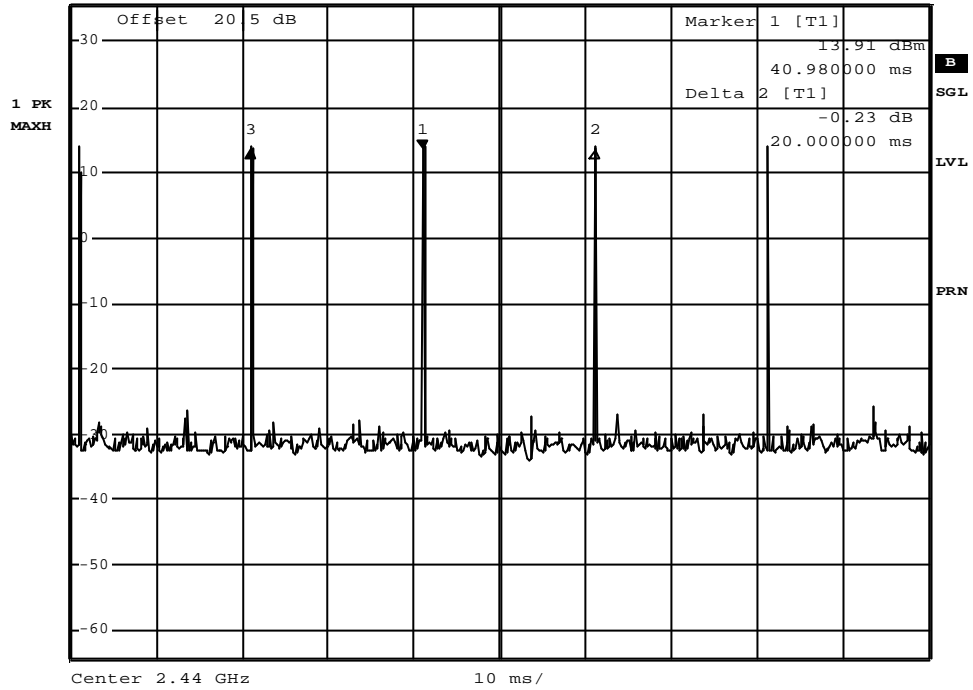


Date: 15.JUN.2002 17:04:50

Dwell time



15.Jun 02 17:05 RBW 300 kHz Delta 2 [T1]
 Ref 35.5 dBm *Att 40 dB *VBW 300 kHz 0.12 dB
 SWT 200 μ s 128.800000 μ s

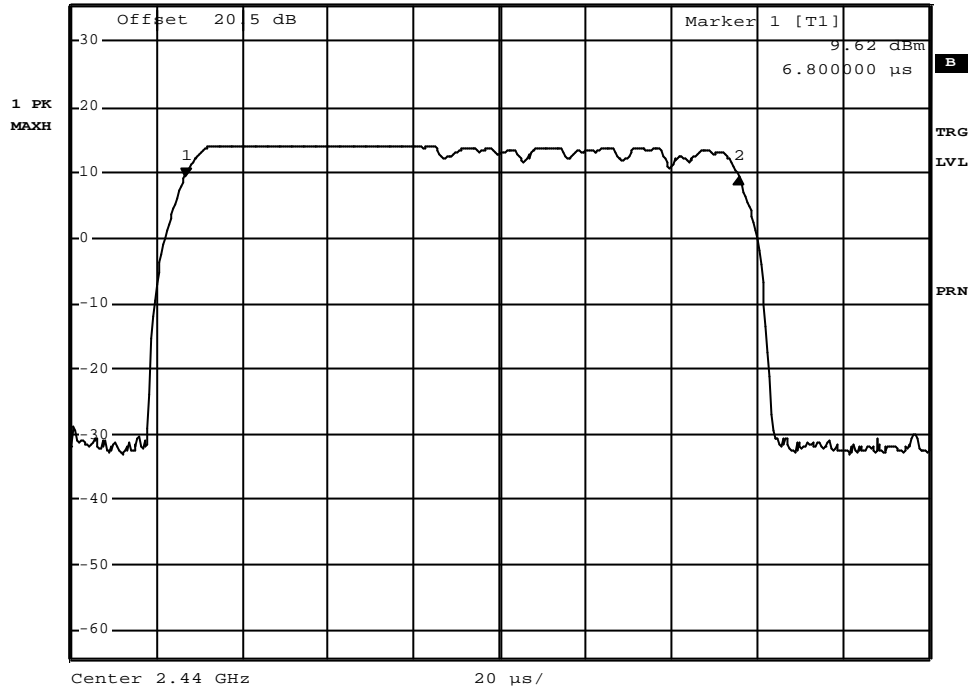

Date: 15.JUN.2002 17:05:43

Dwell time



Power Density


| | | |
|-----------------|--------------|-----------------------------|
| Op. Mode | Setup | Port |
| op-mode 4 | setup 1 | temporary antenna connector |



13.Jun 02 20:46
Ref 35.5 dBm

*Att 40 dB

*RBW 3 kHz Marker 1 [T1]
*VBW 3 kHz 4.00 dBm
SWT 450 ms 2.441004000 GHz

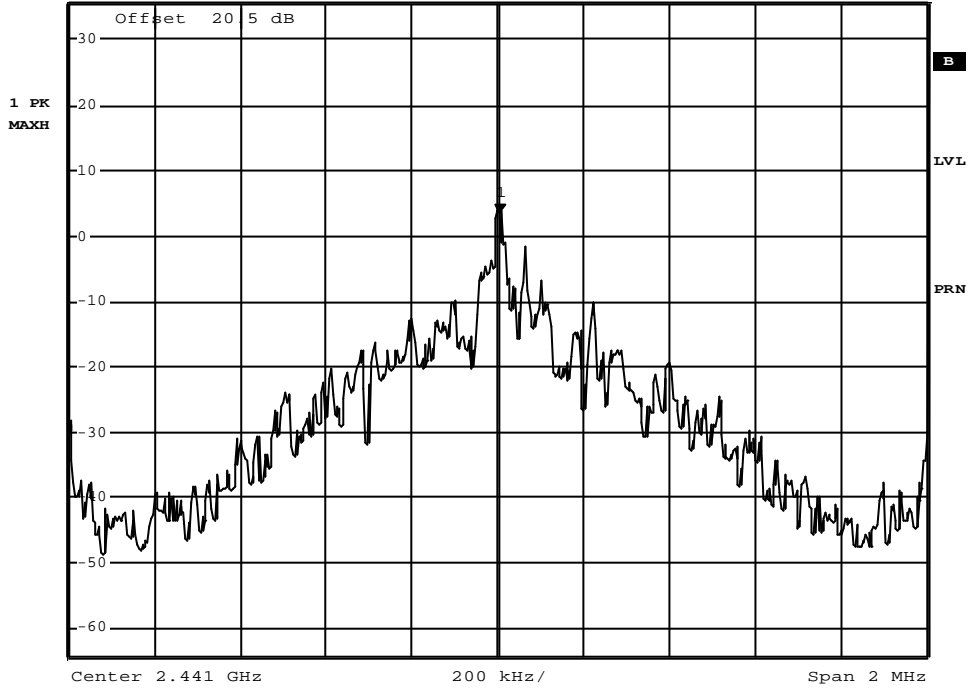

Date: 13.JUN.2002 20:46:30

power density


Op. Mode **Setup** **Port**
 op-mode 5 setup 1 temporary
 antenna
 connector



15.Jun 02 17:13
 Ref 35.5 dBm

*Att 40 dB

*RBW 3 kHz Marker 1 [T1]
 *VBW 3 kHz 1.37 dBm
 SWT 450 ms 2.440008000 GHz

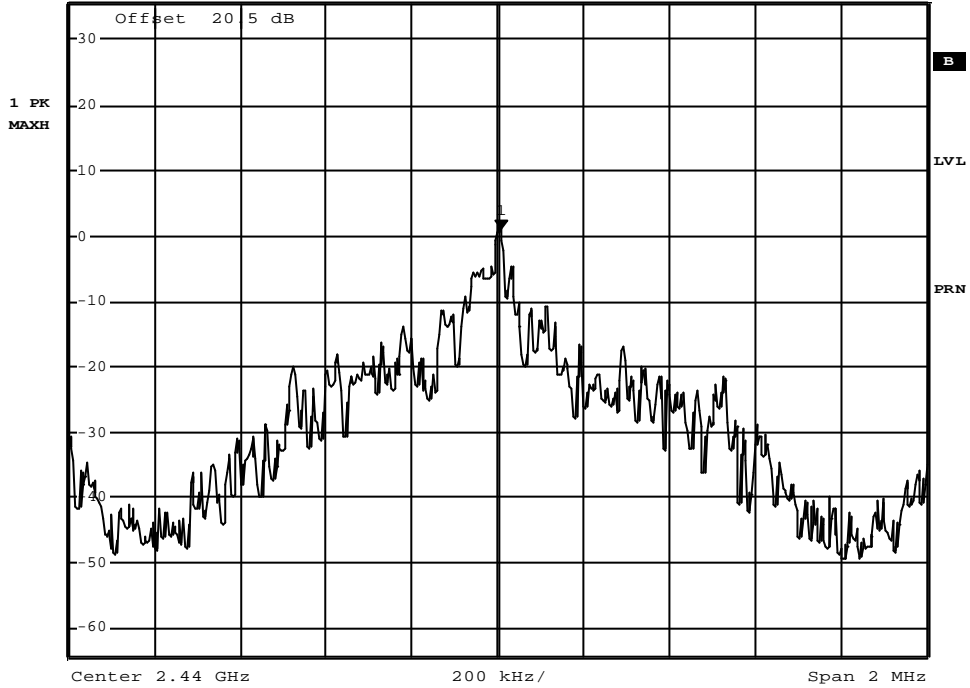


Date: 15.JUN.2002 17:13:35

power density



Channel Separation

Op. Mode **Setup** **Port**
 op-mode 6 setup 1 temporary
 antenna
 connector

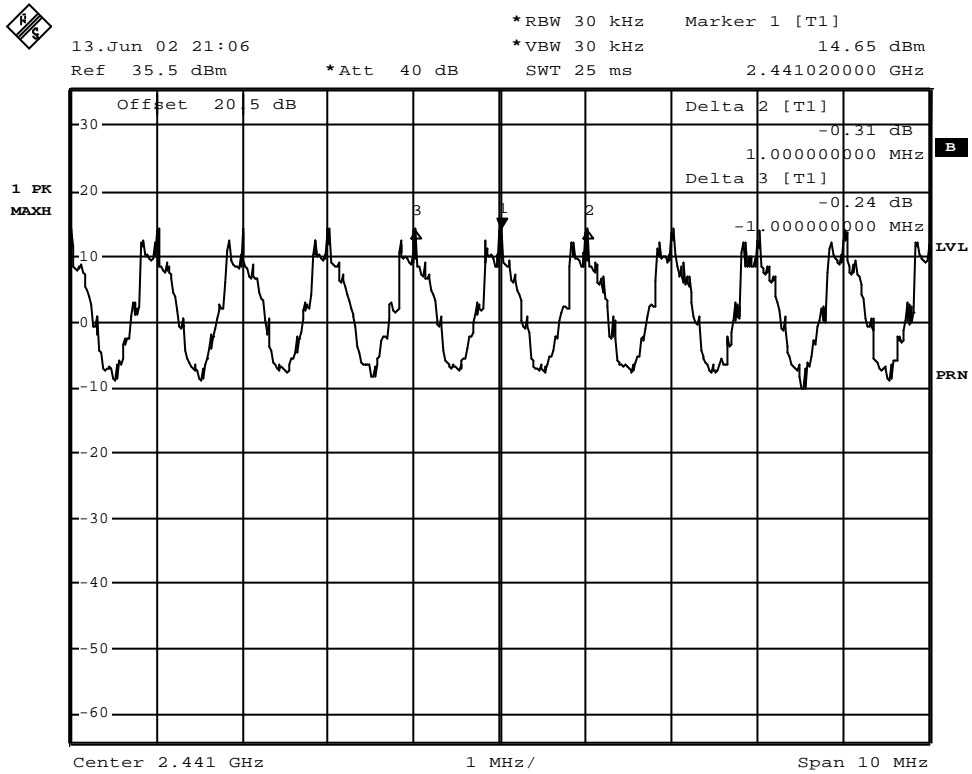

Date: 13.JUN.2002 21:07:00

channel separation