



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR230700149803

Page: 1 of 200

TEST REPORT

Application No.: SHCR2307001498AT
FCC ID: POTCFIZWE1
IC: 4773A-CFIZWE1
Applicant: Inventec Appliances Corp.
Address of Applicant: No.37, Wugong 5th Road, New Taipei industrial Park, Wugu District, New Taipei City, Taiwan.
Manufacturer: Inventec Appliances Corp.
Address of Manufacturer: No.37, Wugong 5th Road, New Taipei industrial Park, Wugu District, New Taipei City, Taiwan.
Equipment Under Test (EUT):
EUT Name: Wireless Earbuds
Model No.: CFI-ZWE1
HVIN: Left: CFI-ZWE1-L; Right: CFI-ZWE1-R
Trade Mark: SONY
Standard(s) : 47 CFR Part 15, Subpart C 15.247
RSS-247 Issue 2, February 2017
RSS-Gen Issue 5 Amendment 2 (February 2021)
Date of Receipt: 2023-07-26
Date of Test: 2023-08-05 to 2023-09-04
Date of Issue: 2023-09-04

Test Result:

Pass*

* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR230700149803

Page: 2 of 200

<i>Revision Record</i>			
Version	Description	Date	Remark
00	Original	2023-09-04	/

Authorized for issue by:			
Tested By			
	<hr/> Micheal Niu /Project Engineer		
Approved By			
	<hr/> Parlam Zhan /Reviewer		

2 Test Summary

Radio Spectrum Technical Requirement				
Item	FCC Requirement	IC Requirement	Method	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	RSS-Gen Clause 6.8	N/A	Customer Declaration
Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence	47 CFR Part 15, Subpart C 15.247(a)(1),(g),(h)	RSS-247 Section 5.1(a)	N/A	Customer Declaration

N/A: Not applicable

Radio Spectrum Matter Part				
Item	FCC Requirement	IC Requirement	Method	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.207	RSS-Gen Section 8.8	ANSI C63.10 (2013) Section 6.2	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247(b)(1)	RSS-247 Section 5.4(b)	ANSI C63.10 (2013) Section 7.8.5	Pass
20dB Bandwidth	47 CFR Part 15, Subpart C 15.247(a)(1)	RSS-247 Section 5.1(a)	ANSI C63.10 (2013) Section 7.8.7	Pass
Carrier Frequencies Separation	47 CFR Part 15, Subpart C 15.247a(1)	RSS-247 Section 5.1(b)	ANSI C63.10 (2013) Section 7.8.2	Pass
Hopping Channel Number	47 CFR Part 15, Subpart C 15.247a(1)(iii)	RSS-247 Section 5.1(d)	ANSI C63.10 (2013) Section 7.8.3	Pass
Dwell Time	47 CFR Part 15, Subpart C 15.247a(1)(iii)	RSS-247 Section 5.1(d)	ANSI C63.10 (2013) Section 7.8.4	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247(d)	RSS-247 Section 5.5	ANSI C63.10 (2013) Section 7.8.6	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247(d)	RSS-247 Section 5.5	ANSI C63.10 (2013) Section 7.8.8	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.205 & 15.209	RSS-247 Section 3.3 & RSS-Gen Section 8.9	ANSI C63.10 (2013) Section 6.10.5	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.205 & 15.209	RSS-247 Section 3.3 & RSS-Gen Section 8.9	ANSI C63.10 (2013) Section 6.4,6.5,6.6	Pass
99% Bandwidth	-	RSS-Gen Section 6.7	ANSI C63.10 Section 6.9.3	Pass

3 Contents

	Page
1 COVER PAGE	1
2 Test Summary	3
3 Contents	4
4 General Information	5
4.1 Details of E.U.T.	5
4.2 Power level setting using in test:.....	5
4.3 Description of Support Units	5
4.4 Measurement Uncertainty	6
4.5 Test Location.....	7
4.6 Test Facility	7
4.7 Deviation from Standards.....	7
4.8 Abnormalities from Standard Conditions	7
5 Equipment List	8
6 Radio Spectrum Technical Requirement	10
6.1 Antenna Requirement	10
6.2 Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence.....	11
7 Radio Spectrum Matter Test Results	12
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz).....	12
7.2 Conducted Peak Output Power.....	16
7.3 20dB Bandwidth	17
7.4 Carrier Frequencies Separation	18
7.5 Hopping Channel Number.....	19
7.6 Dwell Time.....	20
7.7 Conducted Band Edges Measurement	21
7.8 Conducted Spurious Emissions	22
7.9 Radiated Emissions which fall in the restricted bands	23
7.10 Radiated Spurious Emissions Below 1GHz	49
7.11 Radiated Spurious Emissions Below 1GHz	55
7.12 Radiated Spurious Emissions Above 1GHz.....	57
7.13 99% Bandwidth	95
8 Test Setup Photo	96
9 EUT Constructional Details (EUT Photos)	96
10 Appendix	97

4 General Information

4.1 Details of E.U.T.

Power supply:	DC 3.85V by battery Charging case Battery Model: 541963 Nominal Voltage: 3.85V Rated capacity: 780mAh Earbuds Battery Model: 1454 Nominal Voltage: 3.85V Rated capacity: 105mAh
Operation Frequency:	2402MHz to 2480MHz
Bluetooth Version:	V5.0 Dual mode
Modulation Type:	GFSK, pi/4DQPSK, 8DPSK
Number of Channels:	79
Channel Spacing:	1MHz
Spectrum Spread Technology:	Frequency Hopping Spread Spectrum(FHSS)
Antenna Type:	Monopole Antenna
Antenna Gain:	Left 2.08dBi (Provided by the manufacturer) Right -0.06dBi (Provided by the manufacturer)

4.2 Power level setting using in test:

Left

Channel	DH	2DH	3DH
	Ant 1	Ant 1	Ant 1
00	46	46	46
39	46	46	46
78	46	46	46

Right

Channel	DH	2DH	3DH
	Ant 1	Ant 1	Ant 1
00	50	50	50
39	50	50	50
78	50	50	50

4.3 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Notebook	LENOVO	K27	EB24537645

4.4 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	8.4 x 10 ⁻⁸
2	Timeout	2s
3	Duty Cycle	0.37%
4	Occupied Bandwidth	3%
5	RF Conducted Power	0.6dB
6	RF Power Density	2.9dB
7	Conducted Spurious Emissions	0.75dB
8	RF Radiated Power	5.2dB (Below 1GHz)
		5.9dB (Above 1GHz)
9	Radiated Spurious Emission Test	4.2dB (Below 30MHz)
		4.5dB (30MHz-1GHz)
		5.1dB (1GHz-18GHz)
		5.4dB (Above 18GHz)
10	Temperature Test	1°C
11	Humidity Test	3%
12	Supply Voltages	1.5%
13	Time	3%

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. E&E Lab

588 West Jindu Road, Xinqiao, Songjiang, 201612 Shanghai, China

Tel: +86 21 6191 5666

Fax: +86 21 6191 5678

No tests were sub-contracted.

Note:

1. SGS is not responsible for wrong test results due to incorrect information (e.g. max. clock frequency, highest internal frequency, antenna gain, cable loss, etc) is provided by the applicant. (if applicable).
2. SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (if applicable).

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **A2LA (Certificate No. 6332.01)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. is accredited by the American Association for Laboratory Accreditation(A2LA).

• **FCC (Designation Number: CN1301)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been recognized as an accredited testing laboratory.

• **ISED (CAB Identifier: CN0020)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. EMC Laboratory has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory.
Company Number: 8617A

• **VCCI (Member No.: 3061)**

The 3m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-13868, C-14336, T-12221, G-10830 respectively.

4.7 Deviation from Standards

None

4.8 Abnormalities from Standard Conditions

None

5 Equipment List

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RF Conducted Test					
Spectrum Analyzer	R&S	FSP-30	SHEM002-1	2022-12-20	2023-12-19
Spectrum Analyzer	Keysight	N9020B	SHEM241-1	2022-12-20	2023-12-19
Spectrum Analyzer	Agilent	N9020A	SHEM181-1	2023-08-02	2024-08-01
Signal Generator	R&S	SMR20	SHEM006-1	2023-08-02	2024-08-01
Signal Generator	Agilent	N5182A	SHEM182-1	2023-08-02	2024-08-01
Communication Tester	R&S	CMW270	SHEM183-1	2023-06-01	2024-05-31
Communication Tester	R&S	CMW500	SHEM268-1	2023-06-01	2024-05-31
Power Sensor	Keysight	U2021XA * 4	SHEM184-1	2023-08-02	2024-08-01
Splitter	Anritsu	MA1612A	SHEM185-1	/	/
Coupler	e-meca	803-S-1	SHEM186-1	/	/
High-low Temp Cabinet	Suzhou Zhihe	TL-40	SHEM087-1	2022-11-08	2024-11-07
AC Power Stabilizer	APC	KDF-31020T-V0-F0	SHEM216-1	2022-12-20	2023-12-19
DC Power Supply	MCH	MCH-303A	SHEM210-1	2022-12-20	2023-12-19
Conducted test Cable	/	RF01~RF04	/	2022-12-20	2023-12-19
Switcher	Tonscend	JS0806	SHEM184-1	2023-08-02	2024-08-01
Test software	Tonscend	JS Tonscend BT/WIFI System	Version: 2.6	/	/
Coaxial Cable	TST		SHEM263-1	2023-08-02	2024-08-01
Test software	TST	TST PASS	Version: 2.0	/	/
RF Radiated Test					
EMI test Receiver	R&S	ESU40	SHEM051-1	2022-12-20	2023-12-19
Spectrum Analyzer	R&S	FSP-30	SHEM002-1	2022-12-20	2023-12-19
Communication Tester	R&S	CMW500	SHEM268-1	2023-06-01	2024-05-31
Loop Antenna (9kHz-30MHz)	Schwarzbeck	FMZB1519	SHEM135-1	2022-12-20	2023-12-19
Antenna (25MHz-2GHz)	Schwarzbeck	VULB9168	SHEM048-1	2021-09-11	2023-09-10
Antenna (25MHz-2GHz)	Schwarzbeck	VULB9168	SHEM202-1	2022-05-07	2024-05-06
Horn Antenna (1-18GHz)	Schwarzbeck	HF906	SHEM009-1	2022-08-11	2024-08-10
Horn Antenna (1-18GHz)	Schwarzbeck	BBHA9120D	SHEM050-1	2021-09-18	2023-09-17
Horn Antenna (14-40GHz)	Schwarzbeck	BBHA 9170	SHEM049-1	2021-09-18	2023-09-17
Pre-Amplifier	HP	8447D	SHEM236-1	2023-08-02	2024-08-01
High-amplifier (14-40GHz)	Schwarzbeck	10001	SHEM049-2	2022-12-20	2023-12-19
Band Filter	LORCH	9BRX-875/X150	SHEM156-1	/	/
Band Filter	LORCH	13BRX-1950/X500	SHEM083-2	/	/
Band Filter	LORCH	5BRX-2400/X200	SHEM155-1	/	/
Band Filter	LORCH	5BRX-5500/X1000	SHEM157-2	/	/
High pass Filter	Wainwright	WHK3.0/18G	SHEM157-1	/	/
High pass Filter	Wainwright	WHKS1700	SHEM157-3	/	/
Semi/Fully Anechoic	ST	11*6*6M	SHEM078-2	2021-05-25	2024-05-24
RE test Cable	/	RE01, RE02, RE06	/	2023-01-07	2024-01-06
Test software	ESE	E3	Version: 6.111221a	/	/



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR230700149803

Page: 9 of 200

Conducted Emissions at AC Mains Power Port (150kHz-30MHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
EMI test receiver	Rohde & Schwarz	ESR7	SHEM162-1	2022/12/20	2023/12/19
Line impedance stabilization network	SCHWARZBECK	NSLK8127	SHEM061-1	2022/12/20	2023/12/19
Line impedance stabilization network	EMCO	3816_2	SHEM019-1	2022/12/20	2023/12/19
Pulse limiter	Rohde & Schwarz	ESH3-Z2	SHEM029-1	2022/12/20	2023/12/19
Shielding Room	ZHONGYU	8*4*3M	SHEM079-2	2020/12/20	2023/12/19
CE test Cable	/	/	SHEM172-1	2022/12/20	2023/12/19
Test Software	ESE	e3	Version: 6.191211	N/A	N/A

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is Monopole Antenna and no consideration of replacement. The best case gain of the Left antenna is 2.08dBi, Right antenna 0 is -0.06dBi.

Antenna location: Refer to internal photo.

6.2 Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence

6.2.1 Test Requirement:

47 CFR Part 15, Subpart C 15.247(a)(1),(g),(h)

6.2.2 Conclusion

Standard Requirement: The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals. Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section. The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

Compliance for section 15.247(a)(1): According to Technical Specification, the pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

> Number of shift register stages: 9

> Length of pseudo-random sequence: $2^9 - 1 = 511$ bits

> Longest sequence of zeros: 8 (non-inverted signal)

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow: Each frequency used equally on the average by each transmitter. According to Technical Specification, the receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any transmitters and shift frequencies in synchronization with the transmitted signals.

Compliance for section 15.247(g): According to Technical Specification, the system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

Compliance for section 15.247(h): According to Technical specification, the system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels. The system is designed not have the ability to coordinated with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.

7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.
 Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz

7.1.1 E.U.T. Operation


Operating Environment:

Temperature: 24.5 °C Humidity: 48.5 % RH Atmospheric Pressure: 1010 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Charge + TX_non-Hop mode_Keep the EUT in charging and continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.1.3 Test Setup Diagram

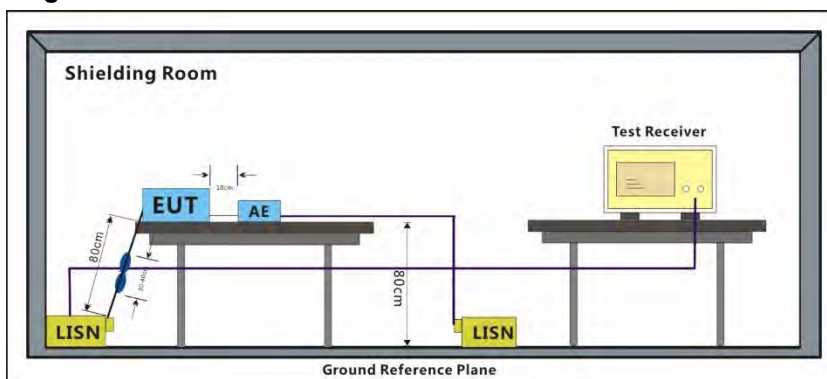


7.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: Level=Read Level+ Cable Loss+ LISN Factor

Test Mode: 00; Line: Live line

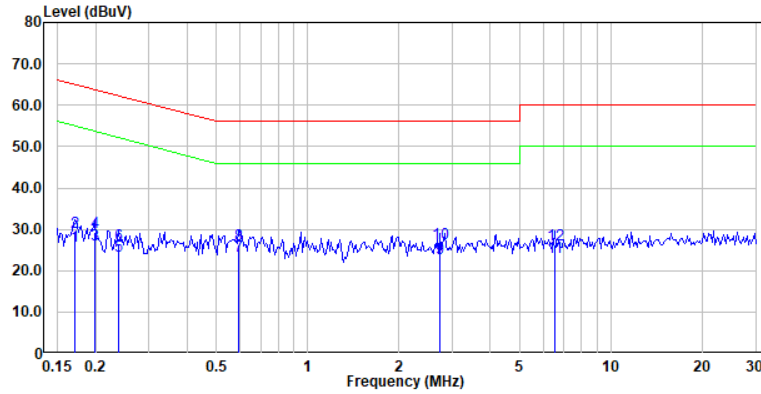


Site: Chamber
Condition :
Mode:

No.	Freq (MHz)	Read level (dBuV)	LISN Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	0.17	6.54	19.56	0.00	26.10	54.94	-28.84	Average
2	0.17	9.65	19.56	0.00	29.21	64.94	-35.73	QP
3	0.20	6.80	19.56	0.00	26.36	53.62	-27.26	Average
4	0.20	9.69	19.56	0.00	29.25	63.62	-34.37	QP
5	0.24	4.05	19.56	0.00	23.61	52.13	-28.52	Average
6	0.24	6.62	19.56	0.00	26.18	62.13	-35.95	QP
7	0.59	4.02	19.58	0.00	23.60	46.00	-22.40	Average
8	0.59	6.60	19.58	0.00	26.18	56.00	-29.82	QP
9	2.74	3.44	19.60	0.00	23.04	46.00	-22.96	Average
10	2.74	6.86	19.60	0.00	26.46	56.00	-29.54	QP
11	6.52	3.49	19.71	0.00	23.20	50.00	-26.80	Average
12	6.52	6.56	19.71	0.00	26.27	60.00	-33.73	QP

Notes: Emission Level = Read Level + LISN Factor + Cable loss

Test Mode: 00; Line: Neutral Line

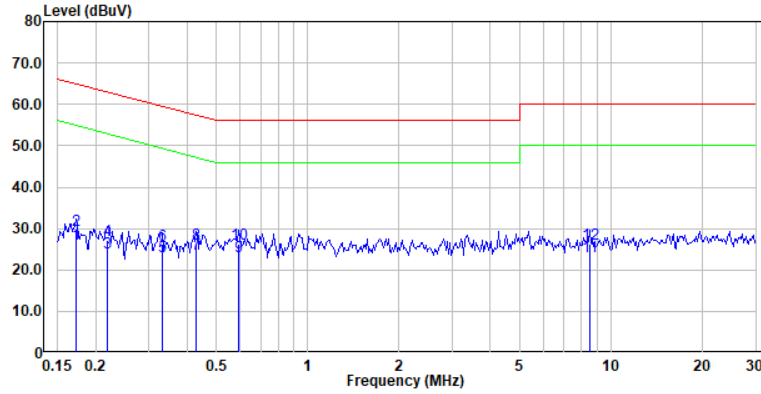

Site: Chamber
 Condition :
 Mode:

No.	Freq (MHz)	Read level (dBuV)	LISN Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	0.17	6.72	19.56	0.00	26.28	54.86	-28.58	Average
2	0.17	9.93	19.56	0.00	29.49	64.86	-35.37	QP
3	0.22	4.74	19.56	0.00	24.30	52.83	-28.53	Average
4	0.22	7.56	19.56	0.00	27.12	62.83	-35.71	QP
5	0.33	3.65	19.57	0.00	23.22	49.40	-26.18	Average
6	0.33	6.49	19.57	0.00	26.06	59.40	-33.34	QP
7	0.43	4.36	19.57	0.00	23.93	47.29	-23.36	Average
8	0.43	6.70	19.57	0.00	26.27	57.29	-31.02	QP
9	0.59	3.52	19.58	0.00	23.10	46.00	-22.90	Average
10	0.59	6.79	19.58	0.00	26.37	56.00	-29.63	QP
11	8.50	3.52	19.74	0.00	23.26	50.00	-26.74	Average
12	8.50	6.41	19.74	0.00	26.15	60.00	-33.85	QP

Notes: Emission Level = Read Level + LISN Factor + Cable loss

7.2 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(1)

Test Method: ANSI C63.10 (2013) Section 7.8.5

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 24.5 °C


Humidity: 48.5 % RH

Atmospheric Pressure: 1010 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.2.3 Test Setup Diagram

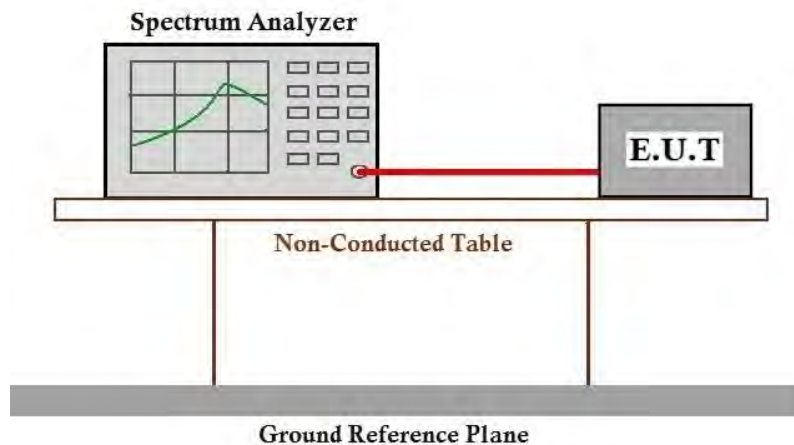

7.2.4 Measurement Procedure and Data

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

Please Refer to Appendix for Details

7.3 20dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247(a)(1)

Test Method: ANSI C63.10 (2013) Section 7.8.7

7.3.1 E.U.T. Operation


Operating Environment:

Temperature: 24.5 °C Humidity: 48.5 % RH Atmospheric Pressure: 1010 mbar

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.3.3 Test Setup Diagram

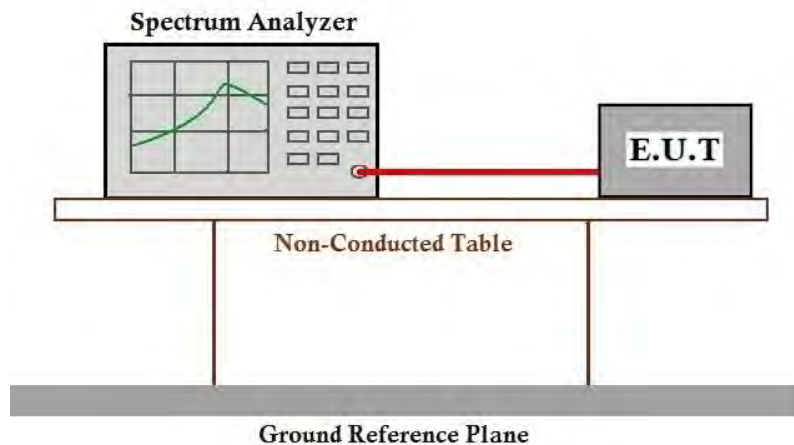

7.3.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.4 Carrier Frequencies Separation

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)

Test Method: ANSI C63.10 (2013) Section 7.8.2

Limit:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

7.4.1 E.U.T. Operation


Operating Environment:

Temperature: 24.5 °C Humidity: 48.5 % RH Atmospheric Pressure: 1010 mbar

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.4.3 Test Setup Diagram

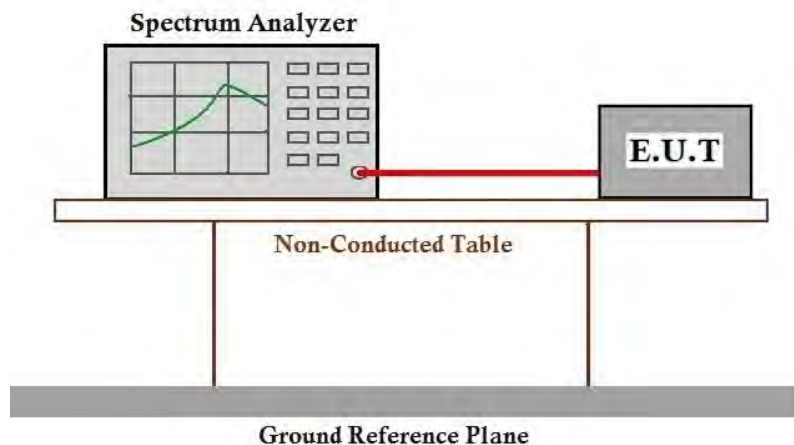

7.4.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.5 Hopping Channel Number

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)(iii)

Test Method: ANSI C63.10 (2013) Section 7.8.3

Limit:

Frequency range(MHz)	Number of hopping channels (minimum)
902-928	50 for 20dB bandwidth <250kHz
	25 for 20dB bandwidth ≥250kHz
2400-2483.5	15
5725-5850	75

7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 24.5 °C


Humidity: 48.5 % RH

Atmospheric Pressure: 1010 mbar

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.5.3 Test Setup Diagram

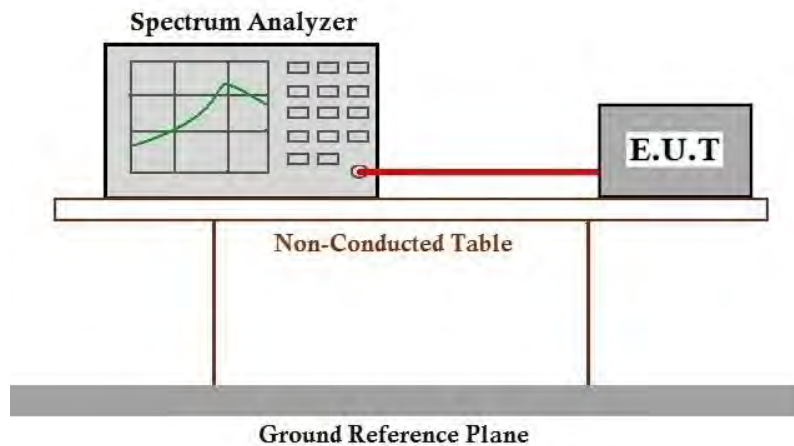

7.5.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.6 Dwell Time

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)(iii)

Test Method: ANSI C63.10 (2013) Section 7.8.4

Limit:

Frequency(MHz)	Limit
902-928	0.4S within a 20S period(20dB bandwidth<250kHz)
	0.4S within a 10S period(20dB bandwidth≥250kHz)
2400-2483.5	0.4S within a period of 0.4S multiplied by the number of hopping channels
5725-5850	0.4S within a 30S period

7.6.1 E.U.T. Operation


Operating Environment:

Temperature: 24.5 °C Humidity: 48.5 % RH Atmospheric Pressure: 1010 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.6.3 Test Setup Diagram

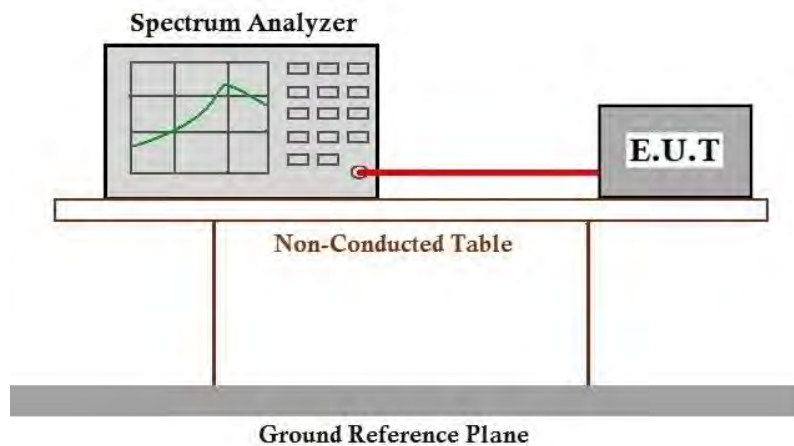

7.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.7 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2013) Section 7.8.6

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.7.1 E.U.T. Operation


Operating Environment:

Temperature: 24.5 °C Humidity: 48.5 % RH Atmospheric Pressure: 1010 mbar

7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.7.3 Test Setup Diagram

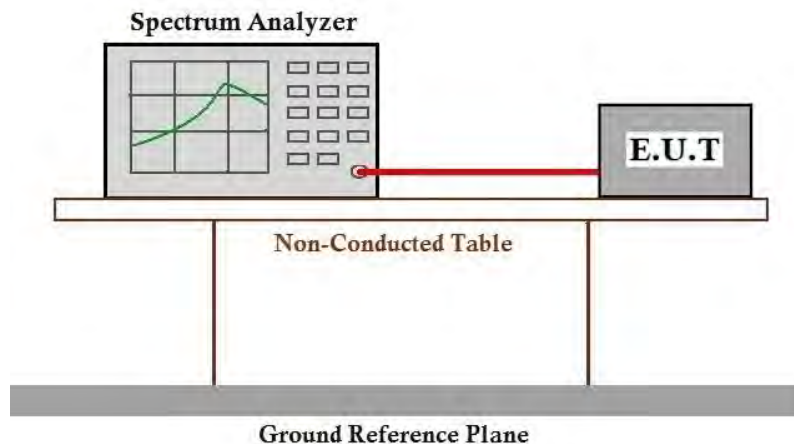

7.7.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.8 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2013) Section 7.8.8

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.8.1 E.U.T. Operation


Operating Environment:

Temperature: 24.5 °C Humidity: 48.5 % RH Atmospheric Pressure: 1010 mbar

7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.8.3 Test Setup Diagram

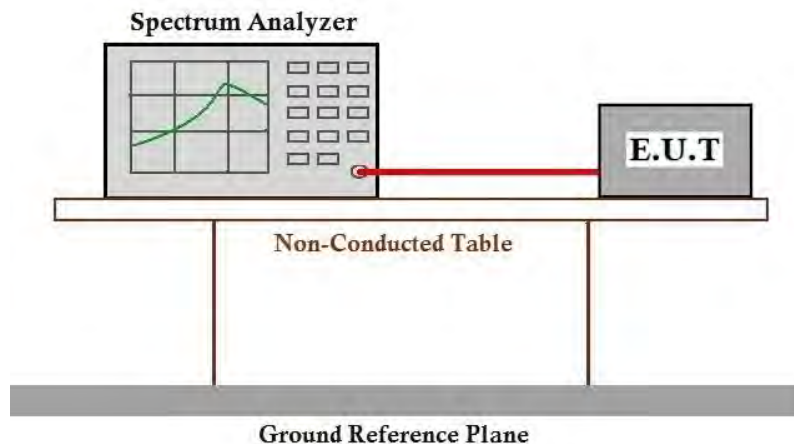

7.8.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.9 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.10.5

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.9.1 E.U.T. Operation


Operating Environment:

Temperature: 25.3 °C Humidity: 46.2 % RH Atmospheric Pressure: 1010 mbar

7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.9.3 Test Setup Diagram

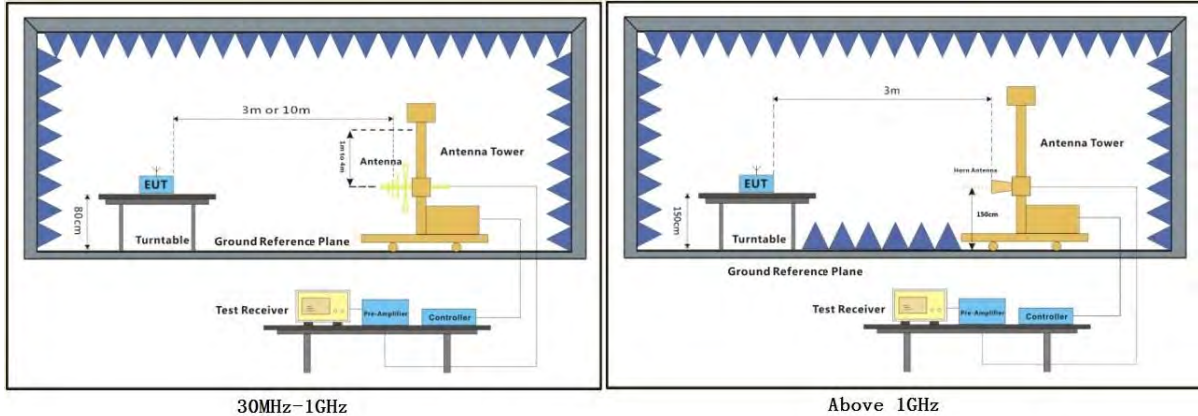

7.9.4 Measurement Procedure and Data


- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Left

Test Mode: 01; Polarity: Horizontal; Modulation:GFSK; Channel:Low

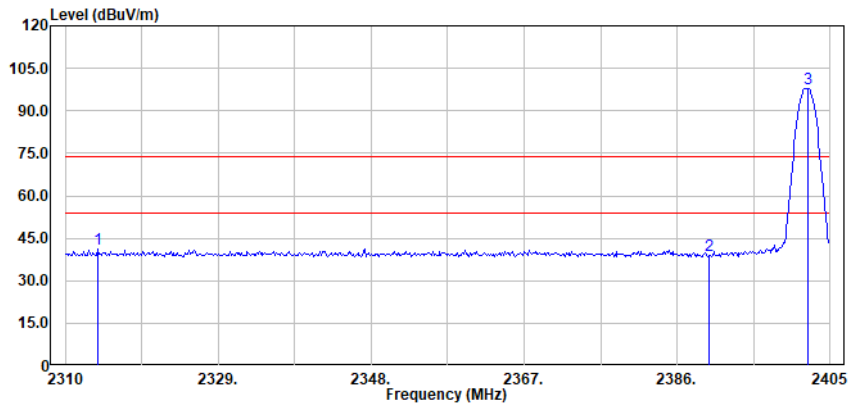


Antenna Polarity :Horizontal

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	2313.99	61.42	27.49	2.65	50.22	41.34	74.00	-32.66	Peak
	2390.00	59.02	27.55	2.66	50.13	39.10	74.00	-34.90	Peak
	2402.25	117.74	27.56	2.67	50.11	97.86	74.00	23.86	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Vertical; Modulation:GFSK; Channel:Low

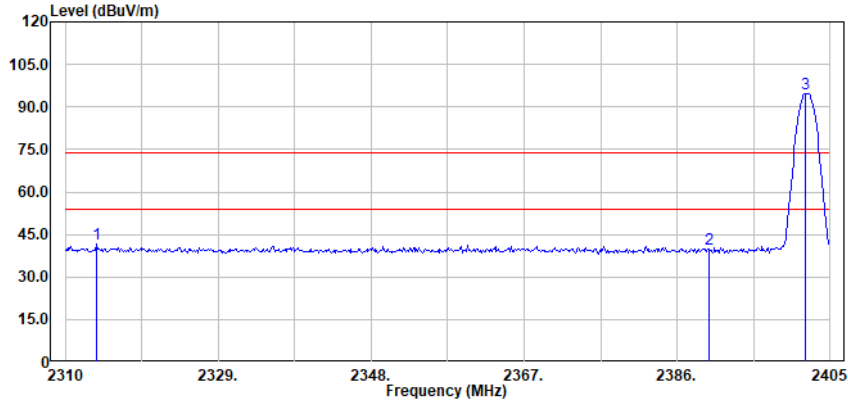


Antenna Polarity :Vertical

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	2313.86	61.68	27.49	2.65	50.22	41.60	74.00	-32.40	Peak
	2390.00	59.61	27.55	2.66	50.13	39.69	74.00	-34.31	Peak
	2401.97	114.51	27.55	2.67	50.11	94.62	74.00	20.62	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Horizontal; Modulation:GFSK; Channel:High

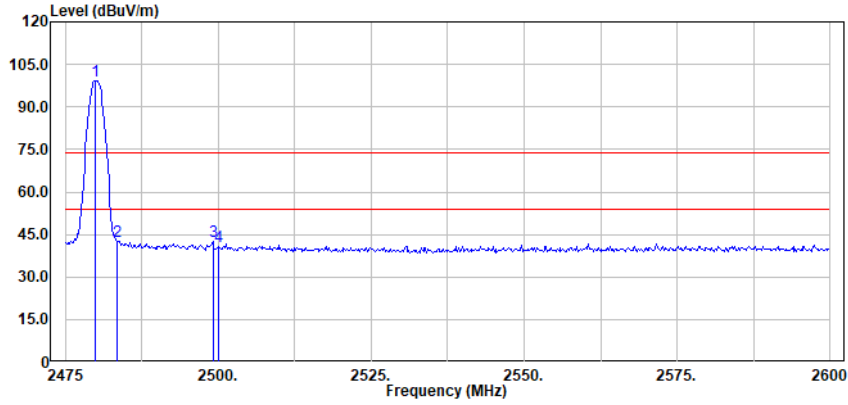


Antenna Polarity :Horizontal

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
	2479.89	118.59	27.58	2.73	49.90	99.00	74.00	25.00	Peak
	2483.50	62.21	27.58	2.73	49.90	42.62	74.00	-31.38	Peak
	2499.09	62.29	27.59	2.74	49.94	42.68	74.00	-31.32	Peak
	2500.00	60.21	27.59	2.74	49.94	40.60	74.00	-33.40	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Vertical; Modulation:GFSK; Channel:High

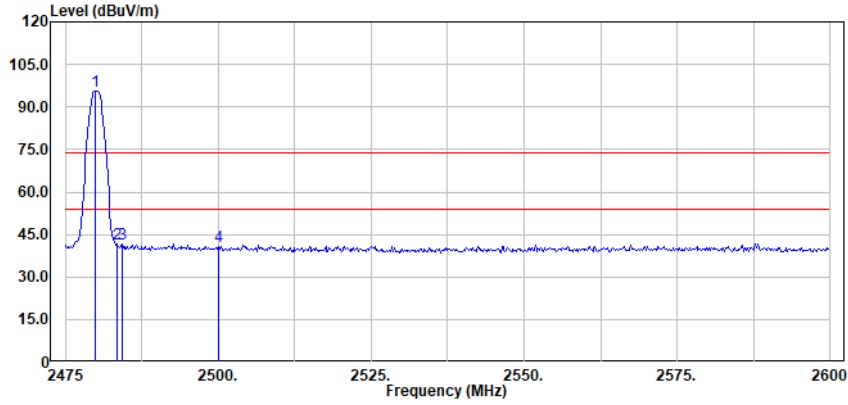


Antenna Polarity :Vertical

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	2479.89	115.06	27.58	2.73	49.90	95.47	74.00	21.47	Peak
	2483.50	61.05	27.58	2.73	49.90	41.46	74.00	-32.54	Peak
	2484.24	61.19	27.58	2.73	49.91	41.59	74.00	-32.41	Peak
	2500.00	60.32	27.59	2.74	49.94	40.71	74.00	-33.29	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Horizontal; Modulation: $\pi/4$ DQPSK; Channel: Low

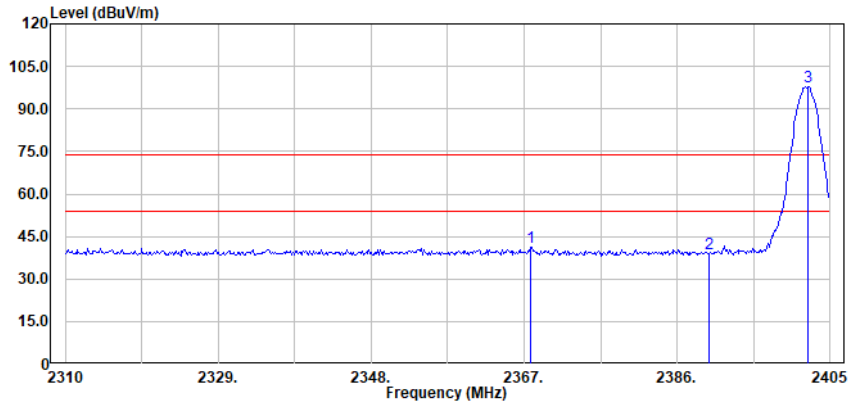


Antenna Polarity :Horizontal

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
	2367.83	61.35	27.54	2.64	50.16	41.37	74.00	-32.63	Peak
	2390.00	58.67	27.55	2.66	50.13	38.75	74.00	-35.25	Peak
	2402.25	117.52	27.56	2.67	50.11	97.64	74.00	23.64	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Vertical; Modulation: $\pi/4$ DQPSK; Channel: Low

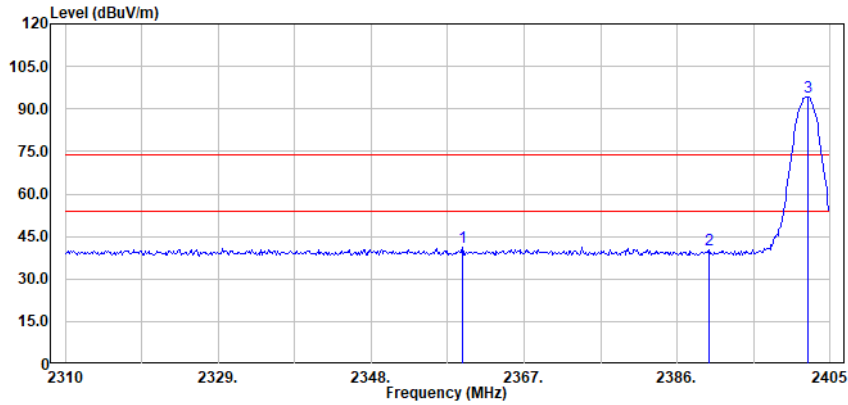

Antenna Polarity :Vertical

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
	2359.29	61.09	27.54	2.63	50.17	41.09	74.00	-32.91	Peak
	2390.00	60.08	27.55	2.66	50.13	40.16	74.00	-33.84	Peak
	2402.25	114.05	27.56	2.67	50.11	94.17	74.00	20.17	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor




SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR230700149803

Page: 31 of 200

Test Mode: 01; Polarity: Horizontal; Modulation: $\pi/4$ DQPSK; Channel: High

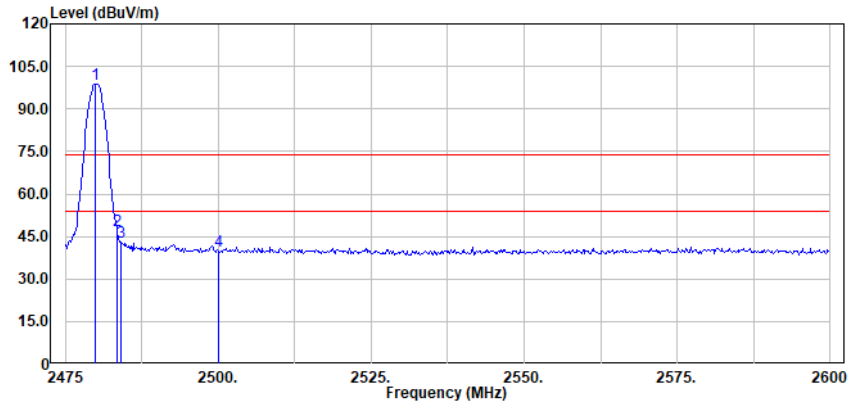


Antenna Polarity :Horizontal

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	2479.89	118.40	27.58	2.73	49.90	98.81	74.00	24.81	Peak
	2483.50	66.71	27.58	2.73	49.90	47.12	74.00	-26.88	Peak
	2484.06	62.53	27.58	2.73	49.90	42.94	74.00	-31.06	Peak
	2500.00	59.58	27.59	2.74	49.94	39.97	74.00	-34.03	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Vertical; Modulation: $\pi/4$ DQPSK; Channel: High

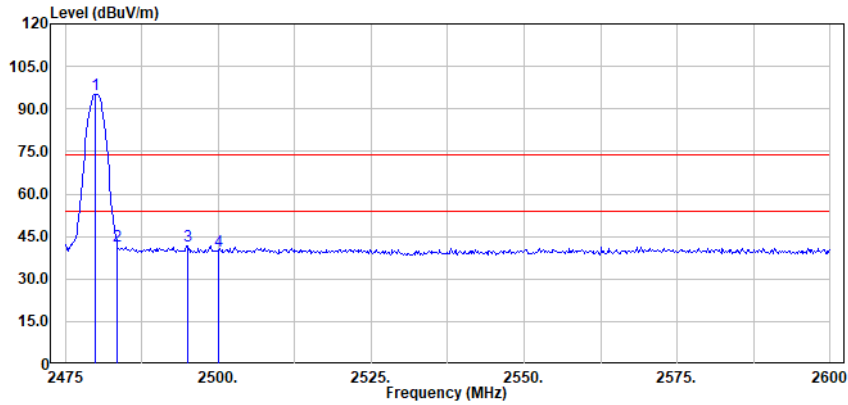


Antenna Polarity :Vertical

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
	2479.89	114.88	27.58	2.73	49.90	95.29	74.00	21.29	Peak
	2483.50	61.28	27.58	2.73	49.90	41.69	74.00	-32.31	Peak
	2494.93	61.20	27.59	2.74	49.93	41.60	74.00	-32.40	Peak
	2500.00	59.26	27.59	2.74	49.94	39.65	74.00	-34.35	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Horizontal; Modulation:8DPSK; Channel:Low

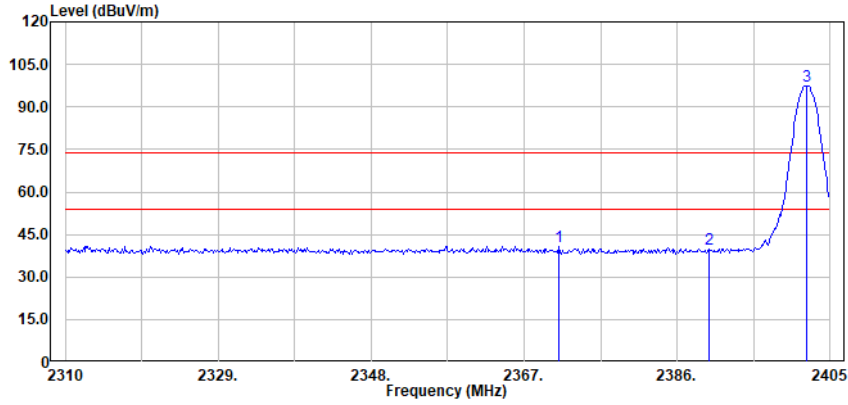


Antenna Polarity :Horizontal

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	2371.27	60.92	27.54	2.64	50.15	40.95	74.00	-33.05	Peak
	2390.00	59.60	27.55	2.66	50.13	39.68	74.00	-34.32	Peak
	2402.11	117.35	27.55	2.67	50.11	97.46	74.00	23.46	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Vertical; Modulation:8DPSK; Channel:Low

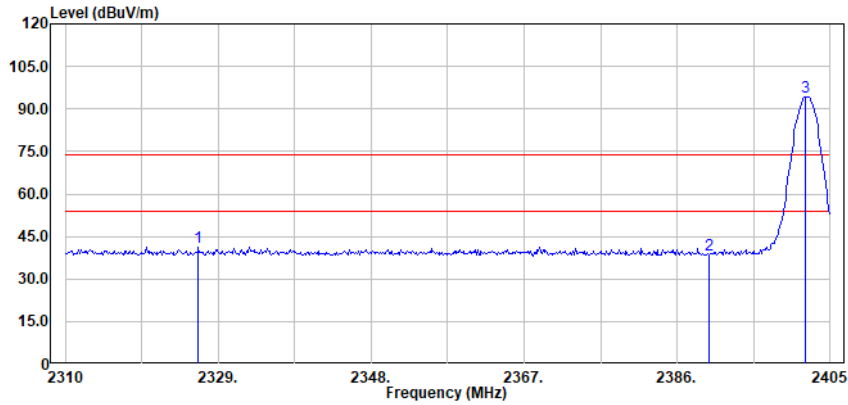

Antenna Polarity :Vertical

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	2326.52	61.34	27.51	2.64	50.20	41.29	74.00	-32.71	Peak
	2390.00	58.43	27.55	2.66	50.13	38.51	74.00	-35.49	Peak
	2401.97	114.08	27.55	2.67	50.11	94.19	74.00	20.19	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor




SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR230700149803

Page: 35 of 200

Test Mode: 01; Polarity: Horizontal; Modulation:8DPSK; Channel:High

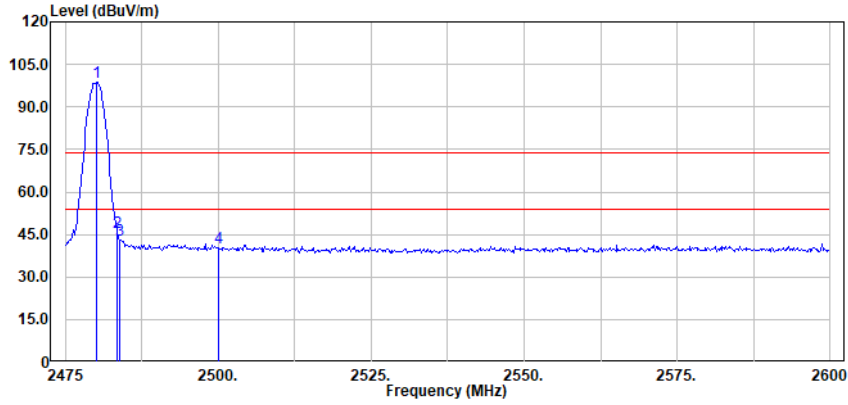


Antenna Polarity :Horizontal

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	2480.07	118.13	27.58	2.73	49.90	98.54	74.00	24.54	Peak
	2483.50	65.31	27.58	2.73	49.90	45.72	74.00	-28.28	Peak
	2483.88	62.81	27.58	2.73	49.90	43.22	74.00	-30.78	Peak
	2500.00	59.74	27.59	2.74	49.94	40.13	74.00	-33.87	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Vertical; Modulation:8DPSK; Channel:High

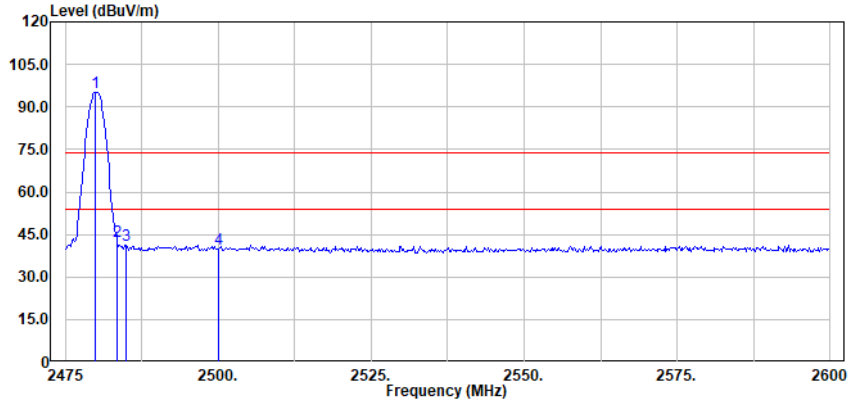


Antenna Polarity :Vertical

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
	2479.89	114.68	27.58	2.73	49.90	95.09	74.00	21.09	Peak
	2483.50	62.20	27.58	2.73	49.90	42.61	74.00	-31.39	Peak
	2484.96	60.93	27.58	2.73	49.91	41.33	74.00	-32.67	Peak
	2500.00	59.58	27.59	2.74	49.94	39.97	74.00	-34.03	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Right

Test Mode: 01; Polarity: Horizontal; Modulation:GFSK; Channel:Low

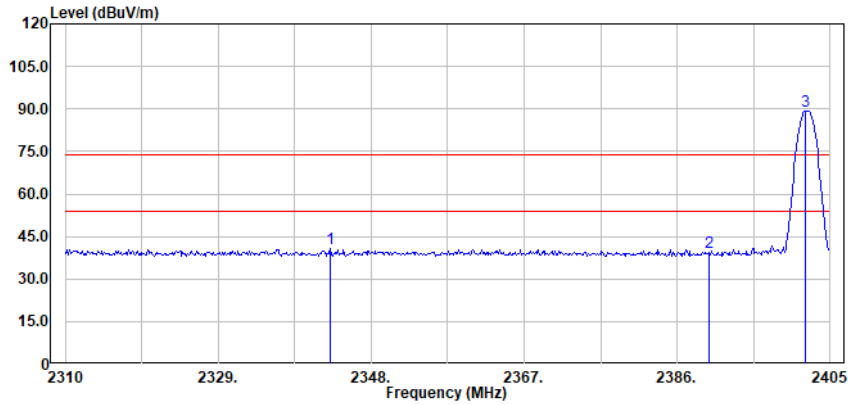


Antenna Polarity :Horizontal

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	2342.91	60.76	27.52	2.64	50.19	40.73	74.00	-33.27	Peak
	2390.00	59.28	27.55	2.66	50.13	39.36	74.00	-34.64	Peak
	2401.97	109.17	27.55	2.67	50.11	89.28	74.00	15.28	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Vertical; Modulation:GFSK; Channel:Low

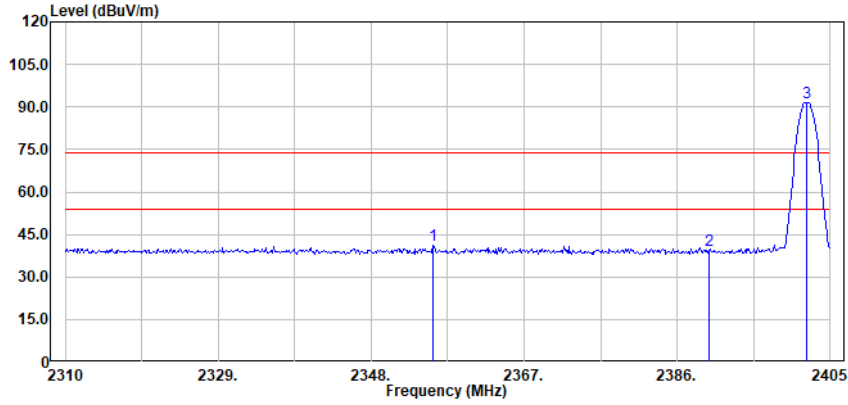


Antenna Polarity :Vertical

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	2355.71	61.11	27.54	2.63	50.17	41.11	74.00	-32.89	Peak
	2390.00	59.28	27.55	2.66	50.13	39.36	74.00	-34.64	Peak
	2402.11	111.23	27.55	2.67	50.11	91.34	74.00	17.34	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Horizontal; Modulation:GFSK; Channel:High

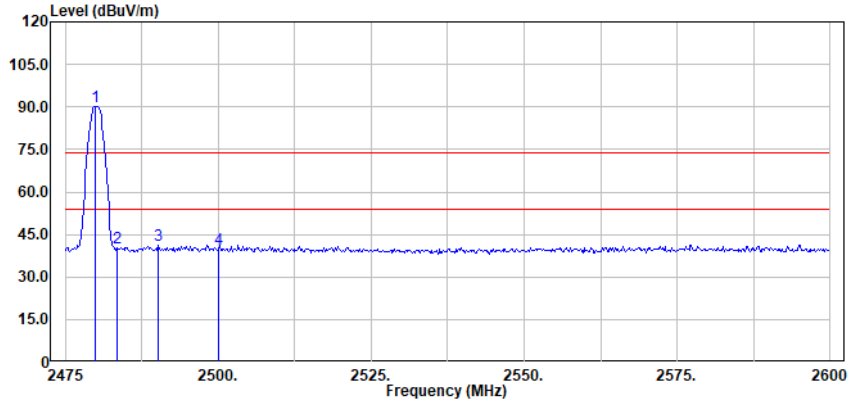


Antenna Polarity :Horizontal

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	2479.89	109.75	27.58	2.73	49.90	90.16	74.00	16.16	Peak
	2483.50	59.78	27.58	2.73	49.90	40.19	74.00	-33.81	Peak
	2490.22	60.85	27.58	2.74	49.92	41.25	74.00	-32.75	Peak
	2500.00	59.41	27.59	2.74	49.94	39.80	74.00	-34.20	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Vertical; Modulation:GFSK; Channel:High

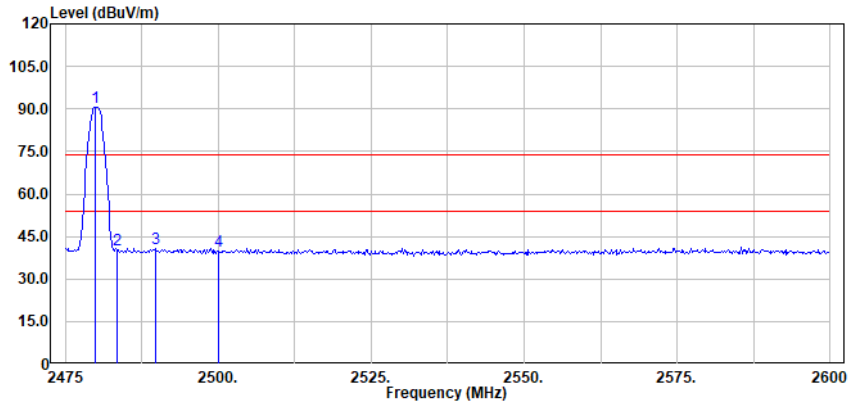


Antenna Polarity :Vertical

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	2479.89	110.21	27.58	2.73	49.90	90.62	74.00	16.62	Peak
	2483.50	59.87	27.58	2.73	49.90	40.28	74.00	-33.72	Peak
	2489.67	60.37	27.58	2.74	49.92	40.77	74.00	-33.23	Peak
	2500.00	59.40	27.59	2.74	49.94	39.79	74.00	-34.21	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Horizontal; Modulation: $\pi/4$ DQPSK; Channel: Low

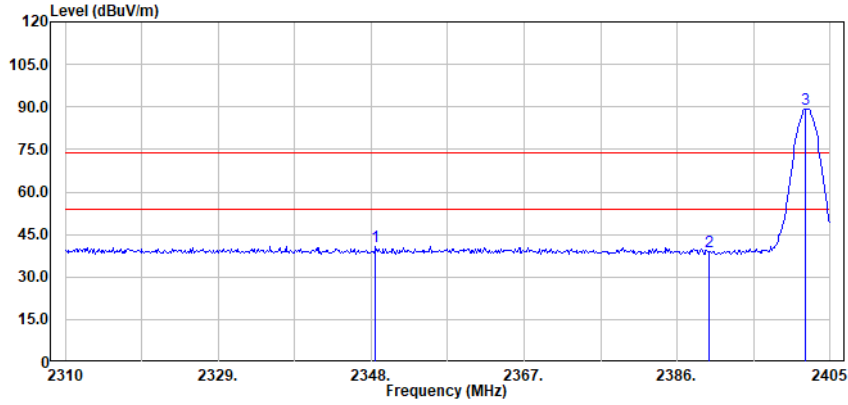


Antenna Polarity :Horizontal

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
	2348.55	60.83	27.53	2.63	50.18	40.81	74.00	-33.19	Peak
	2390.00	58.66	27.55	2.66	50.13	38.74	74.00	-35.26	Peak
	2401.97	109.00	27.55	2.67	50.11	89.11	74.00	15.11	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Vertical; Modulation: $\pi/4$ DQPSK; Channel: Low

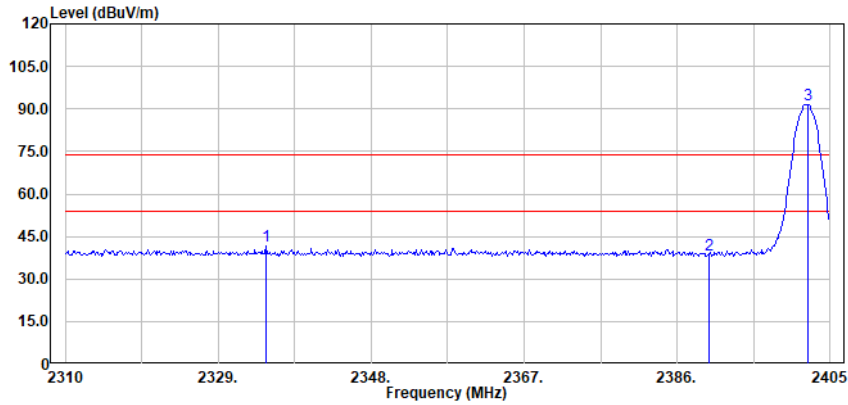


Antenna Polarity :Vertical

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
	2334.92	61.80	27.52	2.64	50.19	41.77	74.00	-32.23	Peak
	2390.00	58.42	27.55	2.66	50.13	38.50	74.00	-35.50	Peak
	2402.25	111.23	27.56	2.67	50.11	91.35	74.00	17.35	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Horizontal; Modulation: $\pi/4$ DQPSK; Channel: High

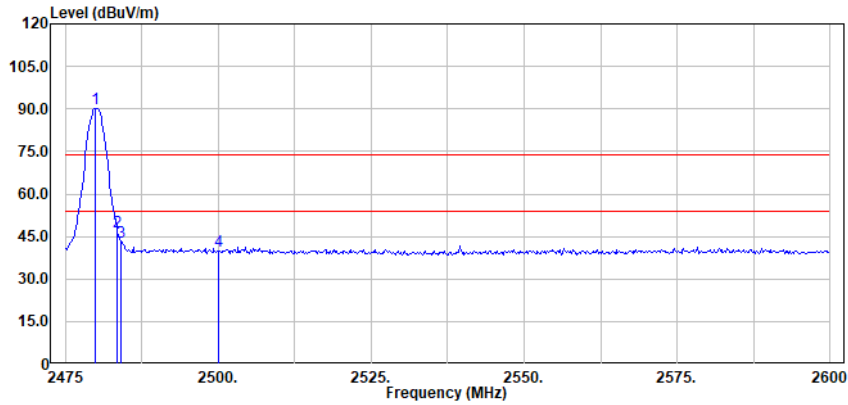


Antenna Polarity :Horizontal

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	2479.89	109.75	27.58	2.73	49.90	90.16	74.00	16.16	Peak
	2483.50	66.04	27.58	2.73	49.90	46.45	74.00	-27.55	Peak
	2484.06	62.80	27.58	2.73	49.90	43.21	74.00	-30.79	Peak
	2500.00	59.24	27.59	2.74	49.94	39.63	74.00	-34.37	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Vertical; Modulation: $\pi/4$ DQPSK; Channel: High

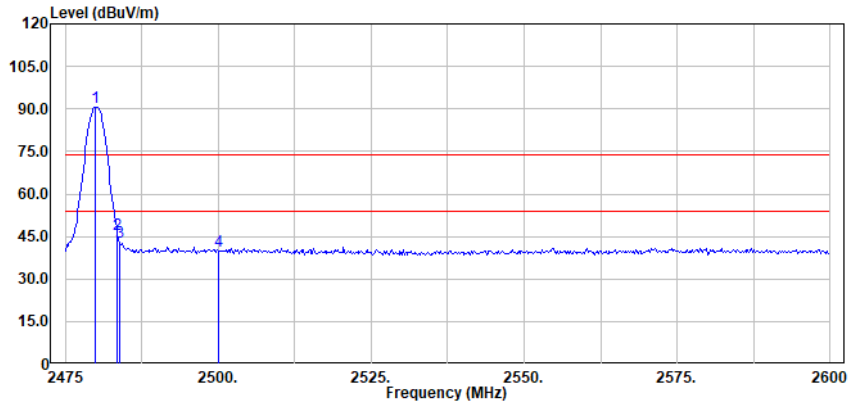


Antenna Polarity :Vertical

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	2479.89	110.23	27.58	2.73	49.90	90.64	74.00	16.64	Peak
	2483.50	65.53	27.58	2.73	49.90	45.94	74.00	-28.06	Peak
	2483.88	62.51	27.58	2.73	49.90	42.92	74.00	-31.08	Peak
	2500.00	59.66	27.59	2.74	49.94	40.05	74.00	-33.95	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Horizontal; Modulation:8DPSK; Channel:Low

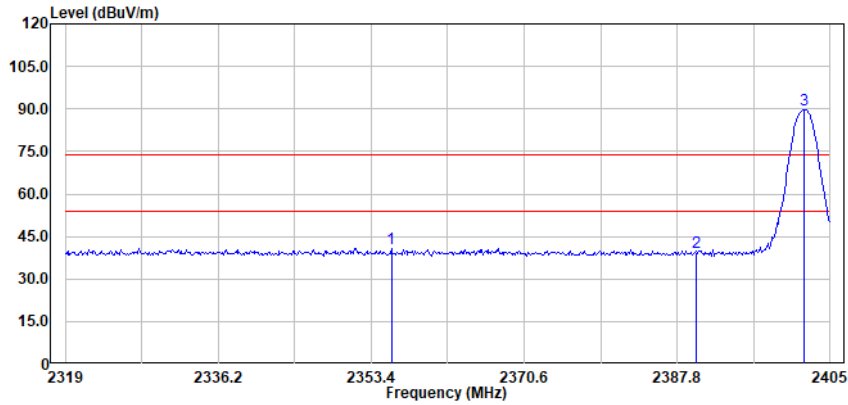


Antenna Polarity :Horizontal

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	2355.64	60.83	27.54	2.63	50.17	40.83	74.00	-33.17	Peak
	2390.00	59.32	27.55	2.66	50.13	39.40	74.00	-34.60	Peak
	2402.13	109.51	27.55	2.67	50.11	89.62	74.00	15.62	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Vertical; Modulation:8DPSK; Channel:Low

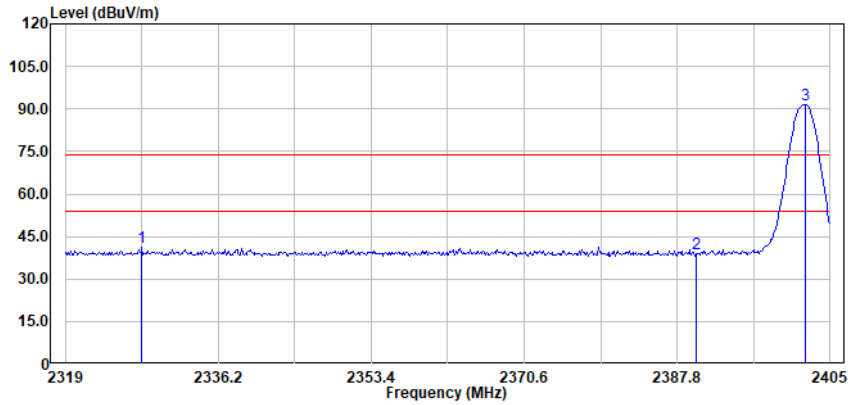


Antenna Polarity :Vertical

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
	2327.60	61.42	27.51	2.64	50.20	41.37	74.00	-32.63	Peak
	2390.00	58.79	27.55	2.66	50.13	38.87	74.00	-35.13	Peak
	2402.26	111.29	27.56	2.67	50.11	91.41	74.00	17.41	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Horizontal; Modulation: 8DPSK; Channel: High

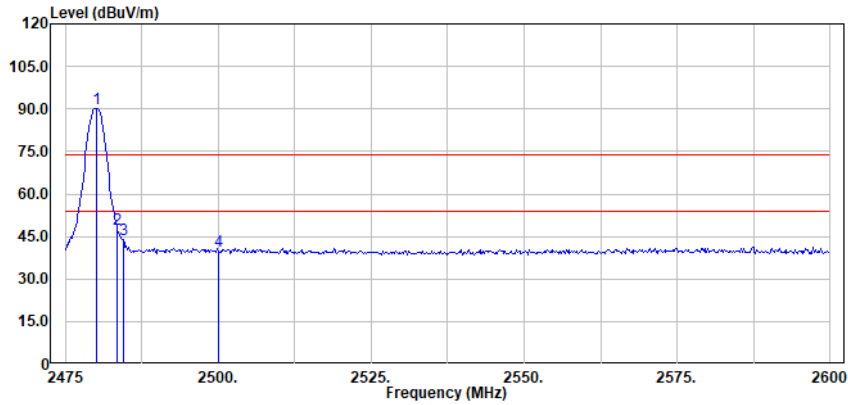

Antenna Polarity :Horizontal

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
	2480.07	109.76	27.58	2.73	49.90	90.17	74.00	16.17	Peak
	2483.50	66.97	27.58	2.73	49.90	47.38	74.00	-26.62	Peak
	2484.42	63.61	27.58	2.73	49.91	44.01	74.00	-29.99	Peak
	2500.00	59.58	27.59	2.74	49.94	39.97	74.00	-34.03	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor




SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR230700149803

Page: 48 of 200

Test Mode: 01; Polarity: Vertical; Modulation:8DPSK; Channel:High

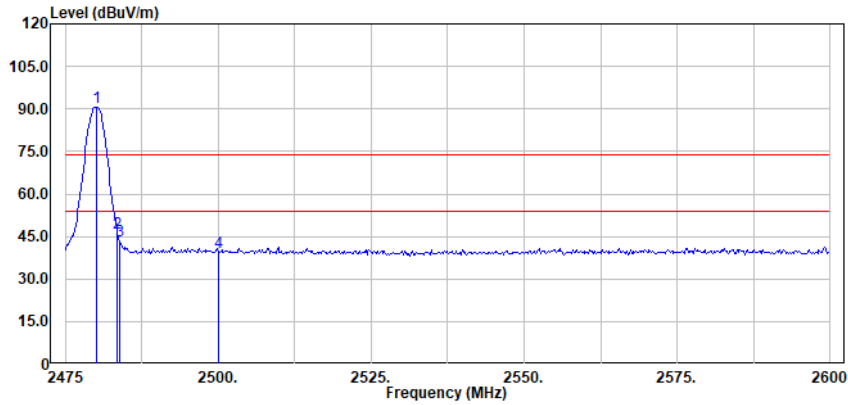

Antenna Polarity :Vertical

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	2480.07	110.22	27.58	2.73	49.90	90.63	74.00	16.63	Peak
	2483.50	65.69	27.58	2.73	49.90	46.10	74.00	-27.90	Peak
	2483.88	62.86	27.58	2.73	49.90	43.27	74.00	-30.73	Peak
	2500.00	58.93	27.59	2.74	49.94	39.32	74.00	-34.68	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

7.10 Radiated Spurious Emissions Below 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.4,6.5

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

7.10.1 E.U.T. Operation

Operating Environment:

Temperature: 25.3 °C


Humidity: 46.3 % RH

Atmospheric Pressure: 1010 mbar

7.10.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.10.3 Test Setup Diagram

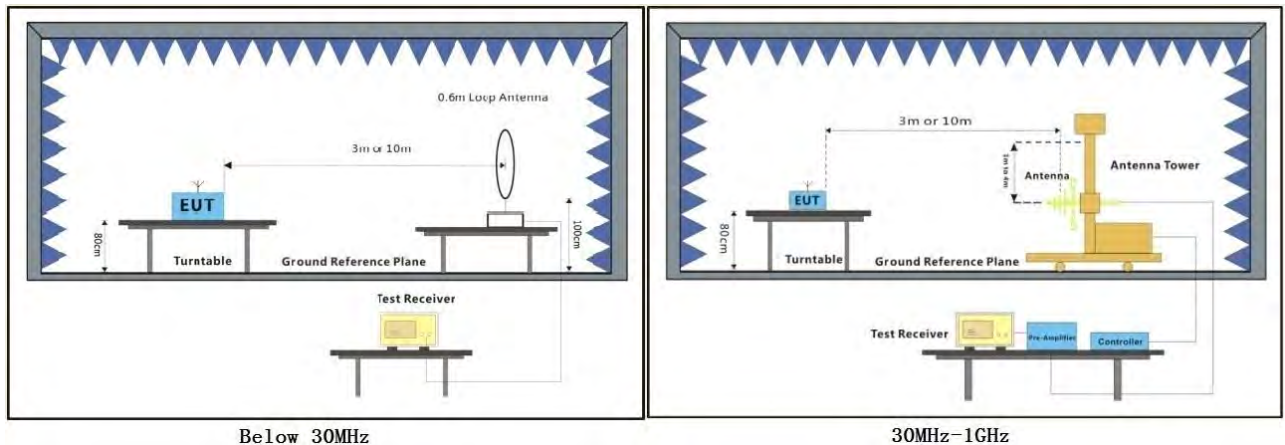


7.10.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. $Level = Read\ Level + Cable\ Loss + Antenna\ Factor - Preamp\ Factor$
2. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. The disturbance below 1GHz was very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.

Test Mode: 01; Polarity: Horizontal;

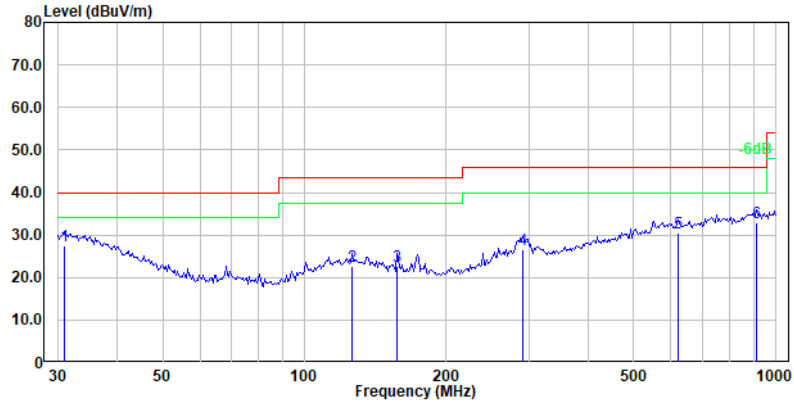


Site: Chamber
Condition :
Mode:

No.	Freq (MHz)	Read level (dBuV)	LISN Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	30.85	2.36	24.91	0.23	27.50	40.00	-12.50	QP
2	126.33	3.19	18.50	0.95	22.64	43.50	-20.86	QP
3	157.01	5.07	16.45	1.12	22.64	43.50	-20.86	QP
4	291.04	6.11	19.18	1.31	26.60	46.00	-19.40	QP
5	620.71	3.20	24.90	2.35	30.45	46.00	-15.55	QP
6	912.86	3.68	26.67	2.50	32.85	46.00	-13.15	QP

Notes: Emission Level = Read Level + LISN Factor + Cable loss

Test Mode: 01; Polarity: Vertical;

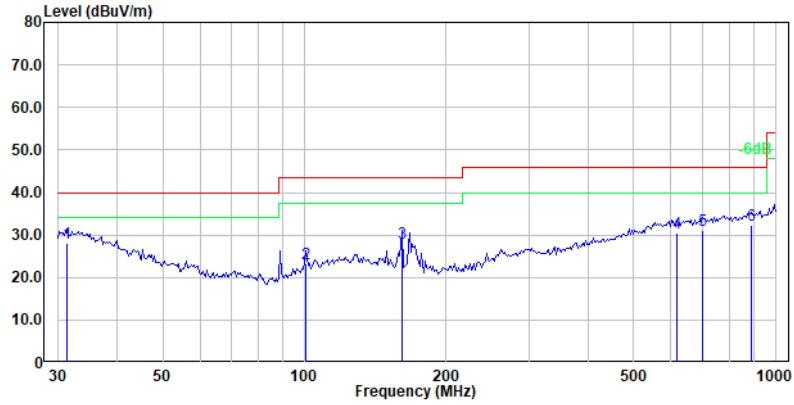


Site: Chamber
 Condition :
 Mode:

No.	Freq (MHz)	Read level (dBuV)	LISN Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	31.29	2.95	24.90	0.23	28.08	40.00	-11.92	QP
2	100.93	6.04	16.45	0.78	23.27	43.50	-20.23	QP
3	161.47	10.82	16.29	1.12	28.23	43.50	-15.27	QP
4	616.37	3.38	24.79	2.34	30.51	46.00	-15.49	QP
5	699.30	3.50	25.16	2.48	31.14	46.00	-14.86	QP
6	887.61	3.00	27.02	2.37	32.39	46.00	-13.61	QP

Notes: Emission Level = Read Level + LISN Factor + Cable loss

Test Mode: 01; Polarity: Horizontal;

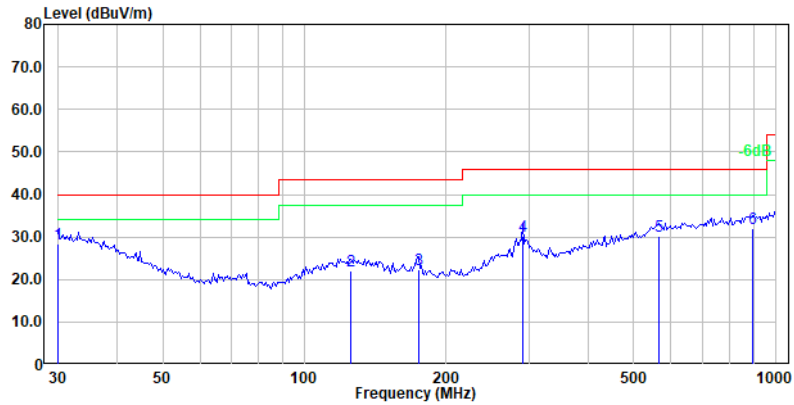


Site: Chamber
 Condition :
 Mode:

No.	Freq (MHz)	Read level (dBuV)	LISN Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	30.00	3.00	25.04	0.21	28.25	40.00	-11.75	QP
2	125.45	2.44	18.51	0.95	21.90	43.50	-21.60	QP
3	174.42	5.69	15.66	1.12	22.47	43.50	-21.03	QP
4	291.04	9.58	19.18	1.31	30.07	46.00	-15.93	QP
5	566.62	2.78	25.13	2.24	30.15	46.00	-15.85	QP
6	893.86	2.49	27.13	2.41	32.03	46.00	-13.97	QP

Notes: Emission Level = Read Level + LISN Factor + Cable loss

Test Mode: 01; Polarity: Vertical;

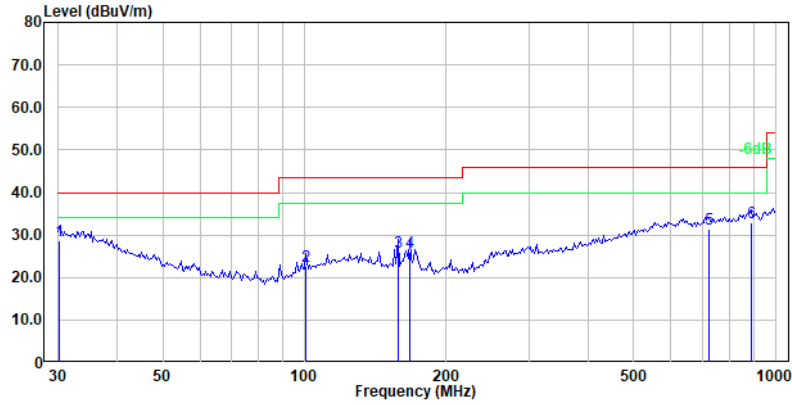

Site: Chamber
 Condition :
 Mode:

No.	Freq (MHz)	Read level (dBuV)	LISN Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	30.21	3.51	25.01	0.21	28.73	40.00	-11.27	QP
2	100.93	5.33	16.45	0.78	22.56	43.50	-20.94	QP
3	158.11	8.30	16.42	1.12	25.84	43.50	-17.66	QP
4	167.24	8.80	16.01	1.12	25.93	43.50	-17.57	QP
5	724.26	3.34	25.49	2.42	31.25	46.00	-14.75	QP
6	887.61	3.40	27.02	2.37	32.79	46.00	-13.21	QP

Notes: Emission Level = Read Level + LISN Factor + Cable loss

7.11 Radiated Spurious Emissions Below 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.4,6.5

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

7.11.1 E.U.T. Operation

Operating Environment:

Temperature: 25.3 °C


Humidity: 46.3 % RH

Atmospheric Pressure: 1010 mbar

7.11.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.11.3 Test Setup Diagram

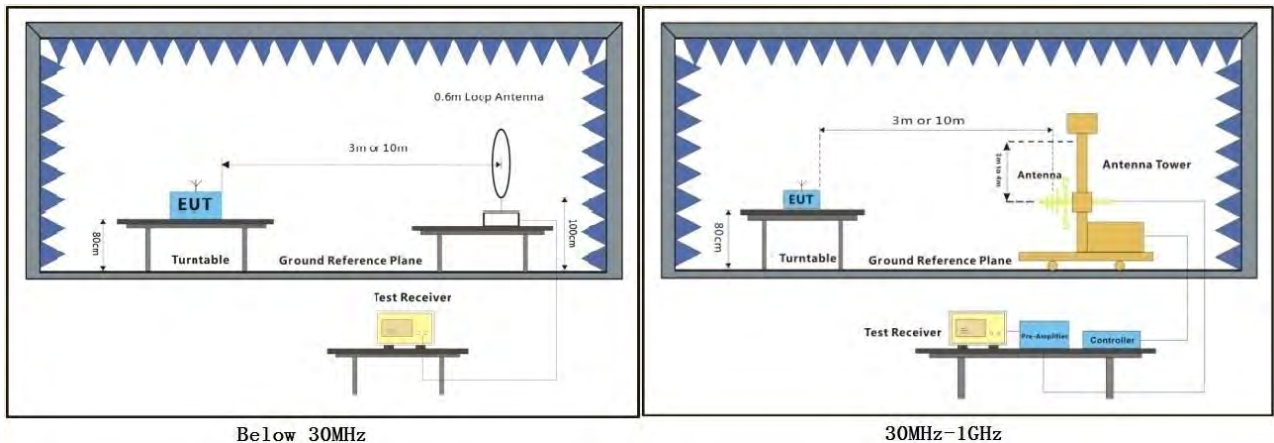

7.11.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. $Level = Read\ Level + Cable\ Loss + Antenna\ Factor - Preamp\ Factor$
2. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. The disturbance below 1GHz was very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.

7.12 Radiated Spurious Emissions Above 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.6

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
Above 1000	500	3

7.12.1 E.U.T. Operation

Operating Environment:

Temperature: 25.3 °C


Humidity: 46.3 % RH

Atmospheric Pressure: 1010 mbar

7.12.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.12.3 Test Setup Diagram

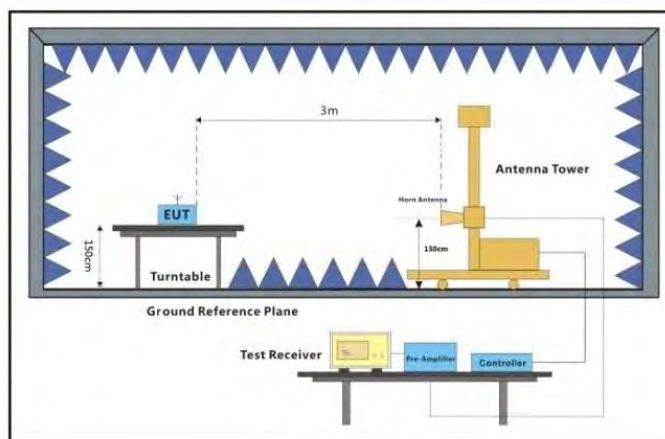

Above 1GHz

7.12.4 Measurement Procedure and Data


- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$
2. Scan from 1GHz to 25GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Left

Test Mode: 01; Polarity: Horizontal; Modulation:GFSK; Channel:Low

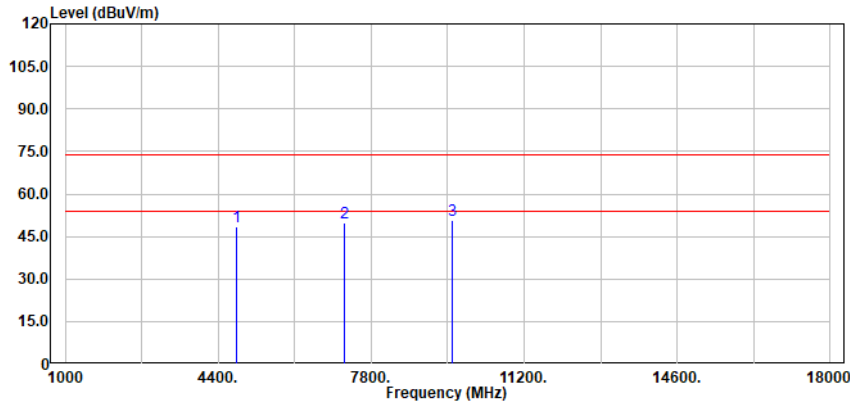

Antenna Polarity :Horizontal

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	4804.00	60.89	31.26	4.14	47.81	48.48	74.00	-25.52	Peak
	7206.00	55.50	35.74	5.33	46.59	49.98	74.00	-24.02	Peak
	9608.00	53.20	38.20	5.71	46.17	50.94	74.00	-23.06	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor




SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR230700149803

Page: 60 of 200

Test Mode: 01; Polarity: Vertical; Modulation:GFSK; Channel:Low

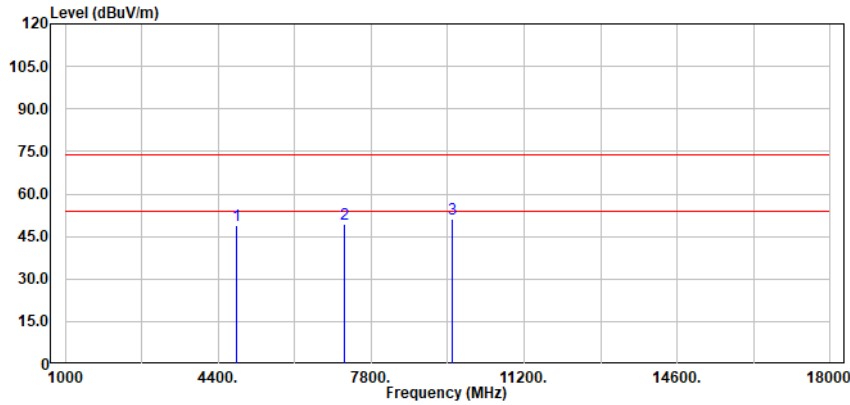


Antenna Polarity :Vertical

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	4804.00	61.21	31.26	4.14	47.81	48.80	74.00	-25.20	Peak
	7206.00	54.78	35.74	5.33	46.59	49.26	74.00	-24.74	Peak
	9608.00	53.25	38.20	5.71	46.17	50.99	74.00	-23.01	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Horizontal; Modulation:GFSK; Channel:middle

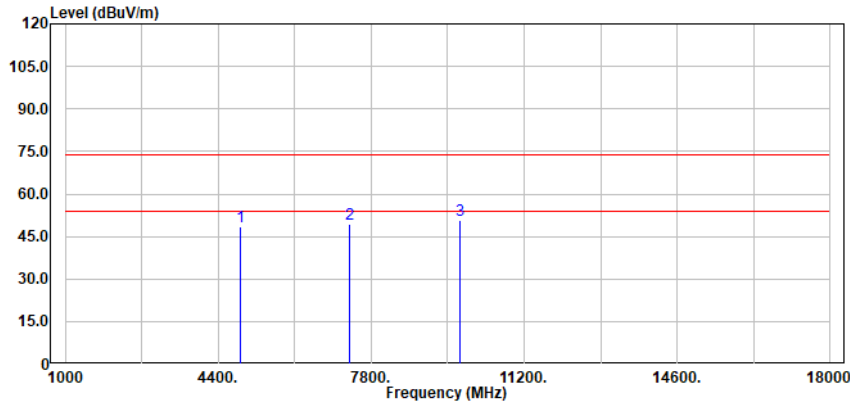


Antenna Polarity :Horizontal

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	4882.00	60.76	31.42	4.17	47.77	48.58	74.00	-25.42	Peak
	7323.00	54.72	36.09	5.43	46.72	49.52	74.00	-24.48	Peak
	9764.00	52.70	38.35	5.75	46.10	50.70	74.00	-23.30	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Vertical; Modulation:GFSK; Channel:middle

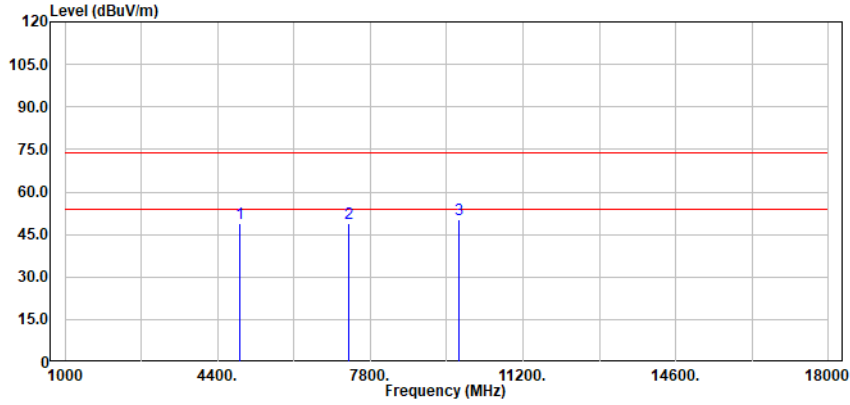


Antenna Polarity :Vertical

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	4882.00	61.12	31.42	4.17	47.77	48.94	74.00	-25.06	Peak
	7323.00	54.30	36.09	5.43	46.72	49.10	74.00	-24.90	Peak
	9764.00	52.14	38.35	5.75	46.10	50.14	74.00	-23.86	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Horizontal; Modulation:GFSK; Channel:High

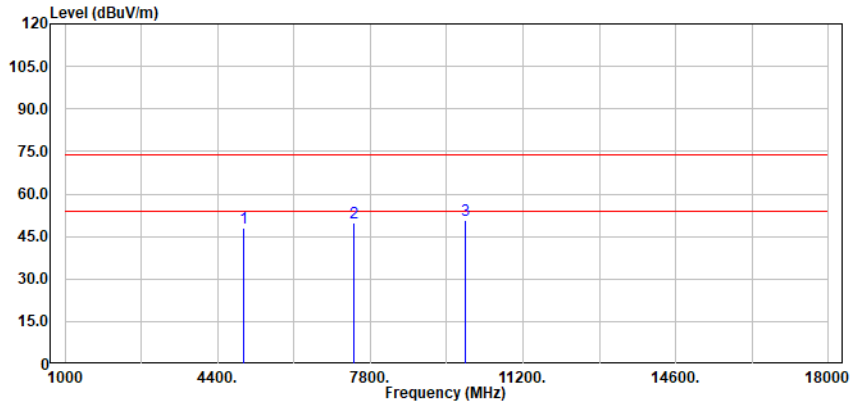


Antenna Polarity :Horizontal

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
	4960.00	60.15	31.58	4.21	47.72	48.22	74.00	-25.78	Peak
	7440.00	54.62	36.35	5.48	46.84	49.61	74.00	-24.39	Peak
	9920.00	52.50	38.51	5.81	46.03	50.79	74.00	-23.21	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Vertical; Modulation:GFSK; Channel:High

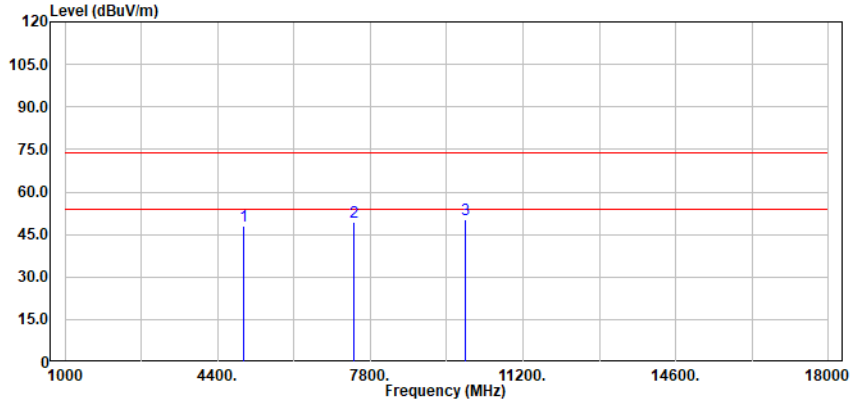


Antenna Polarity :Vertical

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	4960.00	60.05	31.58	4.21	47.72	48.12	74.00	-25.88	Peak
	7440.00	54.21	36.35	5.48	46.84	49.20	74.00	-24.80	Peak
	9920.00	51.79	38.51	5.81	46.03	50.08	74.00	-23.92	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Horizontal; Modulation: $\pi/4$ DQPSK; Channel: Low

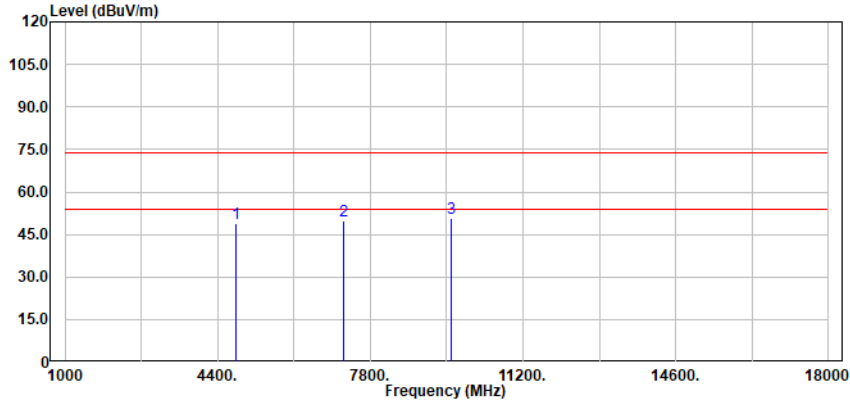

Antenna Polarity :Horizontal

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	4804.00	61.29	31.26	4.14	47.81	48.88	74.00	-25.12	Peak
	7206.00	55.18	35.74	5.33	46.59	49.66	74.00	-24.34	Peak
	9608.00	53.05	38.20	5.71	46.17	50.79	74.00	-23.21	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor




SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR230700149803

Page: 66 of 200

Test Mode: 01; Polarity: Vertical; Modulation: $\pi/4$ DQPSK; Channel: Low

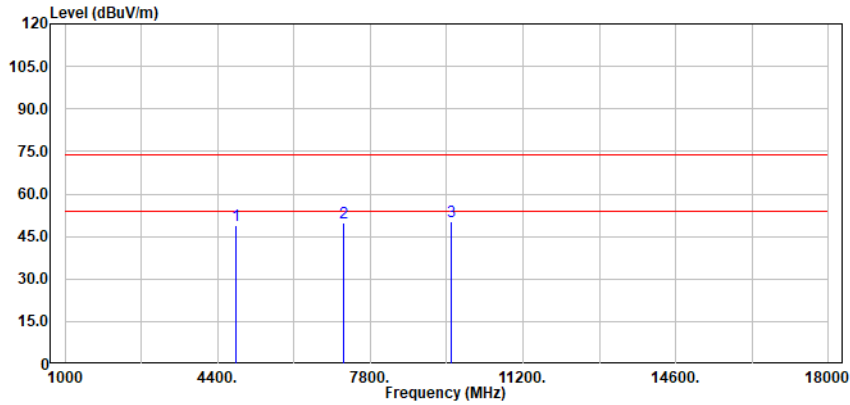


Antenna Polarity :Vertical

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
	4804.00	61.40	31.26	4.14	47.81	48.99	74.00	-25.01	Peak
	7206.00	55.16	35.74	5.33	46.59	49.64	74.00	-24.36	Peak
	9608.00	52.48	38.20	5.71	46.17	50.22	74.00	-23.78	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Horizontal; Modulation: $\pi/4$ DQPSK; Channel: middle

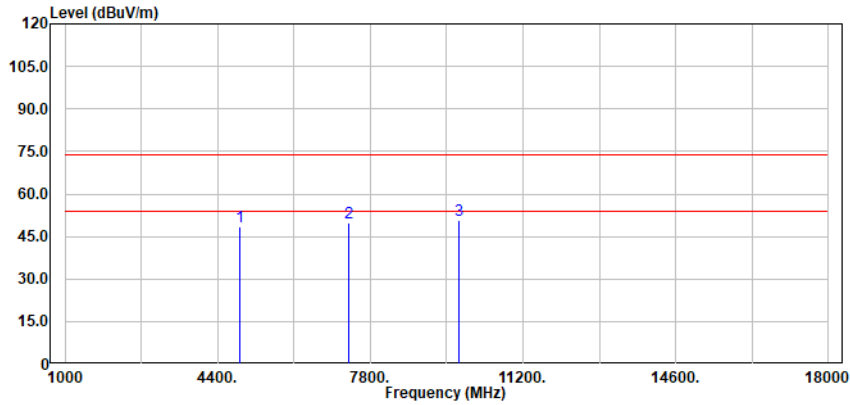


Antenna Polarity :Horizontal

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
	4882.00	60.65	31.42	4.17	47.77	48.47	74.00	-25.53	Peak
	7323.00	55.00	36.09	5.43	46.72	49.80	74.00	-24.20	Peak
	9764.00	52.53	38.35	5.75	46.10	50.53	74.00	-23.47	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Vertical; Modulation: $\pi/4$ DQPSK; Channel: middle

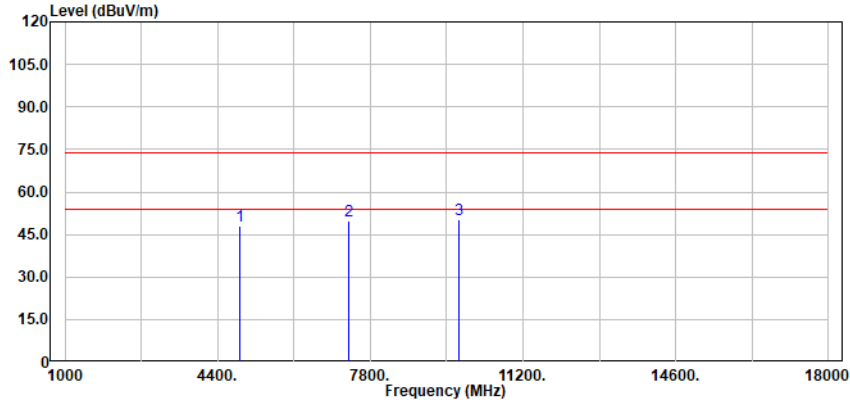

Antenna Polarity :Vertical

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	4882.00	60.33	31.42	4.17	47.77	48.15	74.00	-25.85	Peak
	7323.00	55.08	36.09	5.43	46.72	49.88	74.00	-24.12	Peak
	9764.00	52.09	38.35	5.75	46.10	50.09	74.00	-23.91	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor




SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR230700149803

Page: 69 of 200

Test Mode: 01; Polarity: Horizontal; Modulation: $\pi/4$ DQPSK; Channel: High

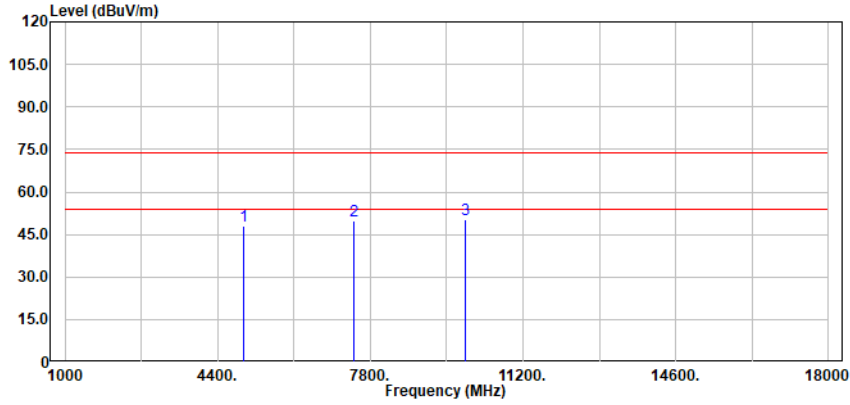


Antenna Polarity :Horizontal

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	4960.00	60.09	31.58	4.21	47.72	48.16	74.00	-25.84	Peak
	7440.00	54.72	36.35	5.48	46.84	49.71	74.00	-24.29	Peak
	9920.00	51.86	38.51	5.81	46.03	50.15	74.00	-23.85	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Vertical; Modulation: $\pi/4$ DQPSK; Channel: High

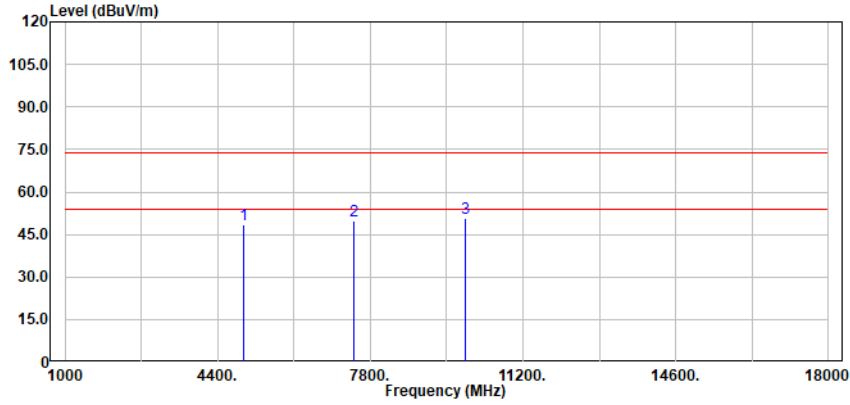

Antenna Polarity :Vertical

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
	4960.00	60.52	31.58	4.21	47.72	48.59	74.00	-25.41	Peak
	7440.00	54.94	36.35	5.48	46.84	49.93	74.00	-24.07	Peak
	9920.00	52.28	38.51	5.81	46.03	50.57	74.00	-23.43	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor




SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR230700149803

Page: 71 of 200

Test Mode: 01; Polarity: Horizontal; Modulation: 8DPSK; Channel: Low

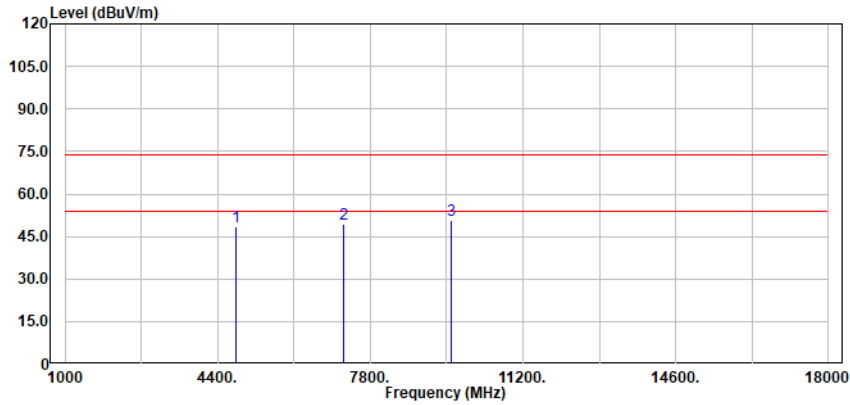

Antenna Polarity :Horizontal

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
	4804.00	60.81	31.26	4.14	47.81	48.40	74.00	-25.60	Peak
	7206.00	55.08	35.74	5.33	46.59	49.56	74.00	-24.44	Peak
	9608.00	53.17	38.20	5.71	46.17	50.91	74.00	-23.09	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor




SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR230700149803

Page: 72 of 200

Test Mode: 01; Polarity: Vertical; Modulation:8DPSK; Channel:Low

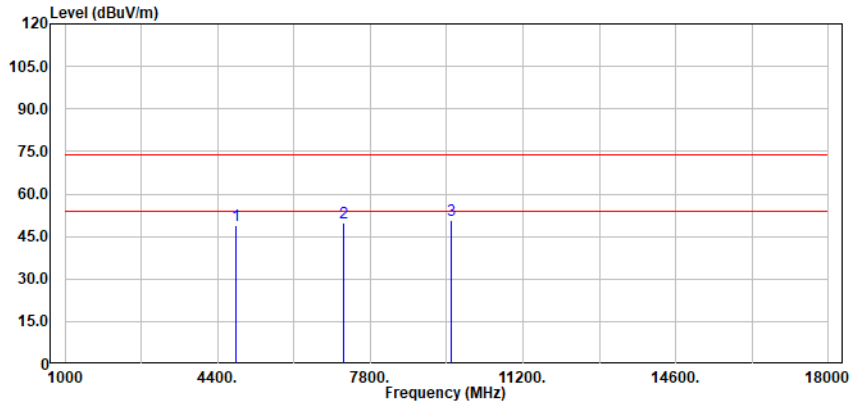


Antenna Polarity :Vertical

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	4804.00	61.14	31.26	4.14	47.81	48.73	74.00	-25.27	Peak
	7206.00	55.49	35.74	5.33	46.59	49.97	74.00	-24.03	Peak
	9608.00	52.92	38.20	5.71	46.17	50.66	74.00	-23.34	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Horizontal; Modulation:8DPSK; Channel:middle

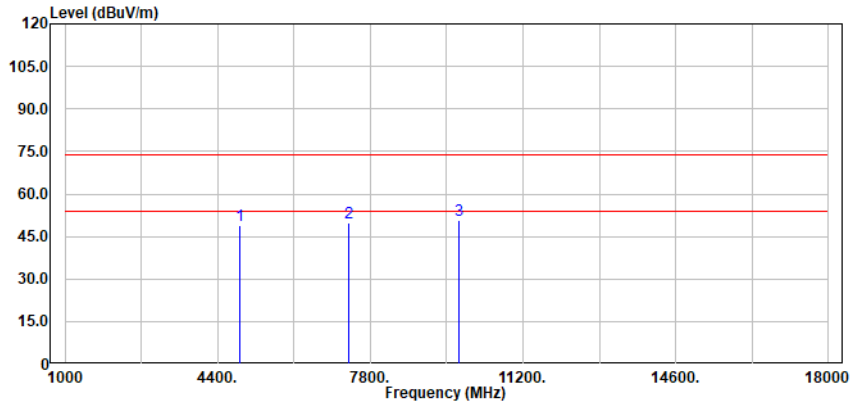


Antenna Polarity :Horizontal

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	4882.00	61.12	31.42	4.17	47.77	48.94	74.00	-25.06	Peak
	7323.00	54.95	36.09	5.43	46.72	49.75	74.00	-24.25	Peak
	9764.00	52.78	38.35	5.75	46.10	50.78	74.00	-23.22	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Vertical; Modulation:8DPSK; Channel:middle

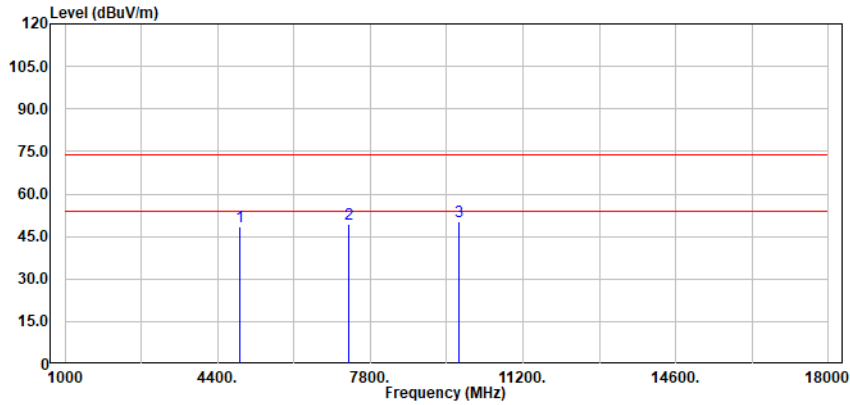

Antenna Polarity :Vertical

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
	4882.00	60.75	31.42	4.17	47.77	48.57	74.00	-25.43	Peak
	7323.00	54.64	36.09	5.43	46.72	49.44	74.00	-24.56	Peak
	9764.00	52.42	38.35	5.75	46.10	50.42	74.00	-23.58	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor




SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR230700149803

Page: 75 of 200

Test Mode: 01; Polarity: Horizontal; Modulation:8DPSK; Channel:High

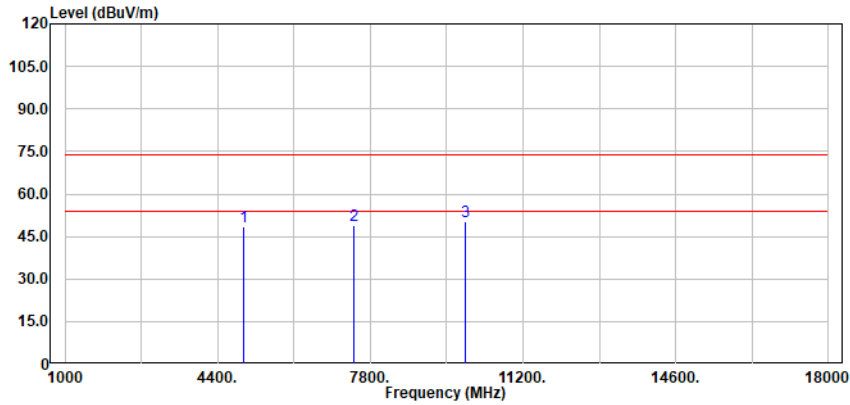


Antenna Polarity :Horizontal

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	4960.00	60.55	31.58	4.21	47.72	48.62	74.00	-25.38	Peak
	7440.00	54.03	36.35	5.48	46.84	49.02	74.00	-24.98	Peak
	9920.00	51.97	38.51	5.81	46.03	50.26	74.00	-23.74	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Vertical; Modulation:8DPSK; Channel:High

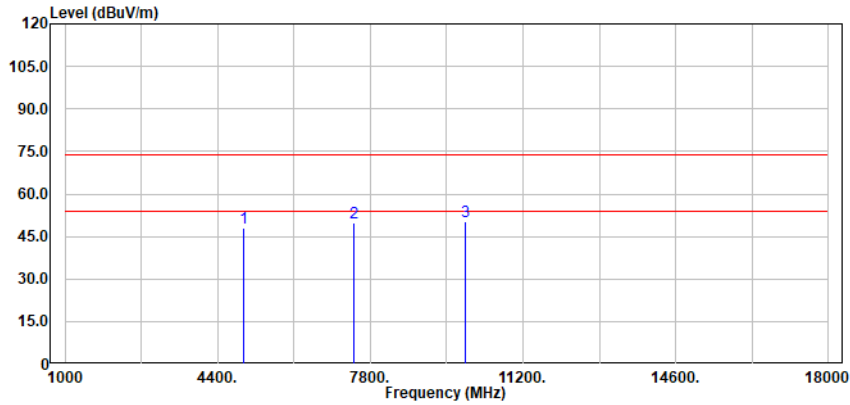

Antenna Polarity :Vertical

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
	4960.00	59.94	31.58	4.21	47.72	48.01	74.00	-25.99	Peak
	7440.00	54.93	36.35	5.48	46.84	49.92	74.00	-24.08	Peak
	9920.00	51.81	38.51	5.81	46.03	50.10	74.00	-23.90	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.


SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR230700149803

Page: 77 of 200

Right

Test Mode: 01; Polarity: Horizontal; Modulation:GFSK; Channel:Low

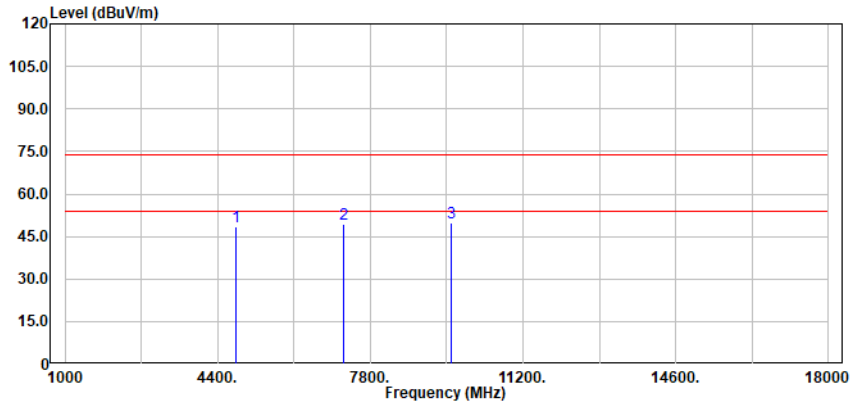

Antenna Polarity :Horizontal

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
	4804.00	60.66	31.26	4.14	47.81	48.25	74.00	-25.75	Peak
	7206.00	54.75	35.74	5.33	46.59	49.23	74.00	-24.77	Peak
	9608.00	52.27	38.20	5.71	46.17	50.01	74.00	-23.99	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor




SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR230700149803

Page: 78 of 200

Test Mode: 01; Polarity: Vertical; Modulation:GFSK; Channel:Low

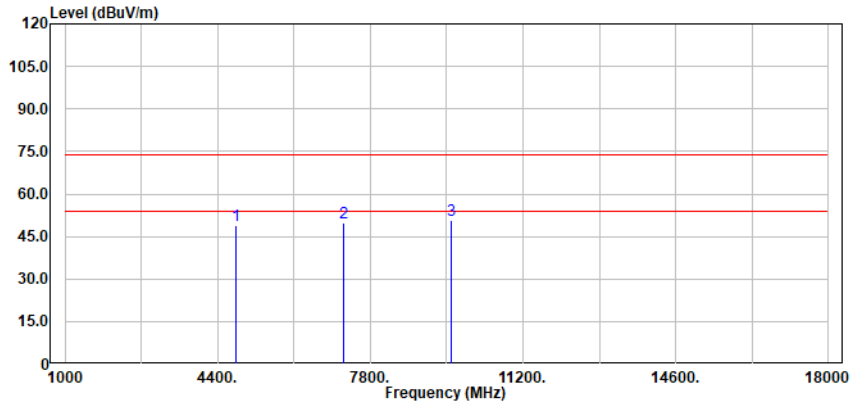


Antenna Polarity :Vertical

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
	4804.00	61.29	31.26	4.14	47.81	48.88	74.00	-25.12	Peak
	7206.00	55.43	35.74	5.33	46.59	49.91	74.00	-24.09	Peak
	9608.00	52.98	38.20	5.71	46.17	50.72	74.00	-23.28	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Horizontal; Modulation:GFSK; Channel:middle

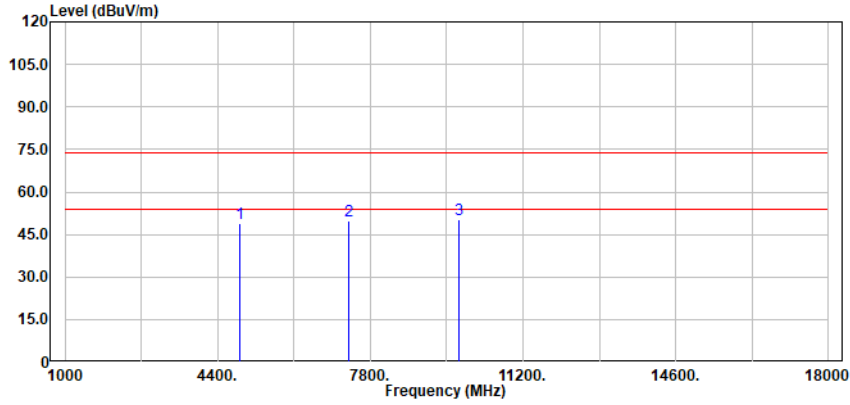


Antenna Polarity :Horizontal

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	4882.00	61.09	31.42	4.17	47.77	48.91	74.00	-25.09	Peak
	7323.00	54.83	36.09	5.43	46.72	49.63	74.00	-24.37	Peak
	9764.00	52.20	38.35	5.75	46.10	50.20	74.00	-23.80	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Vertical; Modulation:GFSK; Channel:middle

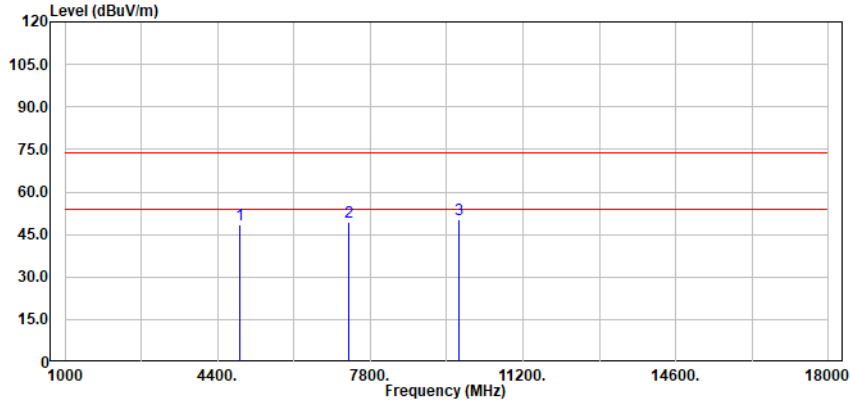


Antenna Polarity :Vertical

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	4882.00	60.54	31.42	4.17	47.77	48.36	74.00	-25.64	Peak
	7323.00	54.61	36.09	5.43	46.72	49.41	74.00	-24.59	Peak
	9764.00	52.24	38.35	5.75	46.10	50.24	74.00	-23.76	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Horizontal; Modulation:GFSK; Channel:High

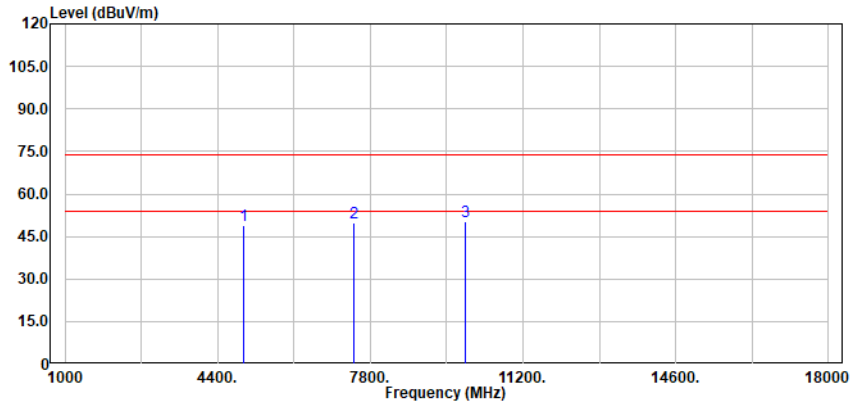


Antenna Polarity :Horizontal

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
	4960.00	60.77	31.58	4.21	47.72	48.84	74.00	-25.16	Peak
	7440.00	54.85	36.35	5.48	46.84	49.84	74.00	-24.16	Peak
	9920.00	52.01	38.51	5.81	46.03	50.30	74.00	-23.70	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Vertical; Modulation:GFSK; Channel:High

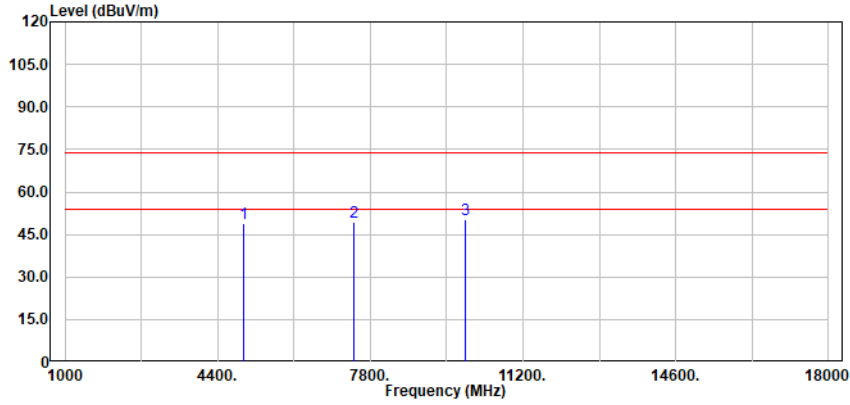

Antenna Polarity :Vertical

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
	4960.00	60.92	31.58	4.21	47.72	48.99	74.00	-25.01	Peak
	7440.00	54.40	36.35	5.48	46.84	49.39	74.00	-24.61	Peak
	9920.00	52.01	38.51	5.81	46.03	50.30	74.00	-23.70	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor




SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR230700149803

Page: 83 of 200

Test Mode: 01; Polarity: Horizontal; Modulation: $\pi/4$ DQPSK; Channel: Low

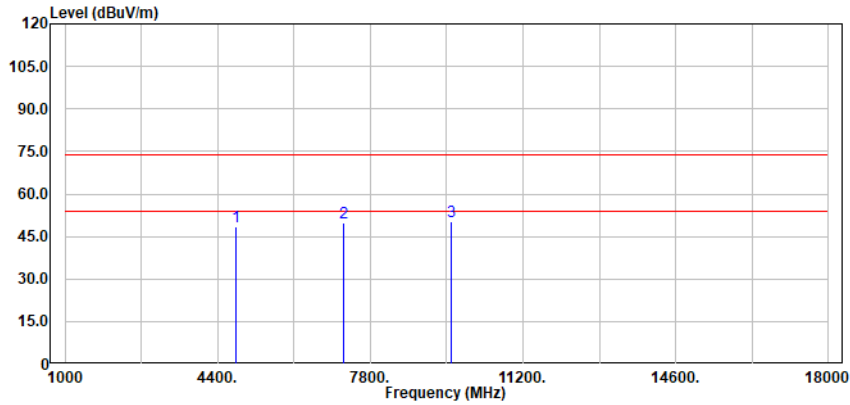

Antenna Polarity :Horizontal

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	4804.00	60.86	31.26	4.14	47.81	48.45	74.00	-25.55	Peak
	7206.00	55.24	35.74	5.33	46.59	49.72	74.00	-24.28	Peak
	9608.00	52.67	38.20	5.71	46.17	50.41	74.00	-23.59	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor




SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR230700149803

Page: 84 of 200

Test Mode: 01; Polarity: Vertical; Modulation: $\pi/4$ DQPSK; Channel: Low

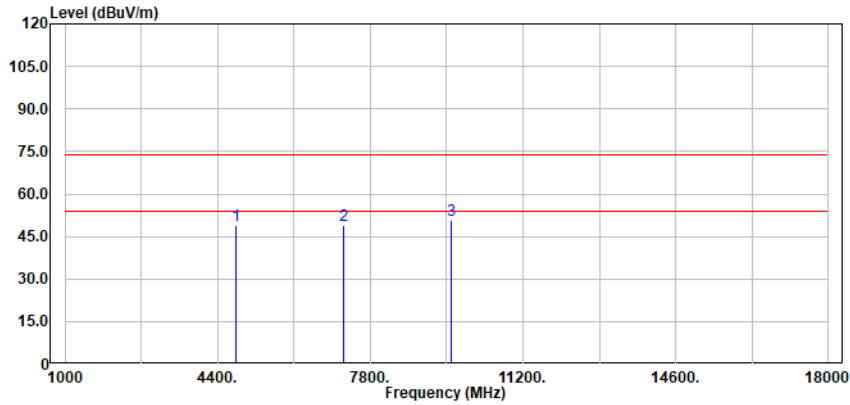

Antenna Polarity :Vertical

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
	4804.00	61.13	31.26	4.14	47.81	48.72	74.00	-25.28	Peak
	7206.00	54.53	35.74	5.33	46.59	49.01	74.00	-24.99	Peak
	9608.00	53.03	38.20	5.71	46.17	50.77	74.00	-23.23	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor




SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR230700149803

Page: 85 of 200

Test Mode: 01; Polarity: Horizontal; Modulation: $\pi/4$ DQPSK; Channel: middle

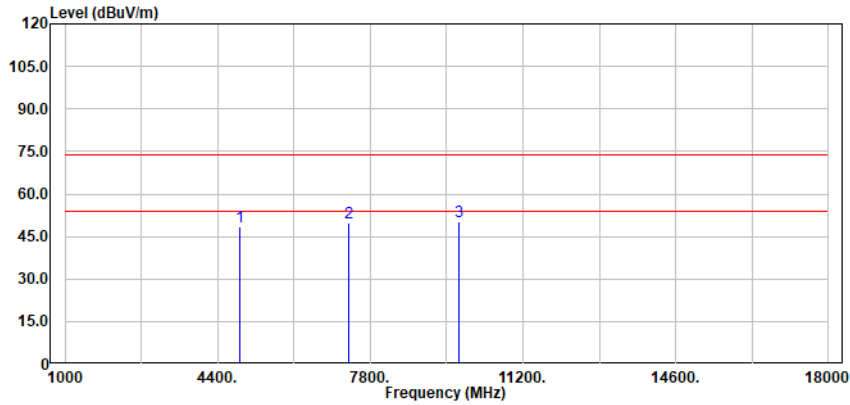


Antenna Polarity :Horizontal

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
	4882.00	60.45	31.42	4.17	47.77	48.27	74.00	-25.73	Peak
	7323.00	54.80	36.09	5.43	46.72	49.60	74.00	-24.40	Peak
	9764.00	52.34	38.35	5.75	46.10	50.34	74.00	-23.66	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Vertical; Modulation: $\pi/4$ DQPSK; Channel: middle

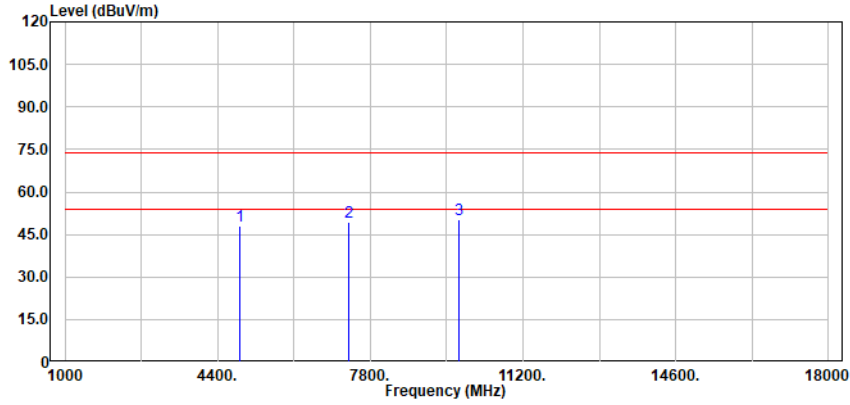

Antenna Polarity :Vertical

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
	4882.00	60.20	31.42	4.17	47.77	48.02	74.00	-25.98	Peak
	7323.00	54.77	36.09	5.43	46.72	49.57	74.00	-24.43	Peak
	9764.00	52.34	38.35	5.75	46.10	50.34	74.00	-23.66	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor




SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR230700149803

Page: 87 of 200

Test Mode: 01; Polarity: Horizontal; Modulation: $\pi/4$ DQPSK; Channel: High

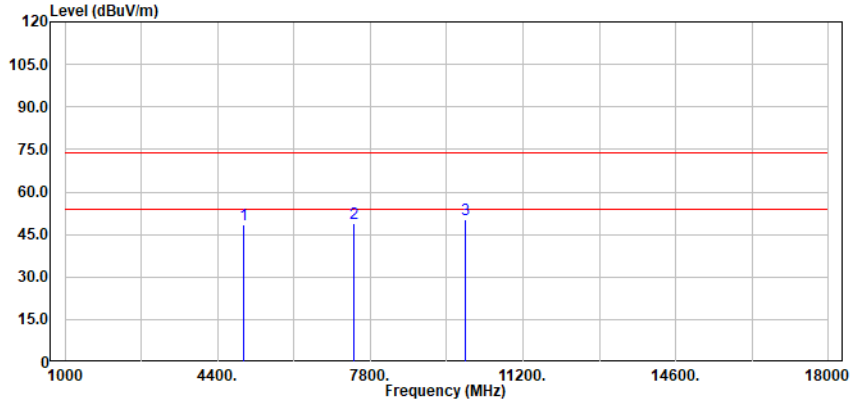


Antenna Polarity :Horizontal

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
	4960.00	60.30	31.58	4.21	47.72	48.37	74.00	-25.63	Peak
	7440.00	54.12	36.35	5.48	46.84	49.11	74.00	-24.89	Peak
	9920.00	52.12	38.51	5.81	46.03	50.41	74.00	-23.59	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Vertical; Modulation: $\pi/4$ DQPSK; Channel: High

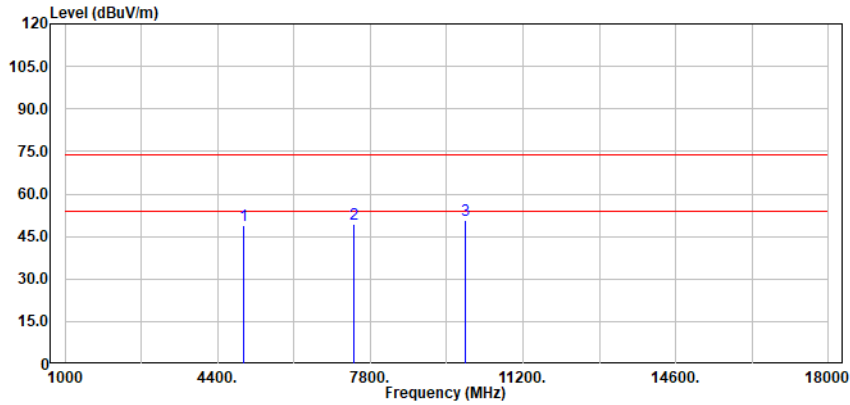

Antenna Polarity :Vertical

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
	4960.00	60.78	31.58	4.21	47.72	48.85	74.00	-25.15	Peak
	7440.00	54.43	36.35	5.48	46.84	49.42	74.00	-24.58	Peak
	9920.00	52.26	38.51	5.81	46.03	50.55	74.00	-23.45	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor




SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR230700149803

Page: 89 of 200

Test Mode: 01; Polarity: Horizontal; Modulation:8DPSK; Channel:Low

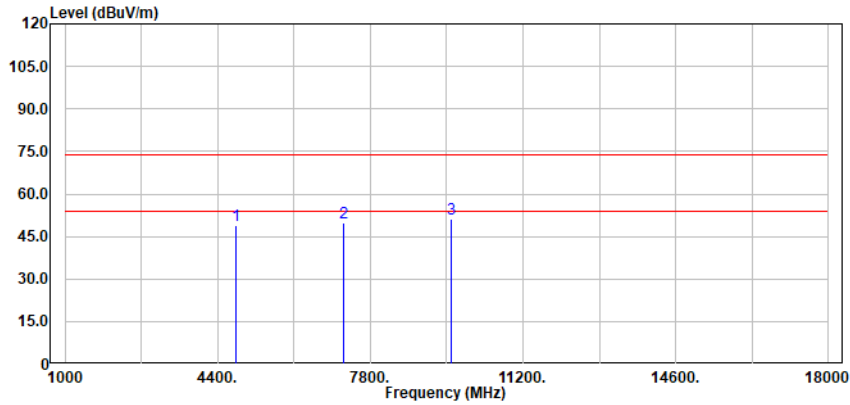

Antenna Polarity :Horizontal

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	4804.00	61.09	31.26	4.14	47.81	48.68	74.00	-25.32	Peak
	7206.00	55.33	35.74	5.33	46.59	49.81	74.00	-24.19	Peak
	9608.00	53.25	38.20	5.71	46.17	50.99	74.00	-23.01	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor




SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR230700149803

Page: 90 of 200

Test Mode: 01; Polarity: Vertical; Modulation:8DPSK; Channel:Low

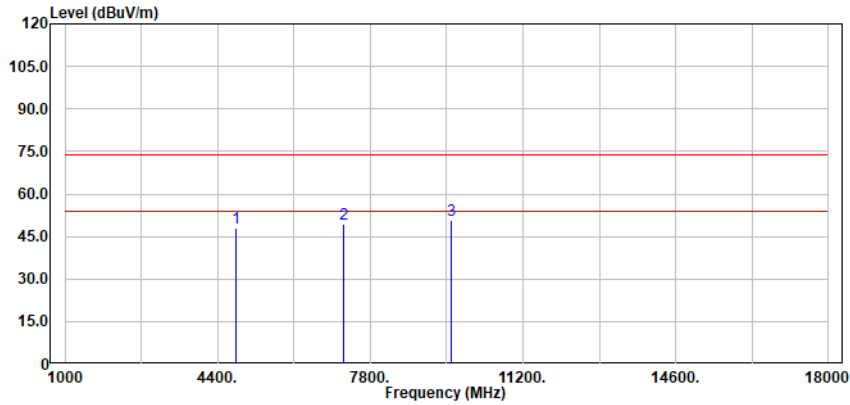

Antenna Polarity :Vertical

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	4804.00	60.45	31.26	4.14	47.81	48.04	74.00	-25.96	Peak
	7206.00	54.80	35.74	5.33	46.59	49.28	74.00	-24.72	Peak
	9608.00	52.84	38.20	5.71	46.17	50.58	74.00	-23.42	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor




SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR230700149803

Page: 91 of 200

Test Mode: 01; Polarity: Horizontal; Modulation:8DPSK; Channel:middle

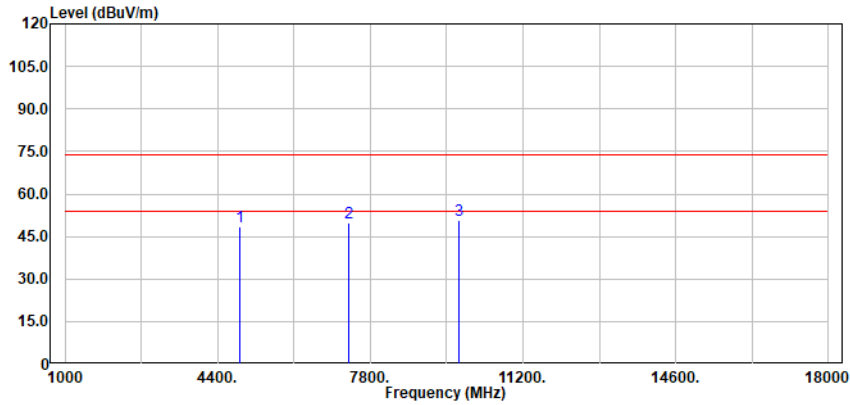

Antenna Polarity :Horizontal

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	4882.00	60.64	31.42	4.17	47.77	48.46	74.00	-25.54	Peak
	7323.00	54.79	36.09	5.43	46.72	49.59	74.00	-24.41	Peak
	9764.00	52.86	38.35	5.75	46.10	50.86	74.00	-23.14	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor




SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR230700149803

Page: 92 of 200

Test Mode: 01; Polarity: Vertical; Modulation:8DPSK; Channel:middle

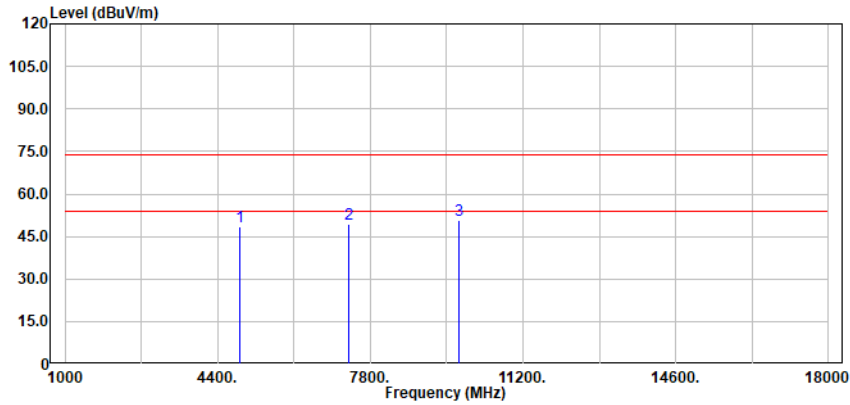


Antenna Polarity :Vertical

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
	4882.00	60.74	31.42	4.17	47.77	48.56	74.00	-25.44	Peak
	7323.00	54.59	36.09	5.43	46.72	49.39	74.00	-24.61	Peak
	9764.00	52.51	38.35	5.75	46.10	50.51	74.00	-23.49	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Horizontal; Modulation:8DPSK; Channel:High

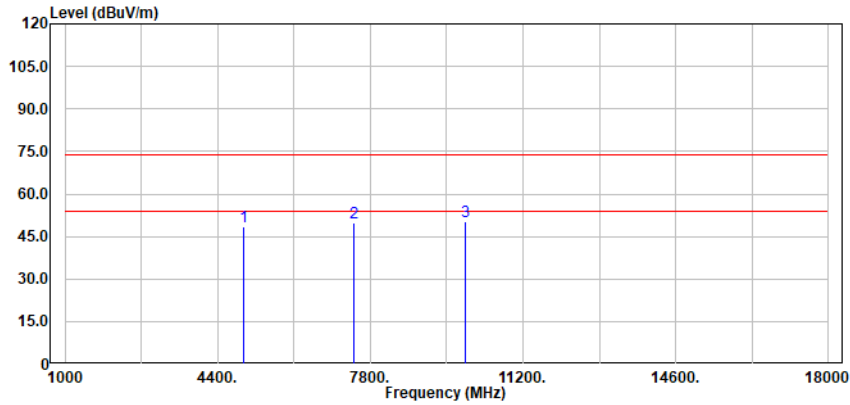


Antenna Polarity :Horizontal

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
	4960.00	60.55	31.58	4.21	47.72	48.62	74.00	-25.38	Peak
	7440.00	54.75	36.35	5.48	46.84	49.74	74.00	-24.26	Peak
	9920.00	52.04	38.51	5.81	46.03	50.33	74.00	-23.67	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Vertical; Modulation:8DPSK; Channel:High

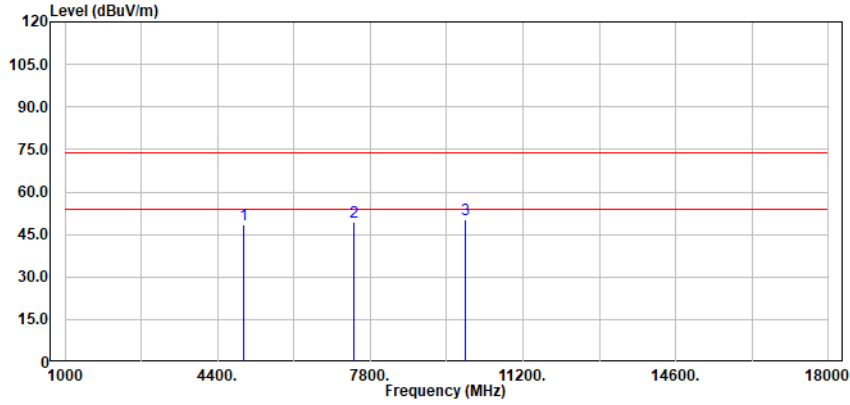

Antenna Polarity :Vertical

No.	Read Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
	4960.00	60.31	31.58	4.21	47.72	48.38	74.00	-25.62	Peak
	7440.00	54.17	36.35	5.48	46.84	49.16	74.00	-24.84	Peak
	9920.00	51.85	38.51	5.81	46.03	50.14	74.00	-23.86	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

7.13 99% Bandwidth

Test Requirement RSS-Gen Section 6.7
 Test Method: ANSI C63.10 (2013) Section 6.9.3


7.13.1 E.U.T. Operation

Operating Environment:
 Temperature: 24.5 °C Humidity: 48.5 % RH Atmospheric Pressure: 1010 mbar

7.13.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.13.3 Test Setup Diagram

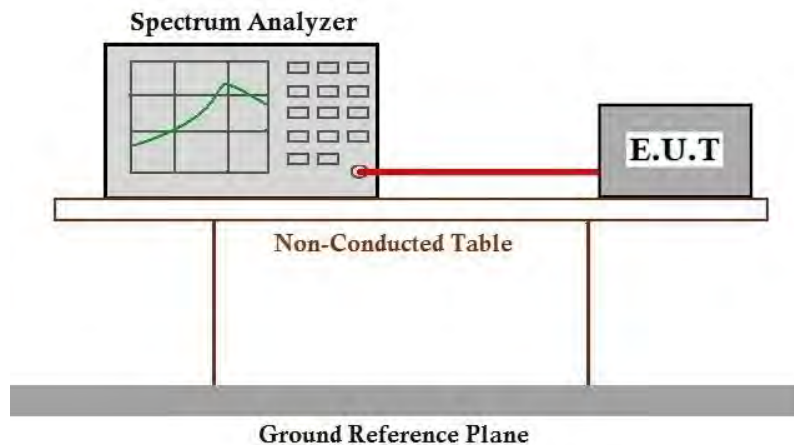

7.13.4 Measurement Procedure and Data

Please Refer to Appendix for Details



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR230700149803

Page: 96 of 200

8 Test Setup Photo

Refer to Appendix - Test Setup Photo for SHCR2307001498AT

9 EUT Constructional Details (EUT Photos)

Refer to Appendix - Photographs of EUT Constructional Details for SHCR2307001498AT

10 Appendix

Left


1. Bandwidth

1.1 OBW


1.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	99% Occupied Bandwidth (MHz)	Verdict
					Result	
GFSK	SISO	2402	DH5	1	0.883	Pass
		2441	DH5	1	0.874	Pass
		2480	DH5	1	0.872	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	1.152	Pass
		2441	2DH5	1	1.152	Pass
		2480	2DH5	1	1.151	Pass
8DPSK	SISO	2402	3DH5	1	1.160	Pass
		2441	3DH5	1	1.160	Pass
		2480	3DH5	1	1.161	Pass


1.1.2 Test Graph

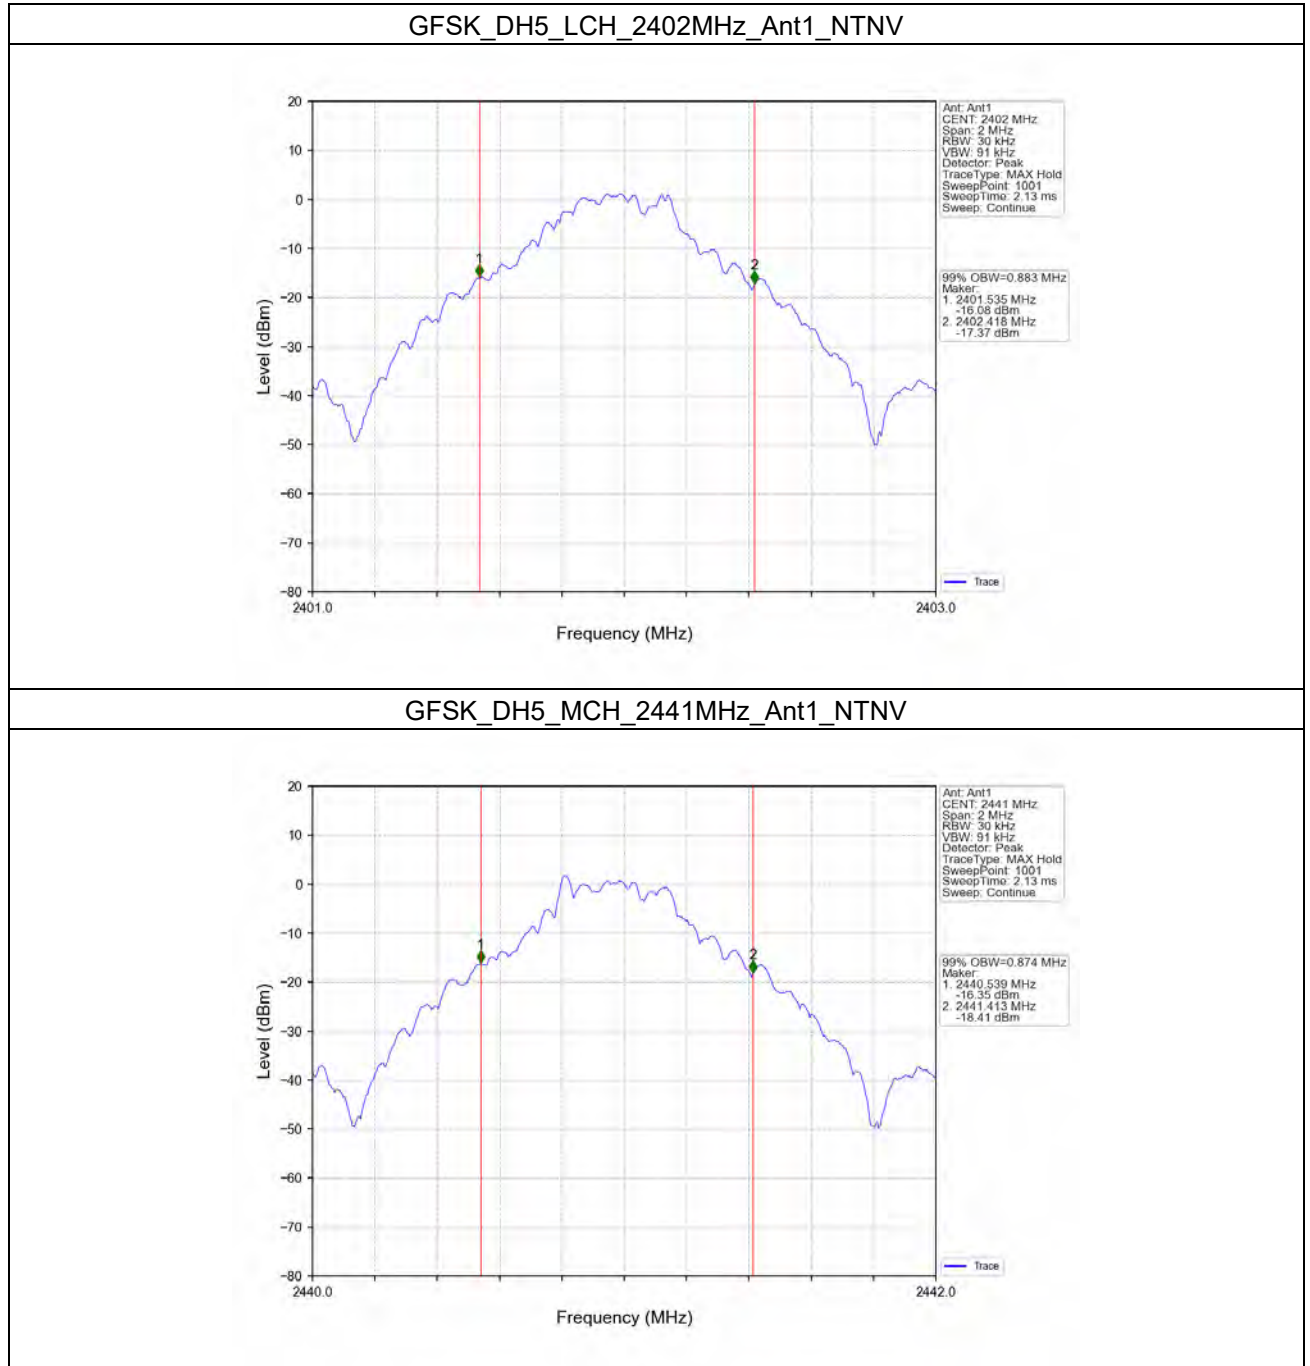


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

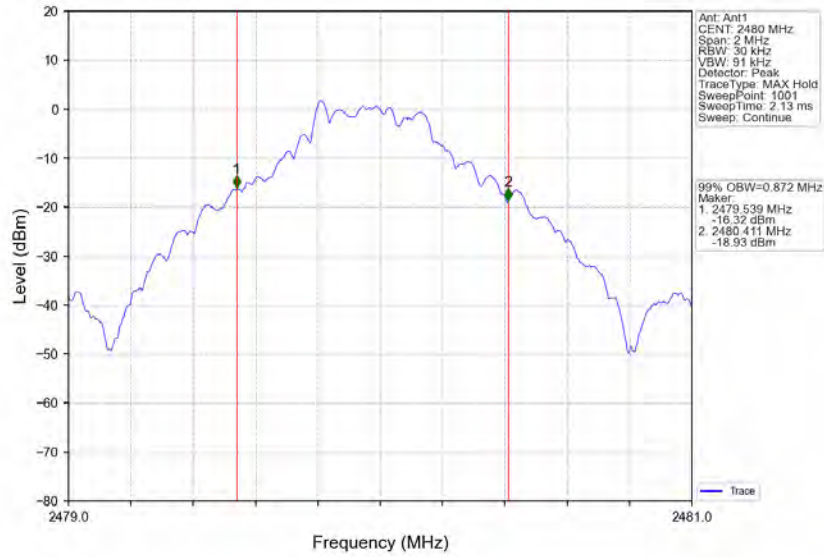


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

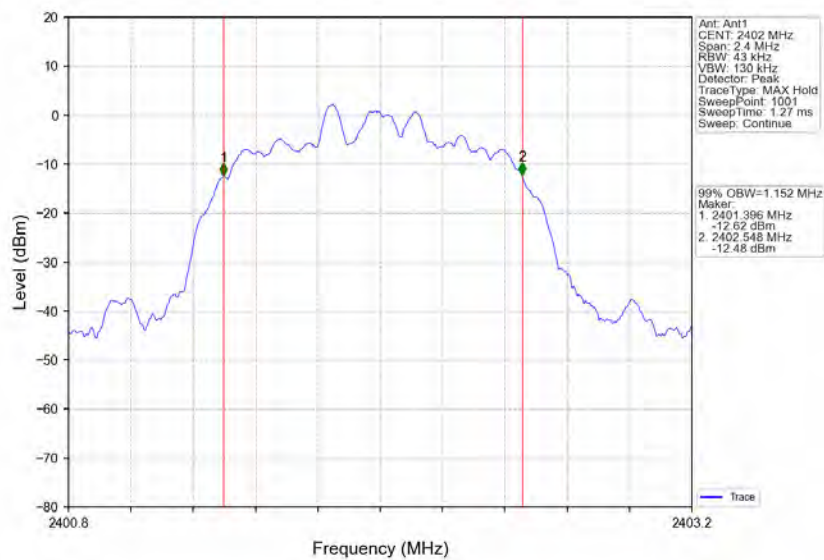


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

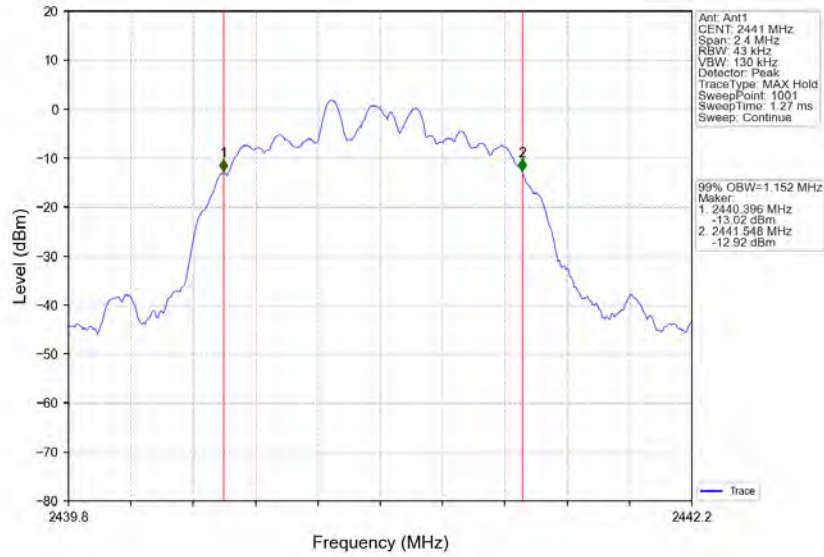


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

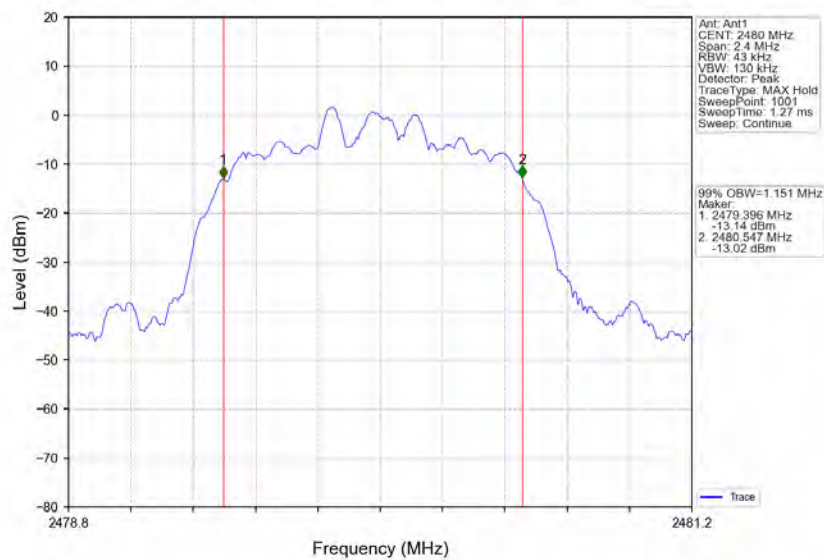


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

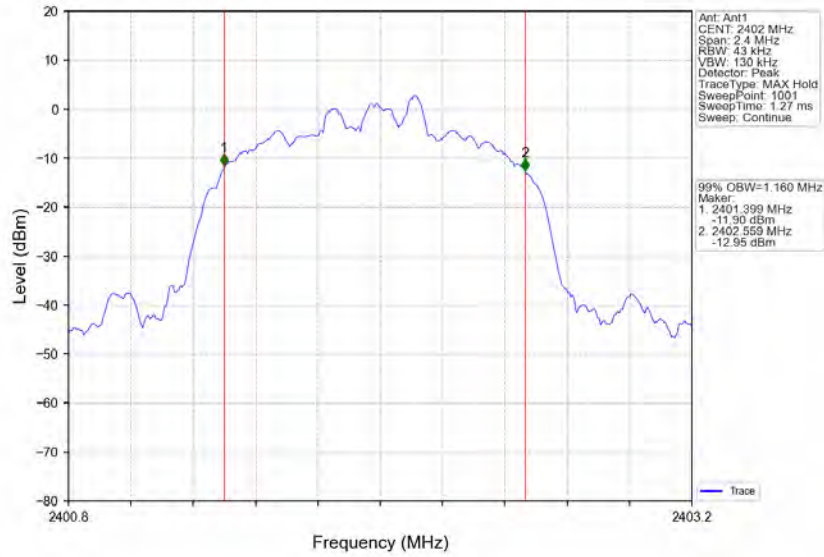

8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

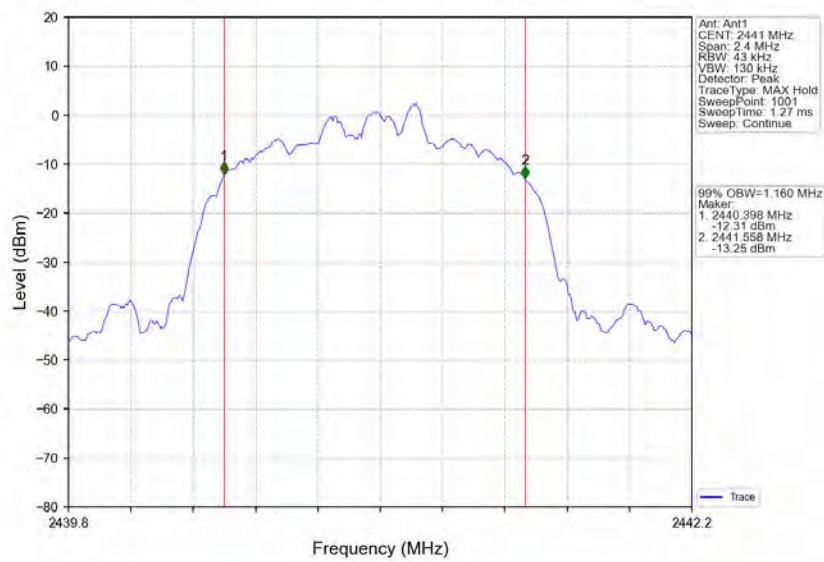

8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

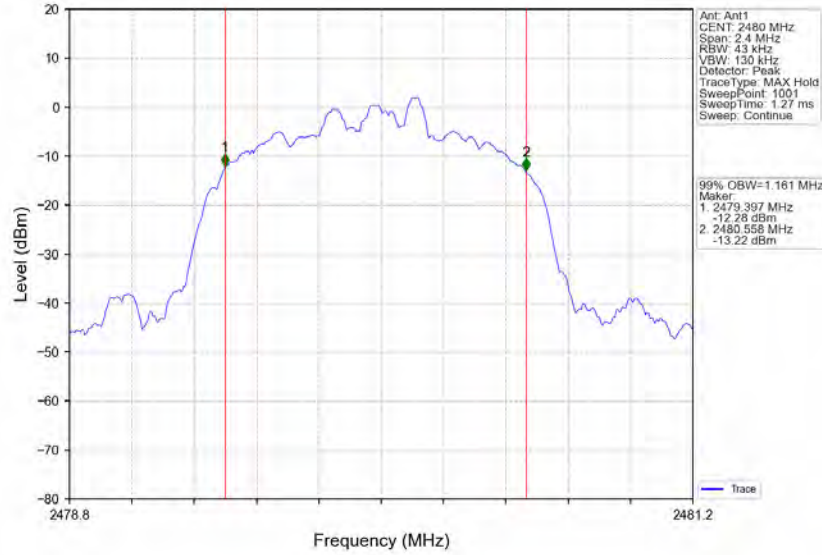

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR230700149803


Page: 103 of 200

1.2 20dB BW


1.2.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	20dB Bandwidth (MHz)	Verdict
					Result	
GFSK	SISO	2402	DH5	1	0.965	Pass
		2441	DH5	1	0.953	Pass
		2480	DH5	1	0.951	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	1.274	Pass
		2441	2DH5	1	1.274	Pass
		2480	2DH5	1	1.275	Pass
8DPSK	SISO	2402	3DH5	1	1.286	Pass
		2441	3DH5	1	1.288	Pass
		2480	3DH5	1	1.285	Pass


1.2.2 Test Graph

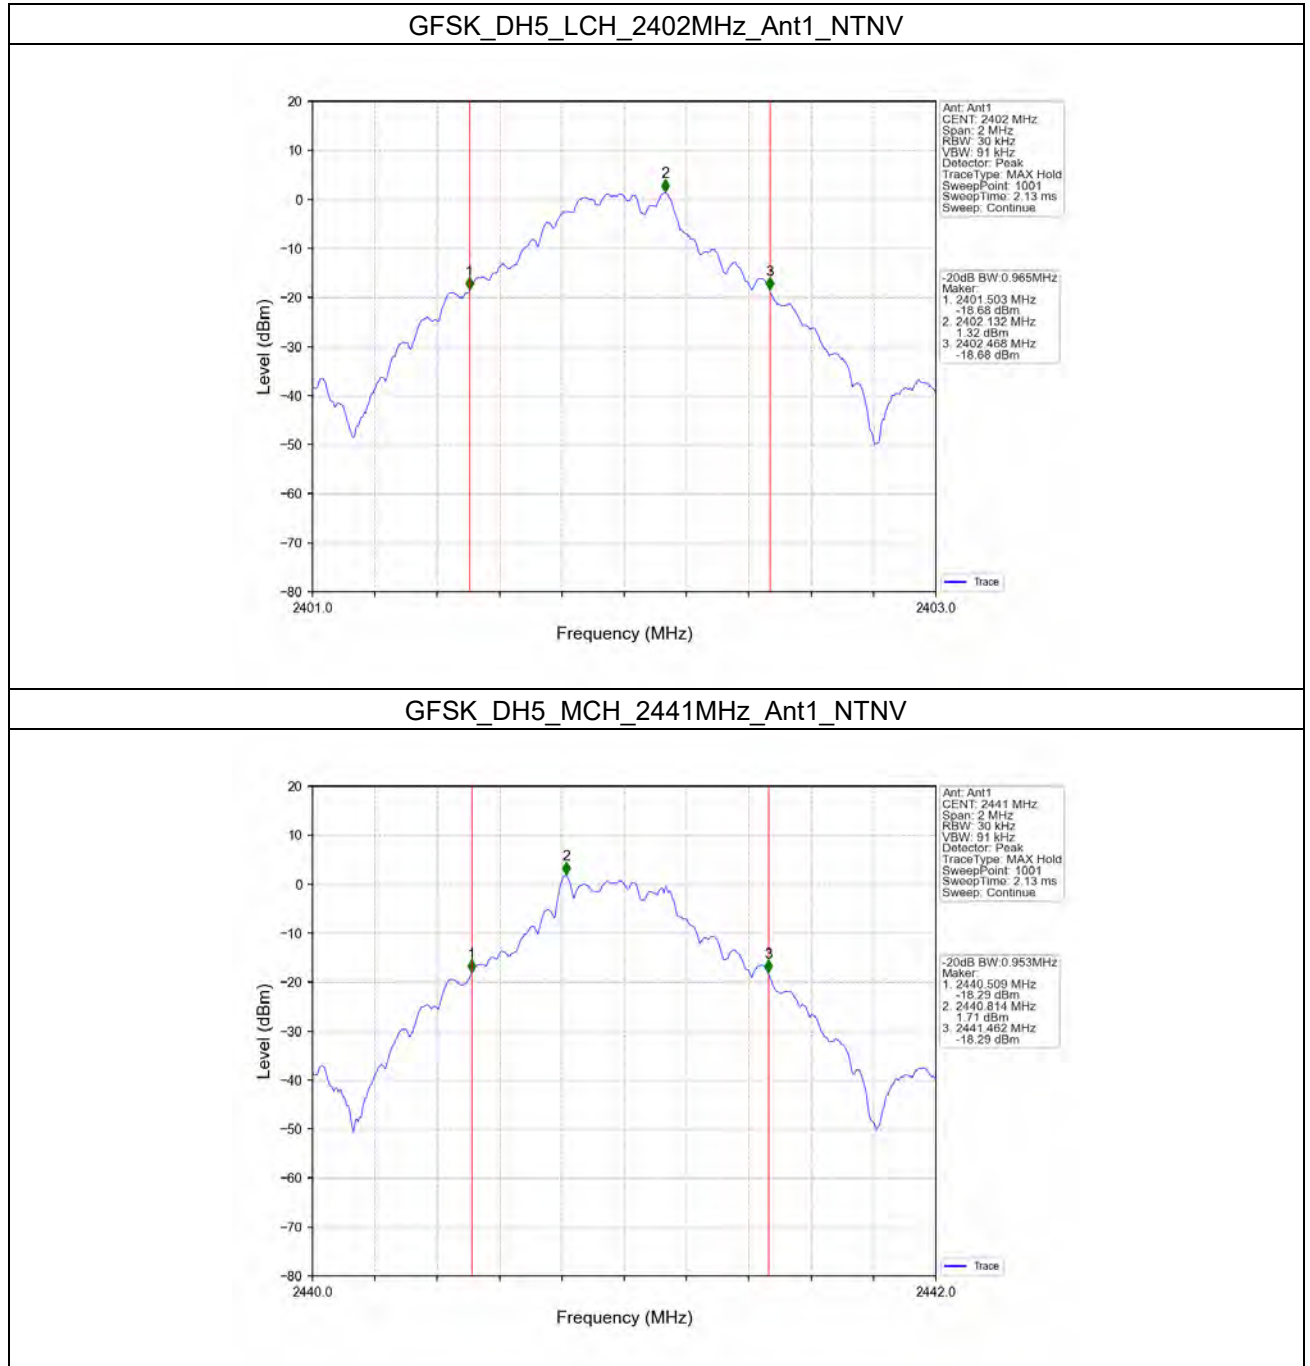


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

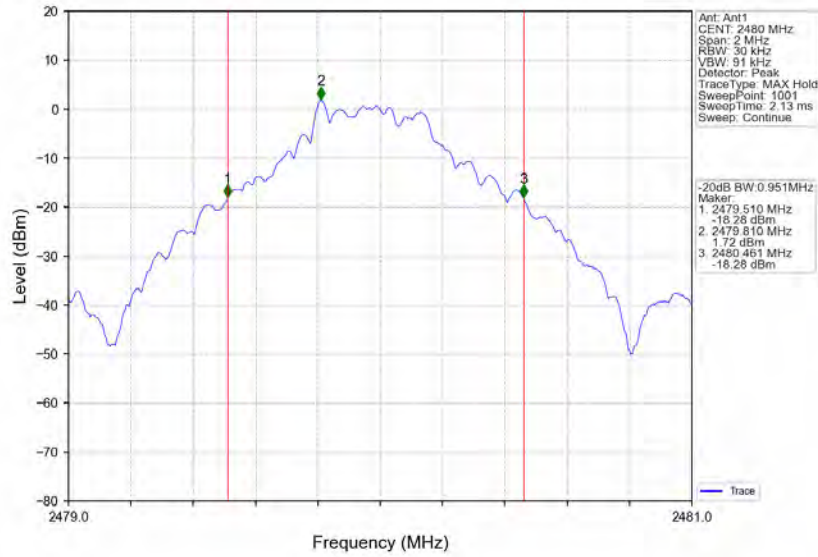


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

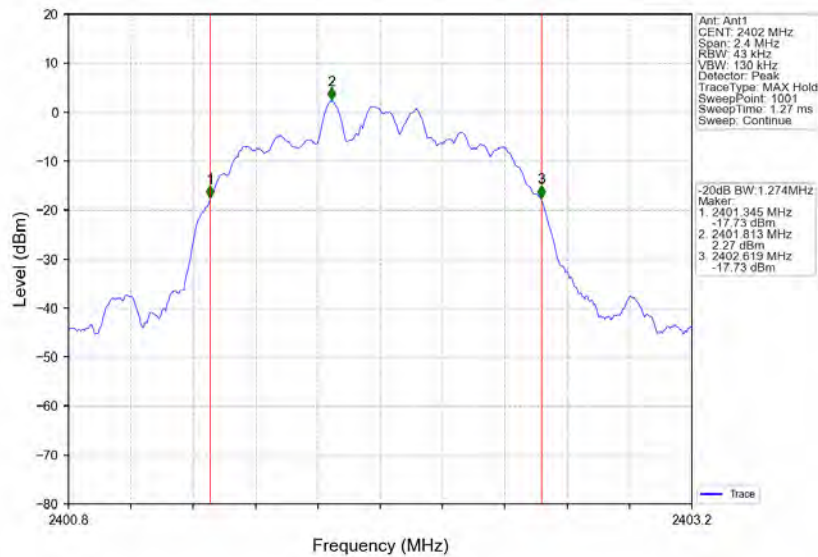


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

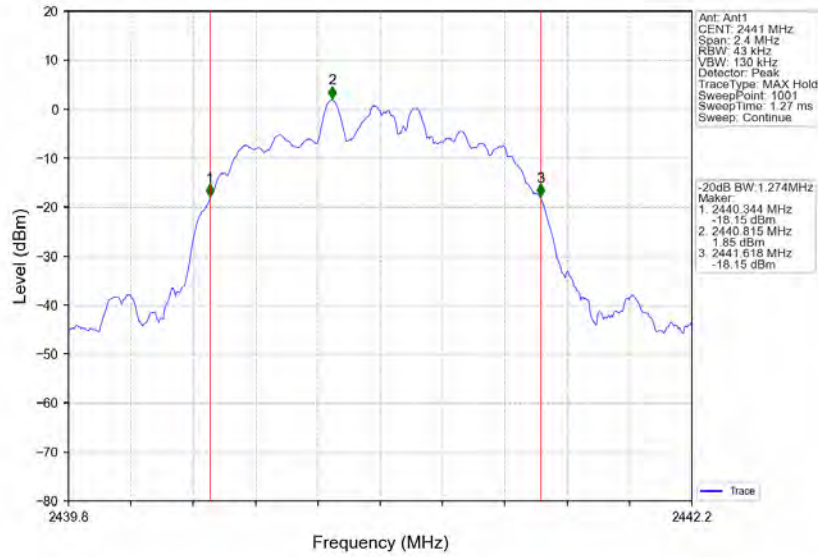


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

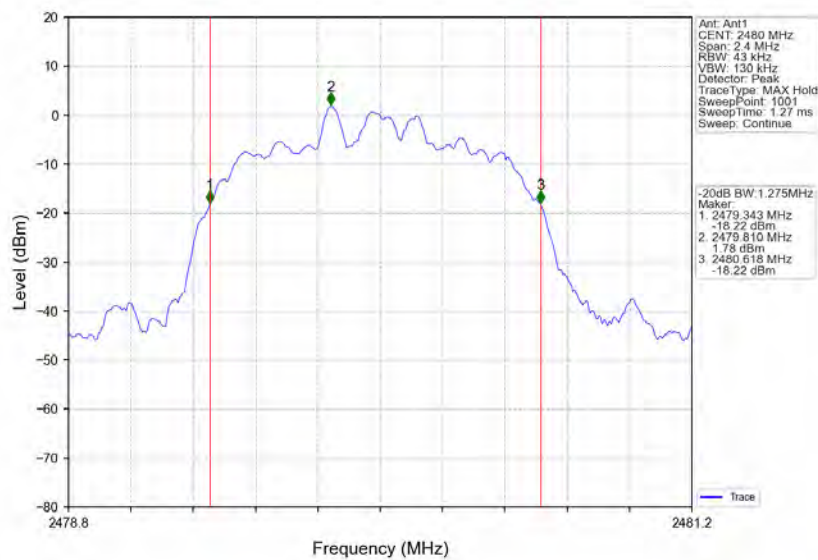


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

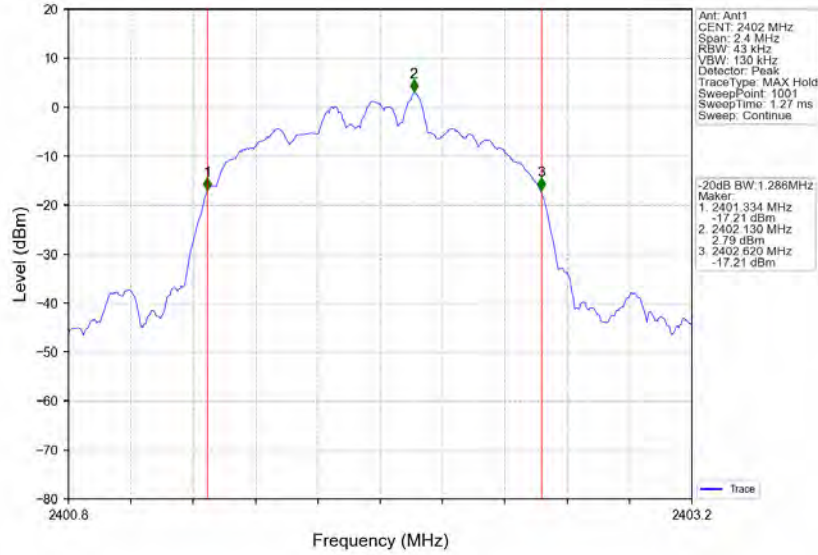

8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

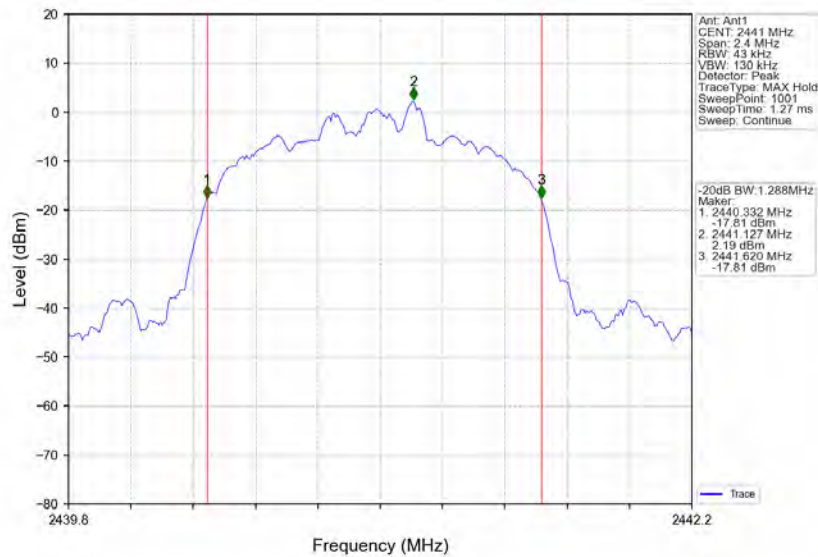

8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

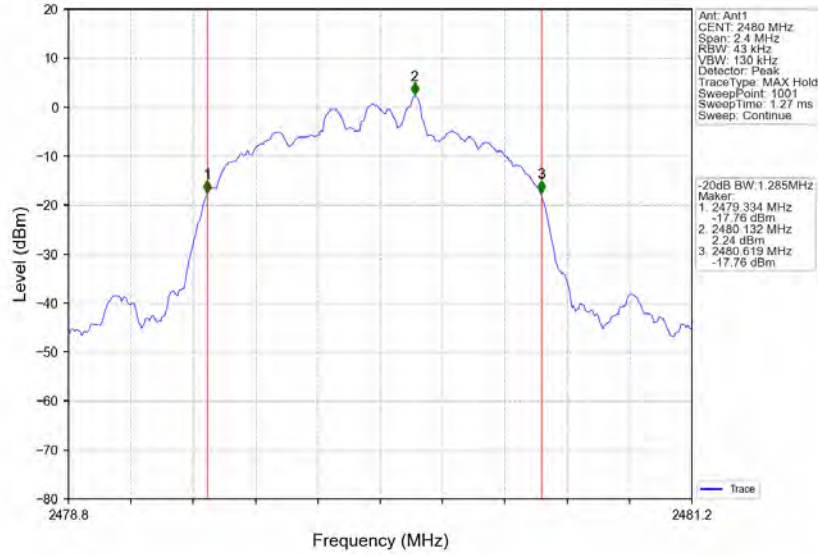

2. Maximum Conducted Output Power


2.1 Power

2.1.1 Test Result


Mode	TX Type	Frequency (MHz)	Packet Type	Maximum Peak Conducted Output Power (dBm)		Verdict
				ANT1	Limit	
GFSK	SISO	2402	DH5	3.48	<=30	Pass
		2441	DH5	3.06	<=30	Pass
		2480	DH5	2.97	<=30	Pass
Pi/4DQPSK	SISO	2402	2DH5	3.33	<=20.97	Pass
		2441	2DH5	2.91	<=20.97	Pass
		2480	2DH5	2.82	<=20.97	Pass
8DPSK	SISO	2402	3DH5	3.40	<=20.97	Pass
		2441	3DH5	2.96	<=20.97	Pass
		2480	3DH5	2.88	<=20.97	Pass

Note1: Antenna Gain: Ant1: 2.08dBi;


2.1.2 Test Graph

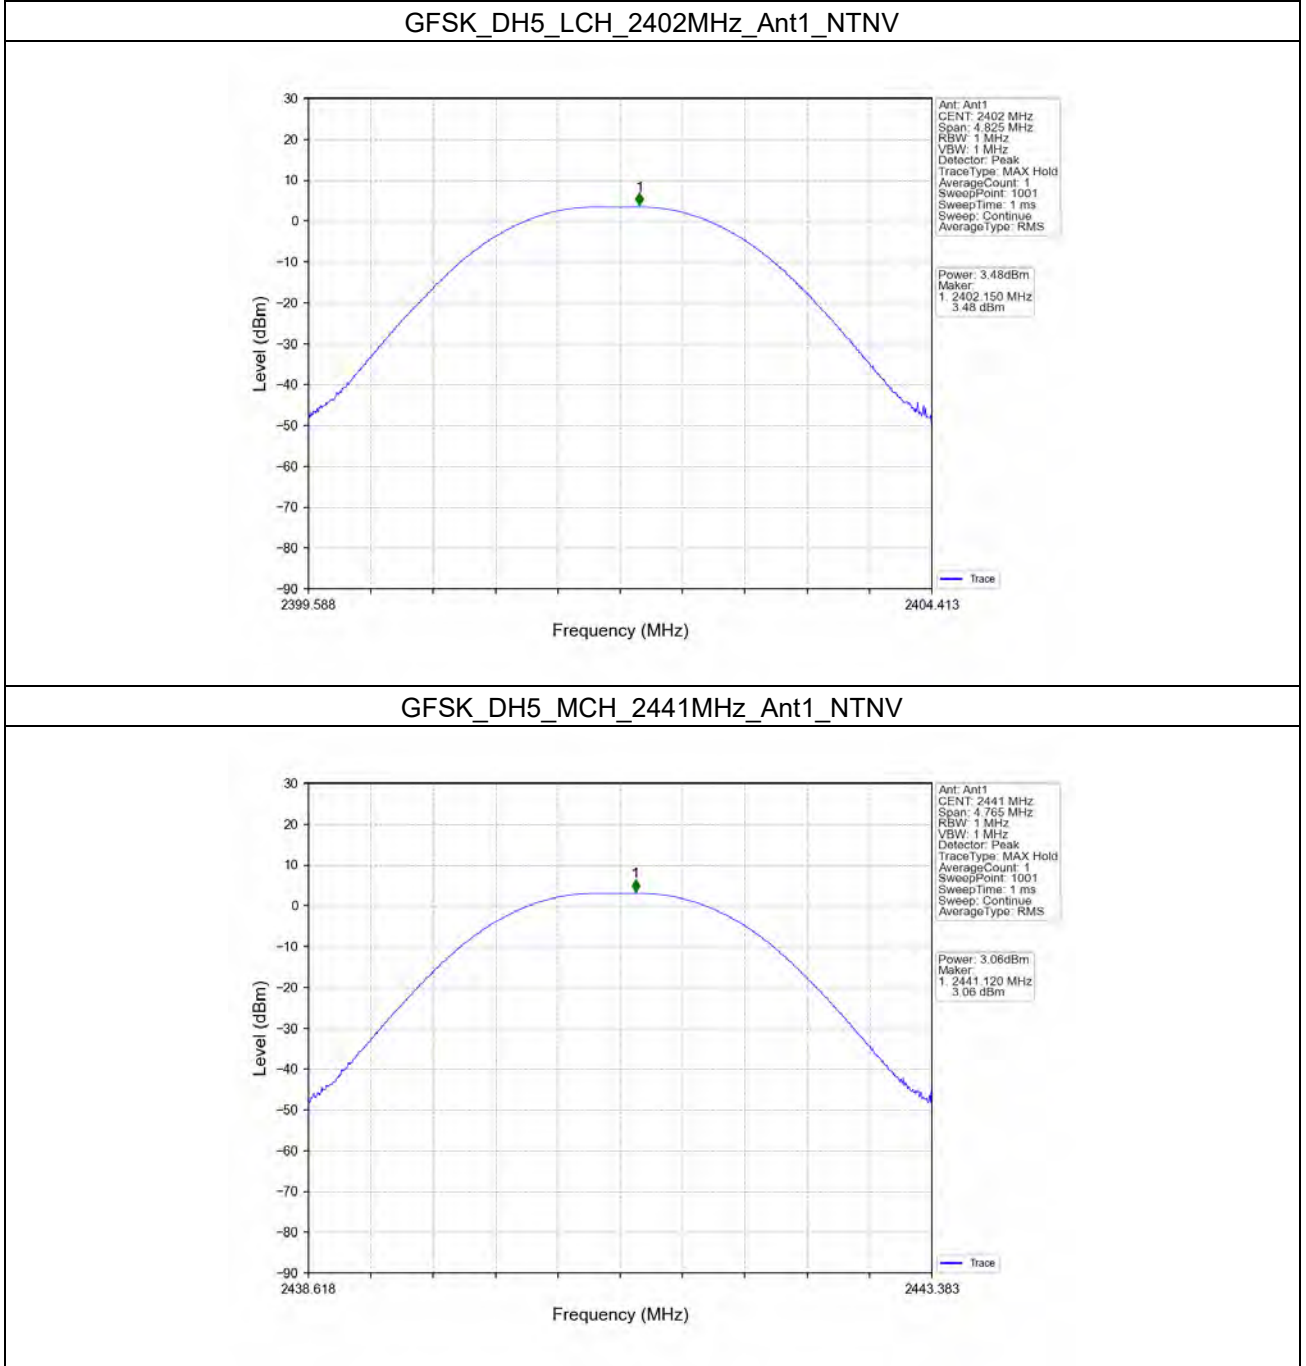


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

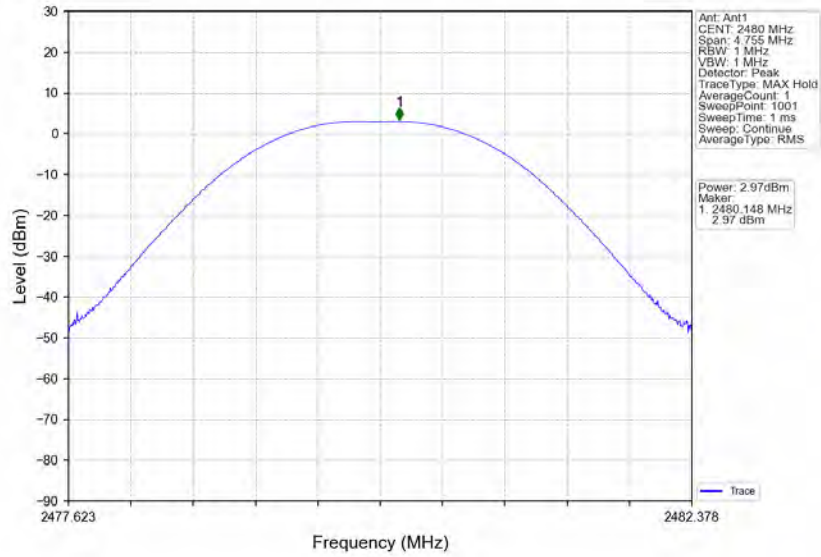


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

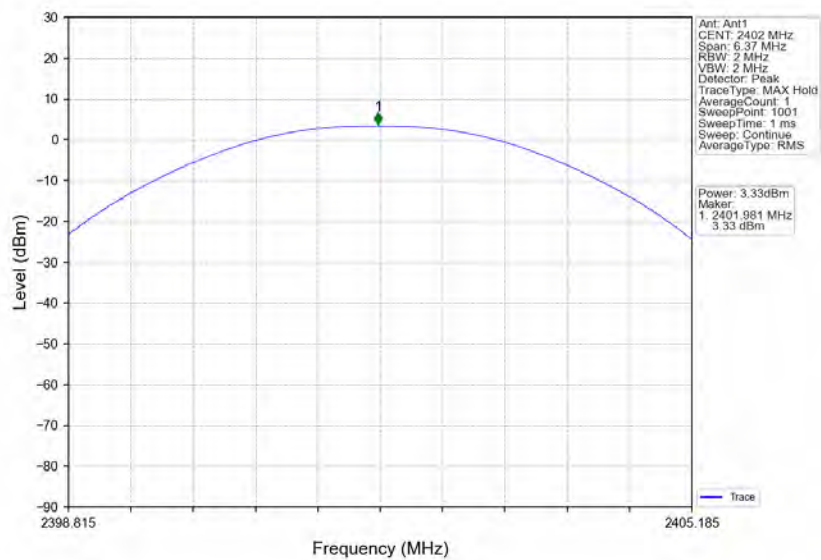


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

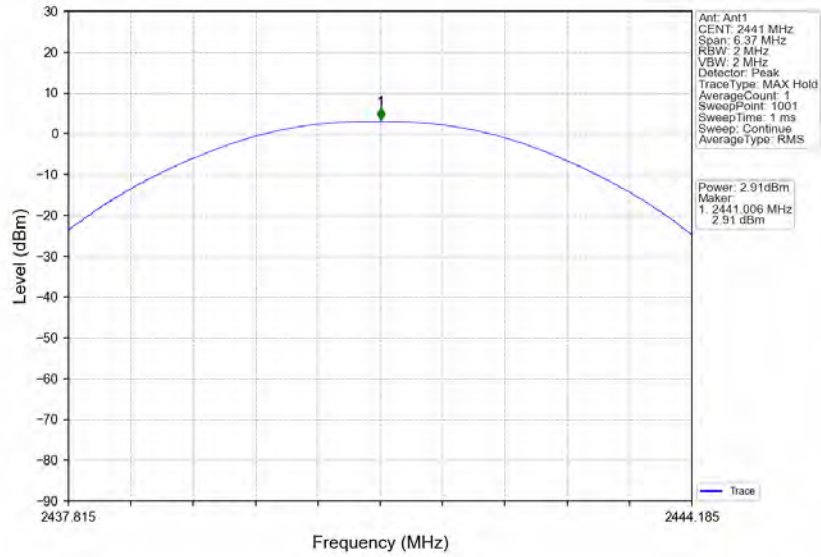


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

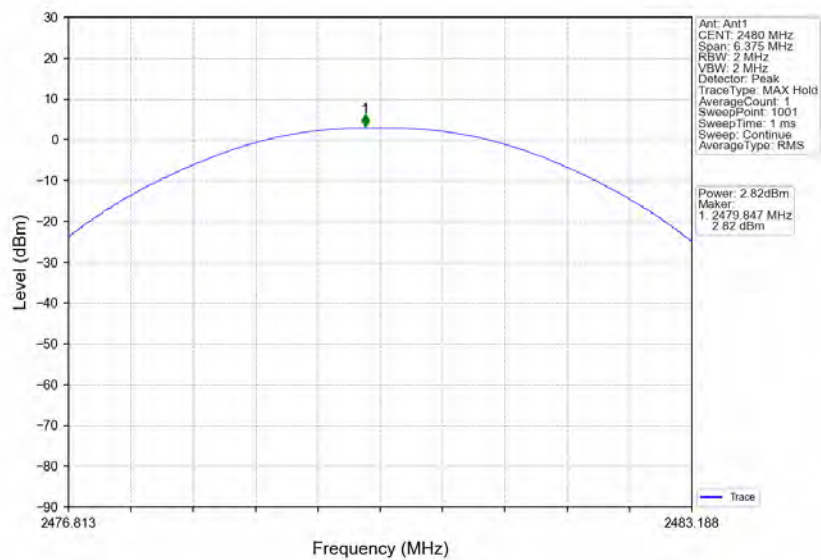


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

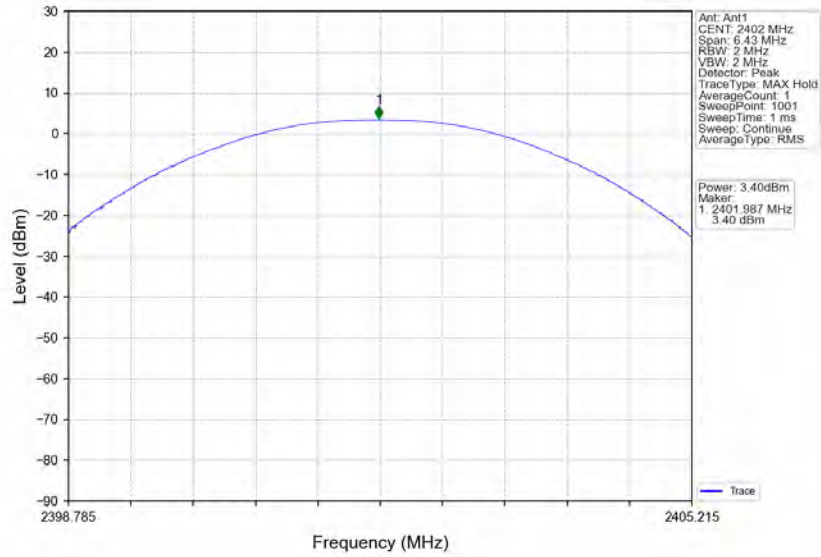

8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

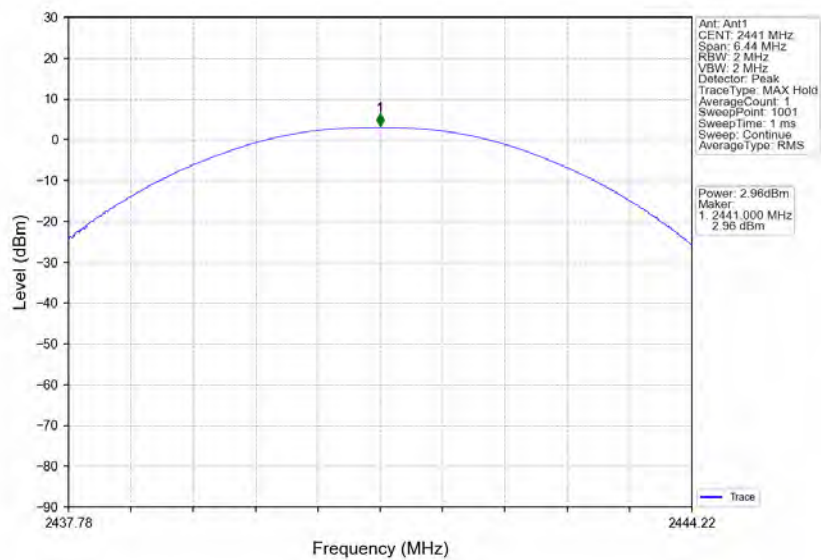

8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

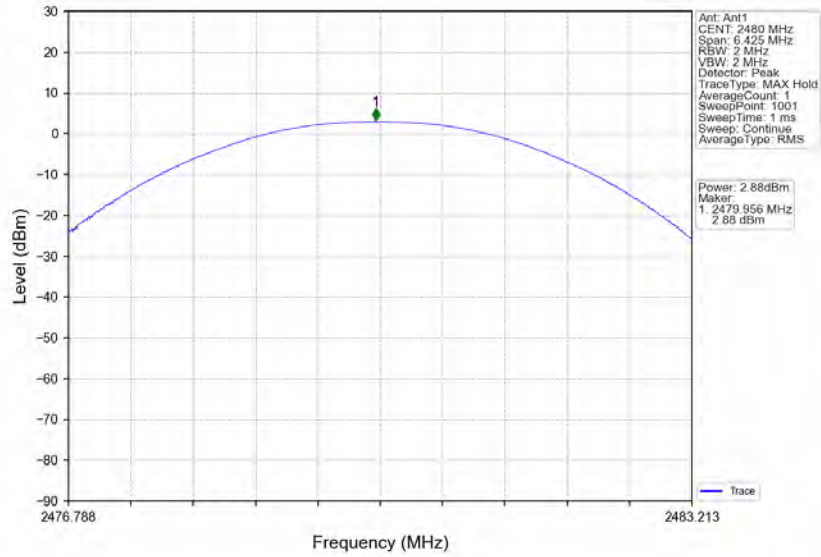


3. Carrier Frequency Separation

3.1 Ant1


3.1.1 Test Result

Ant1							
Mode	TX Type	Frequency (MHz)	Packet Type	Channel Separation (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	Verdict
GFSK	SISO	HOPP	DH5	1.008	0.965	≥ 0.965	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	1.006	1.275	≥ 0.85	Pass
8DPSK	SISO	HOPP	3DH5	0.986	1.288	≥ 0.859	Pass

3.1.2 Test Graph

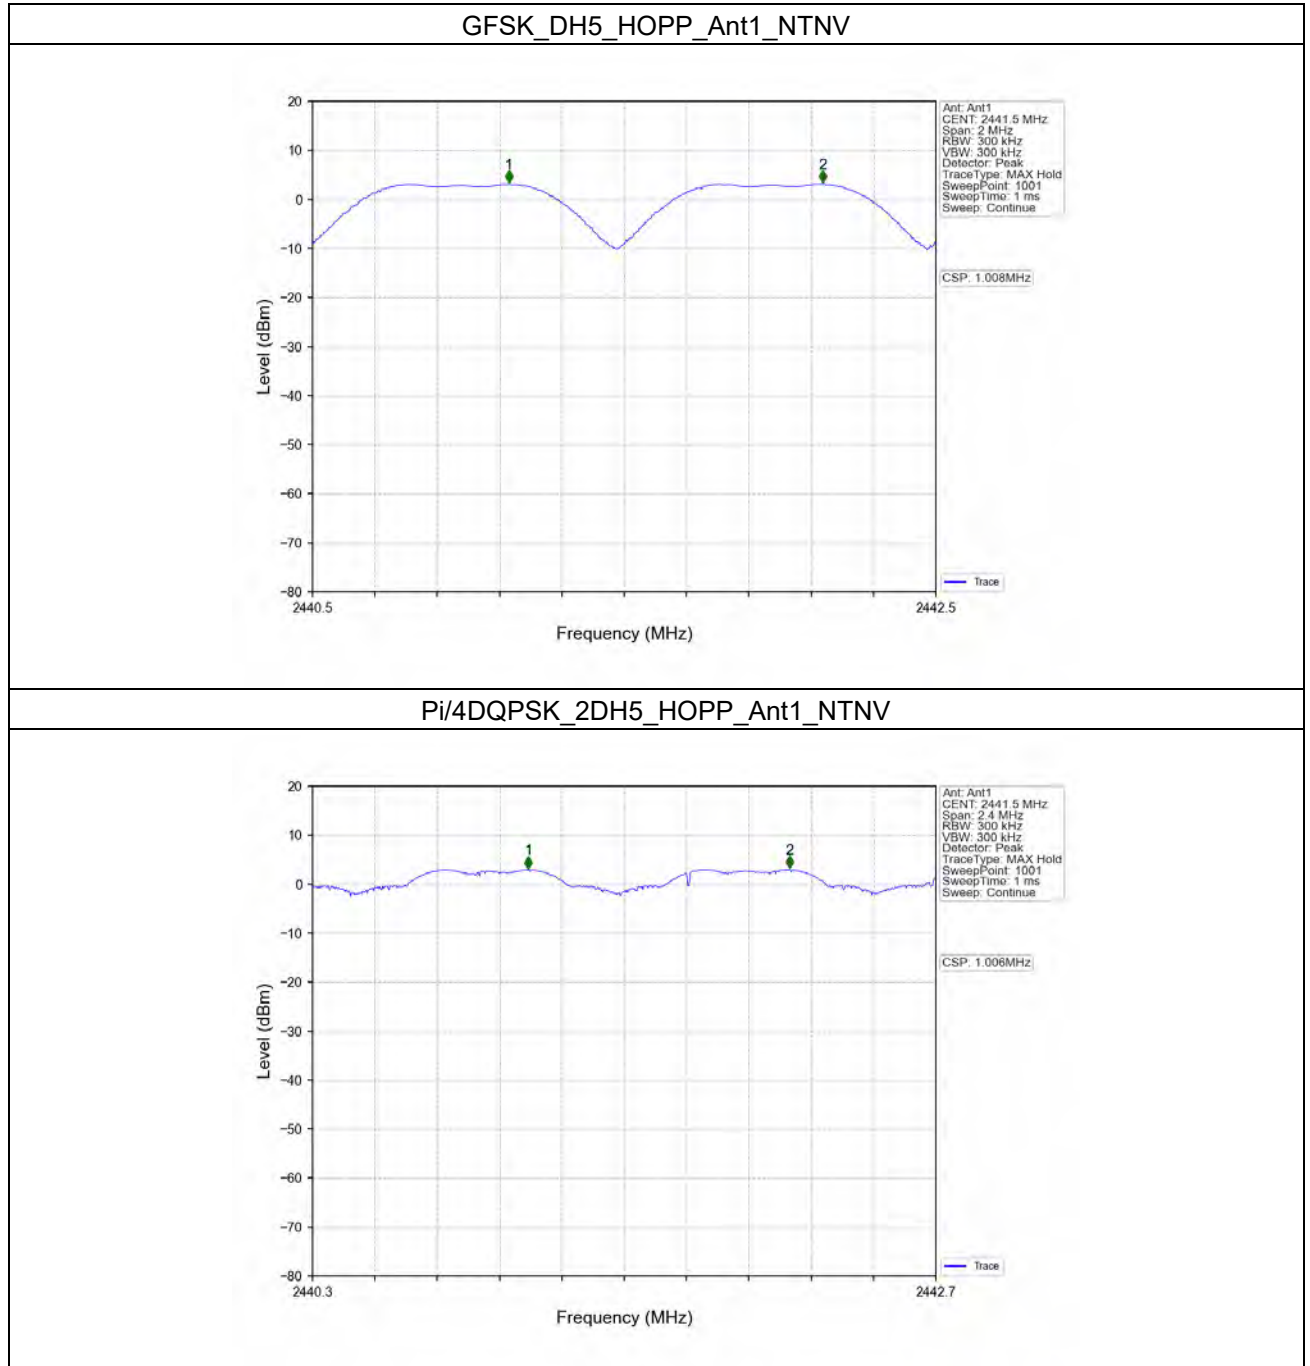

8DPSK_3DH5_HOPP_Ant1_NTNV

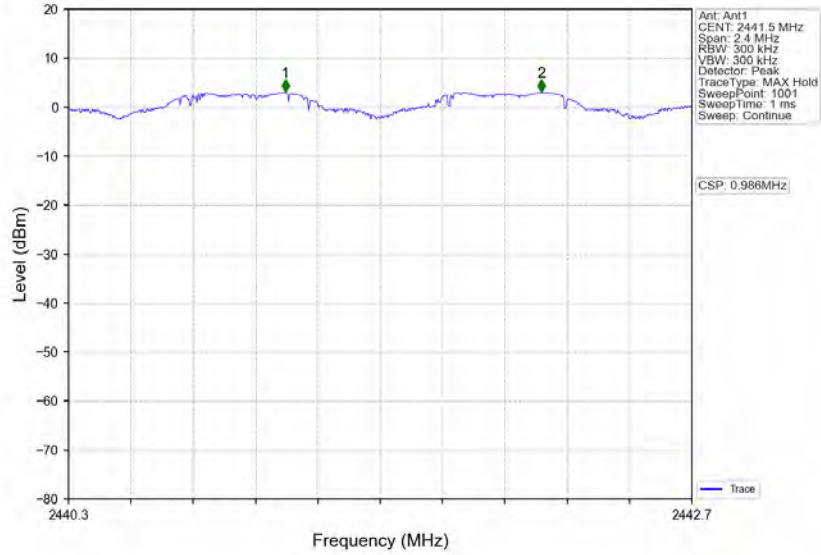



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR230700149803

Page: 118 of 200


4. Number of Hopping Frequencies

4.1 HoppNum


4.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	Num of Hopping Frequencies		Verdict
				ANT1	Limit	
GFSK	SISO	HOPP	DH5	79	≥ 15	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	79	≥ 15	Pass
8DPSK	SISO	HOPP	3DH5	79	≥ 15	Pass

4.1.2 Test Graph

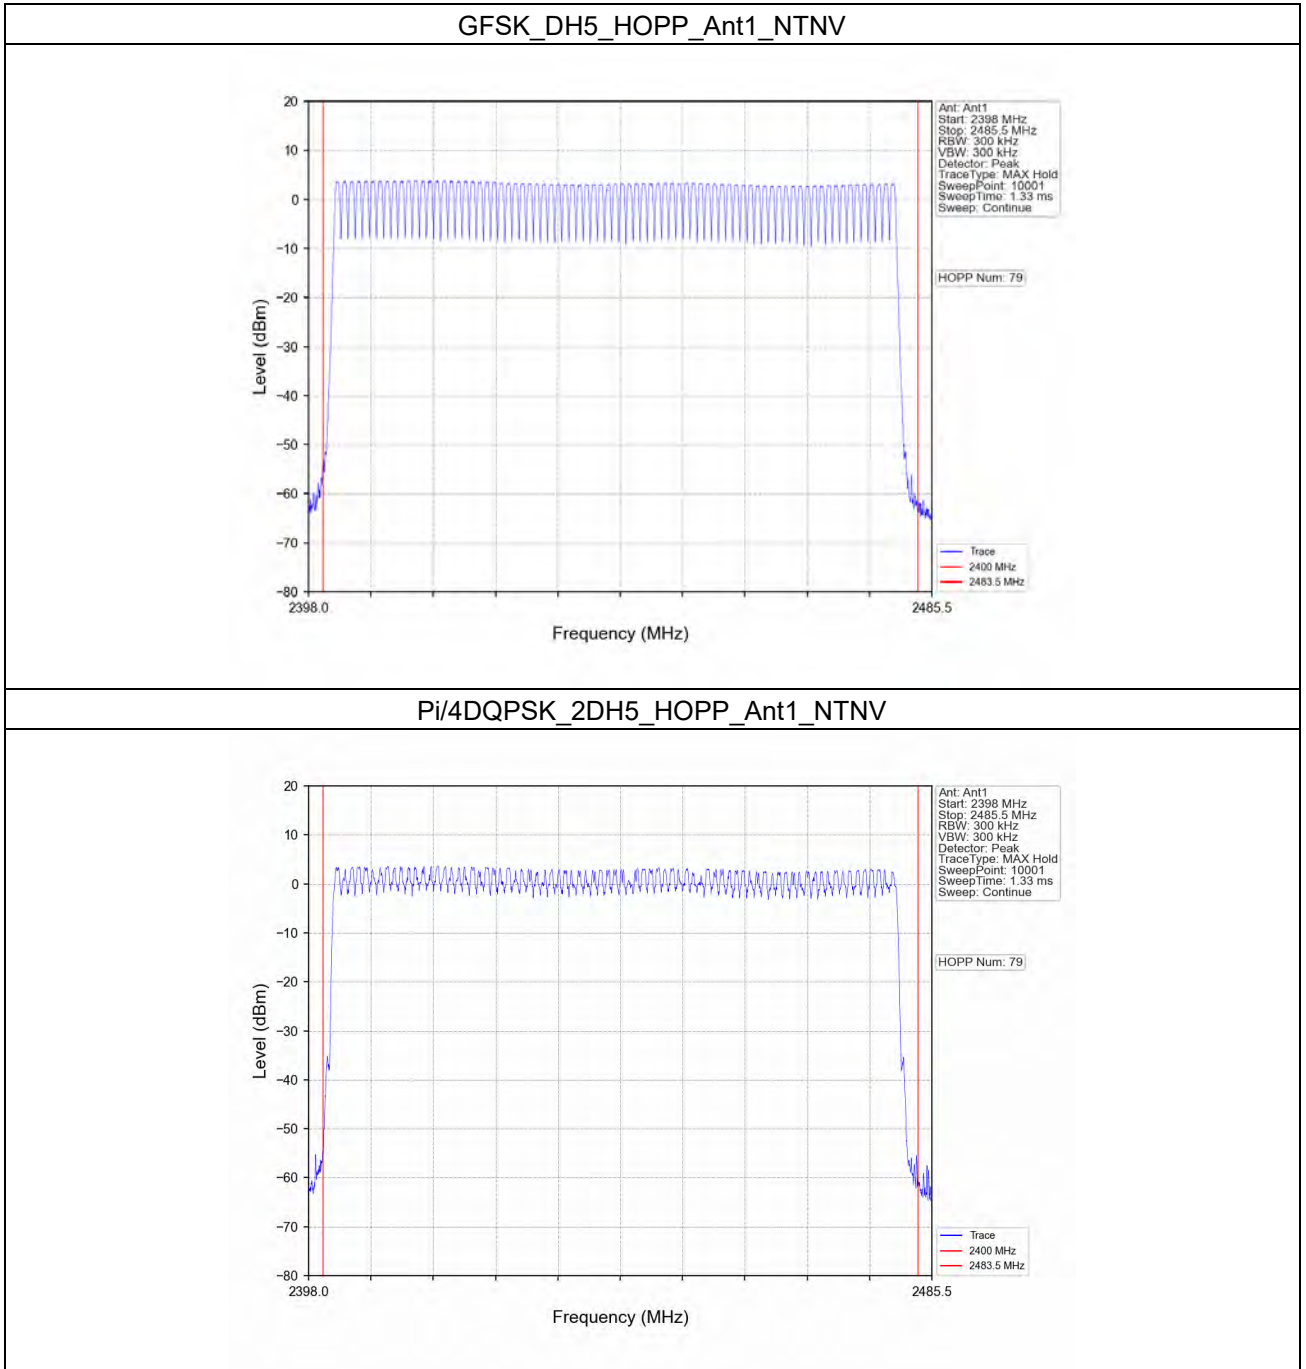

8DPSK_3DH5_HOPP_Ant1_NTNV

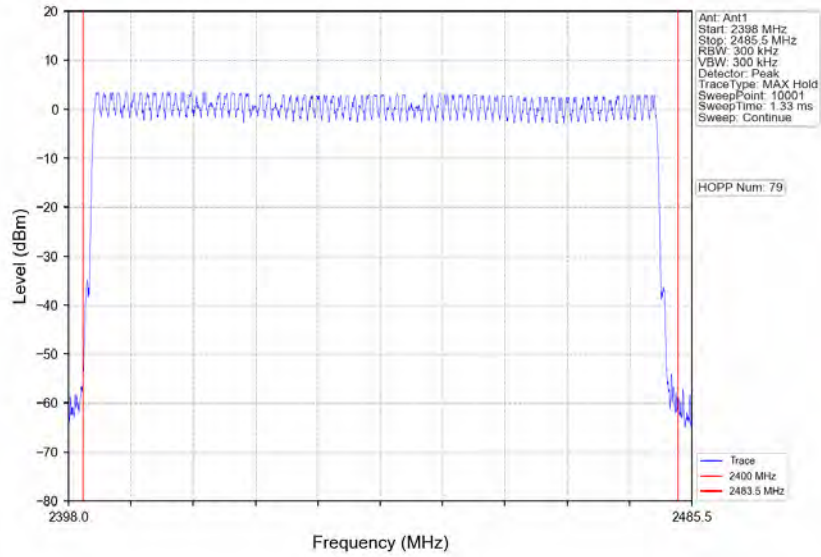



5. Time of Occupancy (Dwell Time)

5.1 Ant1


5.1.1 Test Result

Ant1									
Mode	TX Type	Frequency (MHz)	Packet Type	Duration of Single Pulse (ms)	Observation Period (s)	Num of Pulse in Observation Period	Dwell Time (ms)	Limit (ms)	Verdict
GFSK	SISO	HOPP	DH1	0.378	31.600	320	120.960	<=400	Pass
			DH3	1.634	31.600	160	261.440	<=400	Pass
			DH5	2.882	31.600	106	305.492	<=400	Pass
Pi/4DQPSK	SISO	HOPP	2DH1	0.382	31.600	320	122.240	<=400	Pass
			2DH3	1.634	31.600	160	261.440	<=400	Pass
			2DH5	2.882	31.600	107	308.374	<=400	Pass
8DPSK	SISO	HOPP	3DH1	0.382	31.600	320	122.240	<=400	Pass
			3DH3	0.382	31.600	320	122.240	<=400	Pass
			3DH5	2.884	31.600	106	305.704	<=400	Pass


5.1.2 Test Graph

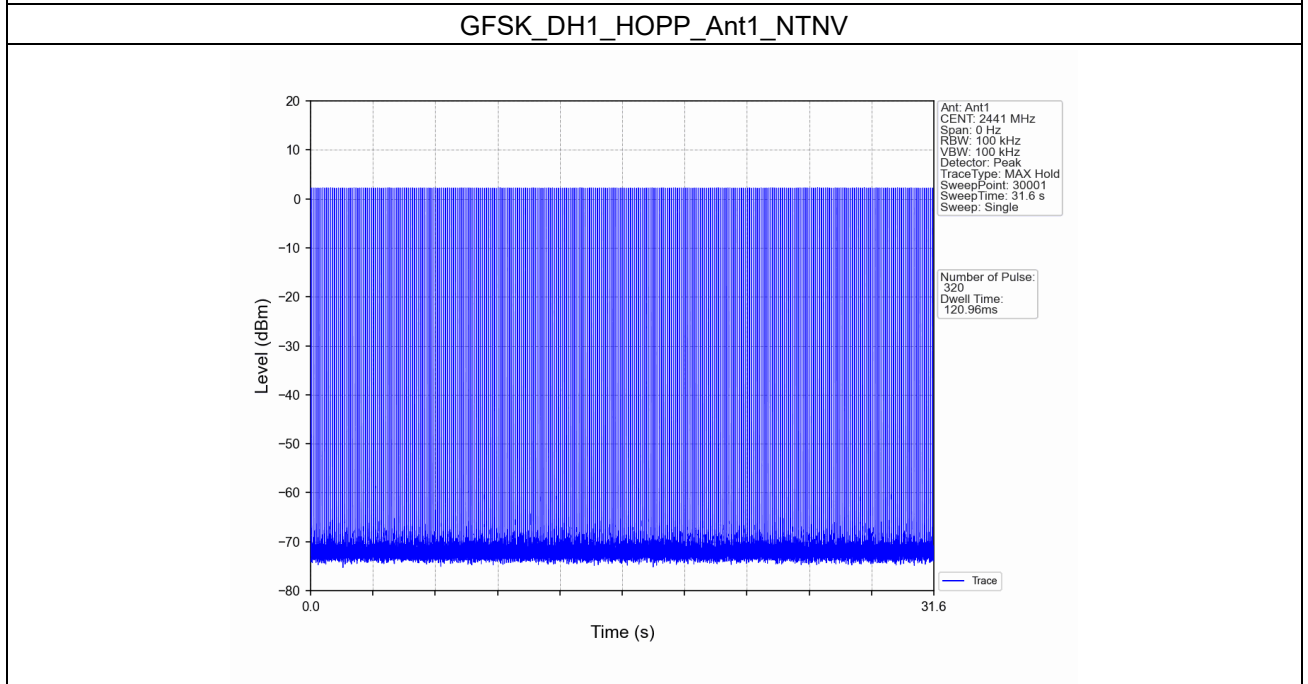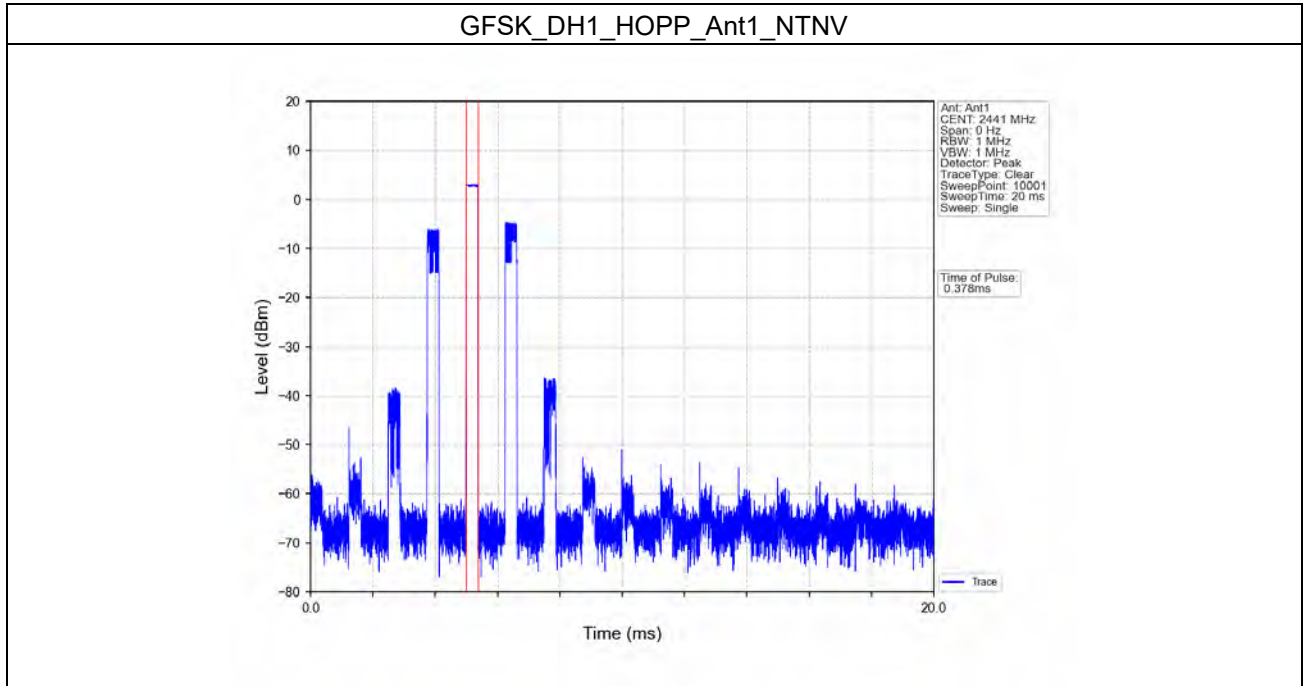


GFSK_DH3_HOPP_Ant1_NTNV

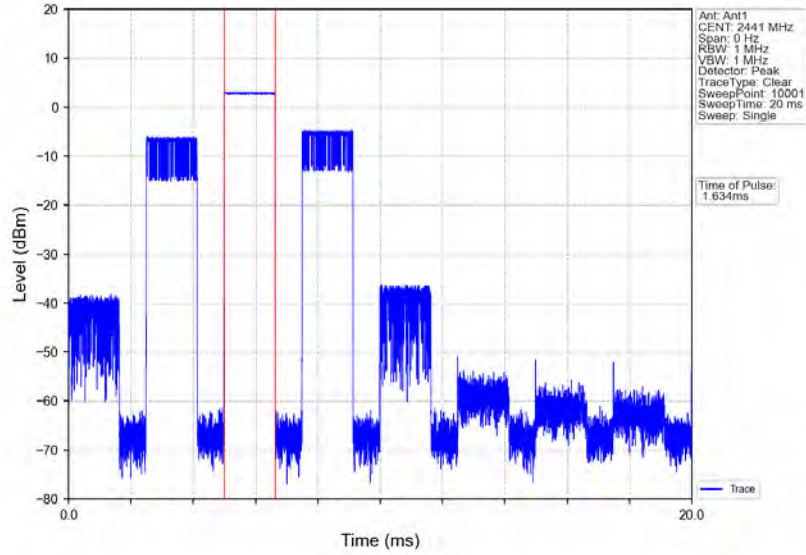


GFSK_DH3_HOPP_Ant1_NTNV

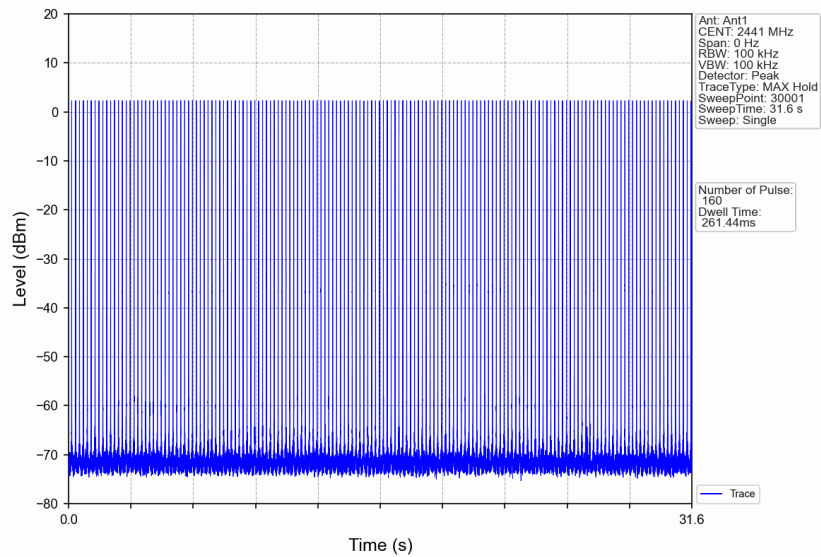


GFSK_DH5_HOPP_Ant1_NTNV

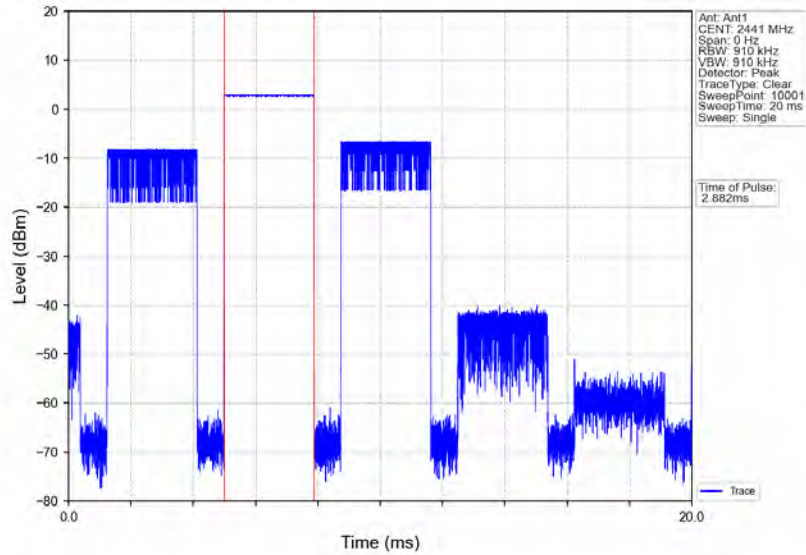


GFSK_DH5_HOPP_Ant1_NTNV

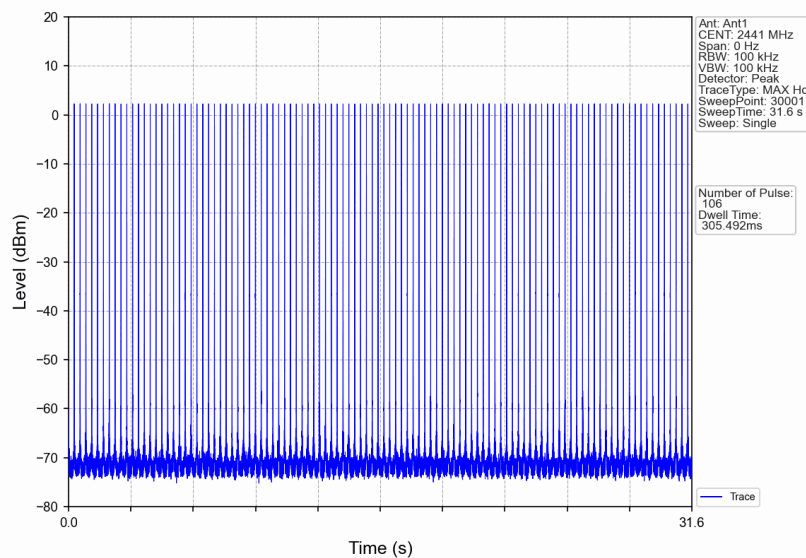


Pi/4DQPSK_2DH1_HOPP_Ant1_NTNV

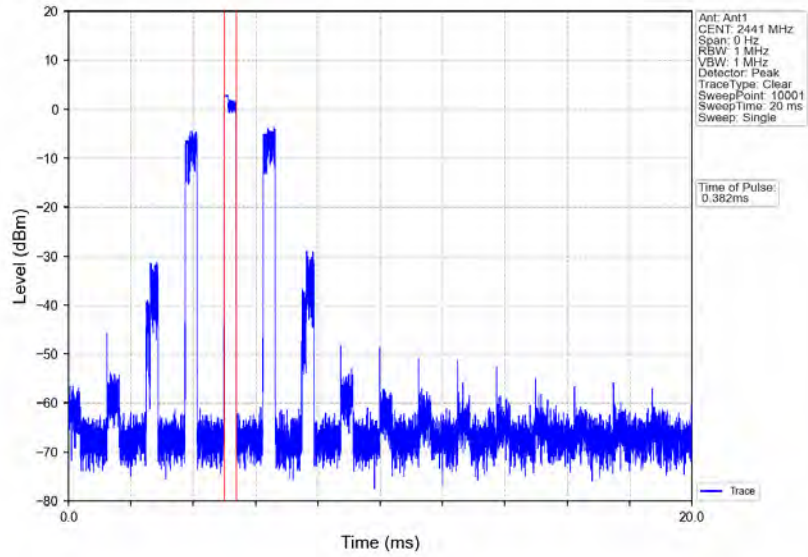


Pi/4DQPSK_2DH1_HOPP_Ant1_NTNV

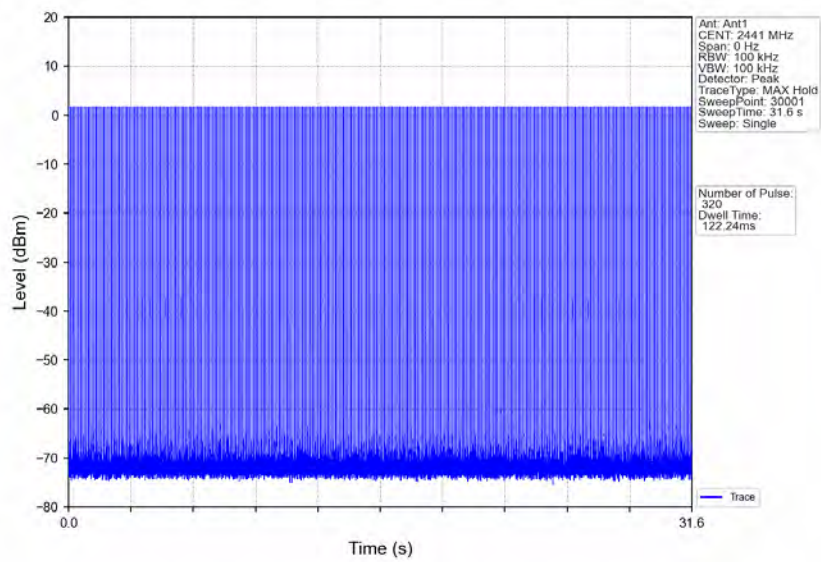


Pi/4DQPSK_2DH3_HOPP_Ant1_NTNV

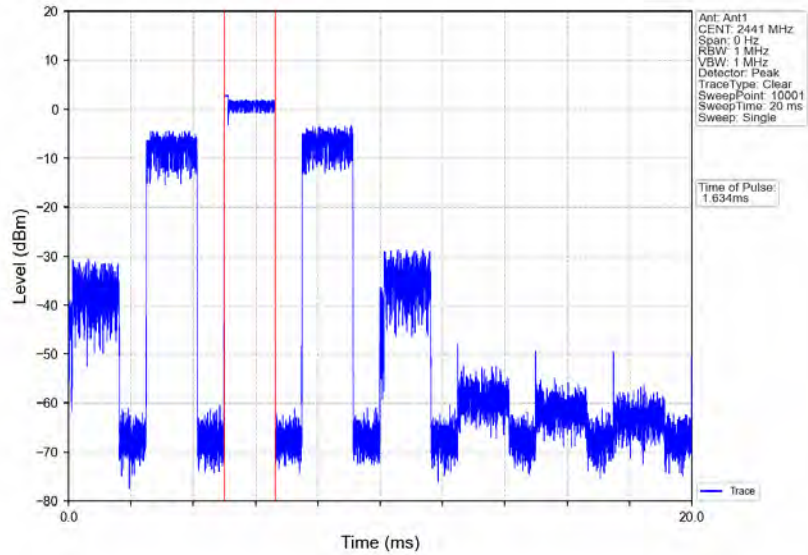


Pi/4DQPSK_2DH3_HOPP_Ant1_NTNV

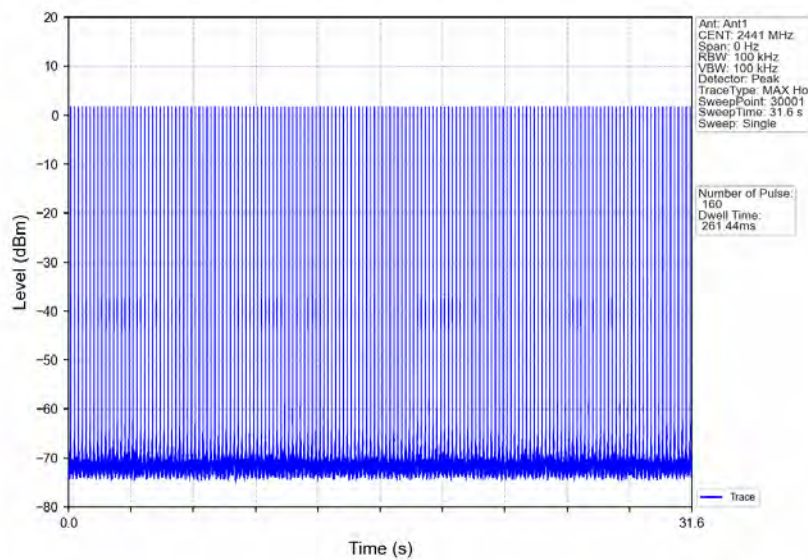


Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

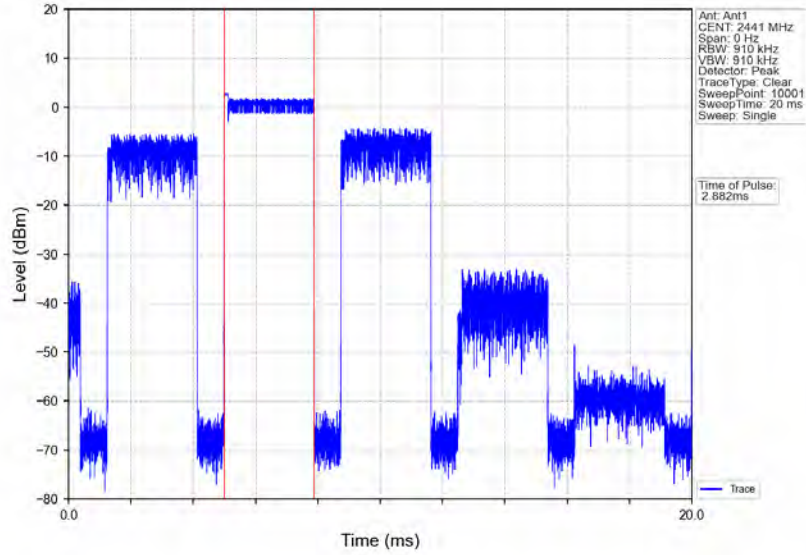


Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

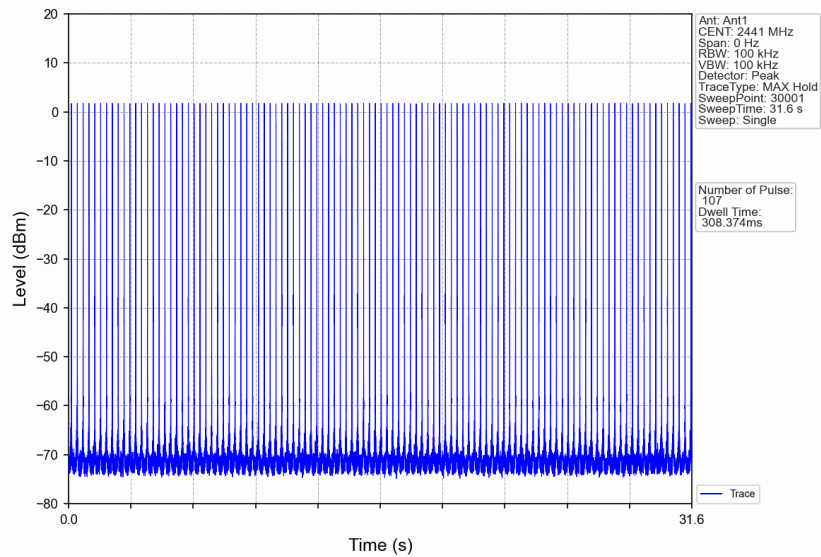


8DPSK_3DH1_HOPP_Ant1_NTNV

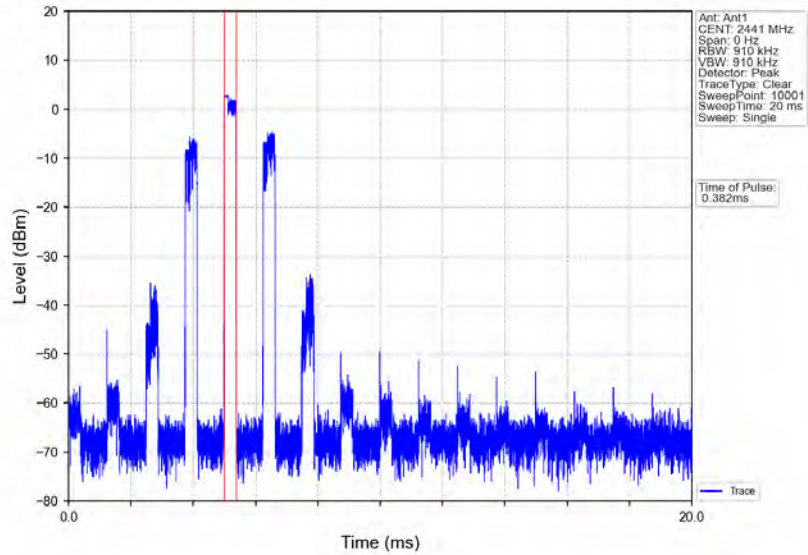


8DPSK_3DH1_HOPP_Ant1_NTNV

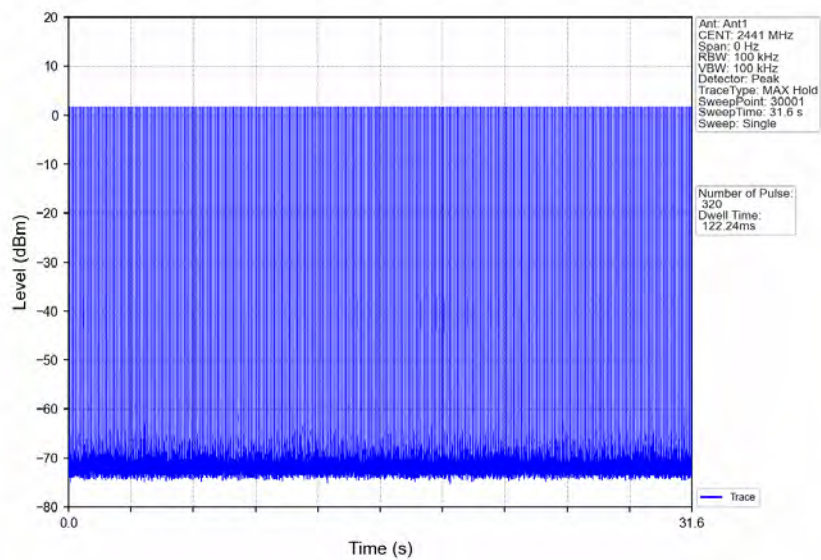


8DPSK_3DH3_HOPP_Ant1_NTNV

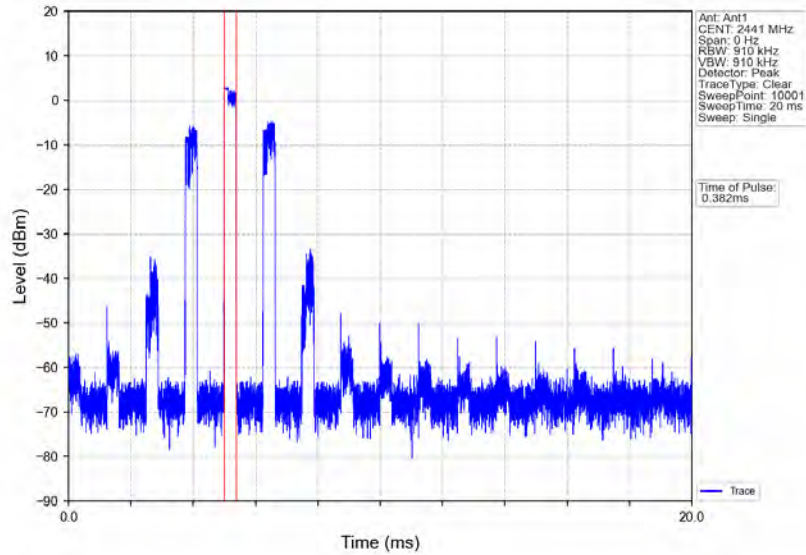


8DPSK_3DH3_HOPP_Ant1_NTNV

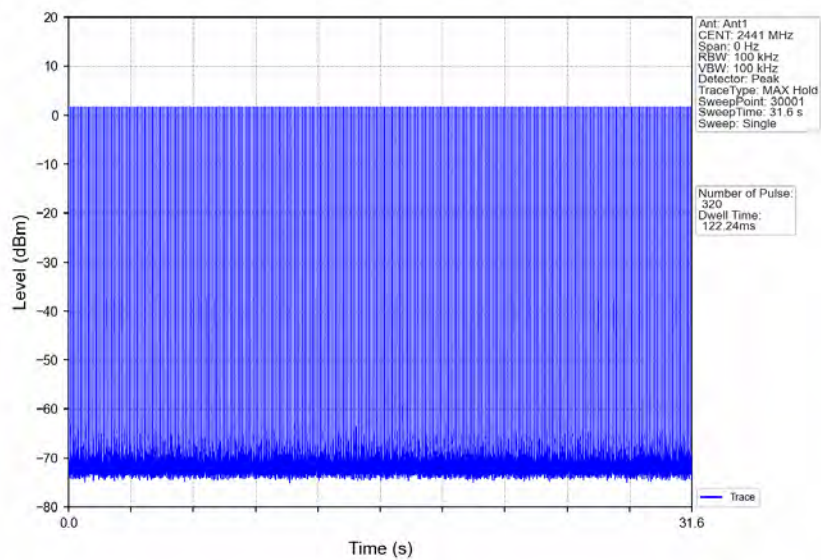

8DPSK_3DH5_HOPP_Ant1_NTNV

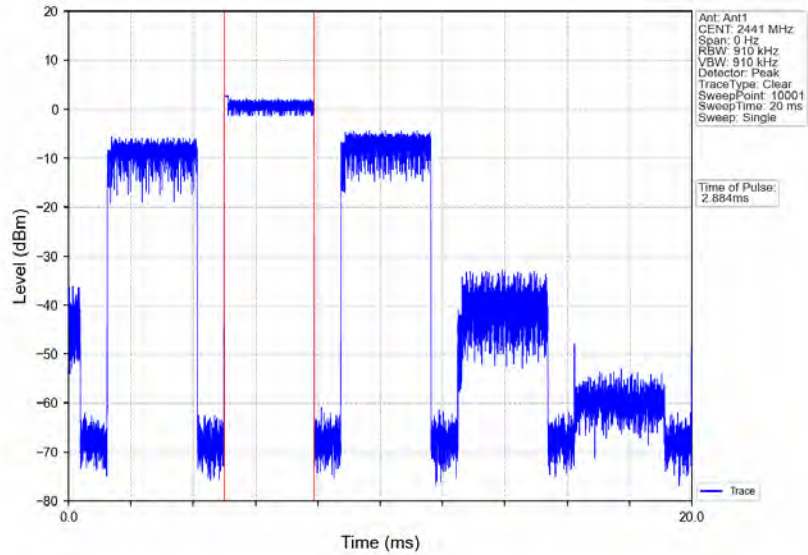

8DPSK_3DH5_HOPP_Ant1_NTNV

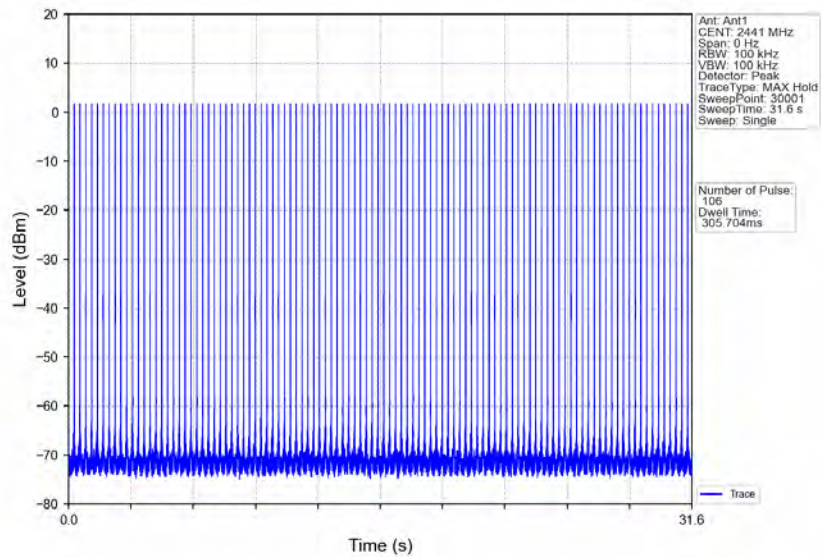

6. Unwanted Emissions In Non-restricted Frequency Bands


6.1 Ref

6.1.1 Test Result


Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)
GFSK	SISO	2402	DH5	1	3.51
		2441	DH5	1	3.06
		2480	DH5	1	3.00
Pi/4DQPSK	SISO	2402	2DH5	1	3.32
		2441	2DH5	1	2.92
		2480	2DH5	1	2.83
8DPSK	SISO	2402	3DH5	1	3.34
		2441	3DH5	1	2.89
		2480	3DH5	1	2.81

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.


6.1.2 Test Graph

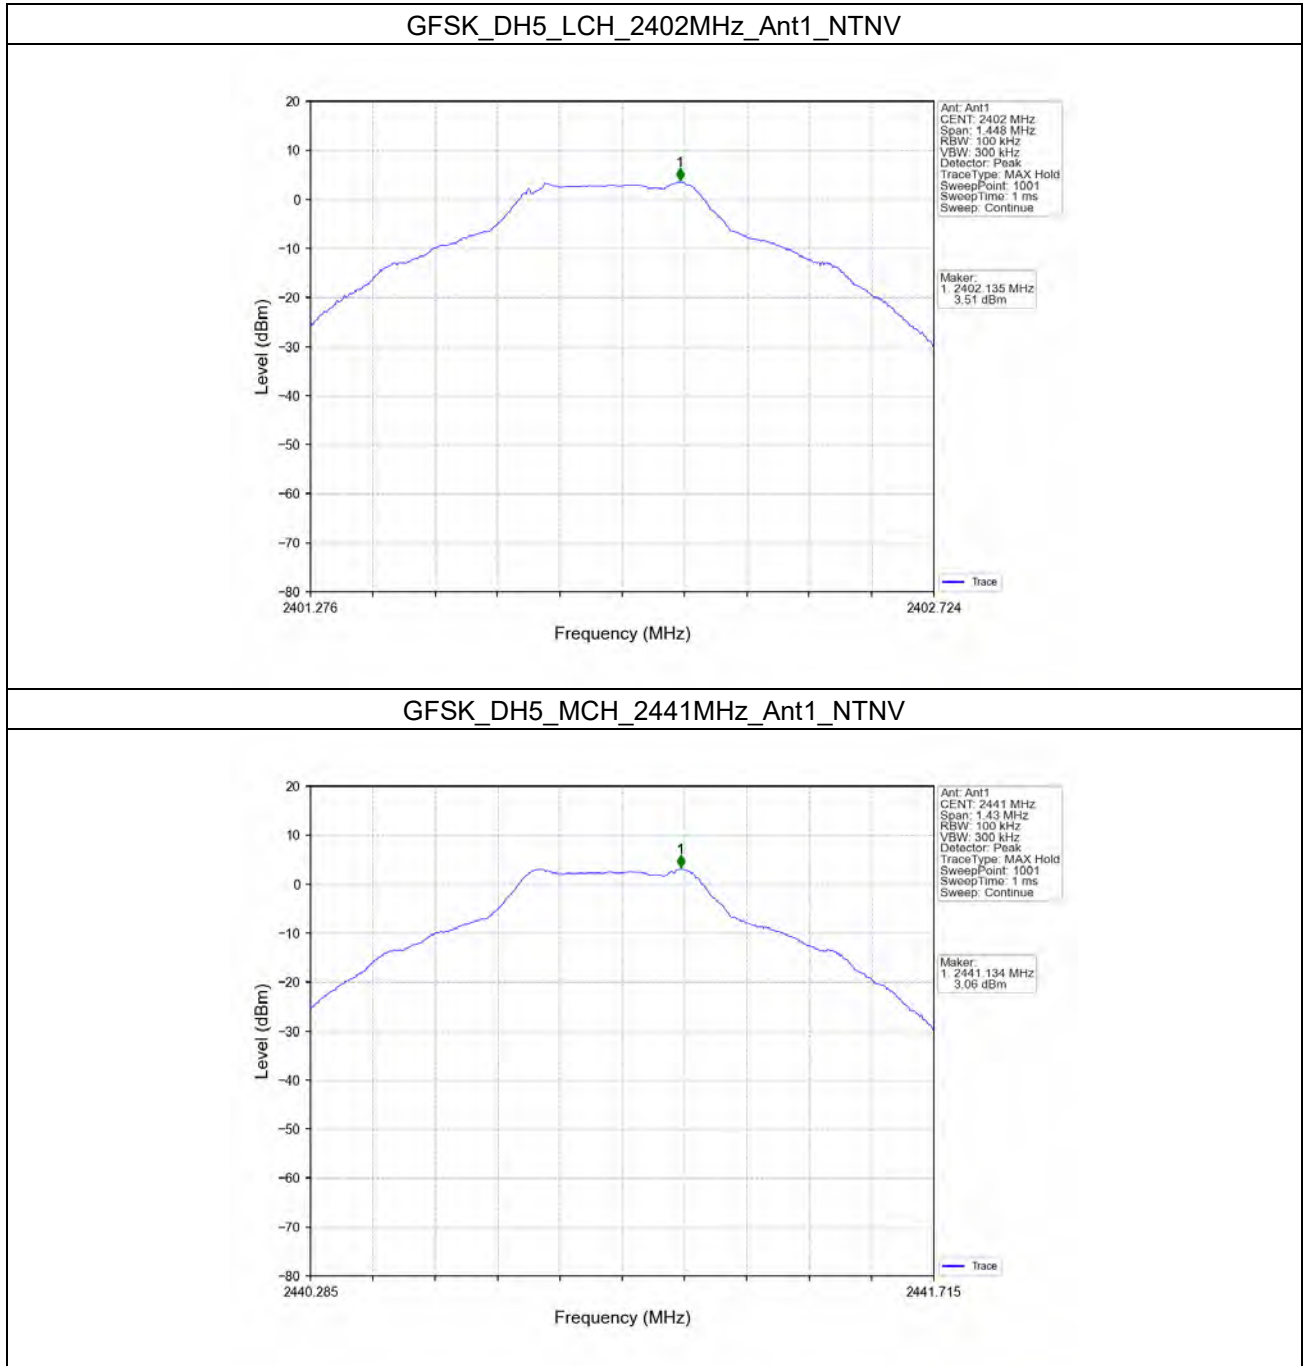


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

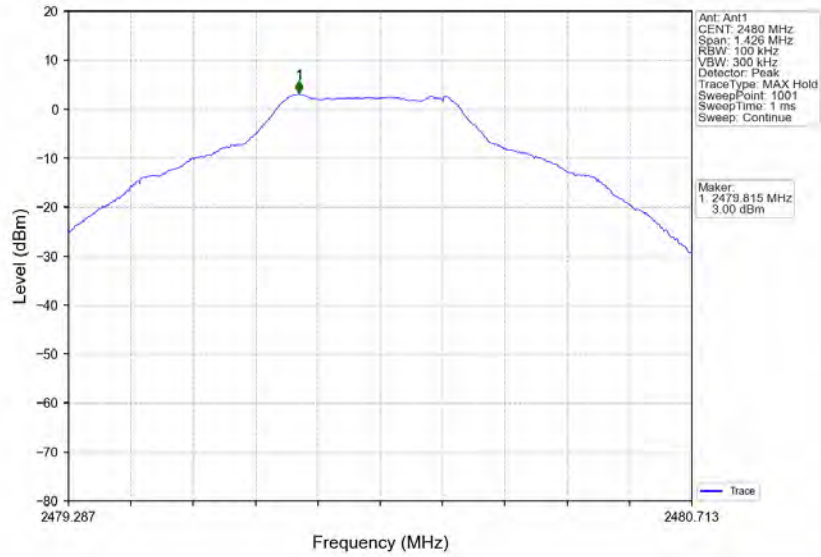


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

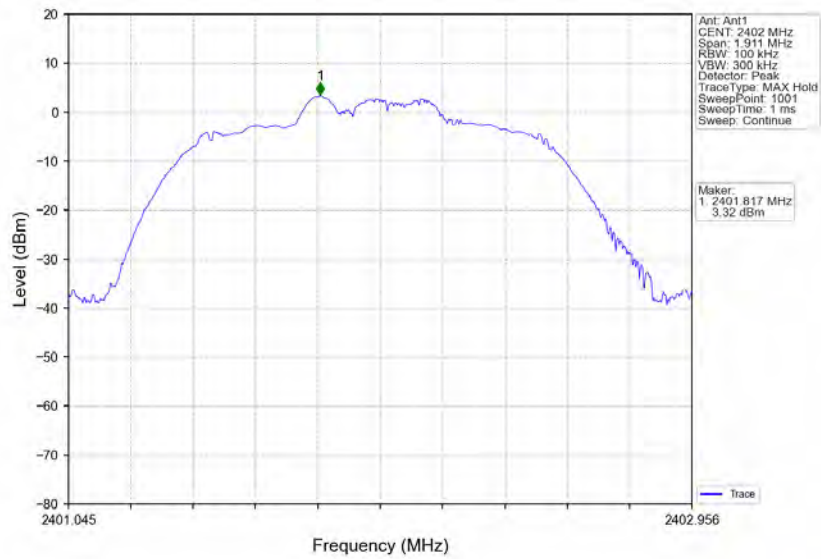


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

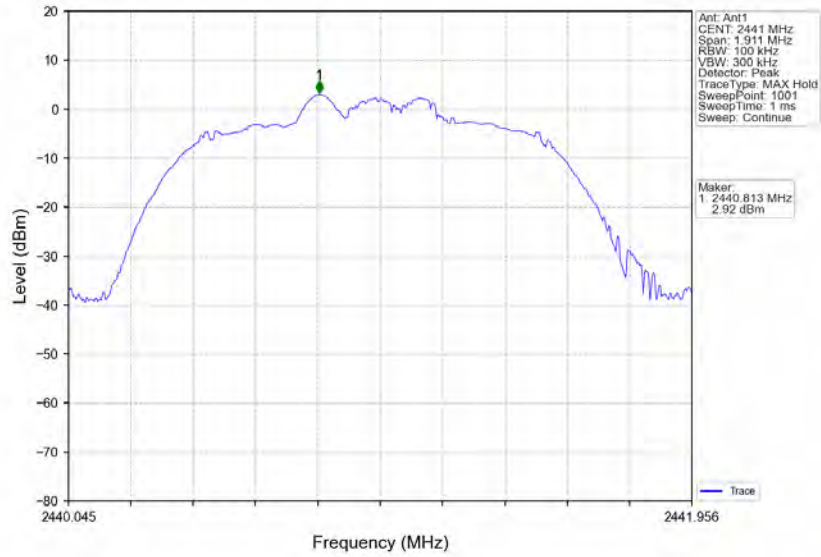


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

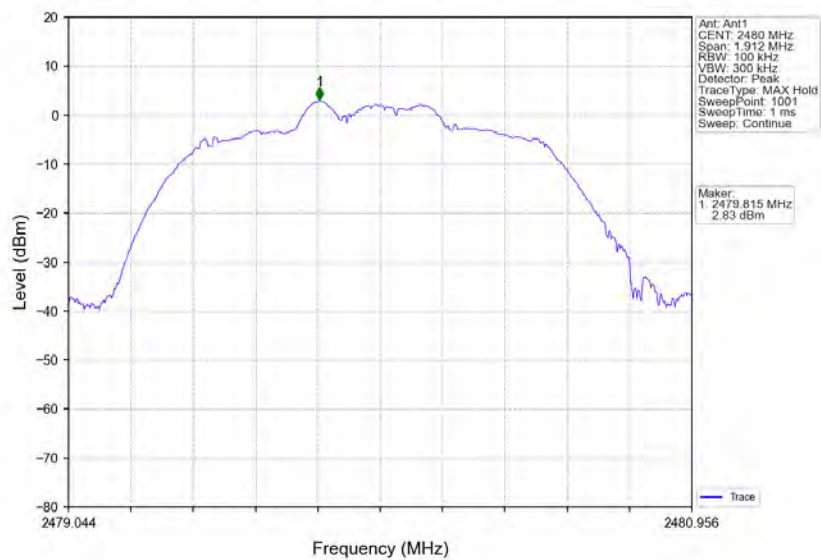


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

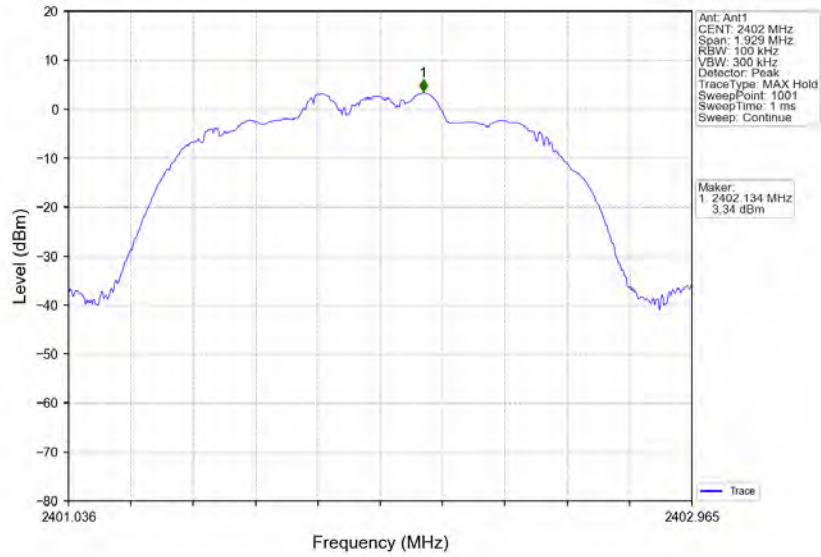

8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

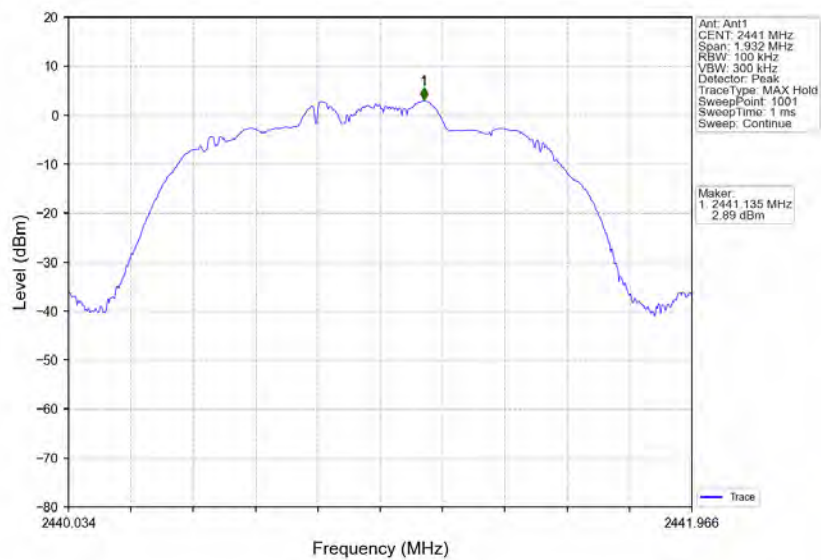

8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

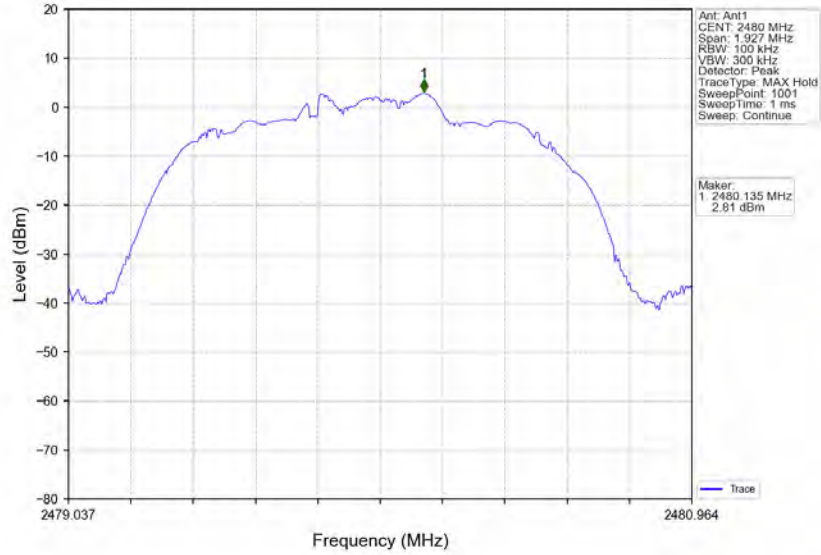


6.2 CSE

6.2.1 Test Result


Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
GFSK	SISO	2402	DH5	1	3.51	-16.49	Pass
		2441	DH5	1	3.51	-16.49	Pass
		2480	DH5	1	3.51	-16.49	Pass
		HOPP	DH5	1	3.51	-16.49	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	3.32	-16.68	Pass
		2441	2DH5	1	3.32	-16.68	Pass
		2480	2DH5	1	3.32	-16.68	Pass
		HOPP	2DH5	1	3.32	-16.68	Pass
8DPSK	SISO	2402	3DH5	1	3.34	-16.66	Pass
		2441	3DH5	1	3.34	-16.66	Pass
		2480	3DH5	1	3.34	-16.66	Pass
		HOPP	3DH5	1	3.34	-16.66	Pass

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.


6.2.2 Test Graph

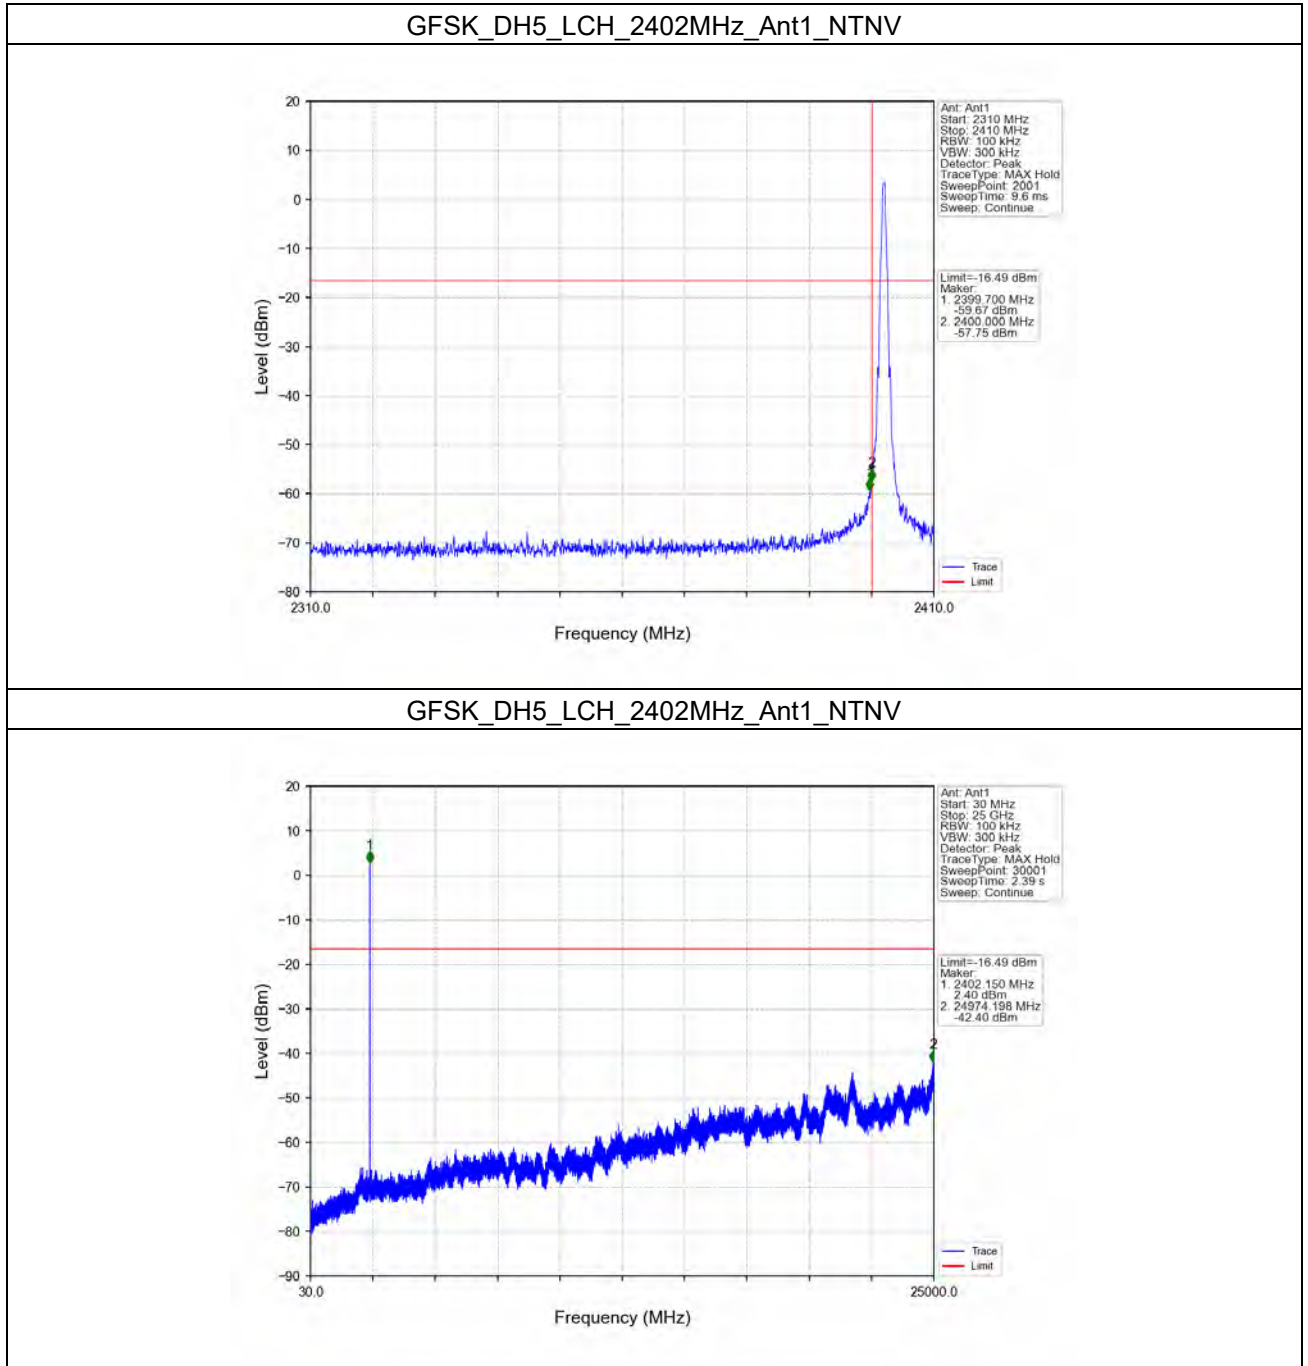


GFSK_DH5_MCH_2441MHz_Ant1_NTNV

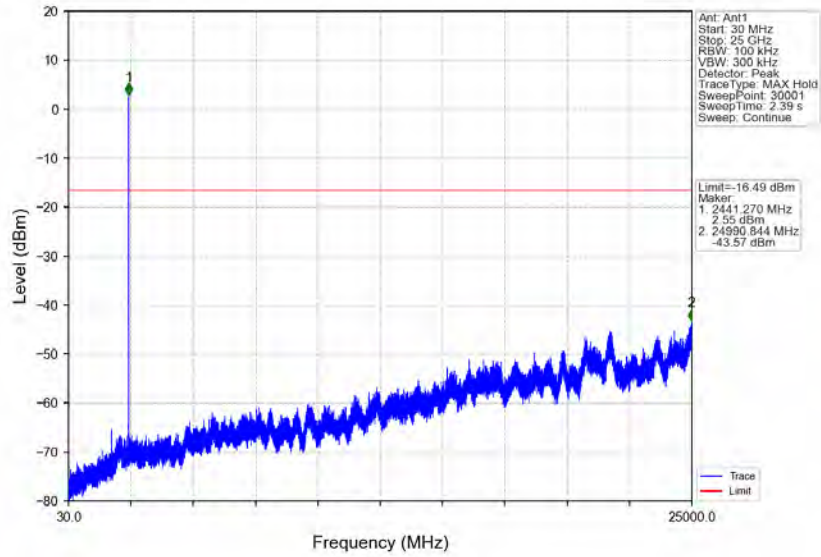


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

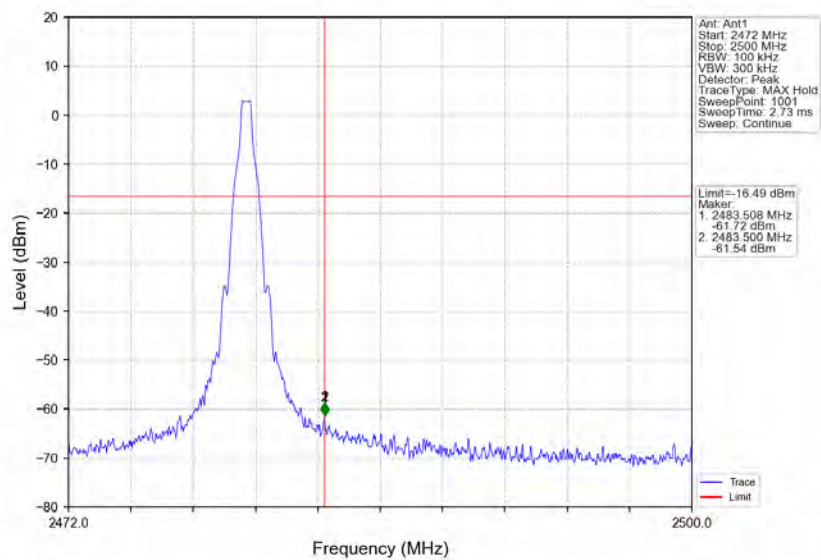


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

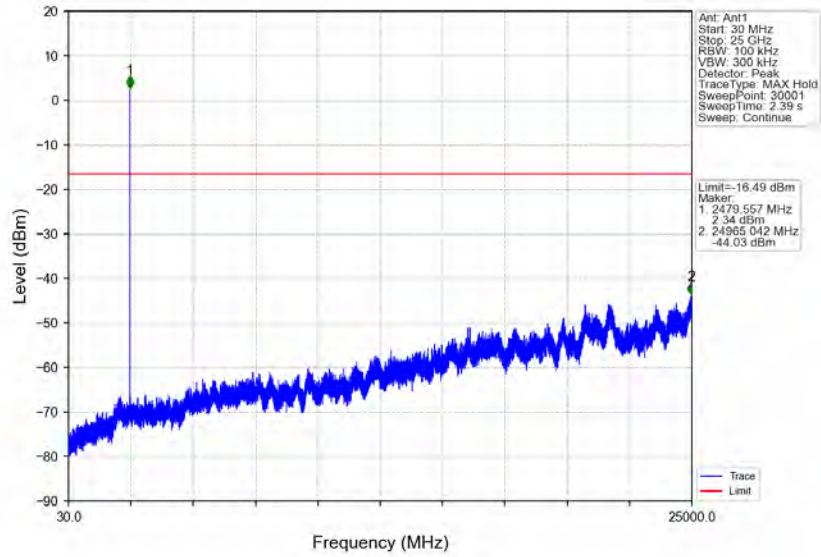


GFSK_DH5_HOPP_Ant1_NTNV

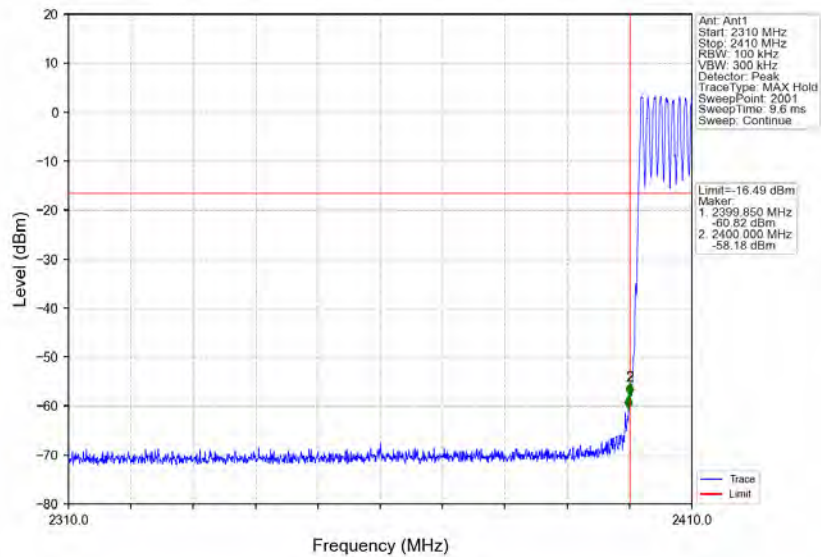


GFSK_DH5_HOPP_Ant1_NTNV

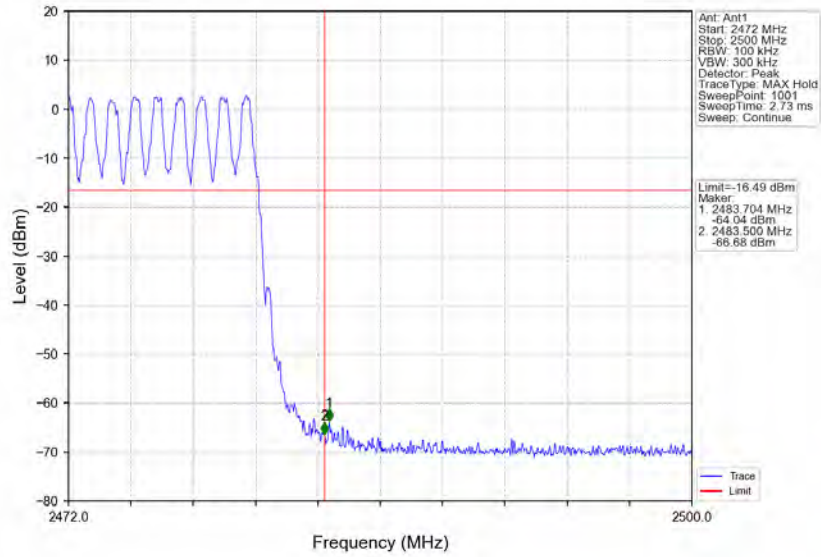


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

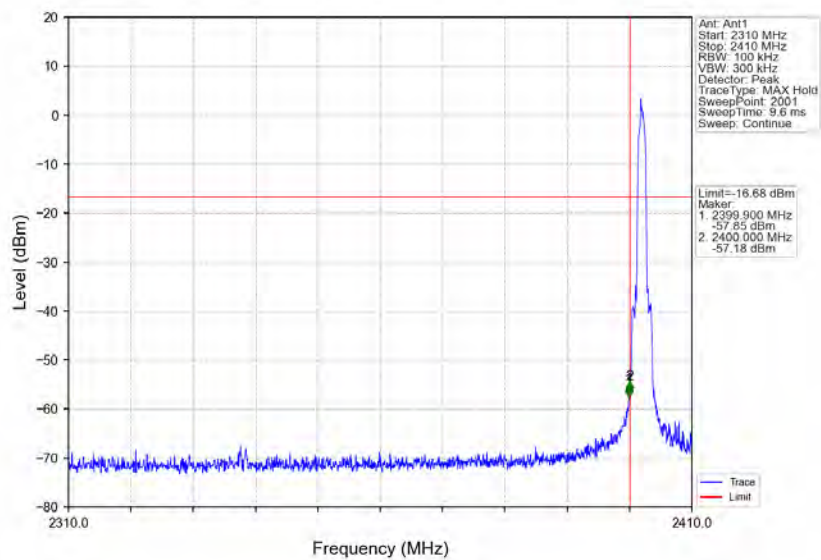


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

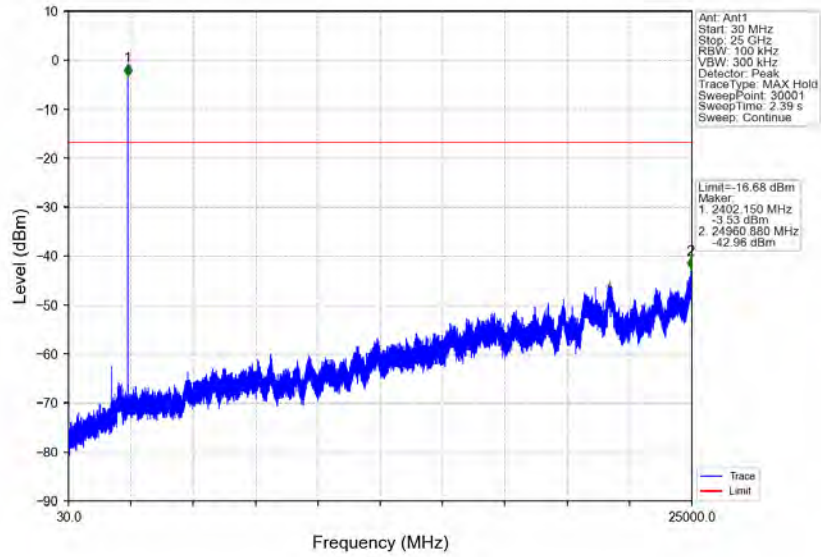


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

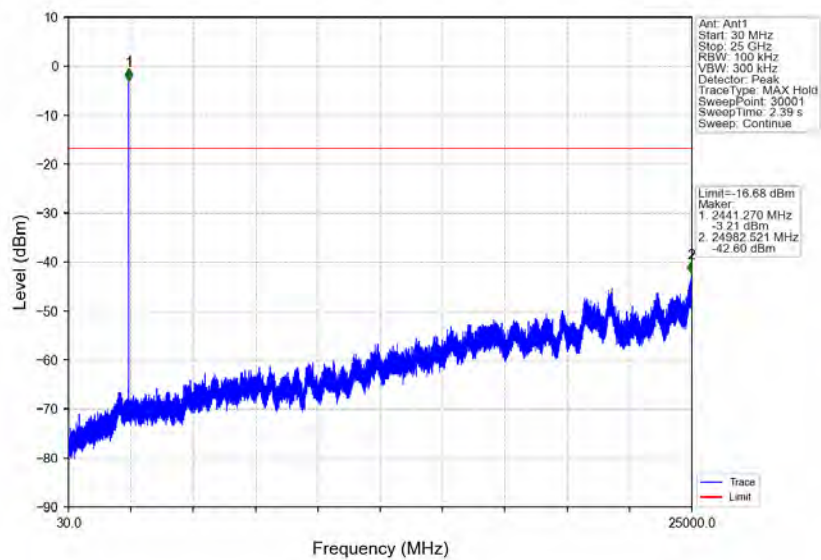


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

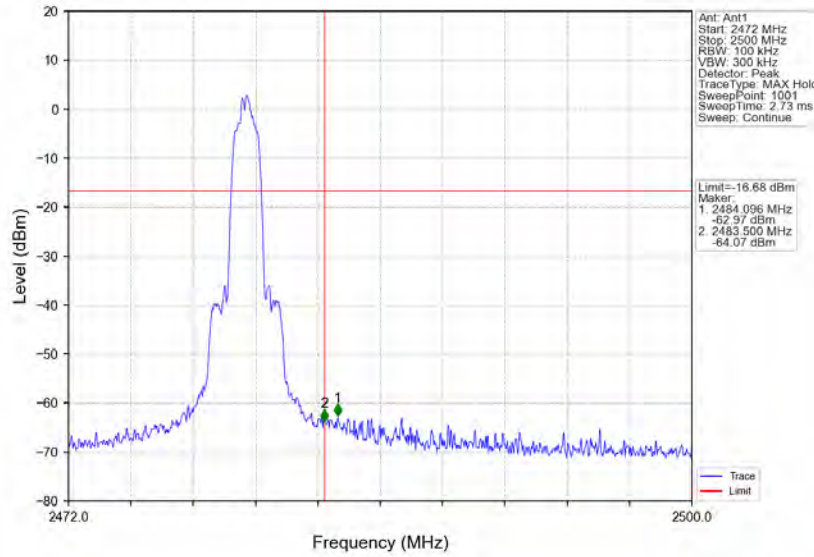


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

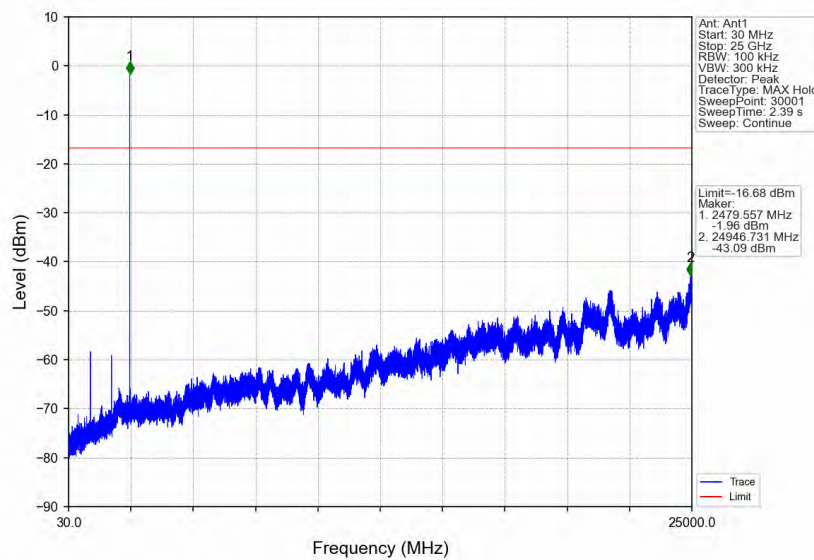


Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

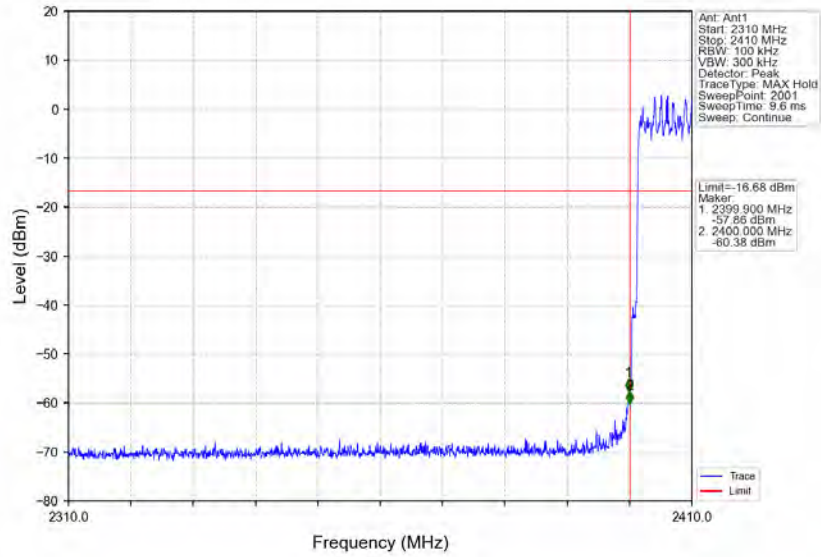


Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

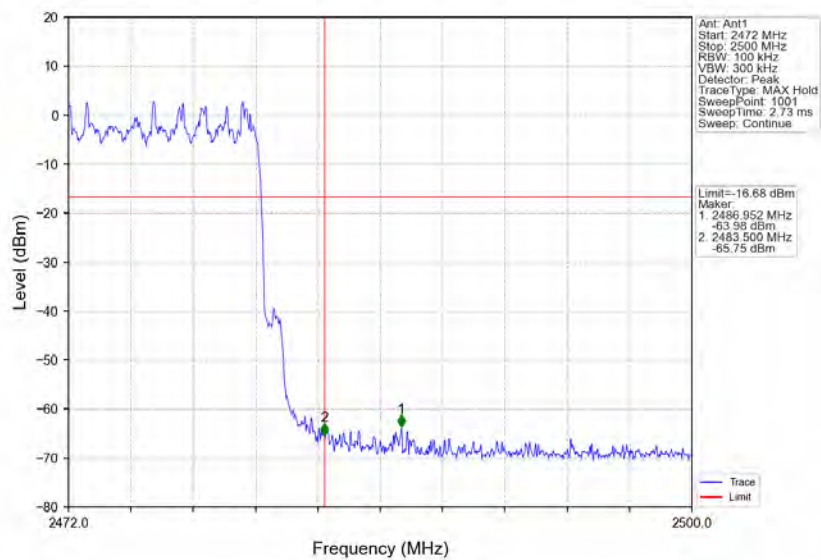


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

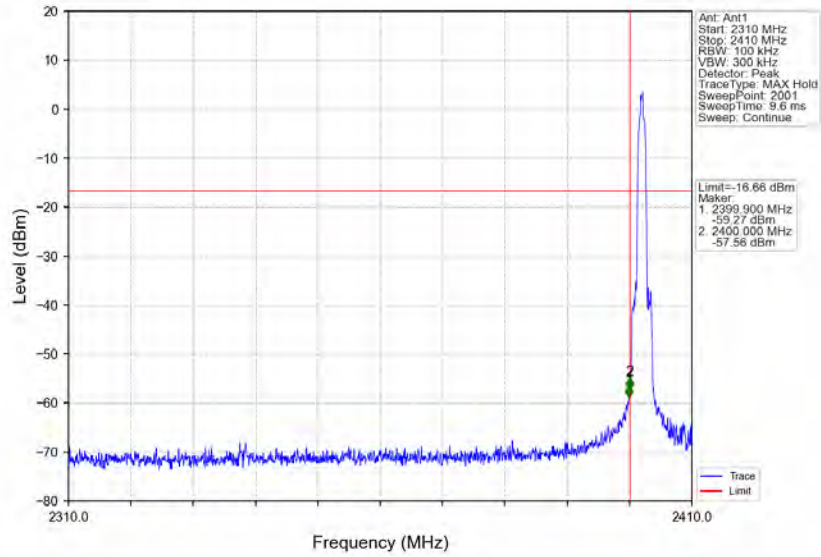


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

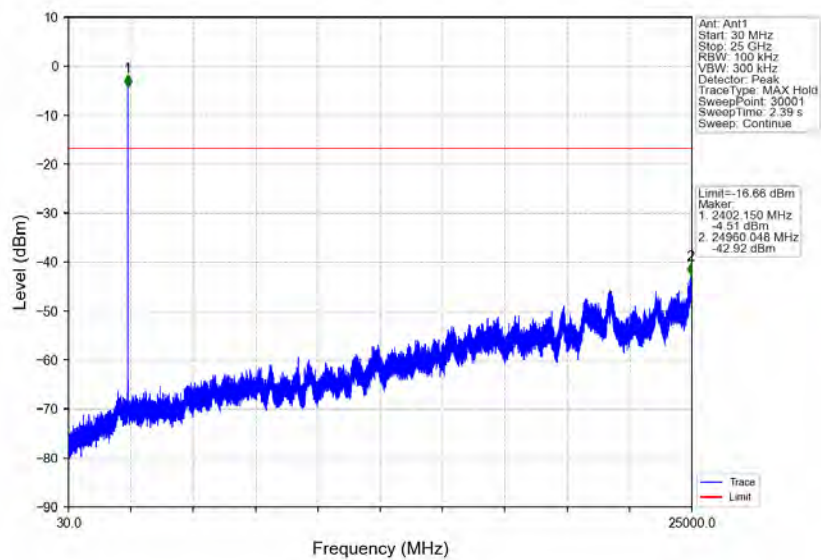


8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

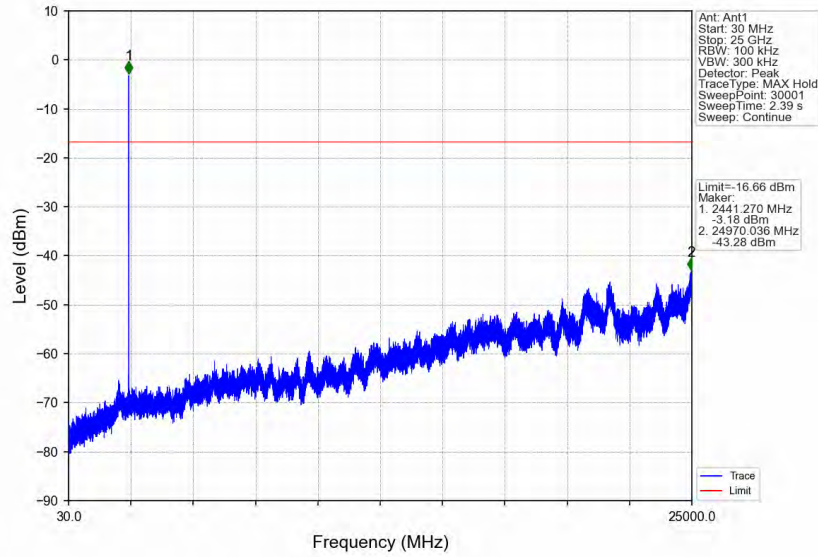


8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

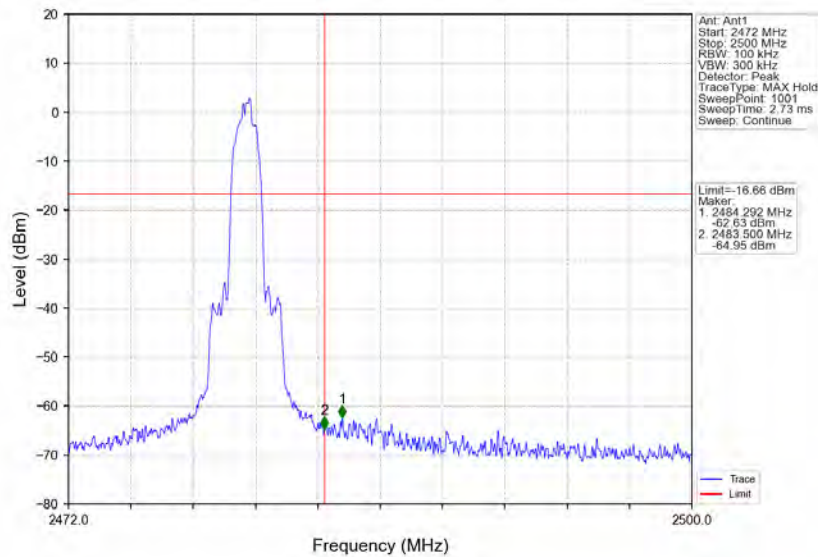


8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

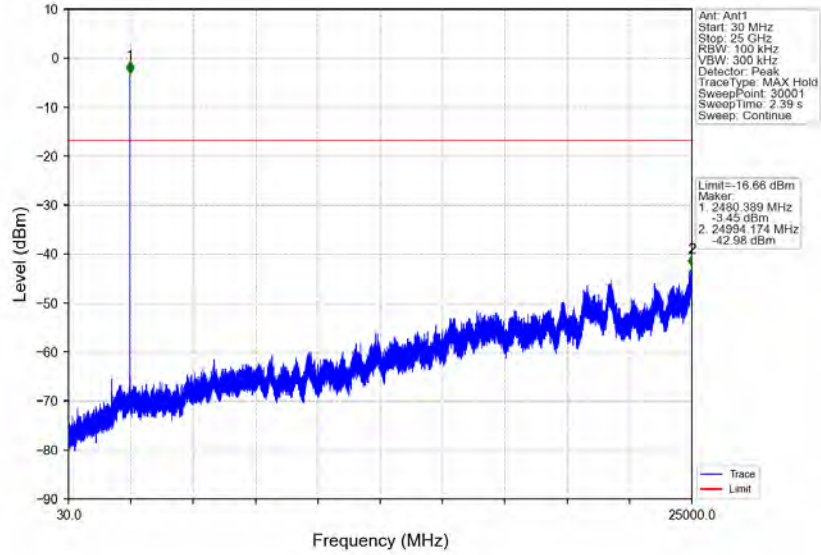

8DPSK_3DH5_HOPP_Ant1_NTNV

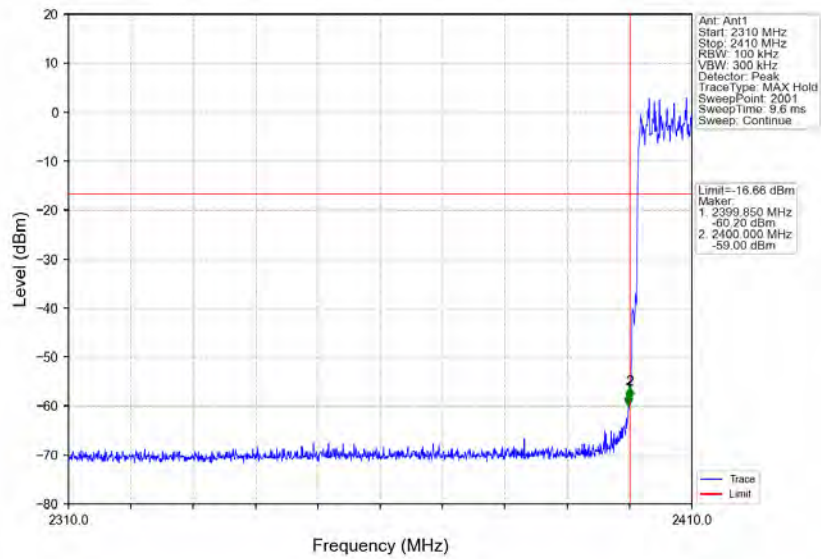

8DPSK_3DH5_HOPP_Ant1_NTNV

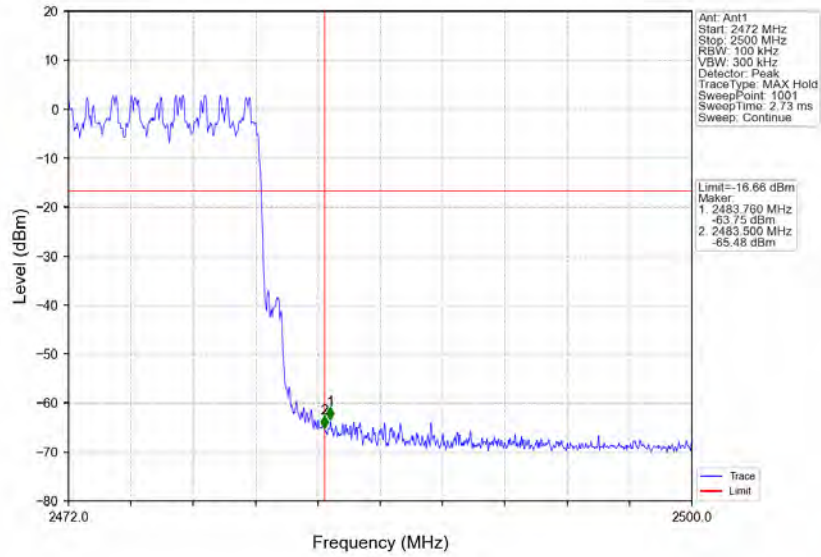

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR230700149803

Page: 149 of 200

Right


1. Bandwidth

1.1 OBW


1.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	99% Occupied Bandwidth (MHz)	Verdict
					Result	
GFSK	SISO	2402	DH5	1	0.883	Pass
		2441	DH5	1	0.883	Pass
		2480	DH5	1	0.881	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	1.150	Pass
		2441	2DH5	1	1.150	Pass
		2480	2DH5	1	1.151	Pass
8DPSK	SISO	2402	3DH5	1	1.157	Pass
		2441	3DH5	1	1.158	Pass
		2480	3DH5	1	1.159	Pass


1.1.2 Test Graph

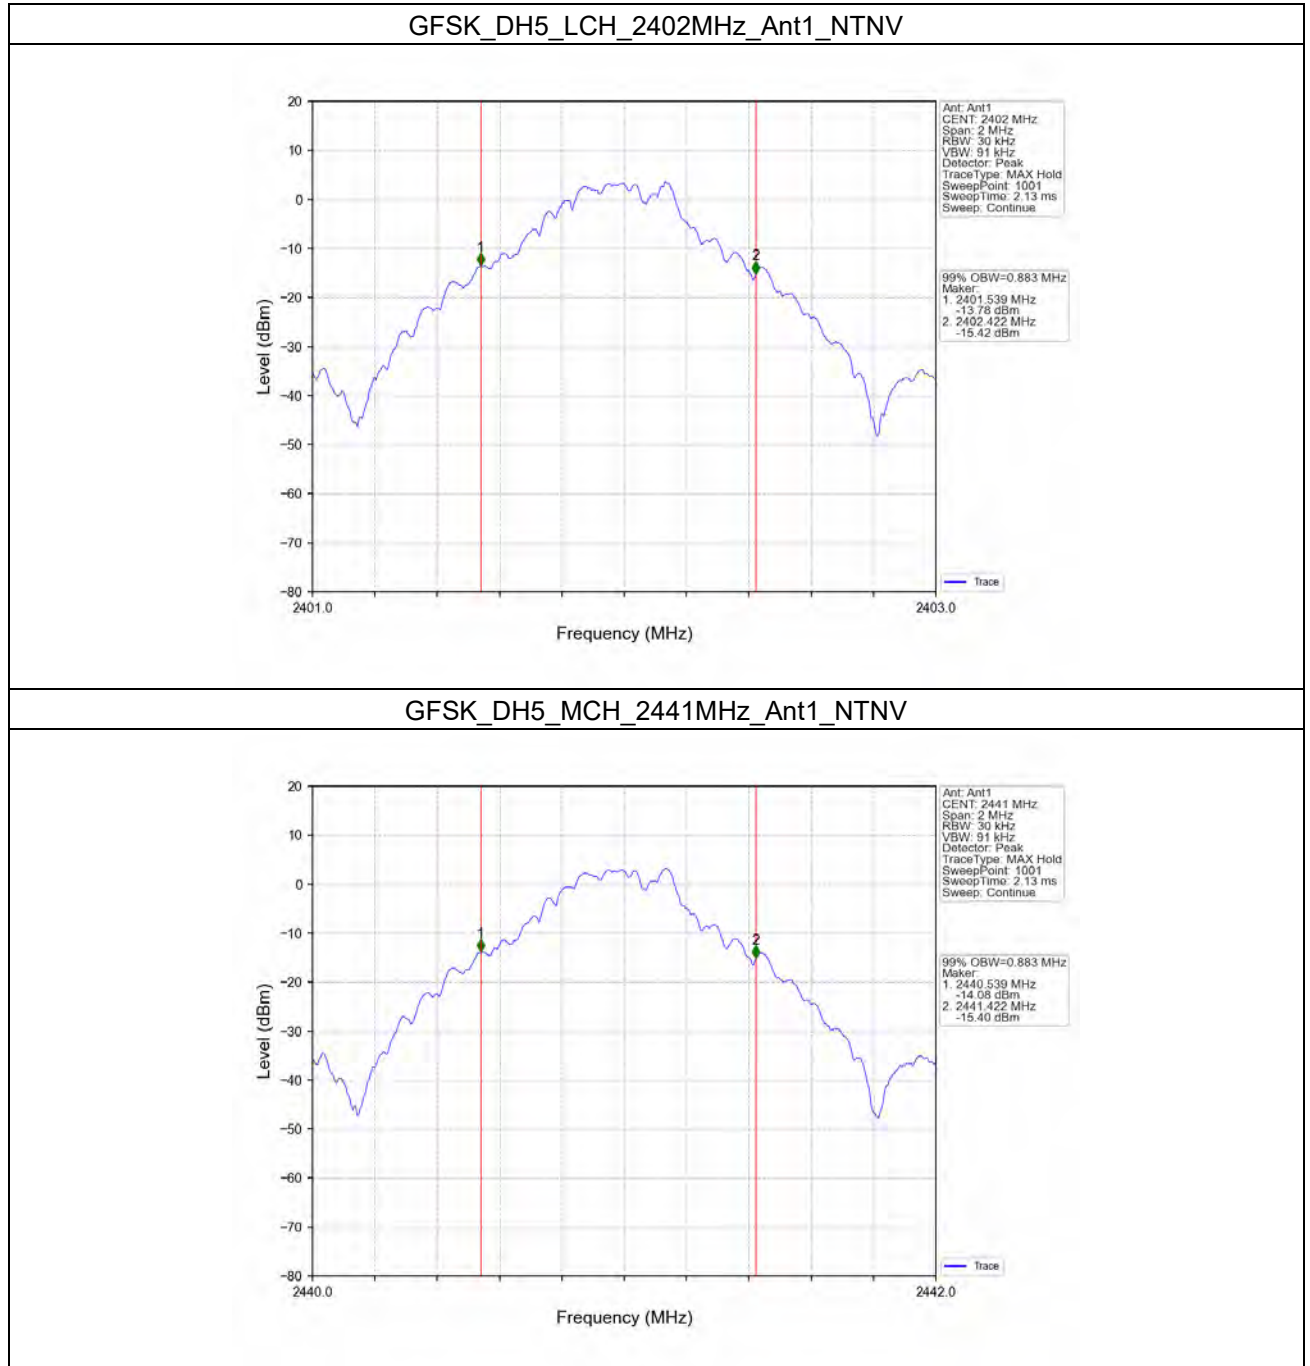


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

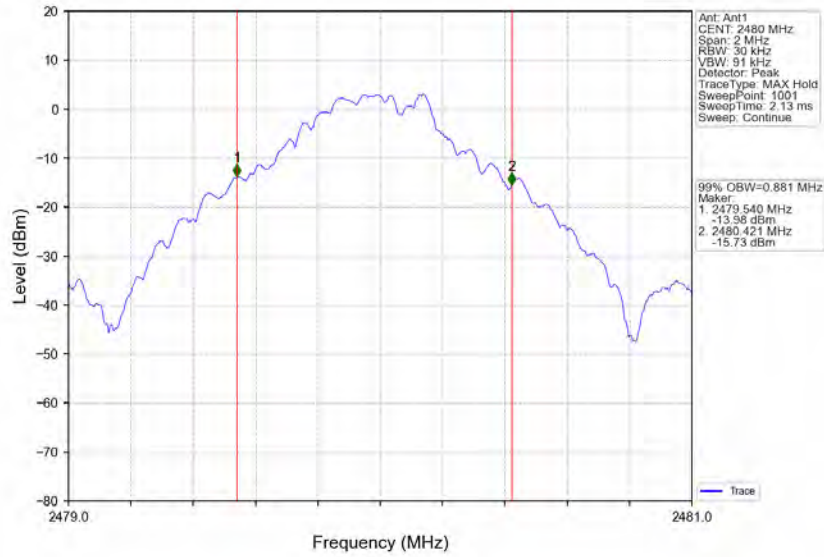


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

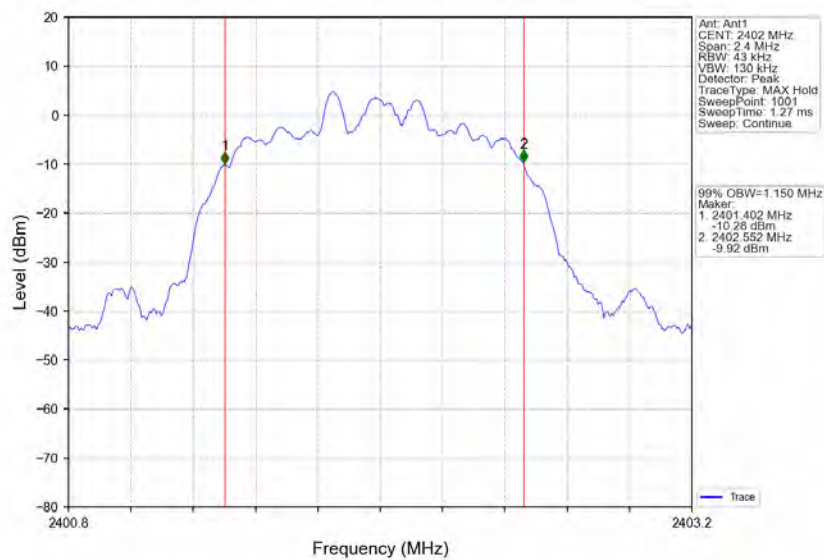


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

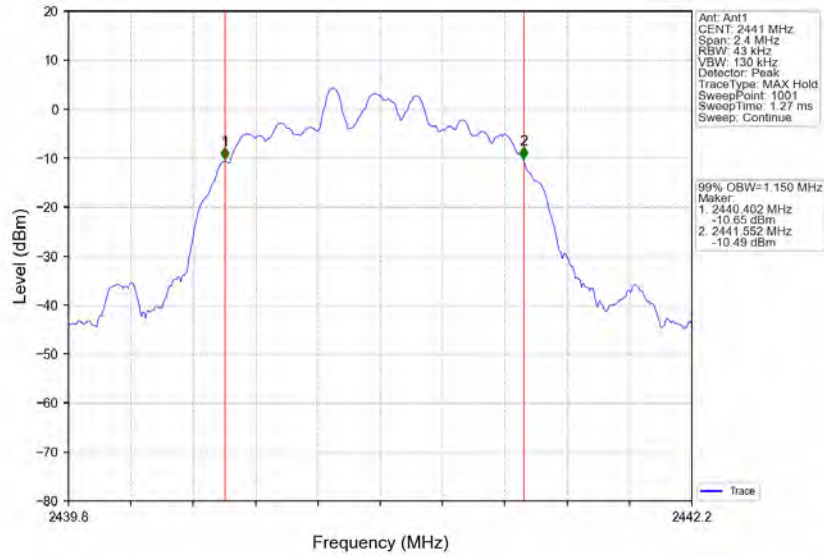


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

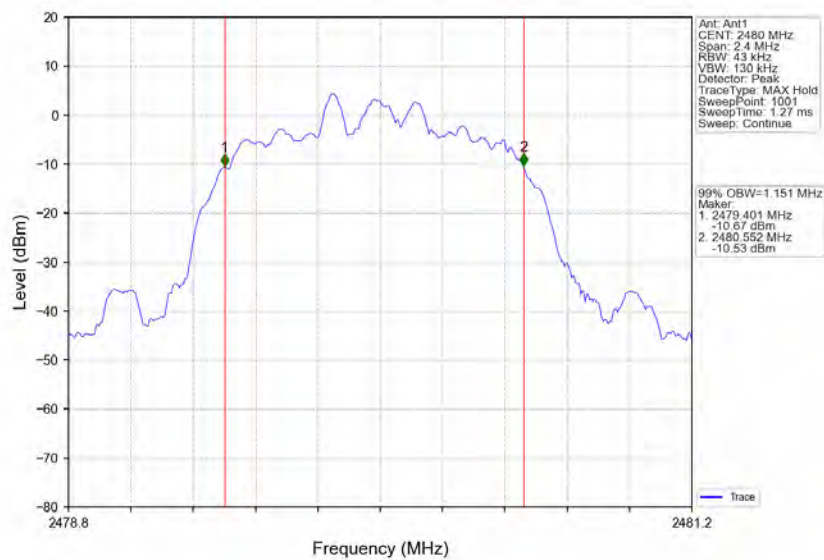


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

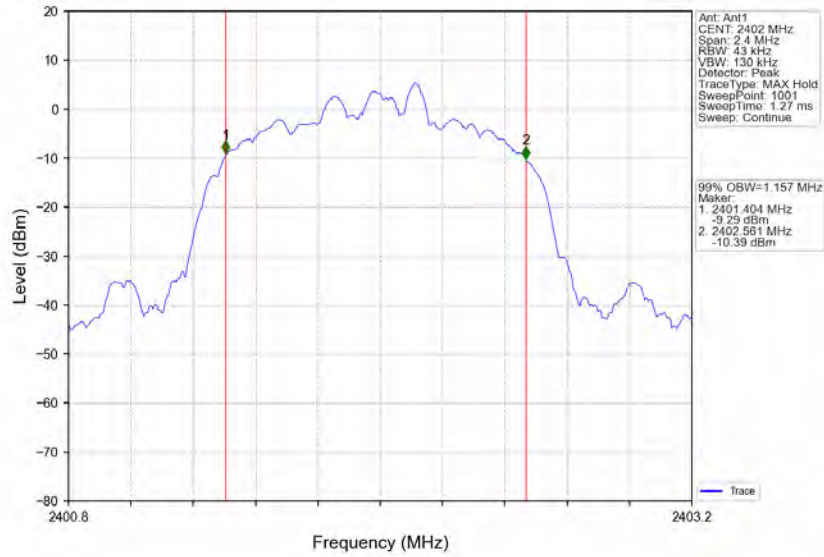

8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

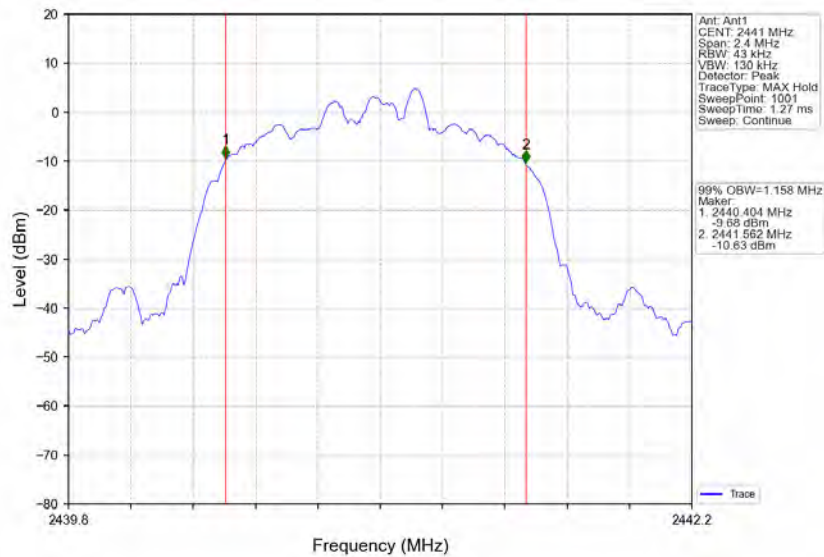

8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

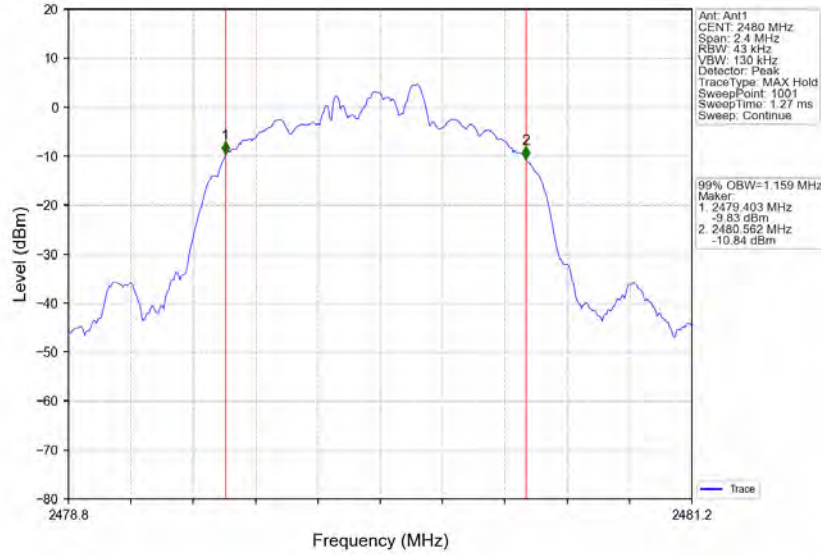

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR230700149803


Page: 155 of 200

1.2 20dB BW


1.2.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	20dB Bandwidth (MHz)	Verdict
					Result	
GFSK	SISO	2402	DH5	1	0.965	Pass
		2441	DH5	1	0.963	Pass
		2480	DH5	1	0.964	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	1.271	Pass
		2441	2DH5	1	1.272	Pass
		2480	2DH5	1	1.270	Pass
8DPSK	SISO	2402	3DH5	1	1.287	Pass
		2441	3DH5	1	1.283	Pass
		2480	3DH5	1	1.282	Pass


1.2.2 Test Graph

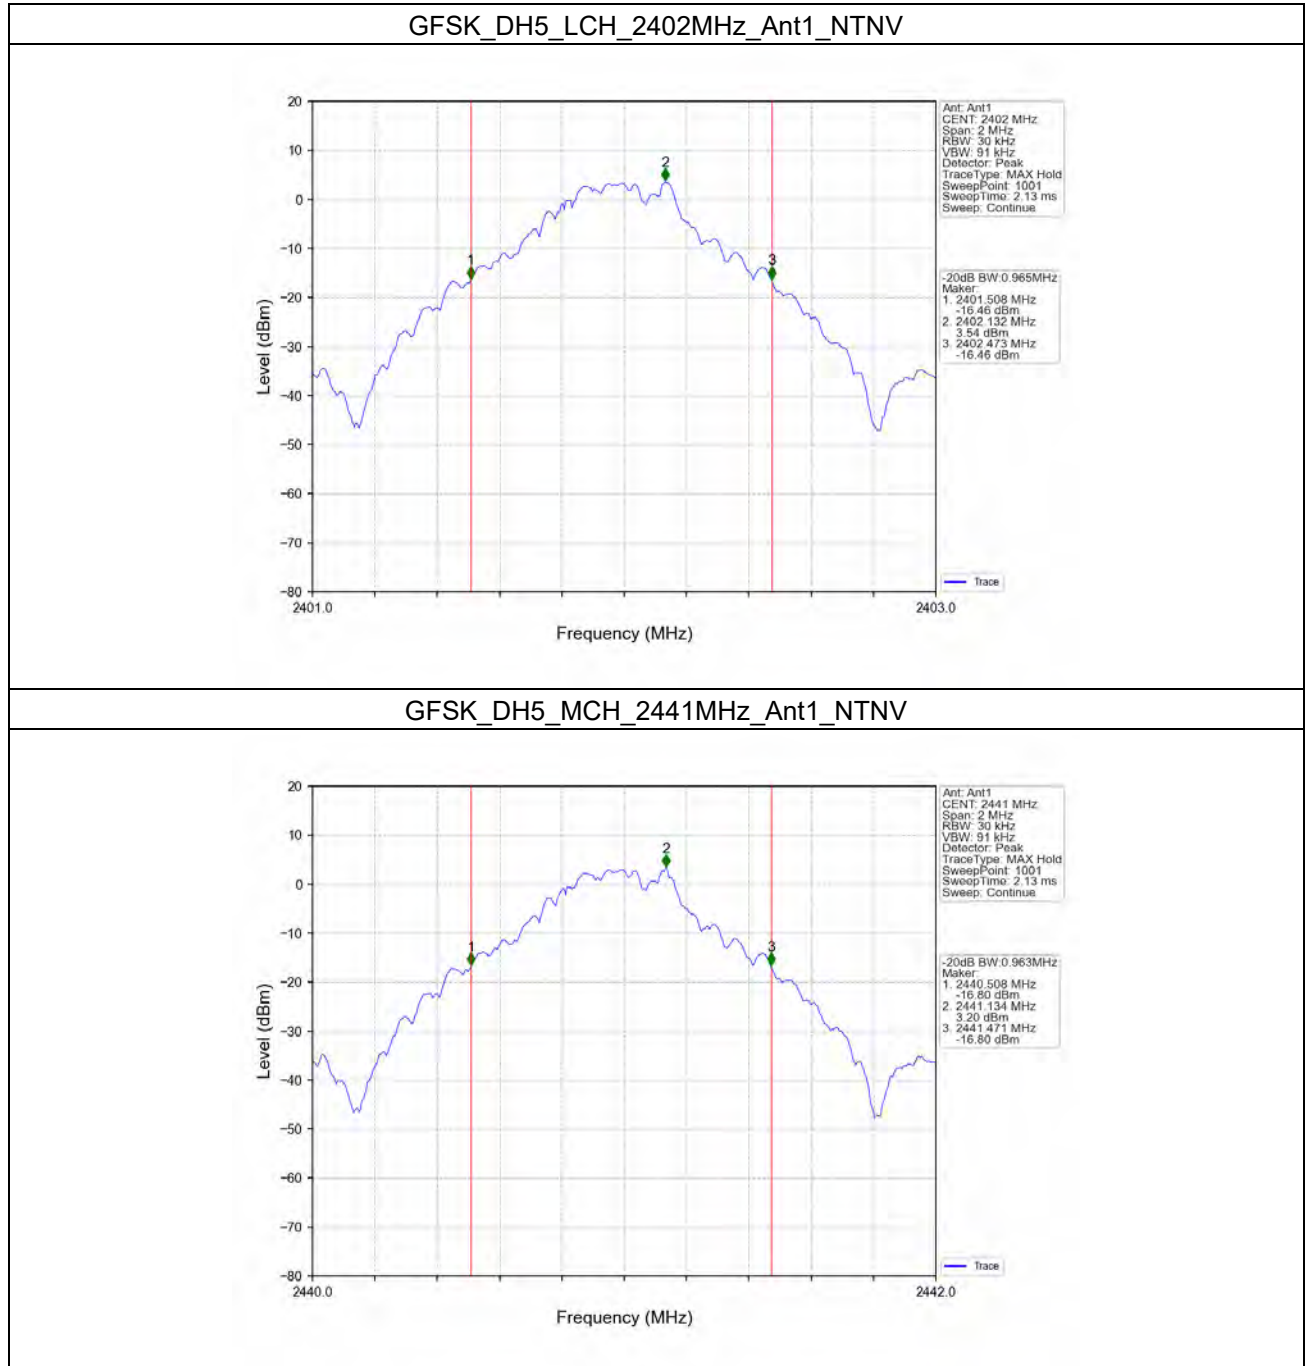


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

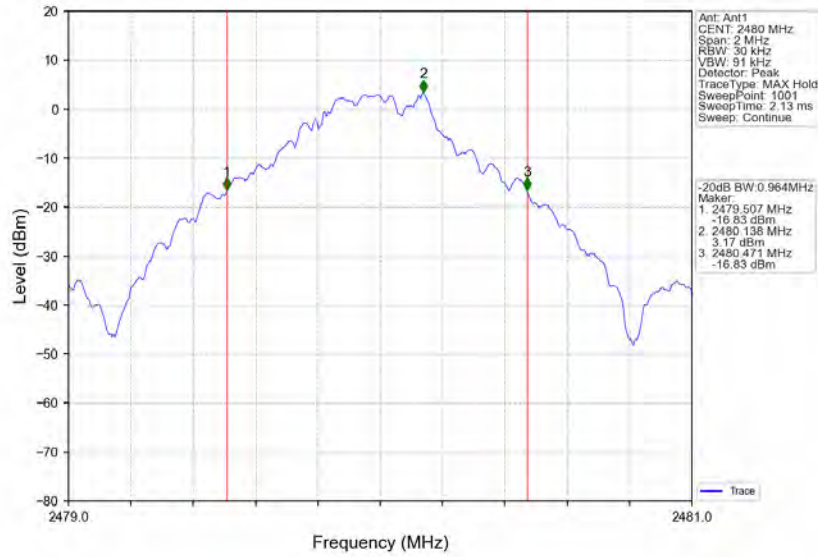


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

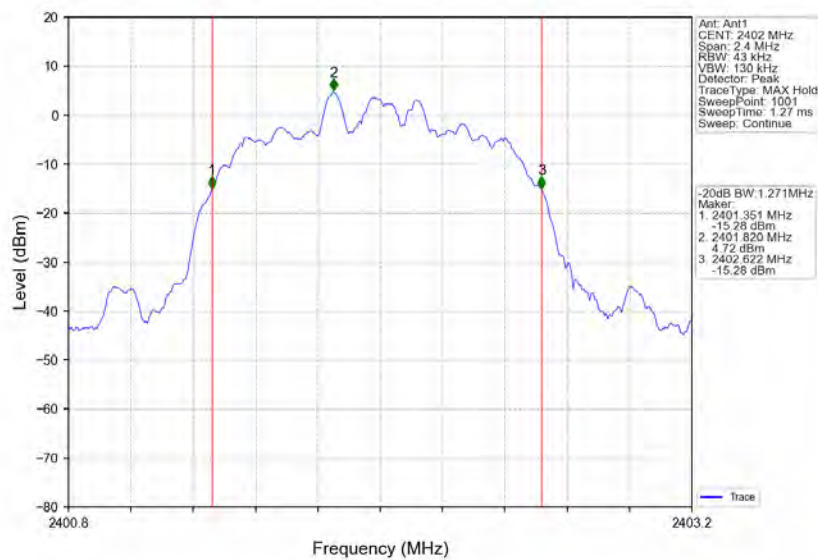


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

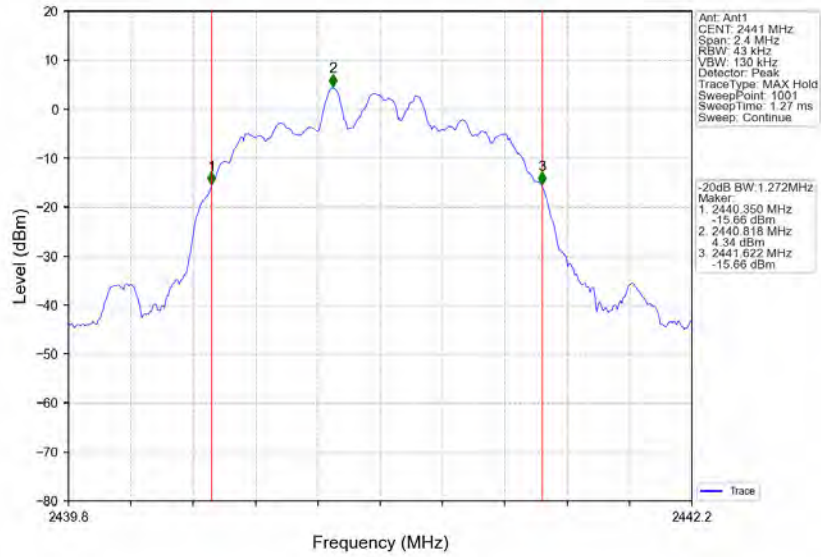


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

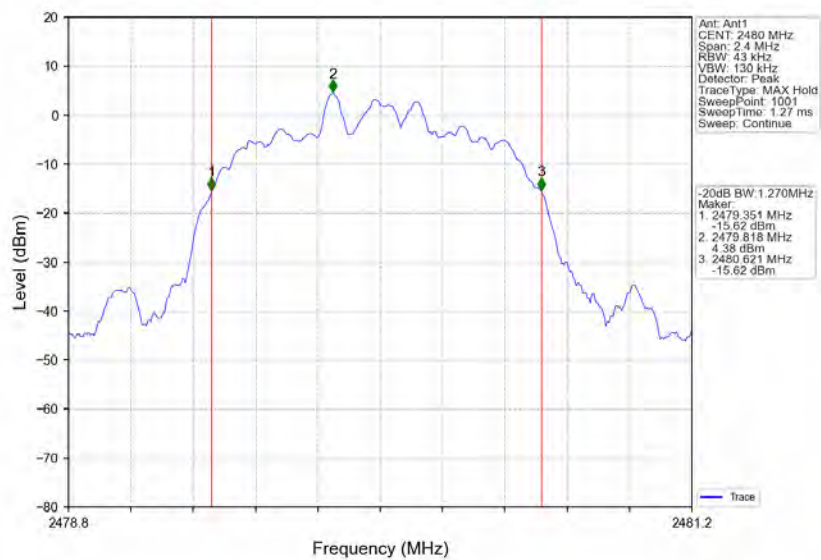


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

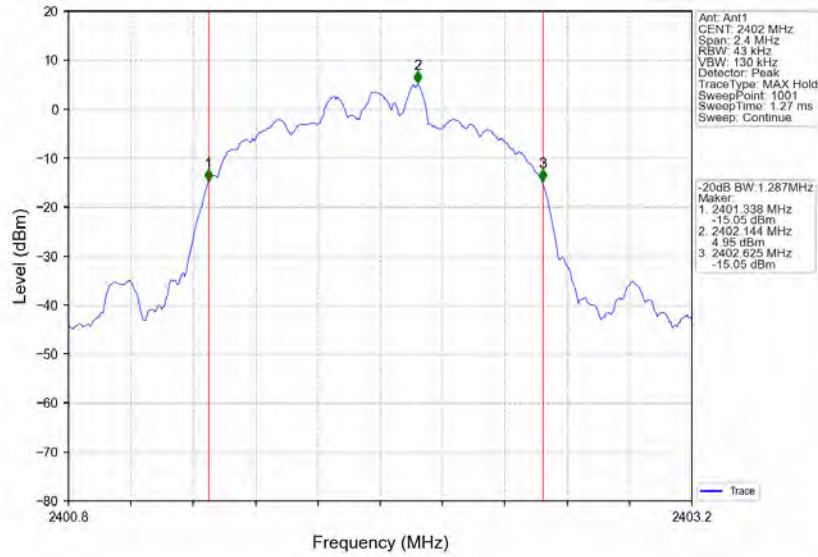

8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

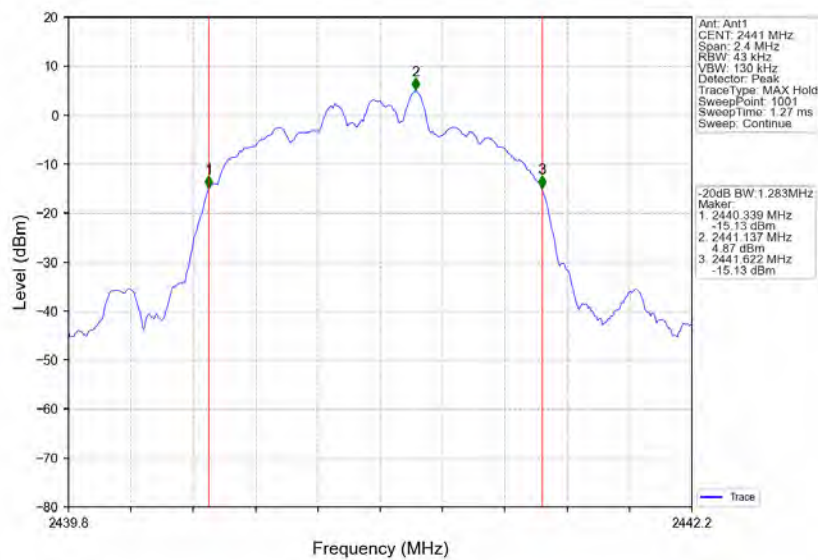

8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

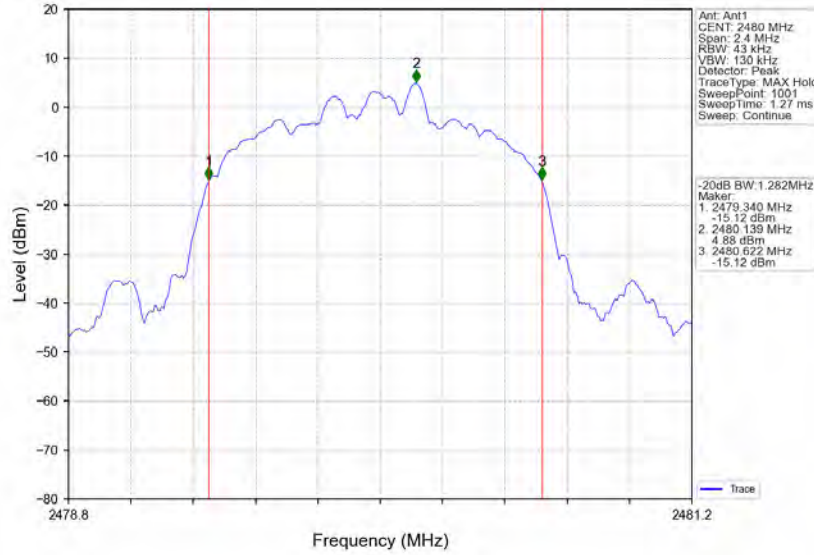

2. Maximum Conducted Output Power


2.1 Power

2.1.1 Test Result


Mode	TX Type	Frequency (MHz)	Packet Type	Maximum Peak Conducted Output Power (dBm)		Verdict
				ANT1	Limit	
GFSK	SISO	2402	DH5	5.71	<=30	Pass
		2441	DH5	5.36	<=30	Pass
		2480	DH5	5.37	<=30	Pass
Pi/4DQPSK	SISO	2402	2DH5	5.75	<=20.97	Pass
		2441	2DH5	5.39	<=20.97	Pass
		2480	2DH5	5.41	<=20.97	Pass
8DPSK	SISO	2402	3DH5	5.80	<=20.97	Pass
		2441	3DH5	5.44	<=20.97	Pass
		2480	3DH5	5.46	<=20.97	Pass

Note1: Antenna Gain: Ant1: -0.06dBi;


2.1.2 Test Graph

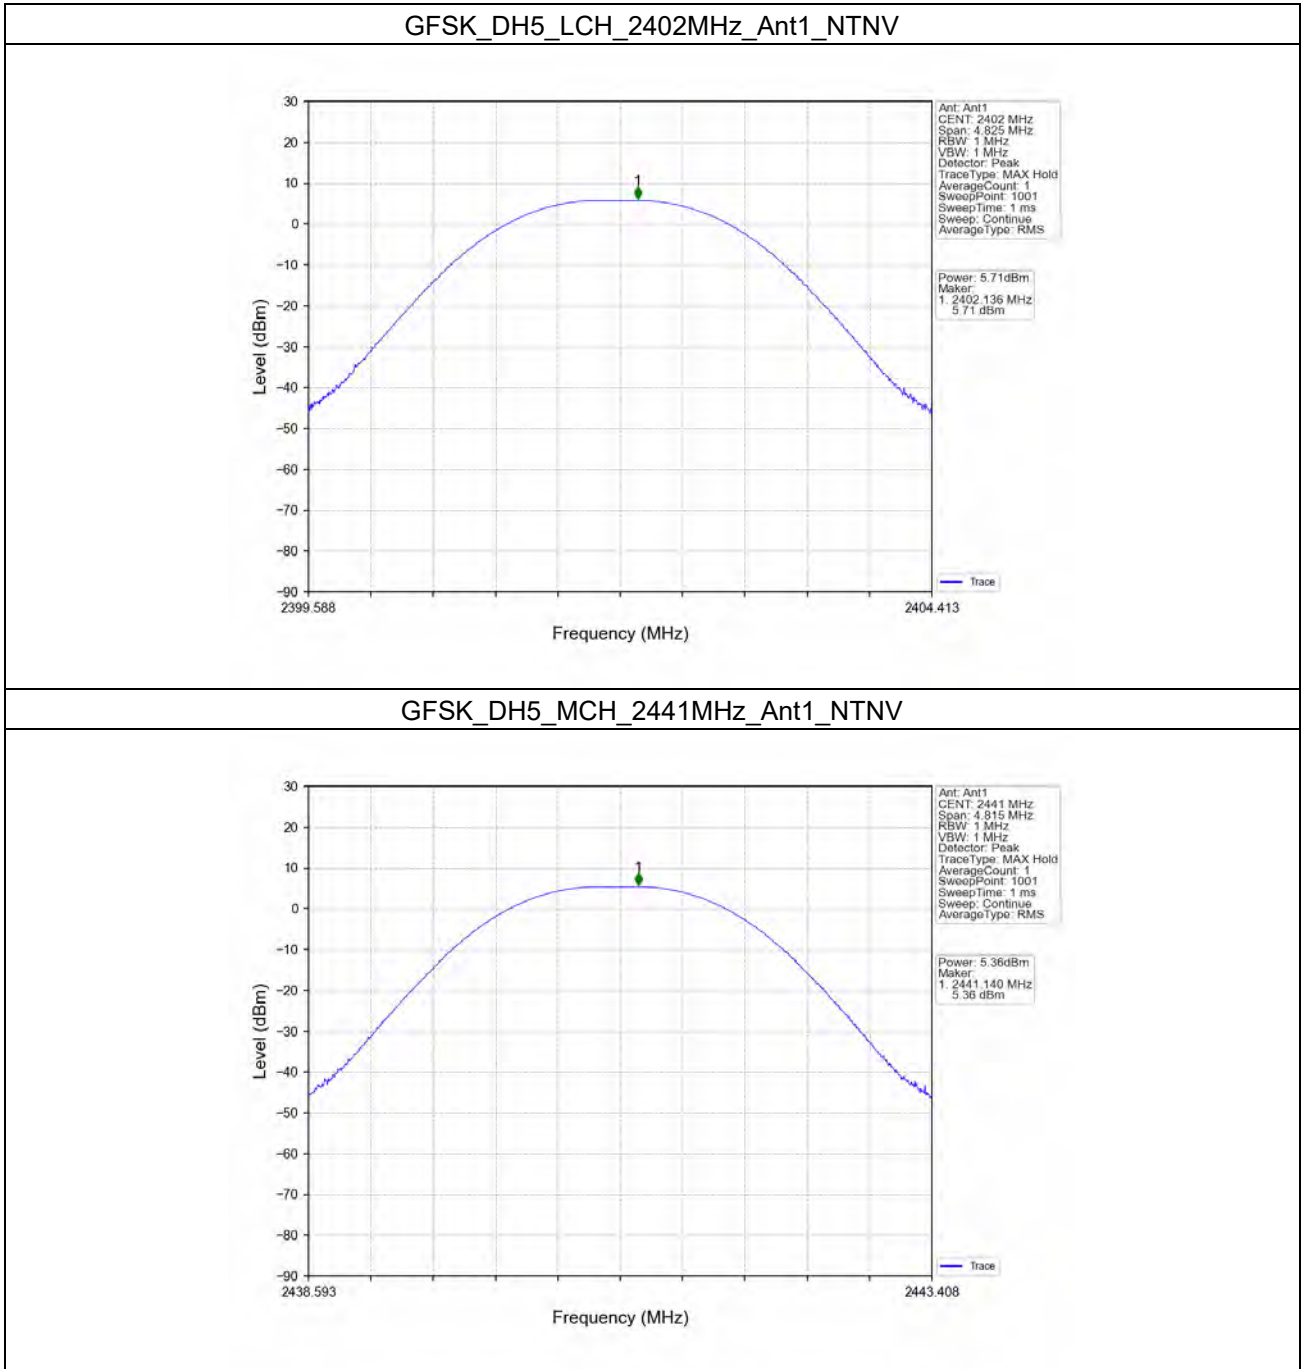


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

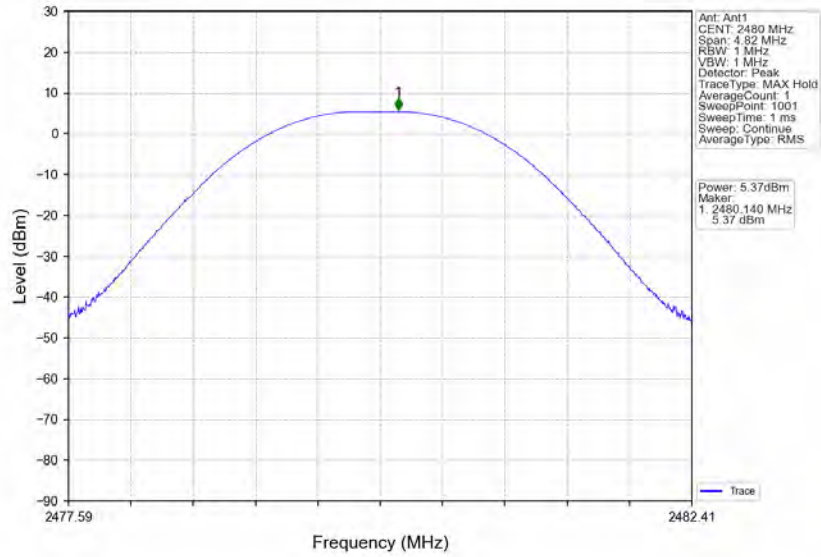


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

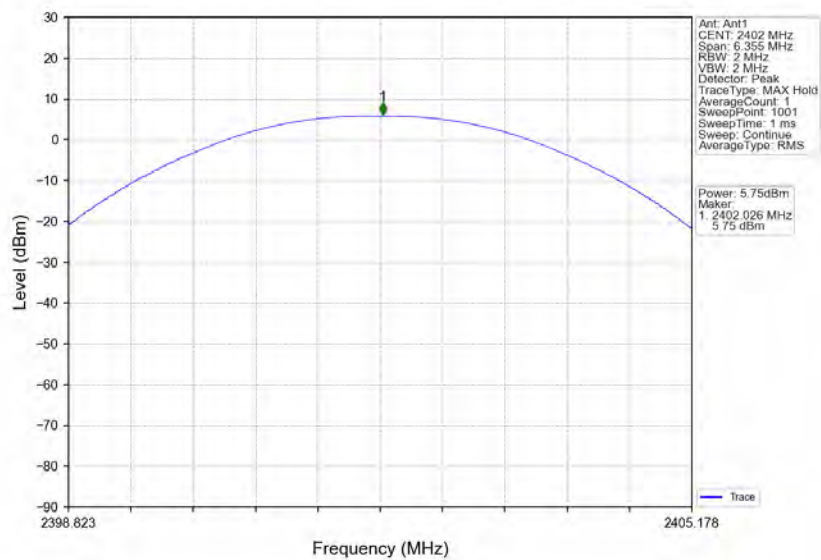


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

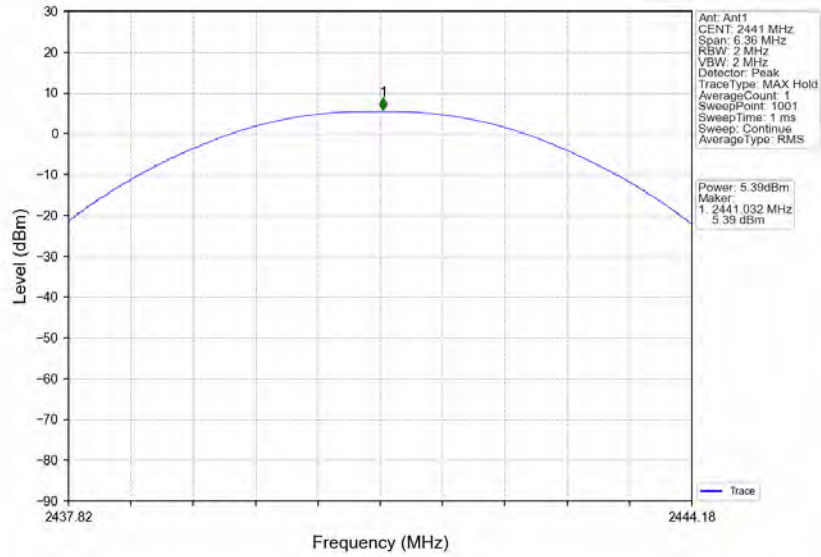


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

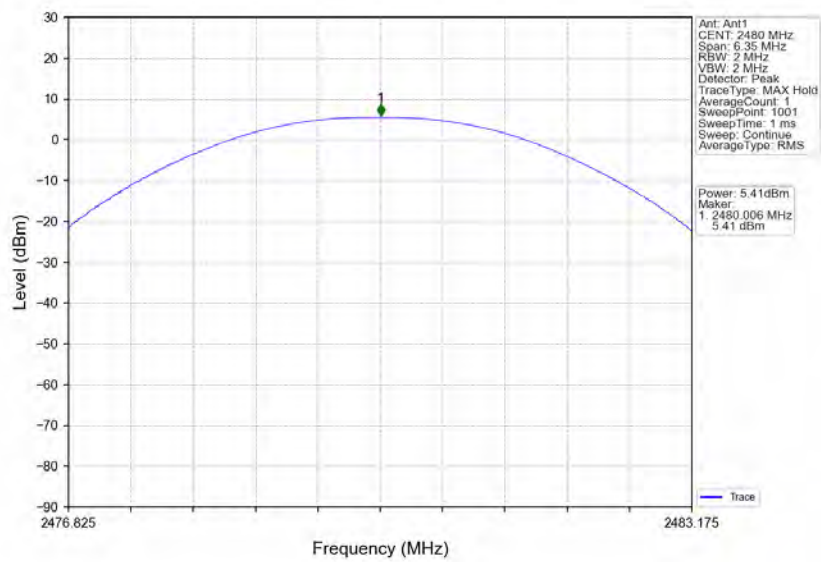


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

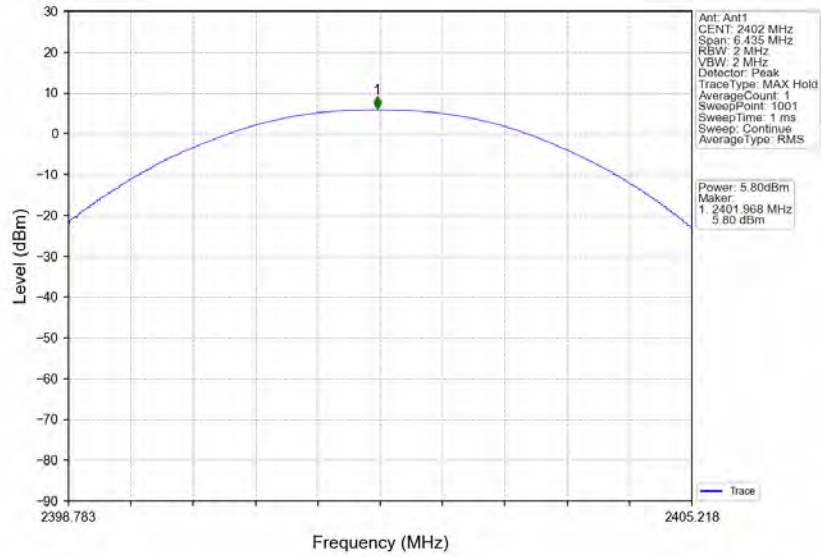

8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

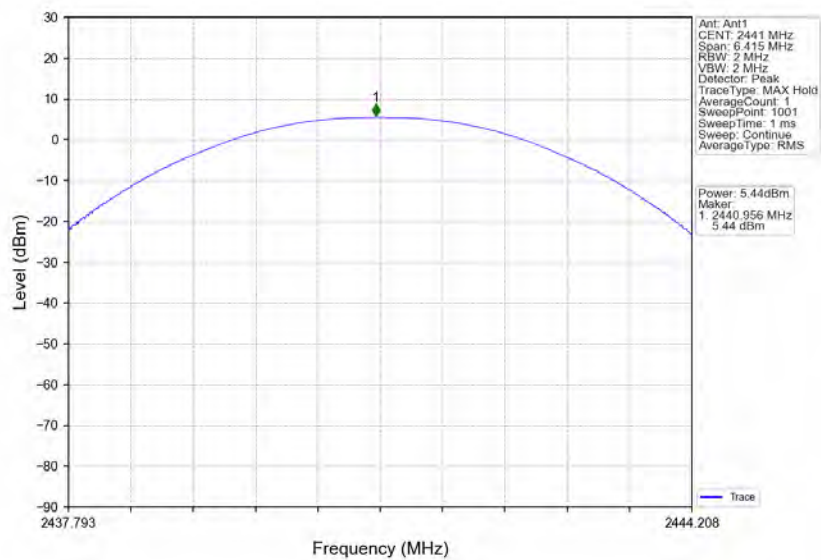

8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

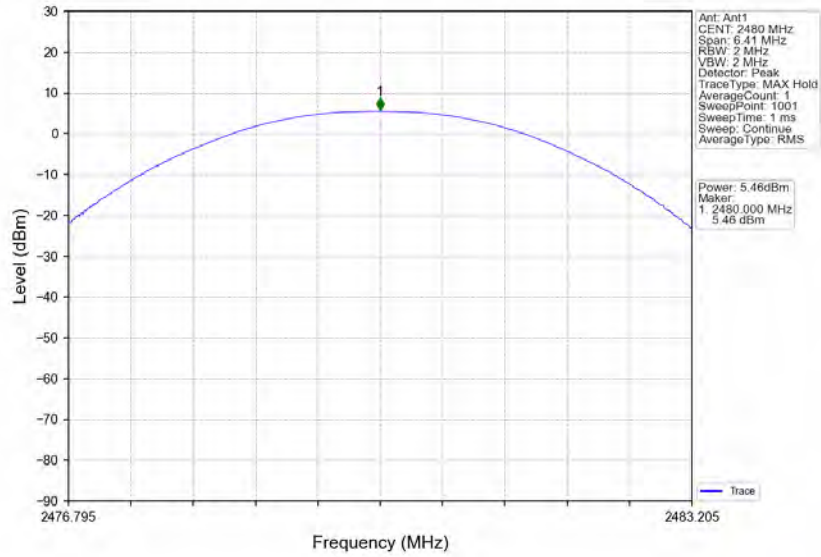



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR230700149803

Page: 167 of 200


3. Carrier Frequency Separation

3.1 Ant1


3.1.1 Test Result

Ant1							
Mode	TX Type	Frequency (MHz)	Packet Type	Channel Separation (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	Verdict
GFSK	SISO	HOPP	DH5	0.998	0.965	≥ 0.965	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	1.001	1.272	≥ 0.848	Pass
8DPSK	SISO	HOPP	3DH5	0.998	1.287	≥ 0.858	Pass

3.1.2 Test Graph

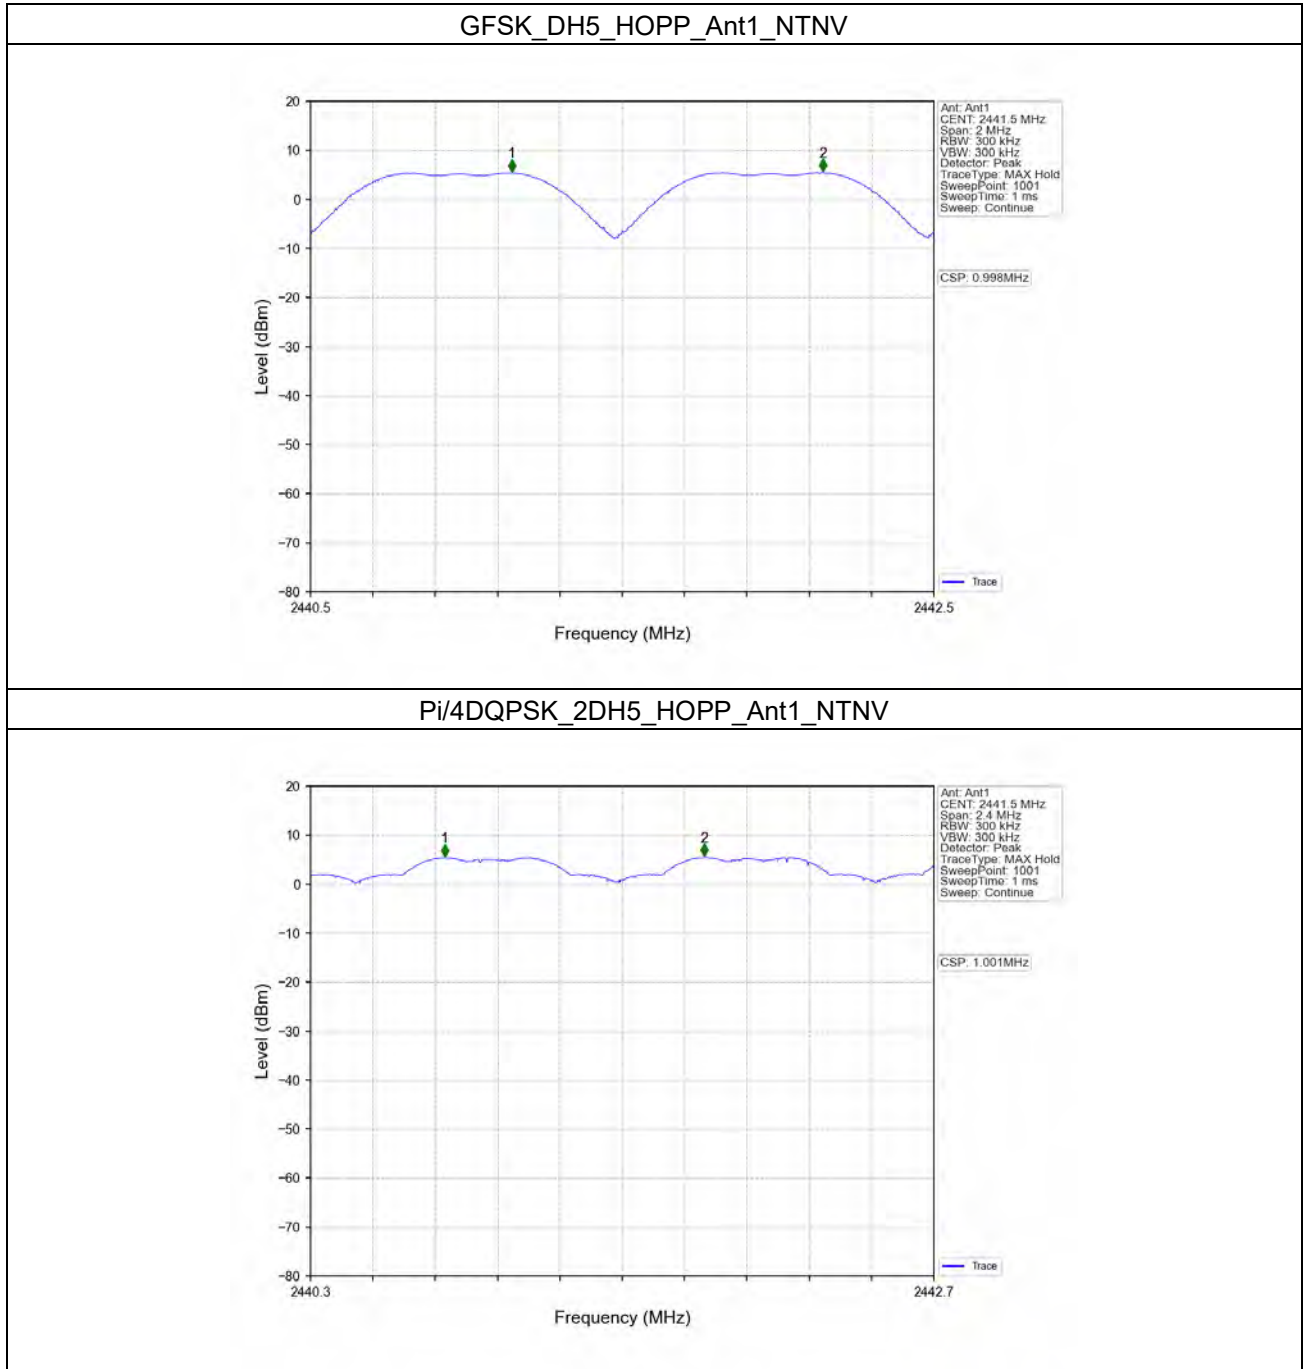

8DPSK_3DH5_HOPP_Ant1_NTNV

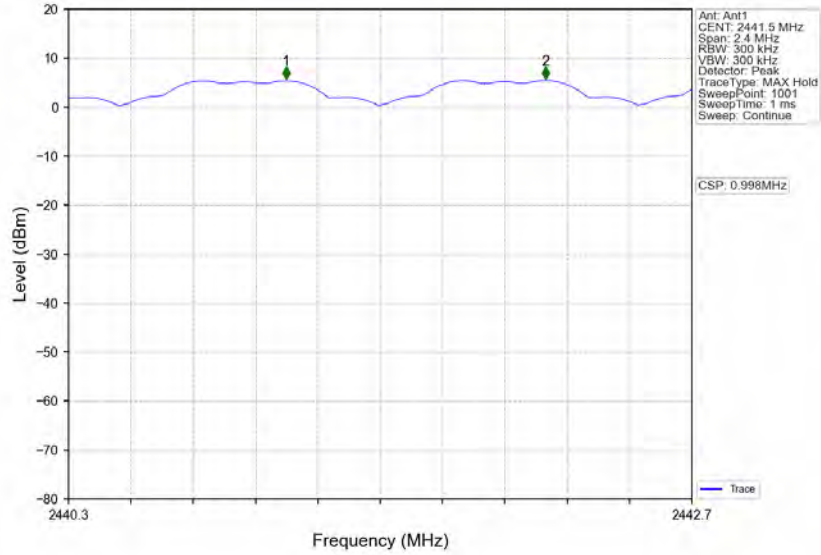



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR230700149803

Page: 170 of 200


4. Number of Hopping Frequencies

4.1 HoppNum


4.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	Num of Hopping Frequencies		Verdict
				ANT1	Limit	
GFSK	SISO	HOPP	DH5	79	≥ 15	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	79	≥ 15	Pass
8DPSK	SISO	HOPP	3DH5	79	≥ 15	Pass

4.1.2 Test Graph

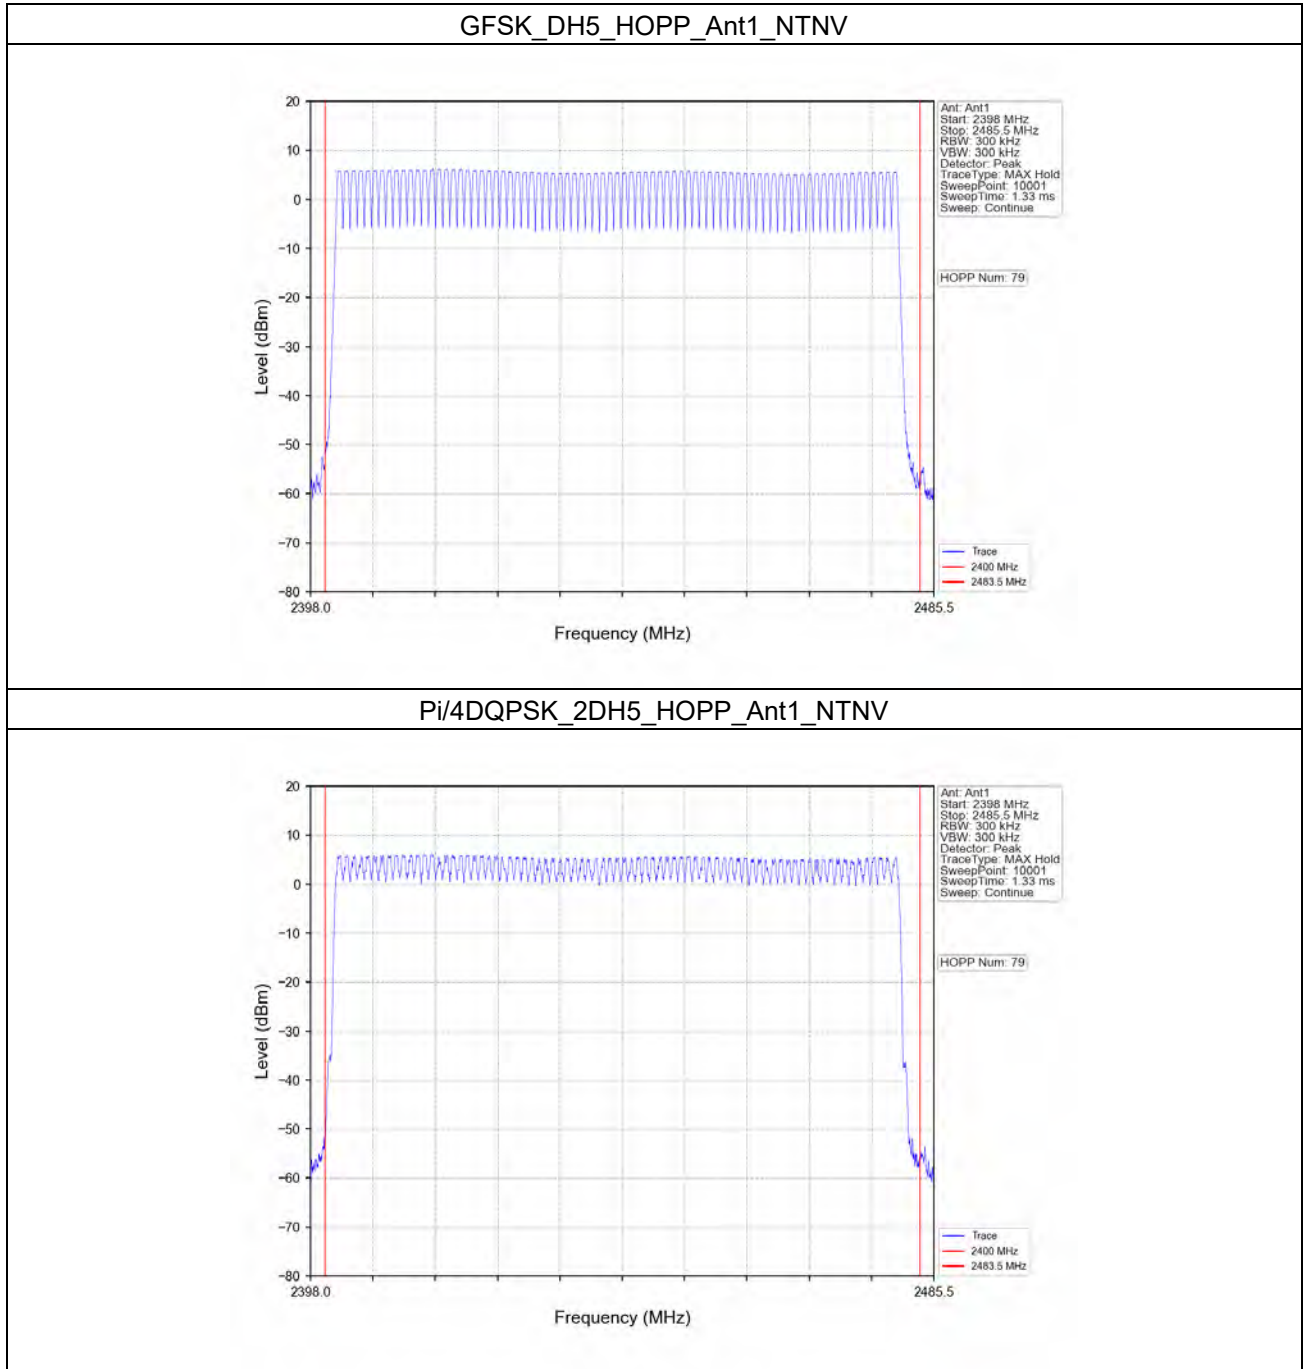

8DPSK_3DH5_HOPP_Ant1_NTNV

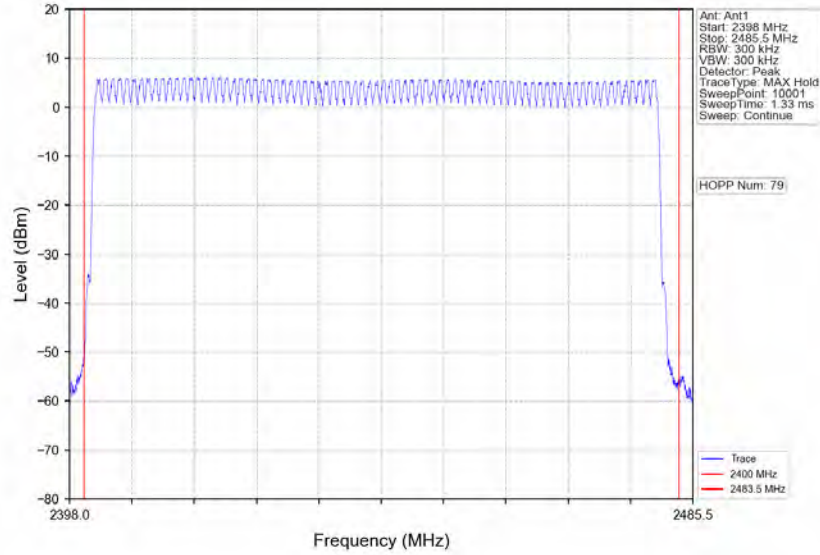


5. Time of Occupancy (Dwell Time)

5.1 Ant1


5.1.1 Test Result

Ant1									
Mode	TX Type	Frequency (MHz)	Packet Type	Duration of Single Pulse (ms)	Observation Period (s)	Num of Pulse in Observation Period	Dwell Time (ms)	Limit (ms)	Verdict
GFSK	SISO	HOPP	DH1	0.378	31.600	320	120.960	<=400	Pass
			DH3	1.634	31.600	160	261.440	<=400	Pass
			DH5	2.882	31.600	107	308.374	<=400	Pass
Pi/4DQPSK	SISO	HOPP	2DH1	0.382	31.600	320	122.240	<=400	Pass
			2DH3	1.634	31.600	160	261.440	<=400	Pass
			2DH5	2.882	31.600	107	308.374	<=400	Pass
8DPSK	SISO	HOPP	3DH1	0.382	31.600	320	122.240	<=400	Pass
			3DH3	1.632	31.600	160	261.120	<=400	Pass
			3DH5	2.884	31.600	106	305.704	<=400	Pass


5.1.2 Test Graph

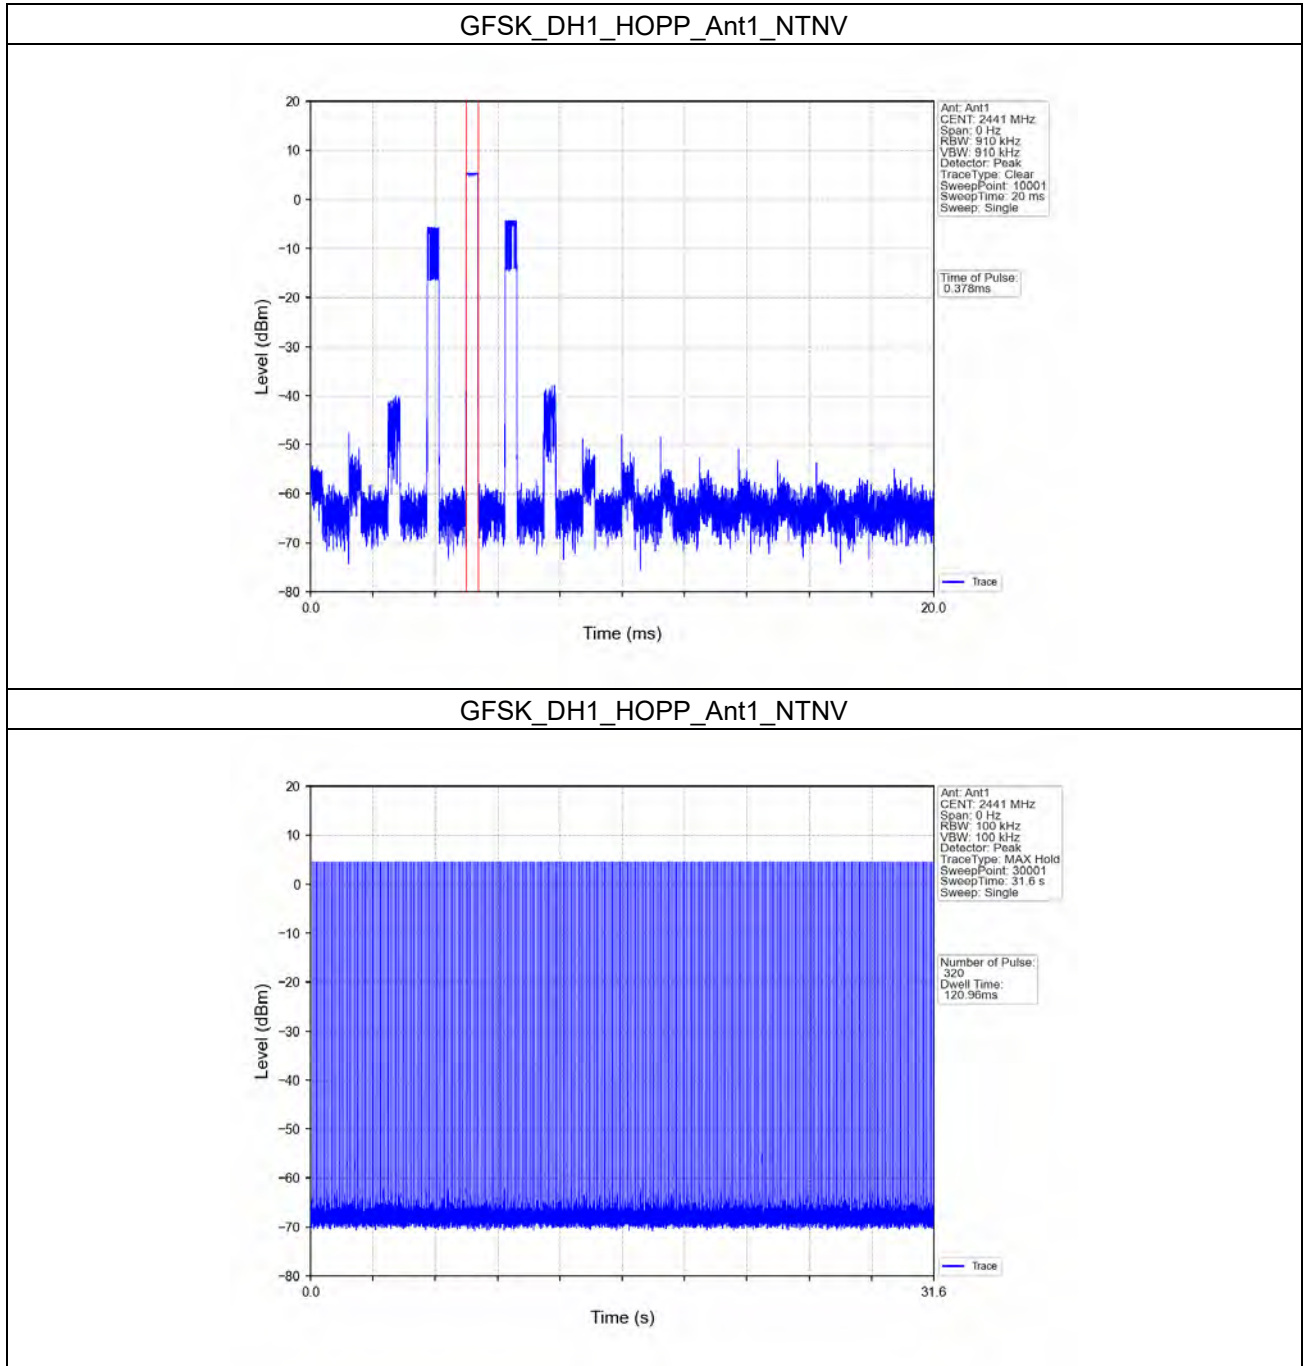


GFSK_DH3_HOPP_Ant1_NTNV

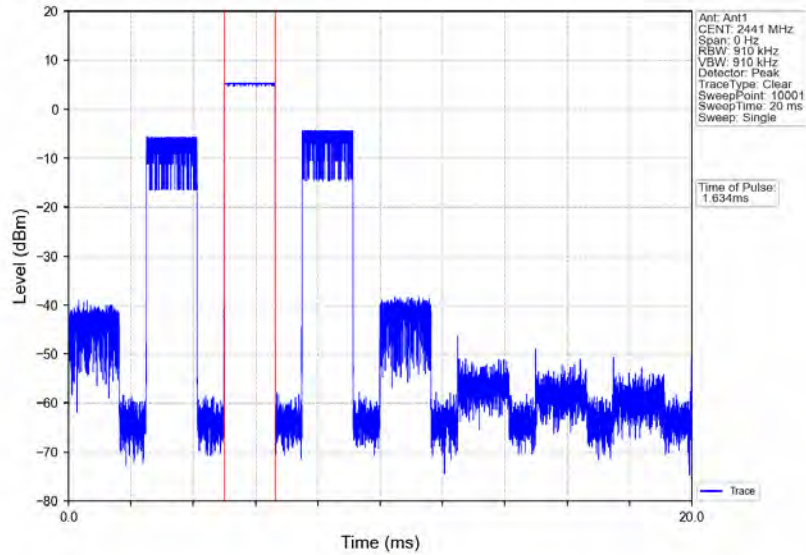


GFSK_DH3_HOPP_Ant1_NTNV

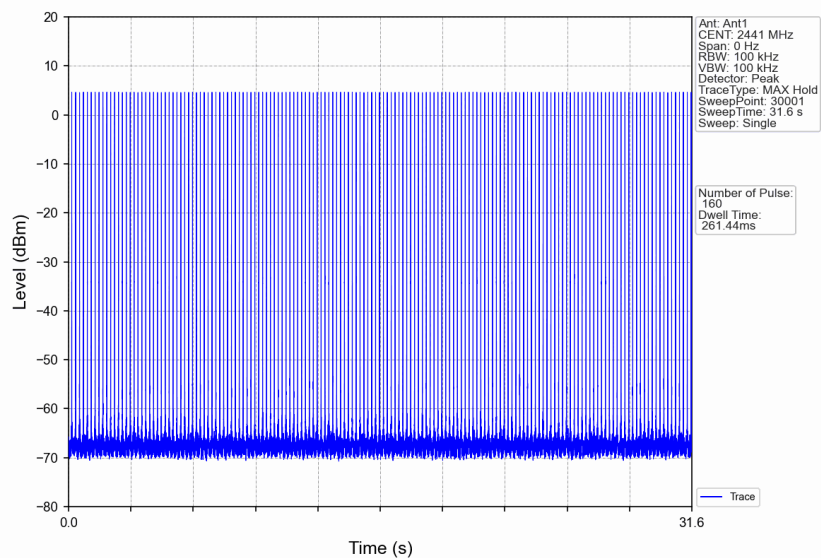


GFSK_DH5_HOPP_Ant1_NTNV

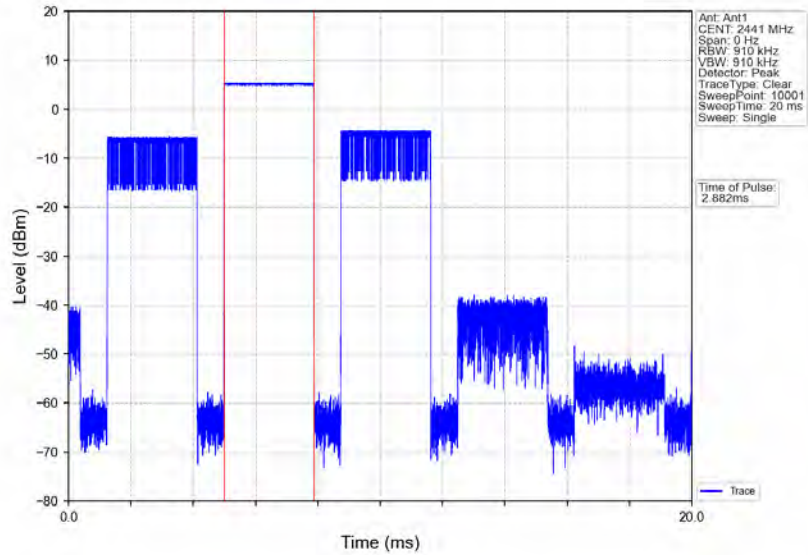


GFSK_DH5_HOPP_Ant1_NTNV

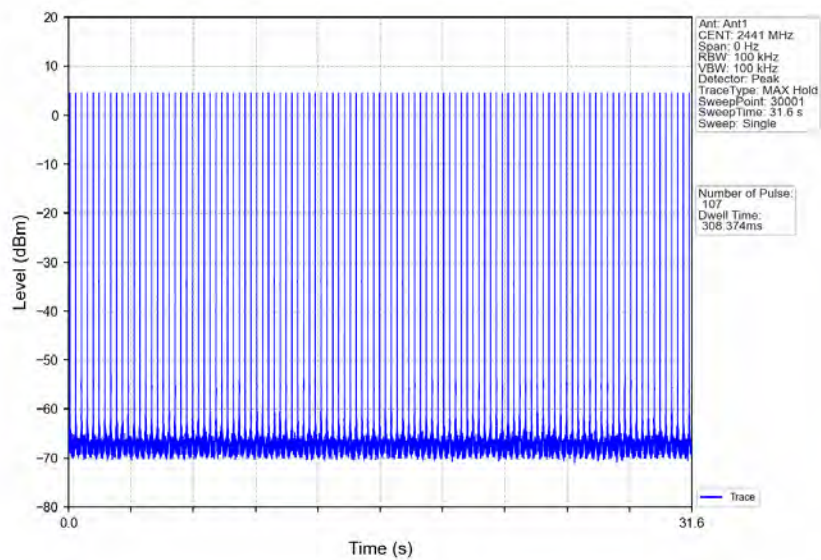


Pi/4DQPSK_2DH1_HOPP_Ant1_NTNV

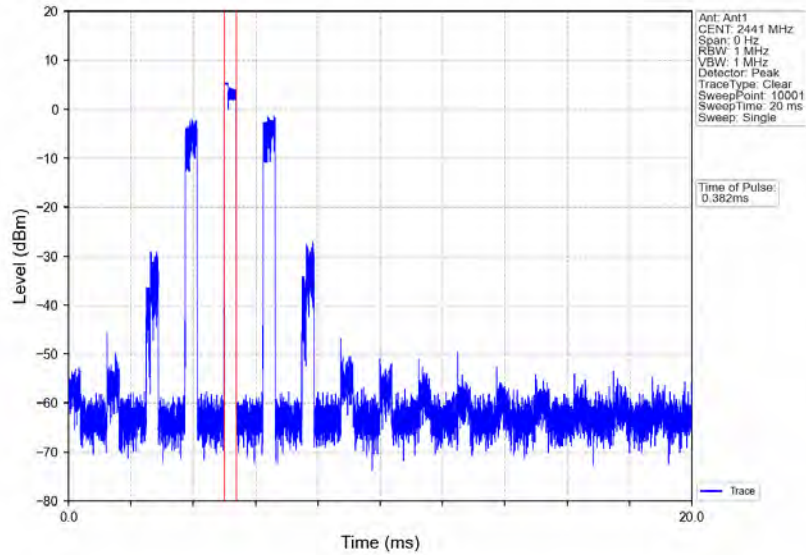


Pi/4DQPSK_2DH1_HOPP_Ant1_NTNV

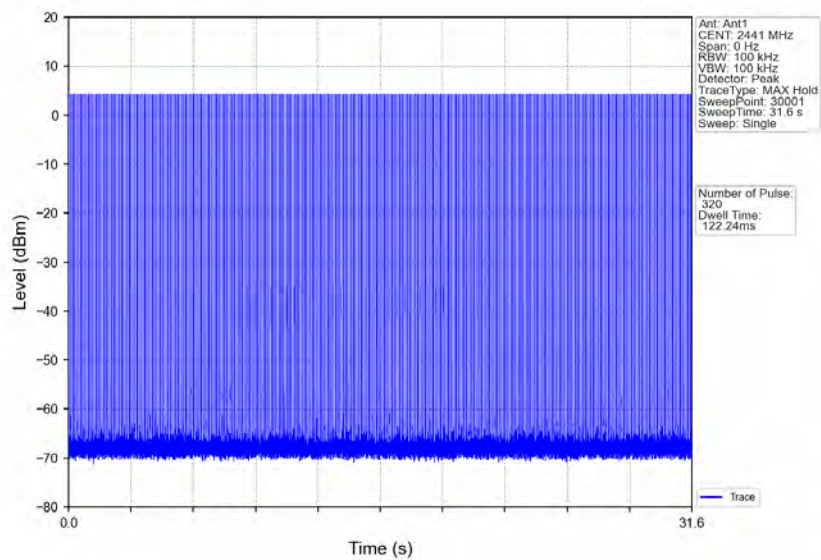


Pi/4DQPSK_2DH3_HOPP_Ant1_NTNV

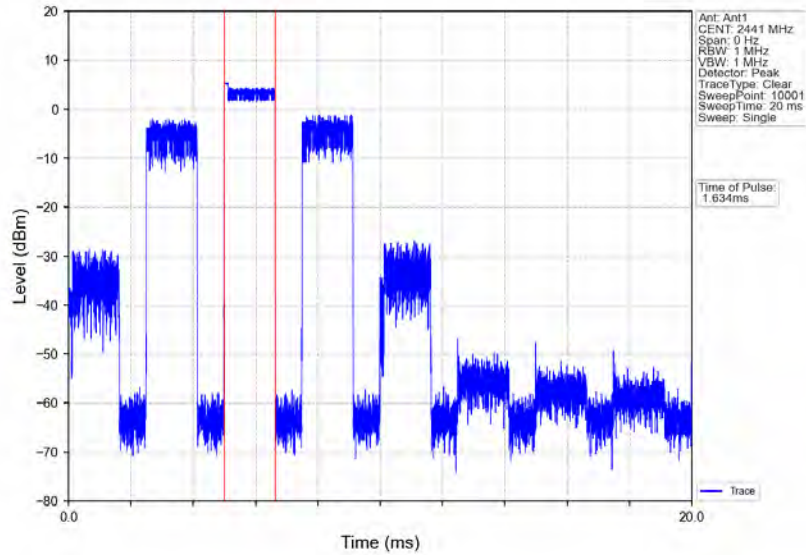


Pi/4DQPSK_2DH3_HOPP_Ant1_NTNV

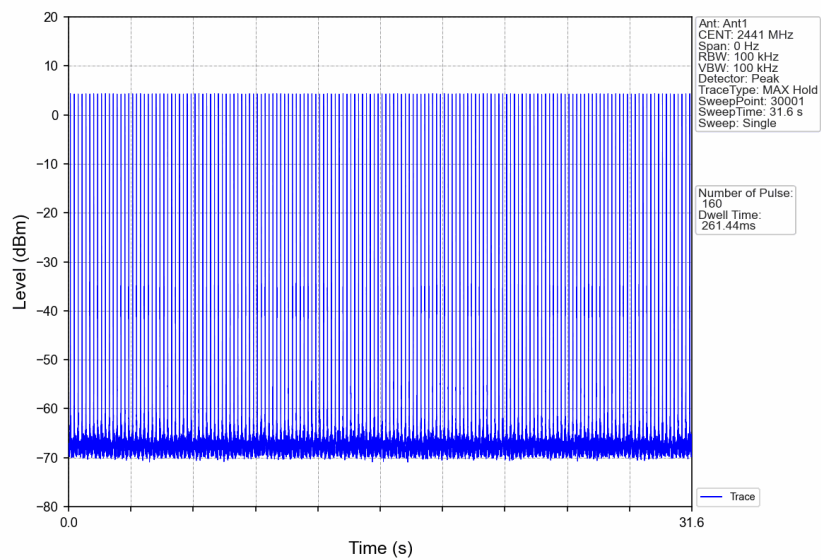


Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

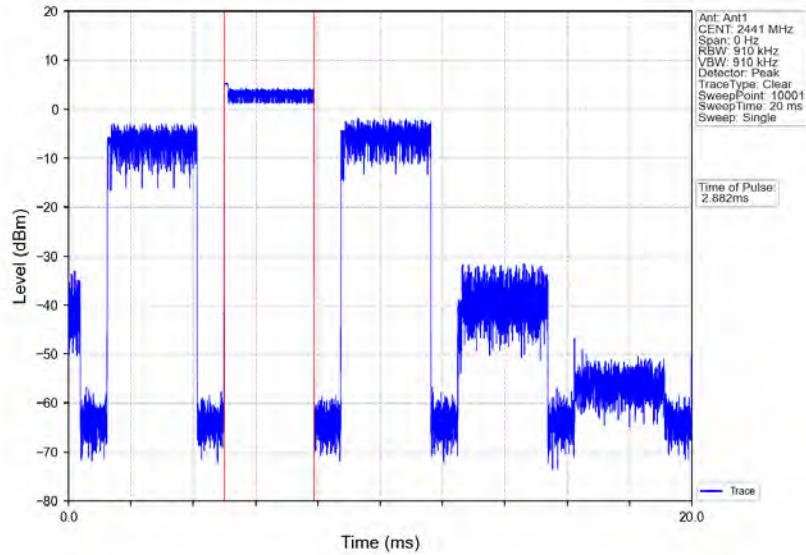


Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

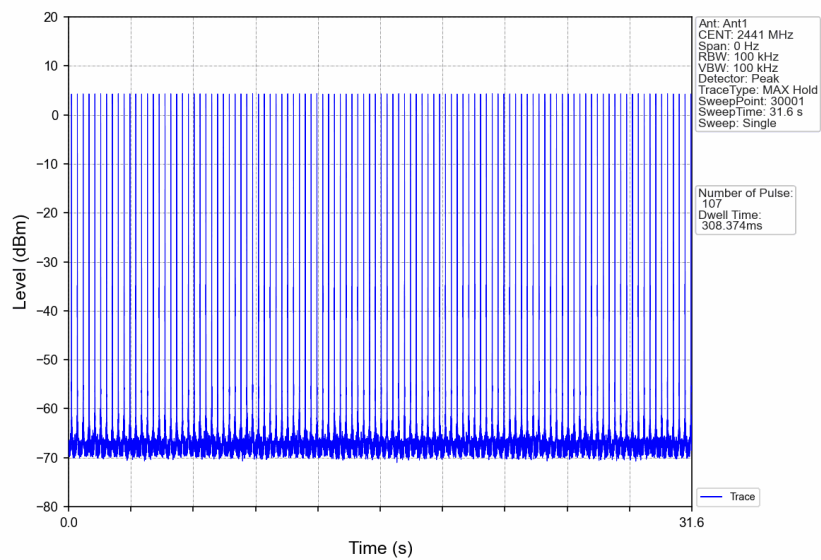


8DPSK_3DH1_HOPP_Ant1_NTNV

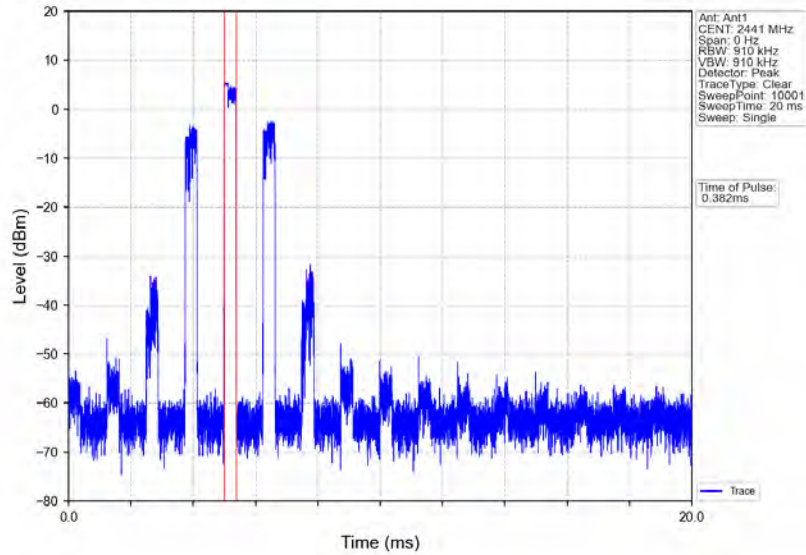


8DPSK_3DH1_HOPP_Ant1_NTNV

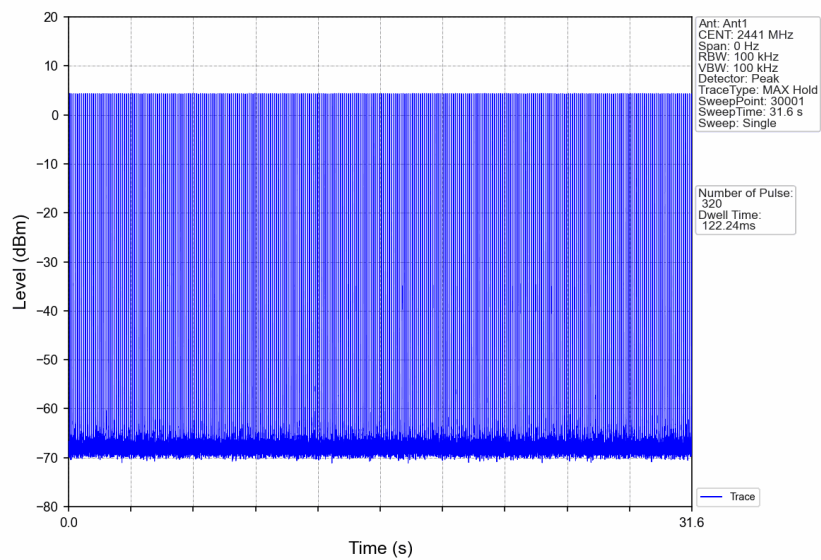


8DPSK_3DH3_HOPP_Ant1_NTNV

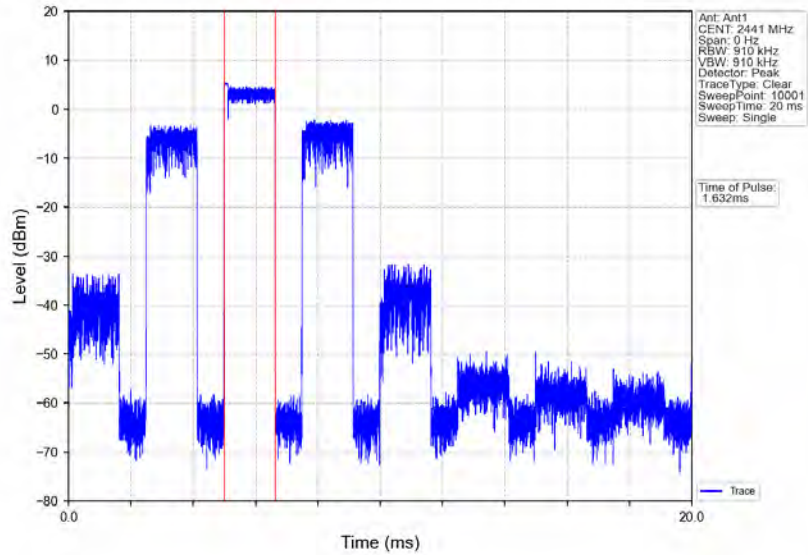


8DPSK_3DH3_HOPP_Ant1_NTNV

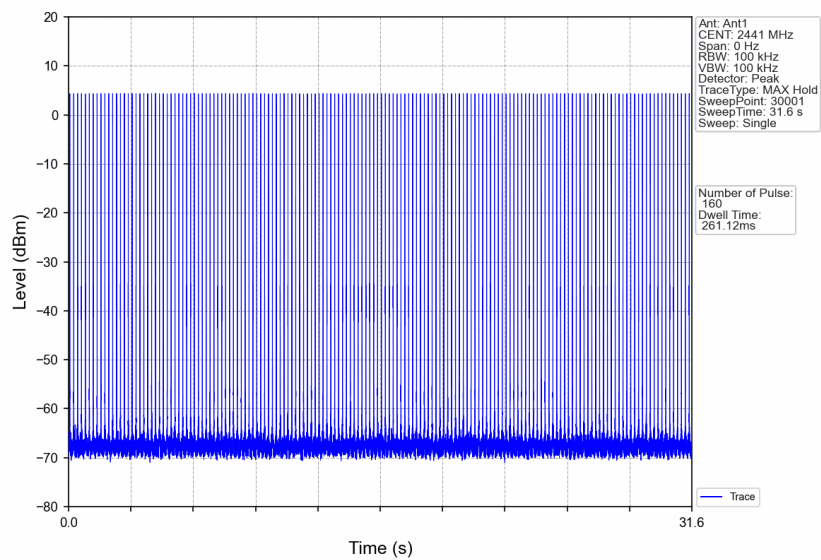

8DPSK_3DH5_HOPP_Ant1_NTNV

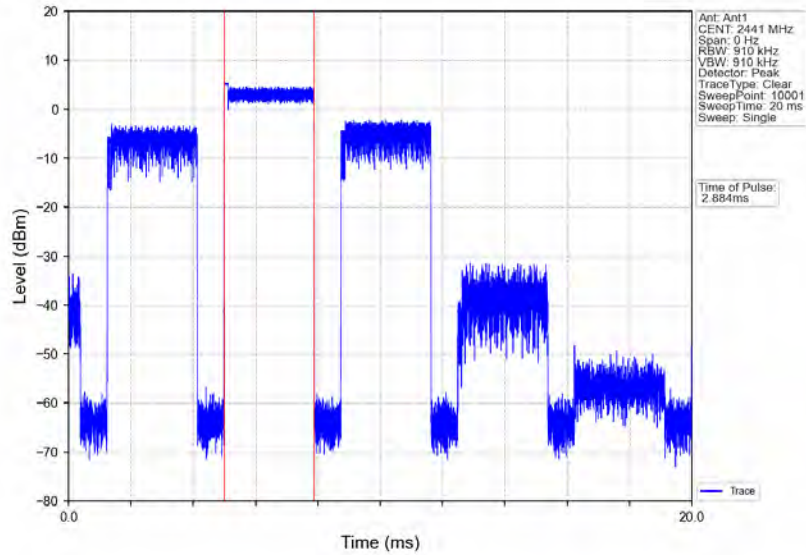

8DPSK_3DH5_HOPP_Ant1_NTNV

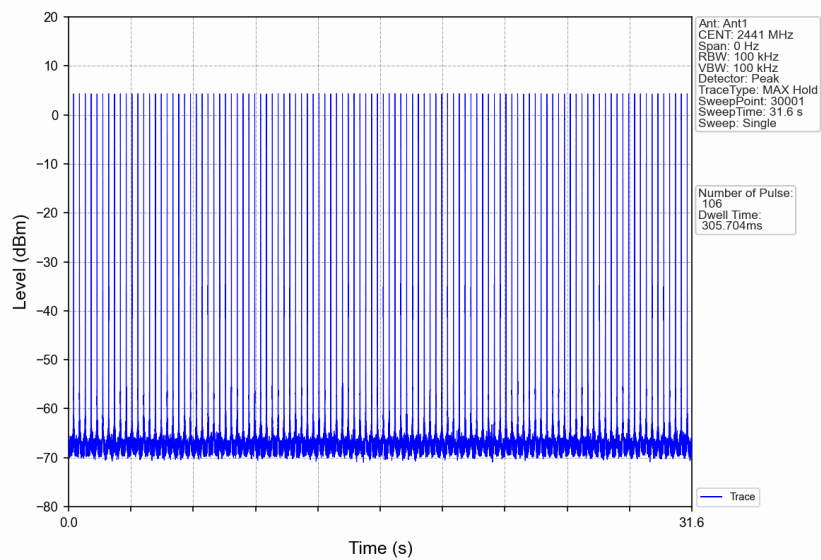

6. Unwanted Emissions In Non-restricted Frequency Bands


6.1 Ref

6.1.1 Test Result


Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)
GFSK	SISO	2402	DH5	1	5.75
		2441	DH5	1	5.39
		2480	DH5	1	5.41
Pi/4DQPSK	SISO	2402	2DH5	1	5.74
		2441	2DH5	1	5.40
		2480	2DH5	1	5.41
8DPSK	SISO	2402	3DH5	1	5.76
		2441	3DH5	1	5.40
		2480	3DH5	1	5.39

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.


6.1.2 Test Graph

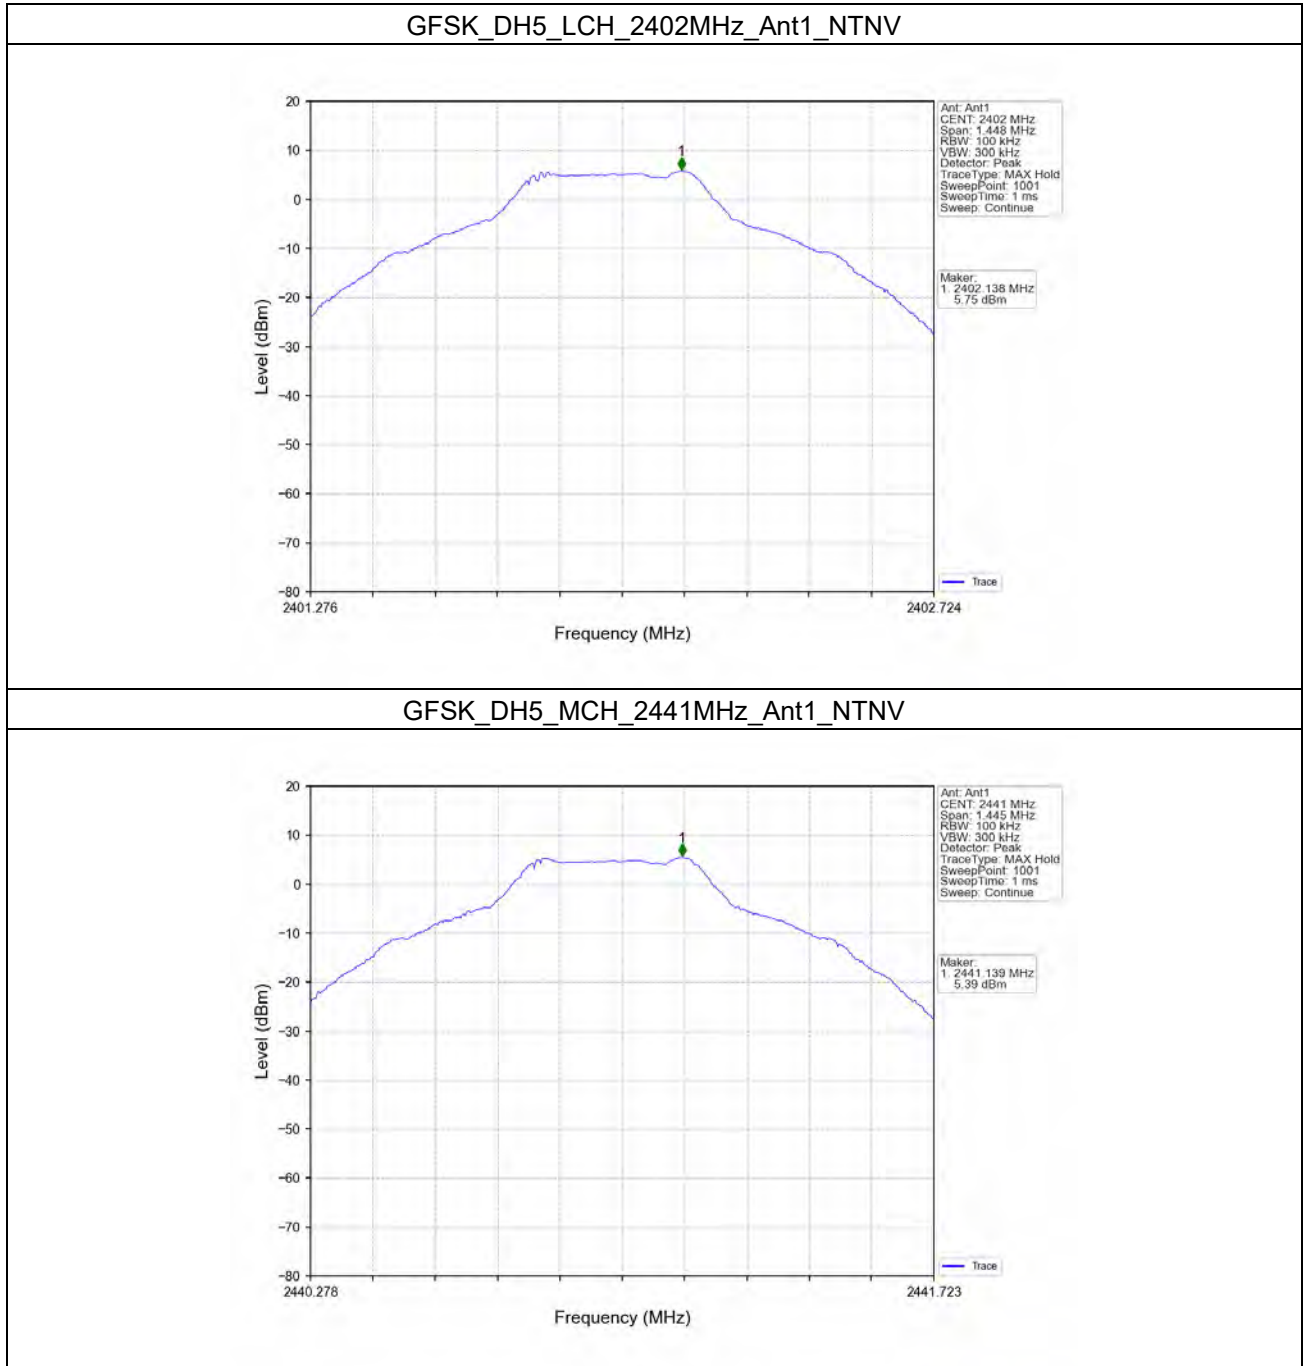


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

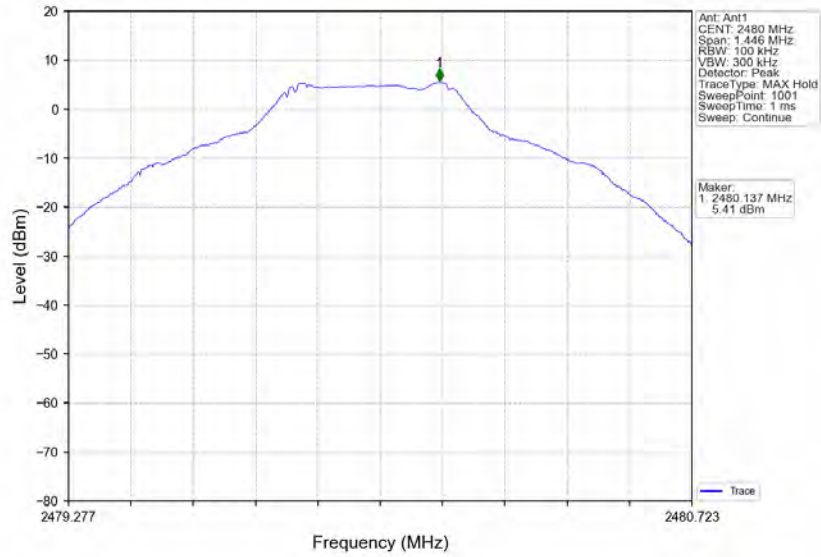


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

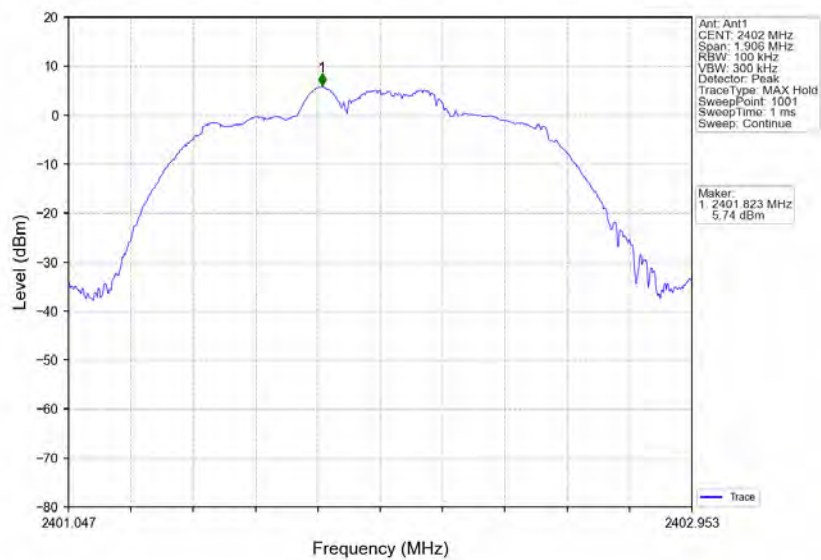


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

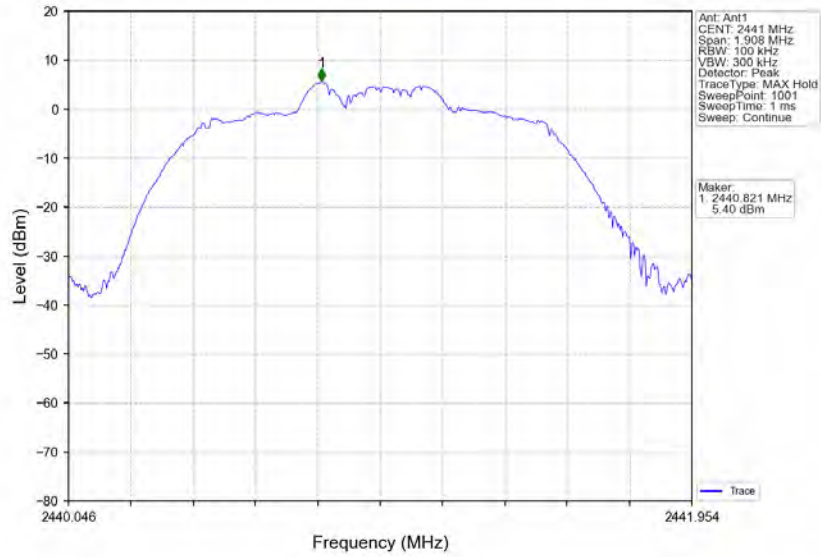


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

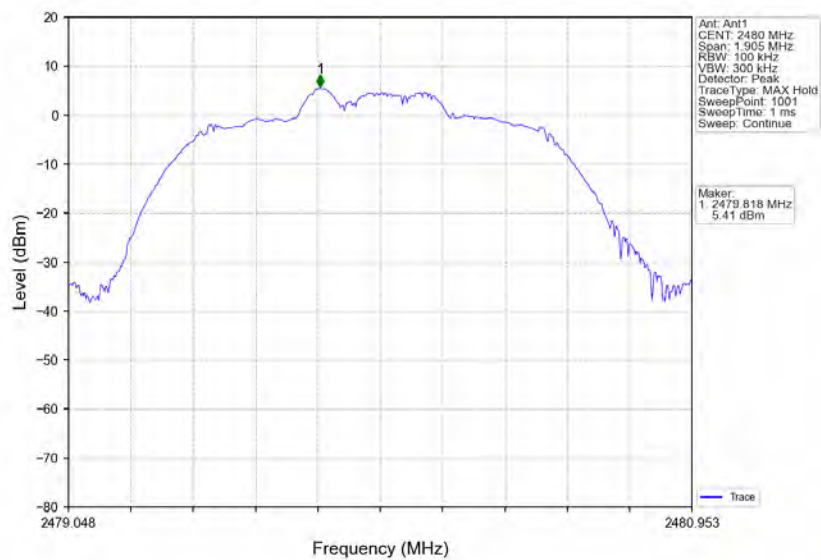


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

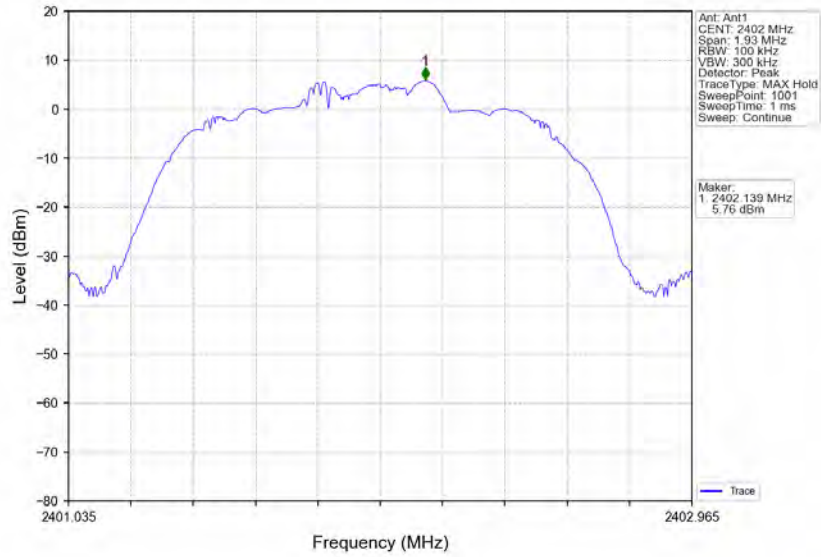

8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

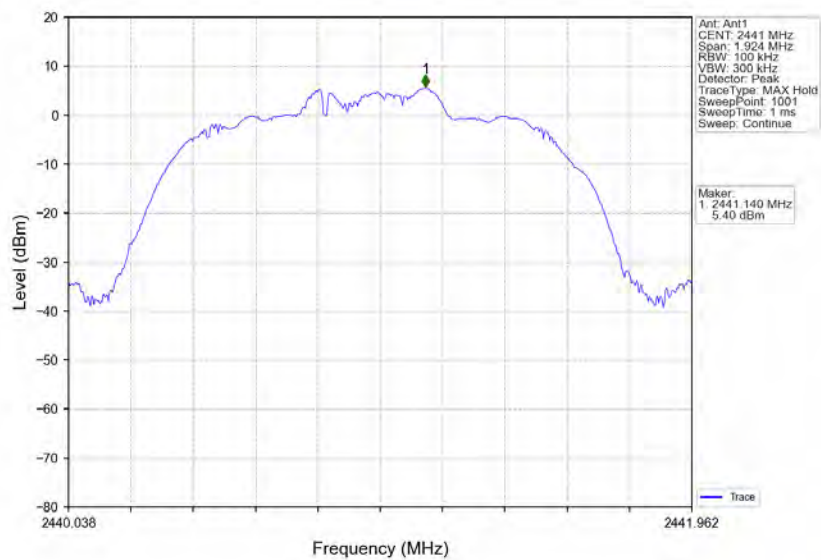

8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

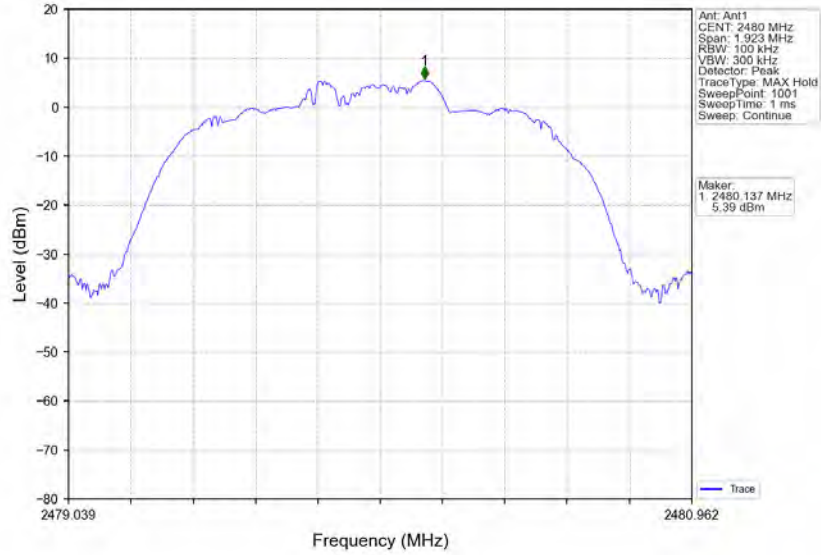


6.2 CSE

6.2.1 Test Result


Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
GFSK	SISO	2402	DH5	1	5.75	-14.25	Pass
		2441	DH5	1	5.75	-14.25	Pass
		2480	DH5	1	5.75	-14.25	Pass
		HOPP	DH5	1	5.75	-14.25	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	5.74	-14.26	Pass
		2441	2DH5	1	5.74	-14.26	Pass
		2480	2DH5	1	5.74	-14.26	Pass
		HOPP	2DH5	1	5.74	-14.26	Pass
8DPSK	SISO	2402	3DH5	1	5.76	-14.24	Pass
		2441	3DH5	1	5.76	-14.24	Pass
		2480	3DH5	1	5.76	-14.24	Pass
		HOPP	3DH5	1	5.76	-14.24	Pass

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.


6.2.2 Test Graph

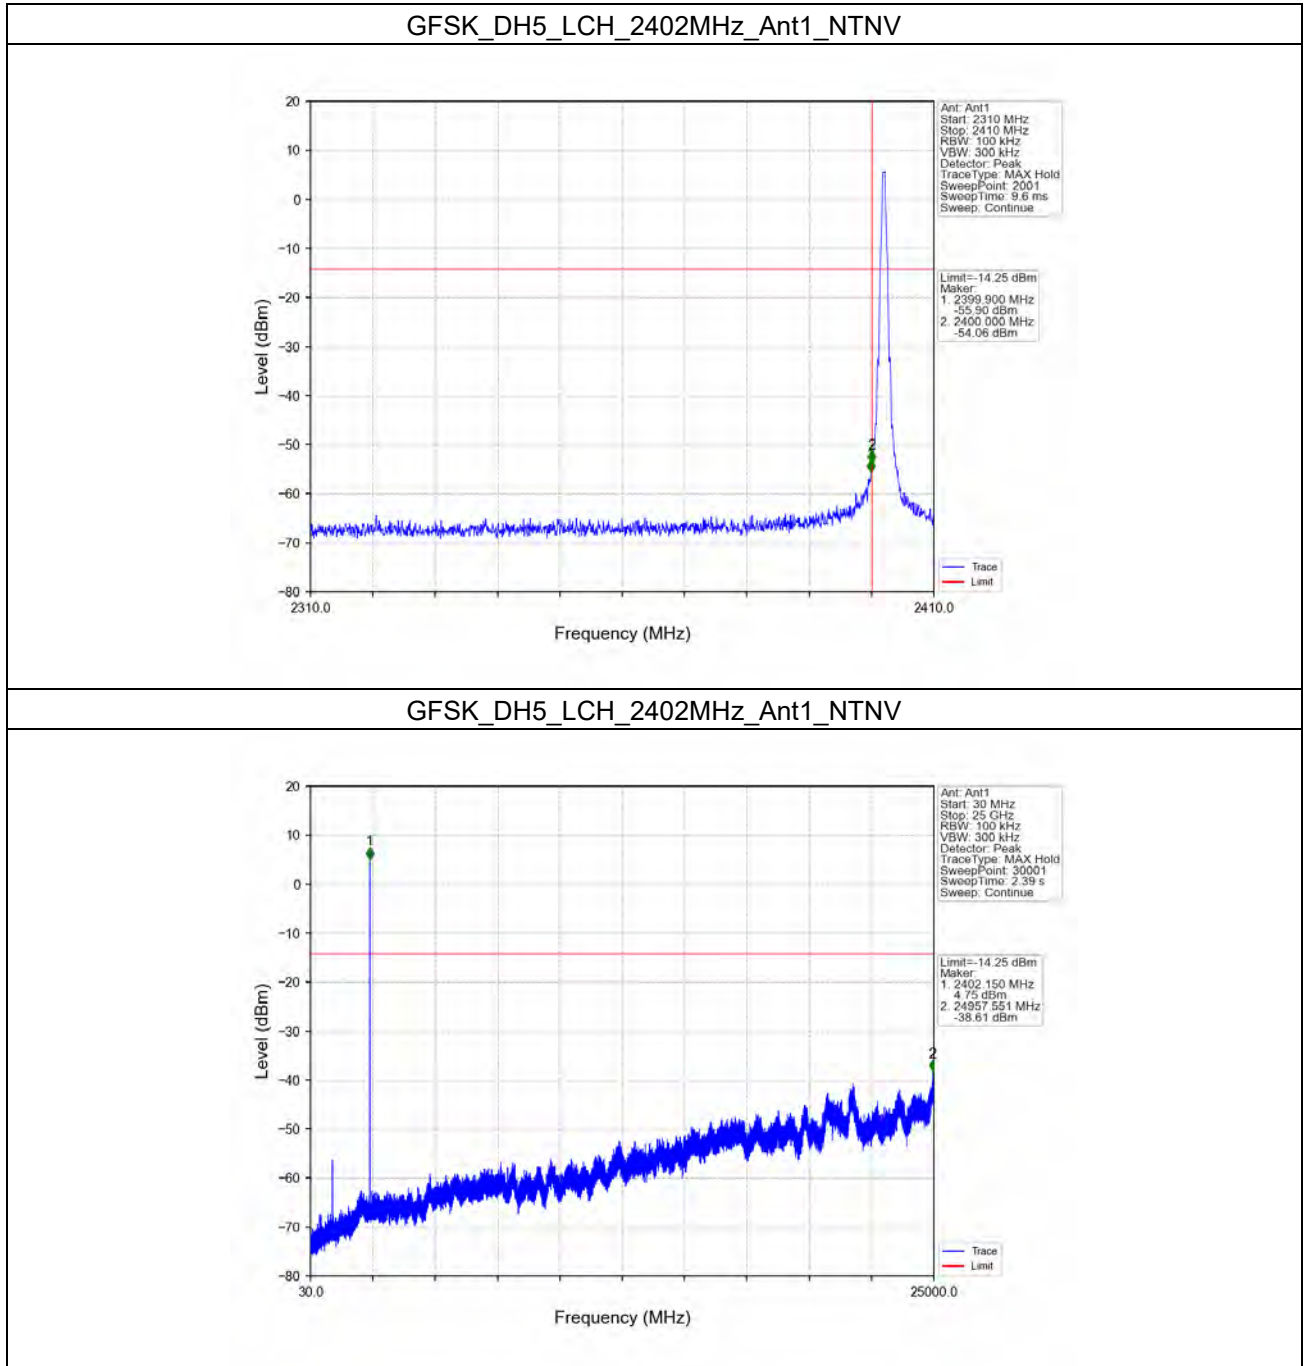


GFSK_DH5_MCH_2441MHz_Ant1_NTNV

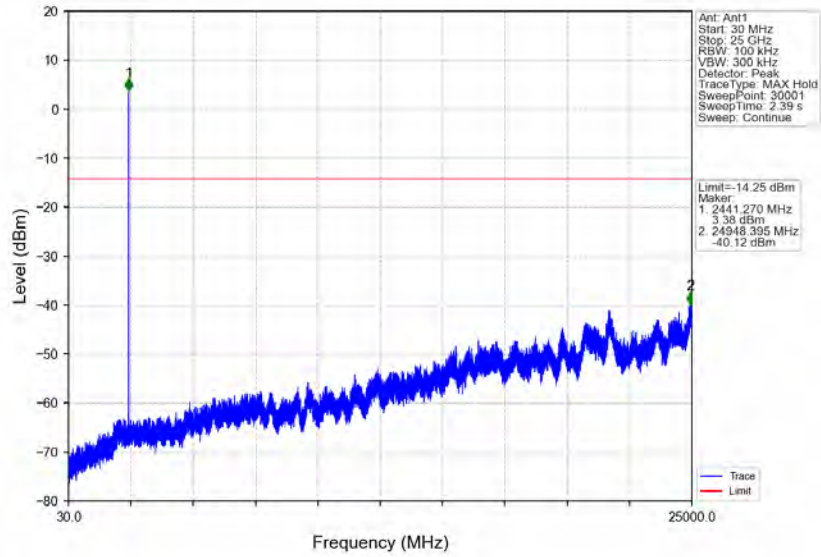


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

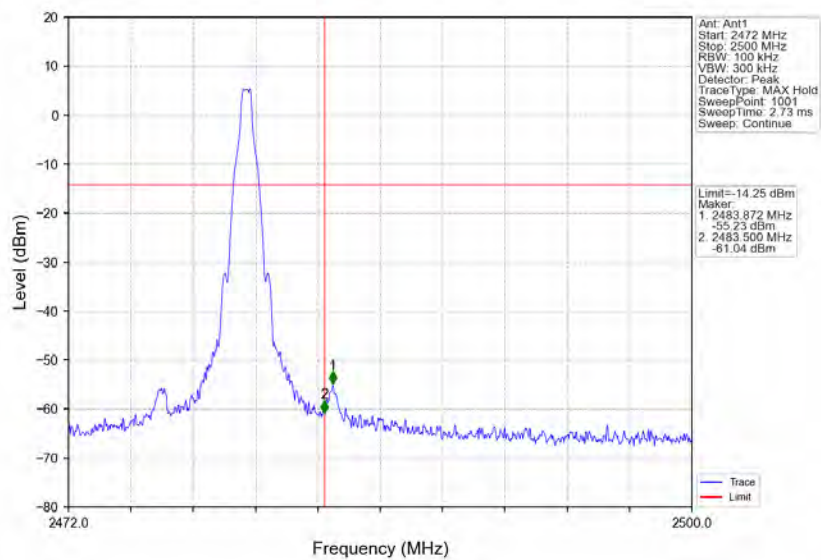


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

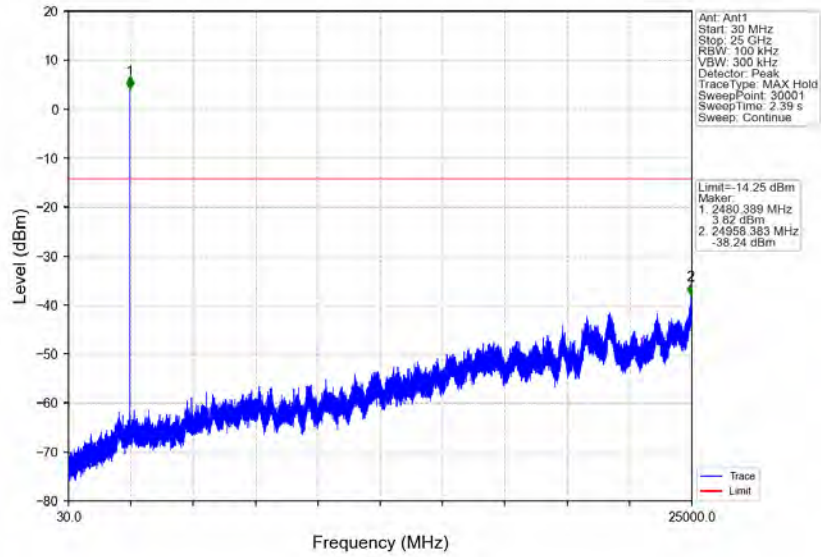


GFSK_DH5_HOPP_2410MHz_Ant1_NTNV

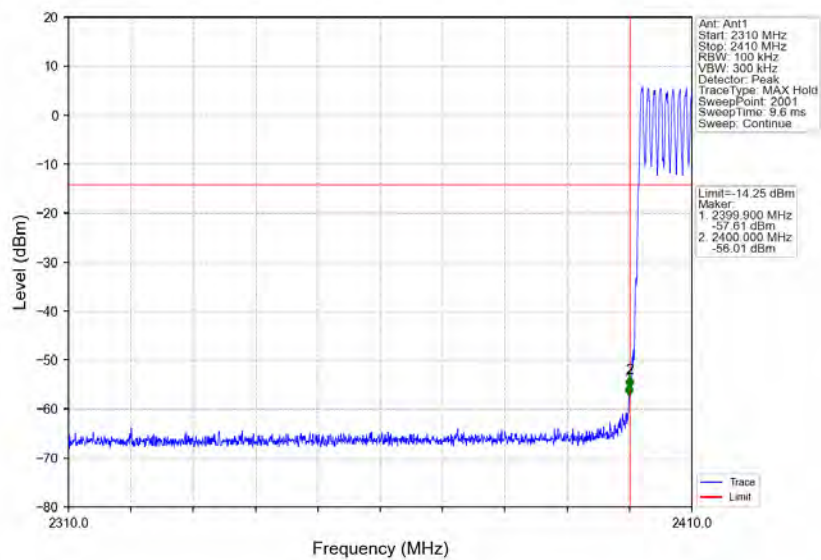


GFSK_DH5_HOPP_Ant1_NTNV

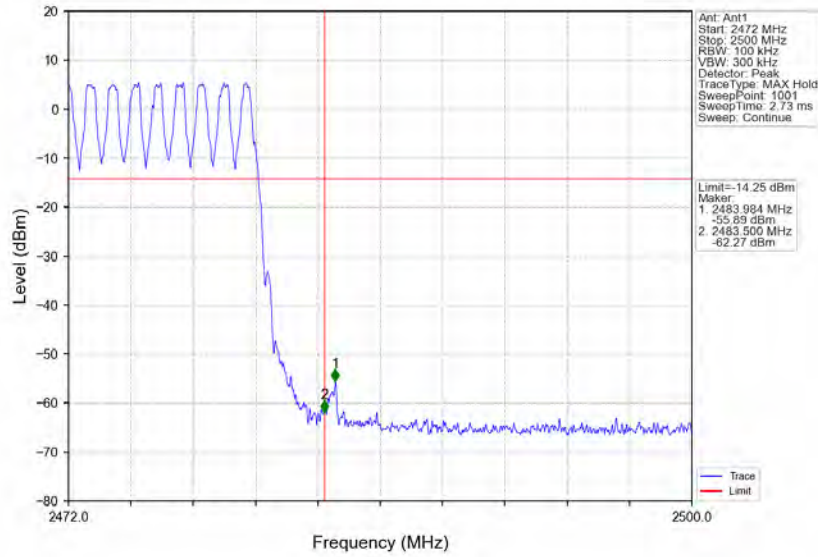


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

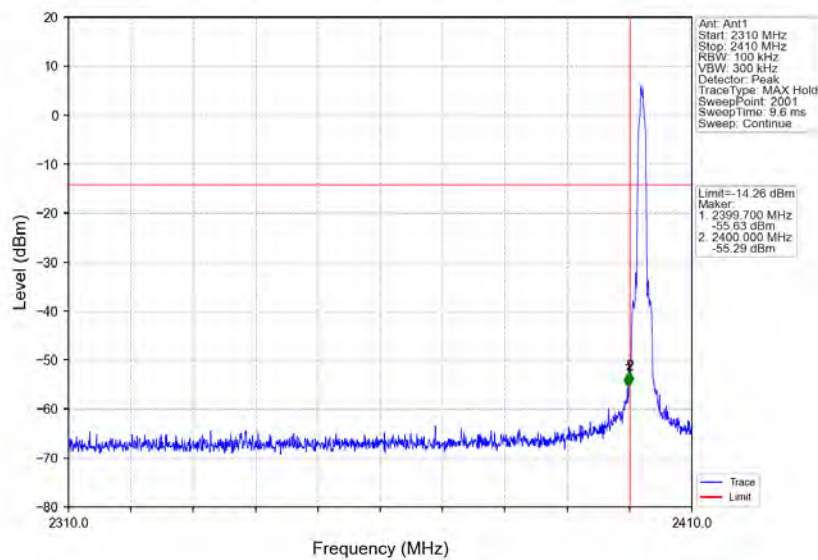


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

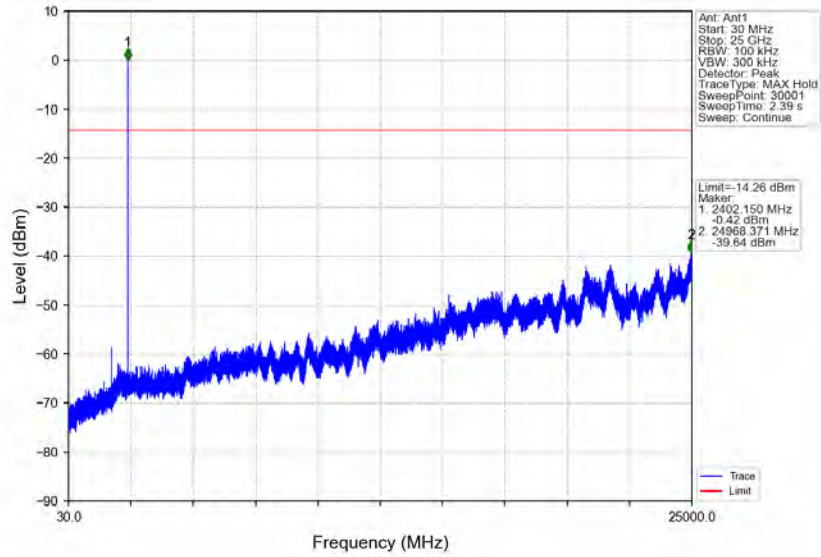


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

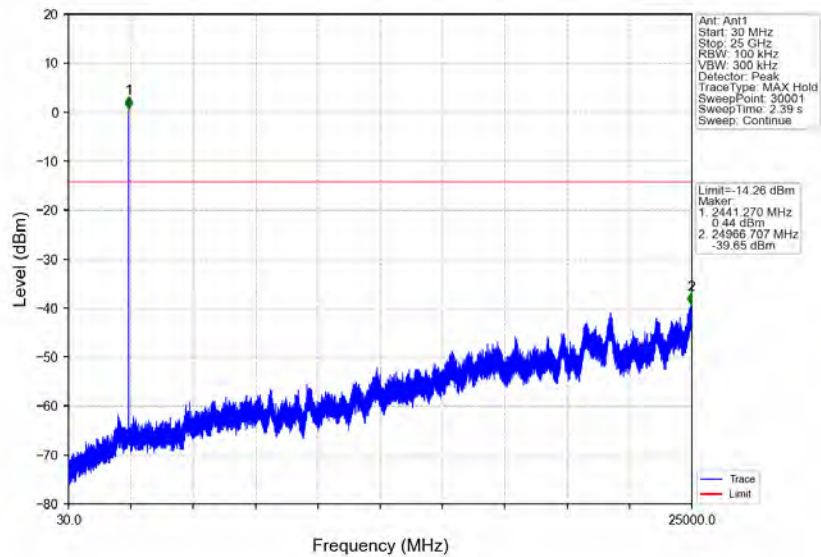


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

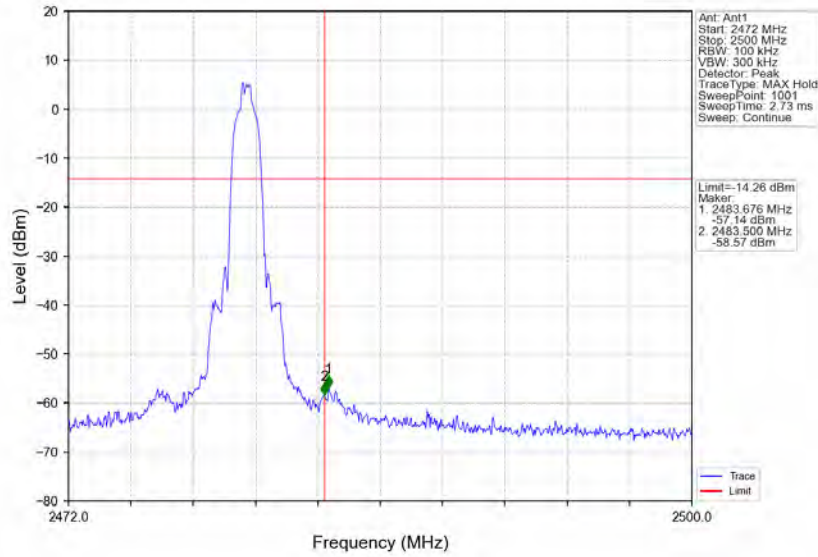


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

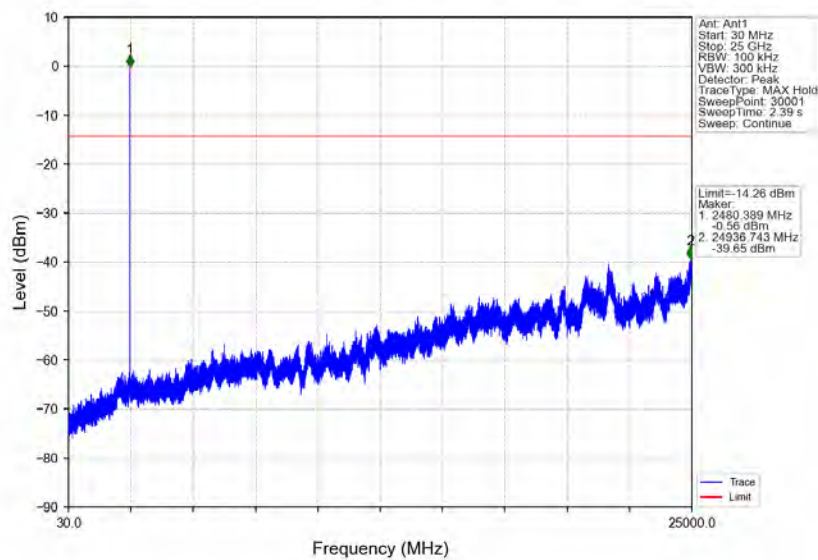


Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

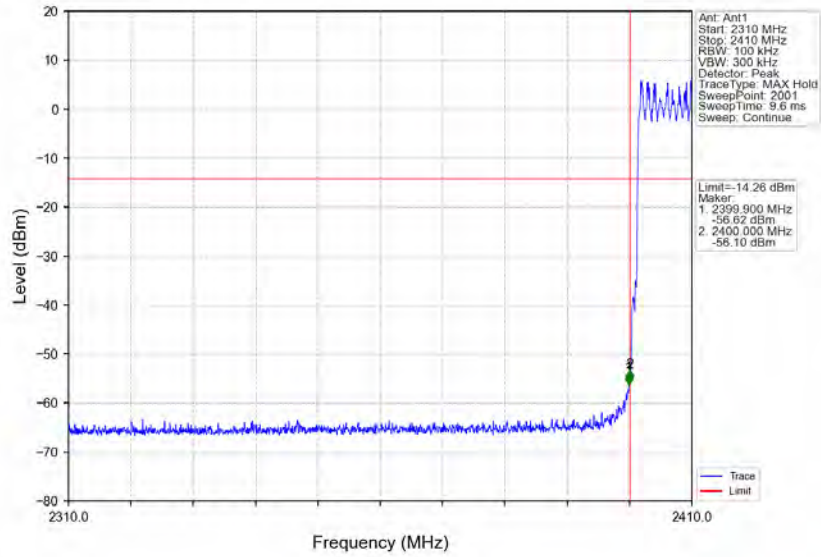


Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

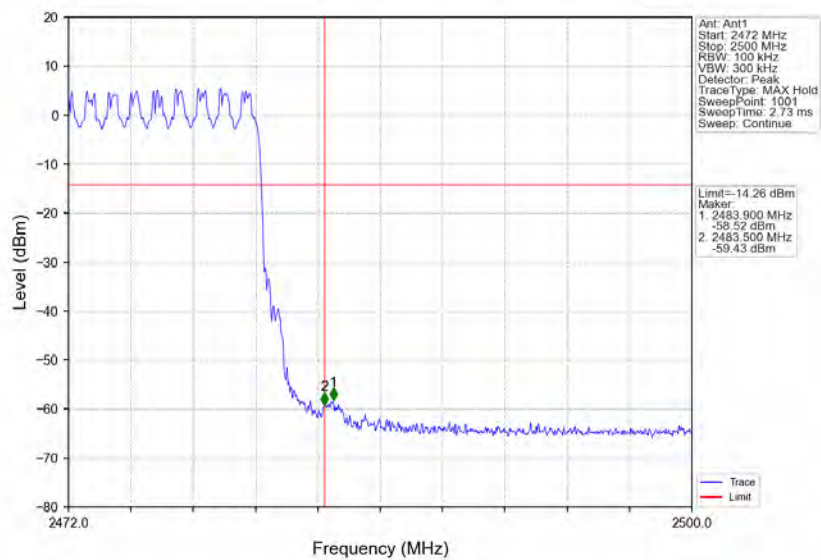


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

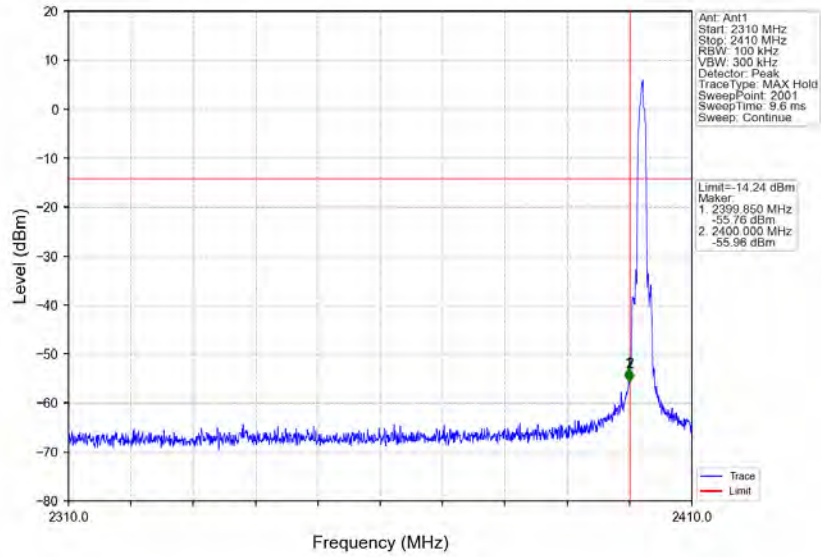


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

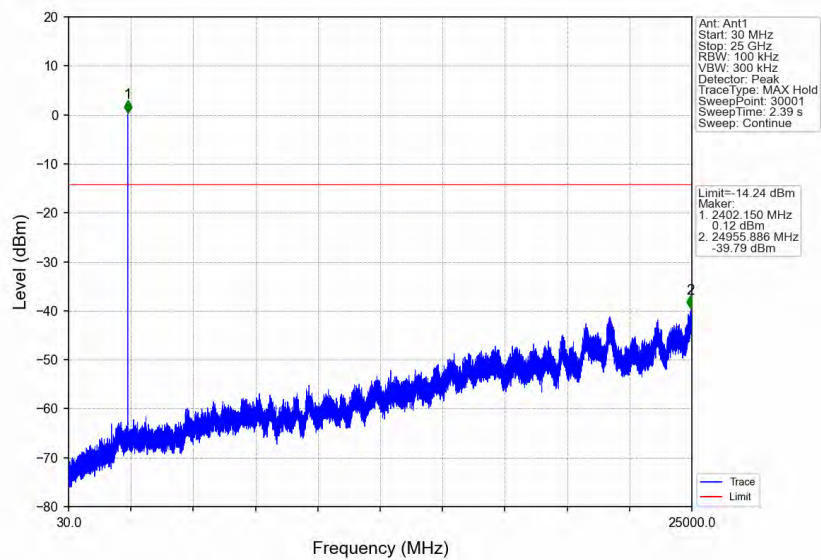


8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

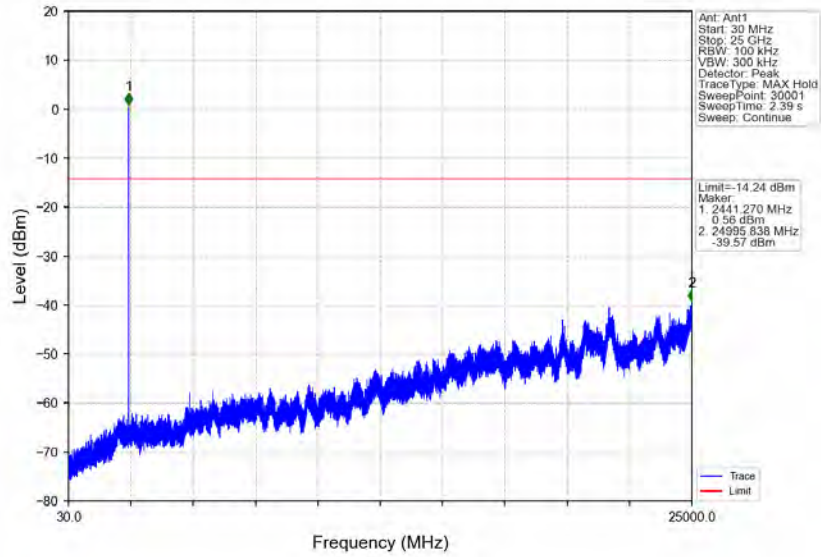


8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

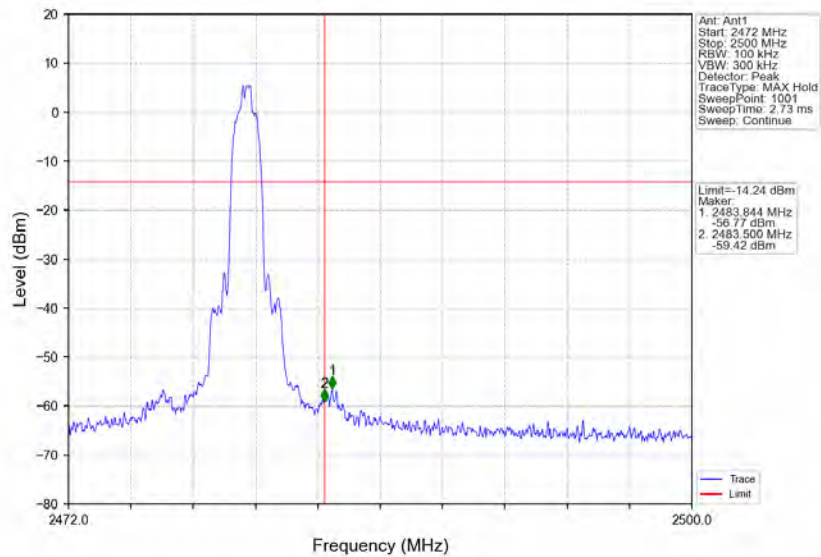


8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

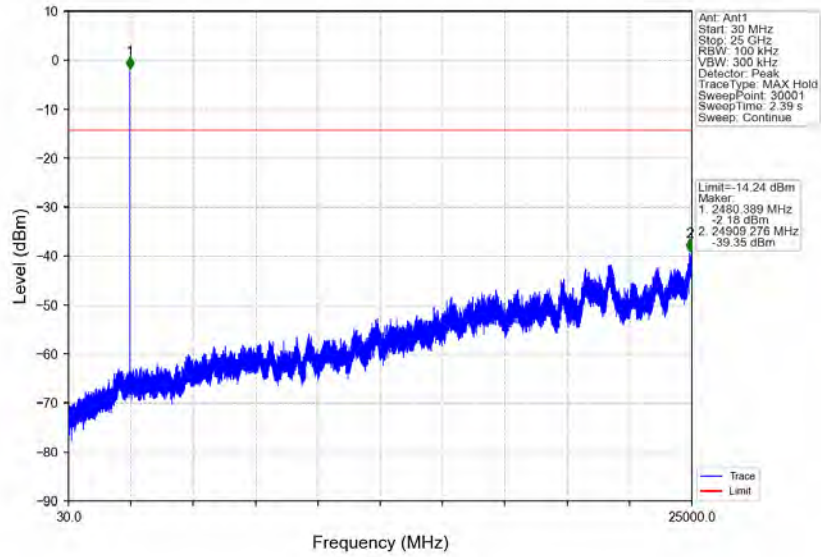

8DPSK_3DH5_HOPP_Ant1_NTNV

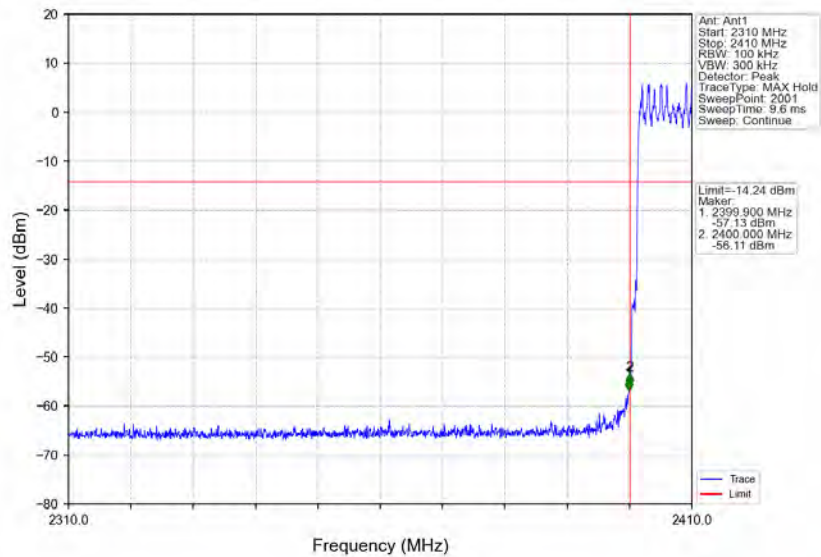

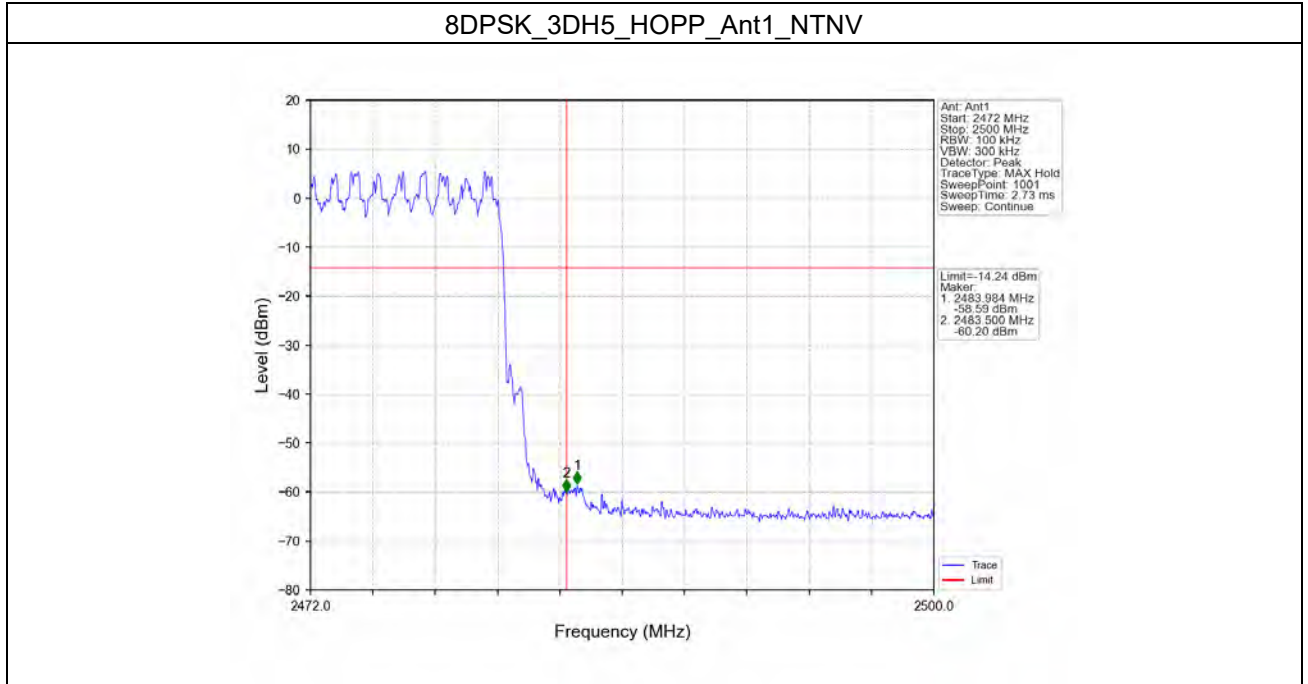

- End of the Report -