

FCC Test Report

(PART 24)

Report No.: RF190417C27-6

FCC ID: POTWA02

Test Model: WA02

Received Date: Apr. 17, 2019

Test Date: Jun. 03 ~ Aug. 07, 2019

Issued Date: Sep. 12, 2019

Applicant: Inventec Appliances Corp.

Address: 37 Wugong 5th road, New Taipei Industrial Park, Wugu District, New Taipei City, Taiwan 24890

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No. 19, Hwa Ya 2nd Rd, Wen Hwa Vil, Kwei Shan Dist., Taoyuan City
33383, Taiwan

**FCC Registration /
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Test Site and Instruments	7
3 General Information	8
3.1 General Description of EUT	8
3.2 Configuration of System under Test	9
3.2.1 Description of Support Units	9
3.3 Test Mode Applicability and Tested Channel Detail	10
3.4 EUT Operating Conditions	13
3.5 General Description of Applied Standards	13
4 Test Types and Results	14
4.1 Output Power Measurement	14
4.1.1 Limits of Output Power Measurement	14
4.1.2 Test Procedures	14
4.1.3 Test Setup	15
4.1.4 Test Results	16
4.2 Modulation Characteristics Measurement	24
4.2.1 Limits of Modulation Characteristics	24
4.2.2 Test Setup	24
4.2.3 Test Procedure	24
4.2.4 Test Results	25
4.3 Frequency Stability Measurement	26
4.3.1 Limits of Frequency Stability Measurement	26
4.3.2 Test Procedure	26
4.3.3 Test Setup	26
4.3.4 Test Results	27
4.4 Occupied Bandwidth Measurement	34
4.4.1 Test Procedure	34
4.4.2 Test Setup	34
4.4.3 Test Result	35
4.5 Band Edge Measurement	39
4.5.1 Limits of Band Edge Measurement	39
4.5.2 Test Setup	39
4.5.3 Test Procedures	39
4.5.4 Test Results	40
4.6 Peak to Average Ratio	46
4.6.1 Limits of Peak to Average Ratio Measurement	46
4.6.2 Test Setup	46
4.6.3 Test Procedures	46
4.6.4 Test Results	47
4.7 Conducted Spurious Emissions	51
4.7.1 Limits of Conducted Spurious Emissions Measurement	51
4.7.2 Test Setup	51
4.7.3 Test Procedure	51
4.7.4 Test Results	52
4.8 Radiated Emission Measurement	59
4.8.1 Limits of Radiated Emission Measurement	59
4.8.2 Test Procedure	59
4.8.3 Deviation from Test Standard	59
4.8.4 Test Setup	60
4.8.5 Test Results	61

5 Pictures of Test Arrangements.....	85
Appendix – Information of the Testing Laboratories	86


Release Control Record


Issue No.	Description	Date Issued
RF190417C27-6	Original Release	Sep. 12, 2019

1 Certificate of Conformity

Product: Notebook
Brand: Inventec Appliances Corp.
Test Model: WA02
Sample Status: Identical Prototype
Applicant: Inventec Appliances Corp.
Test Date: Jun. 03 ~ Aug. 07, 2019
Standards: FCC Part 24, Subpart E

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : , **Date:** Sep. 12, 2019
Ivonne Wu / Supervisor

Approved by : , **Date:** Sep. 12, 2019
Dylan Chiou / Project Engineer

2 Summary of Test Results

Applied Standard: FCC Part 24 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 24.232	Effective Isotropic Radiated Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	Pass	Meet the requirement.
2.1046 24.232(d)	Peak to Average Ratio	Pass	Meet the requirement of limit.
2.1055 24.235	Frequency Stability	Pass	Meet the requirement of limit.
2.1049	Occupied Bandwidth	Pass	Meet the requirement of limit.
24.238	Band Edge Measurements	Pass	Meet the requirement of limit.
2.1051 24.238	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 24.238	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -33.36 dB at 5700.00 MHz.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (\pm)
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	3.04 dB
	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent	N9038A	MY51210203	Mar. 18, 2019	Mar. 17, 2020
Spectrum Analyzer Agilent	N9010A	MY52220314	Dec. 13, 2018	Dec. 12, 2019
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Apr. 15, 2019	Apr. 14, 2020
Spectrum Analyzer ROHDE & SCHWARZ	FSW26	102023	Oct. 11, 2018	Oct. 10, 2019
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-969	Nov. 25, 2018	Nov. 24, 2019
BILOG Antenna SCHWARZBECK	VULB 9168	9168-472	Nov. 23, 2018	Nov. 22, 2019
HORN Antenna SCHWARZBECK	BBHA 9170	148	Nov. 25, 2018	Nov. 24, 2019
Double Ridge Guide Horn Antenna EMCO	3115	5619	Nov. 25, 2018	Nov. 24, 2019
Fixed Attenuator WOKEN	MDCS18N-10	MDCS18N-10-01	Apr. 15, 2019	Apr. 14, 2020
MXG Vector signal generator Agilent	N5182B	MY53050430	Nov. 19, 2018	Nov. 18, 2019
Preamplifier EMCI	EMC 012645	980115	Oct. 12, 2018	Oct. 11, 2019
Preamplifier EMCI	EMC 330H	980112	Oct. 12, 2018	Oct. 11, 2019
RF Coaxial Cable HUBER+SUHNNER	EMC104-SM-SM- 8000&3000	140811+170717	Oct. 12, 2018	Oct. 11, 2019
RF Coaxial Cable HUBER+SUHNNER	SUCOFLEX 104	EMC104-SM-SM- 1000(140807)	Oct. 12, 2018	Oct. 11, 2019
RF Coaxial Cable WOKEN	8D-FB	Cable-Ch10-01	Oct. 12, 2018	Oct. 11, 2019
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Radio Communication Analyzer Anritsu	MT8821C	6201462755	Jan. 16, 2019	Jan. 15, 2020
Radio Communication Analyzer Anritsu	MT8820C	6201300640	Aug. 16, 2017	Aug. 15, 2019
Temperature & Humidity Chamber	GTH-120-40-CP-AR	MAA1306-019	Sep. 05, 2018	Sep. 04, 2019
DC Power Supply Topward	33010D	807748	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 / 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 10.

3 General Information

3.1 General Description of EUT

Product	Notebook	
Brand	Inventec Appliances Corp.	
Test Model	WA02	
Status of EUT	Identical Prototype	
Power Supply Rating	5.0 Vdc / 12Vdc / 15Vdc / 20Vdc (adapter) 7.6 Vdc (Li-ion battery)	
Modulation Type	WCDMA	QPSK
	LTE	QPSK, 16QAM, 64QAM
Frequency Range	WCDMA	1852.4 ~ 1907.6 MHz
	LTE Band 2 (Channel Bandwidth: 1.4 MHz)	1850.7 ~ 1909.3 MHz
	LTE Band 2 (Channel Bandwidth: 3 MHz)	1851.5 ~ 1908.5 MHz
	LTE Band 2 (Channel Bandwidth: 5 MHz)	1852.5 ~ 1907.5 MHz
	LTE Band 2 (Channel Bandwidth: 10 MHz)	1855.0 ~ 1905.0 MHz
	LTE Band 2 (Channel Bandwidth: 15 MHz)	1857.5 ~ 1902.5 MHz
	LTE Band 2 (Channel Bandwidth: 20 MHz)	1860.0 ~ 1900.0 MHz
Max. EIRP Power	WCDMA	209.41 mW
	LTE Band 2 (Channel Bandwidth: 1.4 MHz)	137.72 mW
	LTE Band 2 (Channel Bandwidth: 3 MHz)	147.57 mW
	LTE Band 2 (Channel Bandwidth: 5 MHz)	159.22 mW
	LTE Band 2 (Channel Bandwidth: 10 MHz)	172.19 mW
	LTE Band 2 (Channel Bandwidth: 15 MHz)	180.30 mW
	LTE Band 2 (Channel Bandwidth: 20 MHz)	192.75 mW
Emission Designator	WCDMA	4M15F9W
	LTE Band 2 (Channel Bandwidth: 1.4 MHz)	1M09D7W
	LTE Band 2 (Channel Bandwidth: 3 MHz)	2M70G7D
	LTE Band 2 (Channel Bandwidth: 5 MHz)	4M50D7W
	LTE Band 2 (Channel Bandwidth: 10 MHz)	8M98D7W
	LTE Band 2 (Channel Bandwidth: 15 MHz)	13M5G7D
	LTE Band 2 (Channel Bandwidth: 20 MHz)	18M0D7W
Antenna Type	Monopole antenna with 1 dBi gain (Main) / 0 dBi gain (Aux.)	
Accessory Device	Refer to Note as below	
Data Cable Supplied	Refer to Note as below	

Note:


- The EUT contains following accessory devices.

Product	Brand	Model	Description
Adapter	DARFON	B230-201	I/P: 100-240 Vac, 50/60 Hz, 0.7 A Max. O/P: 5 Vdc, 3 A / 9 Vdc, 3 A / 12 Vdc, 2.5 A / 15 Vdc, 2 A / 20 Vdc, 1.5 A
Battery	GY	NA125S PL2983122	7.6 Vdc, 4200 mAh


- The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Configuration of System under Test

<Radiated Emission Test>

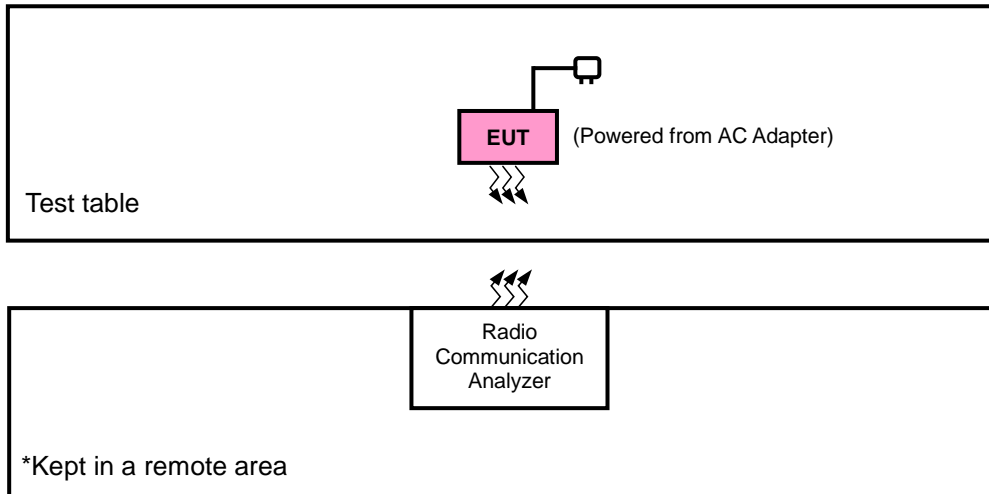

<E.I.R.P. Test>

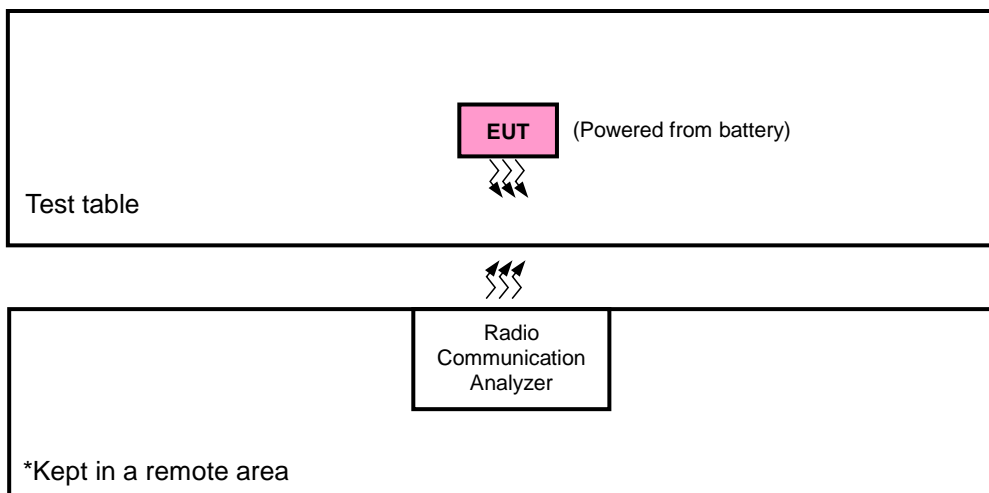

3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units.

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports.

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	EIRP	Radiated Emission
WCDMA	NB Mode	NB Mode
LTE Band 2	NB Mode	NB Mode

WCDMA

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Mode
-	EIRP	9262 to 9538	9262, 9400, 9538	WCDMA
-	Modulation Characteristics	9262 to 9538	9400	WCDMA
-	Frequency Stability	9262 to 9538	9262, 9538	WCDMA
-	Occupied Bandwidth	9262 to 9538	9262, 9400, 9538	WCDMA
-	Band Edge	9262 to 9538	9262, 9538	WCDMA
-	Peak to Average Ratio	9262 to 9538	9262, 9400, 9538	WCDMA
-	Conducted Emission	9262 to 9538	9262, 9400, 9538	WCDMA
-	Radiated Emission	9262 to 9538	9262, 9400, 9538	WCDMA

LTE Band 2

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK, 16QAM, 64QAM	3 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
-	Modulation Characteristics	18700 to 19100	18900	20 MHz	QPSK, 16QAM, 64QAM	100 RB / 0 RB Offset
-	Frequency Stability	18607 to 19193	18607, 19193	1.4 MHz	QPSK	1 RB / 0 RB Offset
		18615 to 19185	18615, 19185	3 MHz	QPSK	1 RB / 0 RB Offset
		18625 to 19175	18625, 19175	5 MHz	QPSK	1 RB / 0 RB Offset
		18650 to 19150	18650, 19150	10 MHz	QPSK	1 RB / 0 RB Offset
		18675 to 19125	18675, 19125	15 MHz	QPSK	1 RB / 0 RB Offset
		18700 to 19100	18700, 19100	20 MHz	QPSK	1 RB / 0 RB Offset
-	Occupied Bandwidth	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK, 16QAM, 64QAM	6 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3 MHz	QPSK, 16QAM, 64QAM	15 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK, 16QAM, 64QAM	25 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10 MHz	QPSK, 16QAM, 64QAM	50 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15 MHz	QPSK, 16QAM, 64QAM	75 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK, 16QAM, 64QAM	100 RB / 0 RB Offset
-	Peak to Average Ratio	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK, 16QAM, 64QAM	3 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	Band Edge	18607 to 19193	18607	1.4 MHz	QPSK	1 RB / 0 RB Offset
			19193	1.4 MHz	QPSK	6 RB / 0 RB Offset
		18615 to 19185	18615	3 MHz	QPSK	1 RB / 5 RB Offset
			19185	3 MHz	QPSK	6 RB / 0 RB Offset
		18625 to 19175	18625	5 MHz	QPSK	1 RB / 0 RB Offset
			19175	5 MHz	QPSK	15 RB / 0 RB Offset
		18650 to 19150	18625	5 MHz	QPSK	1 RB / 14 RB Offset
			19175	5 MHz	QPSK	15 RB / 0 RB Offset
		18650 to 19150	18625	5 MHz	QPSK	1 RB / 0 RB Offset
			19175	5 MHz	QPSK	25 RB / 0 RB Offset
		18675 to 19125	18650	10 MHz	QPSK	1 RB / 24 RB Offset
			19150	10 MHz	QPSK	25 RB / 0 RB Offset
		18675 to 19125	18650	10 MHz	QPSK	1 RB / 0 RB Offset
			19150	10 MHz	QPSK	50 RB / 0 RB Offset
		18700 to 19100	18675	15 MHz	QPSK	1 RB / 49 RB Offset
			19125	15 MHz	QPSK	50 RB / 0 RB Offset
		18700 to 19100	18675	15 MHz	QPSK	1 RB / 0 RB Offset
			19125	15 MHz	QPSK	75 RB / 0 RB Offset
18700 to 19100	18700	20 MHz	QPSK	1 RB / 74 RB Offset		
	19100	20 MHz	QPSK	75 RB / 0 RB Offset		
-	Conducted Emission	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3 MHz	QPSK	3 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10 MHz	QPSK	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15 MHz	QPSK	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK	3 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK	1 RB / 0 RB Offset

Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.
2. For radiated emission above 1 GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest, 5 MHz & highest channel bandwidth for final test.

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
EIRP	26 deg. C, 58 % RH	7.6 Vdc	Tim-Chen
Modulation Characteristics	26 deg. C, 58 % RH	120 Vac, 60 Hz	Wayne Lin
Frequency Stability	26 deg. C, 58 % RH	120 Vac, 60 Hz	Wayne Lin
Occupied Bandwidth	26 deg. C, 58 % RH	120 Vac, 60 Hz	Wayne Lin
Band Edge	26 deg. C, 58 % RH	120 Vac, 60 Hz	Wayne Lin
Peak to Average Ratio	26 deg. C, 58 % RH	120 Vac, 60 Hz	Wayne Lin
Conducted Emission	26 deg. C, 58 % RH	120 Vac, 60 Hz	Wayne Lin
Radiated Emission	25 deg. C, 65 % RH	120 Vac, 60 Hz	Tim-Chen / Thomas Wei

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 24

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-E 2016

ANSI 63.26-2015

NOTE: All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

Mobile / Portable station are limited to 2 watts e.i.r.p.

4.1.2 Test Procedures

EIRP / ERP Measurement:

- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 5 MHz for WCDMA and 10 MHz for LTE mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step b. Record the power level of S.G.
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.R.P \text{ power} - 2.15 \text{ dB}$.


Conducted Power Measurement:

The EUT was set up for the maximum power with WCDMA and LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.


4.1.3 Test Setup

EIRP / ERP Measurement:

<Radiated Emission below or equal 1 GHz>

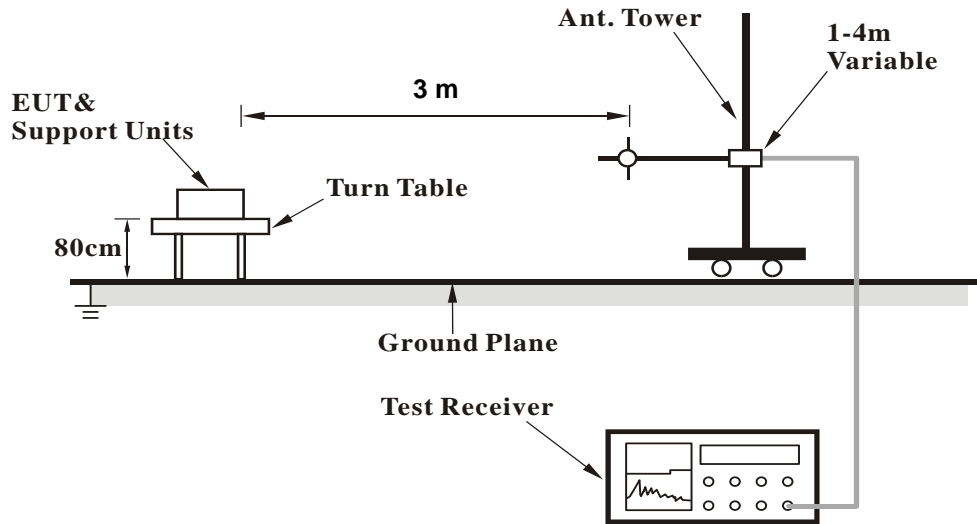

<Radiated Emission above 1 GHz>

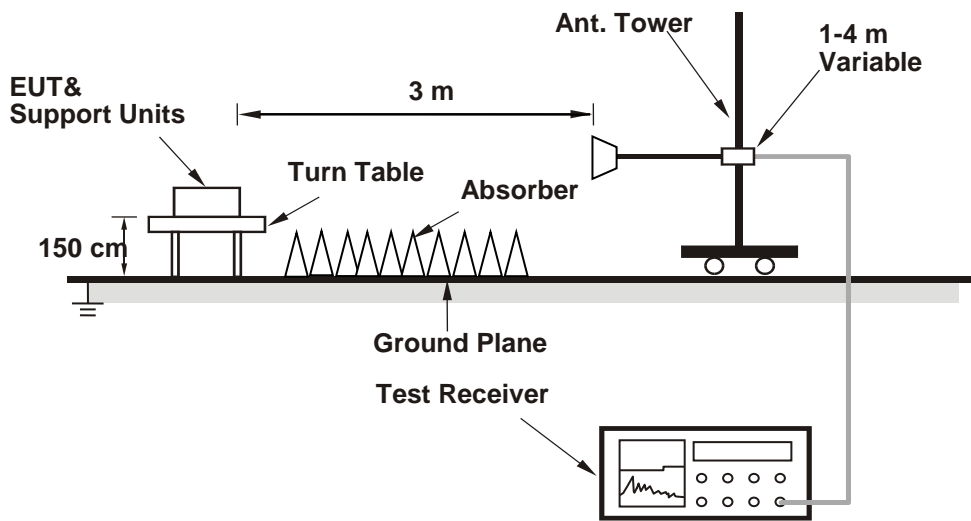

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Conducted Power Measurement:



4.1.4 Test Results

Conducted Output Power (dBm)

Band	WCDMA II		
	9262	9400	9538
Channel	1852.4	1880.0	1907.6
Frequency (MHz)	1852.4	1880.0	1907.6
RMC 12.2K	22.04	22.32	22.18
HSDPA Subtest-1	21.11	21.39	21.25
HSDPA Subtest-2	21.08	21.33	21.19
HSDPA Subtest-3	20.60	20.88	20.74
HSDPA Subtest-4	20.59	20.87	20.73
DC-HSDPA Subtest-1	21.03	21.31	21.17
DC-HSDPA Subtest-2	21.01	21.25	21.11
DC-HSDPA Subtest-3	20.52	20.80	20.66
DC-HSDPA Subtest-4	20.52	20.80	20.66
HSUPA Subtest-1	21.01	21.29	21.15
HSUPA Subtest-2	19.10	19.38	19.24
HSUPA Subtest-3	20.02	20.30	20.16
HSUPA Subtest-4	19.07	19.35	19.21
HSUPA Subtest-5	21.02	21.30	21.16

LTE Band 2																	
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)		
				Channel	18700	18900						19100	Channel	18675		18900	19125
				Frequency (MHz)	1860.0	1880.0						1900.0	Frequency (MHz)	1857.5		1880.0	1902.5
20M	QPSK	1	0	22.24	22.63	22.89	0	15M	QPSK	1	0	22.16	22.61	22.81	0		
		1	50	21.98	22.37	22.63	0			1	37	21.95	22.35	22.61	0		
		1	99	22.02	22.41	22.67	0			1	74	21.92	22.34	22.58	0		
		50	0	21.31	21.70	21.96	1			36	0	21.28	21.67	21.94	1		
		50	25	21.19	21.58	21.84	1			36	19	21.19	21.57	21.80	1		
		50	50	21.21	21.60	21.86	1			36	39	21.21	21.58	21.81	1		
	100	0	21.26	21.65	21.91	1	75		0	21.16	21.65	21.84	1				
	16QAM	1	0	21.33	21.72	21.98	1		16QAM	1	0	21.28	21.63	21.92	1		
		1	50	20.98	21.37	21.63	1			1	37	20.88	21.31	21.54	1		
		1	99	21.28	21.67	21.93	1			1	74	21.27	21.61	21.83	1		
		50	0	20.32	20.71	20.97	2			36	0	20.24	20.71	20.93	2		
		50	25	20.20	20.59	20.85	2			36	19	20.18	20.51	20.79	2		
		50	50	20.28	20.67	20.93	2			36	39	20.23	20.61	20.92	2		
	100	0	20.17	20.56	20.82	2	75		0	20.17	20.54	20.81	2				
	64QAM	1	0	20.31	20.70	20.96	2		64QAM	1	0	20.30	20.63	20.95	2		
		1	50	20.07	20.46	20.72	2			1	37	19.97	20.37	20.72	2		
		1	99	20.29	20.68	20.94	2			1	74	20.29	20.62	20.88	2		
		50	0	19.33	19.72	19.98	3			36	0	19.30	19.70	19.92	3		
50		25	19.25	19.64	19.90	3	36	19		19.22	19.60	19.82	3				
50		50	19.27	19.66	19.92	3	36	39		19.27	19.66	19.85	3				
100	0	19.24	19.63	19.89	3	75	0	19.15	19.55	19.86	3						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)		
				Channel	18650	18900						19150	Channel	18625		18900	19175
				Frequency (MHz)	1855.0	1880.0						1905.0	Frequency (MHz)	1852.5		1880.0	1907.5
10M	QPSK	1	0	22.03	22.54	22.73	0	5M	QPSK	1	0	22.02	22.57	22.57	0		
		1	24	21.83	22.32	22.52	0			1	12	21.90	22.18	22.43	0		
		1	49	21.84	22.22	22.43	0			1	24	21.93	22.38	22.54	0		
		25	0	21.28	21.58	21.78	1			12	0	21.30	21.47	21.62	1		
		25	12	21.10	21.43	21.81	1			12	6	21.07	21.34	21.55	1		
		25	25	21.03	21.54	21.74	1			12	13	21.12	21.39	21.64	1		
	50	0	21.21	21.46	21.84	1	25		0	21.04	21.54	21.75	1				
	16QAM	1	0	21.21	21.59	21.88	1		16QAM	1	0	21.22	21.61	21.78	1		
		1	24	20.85	21.18	21.56	1			1	12	20.79	21.35	21.46	1		
		1	49	21.15	21.51	21.92	1			1	24	21.21	21.52	21.85	1		
		25	0	20.19	20.47	20.83	2			12	0	20.18	20.54	20.81	2		
		25	12	20.10	20.37	20.71	2			12	6	20.10	20.43	20.78	2		
		25	25	20.21	20.59	20.80	2			12	13	20.24	20.43	20.74	2		
	50	0	20.09	20.44	20.66	2	25		0	20.10	20.48	20.81	2				
	64QAM	1	0	20.13	20.55	20.89	2		64QAM	1	0	20.19	20.51	20.85	2		
		1	24	19.90	20.32	20.53	2			1	12	19.87	20.31	20.51	2		
		1	49	20.11	20.59	20.78	2			1	24	20.17	20.55	20.76	2		
		25	0	19.23	19.54	19.84	3			12	0	19.15	19.64	19.85	3		
25		12	19.12	19.54	19.84	3	12	6		19.12	19.55	19.76	3				
25		25	19.17	19.53	19.76	3	12	13		19.16	19.53	19.86	3				
50	0	19.06	19.42	19.74	3	25	0	19.01	19.60	19.80	3						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)		
				Channel	18615	18900						19185	Channel	18607		18900	19193
				Frequency (MHz)	1851.5	1880.0						1908.5	Frequency (MHz)	1850.7		1880.0	1909.3
3M	QPSK	1	0	22.12	22.38	22.78	0	1.4M	QPSK	1	0	22.10	22.47	22.81	0		
		1	7	21.92	22.24	22.45	0			1	2	21.90	22.26	22.60	0		
		1	14	21.79	22.31	22.56	0			1	5	21.89	22.23	22.52	0		
		8	0	21.17	21.54	21.77	1			3	0	22.13	22.58	22.83	0		
		8	3	21.06	21.41	21.67	1			3	1	22.03	22.46	22.75	0		
		8	7	21.12	21.53	21.73	1			3	3	21.97	22.45	22.82	0		
	15	0	21.16	21.58	21.90	1	6		0	21.11	21.46	21.74	1				
	16QAM	1	0	21.13	21.64	21.89	1		16QAM	1	0	21.14	21.58	21.86	1		
		1	7	20.80	21.19	21.53	1			1	2	20.84	21.30	21.50	1		
		1	14	21.24	21.53	21.83	1			1	5	21.17	21.55	21.71	1		
		8	0	20.19	20.58	20.75	2			3	0	21.17	21.65	21.78	1		
		8	3	20.03	20.45	20.69	2			3	1	21.03	21.49	21.73	1		
		8	7	20.11	20.63	20.86	2			3	3	21.14	21.54	21.87	1		
	15	0	20.07	20.37	20.66	2	6		0	20.05	20.31	20.64	2				
	64QAM	1	0	20.16	20.57	20.93	2		64QAM	1	0	20.08	20.53	20.81	2		
		1	7	19.96	20.34	20.61	2			1	2	19.92	20.40	20.67	2		
		1	14	20.11	20.60	20.83	2			1	5	20.11	20.56	20.80	2		
		8	0	19.24	19.57	19.85	3			3	0	20.17	20.63	20.75	2		
8		3	19.17	19.44	19.68	3	3	1		20.13	20.42	20.86	2				
8		7	19.12	19.49	19.77	3	3	3		20.13	20.49	20.81	2				
15	0	19.07	19.51	19.68	3	6	0	19.05	19.55	19.74	3						

EIRP Power (dBm)

WCDMA							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
NB	9262	1852.4	-13.50	36.57	23.07	202.77	H
	9400	1880.0	-14.01	37.22	23.21	209.41	
	9538	1907.6	-14.04	37.18	23.14	206.06	
	9262	1852.4	-20.32	37.65	17.33	54.08	V
	9400	1880.0	-20.00	37.58	17.58	57.28	
	9538	1907.6	-20.07	37.48	17.41	55.08	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 2							
Channel Bandwidth: 1.4 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
NB	18607	1850.7	-15.24	36.57	21.33	135.83	H
	18900	1880.0	-15.83	37.22	21.39	137.72	
	19193	1909.3	-15.93	37.18	21.25	133.35	
	18607	1850.7	-22.25	37.65	15.40	34.67	V
	18900	1880.0	-22.05	37.58	15.53	35.73	
	19193	1909.3	-22.13	37.48	15.35	34.28	
Channel Bandwidth: 1.4 MHz / 16QAM							
NB	18607	1850.7	-16.13	36.57	20.44	110.66	H
	18900	1880.0	-16.74	37.22	20.48	111.69	
	19193	1909.3	-17.04	37.18	20.14	103.28	
	18607	1850.7	-23.21	37.65	14.44	27.80	V
	18900	1880.0	-22.78	37.58	14.80	30.20	
	19193	1909.3	-23.16	37.48	14.32	27.04	
Channel Bandwidth: 1.4 MHz / 64QAM							
NB	18607	1850.7	-17.36	36.57	19.21	83.37	H
	18900	1880.0	-17.70	37.22	19.52	89.54	
	19193	1909.3	-18.21	37.18	18.97	78.89	
	18607	1850.7	-24.25	37.65	13.40	21.88	V
	18900	1880.0	-24.12	37.58	13.46	22.18	
	19193	1909.3	-24.14	37.48	13.34	21.58	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 2							
Channel Bandwidth: 3 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
NB	18615	1851.5	-15.03	36.57	21.54	142.56	H
	18900	1880.0	-15.53	37.22	21.69	147.57	
	19185	1908.5	-15.68	37.18	21.50	141.25	
	18615	1851.5	-22.00	37.65	15.65	36.73	V
	18900	1880.0	-21.72	37.58	15.86	38.55	
	19185	1908.5	-21.84	37.48	15.64	36.64	
Channel Bandwidth: 3 MHz / 16QAM							
NB	18615	1851.5	-15.89	36.57	20.68	116.95	H
	18900	1880.0	-16.42	37.22	20.80	120.23	
	19185	1908.5	-16.75	37.18	20.43	110.41	
	18615	1851.5	-22.90	37.65	14.75	29.85	V
	18900	1880.0	-22.48	37.58	15.10	32.36	
	19185	1908.5	-22.87	37.48	14.61	28.91	
Channel Bandwidth: 3 MHz / 64QAM							
NB	18615	1851.5	-17.13	36.57	19.44	87.90	H
	18900	1880.0	-17.49	37.22	19.73	93.97	
	19185	1908.5	-17.99	37.18	19.19	82.99	
	18615	1851.5	-24.05	37.65	13.60	22.91	V
	18900	1880.0	-23.80	37.58	13.78	23.88	
	19185	1908.5	-23.91	37.48	13.57	22.75	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 2							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
NB	18625	1852.5	-14.69	36.57	21.88	154.17	H
	18900	1880.0	-15.20	37.22	22.02	159.22	
	19175	1907.5	-15.41	37.18	21.77	150.31	
	18625	1852.5	-21.68	37.65	15.97	39.54	V
	18900	1880.0	-21.42	37.58	16.16	41.30	
	19175	1907.5	-21.53	37.48	15.95	39.36	
Channel Bandwidth: 5 MHz / 16QAM							
NB	18625	1852.5	-15.67	36.57	20.90	123.03	H
	18900	1880.0	-16.09	37.22	21.13	129.72	
	19175	1907.5	-16.45	37.18	20.73	118.30	
	18625	1852.5	-22.64	37.65	15.01	31.70	V
	18900	1880.0	-22.25	37.58	15.33	34.12	
	19175	1907.5	-22.63	37.48	14.85	30.55	
Channel Bandwidth: 5 MHz / 64QAM							
NB	18625	1852.5	-16.91	36.57	19.66	92.47	H
	18900	1880.0	-17.22	37.22	20.00	100.00	
	19175	1907.5	-17.68	37.18	19.50	89.13	
	18625	1852.5	-23.75	37.65	13.90	24.55	V
	18900	1880.0	-23.49	37.58	14.09	25.64	
	19175	1907.5	-23.66	37.48	13.82	24.10	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 2							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
NB	18650	1855.0	-14.39	36.57	22.18	165.20	H
	18900	1880.0	-14.86	37.22	22.36	172.19	
	19150	1905.0	-15.18	37.18	22.00	158.49	
	18650	1855.0	-21.38	37.65	16.27	42.36	V
	18900	1880.0	-21.09	37.58	16.49	44.57	
	19150	1905.0	-21.29	37.48	16.19	41.59	
Channel Bandwidth: 10 MHz / 16QAM							
NB	18650	1855.0	-15.43	36.57	21.14	130.02	H
	18900	1880.0	-15.87	37.22	21.35	136.46	
	19150	1905.0	-16.21	37.18	20.97	125.03	
	18650	1855.0	-22.39	37.65	15.26	33.57	V
	18900	1880.0	-22.03	37.58	15.55	35.89	
	19150	1905.0	-22.37	37.48	15.11	32.43	
Channel Bandwidth: 10 MHz / 64QAM							
NB	18650	1855.0	-16.62	36.57	19.95	98.86	H
	18900	1880.0	-16.96	37.22	20.26	106.17	
	19150	1905.0	-17.40	37.18	19.78	95.06	
	18650	1855.0	-23.51	37.65	14.14	25.94	V
	18900	1880.0	-23.19	37.58	14.39	27.48	
	19150	1905.0	-23.41	37.48	14.07	25.53	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 2							
Channel Bandwidth: 15 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
NB	18675	1857.5	-14.19	36.57	22.38	172.98	H
	18900	1880.0	-14.66	37.22	22.56	180.30	
	19125	1902.5	-14.89	37.18	22.29	169.43	
	18675	1857.5	-21.08	37.65	16.57	45.39	V
	18900	1880.0	-20.74	37.58	16.84	48.31	
	19125	1902.5	-20.97	37.48	16.51	44.77	
Channel Bandwidth: 15 MHz / 16QAM							
NB	18675	1857.5	-15.21	36.57	21.36	136.77	H
	18900	1880.0	-15.60	37.22	21.62	145.21	
	19125	1902.5	-16.00	37.18	21.18	131.22	
	18675	1857.5	-22.12	37.65	15.53	35.73	V
	18900	1880.0	-21.82	37.58	15.76	37.67	
	19125	1902.5	-22.15	37.48	15.33	34.12	
Channel Bandwidth: 15 MHz / 64QAM							
NB	18675	1857.5	-16.35	36.57	20.22	105.20	H
	18900	1880.0	-16.70	37.22	20.52	112.72	
	19125	1902.5	-17.18	37.18	20.00	100.00	
	18675	1857.5	-23.21	37.65	14.44	27.80	V
	18900	1880.0	-22.97	37.58	14.61	28.91	
	19125	1902.5	-23.14	37.48	14.34	27.16	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 2							
Channel Bandwidth: 20 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
NB	18700	1860.0	-13.85	36.57	22.72	187.07	H
	18900	1880.0	-14.37	37.22	22.85	192.75	
	19100	1900.0	-14.55	37.18	22.63	183.23	
	18700	1860.0	-20.74	37.65	16.91	49.09	V
	18900	1880.0	-20.50	37.58	17.08	51.05	
	19100	1900.0	-20.66	37.48	16.82	48.08	
Channel Bandwidth: 20 MHz / 16QAM							
NB	18700	1860.0	-14.97	36.57	21.60	144.54	H
	18900	1880.0	-15.35	37.22	21.87	153.82	
	19100	1900.0	-15.80	37.18	21.38	137.40	
	18700	1860.0	-21.92	37.65	15.73	37.41	V
	18900	1880.0	-21.56	37.58	16.02	39.99	
	19100	1900.0	-21.83	37.48	15.65	36.73	
Channel Bandwidth: 20 MHz / 64QAM							
NB	18700	1860.0	-16.03	36.57	20.54	113.24	H
	18900	1880.0	-16.38	37.22	20.84	121.34	
	19100	1900.0	-16.90	37.18	20.28	106.66	
	18700	1860.0	-23.00	37.65	14.65	29.17	V
	18900	1880.0	-22.70	37.58	14.88	30.76	
	19100	1900.0	-22.85	37.48	14.63	29.04	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

4.2 Modulation Characteristics Measurement

4.2.1 Limits of Modulation Characteristics

N/A




4.2.2 Test Setup



4.2.3 Test Procedure

Connect the EUT to Communication Simulator via the antenna connector. The frequency band is set as EUT supported Modulation and Channels, the EUT output is matched with 50 ohm load, the waveform quality and constellation of the EUT was tested.

4.2.4 Test Results

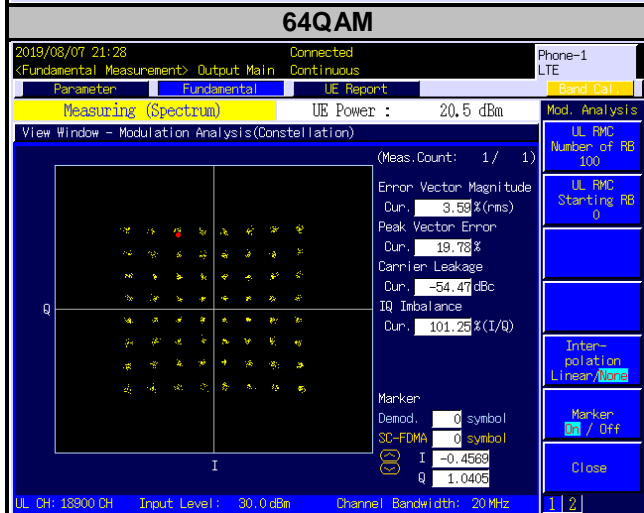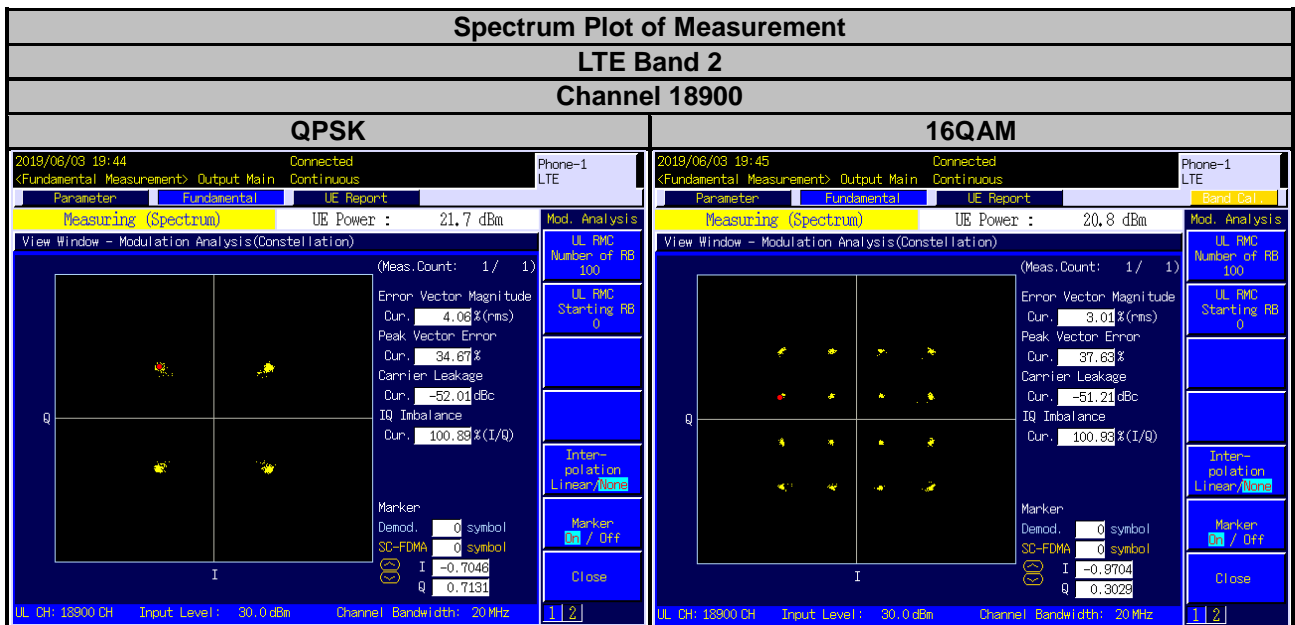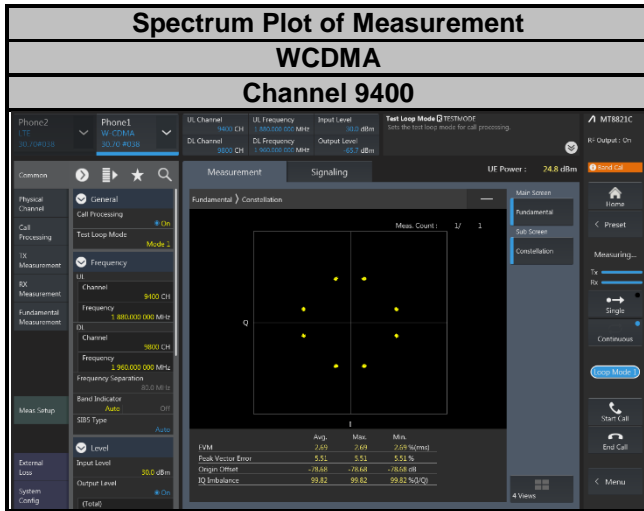

4.3 Frequency Stability Measurement

4.3.1 Limits of Frequency Stability Measurement


The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

4.3.2 Test Procedure

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^\circ\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.3.3 Test Setup

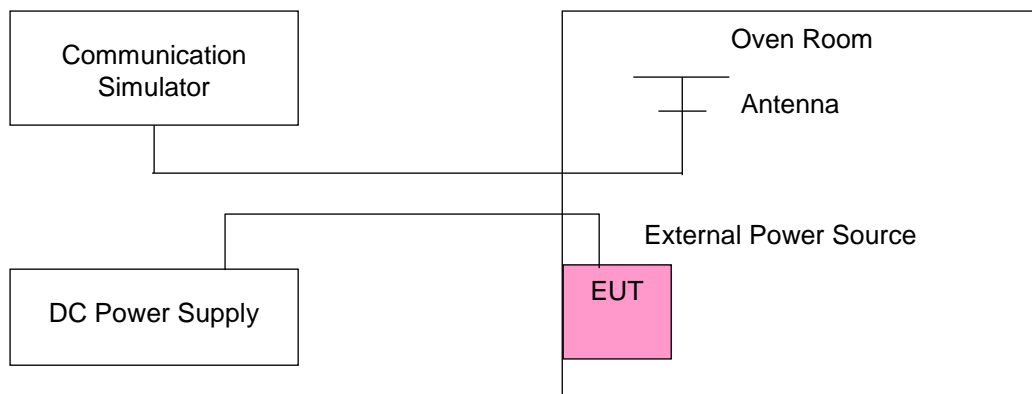

4.3.4 Test Results

Frequency Error vs. Voltage

Voltage (Volts)	WCDMA			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
120	1852.400003	0.001	1907.600003	0.002
102	1852.400002	0.001	1907.600003	0.002
138	1852.400001	0.001	1907.600004	0.002

Note: The applicant defined the normal working voltage is from 102 Vac to 138 Vac.

Frequency Error vs. Temperature

Temp. (°C)	WCDMA			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
0	1852.400001	0.001	1907.600003	0.001
10	1852.400004	0.002	1907.600003	0.002
20	1852.399998	-0.001	1907.599999	-0.001
30	1852.399997	-0.002	1907.599997	-0.002
40	1852.399997	-0.001	1907.599997	-0.002
50	1852.399999	-0.001	1907.599997	-0.001

Note: The applicant declared that the normal operating temperature of the EUT is from 0°C to 50°C.

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2			
	Channel Bandwidth: 1.4 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
120	1850.700001	0.001	1909.300000	0.001
102	1850.700004	0.002	1909.300004	0.002
138	1850.700002	0.001	1909.300001	0.001

Note: The applicant defined the normal working voltage is from 102 Vac to 138 Vac.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 2			
	Channel Bandwidth: 1.4 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
0	1850.700004	0.002	1909.300002	0.001
10	1850.700003	0.002	1909.300004	0.002
20	1850.699997	-0.002	1909.300001	0.001
30	1850.699998	-0.001	1909.299997	-0.001
40	1850.699998	-0.001	1909.299997	-0.002
50	1850.699997	-0.001	1909.299998	-0.001

Note: The applicant declared that the normal operating temperature of the EUT is from 0°C to 50°C.

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2			
	Channel Bandwidth: 3 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
120	1850.700002	0.001	1909.300000	0.001
102	1850.700004	0.002	1909.300001	0.001
138	1850.700003	0.002	1909.300003	0.001

Note: The applicant defined the normal working voltage is from 102 Vac to 138 Vac.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 2			
	Channel Bandwidth: 3 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
0	1850.700001	0.001	1909.300001	0.001
10	1850.700004	0.002	1909.300002	0.001
20	1850.699997	-0.002	1909.300002	0.001
30	1850.699998	-0.001	1909.299997	-0.002
40	1850.699997	-0.001	1909.299996	-0.002
50	1850.699998	-0.001	1909.299998	-0.001

Note: The applicant declared that the normal operating temperature of the EUT is from 0°C to 50°C.

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
120	1850.700004	0.002	1909.300000	0.002
102	1850.700004	0.002	1909.300003	0.001
138	1850.700003	0.002	1909.300001	0.001

Note: The applicant defined the normal working voltage is from 102 Vac to 138 Vac.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 2			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
0	1850.700002	0.001	1909.300001	0.001
10	1850.700001	0.001	1909.300001	0.001
20	1850.699999	-0.001	1909.300004	0.002
30	1850.699996	-0.002	1909.299998	-0.001
40	1850.699998	-0.001	1909.299998	-0.001
50	1850.699998	-0.001	1909.299999	-0.001

Note: The applicant declared that the normal operating temperature of the EUT is from 0°C to 50°C.

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
120	1850.700002	0.001	1909.300000	0.001
102	1850.700003	0.001	1909.300003	0.001
138	1850.700002	0.001	1909.300003	0.001

Note: The applicant defined the normal working voltage is from 102 Vac to 138 Vac.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 2			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
0	1850.700002	0.001	1909.300003	0.001
10	1850.700003	0.001	1909.300002	0.001
20	1850.699999	-0.001	1909.300002	0.001
30	1850.699999	-0.001	1909.299999	-0.001
40	1850.699998	-0.001	1909.299996	-0.002
50	1850.699998	-0.001	1909.299998	-0.001

Note: The applicant declared that the normal operating temperature of the EUT is from 0°C to 50°C.

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2			
	Channel Bandwidth: 15 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
120	1850.700001	0.001	1909.300000	0.001
102	1850.700003	0.002	1909.300002	0.001
138	1850.700001	0.001	1909.300004	0.002

Note: The applicant defined the normal working voltage is from 102 Vac to 138 Vac.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 2			
	Channel Bandwidth: 15 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
0	1850.700004	0.002	1909.300001	0.001
10	1850.700003	0.001	1909.300002	0.001
20	1850.699998	-0.001	1909.300004	0.002
30	1850.699997	-0.002	1909.299999	-0.001
40	1850.699999	-0.001	1909.299997	-0.001
50	1850.699998	-0.001	1909.299998	-0.001

Note: The applicant declared that the normal operating temperature of the EUT is from 0°C to 50°C.

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2			
	Channel Bandwidth: 20 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
120	1850.700004	0.002	1909.300000	0.001
102	1850.700002	0.001	1909.300003	0.002
138	1850.700001	0.001	1909.300002	0.001

Note: The applicant defined the normal working voltage is from 102 Vac to 138 Vac.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 2			
	Channel Bandwidth: 20 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
0	1850.700003	0.002	1909.300004	0.002
10	1850.700003	0.002	1909.300004	0.002
20	1850.699997	-0.002	1909.300002	0.001
30	1850.699997	-0.002	1909.299997	-0.002
40	1850.699999	-0.001	1909.299996	-0.002
50	1850.699997	-0.002	1909.299998	-0.001


Note: The applicant declared that the normal operating temperature of the EUT is from 0°C to 50°C.

4.4 Occupied Bandwidth Measurement

4.4.1 Test Procedure


The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

4.4.2 Test Setup

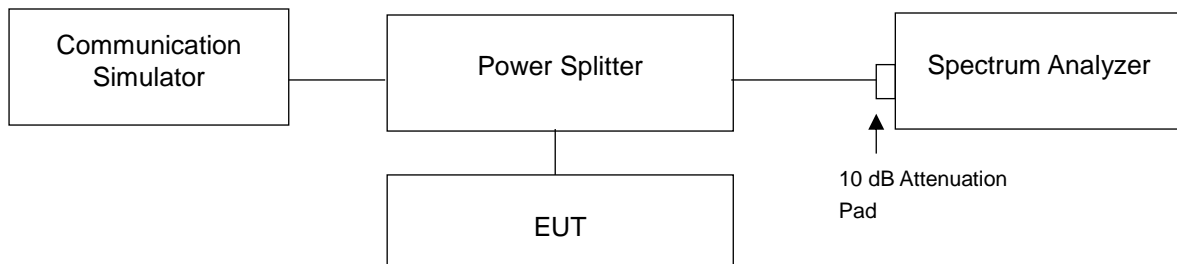


4.4.3 Test Result

WCDMA			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
9262	1852.4	4.1474	4.764
9400	1880.0	4.1326	4.726
9538	1907.6	4.1284	4.744

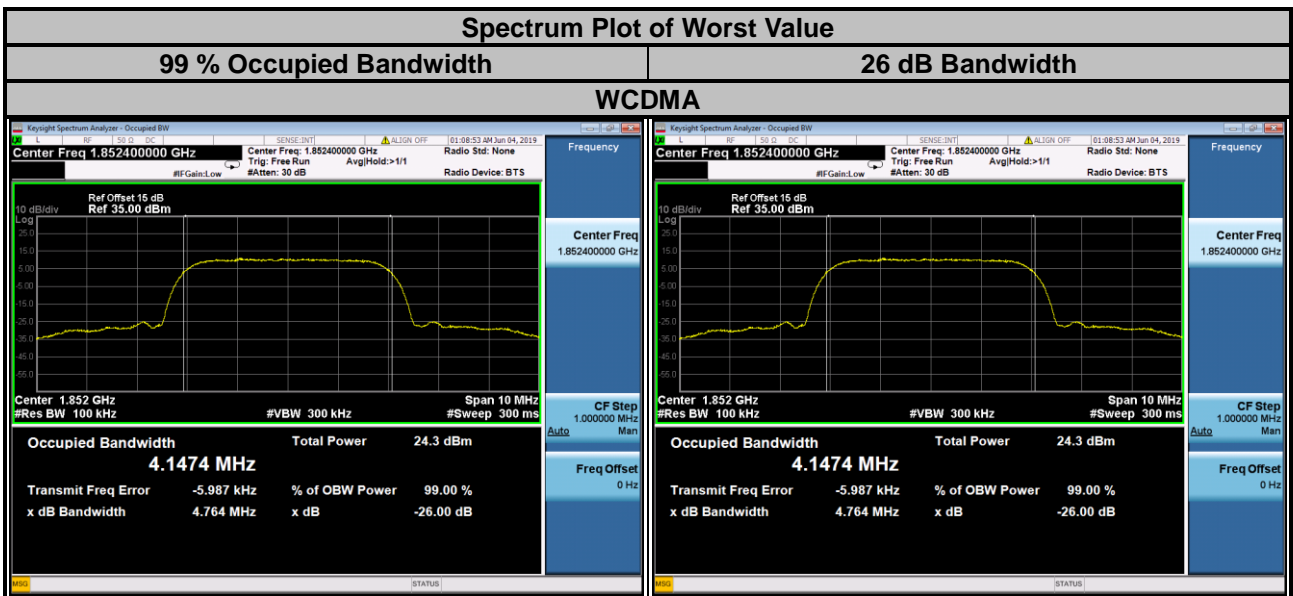

LTE Band 2							
Channel Bandwidth: 1.4 MHz							
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
18607	1850.7	1.0887	1.0907	1.0900	1.235	1.219	1.230
18900	1880.0	1.0863	1.0900	1.0907	1.222	1.211	1.230
19193	1909.3	1.0871	1.0878	1.0898	1.221	1.214	1.229

Channel Bandwidth: 3 MHz							
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
18615	1851.5	2.7008	2.6983	2.6994	2.968	2.940	2.927
18900	1880.0	2.6997	2.6963	2.7004	2.932	2.929	2.941
19185	1908.5	2.7000	2.6957	2.6989	2.934	2.930	2.928

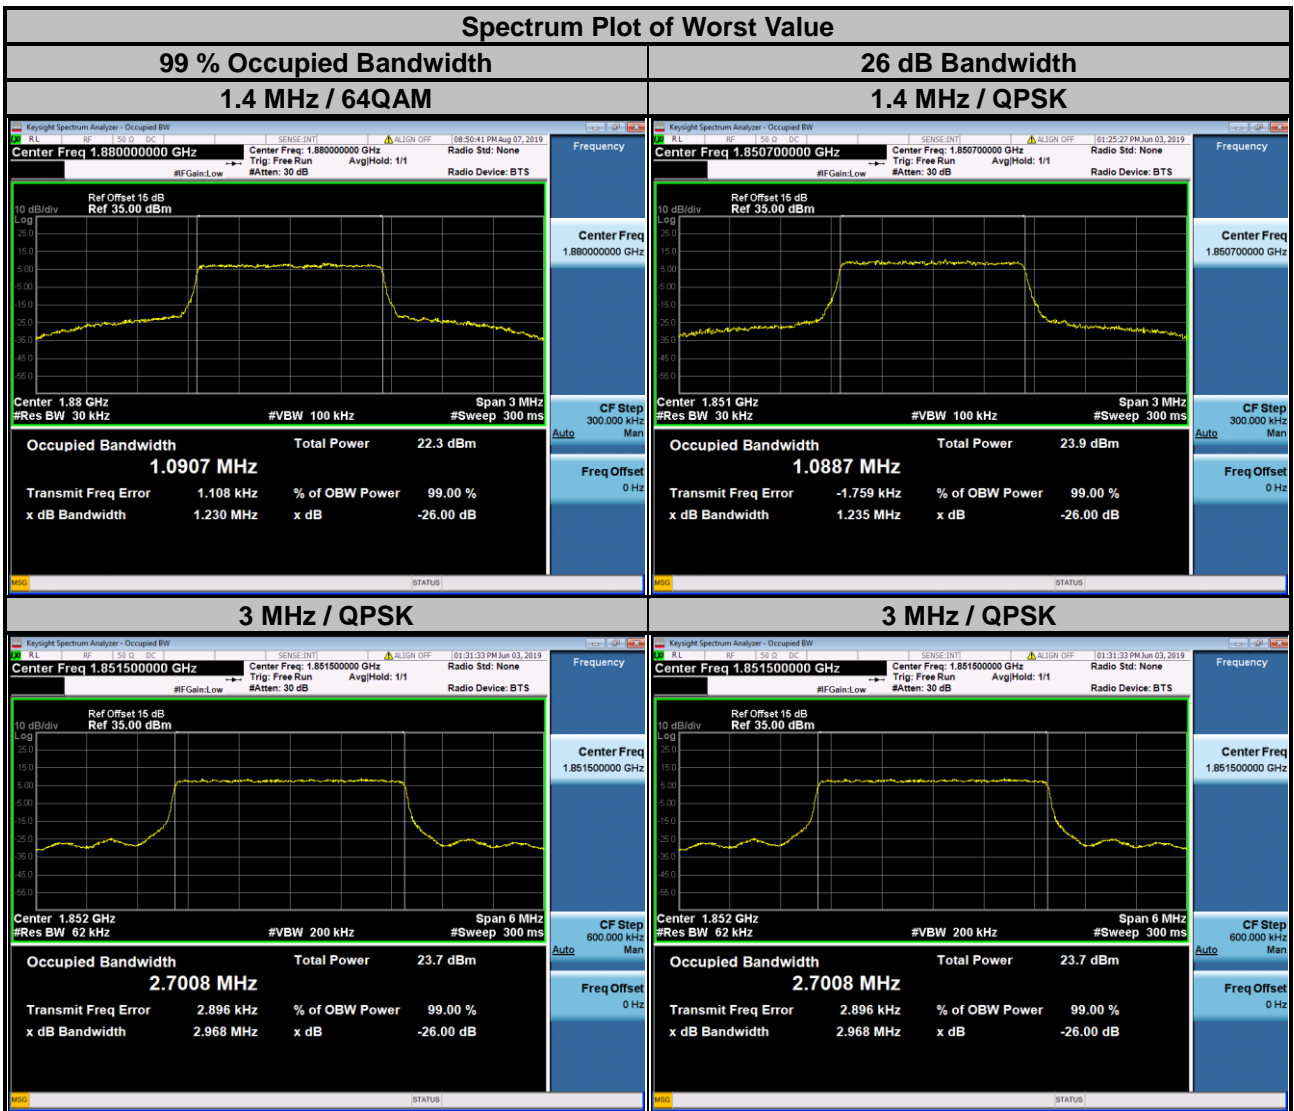


LTE Band 2							
Channel Bandwidth: 5 MHz							
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
18625	1852.5	4.4889	4.4890	4.5030	4.844	4.813	4.848
18900	1880.0	4.4845	4.4891	4.5020	4.819	4.805	4.863
19175	1907.5	4.4861	4.4873	4.5051	4.820	4.800	4.861

Channel Bandwidth: 10 MHz							
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
18650	1855.0	8.9708	8.9776	8.9823	9.677	9.534	9.552
18900	1880.0	8.9605	8.9628	8.9809	9.531	9.521	9.589
19150	1905.0	8.9664	8.9697	8.9840	9.548	9.520	9.580



LTE Band 2							
Channel Bandwidth: 15 MHz							
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
18675	1857.5	13.465	13.456	13.447	14.41	14.28	14.26
18900	1880.0	13.447	13.437	13.460	14.27	14.25	14.30
19125	1902.5	13.463	13.454	13.447	14.30	14.25	14.26

Channel Bandwidth: 20 MHz							
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
18700	1860.0	17.923	17.949	17.944	19.11	19.07	19.04
18900	1880.0	17.904	17.923	17.966	19.05	19.03	19.09
19100	1900.0	17.932	17.960	17.939	19.06	19.04	19.05

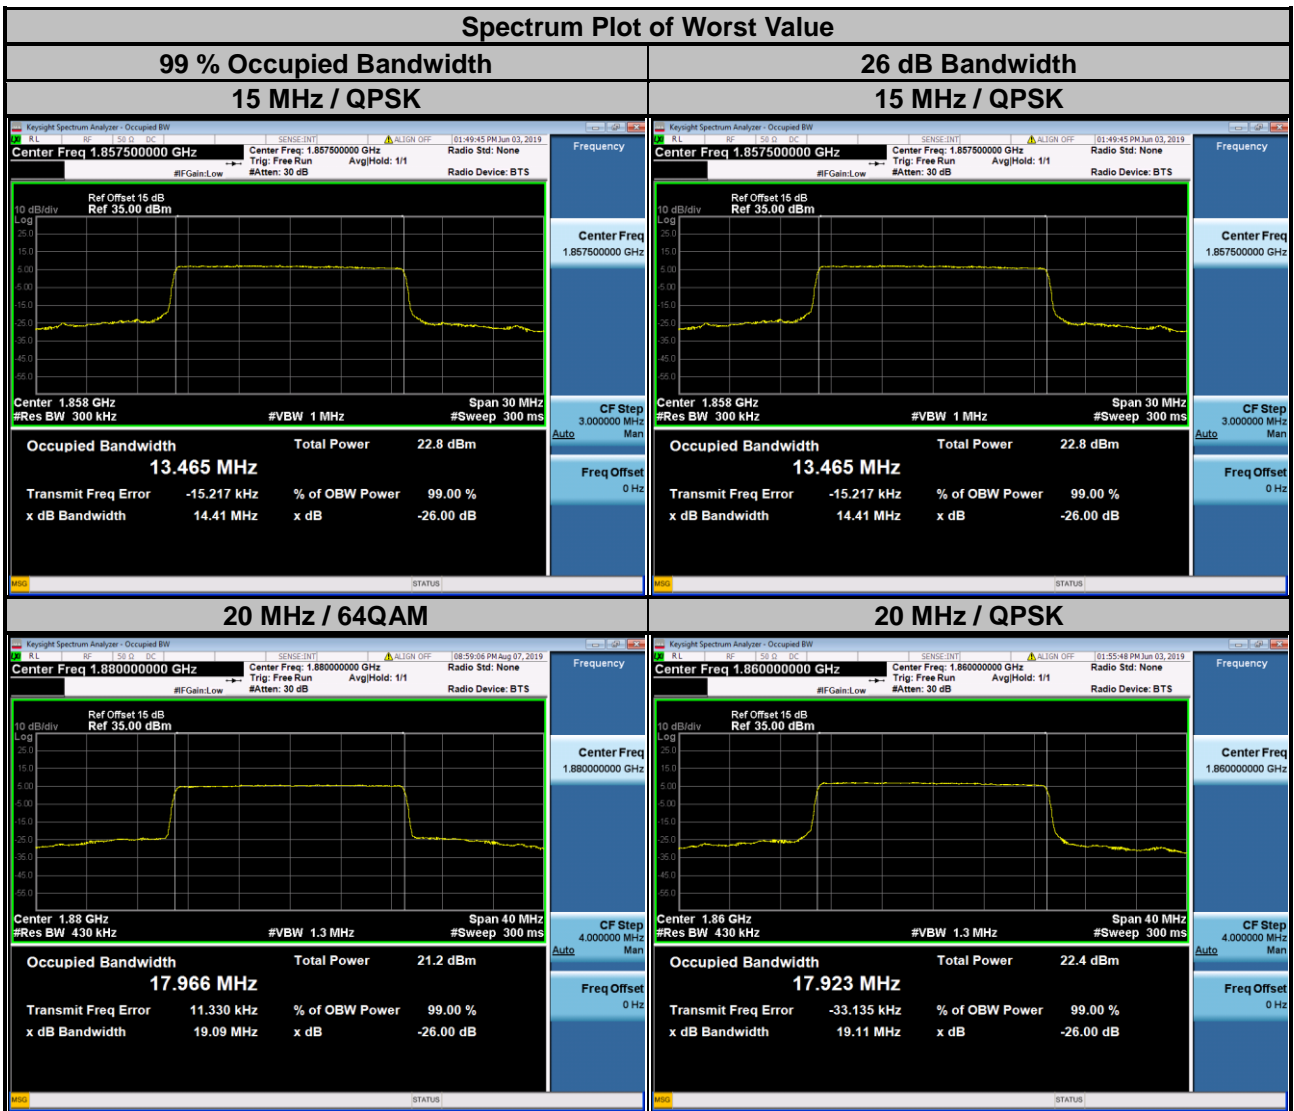


4.5 Band Edge Measurement

4.5.1 Limits of Band Edge Measurement

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.



4.5.2 Test Setup

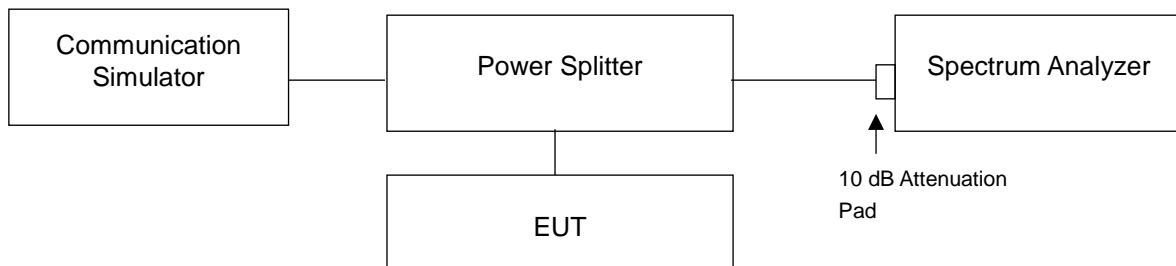

4.5.3 Test Procedures


- a. All measurements were done at low and high operational frequency range.
- b. The center frequency of spectrum is the band edge frequency and span is 5 MHz. RB of the spectrum is 47 kHz and VB of the spectrum is 150 kHz (WCDMA).
- c. The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 15 kHz and VB of the spectrum is 51 kHz (LTE Bandwidth 1.4 MHz).
- d. The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 30 kHz and VB of the spectrum is 100 kHz (LTE Bandwidth 3 MHz).
- e. The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 62 kHz and VB of the spectrum is 200 kHz (LTE Bandwidth 5 MHz).
- f. The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 100 kHz and VB of the spectrum is 300 kHz (LTE Bandwidth 10 MHz).
- g. The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 150 kHz and VB of the spectrum is 470 kHz (LTE Bandwidth 15 MHz).
- h. The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 200 kHz and VB of the spectrum is 1 MHz (LTE Bandwidth 20 MHz).
- i. Record the max trace plot into the test report.


4.5.4 Test Results

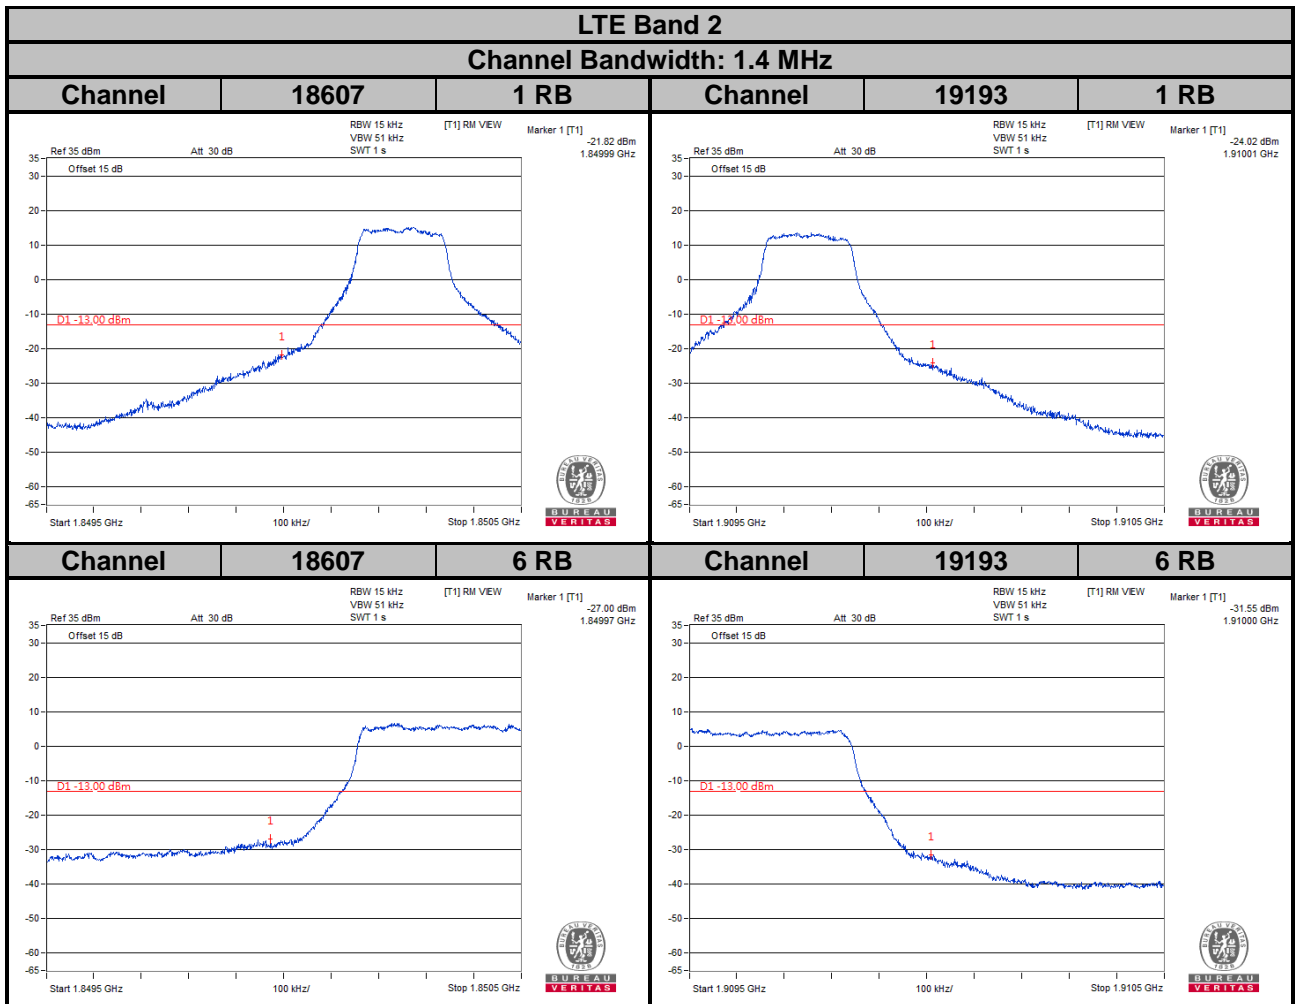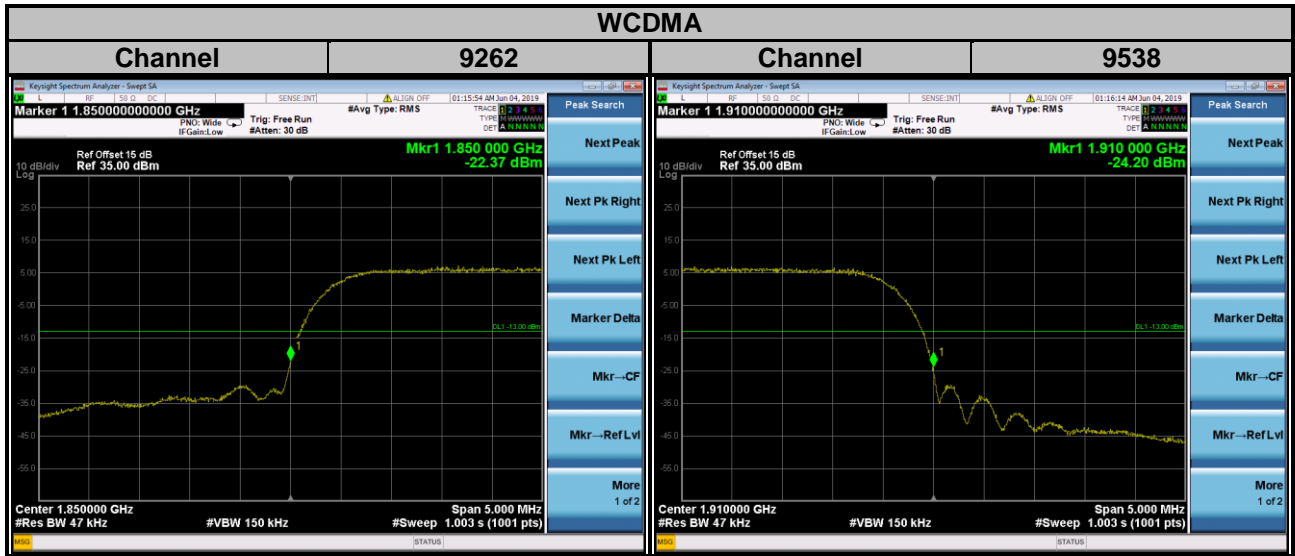



LTE Band 2

Channel Bandwidth: 3 MHz

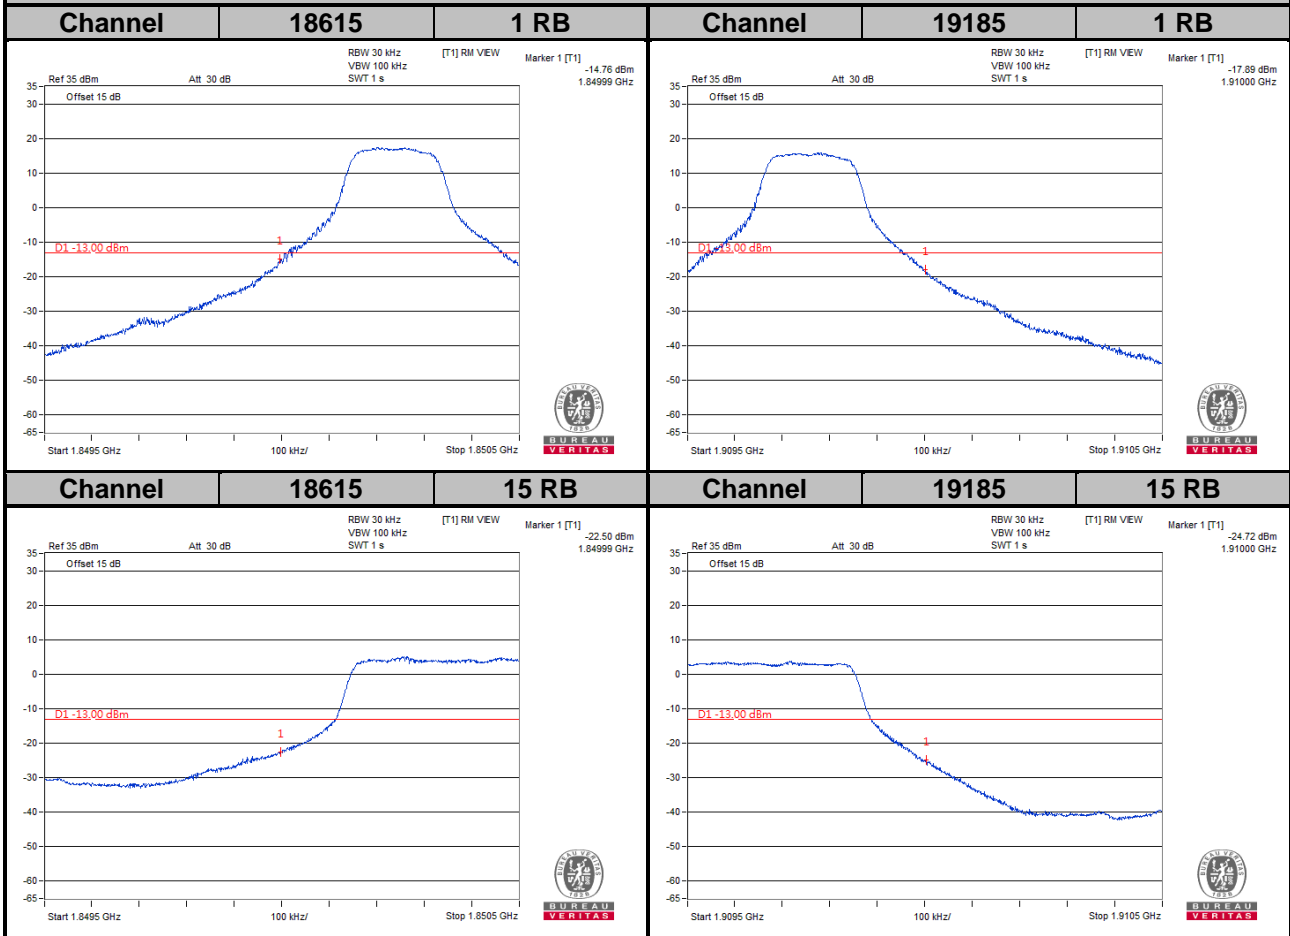

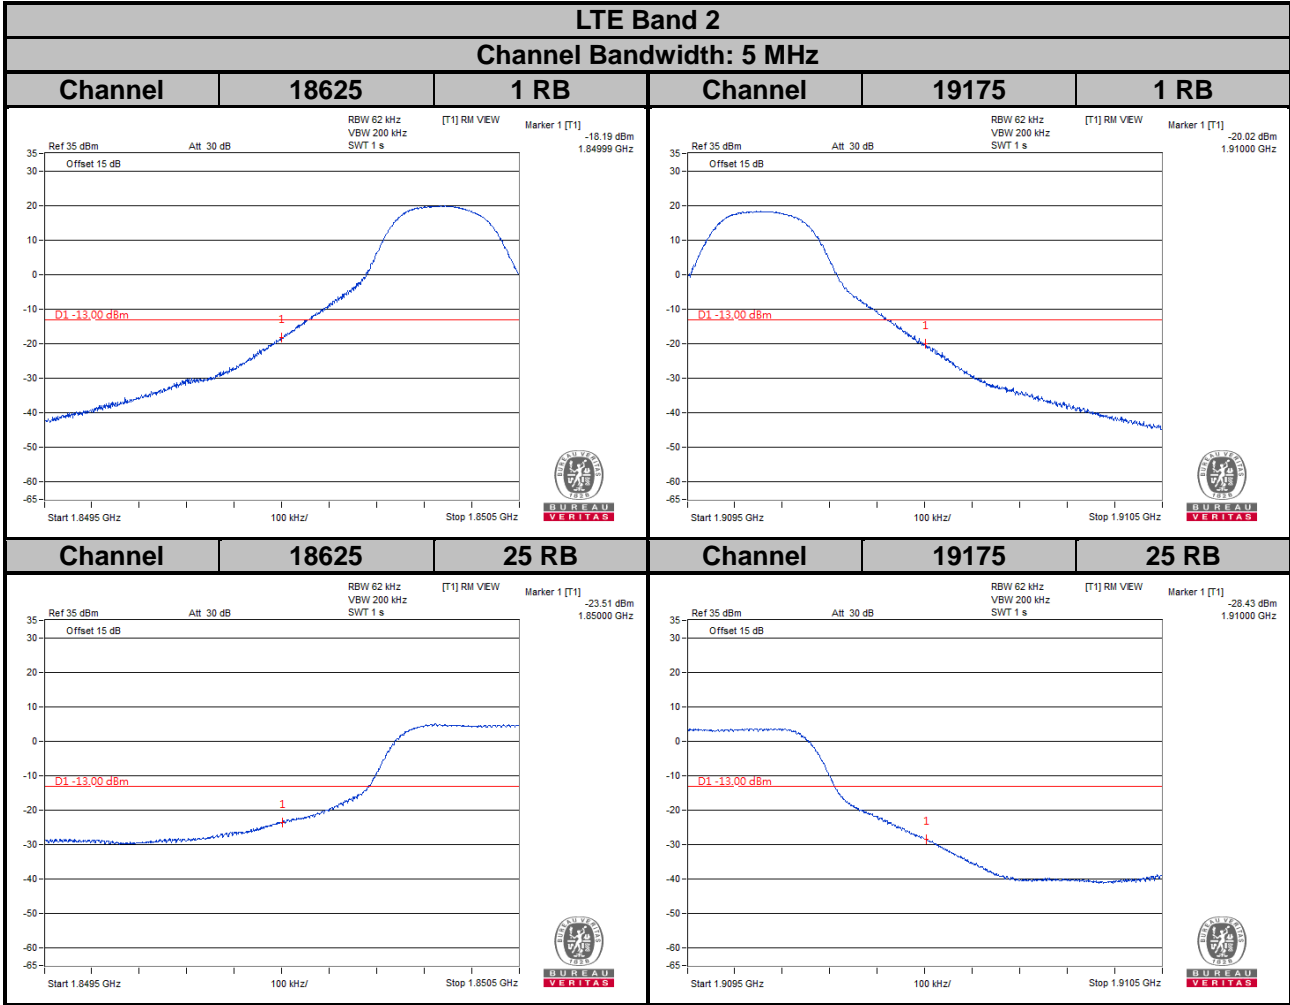


LTE Band 2
Channel Bandwidth: 10 MHz

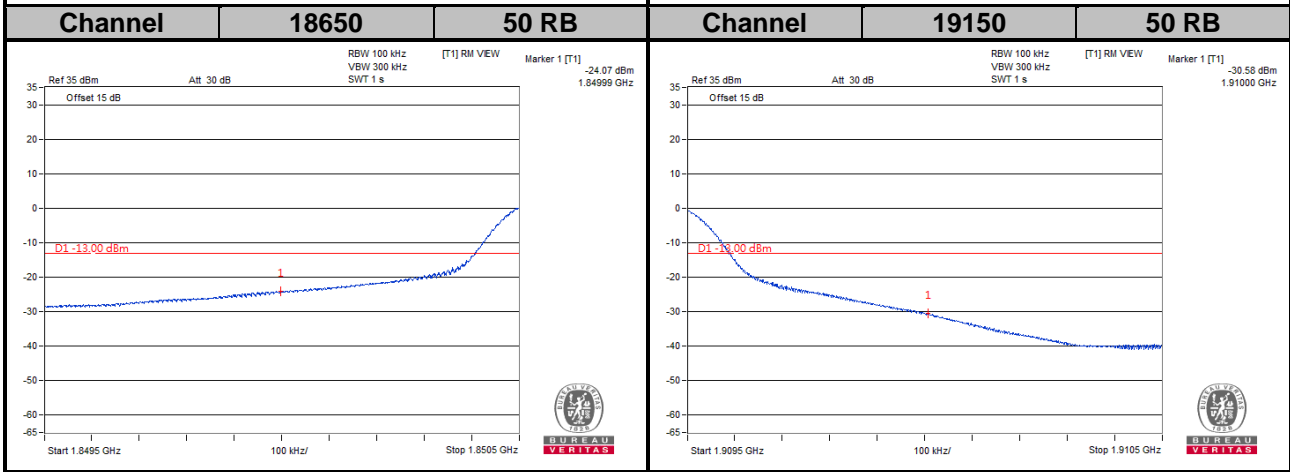
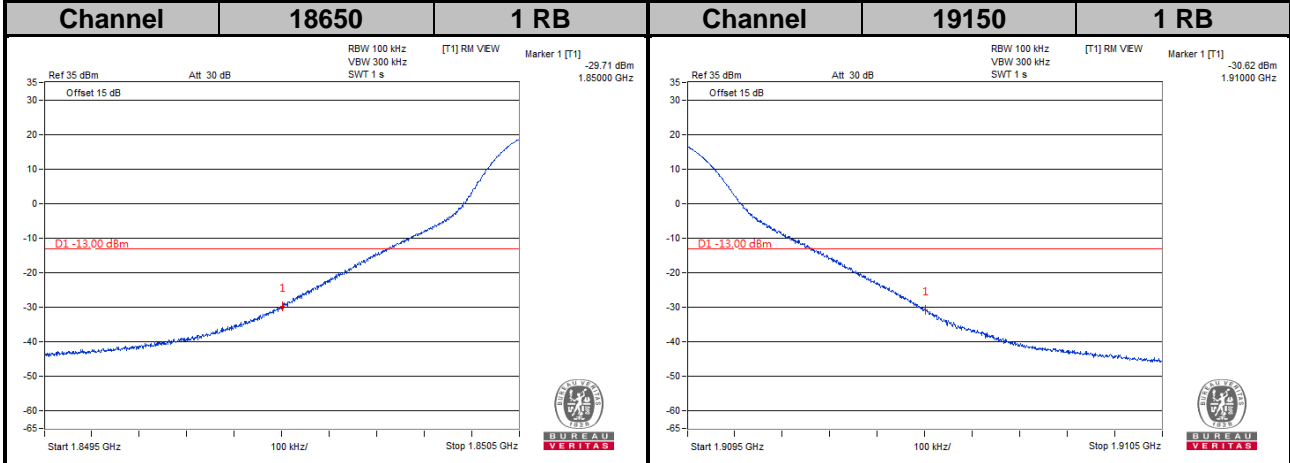


LTE Band 2

Channel Bandwidth: 15 MHz

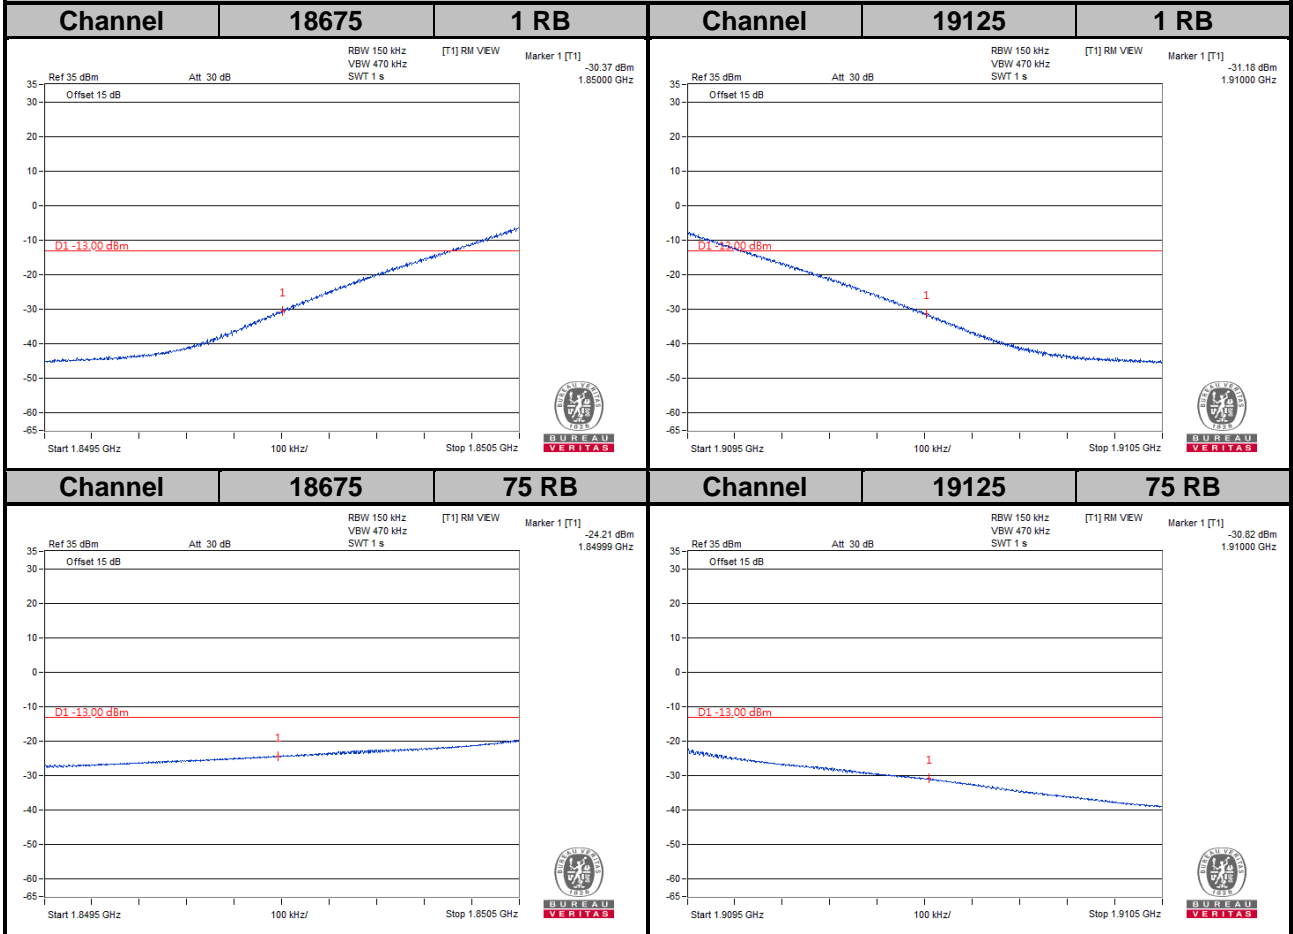

LTE Band 2
Channel Bandwidth: 20 MHz

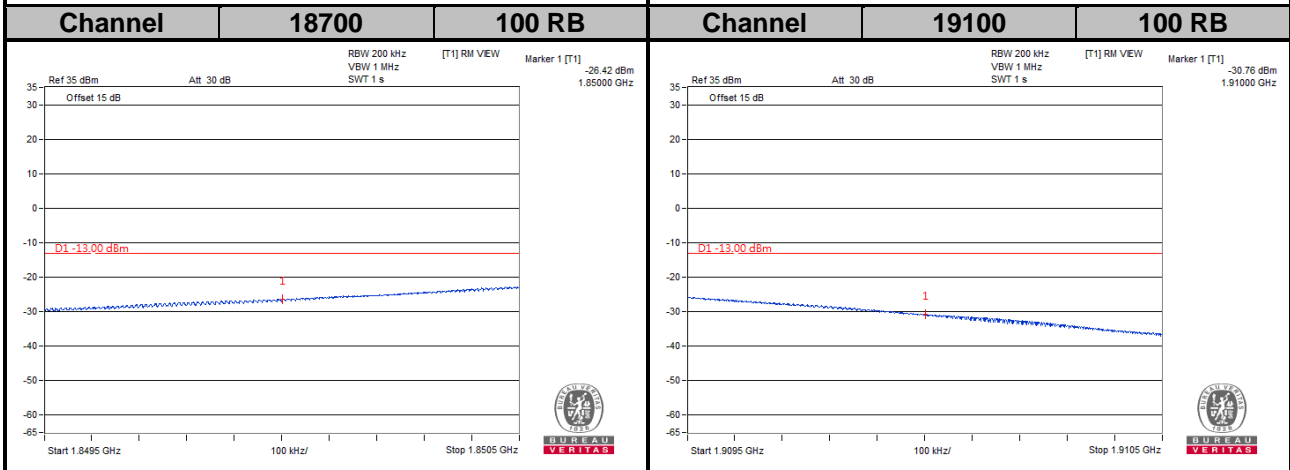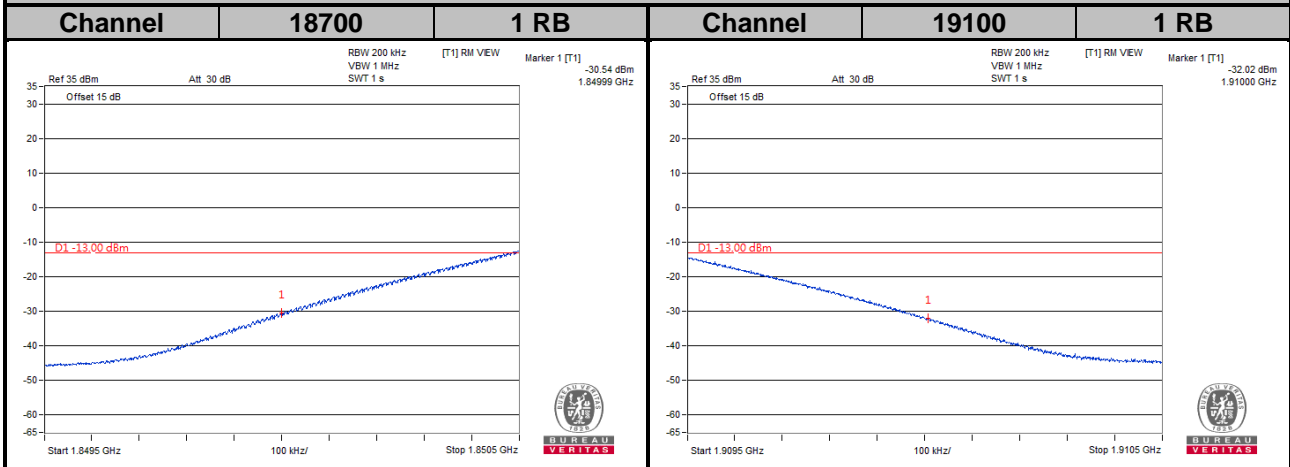


4.6 Peak to Average Ratio

4.6.1 Limits of Peak to Average Ratio Measurement

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.6.2 Test Setup

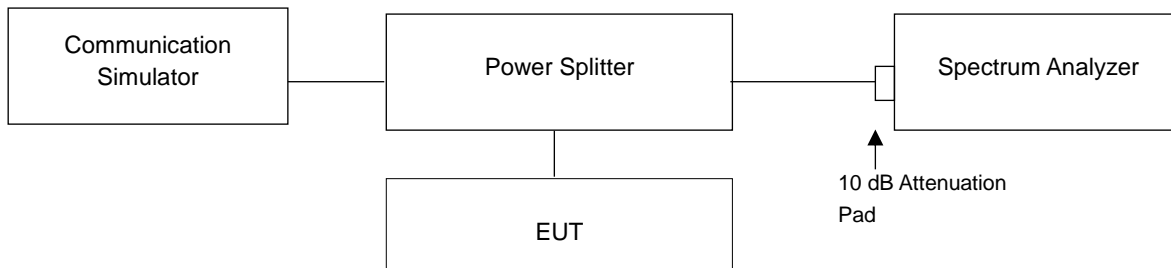


4.6.3 Test Procedures


1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1 %.

4.6.4 Test Results


Channel	Frequency (MHz)	Peak to Average Ratio (dB)
		WCDMA
9262	1852.4	2.59
9400	1880.0	3.03
9538	1907.6	2.93

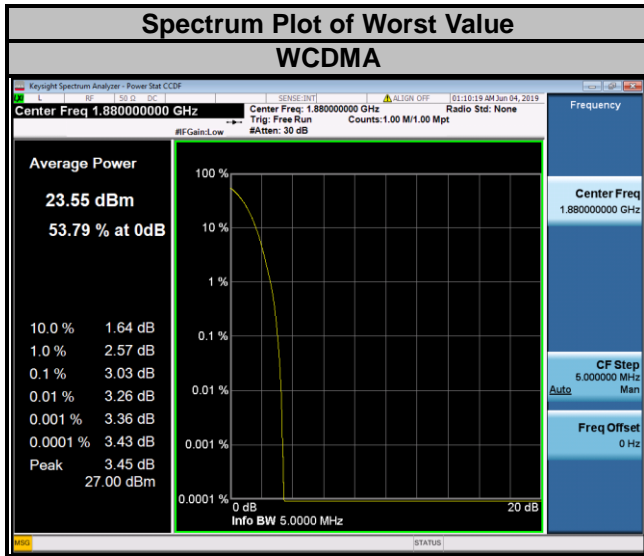


LTE Band 2									
Channel Bandwidth: 1.4 MHz					Channel Bandwidth: 3 MHz				
Channel	Frequency (MHz)	Peak to Average Ratio (dB)			Channel	Frequency (MHz)	Peak to Average Ratio (dB)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
18607	1850.7	3.01	4.05	6.28	18615	1851.5	2.96	4.01	6.22
18900	1880.0	3.79	5.29	6.54	18900	1880.0	3.60	5.18	6.47
19193	1909.3	3.70	5.15	6.36	19185	1908.5	3.55	5.15	6.19

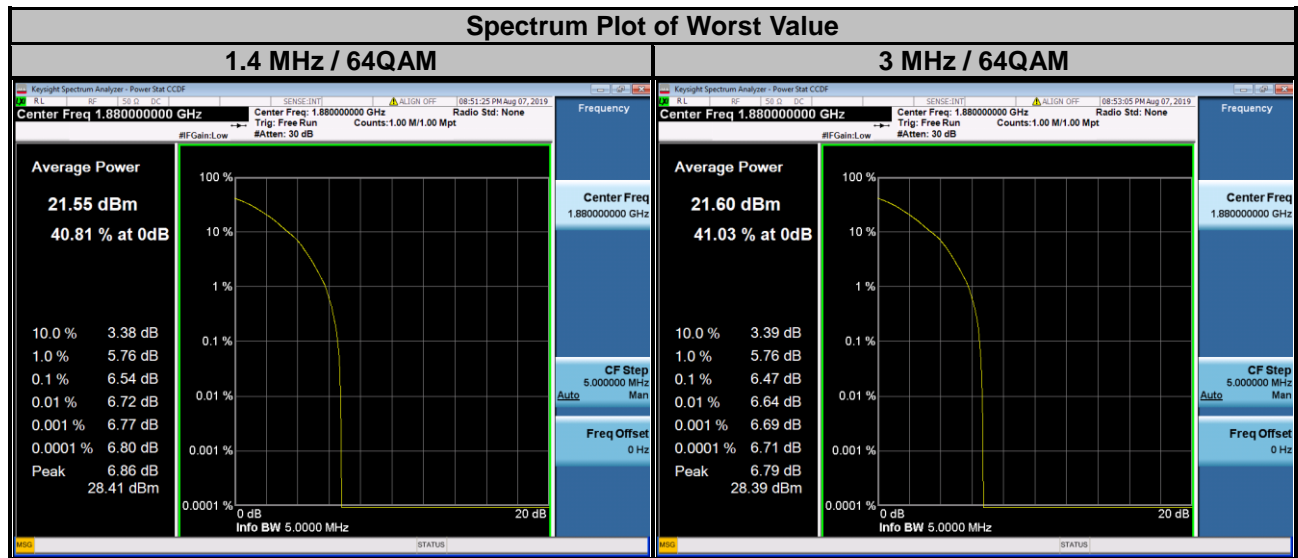

LTE Band 2									
Channel Bandwidth: 5 MHz					Channel Bandwidth: 10 MHz				
Channel	Frequency (MHz)	Peak to Average Ratio (dB)			Channel	Frequency (MHz)	Peak to Average Ratio (dB)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
18625	1852.5	3.02	4.12	6.16	18650	1855.0	3.01	4.15	6.08
18900	1880.0	3.62	5.26	6.37	18900	1880.0	3.56	5.23	6.10
19175	1907.5	3.57	5.21	6.00	19150	1905.0	3.43	4.91	5.08

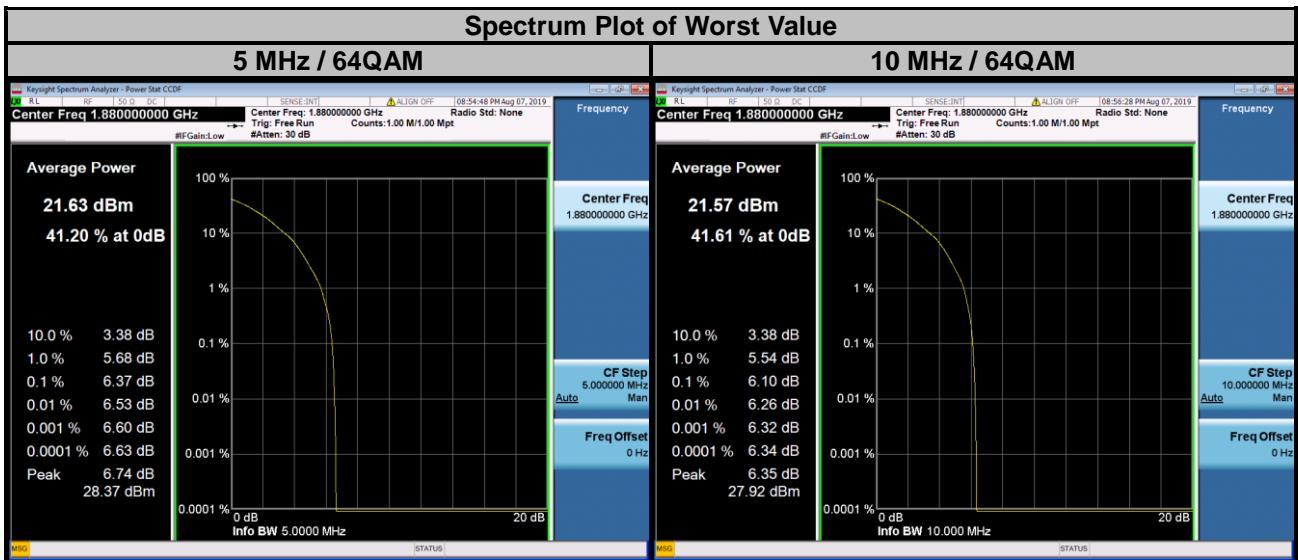

LTE Band 2									
Channel Bandwidth: 15 MHz					Channel Bandwidth: 20 MHz				
Channel	Frequency (MHz)	Peak to Average Ratio (dB)			Channel	Frequency (MHz)	Peak to Average Ratio (dB)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
18675	1857.5	2.99	4.13	5.90	18700	1860.0	3.05	4.21	5.90
18900	1880.0	3.54	5.18	5.63	18900	1880.0	3.49	5.03	5.39
19125	1902.5	2.87	3.93	4.89	19100	1900.0	2.74	3.78	5.30

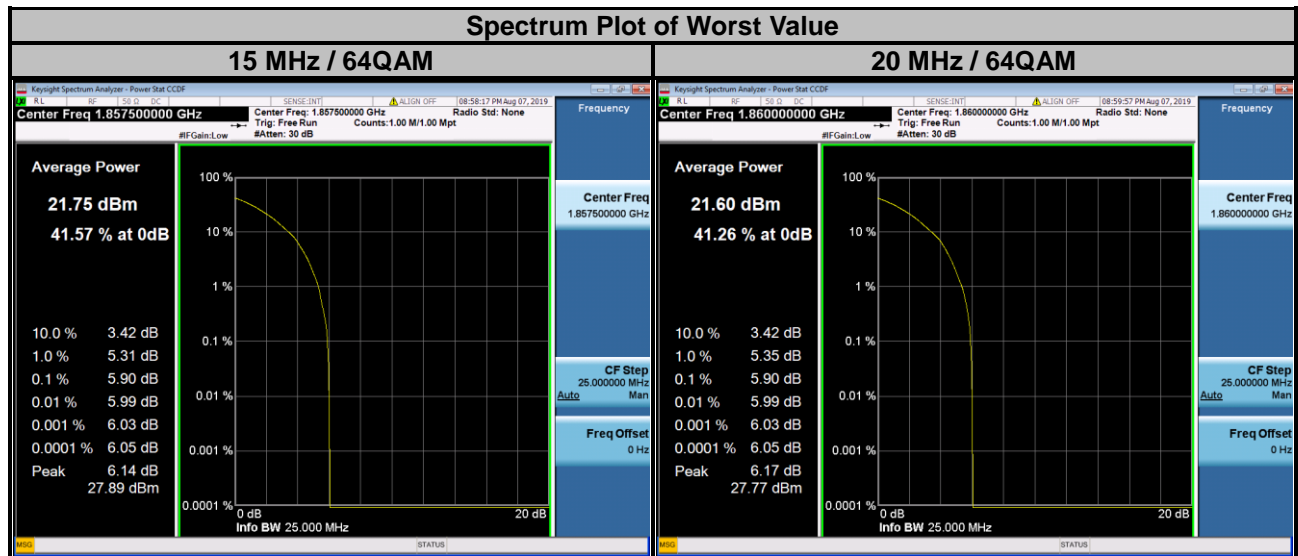


4.7 Conducted Spurious Emissions

4.7.1 Limits of Conducted Spurious Emissions Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13 dBm.

4.7.2 Test Setup

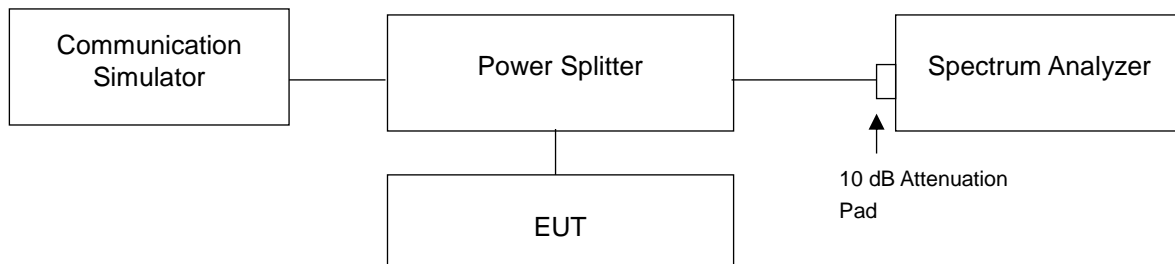


4.7.3 Test Procedure

- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 9 kHz to 1 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 100 kHz and VBW = 300 kHz is used WCDMA for conducted emission measurement. RBW = 300 kHz and VBW = 1 MHz is used LTE for conducted emission measurement
- Measuring frequency range is from 1 GHz to 20 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 1 MHz and VBW = 3 MHz is used for conducted emission measurement.
- Spectrum RBW settings are referenced to ANSI 63.26 section 5.7.2.

4.7.4 Test Results




Note: The signal over the limit in 9 kHz is from spectrum analyzer.

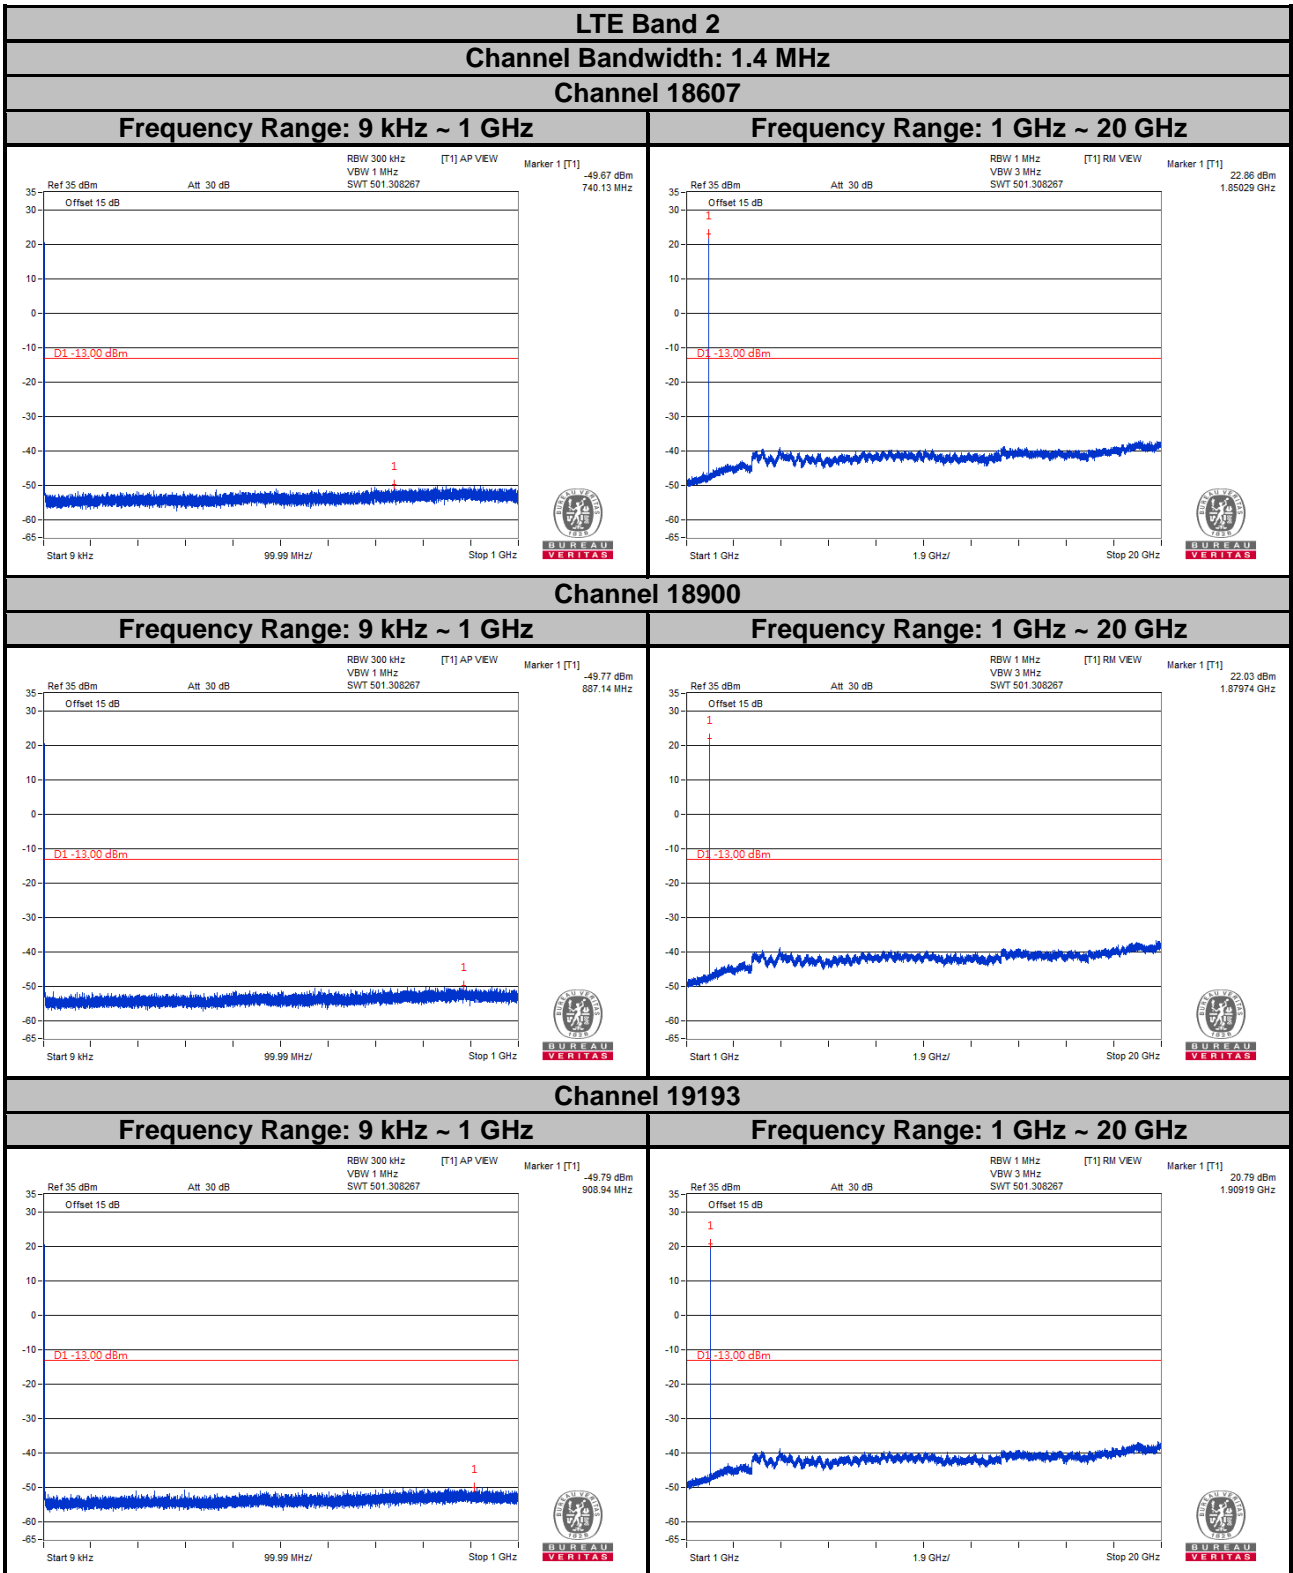


Note: The signal over the limit in 9 kHz is from spectrum analyzer.


LTE Band 2
Channel Bandwidth: 3 MHz
Channel 18615

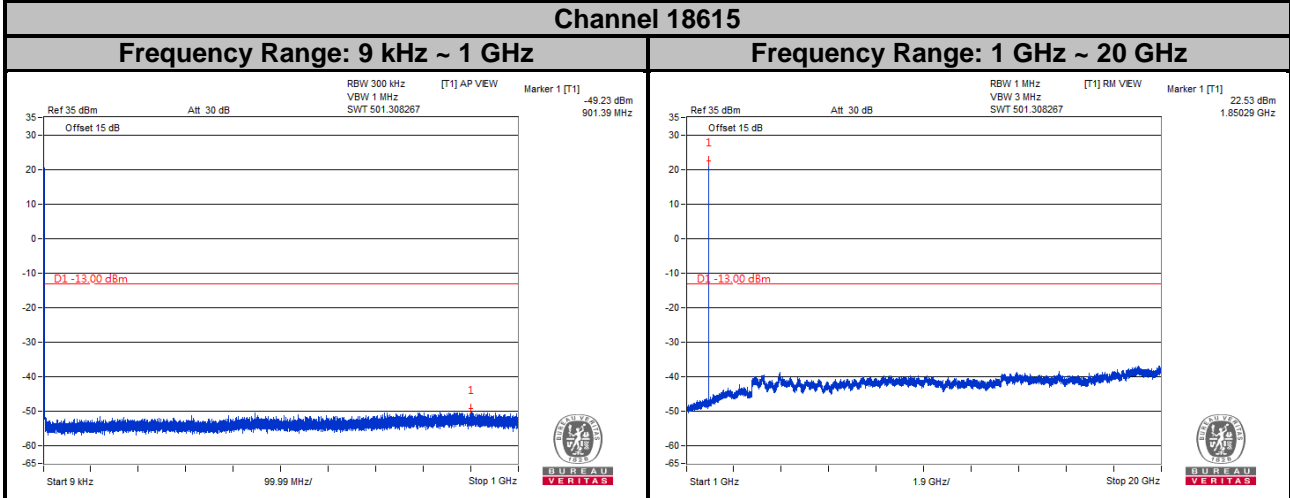

Channel 18900

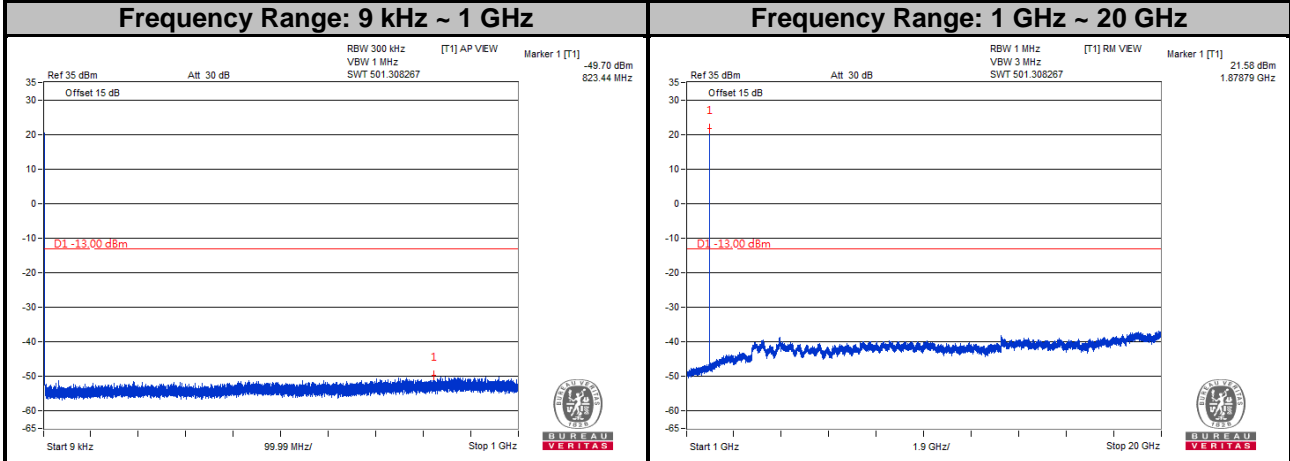


Channel 19185

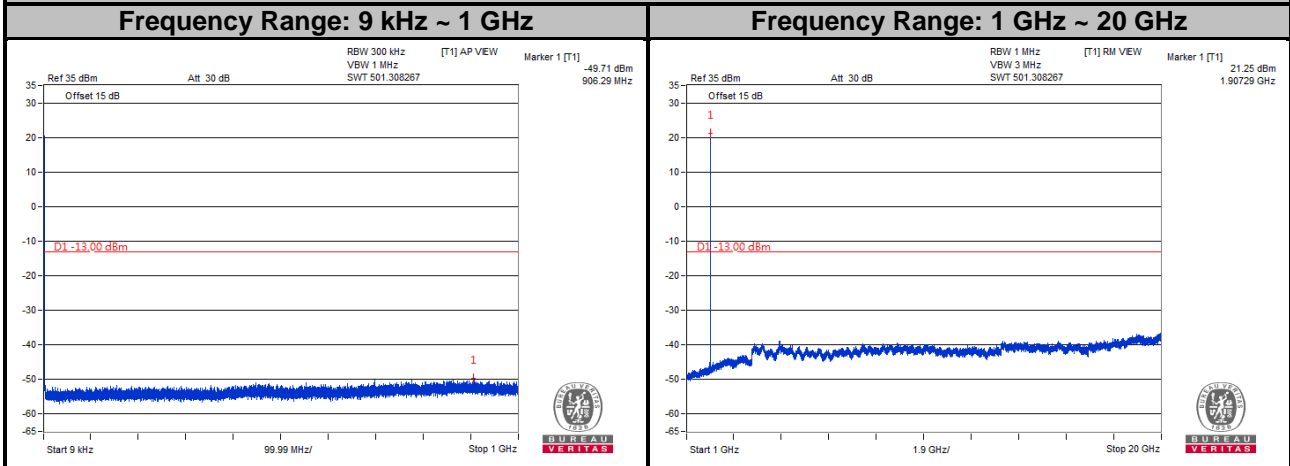


Note: The signal over the limit in 9 kHz is from spectrum analyzer.


LTE Band 2
Channel Bandwidth: 5 MHz
Channel 18625

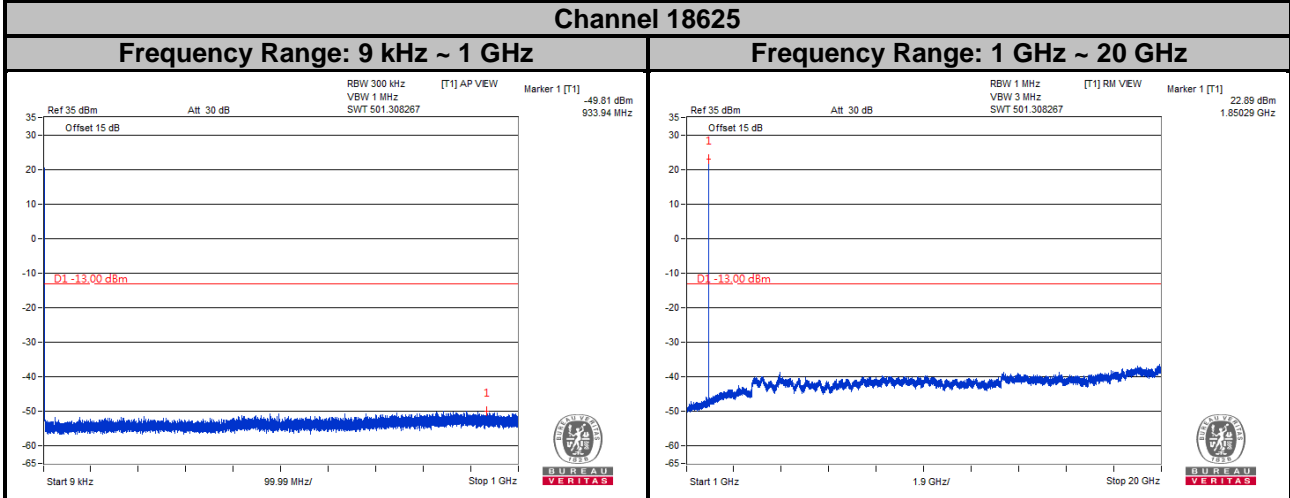

Channel 18900

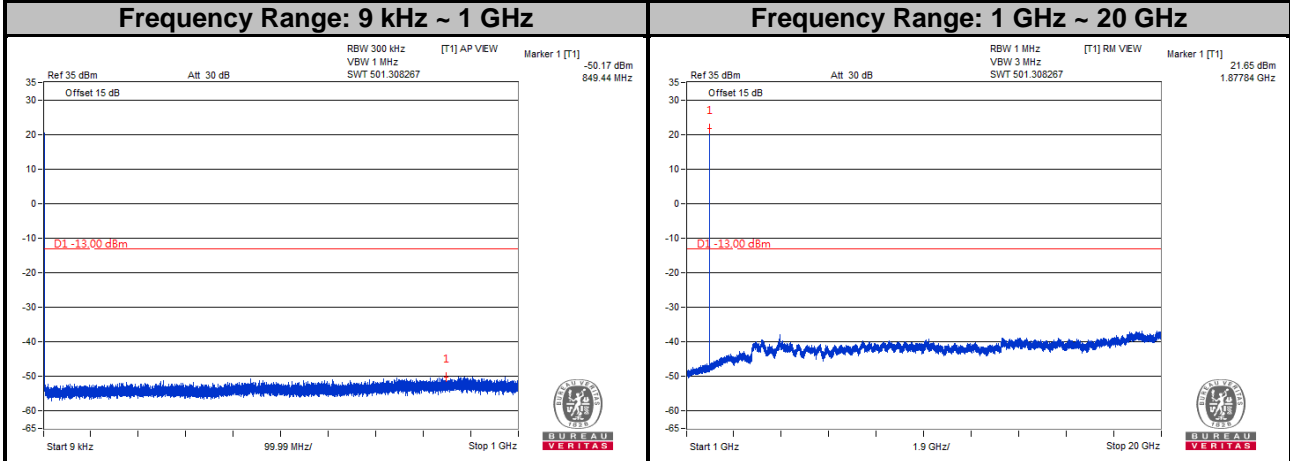


Channel 19175

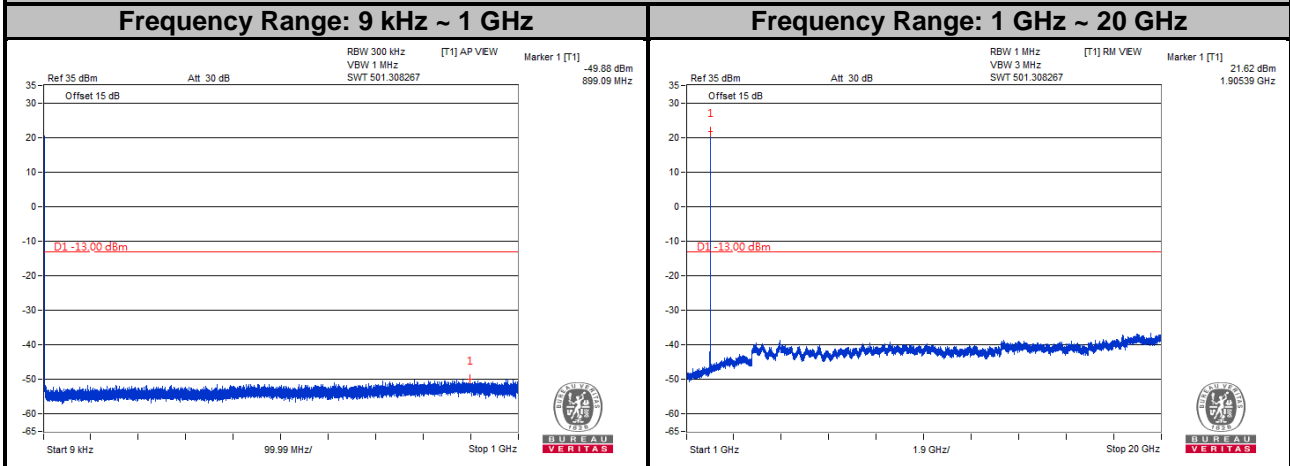


Note: The signal over the limit in 9 kHz is from spectrum analyzer.


LTE Band 2
Channel Bandwidth: 10 MHz
Channel 18650

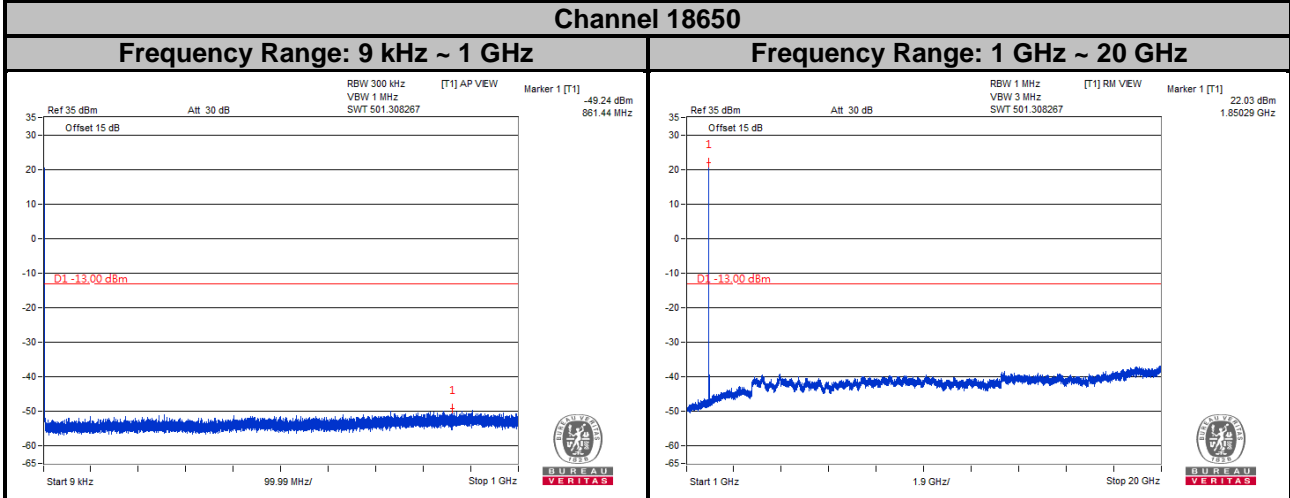

Channel 18900

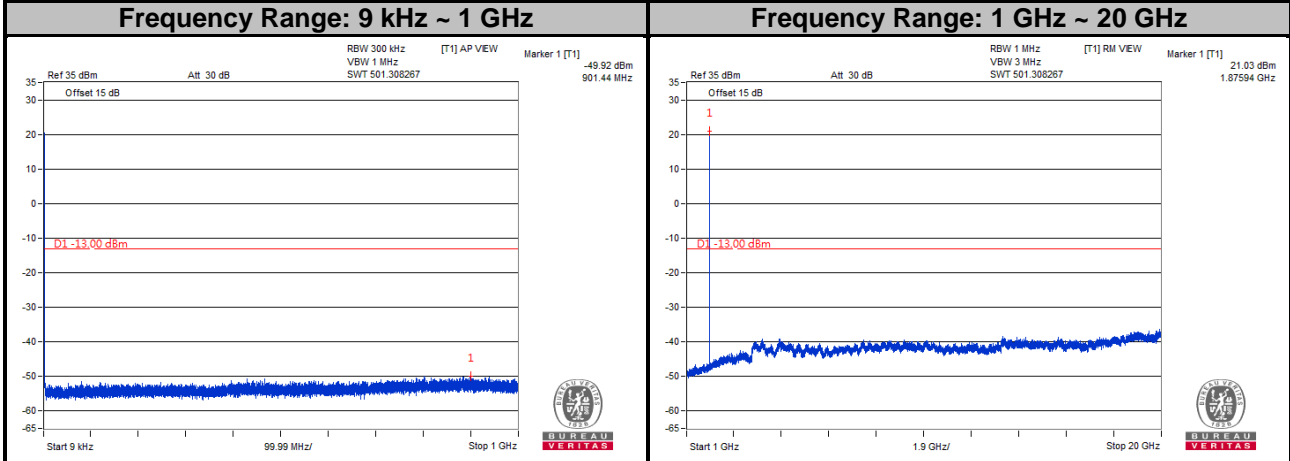


Channel 19150

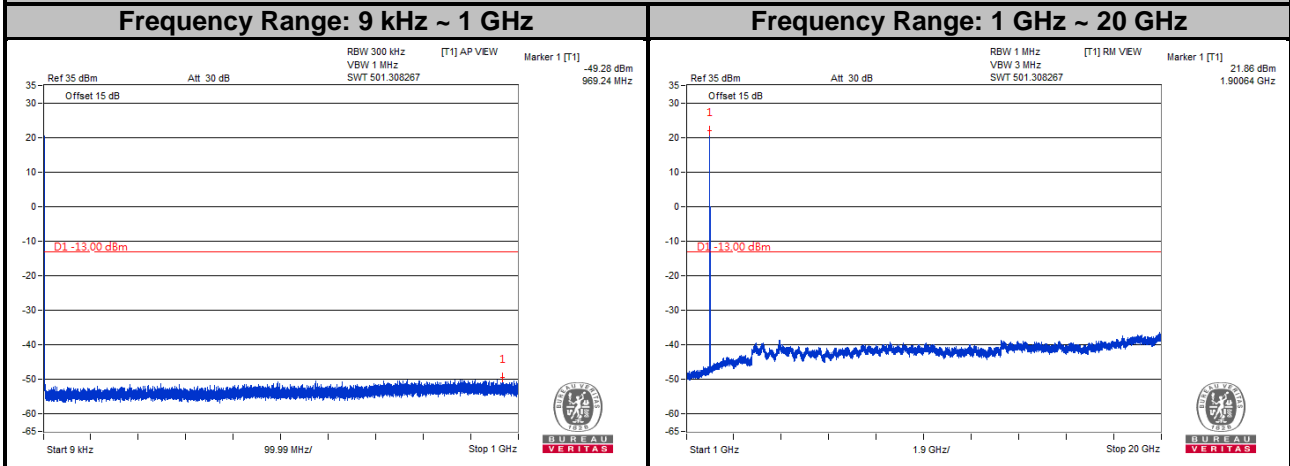


Note: The signal over the limit in 9 kHz is from spectrum analyzer.


LTE Band 2
Channel Bandwidth: 15 MHz
Channel 18675

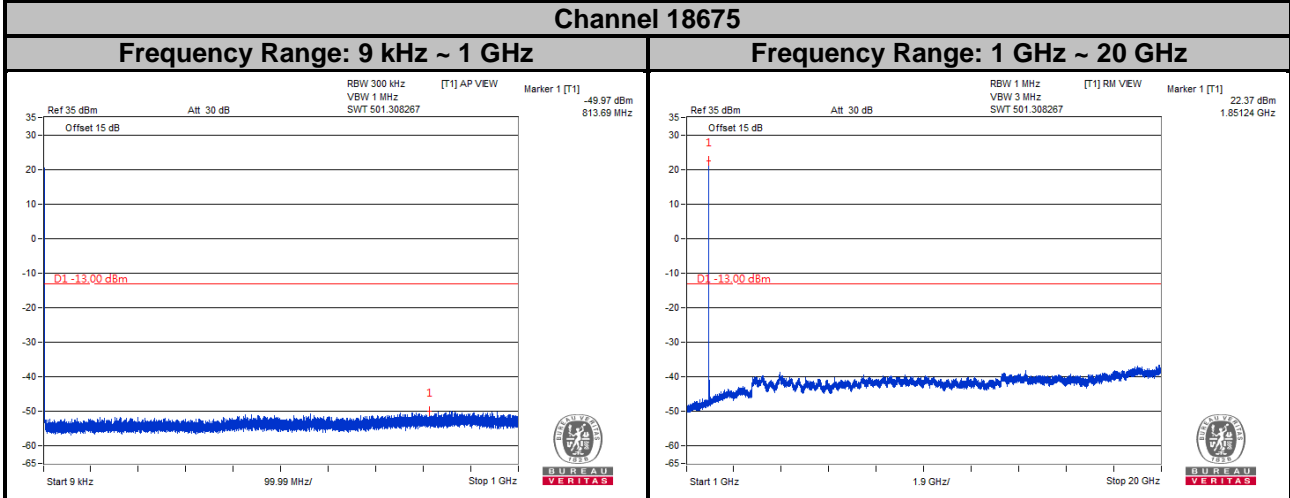

Channel 18900

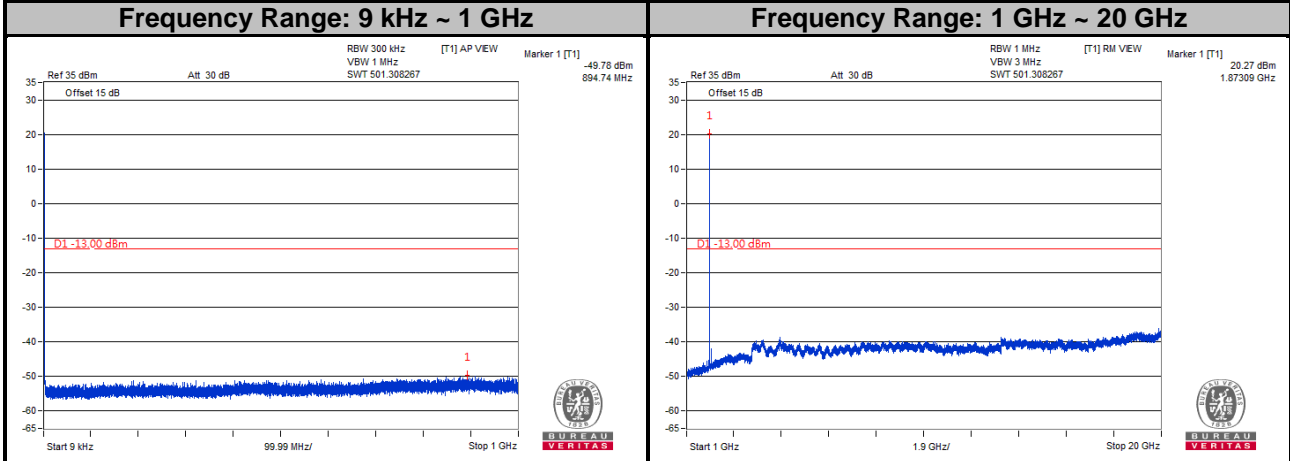


Channel 19125

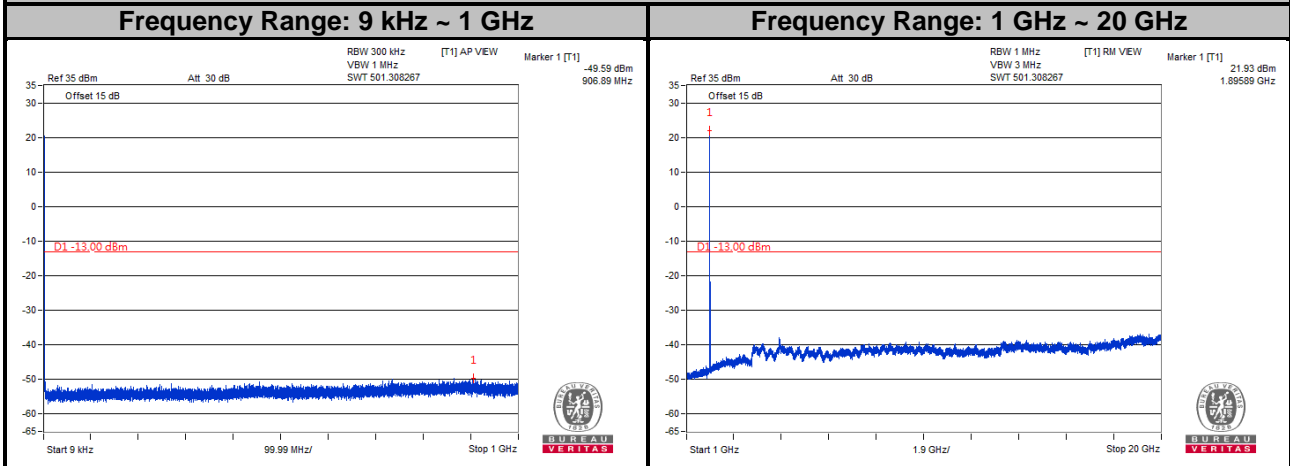


Note: The signal over the limit in 9 kHz is from spectrum analyzer.


LTE Band 2
Channel Bandwidth: 20 MHz
Channel 18700

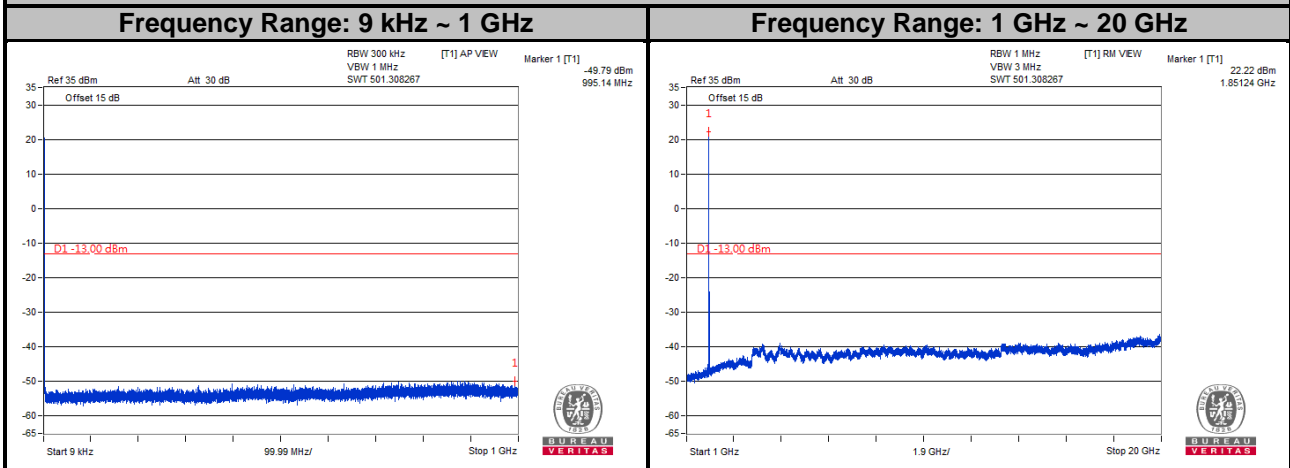

Channel 18900

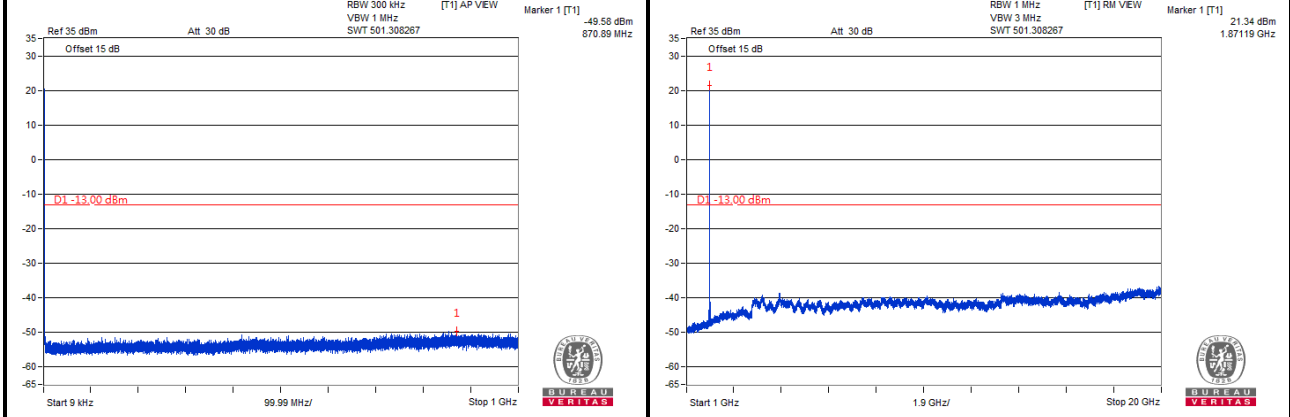

Channel 19100

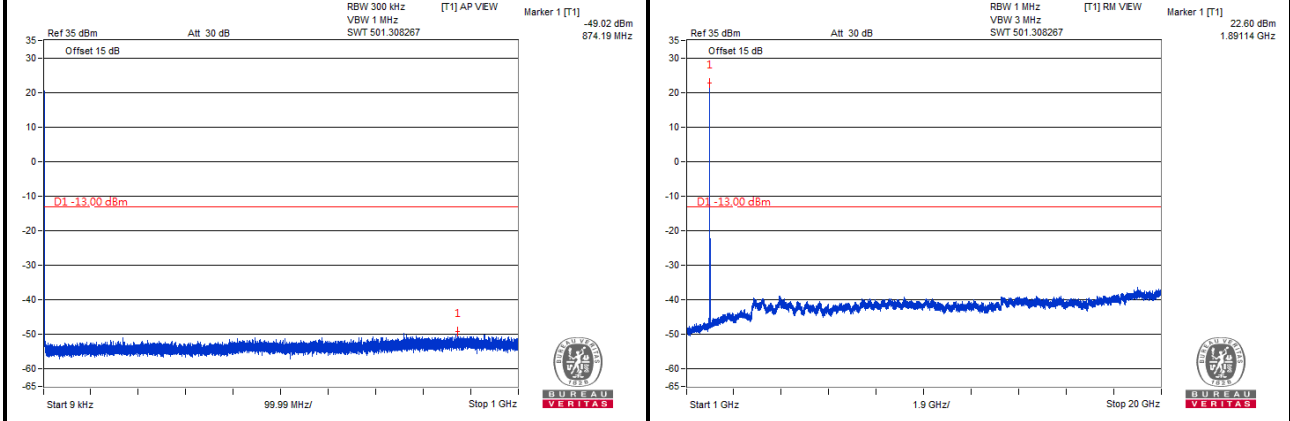

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

4.8 Radiated Emission Measurement

4.8.1 Limits of Radiated Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit is equal to -13 dBm.

4.8.2 Test Procedure

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G.
- c. EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution horn.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, E.R.P power = E.I.R.P power - 2.15 dB.


NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz/3 MHz.

4.8.3 Deviation from Test Standard


No deviation.

4.8.4 Test Setup

<Radiated Emission below or equal 1 GHz>

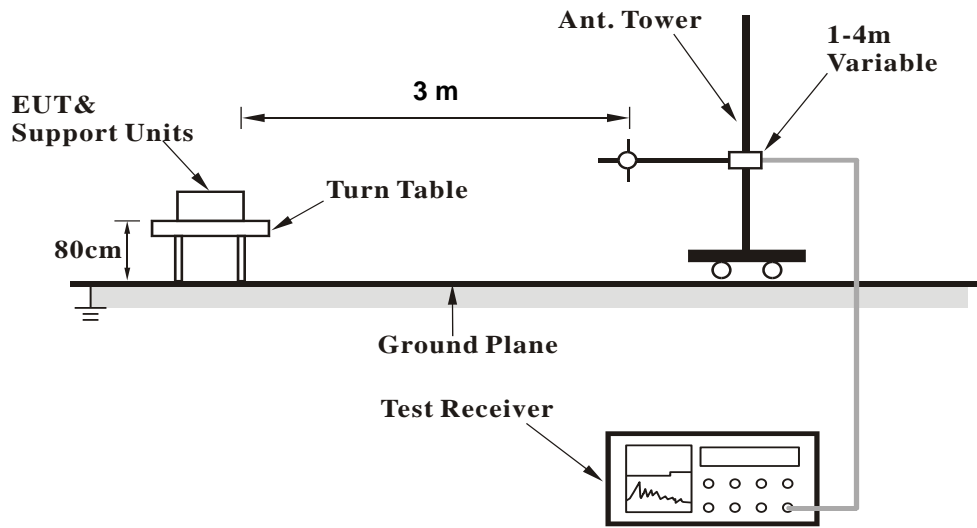

<Radiated Emission above 1 GHz>

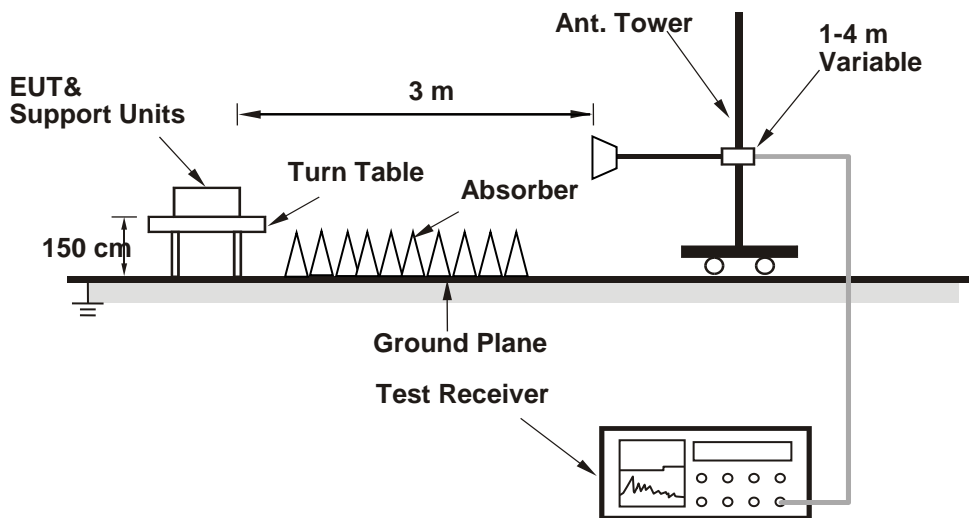

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.8.5 Test Results

WCDMA:

Low Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 07-18-2019

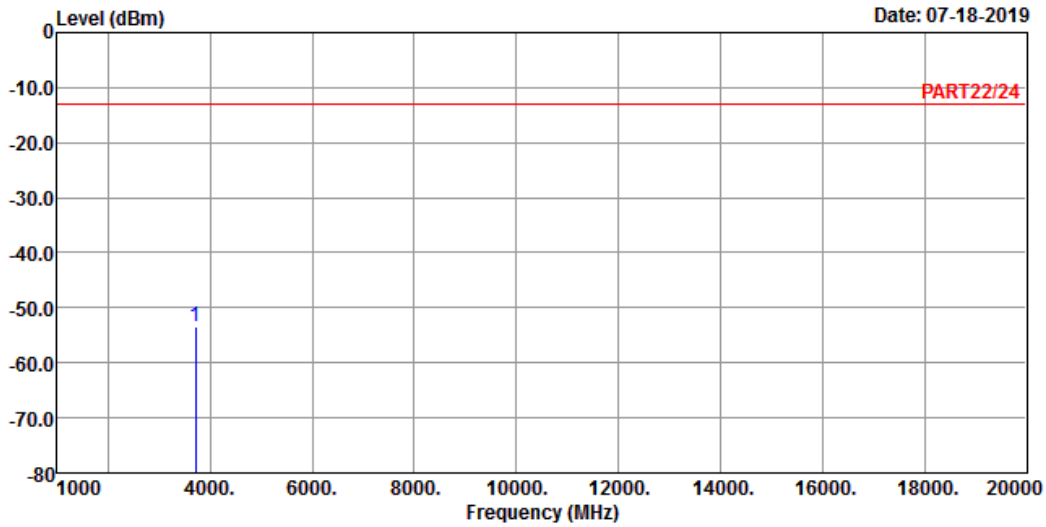

Site : 966 Chamber 5
 Condition: PART22/24 HORIZONTAL
 Remak : WCDMA Band 2 Link_L-CH
 Tested by: Thomas Wei


	Read	Limit	Over	
Freq	Level	Level	Line	Factor
MHz	dBm	dBm	dBm	dB
1 pp 3704.80	-53.48	-46.55	-13.00	-6.93
				-40.48 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

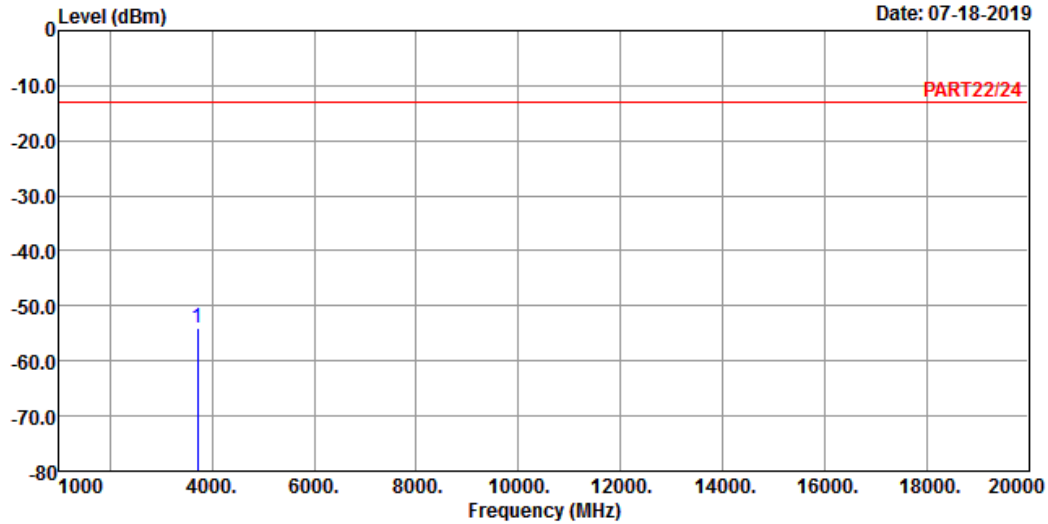

Site : 966 Chamber 5
 Condition: PART22/24 VERTICAL
 Remak : WCDMA Band 2 Link_L-CH
 Tested by: Thomas Wei

Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 3704.80	-53.96	-47.03	-13.00	-6.93	-40.96	Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

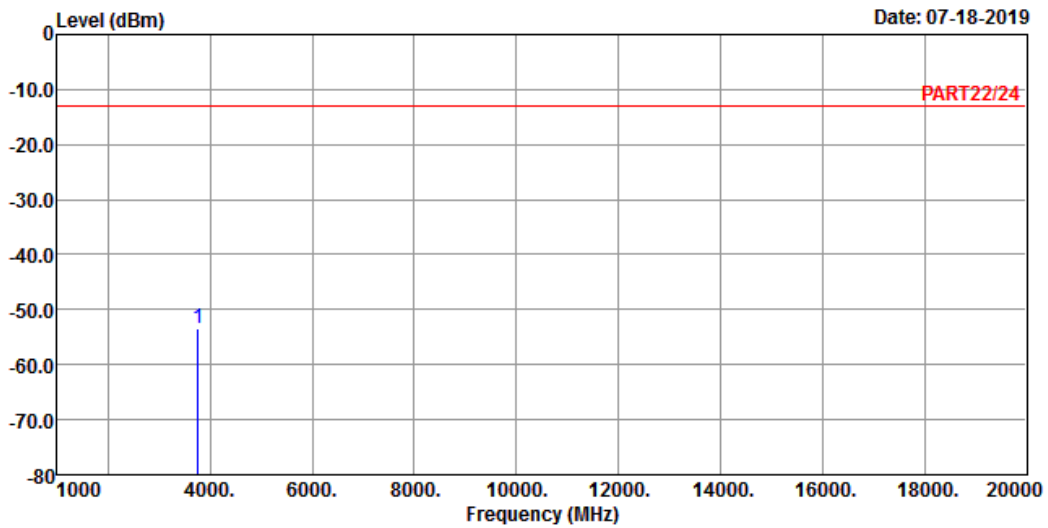

Site : 966 Chamber 5
 Condition: PART22/24 HORIZONTAL
 Remak : WCDMA Band 2 Link_M-CH
 Tested by: Thomas Wei

Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	


1 pp 3760.00 -53.47 -46.82 -13.00 -6.65 -40.47 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

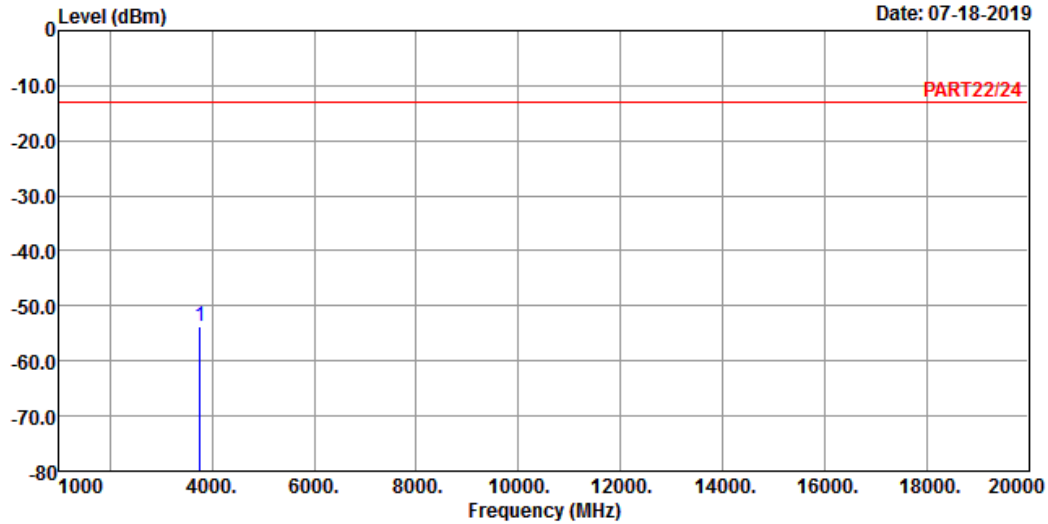

Site : 966 Chamber 5
 Condition: PART22/24 VERTICAL
 Remak : WCDMA Band 2 Link_M-CH
 Tested by: Thomas Wei

Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 3760.00	-53.64	-46.99	-13.00	-6.65	-40.64	Peak

High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 07-18-2019

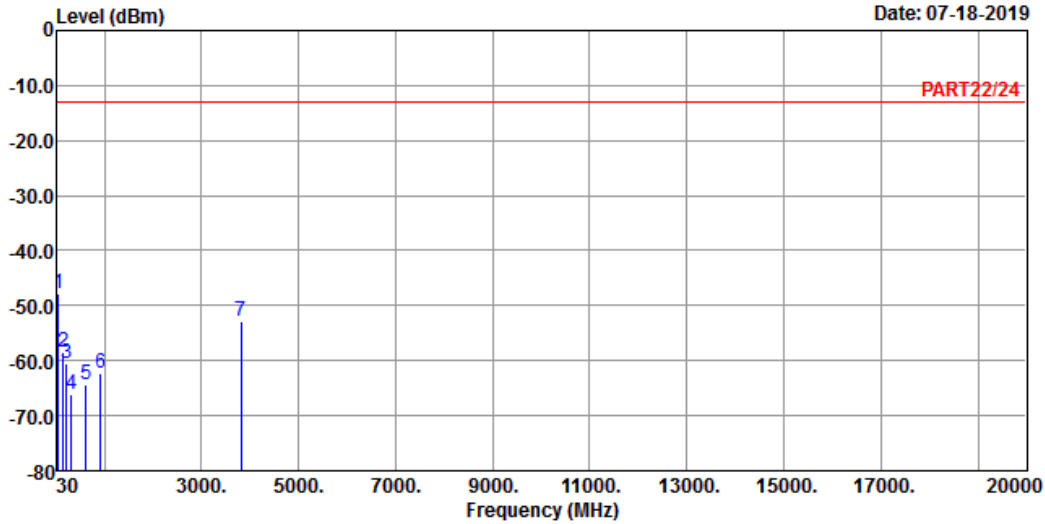

Site : 966 Chamber 5
 Condition: PART22/24 HORIZONTAL
 Remak : WCDMA Band 2 Link_H-CH
 Tested by: Thomas Wei

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	pp	43.58	-47.84	-46.37	-13.00	-1.47	-34.84 Peak
2		159.01	-58.59	-53.47	-13.00	-5.12	-45.59 Peak
3		225.94	-60.56	-53.59	-13.00	-6.97	-47.56 Peak
4		324.88	-66.03	-59.40	-13.00	-6.63	-53.03 Peak
5		621.70	-64.29	-63.48	-13.00	-0.81	-51.29 Peak
6		926.28	-62.39	-63.61	-13.00	1.22	-49.39 Peak
7		3815.20	-52.95	-46.55	-13.00	-6.40	-39.95 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

Date: 07-18-2019

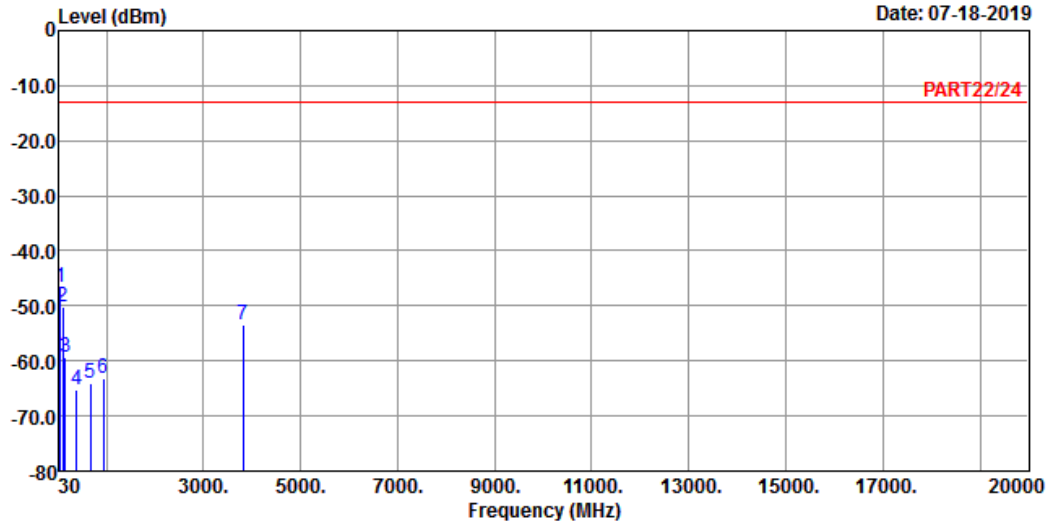

Site : 966 Chamber 5
 Condition: PART22/24 VERTICAL
 Remak : WCDMA Band 2 Link_H-CH
 Tested by: Thomas Wei

	Freq	Level	Read Level	Limit Line	Over Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	43.58	-46.77	-45.30	-13.00	-1.47	-33.77	Peak
2	105.66	-50.28	-39.86	-13.00	-10.42	-37.28	Peak
3	155.13	-59.28	-53.07	-13.00	-6.21	-46.28	Peak
4	385.99	-65.36	-59.33	-13.00	-6.03	-52.36	Peak
5	671.17	-64.12	-63.57	-13.00	-0.55	-51.12	Peak
6	937.92	-63.06	-64.57	-13.00	1.51	-50.06	Peak
7	3815.20	-53.44	-47.04	-13.00	-6.40	-40.44	Peak


LTE Band 2
 Channel Bandwidth: 1.4 MHz / QPSK
 Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

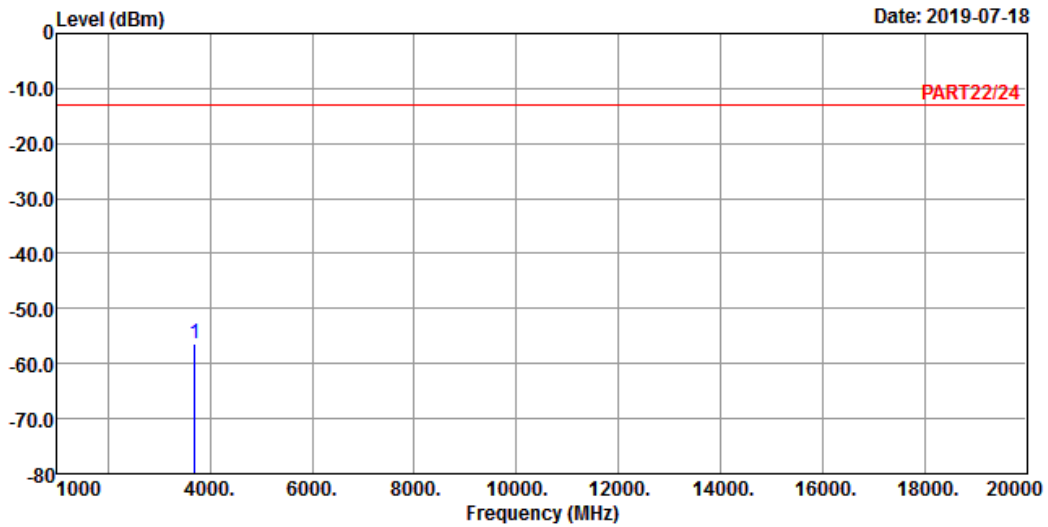

Site : 966 Chamber 5
 Condition: PART22/24 VERTICAL
 Remak : LTE Band 2 QPSK_1.4M Link_L-CH
 Tested by: tim-chen


Freq	Level	Read Level	Limit	Over	Remark
MHz	dBm	dBm	dBm	dB	dB
1 pp 3701.40	-56.27	-49.34	-13.00	-6.93	-43.27 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

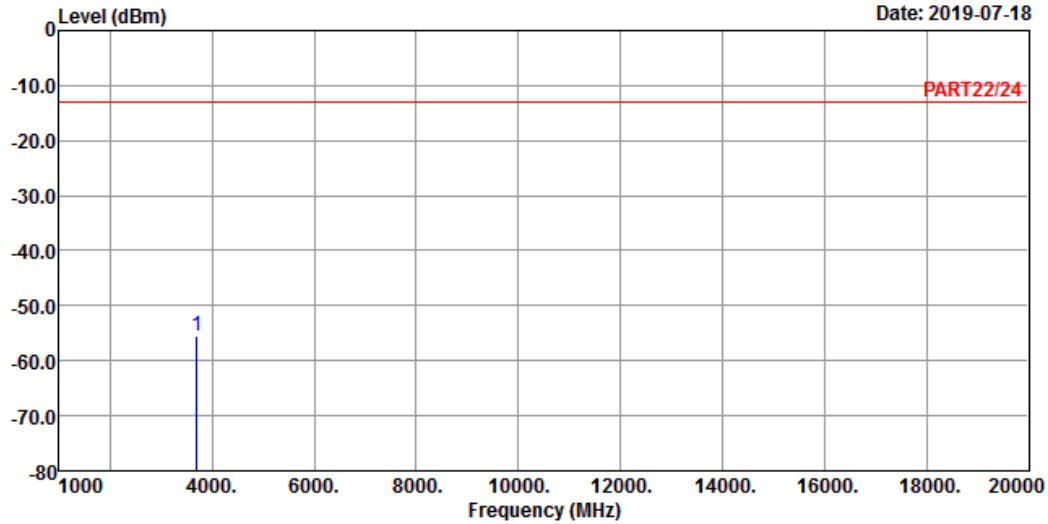

Site : 966 Chamber 5
 Condition: PART22/24 HORIZONTAL
 Remak : LTE Band 2 QPSK_1.4M Link_L-CH
 Tested by: tim-chen

Freq	Level	Read Level	Limit	Over	Remark
MHz	dBm	dBm	dBm	dB	dB
1 pp 3701.40	-55.47	-48.54	-13.00	-6.93	-42.47 Peak

Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 2019-07-18

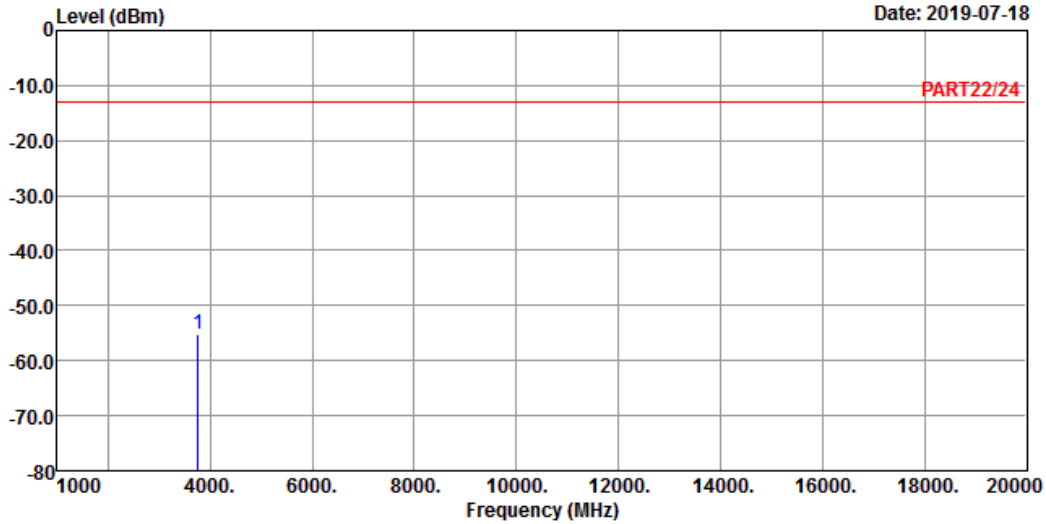

Site : 966 Chamber 5
 Condition: PART22/24 HORIZONTAL
 Remak : LTE Band 2 QPSK_1.4M Link_M-CH
 Tested by: tim-chen

Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	


1 pp 3760.00 -55.17 -48.52 -13.00 -6.65 -42.17 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

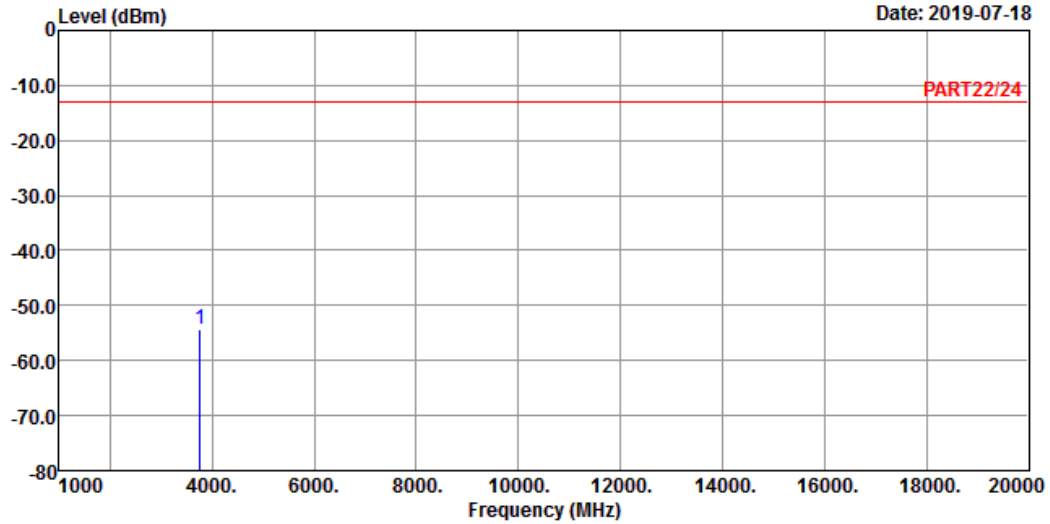

Site : 966 Chamber 5
 Condition: PART22/24 VERTICAL
 Remak : LTE Band 2 QPSK_1.4M Link_M-CH
 Tested by: tim-chen

Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 3760.00	-54.24	-47.59	-13.00	-6.65	-41.24	Peak

High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 2019-07-18

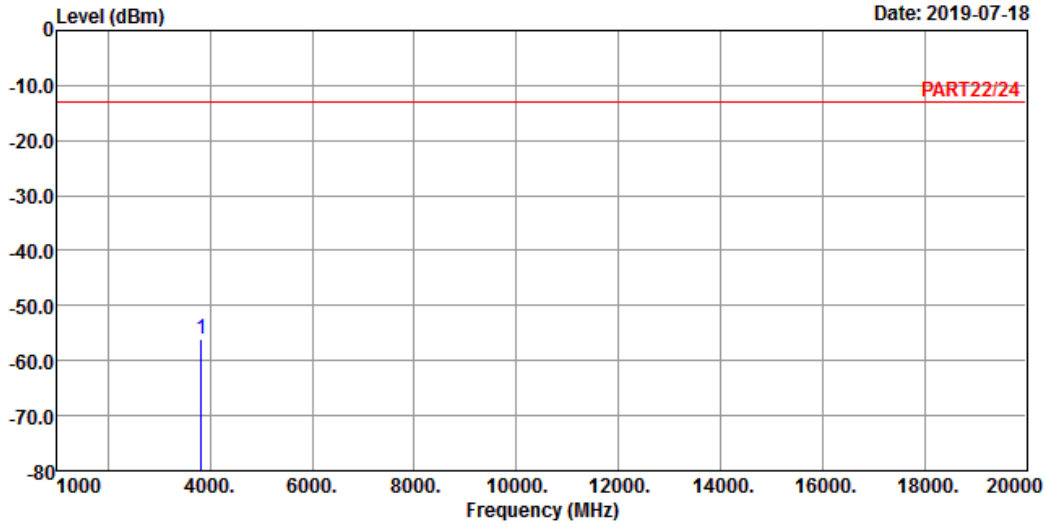

Site : 966 Chamber 5
 Condition: PART22/24 HORIZONTAL
 Remak : LTE Band 2 QPSK_1.4M Link_H-CH
 Tested by: tim-chen

Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	


1 pp 3818.60 -56.14 -49.74 -13.00 -6.40 -43.14 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

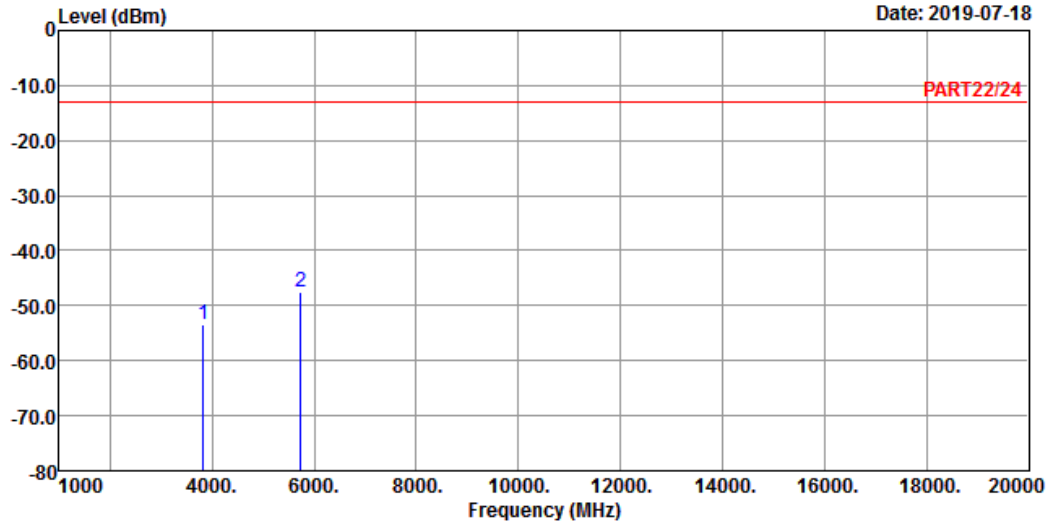

Site : 966 Chamber 5
 Condition: PART22/24 VERTICAL
 Remak : LTE Band 2 QPSK_1.4M Link_H-CH
 Tested by: tim-chen

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	3816.60	-53.32	-46.92	-13.00	-6.40	-40.32	Peak
2	5727.90	-47.53	-45.88	-13.00	-1.65	-34.53	Peak


Channel Bandwidth: 5 MHz / QPSK
Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

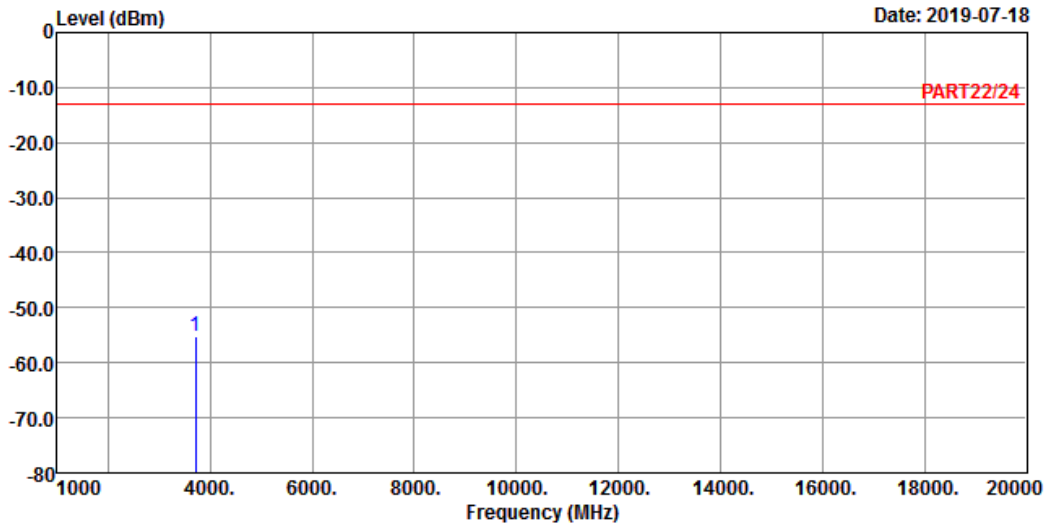

Site : 966 Chamber 5
Condition: PART22/24 HORIZONTAL
Remak : LTE Band 2 QPSK_5M Link_L-CH
Tested by: tim-chen


Freq	Level	Read Level	Limit	Over	Remark
MHz	dBm	dBm	dBm	dB	
1 pp 3705.00	-55.31	-48.38	-13.00	-6.93	-42.31 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

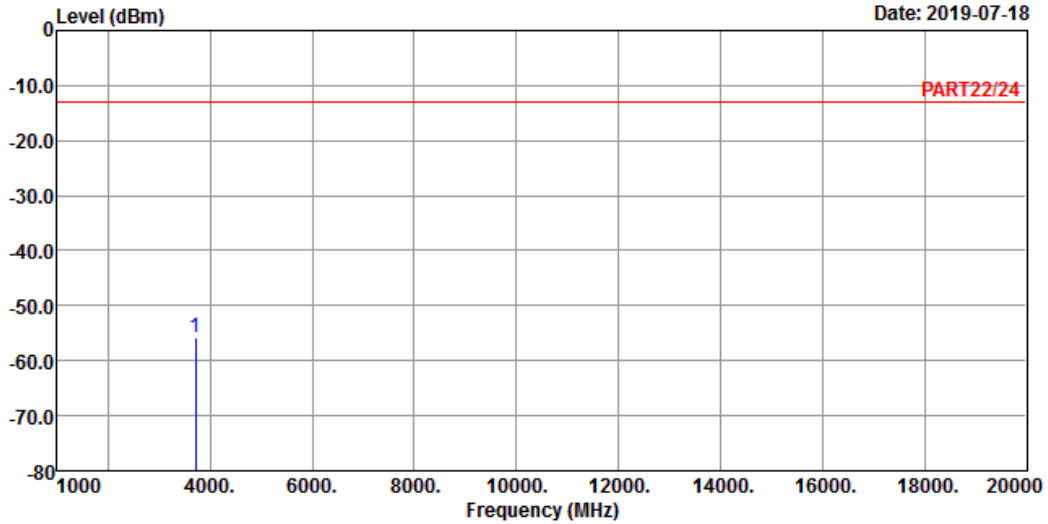

Site : 966 Chamber 5
 Condition: PART22/24 VERTICAL
 Remak : LTE Band 2 QPSK_5M Link_L-CH
 Tested by: tim-chen

Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 3705.00	-55.74	-48.81	-13.00	-6.93	-42.74	Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

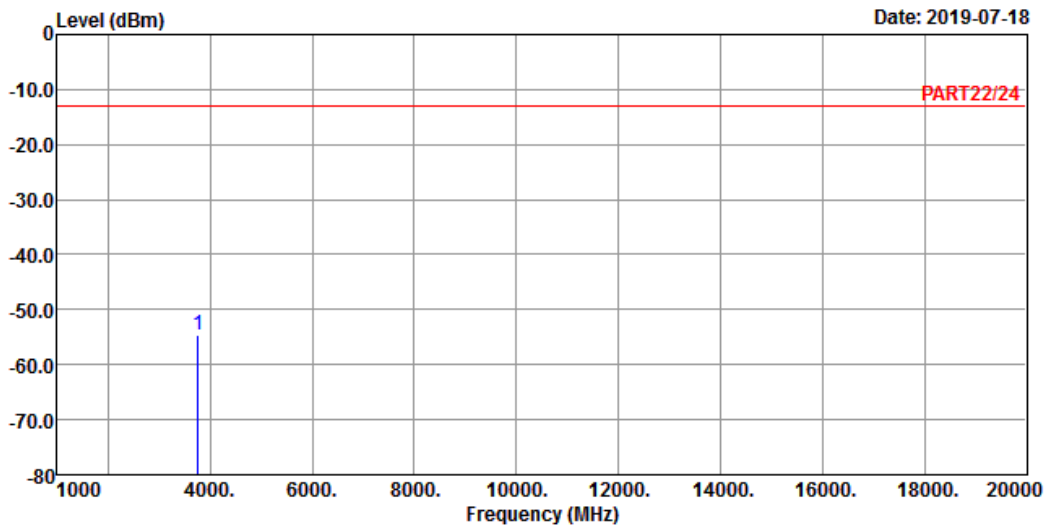

Site : 966 Chamber 5
 Condition: PART22/24 HORIZONTAL
 Remak : LTE Band 2 QPSK_5M Link_M-CH
 Tested by: tim-chen

Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	


1 pp 3760.00 -54.60 -47.95 -13.00 -6.65 -41.60 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

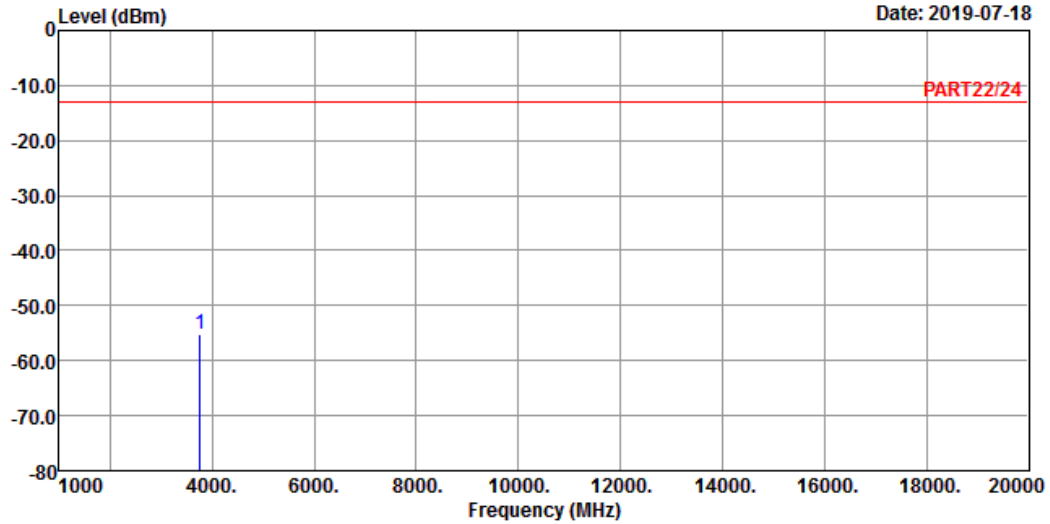

Site : 966 Chamber 5
 Condition: PART22/24 VERTICAL
 Remak : LTE Band 2 QPSK_5M Link_M-CH
 Tested by: tim-chen

Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 3760.00	-55.30	-48.65	-13.00	-6.65	-42.30	Peak


High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

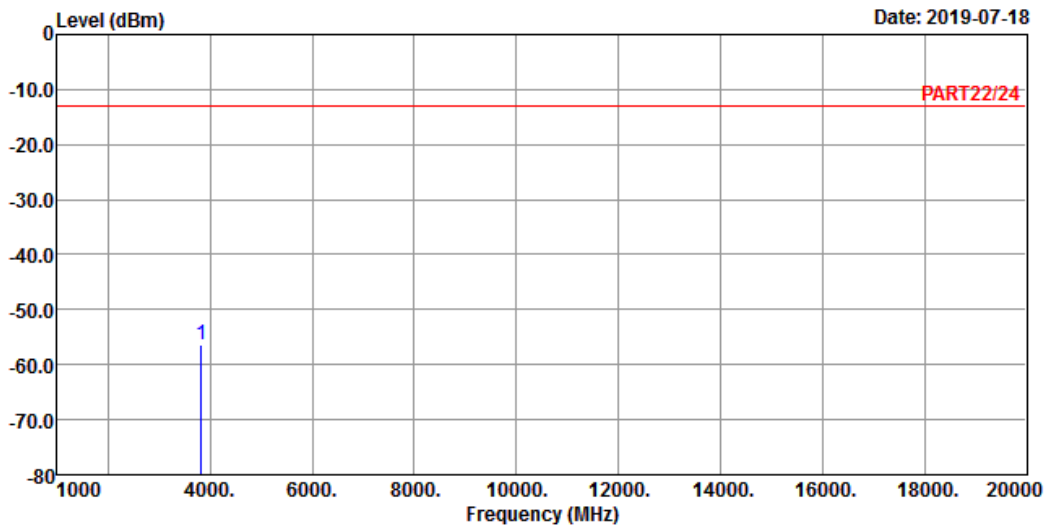

Site : 966 Chamber 5
 Condition: PART22/24 HORIZONTAL
 Remak : LTE Band 2 QPSK_5M Link_H-CH
 Tested by: tim-chen

Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	


1 pp 3815.00 -56.39 -49.99 -13.00 -6.40 -43.39 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

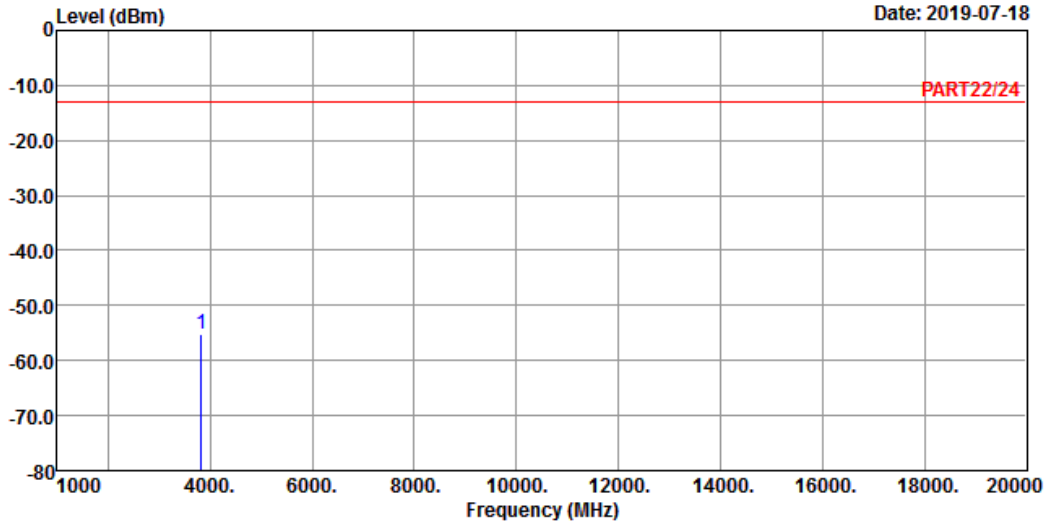

Site : 966 Chamber 5
 Condition: PART22/24 VERTICAL
 Remak : LTE Band 2 QPSK_5M Link_H-CH
 Tested by: tim-chen

Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 3815.00	-55.11	-48.71	-13.00	-6.40	-42.11	Peak


Channel Bandwidth: 20 MHz / QPSK
Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

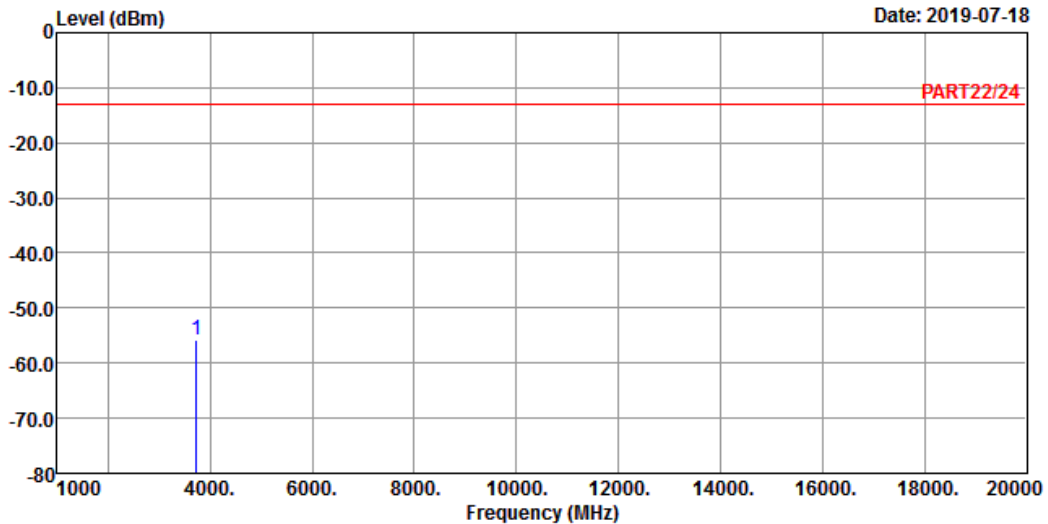

Site : 966 Chamber 5
Condition: PART22/24 HORIZONTAL
Remak : LTE Band 2 QPSK_20M Link_L-CH
Tested by: tim-chen


Freq	Level	Read Level	Limit	Over	Remark
MHz	dBm	dBm	dBm	dB	
1 pp 3720.00	-55.93	-49.11	-13.00	-6.82	-42.93 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

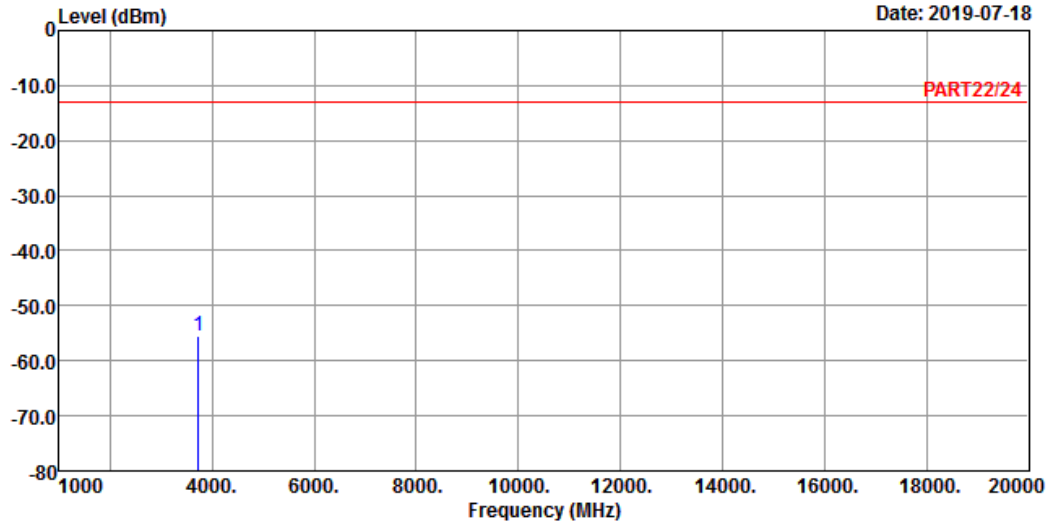

Site : 966 Chamber 5
 Condition: PART22/24 VERTICAL
 Remak : LTE Band 2 QPSK_20M Link_L-CH
 Tested by: tim-chen

Freq	Level	Read Level	Limit	Over	Remark
MHz	dBm	dBm	dBm	dB	dB
1 pp 3720.00	-55.53	-48.71	-13.00	-6.82	-42.53 Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

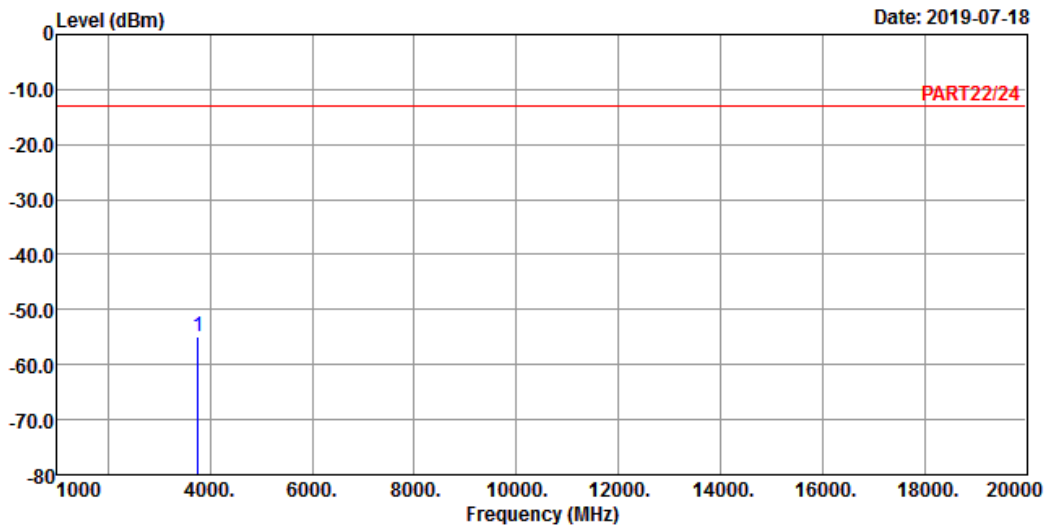

Site : 966 Chamber 5
 Condition: PART22/24 HORIZONTAL
 Remak : LTE Band 2 QPSK_20M Link_M-CH
 Tested by: tim-chen

Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	


1 pp 3760.00 -54.95 -48.30 -13.00 -6.65 -41.95 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

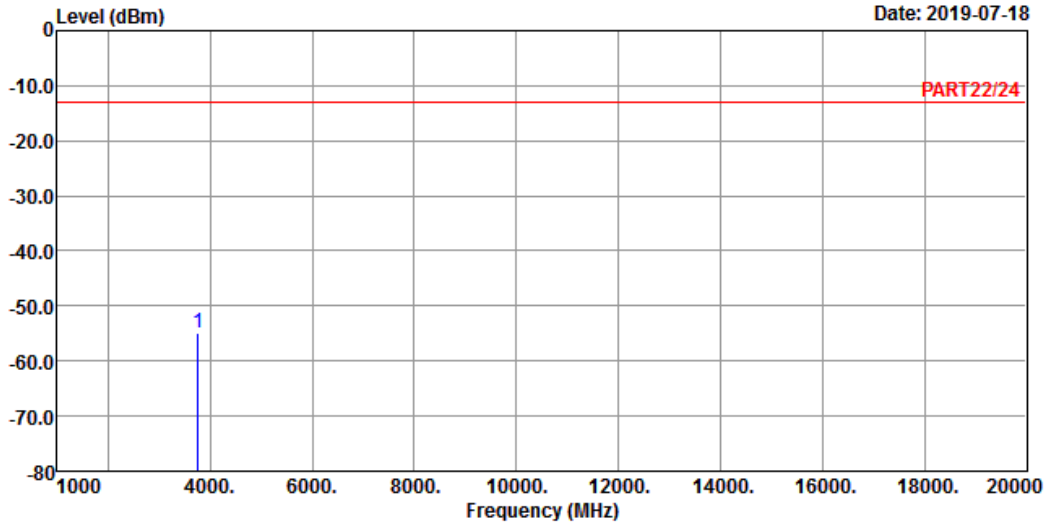

Site : 966 Chamber 5
 Condition: PART22/24 VERTICAL
 Remak : LTE Band 2 QPSK_20M Link_M-CH
 Tested by: tim-chen

Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 3760.00	-54.78	-48.13	-13.00	-6.65	-41.78	Peak

High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 2019-07-18

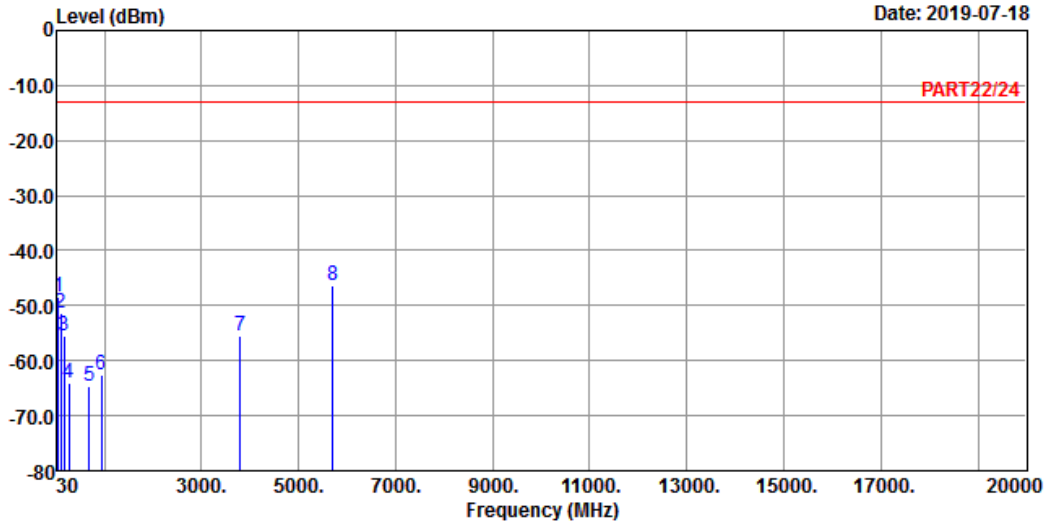

Site : 966 Chamber 5
 Condition: PART22/24 HORIZONTAL
 Remak : LTE Band 2 QPSK_20M Link_H-CH
 Tested by: tim-chen

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	43.58	-48.44	-46.97	-13.00	-1.47	-35.44	Peak
2	104.69	-51.24	-40.80	-13.00	-10.44	-38.24	Peak
3	161.92	-55.56	-50.58	-13.00	-4.98	-42.56	Peak
4	277.35	-63.97	-57.42	-13.00	-6.55	-50.97	Peak
5	685.72	-64.52	-64.19	-13.00	-0.33	-51.52	Peak
6	937.92	-62.53	-64.04	-13.00	1.51	-49.53	Peak
7	3800.00	-55.39	-48.96	-13.00	-6.43	-42.39	Peak
8 pp	5700.00	-46.36	-44.63	-13.00	-1.73	-33.36	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

Date: 2019-07-18

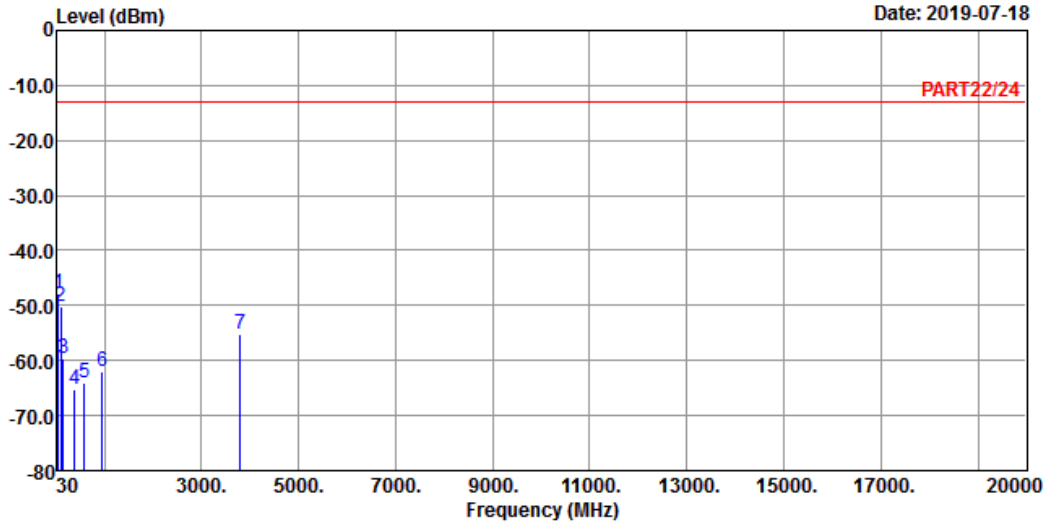

Site : 966 Chamber 5
 Condition: PART22/24 VERTICAL
 Remak : LTE Band 2 QPSK_20M Link_H-CH
 Tested by: tim-chen

	Freq	Level	Read Level	Limit Line	Over Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	43.58	-47.90	-46.43	-13.00	-1.47	-34.90	Peak
2	104.69	-50.09	-39.65	-13.00	-10.44	-37.09	Peak
3	155.13	-59.53	-53.32	-13.00	-6.21	-46.53	Peak
4	386.96	-65.30	-59.28	-13.00	-6.02	-52.30	Peak
5	592.60	-64.02	-62.94	-13.00	-1.08	-51.02	Peak
6	955.38	-61.90	-63.90	-13.00	2.00	-48.90	Peak
7	3800.00	-55.30	-48.87	-13.00	-6.43	-42.30	Peak

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---