

ATTACHMENT O – SAR TEST PLOTS (1 of 3)

TX-215

SAM I Phantom; Left Hand (CRP) Section; Position: (90°,180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1609; ConvF(6.63,6.63,6.63); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.88 \text{ mho/m}$ $\epsilon_r = 42.0$ ρ $= 1.00 \text{ g/cm}^3$

Cube 5x5x7: SAR (1g): 0.240 mW/g, SAR (10g): 0.164 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: 0.06 dB

Comment :

FCC ID: PP4TX-215 / MODEL: TX-215

Company: Hyundai Curitel Inc.


Test Position: Left Touch / Antenna: in

Mode: CDMA / Channel: 1013 (824.70MHz)

Conducted Power : 25.5 dBm

Liquid Temperature : 21.5°C

Date Tested : April 25, 2005

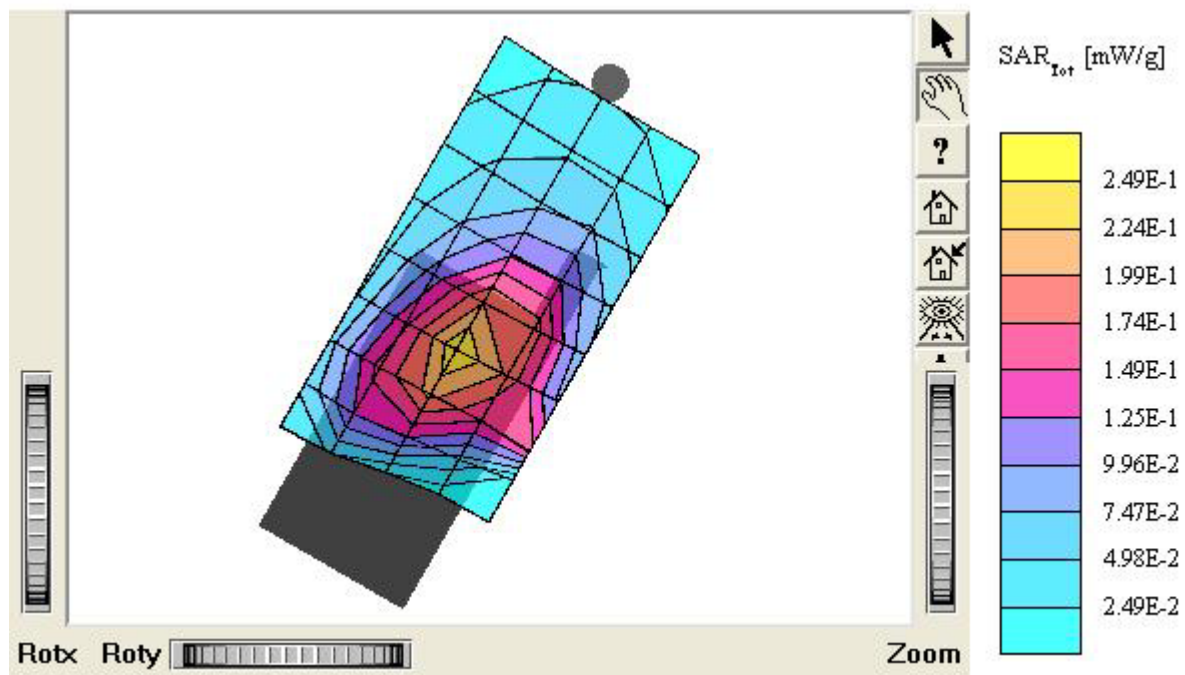

TX-215

SAM I Phantom; Left Hand (CRP) Section; Position: (90°,180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1609; ConvF(6.63,6.63,6.63); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.88$ mho/m $\epsilon_r = 42.0$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 0.294 mW/g, SAR (10g): 0.201 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.11 dB

Comment :

FCC ID: PP4TX-215 / MODEL: TX-215

Company: Hyundai Curitel Inc.


Test Position: Left Touch / Antenna: out

Mode: CDMA / Channel: 1013 (824.70MHz)

Conducted Power : 25.5 dBm

Liquid Temperature : 21.5°C

Date Tested : April 25, 2005

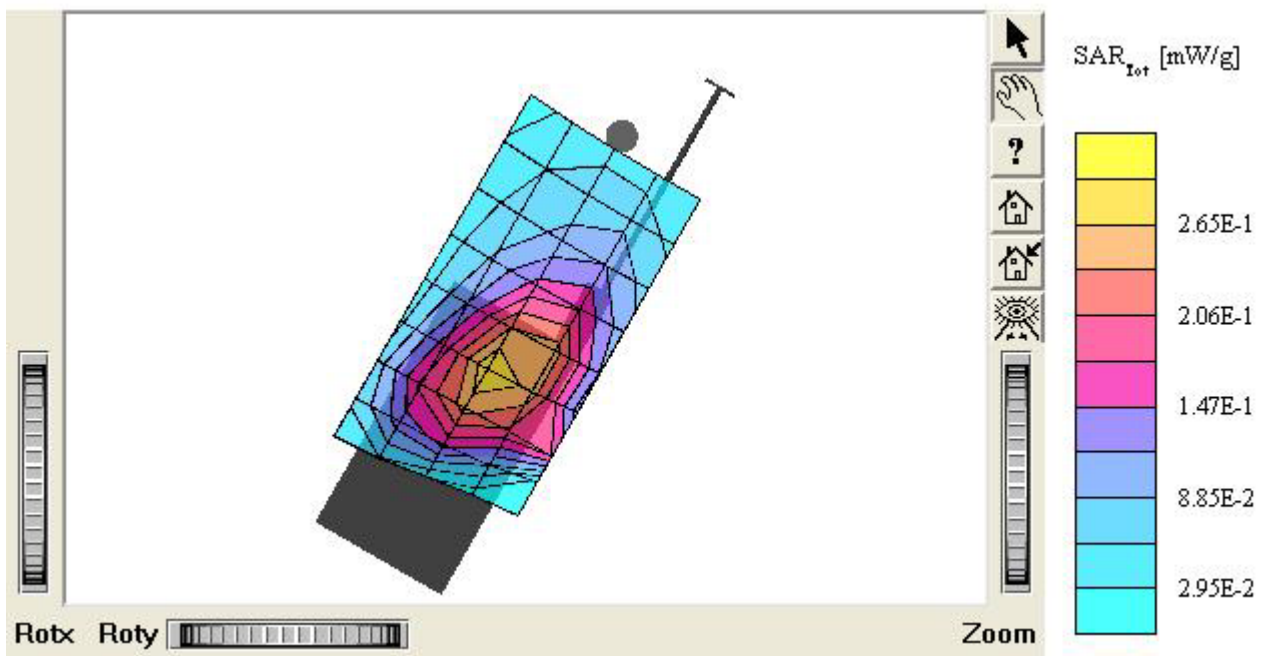

TX-215

SAM I Phantom; Left Hand (CRP) Section; Position: (90°,180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1609; ConvF(6.63,6.63,6.63); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.88 \text{ mho/m}$ $\epsilon_r = 42.0$ $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: SAR (1g): 0.422 mW/g, SAR (10g): 0.287 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.03 dB

Comment :

FCC ID: PP4TX-215 / MODEL: TX-215

Company: Hyundai Curitel Inc.


Test Position: Left Touch / Antenna: in

Mode: CDMA / Channel: 363 (833.89MHz)

Conducted Power : 25.5 dBm

Liquid Temperature : 21.5°C

Date Tested : April 25, 2005

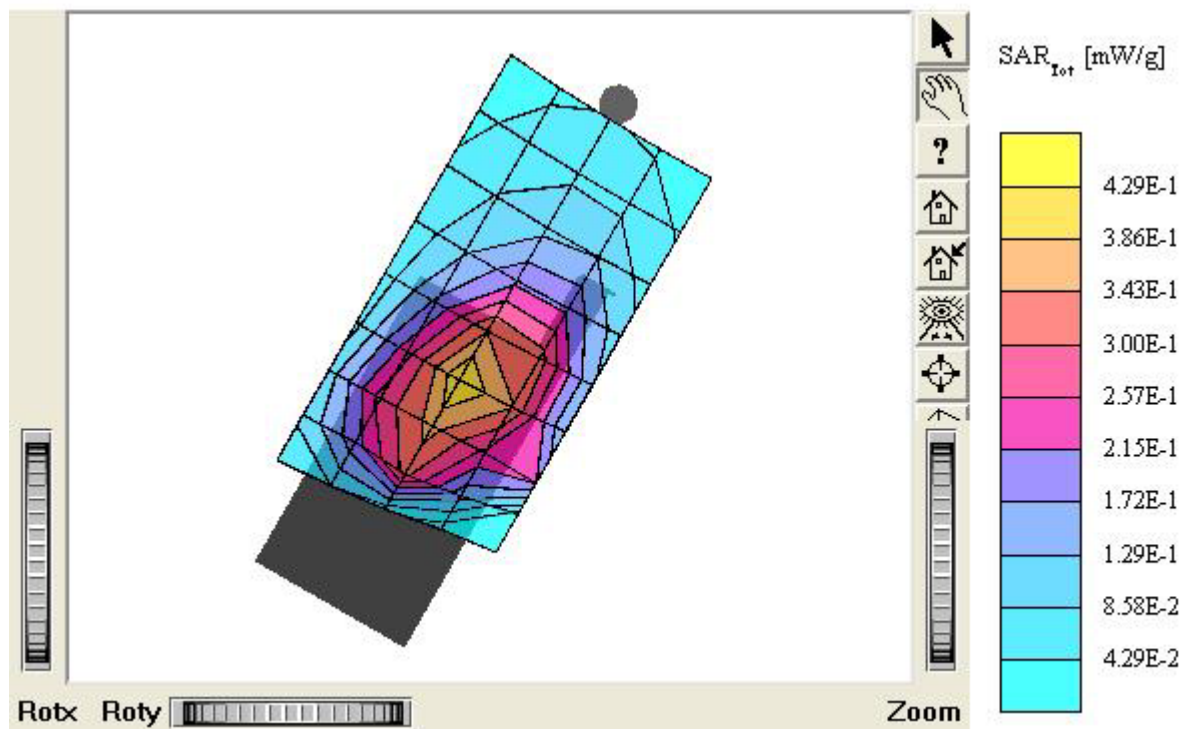

TX-215

SAM I Phantom; Left Hand (CRP) Section; Position: (90°,180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1609; ConvF(6.63,6.63,6.63); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.88 \text{ mho/m}$, $\epsilon_r = 42.0$, $\rho =$

1.00 g/cm^3

Cube 5x5x7: SAR (1g): 0.564 mW/g, SAR (10g): 0.384 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.06 dB

Comment :

FCC ID: PP4TX-215 / MODEL: TX-215

Company: Hyundai Curitel Inc.


Test Position: Left Touch / Antenna: out

Mode: CDMA / Channel: 363 (833.89MHz)

Conducted Power : 25.5 dBm

Liquid Temperature : 21.5°C

Date Tested : April 25, 2005

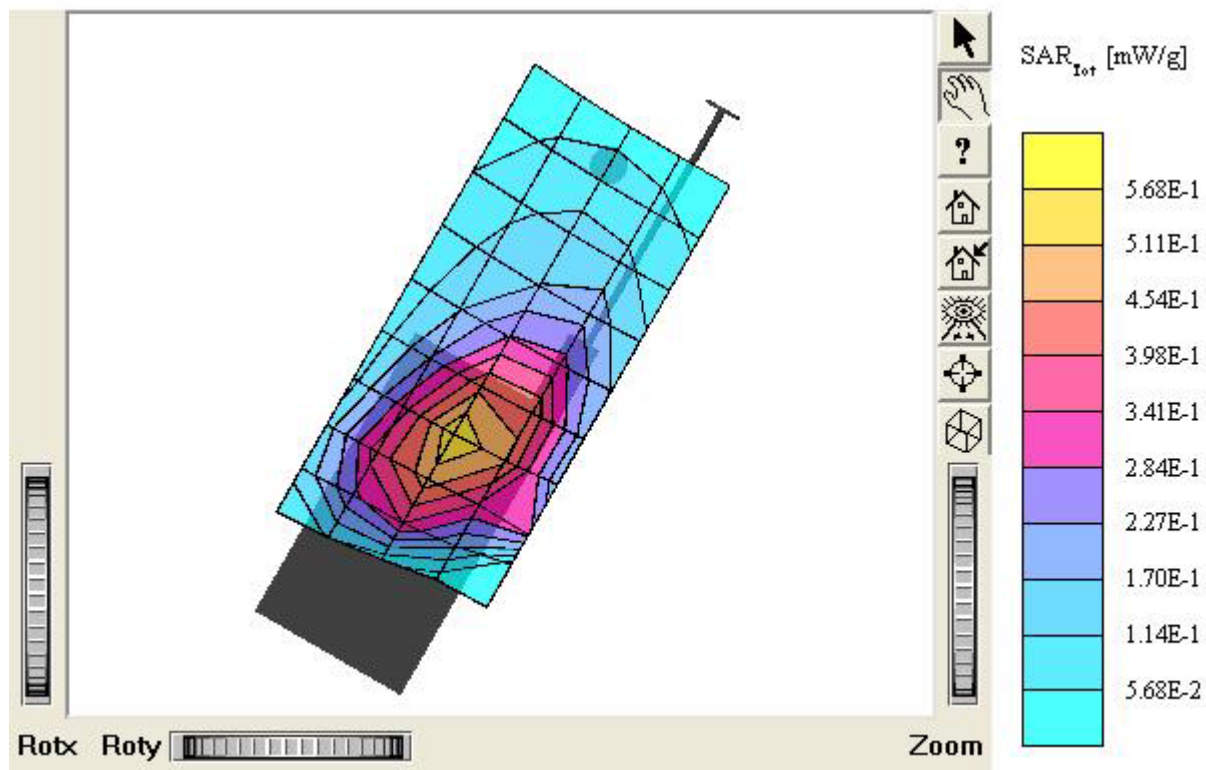

TX-215

SAM I Phantom; Left Hand (CRP) Section; Position: (90°,180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1609; ConvF(6.63,6.63,6.63); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.88$ mho/m $\epsilon_r = 42.0$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 0.242 mW/g, SAR (10g): 0.165 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: 0.07 dB

Comment :

FCC ID: PP4TX-215 / MODEL: TX-215

Company: Hyundai Curitel Inc.


Test Position: Left Touch / Antenna: in

Mode: CDMA / Channel: 777 (848.31MHz)

Conducted Power : 25.5 dBm

Liquid Temperature : 21.5°C

Date Tested : April 25, 2005

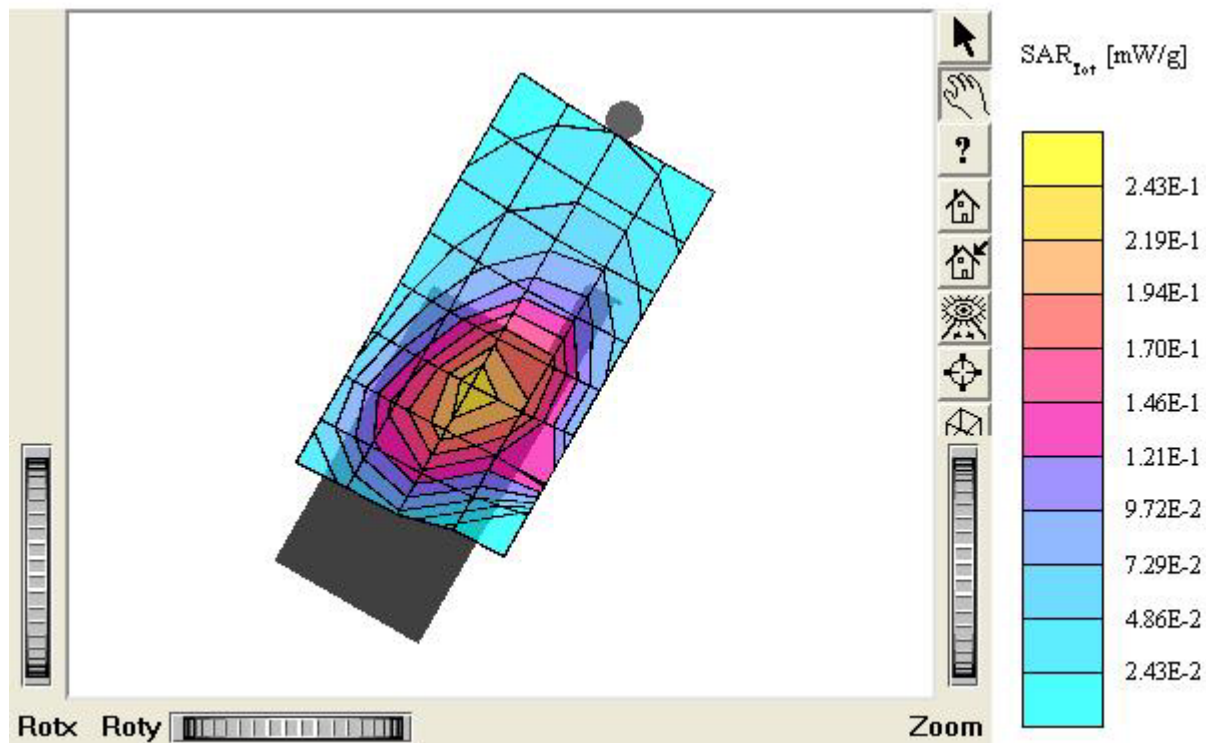

TX-215

SAM I Phantom; Left Hand (CRP) Section; Position: (90°,180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1609; ConvF(6.63,6.63,6.63); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.88$ mho/m $\epsilon_r = 42.0$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 0.320 mW/g, SAR (10g): 0.218 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: 0.00 dB

Comment :

FCC ID: PP4TX-215 / MODEL: TX-215

Company: Hyundai Curitel Inc.


Test Position: Left Touch / Antenna: out

Mode: CDMA / Channel: 777 (848.31MHz)

Conducted Power : 25.5 dBm

Liquid Temperature : 21.5°C

Date Tested : April 25, 2005

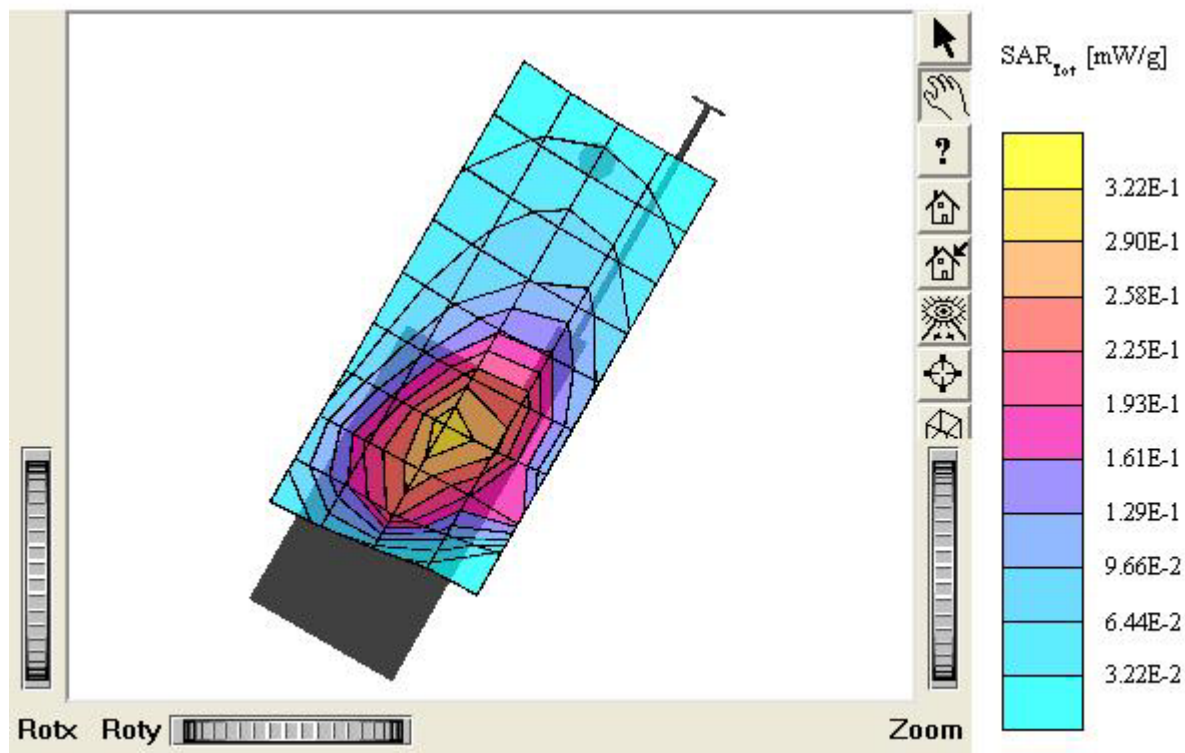

TX-215

SAM I Phantom; Right Hand (CRP) Section; Position: (90°,180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1609; ConvF(6.63,6.63,6.63); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.88$ mho/m $\epsilon_r = 42.0$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 0.266 mW/g, SAR (10g): 0.179 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: 0.00 dB

Comment :

FCC ID: PP4TX-215 / MODEL: TX-215

Company: Hyundai Curitel Inc.


Test Position: Right Touch / Antenna: in

Mode: CDMA / Channel: 1013 (824.70MHz)

Conducted Power : 25.5 dBm

Liquid Temperature : 21.5°C

Date Tested : April 25, 2005

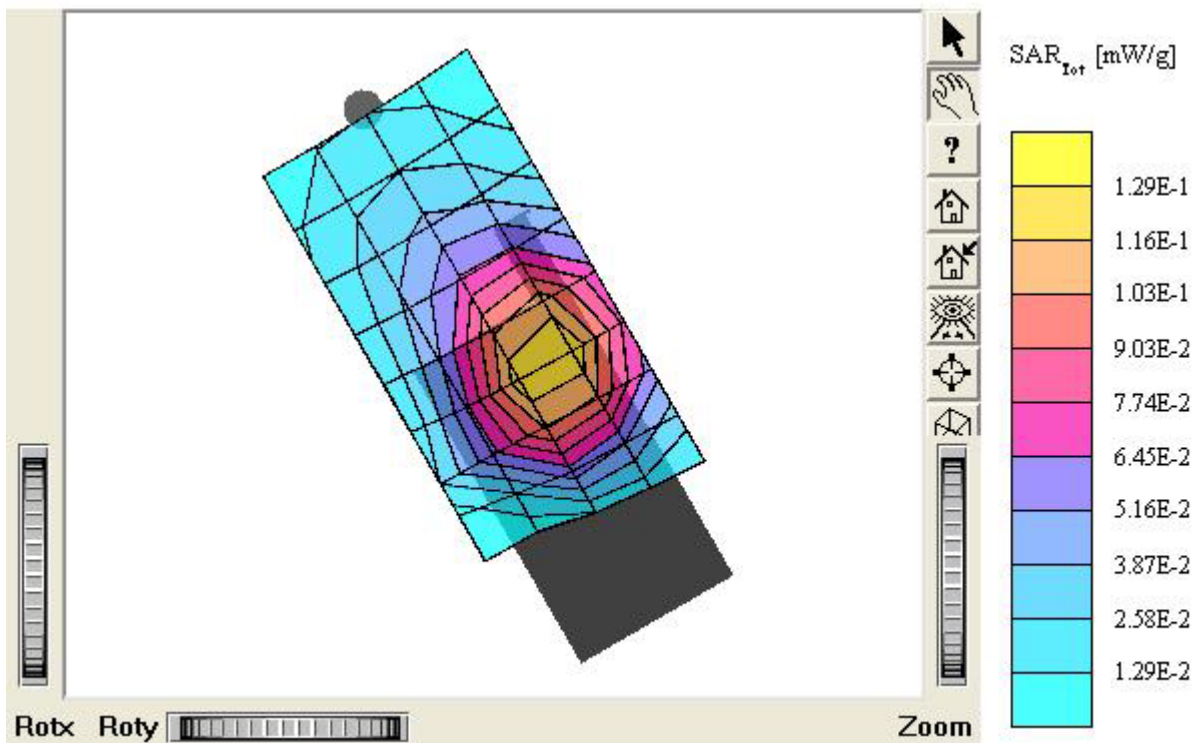

TX-215

SAM I Phantom; Right Hand (CRP) Section; Position: (90°,180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1609; ConvF(6.63,6.63,6.63); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.88 \text{ mho/m}$ $\epsilon_r = 42.0$ $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: SAR(1g): 0.322 mW/g, SAR(10g): 0.216 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: 0.03 dB

Comment :

FCC ID: PP4TX-215 / MODEL: TX-215

Company: Hyundai Curitel Inc.


Test Position: Right Touch / Antenna: out

Mode: CDMA / Channel: 1013 (824.70MHz)

Conducted Power : 25.5 dBm

Liquid Temperature : 21.5°C

Date Tested : April 25, 2005

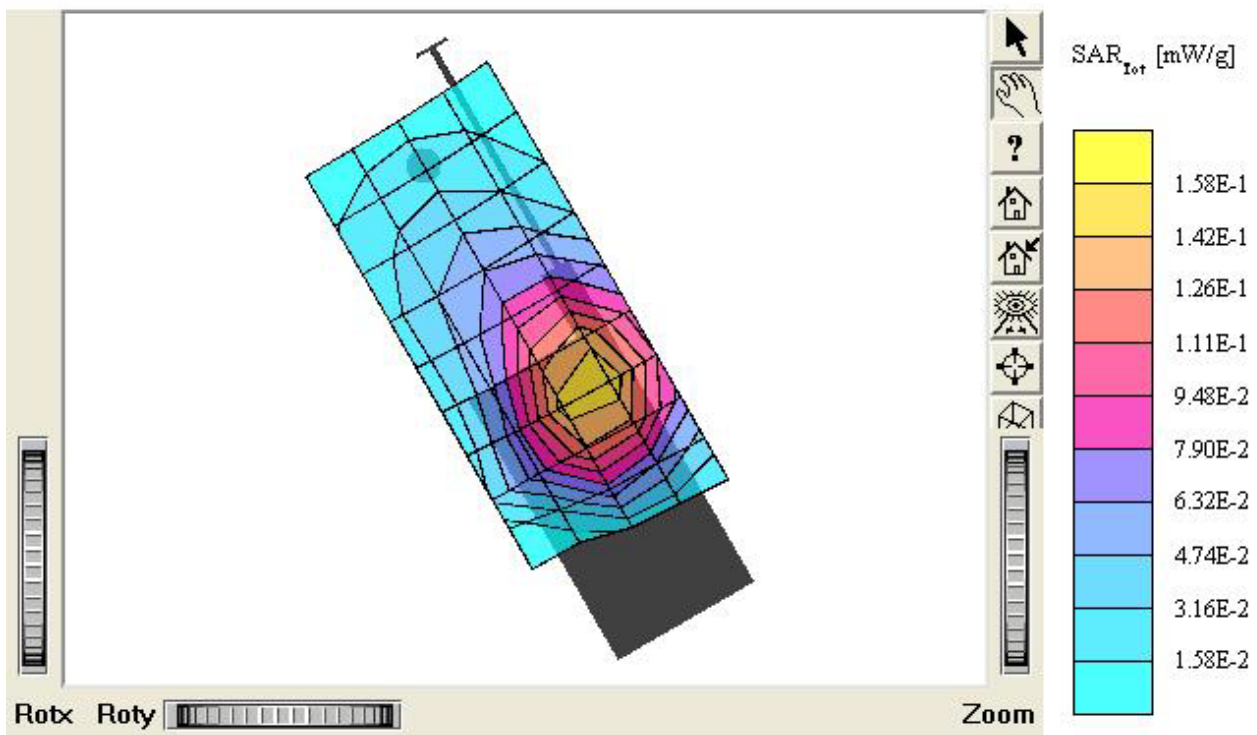

TX-215

SAM I Phantom; Right Hand (CRP) Section; Position: (90°, 180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1609; ConvF(6.63,6.63,6.63); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.88$ mho/m $\epsilon_r = 42.0$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 0.456 mW/g, SAR (10g): 0.305 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.08 dB

Comment :

FCC ID: PP4TX-215 / MODEL: TX-215

Company: Hyundai Curitel Inc.


Test Position: Right Touch / Antenna: in

Mode: CDMA / Channel: 363 (833.89MHz)

Conducted Power : 25.5 dBm

Liquid Temperature : 21.5°C

Date Tested : April 25, 2005

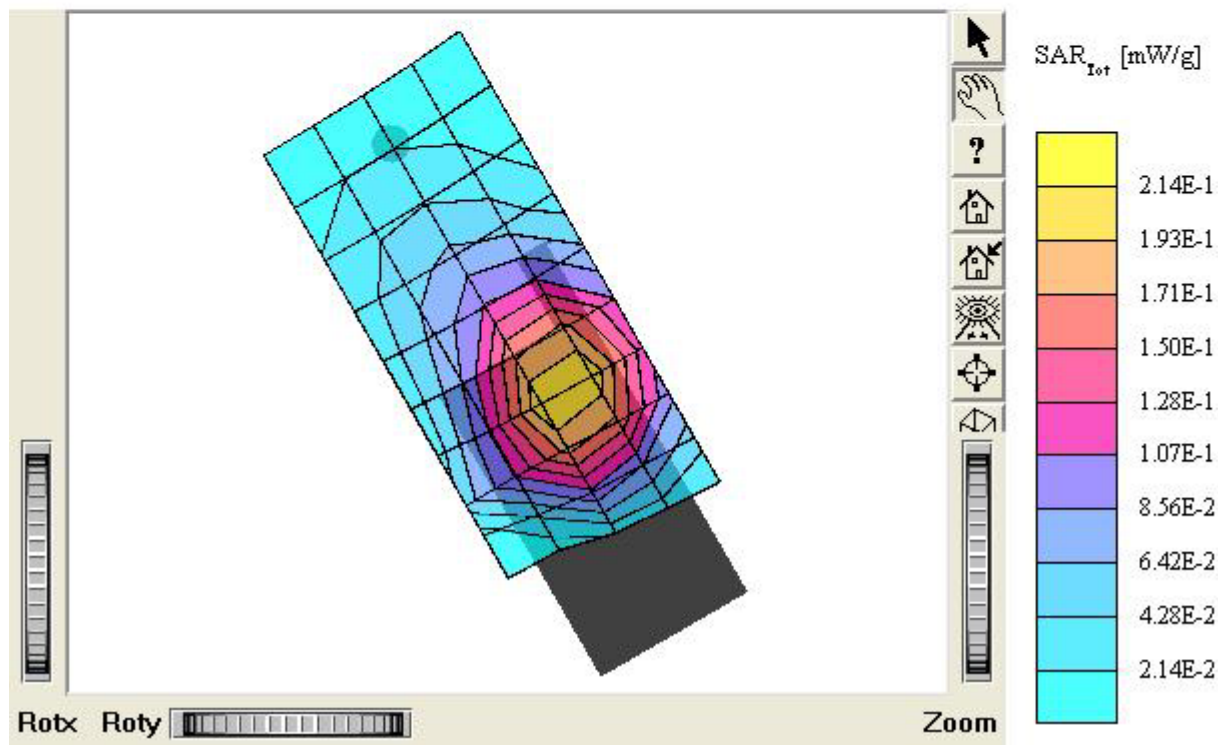

TX-215

SAM I Phantom; Right Hand (CRP) Section; Position: (90°,180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1609; ConvF(6.63,6.63,6.63); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.88$ mho/m $\epsilon_r = 42.0$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 0.599 mW/g, SAR (10g): 0.403 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.02 dB

Comment :

FCC ID: PP4TX-215 / MODEL: TX-215

Company: Hyundai Curitel Inc.


Test Position: Right Touch / Antenna: out

Mode: CDMA / Channel: 363 (833.89MHz)

Conducted Power : 25.5 dBm

Liquid Temperature : 21.5°C

Date Tested : April 25, 2005

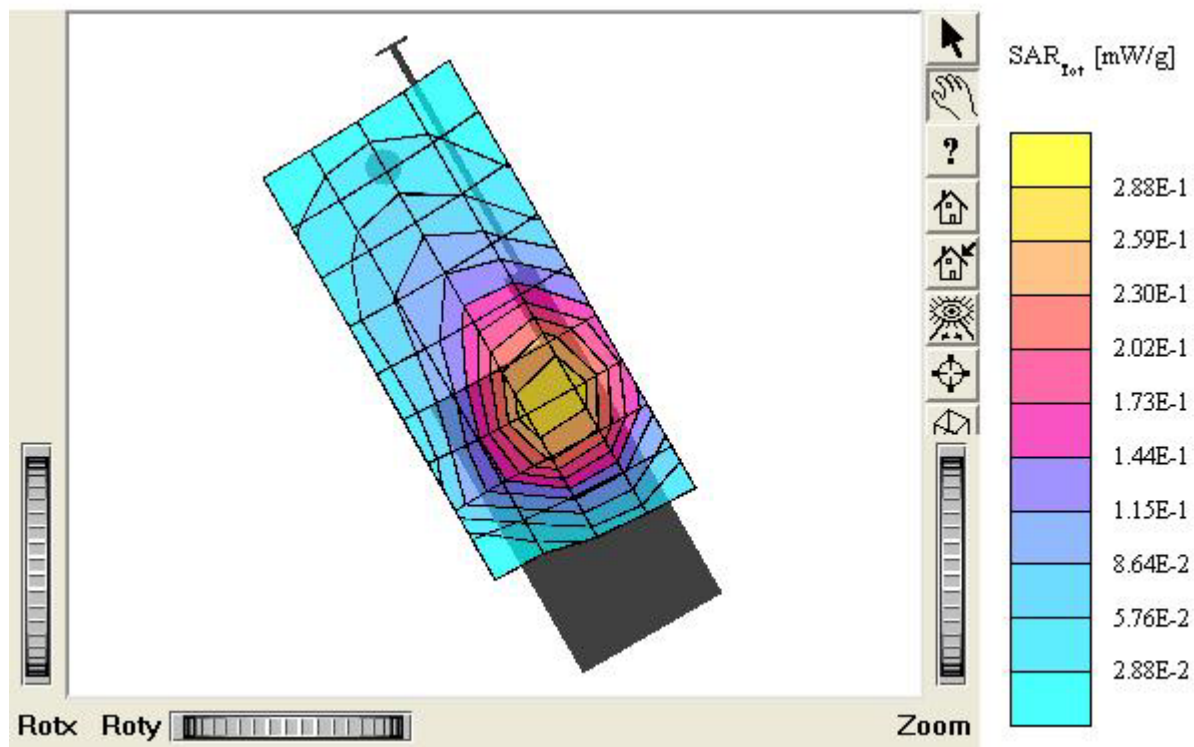

TX-215

SAM I Phantom; Right Hand (CRP) Section; Position: (90°,180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1609; ConvF(6.63,6.63,6.63); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.88 \text{ mho/m}$ $\epsilon_r = 42.0$ $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: SAR (1g): 0.585 mW/g, SAR (10g): 0.392 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.11 dB

Comment :

FCC ID: PP4TX-215 / MODEL: TX-215 (E-battery)

Company: Hyundai Curitel Inc.


Test Position: Right Touch / Antenna: out

Mode: CDMA / Channel: 363 (833.89MHz)

Conducted Power : 25.5 dBm

Liquid Temperature : 21.5°C

Date Tested : April 25, 2005

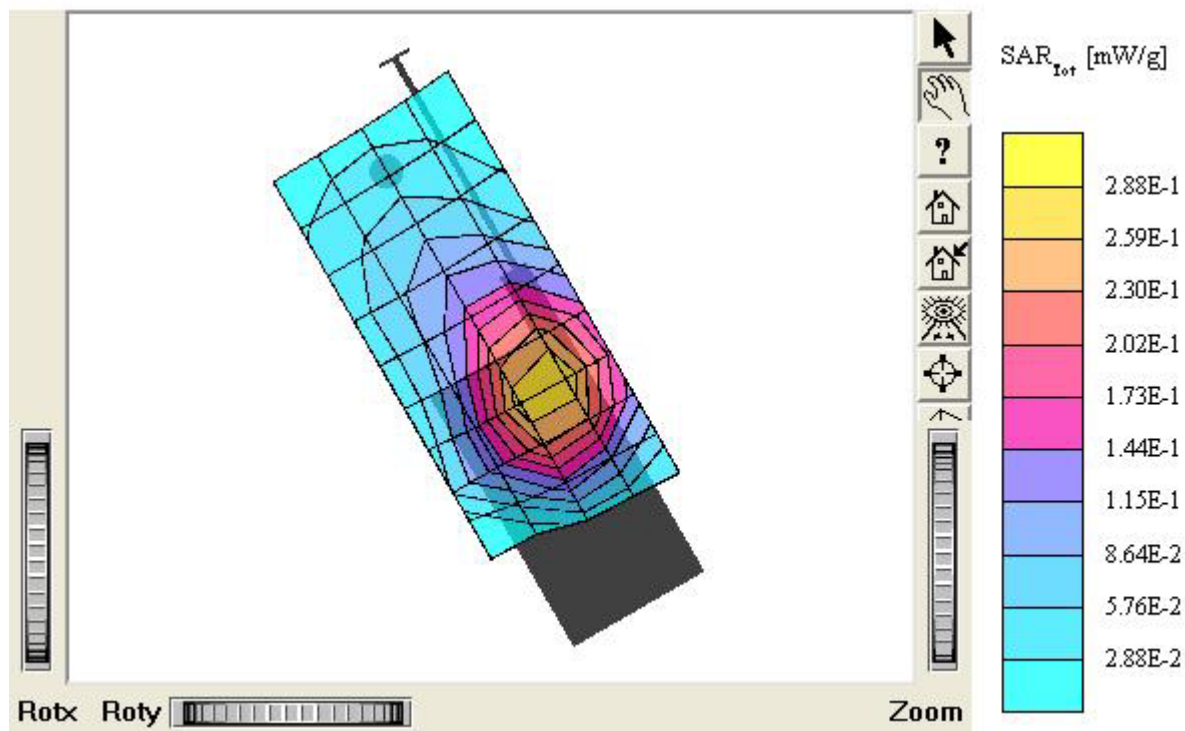

TX-215

SAM I Phantom; Right Hand (CRP) Section; Position: (90°,180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1609; ConvF(6.63,6.63,6.63); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.88 \text{ mho/m}$ $\epsilon_r = 42.0$ $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: SAR (1g): 0.295 mW/g, SAR (10g): 0.197 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: 0.20 dB

Comment :

FCC ID: PP4TX-215 / MODEL: TX-215

Company: Hyundai Curitel Inc.


Test Position: Right Touch / Antenna: in

Mode: CDMA / Channel: 777 (848.31MHz)

Conducted Power : 25.5 dBm

Liquid Temperature : 21.5°C

Date Tested : April 25, 2005

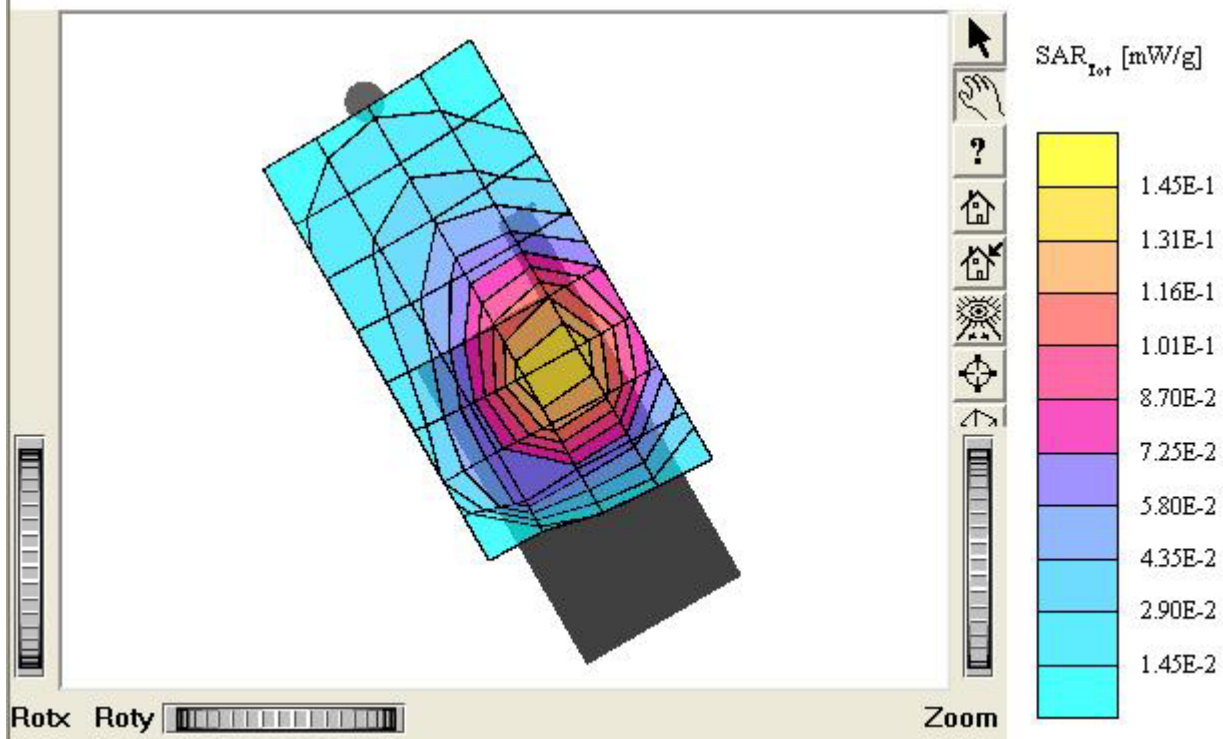

TX-215

SAM I Phantom; Right Hand (CRP) Section; Position: (90°,180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1609; ConvF(6.63,6.63,6.63); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.88 \text{ mho/m}$, $\epsilon_r = 42.0$, $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: SAR (1g): 0.414 mW/g, SAR (10g): 0.278 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.03 dB

Comment :

FCC ID: PP4TX-215 / MODEL: TX-215

Company: Hyundai Curitel Inc.


Test Position: Right Touch / Antenna: out

Mode: CDMA / Channel: 777 (848.31MHz)

Conducted Power : 25.5 dBm

Liquid Temperature : 21.5°C

Date Tested : April 25, 2005

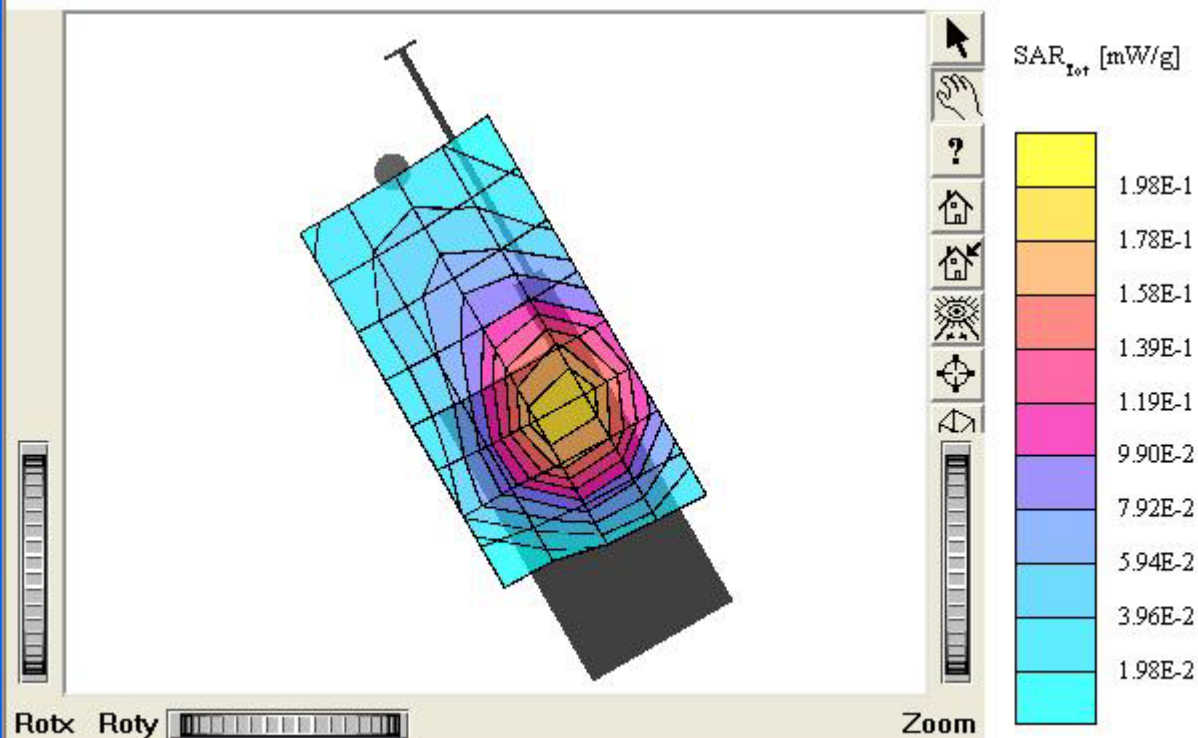

TX-215

SAM I Phantom; Left Hand (CRP) Section; Position: (90°,180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1609; ConvF(6.63,6.63,6.63); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.88 \text{ mho/m}$, $\epsilon_r = 42.0$, $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: SAR (1g): 0.117 mW/g, SAR (10g): 0.0851 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.12 dB

Comment :

FCC ID: PP4TX-215 / MODEL: TX-215

Company: Hyundai Curitel Inc.


Test Position: Left Tilt 15° / Antenna: in

Mode: CDMA / Channel: 363 (833.89MHz)

Conducted Power : 25.5 dBm

Liquid Temperature : 21.5°C

Date Tested : April 25, 2005

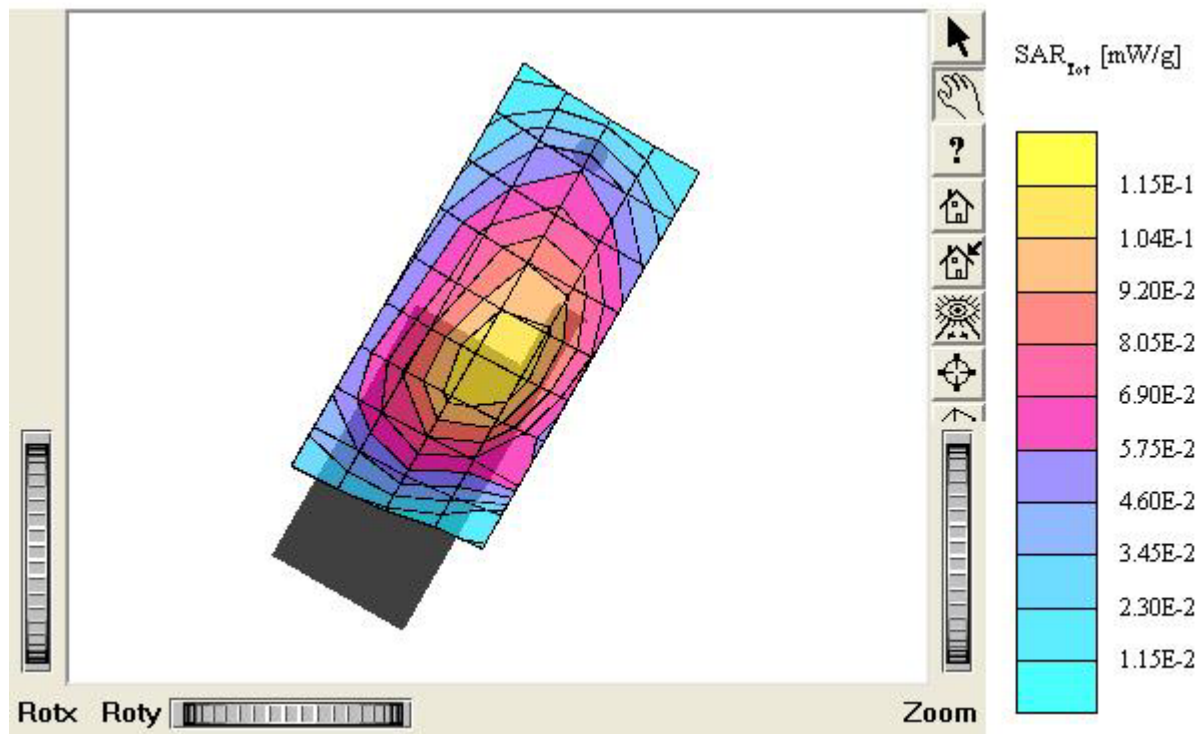

TX-215

SAM I Phantom; Left Hand (CRP) Section; Position: (90°,180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1609; ConvF(6.63,6.63,6.63); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.88 \text{ mho/m}$, $\epsilon_r = 42.0$, $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: SAR(1g): 0.161 mW/g, SAR(10g): 0.117 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.05 dB

Comment :

FCC ID: PP4TX-215 / MODEL: TX-215

Company: Hyundai Curitel Inc.


Test Position: Left Tilt 15° / Antenna: out

Mode: CDMA / Channel: 363 (833.89MHz)

Conducted Power : 25.5 dBm

Liquid Temperature : 21.5°C

Date Tested : April 25, 2005

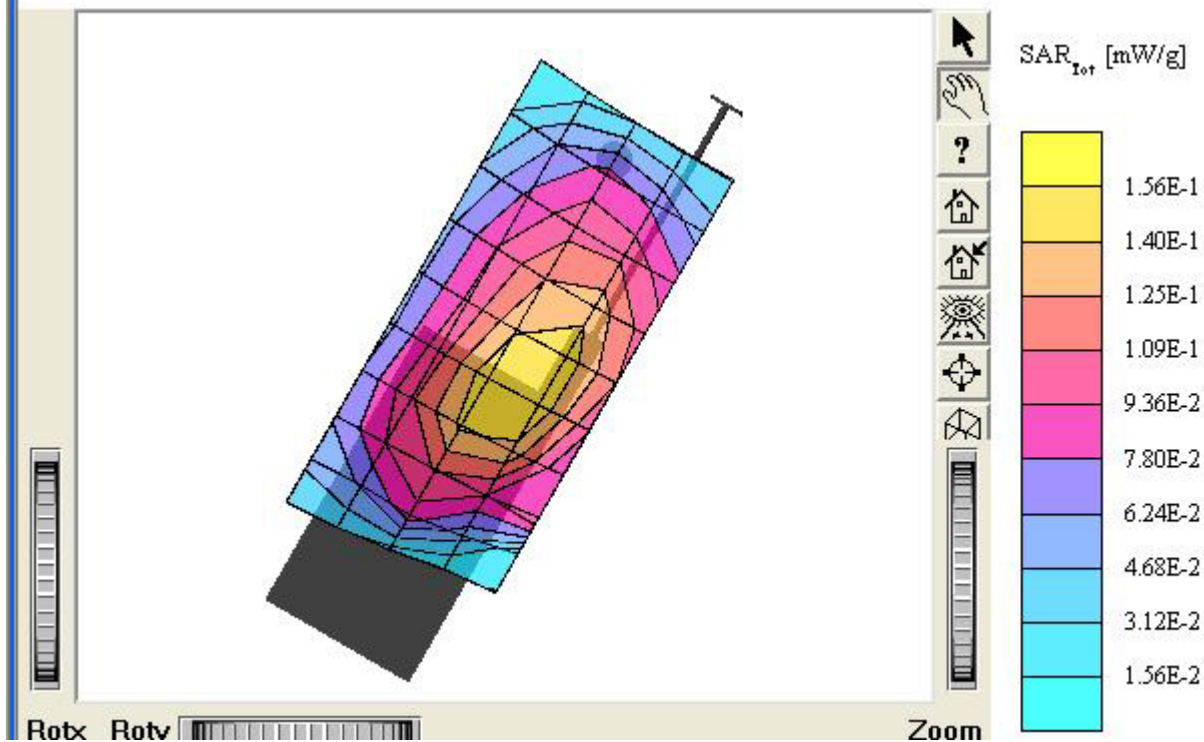

TX-215

SAM I Phantom; Right Hand (CRP) Section; Position: (90°,180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1609; ConvF(6.63,6.63,6.63); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.88$ mho/m $\epsilon_r = 42.0$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 0.134 mW/g, SAR (10g): 0.0975 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.03 dB

Comment :

FCC ID: PP4TX-215 / MODEL: TX-215

Company: Hyundai Curitel Inc.


Test Position: Right Tilt 15° / Antenna: in

Mode: CDMA / Channel: 363 (833.89MHz)

Conducted Power : 25.5 dBm

Liquid Temperature : 21.5°C

Date Tested : April 25, 2005

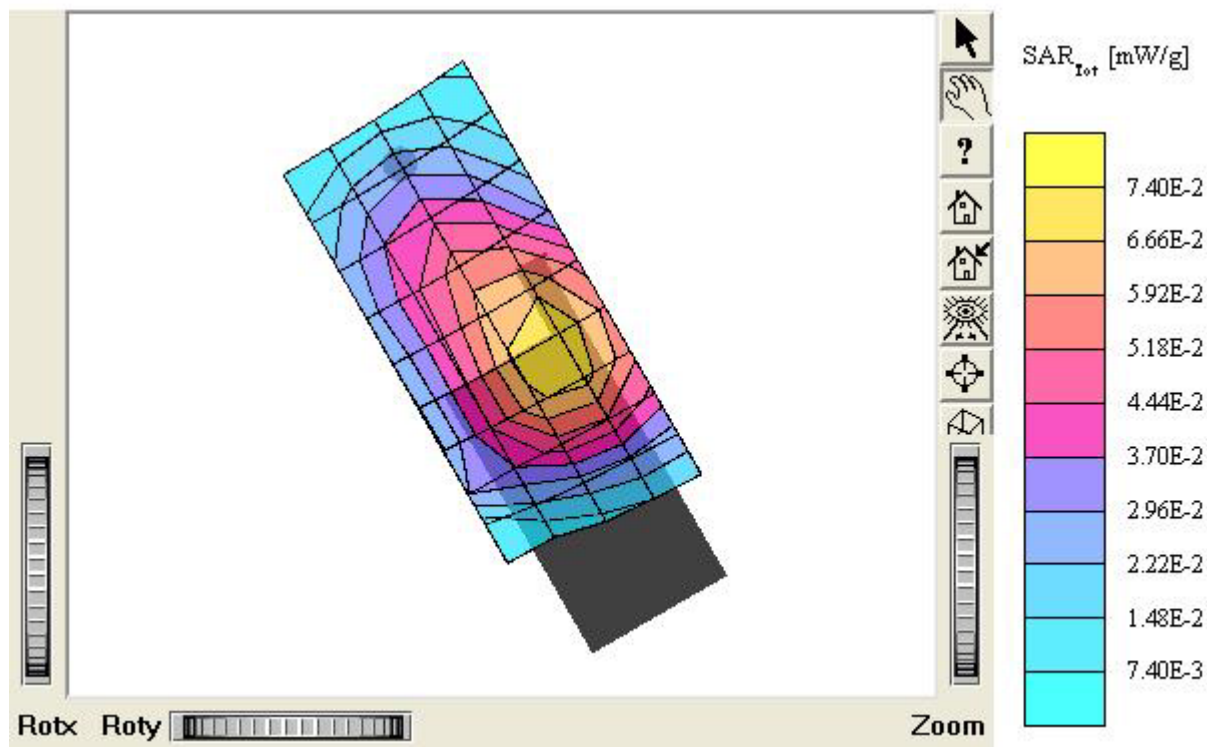

TX-215

SAM I Phantom; Right Hand (CRP) Section; Position: (90°, 180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1609; ConvF(6.63,6.63,6.63); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.88$ mho/m $\epsilon_r = 42.0$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 0.184 mW/g, SAR (10g): 0.134 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: 0.03 dB

Comment :

FCC ID: PP4TX-215 / MODEL: TX-215

Company: Hyundai Curitel Inc.

Test Position: Right Tilt 15° / Antenna: out

Mode: CDMA / Channel: 363 (833.89MHz)

Conducted Power : 25.5 dBm

Liquid Temperature : 21.5°C

Date Tested : April 25, 2005

