

## SAR Compliance Test Report

<b>Test report no.:</b>	FCC_RM-509_05	<b>Date of report:</b>	2010-02-23
<b>Template version:</b>	14.0	<b>Number of pages:</b>	28
<b>Testing laboratory:</b>	TCC Nokia Salo Laboratory P.O.Box 86 Joensuunkatu 7H / Kiila 1B FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 45220	<b>Client:</b>	Nokia Corporation Lise Meitner Strasse 10 89081 ULM GERMANY Tel. +49 731 1754 0 Fax. +49 731 1754 6800
<b>Responsible test engineer:</b>	Virpi Tuominen	<b>Product contact person:</b>	Ralph Schwarz
<b>Measurements made by:</b>	Alina Tähkäpää		
<b>Tested device:</b>	RM-509		
<b>FCC ID:</b>	PPIRM-509H	<b>IC:</b>	661U-RM509
<b>Supplement reports:</b>	FCC_RM-509_03 for RM-509 / FCC ID: PPIRM-509 / IC: 661U-RM509, SAR_Photo_RM-509_08		
<b>Testing has been carried out in accordance with:</b>	<p><b>47CFR §2.1093</b> Radiofrequency Radiation Exposure Evaluation: Portable Devices <b>FCC OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01)</b> Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields</p> <p><b>RSS-102</b> Evaluation Procedure for Mobile and Portable Radio Transmitters with Respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields</p> <p><b>IEEE 1528 - 2003</b> IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Technique</p>		
<b>Documentation:</b>	The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
<b>Test results:</b>	<p><b>The tested device complies with the requirements in respect of all parameters subject to the test.</b> The test results and statements relate only to the items tested. The test report shall not be reproduced except in full, without written approval of the laboratory.</p>		
<b>Date and signatures:</b>			
<b>For the contents:</b>			

## CONTENTS

<b>1. SUMMARY OF SAR TEST REPORT.....</b>	<b>3</b>
1.1 TEST DETAILS.....	3
1.2 MAXIMUM RESULTS.....	3
1.2.1 <i>Head Configuration</i> .....	3
1.2.2 <i>Body Worn Configuration</i> .....	3
1.2.3 <i>Maximum Drift</i> .....	4
1.2.4 <i>Measurement Uncertainty</i> .....	4
<b>2. DESCRIPTION OF THE DEVICE UNDER TEST.....</b>	<b>4</b>
2.1 DESCRIPTION OF THE ANTENNA.....	4
<b>3. TEST CONDITIONS .....</b>	<b>4</b>
3.1 TEMPERATURE AND HUMIDITY.....	4
3.2 TEST SIGNAL, FREQUENCIES AND OUTPUT POWER.....	5
3.3 TEST CASES AND TEST MINIMISATION .....	5
<b>4. DESCRIPTION OF THE TEST EQUIPMENT .....</b>	<b>7</b>
4.1 MEASUREMENT SYSTEM AND COMPONENTS .....	7
4.1.1 <i>Isotropic E-field Probe Type ES3DV3</i> .....	8
4.2 PHANTOMS .....	8
4.3 TISSUE SIMULANTS .....	9
4.3.1 <i>Tissue Simulant Recipes</i> .....	9
4.3.2 <i>System Checking</i> .....	9
4.3.3 <i>Tissue Simulants used in the Measurements</i> .....	10
<b>5. DESCRIPTION OF THE TEST PROCEDURE .....</b>	<b>10</b>
5.1 DEVICE HOLDER.....	10
5.2 TEST POSITIONS.....	11
5.2.1 <i>Against Phantom Head</i> .....	11
5.2.2 <i>Body Worn Configuration</i> .....	11
5.3 SCAN PROCEDURES.....	11
5.4 SAR AVERAGING METHODS.....	12
<b>6. MEASUREMENT UNCERTAINTY.....</b>	<b>13</b>
<b>7. RESULTS .....</b>	<b>14</b>
<b>APPENDIX A: SYSTEM CHECKING SCANS.....</b>	<b>15</b>
<b>APPENDIX B: MEASUREMENT SCANS.....</b>	<b>17</b>
<b>APPENDIX C: RELEVANT PAGES FROM PROBE CALIBRATION REPORT(S) .....</b>	<b>27</b>
<b>APPENDIX D: RELEVANT PAGES FROM DIPOLE VALIDATION KIT REPORT(S) .....</b>	<b>28</b>

## 1. SUMMARY OF SAR TEST REPORT

### 1.1 Test Details

Period of test	2010-02-18 to 2010-02-19
SN, HW and SW numbers of tested device	SN: 356934/03/000586/2, HW: 0650, SW: 4.18, DUT: 14453
Batteries used in testing	BL-4S Sony, DUT: 14006. 14455 BL-4S Sanyo, DUT: 14456
Headsets used in testing	HS-105, DUT: 14009
Other accessories used in testing	-
State of sample	Prototype unit
Notes	-

### 1.2 Maximum Results

The maximum measured SAR values for Head configuration and Body Worn configuration are given in section 1.2.1 and 1.2.2 respectively. The device conforms to the requirements of the standard(s) when the maximum measured SAR value is less than or equal to the limit.

#### 1.2.1 Head Configuration

Mode	Ch / f (MHz)	Conducted power	Position	Measured SAR value (1g avg)	Scaled* SAR value (1g avg)	SAR limit (1g avg)	Result
GSM850**	251 / 848.8	32.5 dBm	Left, Cheek	0.450 W/kg	0.50 W/kg	1.6 W/kg	PASSED
WCDMA1700/2100	1312 / 1712.4	23.0 dBm	Right, Cheek	0.846 W/kg	0.95 W/kg	1.6 W/kg	PASSED
3-slot GPRS1900**	512 / 1850.2	25.7 dBm	Left, Cheek	0.855 W/kg	0.96 W/kg	1.6 W/kg	PASSED

#### 1.2.2 Body Worn Configuration

Mode	Ch / f (MHz)	Conducted power	Separation distance	Measured SAR value (1g avg)	Scaled* SAR value (1g avg)	SAR limit (1g avg)	Result
GSM850**	251 / 848.8	32.5 dBm	1.5 cm	0.420 W/kg	0.47 W/kg	1.6 W/kg	PASSED
WCDMA1700/2100	1312 / 1712.4	23.0 dBm	1.5 cm	0.439 W/kg	0.49 W/kg	1.6 W/kg	PASSED
3-slot GPRS1900**	810 / 1909.8	25.7 dBm	1.5 cm	0.354 W/kg	0.40 W/kg	1.6 W/kg	PASSED

\* SAR values are scaled up by 12% to cover measurement drift. As a consequence of this upwards correction of the SAR values, the contribution of measurement drift to the overall measurement uncertainty (Section 6) is reduced to zero.

\*\*SAR data taken from FCC\_RM-509\_03 / FCC ID: PPIRM-509 / IC: 661U-RM509.

### 1.2.3 Maximum Drift

Maximum drift covered by 12% scaling up of the SAR values	Maximum drift during measurements
0.5dB	0.49 dB

### 1.2.4 Measurement Uncertainty

Expanded Uncertainty (k=2) 95%	± 25.8%
--------------------------------	---------

## 2. DESCRIPTION OF THE DEVICE UNDER TEST

Device category	Portable
Exposure environment	General population / uncontrolled

Modes of Operation	Bands	Modulation Mode	Duty Cycle	Transmitter Frequency Range (MHz)
GSM	850 1900	GMSK	1/8	824 – 849 1850 – 1910
GPRS	850 1900	GMSK	1/8 to 3/8	824 – 849 1850 – 1910
EGPRS	850 1900	GMSK / 8PSK	1/8 to 3/8	824 – 849 1850 – 1910
WCDMA	1700/2100 (Band IV)		1	1712 – 1753
BT	2450	GFSK	1	2402 – 2480

Outside of USA and Canada, the transmitter of the device is capable of operating also in GSM/GPRS/EGPRS900, GSM/GPRS/EGPRS1800, WCDMA900 and WCDMA2100 bands which are not part of this filing.

### 2.1 Description of the Antenna

The device has an internal antenna for cellular use. The cellular antenna is located at the bottom in the back section of the keypad flip.

## 3. TEST CONDITIONS

### 3.1 Temperature and Humidity

Ambient temperature (°C):	20.4 to 21.6
Ambient humidity (RH %):	39 to 49

### 3.2 Test Signal, Frequencies and Output Power

The device was put into operation by using a call tester. Communication between the device and the call tester was established by air link.

The device output power was set to maximum power level for all tests; a fully charged battery was used for every test sequence.

The transmission mode of the device in all WCDMA tests was configured to 12.2kbps RMC with all TPC bits set as "1".

In all operating bands the measurements were performed on lowest, middle and highest channels.

The radiated output power of the device was measured by a separate test laboratory on the same unit(s) as used for SAR testing. The results are given in the EMC report supporting this application.

Some of the SAR results given in this report are duplicated from the earlier report FCC\_RM-509\_03 for RM-509 / FCC ID: PPIRM-509 / IC: 661U-RM509.

### 3.3 Test Cases and Test Minimisation

The tested device examined in this report may not incorporate all of the features described in the text that follows, but its SAR evaluation will have been subjected to the same considerations and test logic described below.

Whilst it's possible to identify the maximum SAR test cases from inspection of the conducted power levels given in the Results tables (Section 7), different modes in the same band and multi-slot transmit GSM/GPRS modes can create some difficulties. Therefore the sequence of the SAR tests made in evaluating this device has used test logic that is based on measured SAR values. Comparison of measured SAR values in this way, can also allow some test minimization (i.e. test elimination) to be made.

For example, when SAR testing multi-slot GSM/GPRS/EGPRS modes, it is an inefficient use of test resources to fully SAR test every test configuration in each of the different modes as these modes have a fixed power relationship between them that is the same, irrespective of the test configuration. In the case of multi-slot GSM/GPRS modes, a single comparative SAR test - using the same test channel and test configuration – is made in each of the n-slot modes; the mode with the highest measured SAR value is then subjected to full SAR testing in all test configurations. These comparative SAR tests (same frequency, same test configuration) are

regarded as extremely accurate as they are relative tests in which the tested device changes neither its frequency nor its position between tests. For different modes that operate in the same band and use the same antenna e.g. GSM/GPRS850 and WCDMA850, full SAR testing is carried out in the GSM/GPRS850 mode but WCDMA850 testing is limited to 3 channel testing in the maximum SAR test configuration for GSM/GPRS850.

Multi-slot SAR testing against the Head is always performed whenever such a device offers Push to Talk over cellular with the internal earpiece active, Dual Transfer Mode (i.e. the ability to transmit voice and data simultaneously using the same transmitter) or has WLAN (which enables a Voice over IP call to take place whilst the device can simultaneously transmit data on a cellular band). Whenever a device has an intended multi-slot use against the head, it is also Head SAR tested in EGPRS mode. It should be noted that EGPRS transmit modes can have either GMSK or 8PSK modulation but, when tested, only 8PSK EGPRS will appear explicitly in the results tables, as GMSK EGPRS mode has identical time-averaged power to the reported GPRS mode.

Devices that have flips or slides are fully SAR tested in all device configurations consistent with their intended usage. For example, flip phones that can receive a call in closed mode are SAR tested against the head in both open and closed configurations. Similarly, slide phones are fully SAR tested in all slide configurations in which calls are intended to be made or received.

In the results tables in Section 7, the maximum SAR value for the 'basic' tests (i.e. left cheek, left tilt, right cheek and right tilt in Head SAR testing; with and without headset with the back &/or display side facing the flat phantom in Body SAR testing) is bolded for each band. In some cases, after full testing of the basic SAR test configurations has been completed, additional checking SAR tests are made. These checking tests are always based on the bolded result from the 'basic' testing. When the SAR value of a checking test exceeds the maximum value from the basic tests, it is also bolded and used as the basis for any further checking tests that might be needed.

Checking tests are largely voluntary and can cover optional batteries, different camera slide positions, optional covers, etc. In the case of optional batteries, if the construction of the optional battery is significantly different to the battery used in the full testing e.g. if the outer can is floating electrically rather than grounded, then the maximum SAR test configuration in each band is tested with the optional battery in 3 channels. For camera slides, if the slide material is metal, then checking tests in 3 channels are again run for the maximum SAR test configuration in each band. For plastic camera slides, SAR checking is only carried out in the channel that provided the maximum SAR value for the original. Optional front and back covers are tested if their shape differs significantly from the original or if their metallic content varies by more than 15% from the original; in the former case, the testing depends on the extent of the physical differences, whereas in the latter case, 3 channel SAR testing is performed in every band in the max SAR test configuration.

## 4. DESCRIPTION OF THE TEST EQUIPMENT

### 4.1 Measurement System and Components

The measurements were performed using an automated near-field scanning system, DASY4, manufactured by Schmid & Partner Engineering AG (SPEAG) in Switzerland. The SAR extrapolation algorithm used in all measurements was the 'advanced extrapolation' algorithm.

The following table lists calibration dates of SPEAG components:

Test Equipment	Serial Number	Calibration interval	Calibration expiry
DAE 4	793	12 months	2010-05
E-field Probe ES3DV3	3119	12 months	2010-09
Dipole Validation Kit, D1800V2	256	24 months	2011-10
DASY4 software	Version 4.7	-	-

Additional test equipment used in testing:

Test Equipment	Model	Serial Number	Calibration interval	Calibration expiry
Signal Generator	SML03	101265	12 months	2010-09
Amplifier	ZHL-42 (SMA)	N072095-5	12 months	2010-09
Power Meter	NRVS	849305/028	12 months	2010-09
Power Sensor	NRV-Z32	839176/020	12 months	2010-09
Call Tester	CMU 200	104983	-	-
Vector Network Analyzer	8753E	US38432928	12 months	2010-09
Dielectric Probe Kit	85070B	US33020420	-	-

#### 4.1.1 Isotropic E-field Probe Type ES3DV3

<b>Construction</b>	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., butyl diglycol)
<b>Calibration</b>	Calibration certificate in Appendix C
<b>Frequency</b>	10 MHz to 4 GHz (dosimetry); Linearity: $\pm 0.2$ dB (30 MHz to 4 GHz)
<b>Directivity</b>	$\pm 0.2$ dB in HSL (rotation around probe axis) $\pm 0.3$ dB in HSL (rotation normal to probe axis)
<b>Dynamic Range</b>	5 $\mu$ W/g to $> 100$ mW/g; Linearity: $\pm 0.2$ dB
<b>Dimensions</b>	Overall length: 330 mm Tip length: 20 mm Body diameter: 12 mm Tip diameter: 3.9 mm
<b>Application</b>	Distance from probe tip to dipole centers: 2.0 mm General dosimetry up to 4 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms

## 4.2 Phantoms

The phantom used for all tests i.e. for both system checks and device testing, was the twin-headed "SAM Phantom", manufactured by SPEAG. The phantom conforms to the requirements of IEEE 1528 - 2003.

System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.

The SPEAG device holder (see Section 5.1) was used to position the device in all tests whilst a tripod was used to position the validation dipoles against the flat section of phantom.

#### 4.3 Tissue Simulants

Recommended values for the dielectric parameters of the tissue simulants are given in IEEE 1528 - 2003 and FCC Supplement C to OET Bulletin 65. All tests were carried out using simulants whose dielectric parameters were within  $\pm 5\%$  of the recommended values. All tests were carried out within 24 hours of measuring the dielectric parameters.

The depth of the tissue simulant was  $15.0 \pm 0.5$  cm measured from the ear reference point during system checking and device measurements.

##### 4.3.1 Tissue Simulant Recipes

The following recipe(s) were used for Head and Body tissue simulant(s):

**1800MHz band**

Ingredient	Head (% by weight)	Body (% by weight)
Deionised Water	54.0	70.20
Tween 20	45.6	29.37
Salt	0.4	0.43

##### 4.3.2 System Checking

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulants were measured every day using the dielectric probe kit and the network analyser. A system check measurement was made following the determination of the dielectric parameters of the simulant, using the dipole validation kit. A power level of 250 mW was supplied to the dipole antenna, which was placed under the flat section of the twin SAM phantom. The system checking results (dielectric parameters and SAR values) are given in the table below.

**System checking, head tissue simulant**

f [MHz]	Description	SAR [W/kg], 1g	Dielectric Parameters		Temp [°C]
			$\epsilon_r$	$\sigma$ [S/m]	
1800	Reference result	9.90	40.0	1.40	
	$\pm 10\%$ window	8.91 – 10.89			
	2010-02-18	9.42	38.9	1.37	21.0
	2010-02-19	9.34	38.6	1.37	21.0

Plots of the system checking scans are given in Appendix A.

#### 4.3.3 Tissue Simulants used in the Measurements

##### Head tissue simulant measurements

f [MHz]	Description	Dielectric Parameters		Temp [°C]
		$\epsilon_r$	$\sigma$ [S/m]	
1732	Recommended value	40.1	1.36	
	$\pm 5\%$ window	38.1 – 42.1	1.29 – 1.43	
	2010-02-18	39.2	1.31	21.0
	2010-02-19	38.9	1.31	21.0

##### Body tissue simulant measurements

f [MHz]	Description	Dielectric Parameters		Temp [°C]
		$\epsilon_r$	$\sigma$ [S/m]	
1732	Recommended value	53.5	1.48	
	$\pm 5\%$ window	50.8 – 56.2	1.40 – 1.55	
	2010-02-19	51.3	1.43	21.0

## 5. DESCRIPTION OF THE TEST PROCEDURE

### 5.1 Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the Dasy system.



Device holder supplied by SPEAG

---

A Nokia designed spacer (illustrated below) was used to position the device within the SPEAG holder. The spacer positions the device so that the holder has minimal effect on the test results but still holds the device securely. The spacer was removed before the tests.



Nokia spacer

## 5.2 Test Positions

### 5.2.1 Against Phantom Head

Measurements were made in “cheek” and “tilt” positions on both the left hand and right hand sides of the phantom.

The positions used in the measurements were according to IEEE 1528 - 2003 "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques".

### 5.2.2 Body Worn Configuration

The device was placed in the SPEAG holder using the Nokia spacer and placed below the flat section of the phantom. The distance between the device and the phantom was kept at the separation distance indicated in the Section 1.2.2 using a separate flat spacer that was removed before the start of the measurements. The device was oriented with both sides facing the phantom to find the highest results.

## 5.3 Scan Procedures

First, area scans were used for determination of the field distribution. Next, a zoom scan, a minimum of 5x5x7 points covering a volume of at least 30x30x30mm, was performed around the highest E-field value to determine the averaged SAR value. Drift was determined by measuring the same point at the start of the area scan and again at the end of the zoom scan.

---

## 5.4 SAR Averaging Methods

The maximum SAR value was averaged over a cube of tissue using interpolation and extrapolation.

The interpolation, extrapolation and maximum search routines within Dasy4 are all based on the modified Quadratic Shepard's method (Robert J. Renka, "Multivariate Interpolation Of Large Sets Of Scattered Data", University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988, pp. 139-148).

The interpolation scheme combines a least-square fitted function method with a weighted average method. A trivariate 3-D / bivariate 2-D quadratic function is computed for each measurement point and fitted to neighbouring points by a least-square method. For the zoom scan, inverse distance weighting is incorporated to fit distant points more accurately. The interpolating function is finally calculated as a weighted average of the quadratics.

In the zoom scan, the interpolation function is used to extrapolate the Peak SAR from the deepest measurement points to the inner surface of the phantom.

## 6. MEASUREMENT UNCERTAINTY

Table 6.1 – Measurement uncertainty evaluation

Uncertainty Component	Section in IEEE 1528	Tol. (%)	Prob Dist	Div	$c_i$	$c_i \cdot u_i$ (%)	$v_i$
<b>Measurement System</b>							
Probe Calibration	E2.1	$\pm 5.9$	N	1	1	$\pm 5.9$	$\infty$
Axial Isotropy	E2.2	$\pm 4.7$	R	$\sqrt{3}$	$(1-c_p)^{1/2}$	$\pm 1.9$	$\infty$
Hemispherical Isotropy	E2.2	$\pm 9.6$	R	$\sqrt{3}$	$(c_p)^{1/2}$	$\pm 3.9$	$\infty$
Boundary Effect	E2.3	$\pm 1.0$	R	$\sqrt{3}$	1	$\pm 0.6$	$\infty$
Linearity	E2.4	$\pm 4.7$	R	$\sqrt{3}$	1	$\pm 2.7$	$\infty$
System Detection Limits	E2.5	$\pm 1.0$	R	$\sqrt{3}$	1	$\pm 0.6$	$\infty$
Readout Electronics	E2.6	$\pm 1.0$	N	1	1	$\pm 1.0$	$\infty$
Response Time	E2.7	$\pm 0.8$	R	$\sqrt{3}$	1	$\pm 0.5$	$\infty$
Integration Time	E2.8	$\pm 2.6$	R	$\sqrt{3}$	1	$\pm 1.5$	$\infty$
RF Ambient Conditions - Noise	E6.1	$\pm 3.0$	R	$\sqrt{3}$	1	$\pm 1.7$	$\infty$
RF Ambient Conditions - Reflections	E6.1	$\pm 3.0$	R	$\sqrt{3}$	1	$\pm 1.7$	$\infty$
Probe Positioner Mechanical Tolerance	E6.2	$\pm 0.4$	R	$\sqrt{3}$	1	$\pm 0.2$	$\infty$
Probe Positioning with respect to Phantom Shell	E6.3	$\pm 2.9$	R	$\sqrt{3}$	1	$\pm 1.7$	$\infty$
Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	E5	$\pm 3.9$	R	$\sqrt{3}$	1	$\pm 2.3$	$\infty$
<b>Test sample Related</b>							
Test Sample Positioning	E4.2	$\pm 6.0$	N	1	1	$\pm 6.0$	11
Device Holder Uncertainty	E4.1	$\pm 5.0$	N	1	1	$\pm 5.0$	7
Output Power Variation - SAR drift measurement	6.6.3	$\pm 0.0$	R	$\sqrt{3}$	1	$\pm 0.0$	$\infty$
<b>Phantom and Tissue Parameters</b>							
Phantom Uncertainty (shape and thickness tolerances)	E3.1	$\pm 4.0$	R	$\sqrt{3}$	1	$\pm 2.3$	$\infty$
Conductivity Target - tolerance	E3.2	$\pm 5.0$	R	$\sqrt{3}$	0.64	$\pm 1.8$	$\infty$
Conductivity - measurement uncertainty	E3.3	$\pm 5.5$	N	1	0.64	$\pm 3.5$	5
Permittivity Target - tolerance	E3.2	$\pm 5.0$	R	$\sqrt{3}$	0.6	$\pm 1.7$	$\infty$
Permittivity - measurement uncertainty	E3.3	$\pm 2.9$	N	1	0.6	$\pm 1.7$	5
<b>Combined Standard Uncertainty</b>				RSS		<b><math>\pm 12.9</math></b>	116
<b>Coverage Factor for 95%</b>				<b>k=2</b>			
<b>Expanded Uncertainty</b>						<b><math>\pm 25.8</math></b>	

## 7. RESULTS

The measured Head SAR values for the test device are tabulated below:

**1700/2100 MHz Head SAR results**

Option used	Test configuration	SAR, averaged over 1g (W/kg)		
		Ch 1312 1712.4 MHz	Ch 1412 1732.4 MHz	Ch 1513 1752.6 MHz
WCDMA	Conducted Power	23.0 dBm	23.0 dBm	23.0 dBm
Flip open Battery BL-4S Sony	Left	Cheek	-	0.624
		Tilt	-	0.126
	Right	Cheek	<b>0.846</b>	0.805
		Tilt	-	0.197
WCDMA Flip open Battery BL-4S Sanyo	Right Cheek	0.834	0.819	0.773

The measured Body SAR values for the test device are tabulated below:

**1700/2100 MHz Body SAR results**

Option used	Device orientation	Test configuration	SAR, averaged over 1g (W/kg)		
			Ch 1312 1712.4 MHz	Ch 1412 1732.4 MHz	Ch 1513 1752.6 MHz
WCDMA	Conducted Power	23.0 dBm	23.0 dBm	23.0 dBm	23.0 dBm
Flip closed Battery BL-4S Sony	Display facing phantom	Without headset	-	0.344	-
		Headset HS-105	-	0.333	-
	Back facing phantom	Without headset	-	0.384	-
		Headset HS-105	<b>0.439</b>	0.397	0.412
WCDMA Flip closed Battery BL-4S Sanyo	Back facing phantom	Headset HS-105	0.396	0.394	0.403

Plots of the Measurement scans are given in Appendix B.

## APPENDIX A: SYSTEM CHECKING SCANS

Date/Time: 2010-02-18 08:30:43

Test Laboratory: TCC Nokia

Type: D1800V2; Serial: D1800V2 - SN:256

### Communication System: CW1800

Frequency: 1800 MHz; Duty Cycle: 1:1

Medium: HSL1800; Medium Notes:  $t=20.6\text{ C}$

Medium parameters used:  $f = 1800\text{ MHz}$ ;  $\sigma = 1.37\text{ mho/m}$ ;  $\epsilon_r = 38.9$ ;  $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3119
- ConvF(5.03, 5.03, 5.03); Calibrated: 2009-09-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2009-05-15
- Phantom: SAM 4; Type: Twin SAM 040 CA; Serial: TP-1018
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**d=15mm, Pin=250mW/Area Scan (61x81x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 10.7 mW/g

**d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 87.8 V/m


Peak SAR (extrapolated) = 17.2 W/kg

**SAR(1 g) = 9.42 mW/g**

**SAR(10 g) = 4.93 mW/g**

**Power Drift = 0.146 dB**

Maximum value of SAR (measured) = 10.5 mW/g

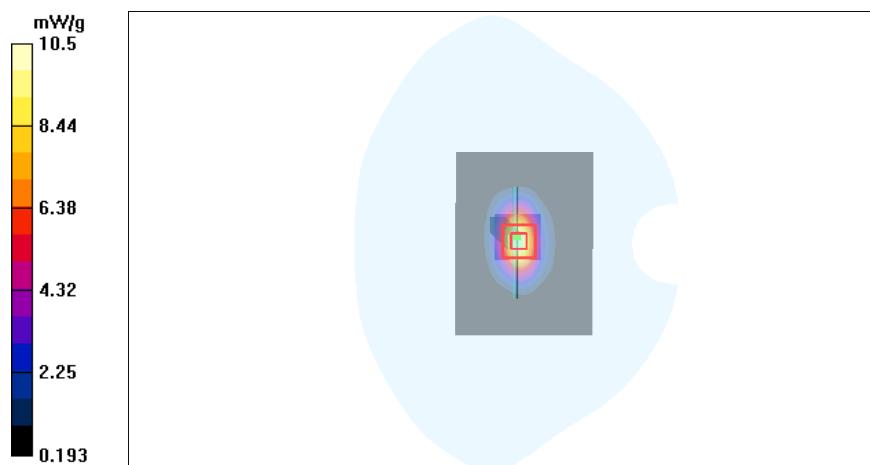

SAR Report

FCC\_RM-509\_05

Applicant: Nokia Corporation

Type: RM-509

Copyright © 2010 TCC Nokia

Date/Time: 2010-02-19 08:35:11

Test Laboratory: TCC Nokia  
Type: D1800V2; Serial: D1800V2 - SN:256

**Communication System: CW1800**

Frequency: 1800 MHz; Duty Cycle: 1:1

Medium: HSL1800; Medium Notes:  $t=20.3\text{ C}$

Medium parameters used:  $f = 1800\text{ MHz}$ ;  $\sigma = 1.37\text{ mho/m}$ ;  $\epsilon_r = 38.6$ ;  $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3119
- ConvF(5.03, 5.03, 5.03); Calibrated: 2009-09-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2009-05-15
- Phantom: SAM 4; Type: Twin SAM 040 CA; Serial: TP-1018
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**d=15mm, Pin=250mW/Area Scan (61x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 10.8 mW/g

**d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 85.6 V/m


Peak SAR (extrapolated) = 17.0 W/kg

**SAR(1 g) = 9.34 mW/g**

**SAR(10 g) = 4.9 mW/g**

**Power Drift = 0.081 dB**

Maximum value of SAR (measured) = 10.5 mW/g

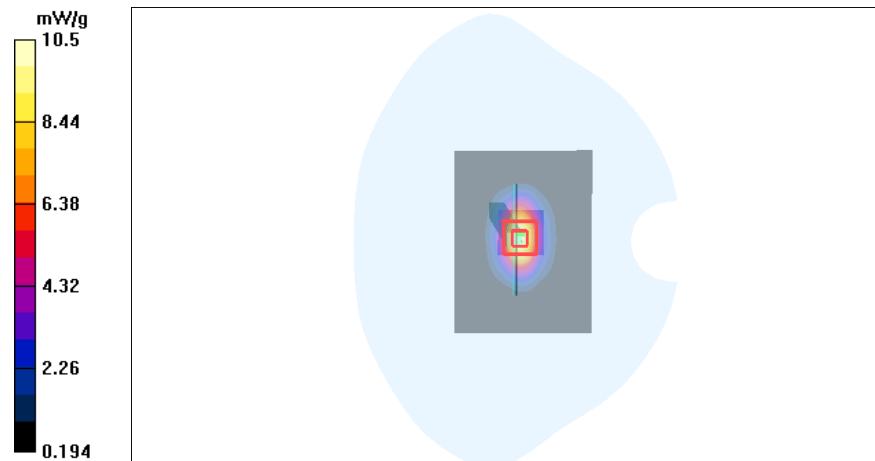

## APPENDIX B: MEASUREMENT SCANS

Date/Time: 2010-02-18 10:06:02

Test Laboratory: TCC Nokia

Type: RM-509; Serial: 356934/03/000586/2

**Communication System: WCDMA1700/2100**

Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: HSL1800; Medium Notes: t=20.6 C

Medium parameters used (interpolated):  $f = 1732.4$  MHz;  $\sigma = 1.31$  mho/m;  $\epsilon_r = 39.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3119
- ConvF(5.03, 5.03, 5.03); Calibrated: 2009-09-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2009-05-15
- Phantom: SAM 4; Type: Twin SAM 040 CA; Serial: TP-1018
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Cheek - Middle - Flip Open - BL-4S Sony /Area Scan (51x131x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.700 mW/g

**Cheek - Middle - Flip Open - BL-4S Sony /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 1.79 V/m


Peak SAR (extrapolated) = 0.928 W/kg

**SAR(1 g) = 0.624 mW/g**

**SAR(10 g) = 0.403 mW/g**

**Power Drift = -0.267 dB**

Maximum value of SAR (measured) = 0.675 mW/g

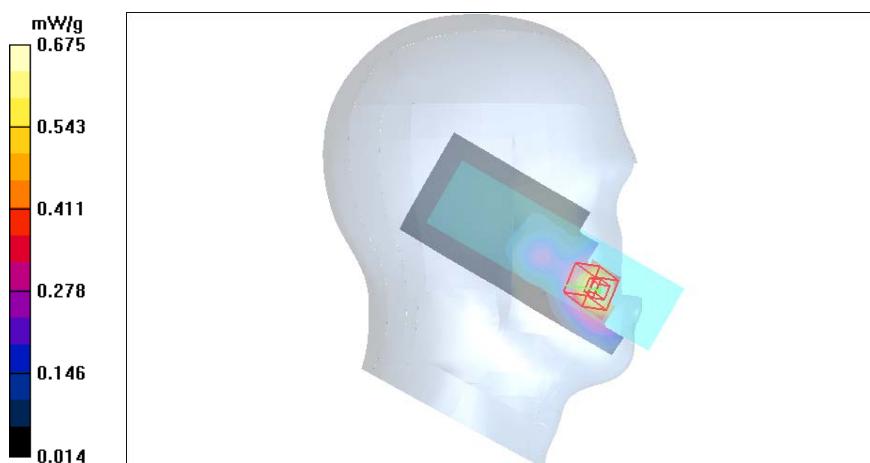

SAR Report

FCC\_RM-509\_05

Applicant: Nokia Corporation

Type: RM-509

Copyright © 2010 TCC Nokia

Date/Time: 2010-02-18 10:21:38

Test Laboratory: TCC Nokia  
Type: RM-509; Serial: 356934/03/000586/2

**Communication System: WCDMA1700/2100**

Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: HSL1800; Medium Notes:  $t=20.6\text{ C}$

Medium parameters used (interpolated):  $f = 1732.4\text{ MHz}$ ;  $\sigma = 1.31\text{ mho/m}$ ;  $\epsilon_r = 39.2$ ;  $\rho = 1000\text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3119
- ConvF(5.03, 5.03, 5.03); Calibrated: 2009-09-22
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2009-05-15
- Phantom: SAM 4; Type: Twin SAM 040 CA; Serial: TP-1018
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Tilt - Middle - Flip Open - BL-4S Sony /Area Scan (51x131x1):** Measurement grid:  $dx=15\text{ mm}$ ,  $dy=15\text{ mm}$

Maximum value of SAR (interpolated) =  $0.152\text{ mW/g}$

**Tilt - Middle - Flip Open - BL-4S Sony /Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{ mm}$ ,  $dy=7.5\text{ mm}$ ,  $dz=5\text{ mm}$

Reference Value =  $7.06\text{ V/m}$

Peak SAR (extrapolated) =  $0.171\text{ W/kg}$


**SAR(1 g) = 0.126 mW/g**

**SAR(10 g) = 0.084 mW/g**

**Power Drift = 0.040 dB**

**Warning:** Maximum averaged SAR over 10 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement.

Maximum value of SAR (measured) =  $0.133\text{ mW/g}$

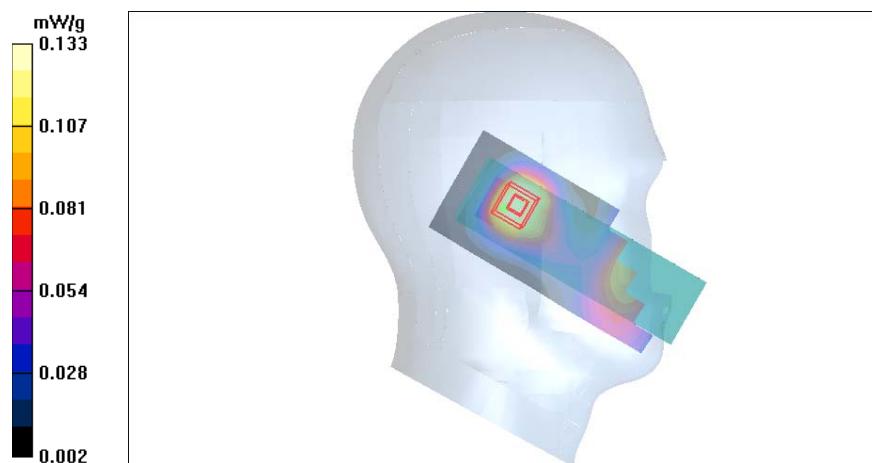

Date/Time: 2010-02-18 14:20:18

Test Laboratory: TCC Nokia  
Type: RM-509; Serial: 356934/03/000586/2

**Communication System: WCDMA1700/2100**

Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium: HSL1800; Medium Notes:  $t=20.6\text{ C}$

Medium parameters used (interpolated):  $f = 1712.4\text{ MHz}$ ;  $\sigma = 1.29\text{ mho/m}$ ;  $\epsilon_r = 39.3$ ;  $\rho = 1000\text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3119
- ConvF(5.03, 5.03, 5.03); Calibrated: 2009-09-22
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2009-05-15
- Phantom: SAM 4; Type: Twin SAM 040 CA; Serial: TP-1018
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Cheek – Low - Flip Open – BL-4S Sony /Area Scan (51x131x1):** Measurement grid:  $dx=15\text{ mm}$ ,  $dy=15\text{ mm}$

Maximum value of SAR (interpolated) = 0.978 mW/g

**Cheek - Low - Flip Open – BL-4S Sony /Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{ mm}$ ,  $dy=7.5\text{ mm}$ ,  $dz=5\text{ mm}$

Reference Value = 1.34 V/m


Peak SAR (extrapolated) = 1.27 W/kg

**SAR(1 g) = 0.846 mW/g**

**SAR(10 g) = 0.543 mW/g**

**Power Drift = 0.444 dB**

Maximum value of SAR (measured) = 0.905 mW/g

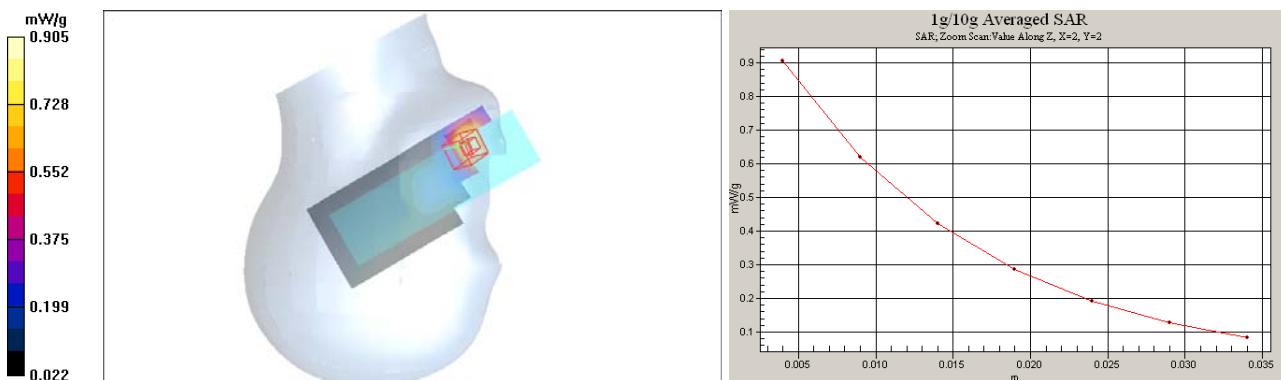

Date/Time: 2010-02-18 12:23:41

Test Laboratory: TCC Nokia

Type: RM-509; Serial: 356934/03/000586/2

**Communication System: WCDMA1700/2100**

Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: HSL1800; Medium Notes:  $t=20.6\text{ C}$

Medium parameters used (interpolated):  $f = 1732.4\text{ MHz}$ ;  $\sigma = 1.31\text{ mho/m}$ ;  $\epsilon_r = 39.2$ ;  $\rho = 1000\text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3119
- ConvF(5.03, 5.03, 5.03); Calibrated: 2009-09-22
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2009-05-15
- Phantom: SAM 4; Type: Twin SAM 040 CA; Serial: TP-1018
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Tilt – Middle - Flip Open – BL-4S Sony /Area Scan (51x131x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.242 mW/g

**Tilt - Middle - Flip Open – BL-4S Sony /Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 6.08 V/m


Peak SAR (extrapolated) = 0.302 W/kg

**SAR(1 g) = 0.197 mW/g**

**SAR(10 g) = 0.119 mW/g**

**Power Drift = -0.492 dB**

Maximum value of SAR (measured) = 0.212 mW/g

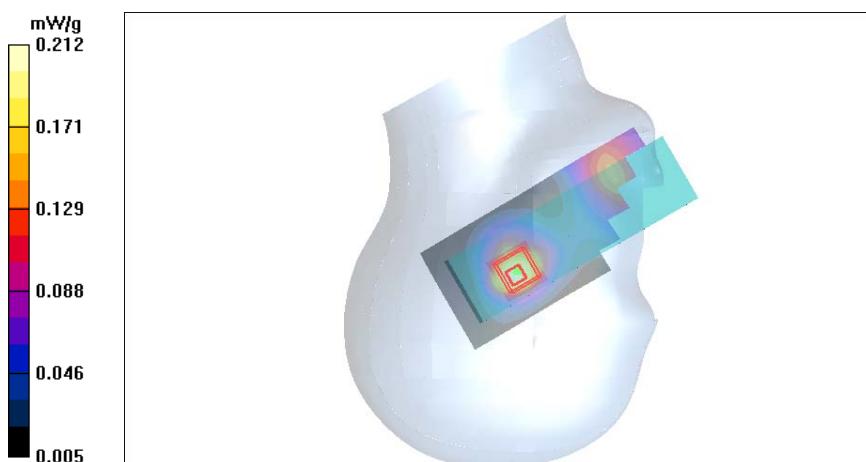

SAR Report

FCC\_RM-509\_05

Applicant: Nokia Corporation

Type: RM-509

Copyright © 2010 TCC Nokia

Date/Time: 2010-02-19 09:23:29

Test Laboratory: TCC Nokia  
Type: RM-509; Serial: 356934/03/000586/2

**Communication System: WCDMA1700/2100**

Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium: HSL1800; Medium Notes:  $t=20.3\text{ C}$

Medium parameters used (interpolated):  $f = 1712.4\text{ MHz}$ ;  $\sigma = 1.29\text{ mho/m}$ ;  $\epsilon_r = 39$ ;  $\rho = 1000\text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3119
- ConvF(5.03, 5.03, 5.03); Calibrated: 2009-09-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2009-05-15
- Phantom: SAM 4; Type: Twin SAM 040 CA; Serial: TP-1018
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Cheek -Low - Flip Open - BL-4S Sanyo /Area Scan (51x131x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.941 mW/g

**Cheek - Low - Flip Open - BL-4S Sanyo /Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 1.54 V/m


Peak SAR (extrapolated) = 1.19 W/kg

**SAR(1 g) = 0.834 mW/g**

**SAR(10 g) = 0.540 mW/g**

**Power Drift = 0.279 dB**

Maximum value of SAR (measured) = 0.898 mW/g

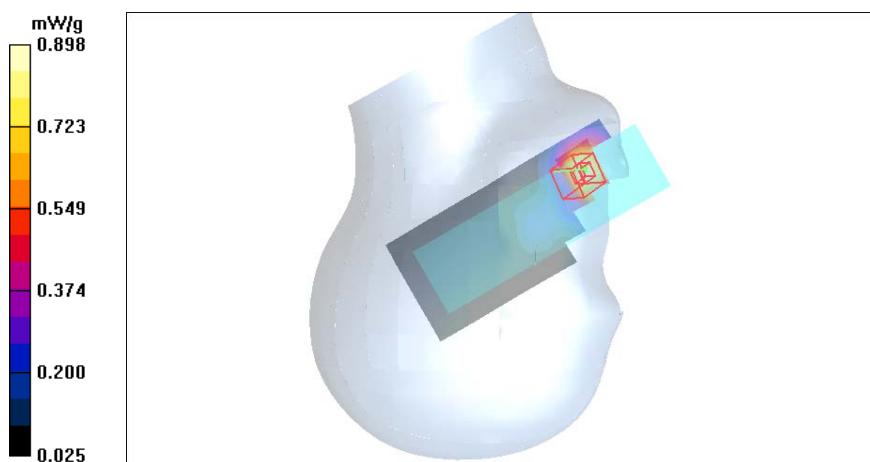

Date/Time: 2010-02-19 10:01:01

Test Laboratory: TCC Nokia  
Type: RM-509; Serial: 356934/03/000586/2

**Communication System: WCDMA1700/2100**

Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: BSL1800; Medium Notes:  $t = 20.0 \text{ C}$

Medium parameters used (interpolated):  $f = 1732.4 \text{ MHz}$ ;  $\sigma = 1.43 \text{ mho/m}$ ;  $\epsilon_r = 51.3$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3119
- ConvF(4.65, 4.65, 4.65); Calibrated: 2009-09-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2009-05-15
- Phantom: SAM 3; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Body - Middle - Flip Closed - BL-4S Sony - No Accessory - Display Facing Phantom/Area Scan (51x81x1):**

Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.387 mW/g

**Body - Middle - Flip Closed - BL-4S Sony - No Accessory - Display Facing Phantom/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 9.20 V/m


Peak SAR (extrapolated) = 0.489 W/kg

**SAR(1 g) = 0.344 mW/g**

**SAR(10 g) = 0.227 mW/g**

**Power Drift = -0.136 dB**

Maximum value of SAR (measured) = 0.370 mW/g

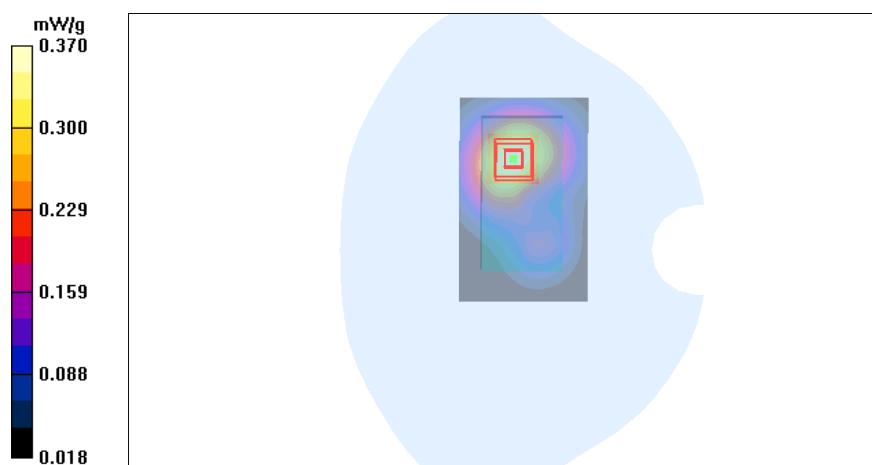

Date/Time: 2010-02-19 10:27:57

Test Laboratory: TCC Nokia  
Type: RM-509; Serial: 356934/03/000586/2

**Communication System: WCDMA1700/2100**

Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: BSL1800; Medium Notes:  $t = 20.0 \text{ C}$

Medium parameters used (interpolated):  $f = 1732.4 \text{ MHz}$ ;  $\sigma = 1.43 \text{ mho/m}$ ;  $\epsilon_r = 51.3$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3119
- ConvF(4.65, 4.65, 4.65); Calibrated: 2009-09-22
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2009-05-15
- Phantom: SAM 3; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Body - Middle - Flip Closed - BL-4S Sony - HS-105 - Display Facing Phantom/Area Scan (51x81x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.368 mW/g

**Body - Middle - Flip Closed - BL-4S Sony - HS-105 - Display Facing Phantom/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 9.56 V/m


Peak SAR (extrapolated) = 0.472 W/kg

**SAR(1 g) = 0.333 mW/g**

**SAR(10 g) = 0.221 mW/g**

**Power Drift = -0.216 dB**

Maximum value of SAR (measured) = 0.357 mW/g

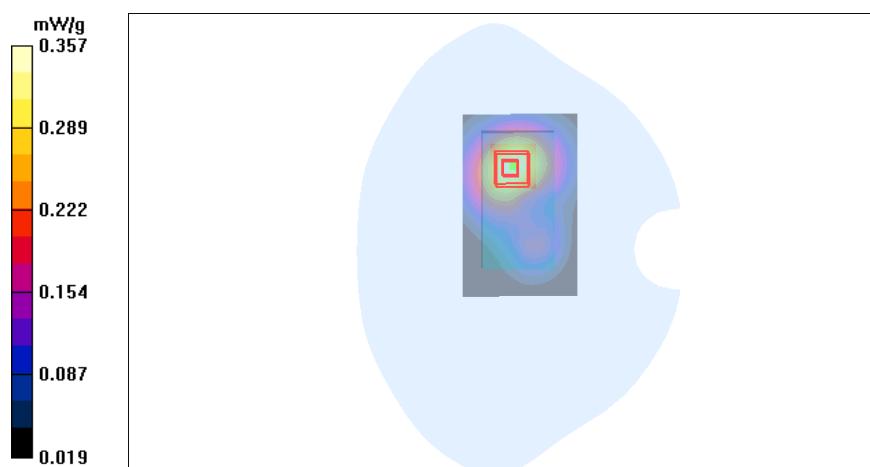

Date/Time: 2010-02-19 10:49:37

Test Laboratory: TCC Nokia  
Type: RM-509; Serial: 356934/03/000586/2

**Communication System: WCDMA1700/2100**

Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: BSL1800; Medium Notes:  $t = 20.0$  C

Medium parameters used (interpolated):  $f = 1732.4$  MHz;  $\sigma = 1.43$  mho/m;  $\epsilon_r = 51.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3119
- ConvF(4.65, 4.65, 4.65); Calibrated: 2009-09-22
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2009-05-15
- Phantom: SAM 3; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Body - Middle - Flip Closed - BL-4S Sony - No accessory - Back Facing Phantom/Area Scan (51x81x1):**

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.410 mW/g

**Body - Middle - Flip Closed - BL-4S Sony - No accessory - Back Facing Phantom/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 15.1 V/m


Peak SAR (extrapolated) = 0.546 W/kg

**SAR(1 g) = 0.384 mW/g**

**SAR(10 g) = 0.254 mW/g**

**Power Drift = -0.089 dB**

Maximum value of SAR (measured) = 0.414 mW/g

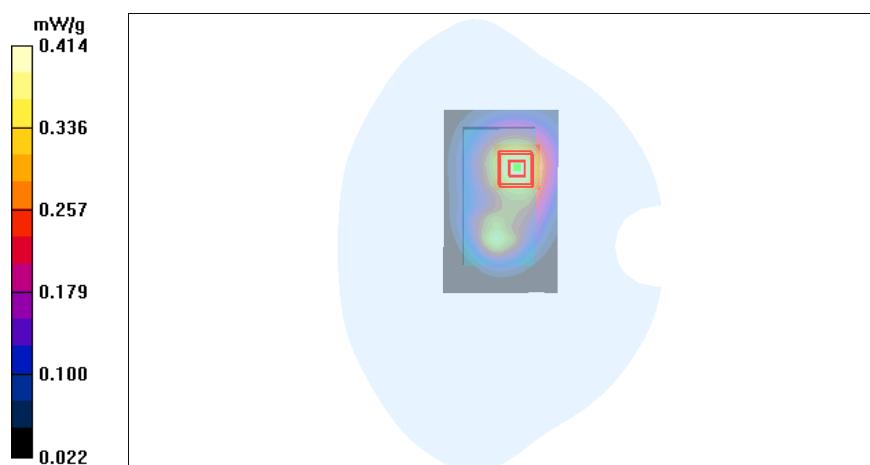

Date/Time: 2010-02-19 12:41:52

Test Laboratory: TCC Nokia  
Type: RM-509; Serial: 356934/03/000586/2

**Communication System: WCDMA1700/2100**

Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium: BSL1800; Medium Notes:  $t = 20.0$  C

Medium parameters used (interpolated):  $f = 1712.4$  MHz;  $\sigma = 1.41$  mho/m;  $\epsilon_r = 51.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3119
- ConvF(4.65, 4.65, 4.65); Calibrated: 2009-09-22
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2009-05-15
- Phantom: SAM 3; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Body - Low - Flip Closed - BL-4S Sony - HS-105 - Back Facing Phantom/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 0.480 mW/g

**Body - Low - Flip Closed - BL-4S Sony - HS-105 - Back Facing Phantom/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 14.7 V/m


Peak SAR (extrapolated) = 0.620 W/kg

**SAR(1 g) = 0.439 mW/g**

**SAR(10 g) = 0.287 mW/g**

**Power Drift = -0.169 dB**

Maximum value of SAR (measured) = 0.480 mW/g

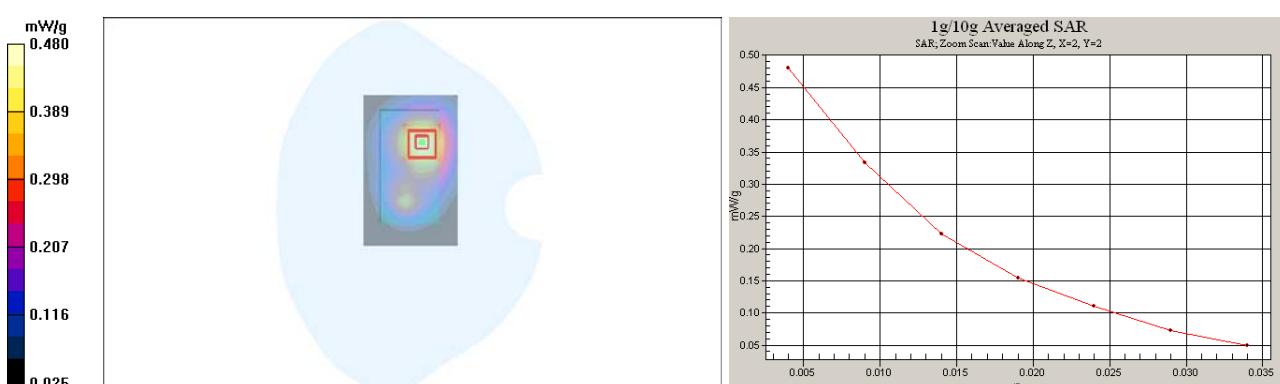

Date/Time: 2010-02-19 13:16:36

Test Laboratory: TCC Nokia  
Type: RM-509; Serial: 356934/03/000586/2

**Communication System: WCDMA1700/2100**

Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: BSL1800; Medium Notes:  $t = 20.0 \text{ }^{\circ}\text{C}$

Medium parameters used:  $f = 1753 \text{ MHz}$ ;  $\sigma = 1.46 \text{ mho/m}$ ;  $\epsilon_r = 51.2$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3119
- ConvF(4.65, 4.65, 4.65); Calibrated: 2009-09-22
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2009-05-15
- Phantom: SAM 3; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Body - High - Flip Closed - BL-4S Sanyo - HS-105 - Back Facing Phantom/Area Scan (51x81x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
Maximum value of SAR (interpolated) = 0.447 mW/g

**Body - High - Flip Closed - BL-4S Sanyo - HS-105 - Back Facing Phantom/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 15.4 V/m


Peak SAR (extrapolated) = 0.573 W/kg

**SAR(1 g) = 0.403 mW/g**

**SAR(10 g) = 0.265 mW/g**

**Power Drift = -0.217 dB**

Maximum value of SAR (measured) = 0.431 mW/g

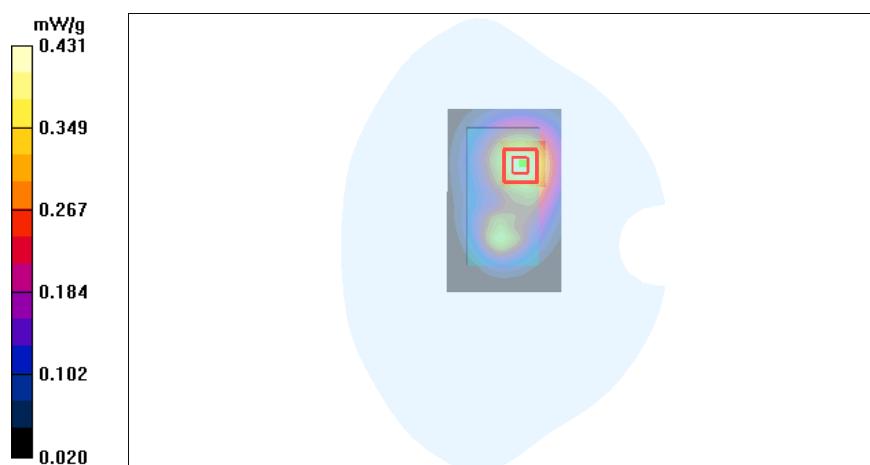

---

**APPENDIX C: RELEVANT PAGES FROM PROBE CALIBRATION REPORT(S)**



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Nokia Denmark A/S**

Certificate No: **ES3-3119\_Sep09**

## CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3119**

Calibration procedure(s) **QA CAL-01.v6, QA CAL-23.v3 and QA CAL-25.v2  
Calibration procedure for dosimetric E-field probes**

Calibration date: **September 22, 2009**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

### Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	1-Apr-09 (No. 217-01030)	Apr-10
Power sensor E4412A	MY41495277	1-Apr-09 (No. 217-01030)	Apr-10
Power sensor E4412A	MY41498087	1-Apr-09 (No. 217-01030)	Apr-10
Reference 3 dB Attenuator	SN: S5054 (3c)	31-Mar-09 (No. 217-01026)	Mar-10
Reference 20 dB Attenuator	SN: S5086 (20b)	31-Mar-09 (No. 217-01028)	Mar-10
Reference 30 dB Attenuator	SN: S5129 (30b)	31-Mar-09 (No. 217-01027)	Mar-10
Reference Probe ES3DV2	SN: 3013	2-Jan-09 (No. ES3-3013_Jan09)	Jan-10
DAE4	SN: 660	9-Sep-08 (No. DAE4-660_Sep08)	Sep-09

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-07)	In house check: Oct-09
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-08)	In house check: Oct-09


Calibrated by:	Name	Function	Signature
	Marcel Fehr	Laboratory Technician	

Approved by:	Name	Function	Signature
	Katja Pokovic	Technical Manager	

Issued: September 22, 2009

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

## Conversion Factor Assessment

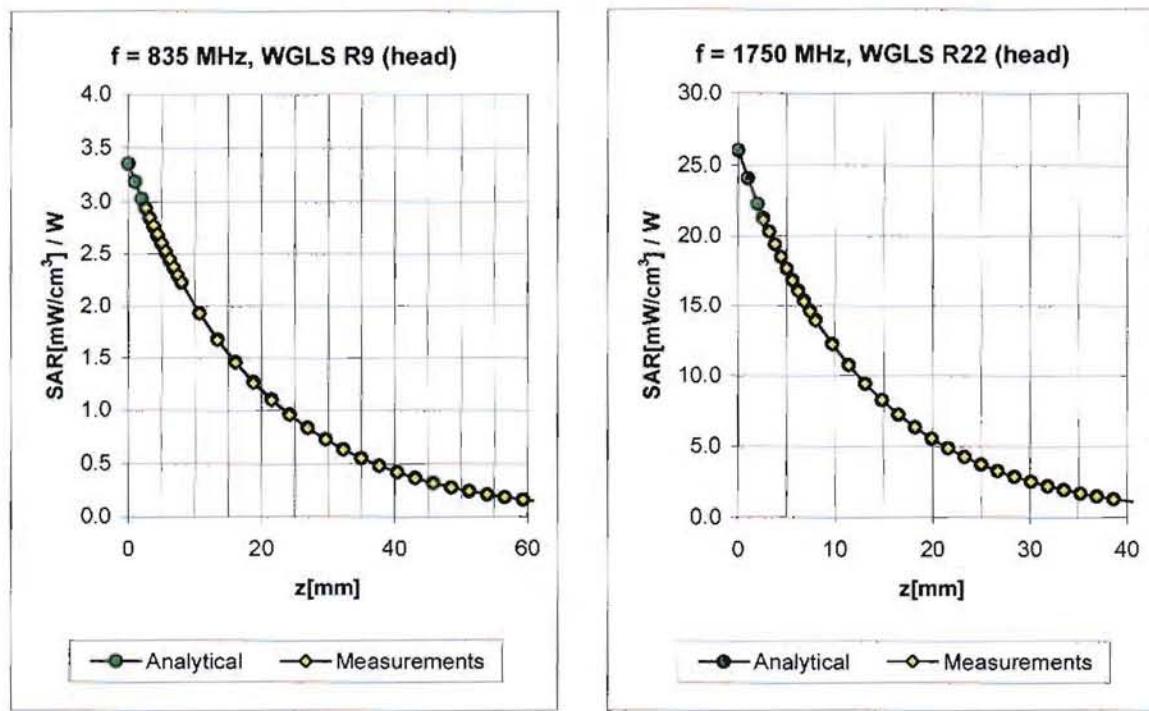

f [MHz]	Validity [MHz] <sup>c</sup>	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
835	$\pm 50 / \pm 100$	Head	$41.5 \pm 5\%$	$0.90 \pm 5\%$	0.87	1.10	$5.88 \pm 11.0\% (k=2)$
1750	$\pm 50 / \pm 100$	Head	$40.1 \pm 5\%$	$1.37 \pm 5\%$	0.46	1.61	$5.03 \pm 11.0\% (k=2)$
1900	$\pm 50 / \pm 100$	Head	$40.0 \pm 5\%$	$1.40 \pm 5\%$	0.45	1.62	$4.81 \pm 11.0\% (k=2)$
2450	$\pm 50 / \pm 100$	Head	$39.2 \pm 5\%$	$1.80 \pm 5\%$	0.41	1.84	$4.27 \pm 11.0\% (k=2)$

835	$\pm 50 / \pm 100$	Body	$55.2 \pm 5\%$	$0.97 \pm 5\%$	0.97	1.11	$5.71 \pm 11.0\% (k=2)$
1750	$\pm 50 / \pm 100$	Body	$53.4 \pm 5\%$	$1.49 \pm 5\%$	0.37	2.06	$4.65 \pm 11.0\% (k=2)$
1900	$\pm 50 / \pm 100$	Body	$53.3 \pm 5\%$	$1.52 \pm 5\%$	0.37	2.25	$4.43 \pm 11.0\% (k=2)$
2450	$\pm 50 / \pm 100$	Body	$52.7 \pm 5\%$	$1.95 \pm 5\%$	0.99	1.08	$4.13 \pm 11.0\% (k=2)$

<sup>c</sup> The validity of  $\pm 100$  MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

---

**APPENDIX D: RELEVANT PAGES FROM DIPOLE VALIDATION KIT REPORT(S)**



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Nokia Salo TCC**

Certificate No: **D1800V2-256\_Oct09**

## CALIBRATION CERTIFICATE

Object	D1800V2 - SN: 256																																																														
Calibration procedure(s)	QA CAL-05.v7 Calibration procedure for dipole validation kits																																																														
Calibration date:	October 20, 2009																																																														
<p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature <math>(22 \pm 3)^\circ\text{C}</math> and humidity <math>&lt; 70\%</math>.</p> <p>Calibration Equipment used (M&amp;TE critical for calibration)</p>																																																															
<table border="1"> <thead> <tr> <th>Primary Standards</th><th>ID #</th><th>Cal Date (Certificate No.)</th><th>Scheduled Calibration</th></tr> </thead> <tbody> <tr> <td>Power meter EPM-442A</td><td>GB37480704</td><td>06-Oct-09 (No. 217-01086)</td><td>Oct-10</td></tr> <tr> <td>Power sensor HP 8481A</td><td>US37292783</td><td>06-Oct-09 (No. 217-01086)</td><td>Oct-10</td></tr> <tr> <td>Reference 20 dB Attenuator</td><td>SN: 5086 (20g)</td><td>31-Mar-09 (No. 217-01025)</td><td>Mar-10</td></tr> <tr> <td>Type-N mismatch combination</td><td>SN: 5047.2 / 06327</td><td>31-Mar-09 (No. 217-01029)</td><td>Mar-10</td></tr> <tr> <td>Reference Probe ES3DV3</td><td>SN: 3205</td><td>26-Jun-09 (No. ES3-3205_Jun09)</td><td>Jun-10</td></tr> <tr> <td>DAE4</td><td>SN: 601</td><td>07-Mar-09 (No. DAE4-601_Mar09)</td><td>Mar-10</td></tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Secondary Standards</th><th>ID #</th><th>Check Date (in house)</th><th>Scheduled Check</th></tr> </thead> <tbody> <tr> <td>Power sensor HP 8481A</td><td>MY41092317</td><td>18-Oct-02 (in house check Oct-09)</td><td>In house check: Oct-11</td></tr> <tr> <td>RF generator R&amp;S SMT-06</td><td>100005</td><td>4-Aug-99 (in house check Oct-09)</td><td>In house check: Oct-11</td></tr> <tr> <td>Network Analyzer HP 8753E</td><td>US37390585 S4206</td><td>18-Oct-01 (in house check Oct-09)</td><td>In house check: Oct-10</td></tr> </tbody> </table> <table> <thead> <tr> <th>Calibrated by:</th><th>Name</th><th>Function</th><th>Signature</th></tr> </thead> <tbody> <tr> <td></td><td>Jeton Kastrati</td><td>Laboratory Technician</td><td></td></tr> </tbody> </table> <table> <thead> <tr> <th>Approved by:</th><th>Name</th><th>Function</th><th>Signature</th></tr> </thead> <tbody> <tr> <td></td><td>Katja Pokovic</td><td>Technical Manager</td><td></td></tr> </tbody> </table>				Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration	Power meter EPM-442A	GB37480704	06-Oct-09 (No. 217-01086)	Oct-10	Power sensor HP 8481A	US37292783	06-Oct-09 (No. 217-01086)	Oct-10	Reference 20 dB Attenuator	SN: 5086 (20g)	31-Mar-09 (No. 217-01025)	Mar-10	Type-N mismatch combination	SN: 5047.2 / 06327	31-Mar-09 (No. 217-01029)	Mar-10	Reference Probe ES3DV3	SN: 3205	26-Jun-09 (No. ES3-3205_Jun09)	Jun-10	DAE4	SN: 601	07-Mar-09 (No. DAE4-601_Mar09)	Mar-10	Secondary Standards	ID #	Check Date (in house)	Scheduled Check	Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11	RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	In house check: Oct-11	Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-09)	In house check: Oct-10	Calibrated by:	Name	Function	Signature		Jeton Kastrati	Laboratory Technician		Approved by:	Name	Function	Signature		Katja Pokovic	Technical Manager	
Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration																																																												
Power meter EPM-442A	GB37480704	06-Oct-09 (No. 217-01086)	Oct-10																																																												
Power sensor HP 8481A	US37292783	06-Oct-09 (No. 217-01086)	Oct-10																																																												
Reference 20 dB Attenuator	SN: 5086 (20g)	31-Mar-09 (No. 217-01025)	Mar-10																																																												
Type-N mismatch combination	SN: 5047.2 / 06327	31-Mar-09 (No. 217-01029)	Mar-10																																																												
Reference Probe ES3DV3	SN: 3205	26-Jun-09 (No. ES3-3205_Jun09)	Jun-10																																																												
DAE4	SN: 601	07-Mar-09 (No. DAE4-601_Mar09)	Mar-10																																																												
Secondary Standards	ID #	Check Date (in house)	Scheduled Check																																																												
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11																																																												
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	In house check: Oct-11																																																												
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-09)	In house check: Oct-10																																																												
Calibrated by:	Name	Function	Signature																																																												
	Jeton Kastrati	Laboratory Technician																																																													
Approved by:	Name	Function	Signature																																																												
	Katja Pokovic	Technical Manager																																																													
Issued: October 21, 2009																																																															
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.																																																															

# DASY5 Validation Report for Head TSL

Date/Time: 20.10.2009 10:26:59

Test Laboratory: SPEAG, Zurich, Switzerland

## DUT: Dipole 1800 MHz; Type: D1800V2; Serial: D1800V2 - SN:256

Communication System: CW; Frequency: 1800 MHz; Duty Cycle: 1:1

Medium: HSL U11 BB

Medium parameters used:  $f = 1800$  MHz;  $\sigma = 1.4$  mho/m;  $\epsilon_r = 40$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.25, 5.25, 5.25); Calibrated: 26.06.2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.03.2009
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57


**Pin=250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 97.2 V/m; Power Drift = 0.025 dB

Peak SAR (extrapolated) = 17.9 W/kg

**SAR(1 g) = 9.9 mW/g; SAR(10 g) = 5.21 mW/g**

Maximum value of SAR (measured) = 12.4 mW/g

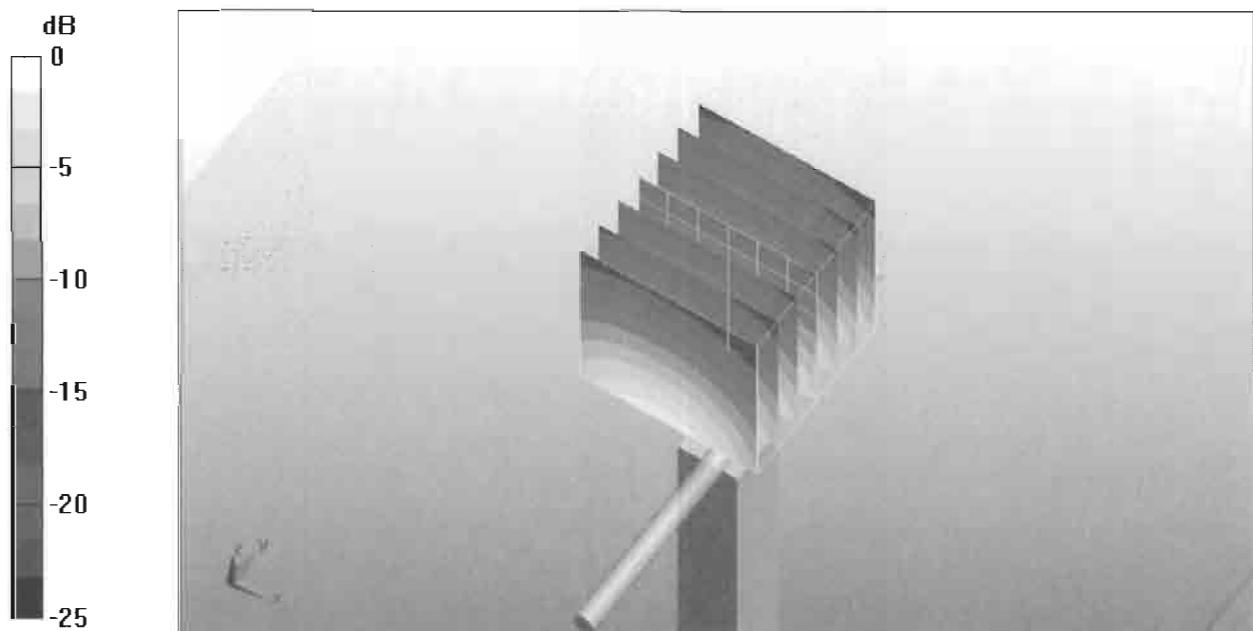

# DASY5 Validation Report for Body

Date/Time: 20.10.2009 14:52:33

Test Laboratory: SPEAG, Zurich, Switzerland

## DUT: Dipole 1800 MHz; Type: D1800V2; Serial: D1800V2 - SN:256

Communication System: CW; Frequency: 1800 MHz; Duty Cycle: 1:1

Medium: MSL U10 BB

Medium parameters used:  $f = 1800$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 53.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.8, 4.8, 4.8); Calibrated: 26.06.2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.03.2009
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57


**Pin250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 94.2 V/m; Power Drift = 0.020 dB

Peak SAR (extrapolated) = 16.8 W/kg

**SAR(1 g) = 9.61 mW/g; SAR(10 g) = 5.07 mW/g**

Maximum value of SAR (measured) = 12.2 mW/g

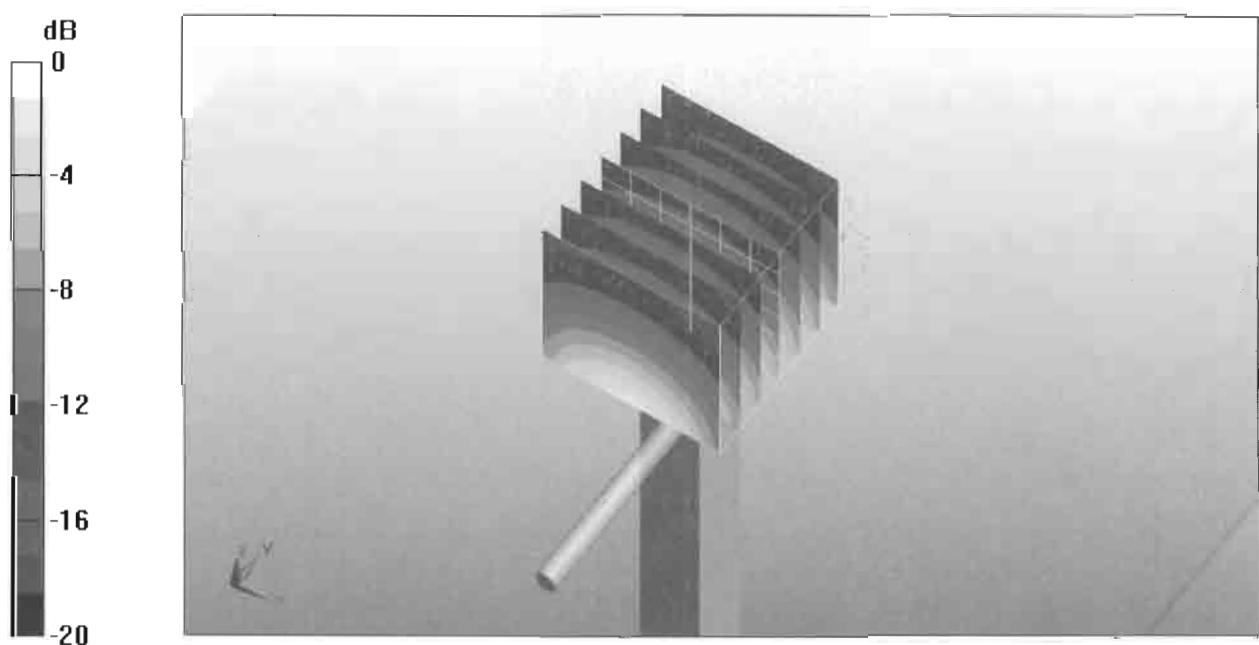

0 dB = 12.2mW/g