

FCC Part 22/24 Compliance Test Report

Test Report no.:	FCC22&24_RM-510_11.docx	Date of Report:	24-Jul-2010
Number of pages:	22	Customer's Contact person:	Bruno Ramelli
Testing laboratory:	TCC Nokia Salo Laboratory P.O.Box(86) Joensuukatu 7H / Kiila 1B FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 45220	Customer:	Nokia Corporation Lise Meitner Strasse 10 89081 ULM GERMANY Tel. +49 731 1754 0 Fax. +49 731 1754 6800
FCC listing no.:	533467		
IC recognition no.:	661V-1		
Tested devices/ accessories:	Phone RM-510 / Battery BL-4S / Headset HS-105 / AC Charger AC-8E		
FCC ID:	PPIRM-510	IC:	661U-RM510
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Parts 22 and 24, TIA-603-C-2004 and IC standards RSS-GEN (Issue 2, June 2007), RSS-132 (Issue 2, September 2005) and RSS-133 (Issue 5, February 2009). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			

Jufo Tuohino, Senior Engineer, Global Testing

1. Summary for FCC Part 22/24 Compliance Test Report

Date of receipt	21-Jul-2010
Testing completed	23-Jul-2010
The customer's contact person	Bruno Ramelli
Test Plan referred to	T:\Projects\RM-510\TestPlan_RS\RS_testplan_RM-510_CR_HW0810.xls
Notes	-
Document name	\\satcc01nmp\tcc_salo\Projects\RM-510\EMC\FCC22&24_RM-510_03.docx

1.1. EUT and Accessory Information

The EUT is a 7-band (GSM850/900/1800/1900) and WCDMA Band (I/II(1900)/VIII) mobile phone with GPRS, EGPRS, HSDPA, HSUPA. The EUT is tested with maximum rated TX power, modulated with pseudo random bit sequence (PRBS9).

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-510	356935030422833	0810	-	9.23	14924
Battery	BL-4S	382066813114010321500670577	-	-	-	14925
Headset	HS-105	06942879305J2611240	-	-	-	14926
AC Charger	AC-8E	409049926204050039900675387	-	-	-	14927

1.2. Summary of Test Results

GSM850:

Section in CFR 47	Section in RSS-GEN or RSS-132	Name of the test	Result
§2.1046(a), 22.913(a)	4.4	Conducted RF output power	NP
§22.913(a)	4.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§22.917(a)	4.5	Band edge compliance	PASSED
§22.917(a), §2.1051	4.5	Spurious emissions at antenna terminals	NP
§22.917(a), §2.1053	4.5	Spurious radiated emissions	PASSED
§2.1055(a)	4.3	Frequency stability, temperature variation	NP
§2.1055(d)	4.3	Frequency stability, voltage variation	NP

GSM1900:

Section in CFR 47	Section in RSS-GEN or RSS-133	Name of the test	Result
§2.1046(a)	6.4	Conducted RF output power	NP
§24.232(b)	6.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§24.238(a)	6.5	Band edge compliance	PASSED
§24.238(a), §2.1051	6.5	Spurious emissions at antenna terminals	NP
§24.238(a), §2.1053	6.5	Spurious radiated emissions	PASSED
§2.1055(a)	6.3	Frequency stability, temperature variation	NP
§2.1055(d)	6.3	Frequency stability, voltage variation	NP

WCDMA 850 (Band V):

Section in CFR 47	Section in RSS-GEN or RSS-132	Name of the test	Result
§2.1046(a), 22.913(a)	4.4	Conducted RF output power	NP
§22.913(a)	4.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§22.917(a)	4.5	Band edge compliance	PASSED
§22.917(a), §2.1051	4.5	Spurious emissions at antenna terminals	NP
§22.917(a), §2.1053	4.5	Spurious radiated emissions	PASSED
§2.1055(a)	4.3	Frequency stability, temperature variation	NP
§2.1055(d)	4.3	Frequency stability, voltage variation	NP

WCDMA 1900 (Band II):

Section in CFR 47	Section in RSS-GEN or RSS-133	Name of the test	Result
§2.1046(a)	6.4	Conducted RF output power	NP
§24.232(b)	6.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§24.238(a)	6.5	Band edge compliance	PASSED
§24.238(a), §2.1051	6.5	Spurious emissions at antenna terminals	NP
§24.238(a), §2.1053	6.5	Spurious radiated emissions	PASSED
§2.1055(a)	6.3	Frequency stability, temperature variation	NP
§2.1055(d)	6.3	Frequency stability, voltage variation	NP

PASSED

FAILED

NP

The EUT complies with the essential requirements in the standard.

The EUT does not comply with the essential requirements in the standard.

The test was not performed by the TCC Nokia Laboratory.


CONTENTS

1. Summary for FCC Part 22/24 Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Band edge compliance	
(FCC §22.917(a), §24.238(a), RSS-132 4.5, RSS-133 6.5).....	5
2.1. Test Setup.....	5
2.2. Test method and limit	5
2.3. GSM850 Test results.....	6
2.4. GSM1900 Test results.....	9
2.5. WCDMA2 Test results.....	12
2.6. WCDMA5 Test results.....	14
3. Spurious radiated emissions	
(FCC §22.917(a), §2.1053, §24.238(a), §2.1053, RSS-132 4.5, RSS-133 6.5).....	16
3.1. Test Setup.....	16
3.2. Test method and limit	16
3.3. GSM850 TX Test results	18
3.4. GSM1900 TX Test results	19
3.5. WCDMA2 TX Test results	20
3.6. WCDMA5 TX Test results	20
4. Test Equipment	21
4.1. Conducted measurements	21
4.2. Radiated measurements	21

2. Band edge compliance (FCC §22.917(a), §24.238(a), RSS-132 4.5, RSS-133 6.5)

EUT with DUT number	RM-510, DUT 14924
Accessories with DUT numbers	BL-4S, DUT 14925 ; HS-105, DUT 14926 ; AC-8E, DUT 14927
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] /	21.2 / 46
Date of measurements	22-Jul-2010
Measured by	Jufo Tuohino

2.1. Test Setup

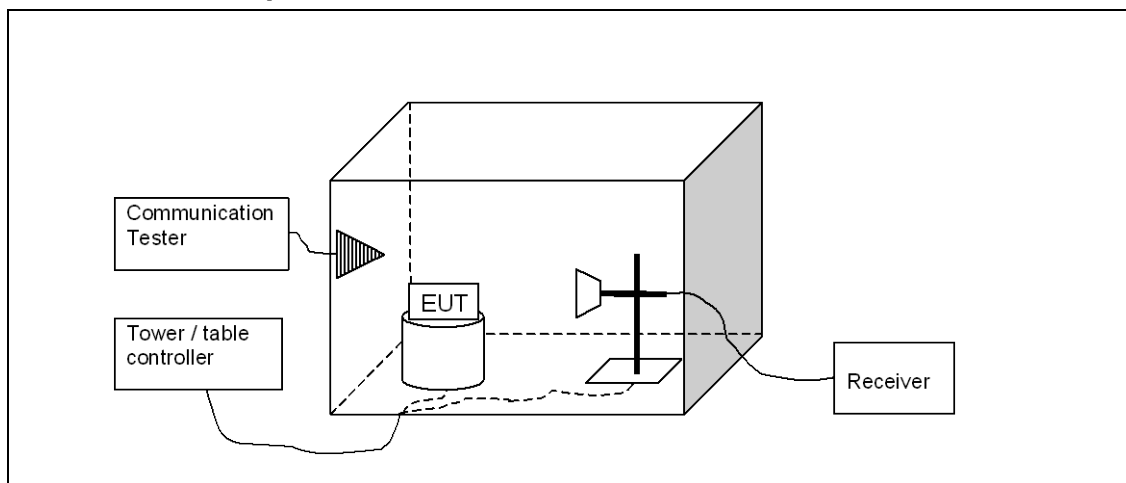

2.2. Test method and limit

The measurement is made according to FCC rules parts 22, 24 and IC standards , RSS-132, RSS-133.


Limits for band edge compliance measurements

Operation band	Frequency range [MHz]	Limit [dBm]
GSM850 / WCDMA 850	Below 824 and above 849	-13
WCDMA 1700	Below 1710 and above 1755	-13
GSM 1900 / WCDMA 1900	Below 1850 and above 1910	-13


2.3. GSM850 Test results

Operation mode (TX on)	Channel / f_c [MHz]	Level [dBm]
GSM, Flip Open	128 / 824.2	-13.53
GSM, Flip Open	251 / 848.8	-13.88
EGPRS, Flip Open	128 / 824.2	-25.13
EGPRS, Flip Open	251 / 848.8	-24.87
GSM, Flip Closed	128 / 824.2	-13.86
GSM, Flip Closed	251 / 848.8	-15.35
EGPRS, Flip Closed	128 / 824.2	-21.98
EGPRS, Flip Closed	251 / 848.8	-25.5


GSM, channel 128 / 824.2 MHz (Peak detector, RBW: 3 kHz) , Flip Open

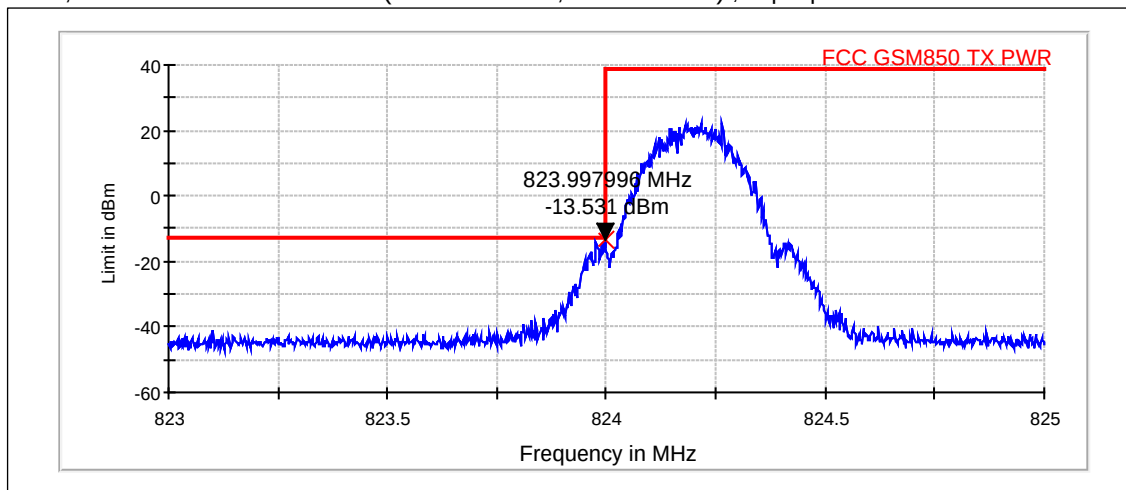


GSM, channel 251 / 848.8 MHz (Peak detector, RBW: 3 kHz) , Flip Open

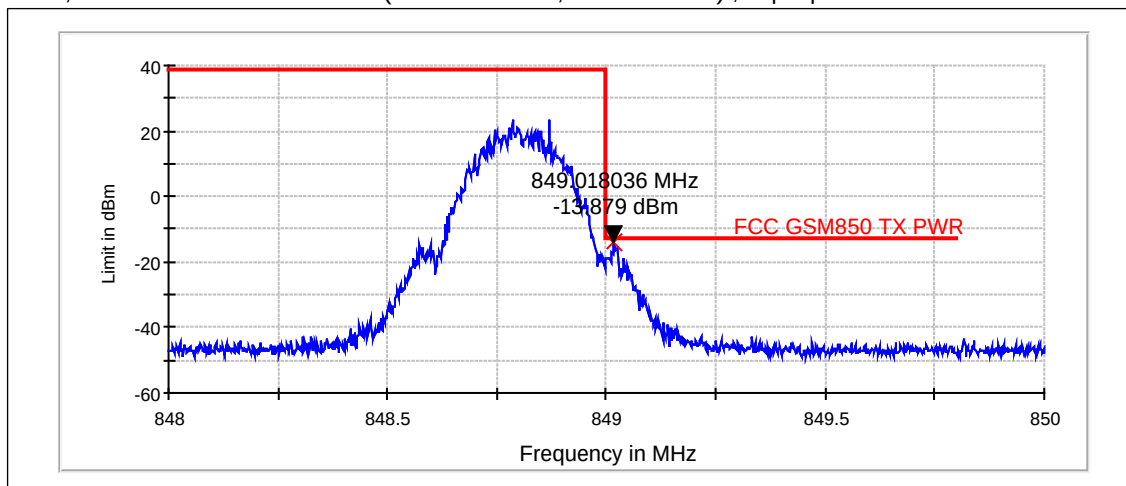


EGPRS, channel 128 / 824.2 MHz (Peak detector, RBW: 3 kHz) , Flip Open

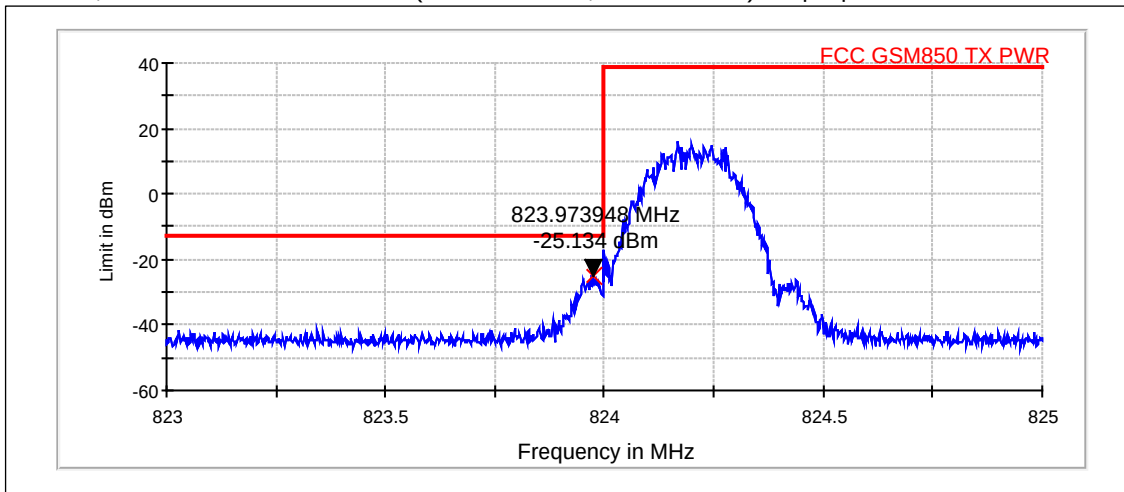


EGPRS, channel 251 / 848.8 MHz (Peak detector, RBW: 3 kHz) , Flip Open

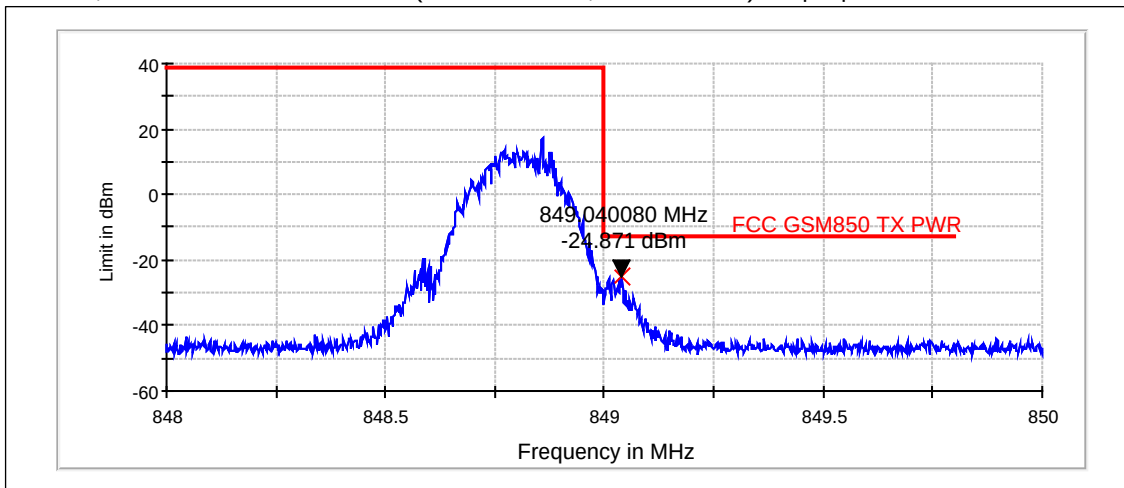


GSM, channel 128 / 824.2 MHz (Peak detector, RBW: 3 kHz), Flip Closed

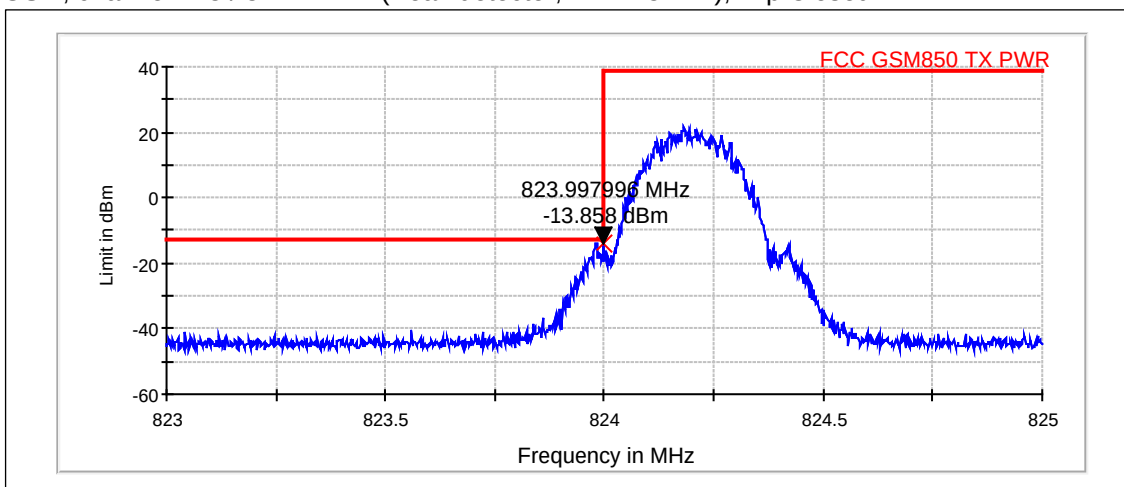


GSM, channel 251 / 848.8 MHz (Peak detector, RBW: 3 kHz), Flip Closed

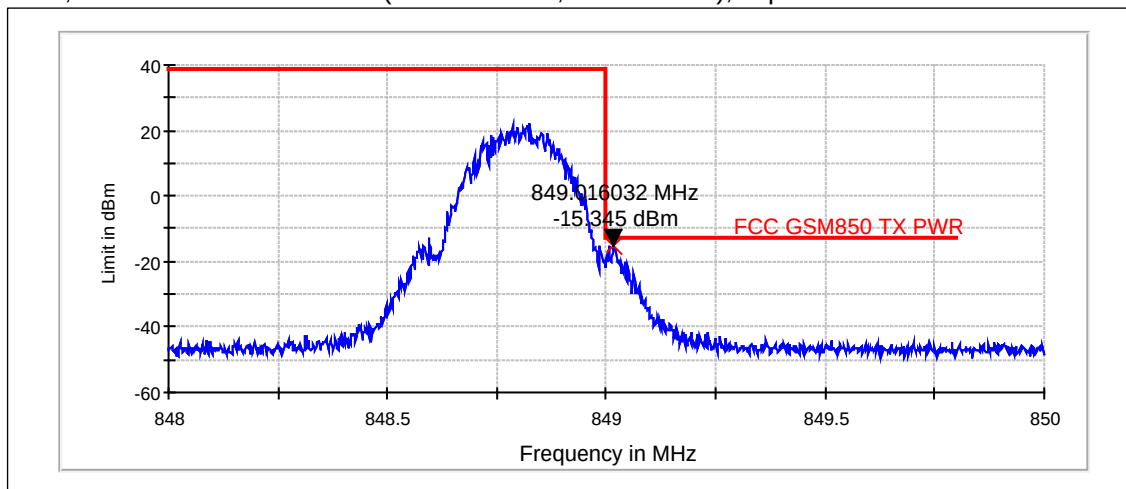

EGPRS, channel 128 / 824.2 MHz (Peak detector, RBW: 3 kHz), Flip Closed

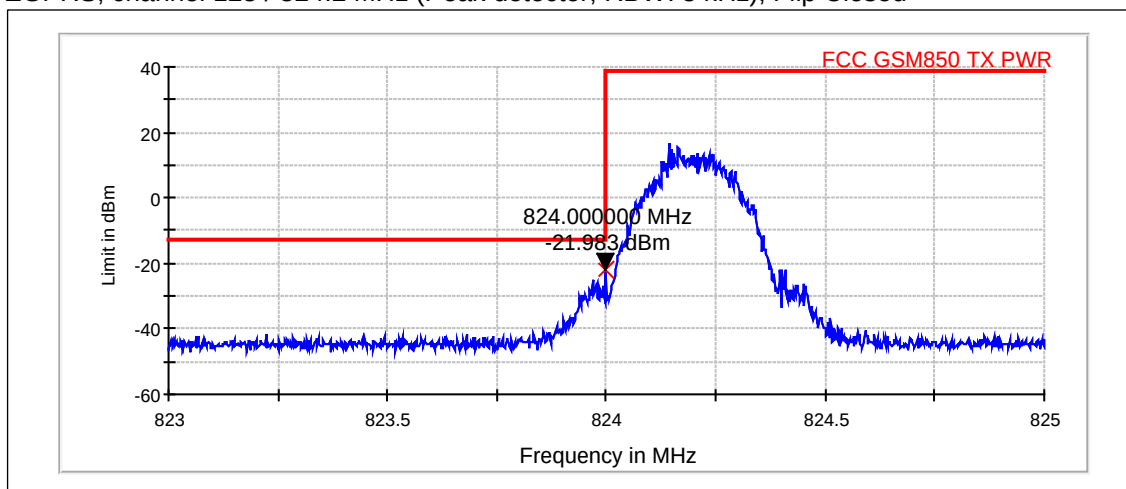


EGPRS, channel 251 / 848.8 MHz (Peak detector, RBW: 3 kHz), Flip Closed

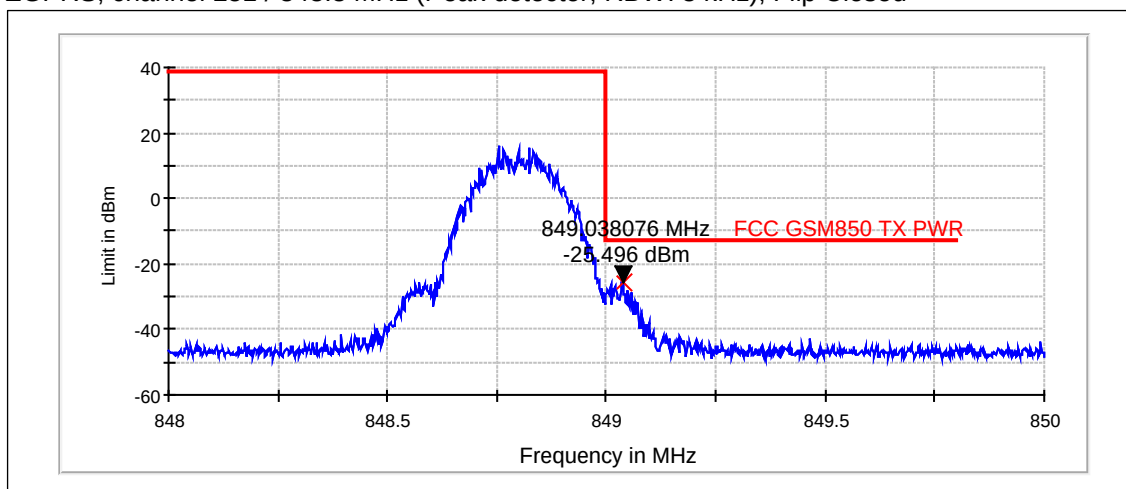


2.4. GSM1900 Test results

Operation mode (TX on)	Channel / f_c [MHz]	Level [dBm]
GSM, Flip Open	512 / 1850.2	-15.52
GSM, Flip Open	810 / 1909.8	-14.02
EGPRS, Flip Open	512 / 1850.2	-23.69
EGPRS, Flip Open	810 / 1909.8	-22.15
GSM, Flip Closed	512 / 1850.2	-14.73
GSM, Flip Closed	810 / 1909.8	-16.49
EGPRS, Flip Closed	512 / 1850.2	-26.25
EGPRS, Flip Closed	810 / 1909.8	-23.29


GSM, channel 512 / 1850.2 MHz (Peak detector, RBW: 3 kHz) , Flip Open

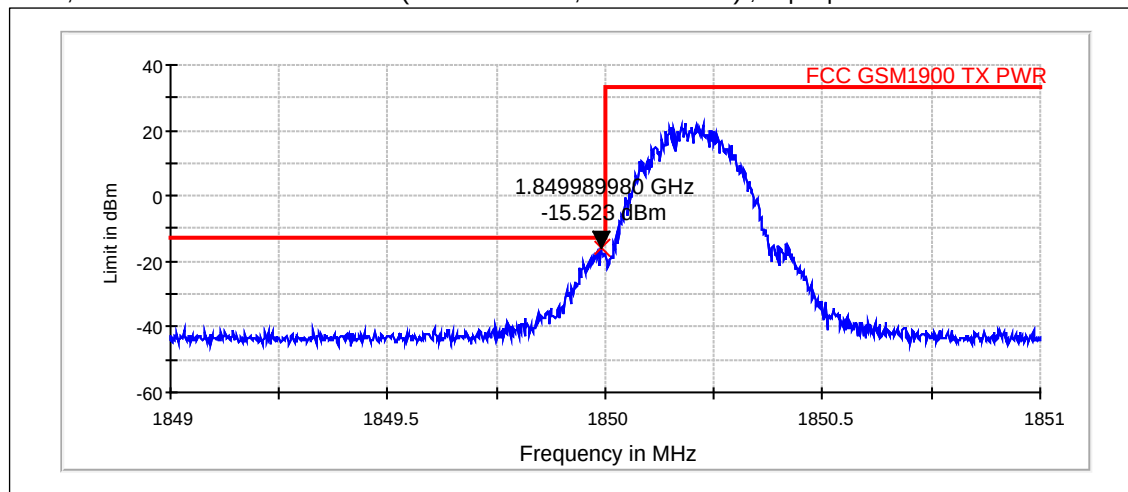


GSM, channel 810 / 1909.8 MHz (Peak detector, RBW: 3 kHz) , Flip Open

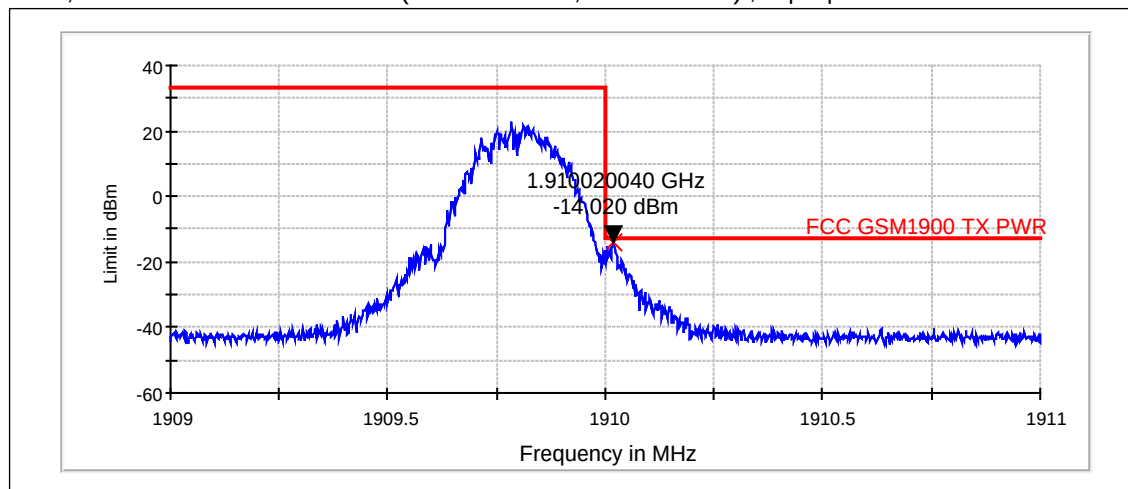


EGPRS, channel 512 / 1850.2 MHz (Peak detector, RBW: 3 kHz) , Flip Open

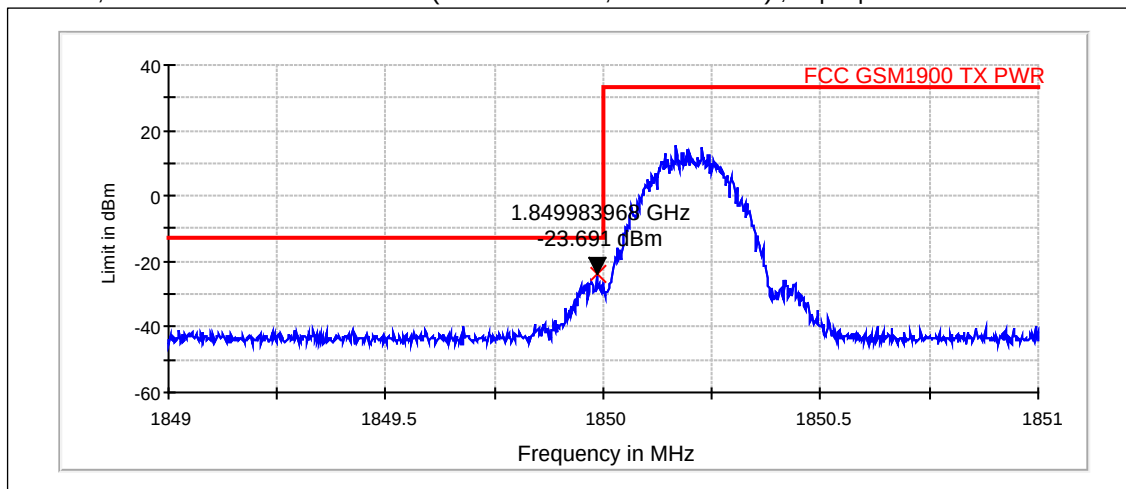


EGPRS, channel 810 / 1909.8 MHz (Peak detector, RBW: 3 kHz) , Flip Open

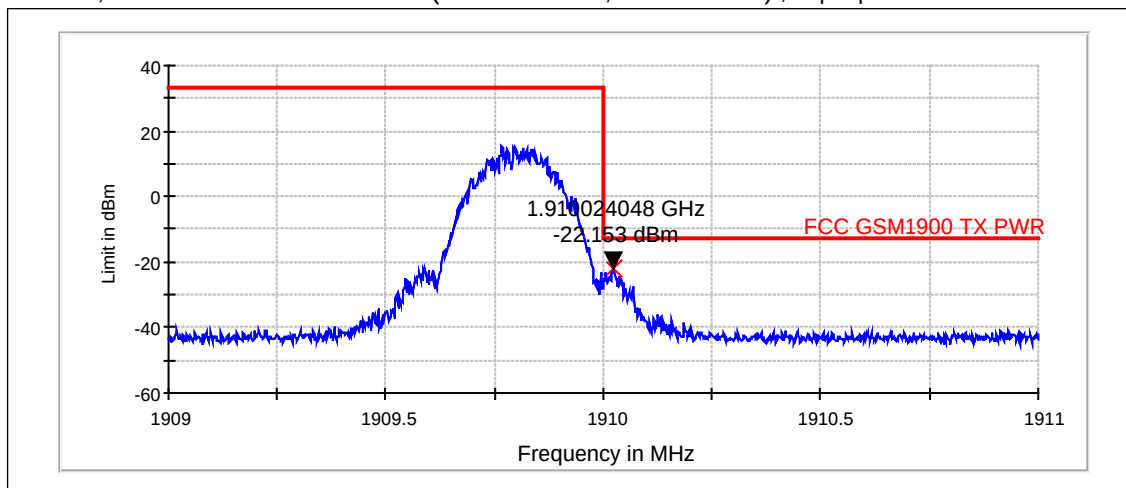


EGPRS, channel 512 / 1850.2 MHz (Peak detector, RBW: 3 kHz) , Flip Closed

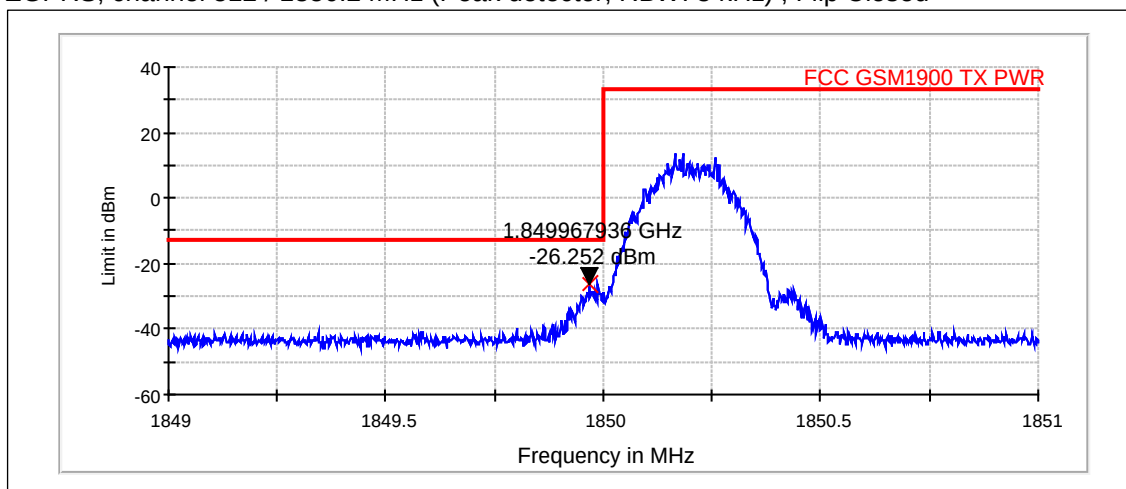


EGPRS, channel 810 / 1909.8 MHz (Peak detector, RBW: 3 kHz) , Flip Closed

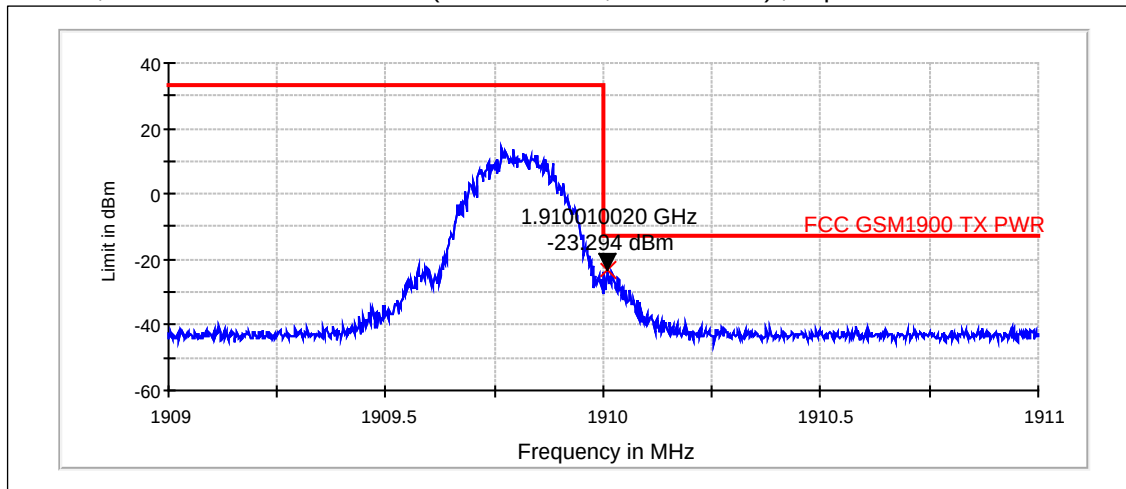

GSM, channel 512 / 1850.2 MHz (Peak detector, RBW: 3 kHz) , Flip Closed

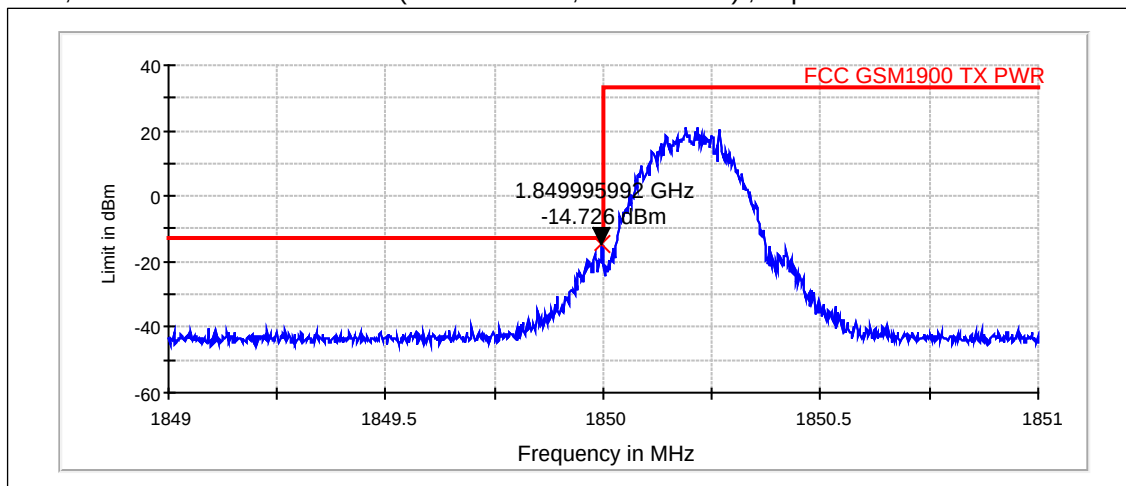


GSM, channel 810 / 1909.8 MHz (Peak detector, RBW: 3 kHz) , Flip Closed

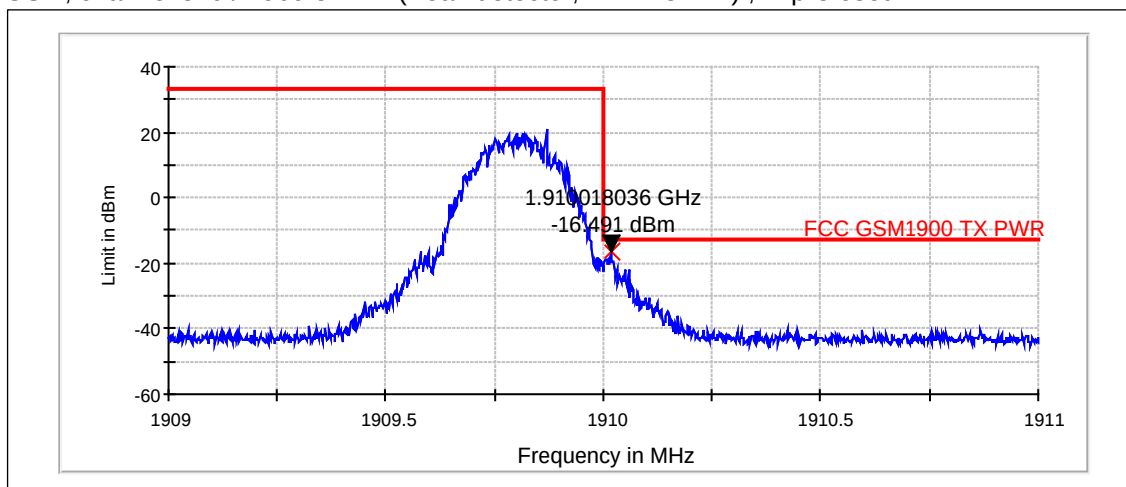


2.5. WCDMA2 Test results

Operation mode (TX on)	Channel / f_c [MHz]	Level [dBm]
FDD, Flip Open	9262 / 1852.4	-14.16
FDD, Flip Open	9538 / 1907.6	-14.14
FDD, Flip Closed	9262 / 1852.4	-13.83
FDD, Flip Closed	9538 / 1907.6	-16.7


FDD, channel 9262 / 1852.4 MHz (Peak detector, RBW: 50 kHz) , Flip Open

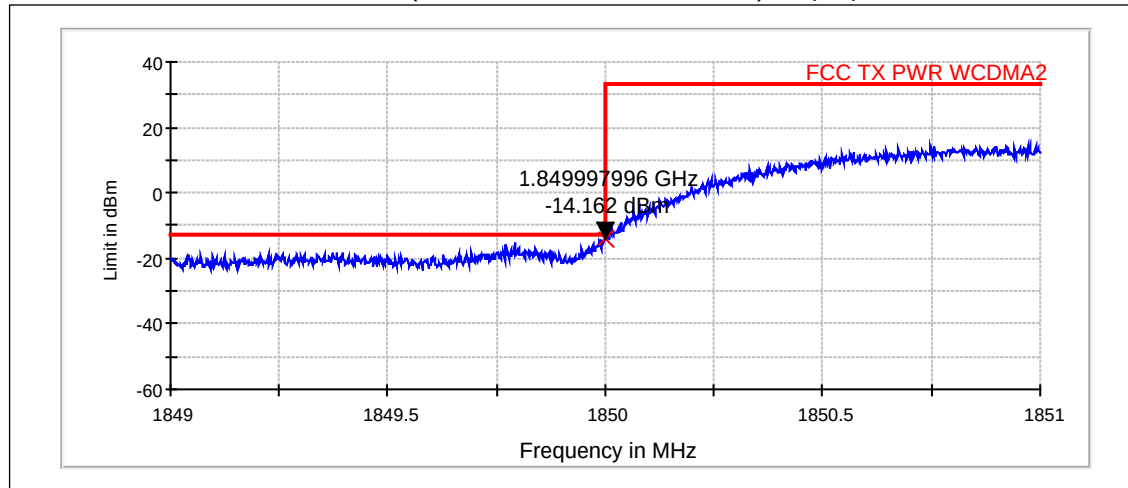


FDD, channel 9538 / 1907.6 MHz (Peak detector, RBW: 50 kHz) , Flip Open

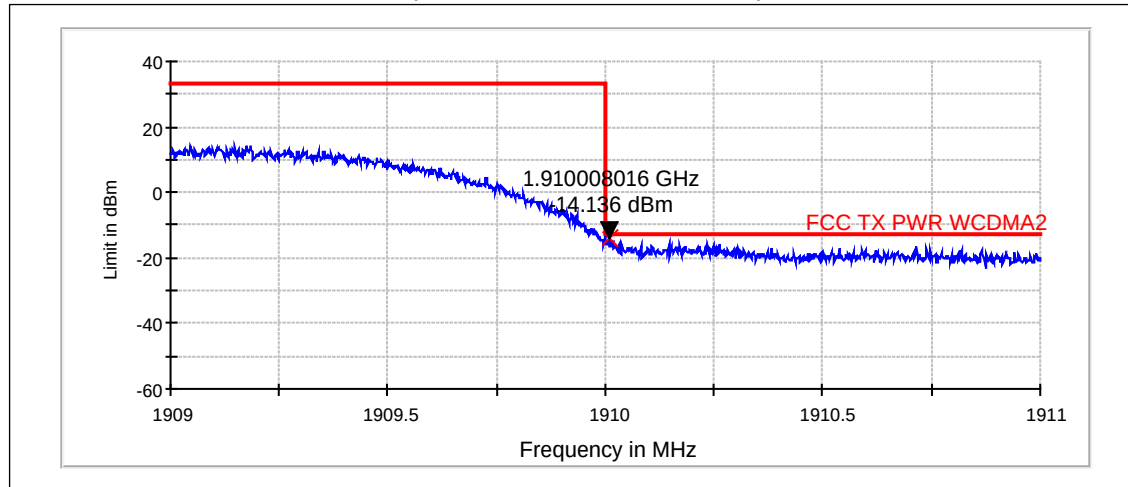

FDD, channel 9262 / 1852.4 MHz (Peak detector, RBW: 50 kHz) , Flip Closed

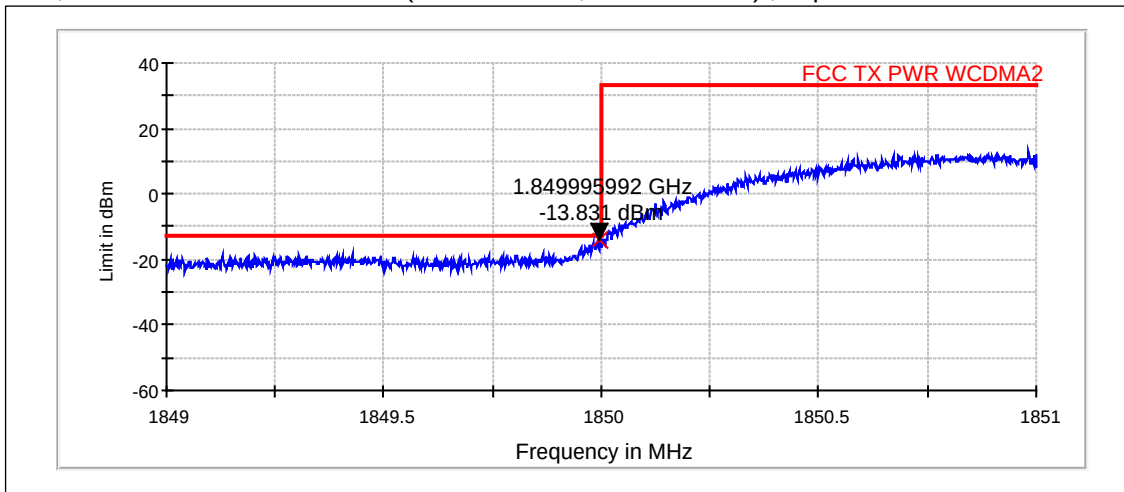


FDD, channel 9538 / 1907.6 MHz (Peak detector, RBW: 50 kHz) , Flip Closed

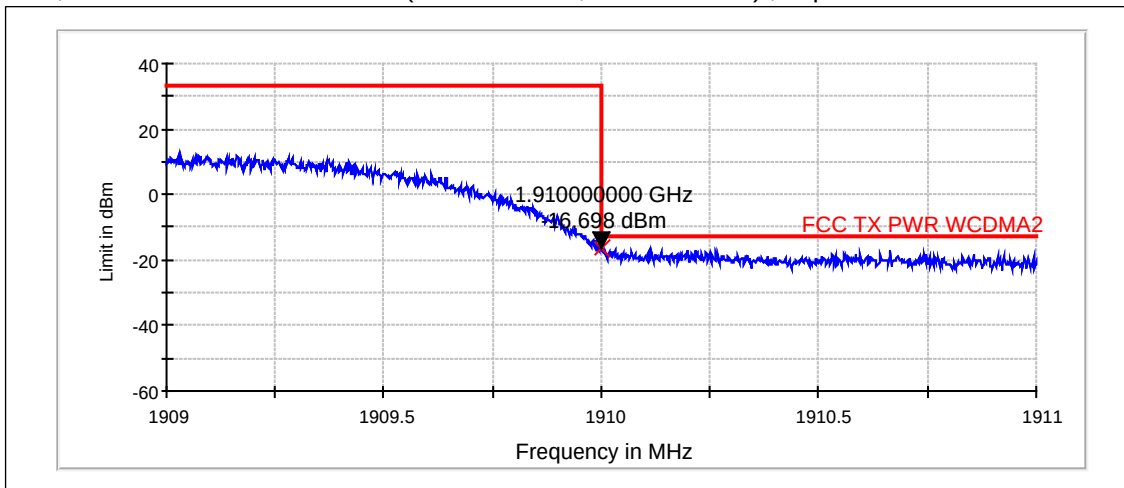


2.6. WCDMA5 Test results

Operation mode (TX on)	Channel / f_c [MHz]	Level [dBm]
FDD, Flip Open	4132 / 826.4	-16.44
FDD, Flip Open	4233 / 846.6	-21.24
FDD, Flip Closed	4132 / 826.4	-16.95
FDD, Flip Closed	4233 / 846.6	-21.05


FDD, channel 4132 / 826.4 MHz (Peak detector, RBW: 50 kHz) , Flip Open

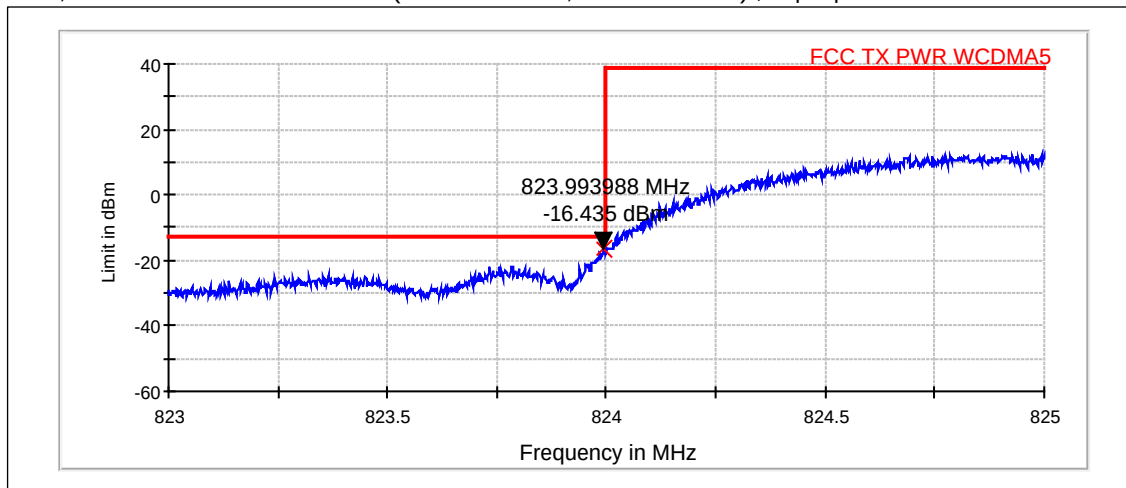


FDD, channel 4233 / 846.6 MHz (Peak detector, RBW: 50 kHz) , Flip Open

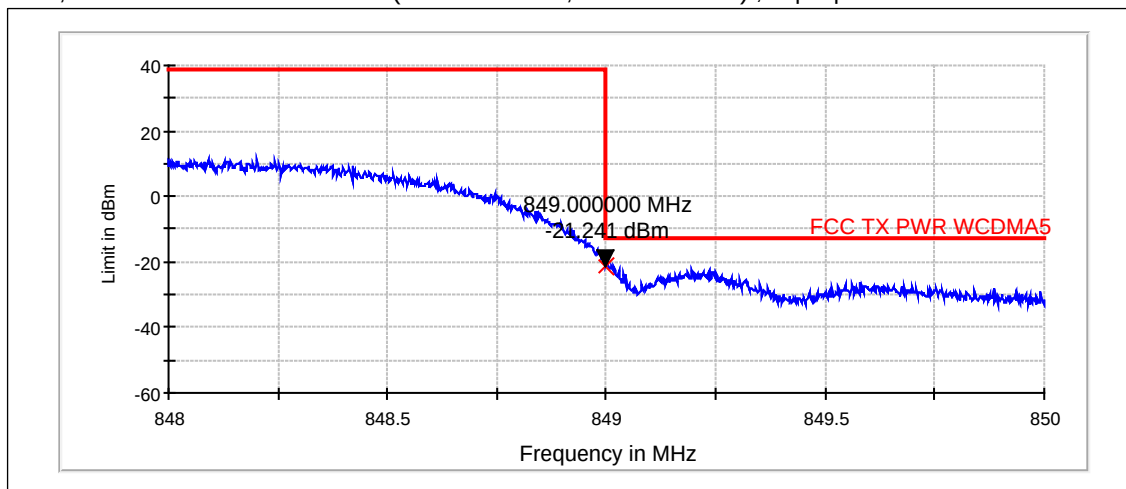

FDD, channel 4132 / 826.4 MHz (Peak detector, RBW: 50 kHz) , Flip Closed

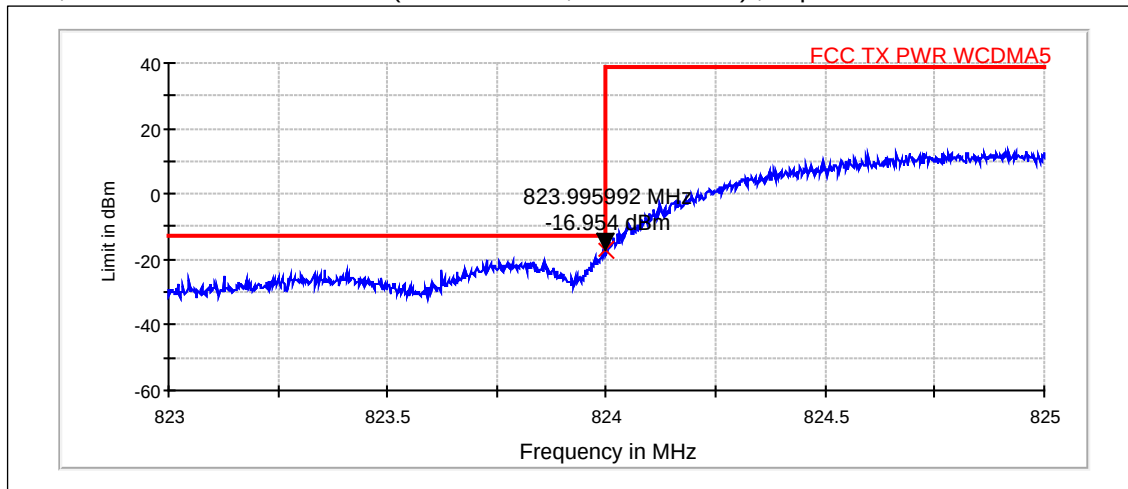


FDD, channel 4233 / 846.6 MHz (Peak detector, RBW: 50 kHz) , Flip Closed

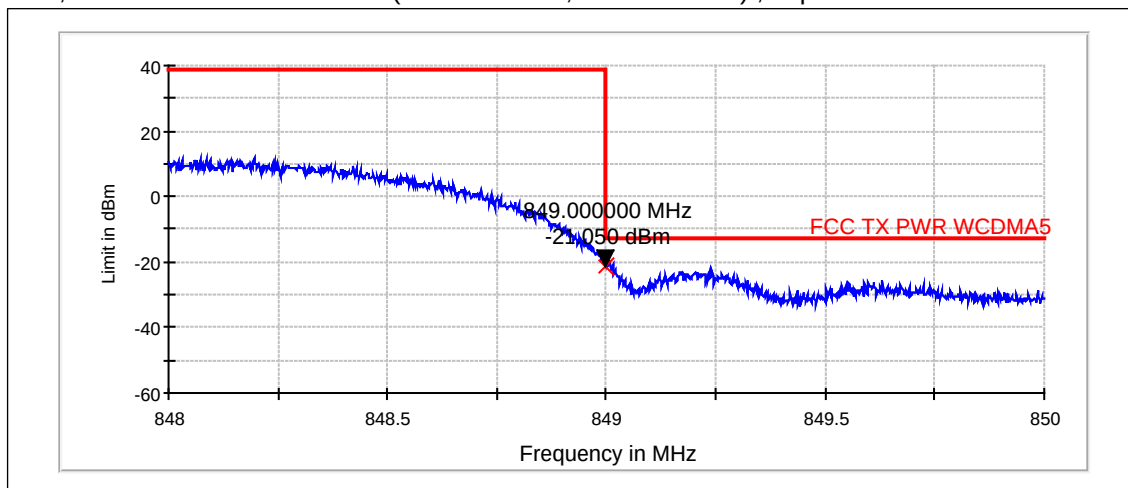

3. Spurious radiated emissions (FCC §22.917(a), §2.1053, §24.238(a), §2.1053, RSS-132 4.5, RSS-133 6.5)

EUT with DUT number	RM-510, DUT 14924
Accessories with DUT numbers	BL-4S, DUT 14925 ; HS-105, DUT 14926 ; AC-8E, DUT 14927
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] /	21.4 / 46
Date of measurements	22-Jul-2010
Measured by	Jufo Tuohino

3.1. Test Setup

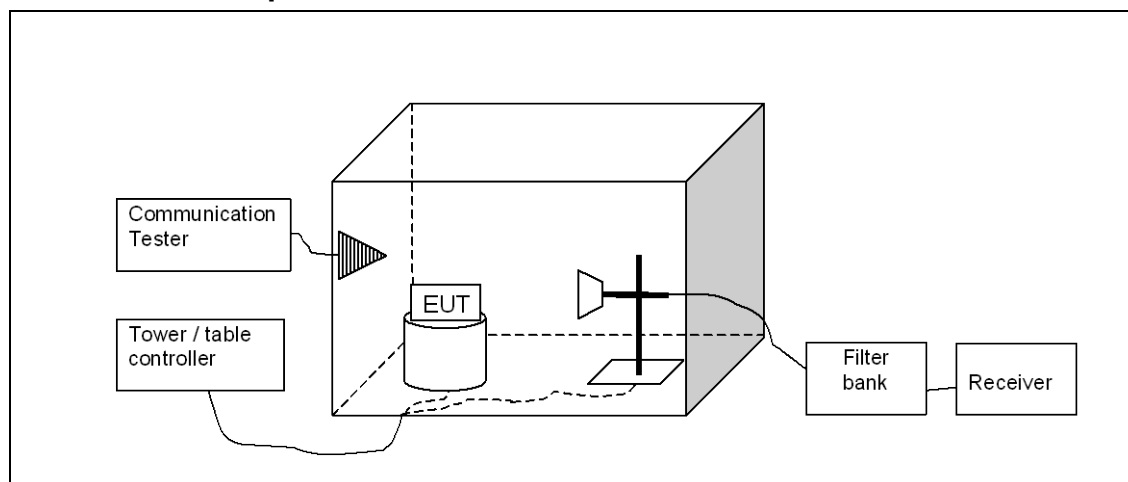

3.2. Test method and limit

The measurement is made according to TIA-603-C-2004 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The substitution method is used. Substitution values at each frequencies are measured beforehand and saved to the test software.

The substitution corrections are obtained as described below:

$$A_{SUBST} = P_{SUBST\ TX} - P_{SUBST\ RX} - L_{SUBST\ CABLES} + G_{SUBST\ TX\ ANT}$$

Where A_{SUBST} is the final substitution correction including receive antenna gain. $P_{SUBST\ TX}$ is signal generator level, $P_{SUBST\ RX}$ is receiver level, $L_{SUBST\ CABLES}$ is cable losses including both TX and RX cables and $G_{SUBST\ TX\ ANT}$ is substitution antenna gain.

The measurement results are obtained as described below:

$$P[dBm] = P_{MEAS} + A_{TOT}$$

Where P_{MEAS} is receiver reading in dBm and A_{TOT} is total correction factor including cable loss and substitution correction ($A_{TOT} = L_{CABLES} - G_{PREAMP} + A_{SUBST}$).

Limits for spurious radiated emissions measurements

Operation band	Frequency range [MHz]	Limit [dBm]
WCDMA 850	30 - 8500	-13
GSM 1900 / WCDMA 1700 /	30 - 18500	-13

3.3. GSM850 TX Test results

GSM mode, channel 190 / 836.6 MHz, Flip Open

Frequency [MHz]	P[dBm]	P [μW]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
850.842	-62.92	0.00051	-54.33	-8.59	VERTICAL	PASSED
1672.932	-36.98	0.20045	-39.41	2.43	VERTICAL	PASSED
1673.304	-49.7	0.01072	-52.15	2.45	VERTICAL	PASSED
1673.346	-49.89	0.01026	-52.34	2.45	VERTICAL	PASSED
2509.639	-43.6	0.04365	-49.9	6.3	VERTICAL	PASSED
2509.98	-40.87	0.08185	-47.16	6.29	VERTICAL	PASSED

GSM mode, channel 190 / 836.6 MHz, Flip Closed

Frequency [MHz]	P[dBm]	P [μW]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
848.641	-65.15	0.00031	-56.57	-8.58	VERTICAL	PASSED
1672.683	-44.67	0.03412	-47.08	2.41	VERTICAL	PASSED
1673.061	-44.73	0.03365	-47.17	2.44	VERTICAL	PASSED
2509.639	-41.72	0.0673	-48.02	6.3	VERTICAL	PASSED
2509.94	-39.82	0.10423	-46.32	6.5	HORIZONTAL	PASSED
3343.888	-59.47	0.00113	-60.51	1.04	VERTICAL	PASSED

EGPRS mode, channel 190 / 836.6 MHz, Flip Open

Frequency [MHz]	P[dBm]	P [μW]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
849.161	-63.02	0.0005	-54.41	-8.61	VERTICAL	PASSED
1673.226	-48.76	0.0133	-51.21	2.45	VERTICAL	PASSED
1673.327	-48.06	0.01563	-50.51	2.45	VERTICAL	PASSED
1682.385	-56.34	0.00232	-58.74	2.4	VERTICAL	PASSED
2509.92	-50.27	0.0094	-56.57	6.3	VERTICAL	PASSED
2513.507	-51.89	0.00647	-57.99	6.1	VERTICAL	PASSED

EGPRS mode, channel 190 / 836.6 MHz, Flip Closed

Frequency [MHz]	P[dBm]	P [μW]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
848.8	-63.98	0.0004	-55.38	-8.6	VERTICAL	PASSED
1675.892	-55.67	0.00271	-58.14	2.47	VERTICAL	PASSED
1677.234	-55.93	0.00255	-58.36	2.43	VERTICAL	PASSED
2509.76	-39.29	0.11776	-45.79	6.5	HORIZONTAL	PASSED
2513.828	-51.71	0.00675	-57.81	6.1	VERTICAL	PASSED
3341.102	-59.73	0.00106	-60.76	1.03	VERTICAL	PASSED

3.4. GSM1900 TX Test results

GSM mode, channel 661 / 1880.0 MHz, Flip Open

Frequency [MHz]	P[dBm]	P [μW]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
9308.497	-45.8	0.0263	-63.89	18.09	HORIZONTAL	PASSED
9473.186	-45.46	0.02844	-63.08	17.62	VERTICAL	PASSED
9715.311	-44.52	0.03532	-63.07	18.55	VERTICAL	PASSED
9762.766	-45.37	0.02904	-64.25	18.88	HORIZONTAL	PASSED
9990.931	-44.39	0.03639	-63.12	18.73	HORIZONTAL	PASSED
14519.88	-41.34	0.07345	-66.92	25.58	HORIZONTAL	PASSED

GSM mode, channel 661 / 1880.0 MHz, Flip Closed

Frequency [MHz]	P[dBm]	P [μW]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
9459.519	-44.81	0.03304	-62.38	17.57	HORIZONTAL	PASSED
9789.659	-44.01	0.03972	-62.84	18.83	HORIZONTAL	PASSED
9936.032	-45.16	0.03048	-64.02	18.86	HORIZONTAL	PASSED
9997.325	-44.64	0.03436	-62.98	18.34	VERTICAL	PASSED
10625.651	-43.26	0.04721	-63.04	19.78	HORIZONTAL	PASSED
14527.134	-40.97	0.07998	-66.75	25.78	HORIZONTAL	PASSED

EGPRS mode, channel 661 / 1880.0 MHz, Flip Open

Frequency [MHz]	P[dBm]	P [μW]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
9322.745	-45.46	0.02844	-63.11	17.65	HORIZONTAL	PASSED
9423.707	-45.8	0.0263	-63.81	18.01	VERTICAL	PASSED
9712.325	-43.69	0.04276	-62.16	18.47	VERTICAL	PASSED
9791.042	-44.9	0.03236	-63.73	18.83	HORIZONTAL	PASSED
9982.024	-43.79	0.04178	-62.65	18.86	HORIZONTAL	PASSED
14565.631	-42.34	0.05834	-67.79	25.45	HORIZONTAL	PASSED

EGPRS mode, channel 661 / 1880.0 MHz, Flip Closed

Frequency [MHz]	P[dBm]	P [μW]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
9428.357	-45.24	0.02992	-63.65	18.41	HORIZONTAL	PASSED
9815.571	-44.13	0.03864	-63.11	18.98	HORIZONTAL	PASSED
9915.17	-44.36	0.03664	-63.26	18.9	HORIZONTAL	PASSED
9944.749	-44.87	0.03258	-63.53	18.66	VERTICAL	PASSED
10600.701	-43.26	0.04721	-63.4	20.14	HORIZONTAL	PASSED
14514.649	-41.32	0.07379	-66.64	25.32	HORIZONTAL	PASSED

3.5. WCDMA2 TX Test results

Channel 9400 / 1880.0 MHz, Flip Open

Frequency [MHz]	P[dBm]	P [μW]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
1961.063	-40.5	0.08913	-45.69	5.19	VERTICAL	PASSED
1961.191	-41.12	0.07727	-46.31	5.19	VERTICAL	PASSED
8818.156	-45.99	0.02518	-62.78	16.79	HORIZONTAL	PASSED
9678.758	-45.71	0.02685	-63.78	18.07	HORIZONTAL	PASSED
9858.437	-44.68	0.03404	-63.43	18.75	HORIZONTAL	PASSED
9934.581	-44.65	0.03428	-63.52	18.87	HORIZONTAL	PASSED

Channel 9400 / 1880.0 MHz, Flip Closed

Frequency [MHz]	P[dBm]	P [μW]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
1840.136	-53.38	0.00459	-58.08	4.7	HORIZONTAL	PASSED
1845.933	-51.54	0.00701	-56.13	4.59	HORIZONTAL	PASSED
1961.063	-38.79	0.13213	-44.55	5.76	HORIZONTAL	PASSED
9783.086	-44.22	0.03784	-62.68	18.46	VERTICAL	PASSED
12514.349	-42.97	0.05047	-61.97	19	HORIZONTAL	PASSED
13531.844	-42.99	0.05023	-65.12	22.13	VERTICAL	PASSED

3.6. WCDMA5 TX Test results

Channel 4175 / 835.0 MHz, Flip Open

Frequency [MHz]	P[dBm]	P [μW]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
823.699	-50.39	0.00914	-44.02	-6.37	VERTICAL	PASSED
848.67	-58.52	0.00141	-49.69	-8.83	VERTICAL	PASSED
848.74	-58.68	0.00136	-49.85	-8.83	VERTICAL	PASSED
1650.279	-55.72	0.00268	-58.25	2.53	HORIZONTAL	PASSED
2509.319	-51.86	0.00652	-58.15	6.29	VERTICAL	PASSED
2558.377	-50.53	0.00885	-57.51	6.98	HORIZONTAL	PASSED

Channel 4175 / 835.0 MHz, Flip Closed

Frequency [MHz]	P[dBm]	P [μW]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
1650.682	-56.43	0.00228	-58.95	2.52	VERTICAL	PASSED
1668.548	-54.7	0.00339	-56.2	1.5	HORIZONTAL	PASSED
2482.124	-49.97	0.01007	-56.31	6.34	VERTICAL	PASSED
2510.521	-51.12	0.00773	-57.58	6.46	HORIZONTAL	PASSED
3312.705	-58.72	0.00134	-60.23	1.51	HORIZONTAL	PASSED
3380.721	-59.37	0.00116	-60.87	1.5	VERTICAL	PASSED

4. Test Equipment

4.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
1759	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
1916	Communication Tester	CMTA84	R&S	15B
1986	GPS Antenna	AMHP10-15R/390	European Antenna	15C, 15B
1992	Signal Generator	83630B	Agilent	15C, 15B
2039	Power Supply	PL330QMD	Thurlby	15C, 15B
2060	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
2068	CDN	S1	NMP	15C, 15B
2097	Pulse Limiter	ESH3-Z2	R&S	15C, 15B
2156	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2180	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2206	Signal Generator	SMX	R&S	15C, 15B
2347	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2352	Spectrum Analyzer	FSP-30	R&S	22/24/27, 15C
2359	Temperature Test Chamber	VT4002	Vötsch	22/24/27
2360	Serial Bus Converter	Serial 488A	IO Tech	22/24/27
2362	Power Supply	NGPX 70/5	R&S	22/24/27
2388	Bluetooth Tester	CBT	R&S	15B
2389	Signal Generator	SMJ 100A	R&S	15B
2390	Directional Coupler	DC2600	AR	-
6009	GPS Antenna	SA-700	Chronos	15C
6010	GPS Network amplifier	NLA20FPDC	GPS Networking, Inc	15C
6011	GPS signal Splitter	LDCBS1x4	GPS Networking, Inc	15C
6012	CDN	CDN USB/c	Teseq	-
6015	Receiver	ESI	R&S	22/24, 15C, 15B
6016	ESD gun	PESD 1610	HAEFELY	-
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	RF Emission Software	ES-K1 v.1.71	R&S	22/24/27, 15C, 15B
6036	Data Logger	175-H2	Testo	22/24/27, 15C, 15B
6038	Data Logger	Testo 580	Testo	23/24/27, 15C, 15B
6039	USB Interface	5541765	Testo	23/24/27, 15C, 15B
2059	V-network	ESH3-Z6	R&S	-
6044	V-network	ESH3-Z6	R&S	-
6045	Power splitter	11667B	Agilent	23/24/27, 15C
6046	Attenuator 10dB	8493C	Agilent	23/24/27, 15C
6047	Attenuator 20dB	8493C	Agilent	23/24/27, 15C

4.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
1917	Communication Tester	CMTA84	R&S	15B
1984	Antenna	BBHA 9120 D	Schwarzbeck	22/24/27, 15C, 15B
1986	GPS Antenna	AMHP10-15R/390	European Antenna	15C, 15B
1988	Antenna	HL562	R&S	22/24/27, 15C, 15B
1989	Relay Switch Unit	TS-RSP	R&S	22/24/27, 15C, 15B
2009	Signal Generator	SMP 22	R&S	22/24/27, 15C, 15B
2027	CDN	M2 (modified) DC1	MEB	22/24/27, 15C, 15B
2028	CDN	M3 (modified) DC2	MEB	22/24/27, 15C, 15B
2029	Power Supply	PL330	Thurlby	22/24/27, 15C
2043	Band Reject Filter	WRCA824/849-0,2-6SS	Wainwright	22

Eq. No	Equipment	Type	Manufacturer	Used in
2047	Band Reject Filter	WRCC1800/2000-0.2-10SS	Wainwright	24
2051	High Pass Filter	4HC1700-1-KK	R&S	22
2109	Power Supply	PL330QMD	Thurlby	22/24/27, 15C, 15B
2116	Controller	EMCO 2090	ETS	22/24/27, 15C, 15B
2135	CDN	CDN 801-M3	Lüthi	22/24/27, 15C, 15B
2140	Antenna	EMCO93110B	EMCO	22/24/27, 15C
2142	Antenna	3146	EMCO	22/24/27, 15C
2150	High Pass Filter	F-15041	RLC	22/24/27, 15C
2156	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2176	CDN	CDN 801-M3	Lüthi	22/24/27, 15C, 15B
2180	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2188	Preamplifier	AFS4-00100300-20-23P-6	Miteq	22/24/27, 15C, 15B
2347	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2348	Controller	G-1000DXC	Yaesu	22/24/27, 15C, 15B
2349	Computer Controller	GS-232B	Yaesu	22/24/27, 15C, 15B
2350	Preamplifier	AMF-6D-020180-29-20P	Miteq	22/24/27, 15C, 15B
2353	Receiver	ESIB26	R&S	22/24/27, 15C, 15B
2357	Band Reject Filter	WRCG2400/2483-2390/2493-35/10SS	Wainwright	15C
2361	Anechoic Chamber	3 m Semi / Full Anechoic Chamber	Euroshield	22/24/27, 15C, 15B
2364	Band Reject Filter	WRCG1877/1883 - 1870/1890-40/6SS	Wainwright	24
2366	Relay Switch Unit	TS-RSP	R&S	22/24/27, 15C, 15B
2384	Band Reject Filter	WRCG832/838-825/845-40/5SS	Wainwright	22
2388	Bluetooth Tester	CBT	R&S	15B
2389	Signal Generator	SMJ 100A	R&S	15B
2391	Band Reject Filter	WRCG1729.4/1735.4-1722.4/1742.4-40/6SS	Wainwright	27
6009	GPS Antenna	SA-700	Chronos	15C
6010	GPS Network amplifier	NLA20FPDC	GPS Networking, Inc	15C
6011	GPS signal Splitter	LDCBS1x4	GPS Networking, Inc	15C
6014	Substitute Calibration Cable	Sucoflex 104PB	Suhner	-
6017	Antenna	SBA 9113	Schwarzbeck	22 / 24 / 27
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	RF Emission Software	ES-K1 v.1.71	R&S	22/24/27, 15C, 15B
-	RF immunity / Emission Software	EMC32	R&S	22/24/27, 15C, 15B
6037	Data Logger	175-H2	Testo	23/24/27, 15C, 15B
6038	Data Logger	Testo 580	Testo	23/24/27, 15C, 15B
6039	USB Interface	5541765	Testo	23/24/27, 15C, 15B